

	TEST REPORT	•					
FCC ID:	2BCDW-MARLY						
Test Report No::	TCT230727E008	(3) (3)					
Date of issue::	Aug. 31, 2023						
Testing laboratory:	SHENZHEN TONGCE TESTING I	_AB					
Testing location/ address:	2101 & 2201, Zhenchang Factory, Fuhai Subdistrict, Bao'an District, \$518103, People's Republic of Chin	Shenzhen, Guangdong,					
Applicant's name::	ShenZhen OuZhiXin Technology Co., Limited						
Address:	UNIT 1507C, 15/F, EASTCORE 39 TONG KL, Hong Kong, China	98 KWUN TONG ROAD KWUN					
Manufacturer's name:	ShenZhen OuQiang Technology C	co., Limited					
Address::	5th Floor, Building B2, Fuxinlin Ind Bao'an District, Shenzhen, China	ustrial Park, Xixiang Street,					
Standard(s):	FCC CFR Title 47 Part 15 Subpart FCC KDB 558074 D01 15.247 Met ANSI C63.10:2013						
Product Name::	Mobile Phone						
Trade Mark:	3Wolves						
Model/Type reference:	Marly						
Rating(s):	Adapter Information: Input: AC 110-240V, 50/60Hz, 0.15 Output: DC 5V, 0.5A Rechargeable Li-ion Battery DC 3.						
Date of receipt of test item:	Jul. 27, 2023						
Date (s) of performance of test:	Jul. 27, 2023 - Aug. 31, 2023						
Tested by (+signature) :	Brews XU	forens Muscer					
Check by (+signature):	Beryl ZHAO	Boyl 20 TCT)					
Approved by (+signature):	Tomsin	Toms in the					

General disclaimer:

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com





Table of Contents

1. General Product Information	
1.1. EUT description	
1.2. Model(s) list	3
1.3. Operation Frequency	3
1.3. Operation Frequency 2. Test Result Summary	4
3. General Information	5
3.1. Test environment and mode	5
3.2. Description of Support Units	5
4. Facilities and Accreditations	6
4.1. Facilities	6
4.2. Location	6
4.3. Measurement Uncertainty	6
5. Test Results and Measurement Data	7
5.1. Antenna requirement	7
5.2. Conducted Emission	8
5.3. Conducted Output Power	12
5.4. 20dB Occupy Bandwidth	13
5.5. Carrier Frequencies Separation	14
5.6. Hopping Channel Number	15
5.7. Dwell Time	
5.8. Pseudorandom Frequency Hopping Sequence	17
5.9. Conducted Band Edge Measurement	18
5.10.Conducted Spurious Emission Measurement	19
5.11.Radiated Spurious Emission Measurement	20
Appendix A: Test Result of Conducted Test	
Appendix B: Photographs of Test Setup	
Appendix C: Photographs of EUT	



1. General Product Information

1.1. EUT description

Product Name:	Mobile Phone		
Model/Type reference:	Marly		
Sample Number:	TCT230727E008-0101		
Bluetooth Version:	V4.0		
Operation Frequency:	2402MHz~2480MHz		
Channel Separation:	1MHz		
Transfer Rate:	1/2/3 Mbits/s		
Number of Channel:	79		
Modulation Type:	GFSK, π/4-DQPSK, 8DPSK		
Modulation Technology:	FHSS	\	
Antenna Type:	Internal Antenna		(60)
Antenna Gain:	1dBi		
Rating(s)::	Adapter Information: Input: AC 110-240V, 50/60Hz, 0.15A Output: DC 5V, 0.5A Rechargeable Li-ion Battery DC 3.7V		

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

1.2. Model(s) list

None.

1.3. Operation Frequency

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz	(C)	- (, Ć

Remark: Channel 0, 39 & 78 have been tested for GFSK, $\pi/4$ -DQPSK, 8DPSK modulation mode.



2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna Requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(1)	PASS
20dB Occupied Bandwidth	§15.247 (a)(1)	PASS
Carrier Frequencies Separation	§15.247 (a)(1)	PASS
Hopping Channel Number	§15.247 (a)(1)	PASS
Dwell Time	§15.247 (a)(1)	PASS
Radiated Emission	§15.205/§15.209	PASS
Band Edge	§15.247(d)	PASS

Note:

- 1. PASS: Test item meets the requirement.
- 2. Fail: Test item does not meet the requirement.
- 3. N/A: Test case does not apply to the test object.
- 4. The test result judgment is decided by the limit of test standard.



3. General Information

3.1. Test environment and mode

Operating Environment:							
Condition	Conducted Emission	Radiated Emission					
Temperature:	23.5 °C	24.9 °C					
Humidity:	52 % RH	51 % RH					
Atmospheric Pressure:	1010 mbar	1010 mbar					
Test Software:							
Software Information:	Test Mode						
Power Level:	Power Level: Default						
Test Mode:							
Engineer mode: Keep the EUT in continuous transmitting by select channel and modulations with Fully-charged battery							

The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case(Z axis) are shown in Test Results of the following pages. DH1 DH3 DH5 all have been tested, only worse case DH1 is reported.

3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
- 3. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

Page 5 of 97

Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com



4. Facilities and Accreditations

4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

• FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

• IC - Registration No.: 10668A-1

SHENZHEN TONGCE TESTING LAB

CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict,

Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339

4.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	± 3.10 dB
2	RF power, conducted	± 0.12 dB
3	Spurious emissions, conducted	± 0.11 dB
4	All emissions, radiated(<1 GHz)	± 4.56 dB
5	All emissions, radiated(1 GHz - 18 GHz)	± 4.22 dB
6	All emissions, radiated(18 GHz- 40 GHz)	± 4.36 dB

Report No.: TCT230727E008



5. Test Results and Measurement Data

5.1. Antenna requirement

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The Bluetooth antenna is internal antenna which permanently attached, and the best case gain of the antenna is 1dBi.

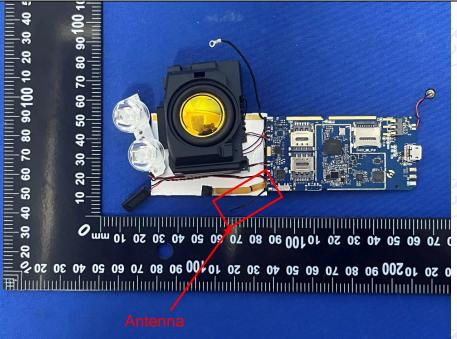

Page 7 of 97





5.2. Conducted Emission

5.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207								
Test Method:	ANSI C63.10:2013								
Frequency Range:	150 kHz to 30 MHz								
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto								
Limits:	Frequency range Limit (dBuV) (MHz) Quasi-peak Average 0.15-0.5 66 to 56* 56 to 46 0.5-5 56 46 5-30 60 50								
Test Setup:	Reference Plane 40cm 80cm LISN Filter AC power Test table/Insulation plane Remark E.U.T. Equipment Under Test LISN: Line Impedence Stabilization Network Test table height=0.8m								
Test Mode:	Charging + Transmitting	g Mode							
Test Procedure:	 The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to 								
Test Result:	ANSI C63.10:2013 o								



5.2.2. Test Instruments

Cond	Conducted Emission Shielding Room Test Site (843)										
Equipment	Manufacturer	Model	Serial Number	Calibration Due							
EMI Test Receiver	R&S	ESCI3	100898	Jun. 29, 2024							
Line Impedance Stabilisation Newtork(LISN)	Schwarzbeck	NSLK 8126	8126453	Feb. 20, 2024							
Line-5	TCT	CE-05	/	Jul. 03, 2024							
EMI Test Software	Shurple Technology	EZ-EMC	1 (3)	1 6							






5.2.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

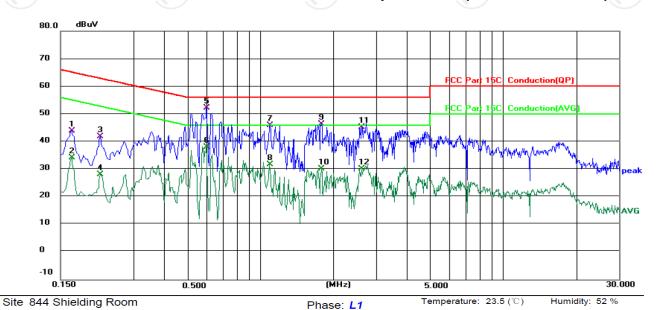

Limit: FCC Part 15C Conduction(QP)

Power: AC 120 V/60 Hz

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBu∨	dB	dBu∨	dBu∨	dB	Detector	Comment
1		0.1660	33.79	10.13	43.92	65.16	-21.24	QP	
2		0.1660	24.05	10.13	34.18	55.16	-20.98	AVG	
3		0.2179	31.99	9.95	41.94	62.90	-20.96	QP	
4		0.2179	18.27	9.95	28.22	52.90	-24.68	AVG	
5	*	0.5979	42.81	9.36	52.17	56.00	-3.83	QP	
6		0.5979	28.79	9.36	38.15	46.00	-7.85	AVG	
7		1.0940	36.95	8.89	45.84	56.00	-10.16	QP	
8		1.0940	22.93	8.89	31.82	46.00	-14.18	AVG	
9		1.7860	36.37	10.01	46.38	56.00	-9.62	QP	
10		1.7860	20.11	10.01	30.12	46.00	-15.88	AVG	
11		2.6139	35.30	10.02	45.32	56.00	-10.68	QP	
12		2.6139	20.17	10.02	30.19	46.00	-15.81	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level $(dB\mu V)$ = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement $(dB\mu V)$ = Reading level $(dB\mu V)$ + Corr. Factor (dB)

 $Limit (dB\mu V) = Limit stated in standard$

 $Margin (dB) = Measurement (dB\mu V) - Limits (dB\mu V)$

Q.P. =Quasi-Peak


AVG =average

^{*} is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.





Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

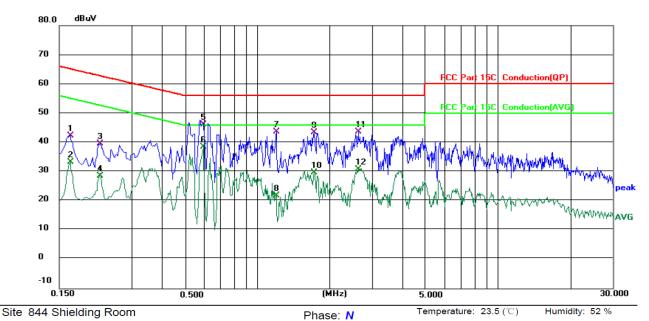

Limit: FCC Part 15C Conduction(QP)

Power: AC 120 V/60 Hz

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBu∨	dB	dBu∨	dBu∨	dB	Detector	Comment
1		0.1660	32.16	10.11	42.27	65.16	-22.89	QP	
2		0.1660	23.17	10.11	33.28	55.16	-21.88	AVG	
3		0.2220	29.56	9.95	39.51	62.74	-23.23	QP	
4		0.2220	18.58	9.95	28.53	52.74	-24.21	AVG	
5		0.5977	36.84	9.36	46.20	56.00	-9.80	QP	
6	*	0.5977	29.21	9.36	38.57	46.00	-7.43	AVG	
7		1.1977	33.66	9.99	43.65	56.00	-12.35	QP	
8		1.1977	11.77	9.99	21.76	46.00	-24.24	AVG	
9		1.7177	33.37	10.00	43.37	56.00	-12.63	QP	
10		1.7177	19.78	10.00	29.78	46.00	-16.22	AVG	
11		2.6339	33.74	10.03	43.77	56.00	-12.23	QP	
12		2.6339	20.82	10.03	30.85	46.00	-15.15	AVG	

Note1:

Freq. = Emission frequency in MHz

Reading level $(dB\mu V)$ = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement $(dB\mu V)$ = Reading level $(dB\mu V)$ + Corr. Factor (dB)

 $Limit (dB\mu V) = Limit stated in standard$

 $Margin (dB) = Measurement (dB\mu V) - Limits (dB\mu V)$

Q.P. =Quasi-Peak AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Note2:

Measurements were conducted in all three channels (high, middle, low) and three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (Middle channel and GFSK) was submitted only.





5.3. Conducted Output Power

5.3.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)		
Test Method:	KDB 558074 D01 v05r02		
Limit:	Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.		
Test Setup:	Spectrum Analyzer EUT		
Test Mode:	Transmitting mode with modulation		
Test Procedure:	Use the following spectrum analyzer settings: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel RBW > the 20 dB bandwidth of the emission being measured VBW ≥ RBW Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.		
Test Result:	PASS		

5.3.2. Test Instruments

5.3.2. Test Instru	ments			
Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 28, 2024
Combiner Box	Ascentest	AT890-RFB	9) /	(0)





5.4. 20dB Occupy Bandwidth

5.4.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)			
Test Method:	KDB 558074 D01 v05r02			
Limit:	N/A			
Test Setup:	Spectrum Analyzer	EUT		
Test Mode:	Transmitting mode with	h modulation		
Test Procedure:	 Transmitting mode with modulation The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Use the following spectrum analyzer settings for 20dE Bandwidth measurement. Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel; 1%≤RBW≤5% of the 20 dB bandwidth; VBW≥3RBW Sweep = auto; Detector function = peak; Trace = maxhold. 			
Test Result:	Measure and record the results in the test report. PASS			

5.4.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 28, 2024
Combiner Box	Ascentest	AT890-RFB	/	/

Page 13 of 97

Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com



5.5. Carrier Frequencies Separation

5.5.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	KDB 558074 D01 v05r02
Limit:	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.
Test Setup:	Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Enable the EUT hopping function. Use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels; RBW is set to approximately 30% of the channel spacing, adjust as necessary to best identify the center of each individual channel; VBW≥RBW; Sweep = auto; Detector function = peak; Trace = max hold. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Record the value in report.
Test Result:	PASS

5.5.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 28, 2024
Combiner Box	Ascentest	AT890-RFB		





5.6. Hopping Channel Number

5.6.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)		
Test Method:	KDB 558074 D01 v05r02		
Limit:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.		
Test Setup:	Spectrum Analyzer EUT		
Test Mode:	Hopping mode		
Test Procedure:	 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Enable the EUT hopping function. Use the following spectrum analyzer settings: Span = the frequency band of operation; set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller; VBW≥RBW; Sweep = auto; Detector function = peak; Trace = max hold. The number of hopping frequency used is defined as the number of total channel. Record the measurement data in report. 		
Test Result:	PASS		
1 27 31			

5.6.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 28, 2024
Combiner Box	Ascentest	AT890-RFB	/	1



5.7. Dwell Time

5.7.1. Test Specification

FCC Part15 C Section 15.247 (a)(1)		
KDB 558074 D01 v05r02		
The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.		
Spectrum Analyzer EUT		
Hopping mode		
 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Enable the EUT hopping function. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW shall be ≤ channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel; VBW≥RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold. Measure and record the results in the test report. 		
PASS		

5.7.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 28, 2024
Combiner Box	Ascentest	AT890-RFB	3) /	



5.8. Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC F

FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29-1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

Page 17 of 97

Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com





5.9. Conducted Band Edge Measurement

5.9.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)		
Test Method:	KDB 558074 D01 v05r02		
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fal in the restricted bands must also comply with the radiated emission limits.		
Test Setup:	Spectrum Analyzer EUT		
Test Mode:	Transmitting mode with modulation		
Test Procedure:	 Set to the maximum power setting and enable the EUT transmit continuously. Set RBW = 100 kHz (≥1% span=10MHz), VBW = 300 kHz (≥RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used. Enable hopping function of the EUT and then repeat step 2 and 3. Measure and record the results in the test report. 		
Test Result:	PASS		

5.9.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 28, 2024
Combiner Box	Ascentest	AT890-RFB	1	

Page 18 of 97





5.10. Conducted Spurious Emission Measurement

5.10.1. Test Specification

FCC Part15 C Section 15.247 (d)
KDB 558074 D01 v05r02
In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Spectrum Analyzer EUT
Transmitting mode with modulation
 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Measure and record the results in the test report. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
PASS

5.10.2. Test Instruments

Name	Manufacturer	Model No.	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jun. 28, 2024
Combiner Box	Ascentest	AT890-RFB	3 /	(3)

Page 19 of 97

Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com




5.11. Radiated Spurious Emission Measurement

5.11.1. Test Specification

		<u> </u>				
Test Requirement:	FCC Part15	C Section	n 15.209	(0,)		2
Test Method:	ANSI C63.10	0:2013				
Frequency Range:	9 kHz to 25 (GHz				i
Measurement Distance:	3 m		(b)		120)
Antenna Polarization:	Horizontal &	Vertical				
	Frequency	Detector	RBW	VBW		Remark
	9kHz- 150kHz	Quasi-pea	k 200Hz	1kHz	Quas	i-peak Value
Receiver Setup:	150kHz- 30MHz	Quasi-pea		30kHz		i-peak Value
·	30MHz-1GHz	Quasi-pea	k 120KHz	300KHz	Quas	i-peak Value
	(C1)	Peak	1MHz	3MHz	1 0	eak Value
	Above 1GHz	Peak	1MHz	10Hz		rage Value
	Frequen		Field Stre	/meter)	Mea	asurement nce (meters)
	0.009-0.4		2400/F(F		300	
	0.490-1.7		24000/F(F		30	
	1.705-3		30			30
	30-88	-	100			3
	88-216		150		-(.c	3
Limit:	216-96	0	200			3
	Above 9	60	500			3
	Frequency		eld Strength rovolts/meter)	Measure Distan (mete	се	Detector
	Above 1GH	_	500	3		Average
	Above IGH		5000	3		Peak
Test setup:	For radiated emis	Turn table	v 30MHz	—∟ F	Comput	
	0011111210110112					





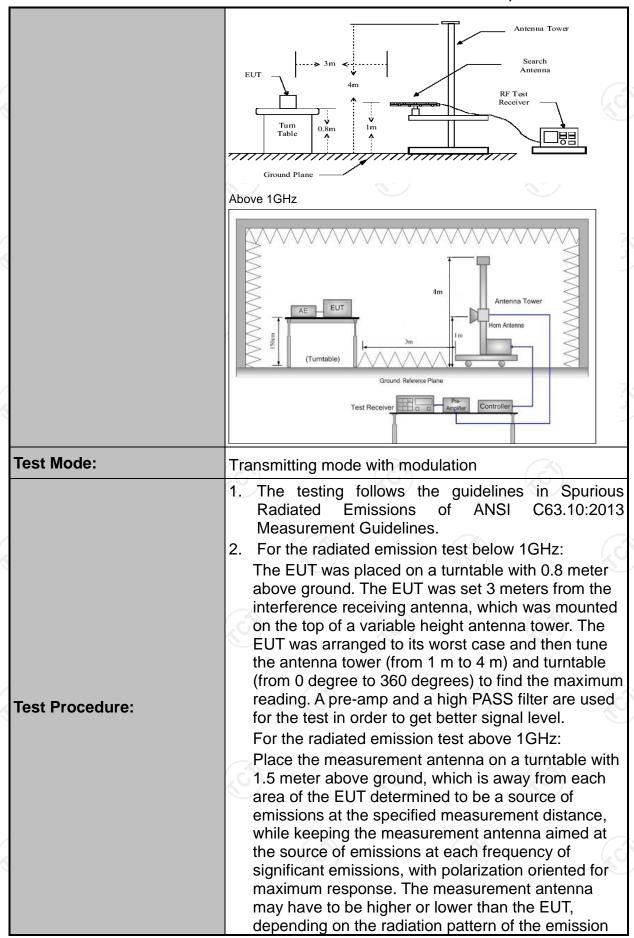



TESTING CENTRE	TECHNOLOGY	Report No.: TCT230727E00
	re- mo an re- ab 3. S	nd staying aimed at the emission source for eceiving the maximum signal. The final neasurement antenna elevation shall be that which naximizes the emissions. The measurement entenna elevation for maximum emissions shall be estricted to a range of heights of from 1 m to 4 m bove the ground or reference ground plane. Set to the maximum power setting and enable the EUT transmit continuously.
	4. U	Jse the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=120 kHz for f < 1 GHz, RBW=1MHz for f>1GHz; VBW≥RBW; Sweep = auto; Detector function = peak; Trace
		 = max hold for peak (3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time =N1*L1+N2*L2++Nn-1*LNn-1+Nn*Ln Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc. Average Emission Level = Peak Emission Level + 20*log(Duty cycle)
Toot recultor	DA CO	Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
Test results:	PASS	





5.11.2. Test Instruments

	Radiated En	nission Test Site	e (966)	
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESIB7	100197	Jun. 29, 2024
Spectrum Analyzer	R&S	FSQ40	200061	Jun. 29, 2024
Pre-amplifier	SKET	LNPA_0118G- 45	SK2021012 102	Feb. 20, 2024
Pre-amplifier	SKET	LNPA_1840G- 50	SK2021092 03500	Feb. 20, 2024
Pre-amplifier	HP	8447D	2727A05017	Jun. 27, 2024
Loop antenna	Schwarzbeck	FMZB1519B	00191	Jul. 02, 2024
Broadband Antenna	Schwarzbeck	VULB9163	340	Jul. 01, 2024
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jul. 01, 2024
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Feb. 24, 2024
Antenna Mast	Keleto	RE-AM	/	/
Coaxial cable	SKET	RC-18G-N-M	1	Feb. 24, 2024
Coaxial cable	SKET	RC_40G-K-M	/	Feb. 24, 2024
EMI Test Software	Shurple Technology	EZ-EMC		1 6






5.11.3. Test Data

Please refer to following diagram for individual

Horizontal:

Below 1GHz

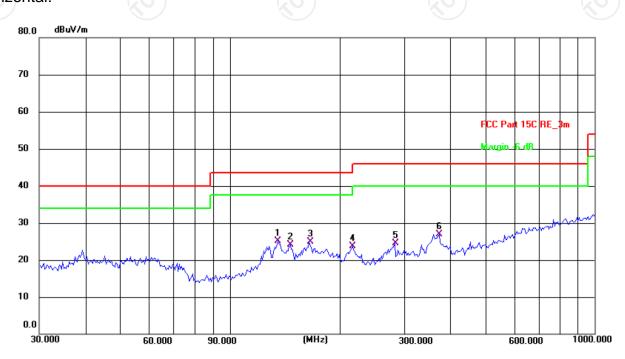


Site: #1 3m Anechoic Chamber Polarization: Horizontal Temperature: 24.9(C) Humidity: 51 %

Limit: FCC Part 15C RE 3m


Power: DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)		Margin (dB)	Detector	P/F	Remark
1 *	135.5061	11.66	13.54	25.20	43.50	-18.30	QP	Р	
2	146.3734	9.89	14.30	24.19	43.50	-19.31	QP	Р	
3	164.9074	10.78	14.10	24.88	43.50	-18.62	QP	Р	
4	216.7828	12.47	11.15	23.62	46.00	-22.38	QP	Р	
5	282.9851	11.13	13.40	24.53	46.00	-21.47	QP	Р	
6	374.6225	11.15	15.81	26.96	46.00	-19.04	QP	Р	

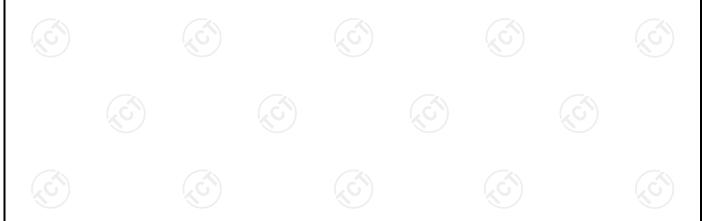



Vertical:

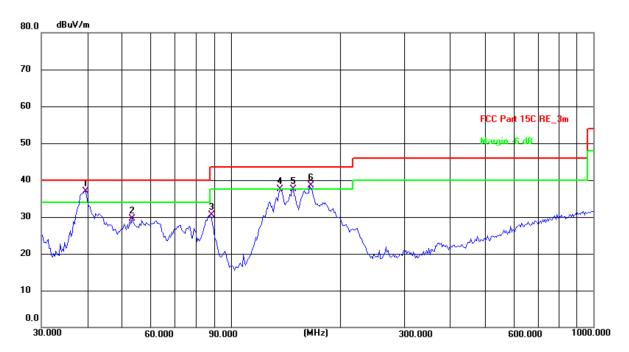

Polarization: Vertical Site: #1 3m Anechoic Chamber Temperature: 24.9(C) Humidity: 51 %

Ļimit: I	FCC Part 15C F	RE_3m				Power:			
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	39.7146	22.70	14.20	36.90	40.00	-3.10	QP	Р	
2	53.3179	16.22	13.34	29.56	40.00	-10.44	QP	Р	
3	87.7248	20.84	9.68	30.52	40.00	-9.48	QP	Р	
4	136.4598	23.96	13.54	37.50	43.50	-6.00	QP	Р	
5 !	148.4410	23.12	14.40	37.52	43.50	-5.98	QP	Р	
6!	164.9075	24.48	14.10	38.58	43.50	-4.92	QP	Р	

Note: 1. The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

- 2. Measurements were conducted in all three channels (high, middle, low) and three modulation (GFSK, Pi/4 DQPSK, 8DPSK) and the worst case Mode (Middle channel and GFSK) was submitted only.
- 3. Freq. = Emission frequency in MHz

Measurement $(dB\mu V/m) = Reading level (dB\mu V) + Corr. Factor (dB)$ Correction Factor= Antenna Factor + Cable loss - Pre-amplifier

 $Limit (dB\mu V/m) = Limit stated in standard$

Over (dB) = Measurement $(dB\mu V/m)$ – Limits $(dB\mu V/m)$


* is meaning the worst frequency has been tested in the test frequency range.



Test Result of Radiated Spurious at Band edges

Lowest channel 2402:

Horizontal:

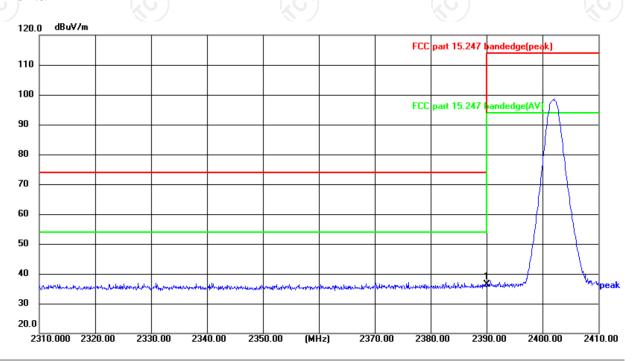

Site: #3 3m Anechoic Chamber Polarization: Horizontal Temperature: 25.3(°C) Humidity: 50 %

Limit: FCC part 15.247 bandedge(peak)


Power:DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)		Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	2390.000	52.87	-16.53	36.34	74.00	-37.66	peak	Р	_





Vertical:

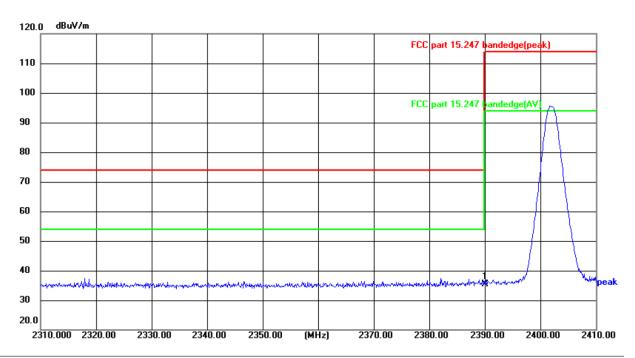

Site: #3 3m Anechoic Chamber

Polarization: Vertical

Temperature: 25.3(°C)

Humidity: 50 %

Limit: FCC part 15.247 bandedge(peak)

Power: DC 3.7 V


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)		Margin (dB)	Detector	P/F	Remark
1 *	2390.000	52.00	-16.53	35.47	74.00	-38.53	peak	Р	





Highest channel 2480:

Horizontal:

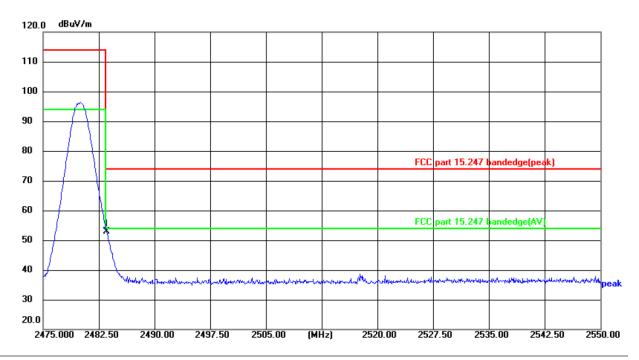

Site: #3 3m Anechoic Chamber Polarization: Horizontal Temperature: 25.3(°C) Humidity: 50 %

Limit

74.00

(dBuV/m) (dBuV/m)

Limit: FCC part 15.247 bandedge(peak)

Frequency

(MHz)

2483.500

No.

1 *

Reading

(dBuV)

69.39

Factor

(dB/m)

-16.43

Level

52.96

Power:DC 3.7 V

P/F

Ρ

Remark

Detector

peak

Margin


(dB)

-21.04

·				



Vertical:

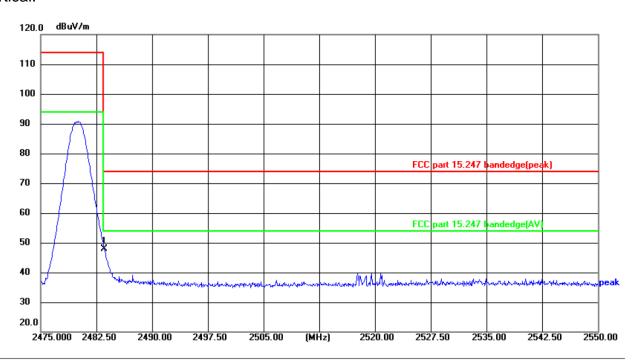

Site: #3 3m Anechoic Chamber

Polarization: Vertical

Temperature: 25.3(°C)

Humidity: 50 %

Limit: FCC part 15.247 bandedge(peak)

Power:DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)				Margin (dB)	Detector	P/F	Remark
1 *	2483.500	64.29	-16.43	47.86	74.00	-26.14	peak	Р	

Note: Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.







































Above 1GHz

Modulation	Type: GF	SK											
Low chann	Low channel: 2402 MHz												
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBuV)	reading Factor Peak			Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)				
4804	Н	45.14		0.66	45.80		74	54	-8.20				
7206	Н	34.36		9.50	43.86		74	54	-10.14				
	Н						-						
	, G)		(,C			.G'\		(.C)					
4804	V	46.27		0.66	46.93	<u></u>	74	54	-7.07				
7206	V	34.53		9.50	44.03		74	54	-9.97				
	V												

Middle cha	nnel: 2441	MHz	(20)			(0)			/C
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBµV)	Correction Factor (dB/m)	Emissic Peak (dBµV/m)	AV	Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)
4882	H	46.33		0.99	47.32		74	54	-6.68
7323	(OH)	35.88	-120	9.87	45.75	O 7-	74	54	-8.25
	H					<u></u>			
4882	V	46.85		0.99	47.84		74	54	-6.16
7323	V	36.21		9.87	46.08		74	54	-7.92
	V	(L		(/ /		(22.)		

High channel: 2480 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBµV)	Correction Factor (dB/m)	Emissic Peak (dBµV/m)	AV	Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)
4960	Н	47.15		1.33	48.48	!	74	54	-5.52
7440	Η	36.66		10.22	46.88		74	54	-7.12
	Н	 /.							
								(.c)	
4960	V	47.42		1.33	48.75		74	54	-5.25
7440	V	36.97		10.22	47.19		74	54	-6.81
	V								

Note:

- 1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss Pre-amplifier
- 2. $Margin (dB) = Emission Level (Peak) (dB\mu V/m)-Average limit (dB\mu V/m)$
- 3. The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 5. Data of measurement shown "---"in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
- 6. Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.
- 7. All the restriction bands are compliance with the limit of 15.209.



Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com



Appendix A: Test Result of Conducted Test

Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	6.67	21	Pass
NVNT	1-DH1	2441	6.88	21	Pass
NVNT	1-DH1	2480	4.82	21	Pass
NVNT	2-DH1	2402	4.14	21	Pass
NVNT	2-DH1	2441	4.27	21	Pass
NVNT	2-DH1	2480	4.15	21	Pass
NVNT	3-DH1	2402	4.15	21	Pass
NVNT	3-DH1	2441	4.29	21	Pass
NVNT	3-DH1	2480	4.10	21	Pass









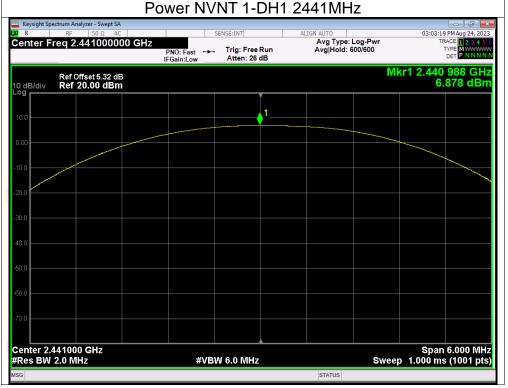















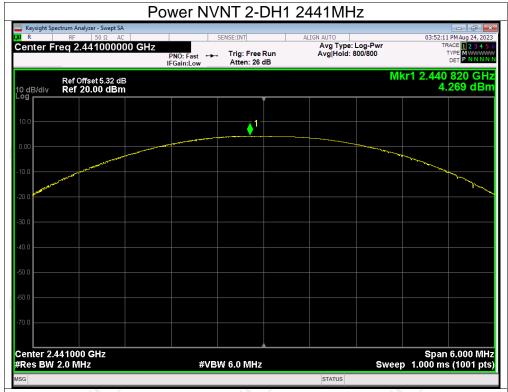


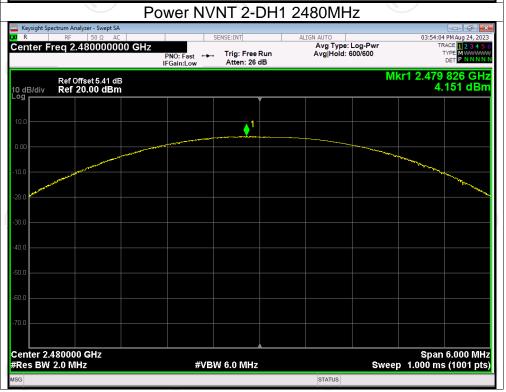








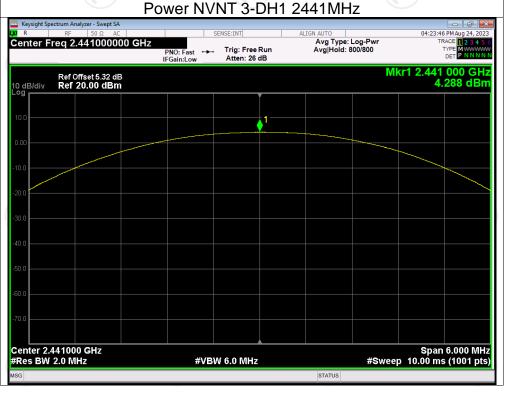



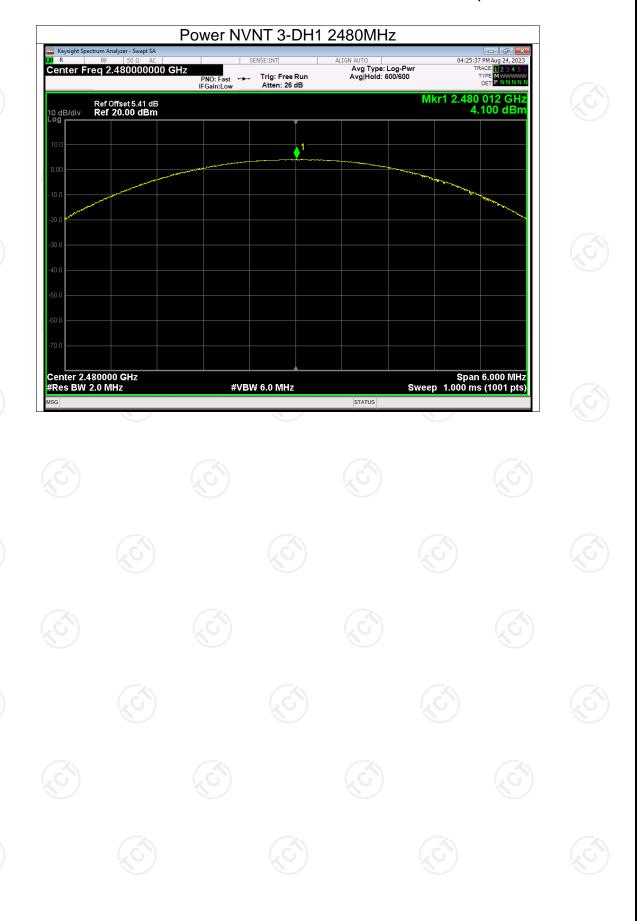



-20dB Bandwidth

Condition	Mode	Frequency (MHz)	-20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	1.027	Pass
NVNT	1-DH1	2441	1.038	Pass
NVNT	1-DH1	2480	1.039	Pass
NVNT	2-DH1	2402	1.226	Pass
NVNT	2-DH1	2441	1.225	Pass
NVNT	2-DH1	2480	1.222	Pass
NVNT	3-DH1	2402	1.252	Pass
NVNT	3-DH1	2441	1.251	Pass
NVNT	3-DH1	2480	1.250	Pass





















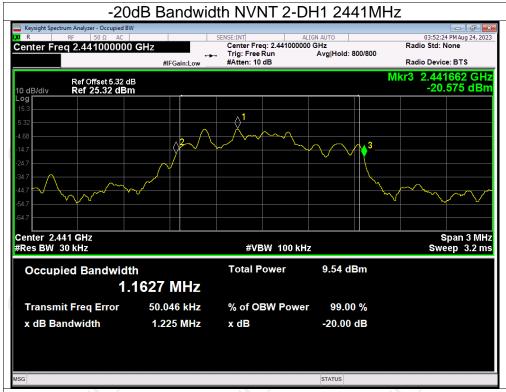






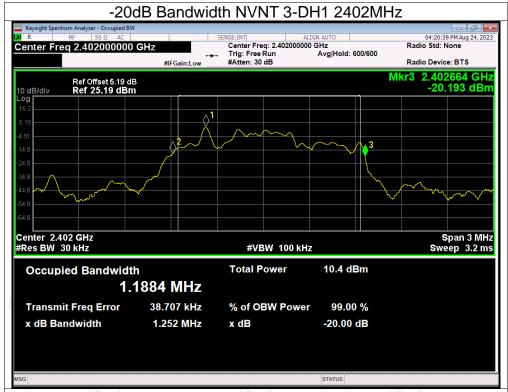





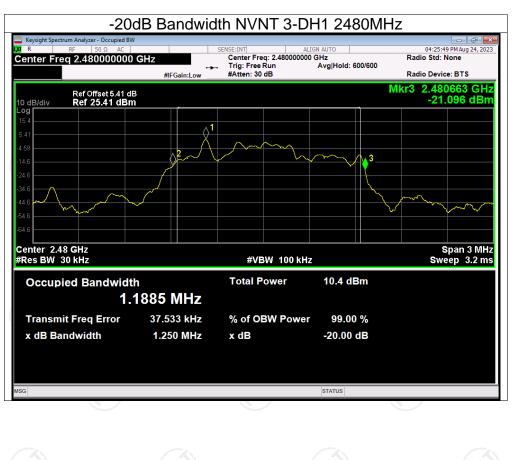






Carrier Frequencies Separation


Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	2402.162	2403.162	1	0.693	Pass
NVNT	1-DH1	2441.162	2442.162	1	0.693	Pass
NVNT	1-DH1	2479.162	2480.162	1	0.693	Pass
NVNT	2-DH1	2401.850	2402.846	0.996	0.817	Pass
NVNT	2-DH1	2440.838	2441.844	1.006	0.817	Pass
NVNT	2-DH1	2478.846	2479.846	1	0.817	Pass
NVNT	3-DH1	2401.850	2402.842	0.992	0.835	Pass
NVNT	3-DH1	2440.842	2441.844	1.002	0.835	Pass
NVNT	3-DH1	2478.844	2479.844	13	0.835	Pass









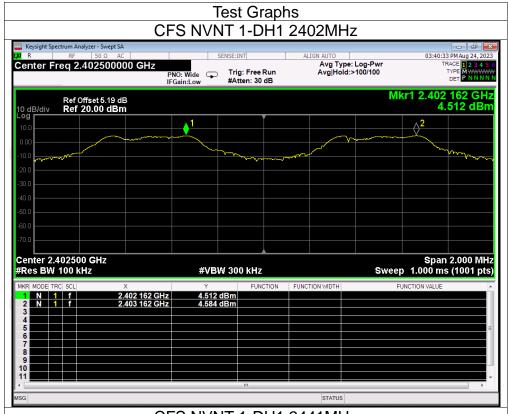

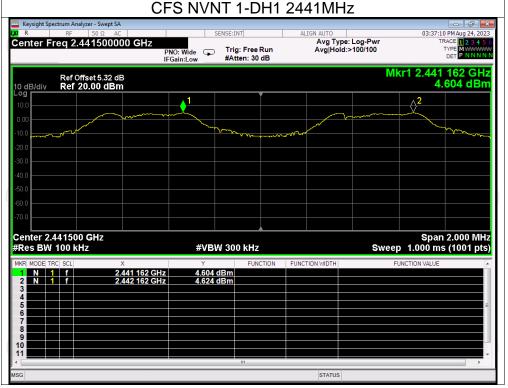





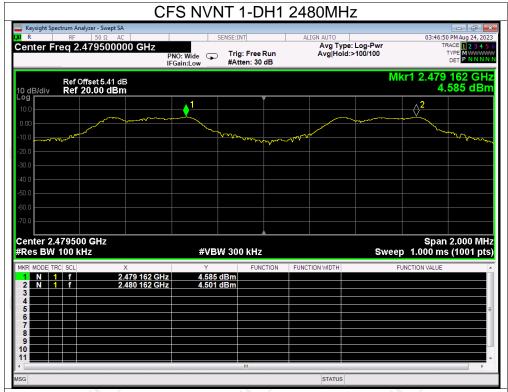

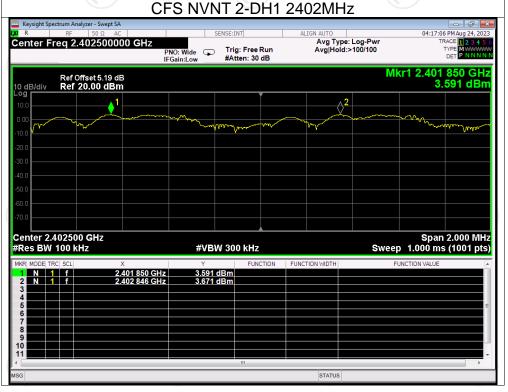





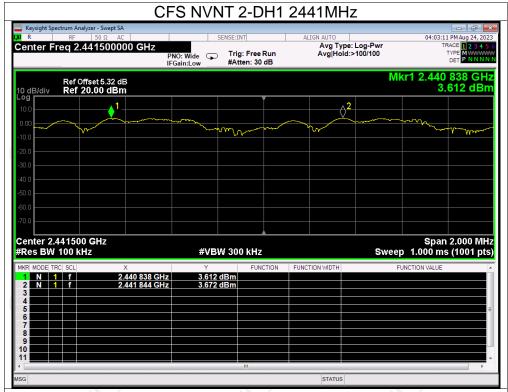


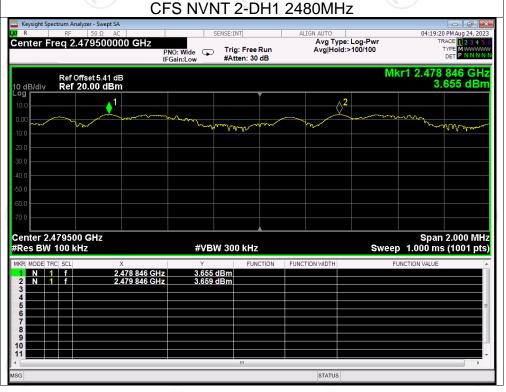




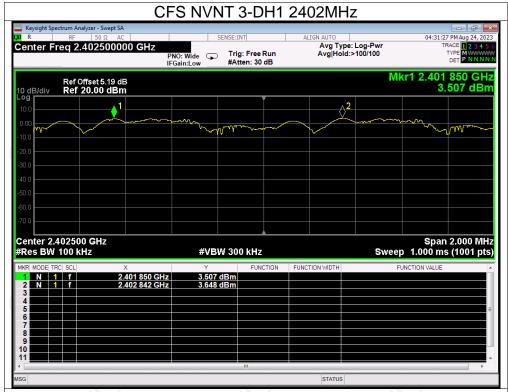

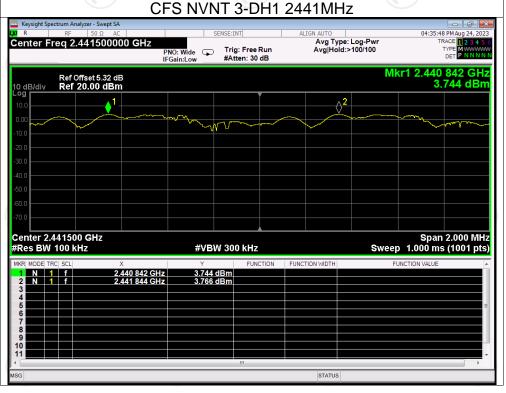






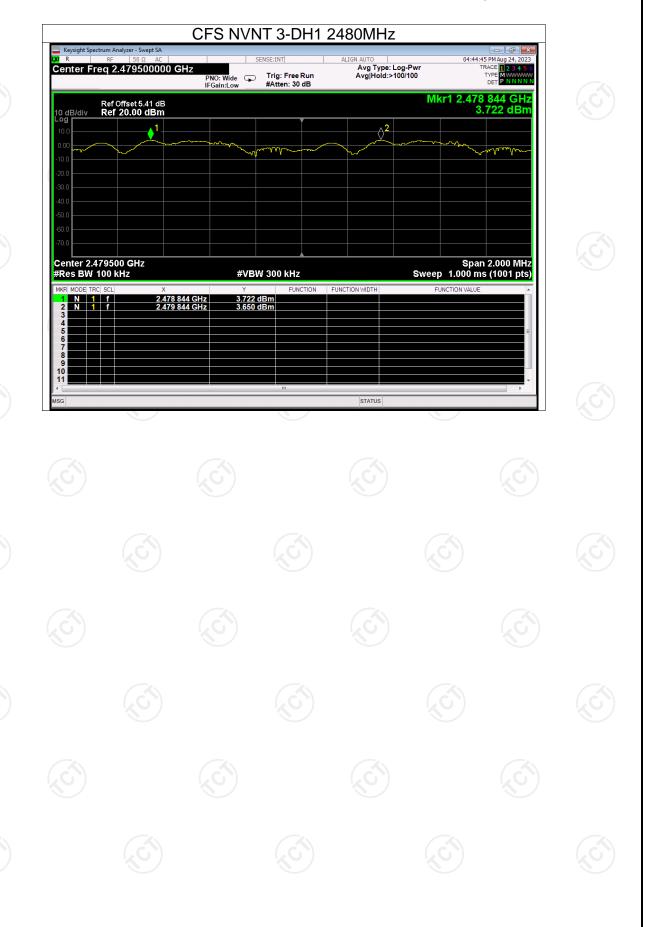





Band Edge

Condition	Mode	Frequency (MHz)	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	No-Hopping	-59.59	-20	Pass
NVNT	1-DH1	2480	No-Hopping	-57.47	-20	Pass
NVNT	2-DH1	2402	No-Hopping	-57.98	-20	Pass
NVNT	2-DH1	2480	No-Hopping	-57.24	-20	Pass
NVNT	3-DH1	2402	No-Hopping	-57.00	-20	Pass
NVNT	3-DH1	2480	No-Hopping	-57.85	-20	Pass

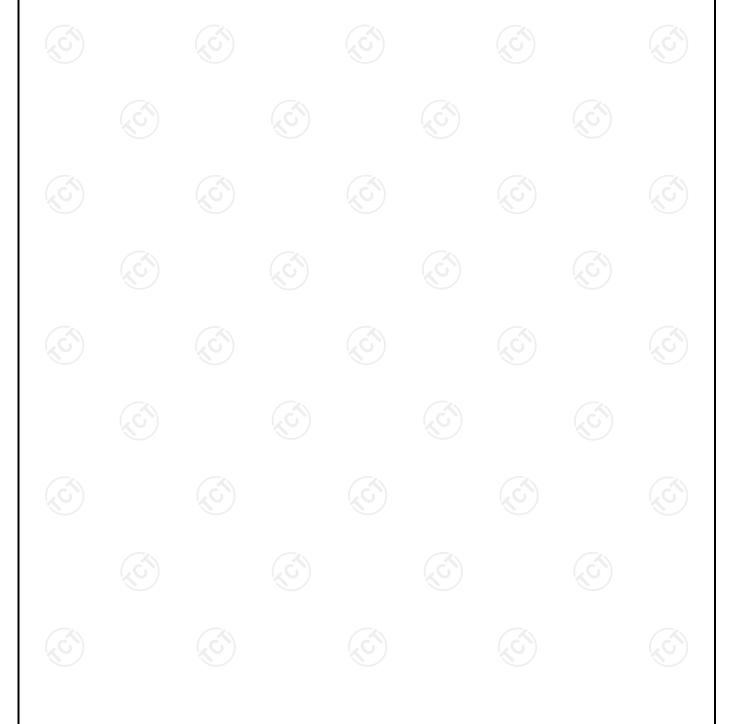




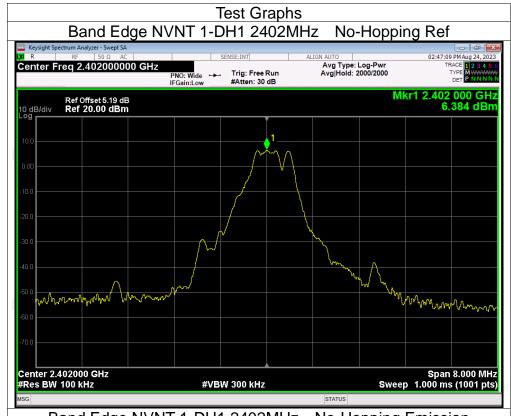

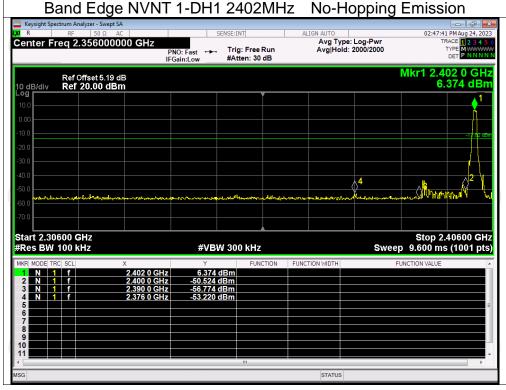






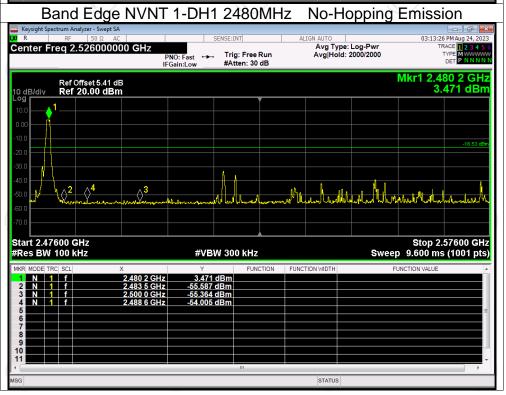






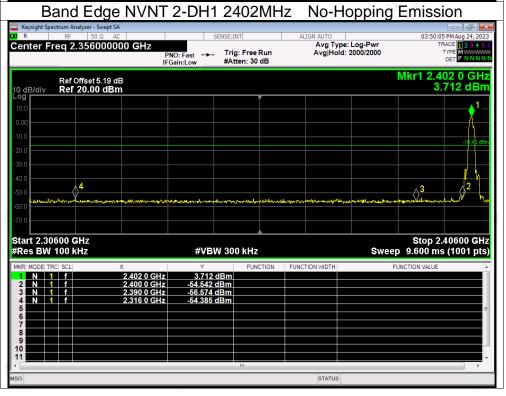







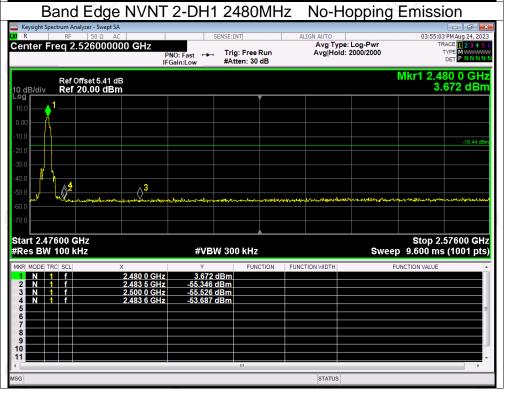





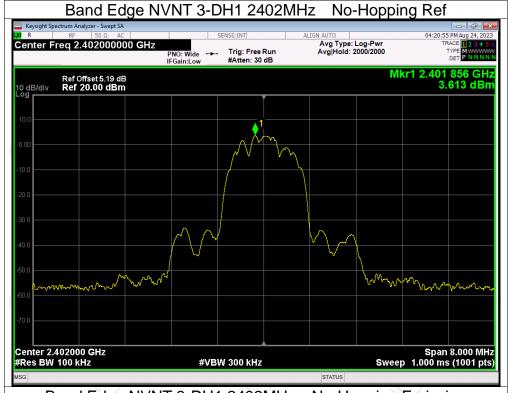

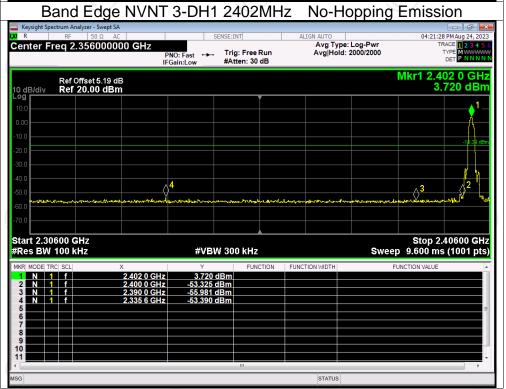



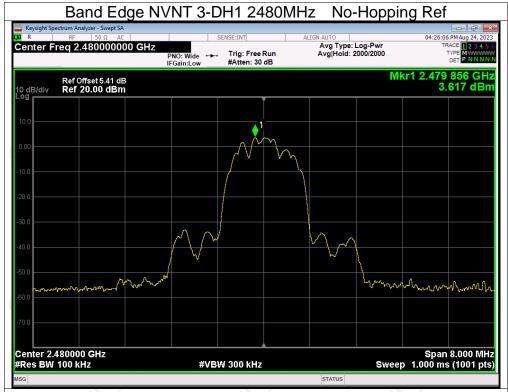


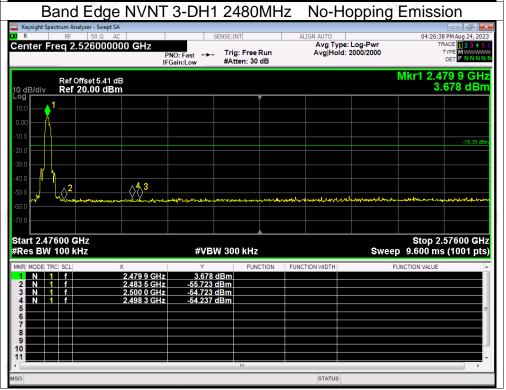




Band Edge(Hopping)


Condition	Mode	Frequency (MHz)	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Hopping	-58.92	-20	Pass
NVNT	1-DH1	2480	Hopping	-58.82	-20	Pass
NVNT	2-DH1	2402	Hopping	-58.61	-20	Pass
NVNT	2-DH1	2480	Hopping	-57.82	-20	Pass
NVNT	3-DH1	2402	Hopping	-57.98	-20	Pass
NVNT	3-DH1	2480	Hopping	-57.65	-20	Pass

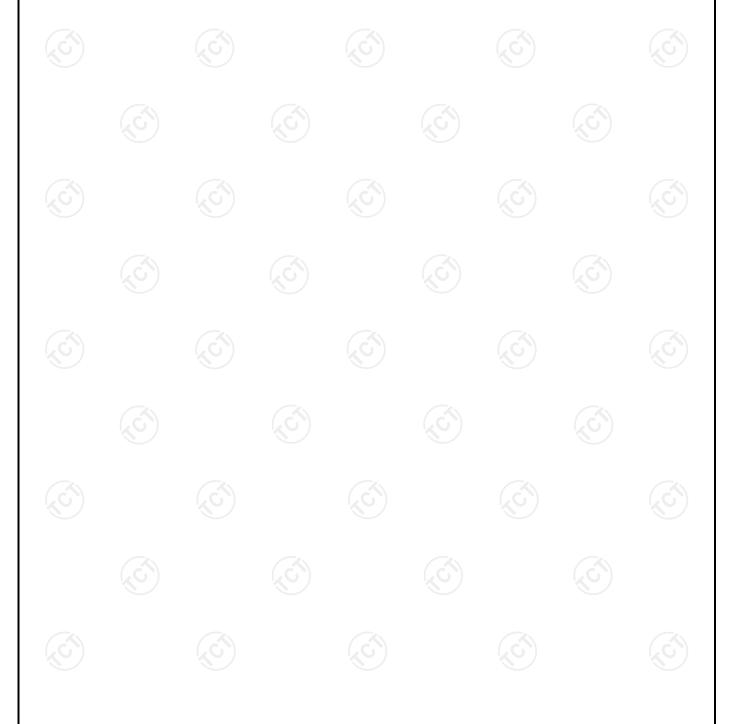






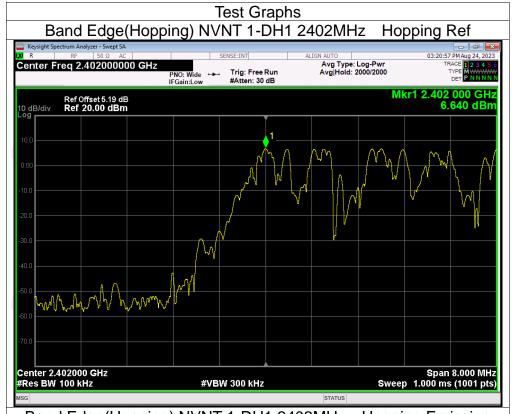

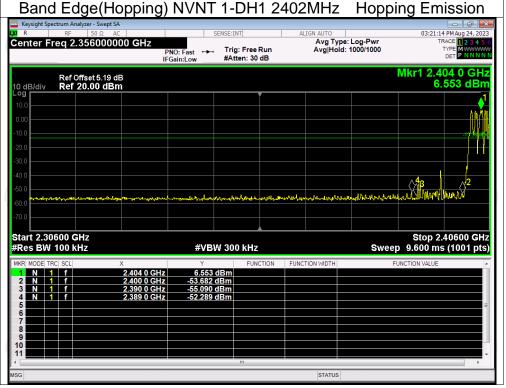






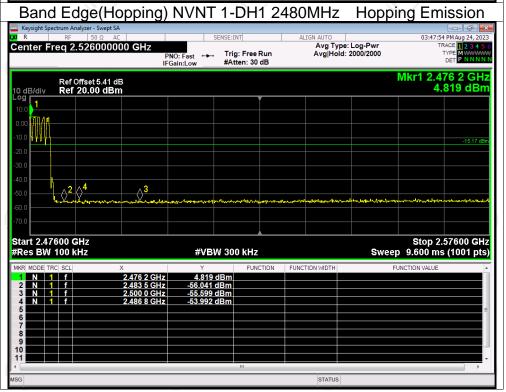






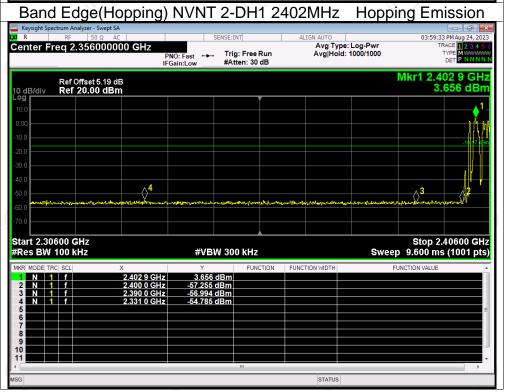







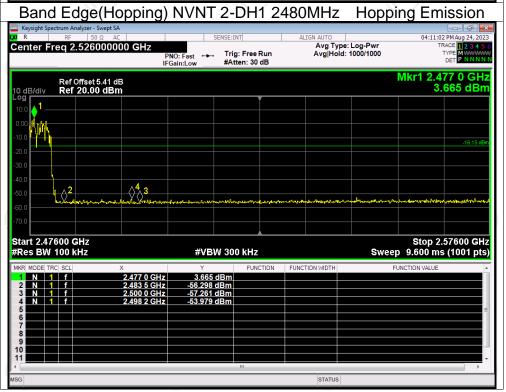




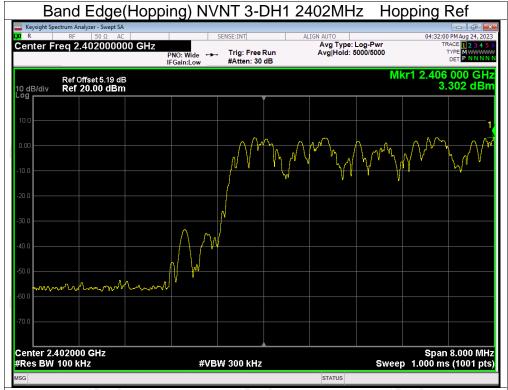

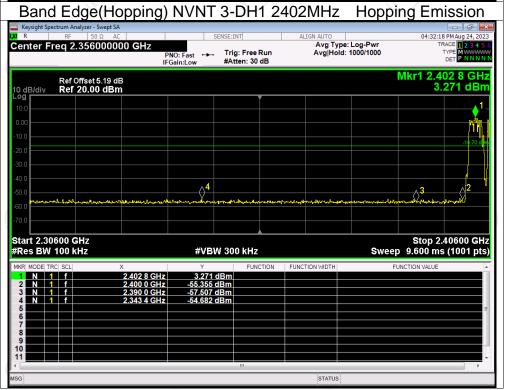





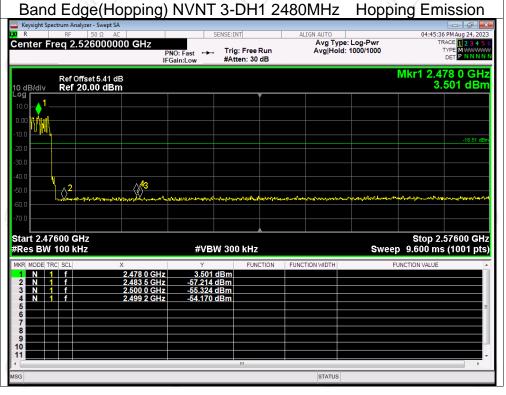



Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	-37.78	-20	Pass
NVNT	1-DH1	2441	-41.87	-20	Pass
NVNT	1-DH1	2480	-45.78	-20	Pass
NVNT	2-DH1	2402	-46.40	-20	Pass
NVNT	2-DH1	2441	-46.25	-20	Pass
NVNT	2-DH1	2480	-45.78	-20	Pass
NVNT	3-DH1	2402	-46.68	-20	Pass
NVNT	3-DH1	2441	-46.46	-20	Pass
NVNT	3-DH1	2480	-45.48	-20	Pass










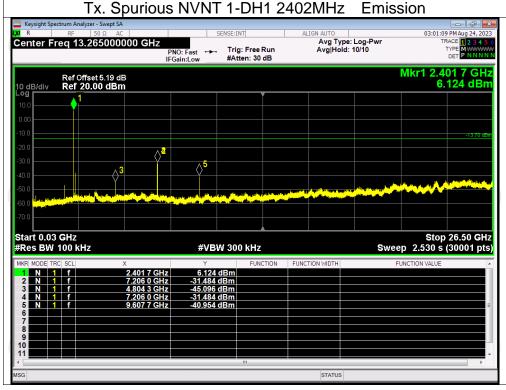






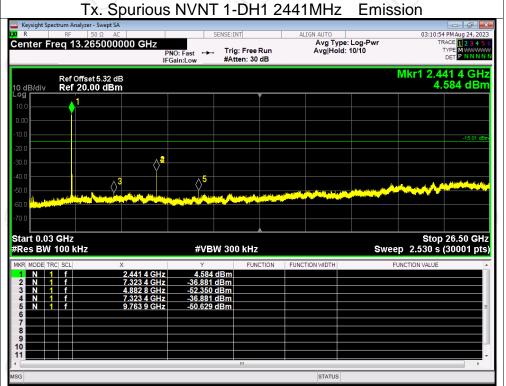






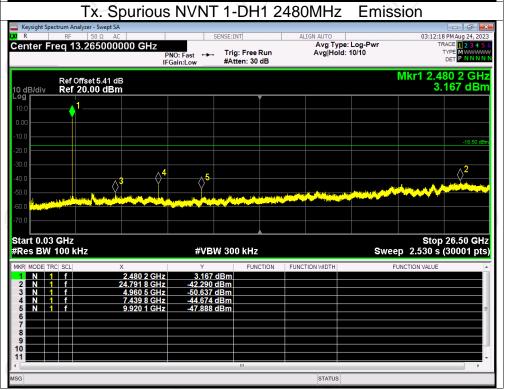






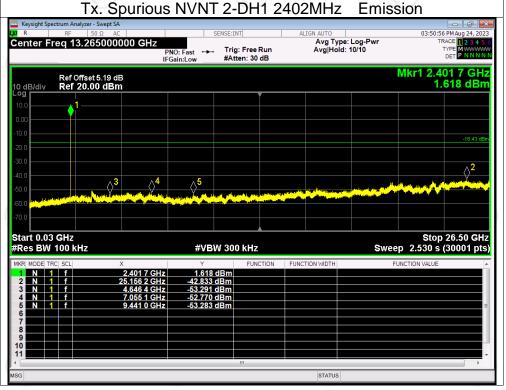






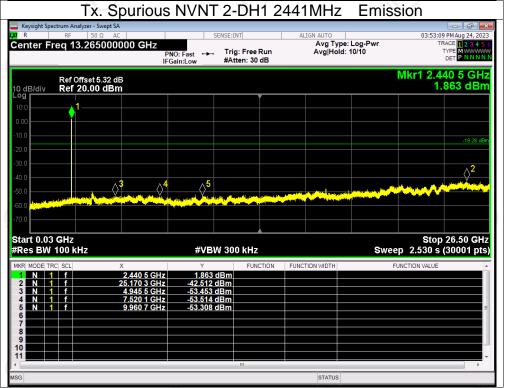






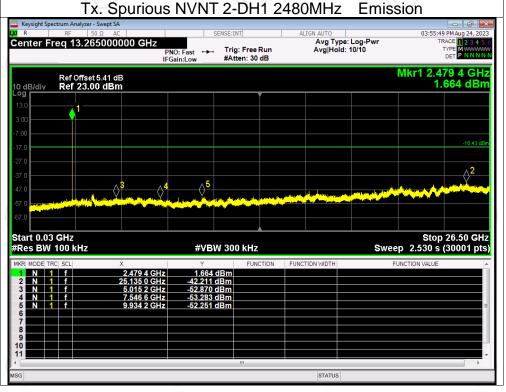






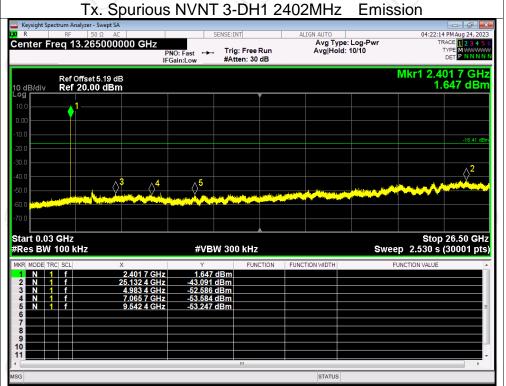






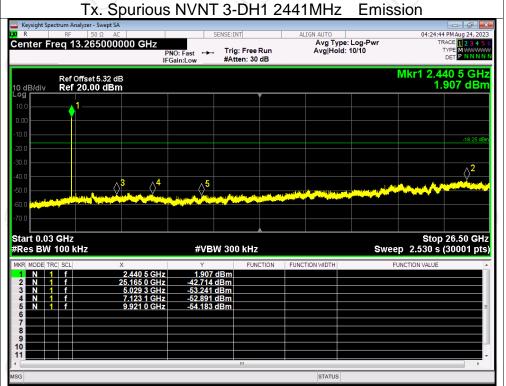






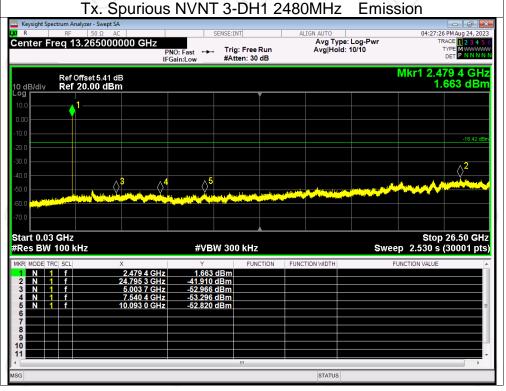




Number of Hopping Channel


Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass
NVNT	3-DH1	79	15	Pass

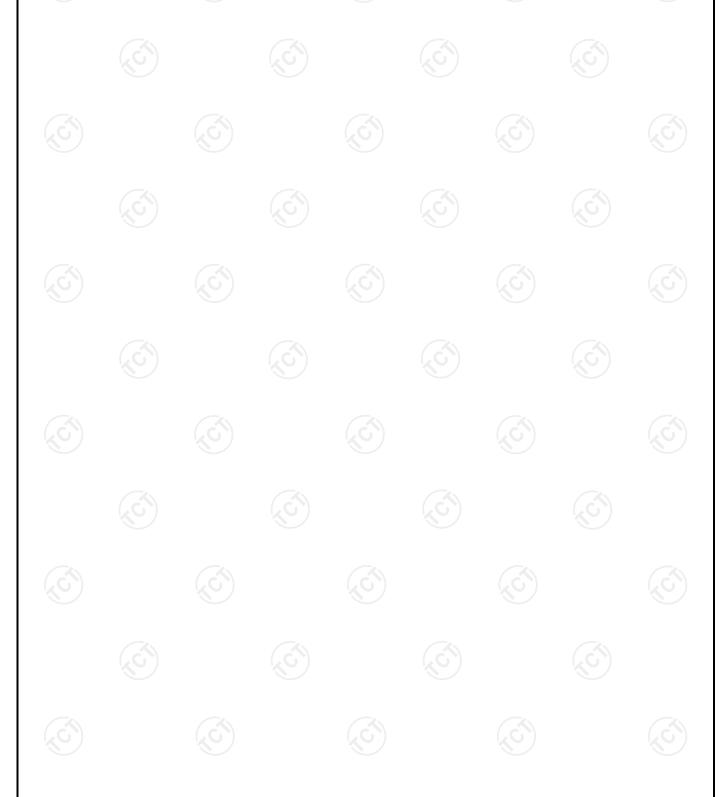






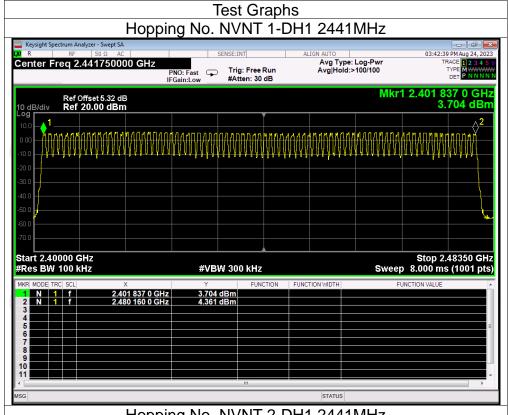

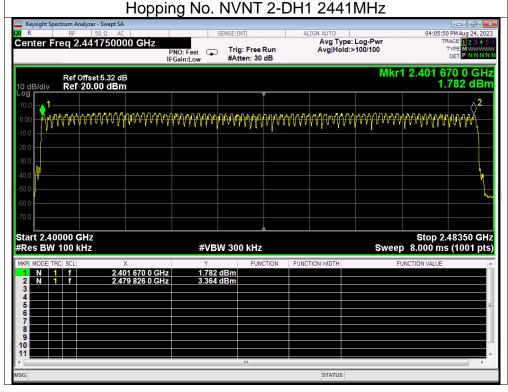





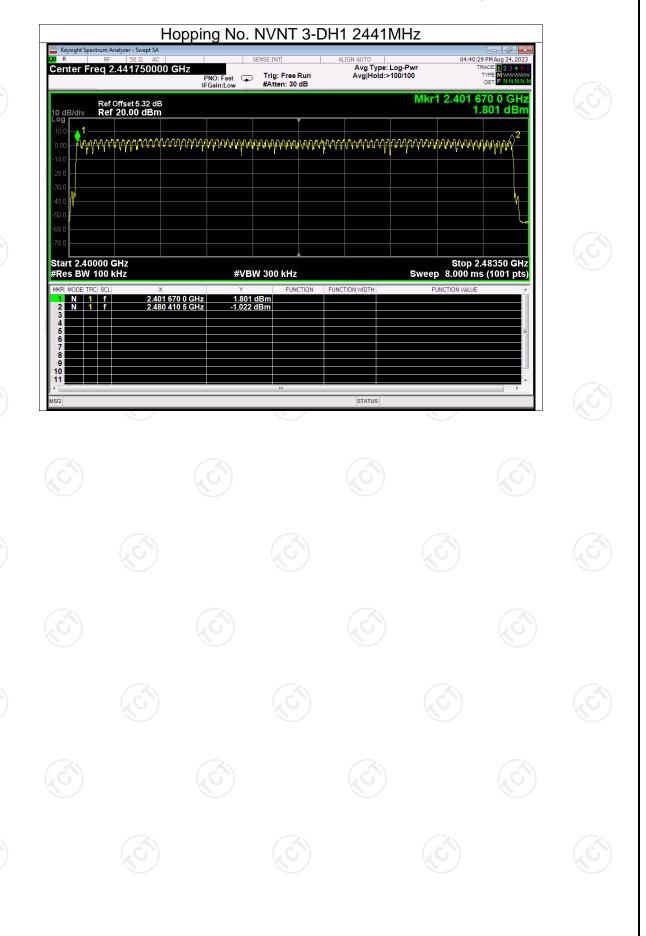



Dwell Time

Condition	Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	0.38	118.94	313	31600	400	Pass
NVNT	1-DH3	2441	1.63	255.91	157	31600	400	Pass
NVNT	1-DH5	2441	2.88	296.64	103	31600	400	Pass
NVNT	2-DH1	2441	0.39	123.63	317	31600	400	Pass
NVNT	2-DH3	2441	1.64	262.40	160	31600	400	Pass
NVNT	2-DH5	2441	2.89	297.67	103	31600	400	Pass
NVNT	3-DH1	2441	0.39	123.24	316	31600	400	Pass
NVNT	3-DH3	2441	1.64	262.40	160	31600	400	Pass
NVNT	3-DH5	2441	2.89	289	100	31600	400	Pass







