



# TEST REPORT

**APPLICANT** : PRISMXR PTE LTD  
**PRODUCT NAME** : PrismXR Puppis S1 Lite  
**MODEL NAME** : P1431  
**BRAND NAME** : PRISMXR  
**FCC ID** : 2BCGS-P1431  
**STANDARD(S)** : 47 CFR Part 15 Subpart C  
**RECEIPT DATE** : 2025.07.22  
**TEST DATE** : 2025.07.22~2025.08.26  
**ISSUE DATE** : 2025.08.26

Edited by:

Zeng Xiaoying  
Zeng Xiaoying (Rapporteur)

Approved by:

Shen Junsheng  
Shen Junsheng (Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB**

Shenzhen Morlab Communications Technology Co., Ltd.  
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555      Fax: 86-755-36698525  
Http://www.morlab.cn      E-mail: service@morlab.cn



## TABLE OF CONTENTS

REVISION HISTORY .....	3
DECLARATION OF REPORT .....	4
SUMMARY OF TEST RESULT .....	5
1. GENERAL DESCRIPTION .....	6
1.1. Applicant .....	6
1.2. Manufacturer .....	6
1.3. Factory .....	6
1.4. General Information of EUT .....	7
1.5. Equipment Specification .....	8
1.6. Modification of EUT .....	9
1.7. Laboratory Information .....	9
1.8. Applicable Standards .....	9
2. TEST CONFIGURATION OF EUT .....	10
2.1. Carrier Frequency Channel .....	10
2.2. Test Modes .....	10
2.3. Block Diagram of Test System .....	11
2.4. Description of Support Units .....	11
2.5. Test Software and Power Level .....	11
2.6. EUT Operating Conditions .....	11
2.7. Equipment List .....	12
2.8. Measurement Uncertainty .....	14
3. TEST RESULT .....	15
3.1. Maximum conducted output power .....	15
3.2. Duty Cycle .....	16
3.3. 6dB Bandwidth and 99% Bandwidth .....	17
3.4. Power Spectral Density .....	19
3.5. Conducted Band Edge .....	20
3.6. Radiated Spurious Emission and Restricted Band .....	21
3.7. AC Power-Line Conducted Emission .....	47
3.8. Conducted Spurious Emission .....	50
3.9. Antenna Requirement .....	51
4. Test Setup Photographs .....	52
5. External And Internal Photos of The EUT .....	52
Appendix A of data .....	53
A1. Maximum Peak conducted output power .....	53
A2. Duty Cycle .....	54
A3. 6dB Bandwidth and 99% Bandwidth .....	55
A4. Power Spectral Density .....	68
A5. Conducted Band Edge and Conducted Spurious Emission .....	73

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



## REVISION HISTORY

Rev.	Issue Date	Revisions	Revised by
A0	2025.08.07	Initial Release	Shen Junsheng

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



## DECLARATION OF REPORT

1. The device has been tested by Morlab, and the test results show that the equipment under test (EUT) is in compliance with the requirements of 47 CFR 15.247. And it is applicable only to the tested sample identified in the report.
2. This report shall not be reproduced except in full, without the written approval of Morlab, this document only be altered or revised by Morlab, personal only, and shall be noted in the revision of the document.
3. The general information of EUT in this report is provided by the customer or manufacture, Morlab is only responsible for the test data but not for the information provided by the customer or manufacture.
4. The results in this report is only apply to the sample as tested under conditions. The customer or manufacturer is responsible for ensuring that the additional production units of this model have the same electrical and mechanical components.
5. In this report, '□' indicates that EUT does not support content after '□', and '☒' indicates that it supports content after '☒'

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

## SUMMARY OF TEST RESULT

Report Section	Standard Section	Test Item	Judgment	Remark
3.1	47 CFR 15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	--
3.2	--	Duty Cycle	Report only	--
3.3	47 CFR 15.247(a)(2)	6dB Bandwidth	PASS	--
	--	99% Bandwidth	Report only	--
3.4	47 CFR 15.247(e)	Power Spectral Density	PASS	--
3.5	47 CFR 15.247(d)	Conducted Band Edge	PASS	--
3.6	47 CFR 15.247(d)	Conducted Spurious Emission	PASS	--
3.7	47 CFR 15.247(d)/15.209(a)/15.205 (a)	Radiated Spurious Emission and Restricted Band	PASS	--
3.8	47 CFR 15.207(a)	AC Power-Line Conducted Emission	PASS	--
3.9	47 CFR 15.203	Antenna Requirements	PASS	--

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

## 1. GENERAL DESCRIPTION

### 1.1. Applicant

Name : PRISMXR PTE LTD

Address : 60 PAYA LEBAR ROAD #12-03 PAYA LEBAR SOUARE, SINGAPORE, 409051

### 1.2. Manufacturer

Name : PRISMXR PTE LTD

Address : 60 PAYA LEBAR ROAD #12-03 PAYA LEBAR SOUARE, SINGAPORE, 409051

### 1.3. Factory

Name : Dongguan Yueshun Electronic Technology Co., Ltd.

Address : Building 2, No. 321, Tangxia Section, Dongshen Road, Lincun Community, Tangxia Town, Dongguan City

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



#### 1.4. General Information of EUT

General Information	
Equipment Name:	PrismXR Puppis S1 Lite
Brand Name:	PRISMXR
Model Name:	P1431
Series Model:	N/A
Model Difference:	N/A
Sample No:	202505150008002
Adapter:	Manufacturer:Shenzhen Keyu Power Supply Technology Co. Ltd. Model:BS12A-1201000US Input:100~240V~50/60Hz 0.4A Max; Output: DC 12V 1000mA
Hardware version:	V1.0
Software version:	2.00
Connecting I/O Port(s)	Refer to the remark below.

#### Remark:

The above information of EUT was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

## 1.5. Equipment Specification

Equipment Specification			
Frequency Range	2412MHz - 2462MHz		
Maximum AVG Output Power To Antenna	<input checked="" type="checkbox"/> 802.11b:	26.548dBm	
	<input checked="" type="checkbox"/> 802.11g:	28.990dBm	
	<input checked="" type="checkbox"/> 802.11n(HT)20:	28.668dBm	
	<input checked="" type="checkbox"/> 802.11n(HT)40:	<b>29.041dBm</b>	
Type of Modulation	<input checked="" type="checkbox"/> 802.11b: DSSS (DBPSK/DQPSK/CCK)		
	<input checked="" type="checkbox"/> 802.11g/n(HT): OFDM (BPSK/QPSK/16QAM/64QAM)		
Antenna Information	<input checked="" type="checkbox"/> SISO	Antenna Type:	PCB
		Antenna 1 Gain:	3.72dBi
		Antenna 2 Gain:	3.26dBi
	<input checked="" type="checkbox"/> Beam Forming	Antenna Type:	PCB
		Antenna 1 Gain:	2.3dBi

### Note:

1. The 802.11n mode can Support Beam Forming.
2. The 802.11b/g mode Support CDD.
3. not support MESH or Bridge functions.

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

## 1.6. Modification of EUT

No modifications are made to the EUT during all test items.

## 1.7. Laboratory Information

<b>Laboratory Name</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Laboratory Address</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
<b>Telephone</b>	+86 755 36698555
<b>Facsimile</b>	+86 755 36698525
<b>FCC Designation Number</b>	CN1192
<b>FCC Test Firm Registration Number</b>	226174

## 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

47 CFR Part 15 Subpart C §15.247;

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2013

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

## 2. TEST CONFIGURATION OF EUT

### 2.1. Carrier Frequency Channel

Frequency Band	Channel	Frequency MHz	Channel	Frequency MHz
2400 - 2483.5 MHz	01	2412	07	2442
	02	2417	08	2447
	03	2422	09	2452
	04	2427	10	2457
	05	2432	11	2462
	06	2437		

Remark:

1. For 20 MHz Bandwidth: Low Channel: **CH 01\_2412 MHz**; Middle Channel: **CH 06\_2437 MHz**; High Channel: **CH 11\_2462 MHz**. For 40 MHz Bandwidth: Low Channel: **CH 03\_2422 MHz**; Middle Channel: **CH 06\_2437 MHz**; High Channel: **CH 09\_2452 MHz**.

### 2.2. Test Modes

Final test modes are considering the modulation and worse data rates as below table.

Summary Table of Test Modes			
Test Item	Mode	Data Rate	Channel
For Conducted and Radiated Test	<input checked="" type="checkbox"/> 802.11b:	1 Mbps	Low, Middle, High
	<input checked="" type="checkbox"/> 802.11g:	6 Mbps	Low, Middle, High
	<input checked="" type="checkbox"/> 802.11n(HT)20:	MCS 0	Low, Middle, High
	<input checked="" type="checkbox"/> 802.11n(HT)40:	MCS 0	Low, Middle, High
	<input type="checkbox"/> 802.11ax(HE)20:	MCS 0	Low, Middle, High
	<input type="checkbox"/> 802.11ax(HE)40:	MCS 0	Low, Middle, High
For AC Power-line Conducted Emission	802.11n20: MIMO(802.11n40 Channel 9) worst mode		

Remark:


1. All the test modes of Radiated Spurious Emission (RSE) were tested at the worst data rate; only the worse data shown in report.
2. The worst test data below 1GHz is MIMO(802.11n40-TX Channel 9)mode.
3. The worst test data above 1GHz is the 802.11b/n20/n40 mode is the MIMO mode.

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.




## 2.3. Block Diagram of Test System

### 2.3.1. For AC Power-Line Conducted Emission

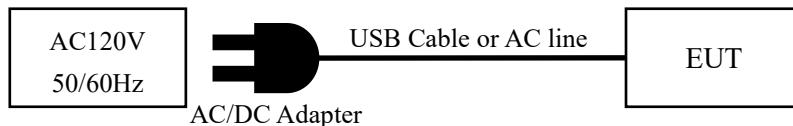

### 2.3.2. For Radiated Spurious Emission

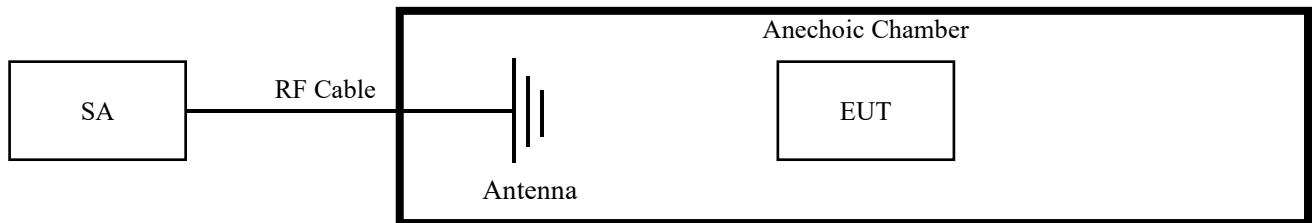

### 2.3.3. For Conducted Test



## 2.4. Description of Support Units

NO.	Unit	Brand	Model	Description
1	PC	Redmi G	2021Ryzen	N/A
2	LanTest	--	--	Flow running software

## 2.5. Test Software and Power Level

During the test, the channel and power control software provided by the customer is used to control the operation channel and output power level.

## 2.6. EUT Operating Conditions

For AC power-line conducted emission, the EUT was connected under the large package sizes transmission.

For radiated spurious emission and conducted test, the engineering test program was provided and make the EUT to continuous transmit/receive.

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

## 2.7. Equipment List

### 2.7.1. For AC Power-Line Conducted Emission

Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	Calibrated due until	Cal. Interval
EMI Test Receiver	R&S	ESPI	100679	2025.03.17	2026.03.16	1 year
LISN	R&S	ENV216	101300	2025.03.17	2026.03.16	1 year
LISN	R&S	ENV216	100333	2025.03.17	2026.03.16	1 year
CE Cable	Chuangce xing	2M	EMI0014	N/A	N/A	N/A
Temperature & Humidity	Deli	Deli	EMI0015	2025.08.01	2026.07.31	1 year
Testing Software	FALA	EZ-EMC(Ver.EMC-C ON 3A.1)	EMI0044	N/A	N/A	N/A

### 2.7.2. For Radiated Spurious Emission

Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	Calibrated due until	Cal. Interval
Signal analyzer	Agilent	N9020A	MY50200811	2025.03.17	2026.03.16	1 year
Amplifier	JPT	JPA0118-5 5-303A	1910001800055000	2025.03.24	2026.03.23	1 year
Amplifier	JPT	JPA-10M1 G32	21010100035001	2025.03.17	2026.03.16	1 year
Antenna/Turn table Controller	Brilliant	N/A	N/A	N/A	N/A	N/A
Loop Antenna(9kHz-30 MHz)	Daze	ZN30900C	20077	2025.05.13	2026.05.12	1 year
Bilog Antenna	SCHWARZBECK	VULB 9168	01174	2025.05.20	2026.05.19	1 year
Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120D	02334	2025.05.20	2026.05.19	1 year
Horn Antenna	COM-POWER	AH-1840	10100008	2025.07.27	2026.07.26	1 year
Thermometer	DeLi	N/A	N/A	2025.08.01	2026.07.31	1 year
Test Software	FALA	EMC-RI(Ver.4A2)	N/A	N/A	N/A	N/A
Wideband radio communication tester	R&S	CMW500	101331	2025.07.28	2026.07.27	1 year
Spectrum analyzer	R&S	FSV40-N	101761	2025.07.28	2026.07.27	1 year

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



### 2.7.3. For Conducted Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	Calibrated due until	Cal. Interval
Power sensor-Card reader	Cesheng	smu 1003	16I00054SN016	2025.03.19	2026.03.18	1 year
Adjustable Attenuator	Agilent	8494B	MY42144015	2025.07.28	2026.07.27	1 year
Adjustable Attenuator	Agilent	8496B	MY42143776	2025.07.28	2026.07.27	1 year
Environmental Test Chamber	KSON	THS-B6C-150	9159K	2025.03.17	2026.03.16	1 year
Signal analyzer	Keysight	N9020A	MY50510136	2025.07.18	2026.07.17	1 year
Vector signal generator	Agilent	N5182A	MY48180764	2025.07.18	2026.07.17	1 year
Analog signal generator	Keysight	N5182B	MY57300196	2025.07.18	2026.07.17	1 year
Wideband radio communication tester	R&S	CMW500	101331	2025.07.28	2026.07.27	1 year
Switch Box	Cesheng	smu 1003	WCS20221215	2025.03.19	2026.03.18	1 year
Thermometer	DeLi	N/A	N/A	2025.08.01	2026.07.31	1 year
Test Software	Cesheng	WCS-WCN	N/A	N/A	N/A	N/A

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

## 2.8. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.958\text{dB}$
2	Conducted spurious emissions	$\pm 2.988\text{dB}$
3	All emissions, radiated 9KHz-30MHz	$\pm 0.96\text{dB}$
4	All emissions, radiated 30MHz-1GHz	$\pm 2.50\text{dB}$
5	All emissions, radiated 1GHz-18GHz	$\pm 3.51\text{dB}$
6	All emissions, radiated 18GHz-40GHz	$\pm 3.56\text{dB}$
7	Occupied bandwidth	$\pm 23.20\text{Hz}$
8	Power spectral density	$\pm 0.886\text{dB}$
9	AC Power Line Conducted Emission 0.15MHz ~ 30MHz	$\pm 1.20\text{dB}$

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

### 3. TEST RESULT

#### 3.1. Maximum conducted output power

##### 3.1.1. Limit

47 CFR 15.247(b)(3): For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

47 CFR 15.247(b)(4): If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


47 CFR 15.247(c)(1)(i): Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

##### 3.1.2. Test Procedure

ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM: Method AVGPM is a measurement using an RF average power meter, as follows:

measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

##### 3.1.3. Test Setup

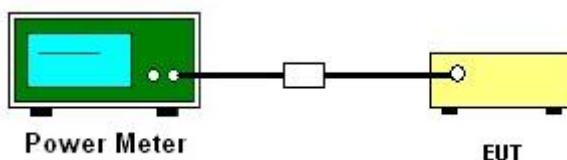

##### 3.1.4. Test Result of Maximum Conducted Output Power

Please refer to the Appendix A1.

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

## 3.2. Duty Cycle

### 3.2.1. Limit

There is no limit requirement for Duty Cycle.

### 3.2.2. Test Procedure


ANSI C63.10-2013 clause 11.6: Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

1. A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.

2. The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- ① Set the center frequency of the instrument to the center frequency of the transmission.
- ② Set RBW  $\geq$  OBW if possible; otherwise, set RBW to the largest available value.
- ③ Set VBW  $\geq$  RBW. Set detector = peak or average.
- ④ The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)

### 3.2.3. Test Setup

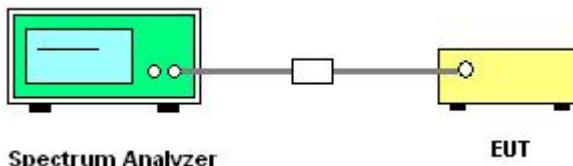

### 3.2.4. Test Result of Duty Cycle

Please refer to the Appendix A2.

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



### 3.3. 6dB Bandwidth and 99% Bandwidth

#### 3.3.1. Limit

47 CFR 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

There is no limit requirement for 99% Bandwidth.

#### 3.3.2. Test Procedure

1. The testing of 6dB Bandwidth follows ANSI C63.10-2013 clause 11.8.1: The steps for the first option are as follows:

- ① Set RBW = 100 kHz.
- ② Set the VBW  $\geq [3 \times \text{RBW}]$ .
- ③ Detector = peak.
- ④ Trace mode = max hold.
- ⑤ Sweep = auto couple.
- ⑥ Allow the trace to stabilize.
- ⑦ Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

2. The testing of 99% Bandwidth follows ANSI C63.10-2013 clause 6.9.3: The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- ① The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- ② The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- ③ Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (\text{OBW}/\text{RBW})]$  below the reference level. Specific guidance is given in ANSI C63.10-2013 clause 4.1.5.2.
- ④ Step a) through step c) might require iteration to adjust within the specified range.
- ⑤ Video averaging is not permitted. Where practical, a sample detection and single sweep

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.


mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

⑥ Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

⑦ If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

⑧ The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

### 3.3.3. Test Setup

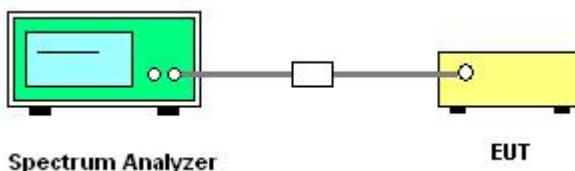

### 3.3.4. Test Result of 6dB Bandwidth and 99% Bandwidth

Please refer to the Appendix A3.

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

### 3.4. Power Spectral Density


#### 3.4.1. Limit

47 CFR 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 3.4.2. Test Procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to 3 kHz.
4. Set the VBW  $\geq [3 \times \text{RBW}]$ .
5. Detector =Peak.
6. Sweep time = auto couple.
7. Trace mode = Max Hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.

#### 3.4.3. Test Setup

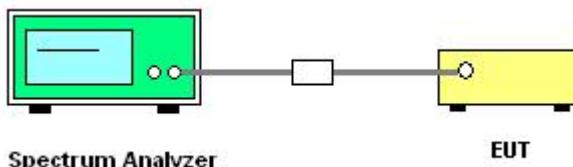

#### 3.4.4. Test Result of Power Spectral Density

Please refer to the Appendix A4.

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



### 3.5. Conducted Band Edge


#### 3.5.1. Limit

47 CFR 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

#### 3.5.2. Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100 kHz, VBW=300 kHz, RMS Detector. Conducted Band Edge measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the 100 kHz bandwidth within the band that contains the highest level of the desired power when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
4. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

#### 3.5.3. Test Setup

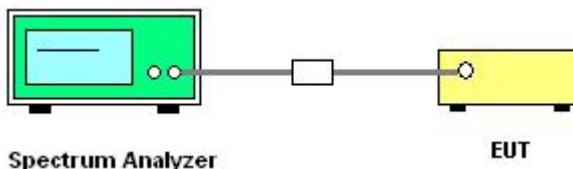

#### 3.5.4. Test Result of Conducted Band Edge

Please refer to the Appendix A5.

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



### 3.6. Radiated Spurious Emission and Restricted Band

#### 3.6.1. Limit

47 CFR 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

47 CFR 15.205(a): Only spurious emissions are permitted in any of the frequency bands listed below:

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)
0.090-0.110	12.29-12.293	149.9-150.05	1660-1710	8.025-8.5
0.495-0.505	12.51975-12.52025	156.52475-156.52525	1718.8-1722.2	9.0-9.2
2.1735-2.1905	12.57675-12.57725	156.7-156.9	2200-2300	9.3-9.5
4.125-4.128	13.36-13.41	162.0125-167.17	2310-2390	10.6-12.7
4.17725-4.17775	16.42-16.423	167.72-173.2	2483.5-2500	13.25-13.4
4.20725-4.20775	16.69475-16.69525	240-285	2690-2900	14.47-14.5
6.215-6.218	16.80425-16.80475	322-335.4	3260-3267	15.35-16.2
6.26775-6.26825	25.5-25.67	399.9-410	3332-3339	17.7-21.4
6.31175-6.31225	37.5-38.25	608-614	3345.8-3358	22.01-23.12
8.291-8.294	73-74.6	960-1240	3600-4400	23.6-24.0
8.362-8.366	74.8-75.2	1300-1427	4500-5150	31.2-31.8
8.37625-8.38675	108-121.94	1435-1626.5	5350-5460	36.43-36.5
8.41425-8.41475	123-138	1645.5-1646.5	7250-7750	Above 38.6

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

47 CFR 15.209(a): The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



### 3.6.2. Test Procedure


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Pre-amp Factor = Level.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - ① Span shall wide enough to fully capture the emission being measured;
  - ② When frequency < 1 GHz:
    - Set RBW=100 kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - ③ When frequency  $\geq$  1 GHz:
    - Set RBW = 1 MHz; VBW = 3 MHz for peak measurement;
    - Set RBW = 1 MHz; VBW = 10 Hz, when duty cycle is no less than 98 percent or VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.




### 3.6.3. Test Setup


#### 3.6.3.1. For radiated emissions below 30MHz

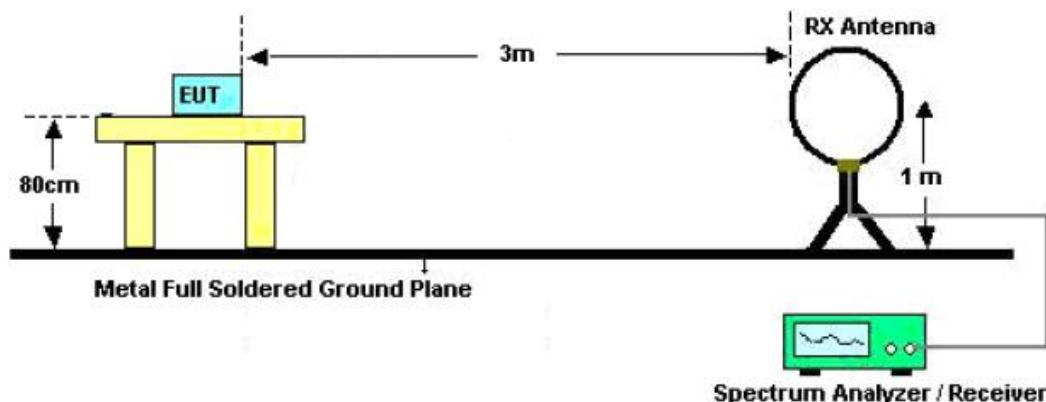

#### 3.6.3.2. For radiated emissions from 30MHz to 1GHz

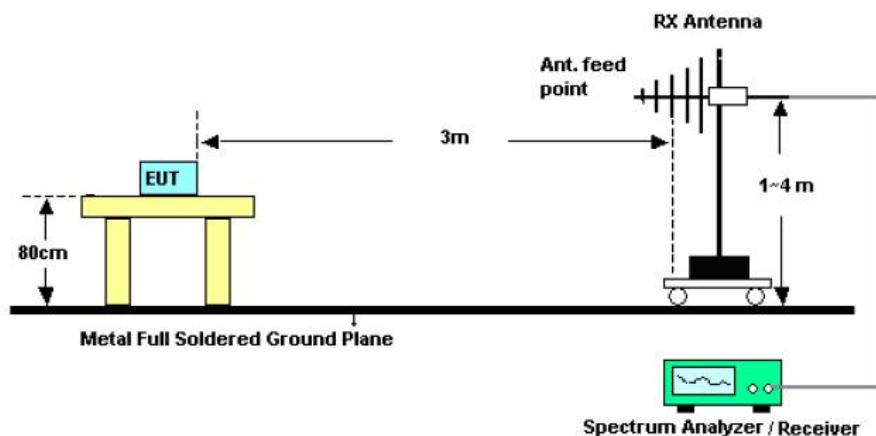

#### 3.6.3.3. For radiated emissions above 1GHz

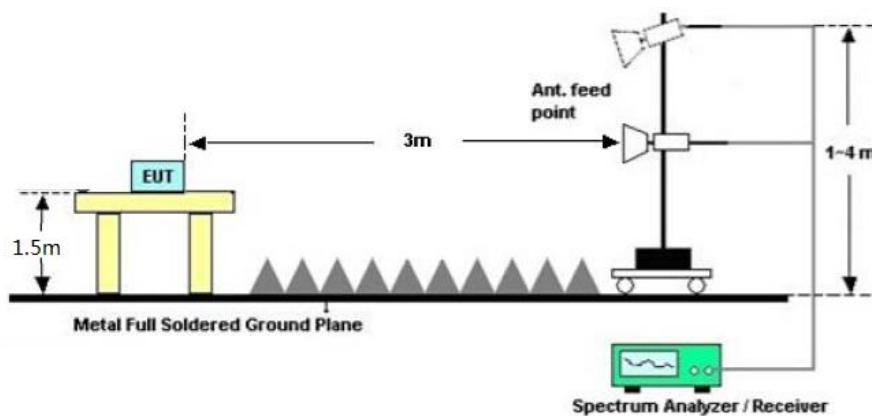

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



### 3.6.4. Test Result of Radiated Spurious Emission

For 9 kHz ~ 30 MHz


Note:

1. The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.
2. The all data rate modes had been test, but only worse test data was recorded in the test report.

#### Below 1GHz:


Note:

1. All modes have been tested, only worst case Mimo(802.11n40-TX Channel 9)mode was recorded in the test report.
2. Emission Level (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. The emission levels of other frequencies were less than 20dB margin against the limit.
5. Margin value = Emission level-Limit value.

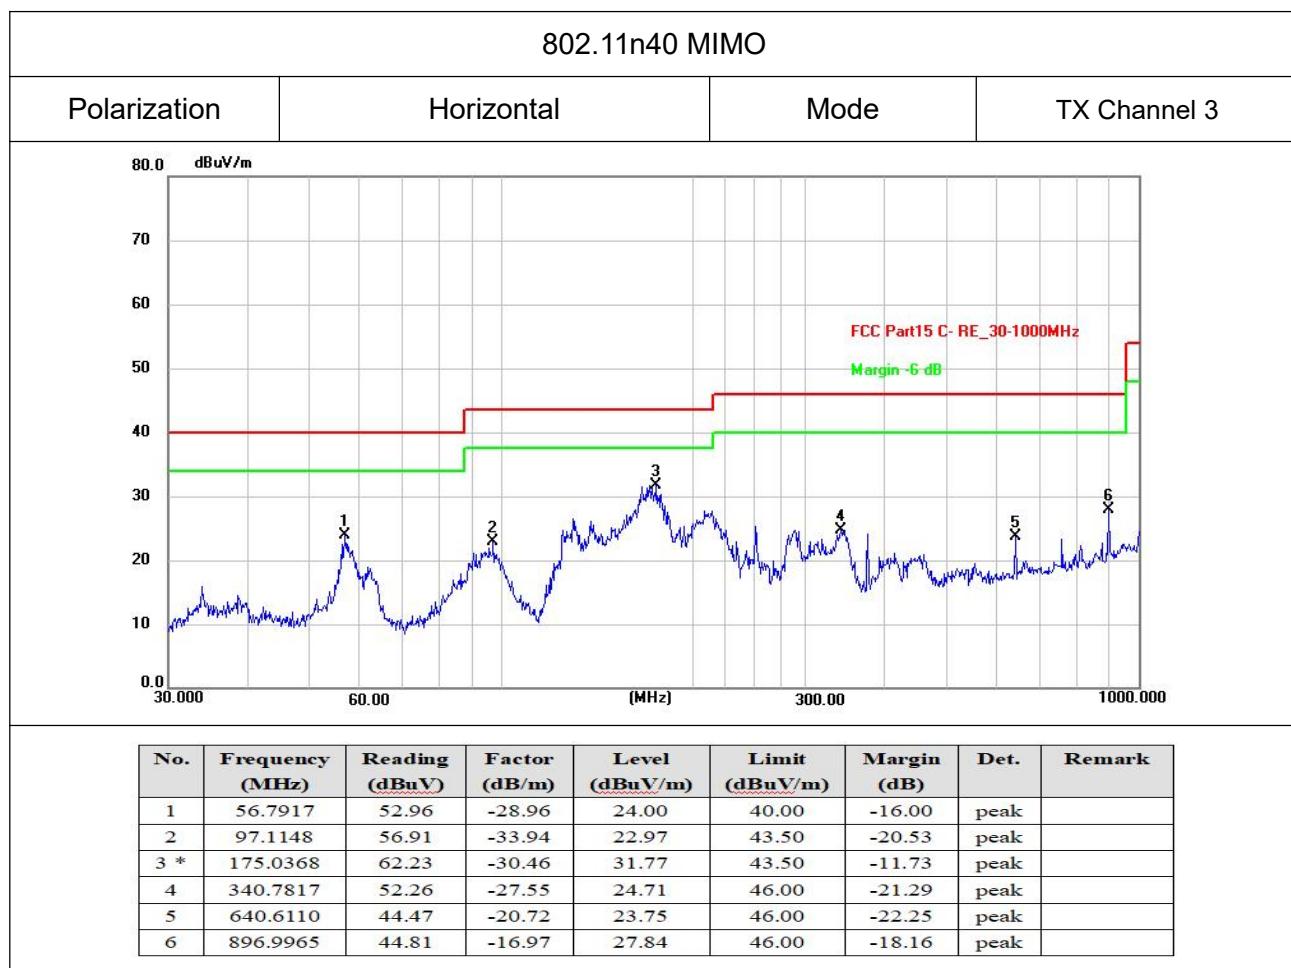

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



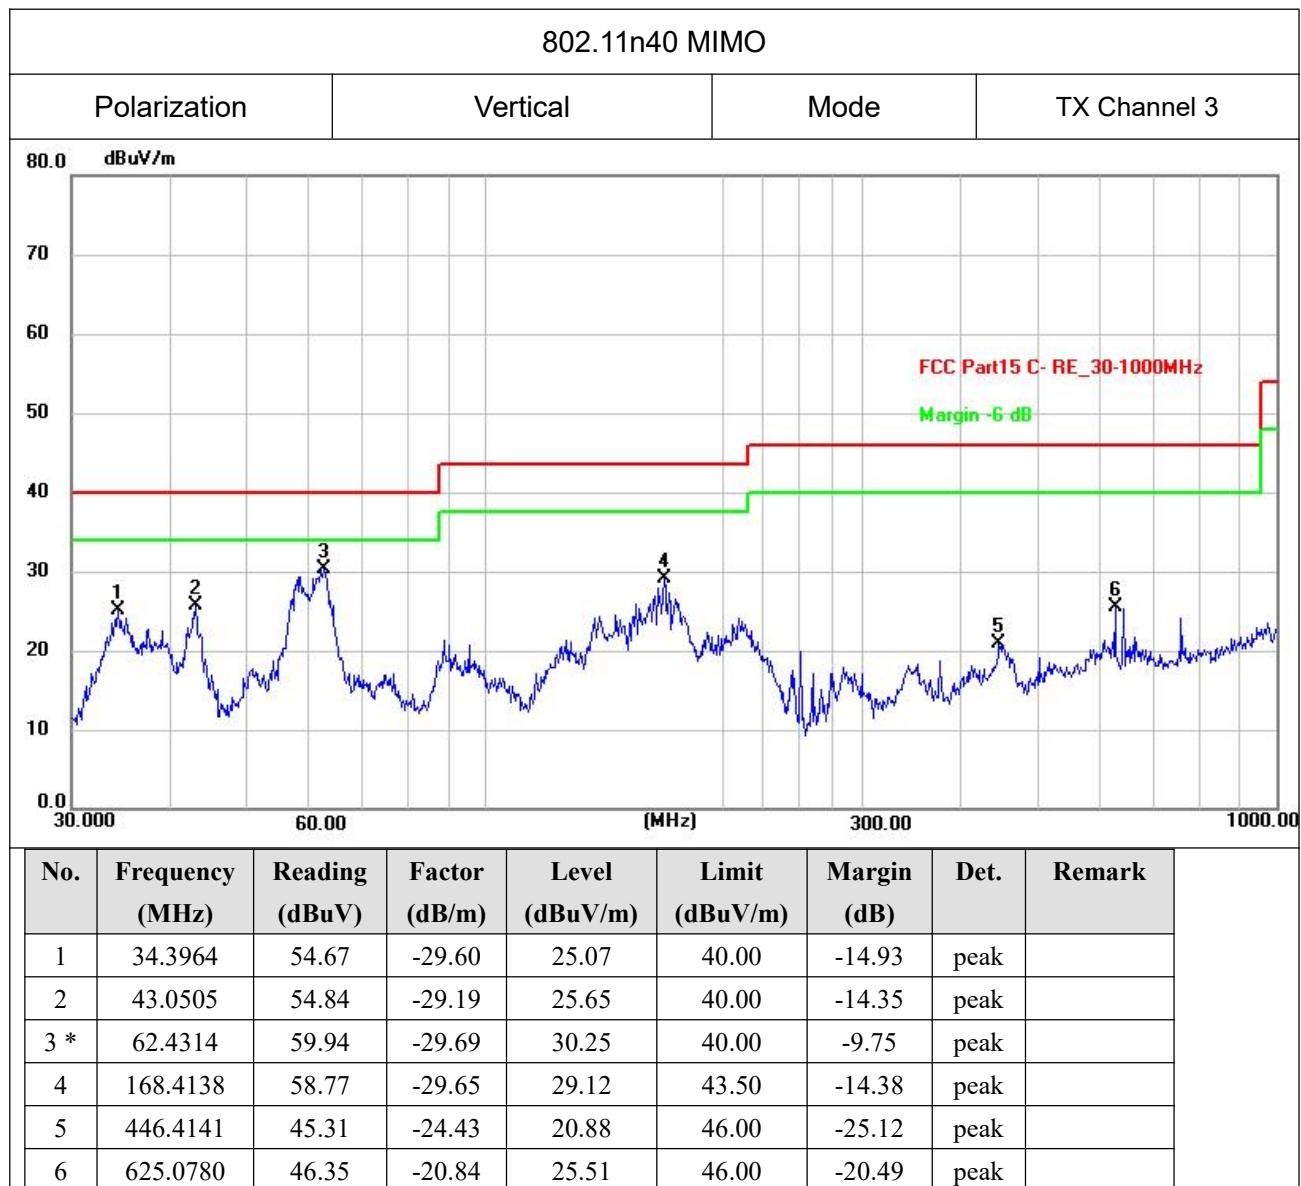

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.


---

**Above 1GHz:****Note:**

- 1.The worst test data above 1GHz is the 802.11B/N20/N40 is the MIMO mode test data was recorded in the test report.
- 2.In frequency ranges 18 ~25GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.
- 3.We used the filter to test and the main frequency was filtered out.
- 4.Emission Level (dB<sub>UV</sub>/m) = Reading Value (dB<sub>UV</sub>) + Correction Factor (dB/m).
5. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
6. Margin value = Emission level-Limit value.


**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



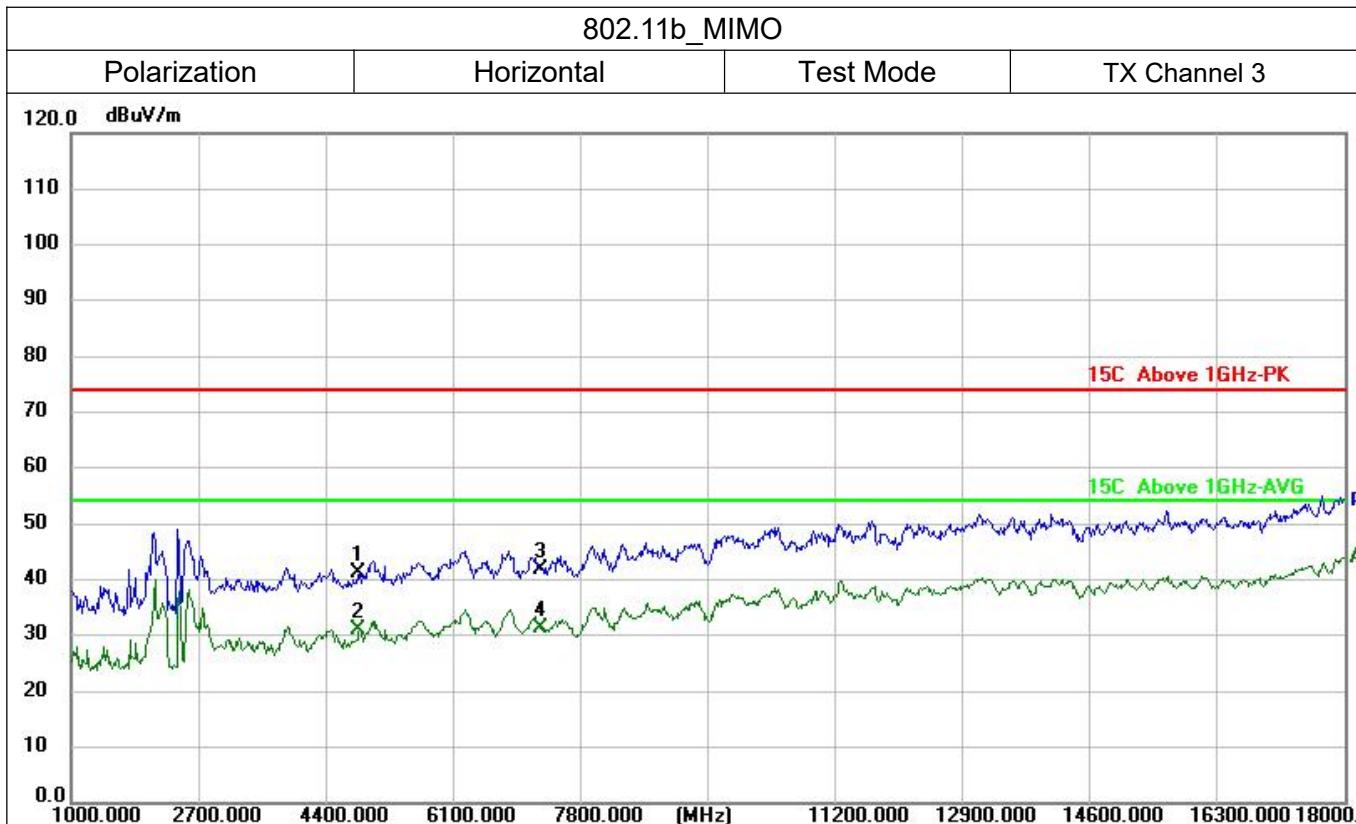


No.	Frequency (MHz)	Reading (dB <sub>UV</sub> )	Factor (dB/m)	Level (dB <sub>UV</sub> /m)	Limit (dB <sub>UV</sub> /m)	Margin (dB)	Det.	Remark	
1	4844.000	46.93	-5.74	41.19	74.00	-32.81	peak		
2	4844.000	36.85	-5.74	31.11	54.00	-22.89	AVG		
3	7266.000	42.05	-0.31	41.74	74.00	-32.26	peak		
4 *	7266.000	31.67	-0.31	31.36	54.00	-22.64	AVG		

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

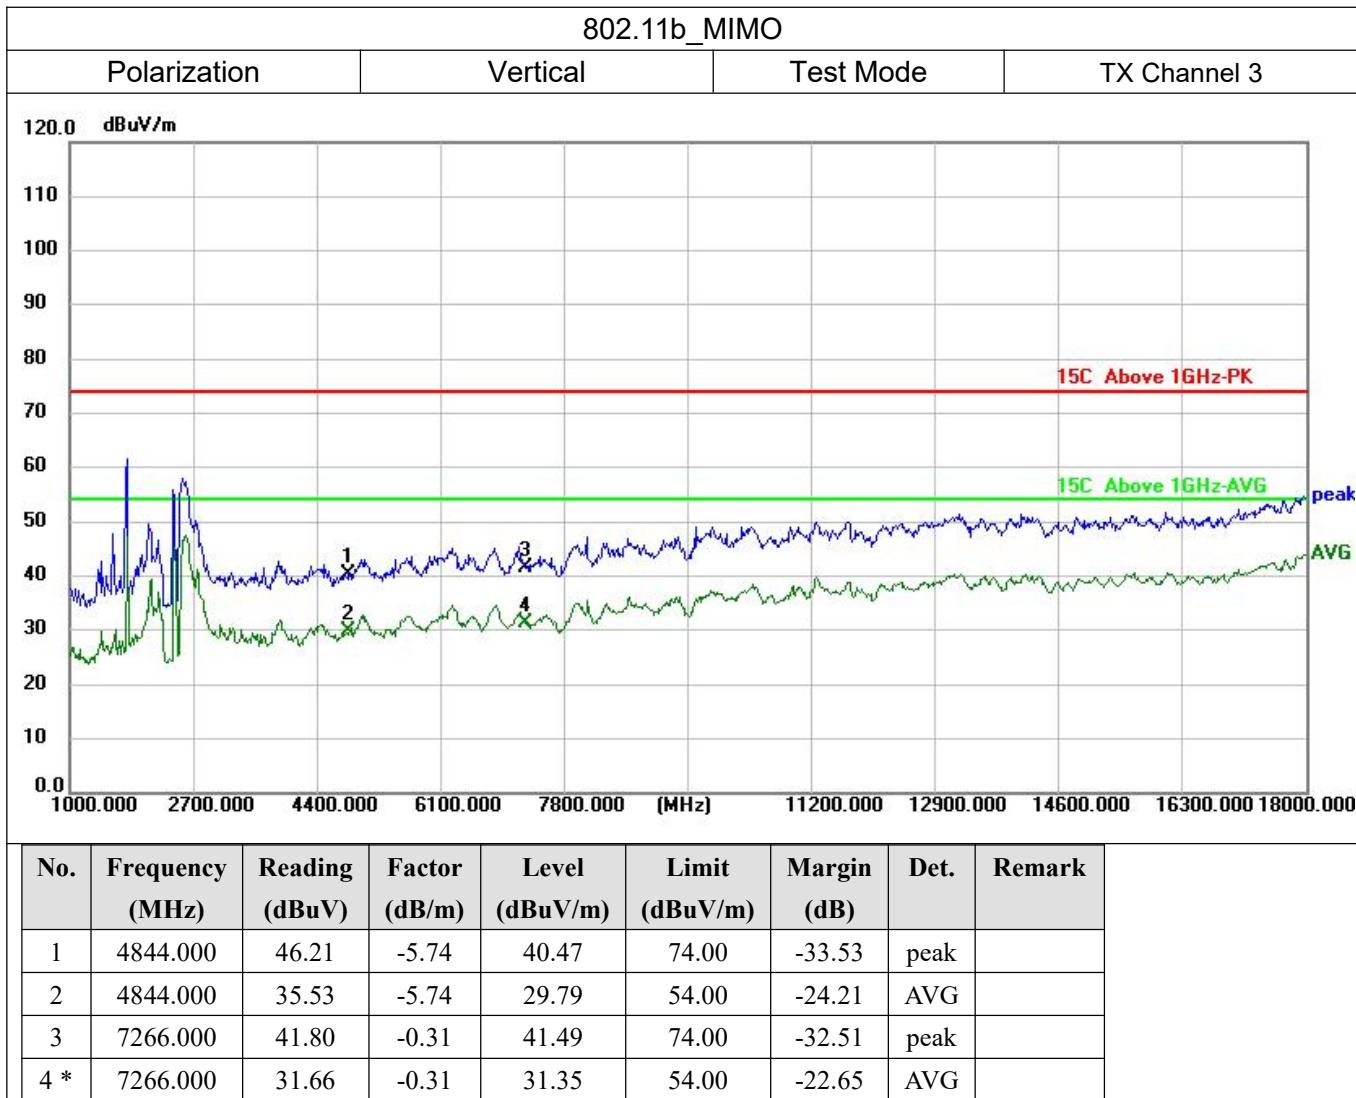


**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



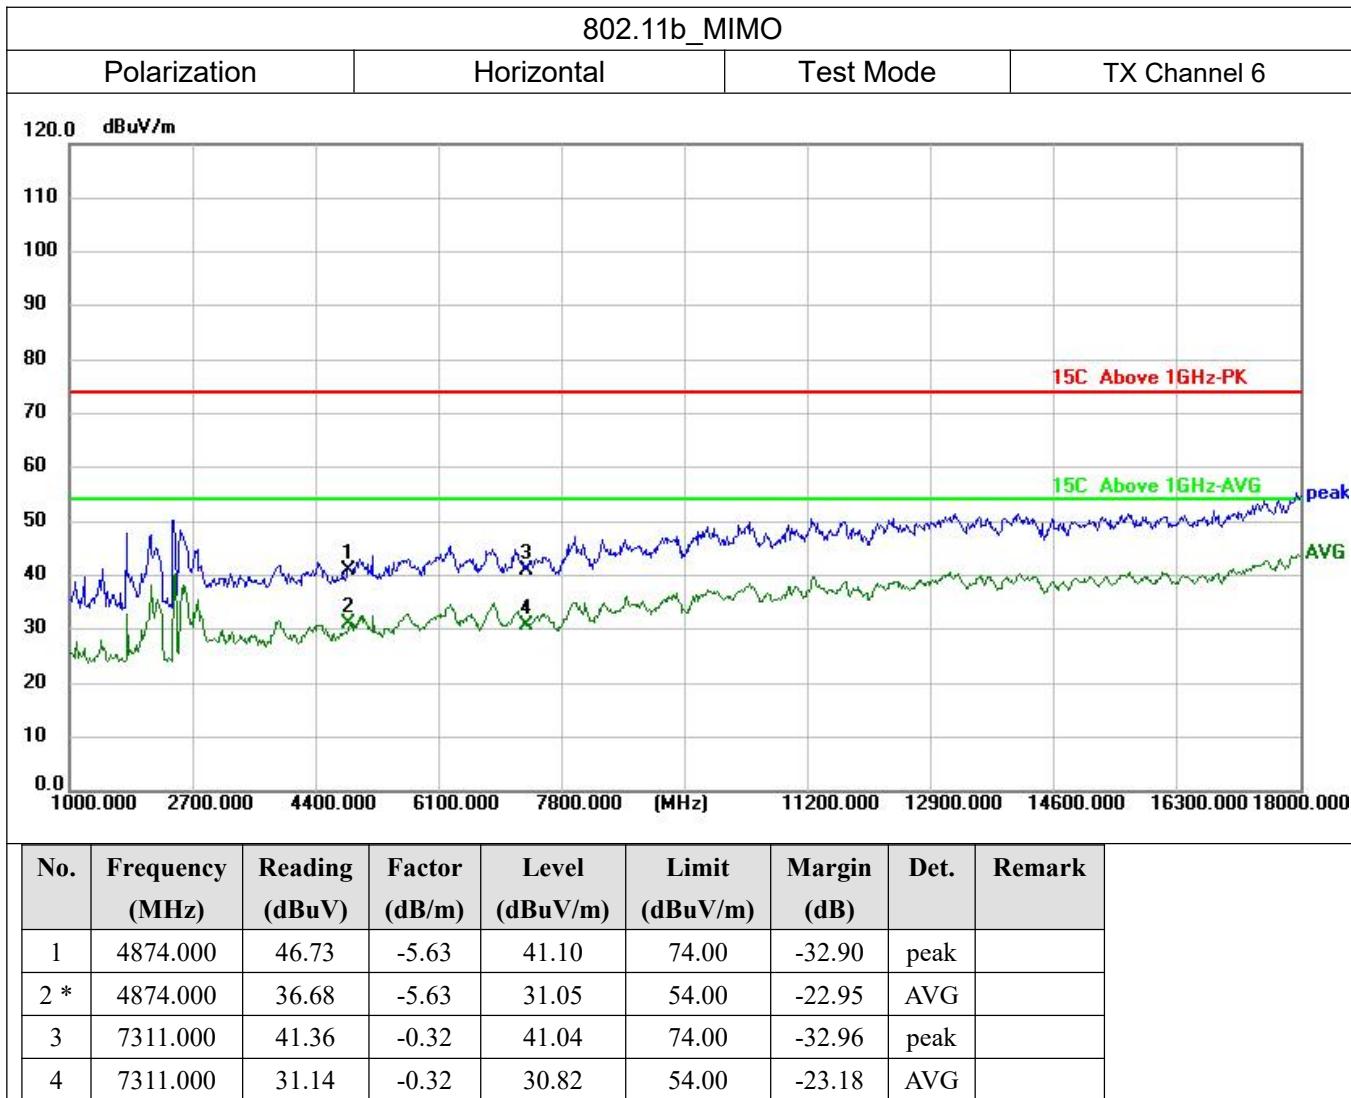


**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



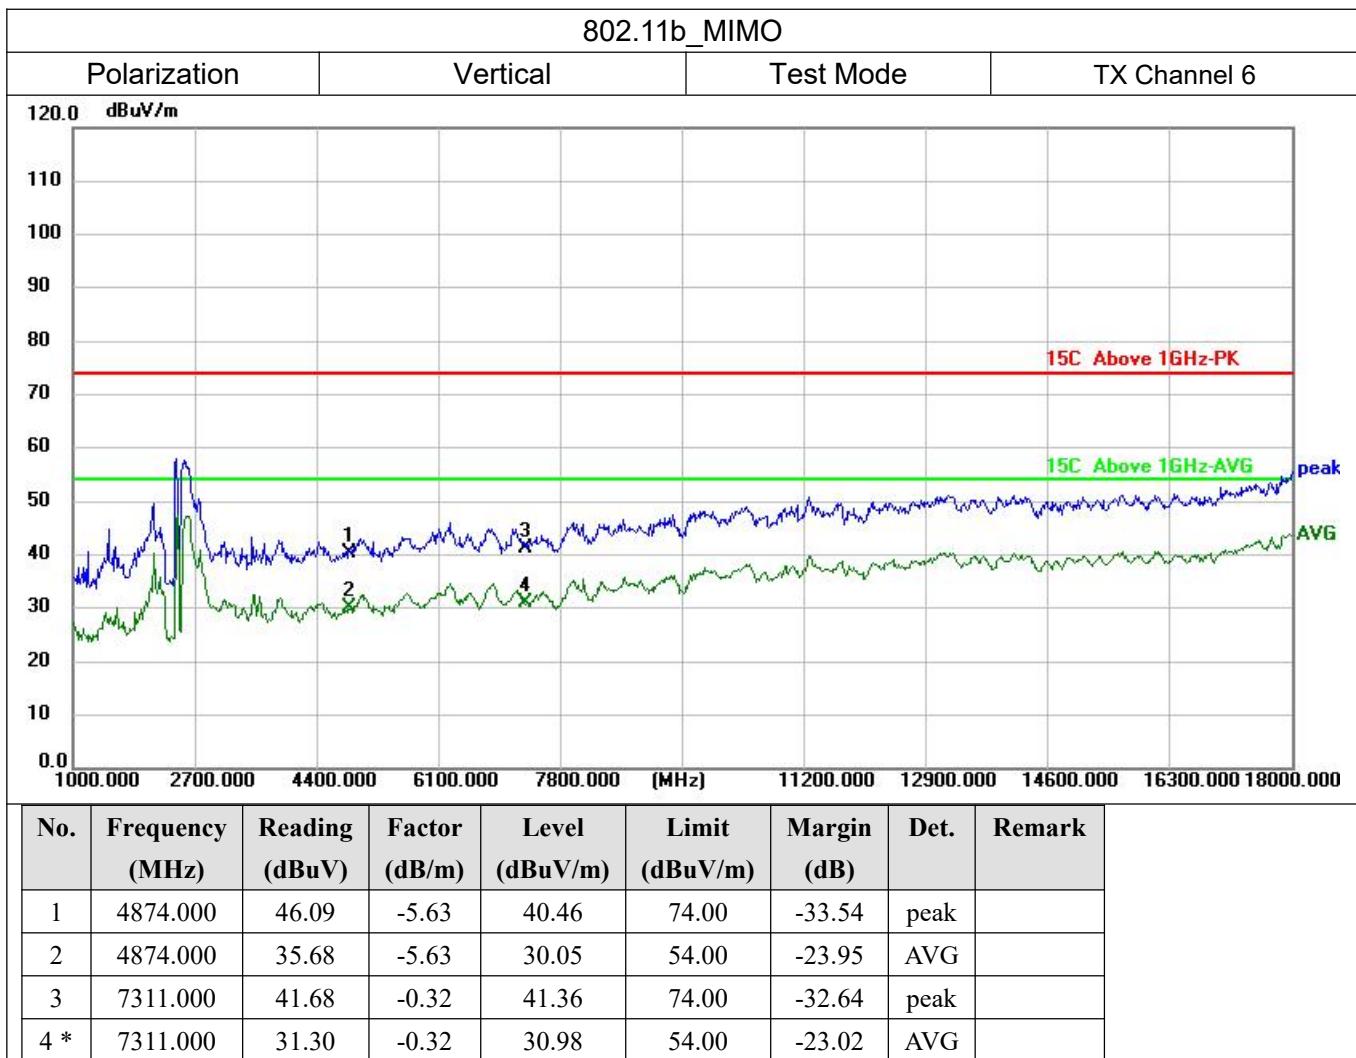


**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



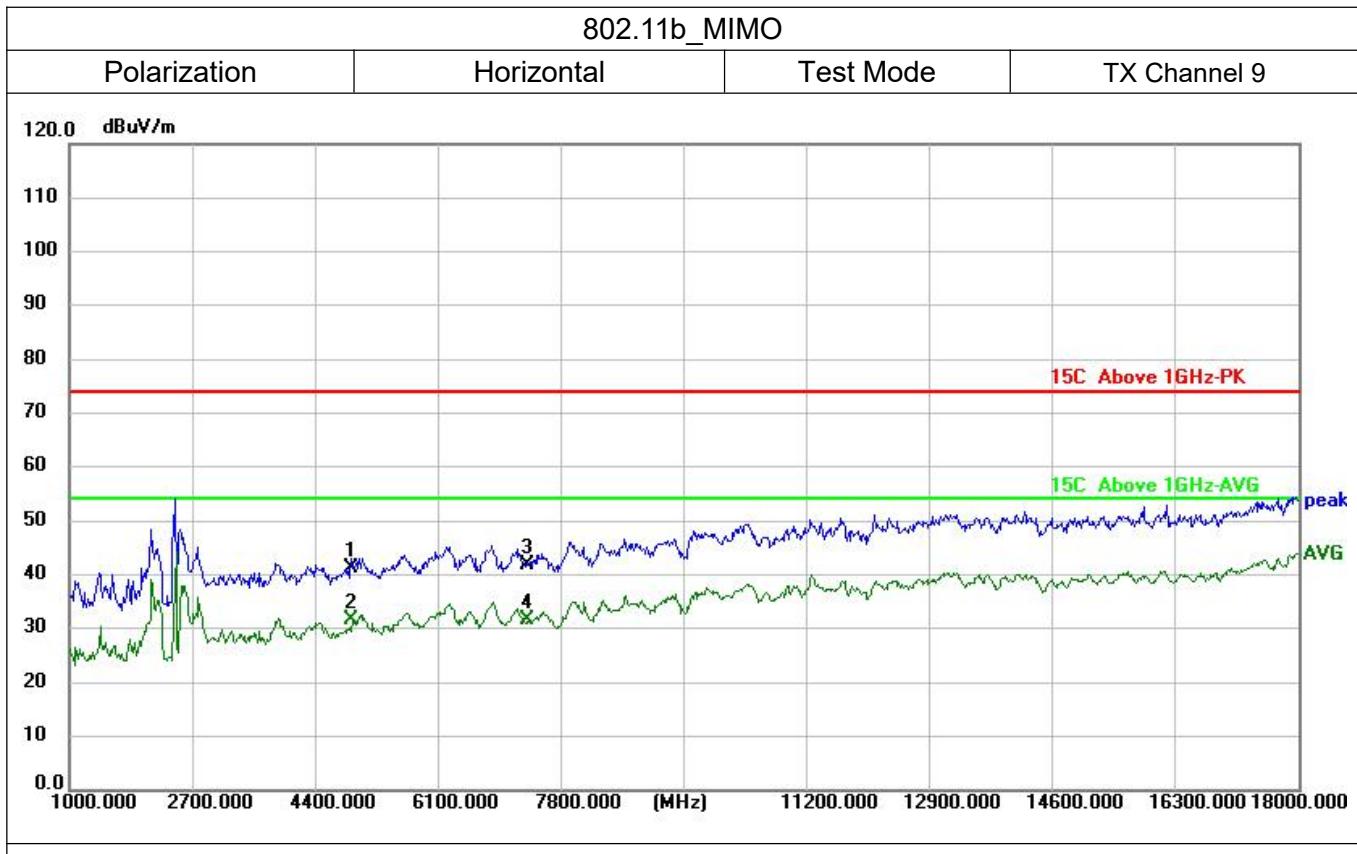


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Remark
1	4904.000	46.91	-5.53	41.38	74.00	-32.62	peak	
2 *	4904.000	37.21	-5.53	31.68	54.00	-22.32	AVG	
3	7356.000	42.26	-0.34	41.92	74.00	-32.08	peak	
4	7356.000	31.86	-0.34	31.52	54.00	-22.48	AVG	

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

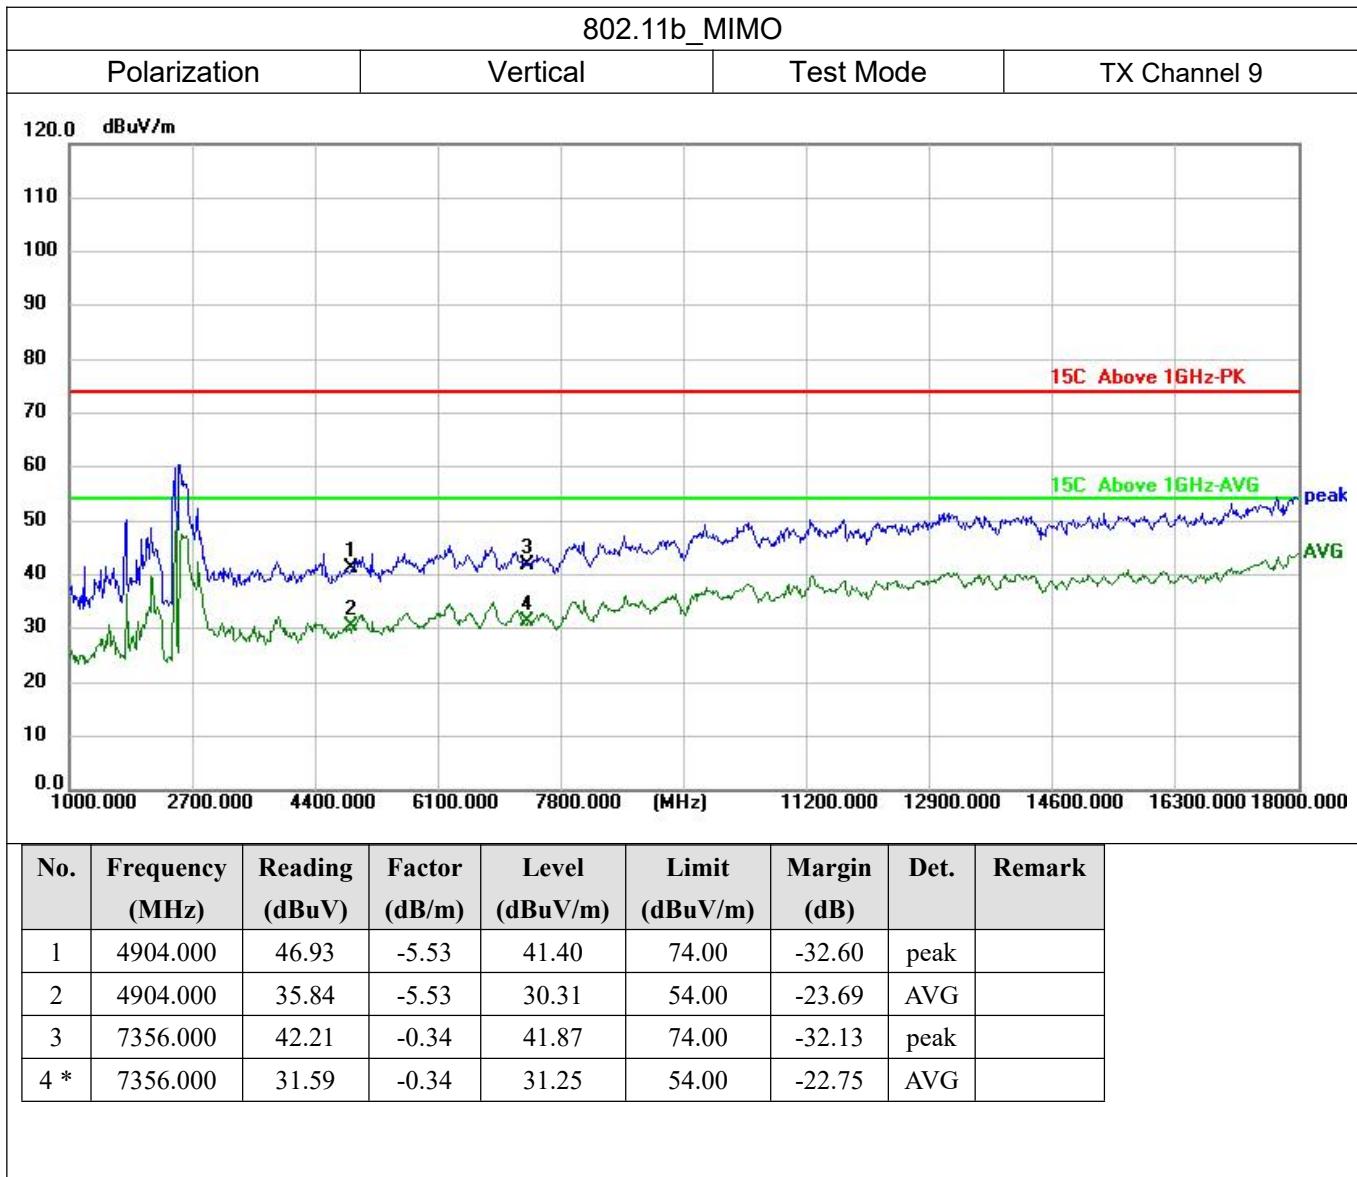


**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



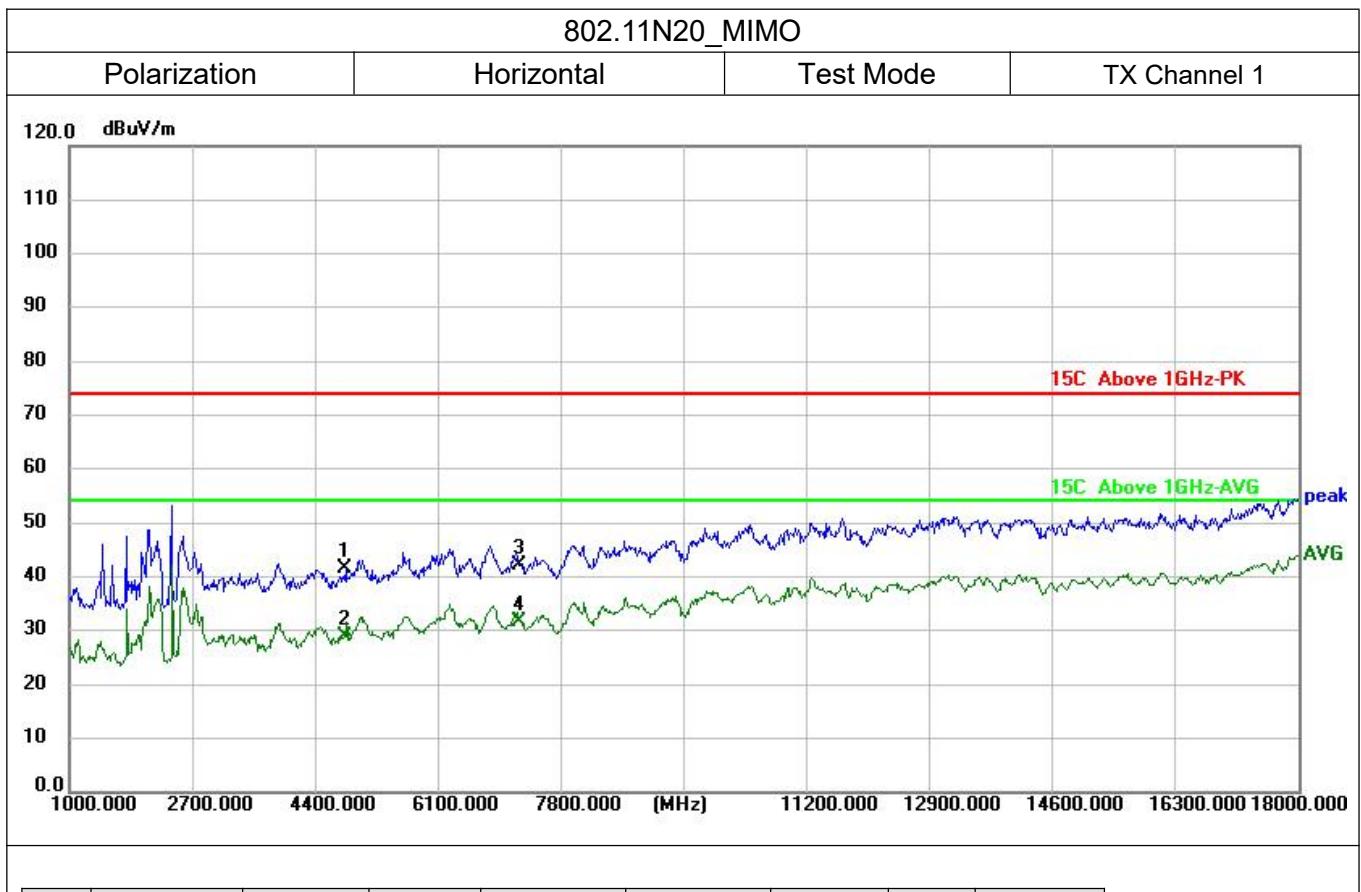


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Remark
1	4824.000	47.50	-5.81	41.69	74.00	-32.31	peak	
2	4824.000	34.66	-5.81	28.85	54.00	-25.15	AVG	
3	7236.000	42.46	-0.29	42.17	74.00	-31.83	peak	
4 *	7236.000	31.97	-0.29	31.68	54.00	-22.32	AVG	

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

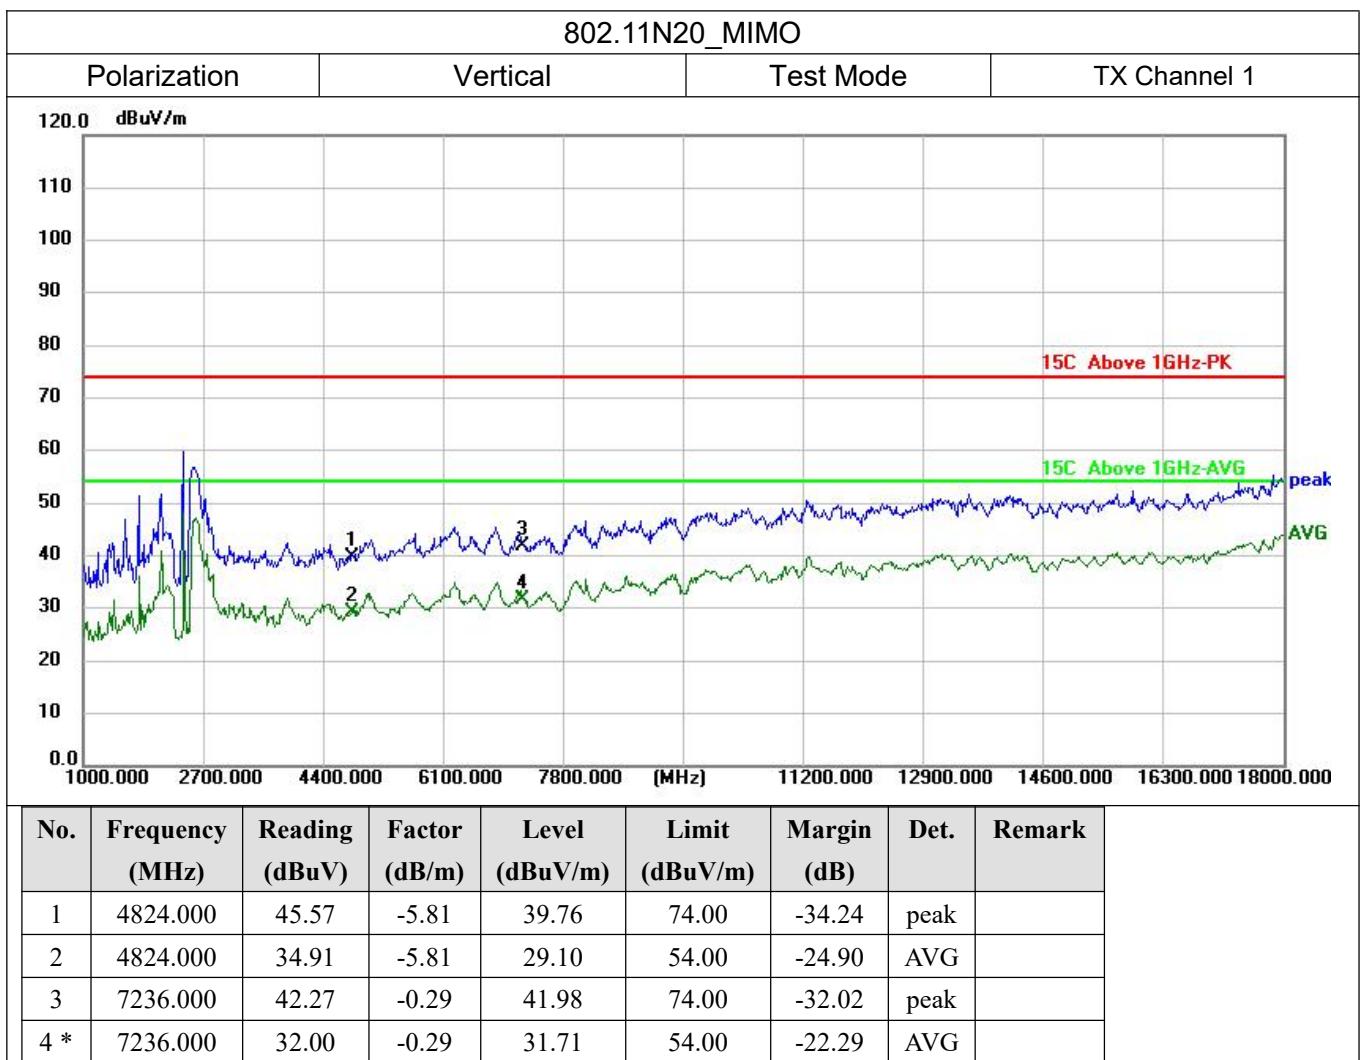


**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

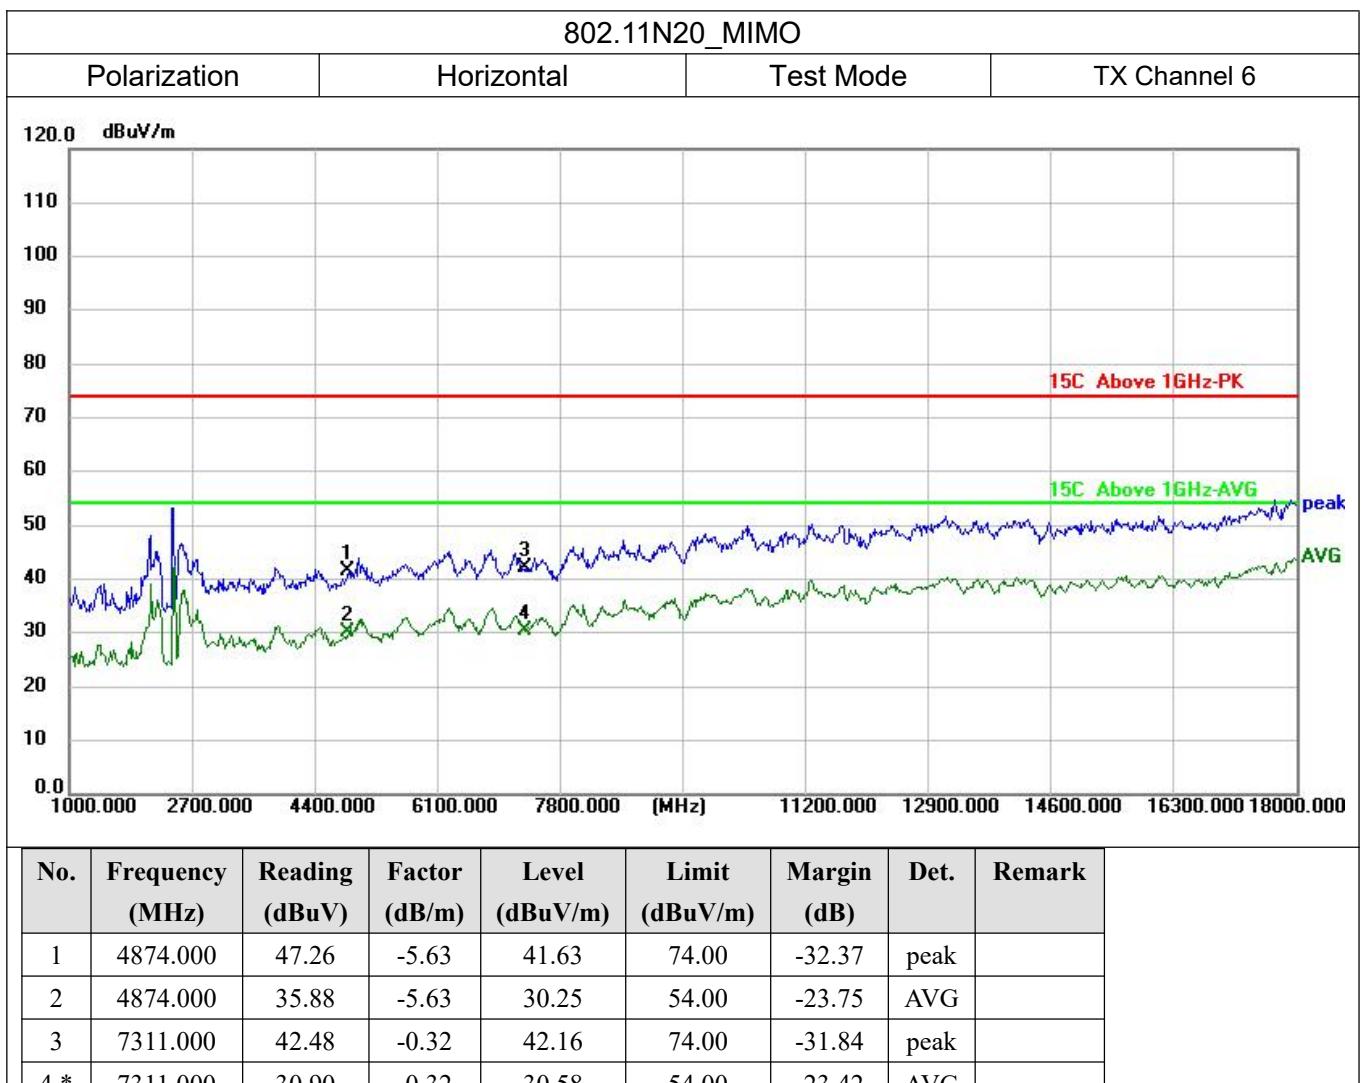


**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



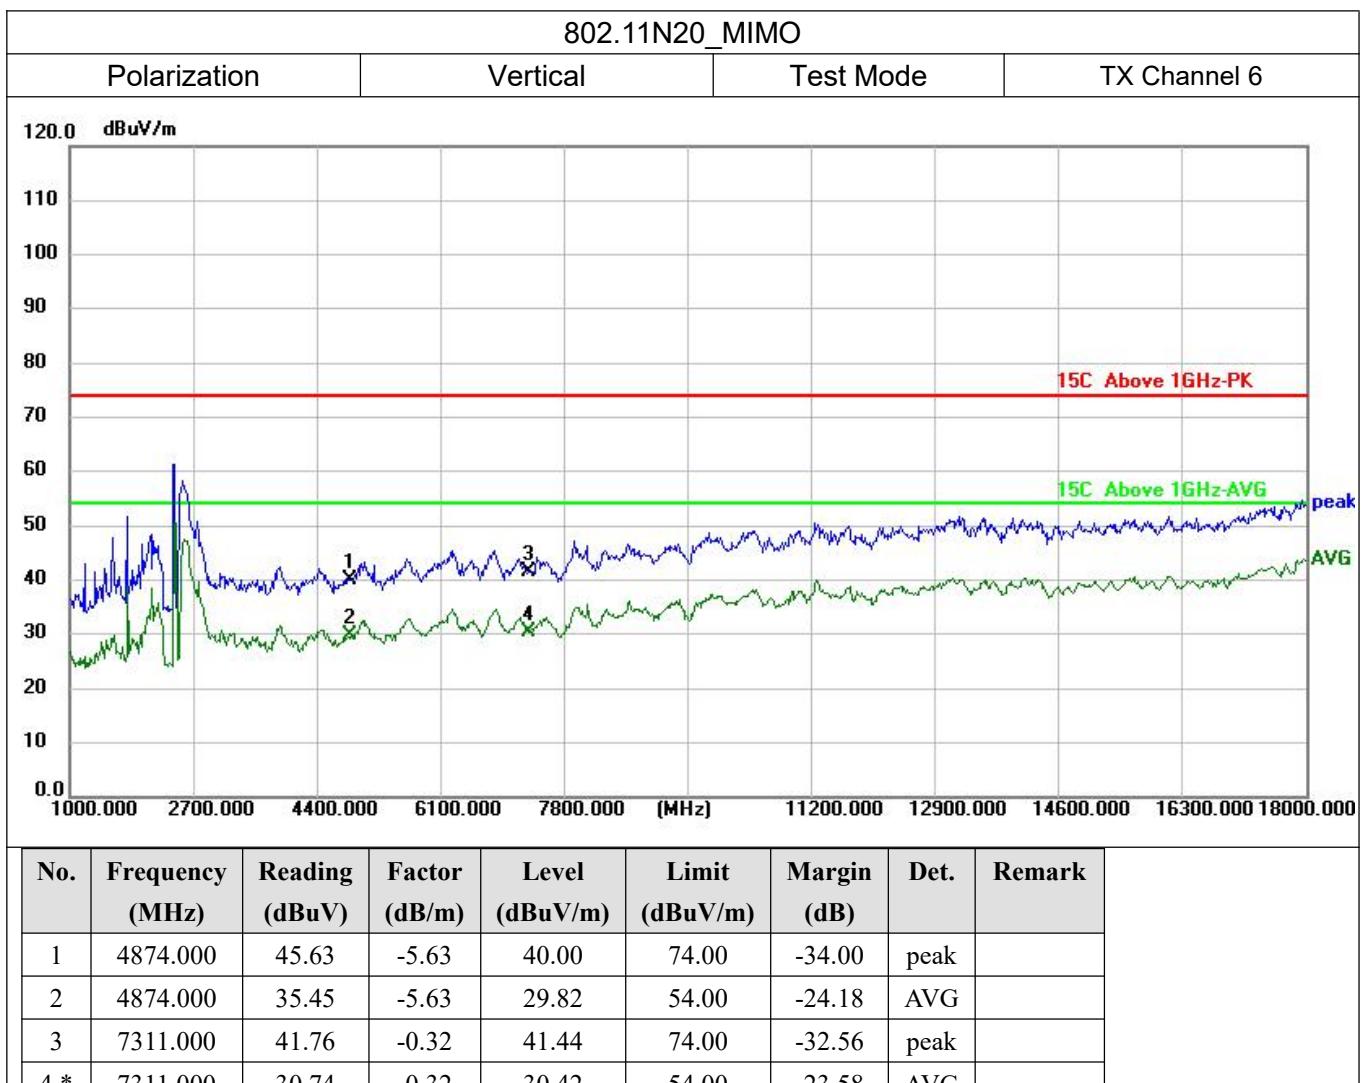


**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



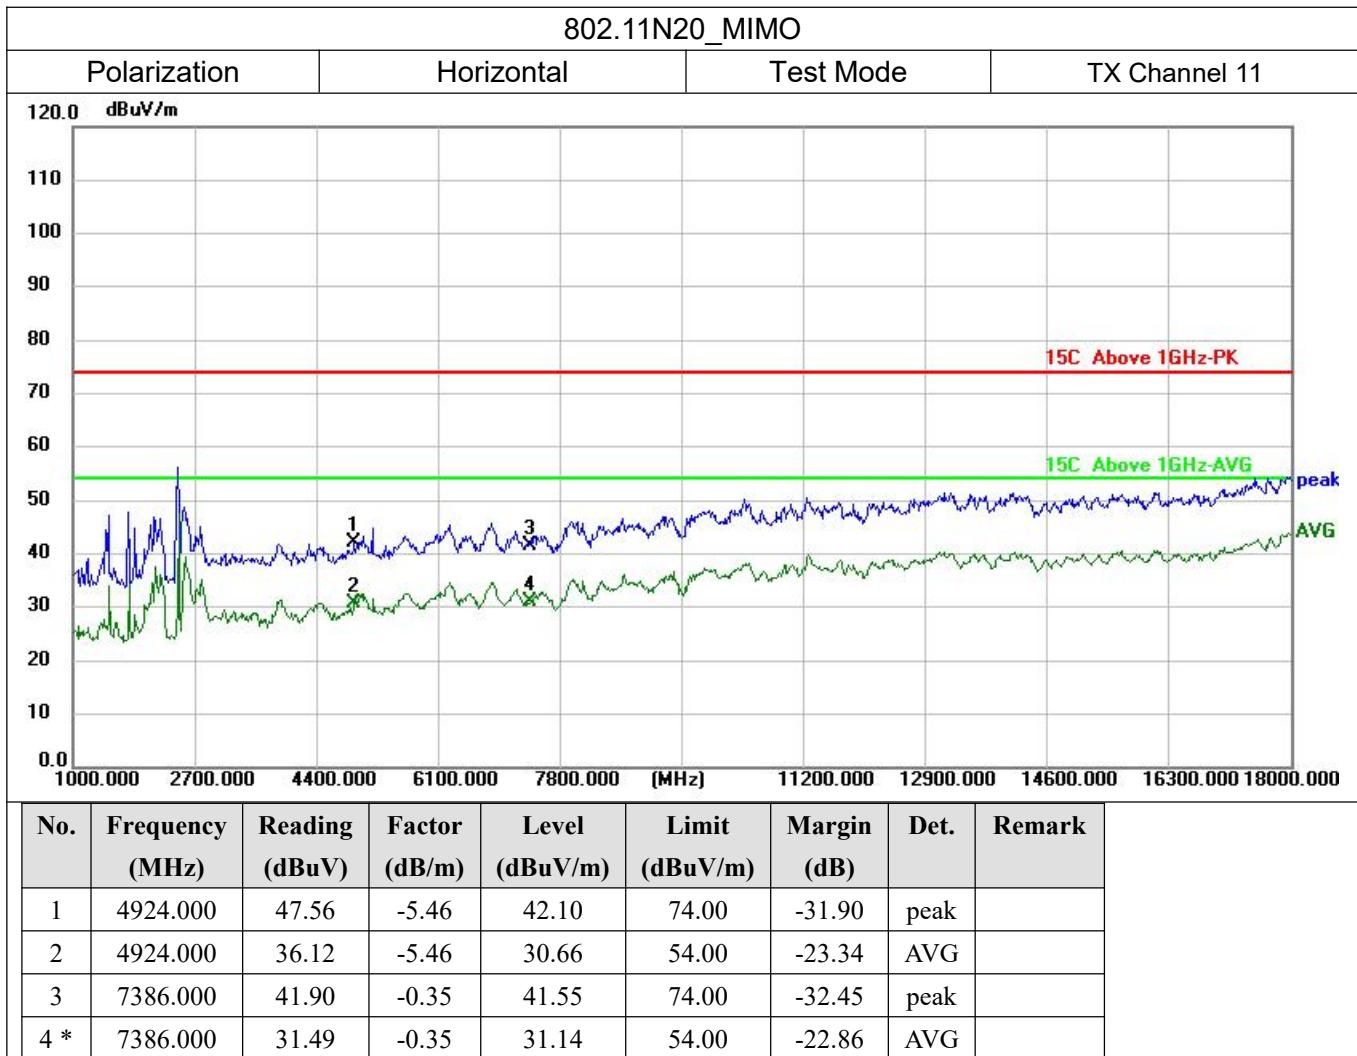


**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



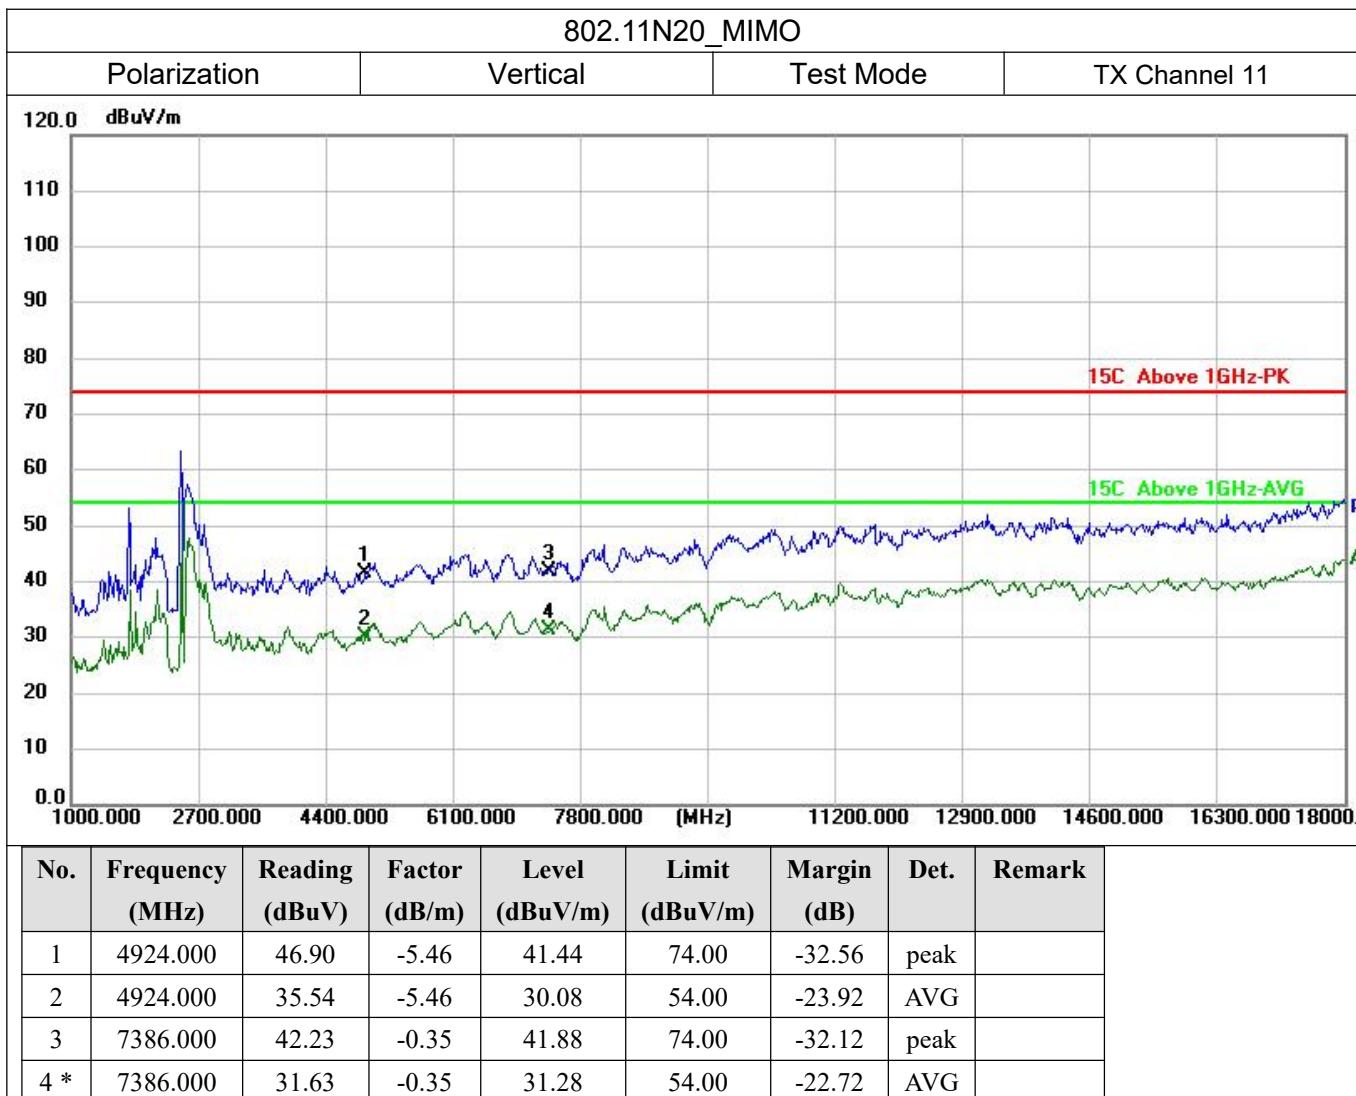


**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



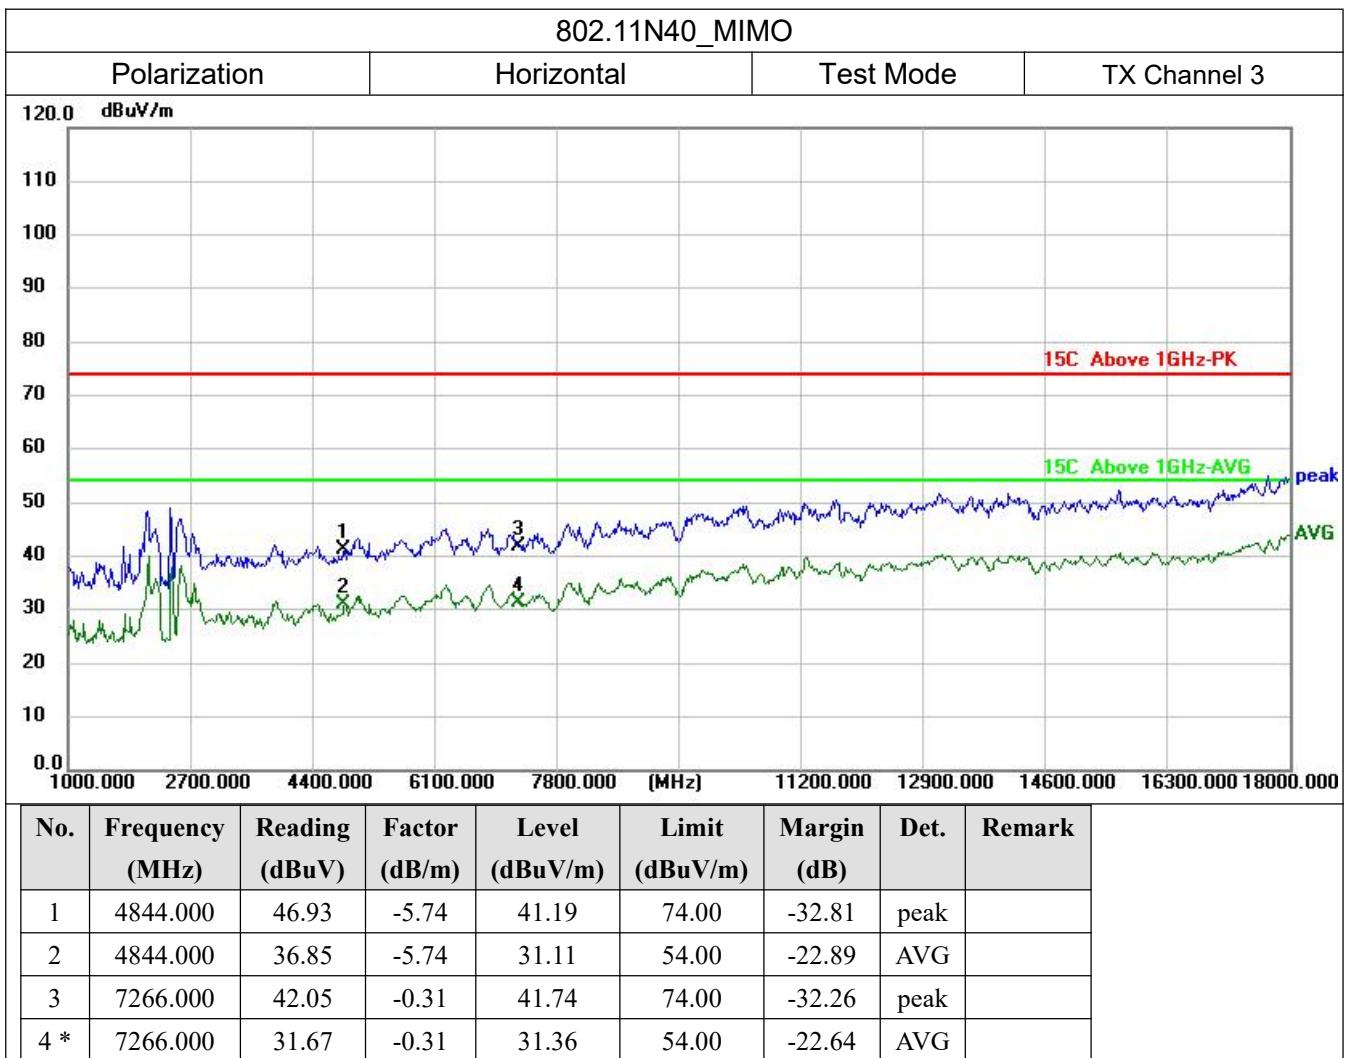


**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



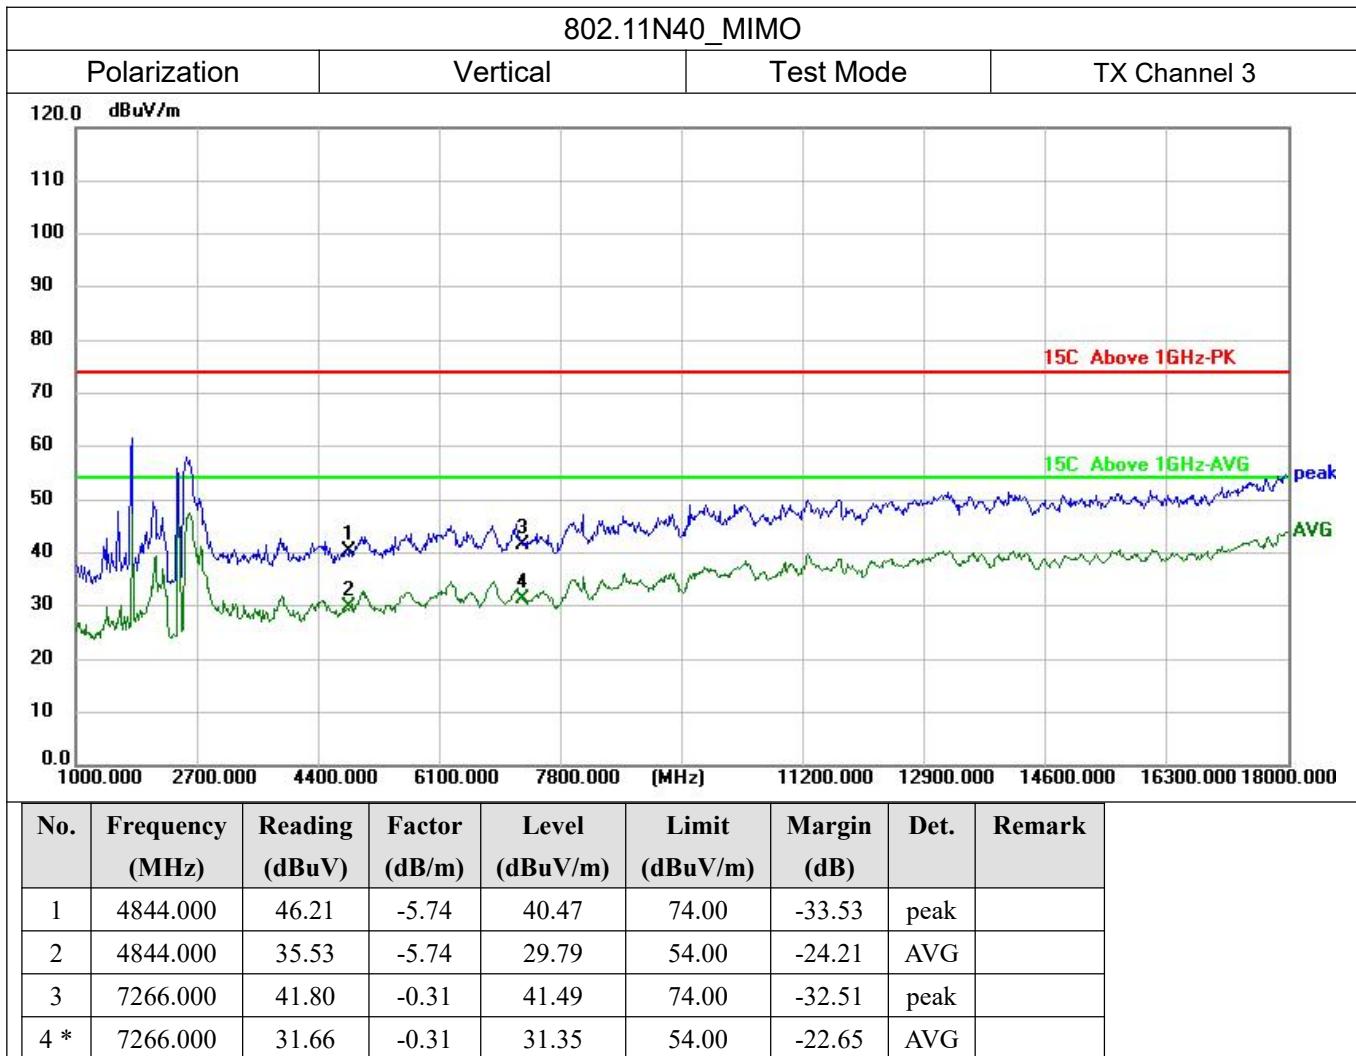


**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.




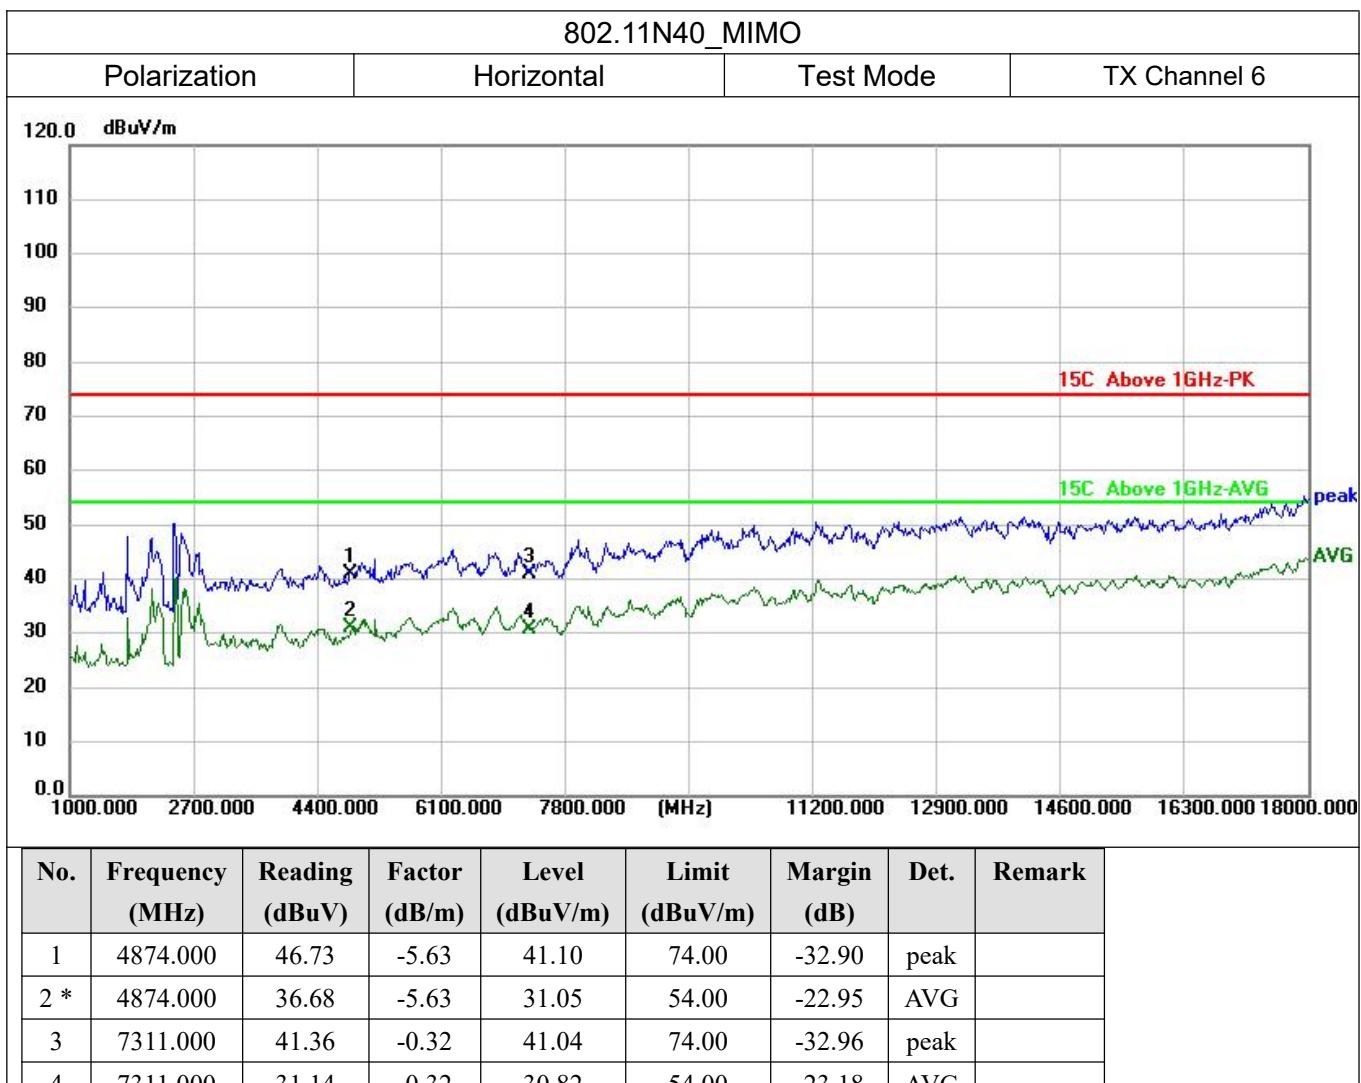


**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

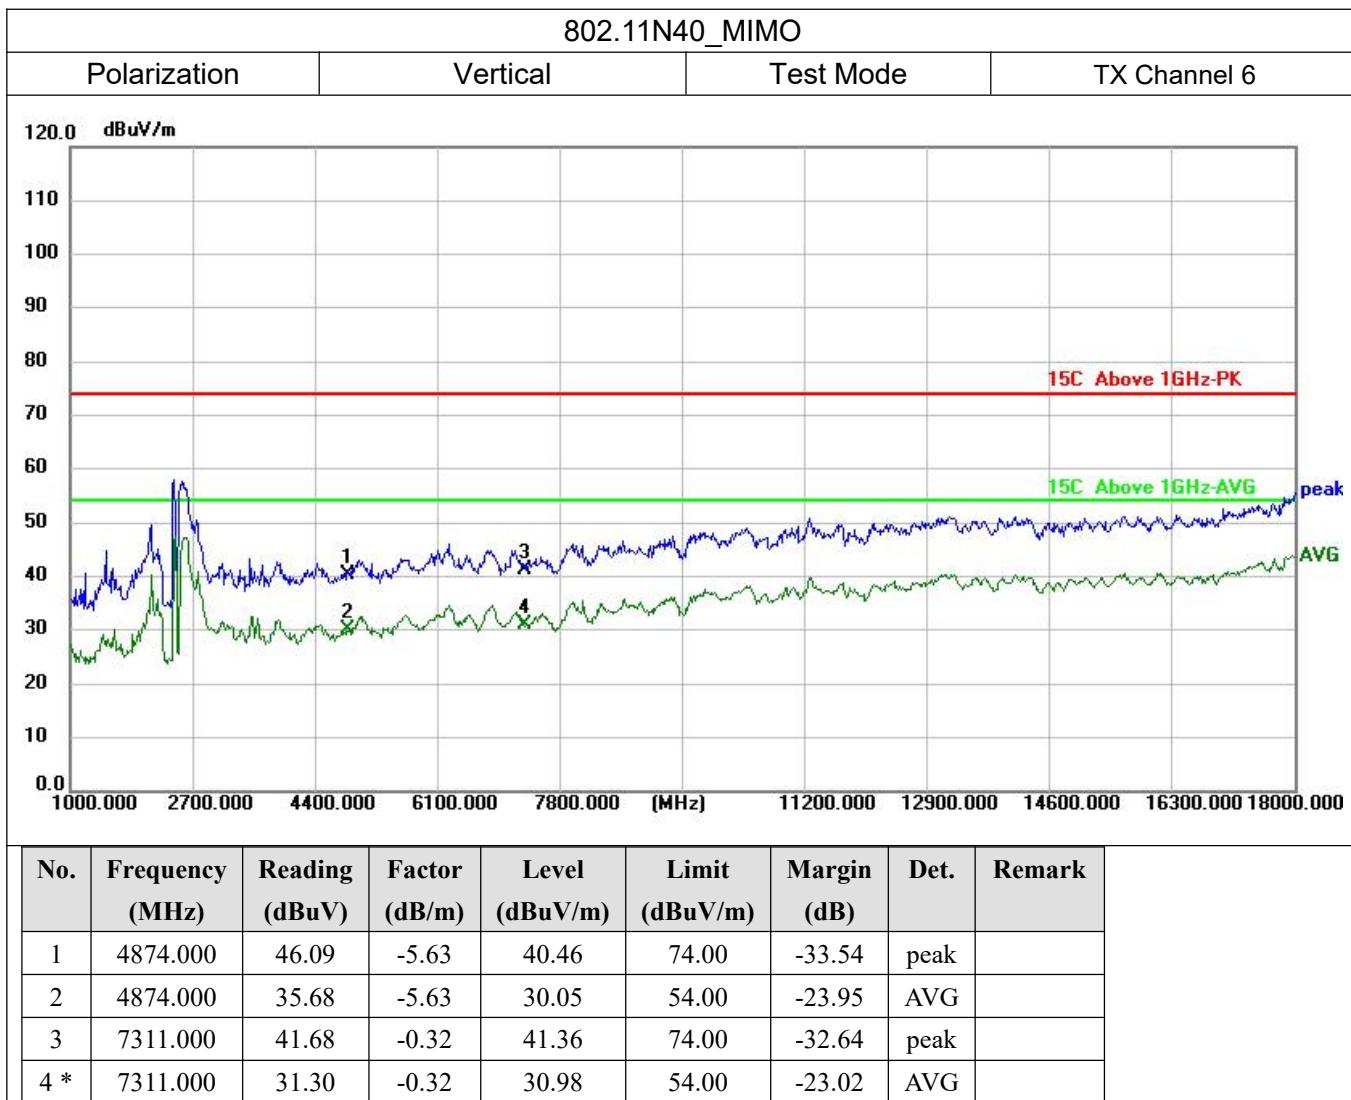

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

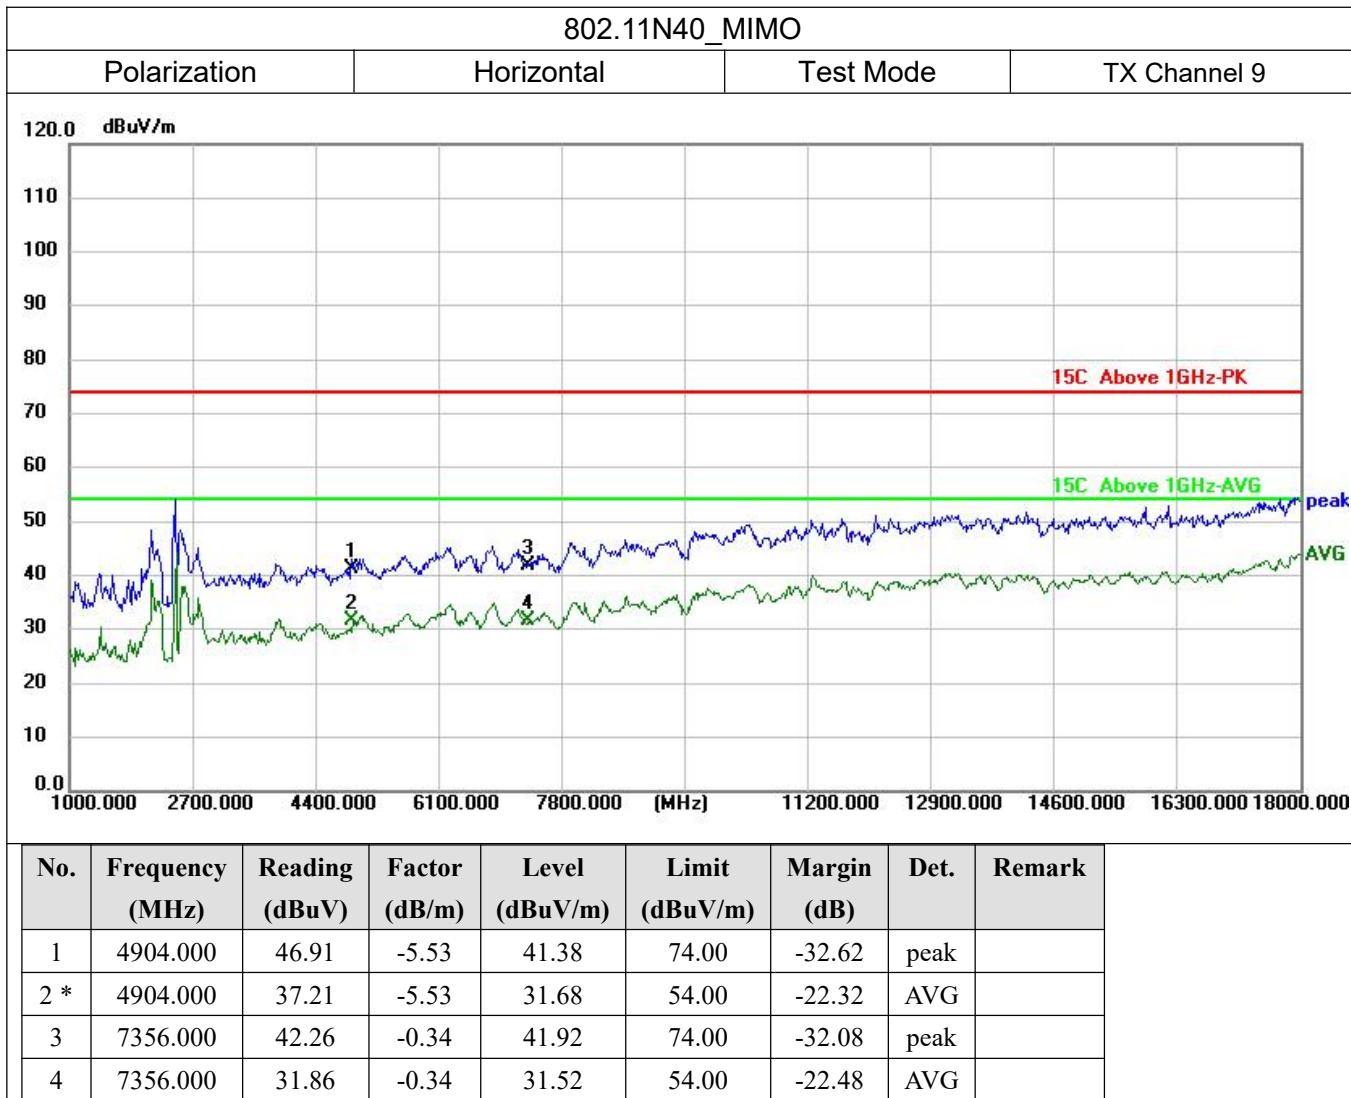

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

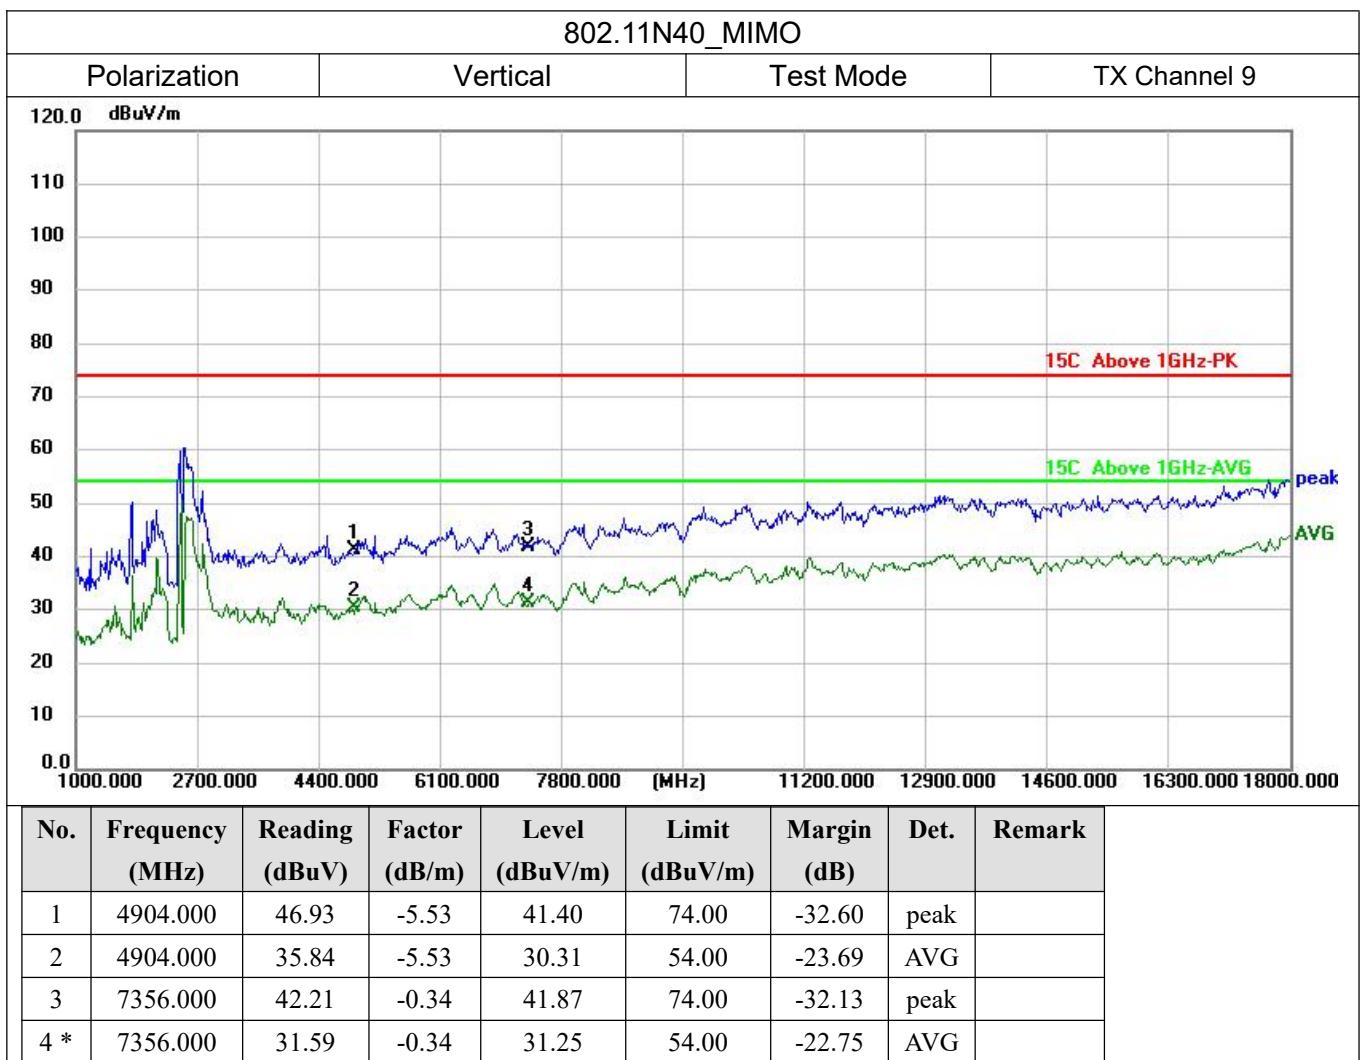

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

## 3.6.5. Test Result of Restricted Band

Test Mode: 802.11n-HT40							
Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Marging (dB)	Detector	Result
2310.00	52.18	-16.09	36.09	74.00	-37.91	peak	Pass
2310.00	40.78	-16.09	24.69	54.00	-29.31	AV	Pass
2390.00	50.82	-15.88	34.94	74.00	-39.06	peak	Pass
2390.00	40.15	-15.88	24.27	54.00	-29.73	AV	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Marging (dB)	Detector	Result
2310.00	51.34	-16.09	35.25	74.00	-38.75	peak	Pass
2310.00	40.70	-16.09	24.61	54.00	-29.39	AV	Pass
2390.00	50.86	-15.88	34.98	74.00	-39.02	peak	Pass
2390.00	40.25	-15.88	24.37	54.00	-29.63	AV	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Marging (dB)	Detector	Result
2483.50	52.38	-15.30	37.08	74.00	-36.92	peak	Pass
2483.50	41.97	-15.30	26.67	54.00	-27.33	AV	Pass
2500.00	52.07	-15.19	36.88	74.00	-37.12	peak	Pass
2500.00	40.95	-15.19	25.76	54.00	-28.24	AV	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Marging (dB)	Detector	Result
2483.50	52.56	-15.30	37.26	74.00	-36.74	peak	Pass
2483.50	41.94	-15.30	26.64	54.00	-27.36	AV	Pass
2500.00	51.48	-15.19	36.29	74.00	-37.71	peak	Pass
2500.00	40.92	-15.19	25.73	54.00	-28.27	AV	Pass

Note: Margin=Level-Limit=Reading+factor-Limit

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



### 3.7. AC Power-Line Conducted Emission

#### 3.7.1. Limit

47 CFR 15.207(a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table:


Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 3.7.2. Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

#### 3.7.3. Test Setup

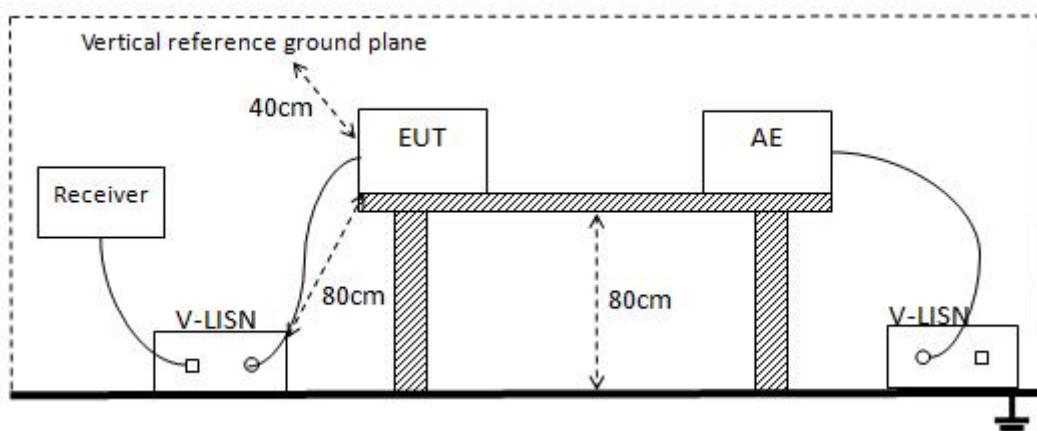


**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

### 3.7.4. Test Result of AC Power-Line Conducted Emission


Note:

1. All modes have been tested, only worst case MIMO (802.11N40-2452MHz) mode was recorded in the test report.
2. Emission Level (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. The emission levels of other frequencies were less than 20dB margin against the limit.
5. Margin value = Emission level-Limit value.

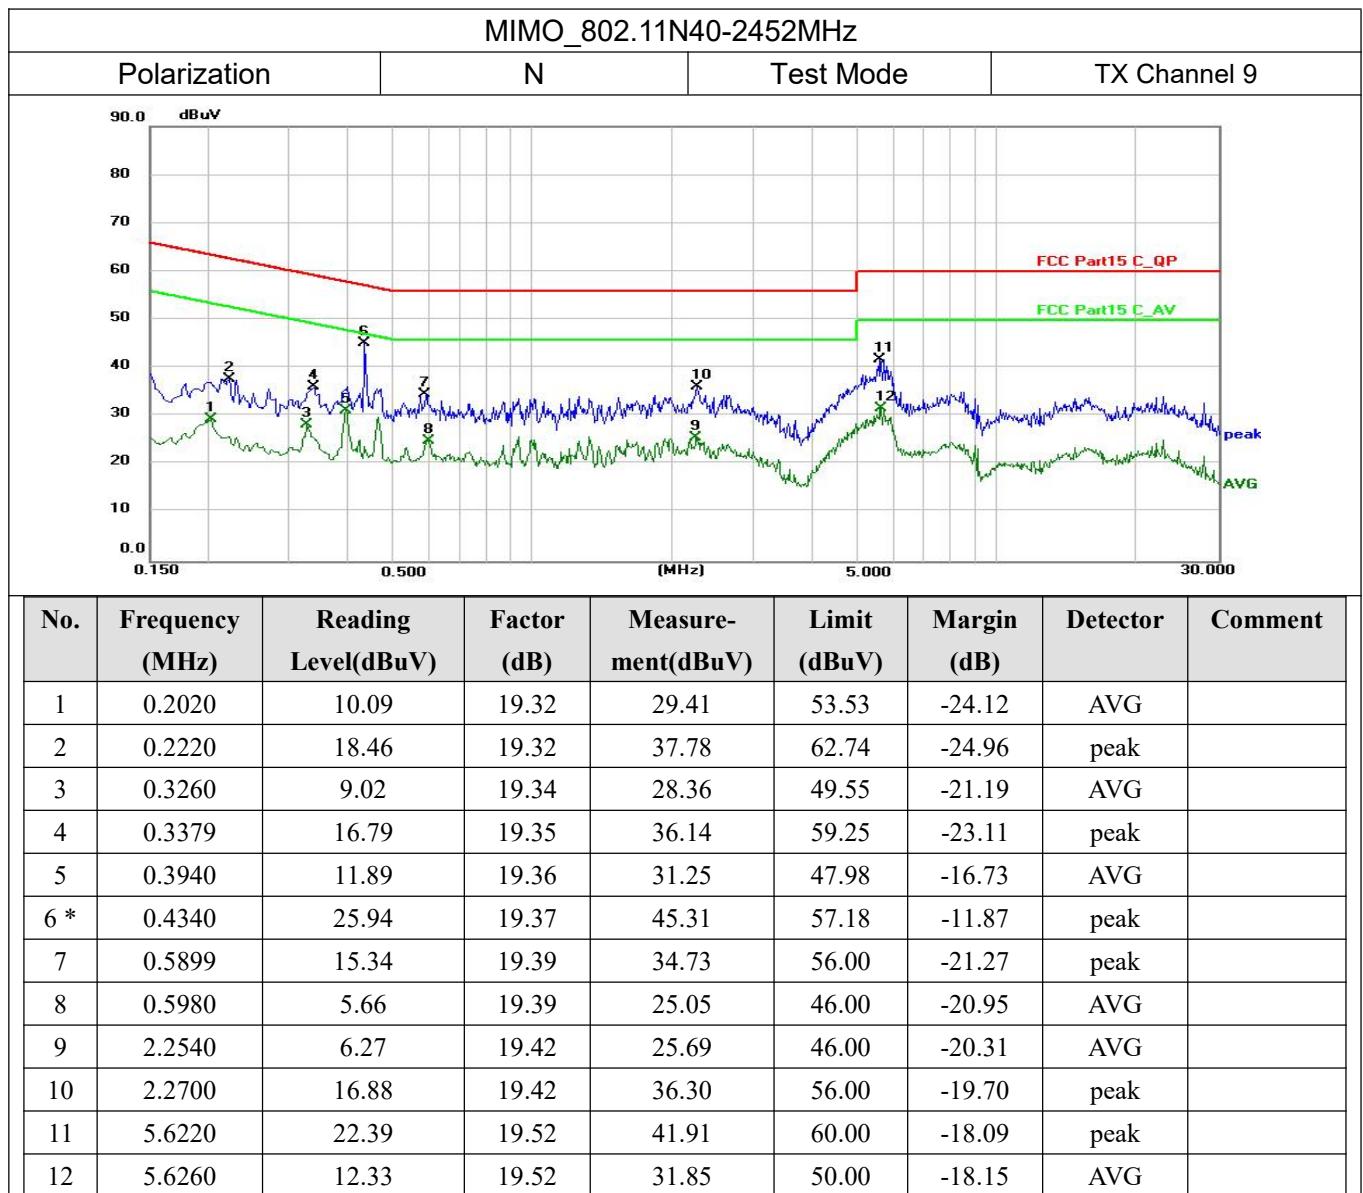

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



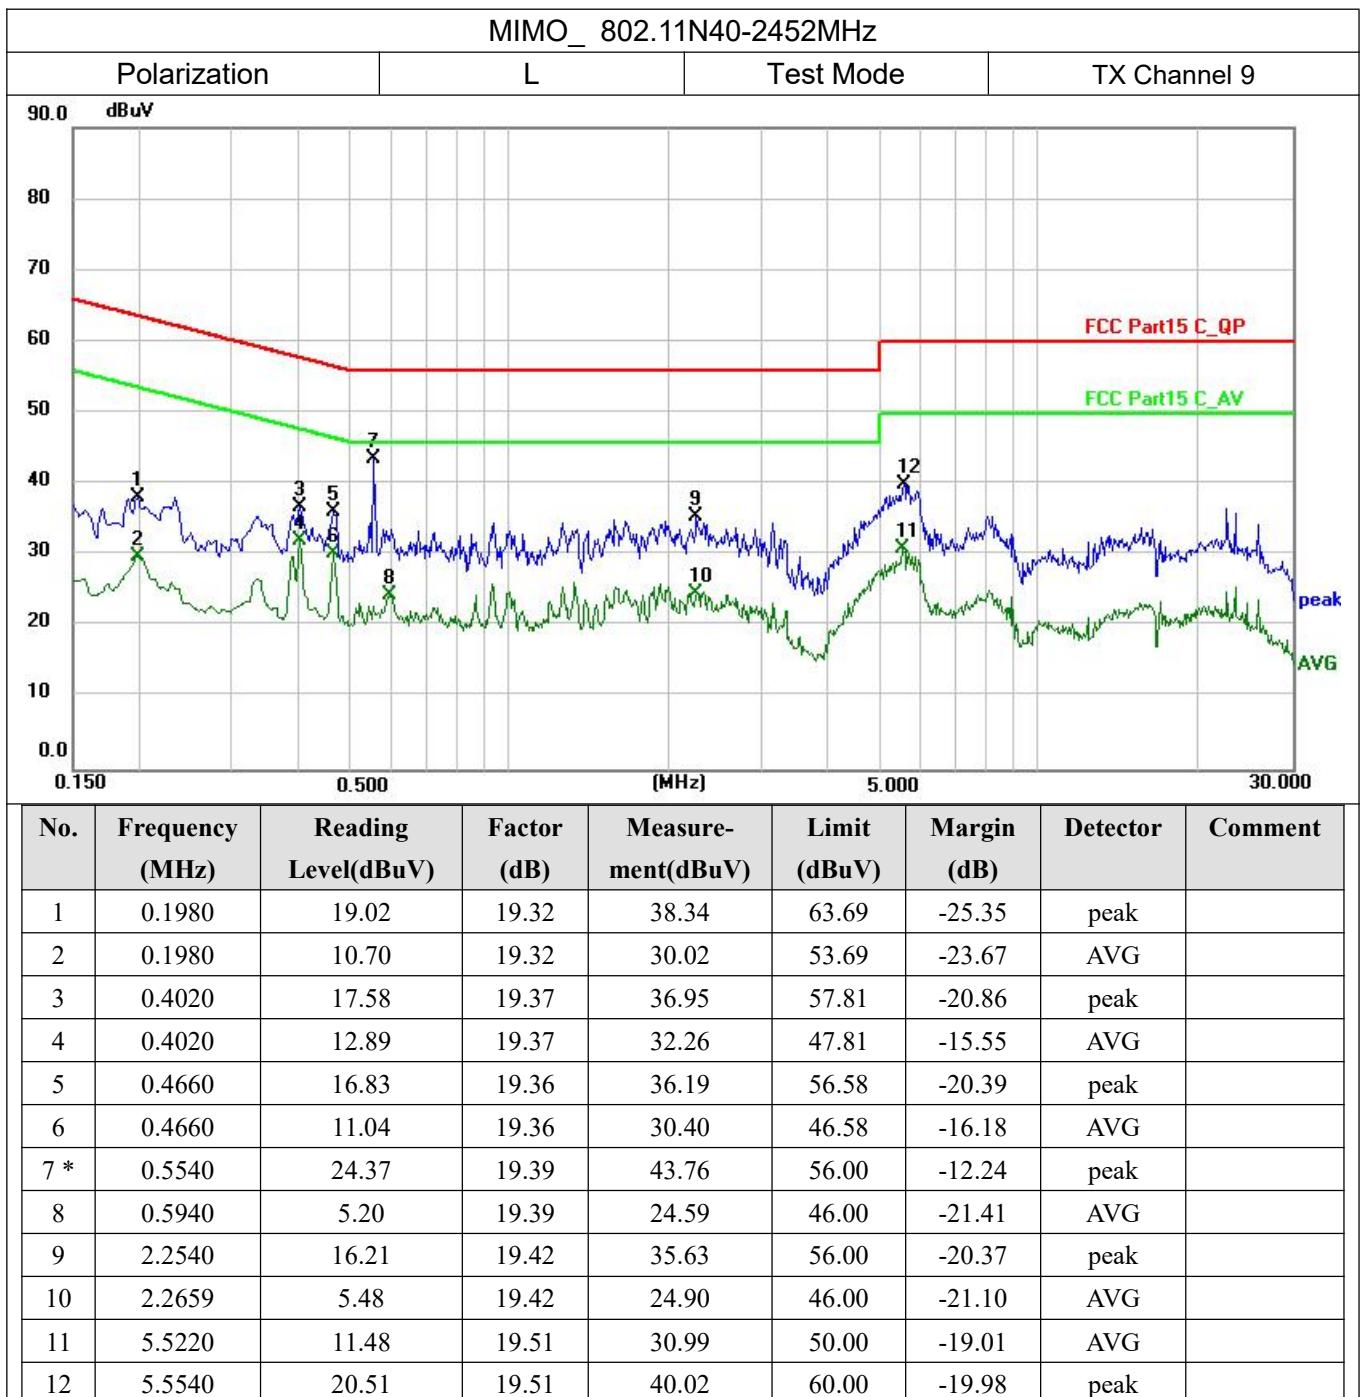

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

### 3.8. Conducted Spurious Emission


#### 3.8.1. Limit

47 CFR 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

#### 3.8.2. Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 30 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

#### 3.8.3. Test Setup

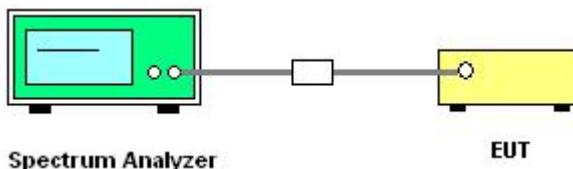

#### 3.8.4. Test Result of Conducted Spurious Emission

Please refer to the Appendix A5.

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

---

### 3.9. Antenna Requirement

#### 3.9.1. Standard Requirement

According to 47 CFR 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### 3.9.2. EUT Antenna

The antenna used for the EUT is PCB Antenna, which meets the antenna requirements.

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



## 4. Test Setup Photographs

Please refer to the Appendix F.

## 5. External And Internal Photos of The EUT

Please refer to the Appendix G.

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

## Appendix A of data

### A1. Maximum Peak conducted output power

#### Test Result

Peak Conducted Output Power						
Mode	Channel	Antenna 1 (dBm)	Antenna 2 (dBm)	Total (dBm)	Limit (dBm)	Result
IEEE 802.11b	1	23.07	23.35	26.223	30	PASS
	6	22.93	22.07	25.532	30	PASS
	11	24.57	22.18	26.548	30	PASS
IEEE 802.11g	1	26.00	25.96	28.990	30	PASS
	6	26.14	25.76	28.964	30	PASS
	11	25.84	25.79	28.825	30	PASS
IEEE 802.11n_20	1	<b>26.01</b>	25.18	28.625	30	PASS
	6	25.65	25.66	28.665	30	PASS
	11	25.14	<b>26.12</b>	28.668	30	PASS
IEEE 802.11n_40	3	25.26	25.27	28.275	30	PASS
	6	25.50	25.97	28.752	30	PASS
	9	25.97	26.09	<b>29.041</b>	30	PASS

#### Note:

- For power measurements on IEEE 802.11 devices,<sup>1,2</sup>  
 $Array\ Gain = 0\ dB$  (i.e., no array gain) for  $N_{ANT} \leq 4$ ;  
 $Array\ Gain = 0\ dB$  (i.e., no array gain) for channel widths  $\geq 40\ MHz$  for any  $N_{ANT}$ ;  
 $Array\ Gain = 5\ log(N_{ANT}/N_{SS})\ dB$  or  $3\ dB$ , whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .
- For power measurements on IEEE 802.11 devices,  
 $Array\ Gain = 0\ dB$  for  $N_{ANT} \leq 4$ ;  
 Directional Gain for Power: 3.72dBi,

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

## A2.Duty Cycle

Note:

Only the worst data Antenna 1 is represented in the report.

Test Result

Duty_Cycle							
Condition	Mode	Frequency(MHz)	Ton(ms)	Toff(ms)	TP(ms)	Duty Cycle(%)	Duty Factor(dB)
NVNT	11b	2412	8.423	0.119	8.542	98.61	0.06
NVNT	11b	2437	8.423	0.119	8.542	98.61	0.06
NVNT	11b	2462	8.423	0.119	8.542	98.61	0.06
NVNT	11g	2412	1.393	0.081	1.474	94.50	0.25
NVNT	11g	2437	1.393	0.155	1.548	89.99	0.46
NVNT	11g	2462	1.393	0.081	1.474	94.50	0.25
NVNT	11n20	2412	1.305	0.144	1.449	90.06	0.45
NVNT	11n20	2437	1.305	0.144	1.449	90.06	0.45
NVNT	11n20	2462	1.282	0.091	1.373	93.37	0.30
NVNT	11n40	2422	8.422	0.118	8.54	98.60	0.06
NVNT	11n40	2437	8.422	0.118	8.542	98.60	0.06
NVNT	11n40	2452	8.422	0.118	8.54	98.60	0.06

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



### A3.6dB Bandwidth and 99% Bandwidth

Note:

Only the worst data Antenna 1 is represented in the report.


Condition	Mode	Frequency (MHz)	99%OBW (MHz)	6BW (MHz)	Frequency Range(MHz)	6BW Limit (MHz)	Result
NVNT	11b	2412	14.025	10.140	2400-2483.5	0.5	Pass
NVNT	11b	2437	13.907	10.140	2400-2483.5	0.5	Pass
NVNT	11b	2462	14.037	10.140	2400-2483.5	0.5	Pass
NVNT	11g	2412	17.231	15.510	2400-2483.5	0.5	Pass
NVNT	11g	2437	16.951	15.780	2400-2483.5	0.5	Pass
NVNT	11g	2462	17.464	15.600	2400-2483.5	0.5	Pass
NVNT	11n20	2412	17.576	15.180	2400-2483.5	0.5	Pass
NVNT	11n20	2437	17.630	16.410	2400-2483.5	0.5	Pass
NVNT	11n20	2462	17.568	16.710	2400-2483.5	0.5	Pass
NVNT	11n40	2422	35.610	35.220	2400-2483.5	0.5	Pass
NVNT	11n40	2437	35.684	35.220	2400-2483.5	0.5	Pass
NVNT	11n40	2452	35.438	33.960	2400-2483.5	0.5	Pass

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

The test image is as follows:



**OCB,11b(HT20),Lowest**

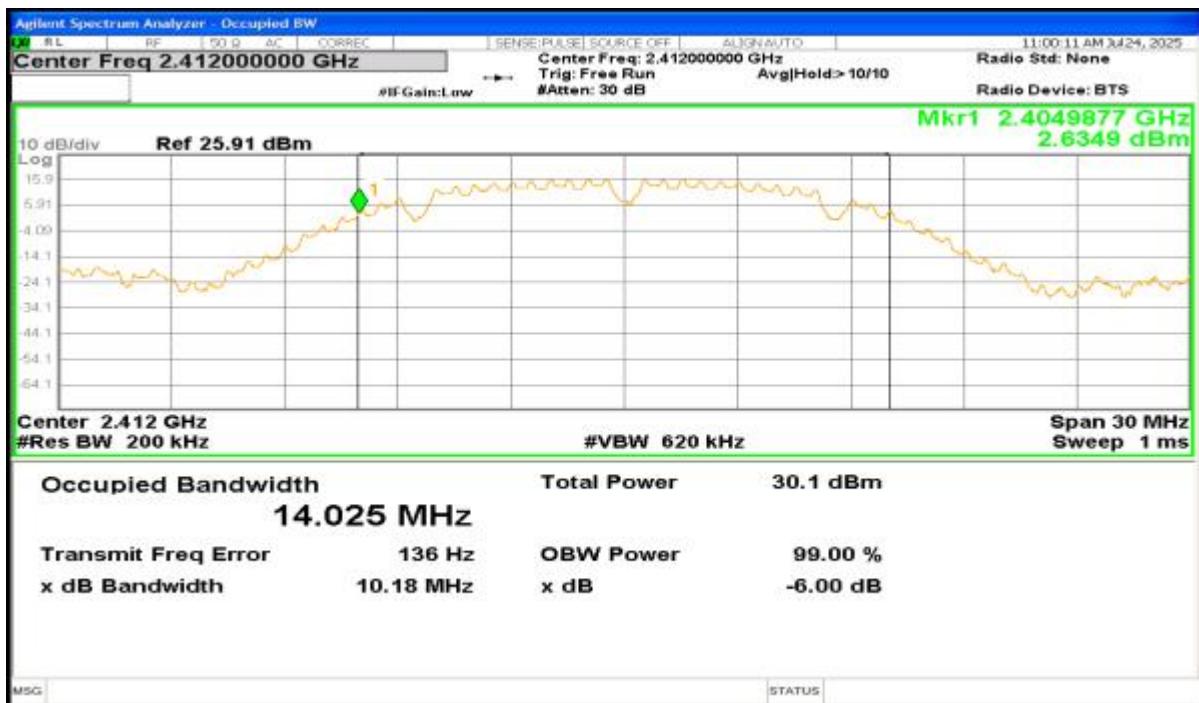

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

## 6BW,11b(HT20),Middle



## OCB,11b(HT20),Middle



**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





## 6BW,11b(HT20),Highest



## OCB,11b(HT20),Highest




**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



## 6BW,11g(HT20),Lowest



## OCB,11g(HT20),Lowest

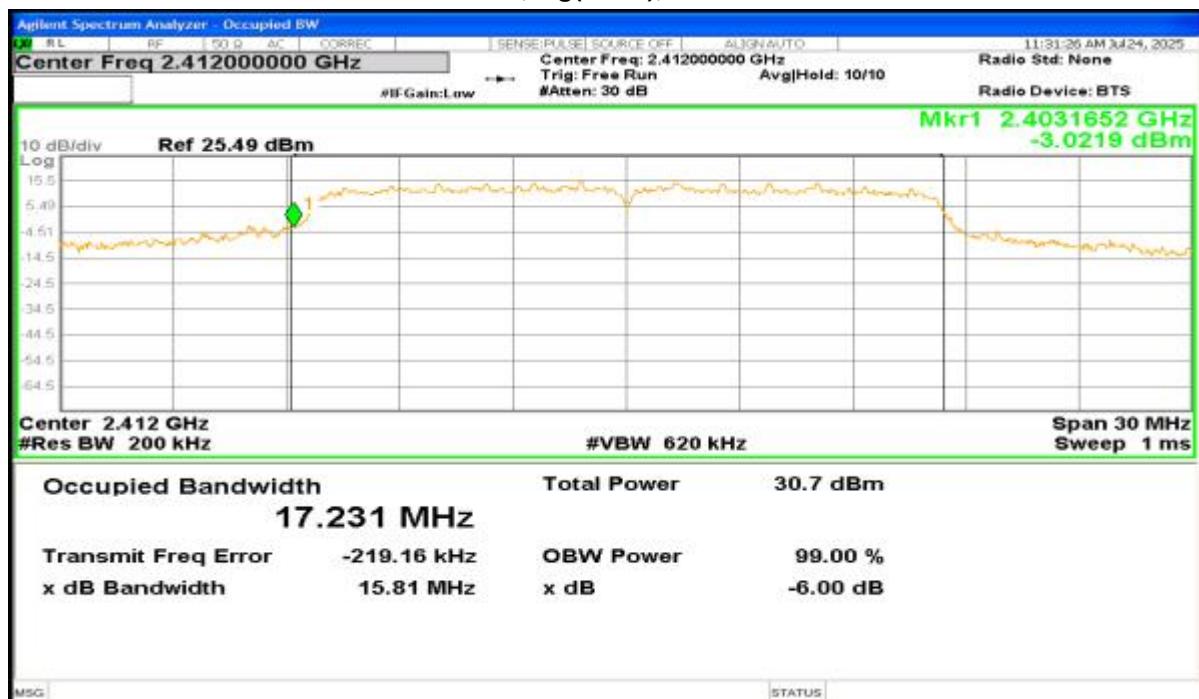


**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



## 6BW,11g(HT20),Middle



## OCB,11g(HT20),Middle

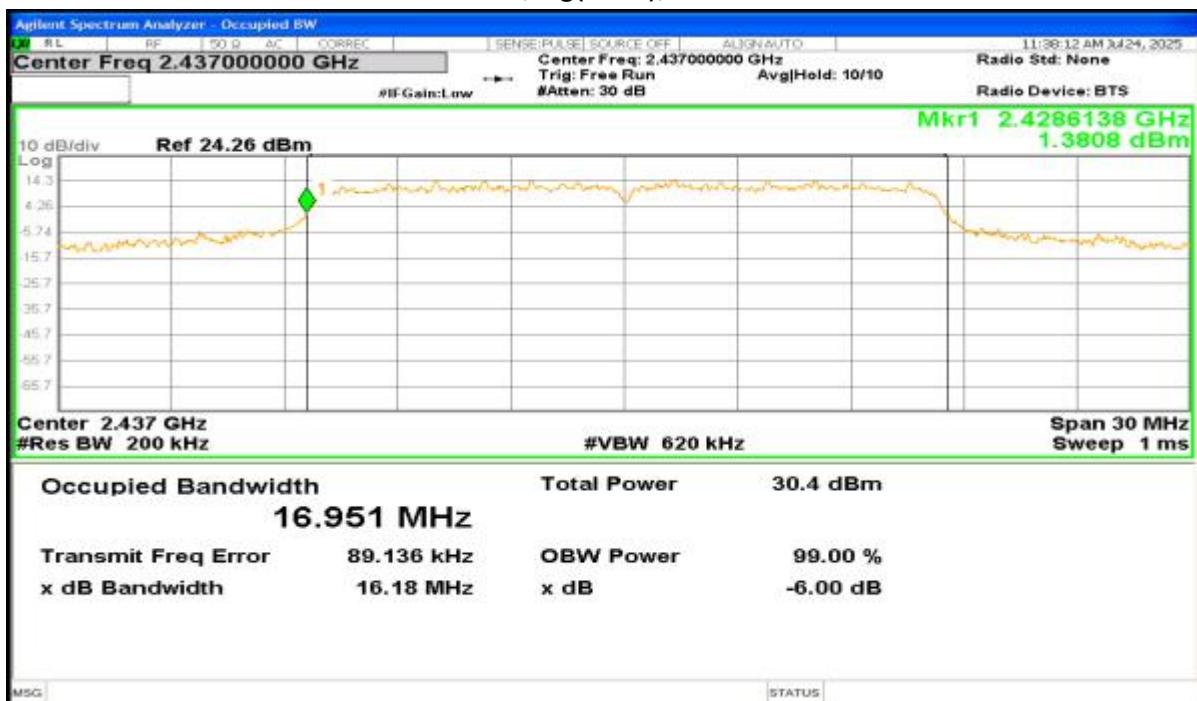

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

