
Appendix E _ Radiated Test data ,Restricted Band and AC Power-Line Conducted Emission**1. Radiated spurious emissions****9 kHz-30 MHz:**


Note:


1. The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Below 1GHz:

Note:

1. All modes have been tested, only worst case Mimo(802.11a20-5745MHz)mode was recorded in the test report.
2. $\text{Emission Level (dBuV/m)} = \text{Reading Value (dBuV)} + \text{Correction Factor (dB/m)}$.
3. $\text{Correction Factor (dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Factor (dB)}$.
4. The emission levels of other frequencies were less than 20dB margin against the limit.
5. $\text{Margin value} = \text{Emission level} - \text{Limit value}$.

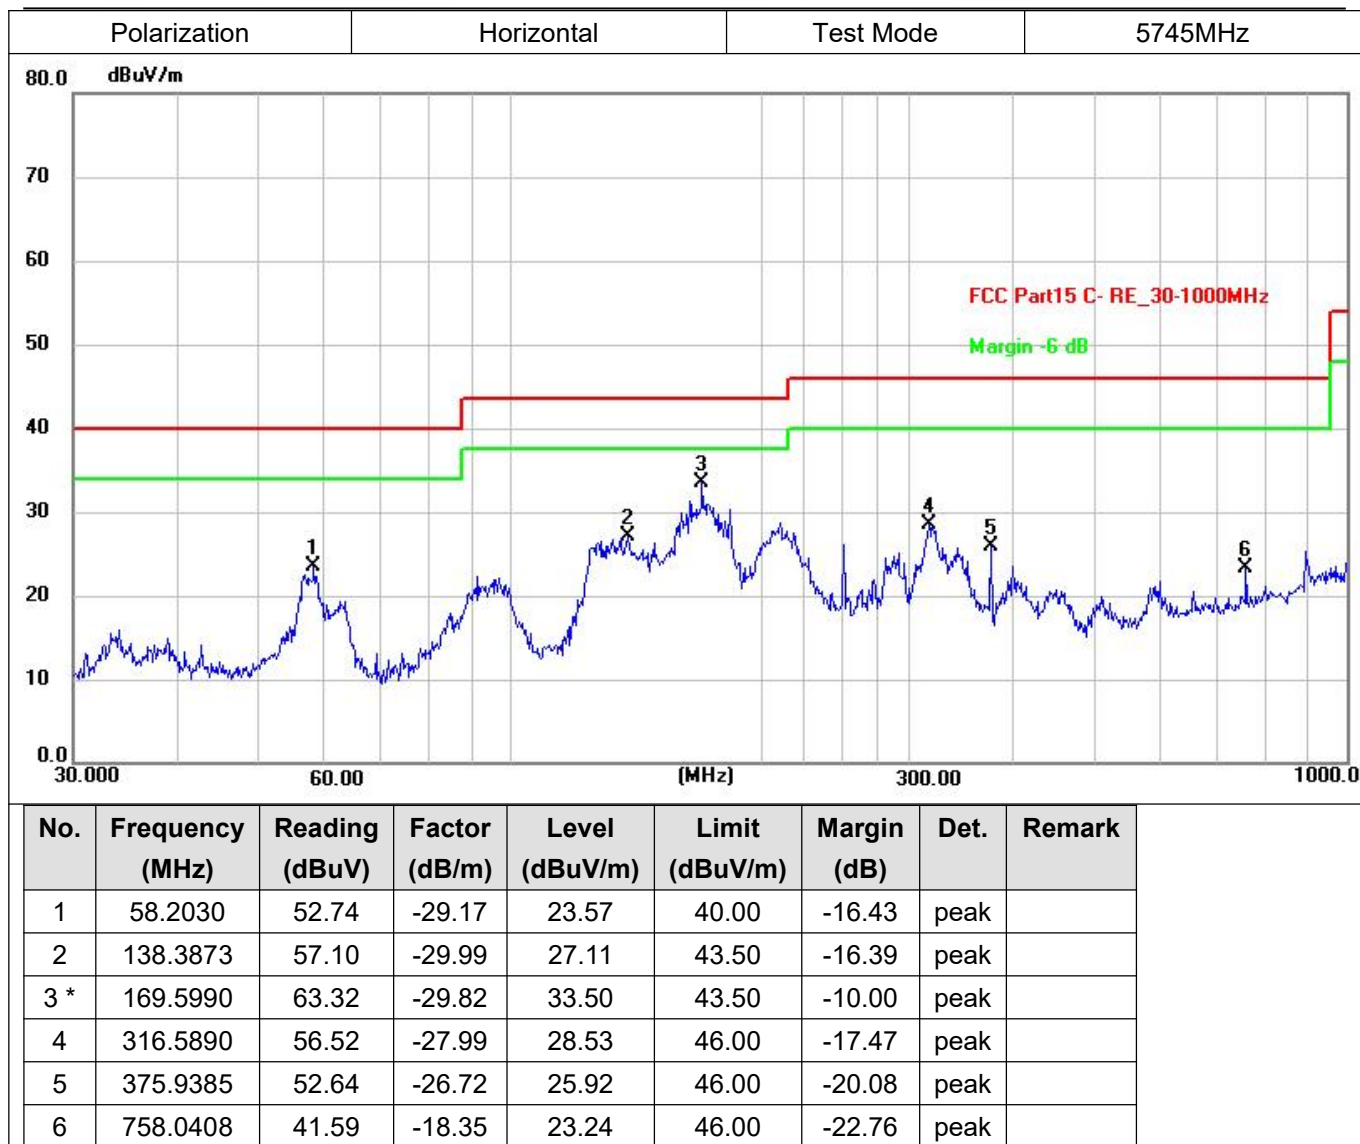

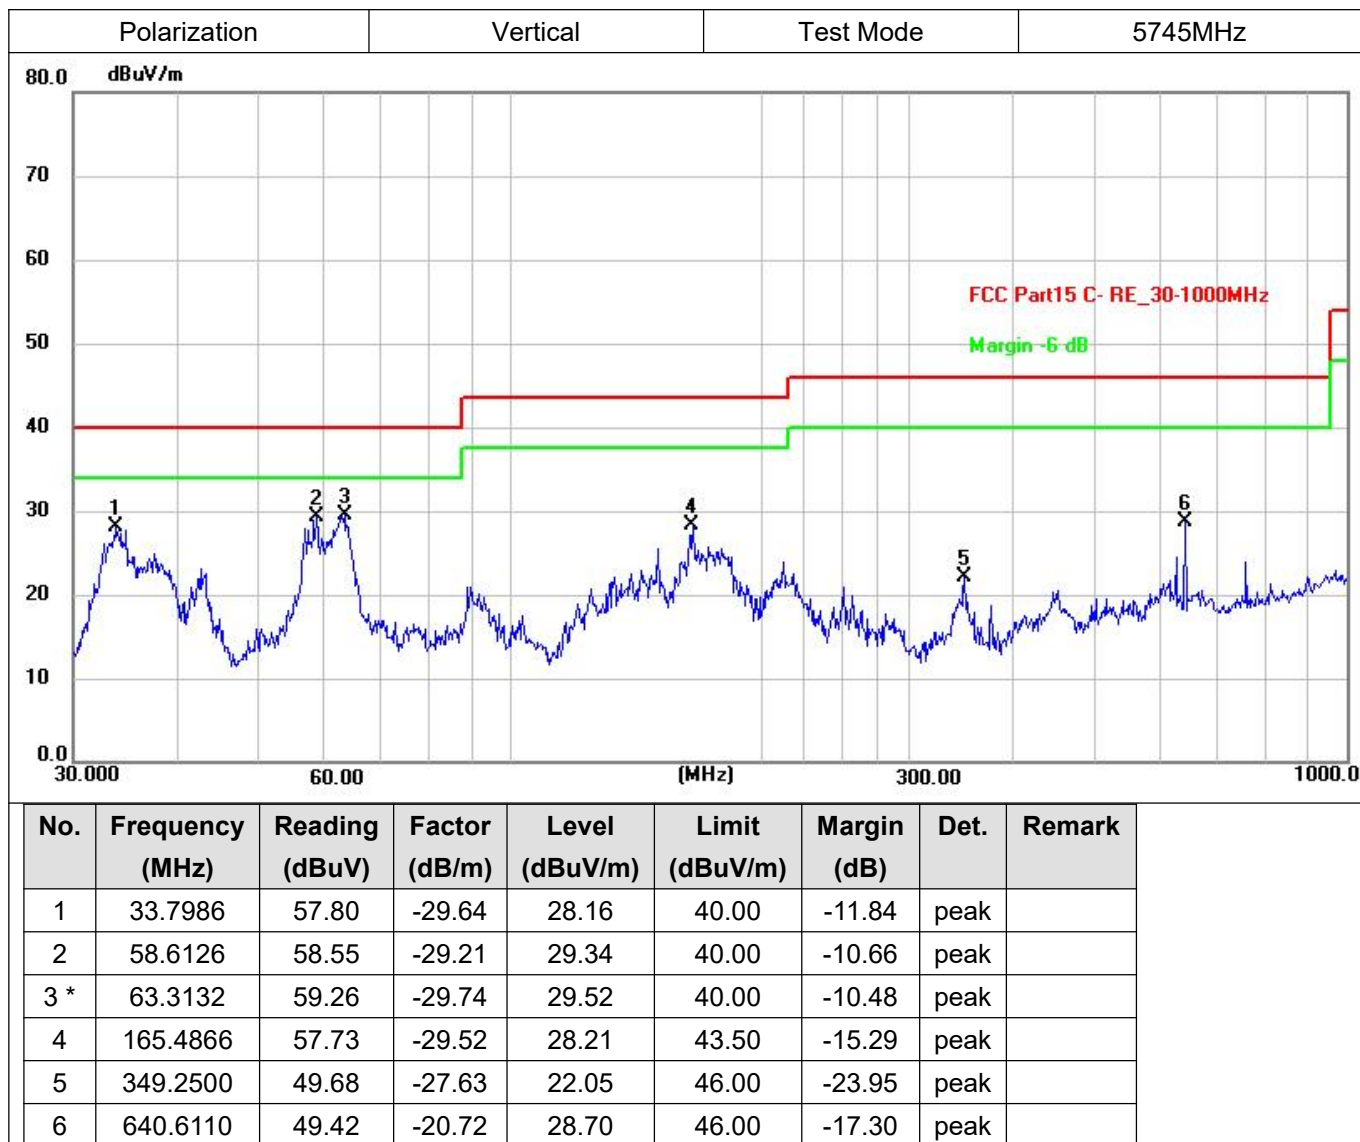

Above 1GHz Data:

Note:

- 1.All the modes have been tested. The report only records the worst data, the low-channel and high-channel performance in the 802.11a/ax20/ax40/ax80 MIMO mode.
- 2.In frequency ranges 18 ~40GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.
- 3.We used the filter to test and the main frequency was filtered out.
- 4.Emission Level (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
5. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
6. The emission levels of other frequencies were less than 20dB margin against the limit.
7. Margin value = Emission level-Limit value.

Test Mode: 802.11a20							
Test Channel: U-NII-1_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10360.000	42.88	5.74	48.62	74.00	-25.38	peak	Pass
10360.000	31.17	5.74	36.91	54.00	-17.09	AV	Pass
15540.000	34.89	11.86	46.75	74.00	-27.25	peak	Pass
15540.000	26.31	11.86	38.17	54.00	-15.83	AV	Pass
Test Channel: U-NII-1_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10360.000	44.20	5.74	49.94	74.00	-24.06	peak	Pass
10360.000	31.84	5.74	37.58	54.00	-16.42	AV	Pass
15540.000	35.88	11.86	47.74	74.00	-26.26	peak	Pass
15540.000	26.19	11.86	38.05	54.00	-15.95	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10480.000	42.49	5.96	48.45	74.00	-25.55	peak	Pass
10480.000	30.89	5.96	36.85	54.00	-17.15	AV	Pass
15720.000	35.38	11.88	47.26	74.00	-26.74	peak	Pass
15720.000	25.75	11.88	37.63	54.00	-16.37	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10480.000	44.23	5.96	50.19	74.00	-23.81	peak	Pass
10480.000	31.94	5.96	37.90	54.00	-16.10	AV	Pass
15720.000	35.43	11.88	47.31	74.00	-26.69	peak	Pass
15720.000	25.75	11.88	37.63	54.00	-16.37	AV	Pass

Test Mode: 802.11N20							
Test Channel: U-NII-1_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10360.000	43.07	5.74	48.81	74.00	-25.19	peak	Pass
10360.000	31.91	5.74	37.65	54.00	-16.35	AV	Pass
15540.000	35.66	11.86	47.52	74.00	-26.48	peak	Pass
15540.000	26.31	11.86	38.17	54.00	-15.83	AV	Pass
Test Channel: U-NII-1_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10360.000	42.35	5.74	48.09	74.00	-25.91	peak	Pass
10360.000	31.95	5.74	37.69	54.00	-16.31	AV	Pass
15540.000	35.43	11.86	47.29	74.00	-26.71	peak	Pass
15540.000	26.27	11.86	38.13	54.00	-15.87	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10480.000	41.91	5.96	47.87	74.00	-26.13	peak	Pass
10480.000	30.95	5.96	36.91	54.00	-17.09	AV	Pass
15720.000	36.13	11.88	48.01	74.00	-25.99	peak	Pass
15720.000	25.85	11.88	37.73	54.00	-16.27	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10480.000	44.42	5.96	50.38	74.00	-23.62	peak	Pass
10480.000	31.86	5.96	37.82	54.00	-16.18	AV	Pass
15720.000	35.30	11.88	47.18	74.00	-26.82	peak	Pass
15720.000	25.79	11.88	37.67	54.00	-16.33	AV	Pass

Test Mode: 802.11N40							
Test Channel: U-NII-1_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10380.000	42.29	5.78	48.07	74.00	-25.93	peak	Pass
10380.000	31.30	5.78	37.08	54.00	-16.92	AV	Pass
15570.000	35.85	11.86	47.71	74.00	-26.29	peak	Pass
15570.000	25.76	11.86	37.62	54.00	-16.38	AV	Pass
Test Channel: U-NII-1_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10380.000	44.40	5.78	50.18	74.00	-23.82	peak	Pass
10380.000	31.61	5.78	37.39	54.00	-16.61	AV	Pass
15570.000	36.39	11.86	48.25	74.00	-25.75	peak	Pass
15570.000	25.63	11.86	37.49	54.00	-16.51	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10460.000	41.92	5.92	47.84	74.00	-26.16	peak	Pass
10460.000	31.13	5.92	37.05	54.00	-16.95	AV	Pass
15690.000	36.30	11.87	48.17	74.00	-25.83	peak	Pass
15690.000	26.26	11.87	38.13	54.00	-15.87	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10460.000	43.14	5.92	49.06	74.00	-24.94	peak	Pass
10460.000	31.88	5.92	37.80	54.00	-16.20	AV	Pass
15690.000	36.11	11.87	47.98	74.00	-26.02	peak	Pass
15690.000	26.25	11.87	38.12	54.00	-15.88	AV	Pass

Test Mode: 802.11AC20							
Test Channel: U-NII-1_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10360.000	42.52	5.74	48.26	74.00	-25.74	peak	Pass
10360.000	31.62	5.74	37.36	54.00	-16.64	AV	Pass
15540.000	35.62	11.86	47.48	74.00	-26.52	peak	Pass
15540.000	26.55	11.86	38.41	54.00	-15.59	AV	Pass
Test Channel: U-NII-1_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10360.000	44.09	5.74	49.83	74.00	-24.17	peak	Pass
10360.000	32.11	5.74	37.85	54.00	-16.15	AV	Pass
15540.000	35.42	11.86	47.28	74.00	-26.72	peak	Pass
15540.000	26.41	11.86	38.27	54.00	-15.73	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10480.000	42.86	5.96	48.82	74.00	-25.18	peak	Pass
10480.000	31.40	5.96	37.36	54.00	-16.64	AV	Pass
15720.000	36.01	11.88	47.89	74.00	-26.11	peak	Pass
15720.000	25.65	11.88	37.53	54.00	-16.47	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10480.000	44.77	5.96	50.73	74.00	-23.27	peak	Pass
10480.000	32.18	5.96	38.14	54.00	-15.86	AV	Pass
15720.000	36.01	11.88	47.89	74.00	-26.11	peak	Pass
15720.000	25.61	11.88	37.49	54.00	-16.51	AV	Pass

Test Mode: 802.11AC40							
Test Channel: U-NII-1_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10380.000	41.61	5.78	47.39	74.00	-26.61	peak	Pass
10380.000	31.20	5.78	36.98	54.00	-17.02	AV	Pass
15570.000	35.65	11.86	47.51	74.00	-26.49	peak	Pass
15570.000	25.69	11.86	37.55	54.00	-16.45	AV	Pass
Test Channel: U-NII-1_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10380.000	42.90	5.78	48.68	74.00	-25.32	peak	Pass
10380.000	31.50	5.78	37.28	54.00	-16.72	AV	Pass
15570.000	35.47	11.86	47.33	74.00	-26.67	peak	Pass
15570.000	25.73	11.86	37.59	54.00	-16.41	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10460.000	41.82	5.92	47.74	74.00	-26.26	peak	Pass
10460.000	30.87	5.92	36.79	54.00	-17.21	AV	Pass
15690.000	36.44	11.87	48.31	74.00	-25.69	peak	Pass
15690.000	26.09	11.87	37.96	54.00	-16.04	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10460.000	42.37	5.92	48.29	74.00	-25.71	peak	Pass
10460.000	31.36	5.92	37.28	54.00	-16.72	AV	Pass
15690.000	36.22	11.87	48.09	74.00	-25.91	peak	Pass
15690.000	26.06	11.87	37.93	54.00	-16.07	AV	Pass

Test Mode: 802.11AC80							
Test Channel: U-NII-1_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10420.000	40.55	5.86	46.41	74.00	-27.59	peak	Pass
10420.000	30.97	5.86	36.83	54.00	-17.17	AV	Pass
15630.000	38.50	11.86	50.36	74.00	-23.64	peak	Pass
15630.000	27.23	11.86	39.09	54.00	-14.91	AV	Pass
Test Channel: U-NII-1_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10420.000	40.94	5.86	46.80	74.00	-27.20	peak	Pass
10420.000	30.82	5.86	36.68	54.00	-17.32	AV	Pass
15630.000	37.95	11.86	49.81	74.00	-24.19	peak	Pass
15630.000	27.24	11.86	39.10	54.00	-14.90	AV	Pass

Test Mode: 802.11AX20							
Test Channel: U-NII-1_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10360.000	42.41	5.74	48.15	74.00	-25.85	peak	Pass
10360.000	31.97	5.74	37.71	54.00	-16.29	AVG	Pass
15540.000	36.31	11.86	48.17	74.00	-25.83	peak	Pass
15540.000	26.40	11.86	38.26	54.00	-15.74	AVG	Pass
Test Channel: U-NII-1_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10360.000	42.99	5.74	48.73	74.00	-25.27	peak	Pass
10360.000	31.56	5.74	37.30	54.00	-16.70	AV	Pass
15540.000	36.43	11.86	48.29	74.00	-25.71	peak	Pass
15540.000	26.37	11.86	38.23	54.00	-15.77	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10480.000	41.95	5.96	47.91	74.00	-26.09	peak	Pass
10480.000	31.34	5.96	37.30	54.00	-16.70	AV	Pass
15720.000	35.34	11.88	47.22	74.00	-26.78	peak	Pass
15720.000	25.59	11.88	37.47	54.00	-16.53	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10480.000	43.42	5.96	49.38	74.00	-24.62	peak	Pass
10480.000	31.91	5.96	37.87	54.00	-16.13	AV	Pass
15720.000	35.01	11.88	46.89	74.00	-27.11	peak	Pass
15720.000	25.72	11.88	37.60	54.00	-16.40	AV	Pass

Test Mode: 802.11AX40							
Test Channel: U-NII-1_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10380.000	41.65	5.78	47.43	74.00	-26.57	peak	Pass
10380.000	31.29	5.78	37.07	54.00	-16.93	AV	Pass
15570.000	36.39	11.86	48.25	74.00	-25.75	peak	Pass
15570.000	25.72	11.86	37.58	54.00	-16.42	AV	Pass
Test Channel: U-NII-1_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10380.000	42.64	5.78	48.42	74.00	-25.58	peak	Pass
10380.000	31.31	5.78	37.09	54.00	-16.91	AV	Pass
15570.000	36.82	11.86	48.68	74.00	-25.32	peak	Pass
15570.000	25.65	11.86	37.51	54.00	-16.49	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10460.000	41.42	5.92	47.34	74.00	-26.66	peak	Pass
10460.000	31.15	5.92	37.07	54.00	-16.93	AV	Pass
15690.000	37.05	11.87	48.92	74.00	-25.08	peak	Pass
15690.000	26.11	11.87	37.98	54.00	-16.02	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10460.000	43.24	5.92	49.16	74.00	-24.84	peak	Pass
10460.000	32.11	5.92	38.03	54.00	-15.97	AV	Pass
15690.000	36.04	11.87	47.91	74.00	-26.09	peak	Pass
15690.000	26.07	11.87	37.94	54.00	-16.06	AV	Pass

Test Mode: 802.11AX80							
Test Channel: U-NII-1_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10420.000	41.07	5.86	46.93	74.00	-27.07	peak	Pass
10420.000	30.81	5.86	36.67	54.00	-17.33	AV	Pass
15630.000	37.72	11.86	49.58	74.00	-24.42	peak	Pass
15630.000	27.27	11.86	39.13	54.00	-14.87	AV	Pass
Test Channel: U-NII-1_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10420.000	43.08	5.86	48.94	74.00	-25.06	peak	Pass
10420.000	31.26	5.86	37.12	54.00	-16.88	AV	Pass
15630.000	38.31	11.86	50.17	74.00	-23.83	peak	Pass
15630.000	27.50	11.86	39.36	54.00	-14.64	AV	Pass

Test Mode: 802.11a20							
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10520.000	41.05	6.04	47.09	74.00	-26.91	peak	Pass
10520.000	30.24	6.04	36.28	54.00	-17.72	AV	Pass
15780.000	35.33	11.87	47.20	74.00	-26.80	peak	Pass
15780.000	24.63	11.87	36.50	54.00	-17.50	AV	Pass
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10520.000	42.49	6.04	48.53	74.00	-25.47	peak	Pass
10520.000	30.18	6.04	36.22	54.00	-17.78	AV	Pass
15780.000	35.36	11.87	47.23	74.00	-26.77	peak	Pass
15780.000	24.56	11.87	36.43	54.00	-17.57	AV	Pass
Test Channel: U-NII-2A_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10640.000	39.70	6.26	45.96	74.00	-28.04	peak	Pass
10640.000	31.08	6.26	37.34	54.00	-16.66	AV	Pass
15960.000	37.17	11.89	49.06	74.00	-24.94	peak	Pass
15960.000	25.94	11.89	37.83	54.00	-16.17	AV	Pass
Test Channel: U-NII-2A_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10640.000	40.02	6.26	46.28	74.00	-27.72	peak	Pass
10640.000	31.83	6.26	38.09	54.00	-15.91	AV	Pass
15960.000	36.22	11.89	48.11	74.00	-25.89	peak	Pass
15960.000	25.70	11.89	37.59	54.00	-16.41	AV	Pass

Test Mode: 802.11N20							
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10520.000	42.20	6.04	48.24	74.00	-25.76	peak	Pass
10520.000	30.21	6.04	36.25	54.00	-17.75	AV	Pass
15780.000	35.05	11.87	46.92	74.00	-27.08	peak	Pass
15780.000	24.64	11.87	36.51	54.00	-17.49	AV	Pass
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10520.000	43.23	6.04	49.27	74.00	-24.73	peak	Pass
10520.000	30.29	6.04	36.33	54.00	-17.67	AV	Pass
15780.000	34.80	11.87	46.67	74.00	-27.33	peak	Pass
15780.000	24.57	11.87	36.44	54.00	-17.56	AV	Pass
Test Channel: U-NII-2A_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10640.000	39.27	6.26	45.53	74.00	-28.47	peak	Pass
10640.000	30.45	6.26	36.71	54.00	-17.29	AV	Pass
15960.000	36.16	11.89	48.05	74.00	-25.95	peak	Pass
15960.000	25.66	11.89	37.55	54.00	-16.45	AV	Pass
Test Channel: U-NII-2A_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10640.000	40.98	6.26	47.24	74.00	-26.76	peak	Pass
10640.000	31.75	6.26	38.01	54.00	-15.99	AV	Pass
15960.000	36.12	11.89	48.01	74.00	-25.99	peak	Pass
15960.000	25.67	11.89	37.56	54.00	-16.44	AV	Pass

Test Mode: 802.11N40							
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10540.000	39.87	6.08	45.95	74.00	-28.05	peak	Pass
10540.000	31.26	6.08	37.34	54.00	-16.66	AV	Pass
15810.000	35.36	11.88	47.24	74.00	-26.76	peak	Pass
15810.000	24.36	11.88	36.24	54.00	-17.76	AV	Pass
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10540.000	41.05	6.08	47.13	74.00	-26.87	peak	Pass
10540.000	31.46	6.08	37.54	54.00	-16.46	AV	Pass
15810.000	34.65	11.88	46.53	74.00	-27.47	peak	Pass
15810.000	24.03	11.88	35.91	54.00	-18.09	AV	Pass
Test Channel: U-NII-2A_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10620.000	40.26	6.22	46.48	74.00	-27.52	peak	Pass
10620.000	30.27	6.22	36.49	54.00	-17.51	AV	Pass
15930.000	36.45	11.89	48.34	74.00	-25.66	peak	Pass
15930.000	25.42	11.89	37.31	54.00	-16.69	AV	Pass
Test Channel: U-NII-2A_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10620.000	42.30	6.22	48.52	74.00	-25.48	peak	Pass
10620.000	30.70	6.22	36.92	54.00	-17.08	AV	Pass
15930.000	36.35	11.89	48.24	74.00	-25.76	peak	Pass
15930.000	25.47	11.89	37.36	54.00	-16.64	AV	Pass

Test Mode: 802.11AC20							
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10520.000	41.92	6.04	47.96	74.00	-26.04	peak	Pass
10520.000	30.16	6.04	36.20	54.00	-17.80	AV	Pass
15780.000	35.46	11.87	47.33	74.00	-26.67	peak	Pass
15780.000	24.58	11.87	36.45	54.00	-17.55	AV	Pass
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10520.000	44.38	6.04	50.42	74.00	-23.58	peak	Pass
10520.000	30.39	6.04	36.43	54.00	-17.57	AV	Pass
15780.000	34.78	11.87	46.65	74.00	-27.35	peak	Pass
15780.000	24.48	11.87	36.35	54.00	-17.65	AV	Pass
Test Channel: U-NII-2A_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10640.000	40.69	6.26	46.95	74.00	-27.05	peak	Pass
10640.000	31.69	6.26	37.95	54.00	-16.05	AV	Pass
15960.000	35.74	11.89	47.63	74.00	-26.37	peak	Pass
15960.000	25.62	11.89	37.51	54.00	-16.49	AV	Pass
Test Channel: U-NII-2A_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10640.000	39.14	6.26	45.40	74.00	-28.60	peak	Pass
10640.000	30.63	6.26	36.89	54.00	-17.11	AV	Pass
15960.000	36.67	11.89	48.56	74.00	-25.44	peak	Pass
15960.000	25.62	11.89	37.51	54.00	-16.49	AV	Pass

Test Mode: 802.11AC40							
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10540.000	39.90	6.08	45.98	74.00	-28.02	peak	Pass
10540.000	31.13	6.08	37.21	54.00	-16.79	AV	Pass
15810.000	35.50	11.88	47.38	74.00	-26.62	peak	Pass
15810.000	24.19	11.88	36.07	54.00	-17.93	AV	Pass
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10540.000	40.55	6.08	46.63	74.00	-27.37	peak	Pass
10540.000	31.53	6.08	37.61	54.00	-16.39	AV	Pass
15810.000	34.79	11.88	46.67	74.00	-27.33	peak	Pass
15810.000	24.19	11.88	36.07	54.00	-17.93	AV	Pass
Test Channel: U-NII-2A_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10620.000	39.79	6.22	46.01	74.00	-27.99	peak	Pass
10620.000	30.10	6.22	36.32	54.00	-17.68	AV	Pass
15930.000	36.04	11.89	47.93	74.00	-26.07	peak	Pass
15930.000	25.43	11.89	37.32	54.00	-16.68	AV	Pass
Test Channel: U-NII-2A_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10620.000	42.08	6.22	48.30	74.00	-25.70	peak	Pass
10620.000	30.81	6.22	37.03	54.00	-16.97	AV	Pass
15930.000	35.60	11.89	47.49	74.00	-26.51	peak	Pass
15930.000	25.64	11.89	37.53	54.00	-16.47	AV	Pass

Test Mode: 802.11AC80							
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10580.000	39.86	6.14	46.00	74.00	-28.00	peak	Pass
10580.000	30.62	6.14	36.76	54.00	-17.24	AV	Pass
15870.000	35.18	11.89	47.07	74.00	-26.93	peak	Pass
15870.000	24.62	11.89	36.51	54.00	-17.49	AV	Pass
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10580.000	41.08	6.14	47.22	74.00	-26.78	peak	Pass
10580.000	30.99	6.14	37.13	54.00	-16.87	AV	Pass
15870.000	35.92	11.89	47.81	74.00	-26.19	peak	Pass
15870.000	24.64	11.89	36.53	54.00	-17.47	AV	Pass

Test Mode: 802.11AX20							
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10520.000	41.08	6.04	47.12	74.00	-26.88	peak	Pass
10520.000	30.32	6.04	36.36	54.00	-17.64	AV	Pass
15780.000	35.61	11.87	47.48	74.00	-26.52	peak	Pass
15780.000	24.53	11.87	36.40	54.00	-17.60	AV	Pass
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10520.000	42.46	6.04	48.50	74.00	-25.50	peak	Pass
10520.000	30.43	6.04	36.47	54.00	-17.53	AV	Pass
15780.000	35.19	11.87	47.06	74.00	-26.94	peak	Pass
15780.000	24.45	11.87	36.32	54.00	-17.68	AV	Pass
Test Channel: U-NII-2A_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10640.000	39.08	6.26	45.34	74.00	-28.66	peak	Pass
10640.000	30.95	6.26	37.21	54.00	-16.79	AV	Pass
15960.000	36.42	11.89	48.31	74.00	-25.69	peak	Pass
15960.000	25.85	11.89	37.74	54.00	-16.26	AV	Pass
Test Channel: U-NII-2A_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10640.000	42.28	6.26	48.54	74.00	-25.46	peak	Pass
10640.000	32.04	6.26	38.30	54.00	-15.70	AV	Pass
15960.000	36.42	11.89	48.31	74.00	-25.69	peak	Pass
15960.000	25.93	11.89	37.82	54.00	-16.18	AV	Pass

Test Mode: 802.11AX40							
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10540.000	41.52	6.08	47.60	74.00	-26.40	peak	Pass
10540.000	31.12	6.08	37.20	54.00	-16.80	AV	Pass
15810.000	34.00	11.88	45.88	74.00	-28.12	peak	Pass
15810.000	24.00	11.88	35.88	54.00	-18.12	AV	Pass
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10540.000	41.42	6.08	47.50	74.00	-26.50	peak	Pass
10540.000	31.22	6.08	37.30	54.00	-16.70	AV	Pass
15810.000	35.21	11.88	47.09	74.00	-26.91	peak	Pass
15810.000	24.06	11.88	35.94	54.00	-18.06	AV	Pass
Test Channel: U-NII-2A_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10620.000	40.20	6.22	46.42	74.00	-27.58	peak	Pass
10620.000	30.17	6.22	36.39	54.00	-17.61	AV	Pass
15930.000	35.99	11.89	47.88	74.00	-26.12	peak	Pass
15930.000	25.83	11.89	37.72	54.00	-16.28	AV	Pass
Test Channel: U-NII-2A_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10620.000	40.73	6.22	46.95	74.00	-27.05	peak	Pass
10620.000	30.36	6.22	36.58	54.00	-17.42	AV	Pass
15930.000	36.39	11.89	48.28	74.00	-25.72	peak	Pass
15930.000	25.71	11.89	37.60	54.00	-16.40	AV	Pass

Test Mode: 802.11AX80							
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10580.000	43.07	6.14	49.21	74.00	-24.79	peak	Pass
10580.000	30.70	6.14	36.84	54.00	-17.16	AV	Pass
15870.000	35.55	11.89	47.44	74.00	-26.56	peak	Pass
15870.000	24.67	11.89	36.56	54.00	-17.44	AV	Pass
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
10580.000	40.70	6.14	46.84	74.00	-27.16	peak	Pass
10580.000	30.44	6.14	36.58	54.00	-17.42	AV	Pass
15870.000	35.83	11.89	47.72	74.00	-26.28	peak	Pass
15870.000	24.44	11.89	36.33	54.00	-17.67	AV	Pass

Test Mode: 802.11A20							
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11000.000	42.28	6.90	49.18	74.00	-24.82	peak	Pass
11000.000	32.13	6.90	39.03	54.00	-14.97	AV	Pass
16500.000	35.04	12.40	47.44	74.00	-26.56	peak	Pass
16500.000	24.17	12.40	36.57	54.00	-17.43	AV	Pass
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11000.000	43.29	6.90	50.19	74.00	-23.81	peak	Pass
11000.000	32.62	6.90	39.52	54.00	-14.48	AV	Pass
16500.000	36.30	12.40	48.70	74.00	-25.30	peak	Pass
16500.000	24.29	12.40	36.69	54.00	-17.31	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11400.000	39.52	7.78	47.30	74.00	-26.70	peak	Pass
11400.000	28.82	7.78	36.60	54.00	-17.40	AV	Pass
17100.000	37.10	13.50	50.60	74.00	-23.40	peak	Pass
17100.000	26.40	13.50	39.90	54.00	-14.10	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11400.000	40.85	7.78	48.63	74.00	-25.37	peak	Pass
11400.000	29.04	7.78	36.82	54.00	-17.18	AV	Pass
17100.000	36.30	13.50	49.80	74.00	-24.20	peak	Pass
17100.000	26.82	13.50	40.32	54.00	-13.68	AV	Pass

Test Mode: 802.11N20							
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11000.000	42.12	6.90	49.02	74.00	-24.98	peak	Pass
11000.000	32.22	6.90	39.12	54.00	-14.88	AV	Pass
16500.000	36.02	12.40	48.42	74.00	-25.58	peak	Pass
16500.000	25.35	12.40	37.75	54.00	-16.25	AV	Pass
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11000.000	44.16	6.90	51.06	74.00	-22.94	peak	Pass
11000.000	33.21	6.90	40.11	54.00	-13.89	AV	Pass
16500.000	36.11	12.40	48.51	74.00	-25.49	peak	Pass
16500.000	25.41	12.40	37.81	54.00	-16.19	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11400.000	39.83	7.78	47.61	74.00	-26.39	peak	Pass
11400.000	28.64	7.78	36.42	54.00	-17.58	AV	Pass
17100.000	36.89	13.50	50.39	74.00	-23.61	peak	Pass
17100.000	26.69	13.50	40.19	54.00	-13.81	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11400.000	38.42	7.78	46.20	74.00	-27.80	peak	Pass
11400.000	28.66	7.78	36.44	54.00	-17.56	AV	Pass
17100.000	36.54	13.50	50.04	74.00	-23.96	peak	Pass
17100.000	26.41	13.50	39.91	54.00	-14.09	AV	Pass

Test Mode: 802.11N40							
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11020.000	41.50	6.95	48.45	74.00	-25.55	peak	Pass
11020.000	30.50	6.95	37.45	54.00	-16.55	AV	Pass
16530.000	36.31	12.42	48.73	74.00	-25.27	peak	Pass
16530.000	25.54	12.42	37.96	54.00	-16.04	AV	Pass
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11020.000	40.95	6.95	47.90	74.00	-26.10	peak	Pass
11020.000	30.67	6.95	37.62	54.00	-16.38	AV	Pass
16530.000	36.38	12.42	48.80	74.00	-25.20	peak	Pass
16530.000	25.39	12.42	37.81	54.00	-16.19	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11340.000	39.70	7.64	47.34	74.00	-26.66	peak	Pass
11340.000	30.20	7.64	37.84	54.00	-16.16	AV	Pass
17010.000	39.53	12.87	52.40	74.00	-21.60	peak	Pass
17010.000	27.83	12.87	40.70	54.00	-13.30	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11340.000	40.42	7.64	48.06	74.00	-25.94	peak	Pass
11340.000	30.57	7.64	38.21	54.00	-15.79	AV	Pass
17010.000	39.08	12.87	51.95	74.00	-22.05	peak	Pass
17010.000	28.10	12.87	40.97	54.00	-13.03	AV	Pass

Test Mode: 802.11AC20							
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11000.000	42.21	6.90	49.11	74.00	-24.89	peak	Pass
11000.000	32.28	6.90	39.18	54.00	-14.82	AV	Pass
16500.000	35.99	12.40	48.39	74.00	-25.61	peak	Pass
16500.000	25.50	12.40	37.90	54.00	-16.10	AV	Pass
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11000.000	42.57	6.90	49.47	74.00	-24.53	peak	Pass
11000.000	33.03	6.90	39.93	54.00	-14.07	AV	Pass
16500.000	36.51	12.40	48.91	74.00	-25.09	peak	Pass
16500.000	25.33	12.40	37.73	54.00	-16.27	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11400.000	39.45	7.78	47.23	74.00	-26.77	peak	Pass
11400.000	28.51	7.78	36.29	54.00	-17.71	AV	Pass
17100.000	36.48	13.50	49.98	74.00	-24.02	peak	Pass
17100.000	26.73	13.50	40.23	54.00	-13.77	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11400.000	40.04	7.78	47.82	74.00	-26.18	peak	Pass
11400.000	28.72	7.78	36.50	54.00	-17.50	AV	Pass
17100.000	36.67	13.50	50.17	74.00	-23.83	peak	Pass
17100.000	26.97	13.50	40.47	54.00	-13.53	AV	Pass

Test Mode: 802.11AC40							
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11020.000	41.65	6.95	48.60	74.00	-25.40	peak	Pass
11020.000	31.35	6.95	38.30	54.00	-15.70	AV	Pass
16530.000	36.42	12.42	48.84	74.00	-25.16	peak	Pass
16530.000	25.45	12.42	37.87	54.00	-16.13	AV	Pass
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11020.000	42.42	6.95	49.37	74.00	-24.63	peak	Pass
11020.000	31.56	6.95	38.51	54.00	-15.49	AV	Pass
16530.000	35.91	12.42	48.33	74.00	-25.67	peak	Pass
16530.000	25.68	12.42	38.10	54.00	-15.90	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11340.000	39.82	7.64	47.46	74.00	-26.54	peak	Pass
11340.000	30.22	7.64	37.86	54.00	-16.14	AV	Pass
17010.000	39.32	12.87	52.19	74.00	-21.81	peak	Pass
17010.000	28.17	12.87	41.04	54.00	-12.96	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11340.000	40.67	7.64	48.31	74.00	-25.69	peak	Pass
11340.000	30.53	7.64	38.17	54.00	-15.83	AV	Pass
17010.000	38.96	12.87	51.83	74.00	-22.17	peak	Pass
17010.000	28.34	12.87	41.21	54.00	-12.79	AV	Pass

Test Mode: 802.11AC80							
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11060.000	41.41	7.04	48.45	74.00	-25.55	peak	Pass
11060.000	31.24	7.04	38.28	54.00	-15.72	AV	Pass
16590.000	38.04	12.47	50.51	74.00	-23.49	peak	Pass
16590.000	27.18	12.47	39.65	54.00	-14.35	AV	Pass
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11060.000	42.22	7.04	49.26	74.00	-24.74	peak	Pass
11060.000	31.29	7.04	38.33	54.00	-15.67	AV	Pass
16590.000	37.24	12.47	49.71	74.00	-24.29	peak	Pass
16590.000	27.09	12.47	39.56	54.00	-14.44	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11220.000	40.89	7.39	48.28	74.00	-25.72	peak	Pass
11220.000	31.43	7.39	38.82	54.00	-15.18	AV	Pass
16830.000	35.01	12.66	47.67	74.00	-26.33	peak	Pass
16830.000	25.18	12.66	37.84	54.00	-16.16	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11220.000	40.92	7.39	48.31	74.00	-25.69	peak	Pass
11220.000	31.51	7.39	38.90	54.00	-15.10	AV	Pass
16830.000	35.00	12.66	47.66	74.00	-26.34	peak	Pass
16830.000	25.36	12.66	38.02	54.00	-15.98	AV	Pass

Test Mode: 802.11AX20							
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11000.000	42.94	6.90	49.84	74.00	-24.16	peak	Pass
11000.000	32.09	6.90	38.99	54.00	-15.01	AV	Pass
16500.000	35.91	12.40	48.31	74.00	-25.69	peak	Pass
16500.000	25.43	12.40	37.83	54.00	-16.17	AV	Pass
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11000.000	42.63	6.90	49.53	74.00	-24.47	peak	Pass
11000.000	33.10	6.90	40.00	54.00	-14.00	AV	Pass
16500.000	36.45	12.40	48.85	74.00	-25.15	peak	Pass
16500.000	25.65	12.40	38.05	54.00	-15.95	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11400.000	38.11	7.78	45.89	74.00	-28.11	peak	Pass
11400.000	28.56	7.78	36.34	54.00	-17.66	AV	Pass
17100.000	36.97	13.50	50.47	74.00	-23.53	peak	Pass
17100.000	27.01	13.50	40.51	54.00	-13.49	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11400.000	39.02	7.78	46.80	74.00	-27.20	peak	Pass
11400.000	28.71	7.78	36.49	54.00	-17.51	AV	Pass
17100.000	37.38	13.50	50.88	74.00	-23.12	peak	Pass
17100.000	27.45	13.50	40.95	54.00	-13.05	AV	Pass

Test Mode: 802.11AX40							
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11020.000	42.18	6.95	49.13	74.00	-24.87	peak	Pass
11020.000	31.35	6.95	38.30	54.00	-15.70	AV	Pass
16530.000	37.03	12.42	49.45	74.00	-24.55	peak	Pass
16530.000	25.59	12.42	38.01	54.00	-15.99	AV	Pass
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11020.000	43.30	6.95	50.25	74.00	-23.75	peak	Pass
11020.000	31.84	6.95	38.79	54.00	-15.21	AV	Pass
16530.000	36.68	12.42	49.10	74.00	-24.90	peak	Pass
16530.000	25.67	12.42	38.09	54.00	-15.91	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11340.000	39.18	7.64	46.82	74.00	-27.18	peak	Pass
11340.000	30.10	7.64	37.74	54.00	-16.26	AV	Pass
17010.000	38.87	12.87	51.74	74.00	-22.26	peak	Pass
17010.000	28.44	12.87	41.31	54.00	-12.69	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11340.000	40.16	7.64	47.80	74.00	-26.20	peak	Pass
11340.000	30.37	7.64	38.01	54.00	-15.99	AV	Pass
17010.000	40.01	12.87	52.88	74.00	-21.12	peak	Pass
17010.000	28.55	12.87	41.42	54.00	-12.58	AV	Pass

Test Mode: 802.11AX80							
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11060.000	41.53	7.04	48.57	74.00	-25.43	peak	Pass
11060.000	31.15	7.04	38.19	54.00	-15.81	AV	Pass
16590.000	36.90	12.47	49.37	74.00	-24.63	peak	Pass
16590.000	27.18	12.47	39.65	54.00	-14.35	AV	Pass
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11060.000	41.68	7.04	48.72	74.00	-25.28	peak	Pass
11060.000	31.30	7.04	38.34	54.00	-15.66	AV	Pass
16590.000	37.37	12.47	49.84	74.00	-24.16	peak	Pass
16590.000	27.15	12.47	39.62	54.00	-14.38	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11220.000	42.29	7.39	49.68	74.00	-24.32	peak	Pass
11220.000	31.06	7.39	38.45	54.00	-15.55	AV	Pass
16830.000	35.62	12.66	48.28	74.00	-25.72	peak	Pass
16830.000	25.55	12.66	38.21	54.00	-15.79	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11220.000	41.33	7.39	48.72	74.00	-25.28	peak	Pass
11220.000	31.41	7.39	38.80	54.00	-15.20	AV	Pass
16830.000	36.14	12.66	48.80	74.00	-25.20	peak	Pass
16830.000	25.32	12.66	37.98	54.00	-16.02	AV	Pass

Test Mode: 802.11A20							
Test Channel: U-NII-3_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11490.000	39.14	7.97	47.11	74.00	-26.89	peak	Pass
11490.000	29.21	7.97	37.18	54.00	-16.82	AV	Pass
17235.000	35.44	14.45	49.89	74.00	-24.11	peak	Pass
17235.000	24.87	14.45	39.32	54.00	-14.68	AV	Pass
Test Channel: U-NII-3_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11490.000	38.98	7.97	46.95	74.00	-27.05	peak	Pass
11490.000	29.96	7.97	37.93	54.00	-16.07	AV	Pass
17235.000	35.64	14.45	50.09	74.00	-23.91	peak	Pass
17235.000	25.12	14.45	39.57	54.00	-14.43	AV	Pass
Test Channel: U-NII-3_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11650.000	39.98	8.09	48.07	74.00	-25.93	peak	Pass
11650.000	30.85	8.09	38.94	54.00	-15.06	AV	Pass
17475.000	35.94	16.12	52.06	74.00	-21.94	peak	Pass
17475.000	25.76	16.12	41.88	54.00	-12.12	AV	Pass
Test Channel: U-NII-3_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11650.000	42.97	8.09	51.06	74.00	-22.94	peak	Pass
11650.000	31.07	8.09	39.16	54.00	-14.84	AV	Pass
17475.000	35.18	16.12	51.30	74.00	-22.70	peak	Pass
17475.000	26.51	16.12	42.63	54.00	-11.37	AV	Pass

Test Mode: 802.11N20							
Test Channel: U-NII-3_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11490.000	38.68	7.97	46.65	74.00	-27.35	peak	Pass
11490.000	29.42	7.97	37.39	54.00	-16.61	AV	Pass
17235.000	36.82	14.45	51.27	74.00	-22.73	peak	Pass
17235.000	24.80	14.45	39.25	54.00	-14.75	AV	Pass
Test Channel: U-NII-3_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11490.000	40.59	7.97	48.56	74.00	-25.44	peak	Pass
11490.000	30.53	7.97	38.50	54.00	-15.50	AV	Pass
17235.000	37.30	14.45	51.75	74.00	-22.25	peak	Pass
17235.000	25.00	14.45	39.45	54.00	-14.55	AV	Pass
Test Channel: U-NII-3_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11650.000	41.08	8.09	49.17	74.00	-24.83	peak	Pass
11650.000	30.64	8.09	38.73	54.00	-15.27	AV	Pass
17454.000	36.20	15.98	52.18	74.00	-21.82	peak	Pass
17454.000	25.69	15.98	41.67	54.00	-12.33	AV	Pass
Test Channel: U-NII-3_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11650.000	41.04	8.09	49.13	74.00	-24.87	peak	Pass
11650.000	31.17	8.09	39.26	54.00	-14.74	AV	Pass
17475.000	35.40	16.12	51.52	74.00	-22.48	peak	Pass
17475.000	26.25	16.12	42.37	54.00	-11.63	AV	Pass

Test Mode: 802.11N40
Test Channel: U-NII-3_Lowest channel, Test Polarization: Vertical

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11510.000	38.84	8.01	46.85	74.00	-27.15	peak	Pass
11510.000	29.34	8.01	37.35	54.00	-16.65	AV	Pass
17265.000	35.00	14.65	49.65	74.00	-24.35	peak	Pass
17265.000	25.83	14.65	40.48	54.00	-13.52	AV	Pass

Test Channel: U-NII-3_Lowest channel, Test Polarization: Horizontal

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11510.000	39.31	8.01	47.32	74.00	-26.68	peak	Pass
11510.000	29.69	8.01	37.70	54.00	-16.30	AV	Pass
17265.000	35.70	14.65	50.35	74.00	-23.65	peak	Pass
17265.000	26.20	14.65	40.85	54.00	-13.15	AV	Pass

Test Channel: U-NII-3_Highest channel, Test Polarization: Vertical

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11590.000	40.59	8.05	48.64	74.00	-25.36	peak	Pass
11590.000	29.68	8.05	37.73	54.00	-16.27	AV	Pass
17385.000	36.16	15.50	51.66	74.00	-22.34	peak	Pass
17385.000	26.81	15.50	42.31	54.00	-11.69	AV	Pass

Test Channel: U-NII-3_Highest channel, Test Polarization: Horizontal

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11590.000	41.18	8.05	49.23	74.00	-24.77	peak	Pass
11590.000	30.06	8.05	38.11	54.00	-15.89	AV	Pass
17385.000	37.50	15.50	53.00	74.00	-21.00	peak	Pass
17385.000	26.87	15.50	42.37	54.00	-11.63	AV	Pass

Test Mode: 802.11AC20							
Test Channel: U-NII-3_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11490.000	39.30	7.97	47.27	74.00	-26.73	peak	Pass
11490.000	29.29	7.97	37.26	54.00	-16.74	AV	Pass
17235.000	35.91	14.45	50.36	74.00	-23.64	peak	Pass
17235.000	24.81	14.45	39.26	54.00	-14.74	AV	Pass
Test Channel: U-NII-3_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11490.000	39.96	7.97	47.93	74.00	-26.07	peak	Pass
11490.000	30.23	7.97	38.20	54.00	-15.80	AV	Pass
17235.000	36.03	14.45	50.48	74.00	-23.52	peak	Pass
17235.000	25.02	14.45	39.47	54.00	-14.53	AV	Pass
Test Channel: U-NII-3_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11650.000	41.87	8.09	49.96	74.00	-24.04	peak	Pass
11650.000	30.63	8.09	38.72	54.00	-15.28	AV	Pass
17475.000	35.98	16.12	52.10	74.00	-21.90	peak	Pass
17475.000	25.87	16.12	41.99	54.00	-12.01	AV	Pass
Test Channel: U-NII-3_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11650.000	42.26	8.09	50.35	74.00	-23.65	peak	Pass
11650.000	31.27	8.09	39.36	54.00	-14.64	AV	Pass
17475.000	36.10	16.12	52.22	74.00	-21.78	peak	Pass
17475.000	26.63	16.12	42.75	54.00	-11.25	AV	Pass

Test Mode: 802.11AC40
Test Channel: U-NII-3_Lowest channel, Test Polarization: Vertical

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11510.000	37.22	8.01	45.23	74.00	-28.77	peak	Pass
11510.000	28.94	8.01	36.95	54.00	-17.05	AV	Pass
17265.000	34.46	14.65	49.11	74.00	-24.89	peak	Pass
17265.000	25.45	14.65	40.10	54.00	-13.90	AV	Pass

Test Channel: U-NII-3_Lowest channel, Test Polarization: Horizontal

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11510.000	39.51	8.01	47.52	74.00	-26.48	peak	Pass
11510.000	28.82	8.01	36.83	54.00	-17.17	AV	Pass
17265.000	35.09	14.65	49.74	74.00	-24.26	peak	Pass
17265.000	25.65	14.65	40.30	54.00	-13.70	AV	Pass

Test Channel: U-NII-3_Highest channel, Test Polarization: Vertical

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11590.000	39.55	8.05	47.60	74.00	-26.40	peak	Pass
11590.000	28.99	8.05	37.04	54.00	-16.96	AV	Pass
17385.000	35.21	15.50	50.71	74.00	-23.29	peak	Pass
17385.000	26.40	15.50	41.90	54.00	-12.10	AV	Pass

Test Channel: U-NII-3_Highest channel, Test Polarization: Horizontal

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11590.000	39.84	8.05	47.89	74.00	-26.11	peak	Pass
11590.000	29.25	8.05	37.30	54.00	-16.70	AV	Pass
17385.000	35.20	15.50	50.70	74.00	-23.30	peak	Pass
17385.000	26.56	15.50	42.06	54.00	-11.94	AV	Pass

Test Mode: 802.11AC80
Test Channel: U-NII-3_Lowest channel, Test Polarization: Vertical

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11550.000	37.83	8.03	45.86	74.00	-28.14	peak	Pass
11550.000	28.72	8.03	36.75	54.00	-17.25	AV	Pass
17325.000	34.91	15.07	49.98	74.00	-24.02	peak	Pass
17325.000	26.79	15.07	41.86	54.00	-12.14	AV	Pass

Test Channel: U-NII-3_Lowest channel, Test Polarization: Horizontal

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11550.000	38.02	8.03	46.05	74.00	-27.95	peak	Pass
11550.000	28.81	8.03	36.84	54.00	-17.16	AV	Pass
17325.000	35.21	15.07	50.28	74.00	-23.72	peak	Pass
17325.000	26.73	15.07	41.80	54.00	-12.20	AV	Pass

Test Mode: 802.11AX40							
Test Channel: U-NII-3_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11510.000	38.04	8.01	46.05	74.00	-27.95	peak	Pass
11510.000	28.77	8.01	36.78	54.00	-17.22	AV	Pass
17265.000	36.10	14.65	50.75	74.00	-23.25	peak	Pass
17265.000	25.75	14.65	40.40	54.00	-13.60	AV	Pass
Test Channel: U-NII-3_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11510.000	37.80	8.01	45.81	74.00	-28.19	peak	Pass
11510.000	28.51	8.01	36.52	54.00	-17.48	AV	Pass
17265.000	35.36	14.65	50.01	74.00	-23.99	peak	Pass
17265.000	25.83	14.65	40.48	54.00	-13.52	AV	Pass
Test Channel: U-NII-3_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11590.000	39.82	8.05	47.87	74.00	-26.13	peak	Pass
11590.000	28.91	8.05	36.96	54.00	-17.04	AV	Pass
17385.000	35.03	15.50	50.53	74.00	-23.47	peak	Pass
17385.000	26.70	15.50	42.20	54.00	-11.80	AV	Pass
Test Channel: U-NII-3_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11590.000	39.73	8.05	47.78	74.00	-26.22	peak	Pass
11590.000	29.24	8.05	37.29	54.00	-16.71	AV	Pass
17385.000	34.92	15.50	50.42	74.00	-23.58	peak	Pass
17385.000	26.72	15.50	42.22	54.00	-11.78	AV	Pass

Test Mode: 802.11AX80**Test Channel: U-NII-3_Lowest channel, Test Polarization: Vertical**

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11550.000	38.21	8.03	46.24	74.00	-27.76	peak	Pass
11550.000	28.74	8.03	36.77	54.00	-17.23	AV	Pass
17325.000	36.13	15.07	51.20	74.00	-22.80	peak	Pass
17325.000	26.72	15.07	41.79	54.00	-12.21	AV	Pass

Test Channel: U-NII-3_Lowest channel, Test Polarization: Horizontal

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
11550.000	38.92	8.03	46.95	74.00	-27.05	peak	Pass
11550.000	28.80	8.03	36.83	54.00	-17.17	AV	Pass
17325.000	35.43	15.07	50.50	74.00	-23.50	peak	Pass
17325.000	26.70	15.07	41.77	54.00	-12.23	AV	Pass

2. Restricted Band

Note:

1. Only the worst MIMO 802.11a and 802.11ax data is represented in the report.

2. For frequencies not falling within the 15.205 MHz limit band, the limit should be 68.2 dBμV/m (-27 dBm/MHz).

The result meets the limit requirements.

Test Mode: 802.11A20							
Test Channel: U-NII-1_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4800.000	47.36	-5.90	41.46	74.00	-32.54	peak	Pass
4800.000	36.49	-5.90	30.59	54.00	-23.41	AV	Pass
5150.000	42.36	-4.86	37.50	74.00	-36.50	peak	Pass
5150.000	30.99	-4.86	26.13	54.00	-27.87	AV	Pass
Test Channel: U-NII-1_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4800.000	46.42	-5.90	40.52	74.00	-33.48	peak	Pass
4800.000	36.44	-5.90	30.54	54.00	-23.46	AV	Pass
5150.000	43.15	-4.86	38.29	74.00	-35.71	peak	Pass
5150.000	31.53	-4.86	26.67	54.00	-27.33	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5350.000	43.28	-4.46	38.82	74.00	-35.18	peak	Pass
5350.000	32.72	-4.46	28.26	54.00	-25.74	AV	Pass
5450.000	43.06	-4.43	38.63	74.00	-35.37	peak	Pass
5450.000	32.50	-4.43	28.07	54.00	-25.93	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5350.000	43.87	-4.46	39.41	74.00	-34.59	peak	Pass
5350.000	32.79	-4.46	28.33	54.00	-25.67	AV	Pass
5450.000	43.23	-4.43	38.80	74.00	-35.20	peak	Pass
5450.000	32.69	-4.43	28.26	54.00	-25.74	AV	Pass

Test Mode: 802.11AX20							
Test Channel: U-NII-1_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4800.000	46.88	-5.90	40.98	74.00	-33.02	peak	Pass
4800.000	36.25	-5.90	30.35	54.00	-23.65	AV	Pass
5150.000	41.89	-4.86	37.03	74.00	-36.97	peak	Pass
5150.000	30.93	-4.86	26.07	54.00	-27.93	AV	Pass
Test Channel: U-NII-1_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4800.000	45.97	-5.90	40.07	74.00	-33.93	peak	Pass
4800.000	35.54	-5.90	29.64	54.00	-24.36	AV	Pass
5150.000	42.04	-4.86	37.18	74.00	-36.82	peak	Pass
5150.000	30.98	-4.86	26.12	54.00	-27.88	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5350.000	43.39	-4.46	38.93	74.00	-35.07	peak	Pass
5350.000	32.78	-4.46	28.32	54.00	-25.68	AV	Pass
5450.000	43.04	-4.43	38.61	74.00	-35.39	peak	Pass
5450.000	32.50	-4.43	28.07	54.00	-25.93	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5350.000	43.11	-4.46	38.65	74.00	-35.35	peak	Pass
5350.000	32.67	-4.46	28.21	54.00	-25.79	AV	Pass
5450.000	42.58	-4.43	38.15	74.00	-35.85	peak	Pass
5450.000	32.50	-4.43	28.07	54.00	-25.93	AV	Pass

Test Mode: 802.11AX40							
Test Channel: U-NII-1_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4800.000	47.05	-5.90	41.15	74.00	-32.85	peak	Pass
4800.000	36.02	-5.90	30.12	54.00	-23.88	AV	Pass
5150.000	41.50	-4.86	36.64	74.00	-37.36	peak	Pass
5150.000	30.75	-4.86	25.89	54.00	-28.11	AV	Pass
Test Channel: U-NII-1_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4800.000	46.13	-5.90	40.23	74.00	-33.77	peak	Pass
4800.000	35.33	-5.90	29.43	54.00	-24.57	AV	Pass
5150.000	41.09	-4.86	36.23	74.00	-37.77	peak	Pass
5150.000	30.75	-4.86	25.89	54.00	-28.11	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5350.000	43.16	-4.46	38.70	74.00	-35.30	peak	Pass
5350.000	32.30	-4.46	27.84	54.00	-26.16	AV	Pass
5450.000	42.33	-4.43	37.90	74.00	-36.10	peak	Pass
5450.000	32.00	-4.43	27.57	54.00	-26.43	AV	Pass
Test Channel: U-NII-1_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5350.000	42.70	-4.46	38.24	74.00	-35.76	peak	Pass
5350.000	32.29	-4.46	27.83	54.00	-26.17	AV	Pass
5450.000	42.43	-4.43	38.00	74.00	-36.00	peak	Pass
5450.000	32.01	-4.43	27.58	54.00	-26.42	AV	Pass

Test Mode: 802.11AX80							
Test Channel: U-NII-1_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4800.000	47.03	-5.90	41.13	74.00	-32.87	peak	Pass
4800.000	36.22	-5.90	30.32	54.00	-23.68	AV	Pass
5150.000	42.21	-4.86	37.35	74.00	-36.65	peak	Pass
5150.000	30.93	-4.86	26.07	54.00	-27.93	AV	Pass
Test Channel: U-NII--1_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5350.000	43.08	-4.46	38.62	74.00	-35.38	peak	Pass
5350.000	32.55	-4.46	28.09	54.00	-25.91	AV	Pass
5450.000	42.79	-4.43	38.36	74.00	-35.64	peak	Pass
5450.000	32.27	-4.43	27.84	54.00	-26.16	AV	Pass

Test Mode: 802.11A20							
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4800.000	48.03	-5.90	42.13	74.00	-31.87	peak	Pass
4800.000	37.33	-5.90	31.43	54.00	-22.57	AV	Pass
5150.000	42.76	-4.86	37.90	74.00	-36.10	peak	Pass
5150.000	31.39	-4.86	26.53	54.00	-27.47	AV	Pass
Test Channel: U-NII--2A_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4800.000	47.67	-5.90	41.77	74.00	-32.23	peak	Pass
4800.000	36.97	-5.90	31.07	54.00	-22.93	AV	Pass
5150.000	41.81	-4.86	36.95	74.00	-37.05	peak	Pass
5150.000	31.43	-4.86	26.57	54.00	-27.43	AV	Pass
Test Channel: U-NII--2A_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5350.000	42.97	-4.46	38.51	74.00	-35.49	peak	Pass
5350.000	32.81	-4.46	28.35	54.00	-25.65	AV	Pass
5450.000	43.14	-4.43	38.71	74.00	-35.29	peak	Pass
5450.000	32.75	-4.43	28.32	54.00	-25.68	AV	Pass
Test Channel: U-NII--2A_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5350.000	43.87	-4.46	39.41	74.00	-34.59	peak	Pass
5350.000	32.93	-4.46	28.47	54.00	-25.53	AV	Pass
5450.000	43.43	-4.43	39.00	74.00	-35.00	peak	Pass
5450.000	32.73	-4.43	28.30	54.00	-25.70	AV	Pass

Test Mode: 802.11AX20							
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4800.000	47.45	-5.90	41.55	74.00	-32.45	peak	Pass
4800.000	36.77	-5.90	30.87	54.00	-23.13	AV	Pass
5150.000	41.95	-4.86	37.09	74.00	-36.91	peak	Pass
5150.000	31.30	-4.86	26.44	54.00	-27.56	AV	Pass
Test Channel: U-NII--2A_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4800.000	47.56	-5.90	41.66	74.00	-32.34	peak	Pass
4800.000	36.12	-5.90	30.22	54.00	-23.78	AV	Pass
5150.000	42.17	-4.86	37.31	74.00	-36.69	peak	Pass
5150.000	31.31	-4.86	26.45	54.00	-27.55	AV	Pass
Test Channel: U-NII--2A_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5350.000	43.47	-4.46	39.01	74.00	-34.99	peak	Pass
5350.000	32.88	-4.46	28.42	54.00	-25.58	AV	Pass
5450.000	44.07	-4.43	39.64	74.00	-34.36	peak	Pass
5450.000	32.64	-4.43	28.21	54.00	-25.79	AV	Pass
Test Channel: U-NII--2A_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5350.000	43.54	-4.46	39.08	74.00	-34.92	peak	Pass
5350.000	32.85	-4.46	28.39	54.00	-25.61	AV	Pass
5450.000	43.26	-4.43	38.83	74.00	-35.17	peak	Pass
5450.000	32.60	-4.43	28.17	54.00	-25.83	AV	Pass

Test Mode: 802.11AX40							
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4800.000	46.80	-5.90	40.90	74.00	-33.10	peak	Pass
4800.000	36.60	-5.90	30.70	54.00	-23.30	AV	Pass
5150.000	42.01	-4.86	37.15	74.00	-36.85	peak	Pass
5150.000	31.29	-4.86	26.43	54.00	-27.57	AV	Pass
Test Channel: U-NII--2A_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4800.000	47.21	-5.90	41.31	74.00	-32.69	peak	Pass
4800.000	36.06	-5.90	30.16	54.00	-23.84	AV	Pass
5150.000	42.01	-4.86	37.15	74.00	-36.85	peak	Pass
5150.000	31.21	-4.86	26.35	54.00	-27.65	AV	Pass
Test Channel: U-NII--2A_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5350.000	43.54	-4.46	39.08	74.00	-34.92	peak	Pass
5350.000	32.77	-4.46	28.31	54.00	-25.69	AV	Pass
5450.000	43.88	-4.43	39.45	74.00	-34.55	peak	Pass
5450.000	32.58	-4.43	28.15	54.00	-25.85	AV	Pass
Test Channel: U-NII--2A_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5350.000	43.30	-4.46	38.84	74.00	-35.16	peak	Pass
5350.000	32.62	-4.46	28.16	54.00	-25.84	AV	Pass
5450.000	43.50	-4.43	39.07	74.00	-34.93	peak	Pass
5450.000	32.41	-4.43	27.98	54.00	-26.02	AV	Pass

Test Mode: 802.11AX80							
Test Channel: U-NII-2A_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4800.000	46.53	-5.90	40.63	74.00	-33.37	peak	Pass
4800.000	36.43	-5.90	30.53	54.00	-23.47	AV	Pass
5150.000	41.94	-4.86	37.08	74.00	-36.92	peak	Pass
5150.000	31.20	-4.86	26.34	54.00	-27.66	AV	Pass
Test Channel: U-NII--2A_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4800.000	45.96	-5.90	40.06	74.00	-33.94	peak	Pass
4800.000	35.87	-5.90	29.97	54.00	-24.03	AV	Pass
5150.000	41.17	-4.86	36.31	74.00	-37.69	peak	Pass
5150.000	31.11	-4.86	26.25	54.00	-27.75	AV	Pass

Test Mode: 802.11A20							
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5400.000	43.36	-4.38	38.98	74.00	-35.02	peak	Pass
5400.000	32.02	-4.38	27.64	54.00	-26.36	AV	Pass
5460.000	42.44	-4.45	37.99	74.00	-36.01	peak	Pass
5460.000	31.34	-4.45	26.89	54.00	-27.11	AV	Pass
5470.000	45.25	-4.45	40.80	68.20	-27.40	peak	Pass
5470.000	34.77	-4.45	30.32	54.00	-23.68	AV	Pass
Test Channel: U-NII--2C_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5470.000	45.16	-4.45	40.71	68.20	-27.49	peak	Pass
5470.000	34.53	-4.45	30.08	54.00	-23.92	AV	Pass
5460.000	44.25	-4.45	39.8	74.00	-34.2	peak	Pass
5460.000	34.29	-4.45	29.84	54.00	-24.16	AV	Pass
5400.000	43.02	-4.38	38.64	74.00	-35.36	peak	Pass
5400.000	32.00	-4.38	27.62	54.00	-26.38	AV	Pass
Test Channel: U-NII--2C_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5725.000	43.47	-3.88	39.59	68.20	-28.61	peak	Pass
5725.000	33.45	-3.88	29.57	54.00	-24.43	AV	Pass
Test Channel: U-NII--2C_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5725.000	43.84	-3.88	39.96	68.20	-28.24	peak	Pass
5725.000	33.38	-3.88	29.50	54.00	-24.50	AV	Pass


Test Mode: 802.11AX20							
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5400.000	42.38	-4.38	38.00	74.00	-36.00	peak	Pass
5400.000	32.00	-4.38	27.62	54.00	-26.38	AV	Pass
5460.000	41.80	-4.45	37.35	74.00	-36.65	peak	Pass
5460.000	31.21	-4.45	26.76	54.00	-27.24	AV	Pass
5470.000	44.58	-4.45	40.13	68.20	-28.07	peak	Pass
5470.000	34.63	-4.45	30.18	54.00	-23.82	AV	Pass
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5400.000	42.49	-4.38	38.11	74.00	-35.89	peak	Pass
5400.000	32.09	-4.38	27.71	54.00	-26.29	AVG	Pass
5460.000	42.13	-4.45	37.68	74.00	-36.32	peak	Pass
5460.000	31.74	-4.45	27.29	54.00	-26.71	AV	Pass
5470.000	45.02	-4.45	40.57	68.20	-27.63	peak	Pass
5470.000	34.55	-4.45	30.10	54.00	-23.90	AVG	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5725.000	44.25	-3.88	40.37	68.20	-27.83	peak	Pass
5725.000	33.42	-3.88	29.54	54.00	-24.46	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5725.000	43.72	-3.88	39.84	68.20	-28.36	peak	Pass
5725.000	33.55	-3.88	29.67	54.00	-24.33	AV	Pass

Test Mode: 802.11AX40							
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5400.000	42.62	-4.38	38.24	74.00	-35.76	peak	Pass
5400.000	31.70	-4.38	27.32	54.00	-26.68	AV	Pass
5460.000	42.17	-4.45	37.48	74.00	-36.52	peak	Pass
5460.000	30.75	-4.45	27.02	54.00	-26.98	AV	Pass
5470.000	45.58	-4.45	41.13	68.20	-27.07	peak	Pass
5470.000	34.13	-4.45	29.68	54.00	-24.32	AV	Pass
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5400.000	42.40	-4.38	38.02	74.00	-35.98	peak	Pass
5400.000	31.68	-4.38	27.30	54.00	-26.70	AVG	Pass
5460.000	42.12	-4.45	37.67	74.00	-36.33	peak	Pass
5460.000	31.64	-4.45	27.19	54.00	-26.81	AV	Pass
5470.000	44.62	-4.45	40.17	68.20	-28.03	peak	Pass
5470.000	34.15	-4.45	29.70	54.00	-24.30	AVG	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5725.000	43.69	-3.88	39.81	68.20	-28.39	peak	Pass
5725.000	33.33	-3.88	29.45	54.00	-24.55	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5725.000	44.17	-3.88	40.29	68.20	-27.91	peak	Pass
5725.000	33.27	-3.88	29.39	54.00	-24.61	AV	Pass

Test Mode: 802.11AX80							
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5400.000	42.90	-4.38	38.52	74.00	-35.48	peak	Pass
5400.000	31.84	-4.38	27.46	54.00	-26.54	AV	Pass
5460.000	43.99	-4.45	39.54	74.00	-34.46	peak	Pass
5460.000	34.26	-4.45	29.81	54.00	-24.19	AV	Pass
5470.000	44.46	-4.45	40.01	68.20	-28.19	peak	Pass
5470.000	34.41	-4.45	29.96	54.00	-24.04	AV	Pass
Test Channel: U-NII-2C_Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5400.000	42.26	-4.38	37.88	74.00	-36.12	peak	Pass
5400.000	31.90	-4.38	27.52	54.00	-26.48	AVG	Pass
5460.000	41.80	-4.45	37.35	74.00	-36.65	peak	Pass
5460.000	30.94	-4.45	26.49	54.00	-27.51	AV	Pass
5470.000	44.67	-4.45	40.22	68.20	-27.98	peak	Pass
5470.000	34.42	-4.45	29.97	54.00	-24.03	AVG	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5725.000	44.39	-3.88	40.51	68.20	-27.69	peak	Pass
5725.000	33.49	-3.88	29.61	54.00	-24.39	AV	Pass
Test Channel: U-NII-2C_Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
5725.000	43.24	-3.88	39.36	68.20	-28.84	peak	Pass
5725.000	33.35	-3.88	29.47	54.00	-24.53	AV	Pass


Test Mode: 802.11A

Test Channel: U-NII-3_Lowest channel, Test Polarization: Vertical

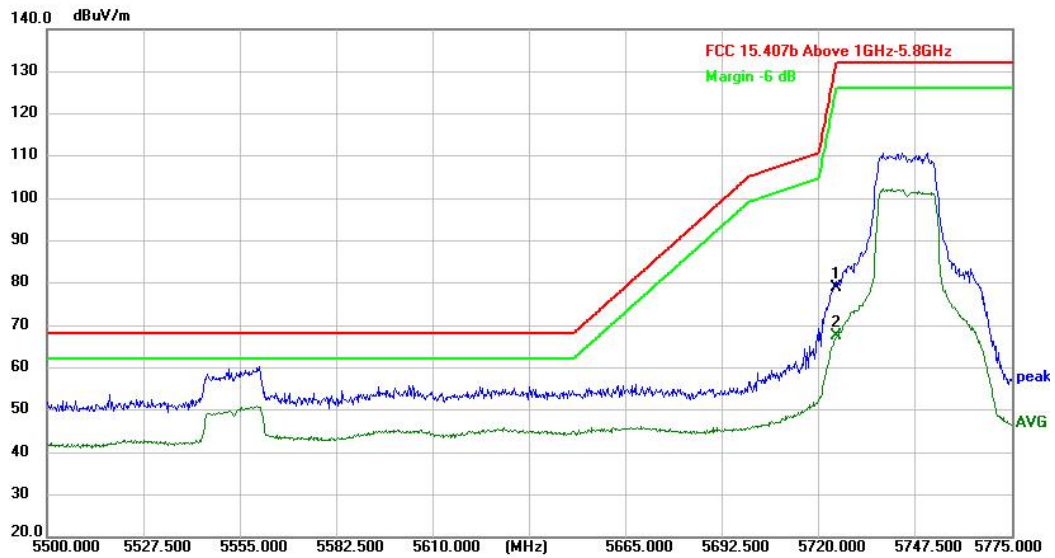


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	5725.000	82.89	-3.88	79.01	132.00	-52.99	peak
2	5725.000	71.35	-3.88	67.47	132.00	-64.53	AVG

Test Channel: U-NII-3_Lowest channel, Test Polarization: Horizontal

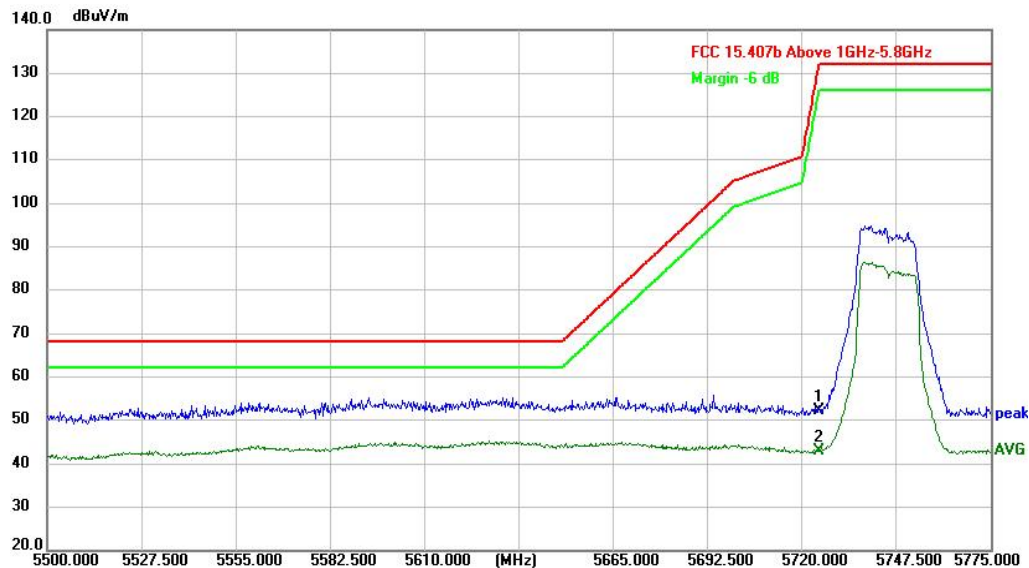

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	5725.000	56.23	-3.88	52.35	132.00	-79.65	peak
2	5725.000	46.96	-3.88	43.08	132.00	-88.92	AVG

Test Channel: U-NII-3_Highest channel, Test Polarization: Vertical

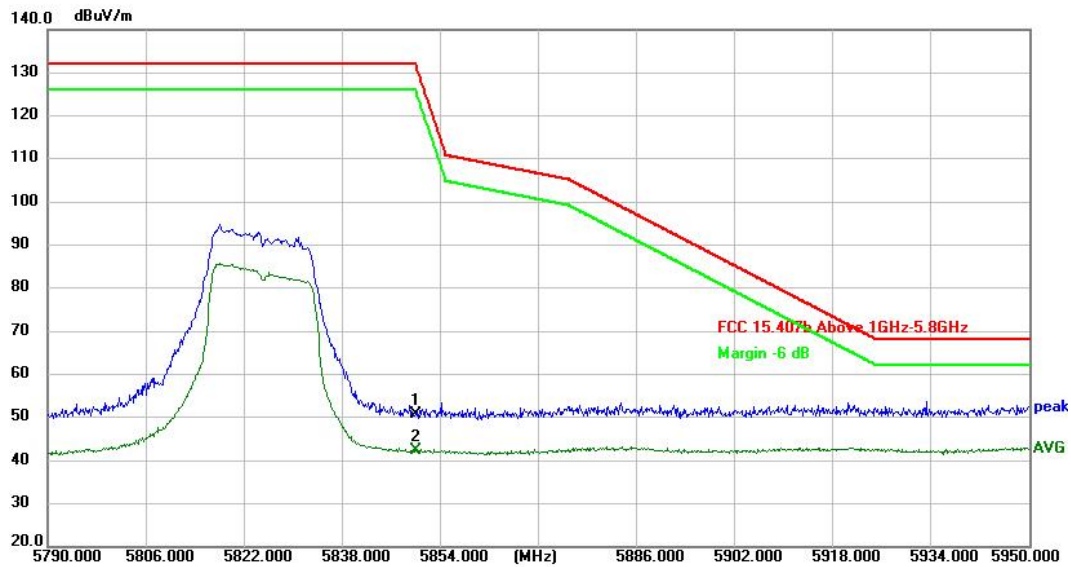

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	5850.000	54.05	-3.25	50.80	132.00	-81.20	peak
2	5850.000	45.75	-3.25	42.50	132.00	-89.50	AVG


Test Channel: U-NII-3_Highest channel, Test Polarization: Horizontal



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	5850.000	59.48	-3.25	56.23	132.00	-75.77	peak
2	5850.000	49.58	-3.25	46.33	132.00	-85.67	AVG


Test Mode: 802.11AX20

Test Channel: U-NII-3_Lowest channel, Test Polarization: Vertical

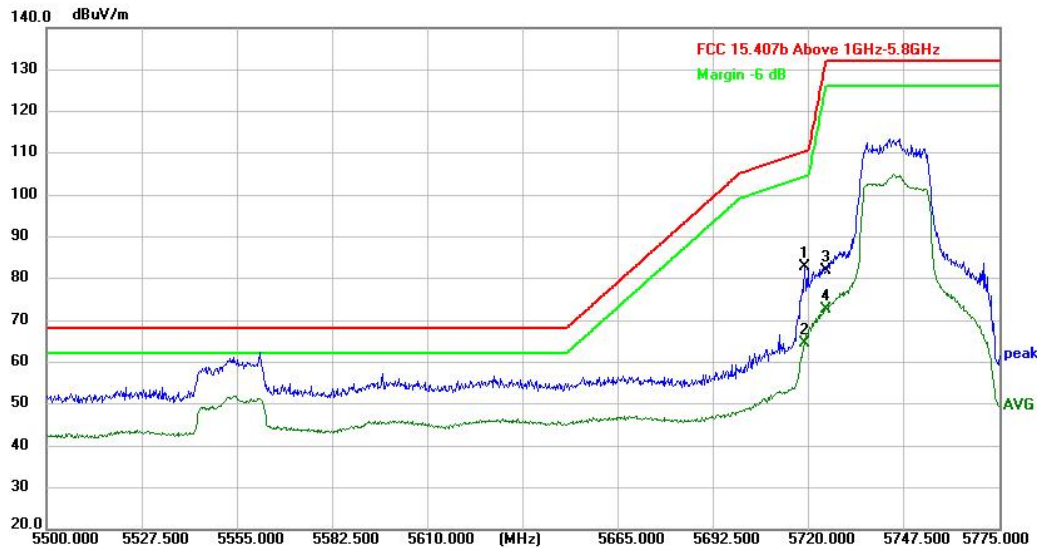

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	5718.900	86.64	-3.90	82.74	110.49	-27.75	peak
2	5718.900	68.43	-3.90	64.53	110.49	-45.96	AVG
3	5725.000	85.83	-3.88	81.95	132.00	-50.05	peak
4	5725.000	76.59	-3.88	72.71	132.00	-59.29	AVG

Test Channel: U-NII-3_Lowest channel, Test Polarization: Horizontal

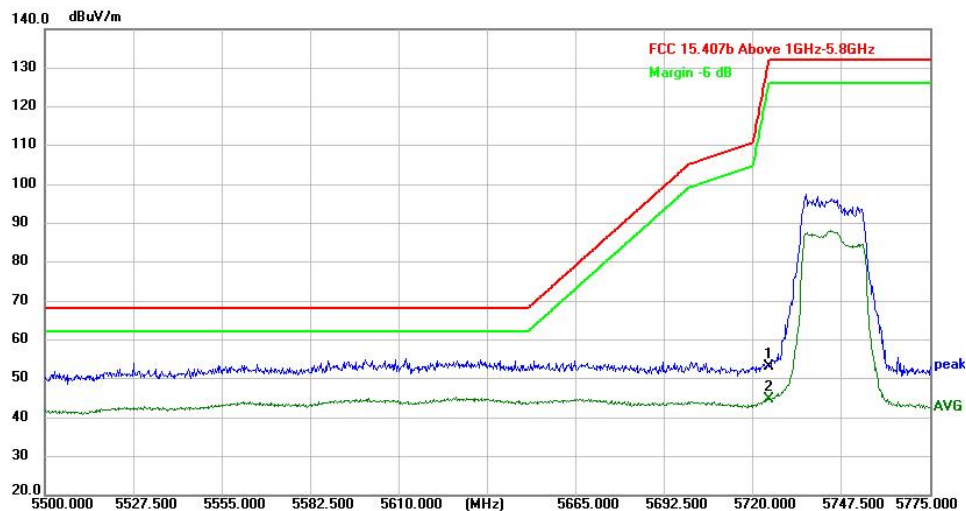

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	5725.000	57.12	-3.88	53.24	132.00	-78.76	peak
2	5725.000	48.76	-3.88	44.88	132.00	-87.12	AVG

Test Channel: U-NII-3_Highest channel, Test Polarization: Vertical



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	5850.000	54.22	-3.25	50.97	132.00	-81.03	peak
2	5850.000	45.80	-3.25	42.55	132.00	-89.45	AVG

Test Channel: U-NII-3_Highest channel, Test Polarization: Horizontal



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	5850.000	80.28	-3.25	77.03	132.00	-54.97	peak
2	5850.000	68.02	-3.25	64.77	132.00	-67.23	AVG


Test Mode: 802.11AX40

Test Channel: U-NII-3_Lowest channel, Test Polarization: Vertical




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	5710.925	86.15	-3.95	82.20	108.26	-26.06	peak
2	5711.575	72.97	-3.95	69.02	108.44	-39.42	AVG
3	5725.000	85.27	-3.88	81.39	132.00	-50.61	peak
4	5725.000	76.06	-3.88	72.18	132.00	-59.82	AVG

Test Channel: U-NII-3_Lowest channel, Test Polarization: Horizontal

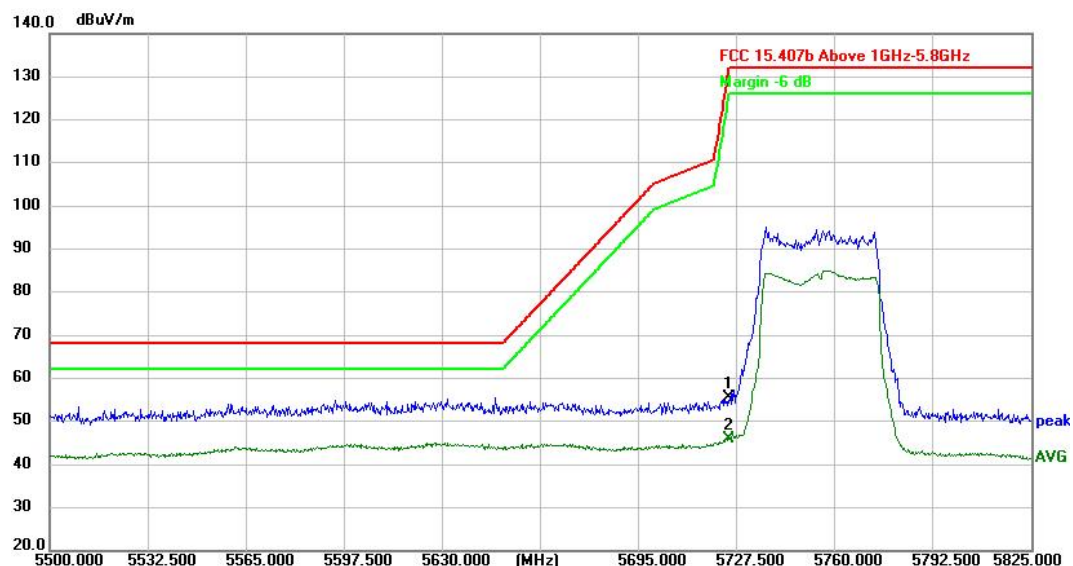

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	5725.000	59.38	-3.88	55.50	132.00	-76.50	peak
2	5725.000	49.87	-3.88	45.99	132.00	-86.01	AVG

Test Channel: U-NII-3_Highest channel, Test Polarization: Vertical

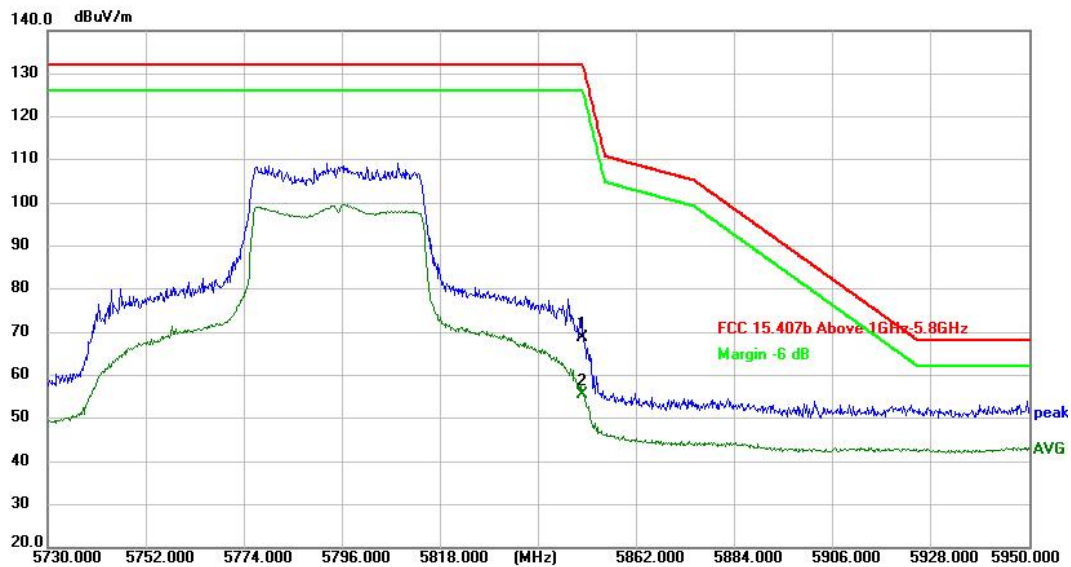

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	5850.000	72.04	-3.25	68.79	132.00	-63.21	peak
2	5850.000	58.90	-3.25	55.65	132.00	-76.35	AVG


Test Channel: U-NII-3_Highest channel, Test Polarization: Horizontal



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	5850.000	55.27	-3.25	52.02	132.00	-79.98	peak
2	5850.000	45.27	-3.25	42.02	132.00	-89.98	AVG

Test Mode: 802.11AX80

Test Channel: U-NII-3_Lowest channel, Test Polarization: Vertical

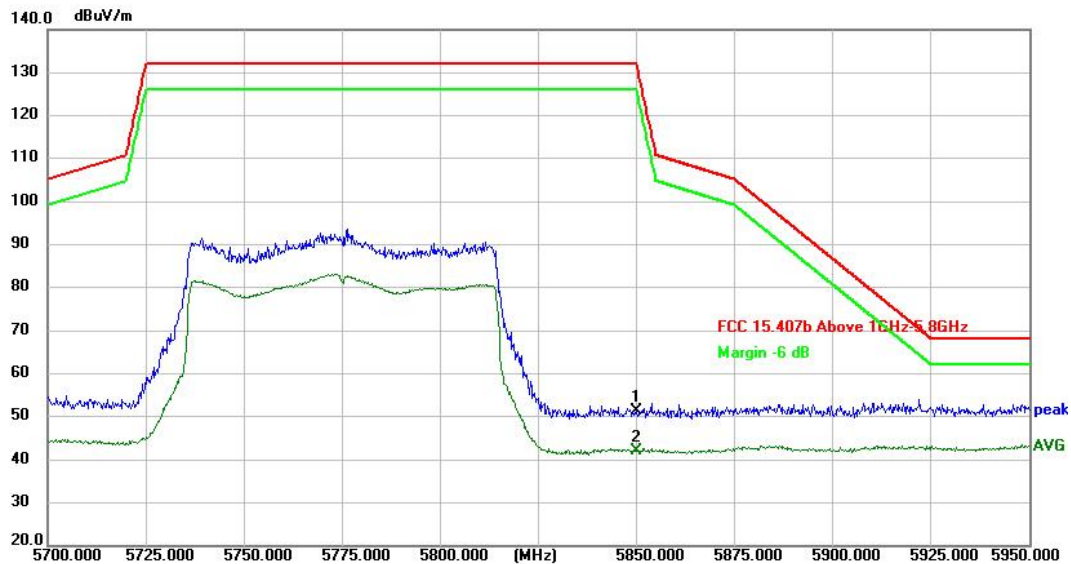

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	5850.000	54.67	-3.25	51.42	132.00	-80.58	peak
2	5850.000	45.36	-3.25	42.11	132.00	-89.89	AVG


Test Channel: U-NII-3_Lowest channel, Test Polarization: Horizontal



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	5850.000	77.87	-3.25	74.62	132.00	-57.38	peak
2	5850.000	67.37	-3.25	64.12	132.00	-67.88	AVG


Test Mode: 802.11AX80

Test Channel: U-NII-3_Lowest channel, Test Polarization: Vertical

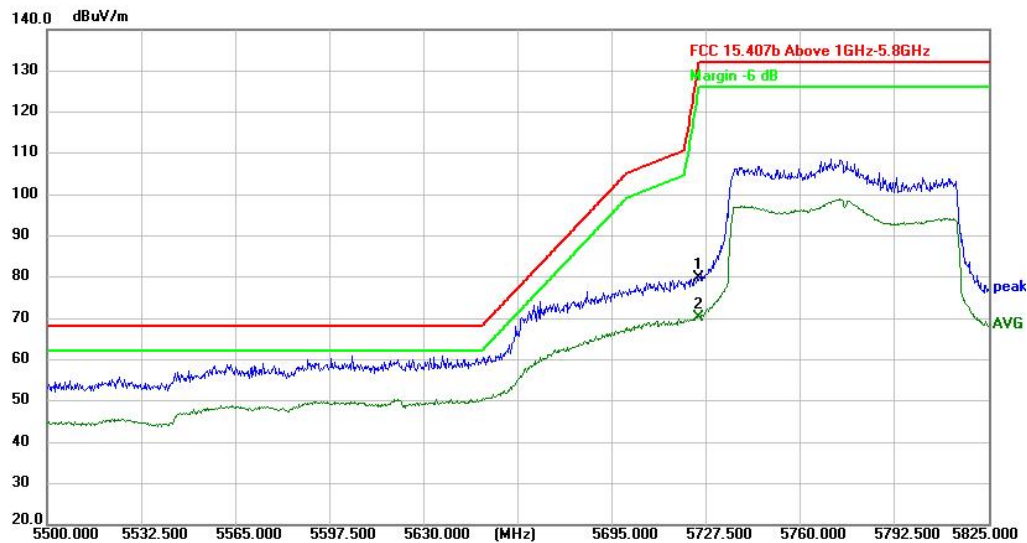

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	5725.000	83.66	-3.88	79.78	132.00	-52.22	peak
2	5725.000	74.23	-3.88	70.35	132.00	-61.65	AVG

Test Channel: U-NII-3_Lowest channel, Test Polarization: Horizontal

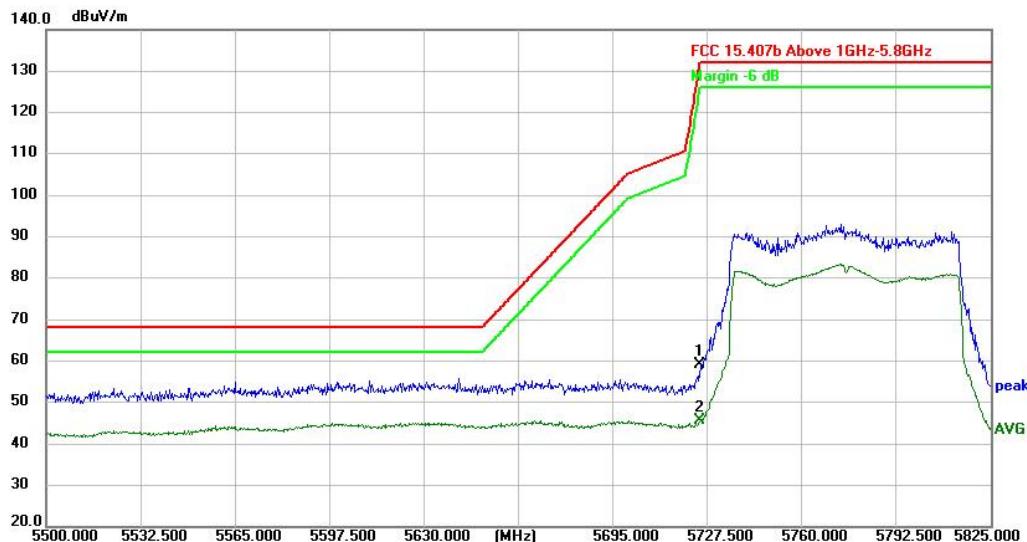



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	5725.000	62.96	-3.88	59.08	132.00	-72.92	peak
2	5725.000	49.49	-3.88	45.61	132.00	-86.39	AVG

3.AC Power-Line Conducted Emission

Note:

All modes have been tested, only worst case WLAN Link + USB Cable(Charging from Adapter)mode was recorded in the test report if no any others.

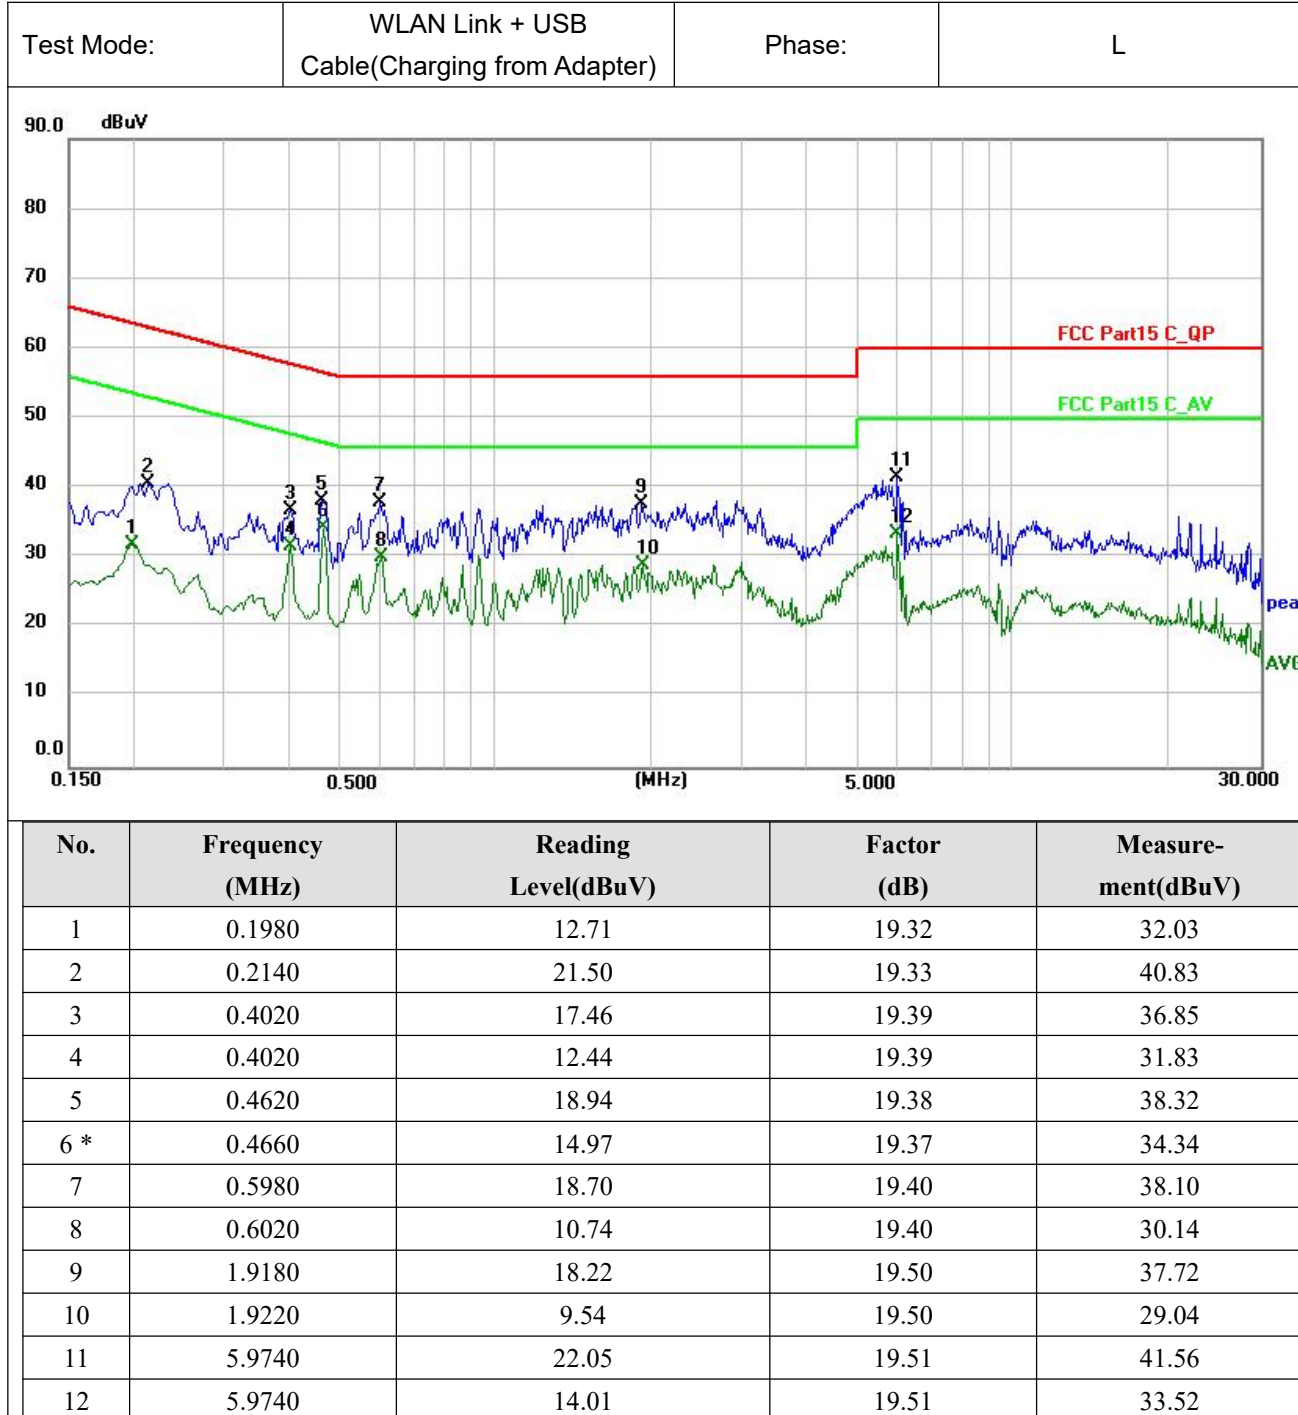

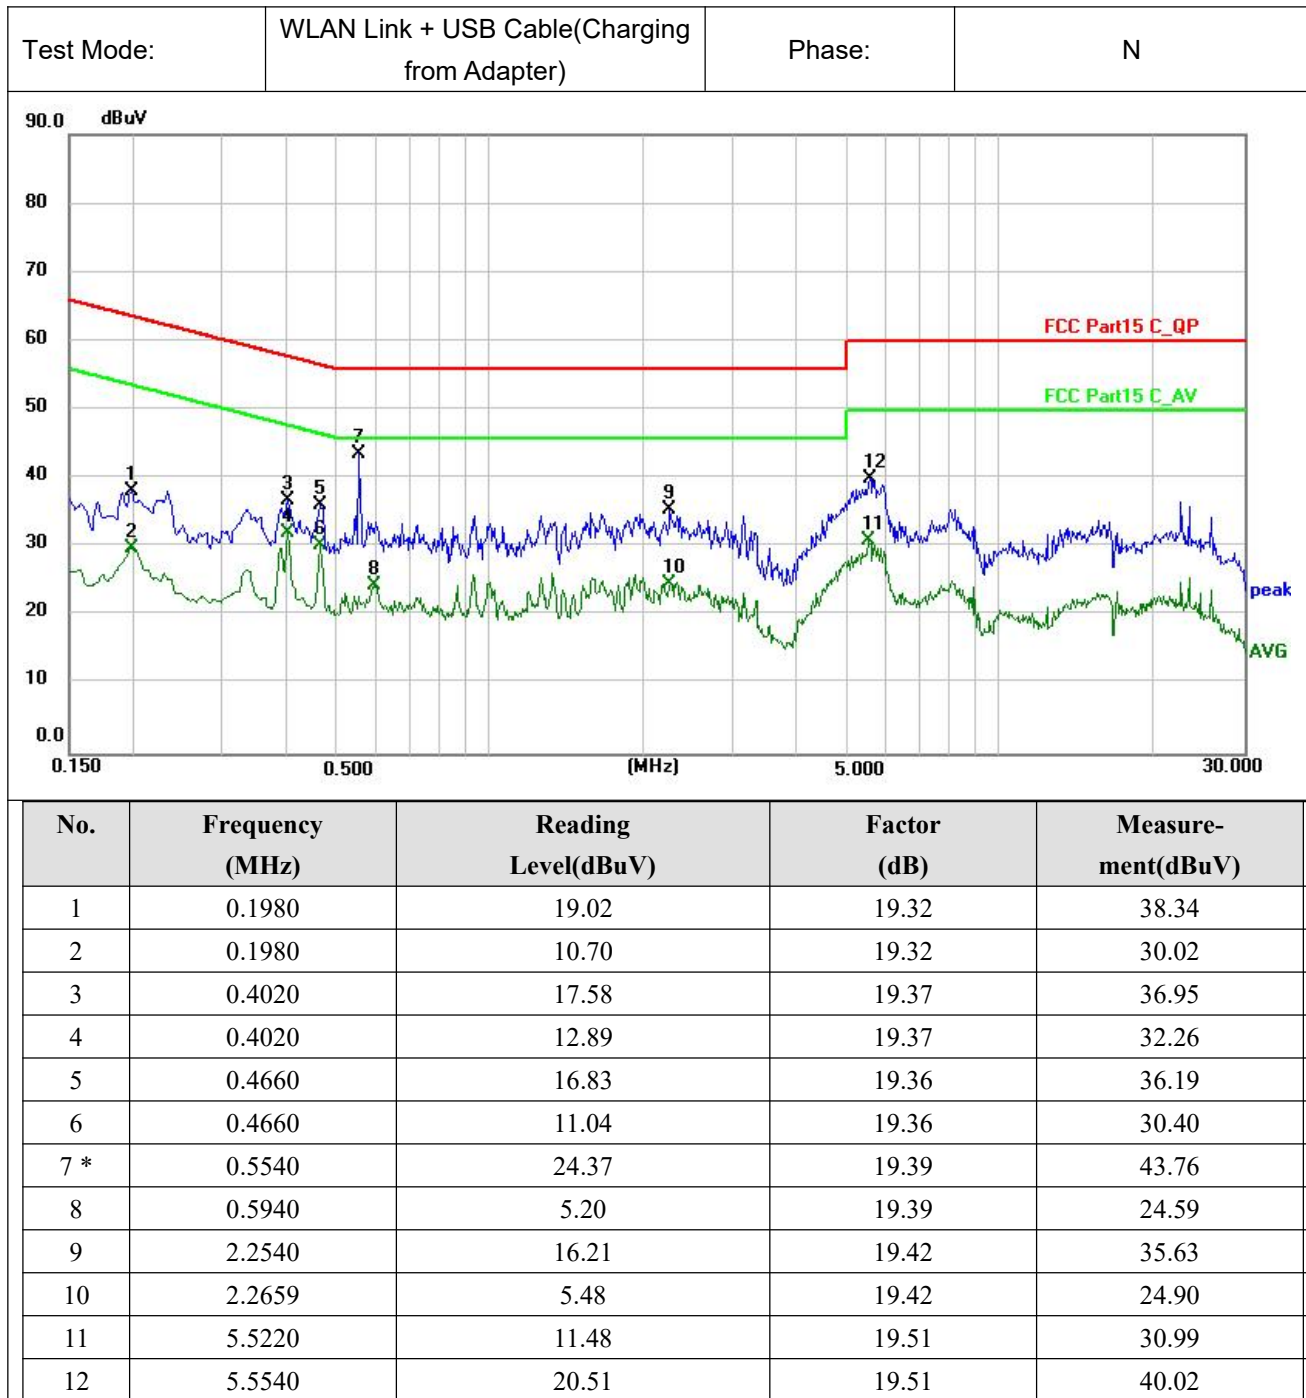

*****END OF APPENDIX B*****