

TEST REPORT

Product Name : 4-in-1 Wireless charger/Speaker/Clock

Model Number : CT02107, 25250

FCC ID : 2BCGV0020

Prepared for : NINGBO CSTAR IMPRINT E-COMMERCE CO.,LTD
Address : B46, BUILDING B, INDUSTRIAL BLOCK, QIAOTOUHU
STREET, NINGHAI COUNTY, NINGBO CITY, ZHEJIANG
PROVINCE

Prepared by : EMTEK (Dongguan) Co., Ltd.
Address : -1&2F., Building 2, Zone A, Zhongda Marine Biotechnology
Research and Development Base, No. 9, Xincheng Avenue,
Songshanhu High-technology Industrial Development Zone,
Dongguan, Guangdong, China

Tel : +86-0769-22807078
Fax: +86-0769-22807079

Report Number : EDG2407010057E00103R
Date(s) of Tests : Jul 01, 2024 to Jul 18, 2024
Date of issue : Jul 19, 2024

TABLE OF CONTENT

Test Report Description	Page
1. SUMMARY OF TEST RESULT	4
2. GENERAL INFORMATION	5
2.1. DESCRIPTION OF DEVICE (EUT).....	5
2.2. DESCRIPTION OF TEST FACILITY	6
2.3. DESCRIPTION OF SUPPORT DEVICE	6
2.4. MEASUREMENT UNCERTAINTY	6
3. MEASURING DEVICE AND TEST EQUIPMENT	7
3.1. FOR MPE MEASUREMENT	7
4. RF EXPOSURE	8
4.1. MEASURING STANDARD	8
4.2. REQUIREMENTS	8
4.3. TEST CONFIGURATION	9
4.4. LIMITS	10
4.5. MEASURING RESULTS	11
5. PHOTOGRAPHS OF TEST SETUP	13

TEST REPORT DESCRIPTION

Applicant : NINGBO CSTAR IMPRINT E-COMMERCE CO.,LTD
B46,BUILDING B,INDUSTRIAL BLOCK,QIAOTOUHU STREET,NINGHAI COUNTY,NINGBO CITY,ZHEJIANG PROVINCE

Manufacturer : NINGBO CSTAR IMPRINT E-COMMERCE CO.,LTD
B46,BUILDING B,INDUSTRIAL BLOCK,QIAOTOUHU STREET,NINGHAI COUNTY,NINGBO CITY,ZHEJIANG PROVINCE

EUT : 4-in-1 Wireless charger/Speaker/Clock

Model Name : CT02107, 25250
Input: DC 5V/2A 9V/2A
Battery capacity: 3.7V/1200mAh 4.44Wh

Rating : Wireless Output Power:10W
Speaker output power:5W*2

Measurement Procedure Used:

FCC Part 1(1.1310) and Part 2(2.1091)
680106 D01 RF Exposure Wireless Charging App v03

The device described above is tested by EMTEK (Dongguan) Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and EMTEK (Dongguan) Co., Ltd. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of EMTEK (Dongguan) Co., Ltd.


Date of Test :

Jul 01, 2024 to Jul 18, 2024




Galen Xiao /Editor

Prepared by :



Tim Dong /Supervisor

Reviewer :



Sam Lv / Manager

Approve & Authorized Signer :



Sam Lv / Manager

1. SUMMARY OF TEST RESULT

EMISSION		
Description of Test Item	Standard & Limits	Results
MPE	FCC Part 1(1.1310) and Part 2(2.1091) 680106 D01 RF Exposure Wireless Charging App v03	Pass
Note: N/A is an abbreviation for Not Applicable.		



2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : 4-in-1 Wireless charger/Speaker/Clock
 Model Number : CT02107, 25250
 (Note: These models are the same, except for the model names; CT02107 was selected for full test.)
 Test Voltage : AC 120V 60Hz
 Operation Frequency for WPT : 111K-205KHz
 Antenna Type : Integral Antenna(Induction coil)
 Modulation : ASK
 Wireless Output Power : 10W Max
 Maximum coupling surface: less than or equal to 400 cm²
 The total leakage (Electric) : 5.21 v/m
 The total leakage (Magnetic) : 0.1121 a/m
 Device category : Portable (<20cm separation)
 Mobile (>20cm separation)
 Others ____
 Exposure classification : Occupational/Controlled exposure (S = 5mW/cm²)
 General Population/Uncontrolled exposure (S=1mW/cm²)
 Antenna diversity : Single antenna
 Multiple antennas
 Tx diversity
 Rx diversity
 Tx/Rx diversity
 Evaluation applied : MPE Evaluation
 SAR Evaluation
 Date of Test : Jul 01, 2024 to Jul 18, 2024

2.2. Description of Test Facility

Site Description

EMC Lab. : Accredited by CNAS, 2020.08.27
The certificate is valid until 2024.07.05
The Laboratory has been assessed and proved to be in compliance with
CNAS/CL01:2018
The Certificate Registration Number is L3150

Accredited by FCC
Designation Number: CN1300
Test Firm Registration Number: 945551

Accredited by A2LA, April 05, 2021
The Certificate Registration Number is 4321.02

Accredited by Industry Canada
The Certificate Registration Number is CN0113

Name of Firm : EMTEK (Dongguan) Co., Ltd.
Site Location : -1&2/F., Buiding 2, Zone A, Zhongda Marine Biotechnology Research and
Development Base, No.9, Xincheng Avenue, Songshanlu High-technology
Industrial Development Zone, Dongguan, Guangdong, China

2.3. Description of Support Device

Adapter : Model : TR343
Input: AC 100-240V, 50/60Hz
Output: 5.0VDC/3.0A , 9.0VDC/2.77A , 12.0VDC/2.08A

2.4. Measurement Uncertainty

Radiated Emission Uncertainty : 3.32dB (30M~1GHz Polarize: H)
3.34dB (30M~1GHz Polarize: V)
4.98dB (1~6GHz)
5.20dB (6~18GHz)

3. MEASURING DEVICE AND TEST EQUIPMENT

3.1. For MPE Measurement

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
<input checked="" type="checkbox"/>	Electric and Magnetic Field Analyzer (1Hz-400kHz)	Narda	EHP-50F	2404/03	2024/4/29	1 Year
<input checked="" type="checkbox"/>	Broadband Field Meter	Narda	NBM-550	232421	2024/4/29	1 Year
<input checked="" type="checkbox"/>	Probe(100cm ²)	Narda	ELT-400	C-0012	2024/4/28	1 Year
<input checked="" type="checkbox"/>	E-Field Probe(100kHz-3GHz)	Narda	EF0391	2304/03	2024/4/28	1 Year

4. RF EXPOSURE

4.1. Measuring Standard

FCC Part 1(1.1310) and Part 2(2.1091)

4.2. Requirements

Three different categories of transmitters are defined by the FCC in OET Bulletin 65. These categories are fixed installation, mobile, and portable and are defined as follows:

- o Fixed Installations: fixed location means that the device, including its antenna, is physically secured at a permanent location and is not able to be easily moved to another location. Additionally, distance to humans from the antenna is maintained to at least 2 meters.
- o Mobile Devices: a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to be generally used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structures and the body of the user or nearby persons. Transmitters designed to be used by consumers or workers that can be easily re-located, such as a wireless modem operating in a laptop computer, are considered mobile devices if they meet the 20 centimeter separation requirement. The FCC rules for evaluating mobile devices for RF compliance are found in 47 CFR §2.1091.
- o Portable Devices: a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user. Portable device requirements are found in Section 2.1093 of the FCC's Rules (47 CFR§2.1093). The FCC also categorizes the use of the device as based upon the user's awareness and ability to exercise control over his or her exposure. The two categories defined are Occupational/ Controlled Exposure and General Population/Uncontrolled Exposure. These two categories are defined as follows:
Occupational/Controlled Exposure: In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means. Awareness of the potential for RF exposure in a workplace or similar environment can be provided through specific training as part of a RF safety program. If appropriate, warning signs and labels can also be used to establish such awareness by providing prominent information on the risk of potential exposure and instructions on methods to minimize such exposure risks.
General Population/Uncontrolled Exposure: The general population / uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category, and the general population/uncontrolled exposure limits apply to these devices.

4.3. Test configuration

- 1) The field strength of both E-field and H-field was measured at 15cm(the 15 cm measured from the center of the probe(s) to the edge of the device) using the equipment list above for determining compliance with the MPE requirements of FCC Part 1.1310.
- 2) The RF power density was measured at 3 indifferent charge conditions: min load, mid load, max load.
- 3) Maximum E-field and H-field measurements were made 15cm from each side of the EUT. Along the side of the EUT and still 15cm away from the edge of the EUT, the field probes were positioned at the location where there is maximum field strength. The maximum E-field and H-field is reported below.
- 4) Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.
- 5) This device uses a wireless charging circuit for power transfer operating at the frequency of 156kHz. Thus, the 300kHz limits were used: E-field Limit = 614 (V/m); H-field limit = 1.63 (A/m).

4.4. Limits

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

Test Mode	Description	Remark
Mode A.1	100% Load	With resistor
	50% Load	With resistor
	10% Load	With resistor

4.5. Measuring Results

Test Mode: Mode A.1(100% Load)

Electric Field Emissions		
Test Position	Measure Value (V/m)	Limit(V/m)
Top	5.21	614
Left	4.62	614
Right	4.58	614
Rear	4.67	614
Front	4.64	614
Bottom	4.32	614

Magnetic Field Emissions

Magnetic Field Emissions		
Test Position	Measure Value (A/m)	Limit(A/m)
Top	0.1121	1.63
Left	0.1013	1.63
Right	0.1047	1.63
Rear	0.1051	1.63
Front	0.1049	1.63
Bottom	0.1011	1.63

Test Mode: Mode A.1(50% Load)

Electric Field Emissions		
Test Position	Measure Value (V/m)	Limit(V/m)
Top	4.29	614
Left	3.67	614
Right	3.61	614
Rear	3.59	614
Front	3.51	614
Bottom	3.44	614

Magnetic Field Emissions

Magnetic Field Emissions		
Test Position	Measure Value (A/m)	Limit(A/m)
Top	0.0984	1.63
Left	0.0927	1.63
Right	0.0911	1.63
Rear	0.0918	1.63
Front	0.0897	1.63
Bottom	0.0876	1.63

Test Mode: Mode A.1(10% Load)

Electric Field Emissions		
Test Position	Measure Value (V/m)	Limit(V/m)
Top	3.21	614
Left	2.98	614
Right	2.96	614
Rear	2.87	614
Front	2.95	614
Bottom	2.66	614


Magnetic Field Emissions		
Test Position	Measure Value (A/m)	Limit(A/m)
Top	0.0264	1.63
Left	0.0224	1.63
Right	0.0217	1.63
Rear	0.0221	1.63
Front	0.0219	1.63
Bottom	0.0154	1.63

Remark: The device meets the mobile RF exposure limit at a 15cm separation distance as specified in §2.1091 of the FCC Rules. The maximum leakage fields at 15 cm surrounding the device from all simultaneous transmitting coils are demonstrated to be less than 30% of the MPE limit.

Requirement for KDB Publication 680106 D01

Condition Requirement	Answers
Power transfer frequency is less than 1 MHz.	The power transfer frequency is 111-205KHz,less than 1MHz
Output power from each primary coil is less than or equal to 15 watts.	Max output power is 10W less than 15W.
The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	The transfer system includes 1 primary coils.
Client device is placed directly in contact with the transmitter.	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Mobile exposure conditions only
The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	Please refer to the result of Electric Field Emissions and Magnetic Field Emissions.

5. PHOTOGRAPHS OF TEST SETUP

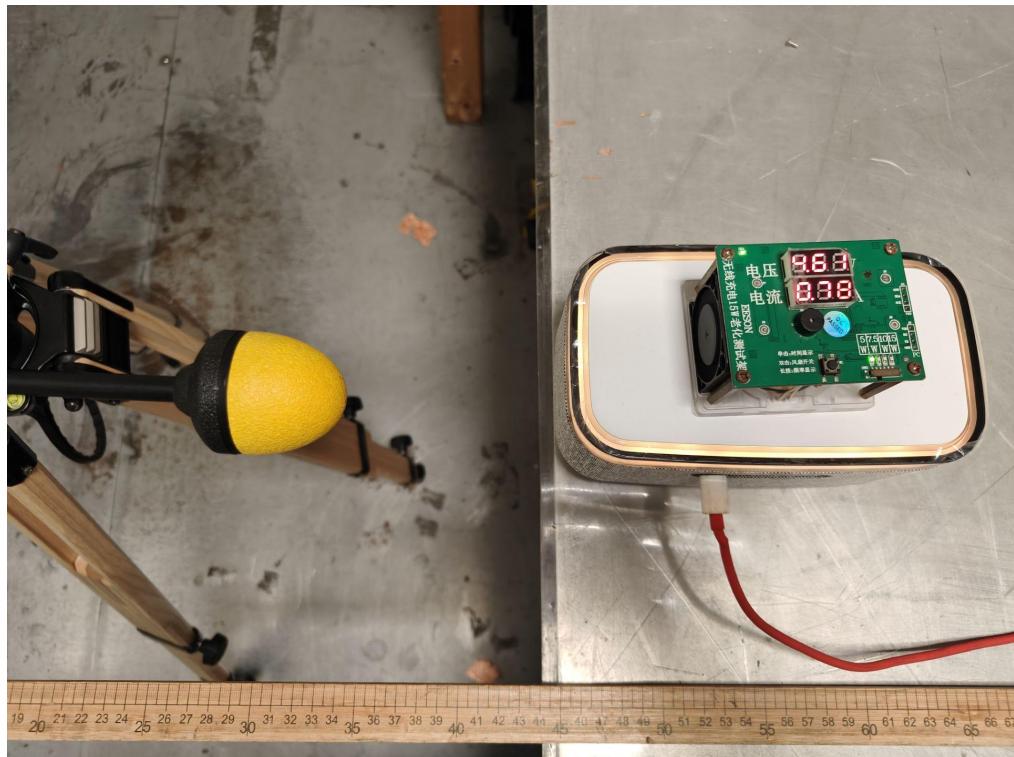

*** End of Report ***