


EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

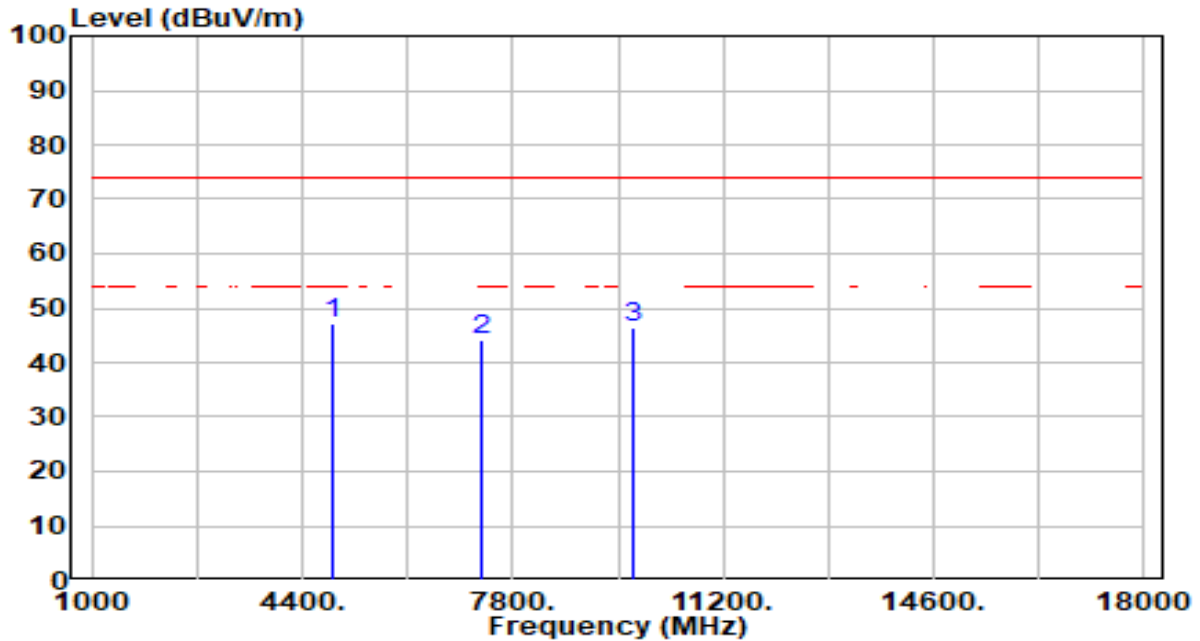


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	46.94	0.36	47.31	-26.69	74.00	200	46	Peak
2		7311.000	38.49	5.59	44.08	-29.92	74.00	200	100	Peak
3		9748.000	41.22	5.34	46.57	-27.43	74.00	200	23	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

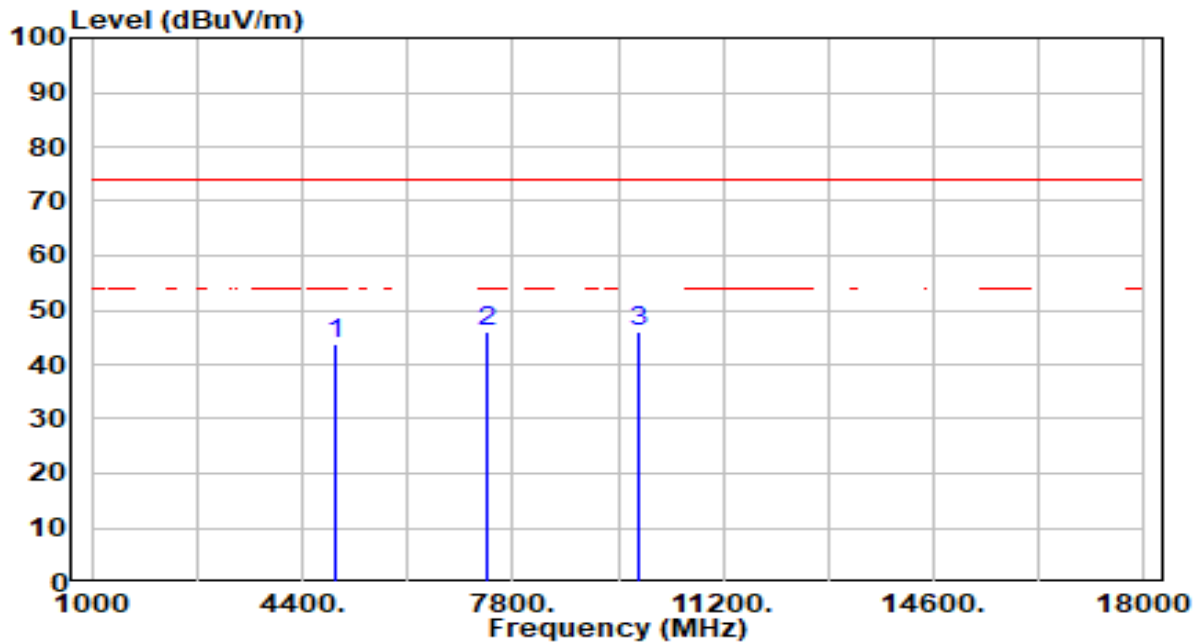


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	43.20	0.49	43.69	-30.31	74.00	200	73	Peak
2	7386.000	40.25	5.64	45.89	-28.11	74.00	200	25	Peak
3	* 9848.000	40.77	5.39	46.15	-27.85	74.00	200	73	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

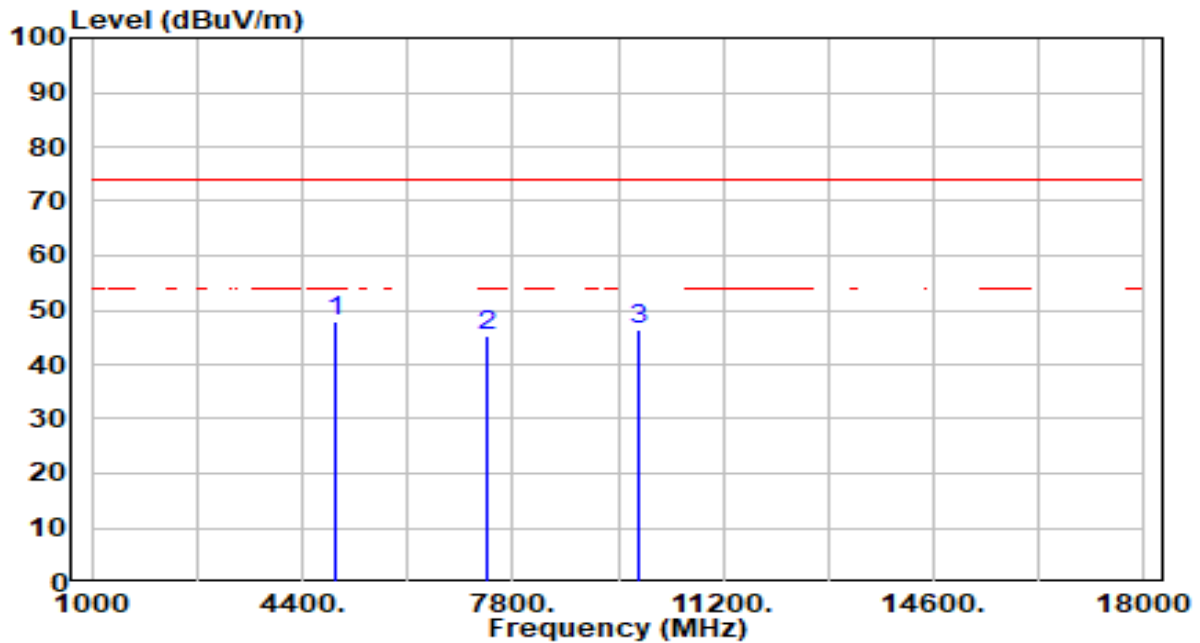


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4924.000	47.52	0.49	48.01	-25.99	74.00	200	42	Peak
2		7386.000	39.73	5.64	45.37	-28.63	74.00	200	172	Peak
3		9848.000	41.18	5.39	46.56	-27.44	74.00	200	14	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

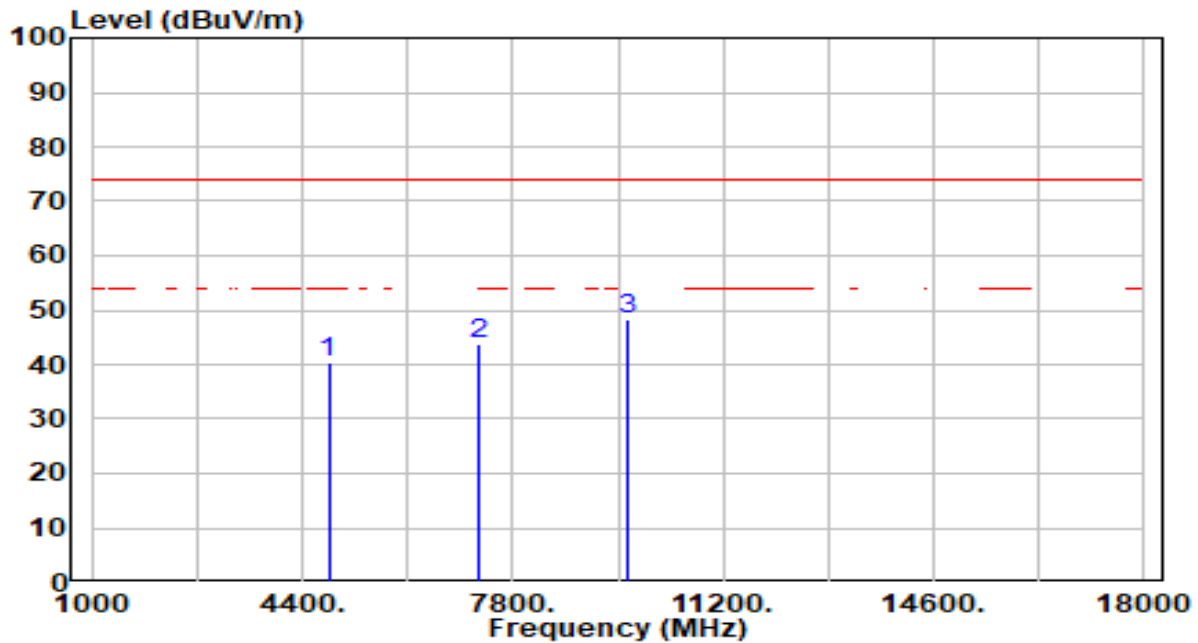


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.26	0.23	40.49	-33.51	74.00	200	8	Peak
2	7236.000	38.15	5.54	43.70	-30.30	74.00	200	0	Peak
3	* 9648.000	43.14	5.30	48.44	-25.56	74.00	200	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

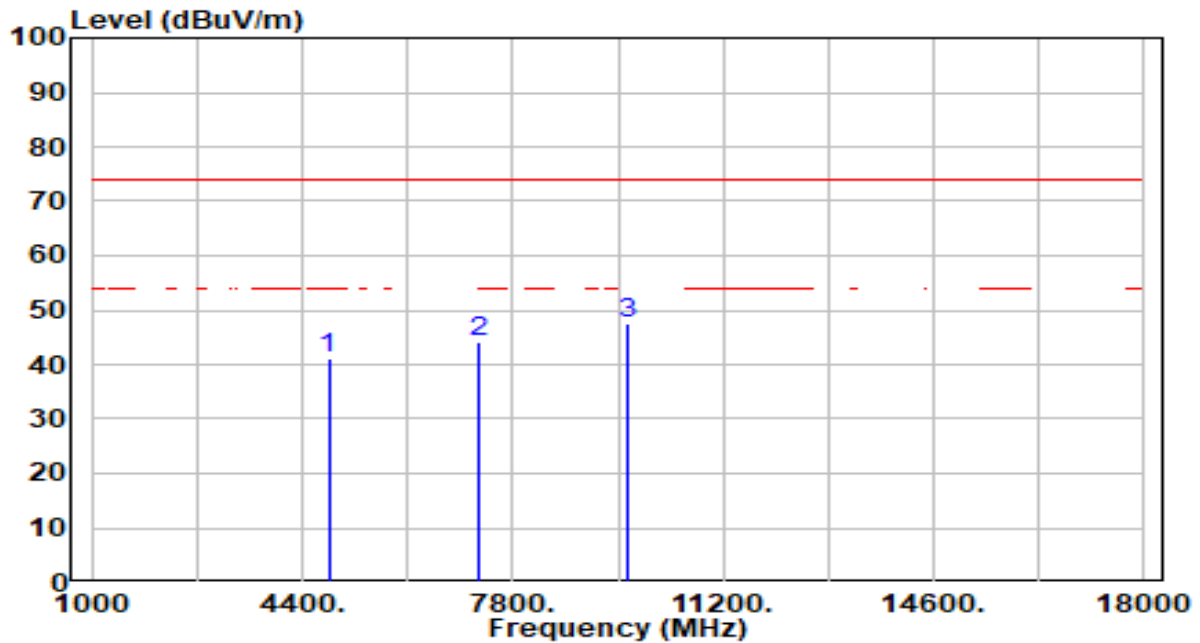


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.72	0.23	40.95	-33.05	74.00	200	71	Peak
2	7236.000	38.58	5.54	44.12	-29.88	74.00	200	32	Peak
3	* 9648.000	42.17	5.30	47.47	-26.53	74.00	200	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

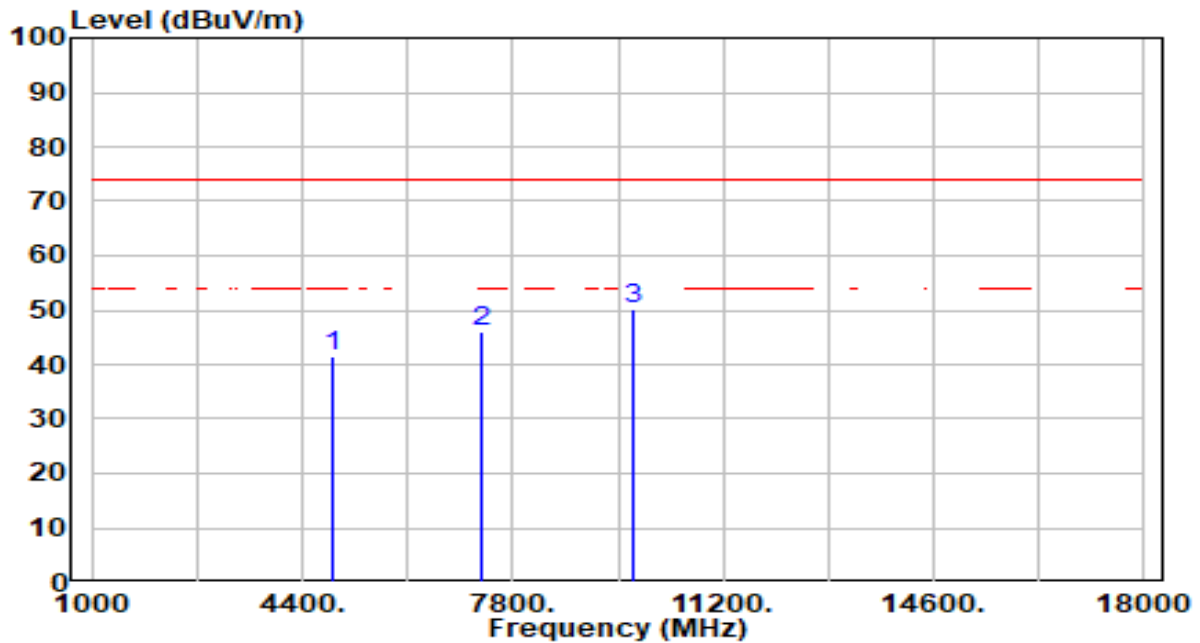


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.25	0.36	41.61	-32.39	74.00	200	0	Peak
2	7311.000	40.39	5.59	45.98	-28.02	74.00	200	294	Peak
3	* 9748.000	44.99	5.34	50.33	-23.67	74.00	200	251	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

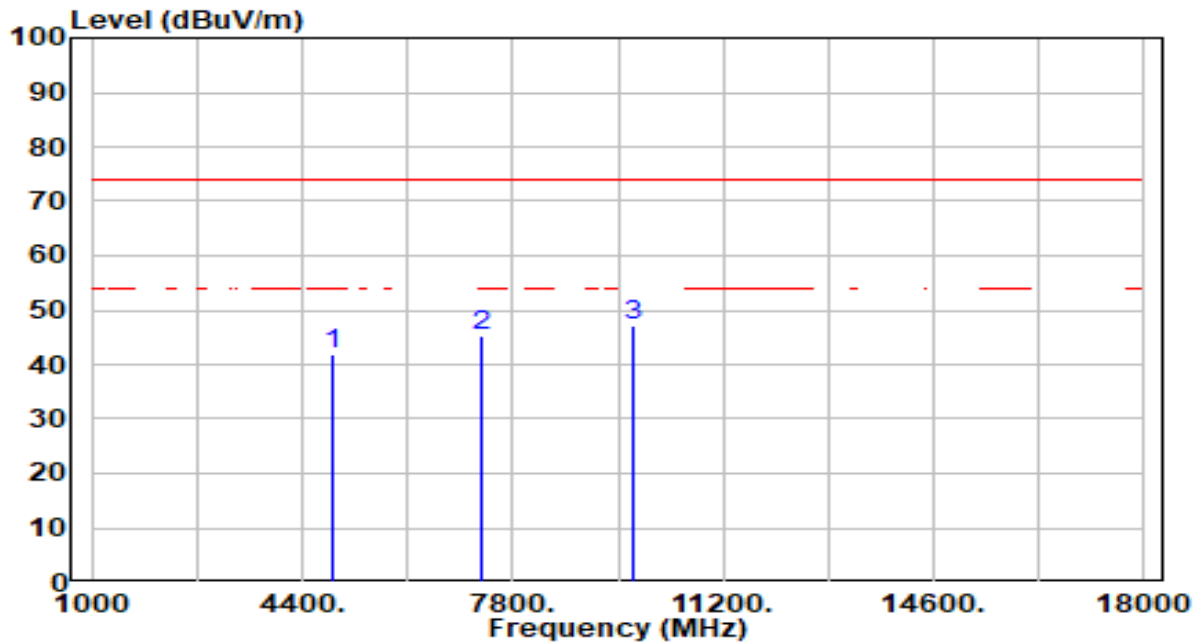


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.34	0.36	41.71	-32.29	74.00	200	71	Peak
2	7311.000	39.53	5.59	45.12	-28.88	74.00	200	1	Peak
3	* 9748.000	41.82	5.34	47.16	-26.84	74.00	200	248	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

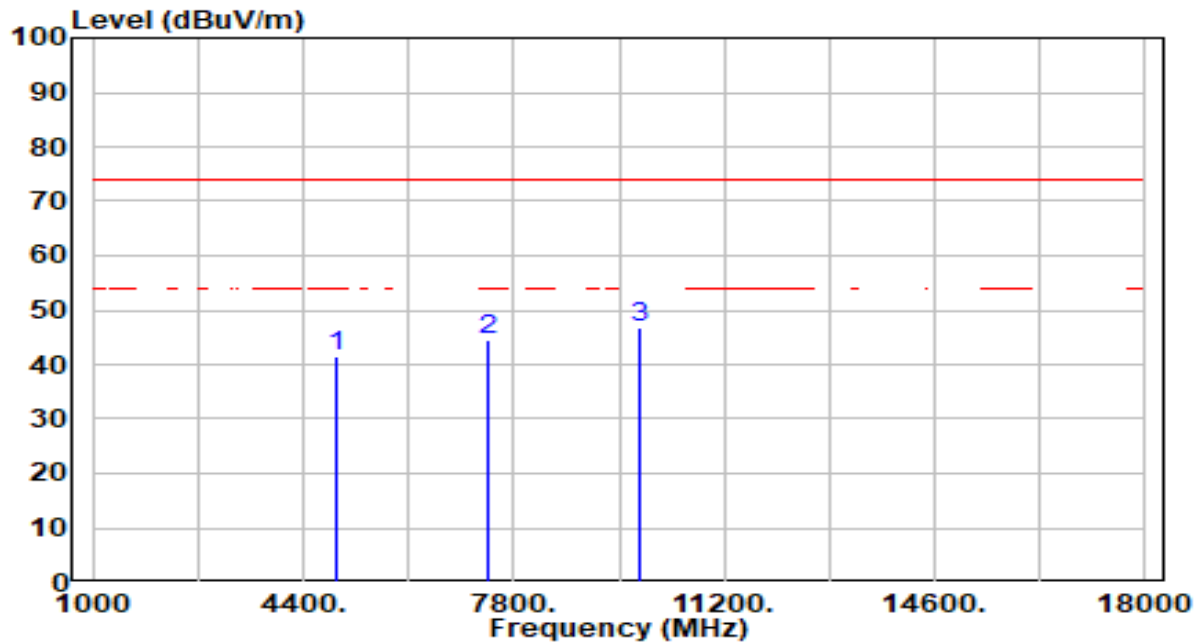


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.10	0.49	41.59	-32.41	74.00	200	326	Peak
2	7386.000	39.05	5.64	44.68	-29.32	74.00	200	160	Peak
3	* 9848.000	41.39	5.39	46.78	-27.22	74.00	200	340	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

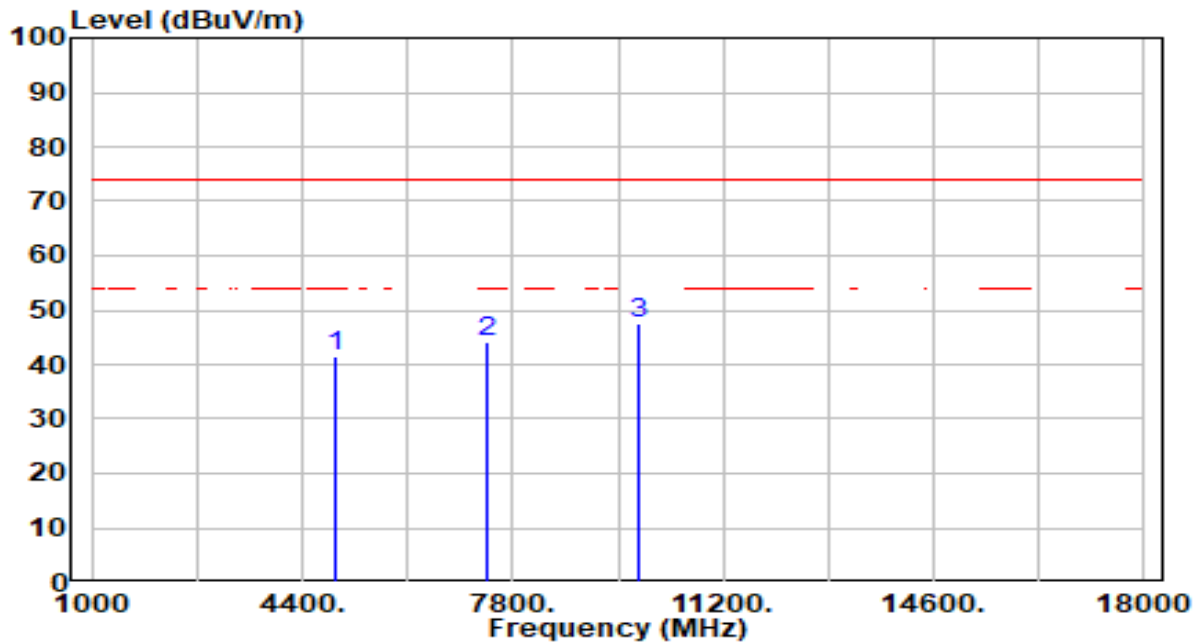


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.11	0.49	41.61	-32.39	74.00	200	74	Peak
2	7386.000	38.50	5.64	44.14	-29.86	74.00	200	249	Peak
3	* 9848.000	42.07	5.39	47.46	-26.54	74.00	200	121	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

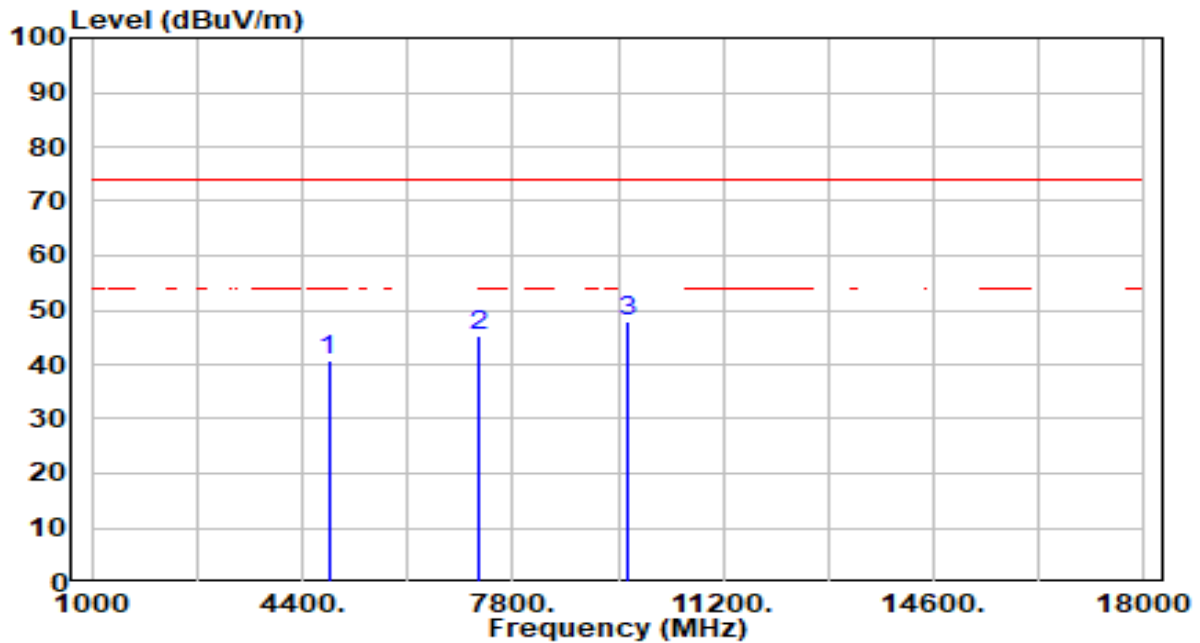


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.59	0.23	40.82	-33.18	74.00	200	88	Peak
2	7236.000	39.58	5.54	45.13	-28.87	74.00	200	294	Peak
3	* 9648.000	42.45	5.30	47.75	-26.25	74.00	200	232	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

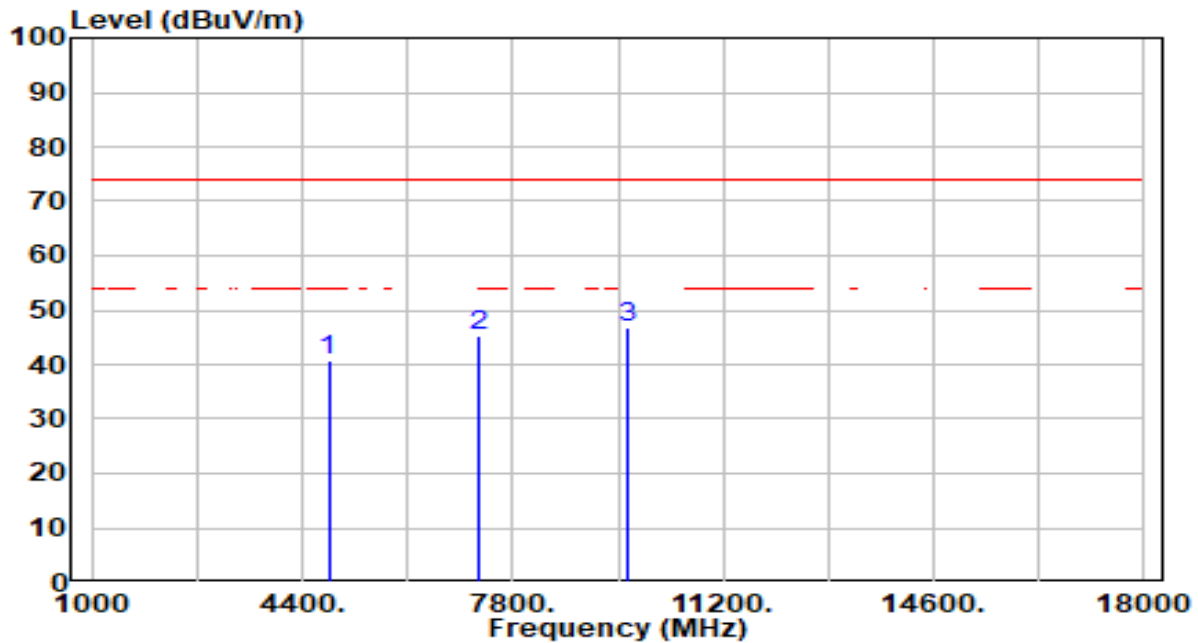


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.63	0.23	40.86	-33.14	74.00	200	143	Peak
2	7236.000	39.60	5.54	45.14	-28.86	74.00	200	360	Peak
3	* 9648.000	41.62	5.30	46.93	-27.07	74.00	200	118	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

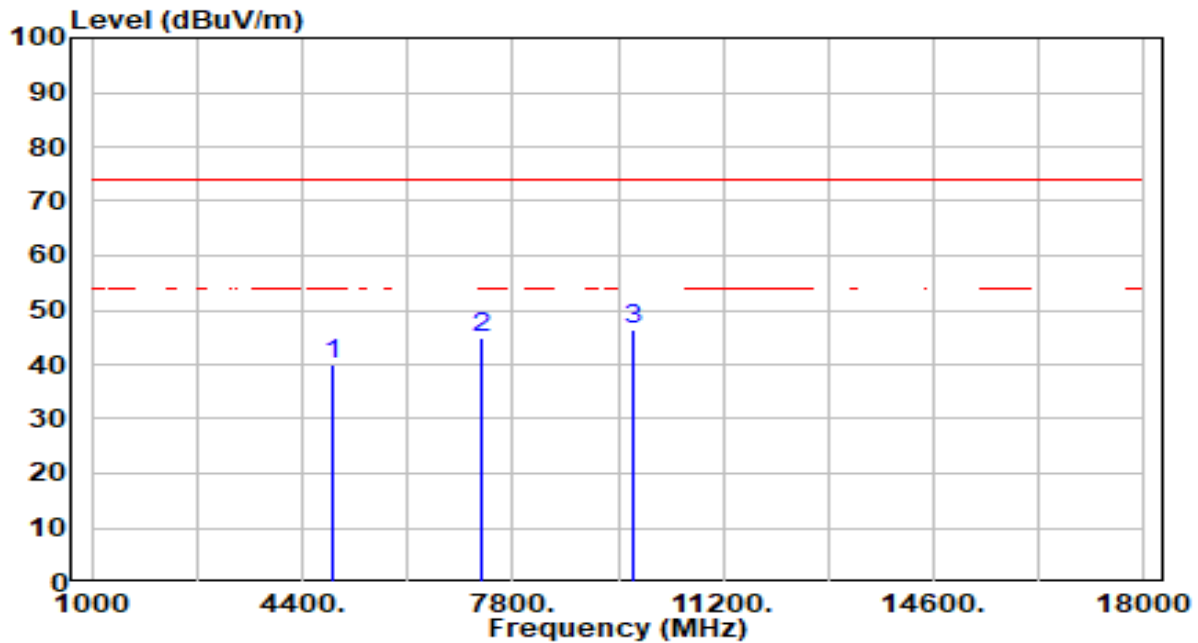


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.63	0.36	39.99	-34.01	74.00	200	155	Peak
2	7311.000	39.37	5.59	44.96	-29.04	74.00	200	200	Peak
3	* 9748.000	41.14	5.34	46.48	-27.52	74.00	200	8	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

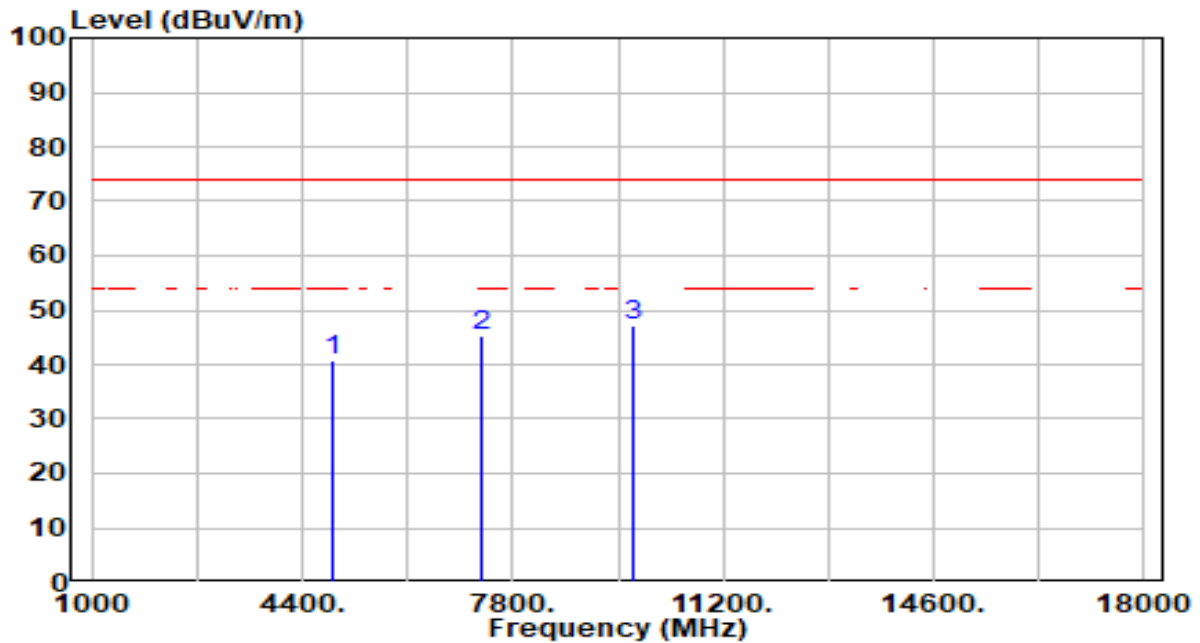


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.26	0.36	40.62	-33.38	74.00	200	334	Peak
2	7311.000	39.68	5.59	45.27	-28.73	74.00	200	286	Peak
3	* 9748.000	41.73	5.34	47.07	-26.93	74.00	200	351	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

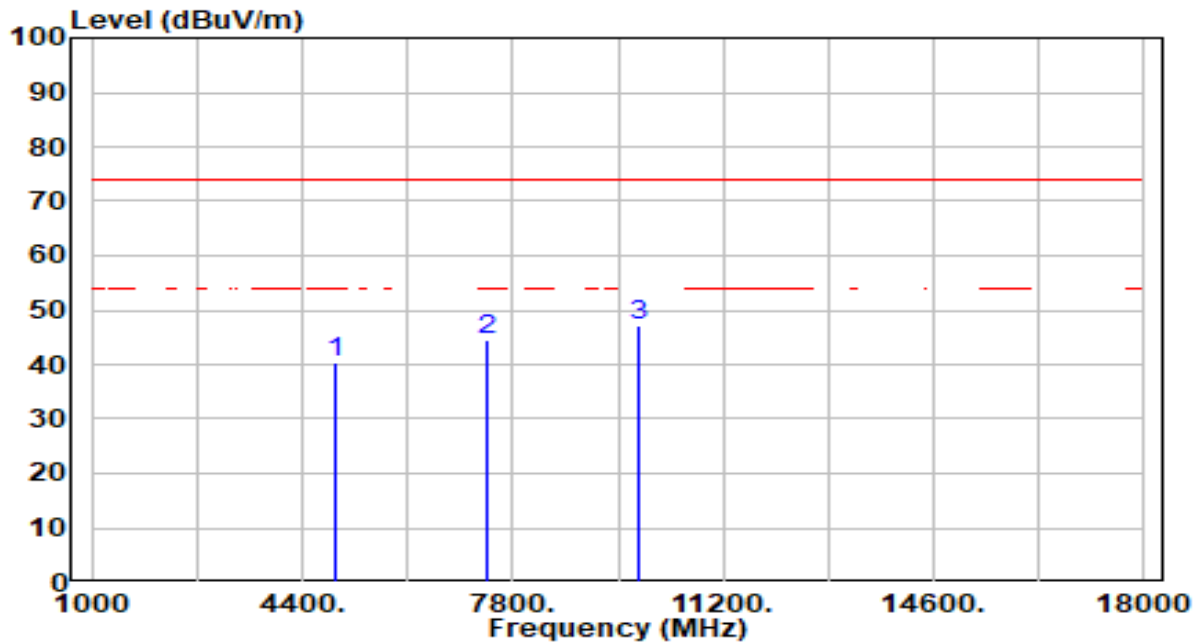


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.72	0.49	40.21	-33.79	74.00	200	148	Peak
2	7386.000	38.97	5.64	44.60	-29.40	74.00	200	174	Peak
3	* 9848.000	41.75	5.39	47.14	-26.86	74.00	200	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

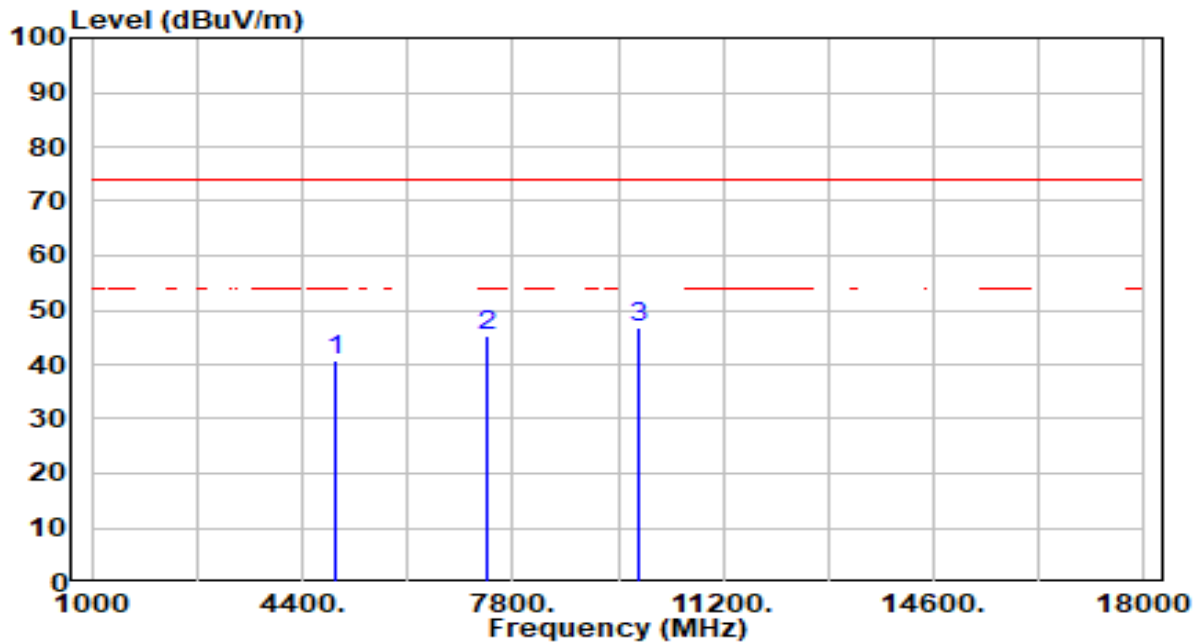


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.16	0.49	40.65	-33.35	74.00	200	0	Peak
2	7386.000	39.46	5.64	45.10	-28.90	74.00	200	0	Peak
3	* 9848.000	41.53	5.39	46.91	-27.09	74.00	200	306	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

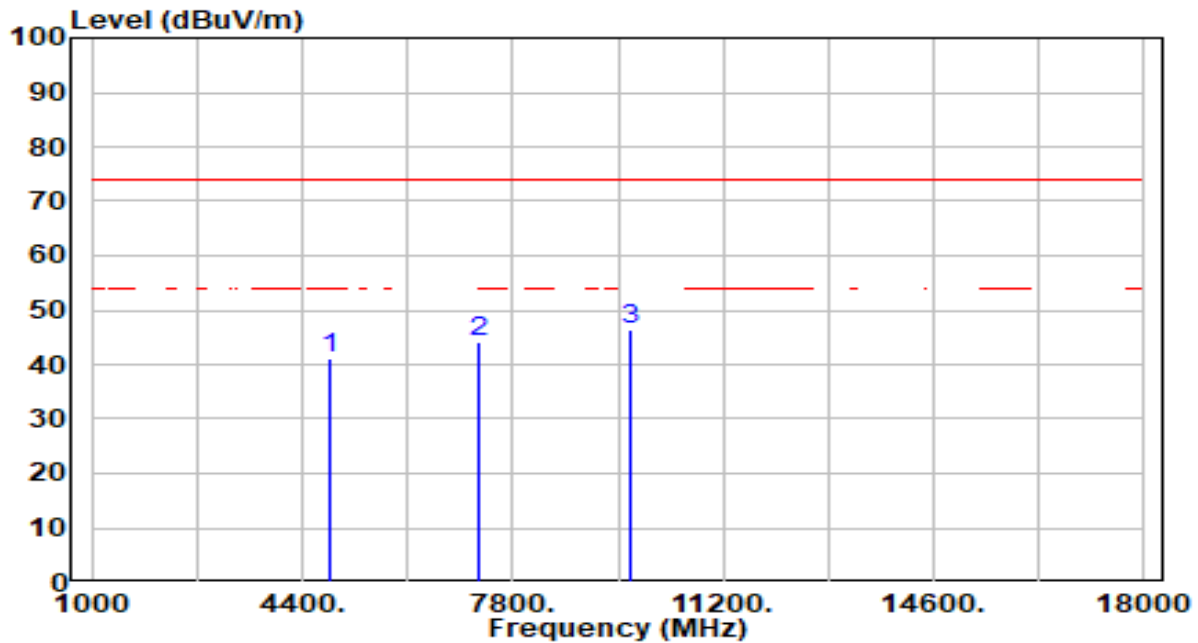


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.67	0.28	40.95	-33.05	74.00	200	160	Peak
2	7266.000	38.60	5.56	44.17	-29.83	74.00	200	0	Peak
3	* 9688.000	41.10	5.32	46.41	-27.59	74.00	0	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

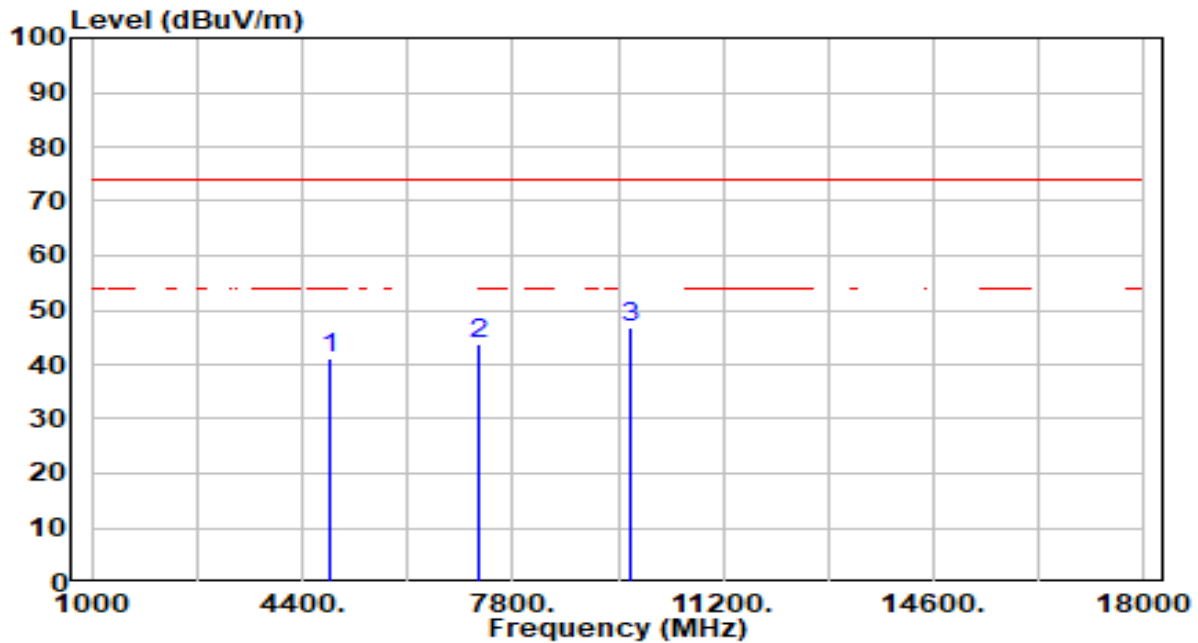


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4844.000	40.95	0.28	41.24	-32.76	74.00	200	309	Peak
2		7266.000	38.32	5.56	43.88	-30.12	74.00	200	223	Peak
3	*	9688.000	41.40	5.32	46.72	-27.28	74.00	200	197	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

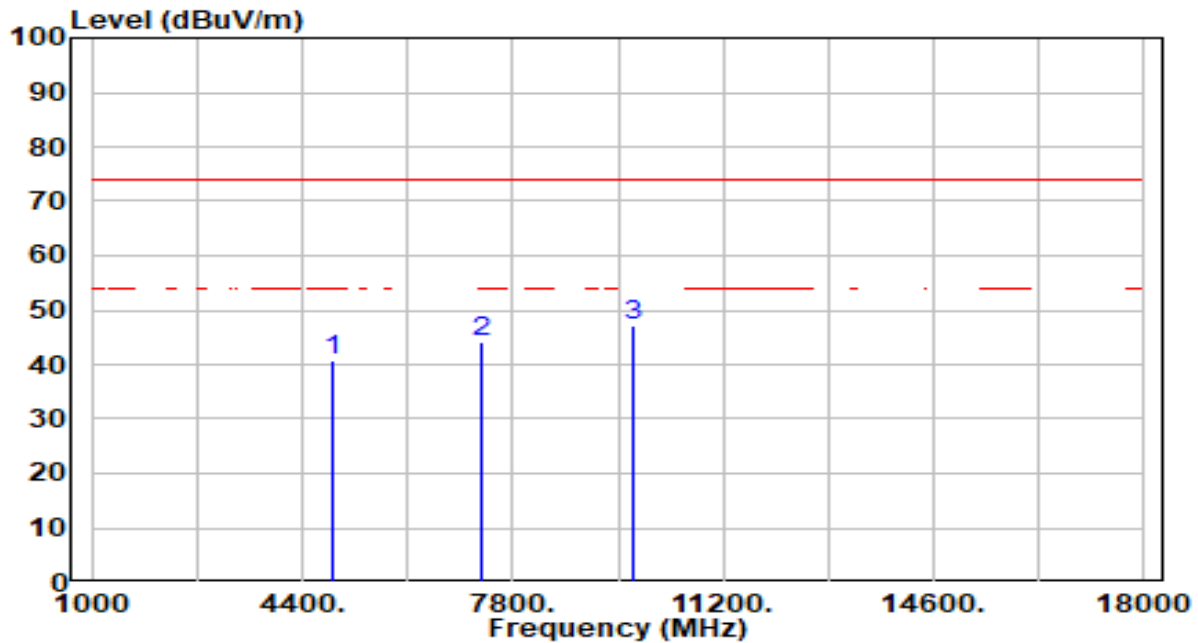


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.31	0.36	40.67	-33.33	74.00	200	112	Peak
2	7311.000	38.43	5.59	44.02	-29.98	74.00	200	161	Peak
3	* 9748.000	41.65	5.34	47.00	-27.00	74.00	200	169	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

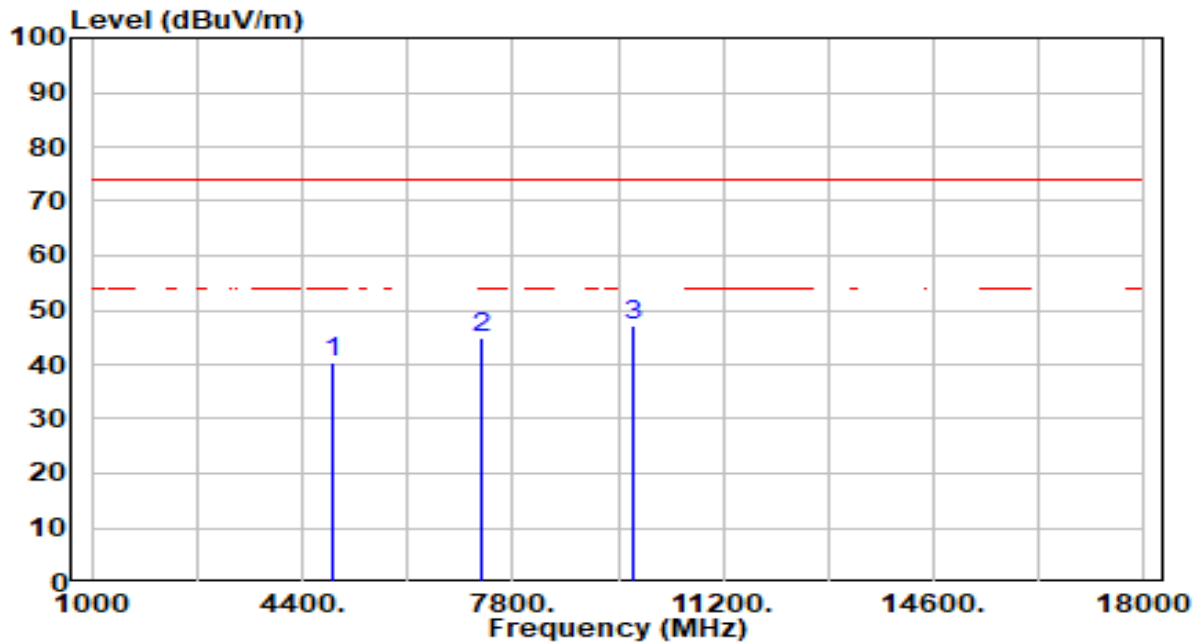


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.07	0.36	40.44	-33.56	74.00	200	257	Peak
2	7311.000	39.30	5.59	44.89	-29.11	74.00	200	11	Peak
3	* 9748.000	41.64	5.34	46.98	-27.02	74.00	200	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

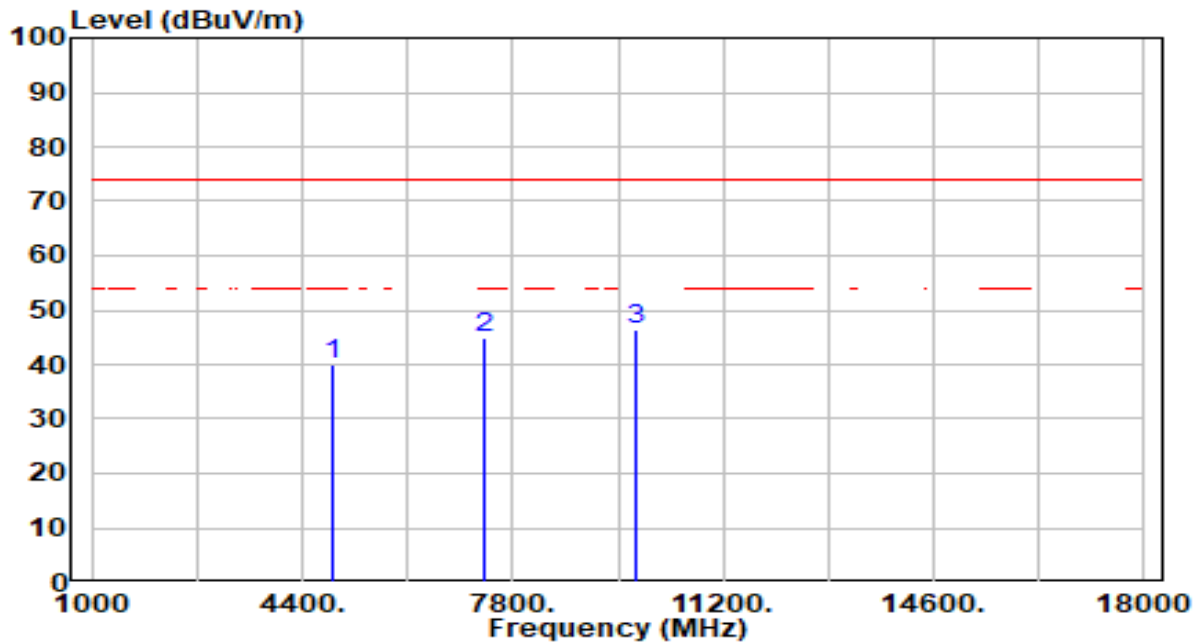


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	39.55	0.44	39.99	-34.01	74.00	200	348	Peak
2	7356.000	39.18	5.62	44.80	-29.20	74.00	200	348	Peak
3	* 9808.000	41.07	5.37	46.44	-27.56	74.00	200	317	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

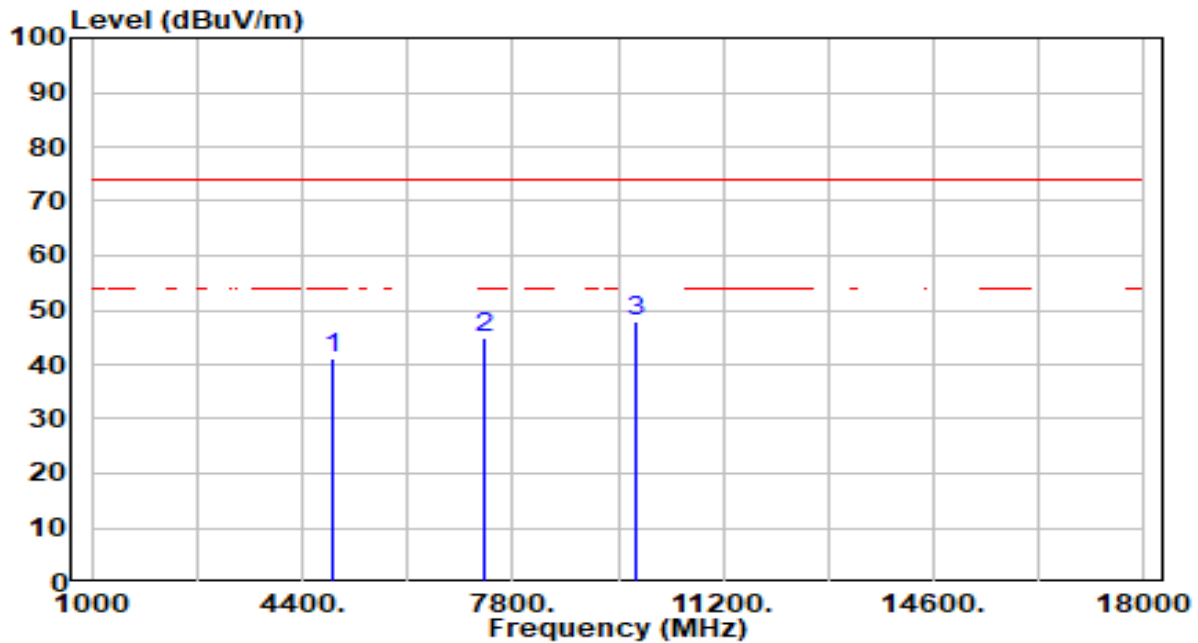


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.80	0.44	41.24	-32.76	74.00	200	281	Peak
2	7356.000	39.11	5.62	44.73	-29.27	74.00	200	195	Peak
3	* 9808.000	42.49	5.37	47.86	-26.14	74.00	200	275	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

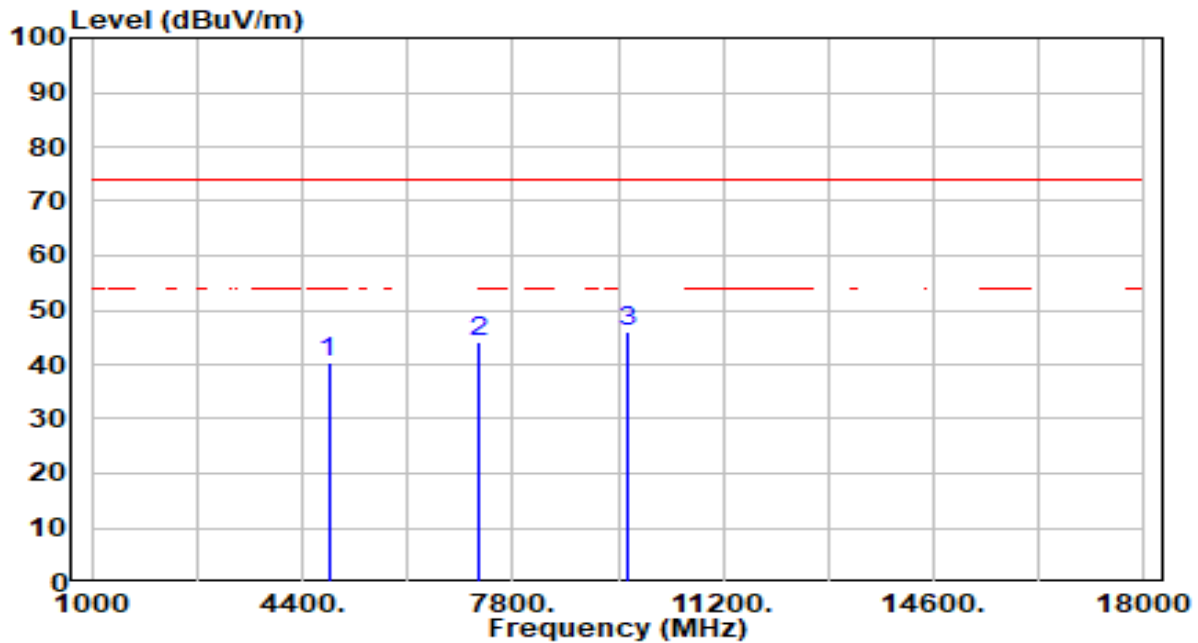


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.04	0.23	40.27	-33.73	74.00	200	25	Peak
2	7236.000	38.54	5.54	44.08	-29.92	74.00	200	148	Peak
3	* 9648.000	40.92	5.30	46.22	-27.78	74.00	200	219	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

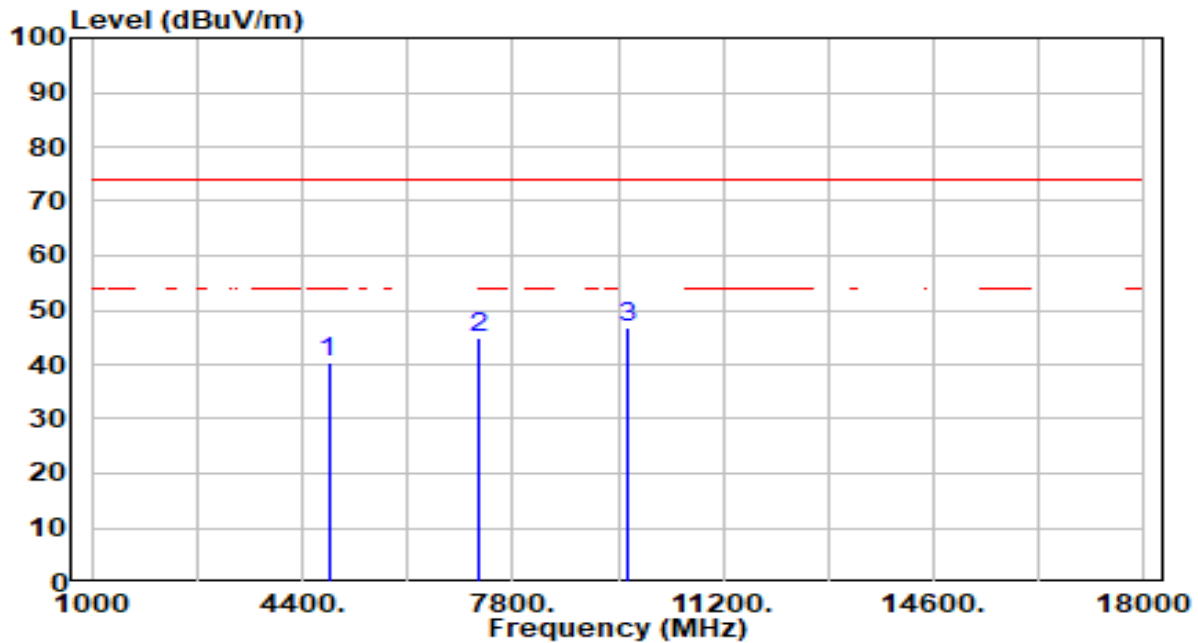


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.20	0.23	40.44	-33.56	74.00	200	143	Peak
2	7236.000	39.40	5.54	44.95	-29.05	74.00	200	274	Peak
3	* 9648.000	41.54	5.30	46.84	-27.16	74.00	200	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

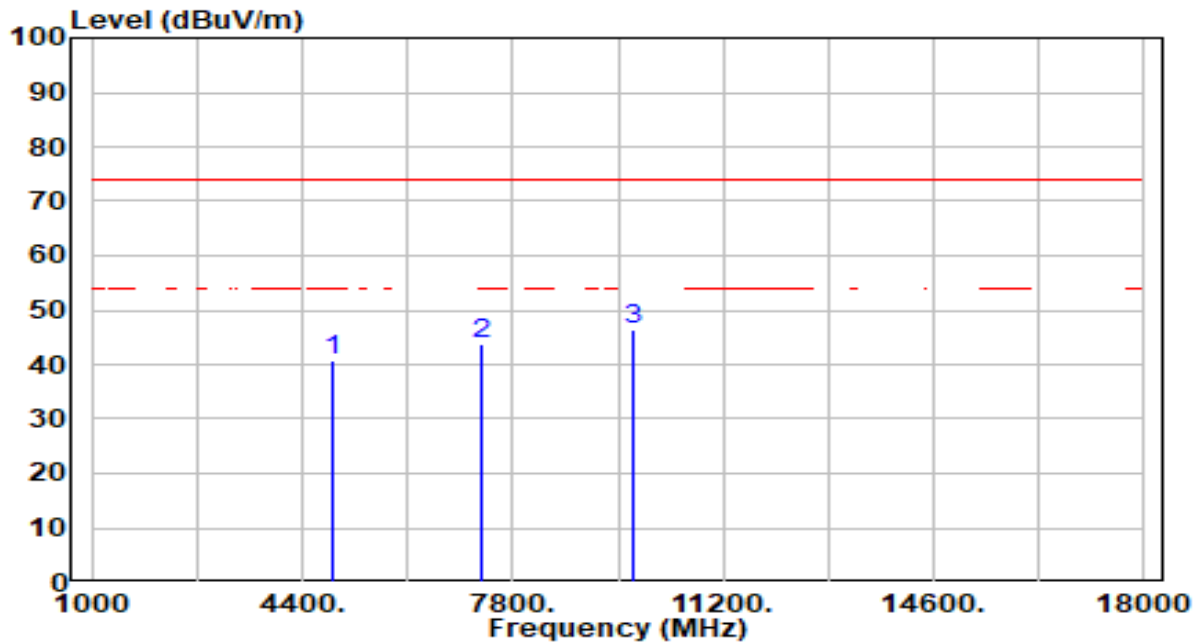


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.32	0.36	40.68	-33.32	74.00	200	97	Peak
2	7311.000	38.21	5.59	43.80	-30.20	74.00	200	195	Peak
3	* 9748.000	41.01	5.34	46.36	-27.64	74.00	200	97	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

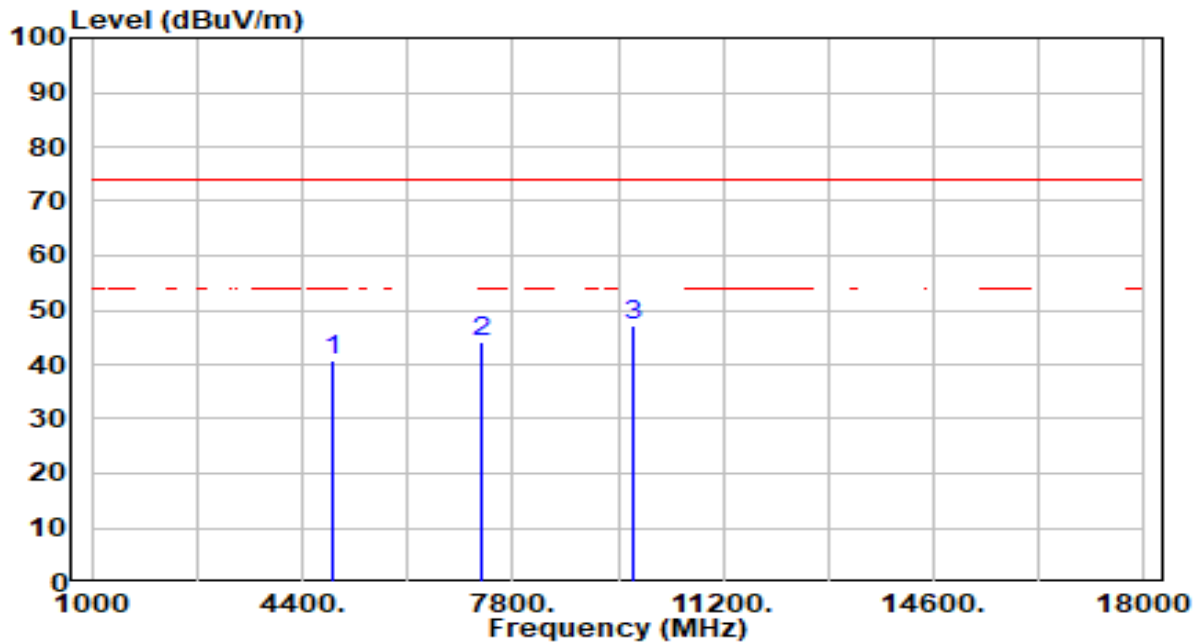


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.33	0.36	40.69	-33.31	74.00	200	16	Peak
2	7311.000	38.51	5.59	44.10	-29.90	74.00	200	44	Peak
3	* 9748.000	41.84	5.34	47.18	-26.82	74.00	200	55	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

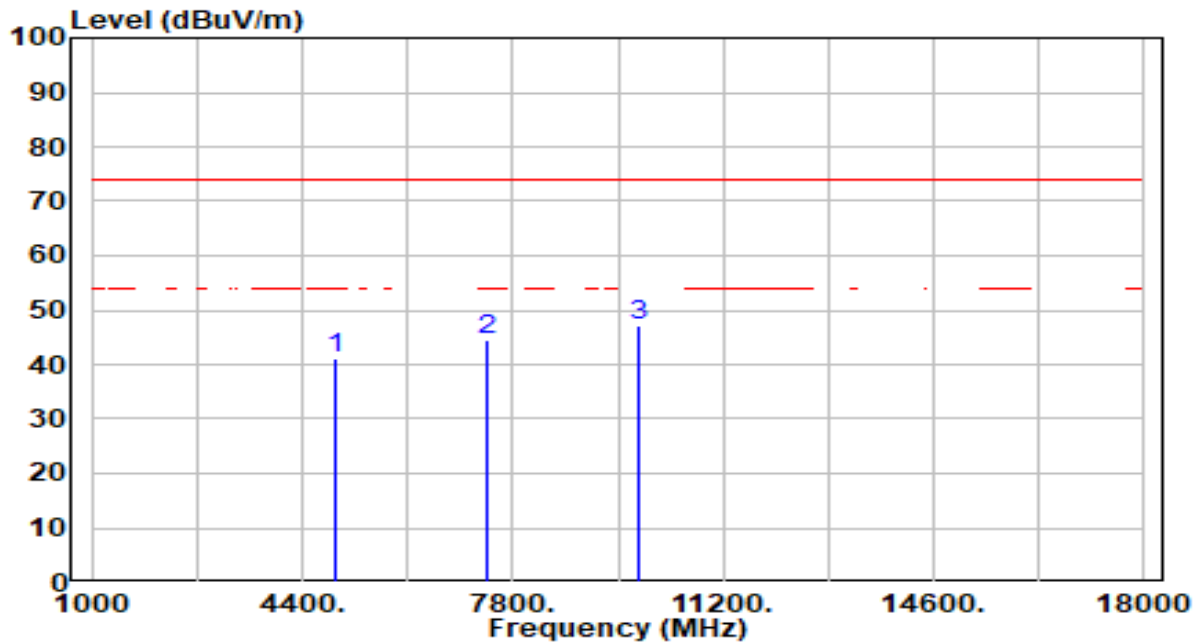


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.61	0.49	41.10	-32.90	74.00	200	345	Peak
2	7386.000	38.76	5.64	44.40	-29.60	74.00	200	104	Peak
3	* 9848.000	41.77	5.39	47.16	-26.84	74.00	200	112	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

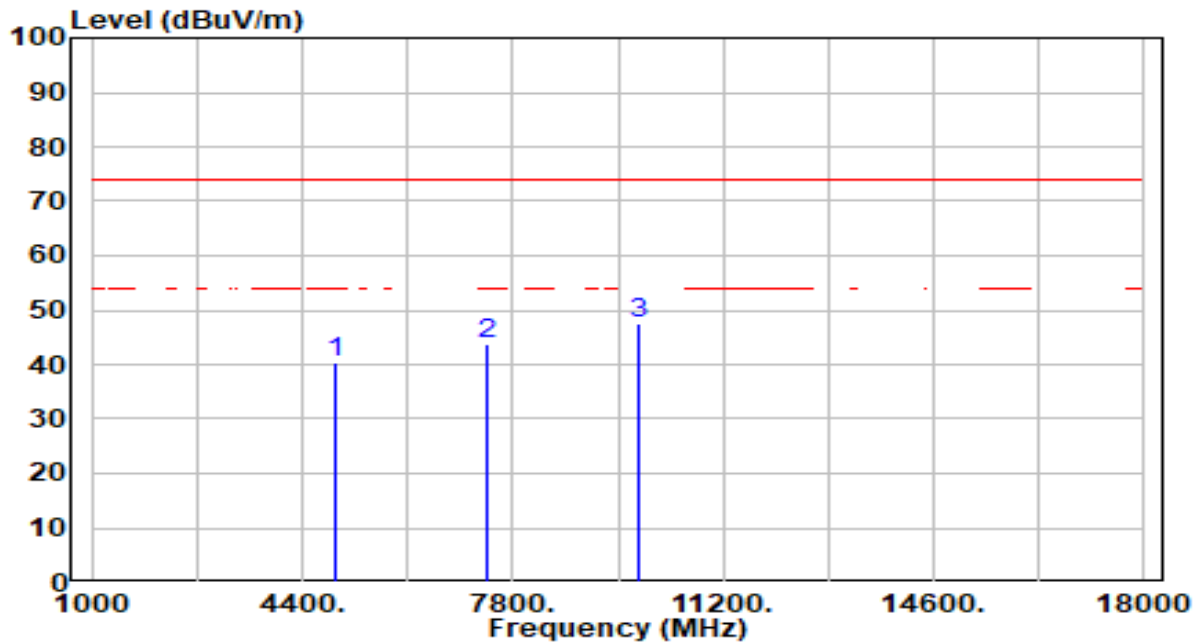


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.04	0.49	40.53	-33.47	74.00	200	10	Peak
2	7386.000	38.29	5.64	43.93	-30.07	74.00	200	360	Peak
3	* 9848.000	42.01	5.39	47.40	-26.60	74.00	200	273	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

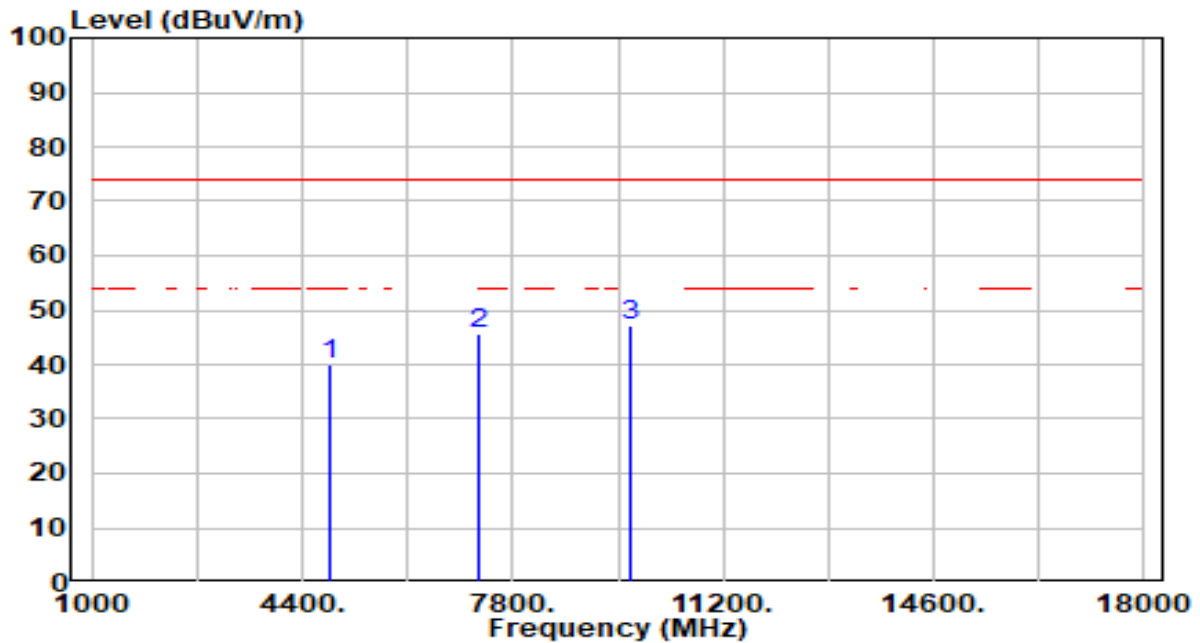


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	39.65	0.28	39.94	-34.06	74.00	200	81	Peak
2	7266.000	40.02	5.56	45.58	-28.42	74.00	200	109	Peak
3	* 9688.000	41.67	5.32	46.99	-27.01	74.00	200	168	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

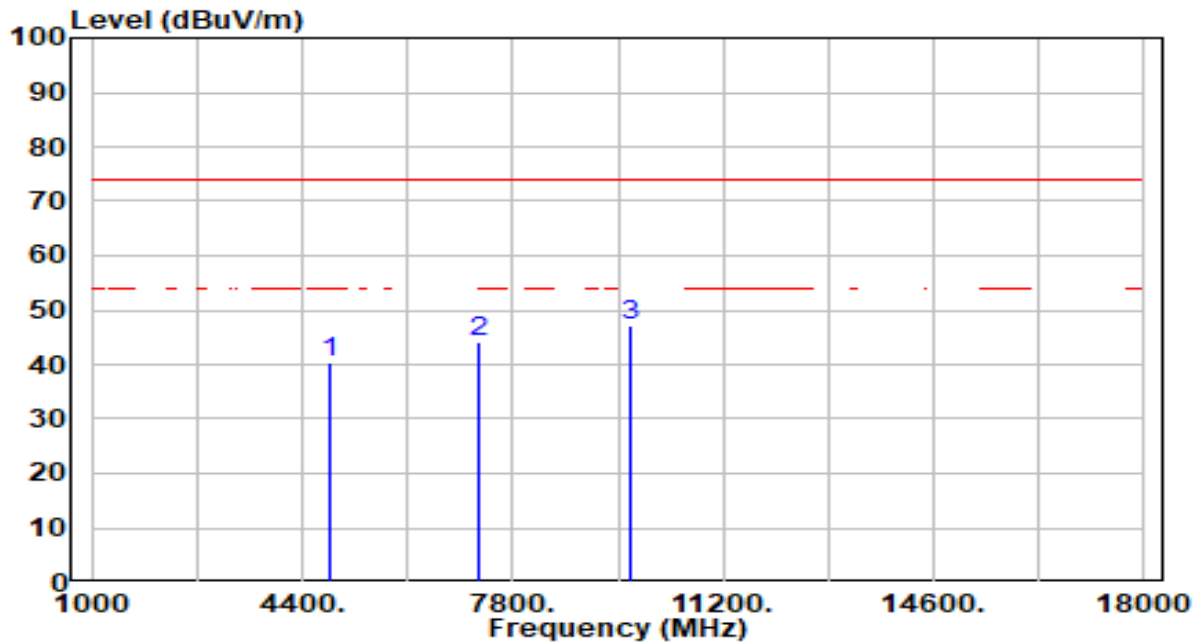


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	39.99	0.28	40.28	-33.72	74.00	200	347	Peak
2	7266.000	38.47	5.56	44.03	-29.97	74.00	200	352	Peak
3	* 9688.000	41.90	5.32	47.22	-26.78	74.00	200	164	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

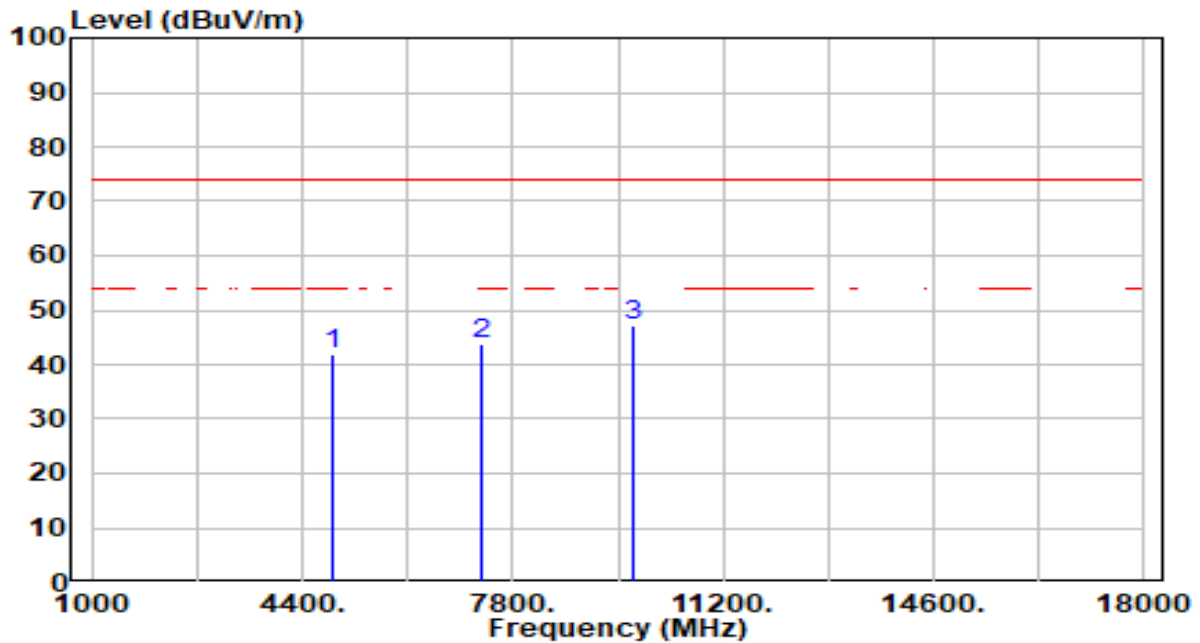


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.34	0.36	41.71	-32.29	74.00	200	353	Peak
2	7311.000	38.27	5.59	43.86	-30.14	74.00	200	86	Peak
3	* 9748.000	41.73	5.34	47.08	-26.92	74.00	200	66	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

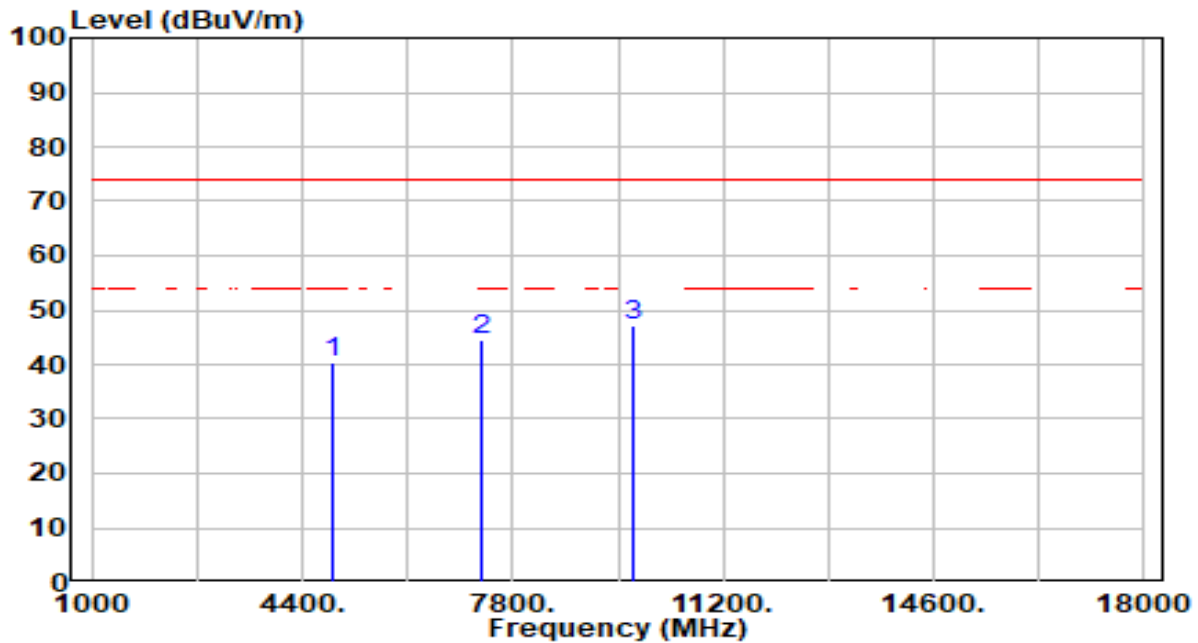


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.17	0.36	40.54	-33.46	74.00	200	75	Peak
2	7311.000	38.93	5.59	44.52	-29.48	74.00	200	188	Peak
3	* 9748.000	41.73	5.34	47.08	-26.92	74.00	200	111	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

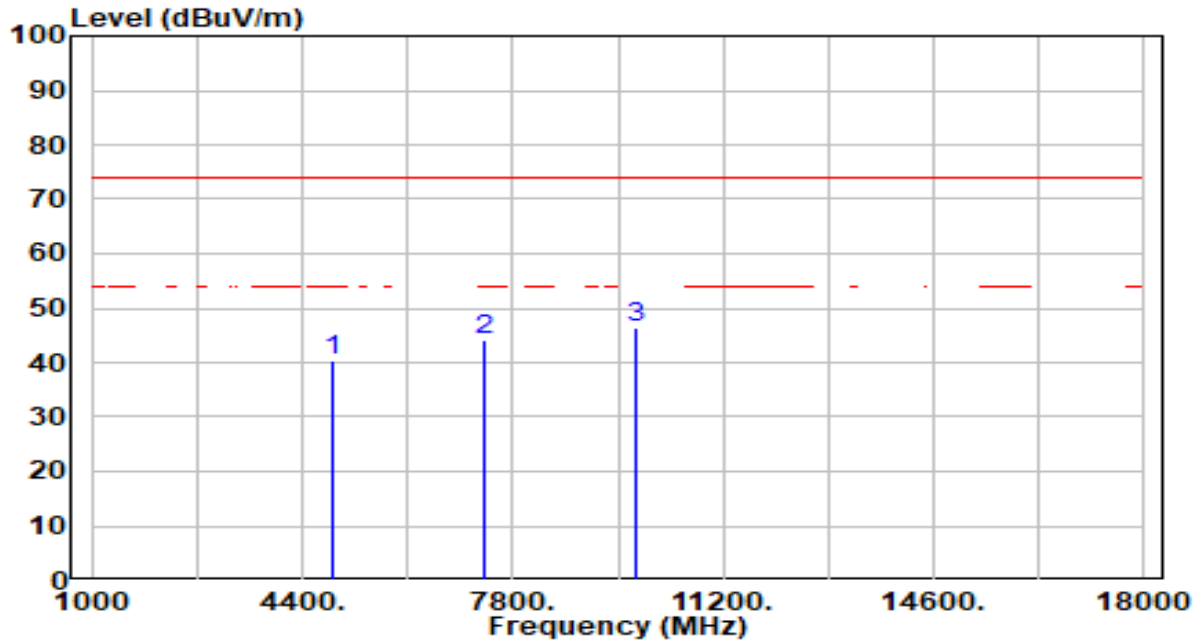


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	39.95	0.44	40.39	-33.61	74.00	200	265	Peak
2	7356.000	38.71	5.62	44.33	-29.67	74.00	200	0	Peak
3	* 9808.000	40.95	5.37	46.32	-27.68	74.00	200	33	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

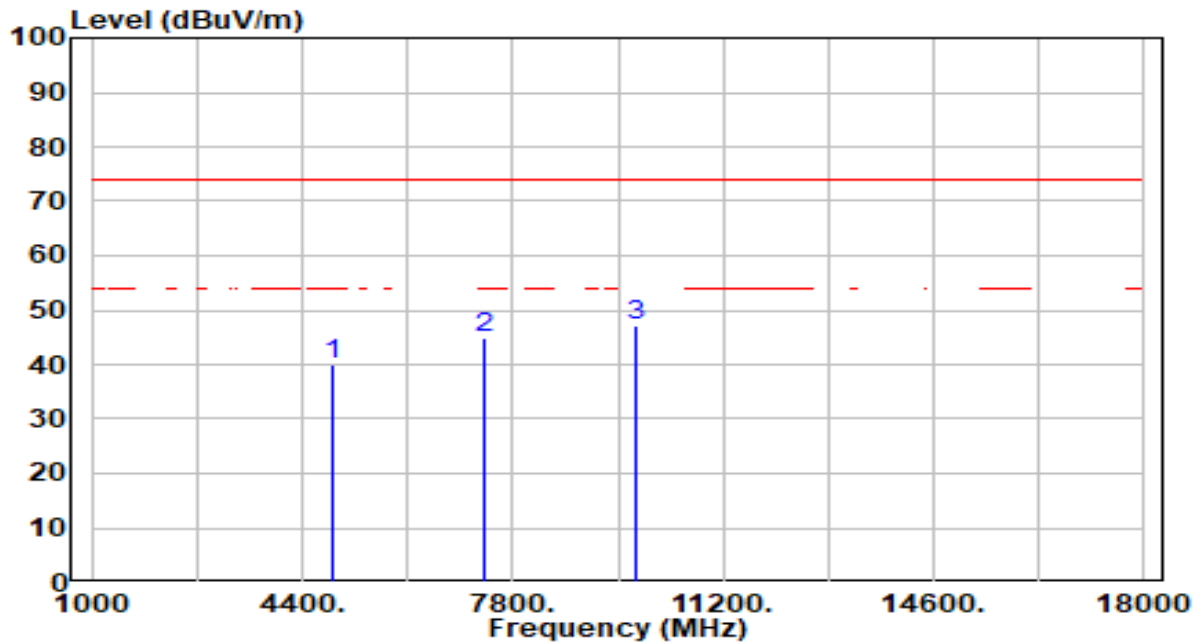


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	39.75	0.44	40.19	-33.81	74.00	200	163	Peak
2	7356.000	39.35	5.62	44.97	-29.03	74.00	200	322	Peak
3	* 9808.000	41.71	5.37	47.08	-26.92	74.00	200	29	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

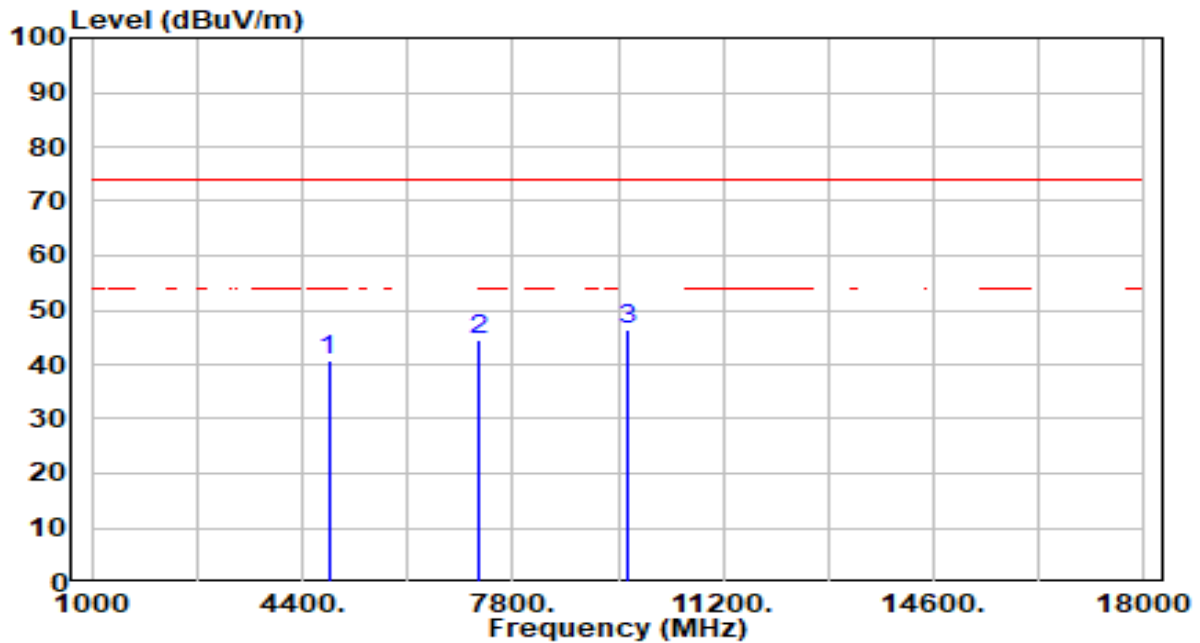


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.55	0.23	40.79	-33.21	74.00	200	251	Peak
2	7236.000	38.87	5.54	44.41	-29.59	74.00	200	188	Peak
3	* 9648.000	41.18	5.30	46.49	-27.51	74.00	200	10	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

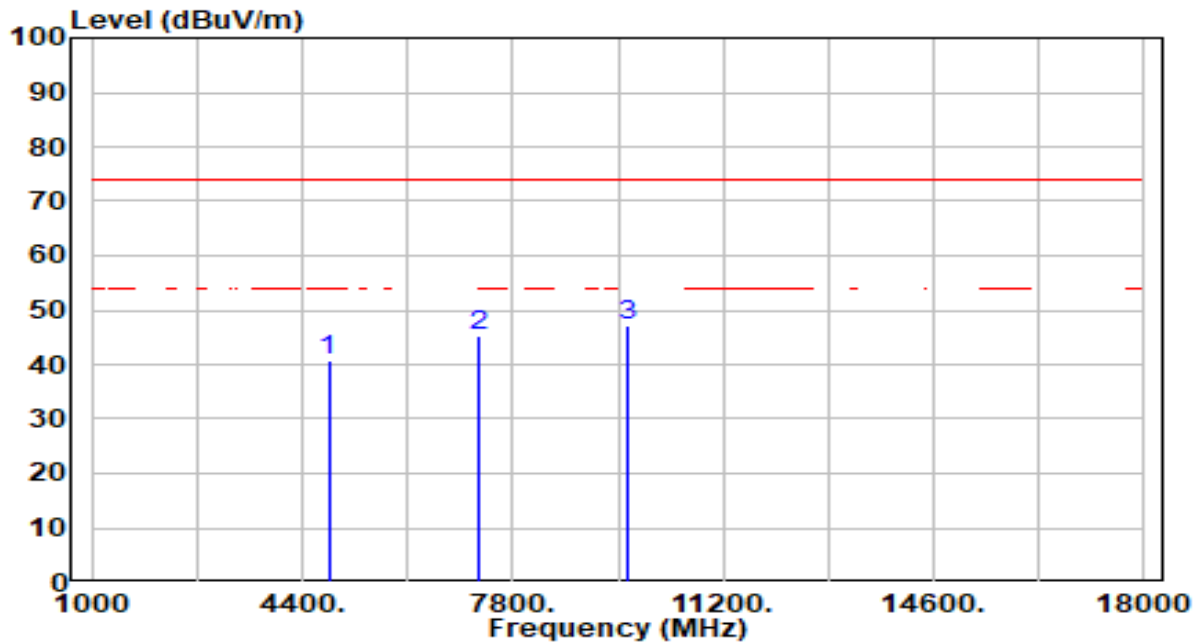


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.36	0.23	40.60	-33.40	74.00	200	284	Peak
2	7236.000	39.79	5.54	45.33	-28.67	74.00	200	115	Peak
3	* 9648.000	41.81	5.30	47.11	-26.89	74.00	200	346	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

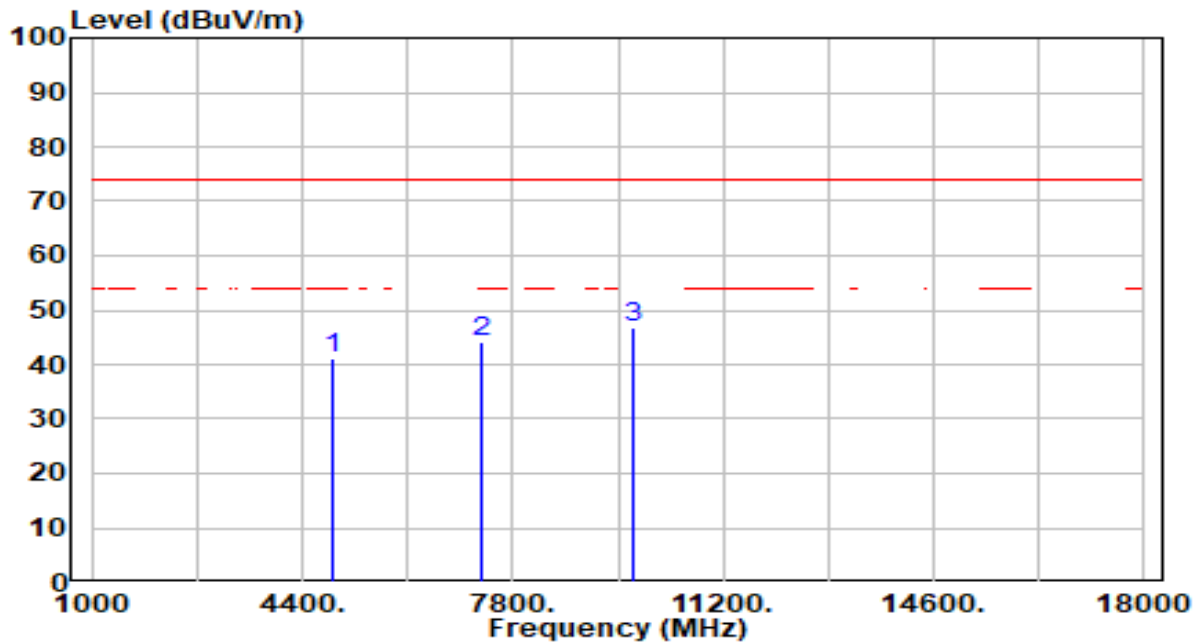


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.93	0.36	41.29	-32.71	74.00	200	0	Peak
2	7311.000	38.58	5.59	44.17	-29.83	74.00	200	45	Peak
3	* 9748.000	41.58	5.34	46.92	-27.08	74.00	200	190	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

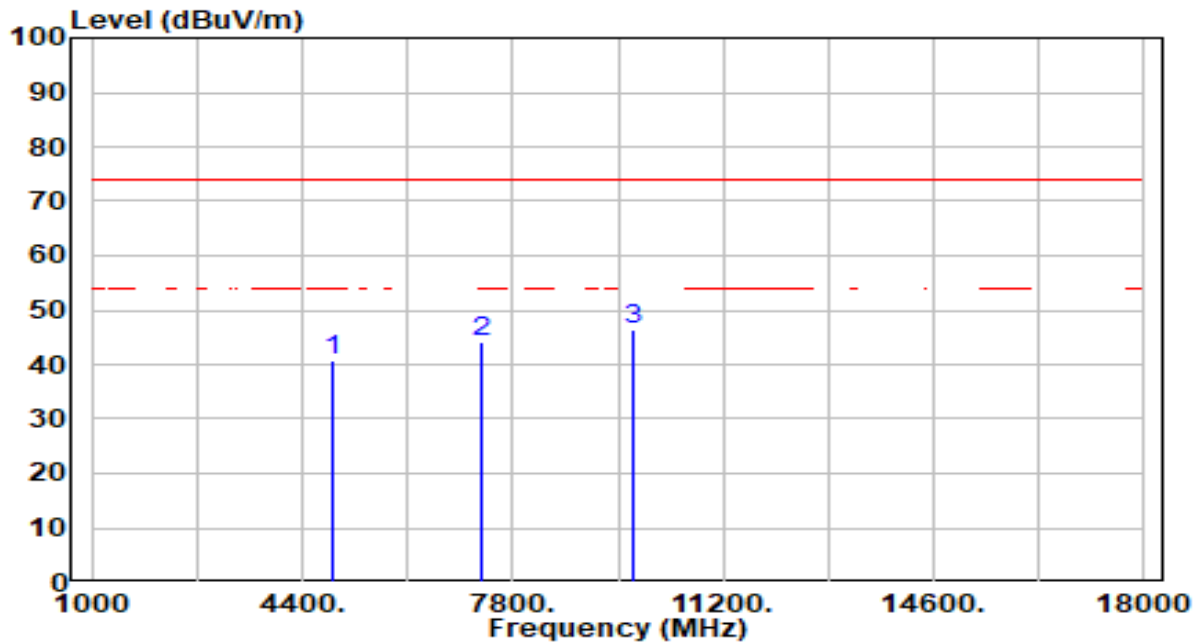


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.33	0.36	40.70	-33.30	74.00	200	108	Peak
2	7311.000	38.45	5.59	44.04	-29.96	74.00	200	136	Peak
3	* 9748.000	41.07	5.34	46.42	-27.58	74.00	200	60	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

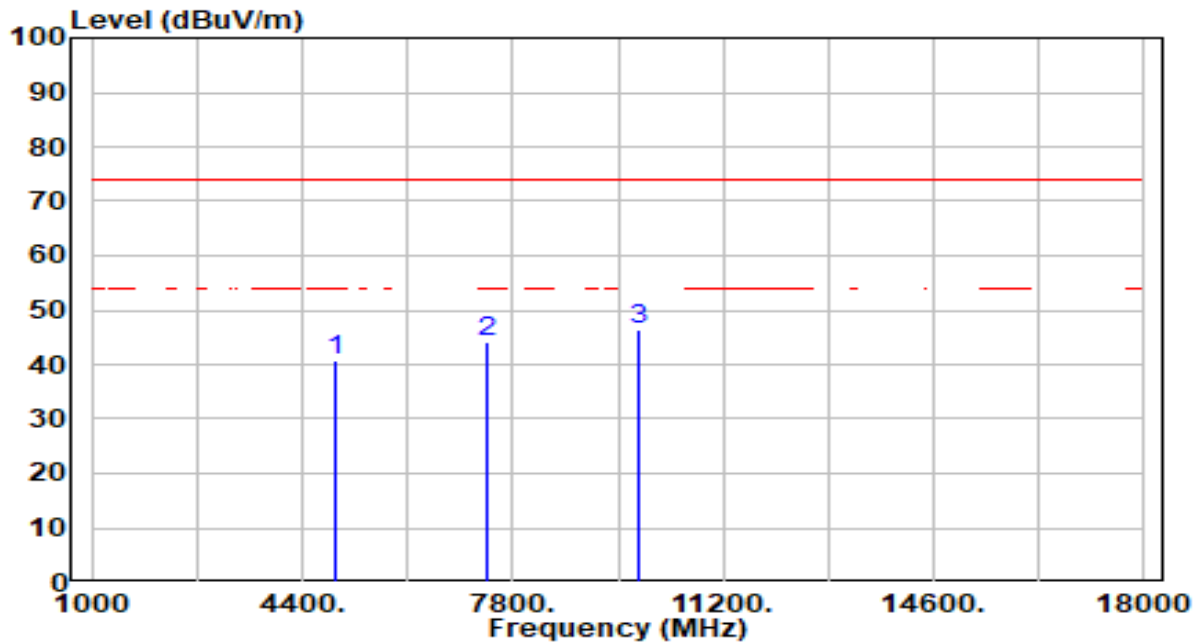


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.24	0.49	40.73	-33.27	74.00	200	230	Peak
2	7386.000	38.48	5.64	44.11	-29.89	74.00	200	317	Peak
3	* 9848.000	40.90	5.39	46.28	-27.72	74.00	200	28	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

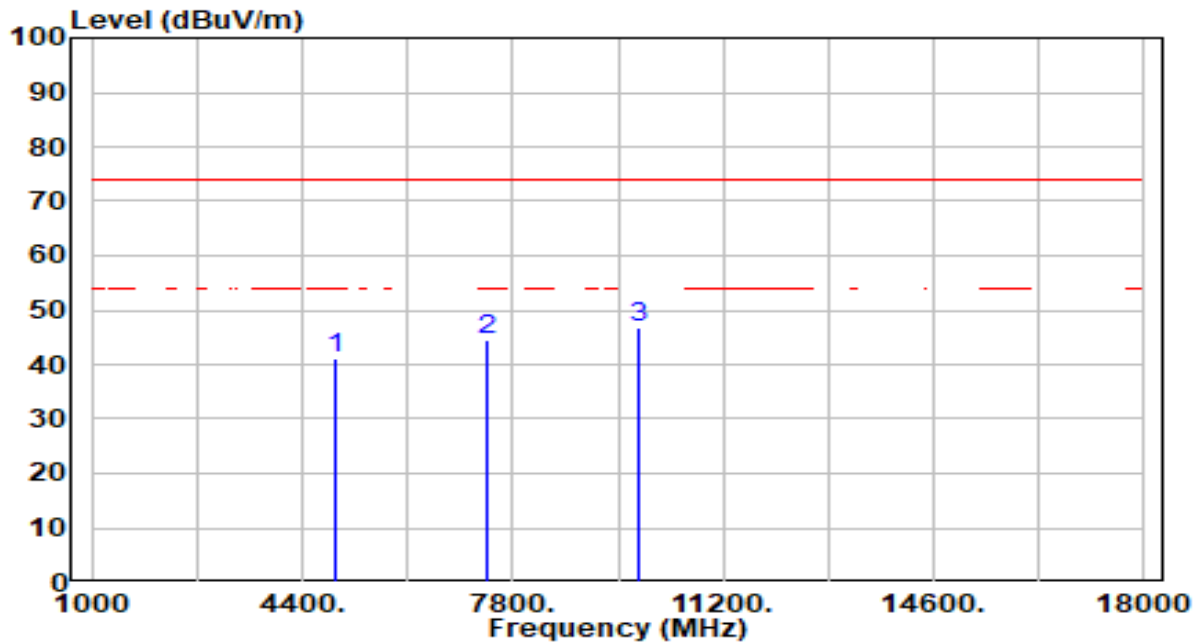


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.52	0.49	41.01	-32.99	74.00	200	23	Peak
2	7386.000	38.83	5.64	44.47	-29.53	74.00	200	321	Peak
3	* 9848.000	41.33	5.39	46.71	-27.29	74.00	200	6	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

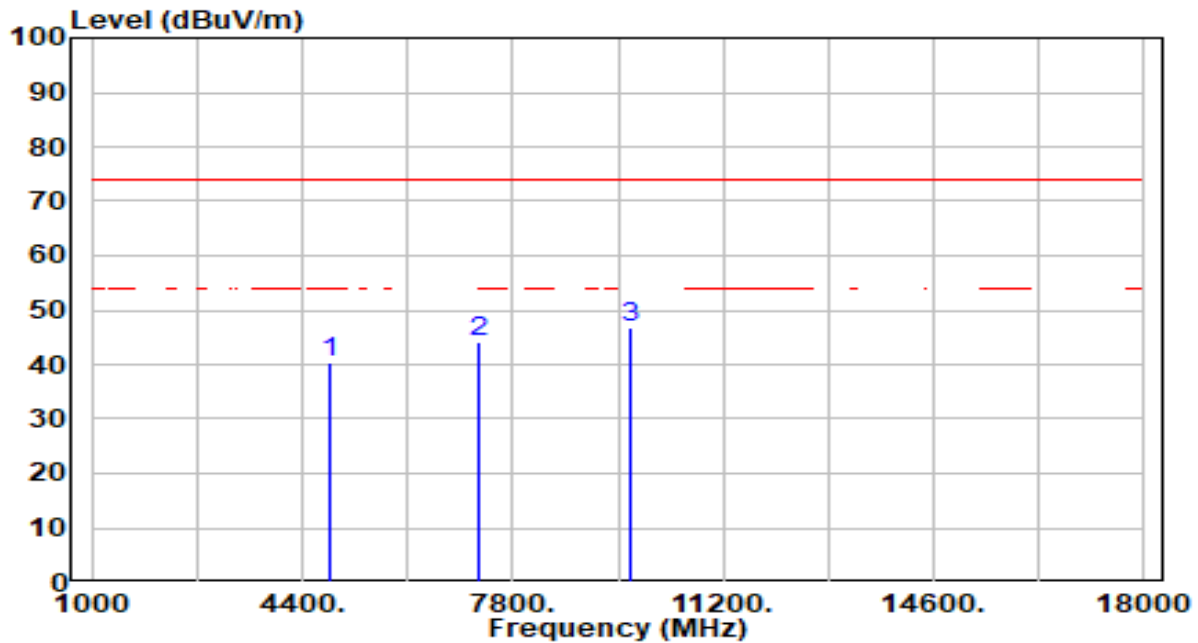


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	39.95	0.28	40.23	-33.77	74.00	200	243	Peak
2	7266.000	38.62	5.56	44.19	-29.81	74.00	200	185	Peak
3	* 9688.000	41.29	5.32	46.60	-27.40	74.00	200	30	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

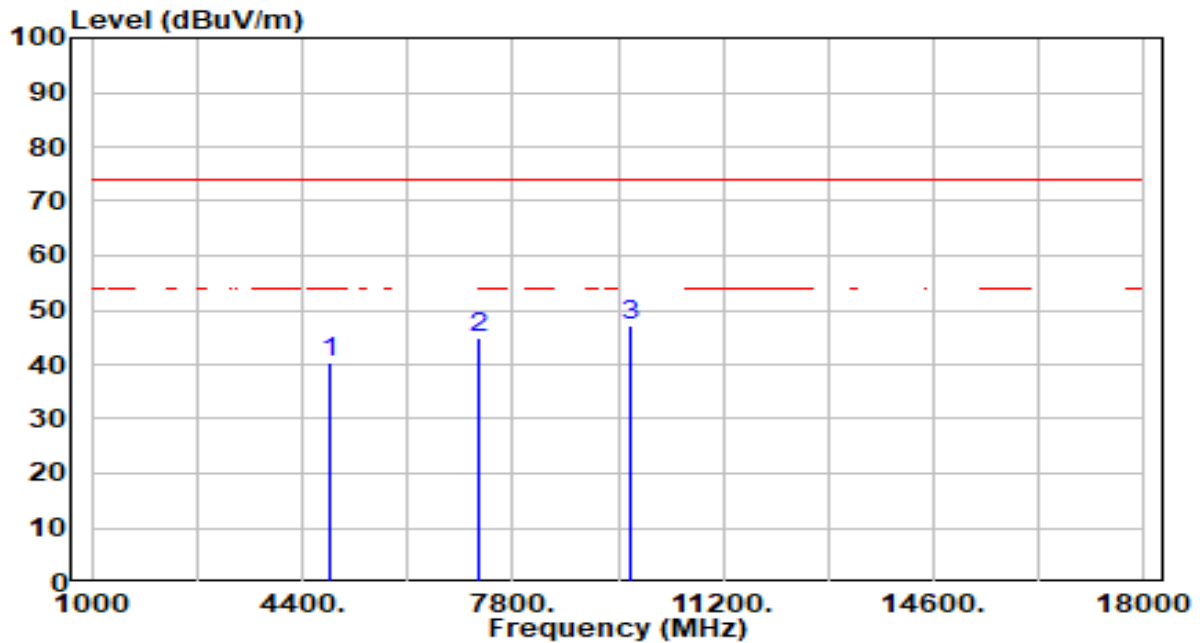


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.12	0.28	40.40	-33.60	74.00	200	335	Peak
2	7266.000	39.29	5.56	44.85	-29.15	74.00	200	145	Peak
3	* 9688.000	41.85	5.32	47.17	-26.83	74.00	200	231	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

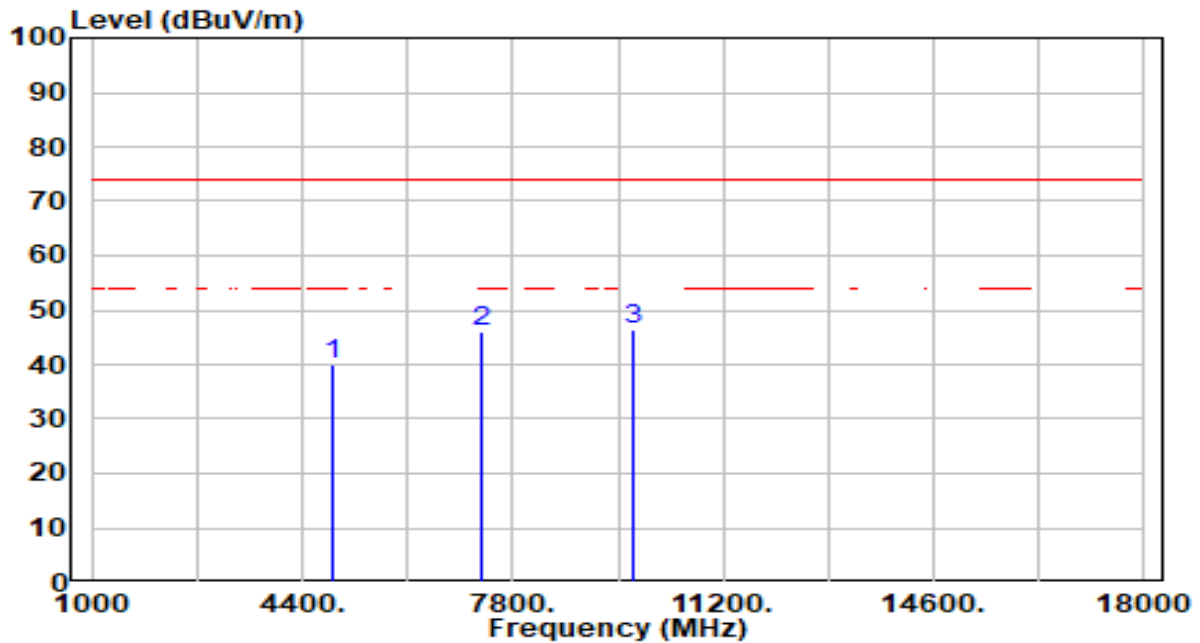


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.81	0.36	40.18	-33.82	74.00	200	202	Peak
2	7311.000	40.30	5.59	45.89	-28.11	74.00	200	107	Peak
3	* 9748.000	41.20	5.34	46.54	-27.46	74.00	200	76	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

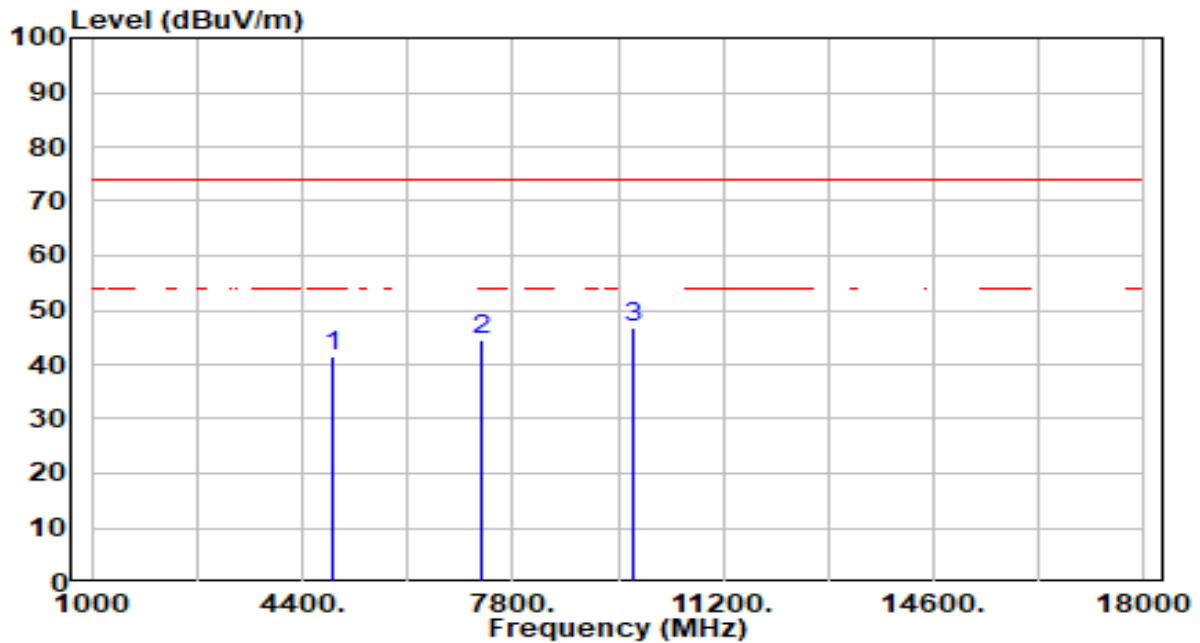


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.31	0.36	41.67	-32.33	74.00	200	52	Peak
2	7311.000	39.11	5.59	44.70	-29.30	74.00	200	60	Peak
3	* 9748.000	41.58	5.34	46.92	-27.08	74.00	200	167	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

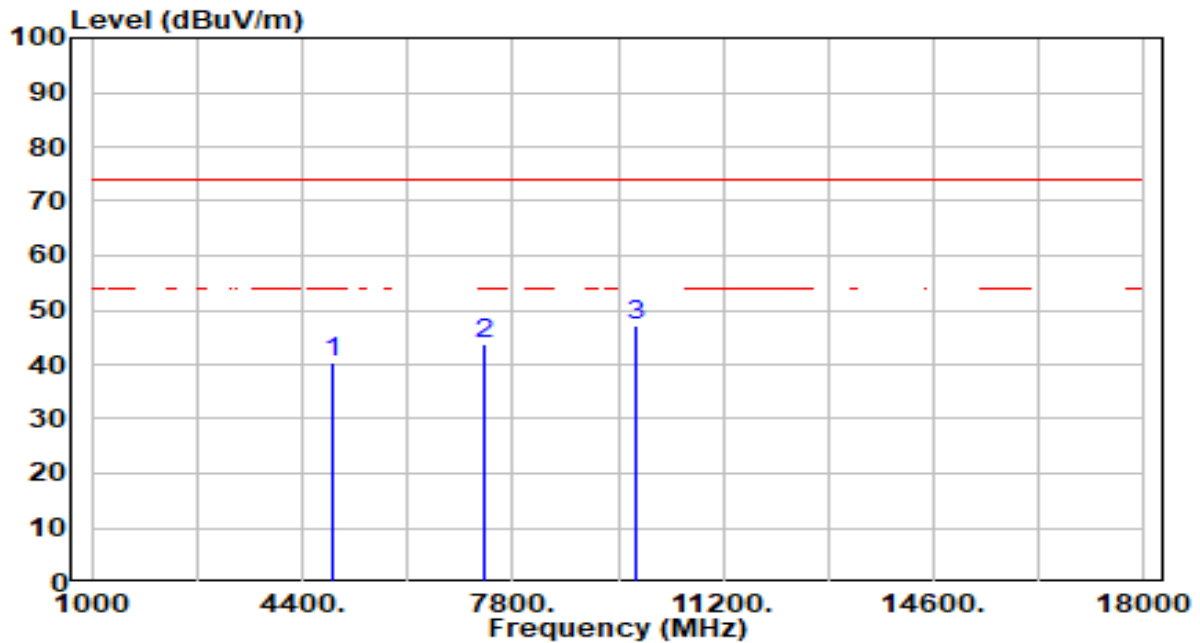


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	39.77	0.44	40.21	-33.79	74.00	200	215	Peak
2	7356.000	38.30	5.62	43.91	-30.09	74.00	200	344	Peak
3	* 9808.000	41.73	5.37	47.10	-26.90	74.00	200	218	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

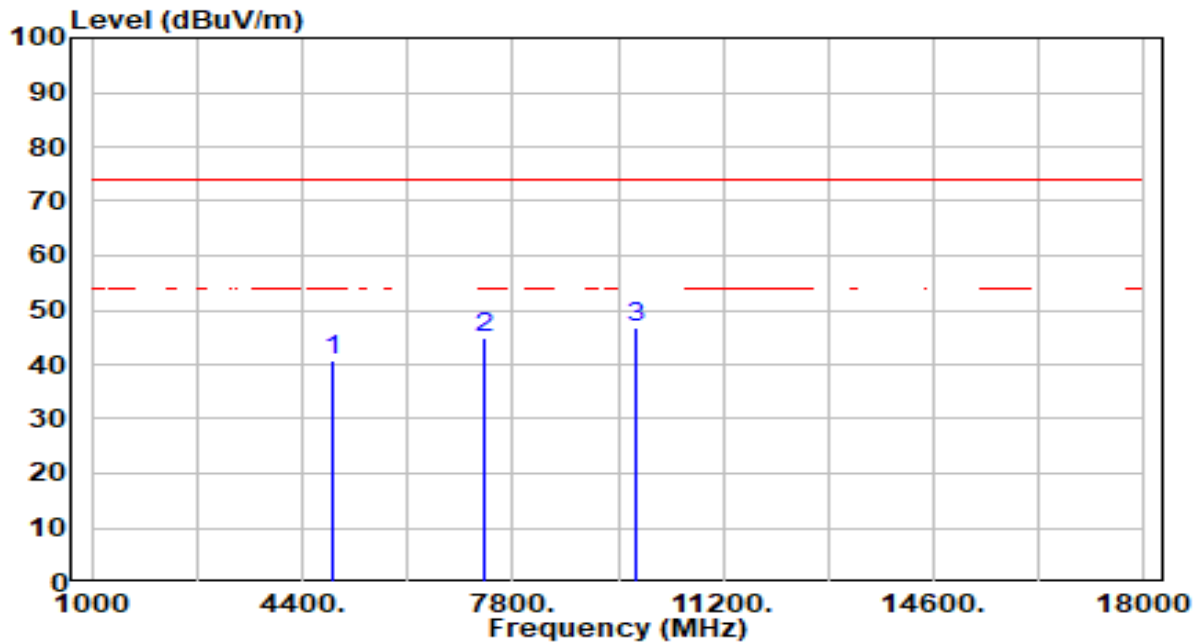


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.26	0.44	40.70	-33.30	74.00	200	360	Peak
2	7356.000	39.48	5.62	45.09	-28.91	74.00	200	0	Peak
3	* 9808.000	41.54	5.37	46.91	-27.09	74.00	200	173	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal Antenna Data

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-22
Factor	BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1_Horizontal Ant	Test Voltage	AC 120V/60Hz

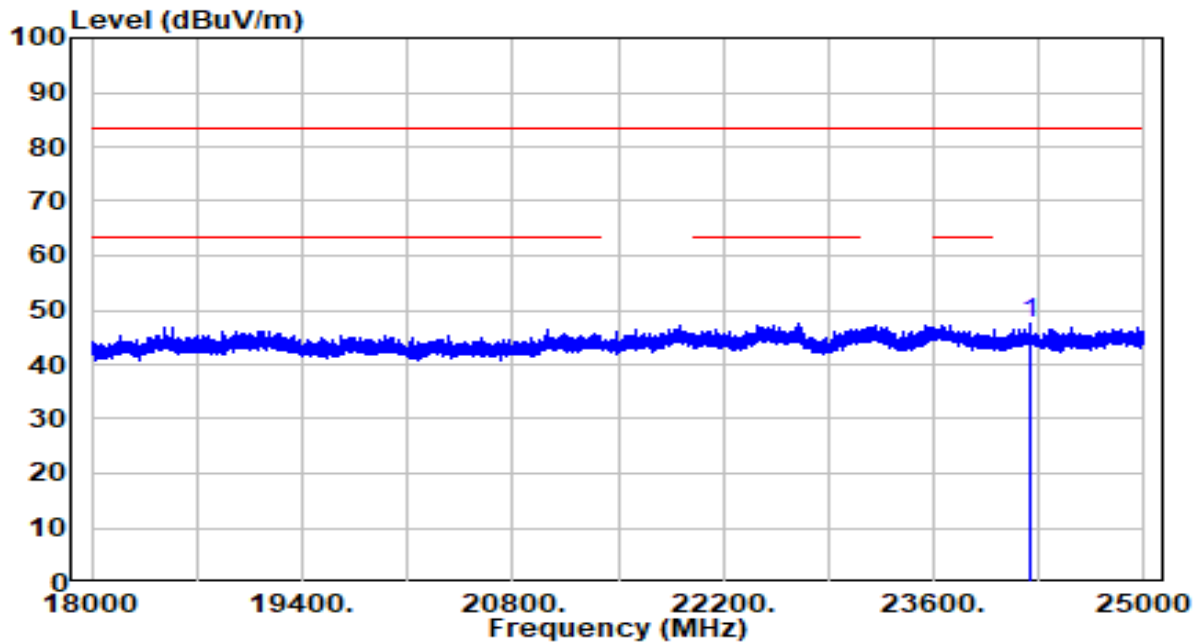


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24240.440	34.93	12.52	47.45	-36.05	83.50	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-22
Factor	BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1_Horizontal Ant	Test Voltage	AC 120V/60Hz

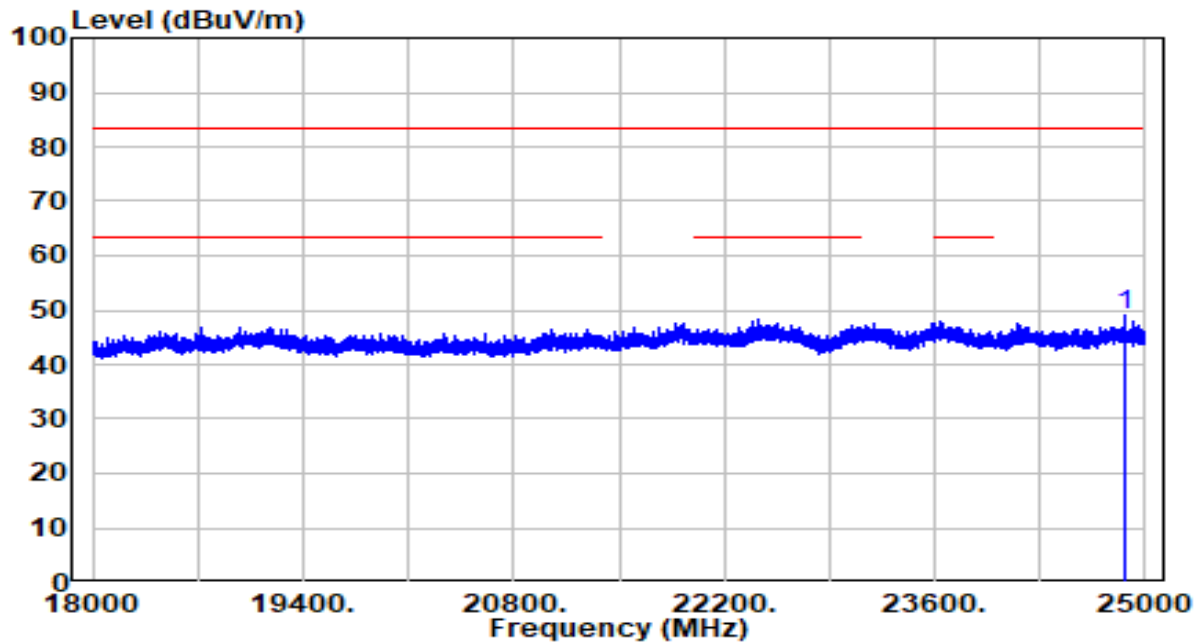


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24864.000	36.04	12.93	48.97	-34.53	83.50	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical Antenna Data

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-22
Factor	BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

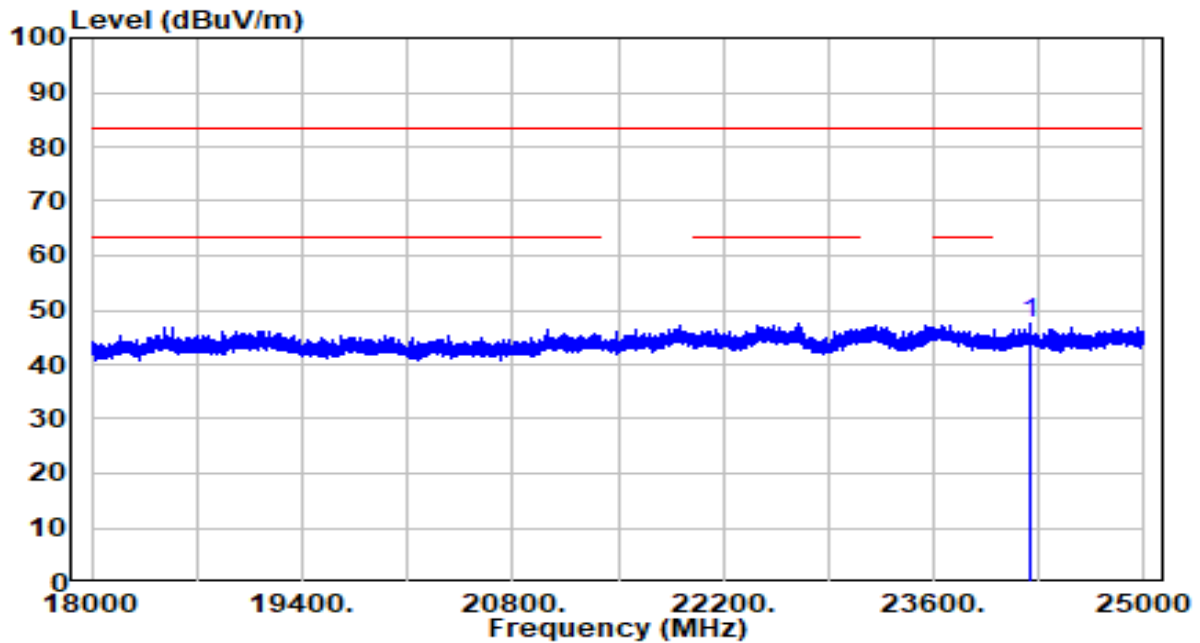


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24240.440	34.93	12.52	47.45	-36.05	83.50	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-22
Factor	BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

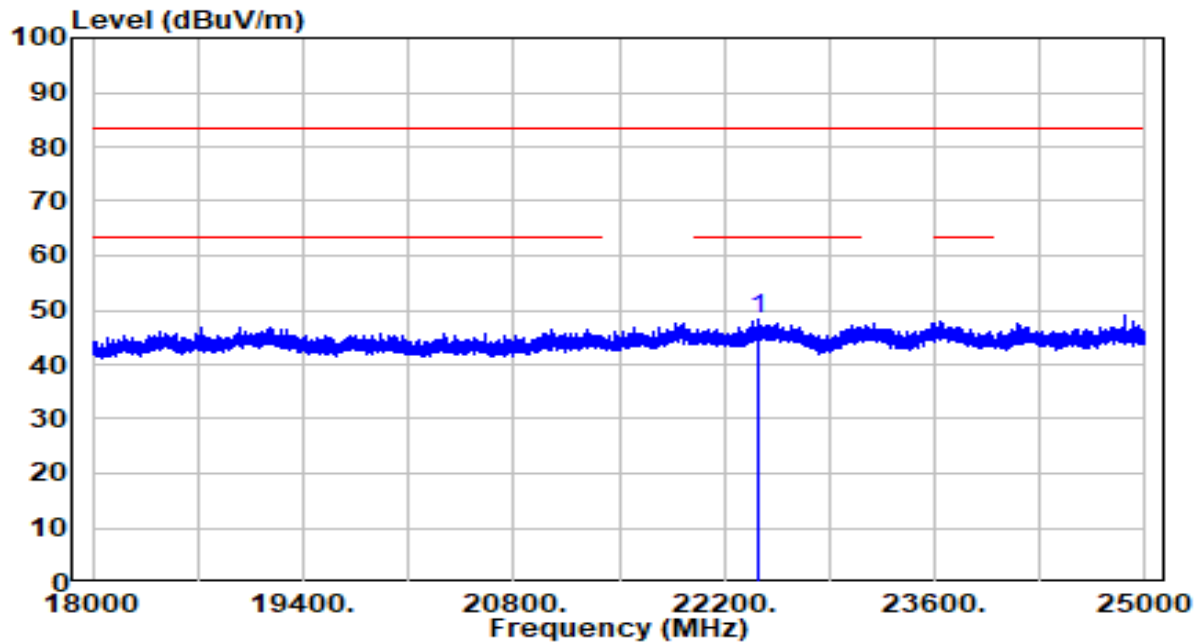


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	22428.880	36.66	11.80	48.46	-35.04	83.50	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-22
Factor	BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

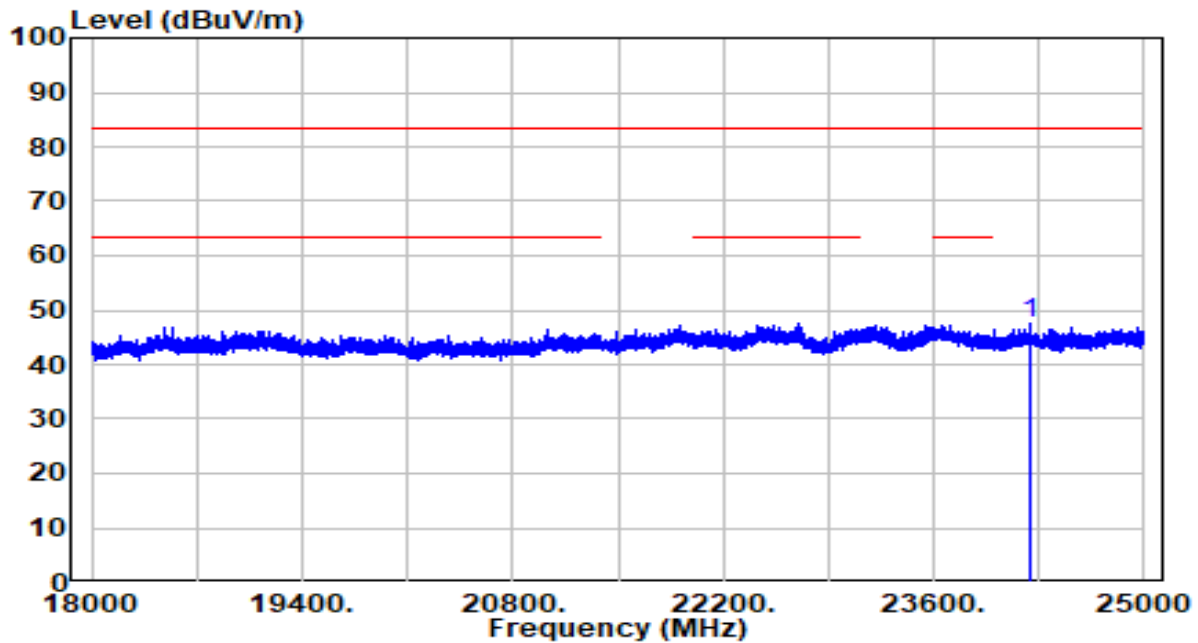


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24240.440	34.93	12.52	47.45	-36.05	83.50	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-22
Factor	BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

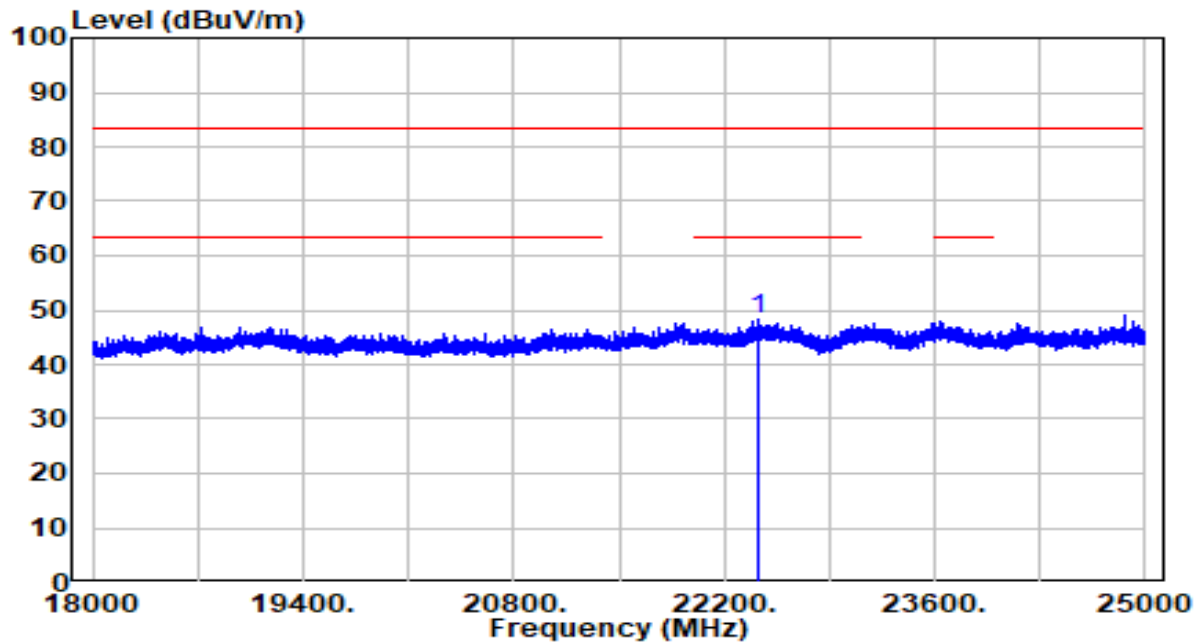

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	22428.880	36.66	11.80	48.46	-35.04	83.50	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2.Test Procedure Used

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

7.7.3.Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration.


4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

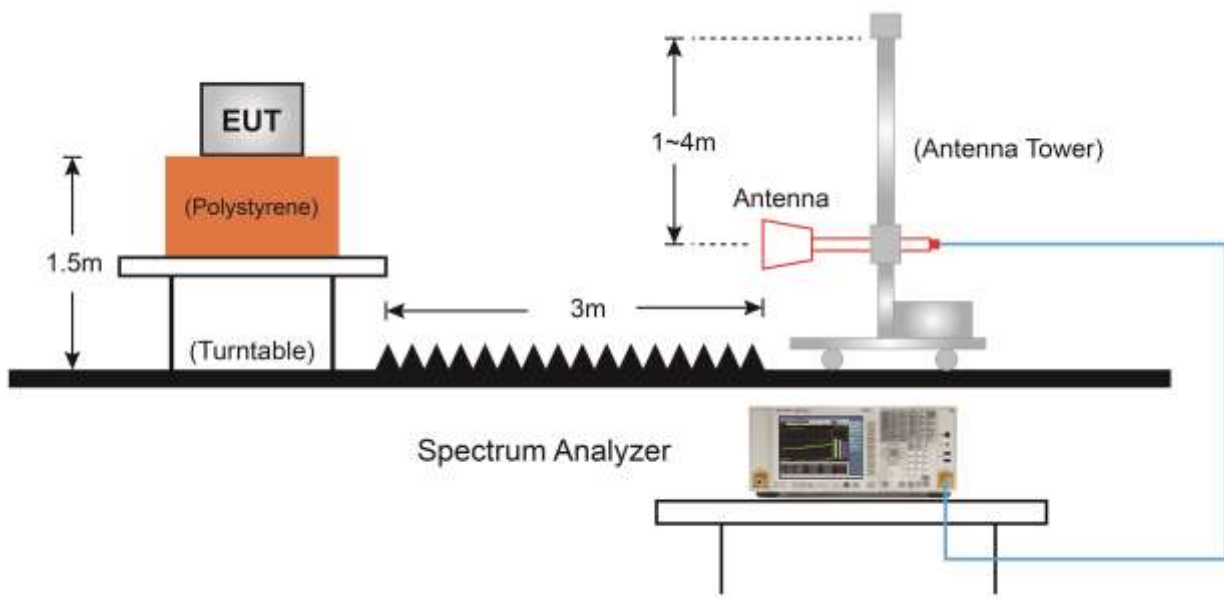7.7.4.Test Setup

7.7.5.Test Result

Horizontal Antenna Data

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

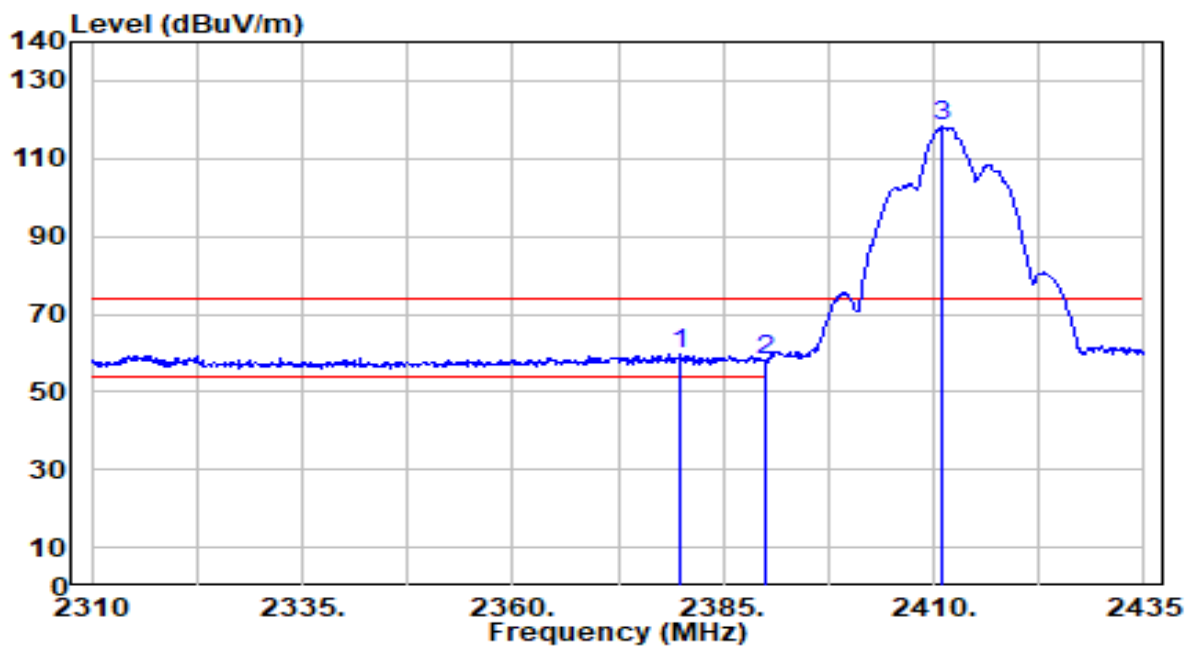


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2380.000	29.16	30.42	59.58	-14.42	74.00	190	40	Peak
2		2390.000	27.66	30.45	58.11	-15.89	74.00	190	40	Peak
3		2411.000	87.62	30.49	118.11	N/A	N/A	190	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

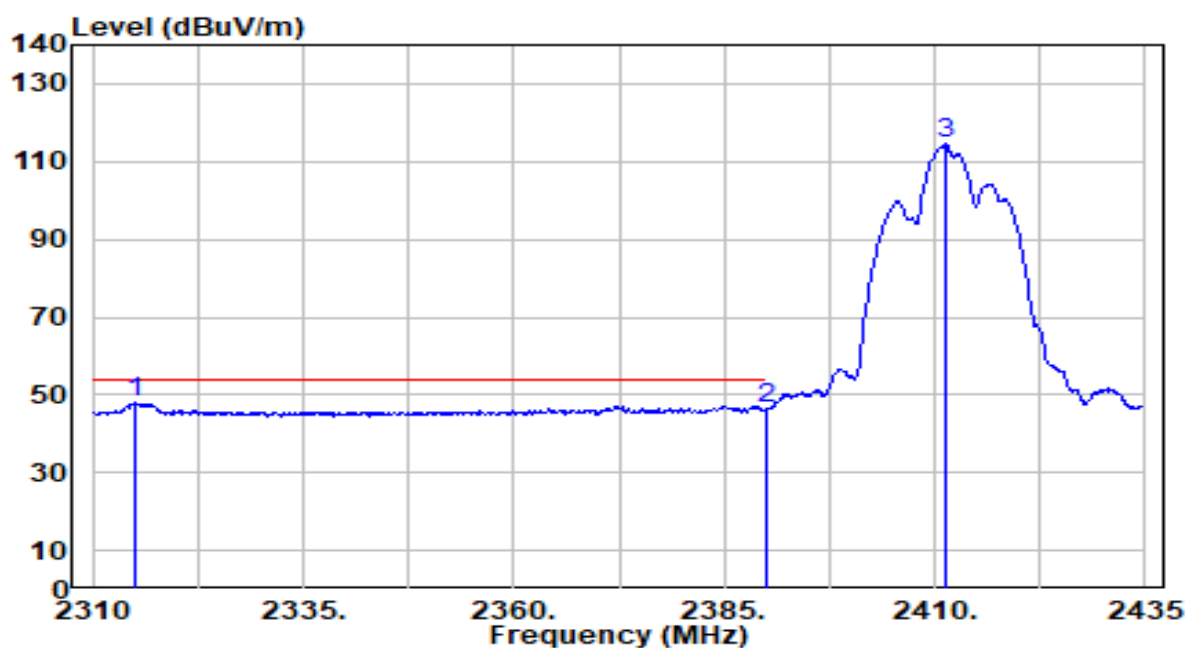


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2315.000	17.96	30.23	48.20	-5.80	54.00	190	40	Average
2		2390.000	16.01	30.45	46.46	-7.54	54.00	190	40	Average
3		2411.250	84.01	30.49	114.50	N/A	N/A	190	40	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

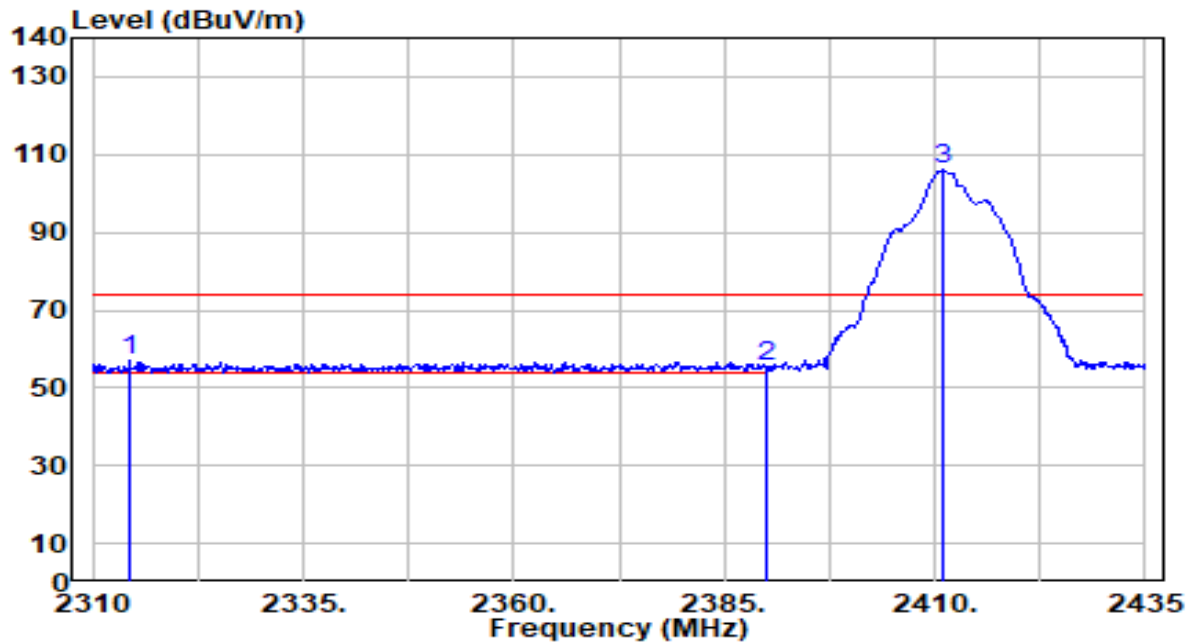


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2314.375	26.60	30.23	56.83	-17.17	74.00	308	124	Peak
2		2390.000	24.79	30.45	55.24	-18.76	74.00	308	124	Peak
3		2411.000	75.48	30.49	105.97	N/A	N/A	308	124	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

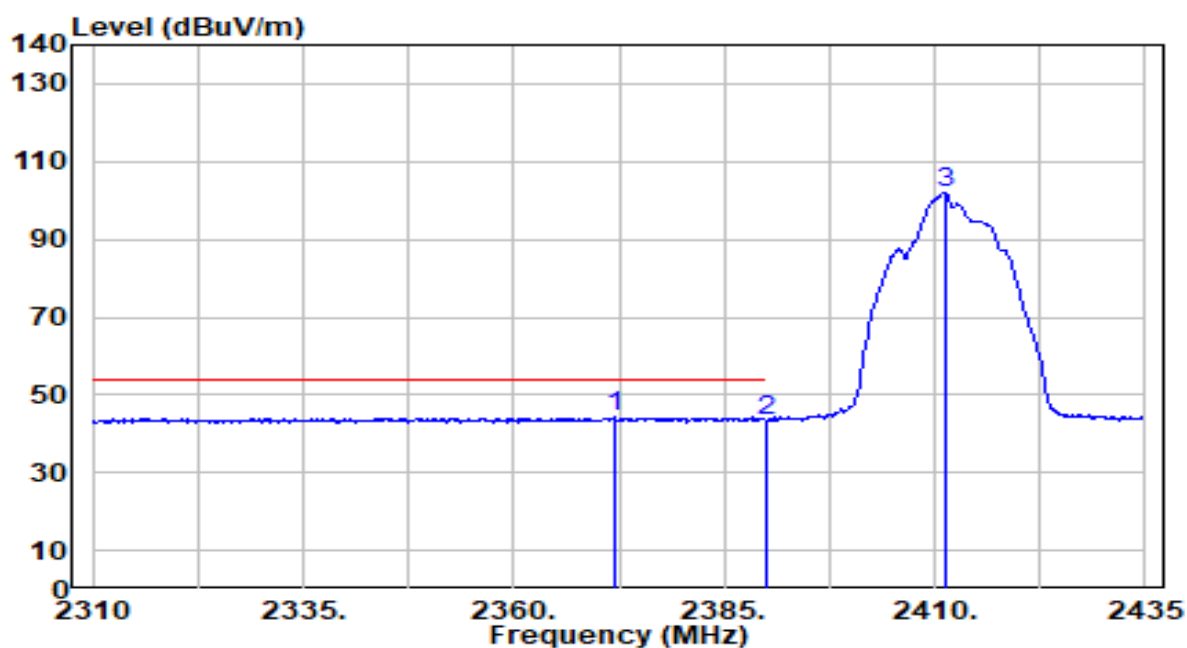


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2372.000	13.79	30.40	44.19	-9.81	54.00	308	124	Average
2		2390.000	12.99	30.45	43.44	-10.56	54.00	308	124	Average
3		2411.375	71.58	30.49	102.07	N/A	N/A	308	124	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

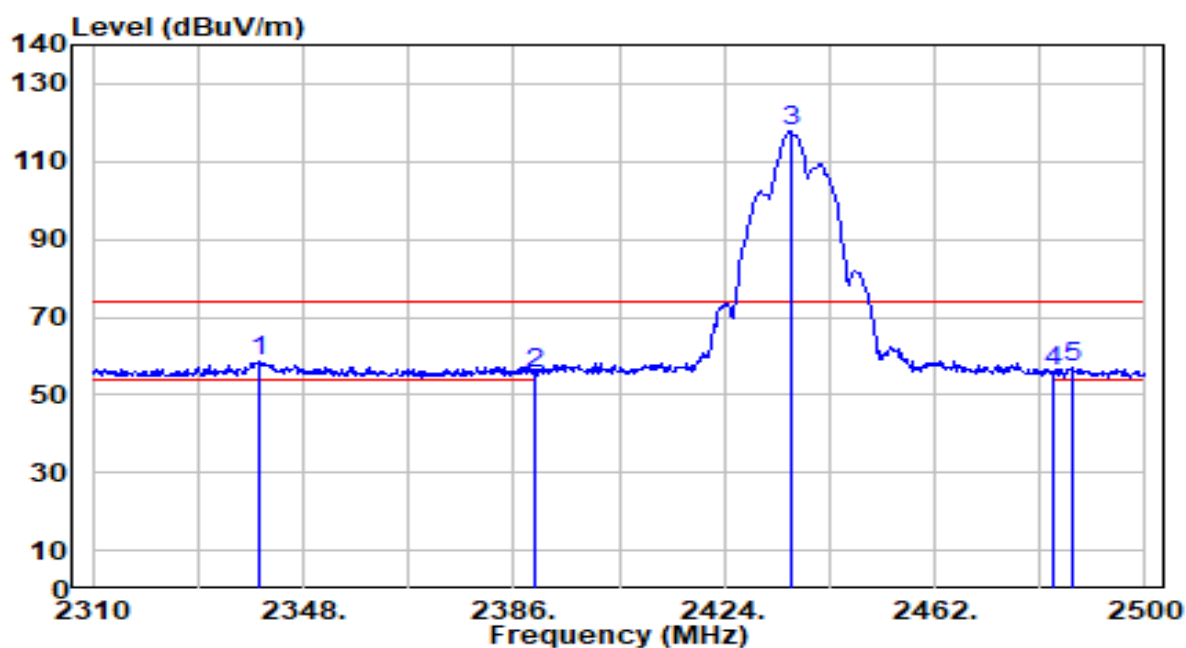


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.210	28.21	30.31	58.51	-15.49	74.00	195	140	Peak
2		2390.000	25.24	30.45	55.69	-18.31	74.00	195	140	Peak
3		2435.970	87.31	30.52	117.83	N/A	N/A	195	140	Peak
4		2483.500	25.21	30.59	55.80	-18.20	74.00	195	140	Peak
5		2486.700	26.50	30.59	57.09	-16.91	74.00	195	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

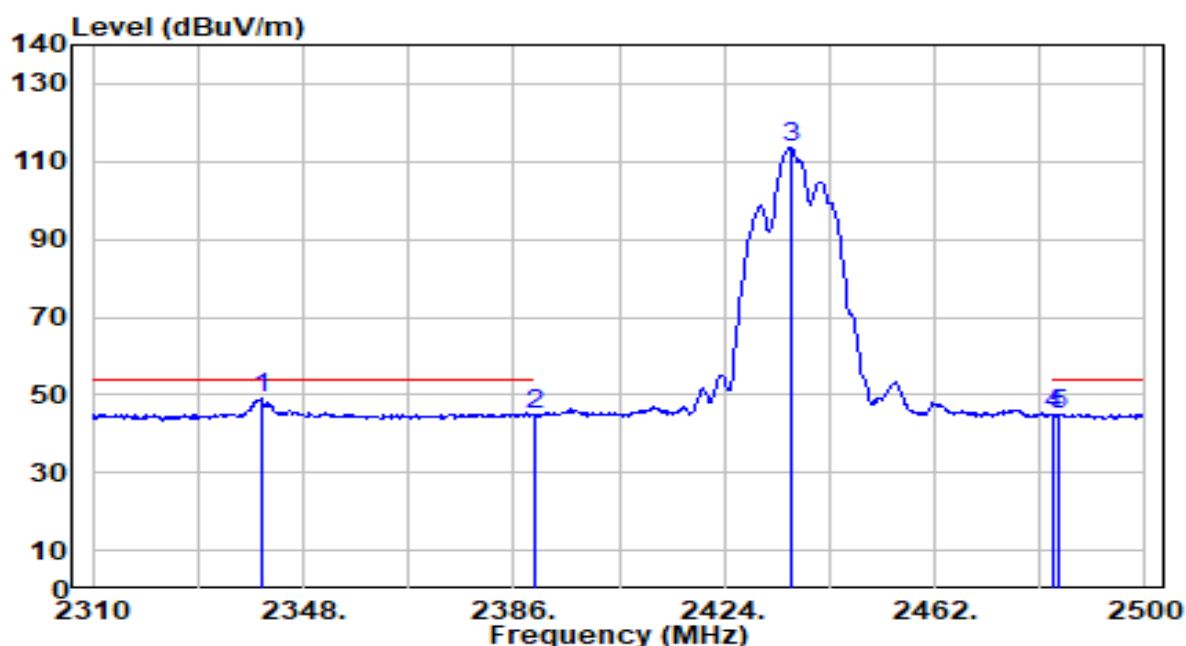


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.400	18.77	30.31	49.07	-4.93	54.00	195	140	Average
2		2390.000	14.54	30.45	44.99	-9.01	54.00	195	140	Average
3		2435.970	83.11	30.52	113.63	N/A	N/A	195	140	Average
4		2483.500	14.46	30.59	45.05	-8.95	54.00	195	140	Average
5		2484.610	14.46	30.59	45.05	-8.95	54.00	195	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

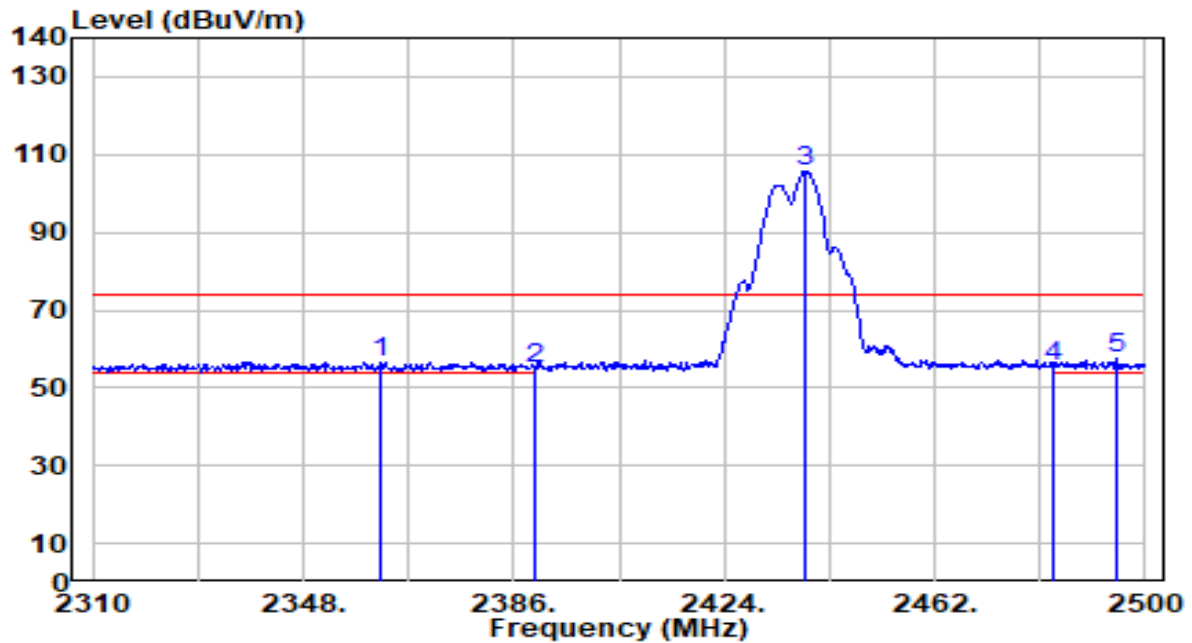


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2361.870	26.37	30.37	56.74	-17.26	74.00	297	102	Peak
2	2390.000	24.71	30.45	55.16	-18.84	74.00	297	102	Peak
3	2438.630	75.29	30.53	105.81	N/A	N/A	297	102	Peak
4	2483.500	24.84	30.59	55.43	-18.57	74.00	297	102	Peak
5	* 2494.680	27.04	30.60	57.65	-16.35	74.00	297	102	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

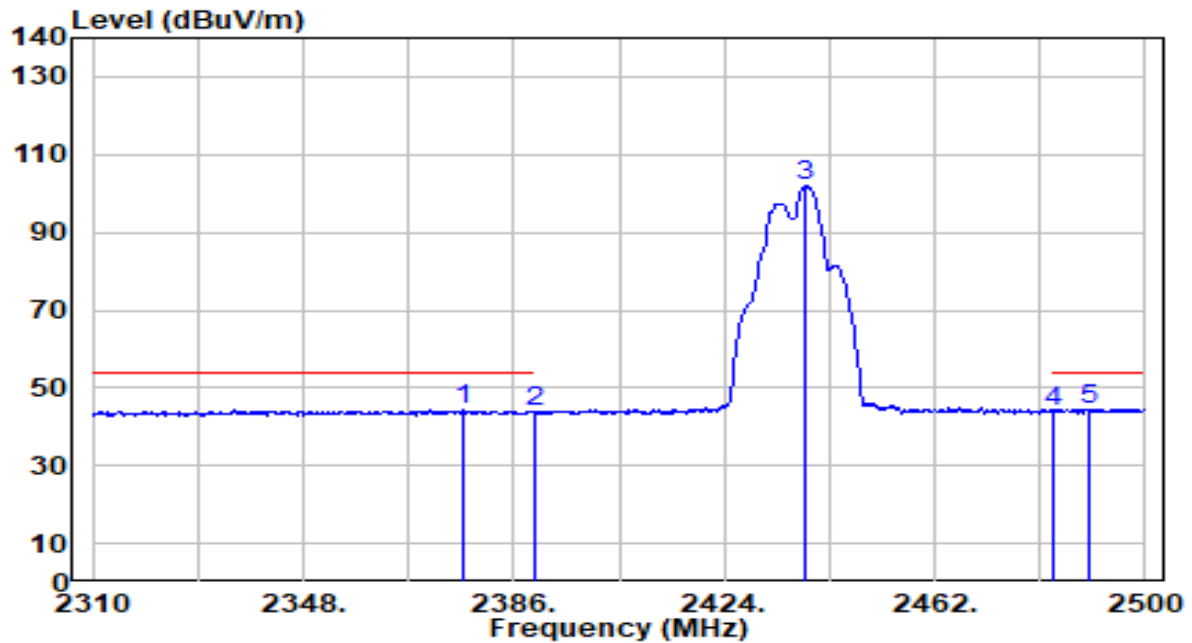


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2377.070	13.80	30.41	44.21	-9.79	54.00	297	102	Average
2		2390.000	13.50	30.45	43.95	-10.05	54.00	297	102	Average
3		2438.820	71.29	30.53	101.82	N/A	N/A	297	102	Average
4		2483.500	13.52	30.59	44.11	-9.89	54.00	297	102	Average
5	*	2489.930	14.03	30.60	44.63	-9.37	54.00	297	102	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

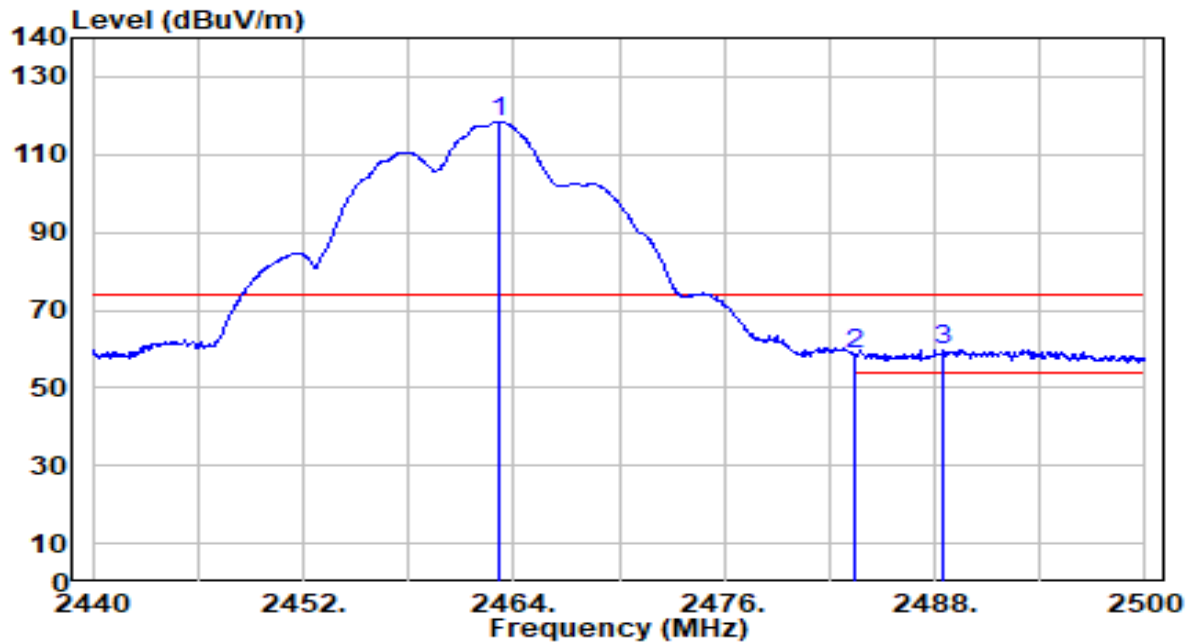


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.100	87.96	30.56	118.53	N/A	N/A	170	6	Peak
2	2483.500	28.10	30.59	58.68	-15.32	74.00	170	6	Peak
3	* 2488.480	29.23	30.59	59.82	-14.18	74.00	170	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

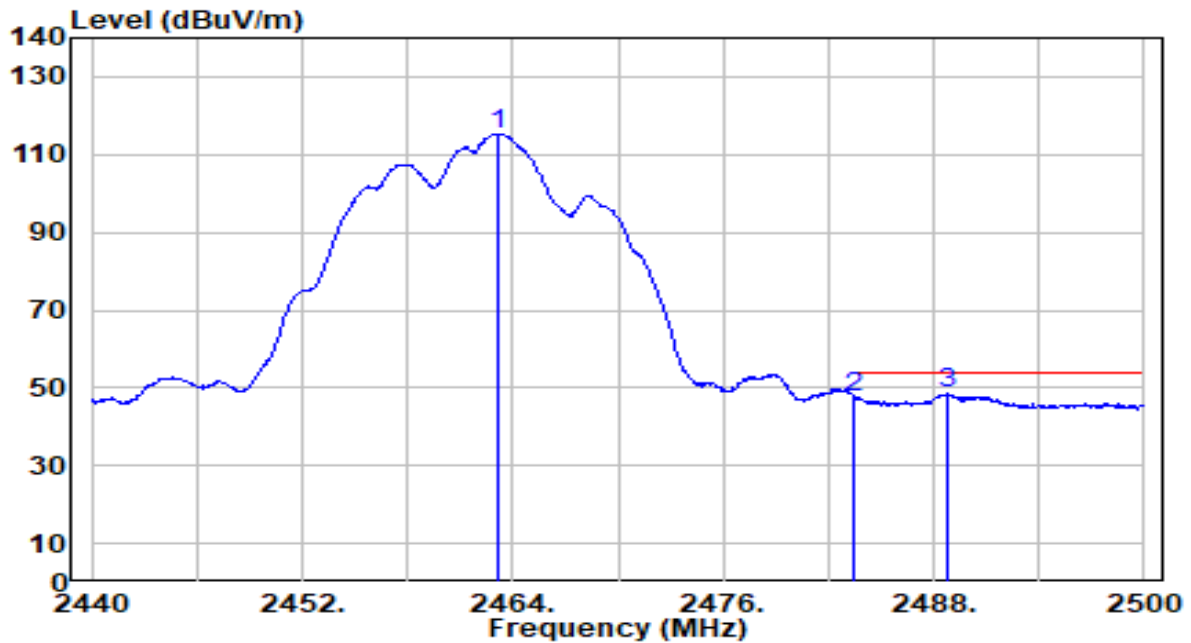


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.100	84.81	30.56	115.37	N/A	N/A	170	6	Average
2		2483.500	17.15	30.59	47.74	-6.26	54.00	170	6	Average
3	*	2488.780	17.86	30.59	48.45	-5.55	54.00	170	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

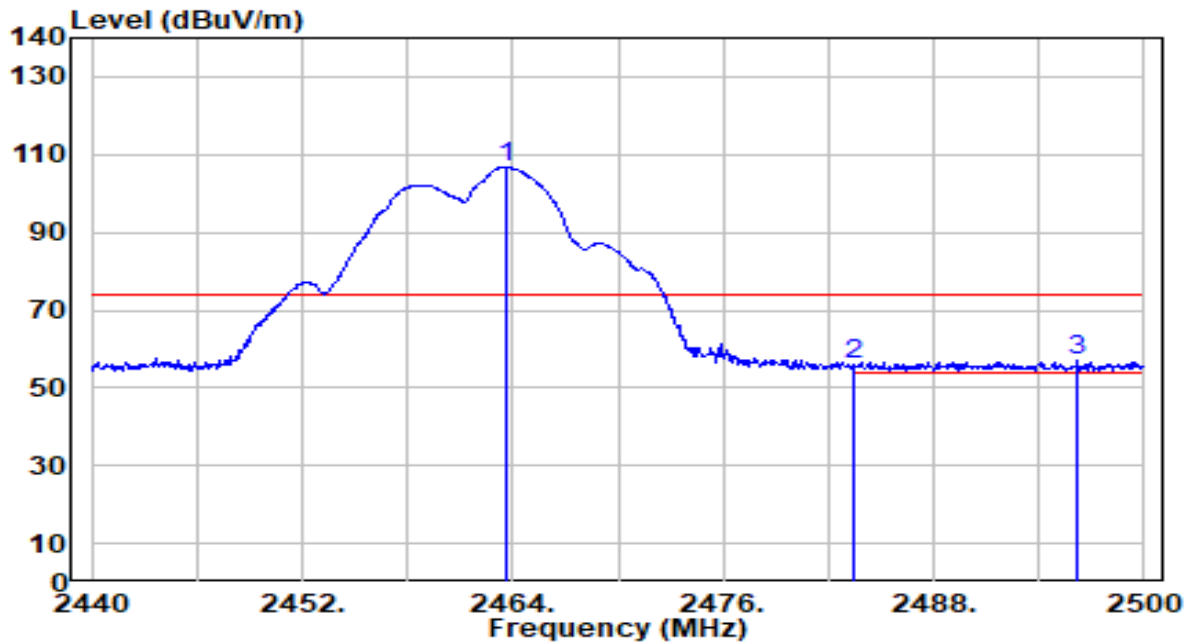


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.580	76.19	30.56	106.75	N/A	N/A	282	103	Peak
2	2483.500	25.18	30.59	55.77	-18.23	74.00	282	103	Peak
3	* 2496.220	26.23	30.60	56.83	-17.17	74.00	282	103	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

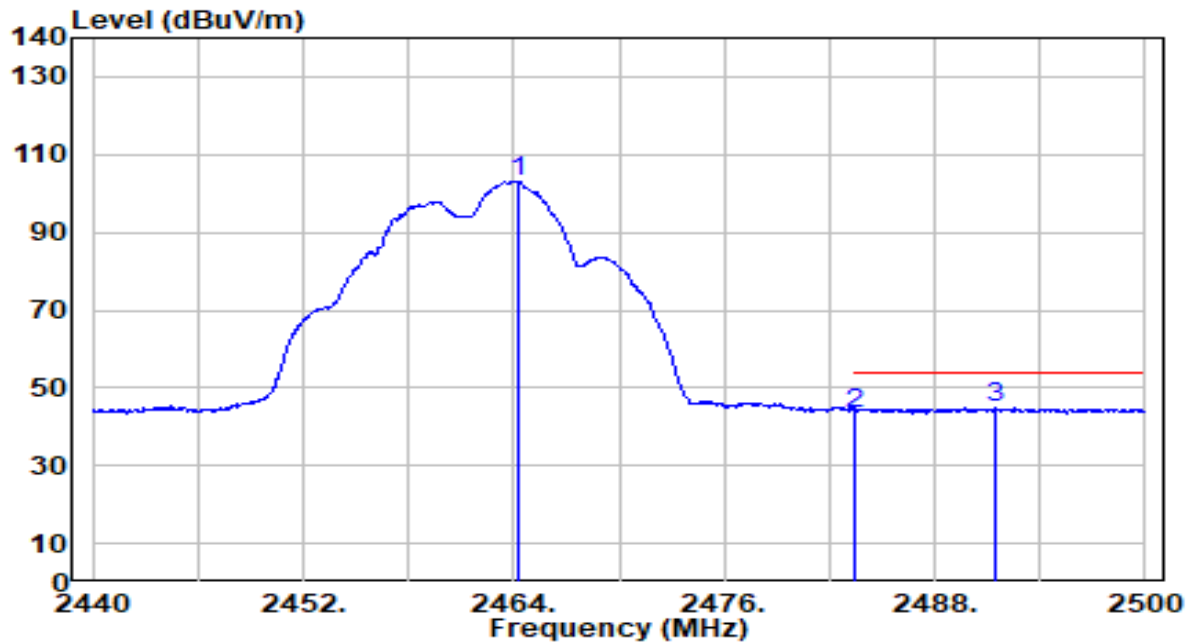


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2464.300	72.55	30.56	103.11	N/A	N/A	282	103	Average
2		2483.500	12.95	30.59	43.54	-10.46	54.00	282	103	Average
3	*	2491.420	14.19	30.60	44.79	-9.21	54.00	282	103	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

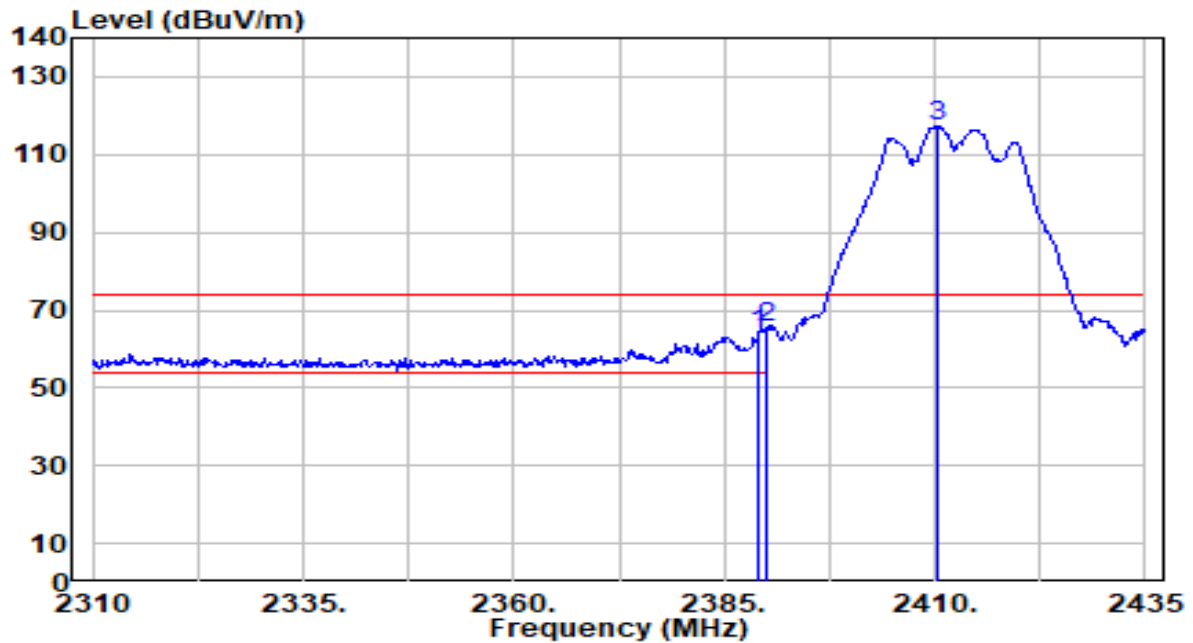


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	33.63	30.44	64.08	-9.92	74.00	190	40	Peak
2	*	2390.000	35.20	30.45	65.65	-8.35	74.00	190	40	Peak
3		2410.375	86.89	30.49	117.38	N/A	N/A	190	40	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

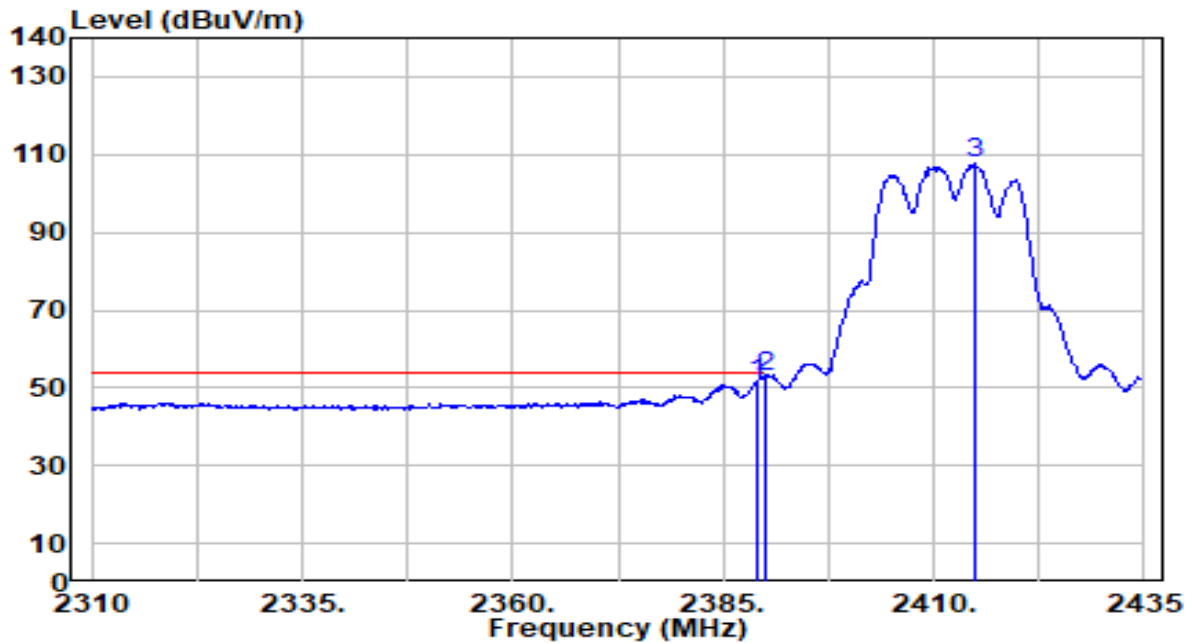


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	21.00	30.44	51.44	-2.56	54.00	190	40	Average
2	*	2390.000	23.41	30.45	53.86	-0.14	54.00	190	40	Average
3		2415.000	77.02	30.50	107.51	N/A	N/A	190	40	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

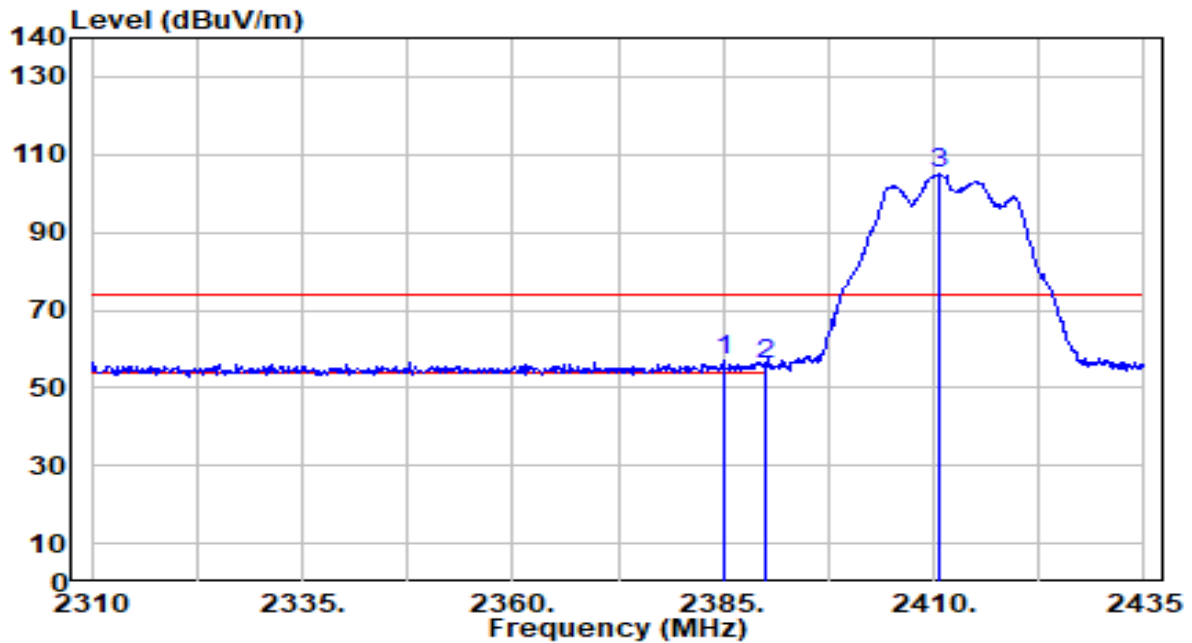


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.000	26.52	30.43	56.95	-17.05	74.00	308	124	Peak
2		2390.000	25.56	30.45	56.01	-17.99	74.00	308	124	Peak
3		2410.750	74.45	30.49	104.94	N/A	N/A	308	124	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

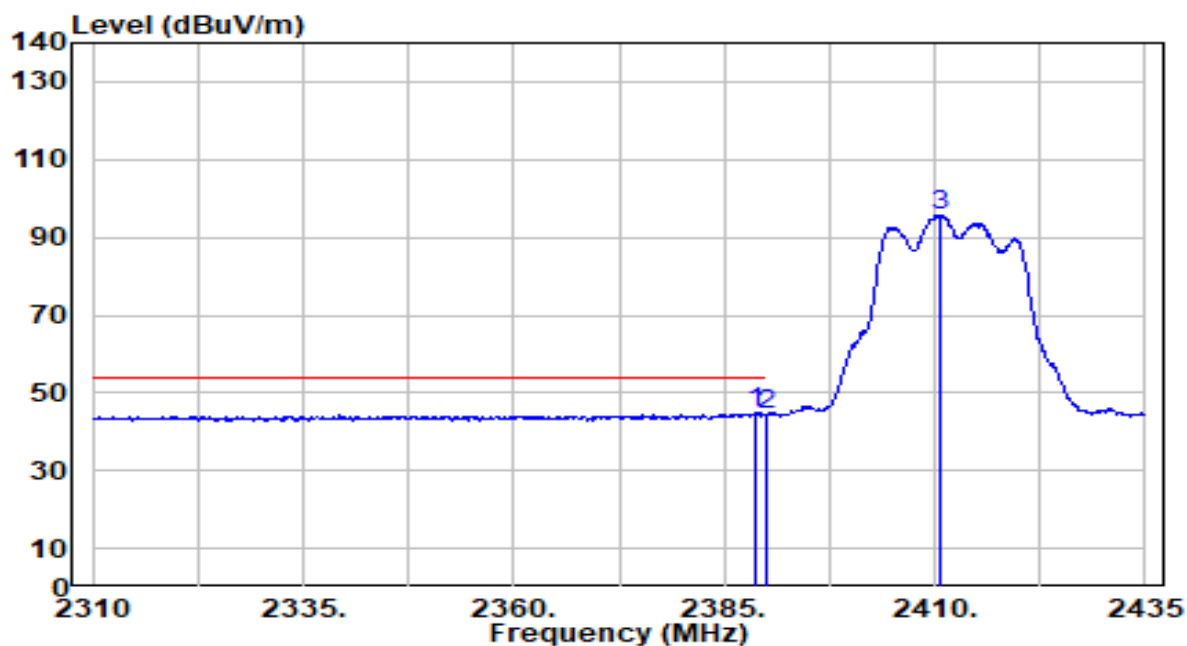


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.625	14.21	30.44	44.65	-9.35	54.00	308	124	Average
2		2390.000	13.74	30.45	44.19	-9.81	54.00	308	124	Average
3		2410.750	65.34	30.49	95.83	N/A	N/A	308	124	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

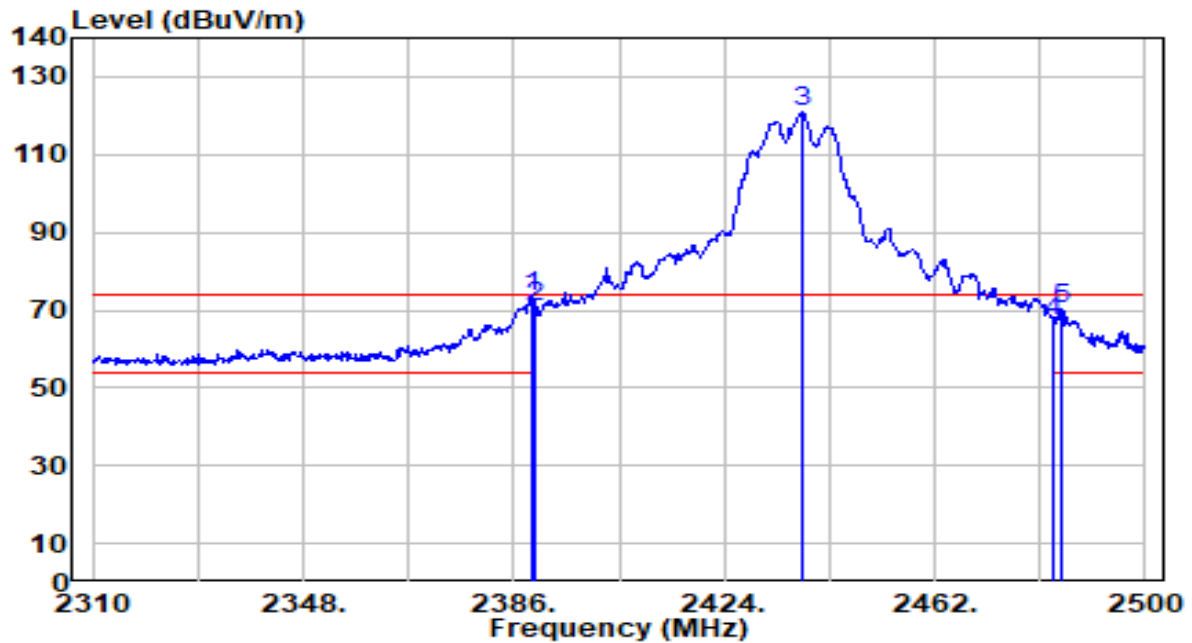


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.420	42.92	30.45	73.36	-0.64	74.00	195	140	Peak
2		2390.000	40.61	30.45	71.06	-2.94	74.00	195	140	Peak
3		2438.060	90.28	30.53	120.80	N/A	N/A	195	140	Peak
4		2483.500	36.60	30.59	67.18	-6.82	74.00	195	140	Peak
5		2484.990	39.58	30.59	70.17	-3.83	74.00	195	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

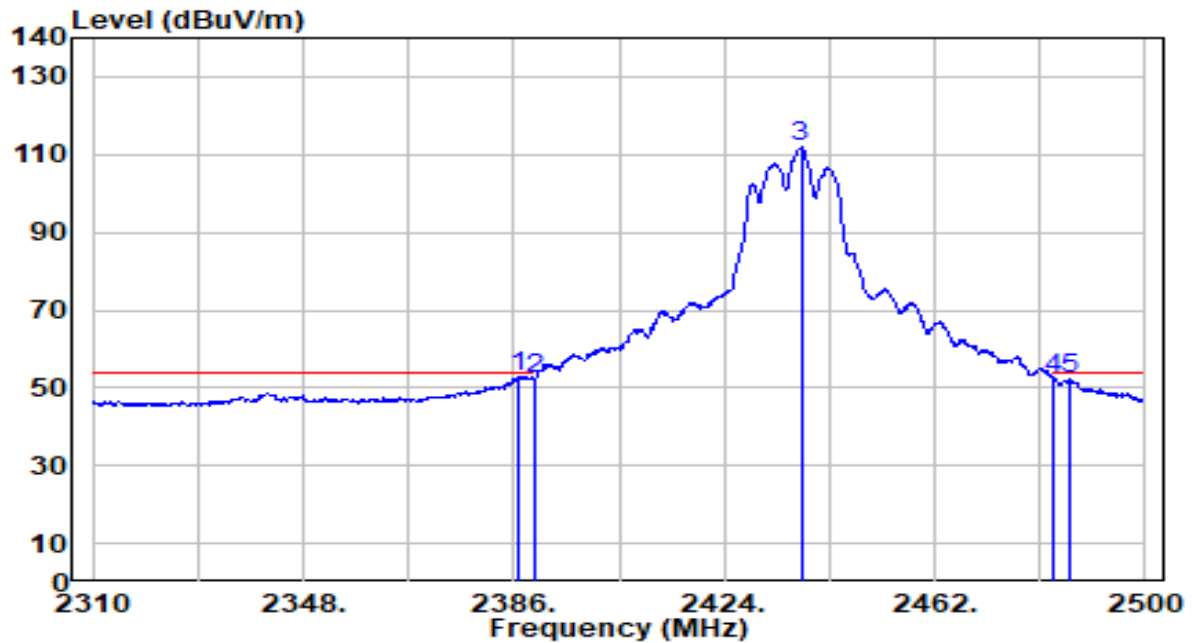


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.950	22.39	30.44	52.83	-1.17	54.00	195	140	Average
2		2390.000	21.85	30.45	52.30	-1.70	54.00	195	140	Average
3		2437.870	81.50	30.53	112.03	N/A	N/A	195	140	Average
4		2483.500	21.71	30.59	52.29	-1.71	54.00	195	140	Average
5		2486.320	21.70	30.59	52.29	-1.71	54.00	195	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

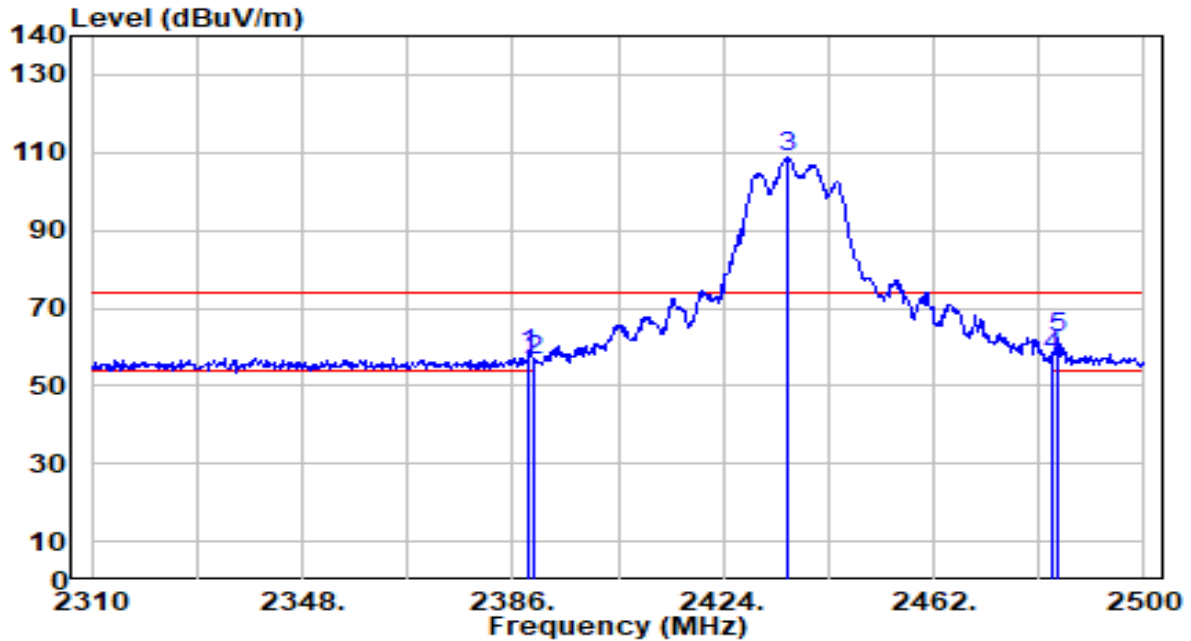


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	27.86	30.44	58.30	-15.70	74.00	297	102	Peak
2	2390.000	25.82	30.45	56.27	-17.73	74.00	297	102	Peak
3	2435.780	78.08	30.52	108.61	N/A	N/A	297	102	Peak
4	2483.500	26.83	30.59	57.41	-16.59	74.00	297	102	Peak
5	* 2484.420	31.50	30.59	62.09	-11.91	74.00	297	102	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

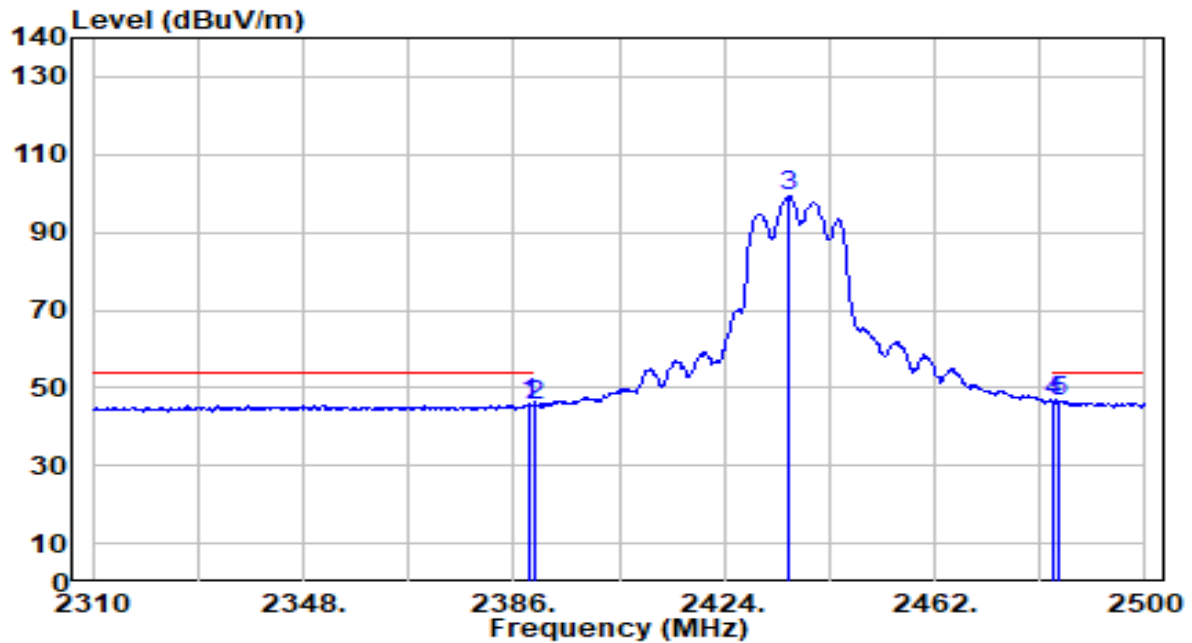


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	15.30	30.44	45.75	-8.25	54.00	297	102	Average
2	2390.000	14.87	30.45	45.32	-8.68	54.00	297	102	Average
3	2435.590	68.64	30.52	99.16	N/A	N/A	297	102	Average
4	2483.500	15.70	30.59	46.29	-7.71	54.00	297	102	Average
5	* 2484.230	16.00	30.59	46.59	-7.41	54.00	297	102	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

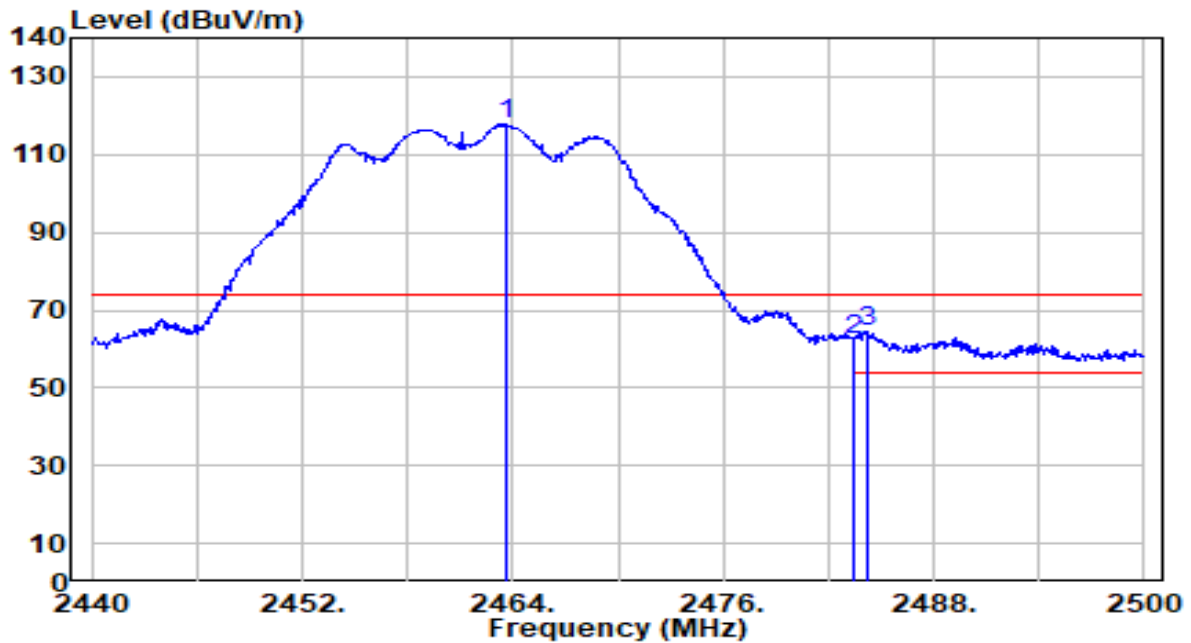


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.580	87.40	30.56	117.96	N/A	N/A	170	6	Peak
2	2483.500	31.76	30.59	62.34	-11.66	74.00	170	6	Peak
3	* 2484.160	34.07	30.59	64.66	-9.34	74.00	170	6	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

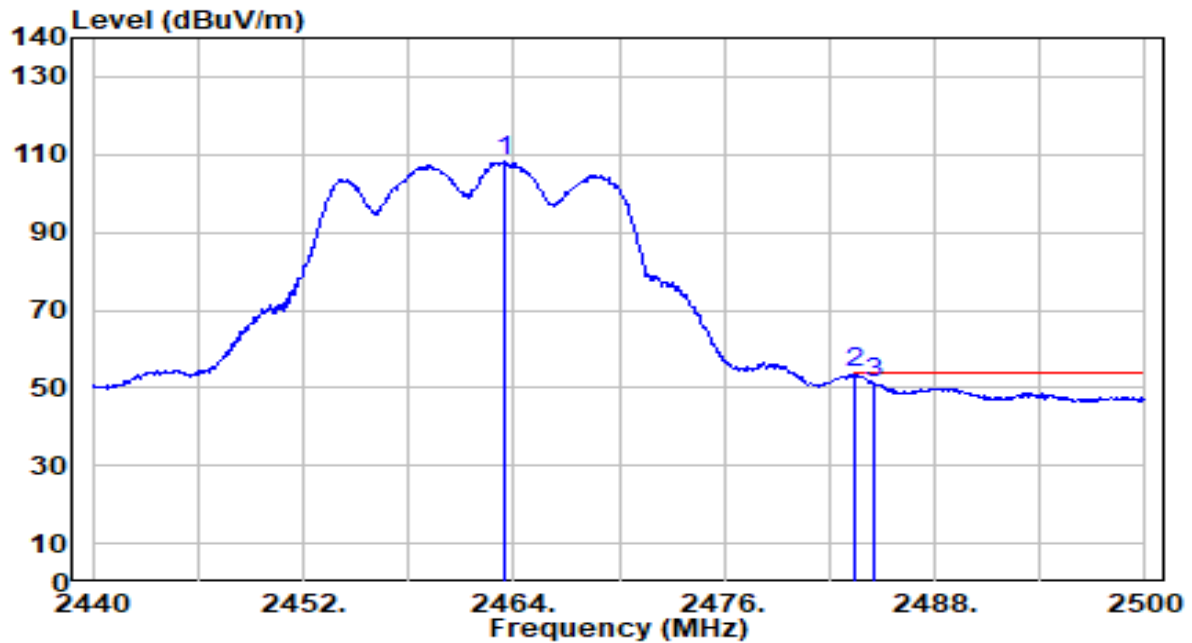


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.460	77.77	30.56	108.34	N/A	N/A	170	6	Average
2	*	2483.500	23.15	30.59	53.74	-0.26	54.00	170	6	Average
3		2484.520	20.63	30.59	51.22	-2.78	54.00	170	6	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

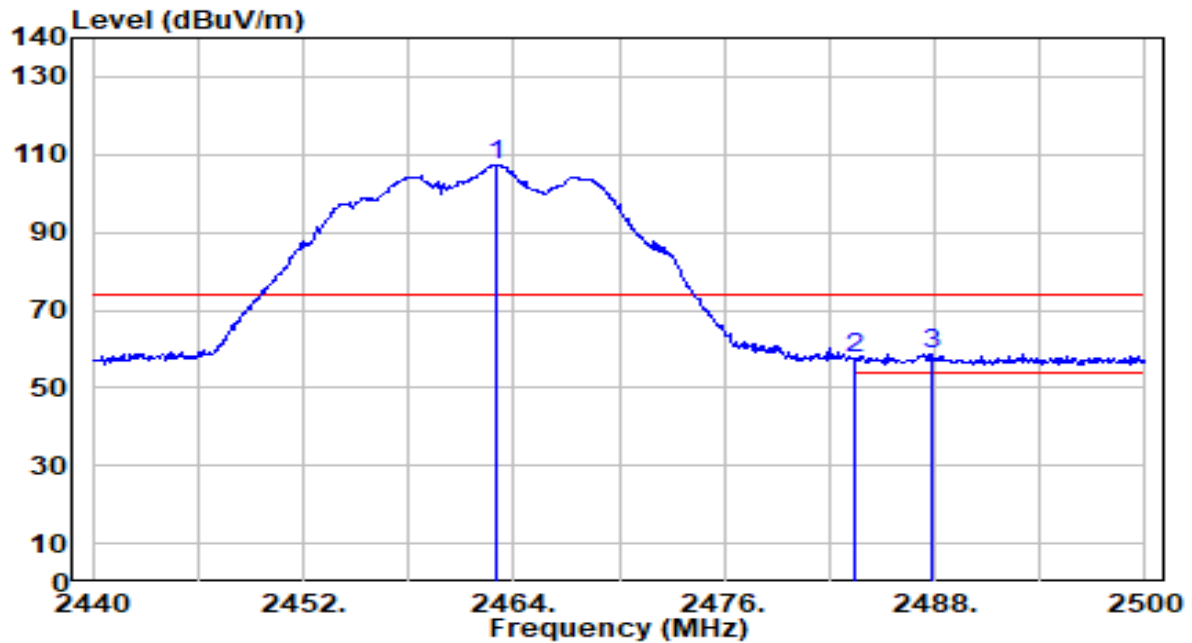


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.040	76.83	30.56	107.39	N/A	N/A	282	103	Peak
2	2483.500	26.97	30.59	57.55	-16.45	74.00	282	103	Peak
3	* 2487.880	28.05	30.59	58.64	-15.36	74.00	282	103	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

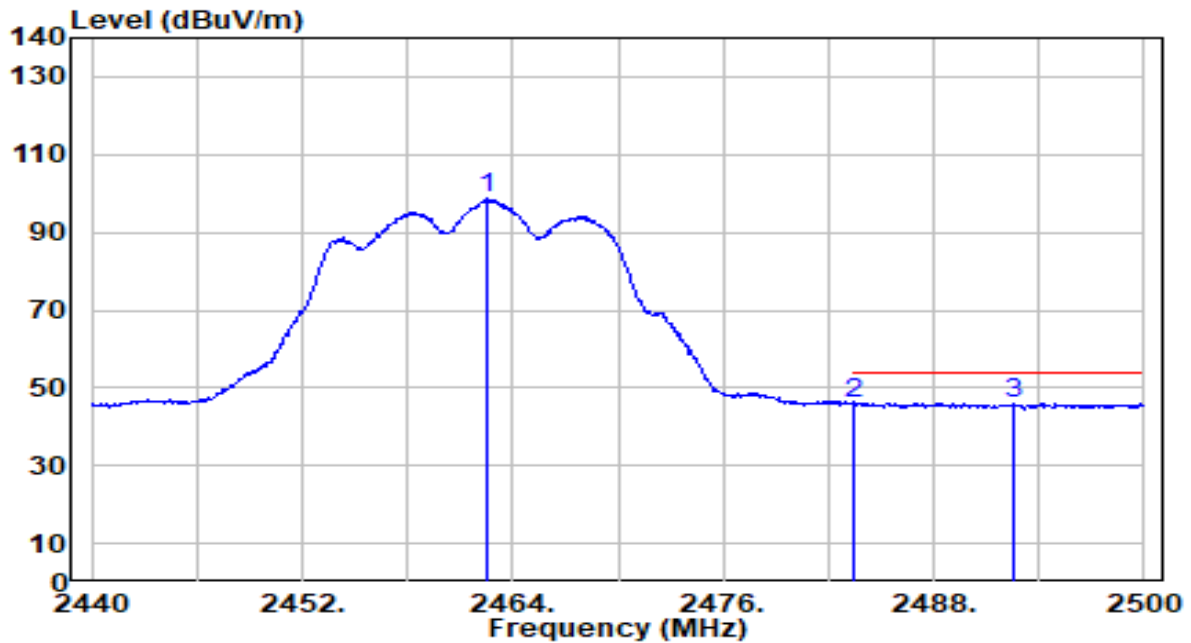


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.560	67.98	30.56	98.54	N/A	N/A	282	103	Average
2		2483.500	15.36	30.59	45.95	-8.05	54.00	282	103	Average
3	*	2492.560	15.51	30.60	46.11	-7.89	54.00	282	103	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

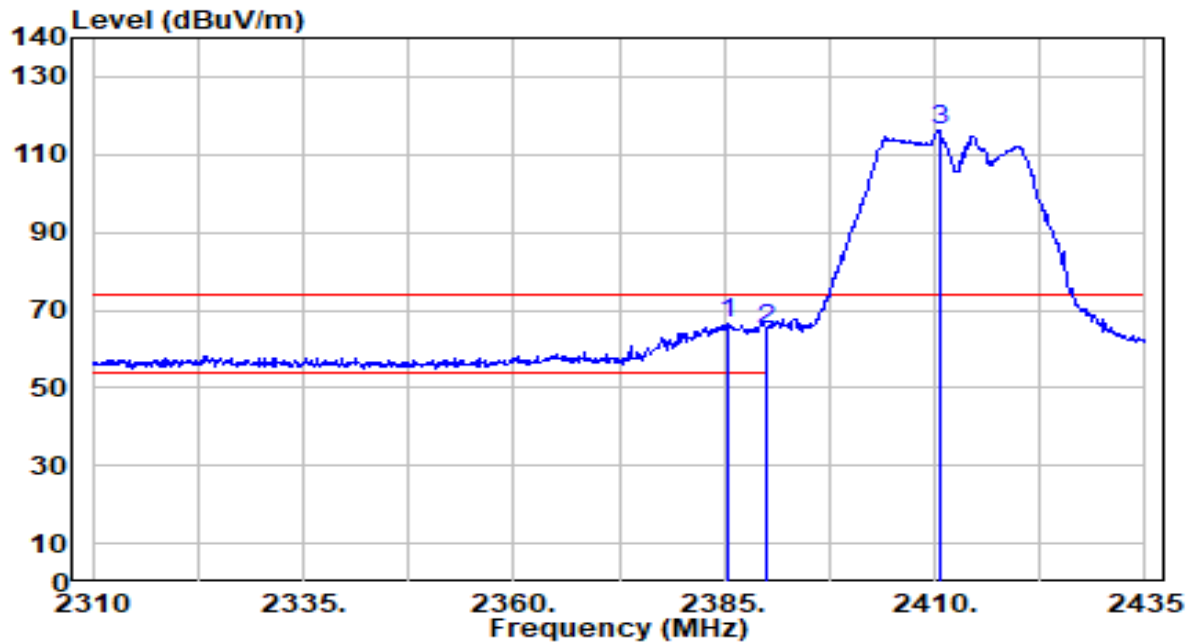


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.375	36.11	30.43	66.54	-7.46	74.00	190	40	Peak
2		2390.000	34.42	30.45	64.87	-9.13	74.00	190	40	Peak
3		2410.500	85.96	30.49	116.45	N/A	N/A	190	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

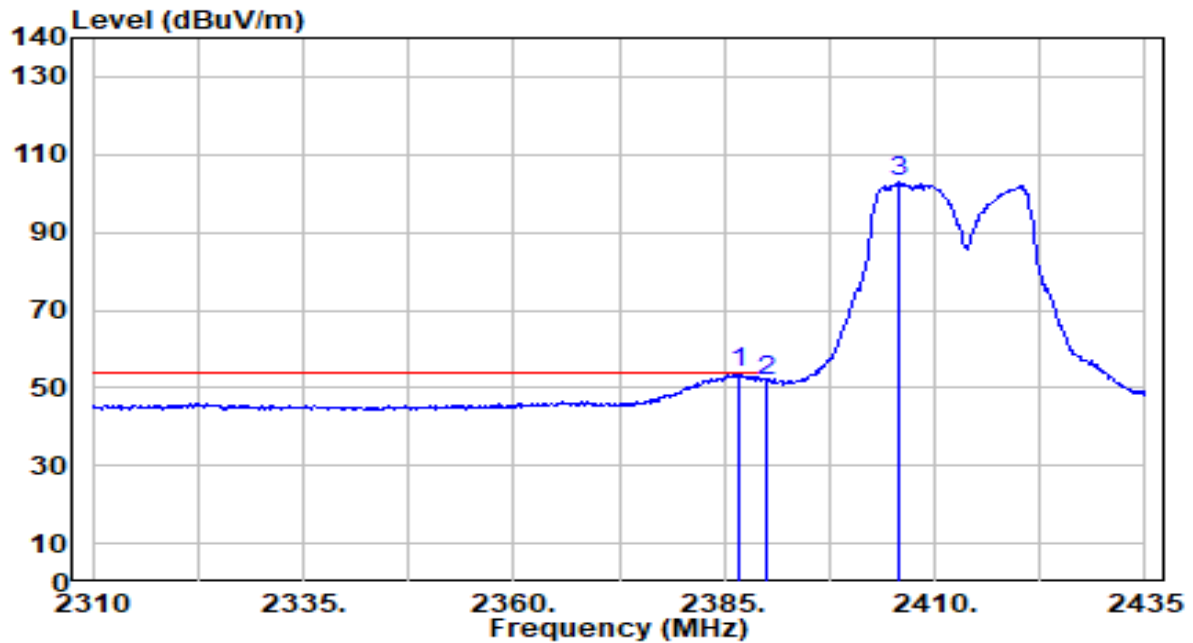


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.625	23.34	30.44	53.78	-0.22	54.00	190	40	Average
2		2390.000	21.54	30.45	51.99	-2.01	54.00	190	40	Average
3		2405.875	72.36	30.48	102.84	N/A	N/A	190	40	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

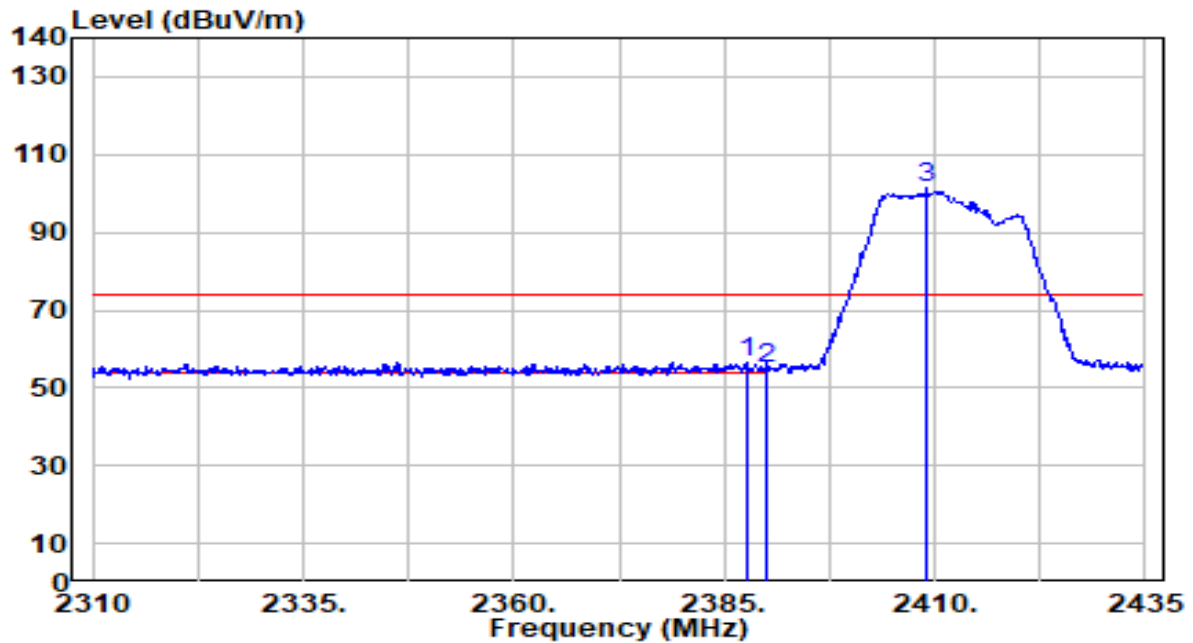


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.875	26.00	30.44	56.44	-17.56	74.00	308	124	Peak
2		2390.000	24.69	30.45	55.14	-18.86	74.00	308	124	Peak
3		2409.125	70.71	30.49	101.20	N/A	N/A	308	124	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

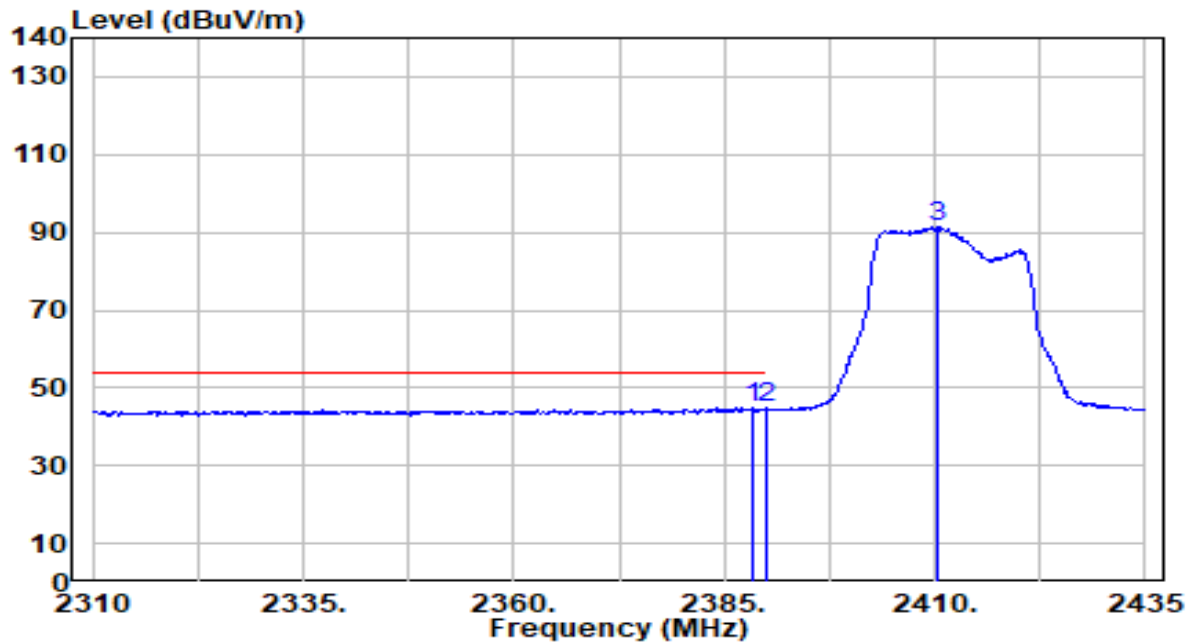


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.250	14.54	30.44	44.98	-9.02	54.00	308	124	Average
2		2390.000	14.42	30.45	44.87	-9.13	54.00	308	124	Average
3		2410.375	61.05	30.49	91.54	N/A	N/A	308	124	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

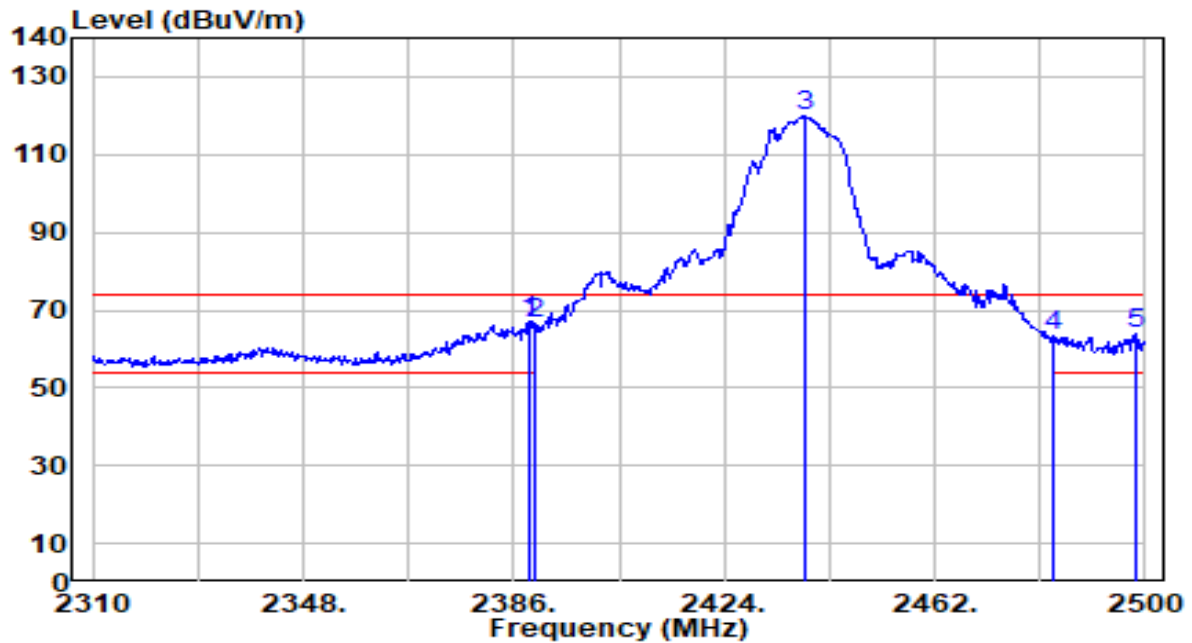


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.040	36.42	30.44	66.87	-7.13	74.00	195	140	Peak
2		2390.000	35.89	30.45	66.34	-7.66	74.00	195	140	Peak
3	*	2438.440	89.35	30.53	119.88	N/A	N/A	195	140	Peak
4		2483.500	33.06	30.59	63.65	-10.35	74.00	195	140	Peak
5		2498.100	33.11	30.61	63.72	-10.28	74.00	195	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

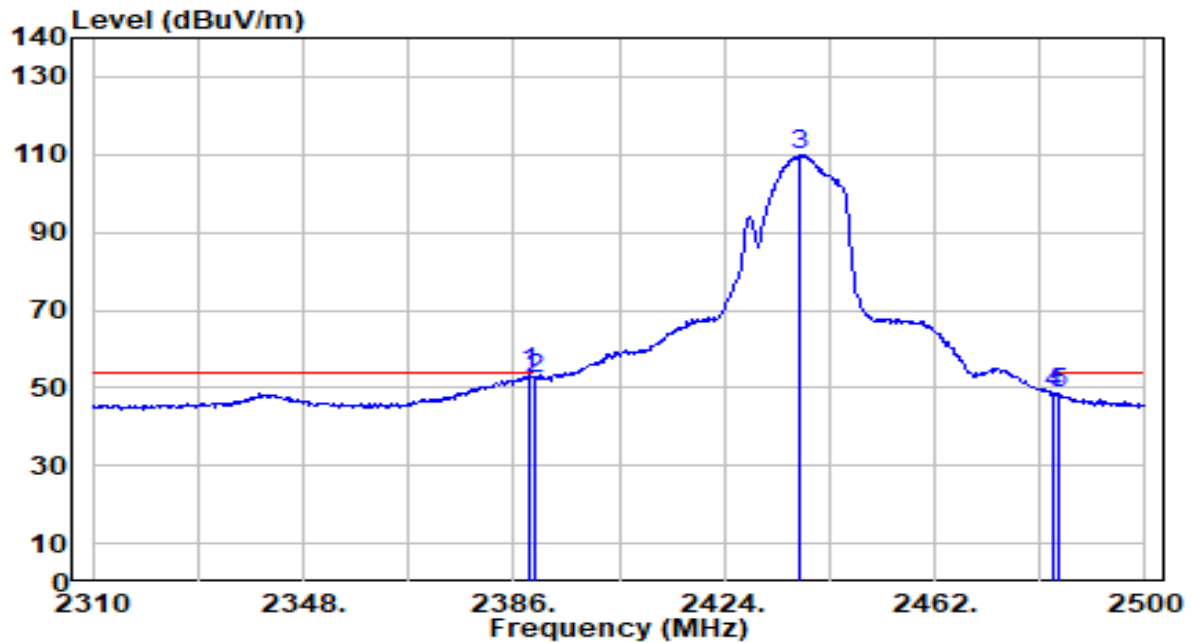


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.040	23.29	30.44	53.73	-0.27	54.00	195	140	Average
2		2390.000	21.67	30.45	52.12	-1.88	54.00	195	140	Average
3		2437.680	79.31	30.53	109.84	N/A	N/A	195	140	Average
4		2483.500	17.90	30.59	48.49	-5.51	54.00	195	140	Average
5		2484.230	17.77	30.59	48.36	-5.64	54.00	195	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

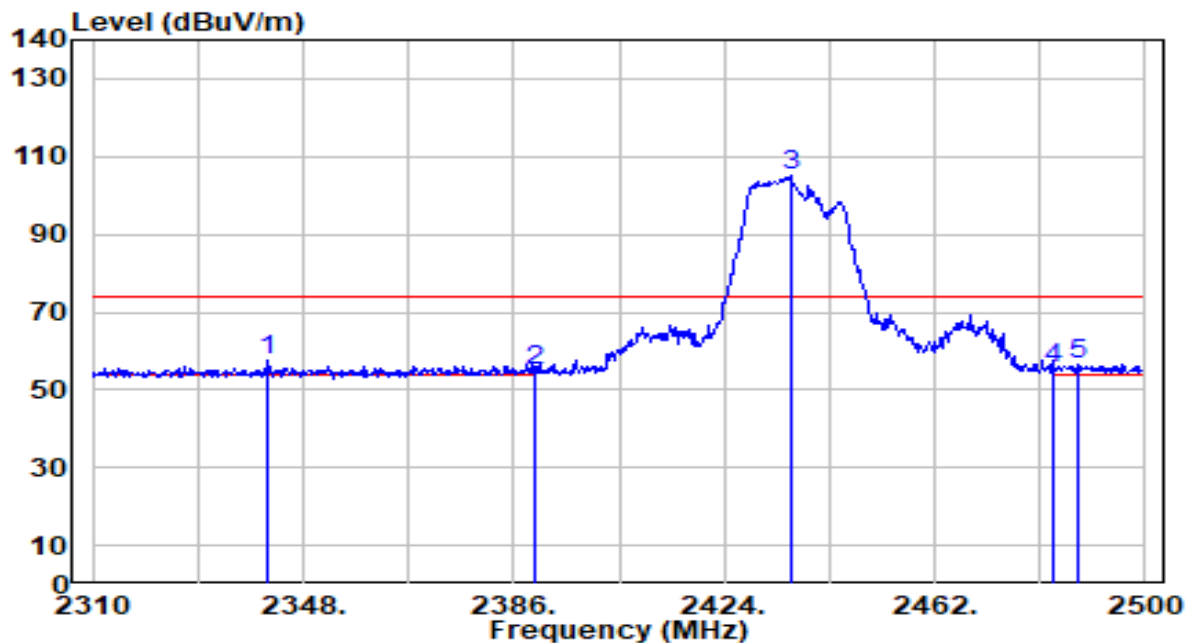


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2341.730	27.15	30.31	57.46	-16.54	74.00	297	102	Peak
2		2390.000	24.58	30.45	55.03	-18.97	74.00	297	102	Peak
3		2435.970	74.78	30.52	105.30	N/A	N/A	297	102	Peak
4		2483.500	24.77	30.59	55.36	-18.64	74.00	297	102	Peak
5		2488.030	25.72	30.59	56.31	-17.69	74.00	297	102	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

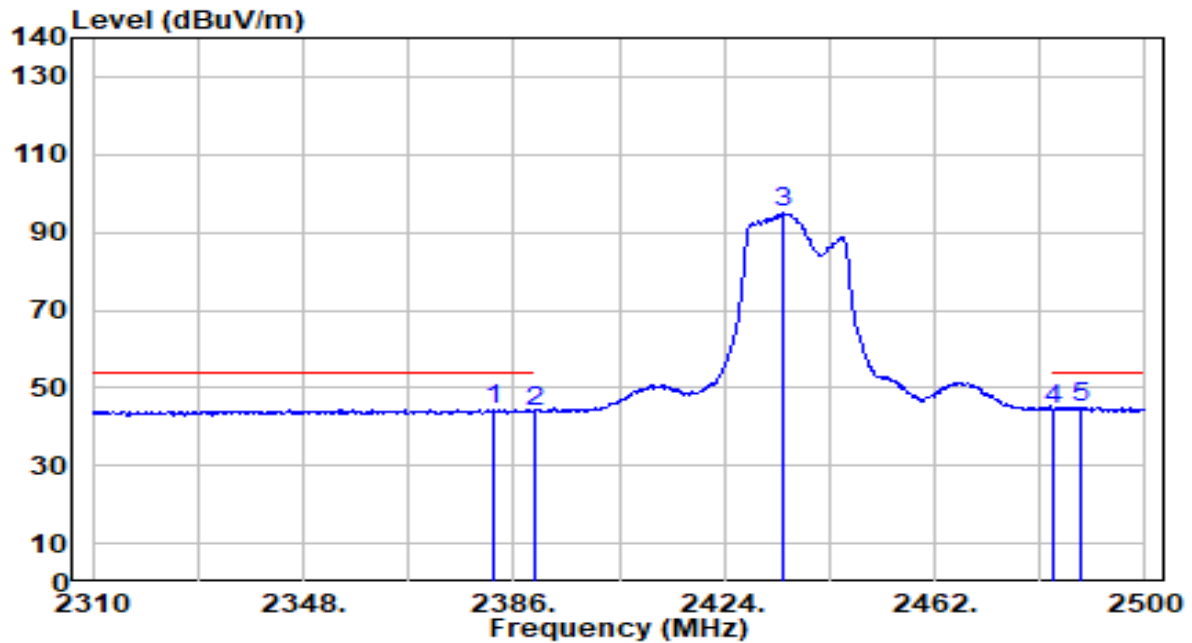


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2382.580	14.12	30.43	44.55	-9.45	54.00	297	102	Average
2		2390.000	13.61	30.45	44.05	-9.95	54.00	297	102	Average
3		2434.640	64.72	30.52	95.24	N/A	N/A	297	102	Average
4		2483.500	14.03	30.59	44.61	-9.39	54.00	297	102	Average
5	*	2488.410	14.44	30.59	45.04	-8.96	54.00	297	102	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

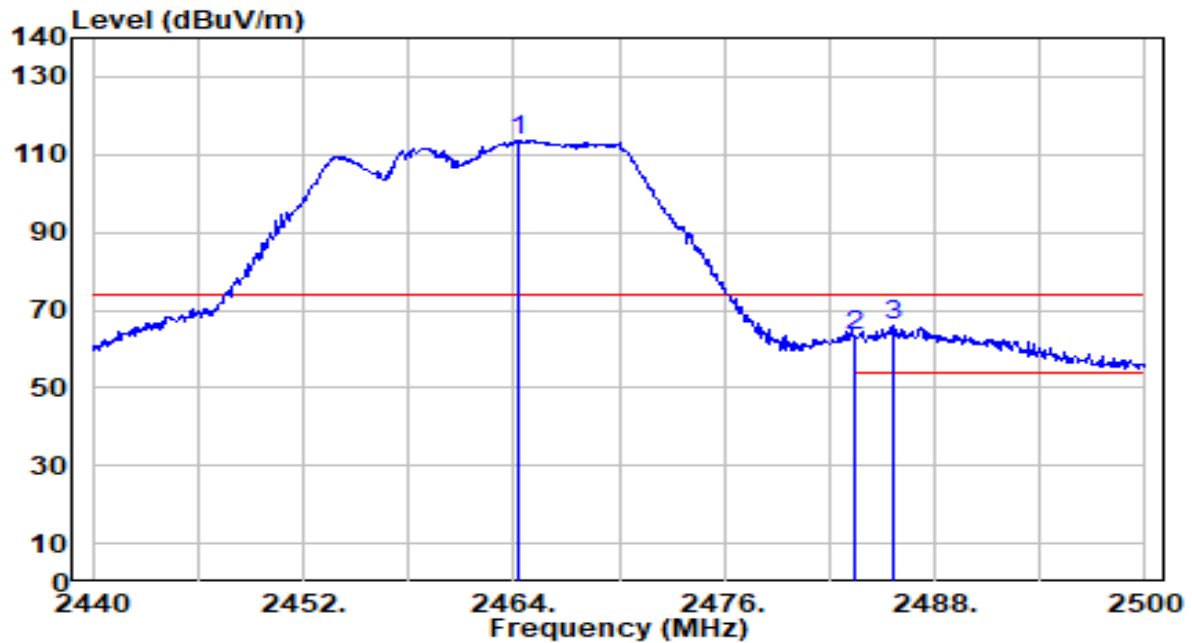


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.240	82.96	30.56	113.53	N/A	N/A	170	6	Peak
2	2483.500	32.70	30.59	63.29	-10.71	74.00	170	6	Peak
3	* 2485.600	35.19	30.59	65.78	-8.22	74.00	170	6	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

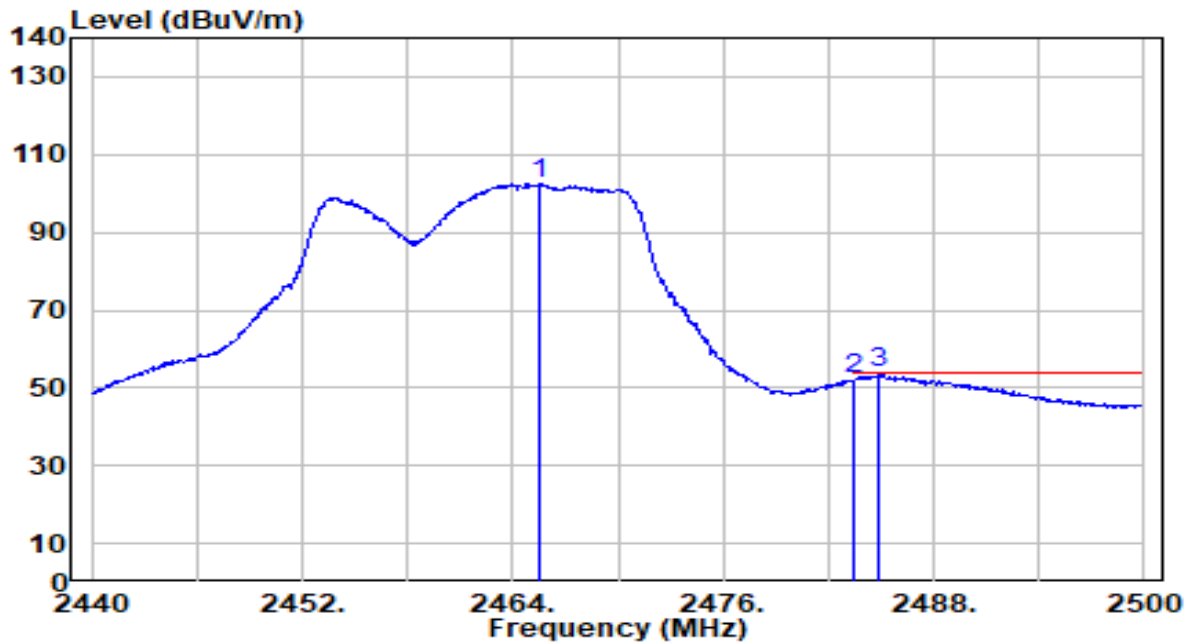


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.560	71.94	30.56	102.51	N/A	N/A	170	6	Average
2	2483.500	21.73	30.59	52.32	-1.68	54.00	170	6	Average
3	* 2484.880	23.15	30.59	53.74	-0.26	54.00	170	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

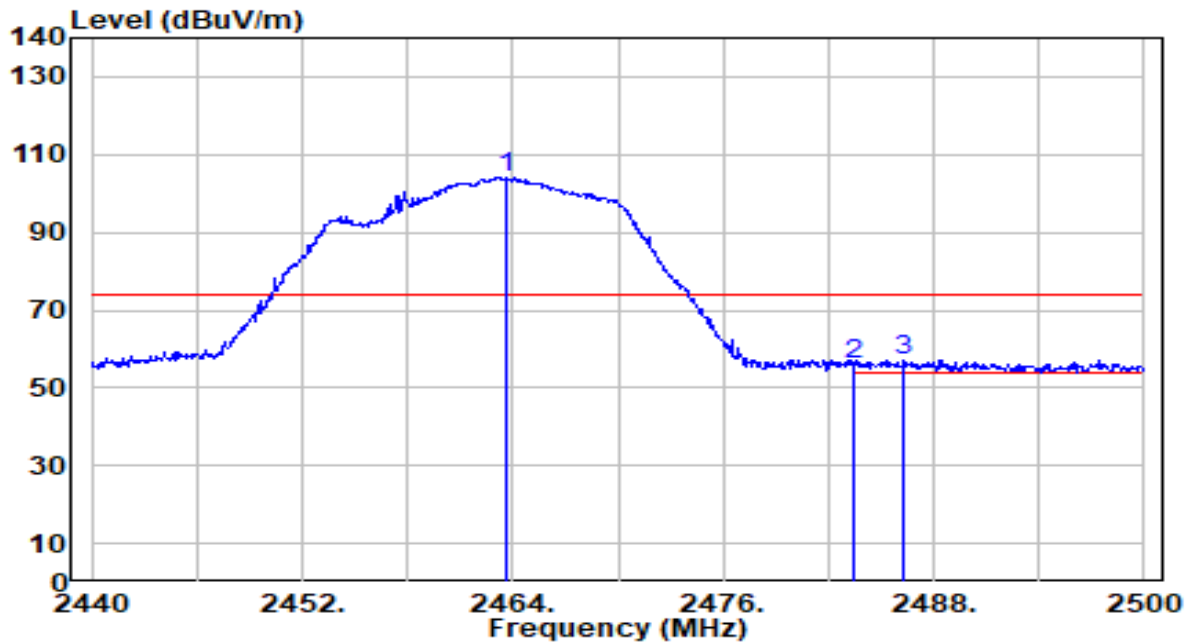


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.700	73.43	30.56	103.99	N/A	N/A	282	103	Peak
2	2483.500	25.38	30.59	55.97	-18.03	74.00	282	103	Peak
3	* 2486.320	26.63	30.59	57.23	-16.77	74.00	282	103	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

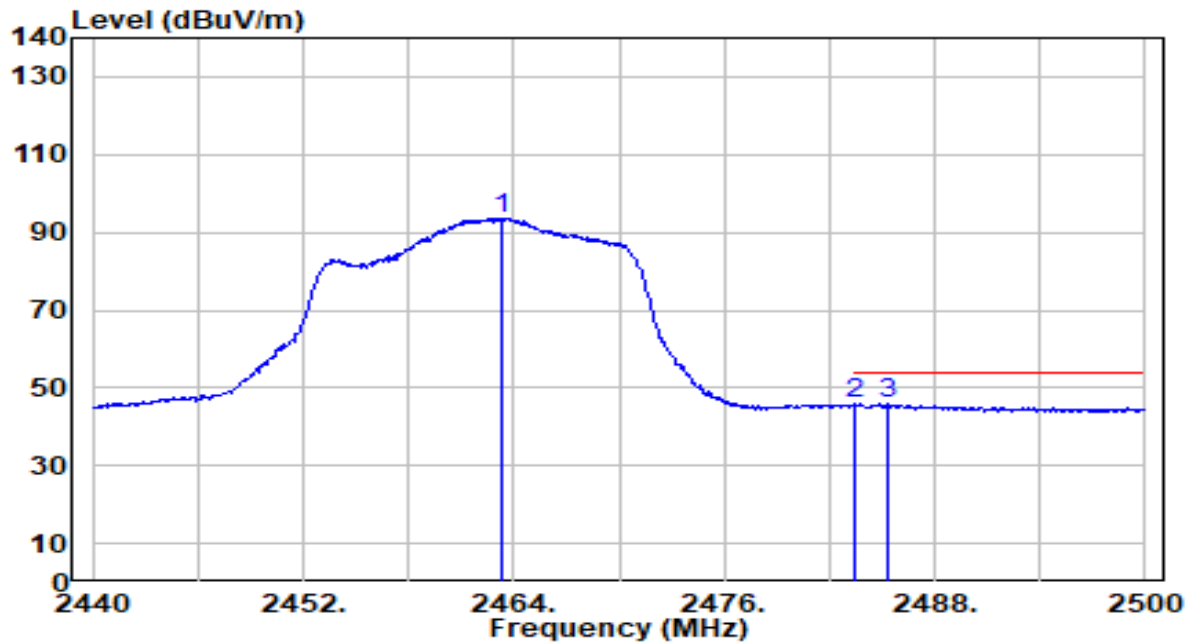


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.340	63.09	30.56	93.65	N/A	N/A	282	103	Average
2	2483.500	15.22	30.59	45.81	-8.19	54.00	282	103	Average
3	* 2485.300	15.28	30.59	45.87	-8.13	54.00	282	103	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

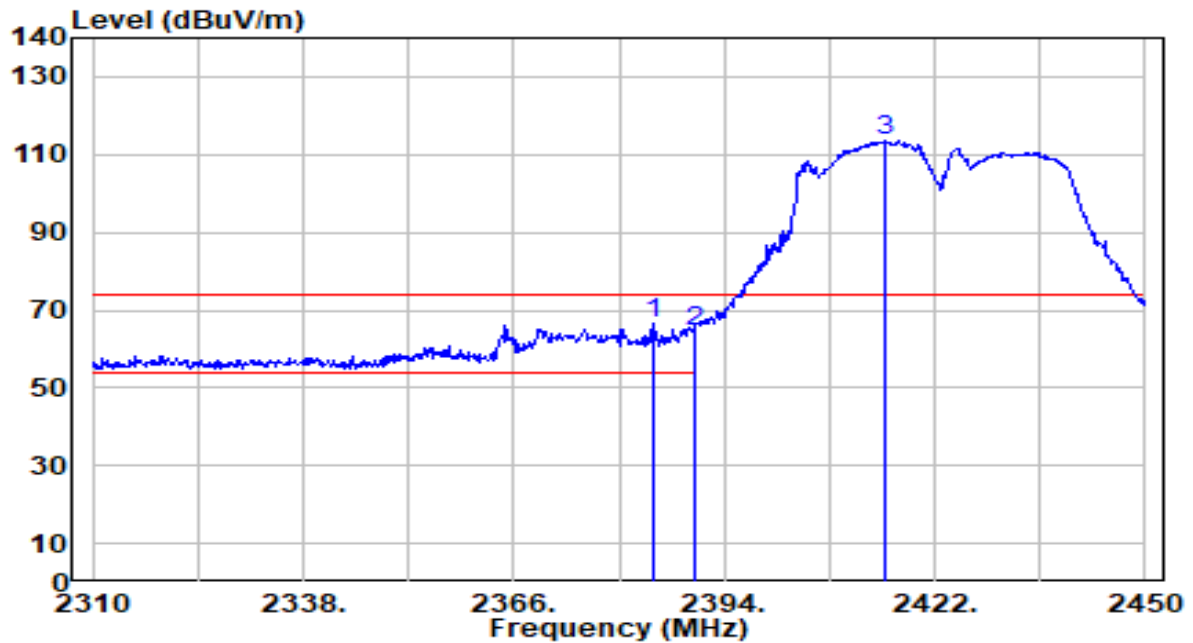


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.760	35.98	30.43	66.41	-7.59	74.00	190	40	Peak
2		2390.000	34.17	30.45	64.61	-9.39	74.00	190	40	Peak
3		2415.280	82.96	30.50	113.45	N/A	N/A	190	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

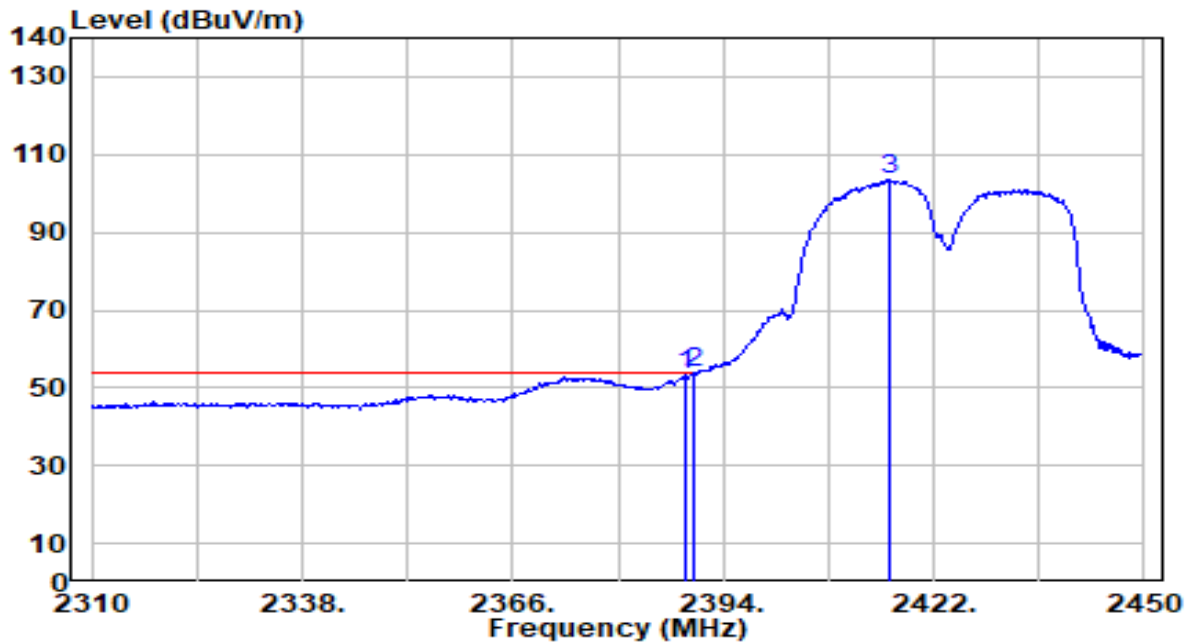


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.960	22.72	30.44	53.16	-0.84	54.00	190	40	Average
2	*	2390.000	23.31	30.45	53.76	-0.24	54.00	190	40	Average
3		2416.120	72.86	30.50	103.35	N/A	N/A	190	40	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

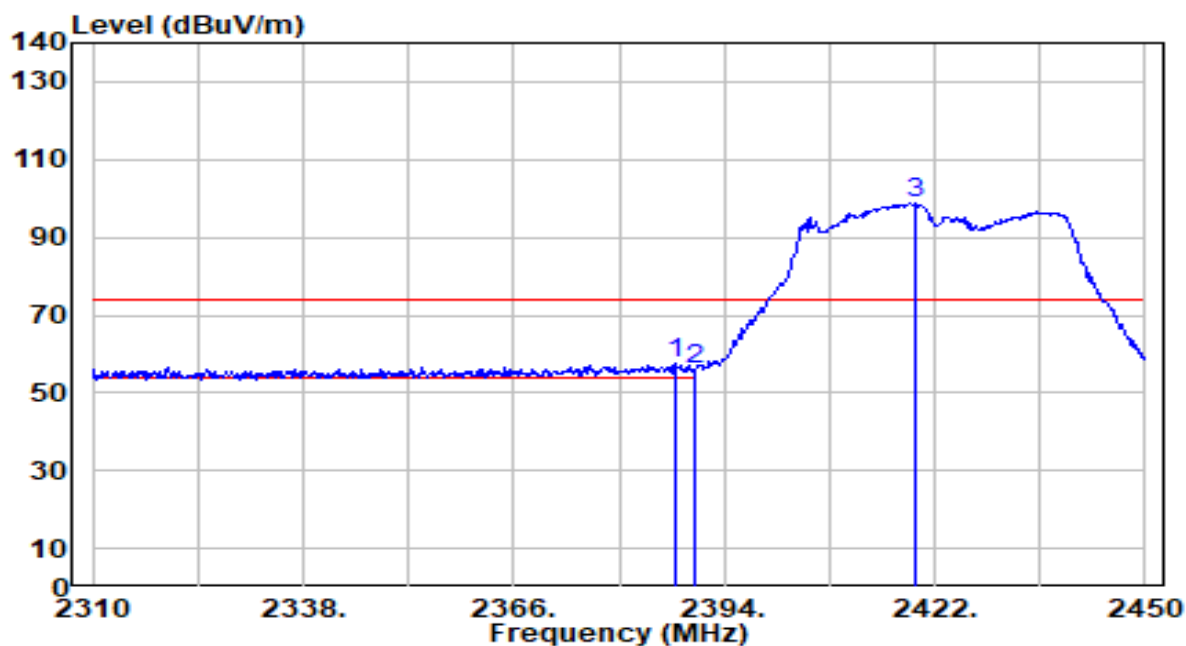


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.700	27.09	30.44	57.53	-16.47	74.00	308	124	Peak
2		2390.000	25.66	30.45	56.11	-17.89	74.00	308	124	Peak
3		2419.340	68.18	30.50	98.69	N/A	N/A	308	124	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

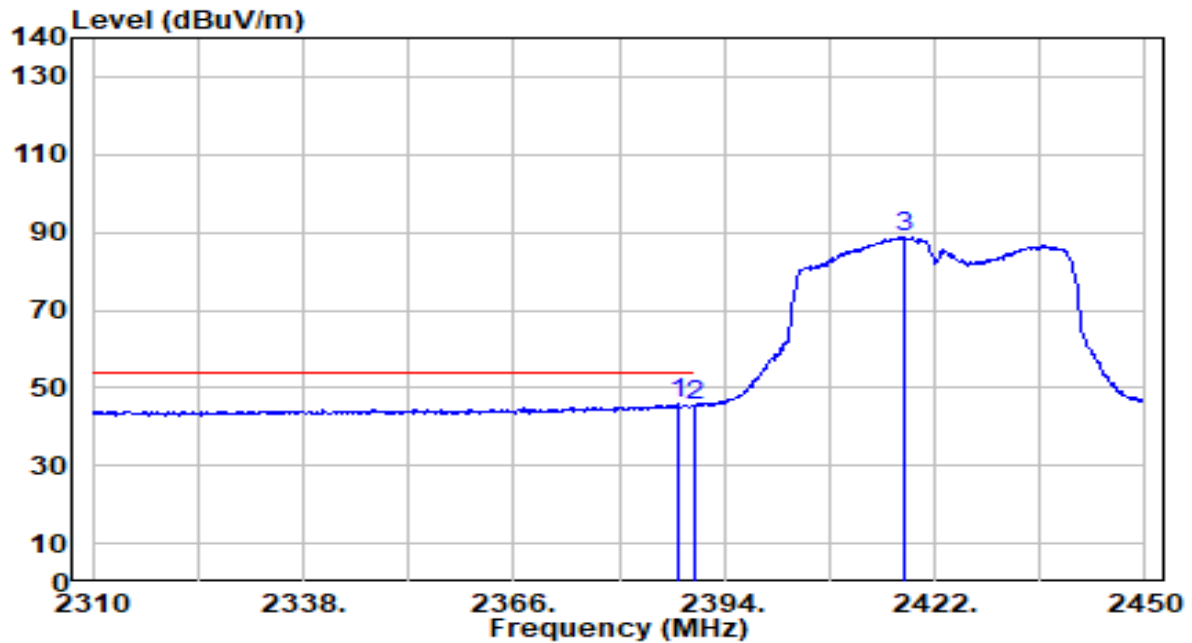


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.840	15.28	30.44	45.73	-8.27	54.00	308	124	Average
2		2390.000	15.19	30.45	45.63	-8.37	54.00	308	124	Average
3		2417.800	58.31	30.50	88.81	N/A	N/A	308	124	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

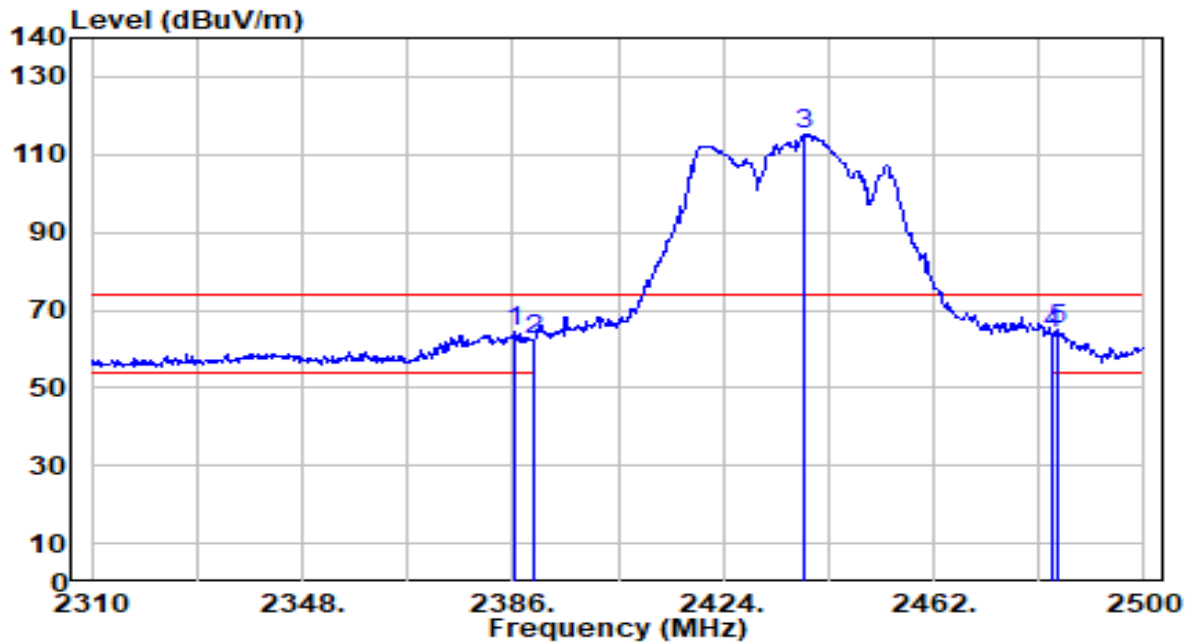


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.380	33.99	30.44	64.43	-9.57	74.00	195	140	Peak
2	2390.000	32.10	30.45	62.55	-11.45	74.00	195	140	Peak
3	2438.630	84.58	30.53	115.11	N/A	N/A	195	140	Peak
4	2483.500	33.38	30.59	63.97	-10.03	74.00	195	140	Peak
5	* 2484.230	34.58	30.59	65.17	-8.83	74.00	195	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

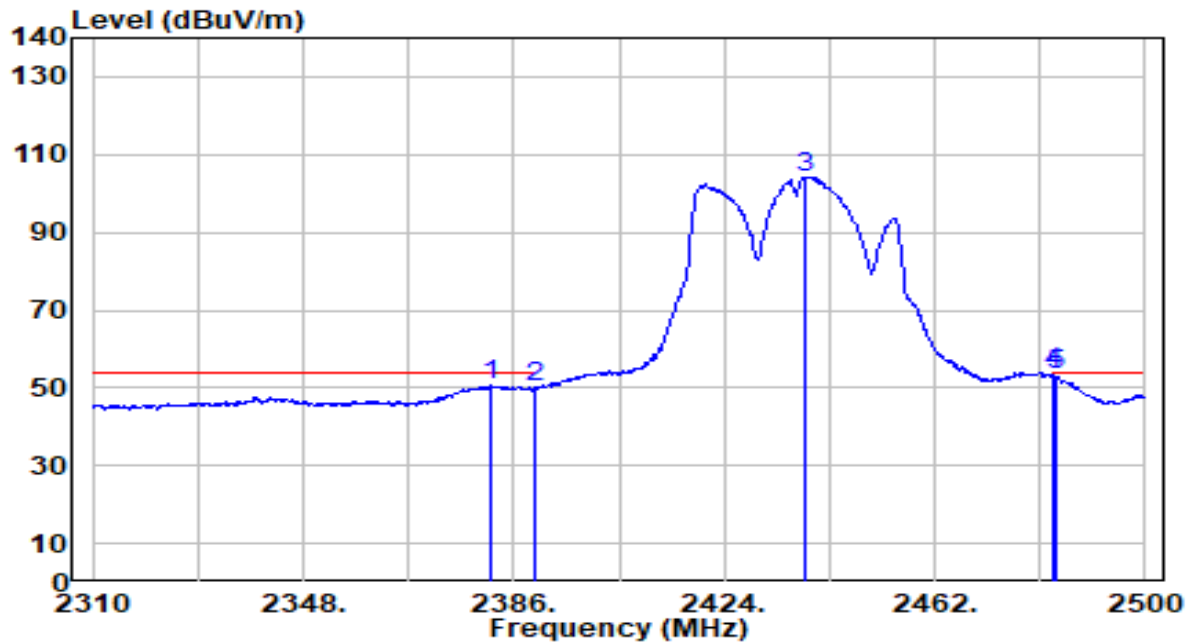


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2382.010	20.06	30.42	50.49	-3.51	54.00	195	140	Average
2	2390.000	19.54	30.45	49.99	-4.01	54.00	195	140	Average
3	2438.820	73.65	30.53	104.18	N/A	N/A	195	140	Average
4	* 2483.500	23.12	30.59	53.71	-0.29	54.00	195	140	Average
5	2484.040	22.93	30.59	53.52	-0.48	54.00	195	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

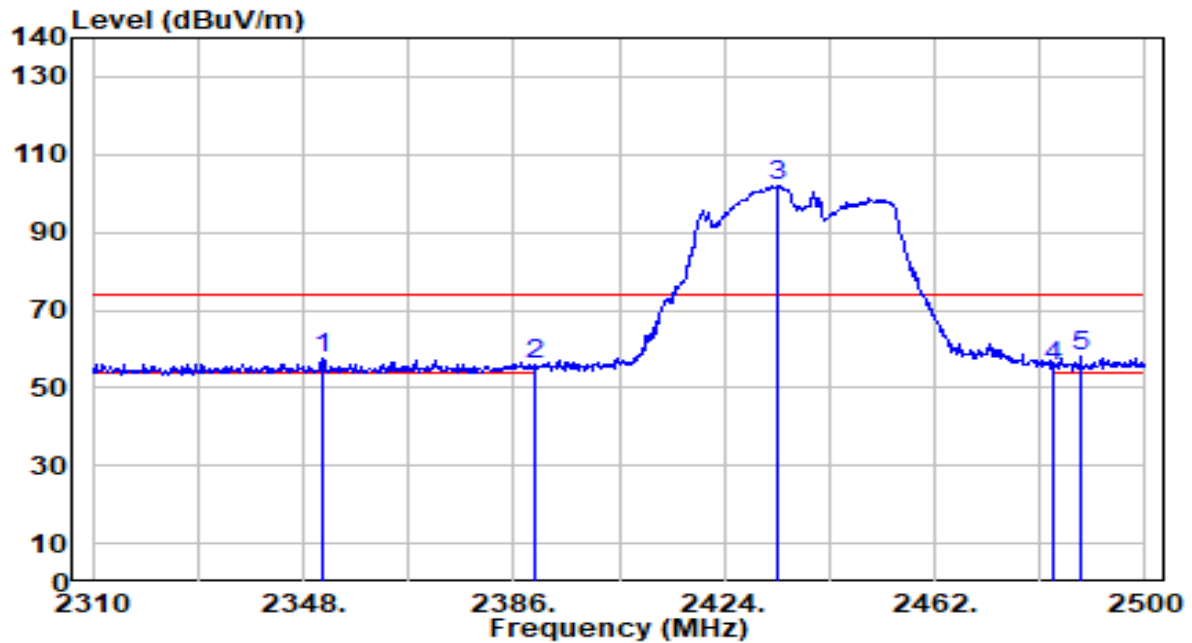


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2351.610	26.98	30.34	57.32	-16.68	74.00	297	102	Peak
2	2390.000	25.34	30.45	55.79	-18.21	74.00	297	102	Peak
3	2433.500	71.46	30.52	101.98	N/A	N/A	297	102	Peak
4	2483.500	24.62	30.59	55.21	-18.79	74.00	297	102	Peak
5	* 2488.410	27.28	30.59	57.88	-16.12	74.00	297	102	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

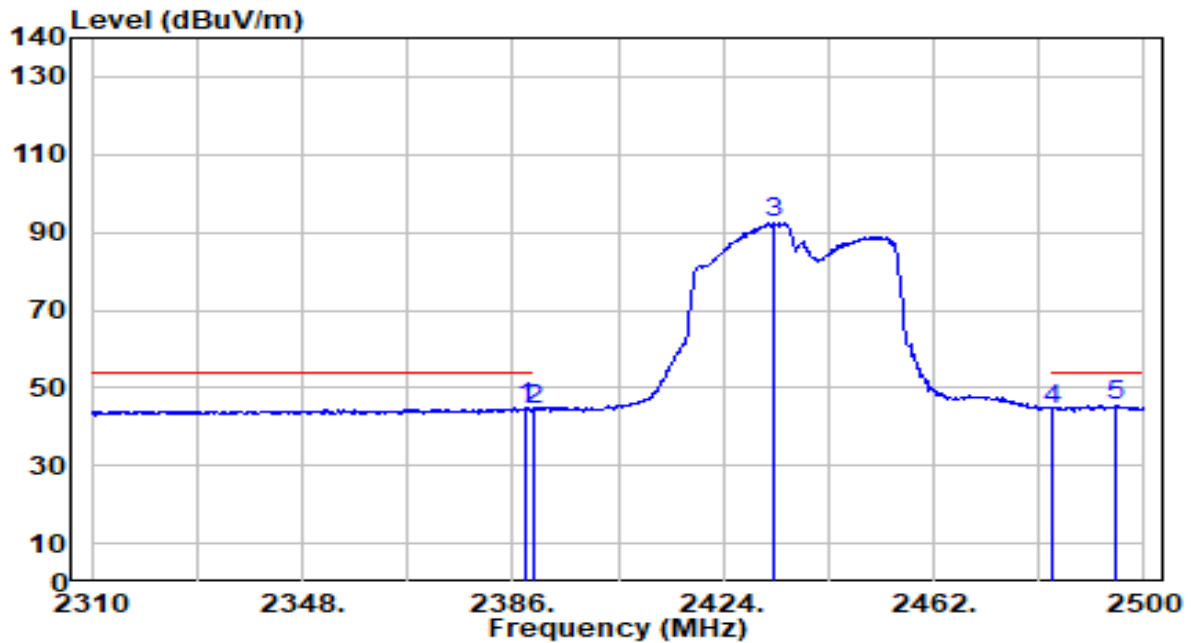


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.280	14.53	30.44	44.97	-9.03	54.00	297	102	Average
2		2390.000	14.14	30.45	44.59	-9.41	54.00	297	102	Average
3		2433.120	62.19	30.52	92.71	N/A	N/A	297	102	Average
4		2483.500	13.74	30.59	44.33	-9.67	54.00	297	102	Average
5	*	2494.870	14.83	30.60	45.44	-8.56	54.00	297	102	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

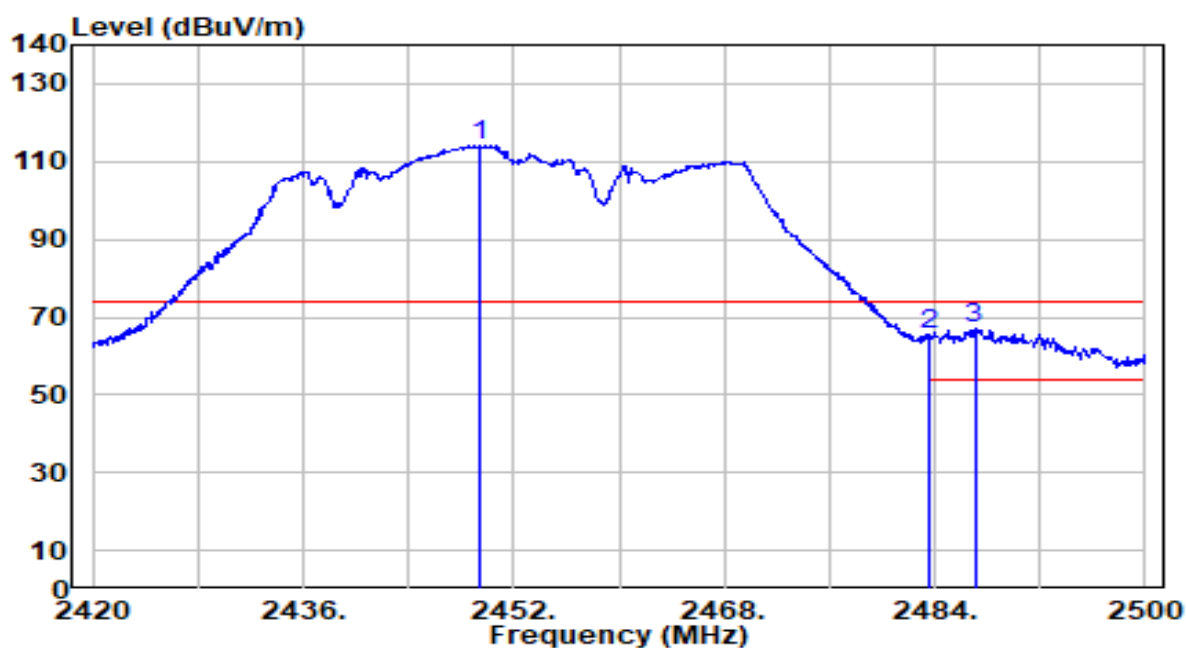


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.520	83.58	30.54	114.12	N/A	N/A	170	6	Peak
2	2483.500	34.96	30.59	65.55	-8.45	74.00	170	6	Peak
3	* 2487.040	36.60	30.59	67.19	-6.81	74.00	170	6	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

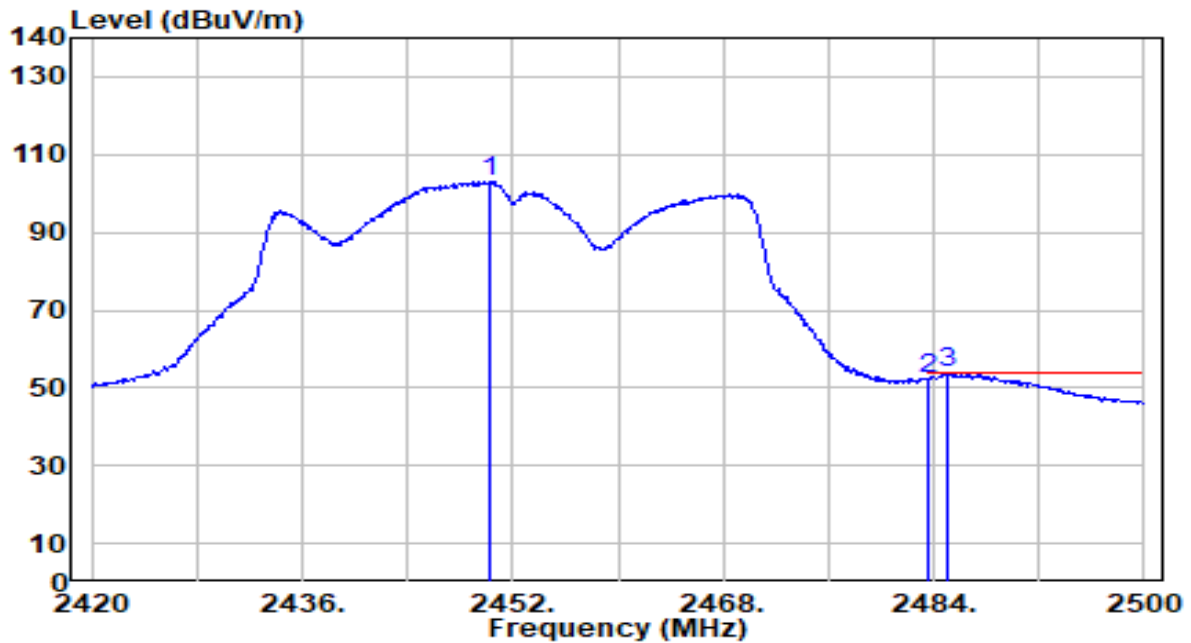


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.160	72.58	30.54	103.12	N/A	N/A	170	6	Average
2	2483.500	21.80	30.59	52.39	-1.61	54.00	170	6	Average
3	* 2484.960	23.19	30.59	53.78	-0.22	54.00	170	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

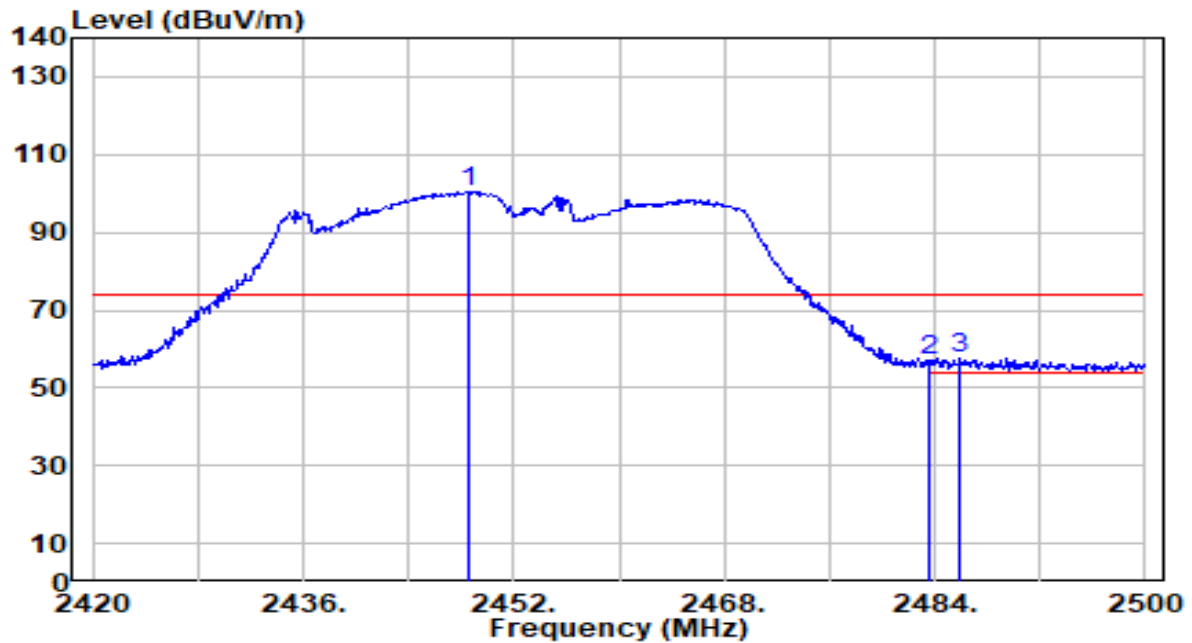


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.640	69.97	30.54	100.51	N/A	N/A	282	103	Peak
2	2483.500	26.68	30.59	57.27	-16.73	74.00	282	103	Peak
3	* 2485.920	27.04	30.59	57.63	-16.37	74.00	282	103	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

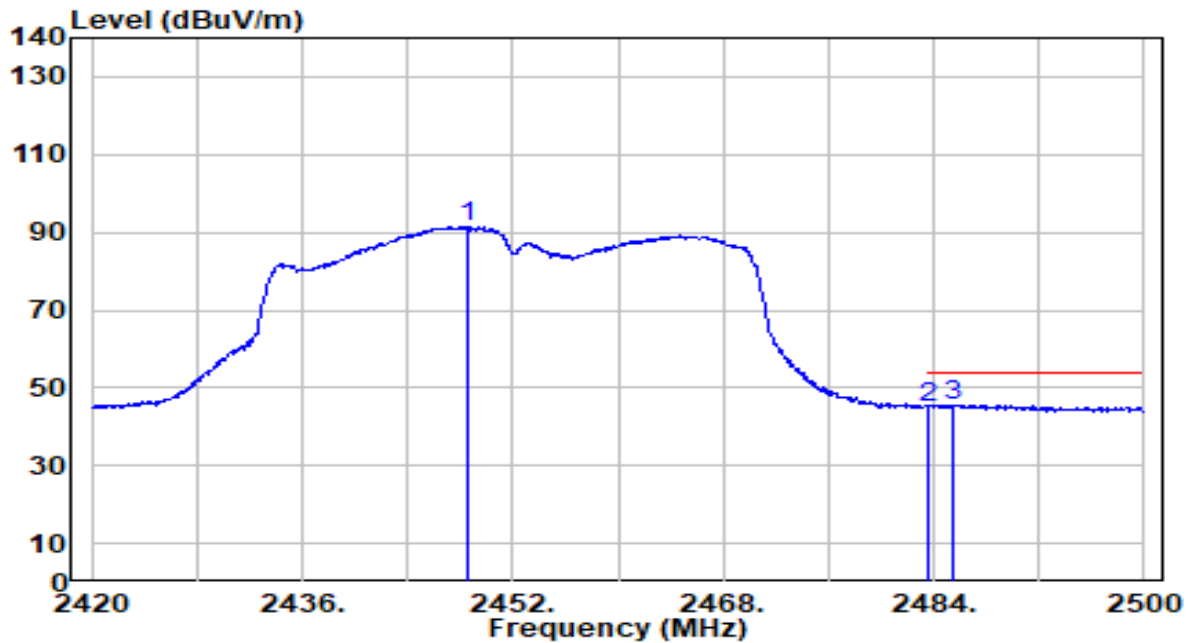


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.640	61.02	30.54	91.56	N/A	N/A	282	103	Average
2	2483.500	14.49	30.59	45.08	-8.92	54.00	282	103	Average
3	* 2485.520	15.10	30.59	45.69	-8.31	54.00	282	103	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

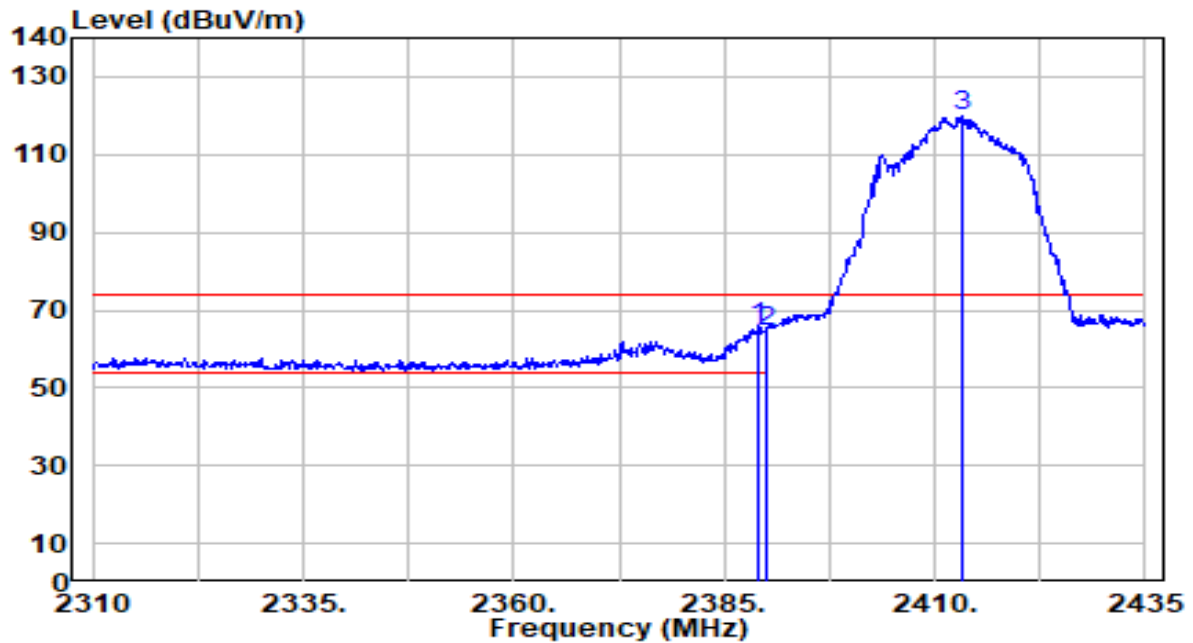


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.000	34.83	30.44	65.27	-8.73	74.00	190	40	Peak
2		2390.000	34.12	30.45	64.57	-9.43	74.00	190	40	Peak
3		2413.125	89.61	30.49	120.10	N/A	N/A	190	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

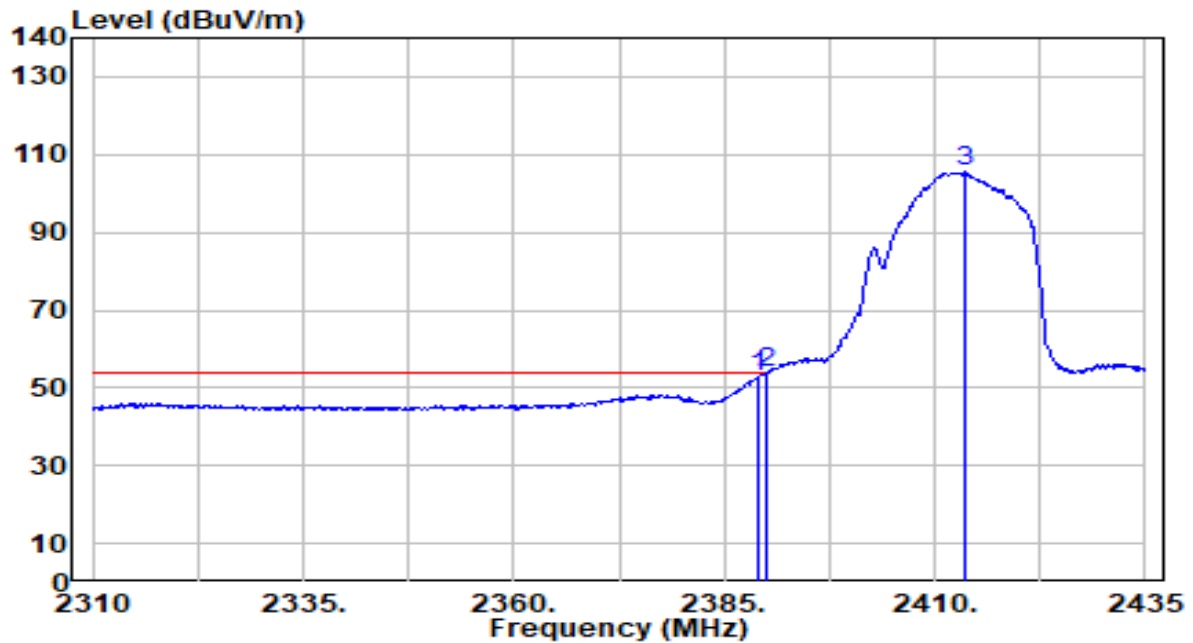


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	22.39	30.44	52.84	-1.16	54.00	190	40	Average
2	*	2390.000	23.30	30.45	53.74	-0.26	54.00	190	40	Average
3		2413.625	74.96	30.49	105.46	N/A	N/A	190	40	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

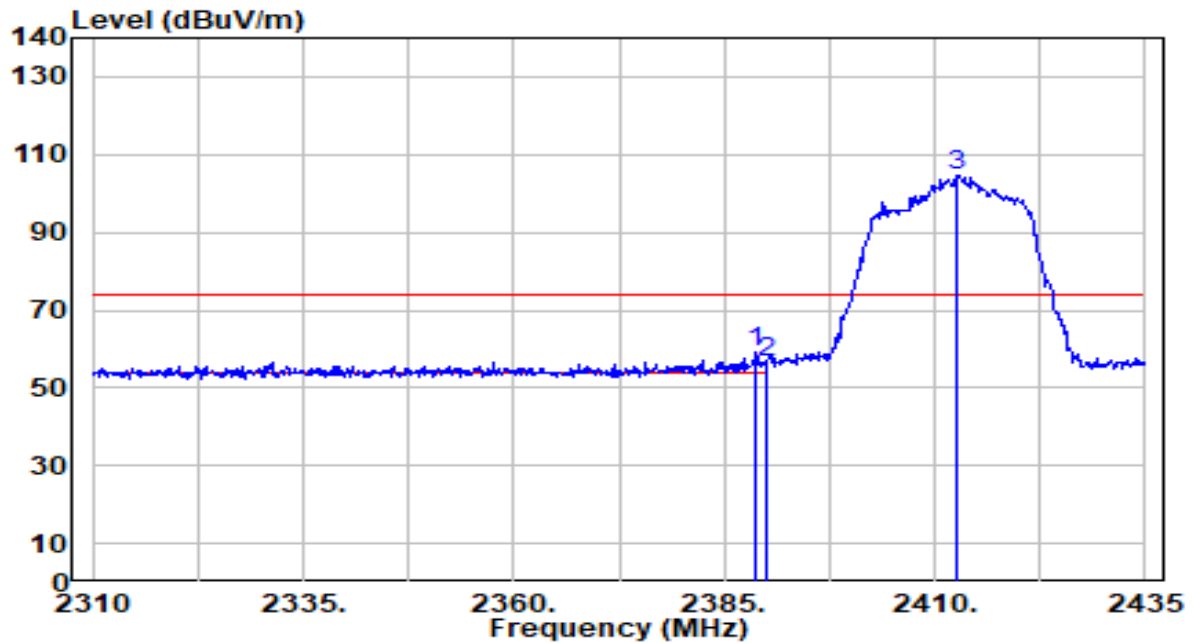


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.750	28.64	30.44	59.08	-14.92	74.00	308	124	Peak
2		2390.000	26.14	30.45	56.58	-17.42	74.00	308	124	Peak
3		2412.750	74.21	30.49	104.71	N/A	N/A	308	124	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

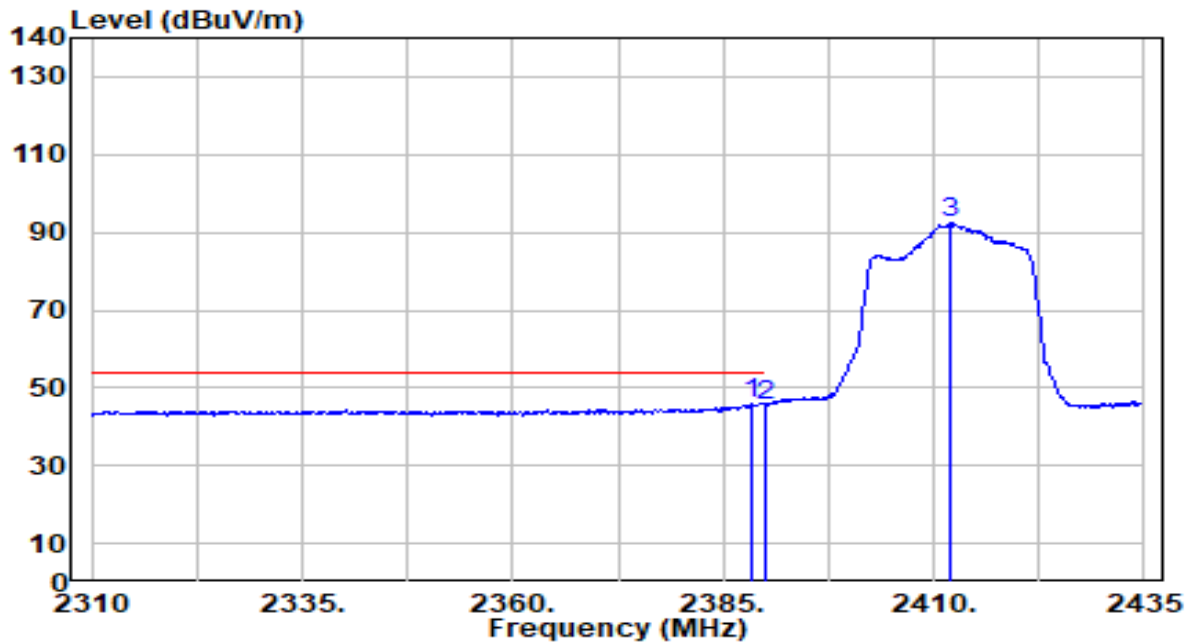


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.500	15.31	30.44	45.76	-8.24	54.00	308	124	Average
2		2390.000	15.09	30.45	45.54	-8.46	54.00	308	124	Average
3		2412.000	61.75	30.49	92.24	N/A	N/A	308	124	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

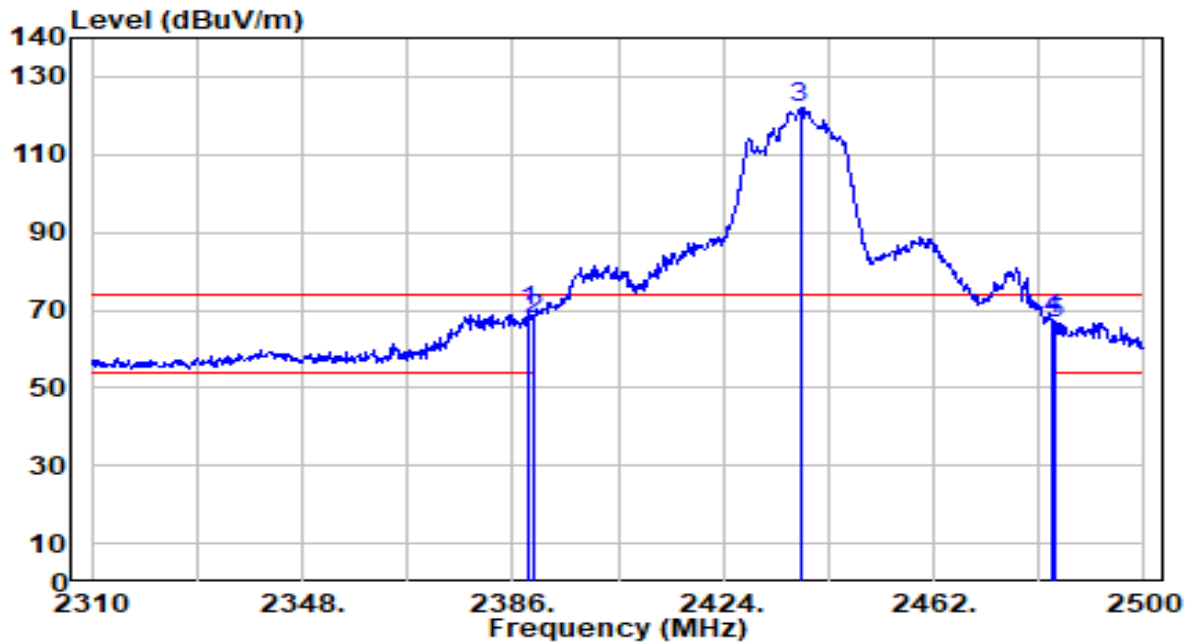


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.040	39.45	30.44	69.89	-4.11	74.00	195	140	Peak
2		2390.000	37.41	30.45	67.86	-6.14	74.00	195	140	Peak
3		2437.870	91.56	30.53	122.09	N/A	N/A	195	140	Peak
4		2483.500	36.87	30.59	67.46	-6.54	74.00	195	140	Peak
5		2484.040	36.24	30.59	66.83	-7.17	74.00	195	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

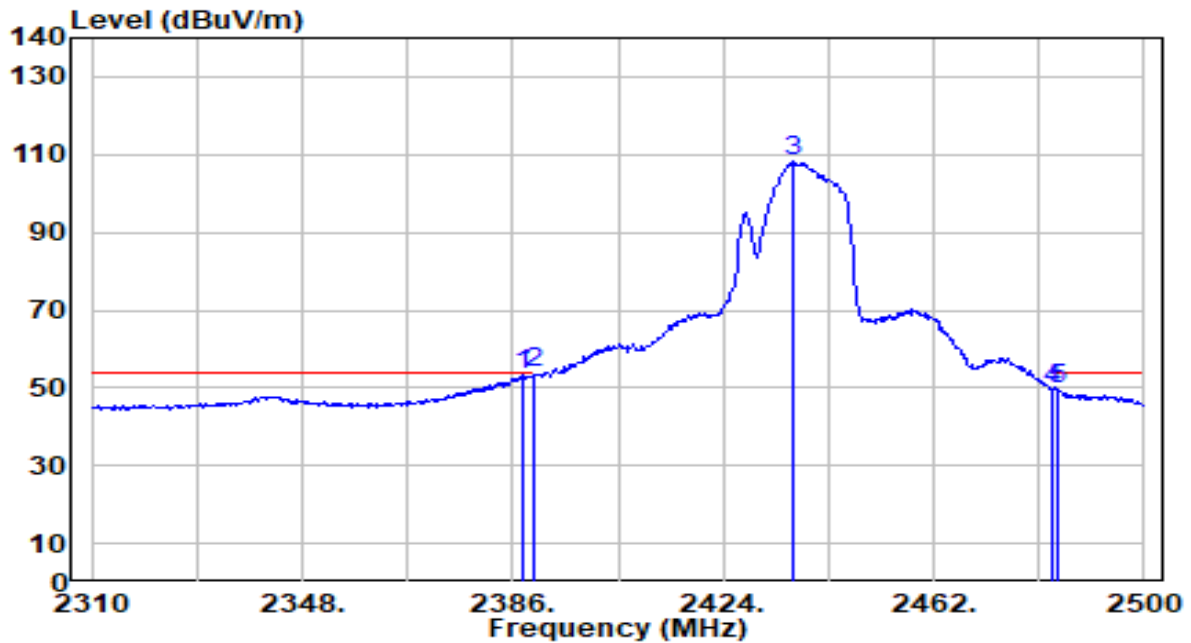


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.900	23.00	30.44	53.44	-0.56	54.00	195	140	Average
2	*	2390.000	23.30	30.45	53.74	-0.26	54.00	195	140	Average
3		2436.540	77.75	30.52	108.27	N/A	N/A	195	140	Average
4		2483.500	18.88	30.59	49.47	-4.53	54.00	195	140	Average
5		2484.230	19.33	30.59	49.92	-4.08	54.00	195	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

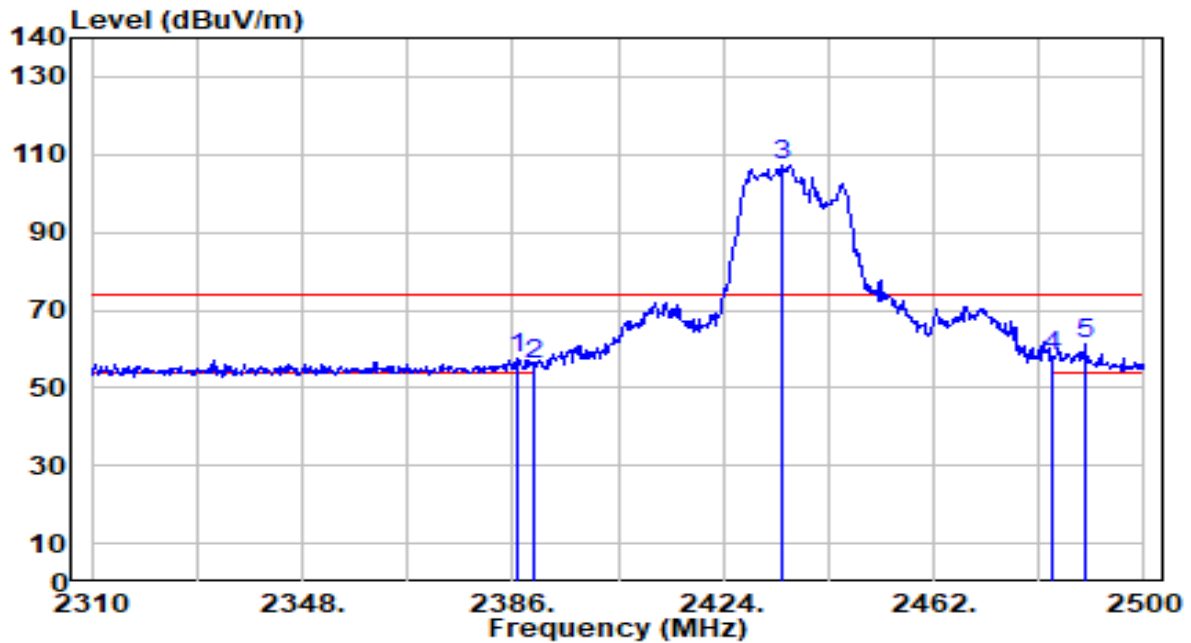


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.760	27.08	30.44	57.52	-16.48	74.00	297	102	Peak
2	2390.000	25.54	30.45	55.99	-18.01	74.00	297	102	Peak
3	2434.830	76.77	30.52	107.29	N/A	N/A	297	102	Peak
4	2483.500	27.68	30.59	58.27	-15.73	74.00	297	102	Peak
5	* 2489.170	30.47	30.60	61.06	-12.94	74.00	297	102	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

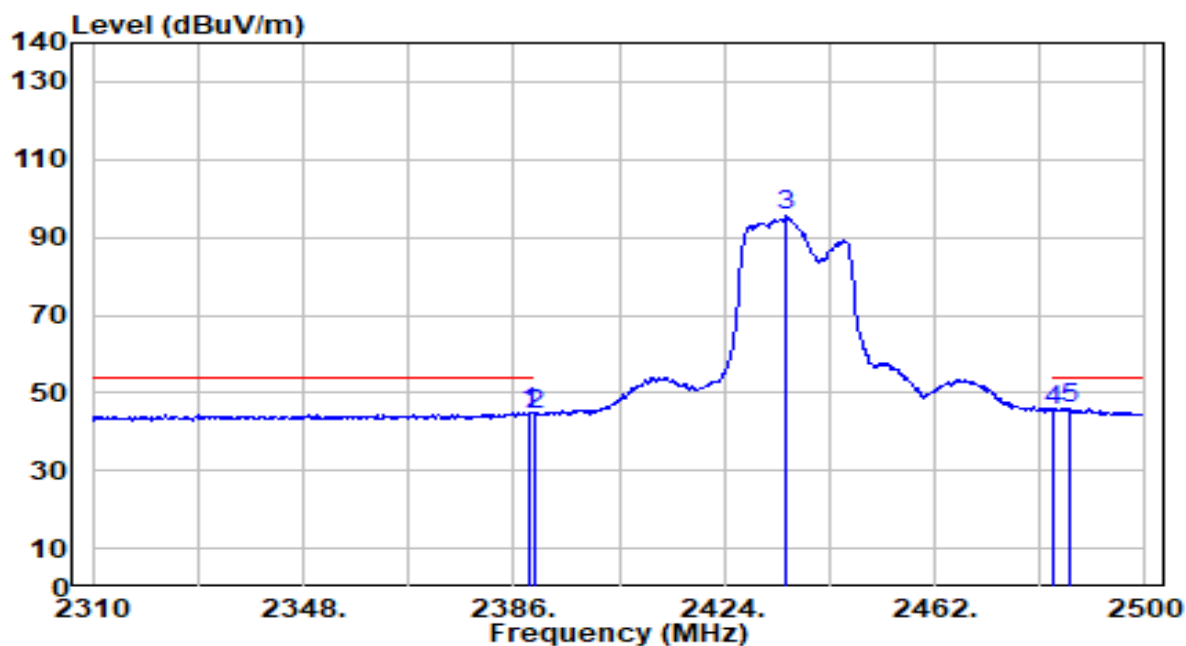


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	14.56	30.44	45.00	-9.00	54.00	297	102	Average
2	2390.000	14.10	30.45	44.55	-9.45	54.00	297	102	Average
3	2435.210	64.91	30.52	95.43	N/A	N/A	297	102	Average
4	2483.500	14.82	30.59	45.40	-8.60	54.00	297	102	Average
5	* 2486.510	15.30	30.59	45.89	-8.11	54.00	297	102	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

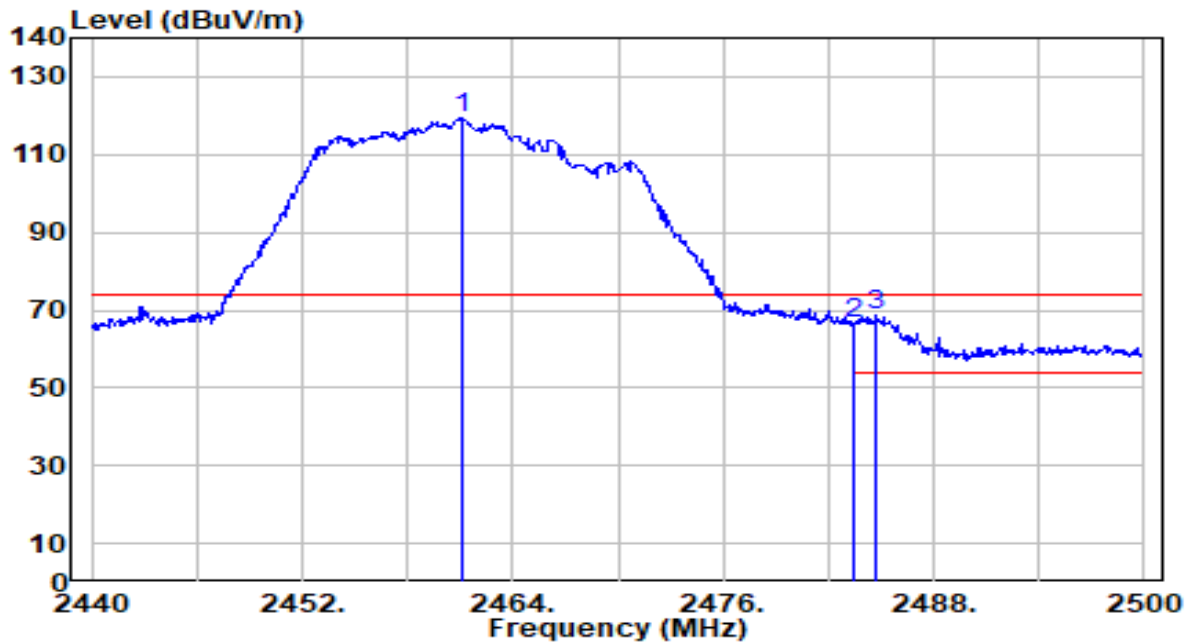


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.060	88.67	30.56	119.23	N/A	N/A	170	6	Peak
2	2483.500	36.07	30.59	66.66	-7.34	74.00	170	6	Peak
3	* 2484.760	37.87	30.59	68.46	-5.54	74.00	170	6	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

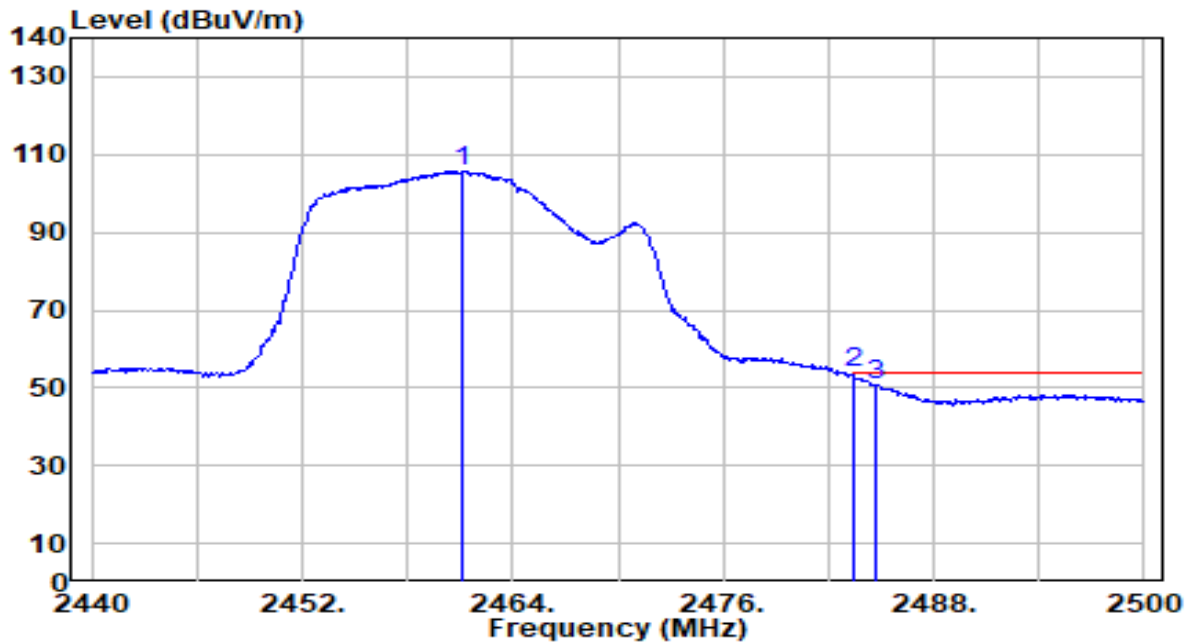


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2461.120	75.32	30.56	105.88	N/A	N/A	170	6	Average
2	*	2483.500	23.13	30.59	53.72	-0.28	54.00	170	6	Average
3		2484.700	20.36	30.59	50.95	-3.05	54.00	170	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

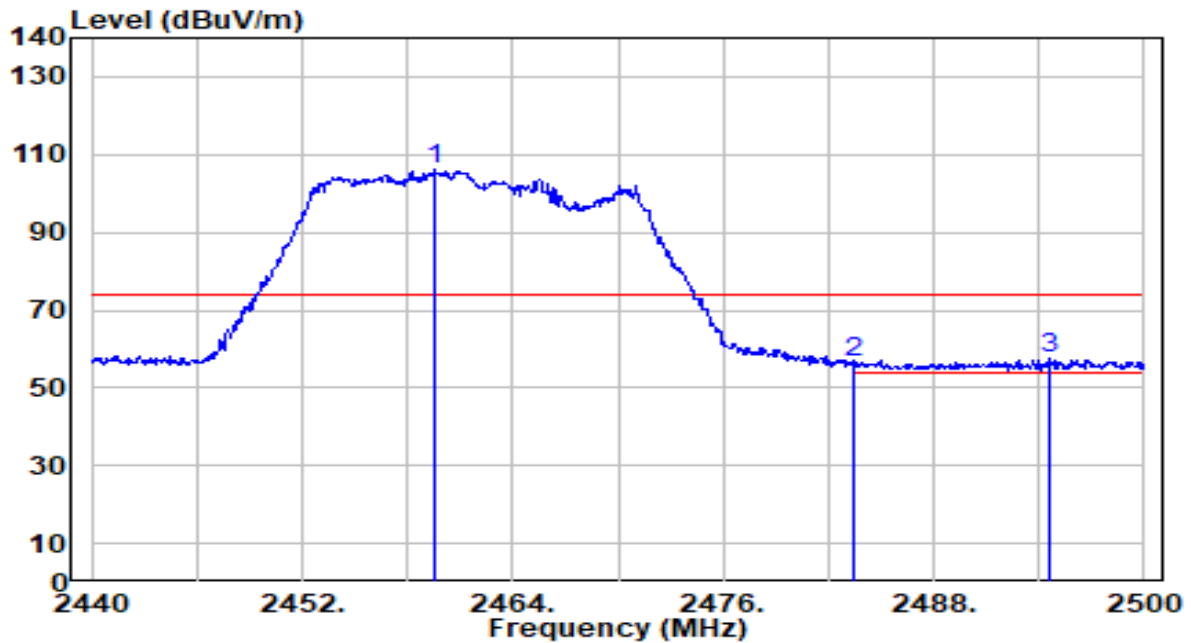


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.620	75.65	30.56	106.20	N/A	N/A	282	103	Peak
2	2483.500	25.88	30.59	56.47	-17.53	74.00	282	103	Peak
3	* 2494.540	26.80	30.60	57.40	-16.60	74.00	282	103	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

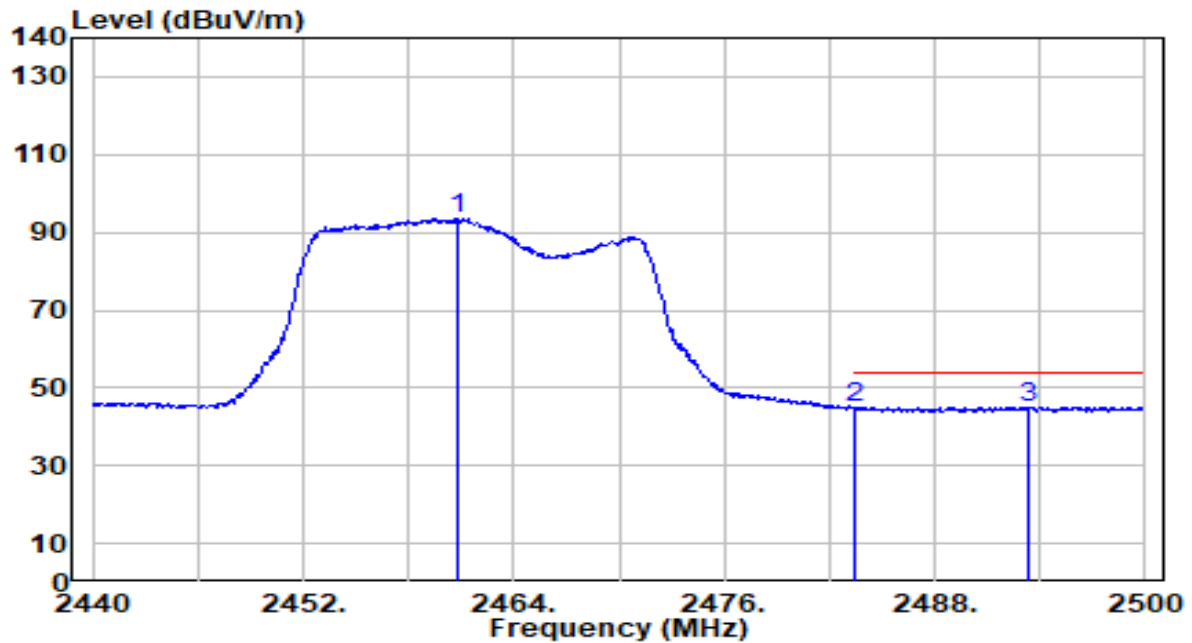


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.760	62.79	30.56	93.35	N/A	N/A	282	103	Average
2	2483.500	14.51	30.59	45.10	-8.90	54.00	282	103	Average
3	* 2493.340	14.56	30.60	45.16	-8.84	54.00	282	103	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

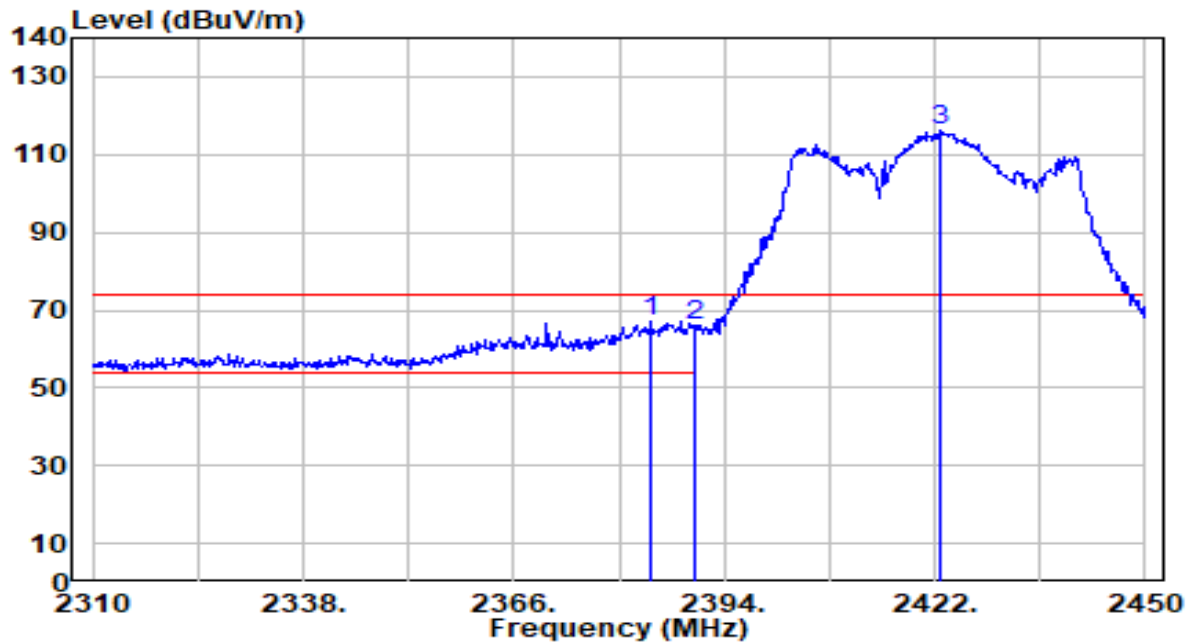


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.200	36.61	30.43	67.04	-6.96	74.00	190	40	Peak
2		2390.000	35.70	30.45	66.15	-7.85	74.00	190	40	Peak
3		2422.560	85.72	30.51	116.22	N/A	N/A	190	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

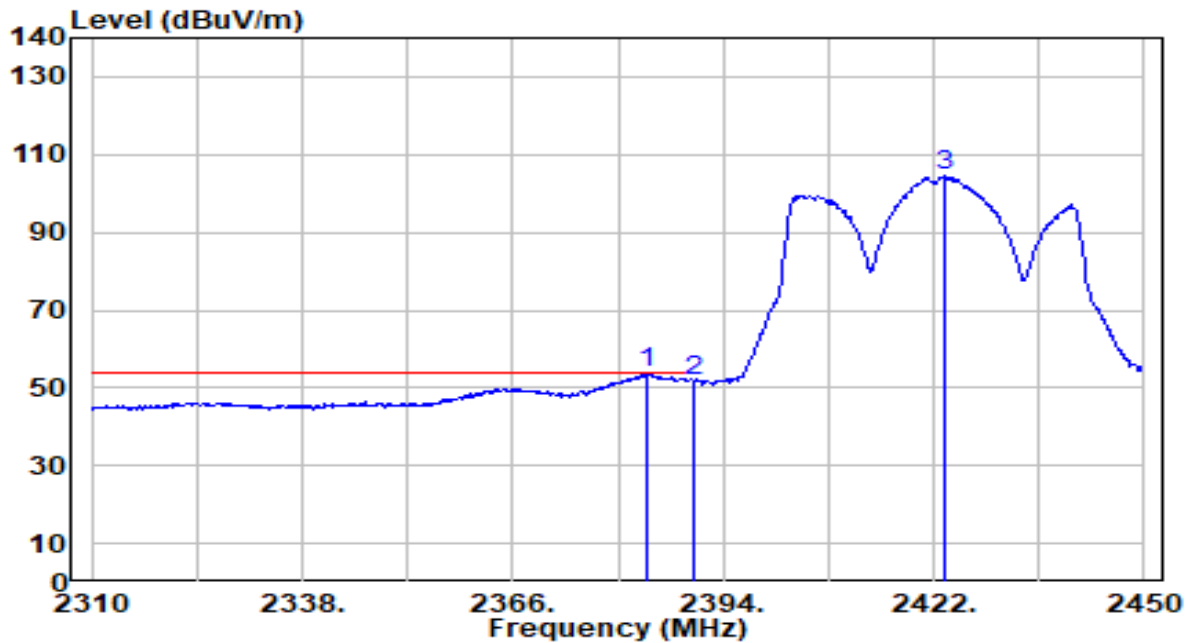


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.920	23.36	30.43	53.79	-0.21	54.00	190	40	Average
2		2390.000	21.25	30.45	51.70	-2.30	54.00	190	40	Average
3		2423.400	73.86	30.51	104.37	N/A	N/A	190	40	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

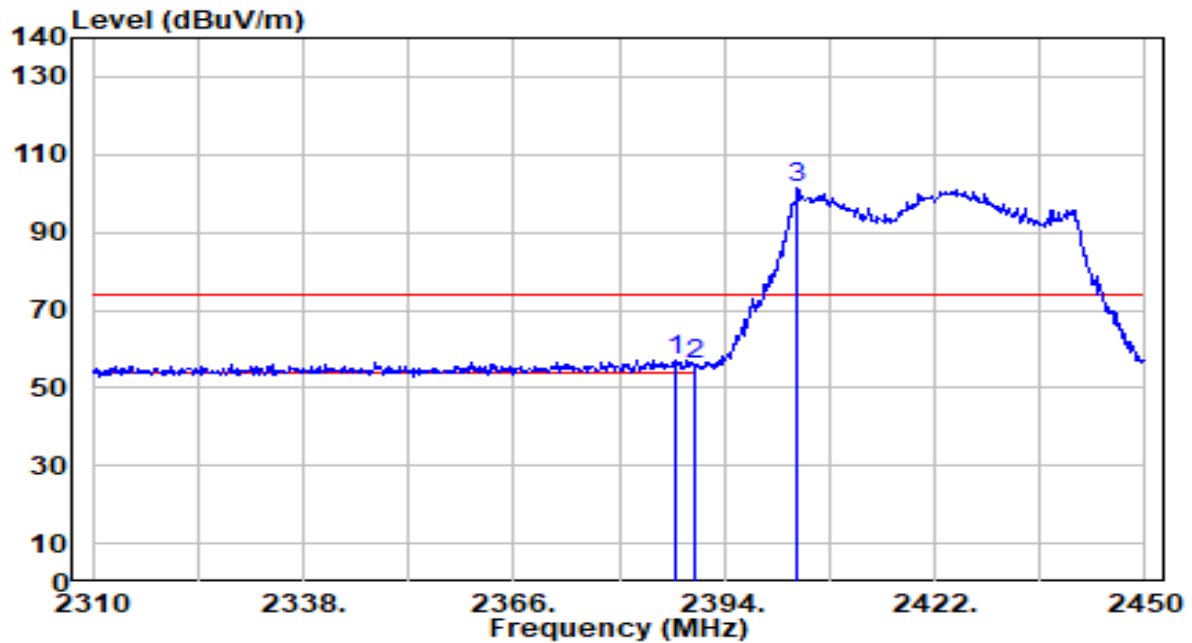


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.420	26.49	30.44	56.93	-17.07	74.00	308	124	Peak
2		2390.000	25.56	30.45	56.01	-17.99	74.00	308	124	Peak
3		2403.800	70.75	30.48	101.23	N/A	N/A	308	124	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

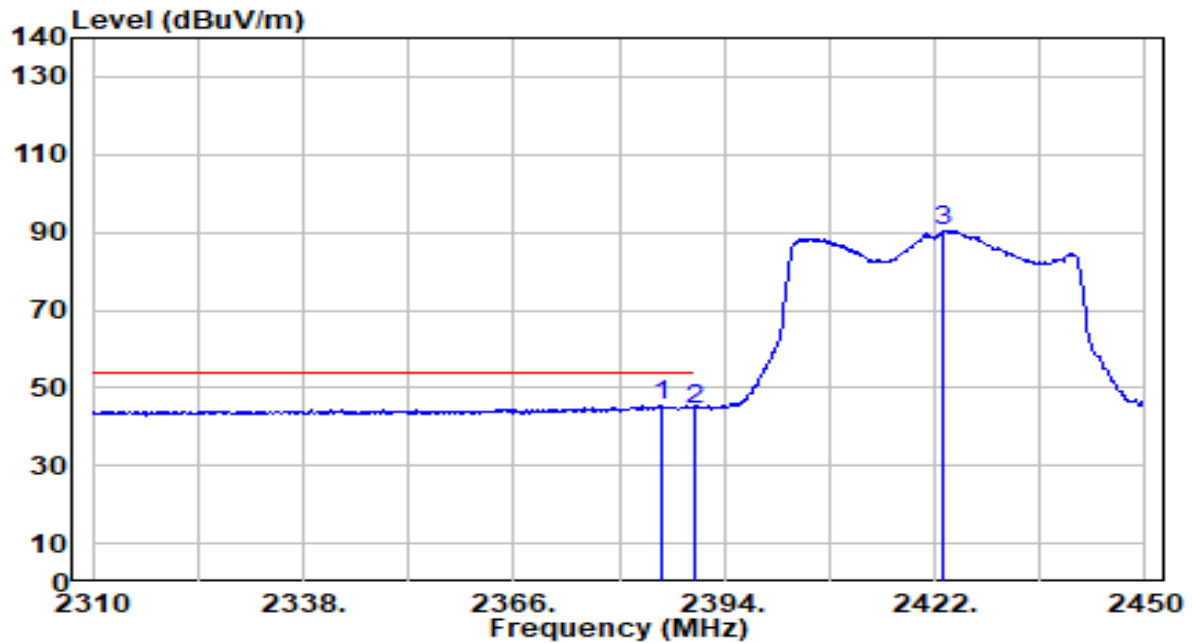


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.600	14.95	30.44	45.39	-8.61	54.00	308	124	Average
2		2390.000	14.14	30.45	44.59	-9.41	54.00	308	124	Average
3		2423.120	59.97	30.51	90.48	N/A	N/A	308	124	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

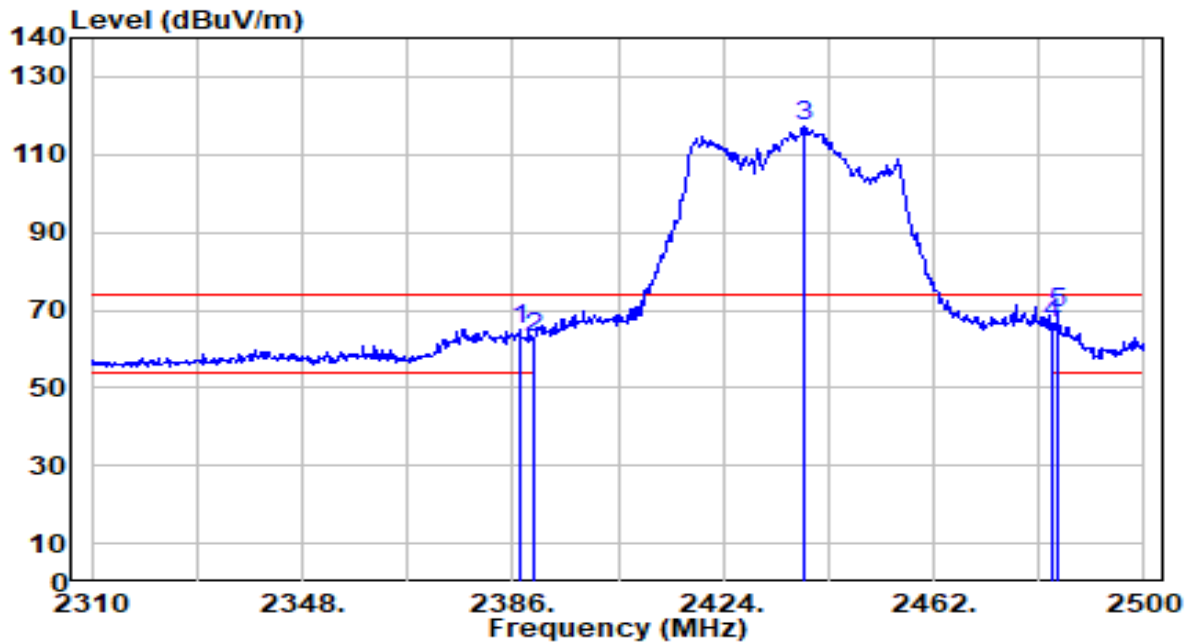


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.330	34.53	30.44	64.97	-9.03	74.00	195	140	Peak
2	2390.000	32.58	30.45	63.03	-10.97	74.00	195	140	Peak
3	2438.630	86.73	30.53	117.26	N/A	N/A	195	140	Peak
4	2483.500	35.75	30.59	66.34	-7.66	74.00	195	140	Peak
5	* 2484.420	38.76	30.59	69.35	-4.65	74.00	195	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

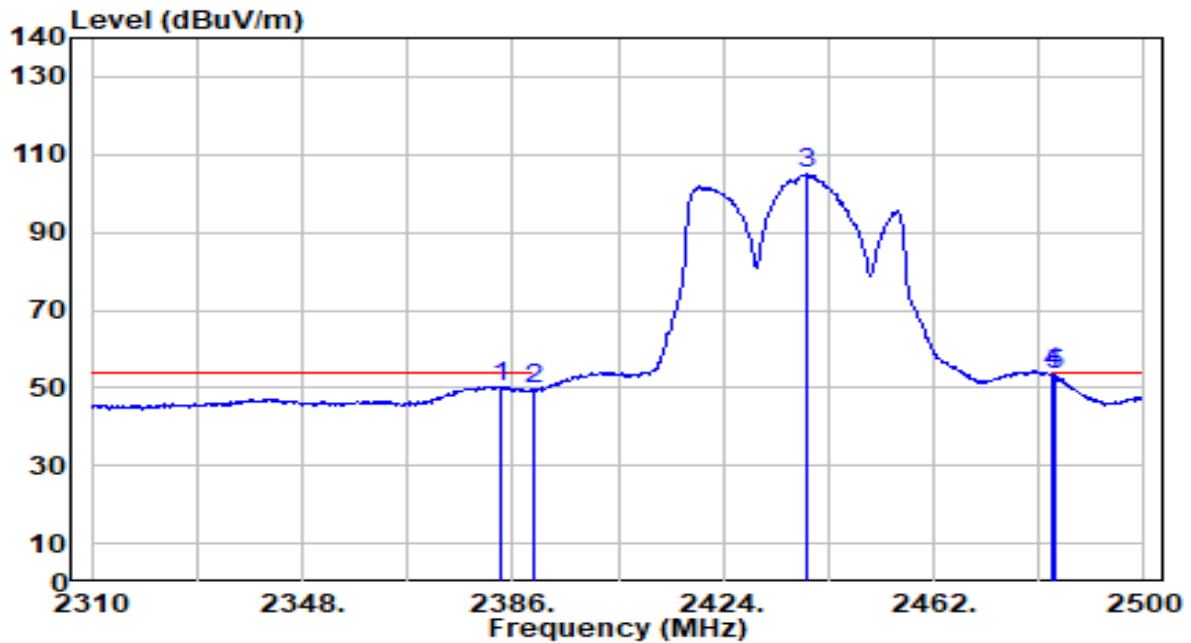


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2383.720	19.96	30.43	50.39	-3.61	54.00	195	140	Average
2		2390.000	19.36	30.45	49.81	-4.19	54.00	195	140	Average
3		2439.200	74.62	30.53	105.15	N/A	N/A	195	140	Average
4	*	2483.500	23.19	30.59	53.78	-0.22	54.00	195	140	Average
5		2484.040	22.99	30.59	53.58	-0.42	54.00	195	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

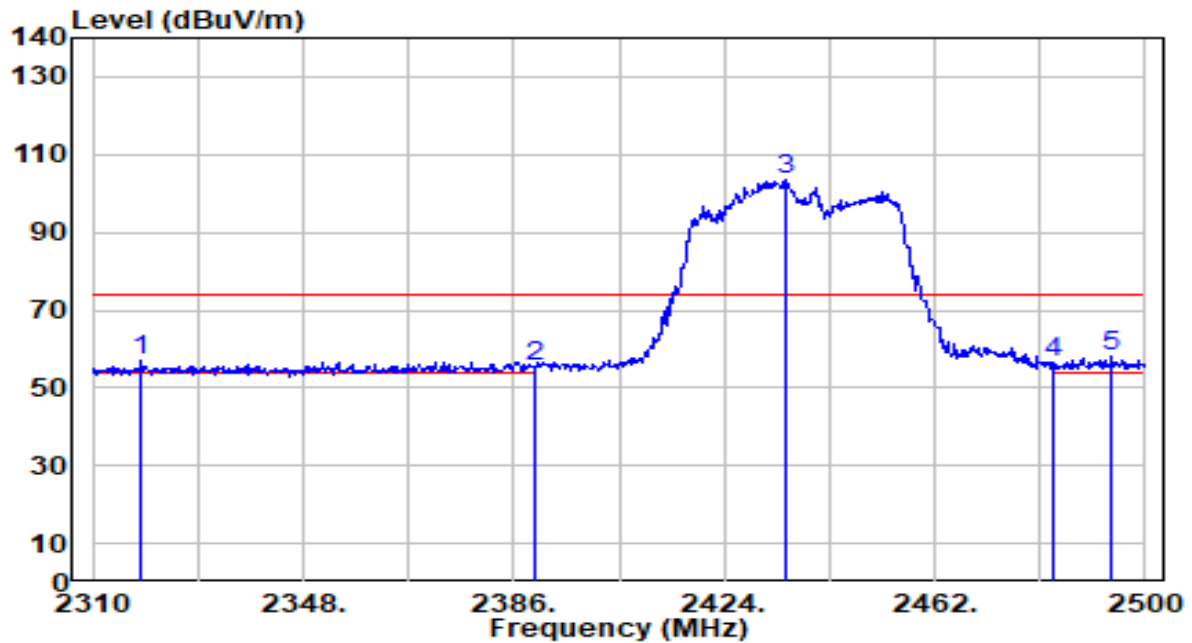


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2318.740	26.58	30.25	56.82	-17.18	74.00	297	102	Peak
2	2390.000	25.02	30.45	55.46	-18.54	74.00	297	102	Peak
3	2435.020	73.13	30.52	103.66	N/A	N/A	297	102	Peak
4	2483.500	25.83	30.59	56.42	-17.58	74.00	297	102	Peak
5	* 2493.920	27.41	30.60	58.01	-15.99	74.00	297	102	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

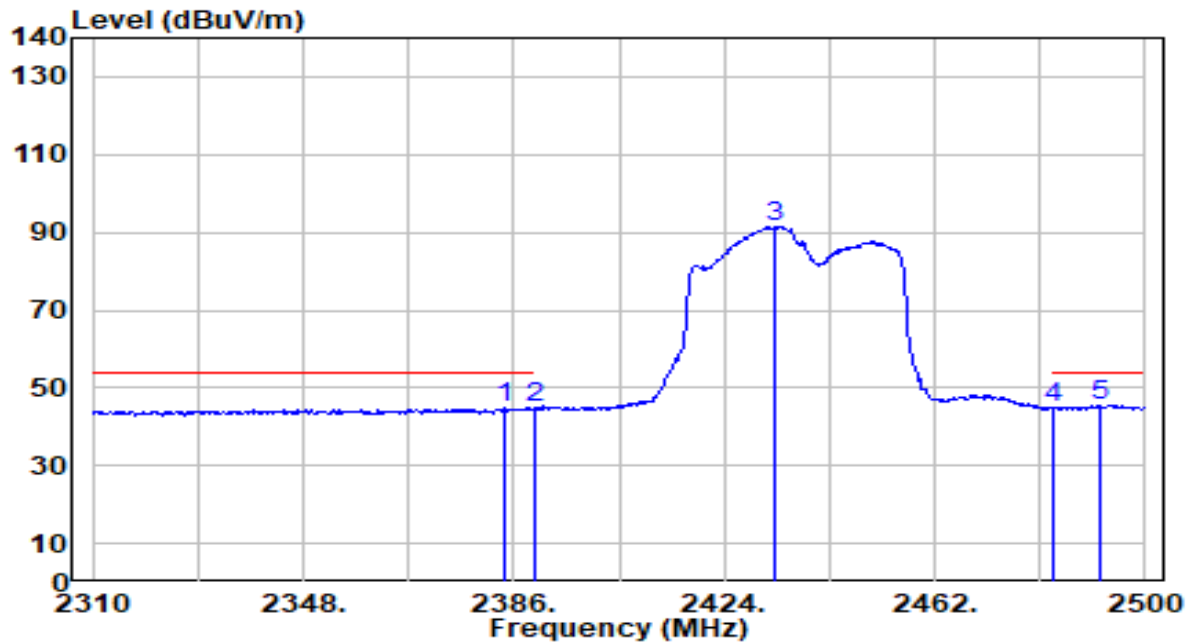


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2384.480	14.31	30.43	44.75	-9.25	54.00	297	102	Average
2		2390.000	14.52	30.45	44.96	-9.04	54.00	297	102	Average
3		2433.310	61.02	30.52	91.54	N/A	N/A	297	102	Average
4		2483.500	14.30	30.59	44.89	-9.11	54.00	297	102	Average
5	*	2491.830	15.09	30.60	45.69	-8.31	54.00	297	102	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

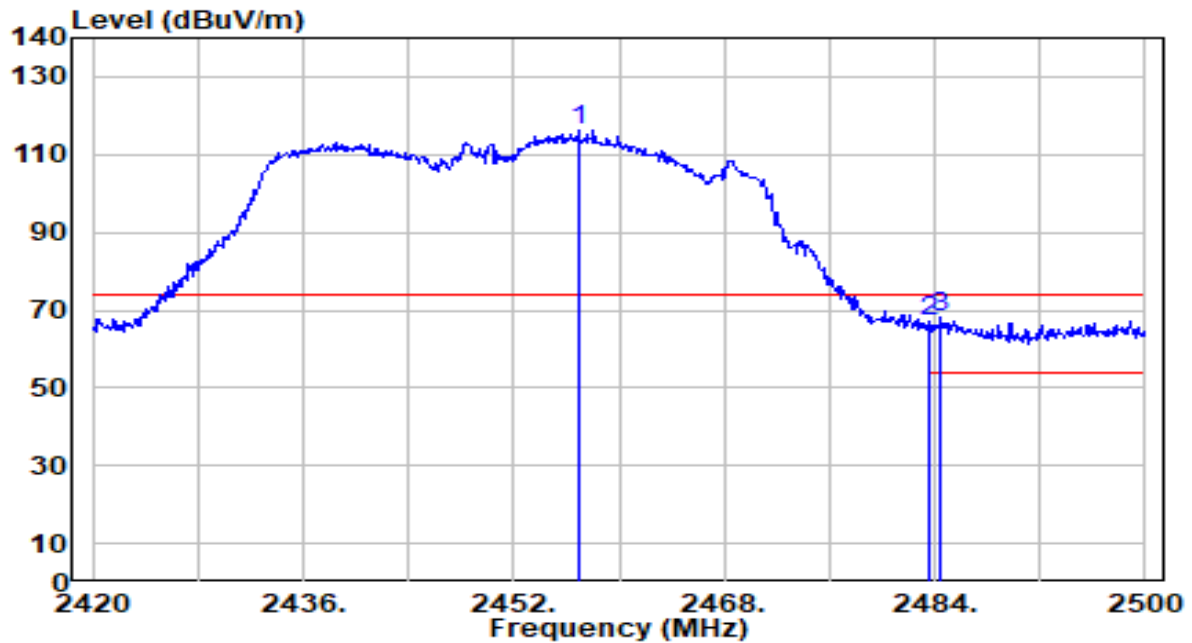


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.880	85.55	30.55	116.11	N/A	N/A	170	6	Peak
2	2483.500	36.42	30.59	67.01	-6.99	74.00	170	6	Peak
3	* 2484.480	37.65	30.59	68.23	-5.77	74.00	170	6	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

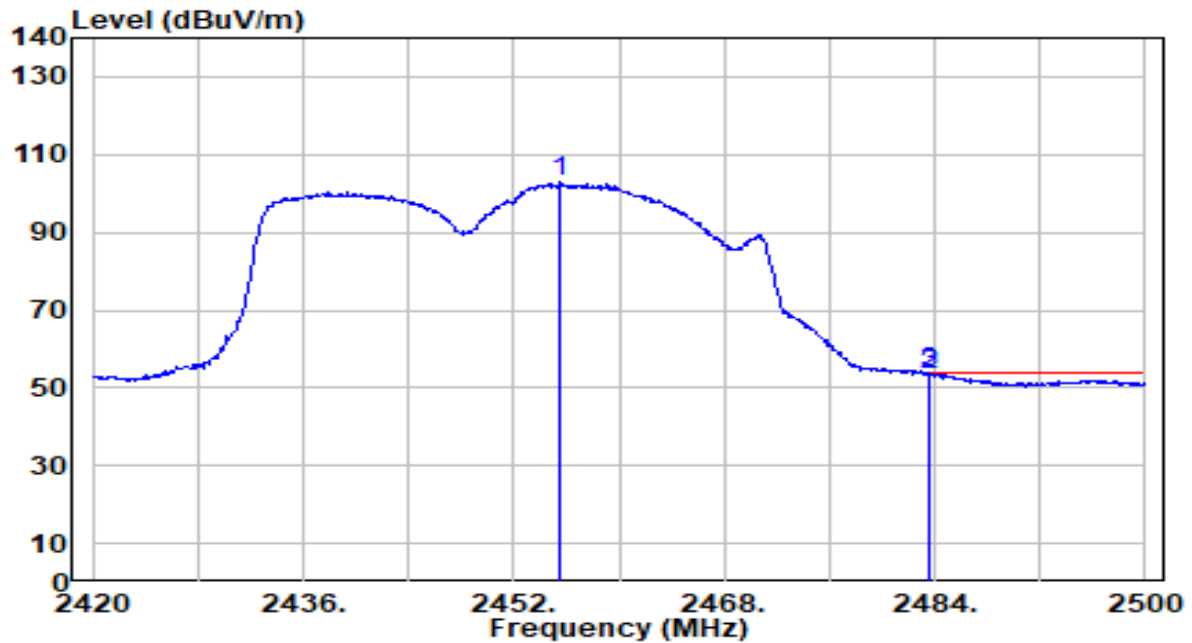


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.520	72.24	30.55	102.79	N/A	N/A	170	6	Average
2	2483.500	22.81	30.59	53.40	-0.60	54.00	170	6	Average
3	* 2483.680	23.28	30.59	53.87	-0.13	54.00	170	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

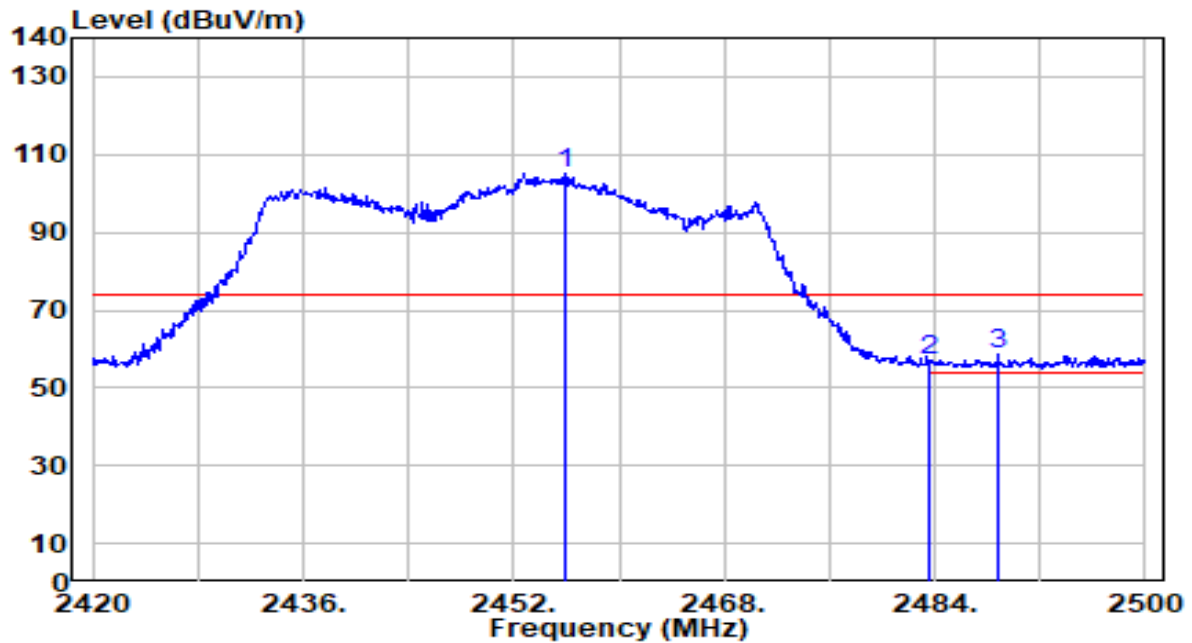


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.000	74.49	30.55	105.04	N/A	N/A	282	103	Peak
2	2483.500	26.24	30.59	56.83	-17.17	74.00	282	103	Peak
3	* 2488.800	28.00	30.59	58.59	-15.41	74.00	282	103	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

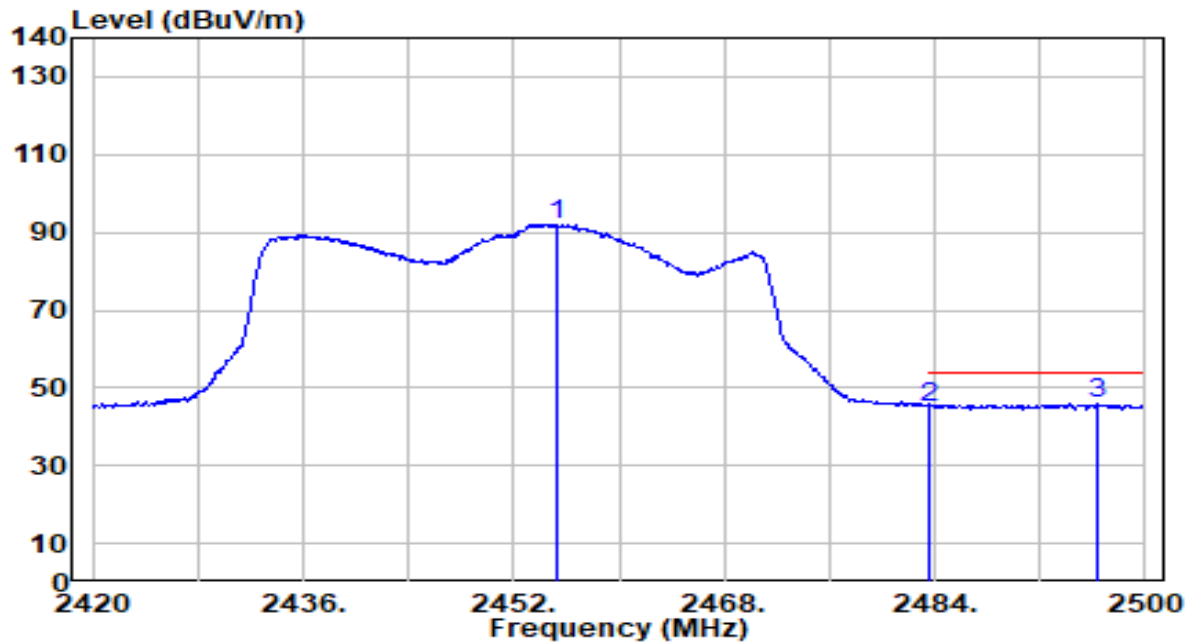


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.280	61.50	30.55	92.05	N/A	N/A	282	103	Average
2		2483.500	14.51	30.59	45.10	-8.90	54.00	282	103	Average
3	*	2496.400	15.19	30.61	45.80	-8.20	54.00	282	103	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

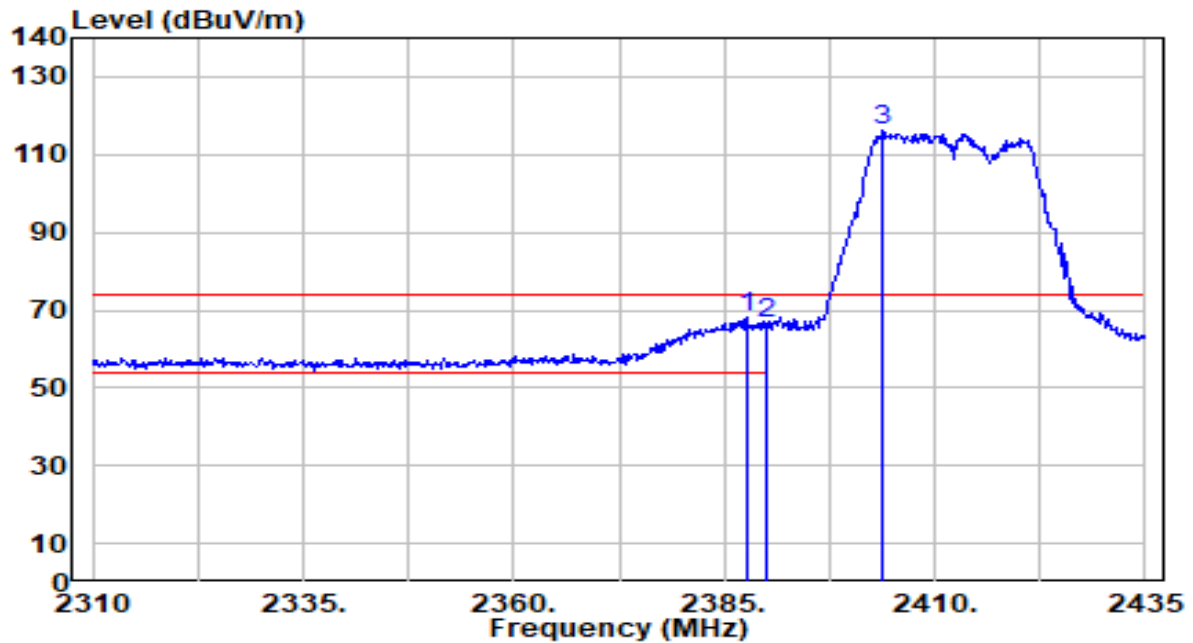


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.625	37.54	30.44	67.98	-6.02	74.00	190	40	Peak
2		2390.000	36.32	30.45	66.77	-7.23	74.00	190	40	Peak
3		2403.875	85.56	30.48	116.04	N/A	N/A	190	40	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

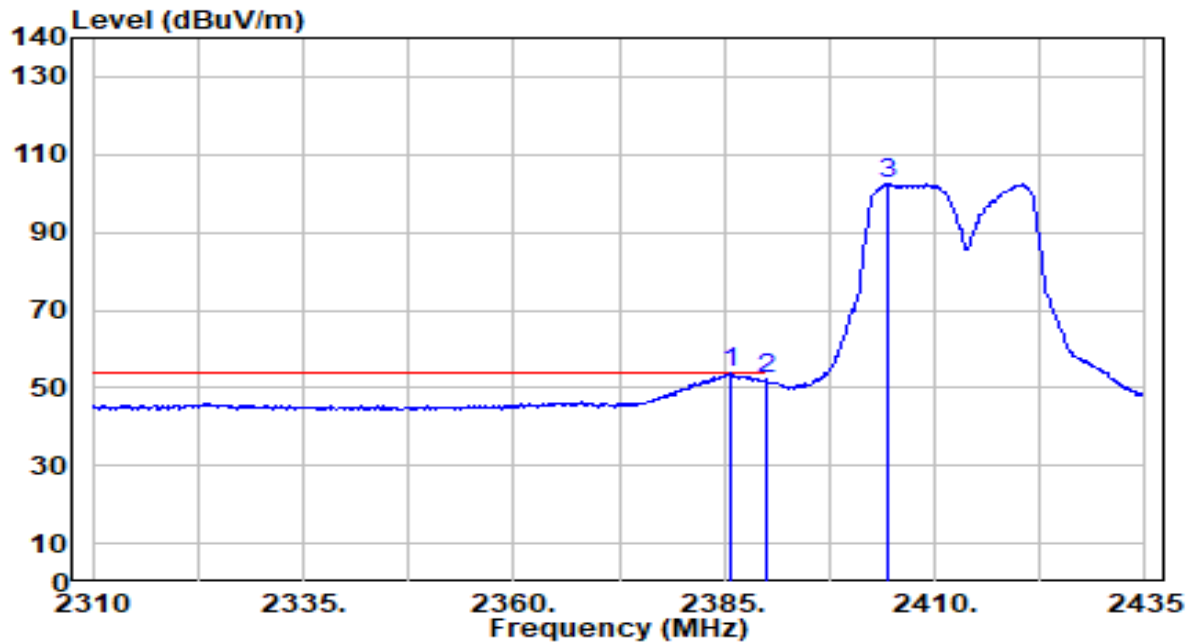


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.625	23.34	30.44	53.78	-0.22	54.00	190	40	Average
2		2390.000	21.63	30.45	52.08	-1.92	54.00	190	40	Average
3		2404.375	71.99	30.48	102.47	N/A	N/A	190	40	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

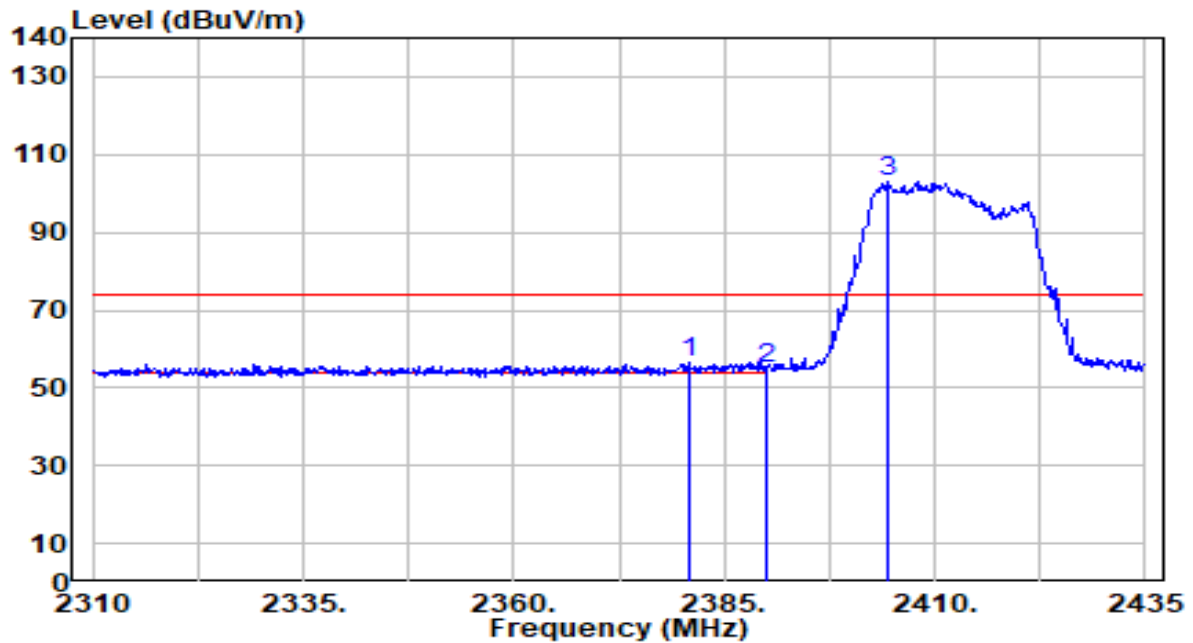


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2380.875	26.08	30.42	56.50	-17.50	74.00	308	124	Peak
2		2390.000	24.48	30.45	54.93	-19.07	74.00	308	124	Peak
3		2404.375	72.48	30.48	102.96	N/A	N/A	308	124	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

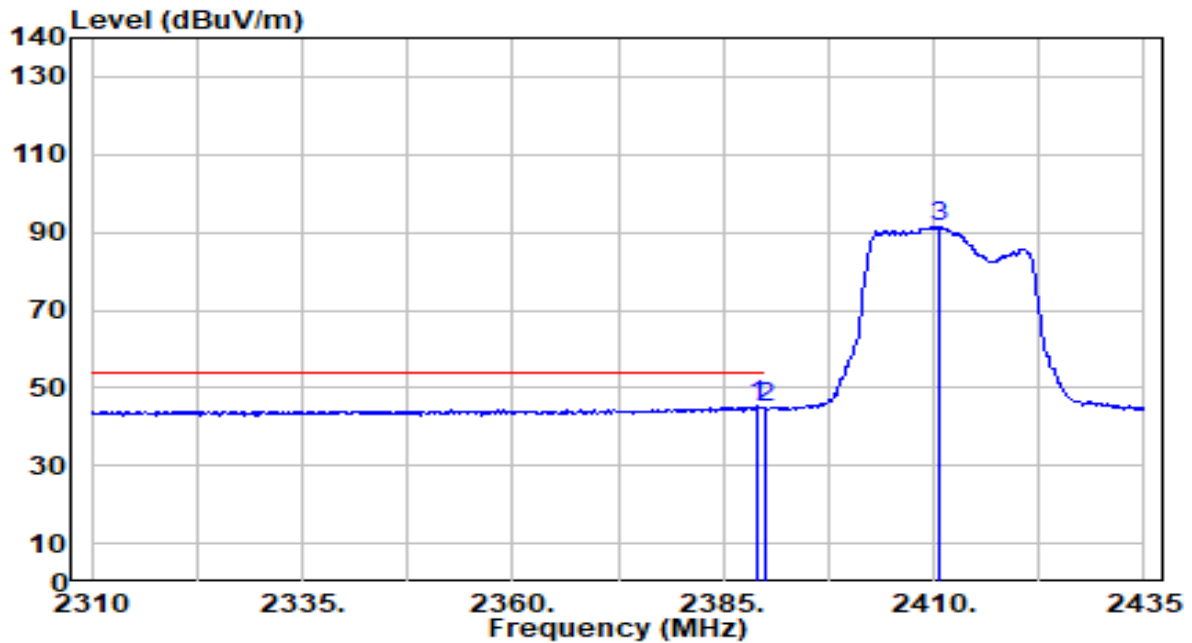


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.000	14.83	30.44	45.27	-8.73	54.00	308	124	Average
2		2390.000	14.36	30.45	44.80	-9.20	54.00	308	124	Average
3		2410.750	60.97	30.49	91.47	N/A	N/A	308	124	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

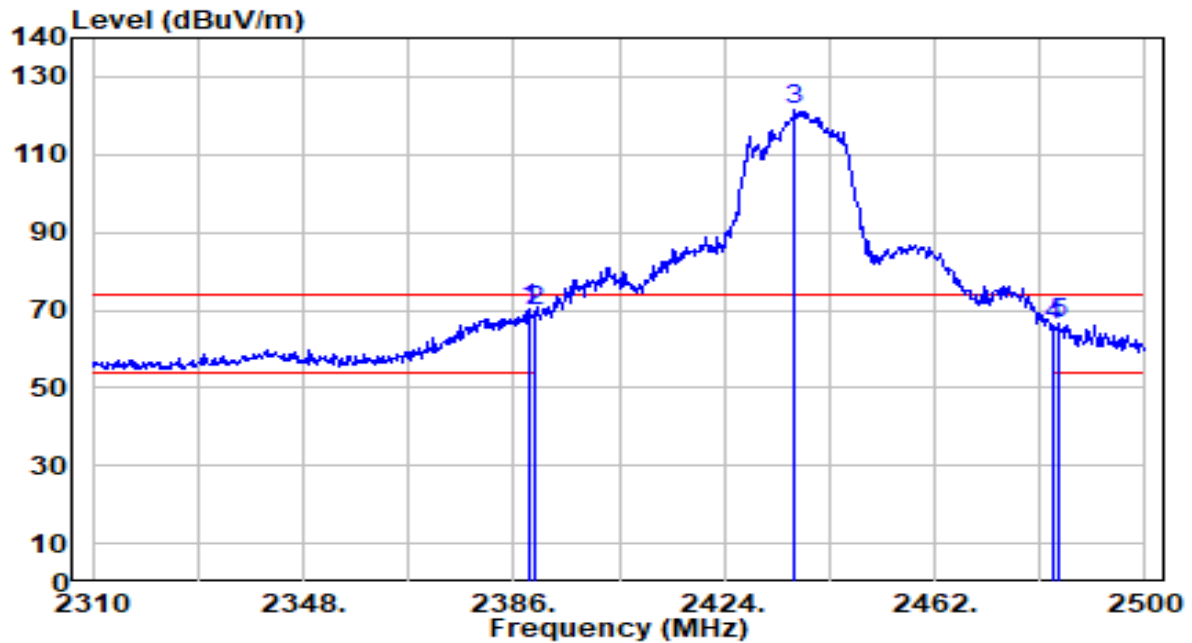


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.660	40.04	30.44	70.48	-3.52	74.00	195	140	Peak
2		2390.000	39.36	30.45	69.81	-4.19	74.00	195	140	Peak
3		2436.730	90.85	30.53	121.38	N/A	N/A	195	140	Peak
4		2483.500	35.34	30.59	65.93	-8.07	74.00	195	140	Peak
5		2484.420	36.12	30.59	66.71	-7.29	74.00	195	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

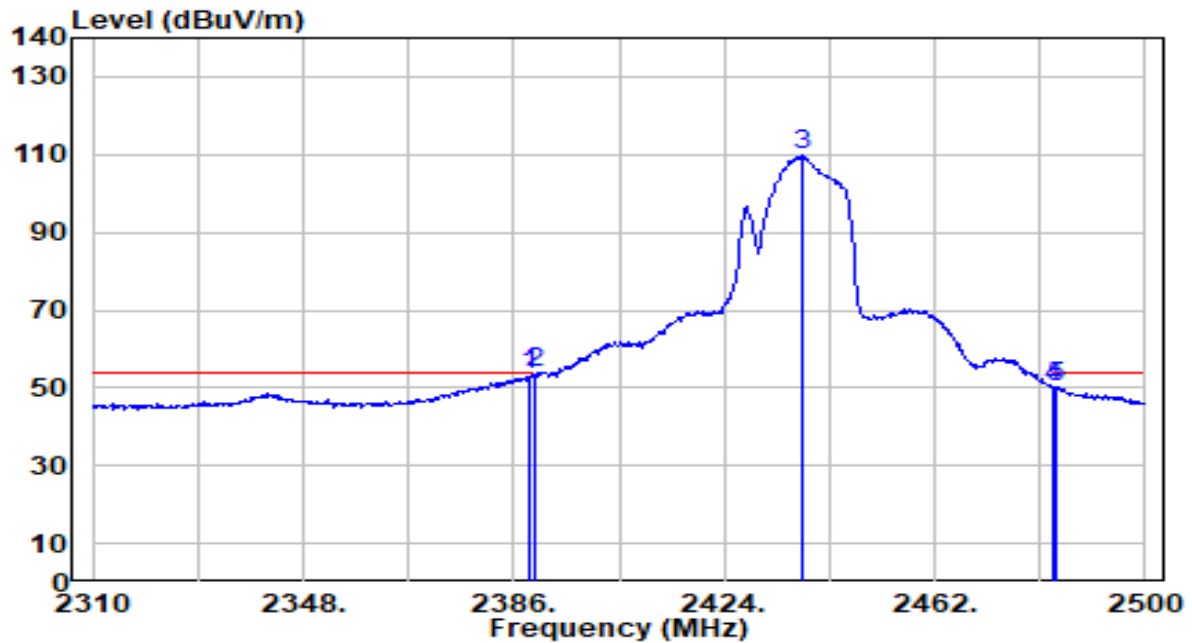


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.660	23.04	30.44	53.48	-0.52	54.00	195	140	Average
2	*	2390.000	23.38	30.45	53.83	-0.17	54.00	195	140	Average
3		2438.060	79.25	30.53	109.78	N/A	N/A	195	140	Average
4		2483.500	19.50	30.59	50.09	-3.91	54.00	195	140	Average
5		2484.040	19.39	30.59	49.98	-4.02	54.00	195	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

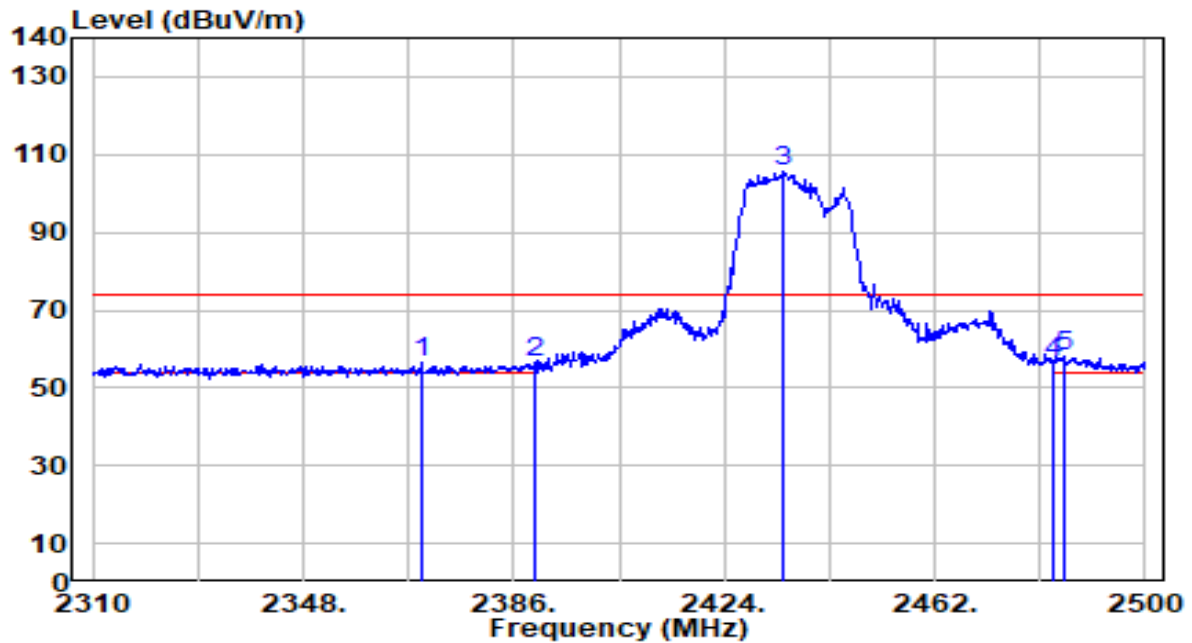


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2369.280	25.91	30.39	56.30	-17.70	74.00	297	102	Peak
2	2390.000	26.12	30.45	56.56	-17.44	74.00	297	102	Peak
3	2434.830	74.95	30.52	105.48	N/A	N/A	297	102	Peak
4	2483.500	25.94	30.59	56.53	-17.47	74.00	297	102	Peak
5	* 2485.370	27.59	30.59	58.18	-15.82	74.00	297	102	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

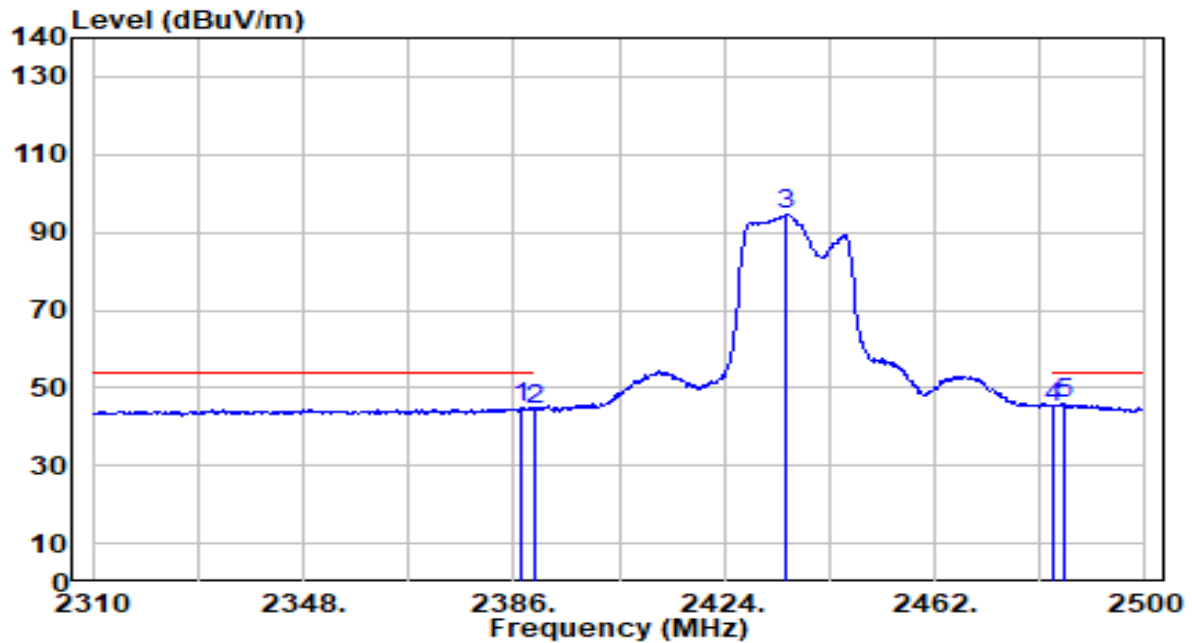


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.520	14.53	30.44	44.97	-9.03	54.00	297	102	Average
2	2390.000	13.88	30.45	44.33	-9.67	54.00	297	102	Average
3	2435.210	64.21	30.52	94.74	N/A	N/A	297	102	Average
4	2483.500	14.56	30.59	45.15	-8.85	54.00	297	102	Average
5	* 2485.560	15.26	30.59	45.85	-8.15	54.00	297	102	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

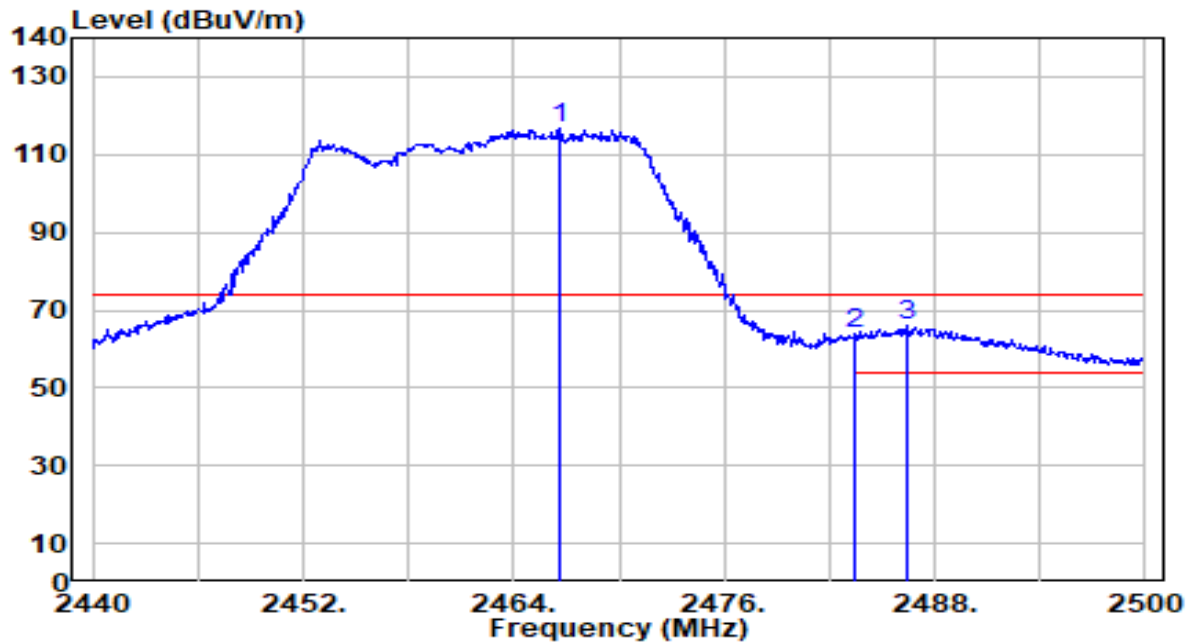


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2466.580	86.20	30.57	116.76	N/A	N/A	170	6	Peak
2	2483.500	33.15	30.59	63.73	-10.27	74.00	170	6	Peak
3	* 2486.380	35.47	30.59	66.06	-7.94	74.00	170	6	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

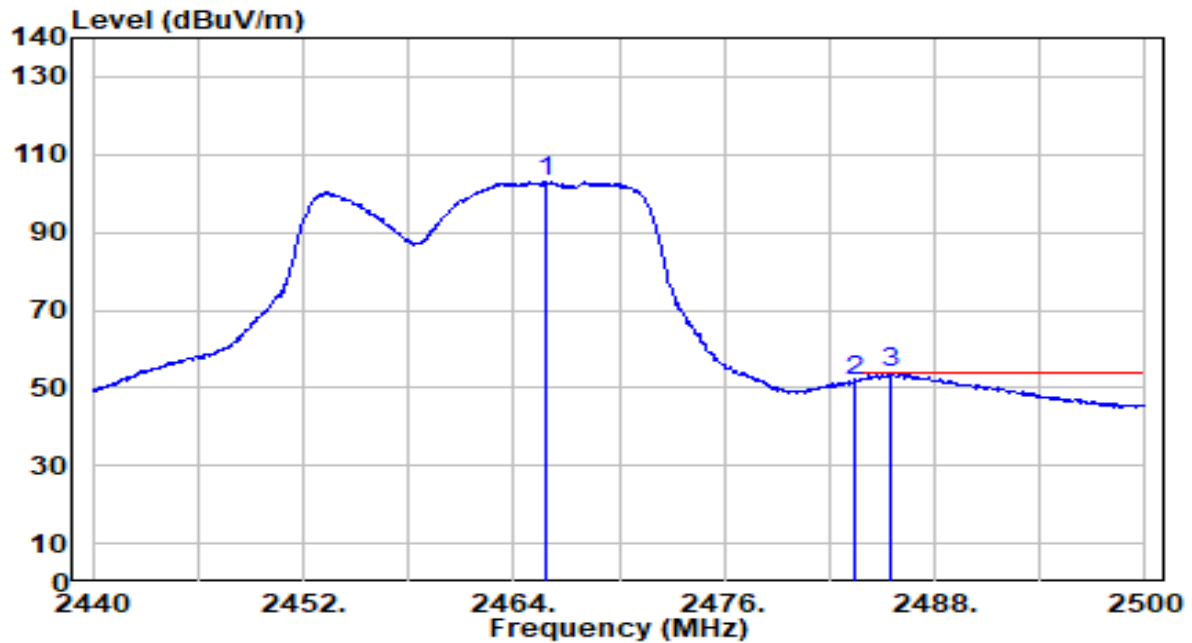


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.860	72.66	30.56	103.23	N/A	N/A	170	6	Average
2	2483.500	21.29	30.59	51.88	-2.12	54.00	170	6	Average
3	* 2485.420	23.21	30.59	53.80	-0.20	54.00	170	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

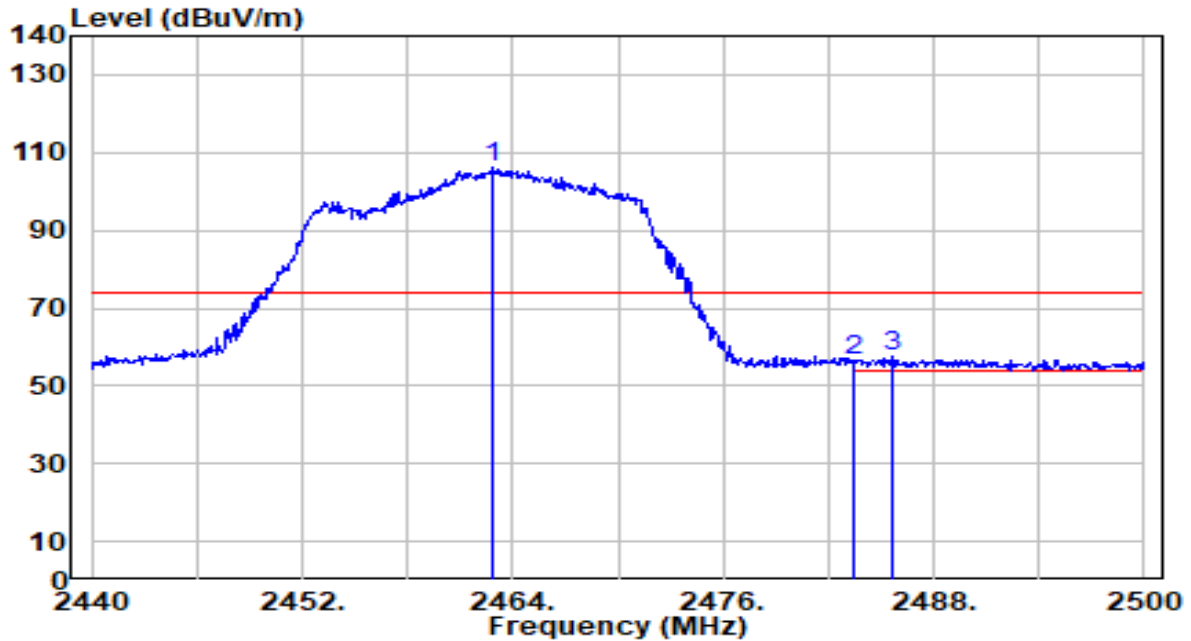


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.920	75.60	30.56	106.16	N/A	N/A	282	103	Peak
2	2483.500	26.18	30.59	56.77	-17.23	74.00	282	103	Peak
3	* 2485.600	26.83	30.59	57.42	-16.58	74.00	282	103	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

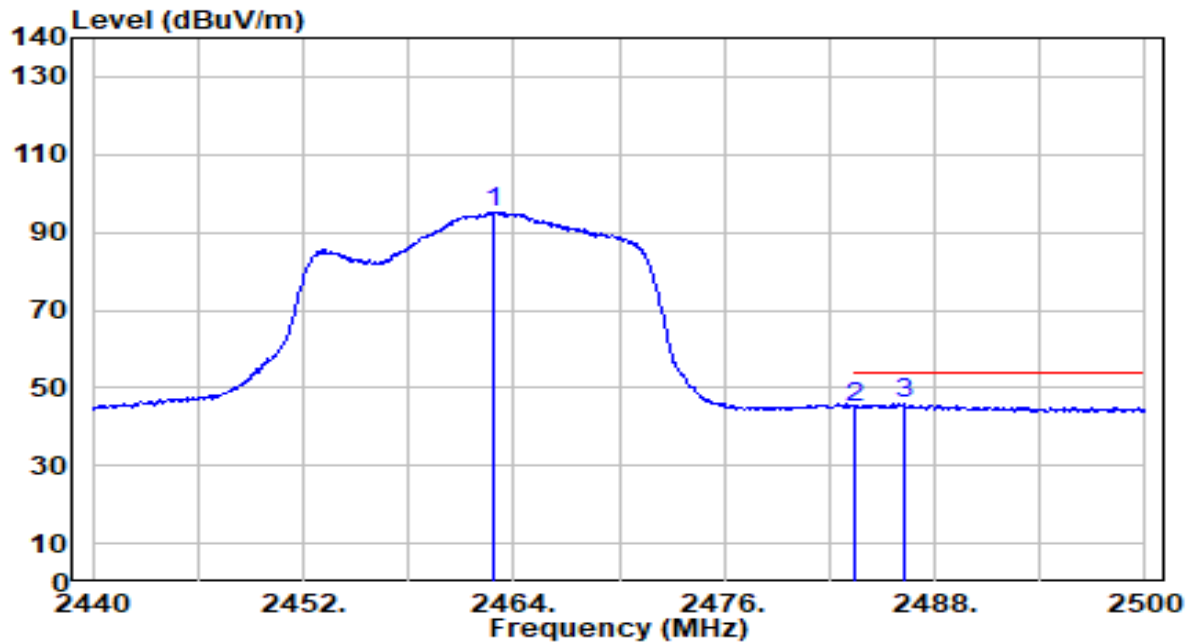


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.860	64.58	30.56	95.14	N/A	N/A	282	103	Average
2	2483.500	14.55	30.59	45.14	-8.86	54.00	282	103	Average
3	* 2486.200	15.26	30.59	45.85	-8.15	54.00	282	103	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

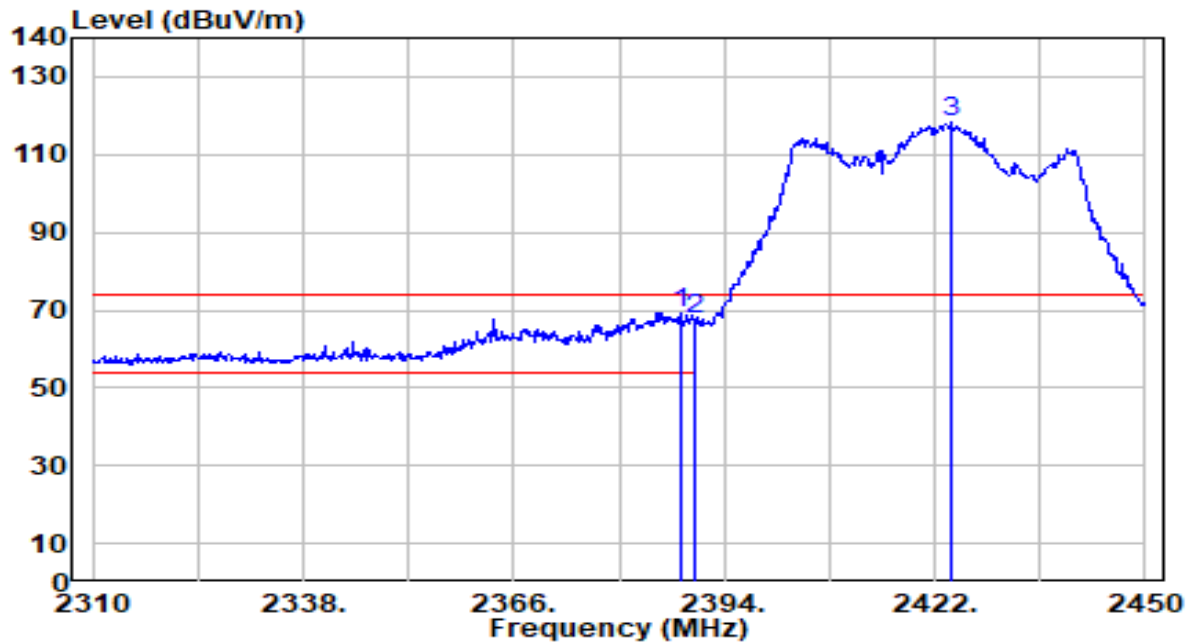


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.120	38.88	30.44	69.33	-4.67	74.00	190	40	Peak
2		2390.000	37.41	30.45	67.86	-6.14	74.00	190	40	Peak
3		2424.240	87.62	30.51	118.13	N/A	N/A	190	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

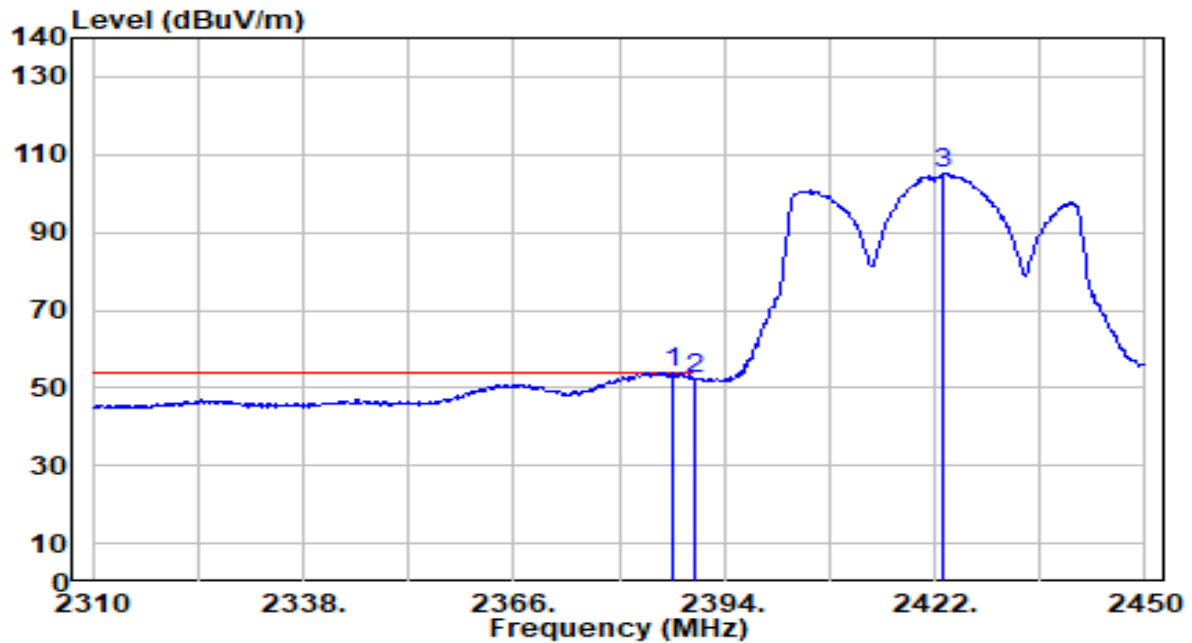


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.280	23.31	30.44	53.75	-0.25	54.00	190	40	Average
2		2390.000	21.95	30.45	52.39	-1.61	54.00	190	40	Average
3		2423.260	74.68	30.51	105.18	N/A	N/A	190	40	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

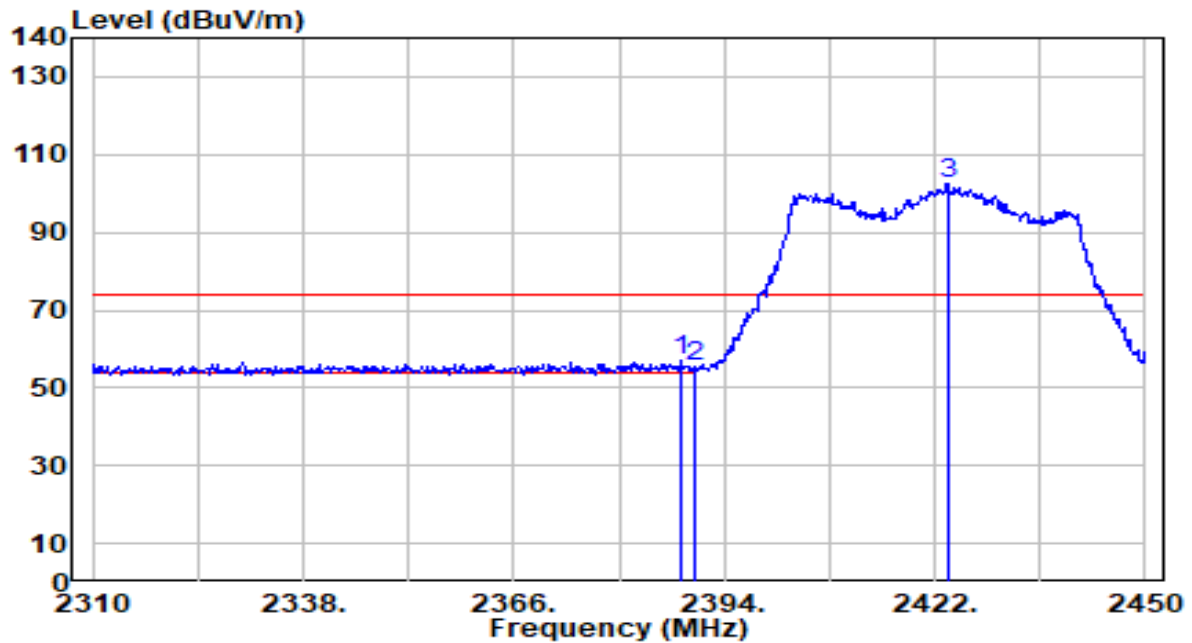


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.260	26.58	30.44	57.02	-16.98	74.00	308	124	Peak
2		2390.000	25.16	30.45	55.61	-18.39	74.00	308	124	Peak
3		2423.680	71.88	30.51	102.39	N/A	N/A	308	124	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

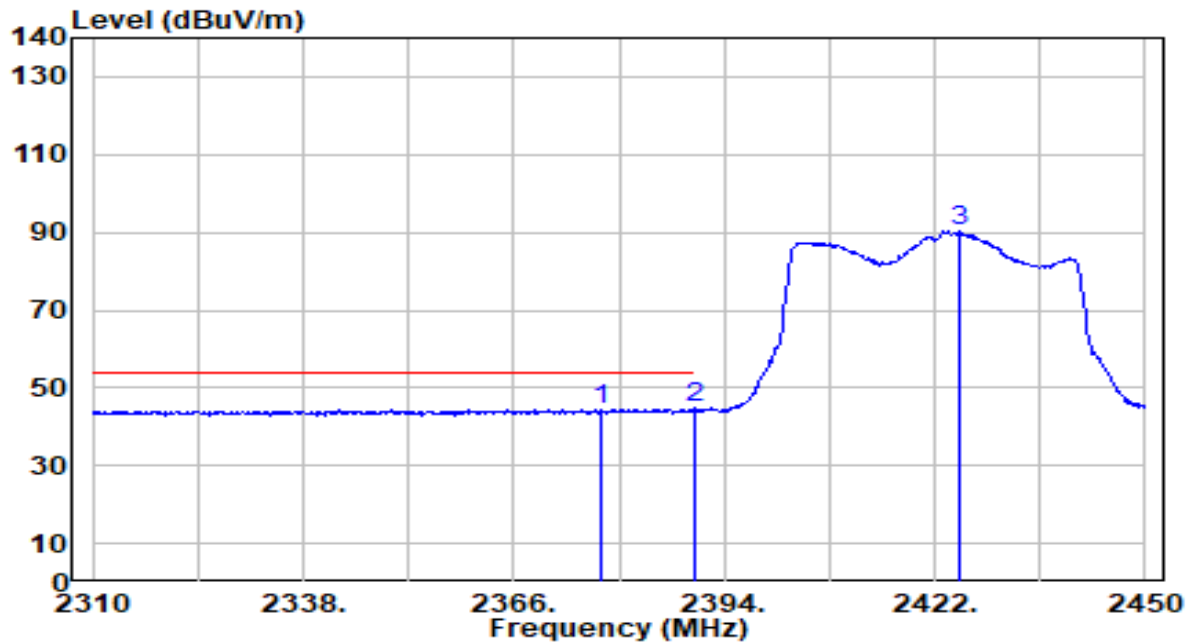


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2377.620	14.16	30.41	44.58	-9.42	54.00	308	124	Average
2	* 2390.000	14.29	30.45	44.73	-9.27	54.00	308	124	Average
3	2425.220	59.75	30.51	90.26	N/A	N/A	308	124	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

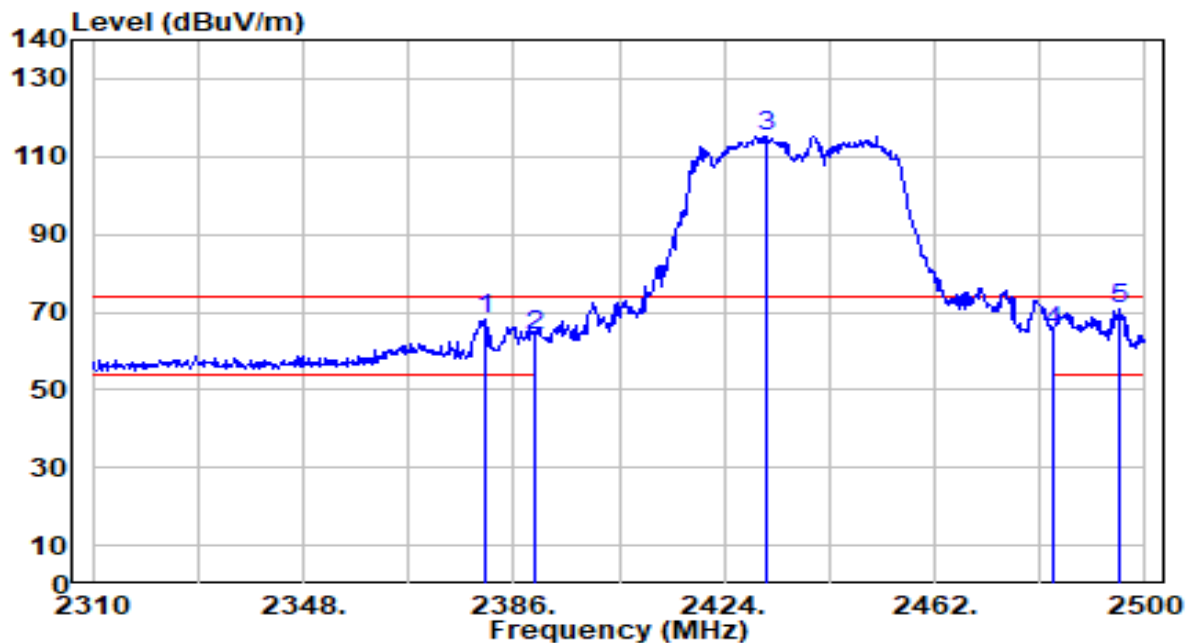


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2380.680	37.61	30.42	68.03	-5.97	74.00	195	140	Peak
2	2390.000	33.28	30.45	63.73	-10.27	74.00	195	140	Peak
3	2431.790	84.91	30.52	115.42	N/A	N/A	195	140	Peak
4	2483.500	34.20	30.59	64.79	-9.21	74.00	195	140	Peak
5	* 2495.440	40.16	30.60	70.76	-3.24	74.00	195	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

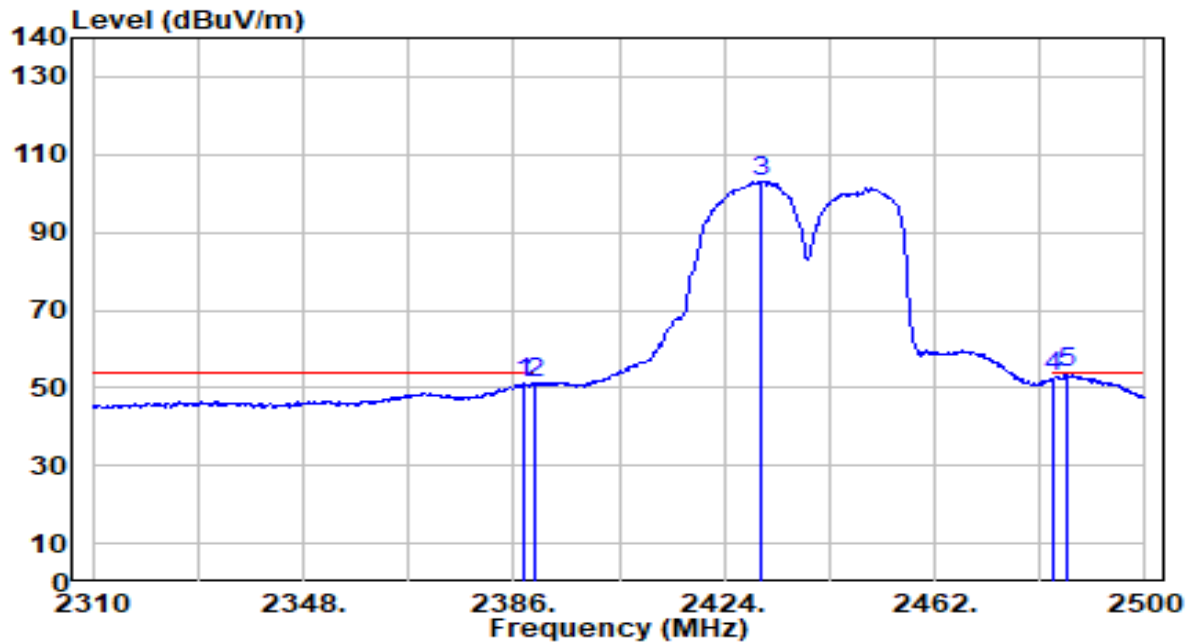


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.710	20.65	30.44	51.10	-2.90	54.00	195	140	Average
2		2390.000	20.59	30.45	51.03	-2.97	54.00	195	140	Average
3		2430.460	72.73	30.52	103.25	N/A	N/A	195	140	Average
4		2483.500	22.14	30.59	52.73	-1.27	54.00	195	140	Average
5	*	2485.940	23.21	30.59	53.80	-0.20	54.00	195	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

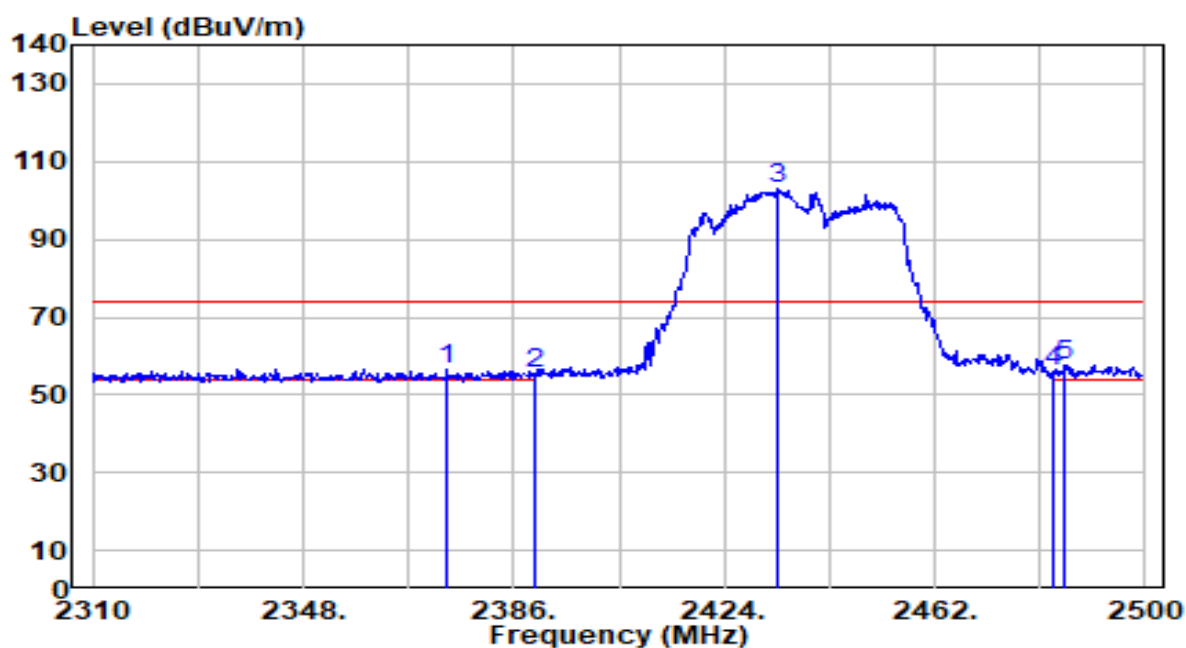


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2374.030	26.23	30.40	56.63	-17.37	74.00	297	102	Peak
2	2390.000	24.77	30.45	55.22	-18.78	74.00	297	102	Peak
3	2433.500	72.49	30.52	103.01	N/A	N/A	297	102	Peak
4	2483.500	25.46	30.59	56.05	-17.95	74.00	297	102	Peak
5	* 2485.560	27.20	30.59	57.79	-16.21	74.00	297	102	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

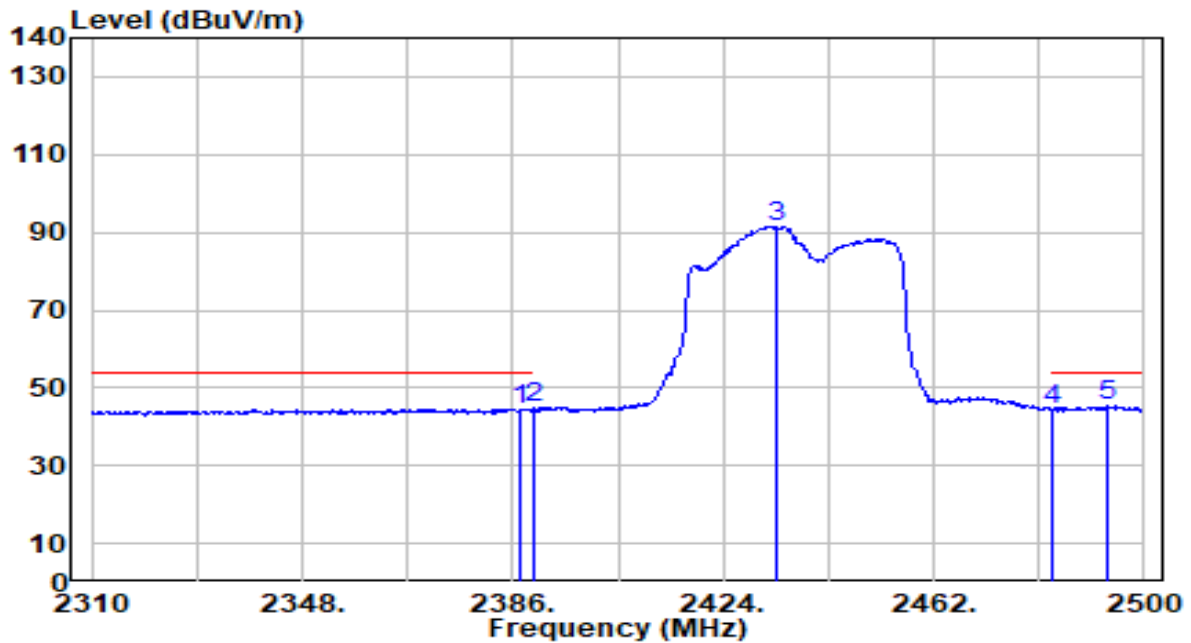


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.330	14.13	30.44	44.57	-9.43	54.00	297	102	Average
2		2390.000	14.25	30.45	44.70	-9.30	54.00	297	102	Average
3		2433.690	61.11	30.52	91.63	N/A	N/A	297	102	Average
4		2483.500	14.05	30.59	44.63	-9.37	54.00	297	102	Average
5	*	2493.540	14.61	30.60	45.21	-8.79	54.00	297	102	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

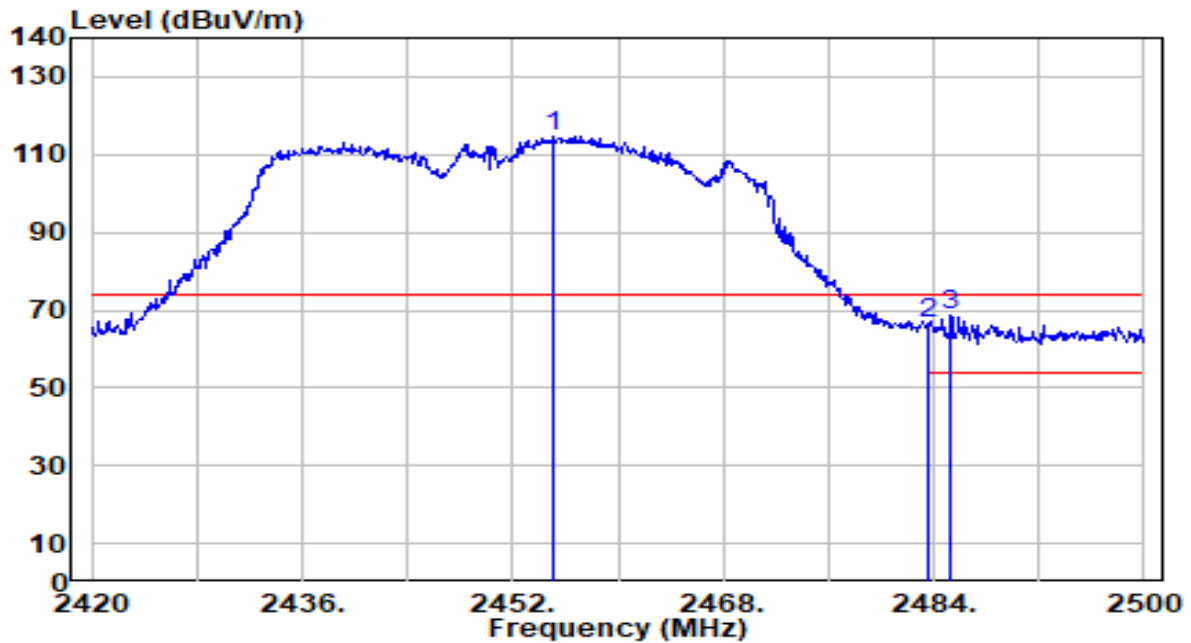


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.040	84.29	30.55	114.84	N/A	N/A	170	6	Peak
2	2483.500	35.84	30.59	66.43	-7.57	74.00	170	6	Peak
3	* 2485.280	37.97	30.59	68.56	-5.44	74.00	170	6	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

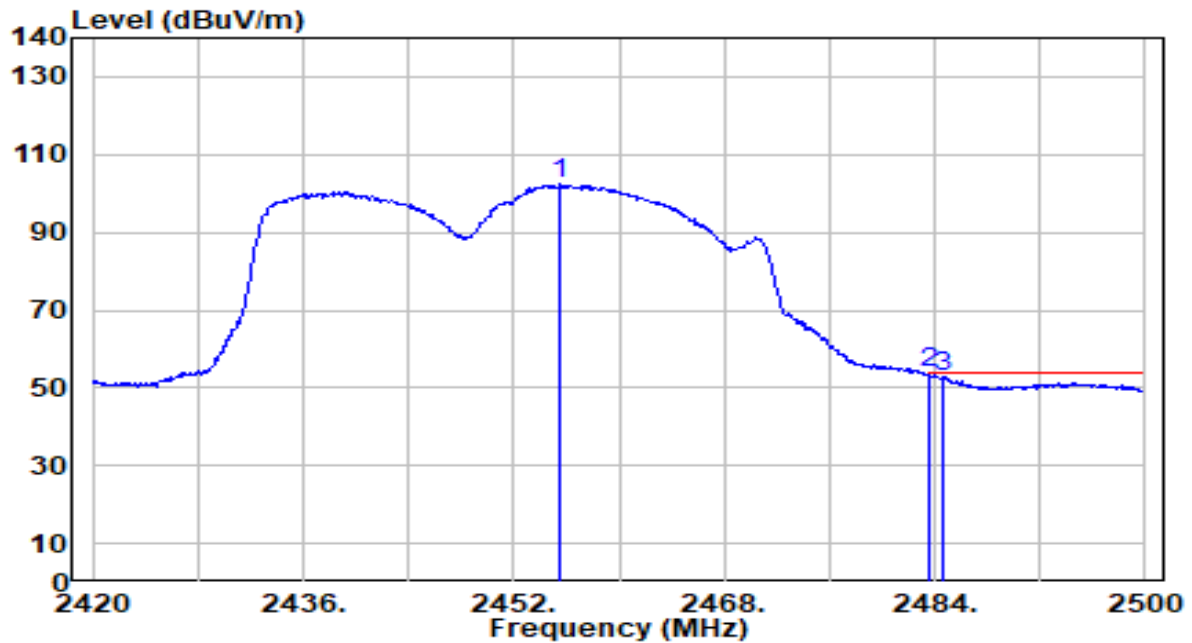


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.520	71.68	30.55	102.23	N/A	N/A	170	6	Average
2	*	2483.500	23.14	30.59	53.72	-0.28	54.00	170	6	Average
3		2484.560	22.25	30.59	52.84	-1.16	54.00	170	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

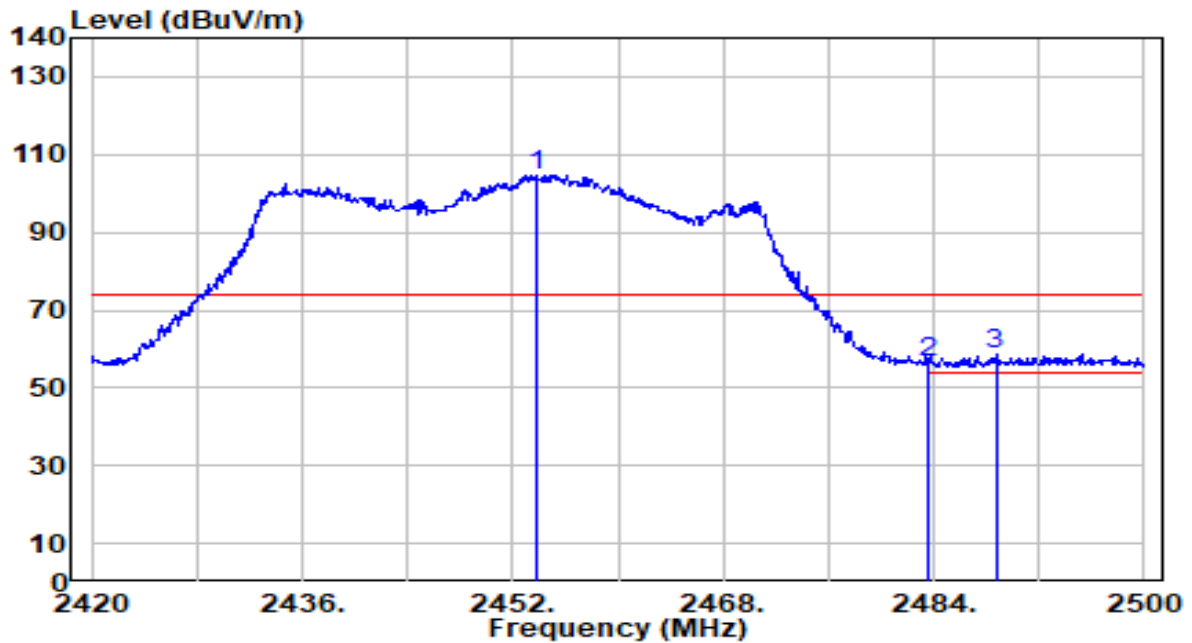


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.840	74.18	30.55	104.73	N/A	N/A	282	103	Peak
2	2483.500	25.81	30.59	56.40	-17.60	74.00	282	103	Peak
3	* 2488.720	27.95	30.59	58.55	-15.45	74.00	282	103	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant	Test Voltage	AC 120V/60Hz

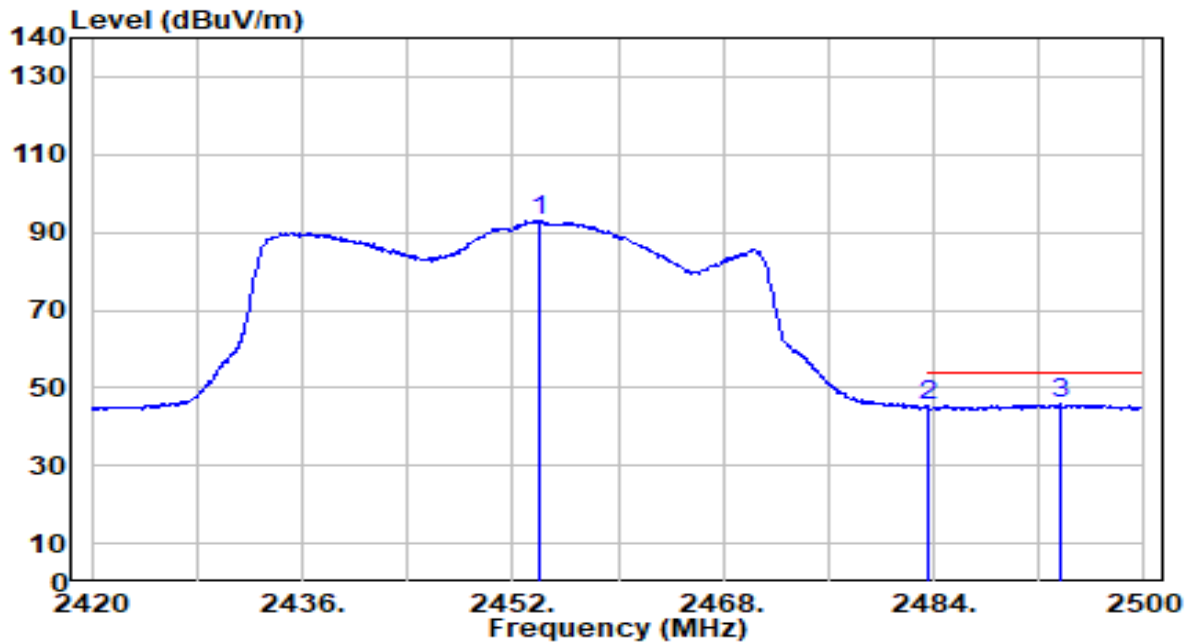


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.000	62.68	30.55	93.23	N/A	N/A	282	103	Average
2	2483.500	14.98	30.59	45.57	-8.43	54.00	282	103	Average
3	* 2493.680	15.22	30.60	45.82	-8.18	54.00	282	103	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_RX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

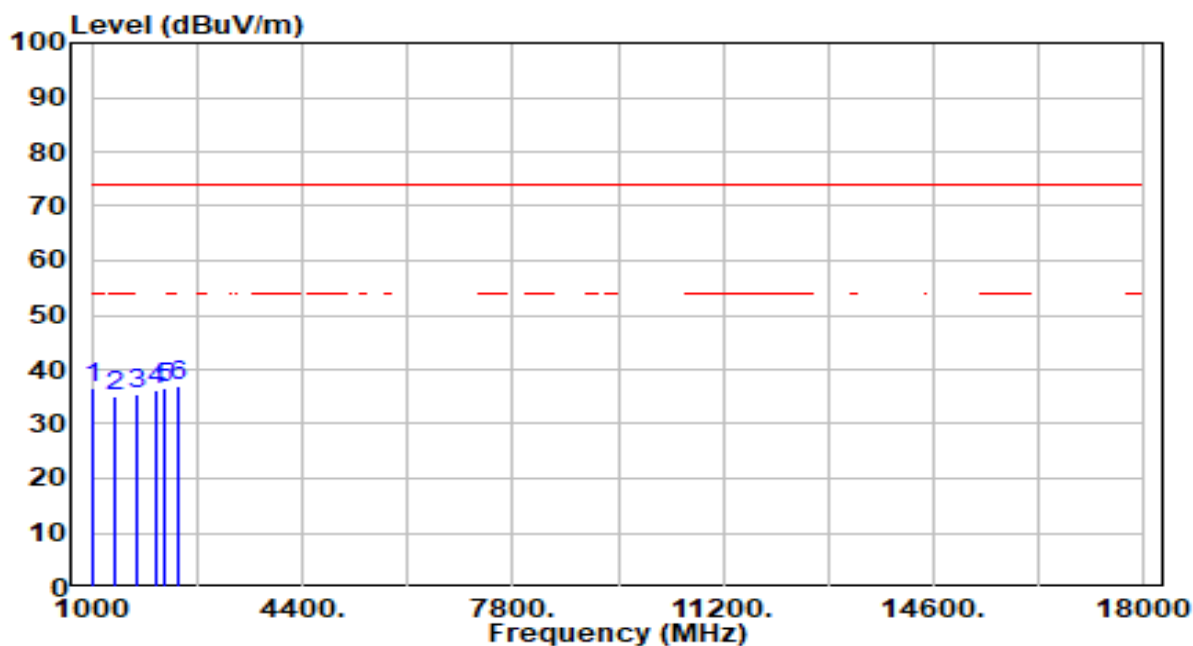


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1038.000	44.63	-8.17	36.46	-37.54	74.00	100	25	Peak
2	1364.000	42.70	-7.42	35.27	-38.73	74.00	200	70	Peak
3	1717.000	42.95	-7.34	35.61	-38.39	74.00	144	360	Peak
4	2028.000	41.96	-5.90	36.05	-37.95	74.00	200	180	Peak
5	2182.000	42.09	-5.54	36.55	-37.45	74.00	200	346	Peak
6	* 2381.000	42.16	-5.16	37.00	-37.00	74.00	200	87	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_RX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

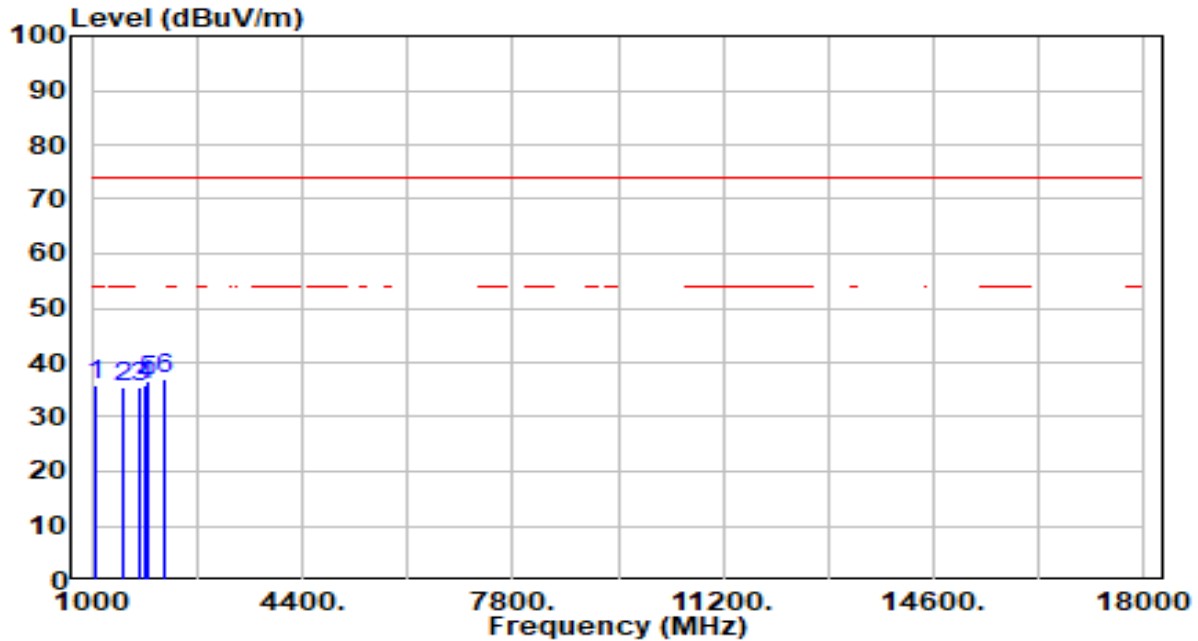


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1072.000	43.91	-8.17	35.75	-38.25	74.00	200	220	Peak
2	1493.000	43.07	-7.49	35.57	-38.43	74.00	300	56	Peak
3	1783.000	42.69	-7.09	35.60	-38.40	74.00	100	14	Peak
4	1851.000	42.59	-6.76	35.83	-38.17	74.00	116	360	Peak
5	1914.000	42.89	-6.42	36.46	-37.54	74.00	100	34	Peak
6	* 2189.000	42.50	-5.52	36.98	-37.02	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical Antenna Data

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

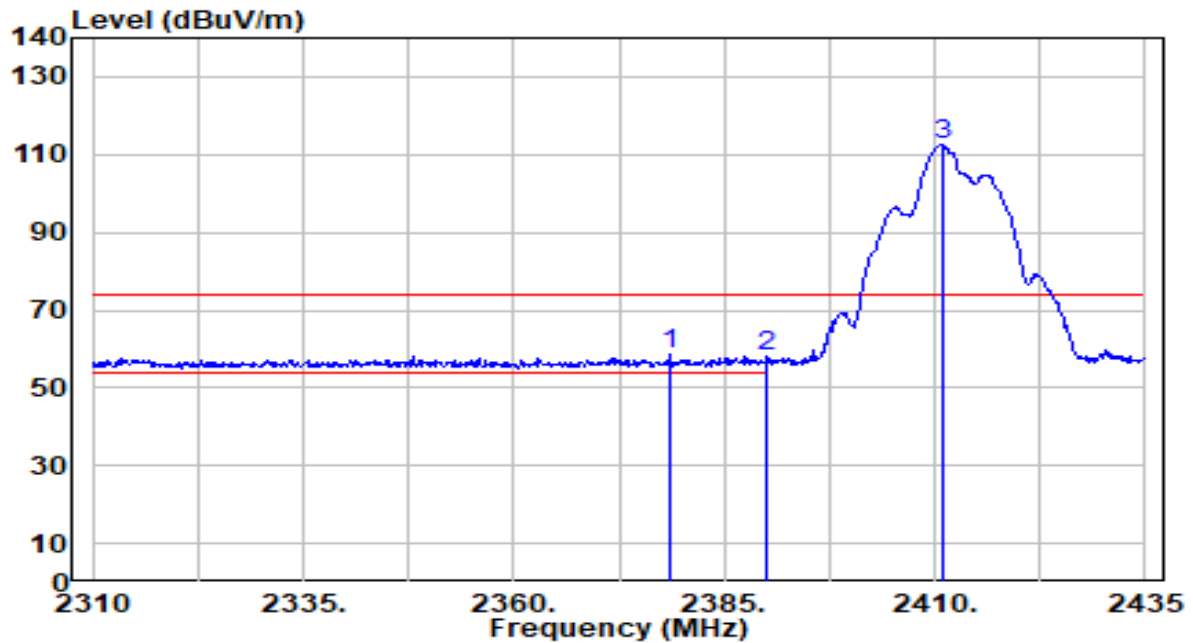


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2378.500	28.20	30.41	58.62	-15.38	74.00	138	310	Peak
2		2390.000	27.50	30.45	57.95	-16.05	74.00	138	310	Peak
3		2410.875	81.90	30.49	112.39	N/A	N/A	138	310	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

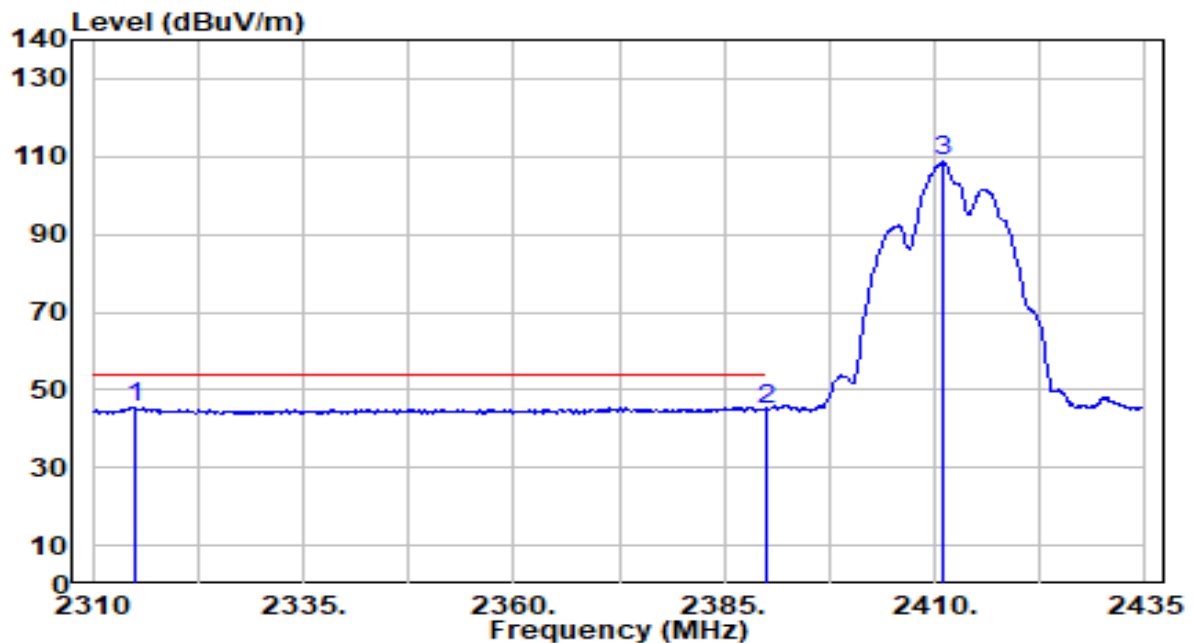


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2315.000	15.44	30.23	45.67	-8.33	54.00	138	310	Average
2		2390.000	14.21	30.45	44.66	-9.34	54.00	138	310	Average
3		2410.875	78.20	30.49	108.69	N/A	N/A	138	310	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

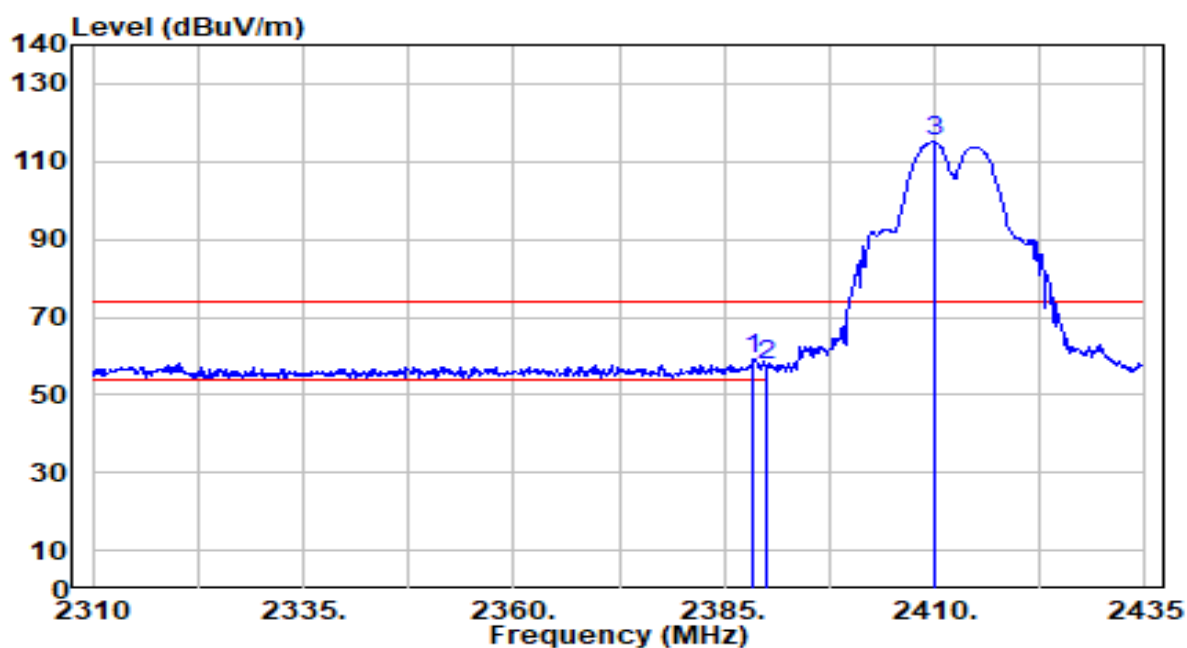


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.500	28.81	30.44	59.25	-14.75	74.00	100	58	Peak
2		2390.000	27.32	30.45	57.77	-16.23	74.00	100	58	Peak
3		2410.000	84.49	30.49	114.98	N/A	N/A	100	58	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

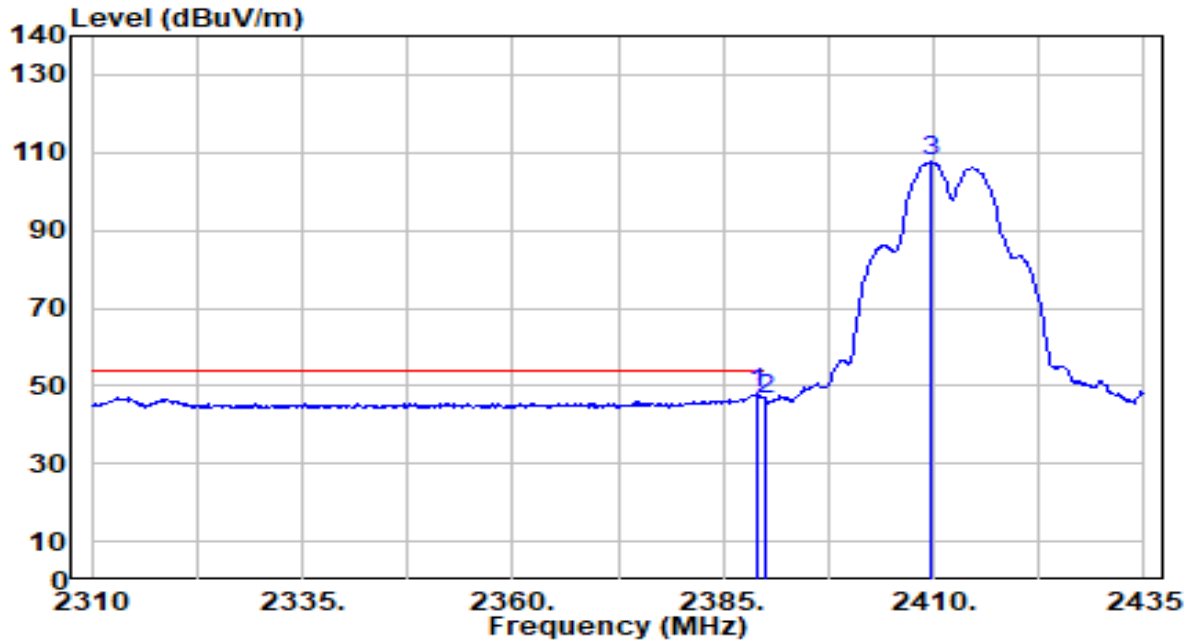


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.000	17.50	30.44	47.94	-6.06	54.00	100	58	Average
2		2390.000	15.78	30.45	46.23	-7.77	54.00	100	58	Average
3		2409.750	77.10	30.49	107.59	N/A	N/A	100	58	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

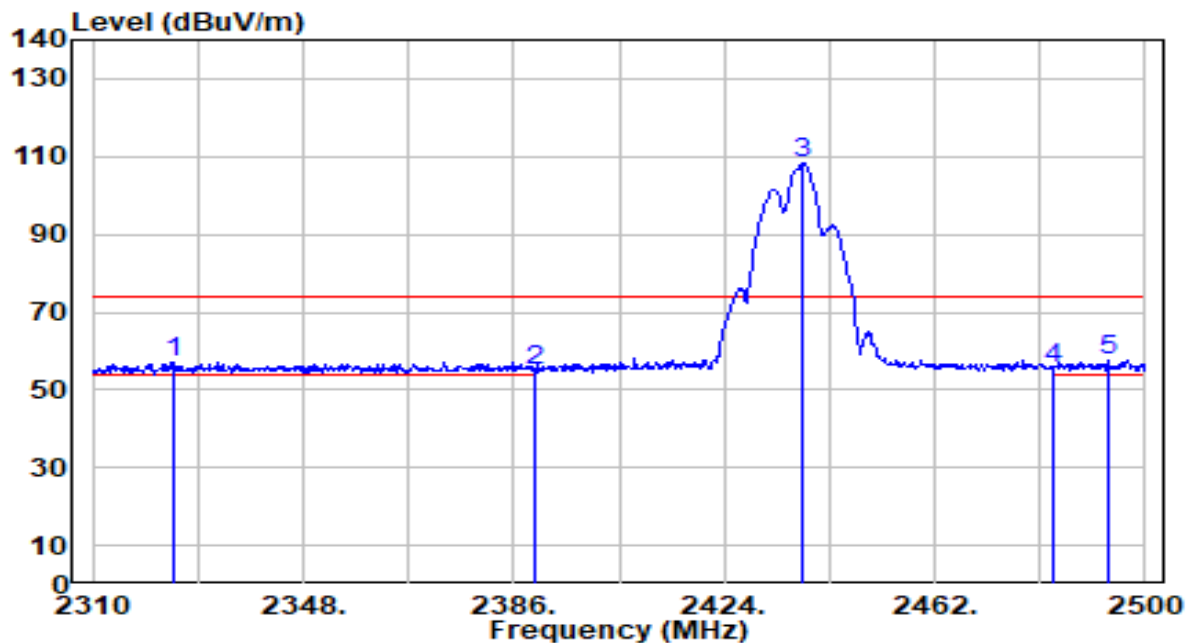


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2324.820	26.97	30.26	57.23	-16.77	74.00	165	201	Peak
2	2390.000	24.43	30.45	54.88	-19.12	74.00	165	201	Peak
3	2438.250	77.81	30.53	108.34	N/A	N/A	165	201	Peak
4	2483.500	24.72	30.59	55.31	-18.69	74.00	165	201	Peak
5	* 2493.160	27.18	30.60	57.78	-16.22	74.00	165	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

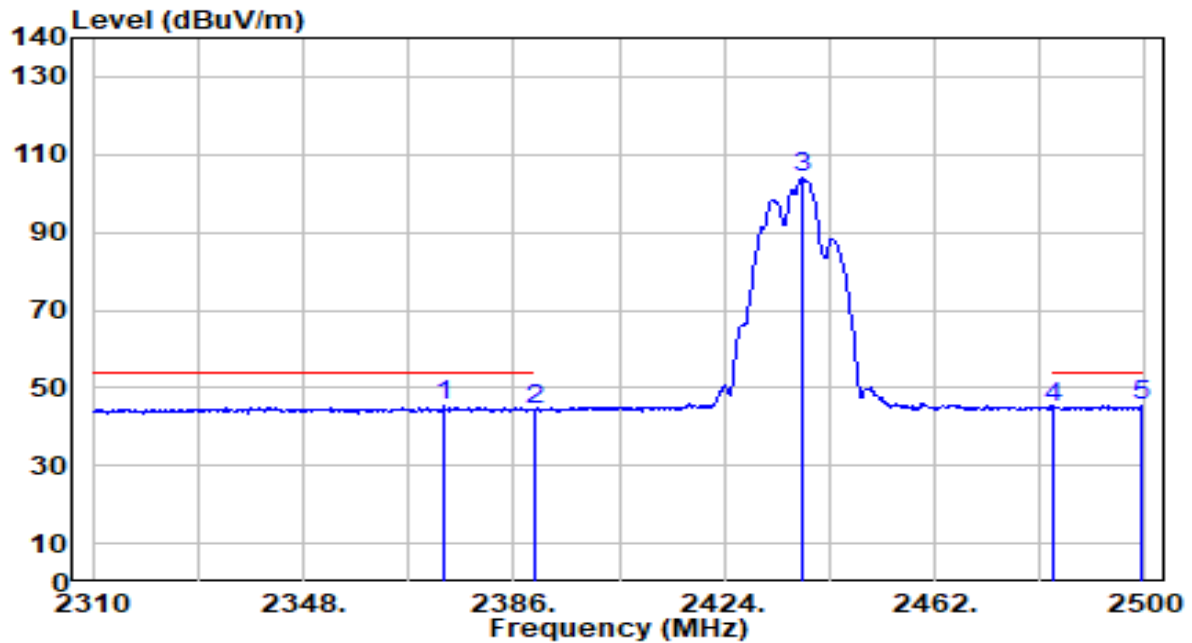


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2373.460	14.90	30.40	45.30	-8.70	54.00	165	201	Average
2	2390.000	13.78	30.45	44.22	-9.78	54.00	165	201	Average
3	2438.060	73.49	30.53	104.01	N/A	N/A	165	201	Average
4	2483.500	14.26	30.59	44.85	-9.15	54.00	165	201	Average
5	* 2499.430	14.79	30.61	45.40	-8.60	54.00	165	201	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

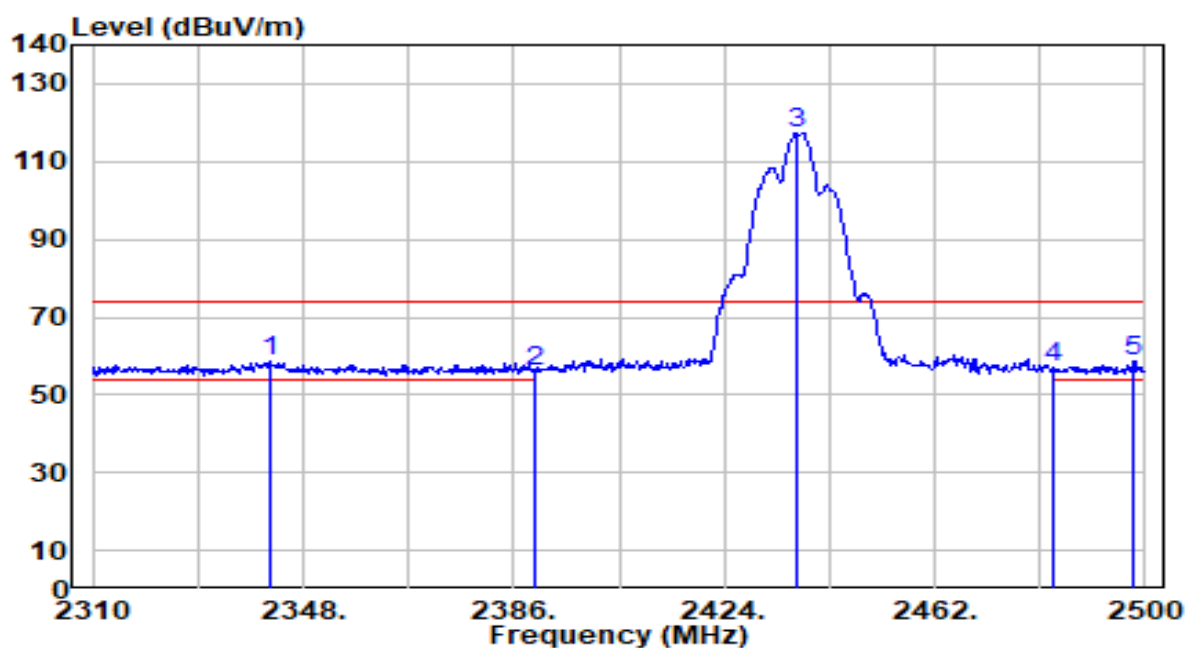


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2342.110	28.50	30.31	58.81	-15.19	74.00	156	289	Peak
2		2390.000	25.61	30.45	56.05	-17.95	74.00	156	289	Peak
3		2437.110	86.92	30.53	117.44	N/A	N/A	156	289	Peak
4		2483.500	26.53	30.59	57.12	-16.88	74.00	156	289	Peak
5		2497.910	27.90	30.61	58.51	-15.49	74.00	156	289	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

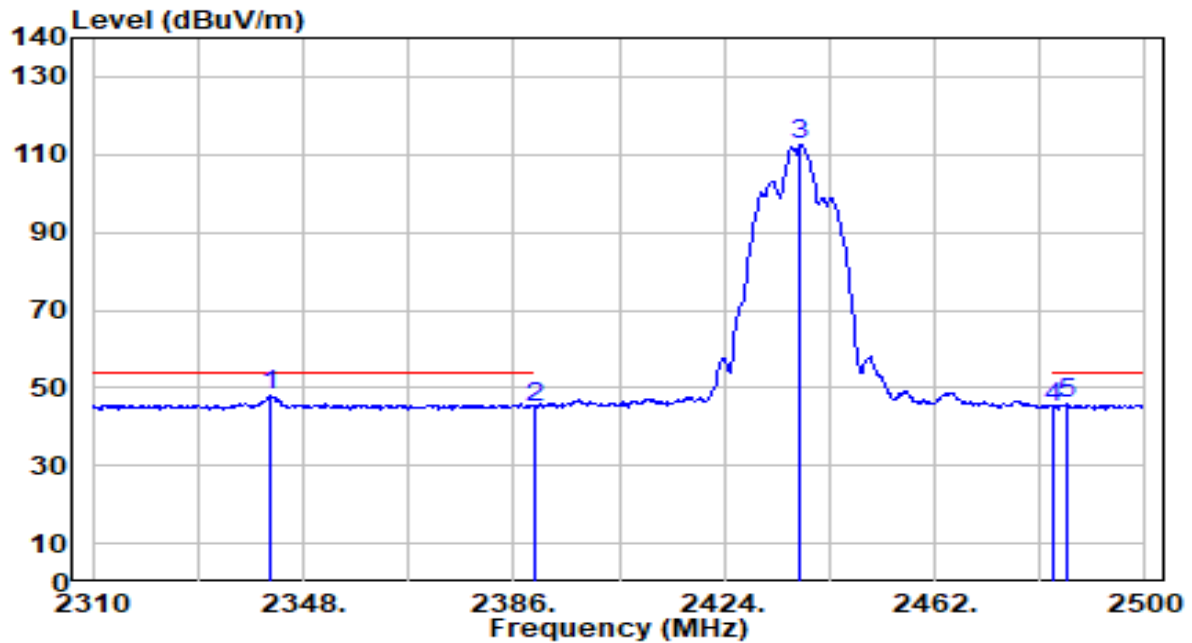


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2341.920	17.56	30.31	47.87	-6.13	54.00	156	289	Average
2		2390.000	14.59	30.45	45.04	-8.96	54.00	156	289	Average
3		2437.680	82.16	30.53	112.69	N/A	N/A	156	289	Average
4		2483.500	14.46	30.59	45.04	-8.96	54.00	156	289	Average
5		2486.130	15.17	30.59	45.76	-8.24	54.00	156	289	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

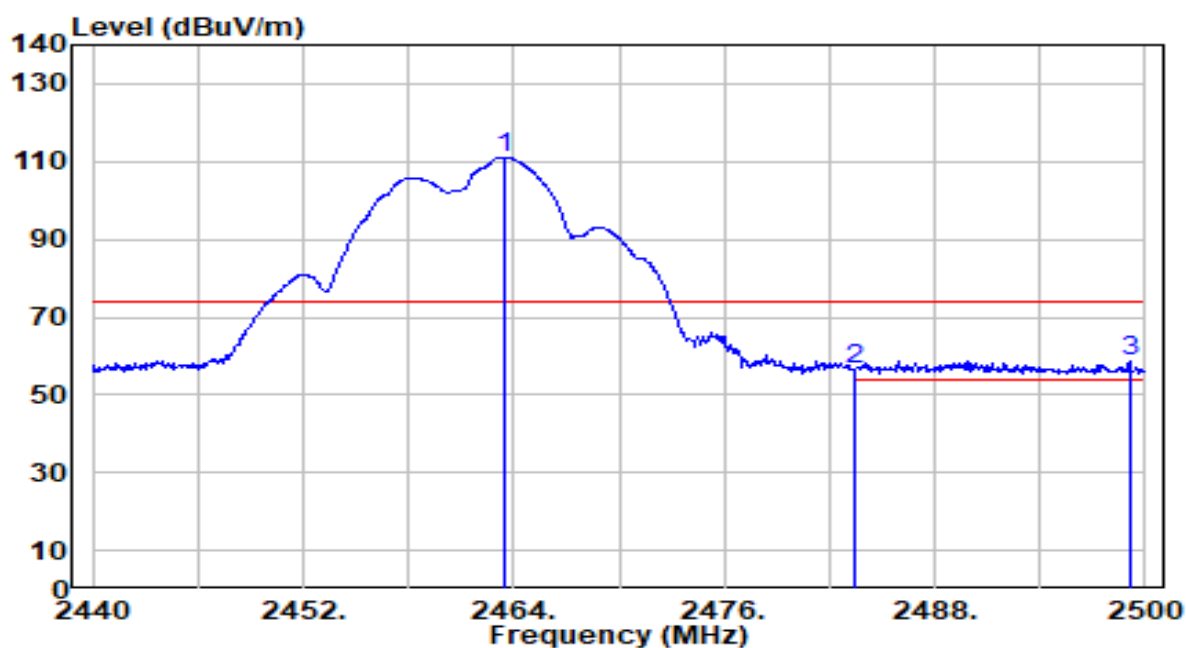


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.460	80.54	30.56	111.10	N/A	N/A	179	310	Peak
2	2483.500	25.76	30.59	56.35	-17.65	74.00	179	310	Peak
3	* 2499.100	28.08	30.61	58.69	-15.31	74.00	179	310	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

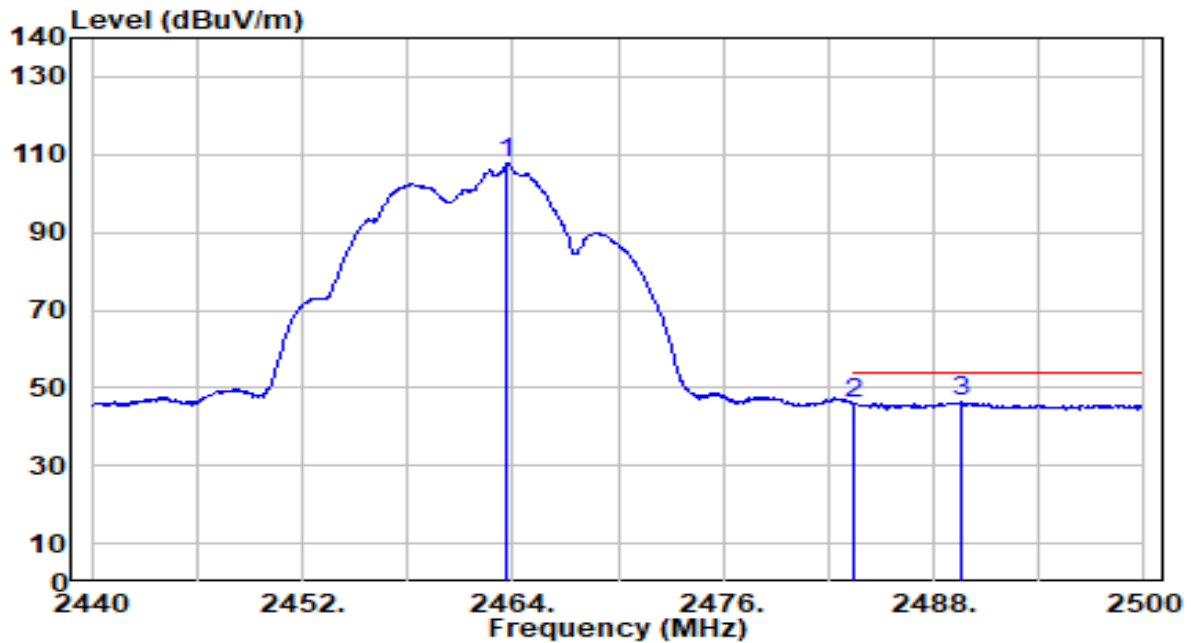


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.640	77.00	30.56	107.56	N/A	N/A	179	310	Average
2		2483.500	15.48	30.59	46.07	-7.93	54.00	179	310	Average
3	*	2489.500	15.89	30.60	46.49	-7.51	54.00	179	310	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

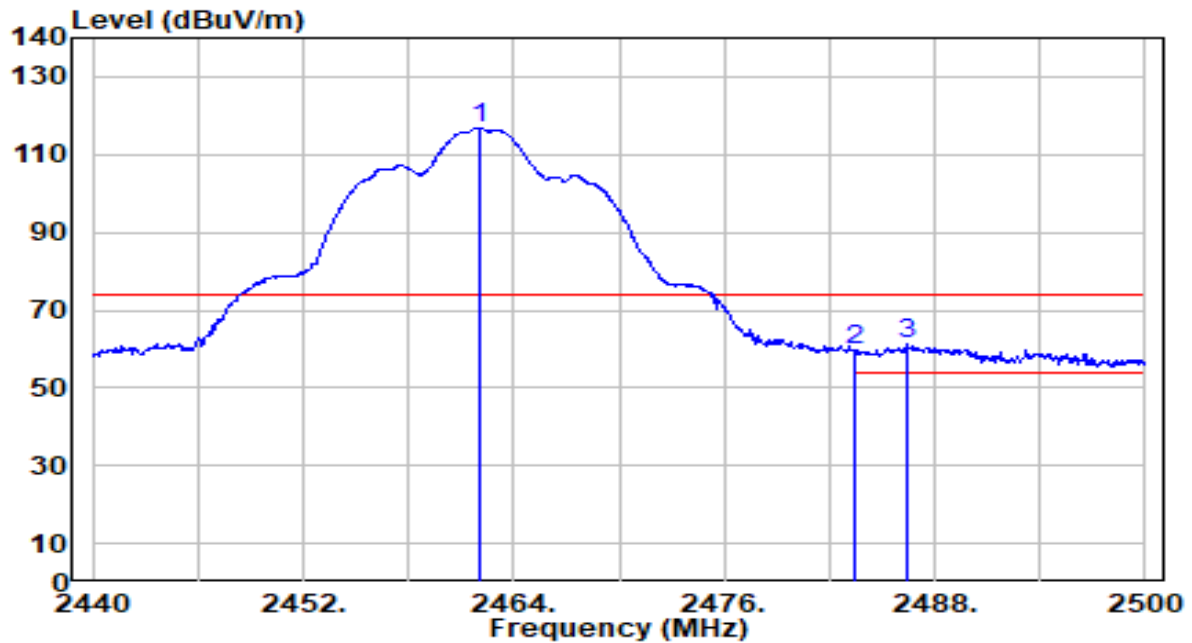


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.020	86.39	30.56	116.95	N/A	N/A	100	54	Peak
2	2483.500	29.27	30.59	59.86	-14.14	74.00	100	54	Peak
3	* 2486.500	30.58	30.59	61.17	-12.83	74.00	100	54	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

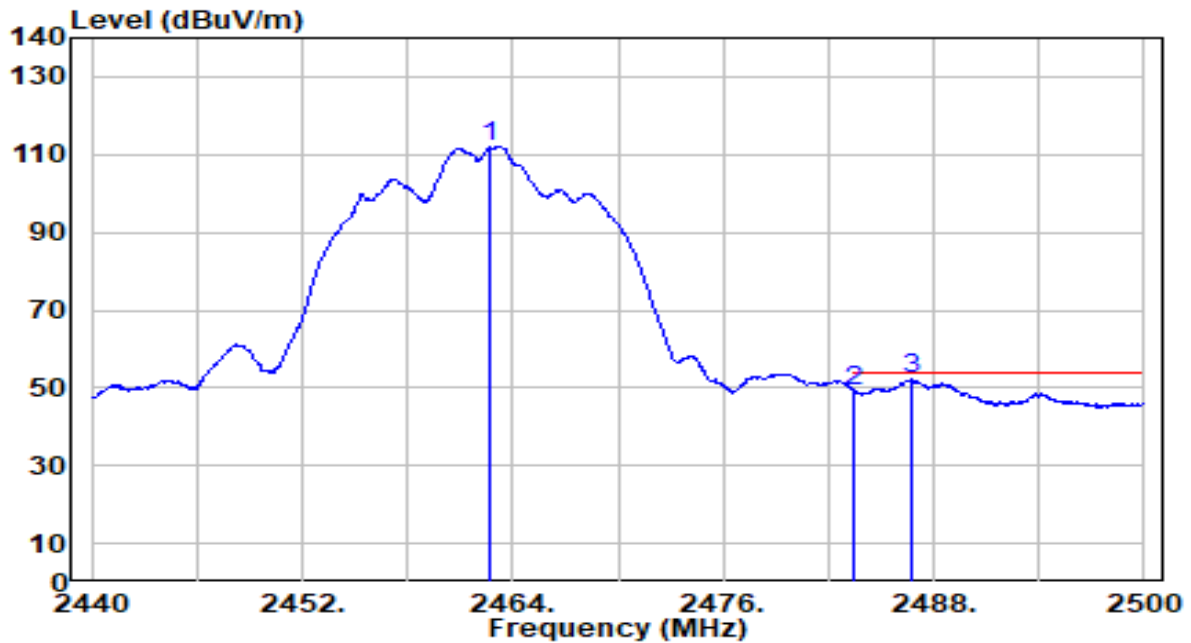


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.680	81.54	30.56	112.10	N/A	N/A	100	54	Average
2	2483.500	18.36	30.59	48.95	-5.05	54.00	100	54	Average
3	* 2486.740	21.73	30.59	52.32	-1.68	54.00	100	54	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

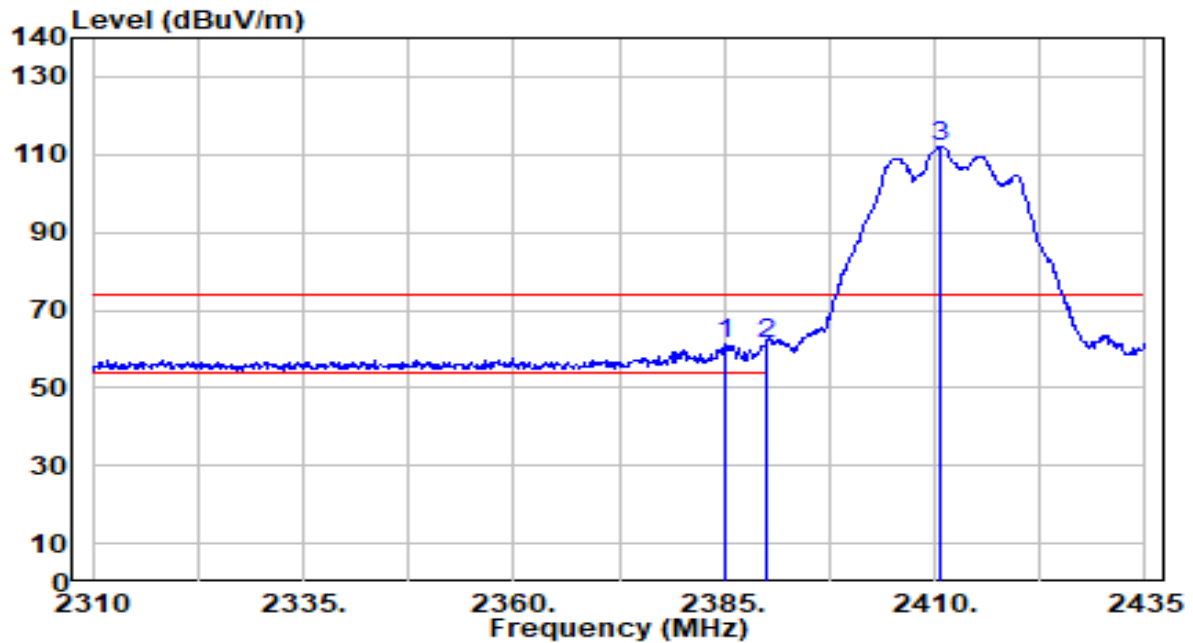


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.250	30.69	30.43	61.12	-12.88	74.00	138	310	Peak
2	*	2390.000	31.05	30.45	61.50	-12.50	74.00	138	310	Peak
3		2410.500	81.58	30.49	112.07	N/A	N/A	138	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

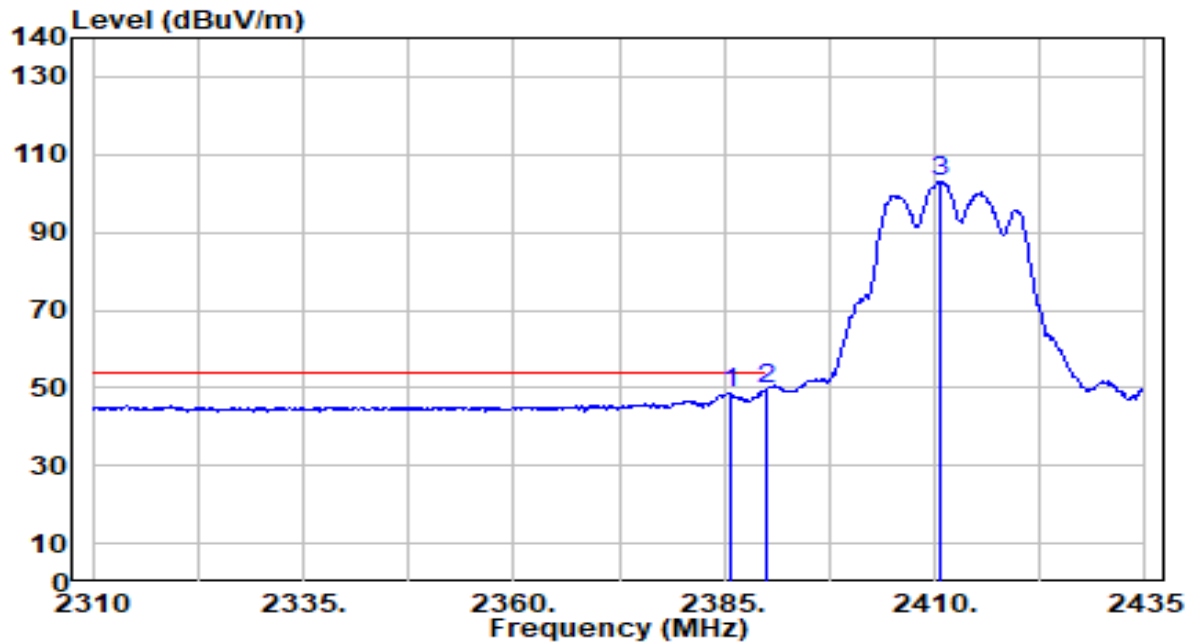


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.625	18.22	30.44	48.66	-5.34	54.00	138	310	Average
2	*	2390.000	19.26	30.45	49.71	-4.29	54.00	138	310	Average
3		2410.750	72.47	30.49	102.96	N/A	N/A	138	310	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

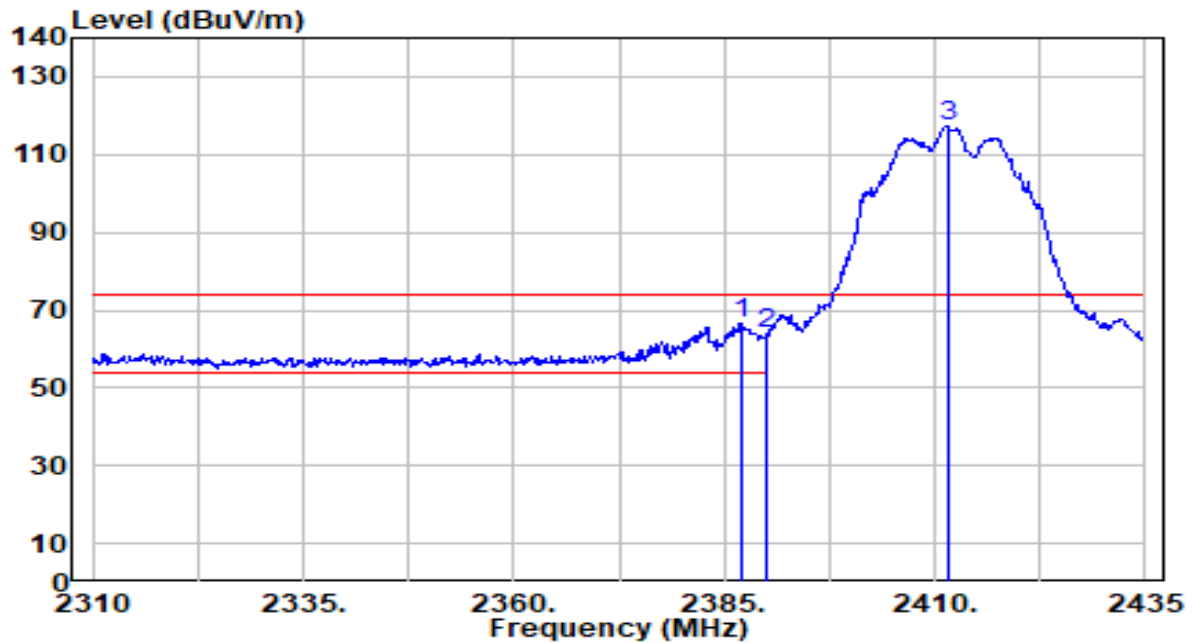


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.125	36.23	30.44	66.66	-7.34	74.00	100	58	Peak
2		2390.000	33.68	30.45	64.12	-9.88	74.00	100	58	Peak
3		2411.500	86.57	30.49	117.06	N/A	N/A	100	58	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

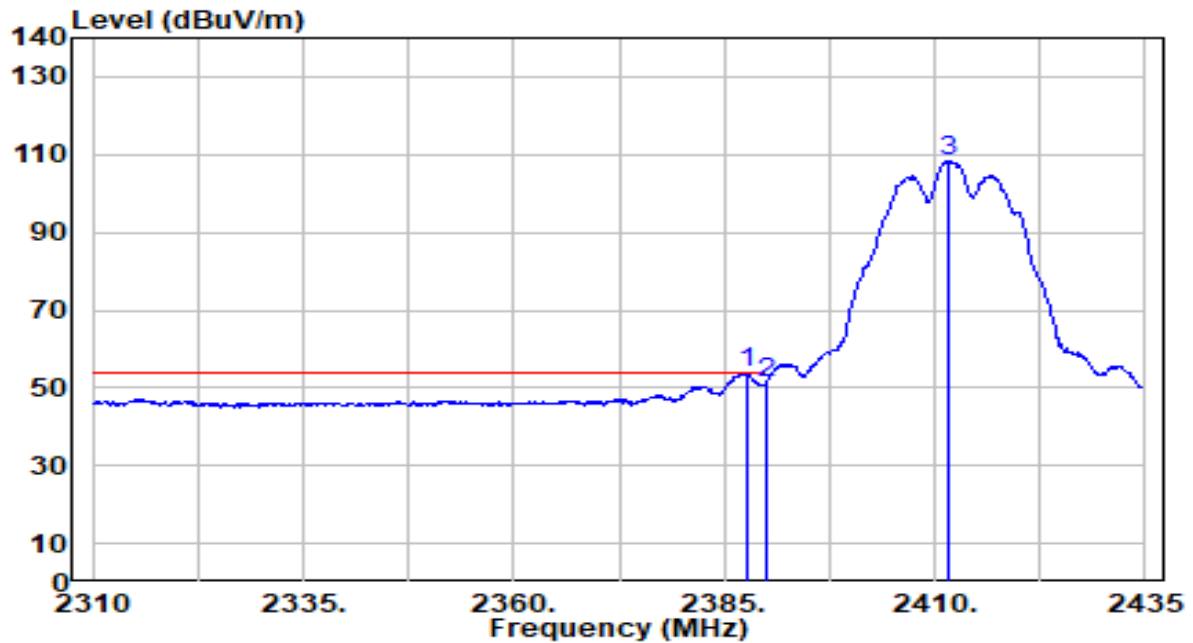


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.625	23.31	30.44	53.76	-0.24	54.00	100	58	Average
2		2390.000	20.98	30.45	51.43	-2.57	54.00	100	58	Average
3		2411.500	77.98	30.49	108.48	N/A	N/A	100	58	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

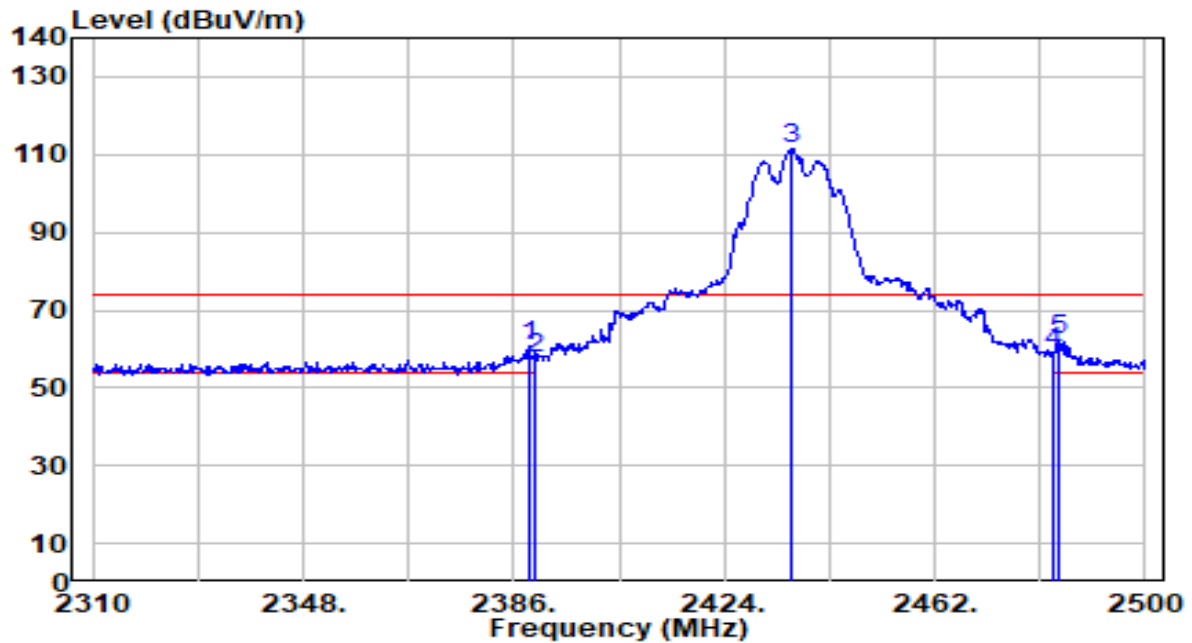


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.660	30.08	30.44	60.52	-13.48	74.00	165	201	Peak
2		2390.000	27.22	30.45	57.66	-16.34	74.00	165	201	Peak
3		2436.350	81.14	30.52	111.66	N/A	N/A	165	201	Peak
4		2483.500	28.80	30.59	59.39	-14.61	74.00	165	201	Peak
5	*	2484.610	31.58	30.59	62.17	-11.83	74.00	165	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

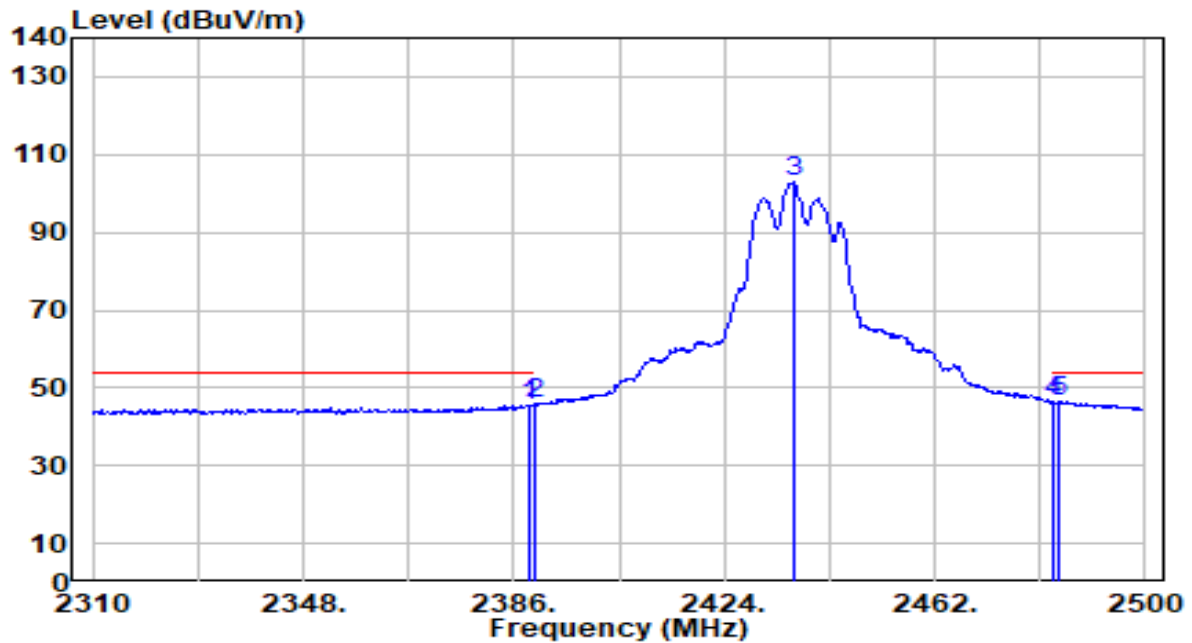


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	15.06	30.44	45.50	-8.50	54.00	165	201	Average
2	2390.000	15.32	30.45	45.77	-8.23	54.00	165	201	Average
3	2436.540	72.35	30.52	102.88	N/A	N/A	165	201	Average
4	2483.500	15.65	30.59	46.24	-7.76	54.00	165	201	Average
5	* 2484.610	15.88	30.59	46.47	-7.53	54.00	165	201	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

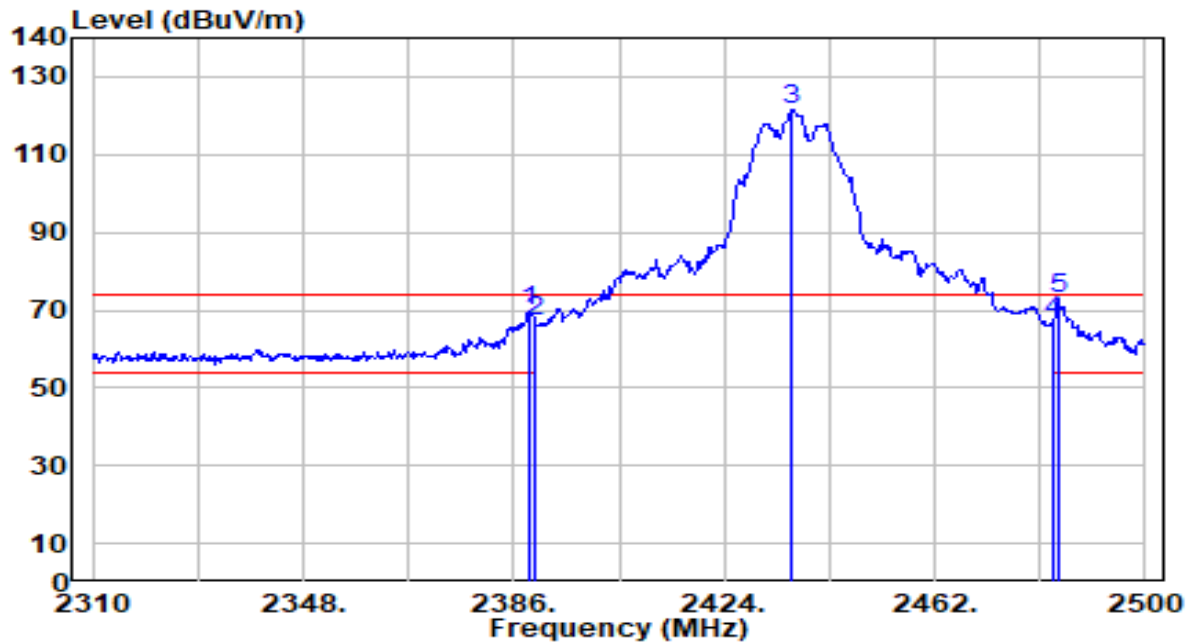


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	39.23	30.44	69.67	-4.33	74.00	156	289	Peak
2	2390.000	36.80	30.45	67.24	-6.76	74.00	156	289	Peak
3	2436.350	90.81	30.52	121.34	N/A	N/A	156	289	Peak
4	2483.500	36.42	30.59	67.00	-7.00	74.00	156	289	Peak
5	* 2484.230	42.25	30.59	72.84	-1.16	74.00	156	289	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

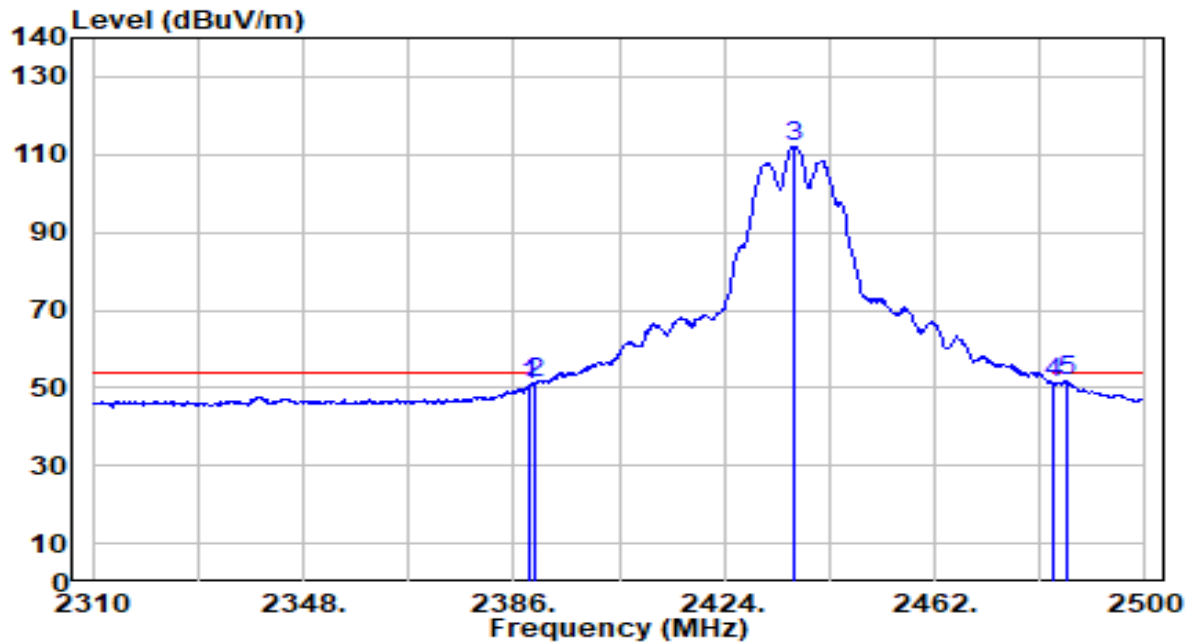


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.040	20.48	30.44	50.93	-3.07	54.00	156	289	Average
2		2390.000	20.68	30.45	51.13	-2.87	54.00	156	289	Average
3		2436.540	81.52	30.52	112.04	N/A	N/A	156	289	Average
4		2483.500	20.77	30.59	51.36	-2.64	54.00	156	289	Average
5	*	2485.750s	21.12	30.59	51.71	-2.29	54.00	156	289	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 10 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

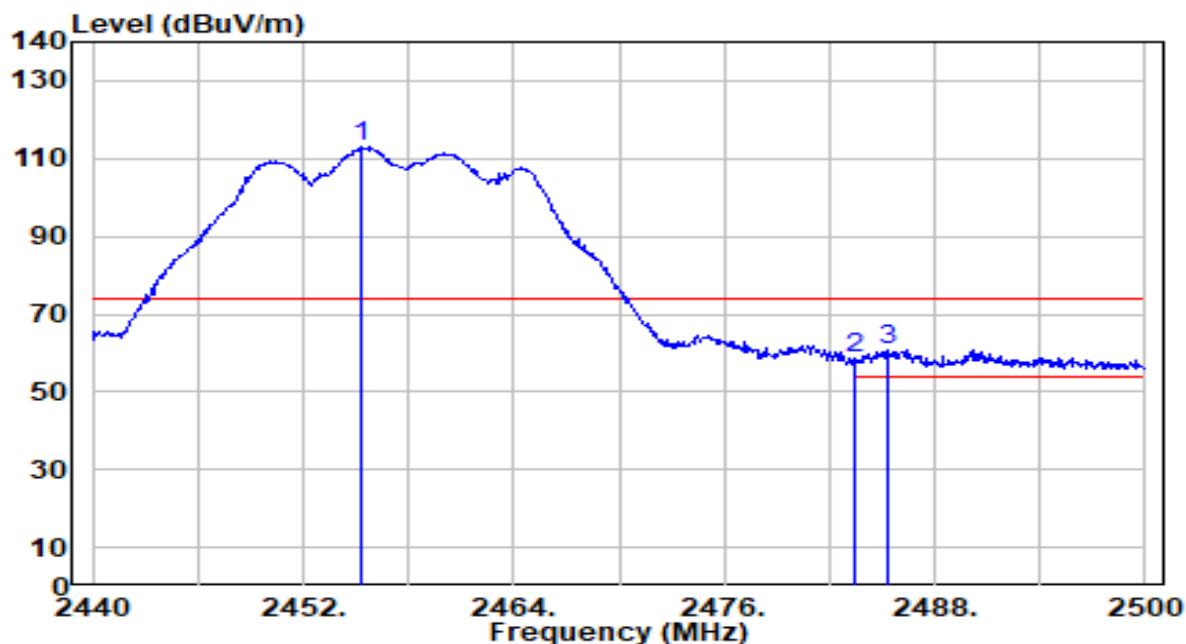


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.300	82.47	30.55	113.02	N/A	N/A	160	319	Peak
2	2483.500	27.98	30.59	58.56	-15.44	74.00	160	319	Peak
3	* 2485.360	30.37	30.59	60.96	-13.04	74.00	160	319	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 10 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

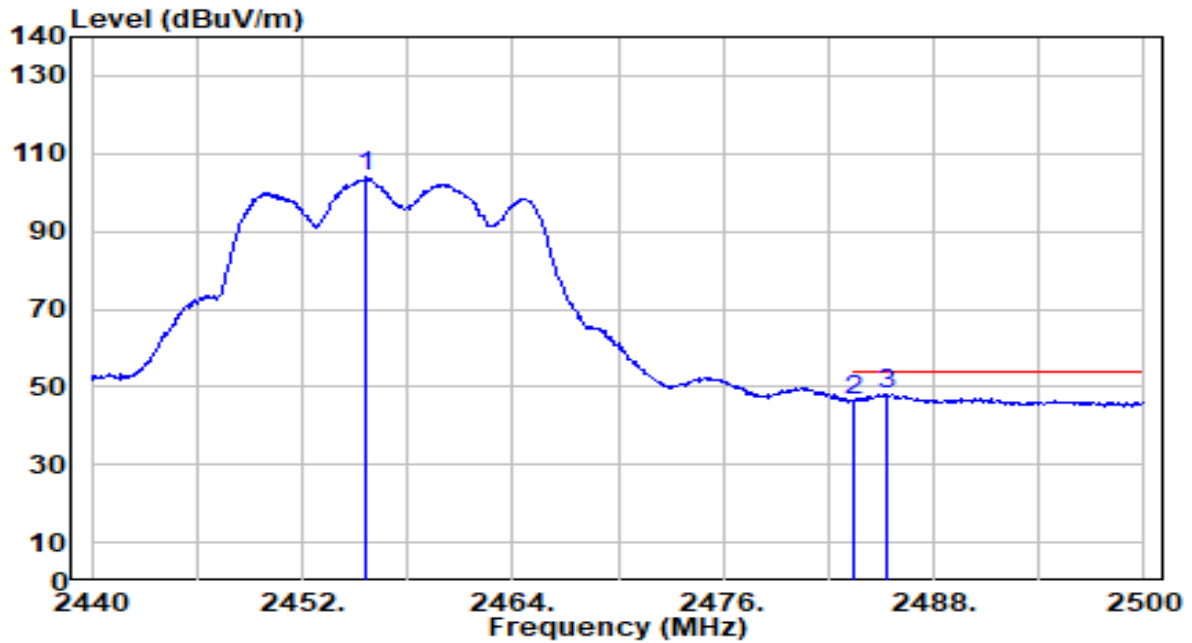


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.600	73.35	30.55	103.90	N/A	N/A	160	319	Average
2	2483.500	15.65	30.59	46.24	-7.76	54.00	160	319	Average
3	* 2485.300	17.62	30.59	48.21	-5.79	54.00	160	319	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 10 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

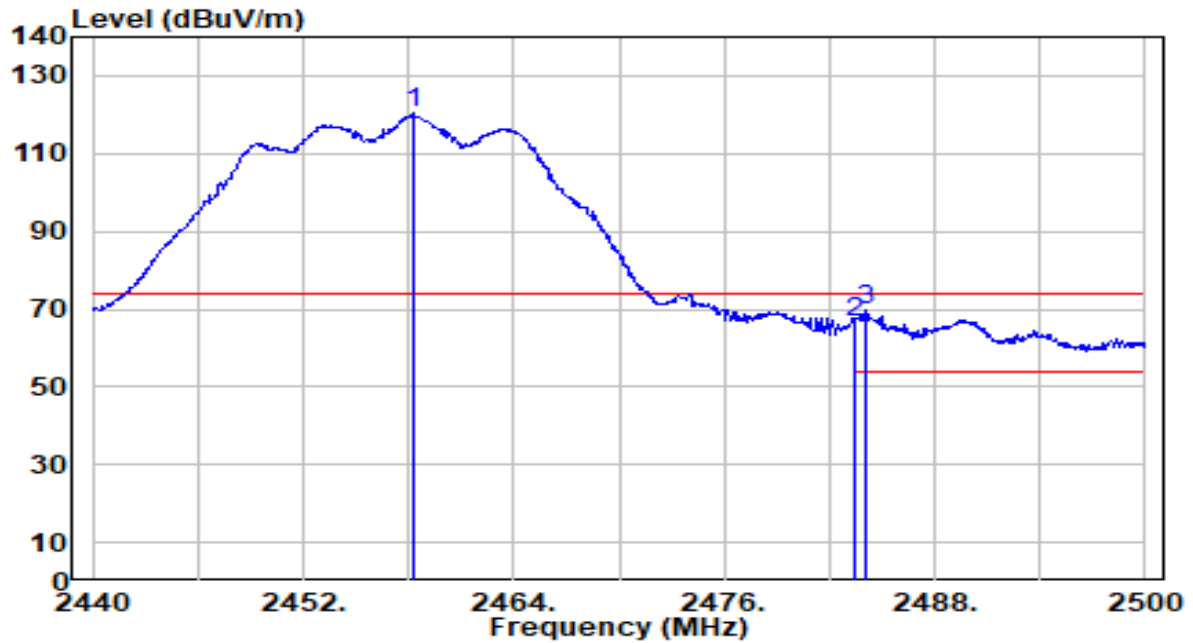


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.240	89.80	30.55	120.36	N/A	N/A	162	306	Peak
2	2483.500	35.90	30.59	66.49	-7.51	74.00	162	306	Peak
3	* 2484.100	39.04	30.59	69.63	-4.37	74.00	162	306	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 10 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

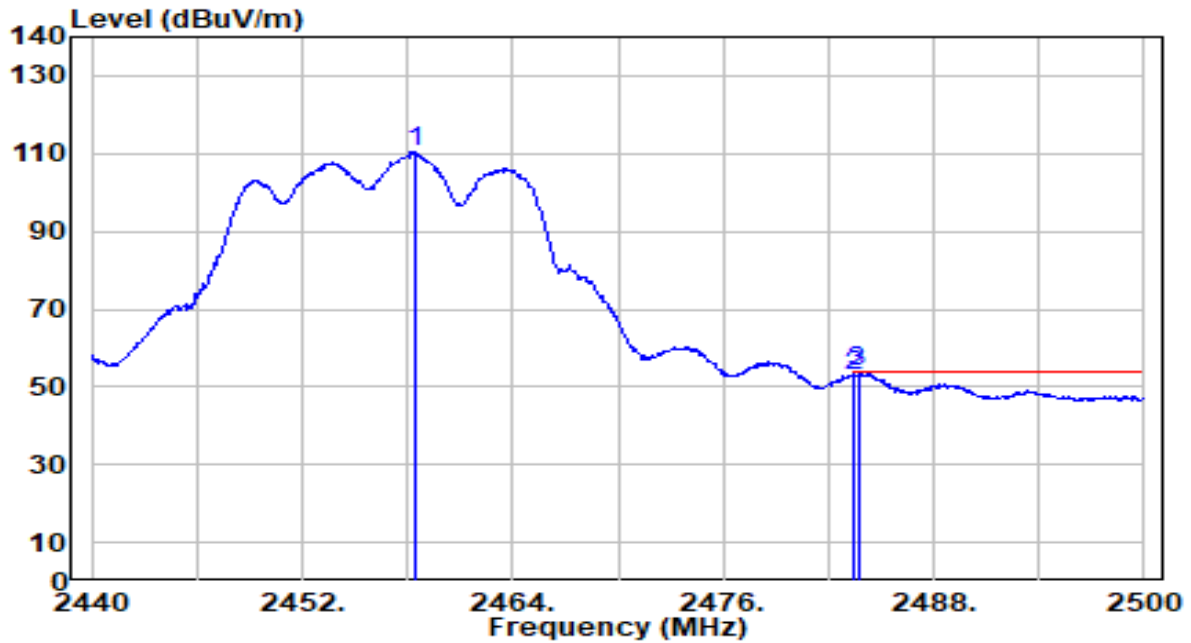


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.420	79.88	30.55	110.44	N/A	N/A	162	306	Average
2	2483.500	22.37	30.59	52.96	-1.04	54.00	162	306	Average
3	* 2483.680	23.18	30.59	53.77	-0.23	54.00	162	306	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

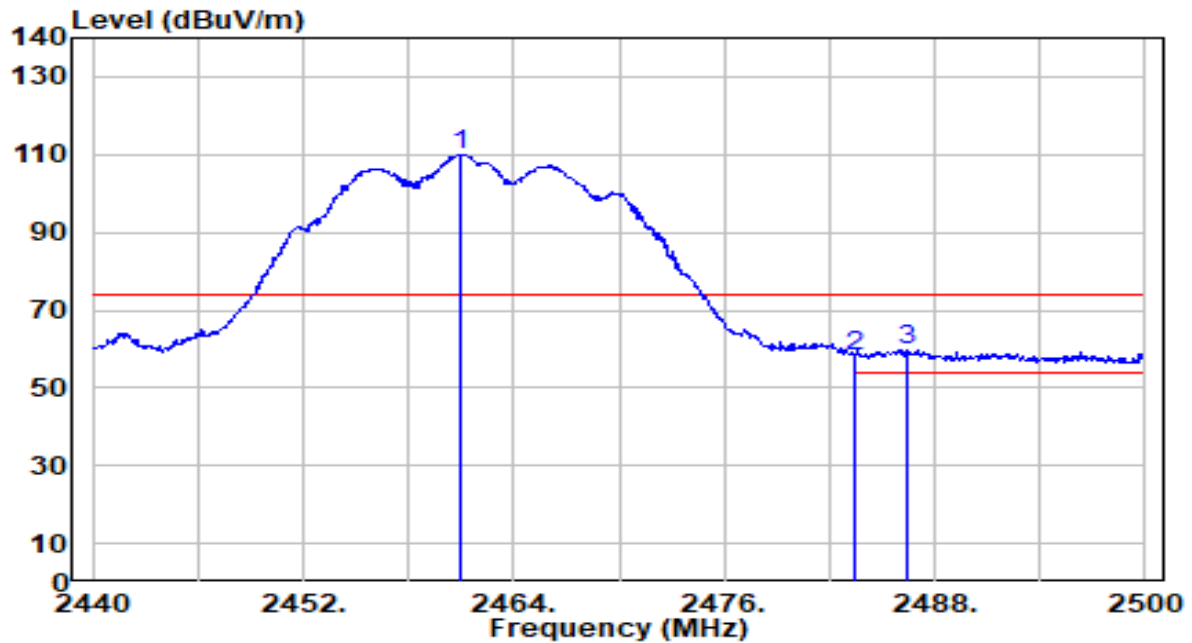


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.940	79.24	30.56	109.80	N/A	N/A	179	310	Peak
2	2483.500	27.74	30.59	58.32	-15.68	74.00	179	310	Peak
3	* 2486.500	29.01	30.59	59.60	-14.40	74.00	179	310	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

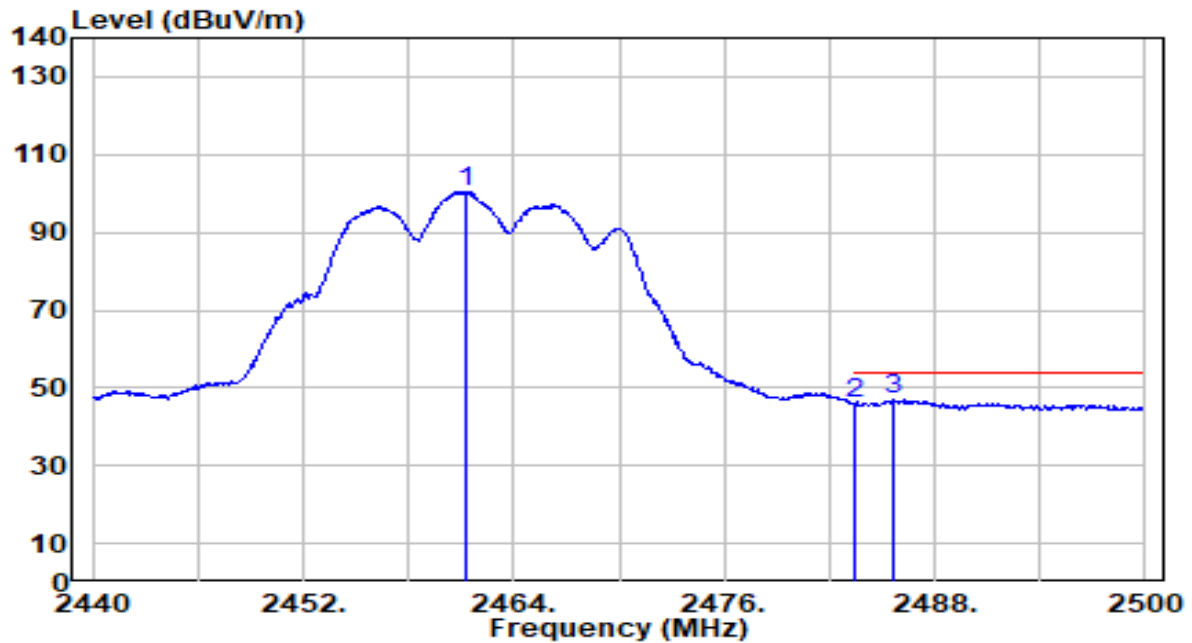


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.240	69.99	30.56	100.54	N/A	N/A	179	310	Average
2	2483.500	15.28	30.59	45.86	-8.14	54.00	179	310	Average
3	* 2485.600	16.25	30.59	46.84	-7.16	54.00	179	310	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

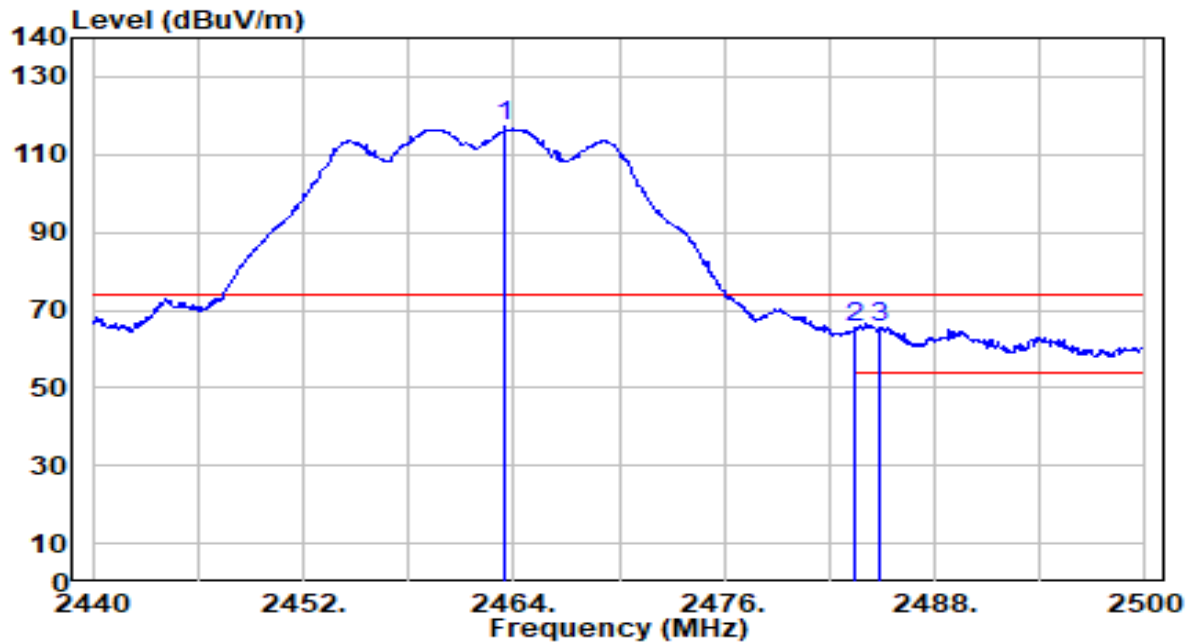


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.460	86.67	30.56	117.23	N/A	N/A	100	54	Peak
2	2483.500	34.97	30.59	65.56	-8.44	74.00	100	54	Peak
3	* 2484.820	35.11	30.59	65.70	-8.30	74.00	100	54	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

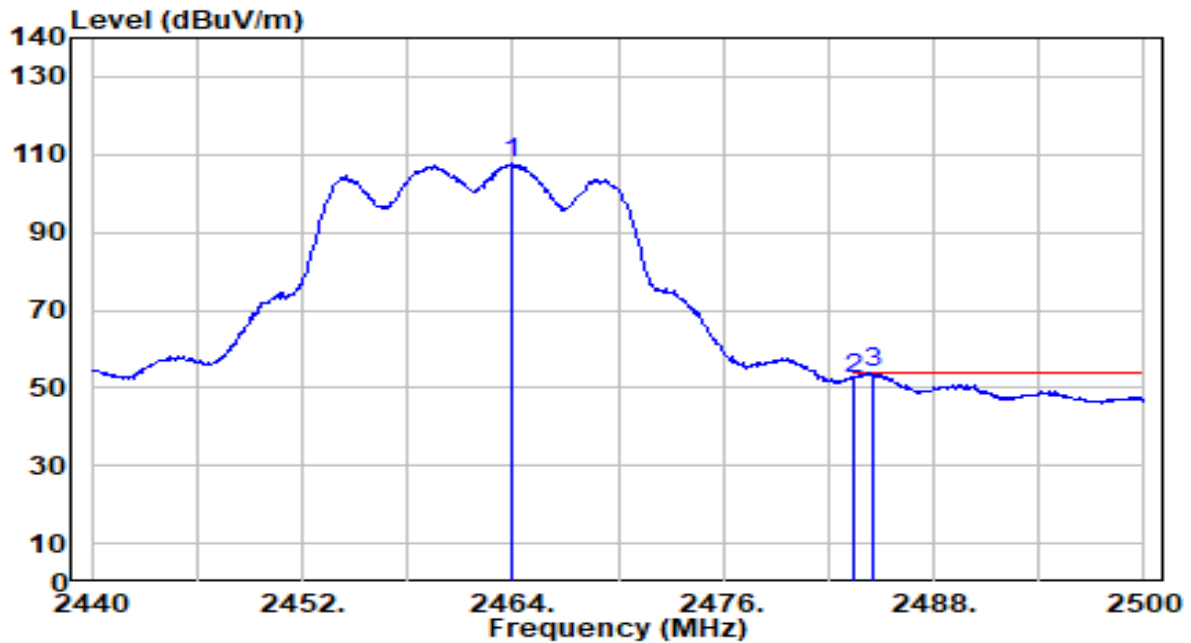


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.000	77.28	30.56	107.84	N/A	N/A	100	54	Average
2	2483.500	21.84	30.59	52.43	-1.57	54.00	100	54	Average
3	* 2484.520	23.21	30.59	53.80	-0.20	54.00	100	54	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

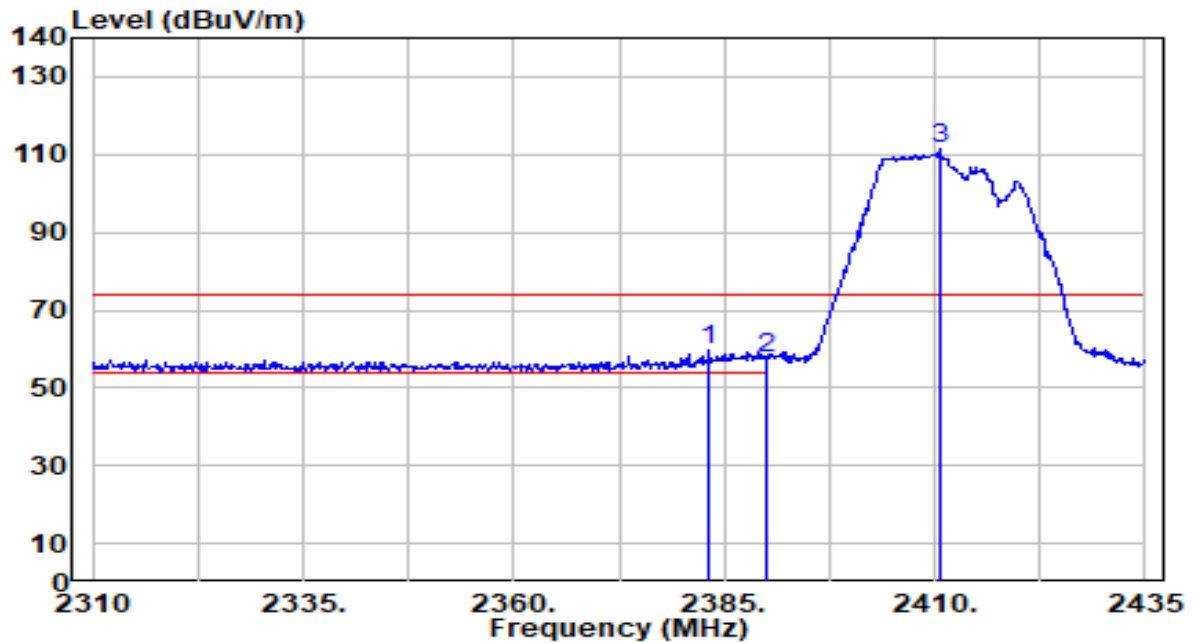


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.250	29.18	30.43	59.61	-14.39	74.00	138	310	Peak
2		2390.000	27.39	30.45	57.84	-16.16	74.00	138	310	Peak
3		2410.500	80.93	30.49	111.43	N/A	N/A	138	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

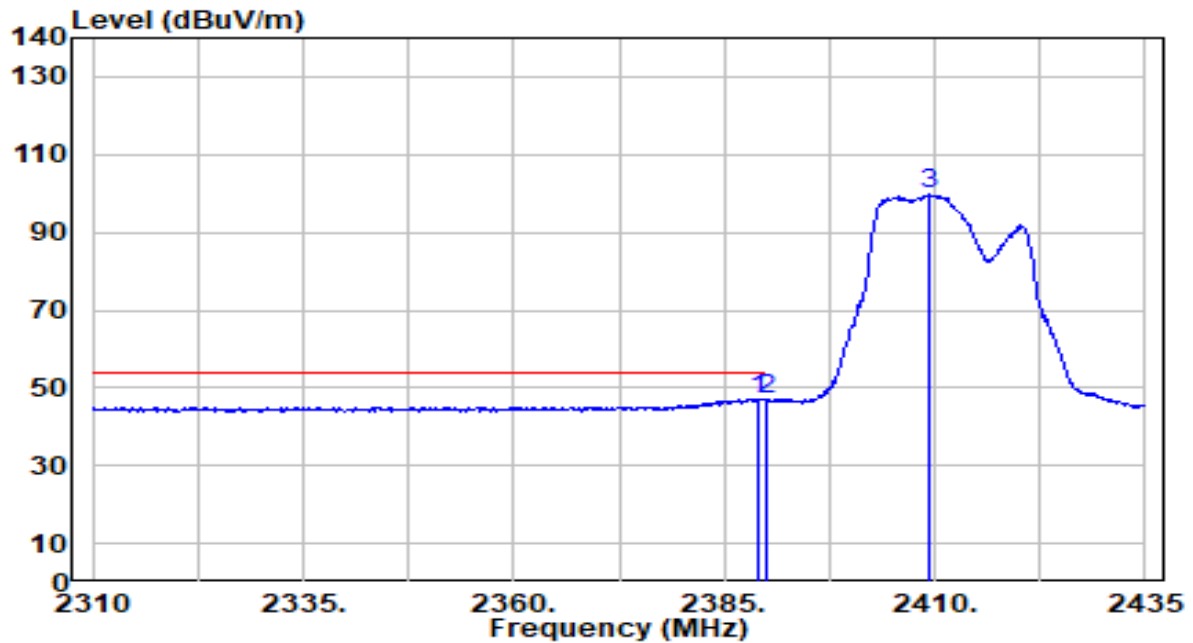


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.000	16.74	30.44	47.19	-6.81	54.00	138	310	Average
2		2390.000	16.39	30.45	46.84	-7.16	54.00	138	310	Average
3		2409.500	69.24	30.49	99.72	N/A	N/A	138	310	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

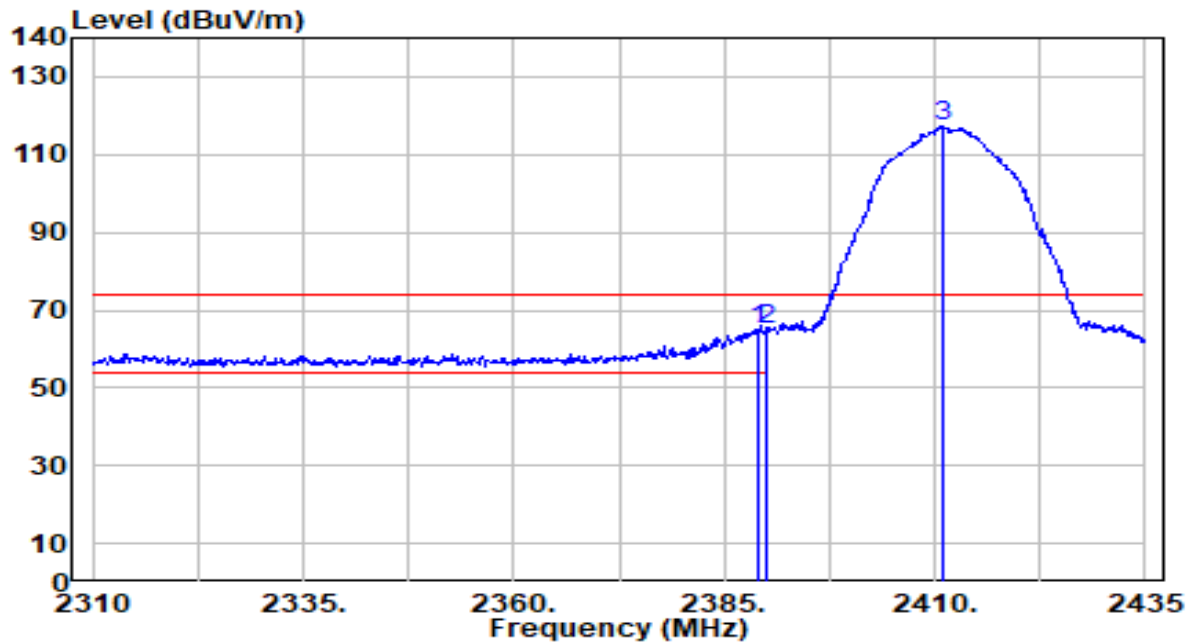


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	34.47	30.44	64.92	-9.08	74.00	100	58	Peak
2	*	2390.000	34.66	30.45	65.11	-8.89	74.00	100	58	Peak
3		2410.875	86.63	30.49	117.12	N/A	N/A	100	58	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

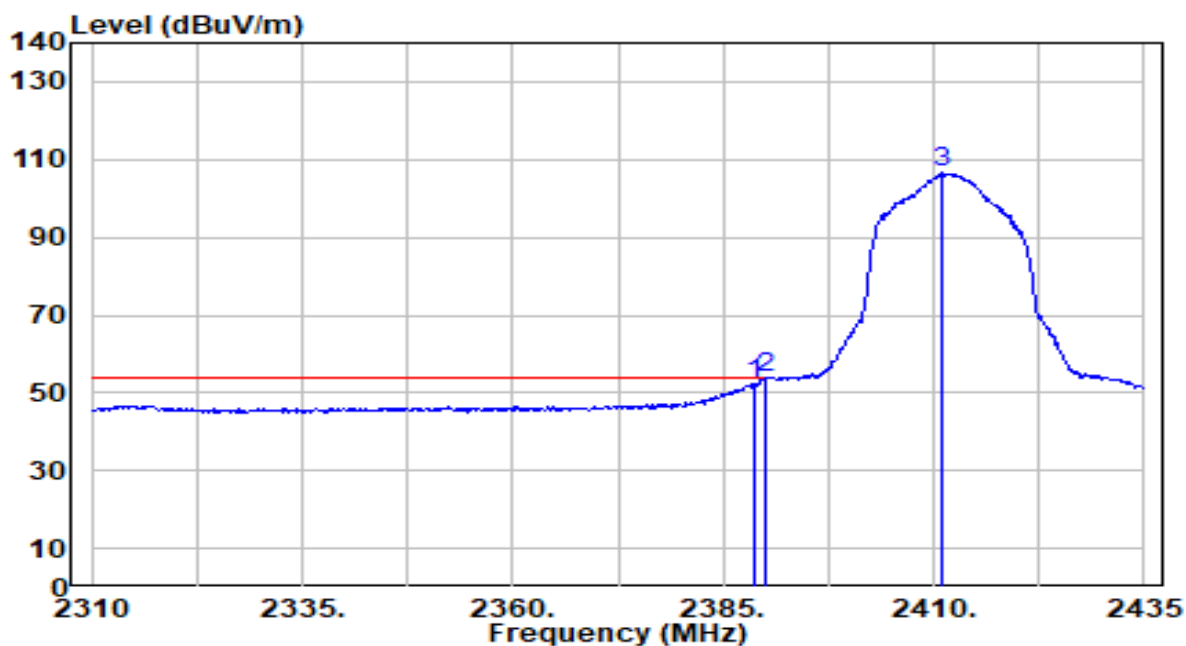


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.750	21.82	30.44	52.26	-1.74	54.00	100	58	Average
2	*	2390.000	23.32	30.45	53.77	-0.23	54.00	100	58	Average
3		2411.125	75.97	30.49	106.46	N/A	N/A	100	58	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 2 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

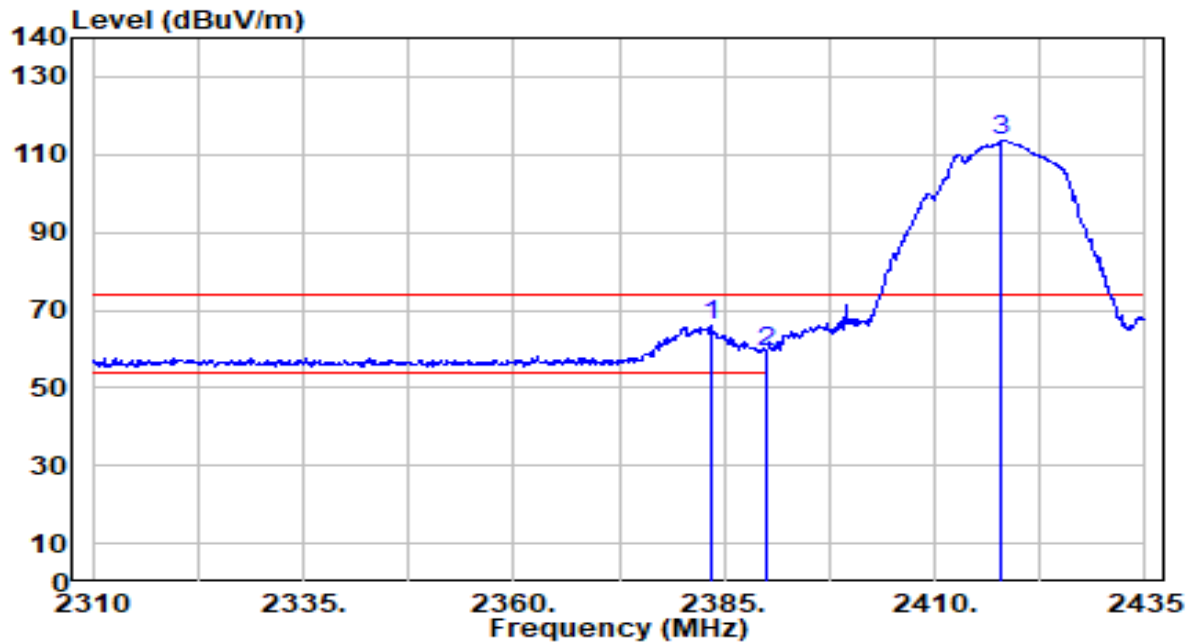


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.500	35.36	30.43	65.79	-8.21	74.00	196	323	Peak
2		2390.000	28.97	30.45	59.42	-14.58	74.00	196	323	Peak
3		2417.750	83.18	30.50	113.68	N/A	N/A	196	323	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 2 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

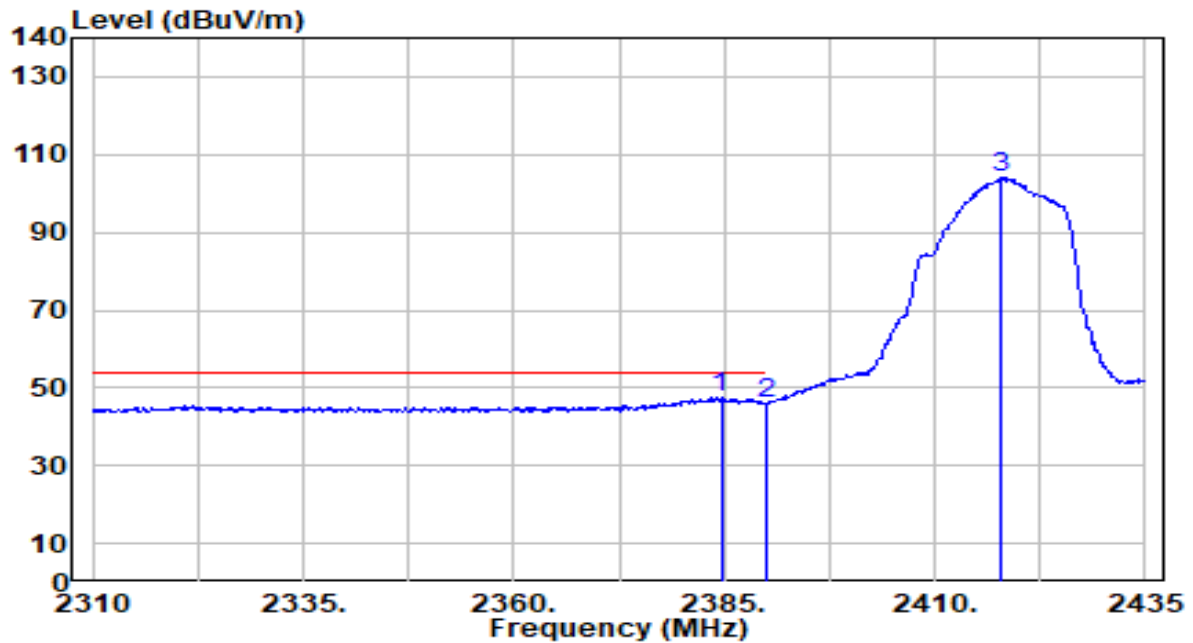


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.625	17.20	30.43	47.63	-6.37	54.00	196	323	Average
2		2390.000	15.38	30.45	45.83	-8.17	54.00	196	323	Average
3		2417.750	73.63	30.50	104.13	N/A	N/A	196	323	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 2 ANT 0+1_Veritical Ant	Test Voltage	AC 120V/60Hz

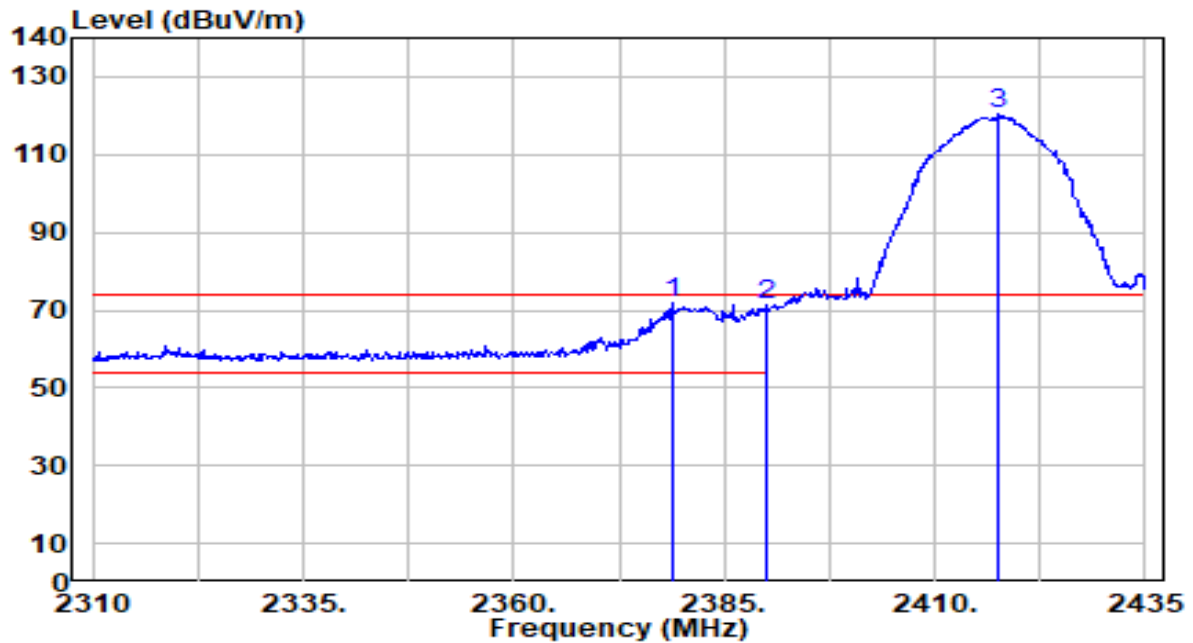


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2378.750	41.29	30.42	71.71	-2.29	74.00	197	184	Peak
2		2390.000	40.63	30.45	71.08	-2.92	74.00	197	184	Peak
3		2417.625	89.70	30.50	120.20	N/A	N/A	197	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 2 ANT 0+1_Veritical Ant	Test Voltage	AC 120V/60Hz

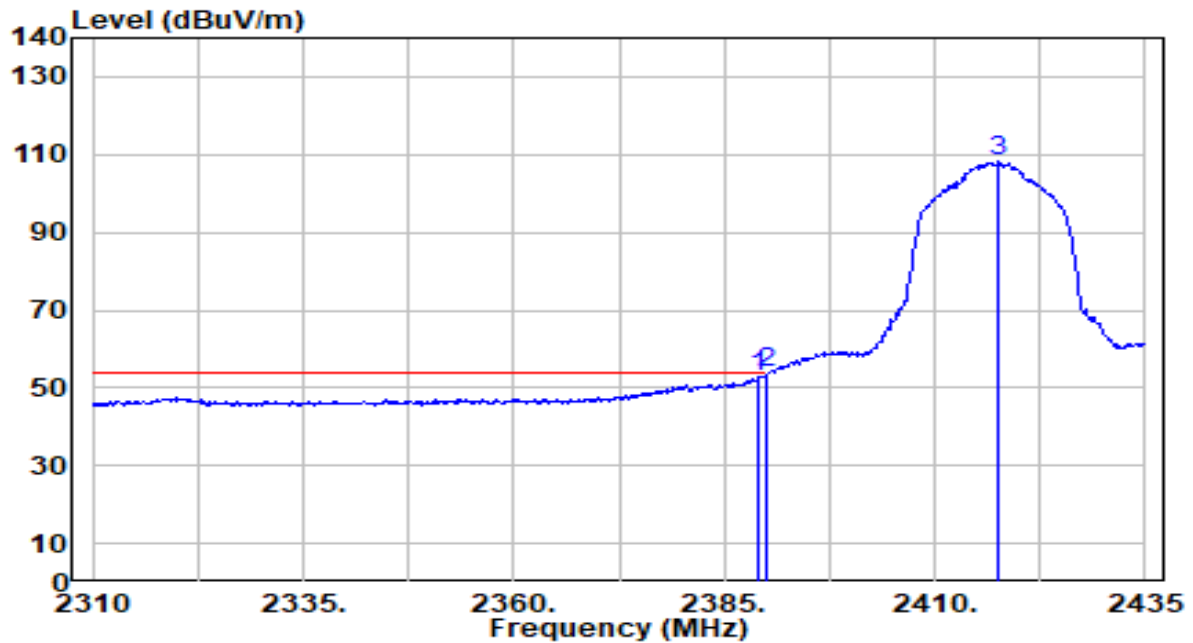


s

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	22.29	30.44	52.74	-1.26	54.00	197	184	Average
2	*	2390.000	23.32	30.45	53.76	-0.24	54.00	197	184	Average
3		2417.625	77.57	30.50	108.07	N/A	N/A	197	184	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

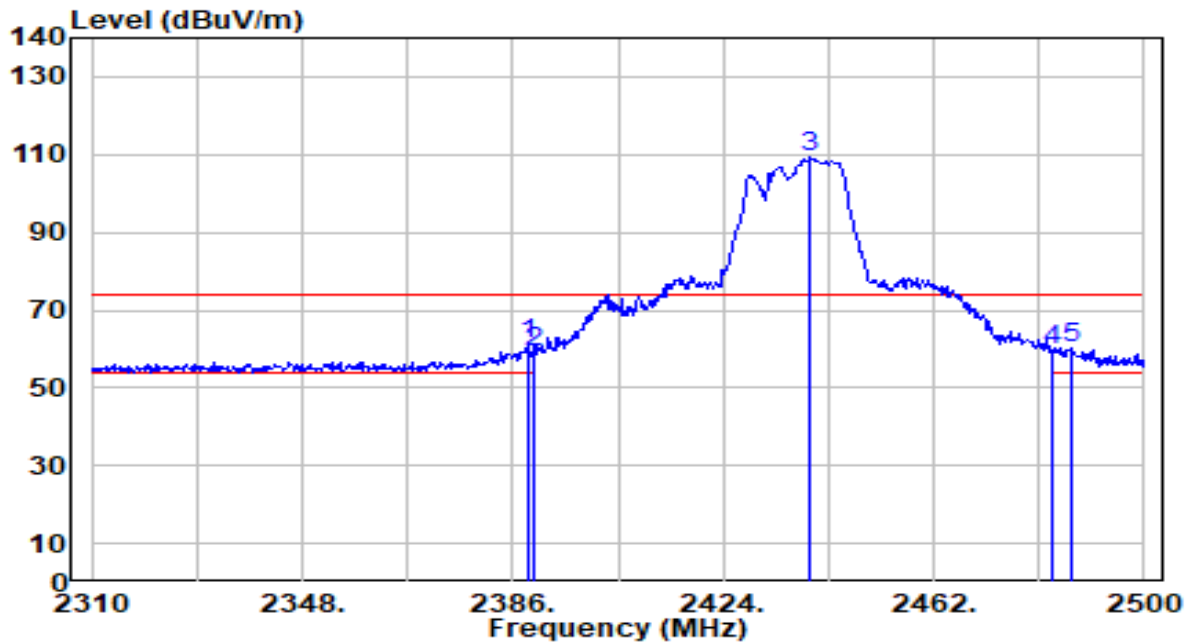


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.660	30.83	30.44	61.27	-12.73	74.00	165	201	Peak
2		2390.000	28.90	30.45	59.35	-14.65	74.00	165	201	Peak
3		2439.770	78.66	30.53	109.19	N/A	N/A	165	201	Peak
4		2483.500	29.20	30.59	59.79	-14.21	74.00	165	201	Peak
5		2486.890	29.42	30.59	60.01	-13.99	74.00	165	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

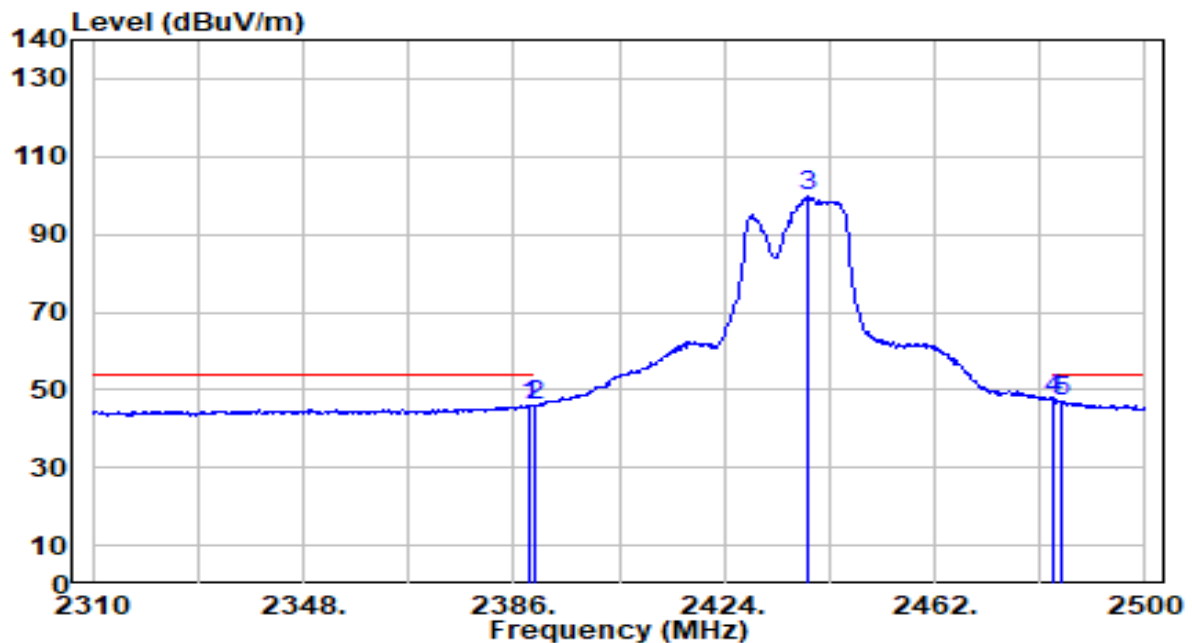


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	15.58	30.44	46.03	-7.97	54.00	165	201	Average
2	2390.000	15.53	30.45	45.98	-8.02	54.00	165	201	Average
3	2439.010	69.08	30.53	99.60	N/A	N/A	165	201	Average
4	* 2483.500	16.79	30.59	47.38	-6.62	54.00	165	201	Average
5	2484.990	16.57	30.59	47.16	-6.84	54.00	165	201	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

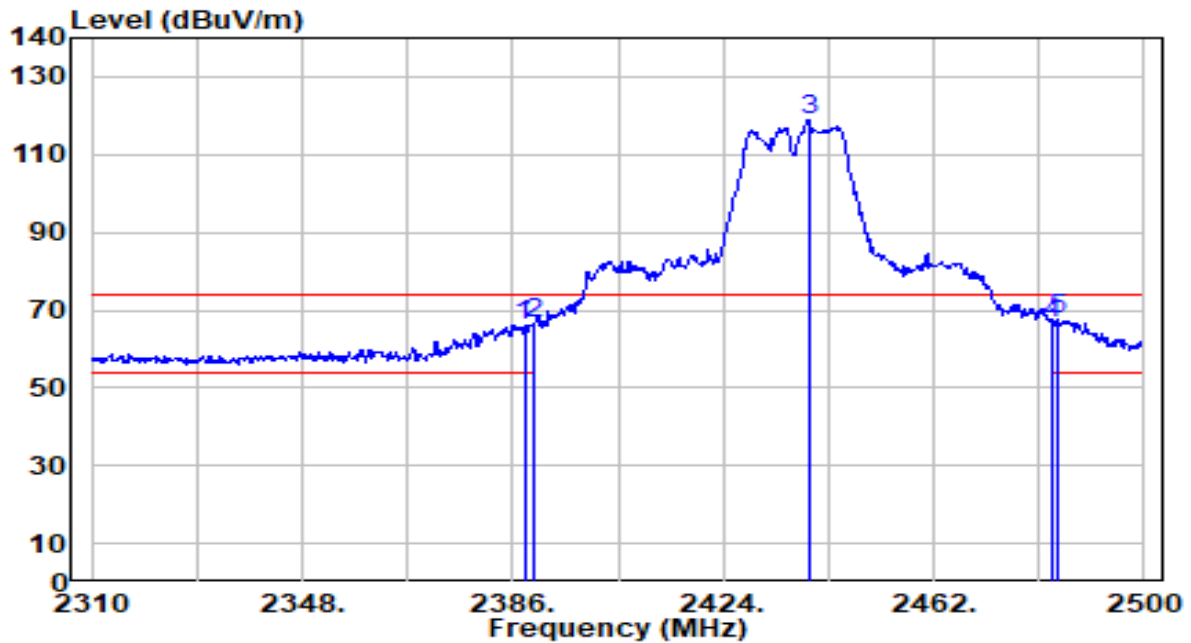


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.090	35.61	30.44	66.05	-7.95	74.00	156	289	Peak
2	2390.000	36.18	30.45	66.63	-7.37	74.00	156	289	Peak
3	2439.390	88.18	30.53	118.70	N/A	N/A	156	289	Peak
4	2483.500	36.21	30.59	66.80	-7.20	74.00	156	289	Peak
5	* 2484.420	36.80	30.59	67.39	-6.61	74.00	156	289	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

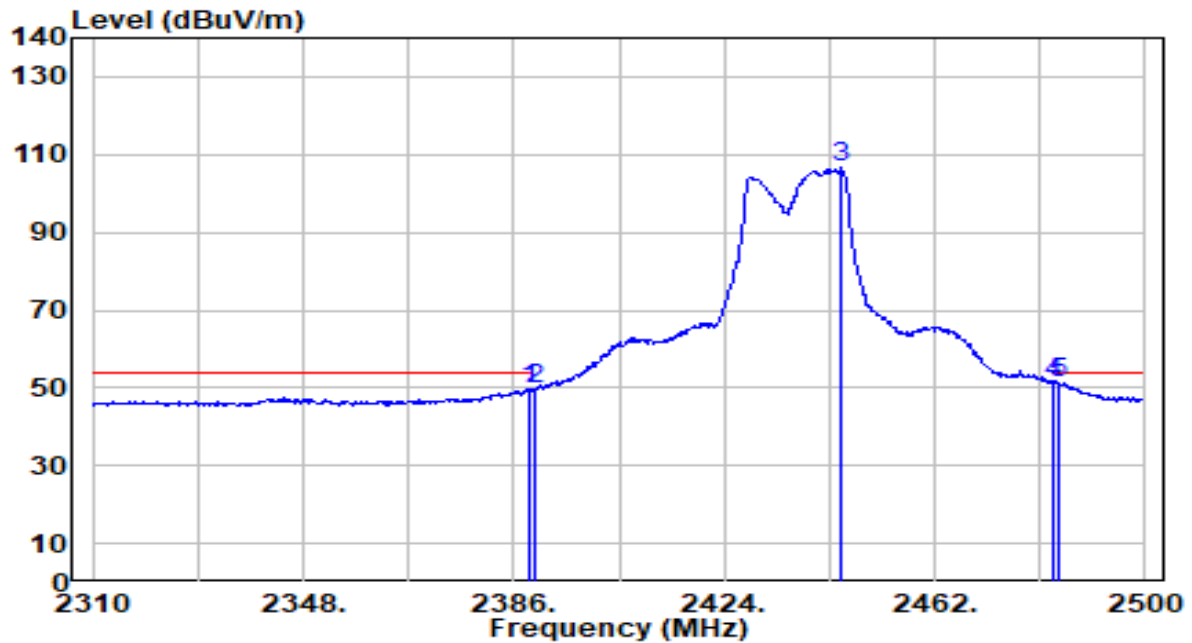


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	19.45	30.44	49.89	-4.11	54.00	156	289	Average
2	2390.000	19.10	30.45	49.55	-4.45	54.00	156	289	Average
3	2445.090	76.02	30.54	106.56	N/A	N/A	156	289	Average
4	2483.500	20.73	30.59	51.31	-2.69	54.00	156	289	Average
5	* 2484.420	20.87	30.59	51.46	-2.54	54.00	156	289	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 10 ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

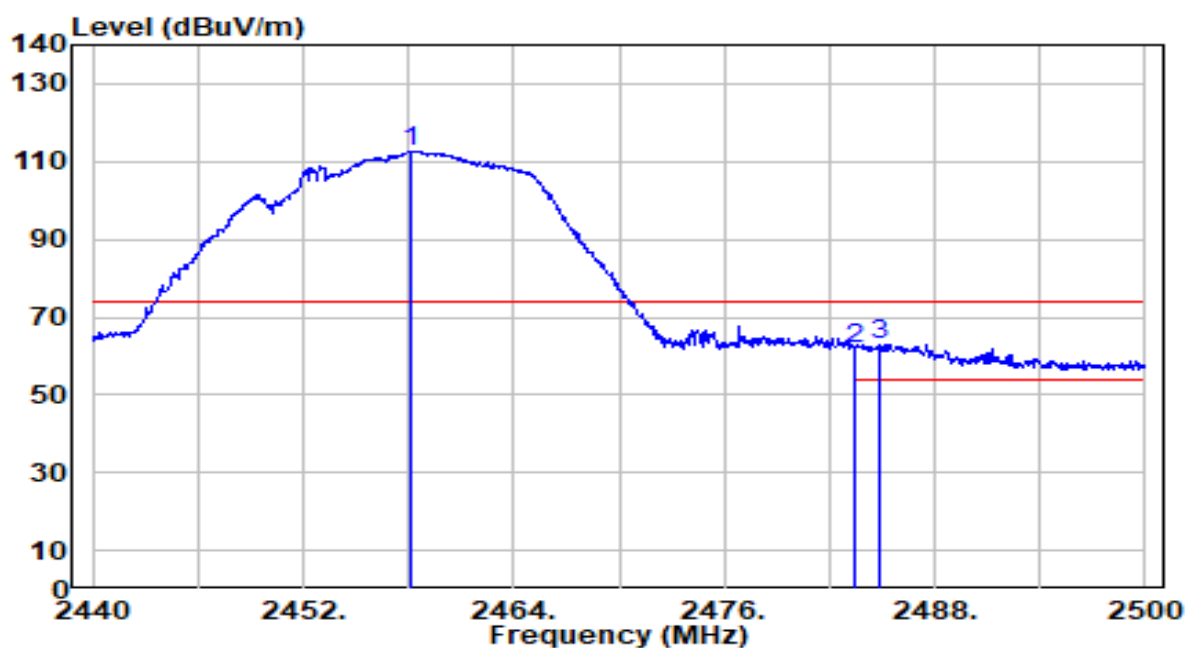


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.180	82.08	30.55	112.63	N/A	N/A	160	319	Peak
2	2483.500	31.44	30.59	62.02	-11.98	74.00	160	319	Peak
3	* 2484.820	32.47	30.59	63.06	-10.94	74.00	160	319	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 10 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

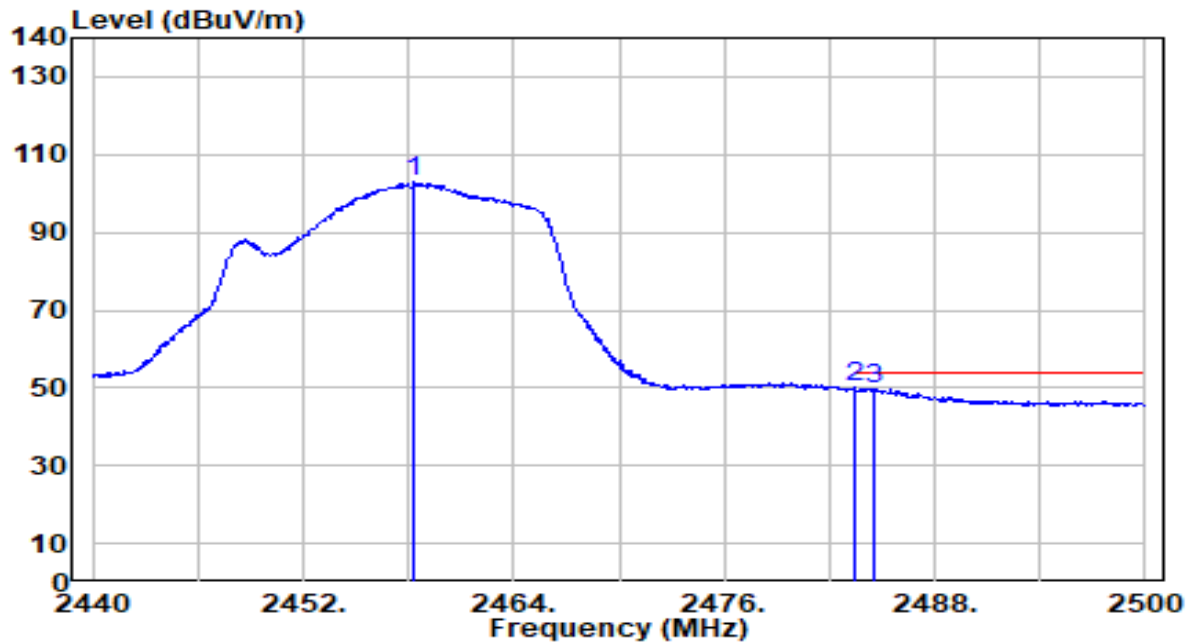


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2458.360	72.56	30.55	103.11	N/A	N/A	160	319	Average
2	*	2483.500	19.44	30.59	50.02	-3.98	54.00	160	319	Average
3		2484.580	18.88	30.59	49.46	-4.54	54.00	160	319	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 10 ANT 0+1_Veritical Ant	Test Voltage	AC 120V/60Hz

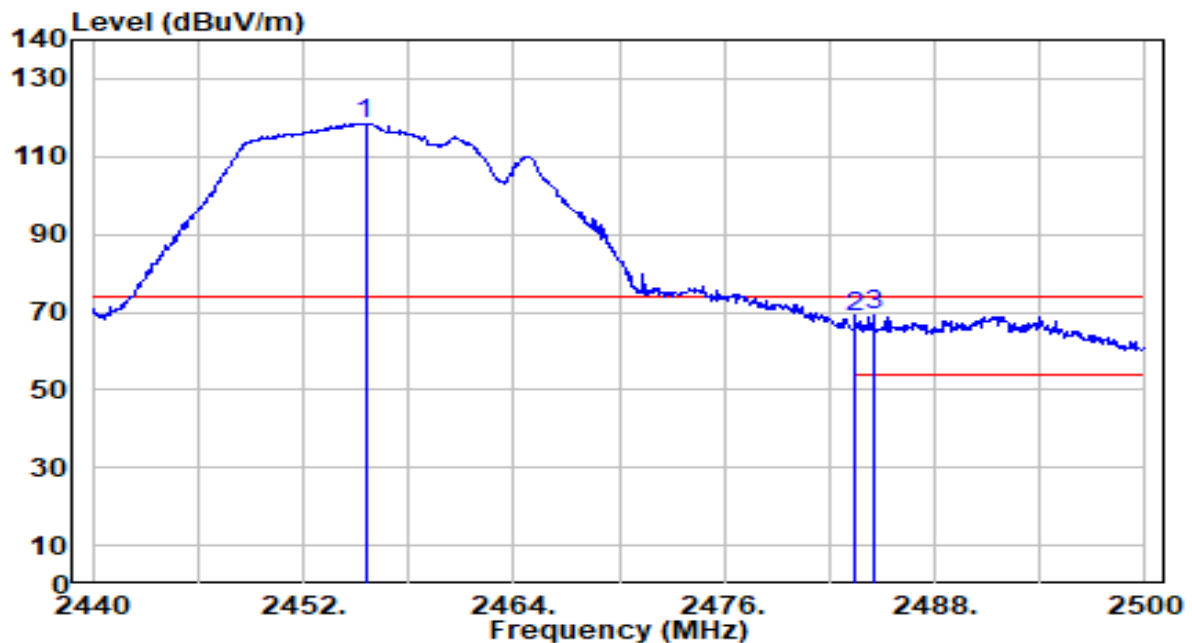


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.540	88.04	30.55	118.59	N/A	N/A	162	306	Peak
2	2483.500	38.24	30.59	68.83	-5.17	74.00	162	306	Peak
3	* 2484.520	38.68	30.59	69.27	-4.73	74.00	162	306	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 10 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

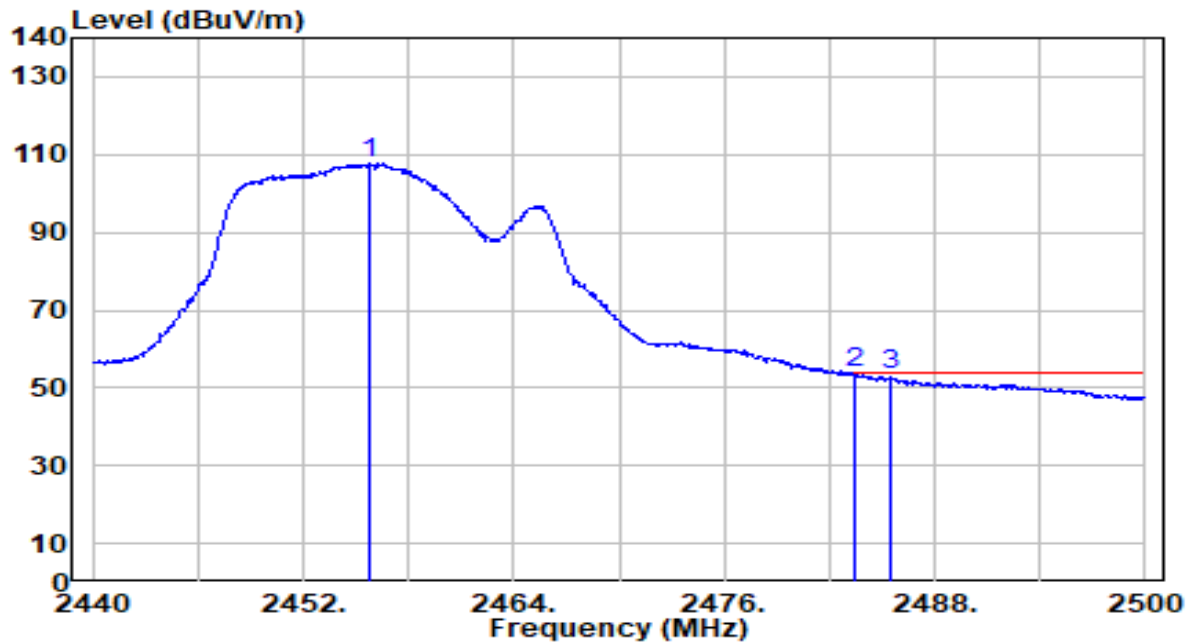


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.720	77.13	30.55	107.69	N/A	N/A	162	306	Average
2	*	2483.500	23.30	30.59	53.89	-0.11	54.00	162	306	Average
3		2485.540	22.79	30.59	53.38	-0.62	54.00	162	306	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

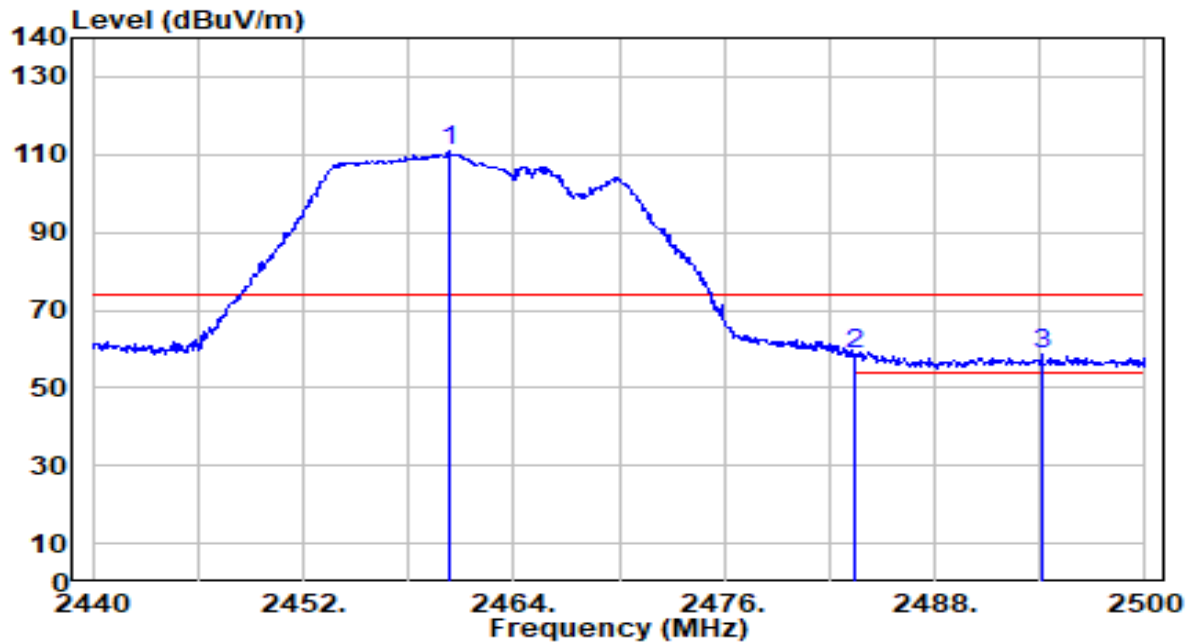


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.340	80.14	30.56	110.69	N/A	N/A	179	310	Peak
2	2483.500	28.08	30.59	58.67	-15.33	74.00	179	310	Peak
3	* 2494.120	28.27	30.60	58.87	-15.13	74.00	179	310	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

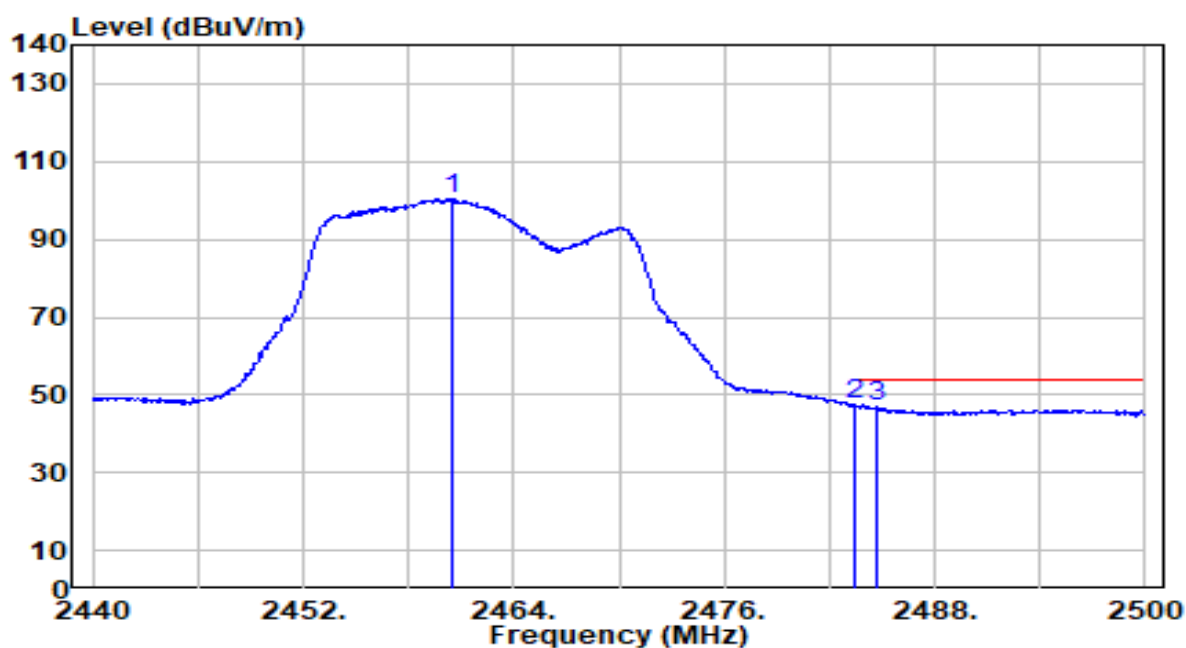


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.460	69.78	30.56	100.33	N/A	N/A	179	310	Average
2	*	2483.500	16.74	30.59	47.32	-6.68	54.00	179	310	Average
3		2484.700	16.38	30.59	46.97	-7.03	54.00	179	310	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

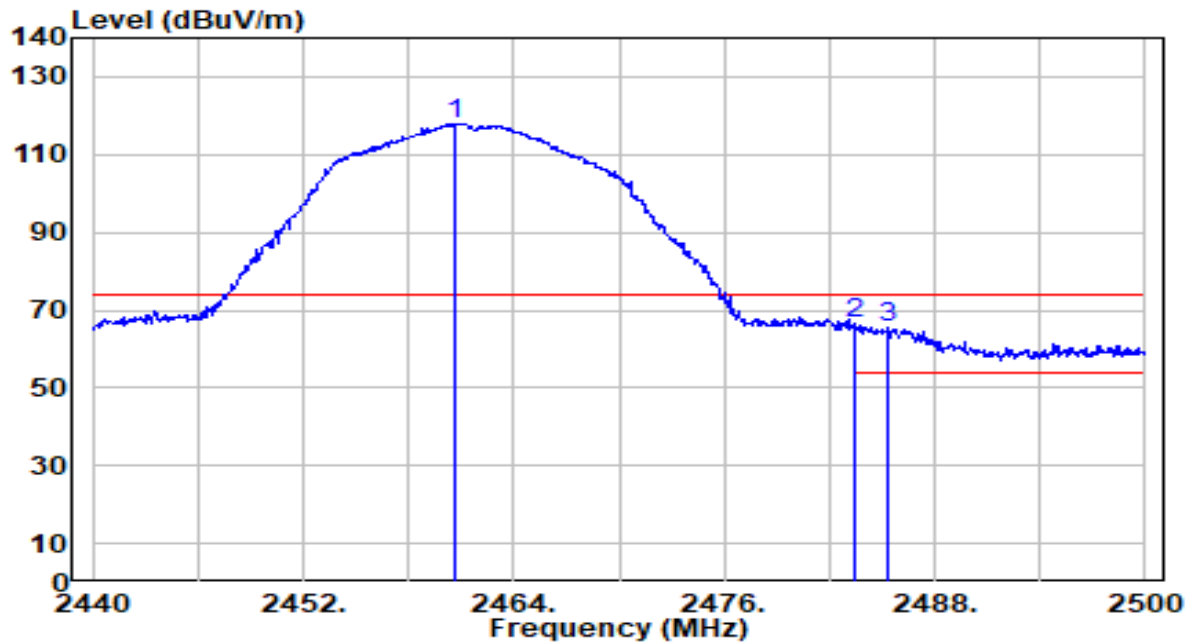


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.640	87.42	30.56	117.98	N/A	N/A	100	54	Peak
2	*	2483.500	36.03	30.59	66.62	-7.38	74.00	100	54	Peak
3		2485.360	35.09	30.59	65.68	-8.32	74.00	100	54	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

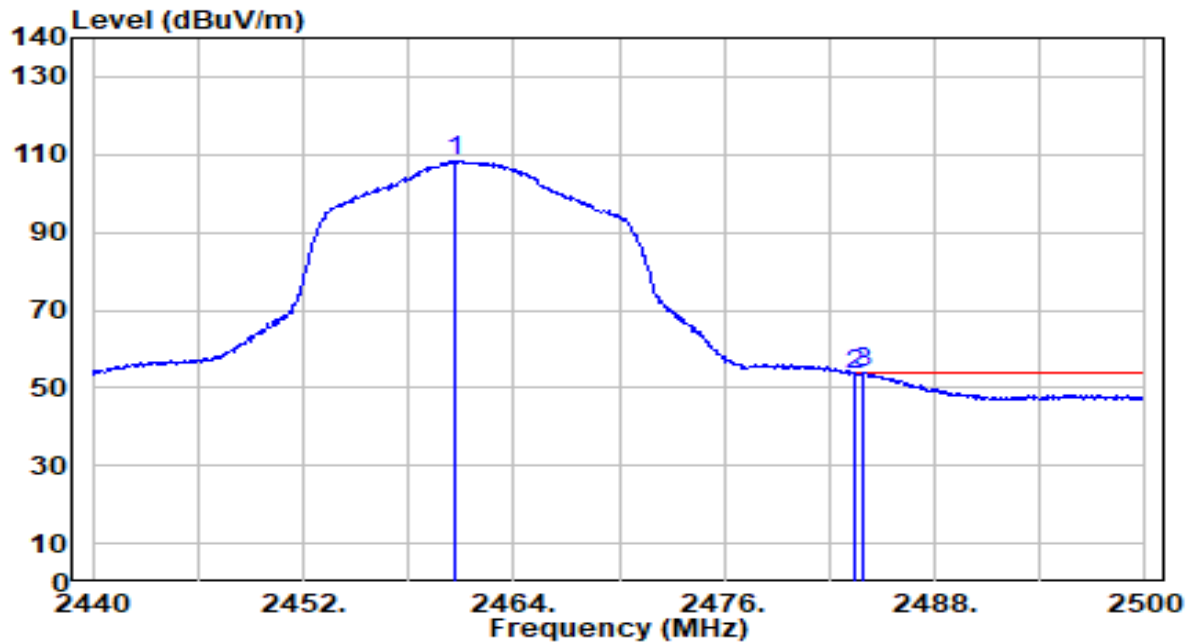


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.640	77.71	30.56	108.27	N/A	N/A	100	54	Average
2	2483.500	22.94	30.59	53.53	-0.47	54.00	100	54	Average
3	* 2483.980	23.26	30.59	53.85	-0.15	54.00	100	54	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

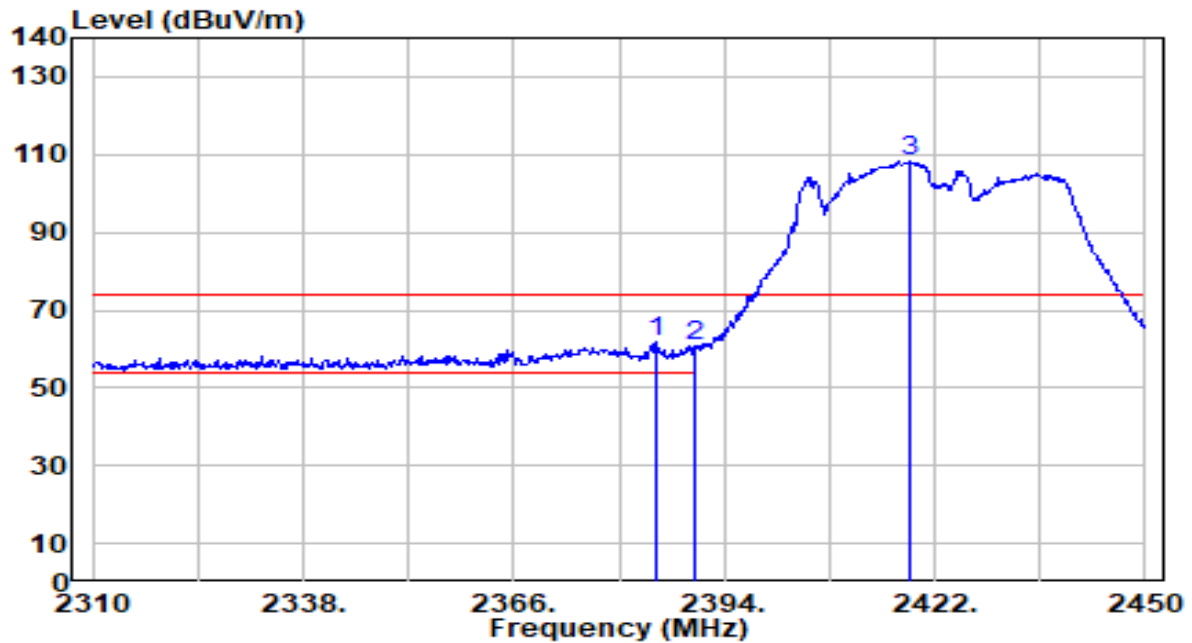


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.900	31.56	30.43	61.99	-12.01	74.00	138	310	Peak
2		2390.000	30.08	30.45	60.53	-13.47	74.00	138	310	Peak
3		2418.780	77.62	30.50	108.12	N/A	N/A	138	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

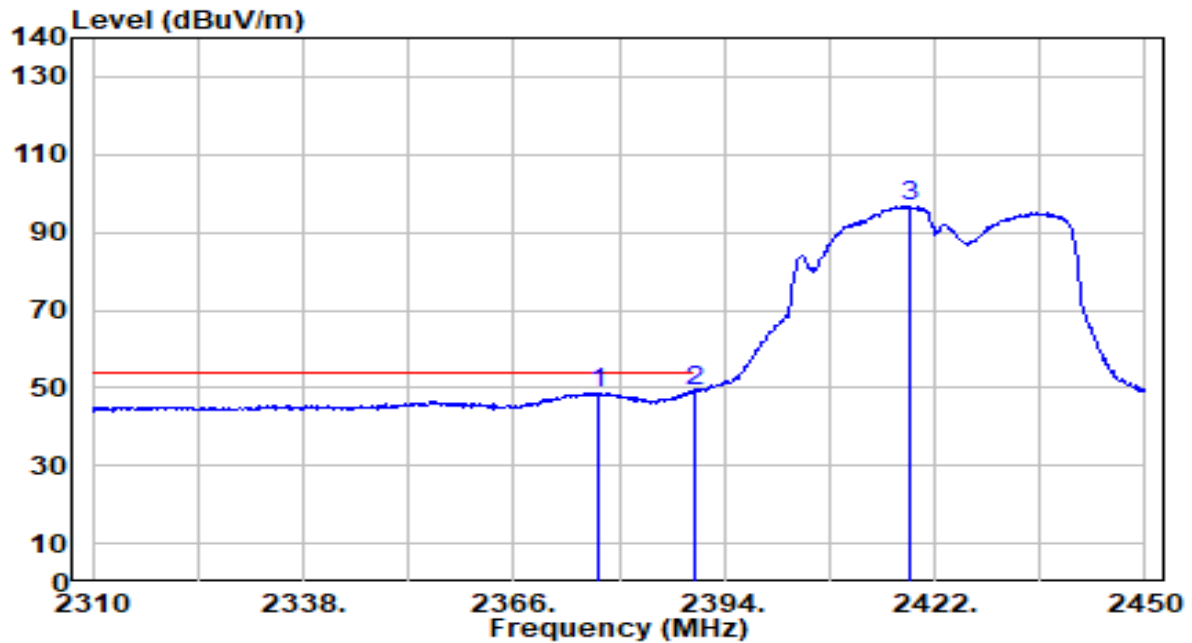


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2377.200	18.36	30.41	48.77	-5.23	54.00	138	310	Average
2	*	2390.000	18.67	30.45	49.12	-4.88	54.00	138	310	Average
3		2418.640	66.23	30.50	96.73	N/A	N/A	138	310	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

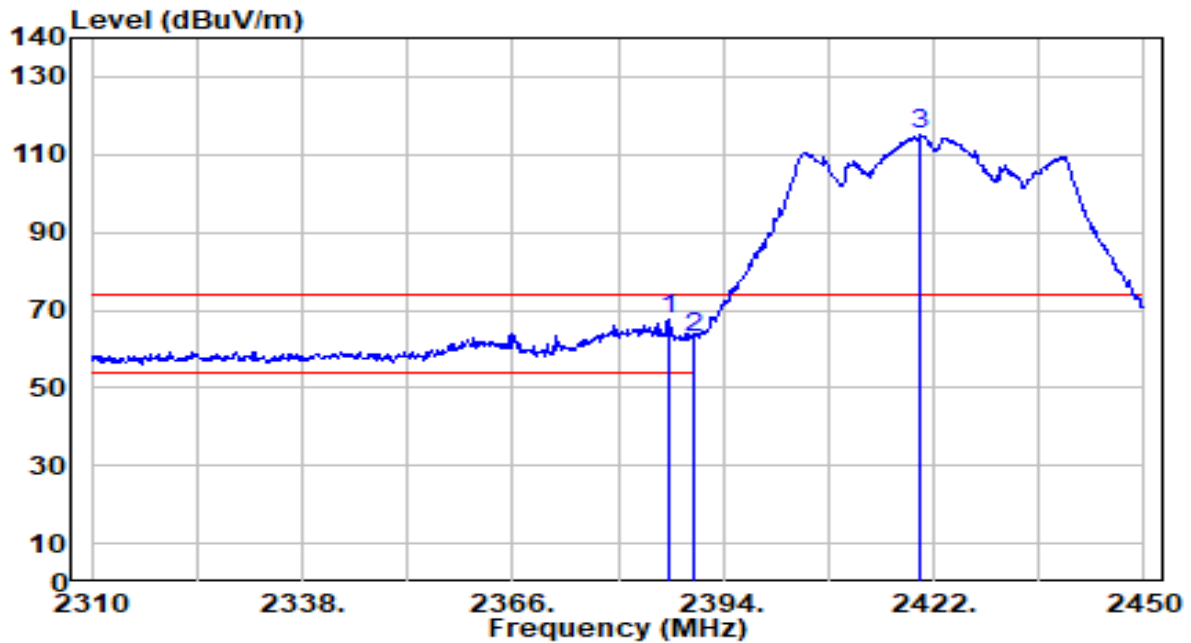


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.720	36.92	30.44	67.36	-6.64	74.00	100	58	Peak
2		2390.000	32.64	30.45	63.08	-10.92	74.00	100	58	Peak
3		2420.320	84.47	30.50	114.97	N/A	N/A	100	58	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

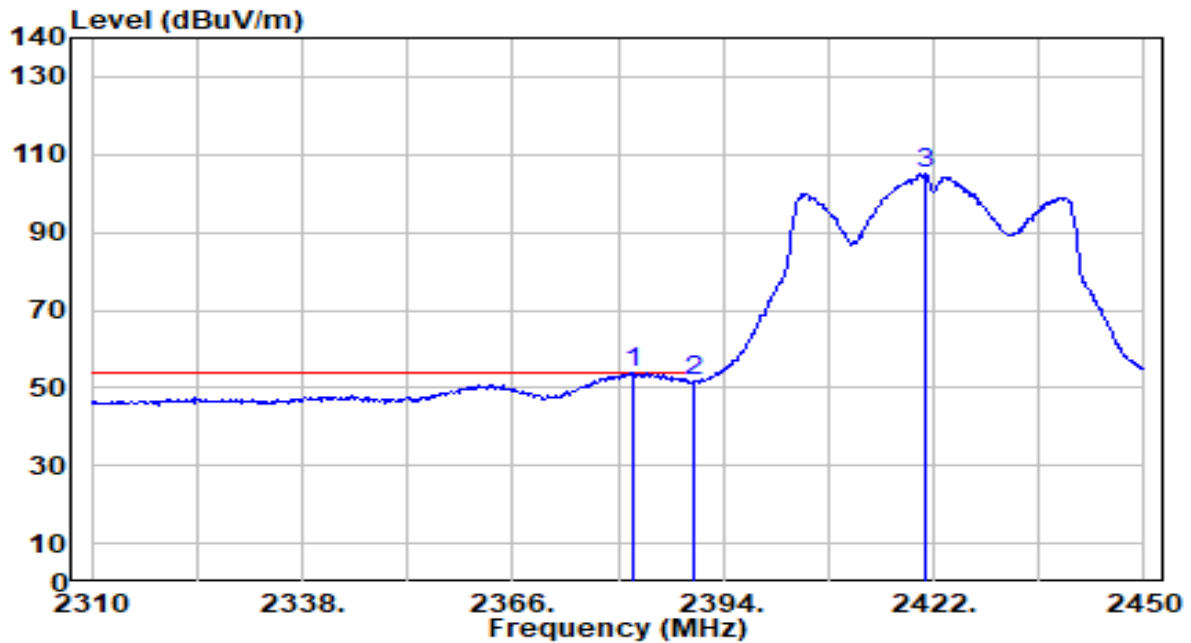


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2382.100	23.40	30.43	53.82	-0.18	54.00	100	58	Average
2		2390.000	21.19	30.45	51.64	-2.36	54.00	100	58	Average
3		2420.740	74.54	30.50	105.04	N/A	N/A	100	58	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

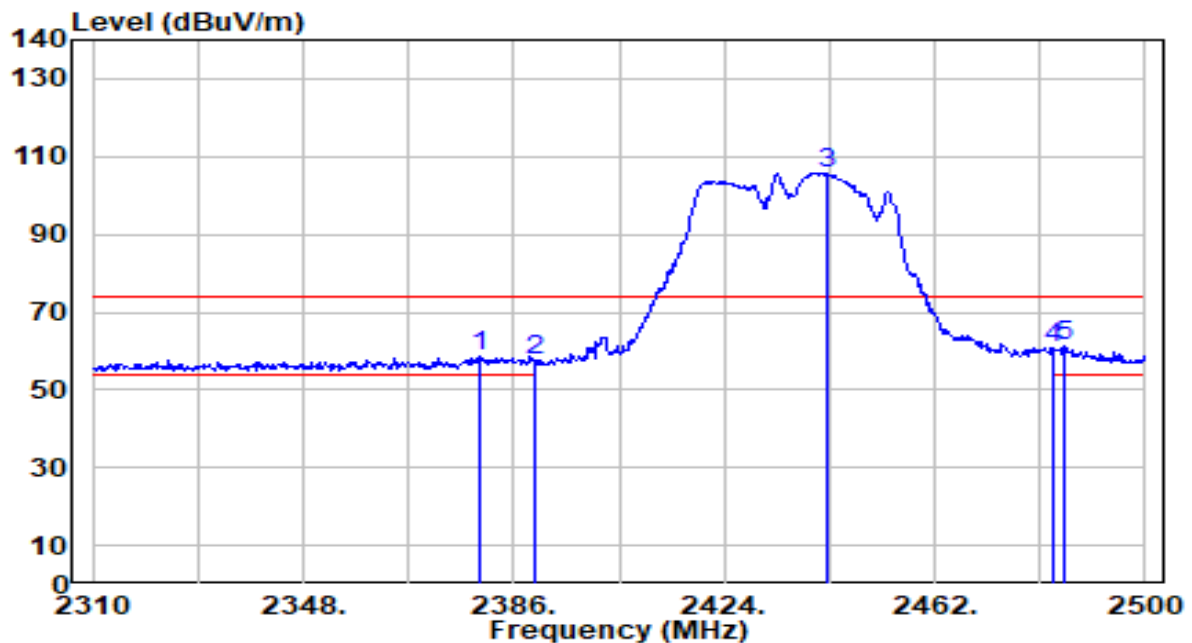


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2380.110	28.20	30.42	58.62	-15.38	74.00	165	201	Peak
2	2390.000	26.92	30.45	57.37	-16.63	74.00	165	201	Peak
3	2442.430	75.31	30.53	105.84	N/A	N/A	165	201	Peak
4	2483.500	30.37	30.59	60.96	-13.04	74.00	165	201	Peak
5	* 2485.180	30.44	30.59	61.03	-12.97	74.00	165	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

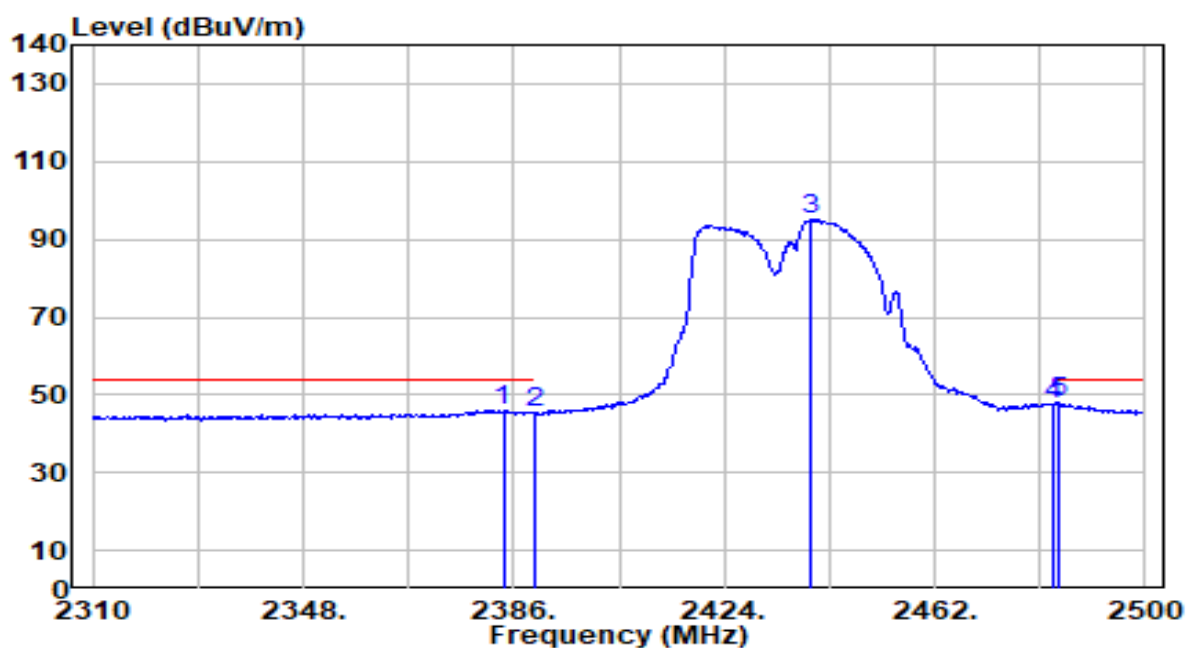


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2384.100	15.65	30.43	46.08	-7.92	54.00	165	201	Average
2		2390.000	14.94	30.45	45.39	-8.61	54.00	165	201	Average
3		2439.770	64.54	30.53	95.07	N/A	N/A	165	201	Average
4		2483.500	16.87	30.59	47.45	-6.55	54.00	165	201	Average
5	*	2484.420	17.26	30.59	47.85	-6.15	54.00	165	201	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

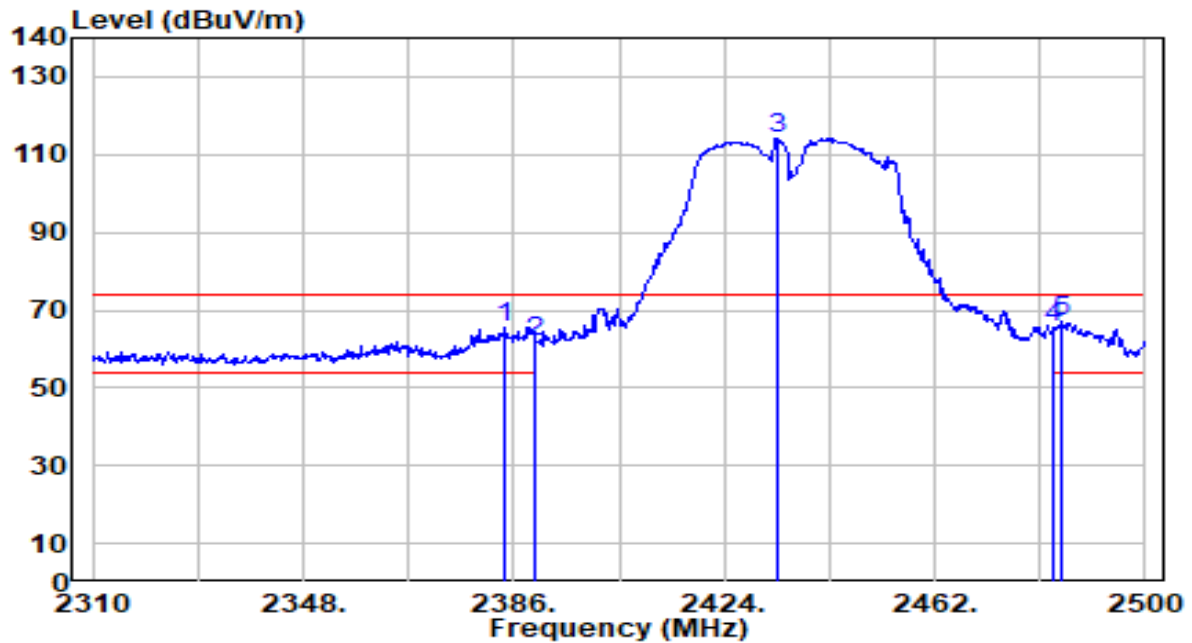


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.290	34.91	30.43	65.34	-8.66	74.00	156	289	Peak
2	2390.000	31.15	30.45	61.60	-12.40	74.00	156	289	Peak
3	2433.500	83.85	30.52	114.37	N/A	N/A	156	289	Peak
4	2483.500	34.74	30.59	65.33	-8.67	74.00	156	289	Peak
5	* 2484.990	36.65	30.59	67.24	-6.76	74.00	156	289	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

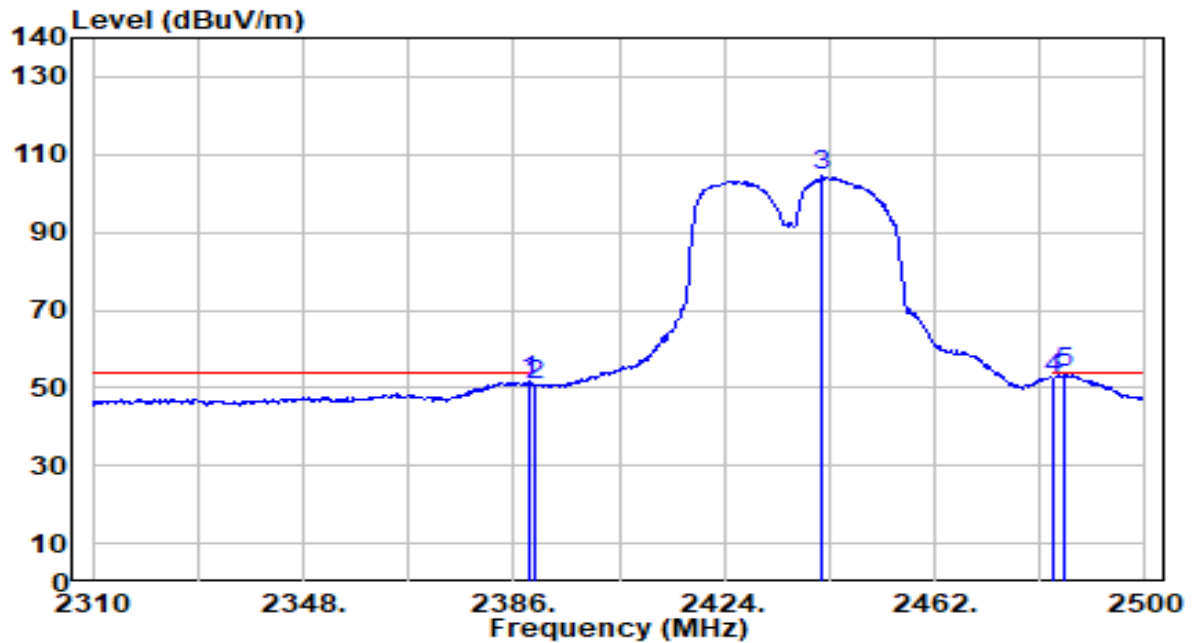


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	21.08	30.44	51.53	-2.47	54.00	156	289	Average
2	2390.000	20.02	30.45	50.46	-3.54	54.00	156	289	Average
3	2441.670	73.82	30.53	104.36	N/A	N/A	156	289	Average
4	2483.500	21.85	30.59	52.44	-1.56	54.00	156	289	Average
5	* 2485.560	23.16	30.59	53.75	-0.25	54.00	156	289	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

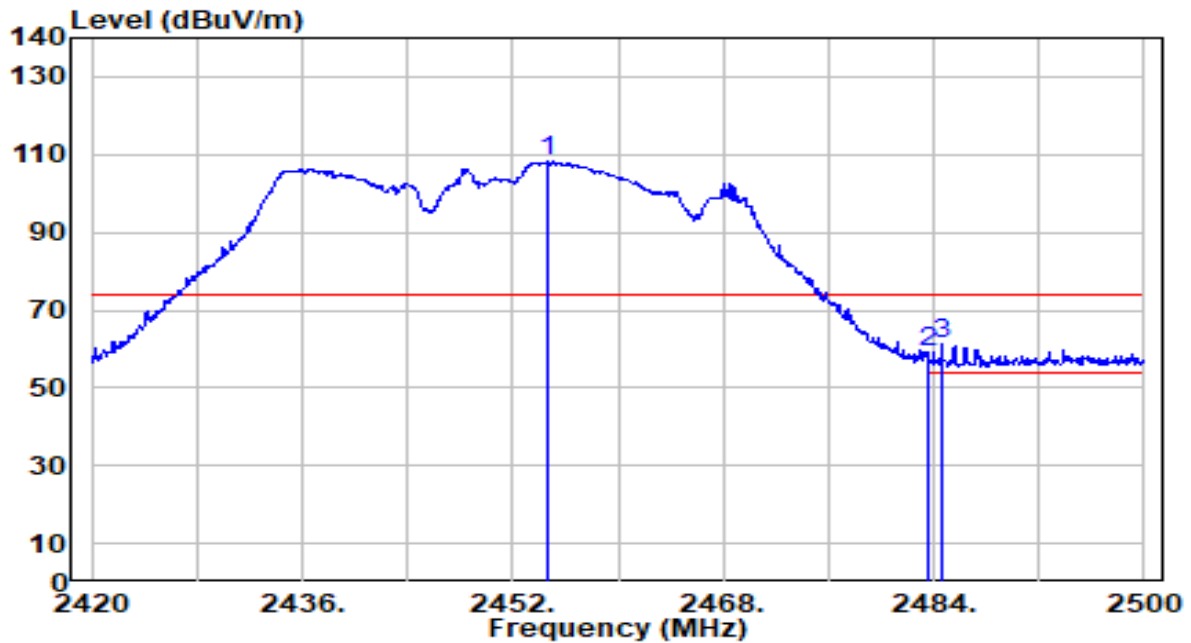


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.640	77.59	30.55	108.14	N/A	N/A	179	310	Peak
2	2483.500	28.64	30.59	59.23	-14.77	74.00	179	310	Peak
3	* 2484.640	30.51	30.59	61.10	-12.90	74.00	179	310	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

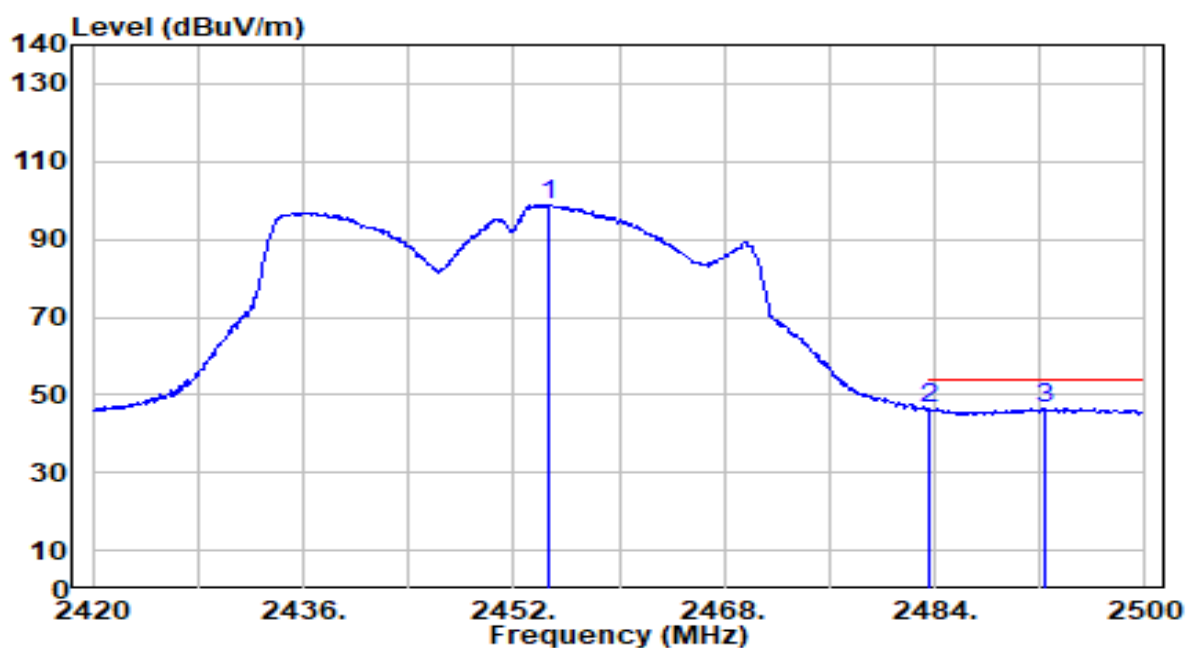


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2454.640	68.31	30.55	98.86	N/A	N/A	179	310	Average
2	*	2483.500	15.91	30.59	46.50	-7.50	54.00	179	310	Average
3		2492.400	15.88	30.60	46.48	-7.52	54.00	179	310	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9 ANT 0+1_Veritical Ant	Test Voltage	AC 120V/60Hz

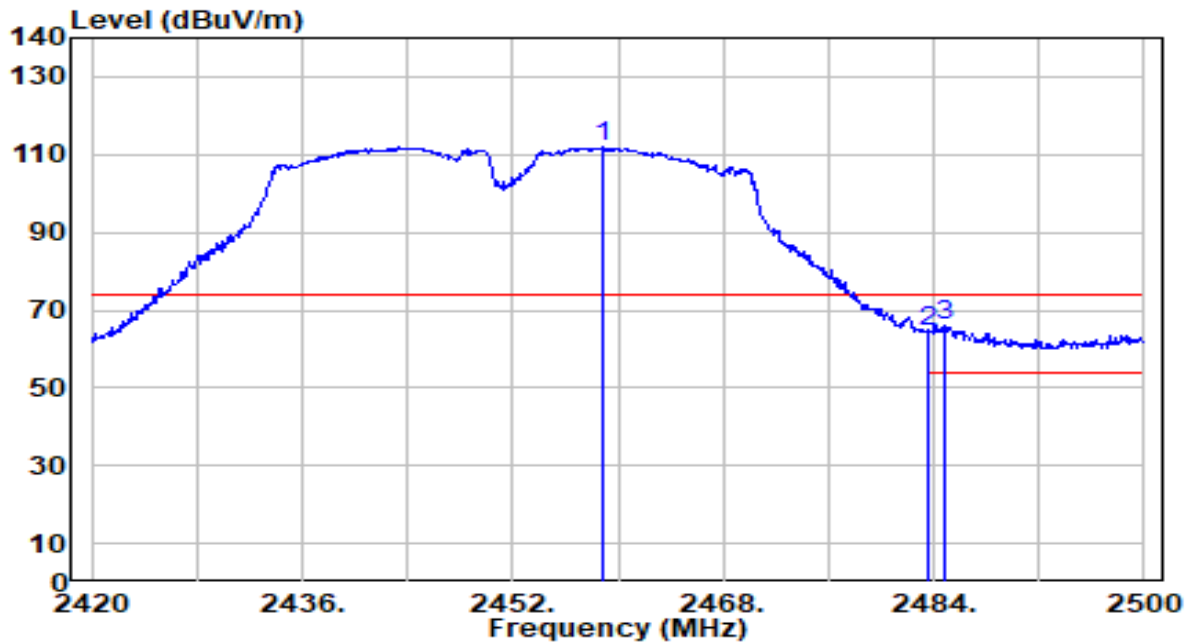


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.800	81.49	30.55	112.04	N/A	N/A	100	54	Peak
2	2483.500	33.62	30.59	64.21	-9.79	74.00	100	54	Peak
3	* 2484.800	35.28	30.59	65.87	-8.13	74.00	100	54	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

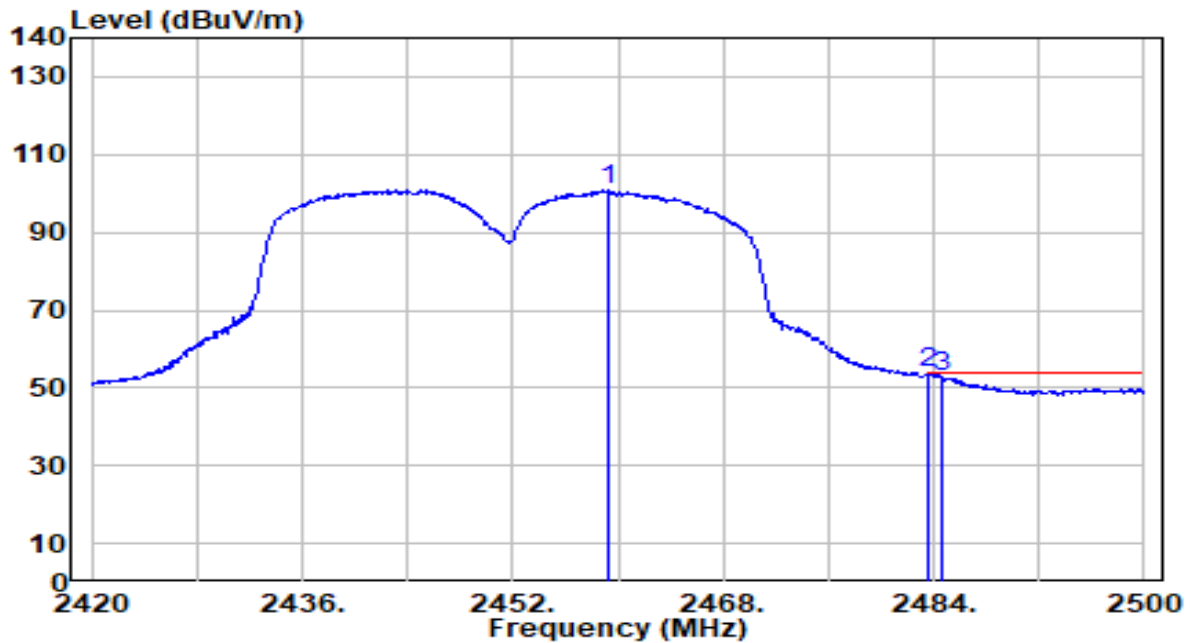


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2459.360	70.27	30.56	100.83	N/A	N/A	100	54	Average
2	*	2483.500	23.19	30.59	53.78	-0.22	54.00	100	54	Average
3		2484.640	22.04	30.59	52.63	-1.37	54.00	100	54	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

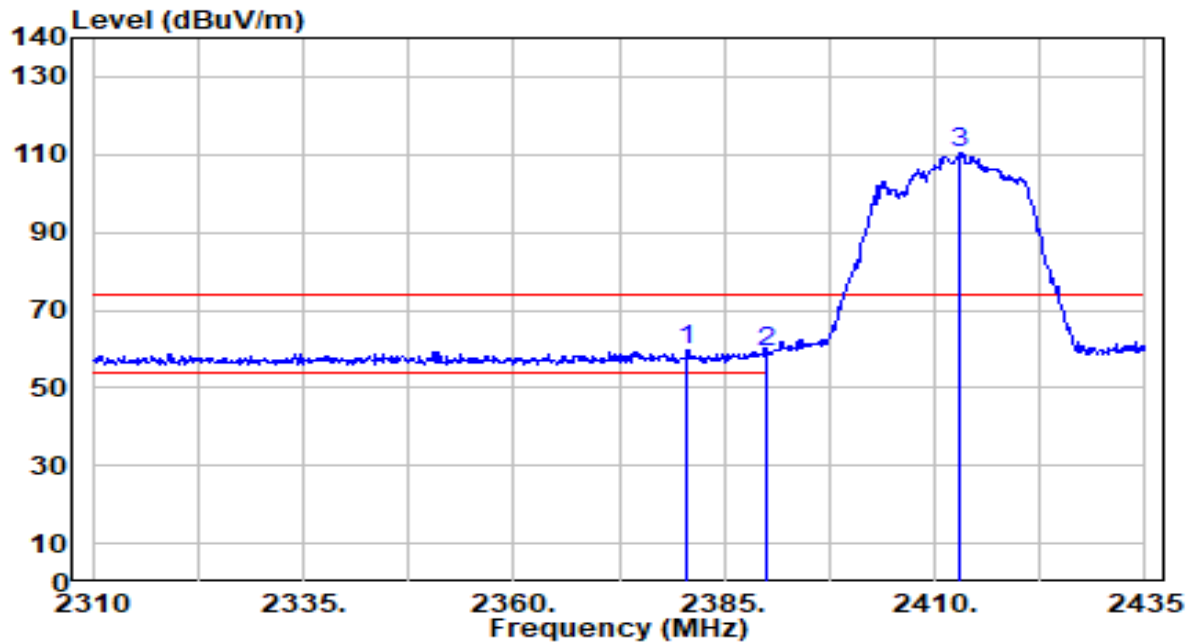


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2380.625	29.34	30.42	59.76	-14.24	74.00	138	310	Peak
2		2390.000	28.74	30.45	59.19	-14.81	74.00	138	310	Peak
3		2412.875	80.16	30.49	110.65	N/A	N/A	138	310	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

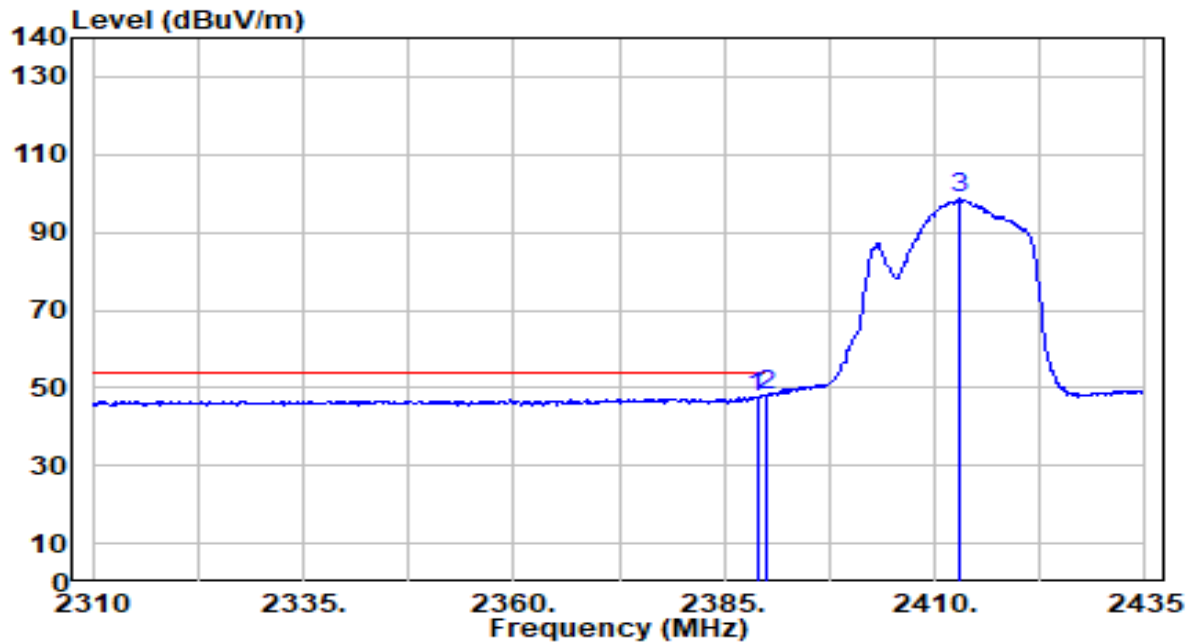


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.875	17.19	30.44	47.64	-6.36	54.00	138	310	Average
2	*	2390.000	17.86	30.45	48.30	-5.70	54.00	138	310	Average
3		2413.000	68.06	30.49	98.55	N/A	N/A	138	310	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

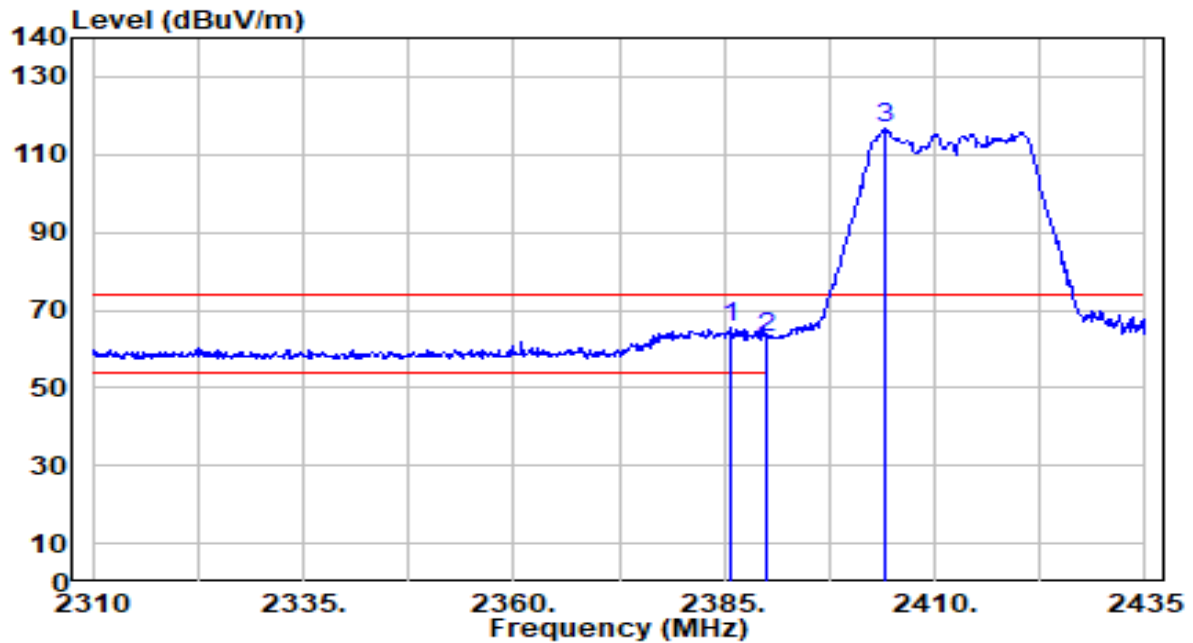


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.750	35.19	30.44	65.62	-8.38	74.00	100	58	Peak
2		2390.000	32.55	30.45	62.99	-11.01	74.00	100	58	Peak
3		2404.250	86.11	30.48	116.59	N/A	N/A	100	58	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

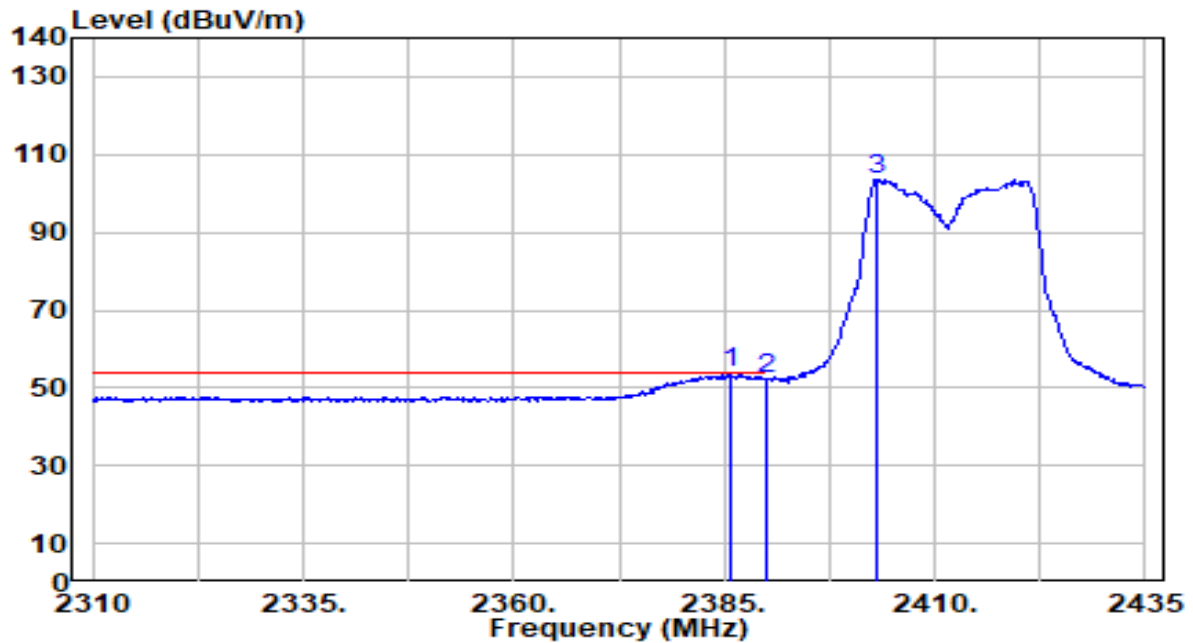


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.625	23.30	30.44	53.73	-0.27	54.00	100	58	Average
2		2390.000	21.66	30.45	52.11	-1.89	54.00	100	58	Average
3		2403.250	73.29	30.48	103.77	N/A	N/A	100	58	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

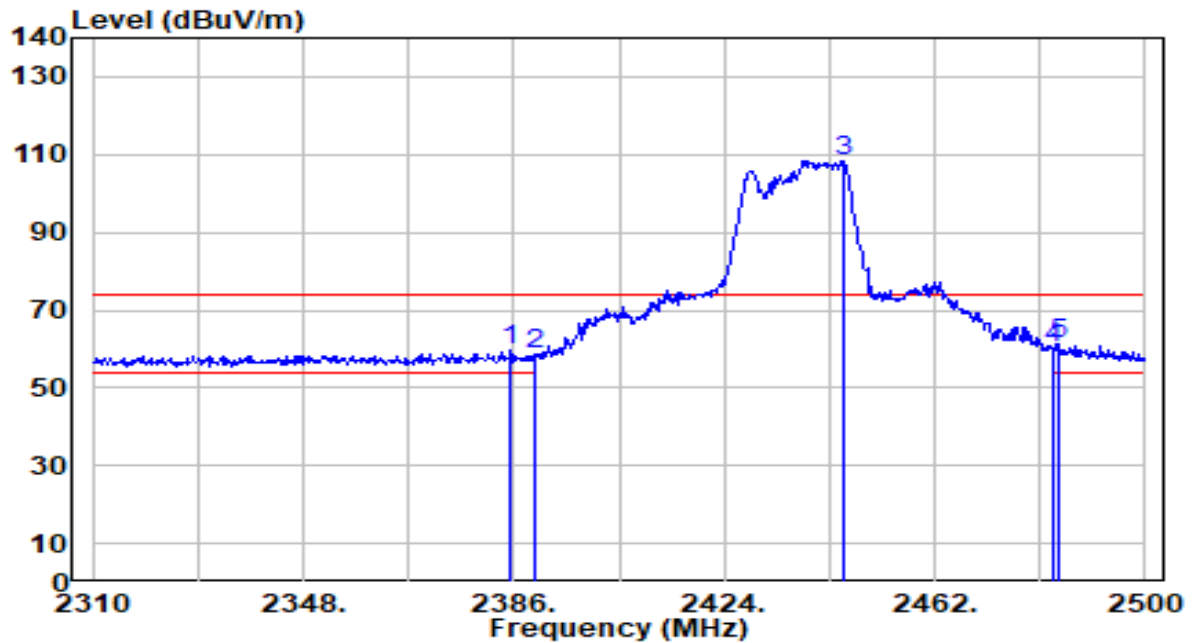


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.430	29.18	30.43	59.61	-14.39	74.00	165	201	Peak
2	2390.000	28.29	30.45	58.74	-15.26	74.00	165	201	Peak
3	2445.470	77.99	30.54	108.52	N/A	N/A	165	201	Peak
4	2483.500	29.75	30.59	60.34	-13.66	74.00	165	201	Peak
5	* 2484.420	30.56	30.59	61.15	-12.85	74.00	165	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

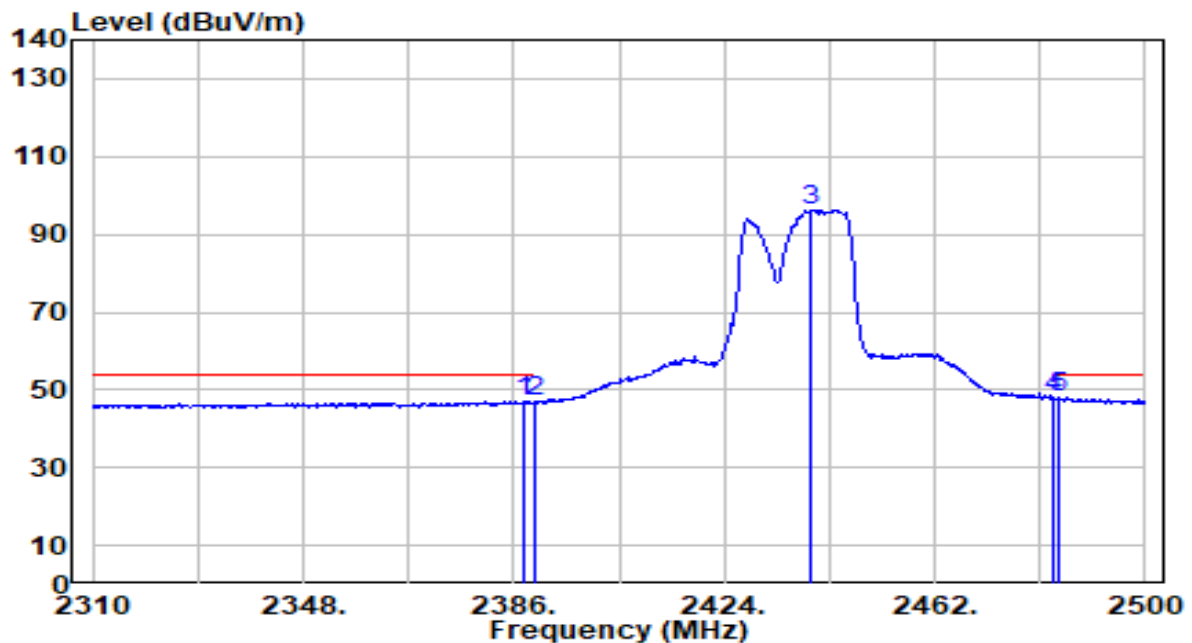


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.710	16.49	30.44	46.94	-7.06	54.00	165	201	Average
2		2390.000	16.54	30.45	46.99	-7.01	54.00	165	201	Average
3		2439.770	65.88	30.53	96.41	N/A	N/A	165	201	Average
4		2483.500	17.52	30.59	48.11	-5.89	54.00	165	201	Average
5	*	2484.230	17.54	30.59	48.13	-5.87	54.00	165	201	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

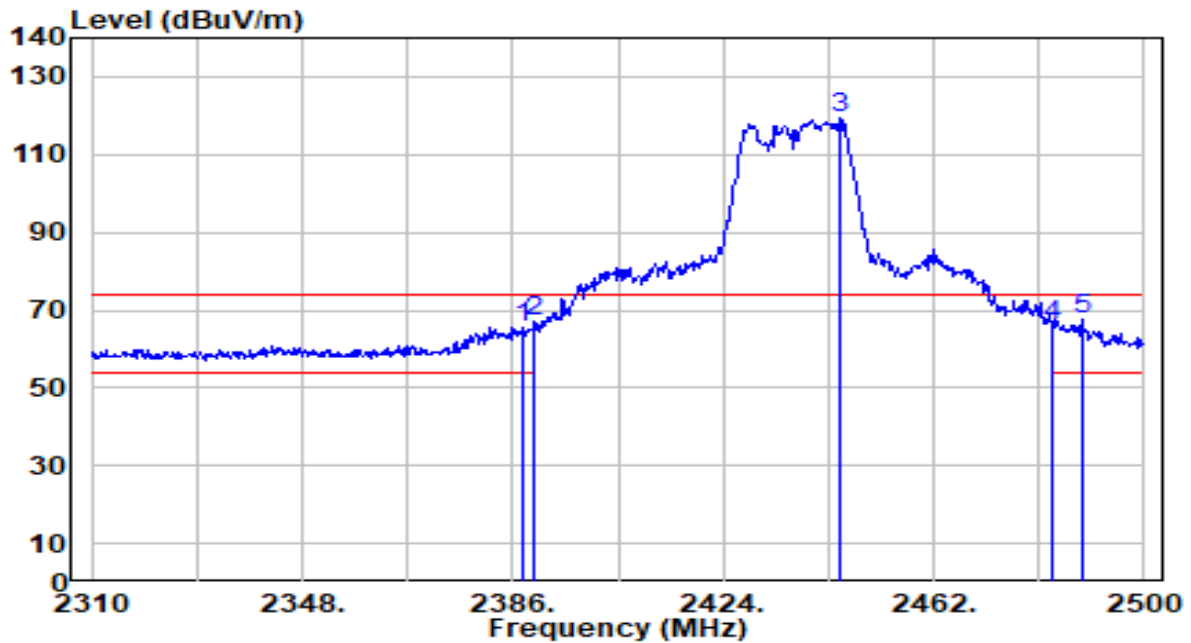


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	35.14	30.44	65.59	-8.41	74.00	156	289	Peak
2	2390.000	36.41	30.45	66.86	-7.14	74.00	156	289	Peak
3	2445.280	88.61	30.54	119.15	N/A	N/A	156	289	Peak
4	2483.500	35.23	30.59	65.82	-8.18	74.00	156	289	Peak
5	* 2488.790	36.98	30.59	67.57	-6.43	74.00	156	289	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

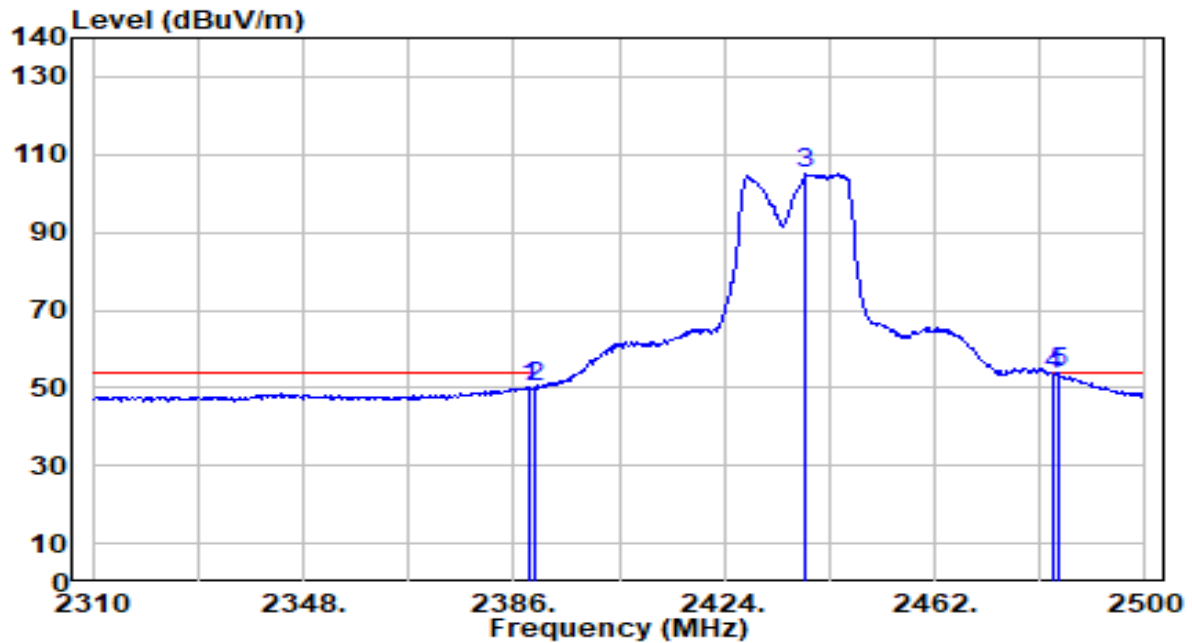


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	19.85	30.44	50.29	-3.71	54.00	156	289	Average
2	2390.000	19.55	30.45	50.00	-4.00	54.00	156	289	Average
3	2438.820	74.37	30.53	104.90	N/A	N/A	156	289	Average
4	2483.500	22.65	30.59	53.23	-0.77	54.00	156	289	Average
5	* 2484.230	23.24	30.59	53.82	-0.18	54.00	156	289	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 10 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

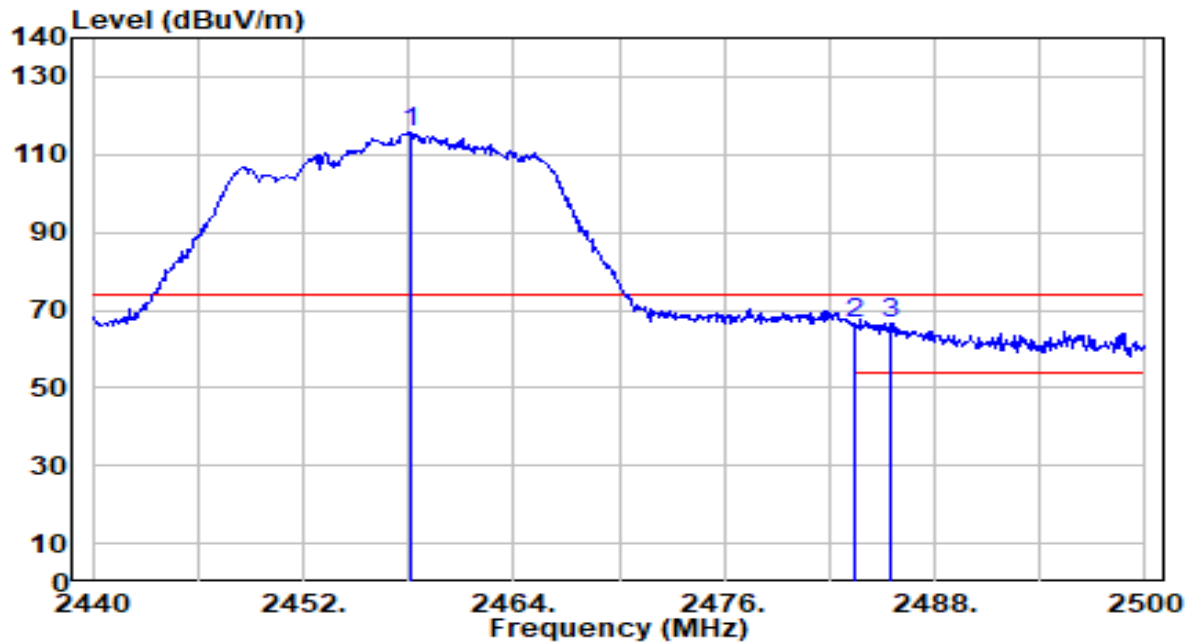


s

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.120	85.20	30.55	115.75	N/A	N/A	160	319	Peak
2	2483.500	35.85	30.59	66.44	-7.56	74.00	160	319	Peak
3	* 2485.420	36.17	30.59	66.76	-7.24	74.00	160	319	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 10 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

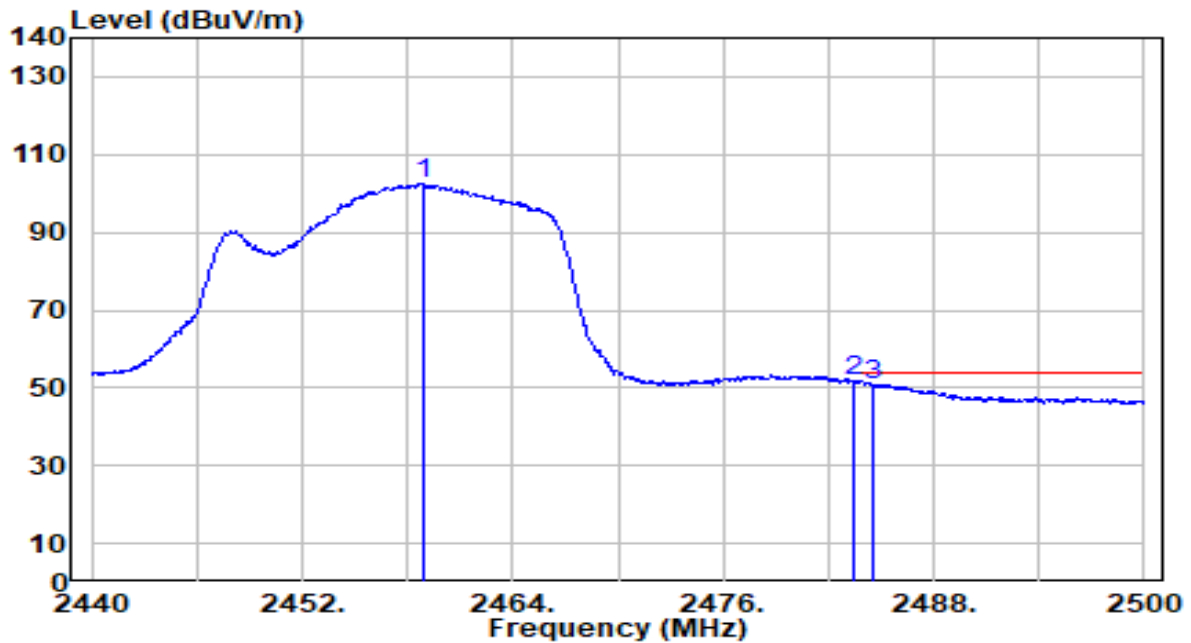


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2458.900	72.15	30.55	102.71	N/A	N/A	160	319	Average
2	*	2483.500	21.02	30.59	51.61	-2.39	54.00	160	319	Average
3		2484.520	20.33	30.59	50.92	-3.08	54.00	160	319	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 10 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

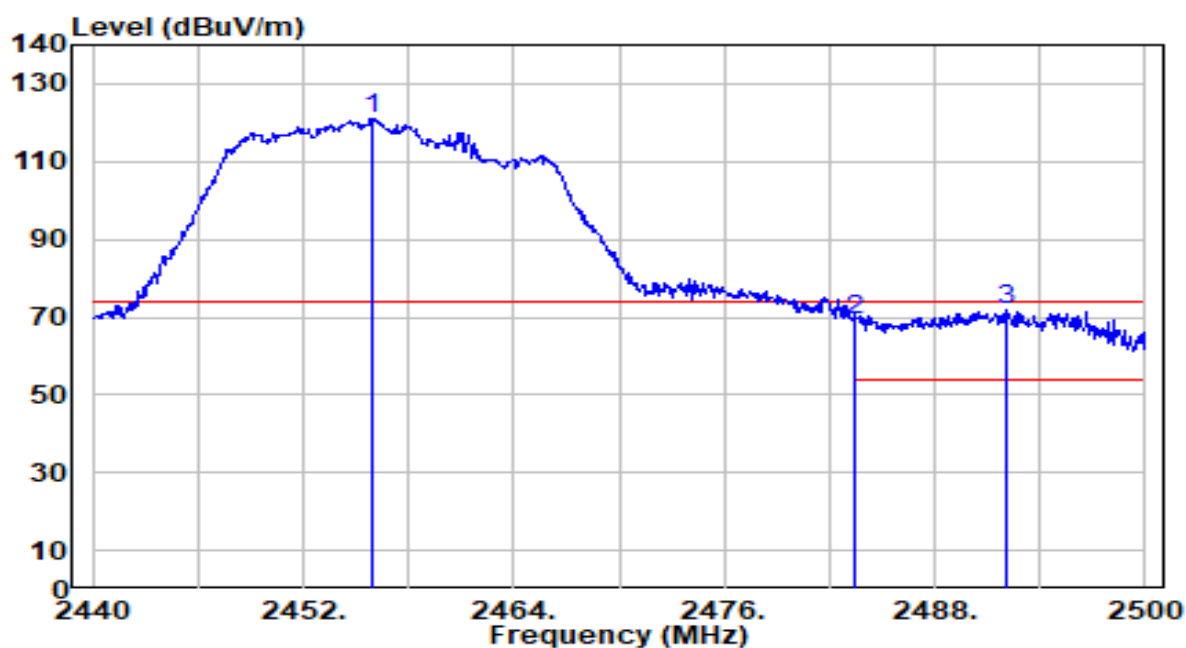


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.900	90.51	30.55	121.06	N/A	N/A	162	306	Peak
2	2483.500	38.43	30.59	69.02	-4.98	74.00	162	306	Peak
3	* 2492.080	41.07	30.60	71.67	-2.33	74.00	162	306	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 10 ANT 0+1_Verical Ant	Test Voltage	AC 120V/60Hz

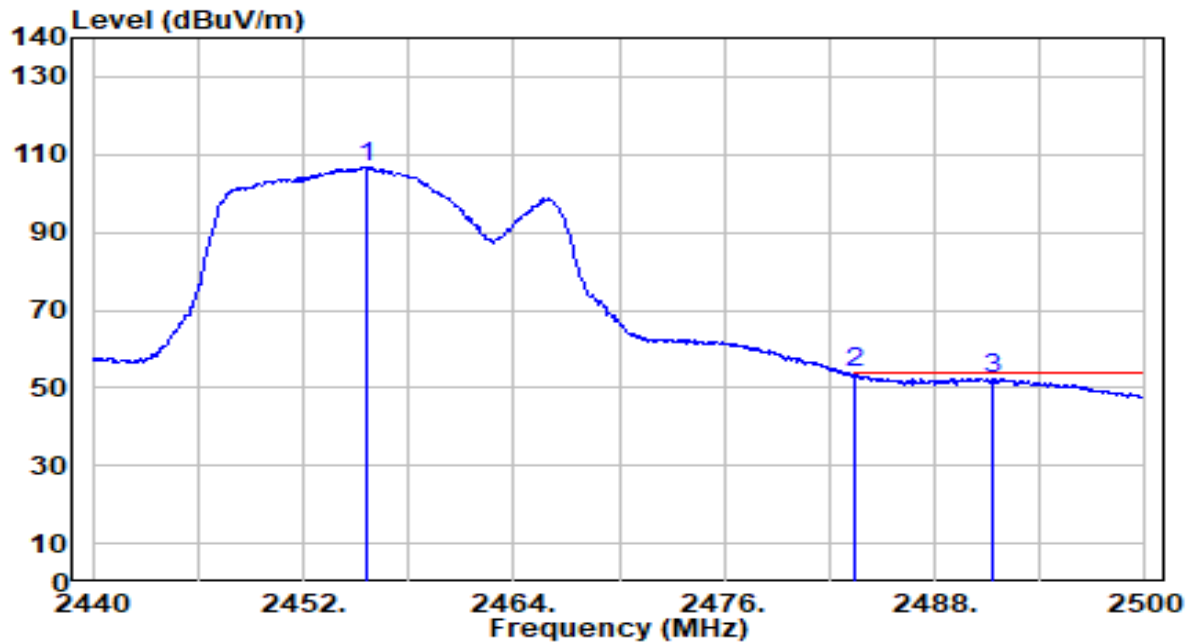


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.600	76.28	30.55	106.83	N/A	N/A	162	306	Average
2	*	2483.500	23.15	30.59	53.74	-0.26	54.00	162	306	Average
3		2491.360	21.81	30.60	52.41	-1.59	54.00	162	306	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

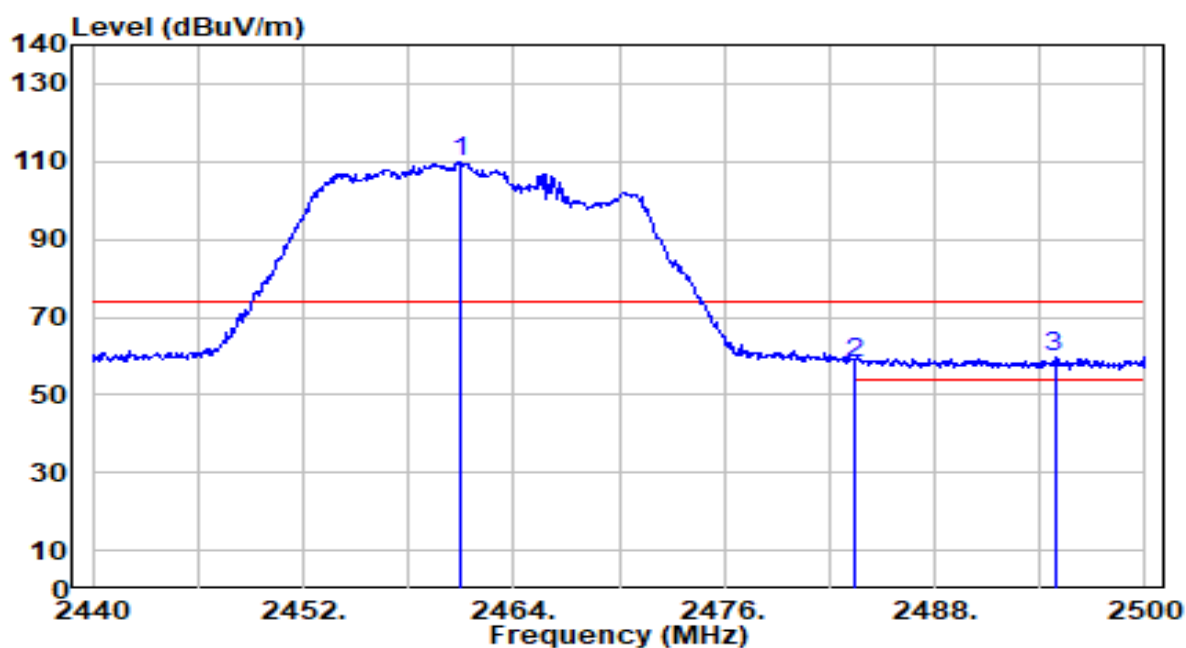


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.000	79.35	30.56	109.90	N/A	N/A	179	310	Peak
2	2483.500	27.54	30.59	58.13	-15.87	74.00	179	310	Peak
3	* 2494.840	29.22	30.60	59.82	-14.18	74.00	179	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

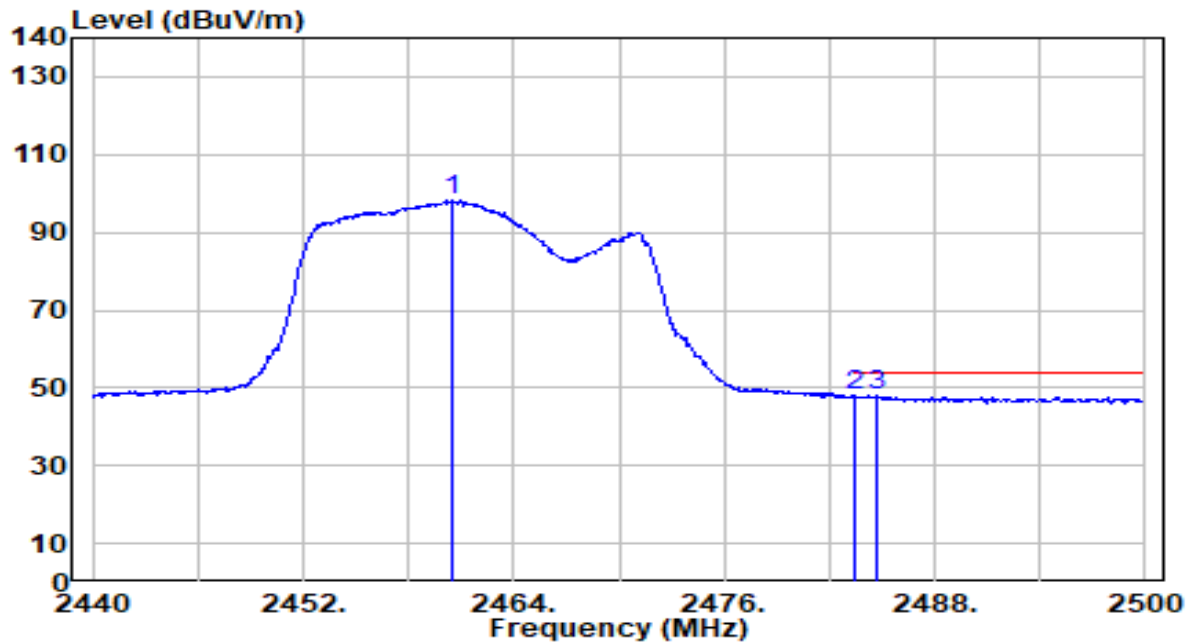


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.520	67.73	30.56	98.29	N/A	N/A	179	310	Average
2	*	2483.500	17.26	30.59	47.85	-6.15	54.00	179	310	Average
3		2484.760	17.25	30.59	47.84	-6.16	54.00	179	310	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

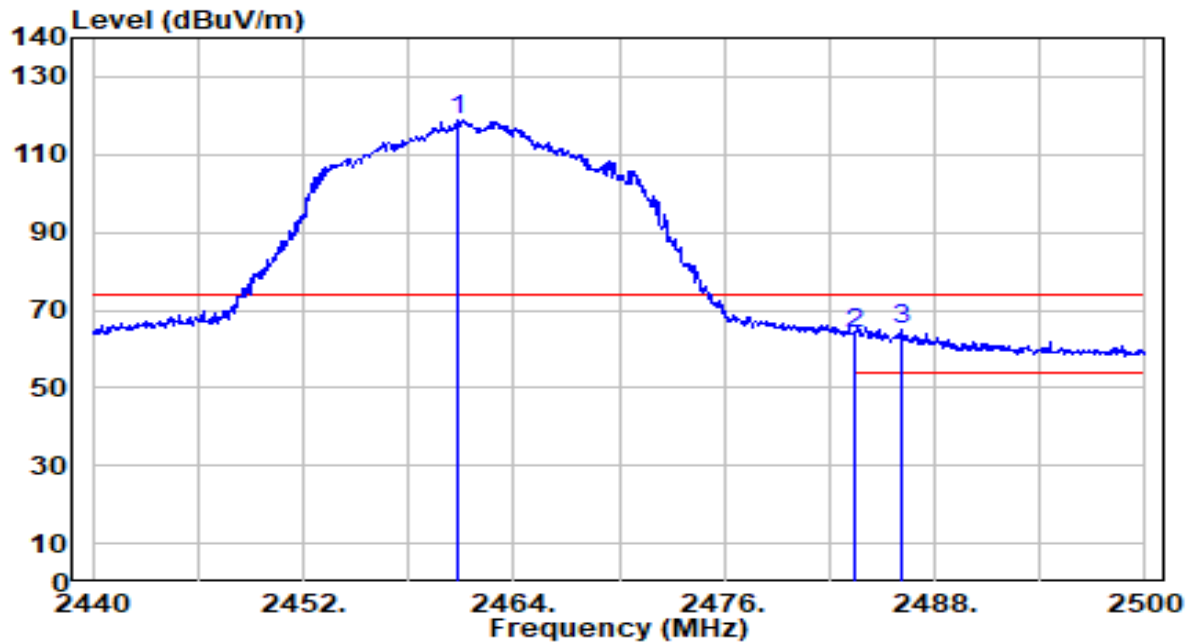


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.880	88.27	30.56	118.83	N/A	N/A	100	54	Peak
2	2483.500	33.36	30.59	63.95	-10.05	74.00	100	54	Peak
3	* 2486.080	34.26	30.59	64.86	-9.14	74.00	100	54	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

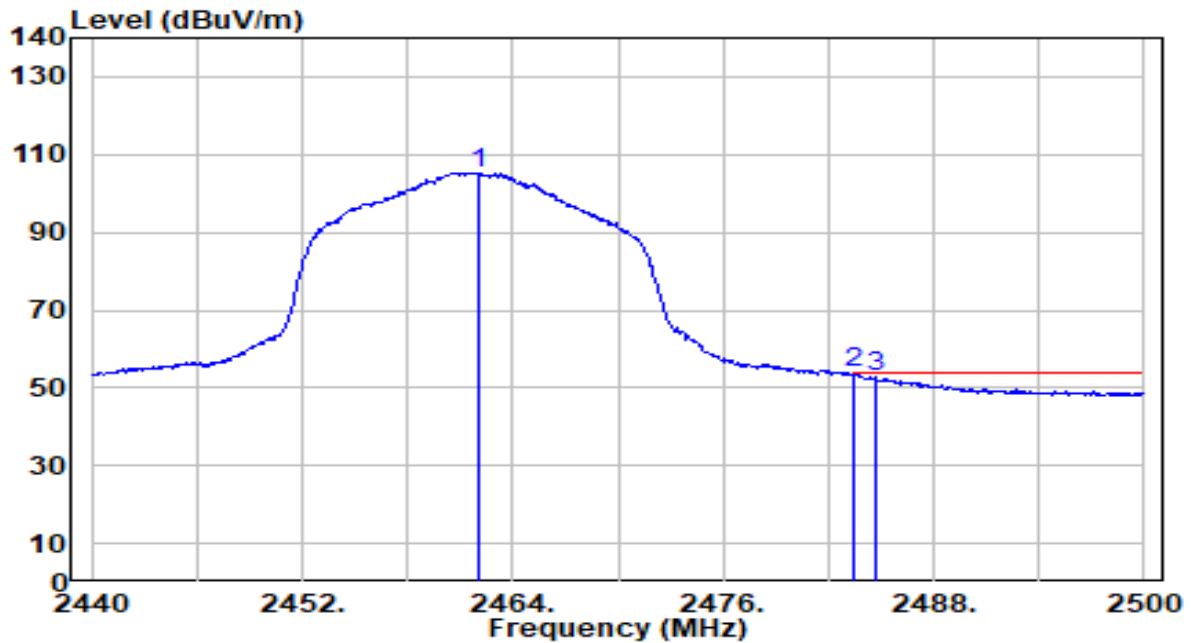


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.080	74.73	30.56	105.29	N/A	N/A	100	54	Average
2	*	2483.500	23.14	30.59	53.73	-0.27	54.00	100	54	Average
3		2484.700	22.03	30.59	52.62	-1.38	54.00	100	54	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

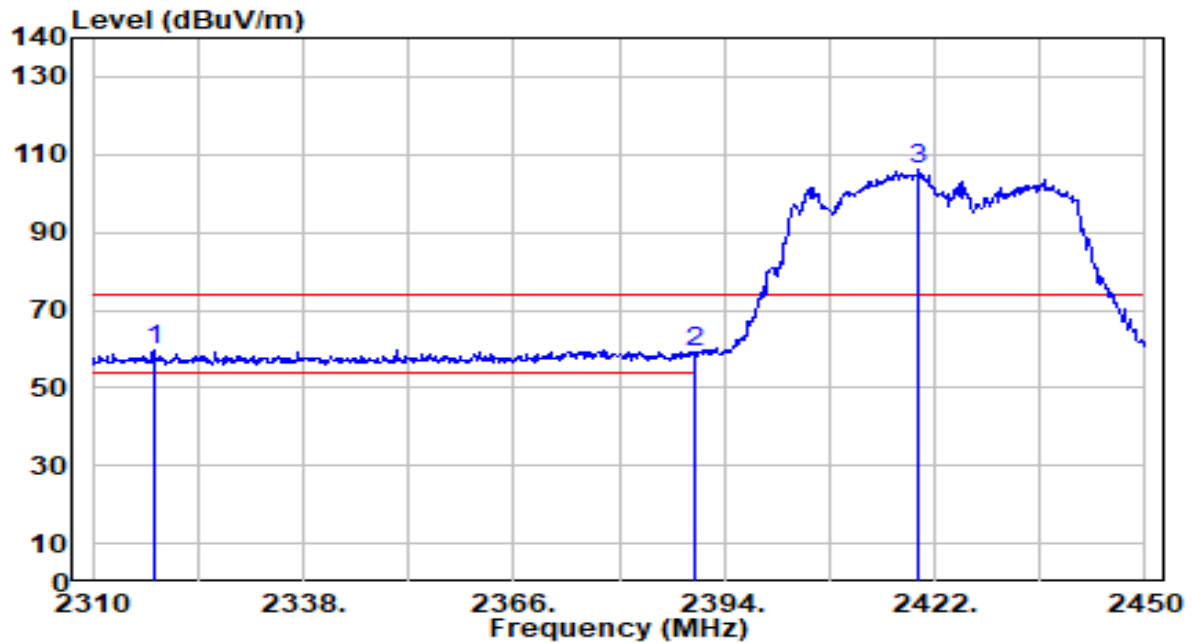


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2318.120	29.51	30.24	59.76	-14.24	74.00	138	310	Peak
2		2390.000	28.50	30.45	58.94	-15.06	74.00	138	310	Peak
3		2419.900	75.60	30.50	106.11	N/A	N/A	138	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

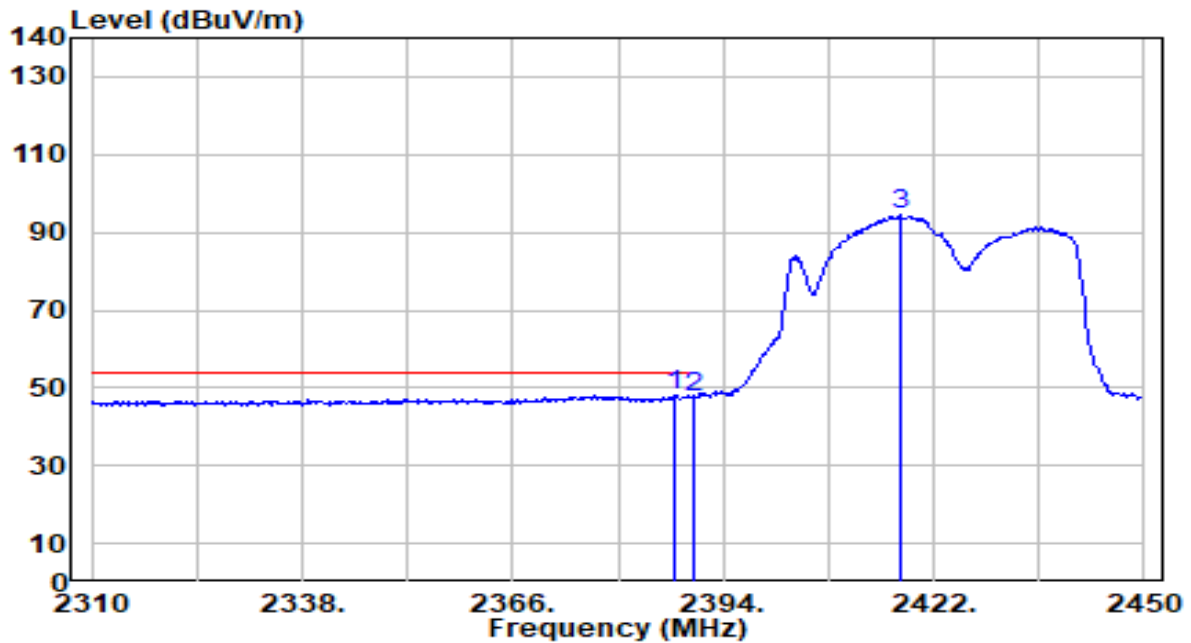


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.420	17.45	30.44	47.89	-6.11	54.00	138	310	Average
2		2390.000	17.21	30.45	47.66	-6.34	54.00	138	310	Average
3		2417.520	63.86	30.50	94.36	N/A	N/A	138	310	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

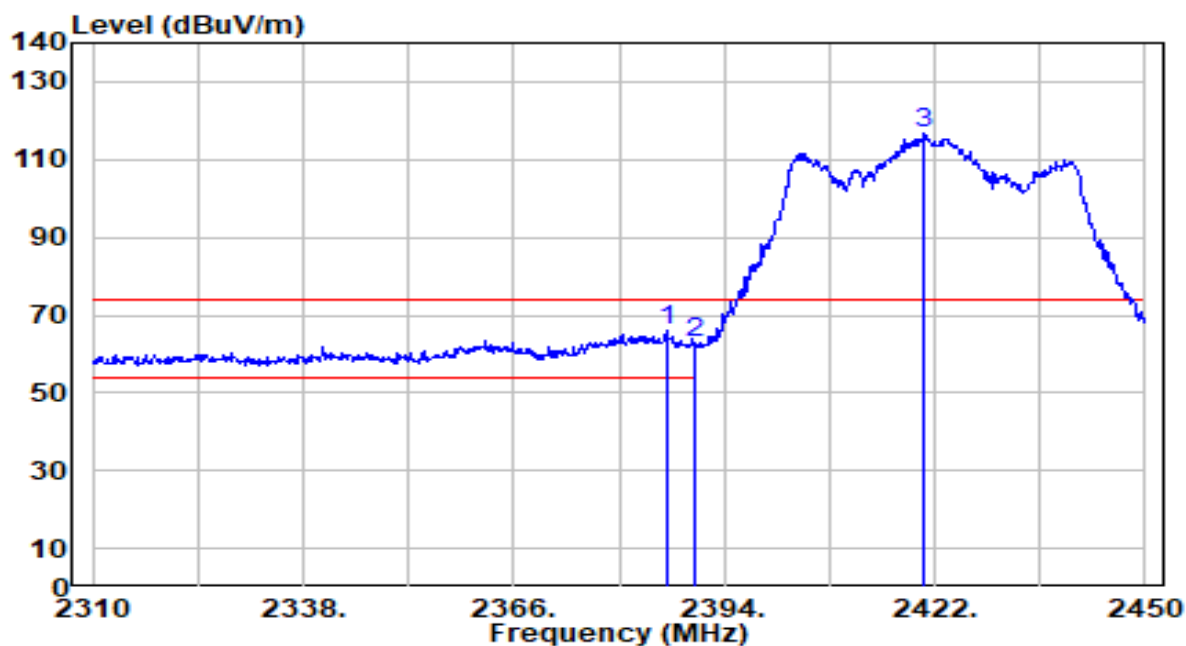


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.300	35.56	30.44	66.00	-8.00	74.00	100	58	Peak
2		2390.000	32.42	30.45	62.87	-11.13	74.00	100	58	Peak
3		2420.600	86.06	30.50	116.57	N/A	N/A	100	58	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

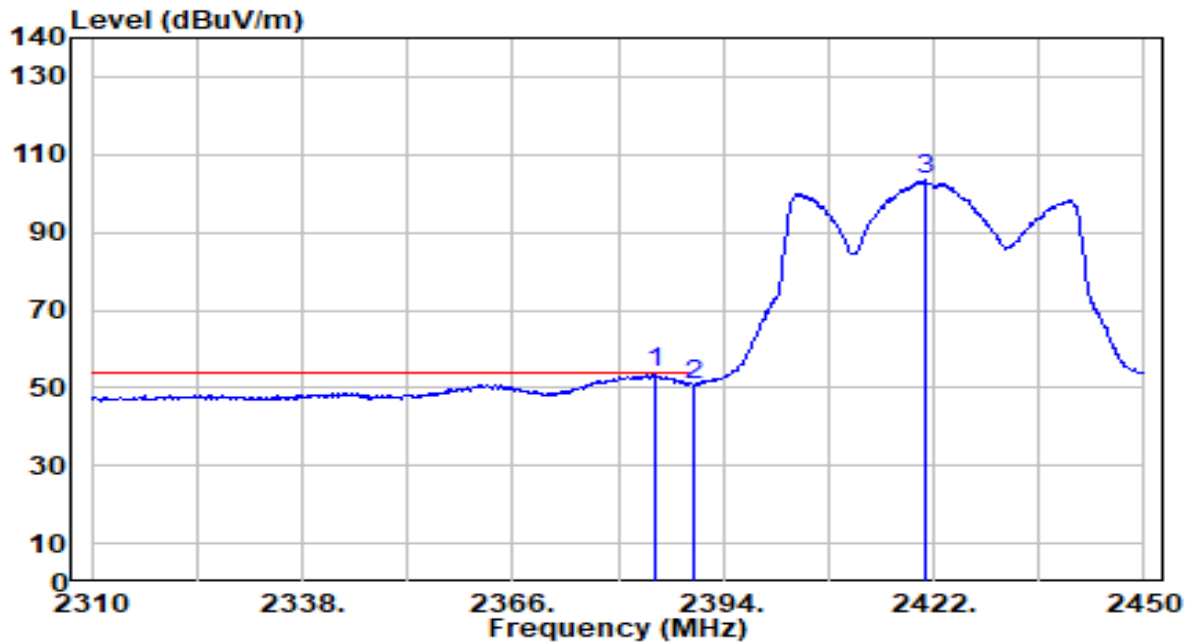


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.900	23.34	30.43	53.78	-0.22	54.00	100	58	Average
2		2390.000	20.26	30.45	50.70	-3.30	54.00	100	58	Average
3		2421.020	72.83	30.50	103.33	N/A	N/A	100	58	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

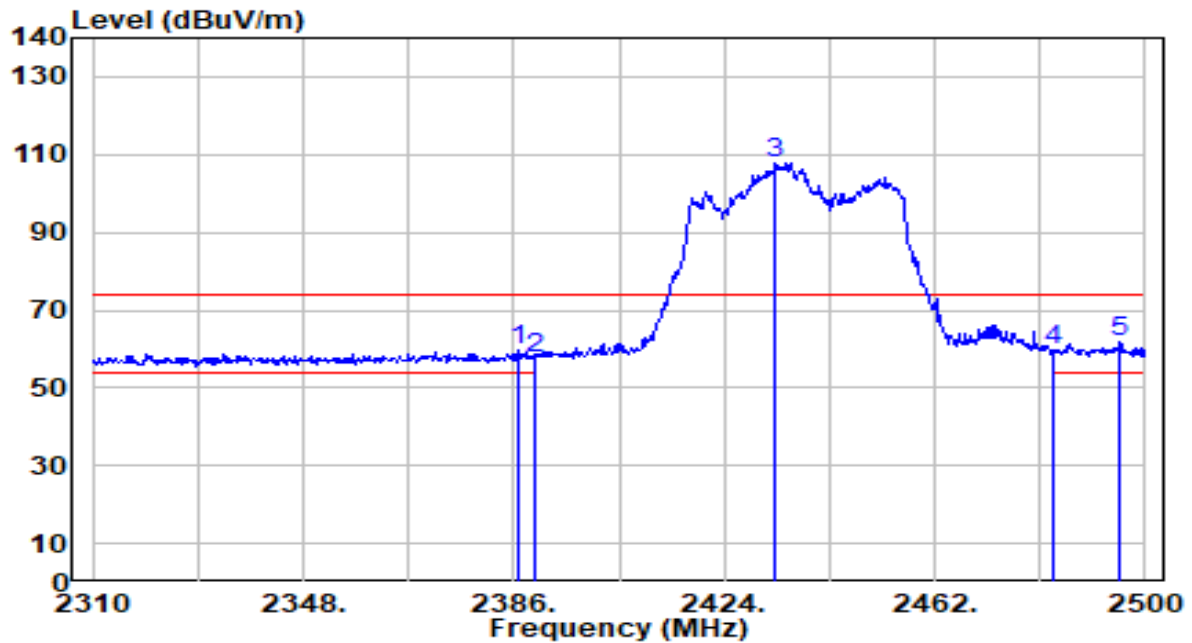


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.760	29.08	30.44	59.51	-14.49	74.00	165	201	Peak
2	2390.000	27.34	30.45	57.79	-16.21	74.00	165	201	Peak
3	2433.310	77.41	30.52	107.93	N/A	N/A	165	201	Peak
4	2483.500	28.88	30.59	59.47	-14.53	74.00	165	201	Peak
5	* 2495.440	30.95	30.60	61.55	-12.45	74.00	165	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

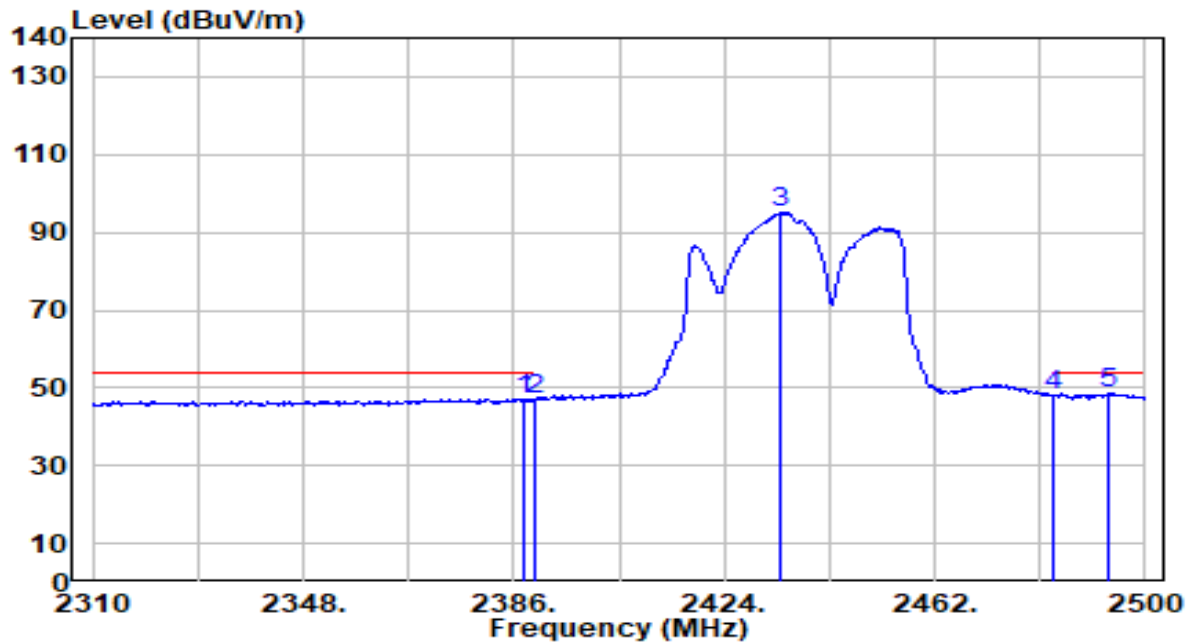


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	16.66	30.44	47.11	-6.89	54.00	165	201	Average
2	2390.000	16.35	30.45	46.80	-7.20	54.00	165	201	Average
3	2434.260	64.61	30.52	95.13	N/A	N/A	165	201	Average
4	2483.500	17.32	30.59	47.91	-6.09	54.00	165	201	Average
5	* 2493.540	18.00	30.60	48.60	-5.40	54.00	165	201	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

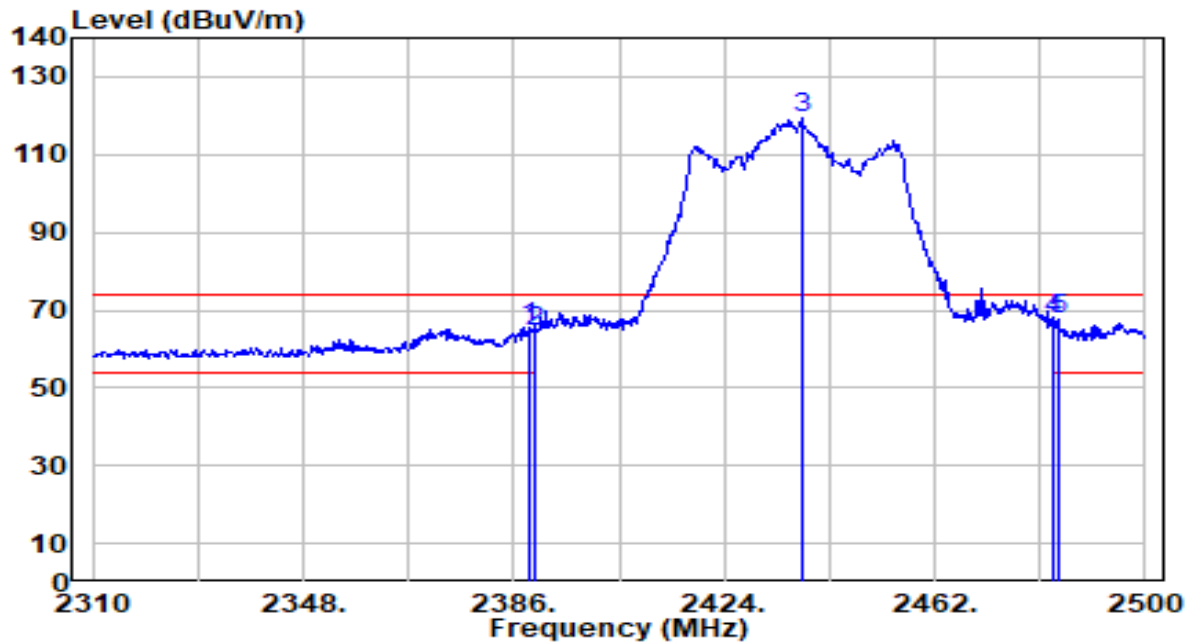


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	35.15	30.44	65.59	-8.41	74.00	156	289	Peak
2	2390.000	34.23	30.45	64.68	-9.32	74.00	156	289	Peak
3	2438.060	88.62	30.53	119.15	N/A	N/A	156	289	Peak
4	* 2483.500	37.15	30.59	67.74	-6.26	74.00	156	289	Peak
5	2484.230	36.95	30.59	67.53	-6.47	74.00	156	289	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

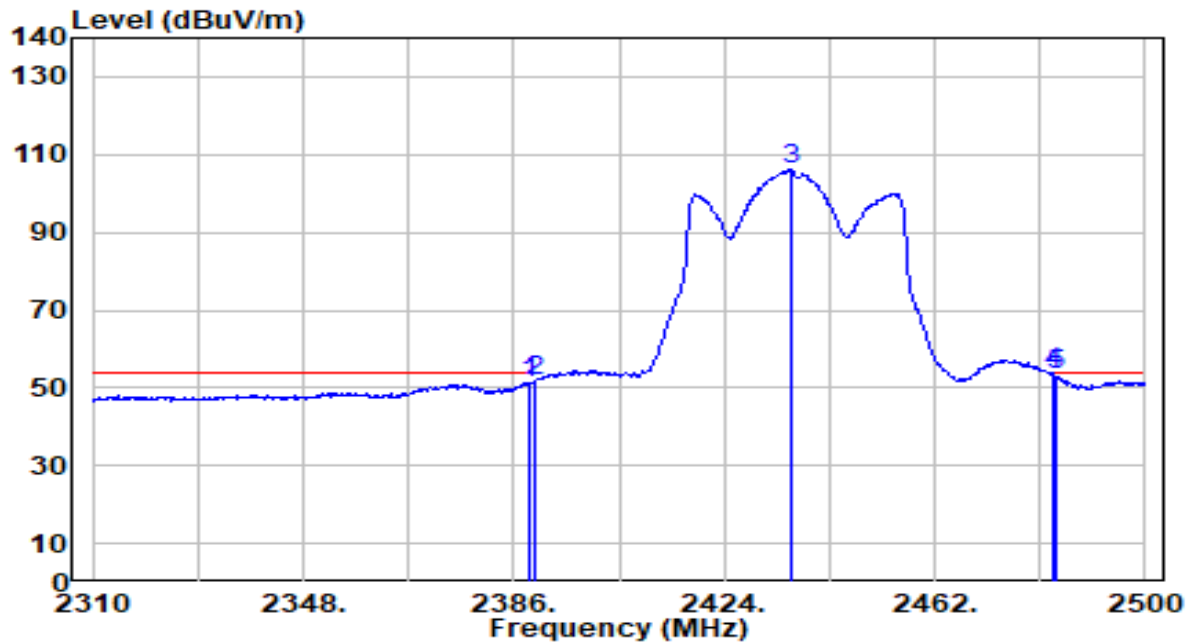


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.850	20.92	30.44	51.36	-2.64	54.00	156	289	Average
2		2390.000	21.57	30.45	52.01	-1.99	54.00	156	289	Average
3		2436.160	75.53	30.52	106.05	N/A	N/A	156	289	Average
4	*	2483.500	23.20	30.59	53.79	-0.21	54.00	156	289	Average
5		2484.040	22.68	30.59	53.27	-0.73	54.00	156	289	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

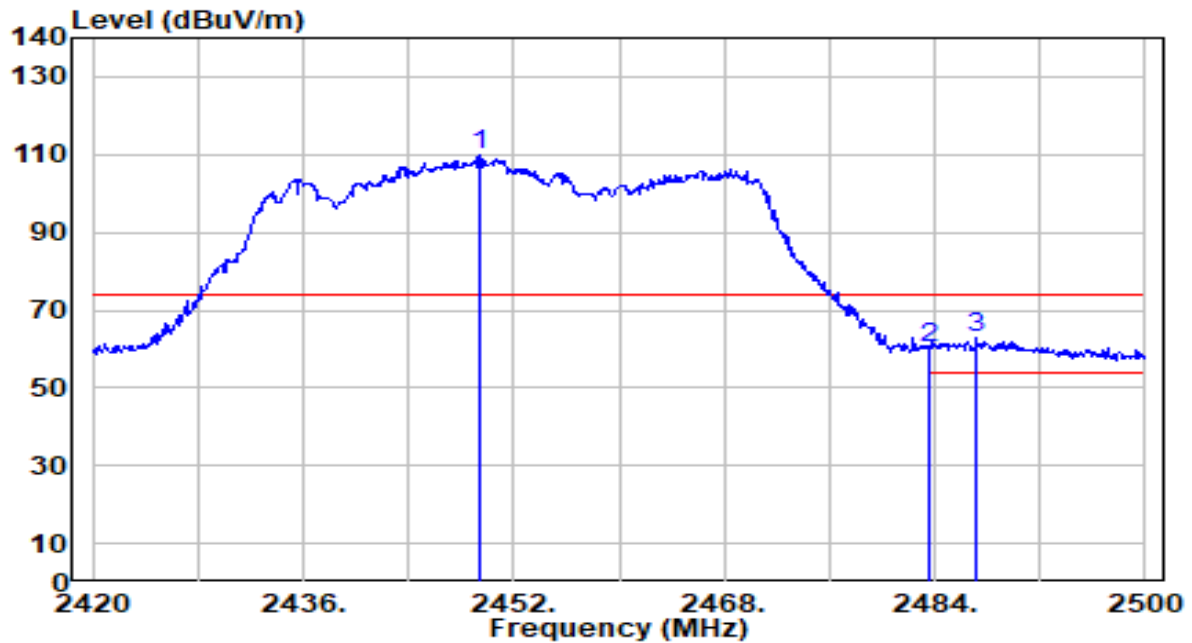


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.520	79.59	30.54	110.14	N/A	N/A	179	310	Peak
2	2483.500	29.39	30.59	59.98	-14.02	74.00	179	310	Peak
3	* 2487.200	32.12	30.59	62.71	-11.29	74.00	179	310	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

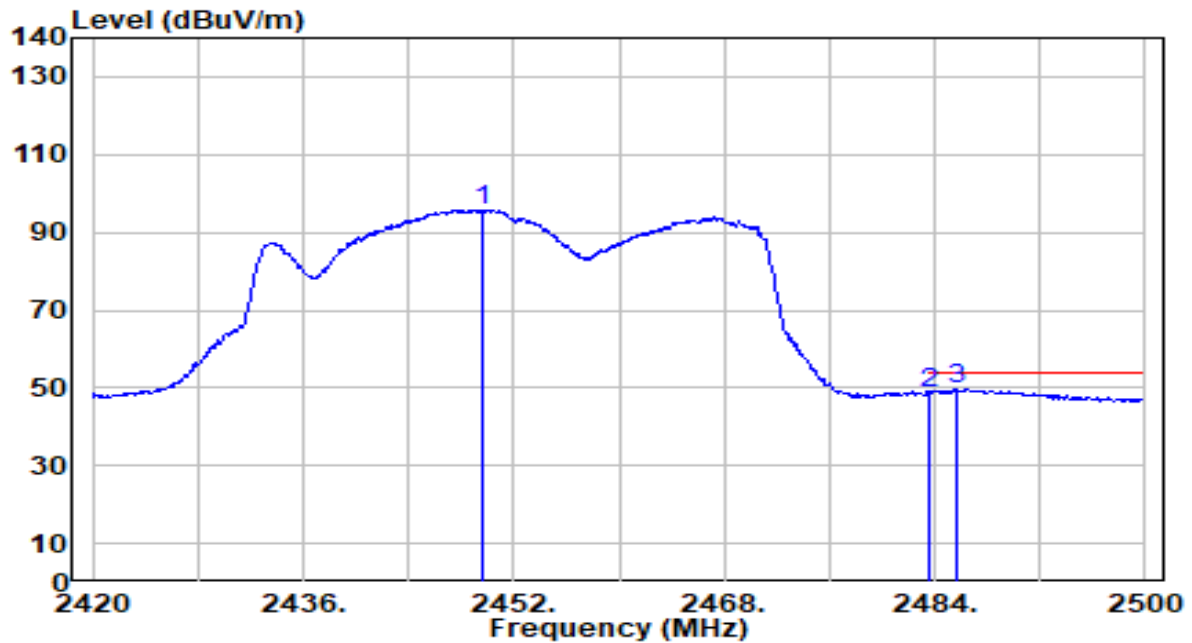


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.600	65.34	30.54	95.88	N/A	N/A	179	310	Average
2	2483.500	18.01	30.59	48.59	-5.41	54.00	179	310	Average
3	* 2485.760	19.06	30.59	49.65	-4.35	54.00	179	310	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

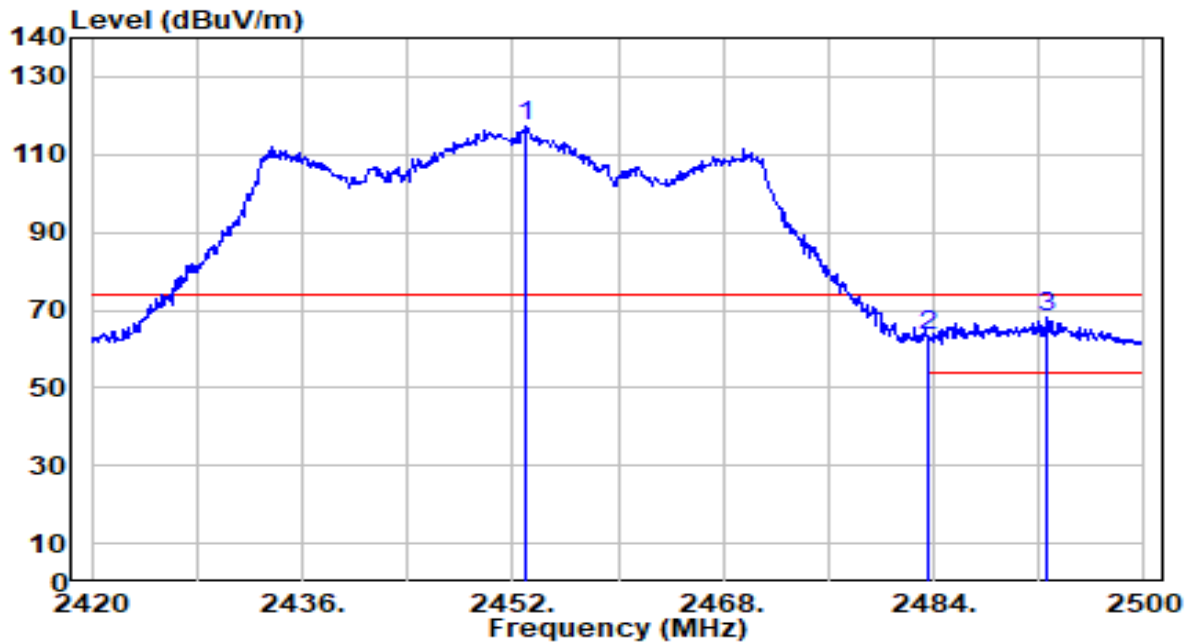


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.040	86.56	30.55	117.10	N/A	N/A	100	54	Peak
2	2483.500	32.61	30.59	63.20	-10.80	74.00	100	54	Peak
3	* 2492.560	37.57	30.60	68.17	-5.83	74.00	100	54	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

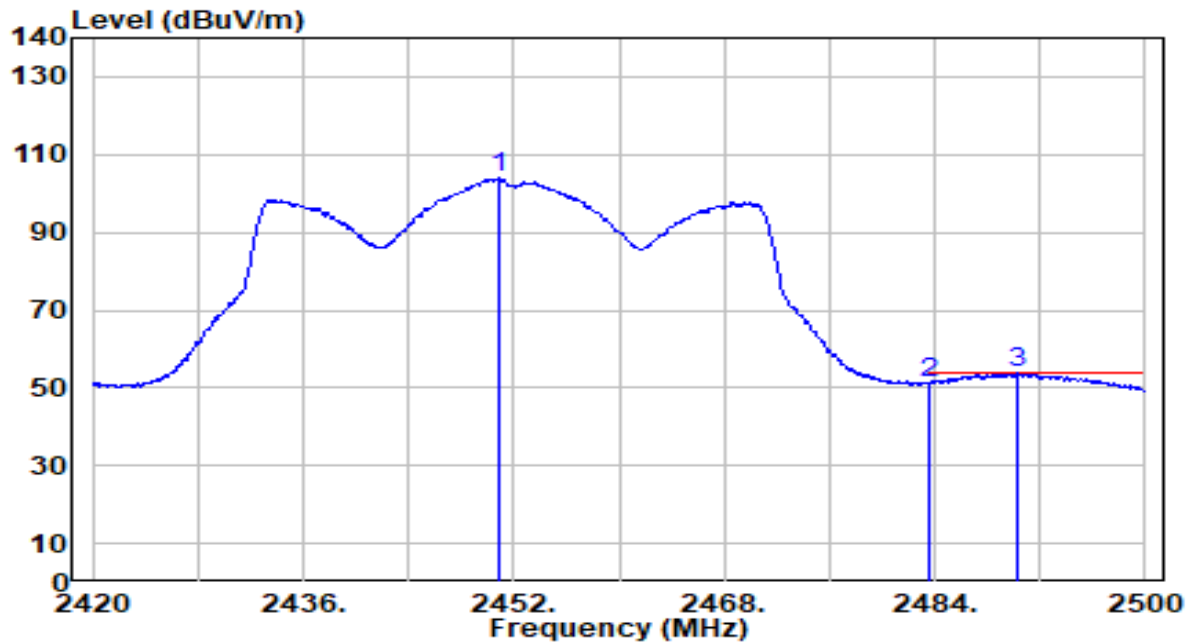


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.880	73.30	30.54	103.84	N/A	N/A	100	54	Average
2	2483.500	20.81	30.59	51.39	-2.61	54.00	100	54	Average
3	* 2490.240	23.15	30.60	53.75	-0.25	54.00	100	54	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

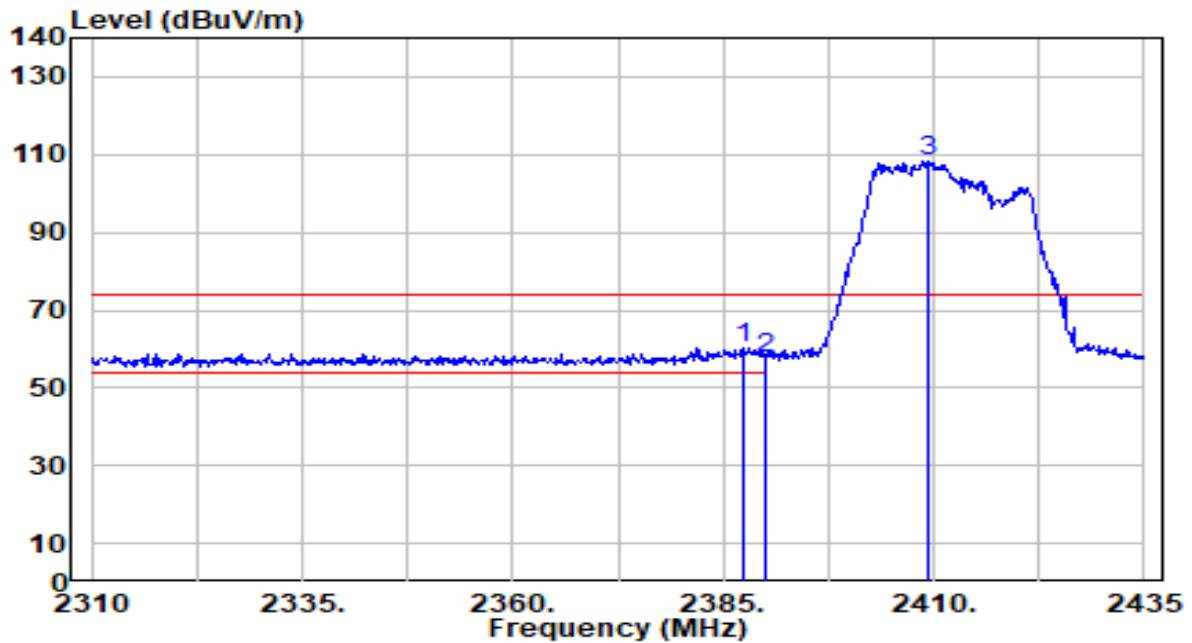


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.250	29.90	30.44	60.34	-13.66	74.00	138	310	Peak
2		2390.000	27.29	30.45	57.74	-16.26	74.00	138	310	Peak
3		2409.375	77.89	30.49	108.38	N/A	N/A	138	310	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

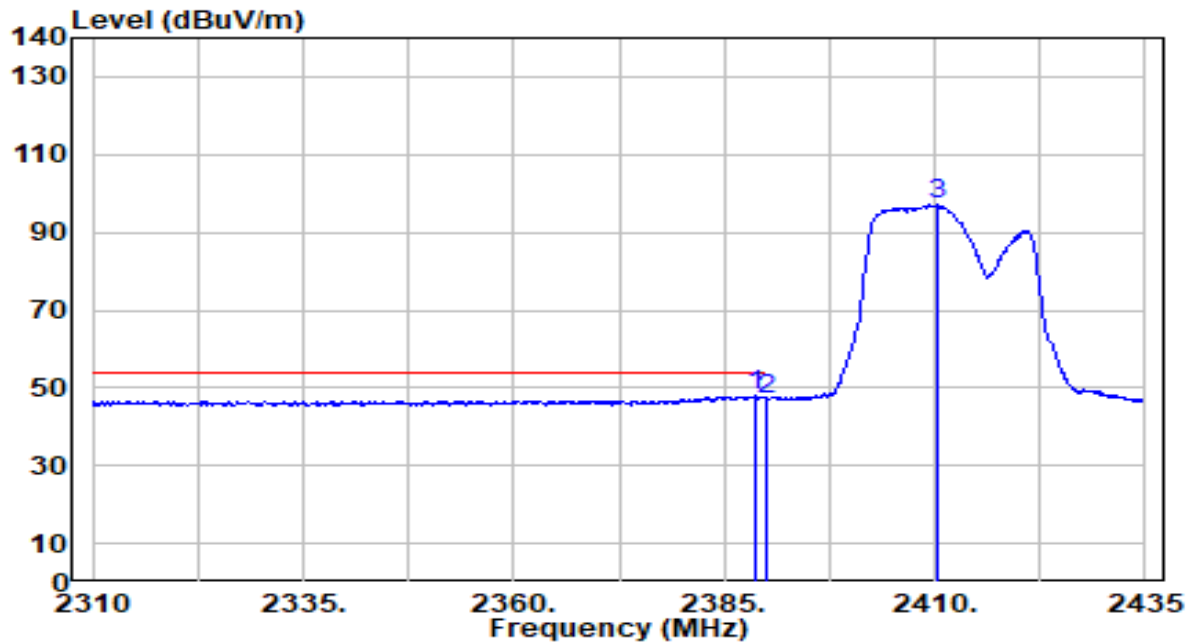


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.625	17.49	30.44	47.93	-6.07	54.00	138	310	Average
2		2390.000	16.73	30.45	47.18	-6.82	54.00	138	310	Average
3		2410.375	66.66	30.49	97.15	N/A	N/A	138	310	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

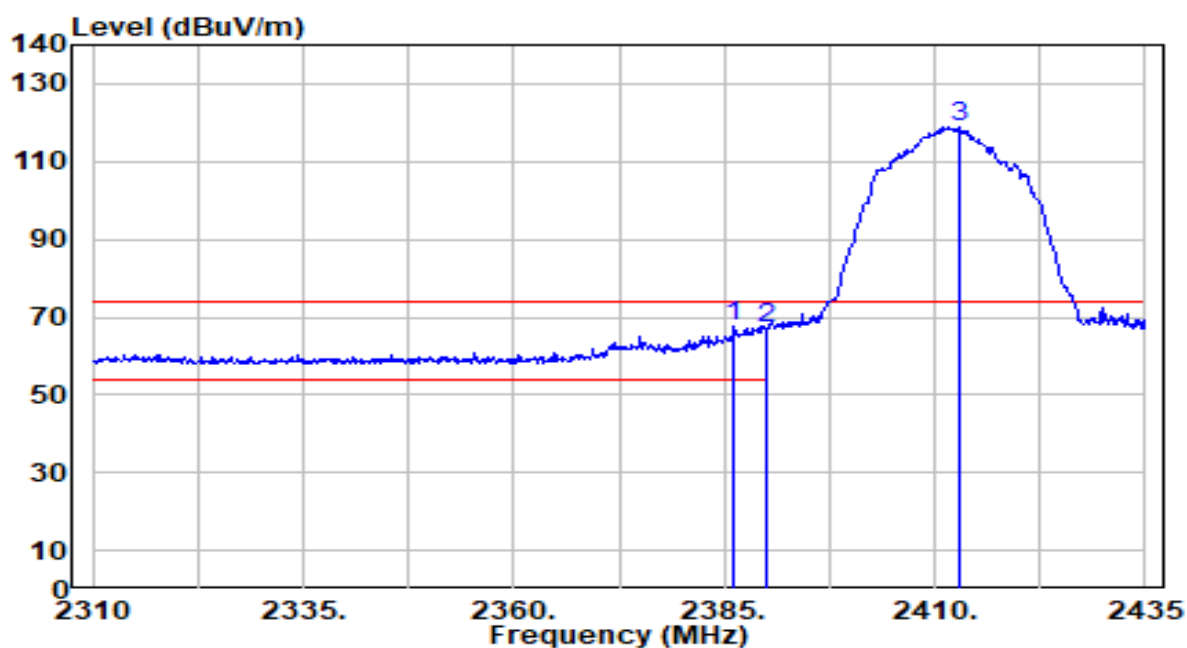


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.125	37.11	30.44	67.55	-6.45	74.00	100	58	Peak
2		2390.000	36.78	30.45	67.23	-6.77	74.00	100	58	Peak
3		2413.000	88.35	30.49	118.84	N/A	N/A	100	58	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

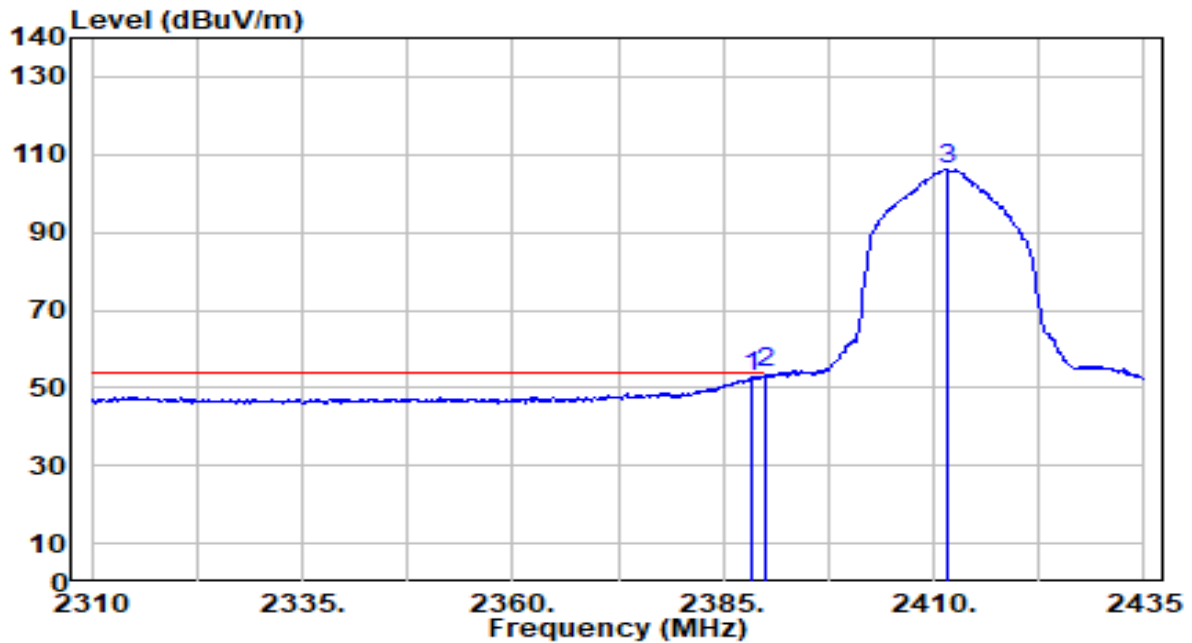


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.375	22.45	30.44	52.89	-1.11	54.00	100	58	Average
2	*	2390.000	23.30	30.45	53.75	-0.25	54.00	100	58	Average
3		2411.500	75.94	30.49	106.43	N/A	N/A	100	58	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

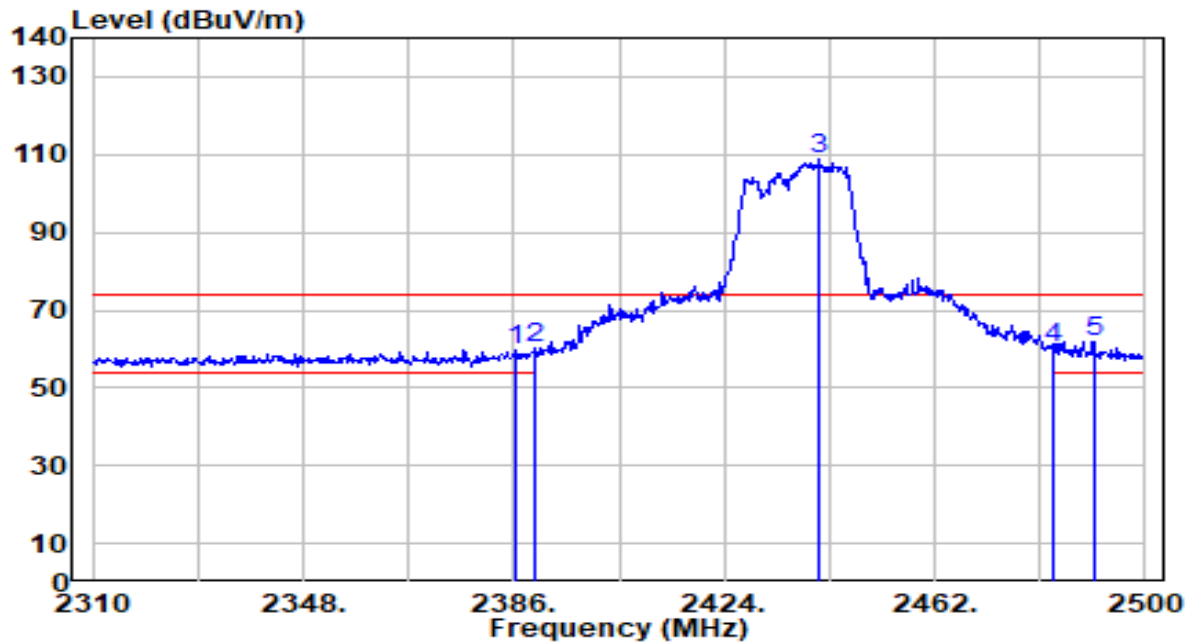


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.380	29.11	30.44	59.54	-14.46	74.00	165	201	Peak
2	2390.000	29.59	30.45	60.04	-13.96	74.00	165	201	Peak
3	2441.100	78.05	30.53	108.58	N/A	N/A	165	201	Peak
4	2483.500	29.49	30.59	60.08	-13.92	74.00	165	201	Peak
5	* 2490.880	31.32	30.60	61.92	-12.08	74.00	165	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

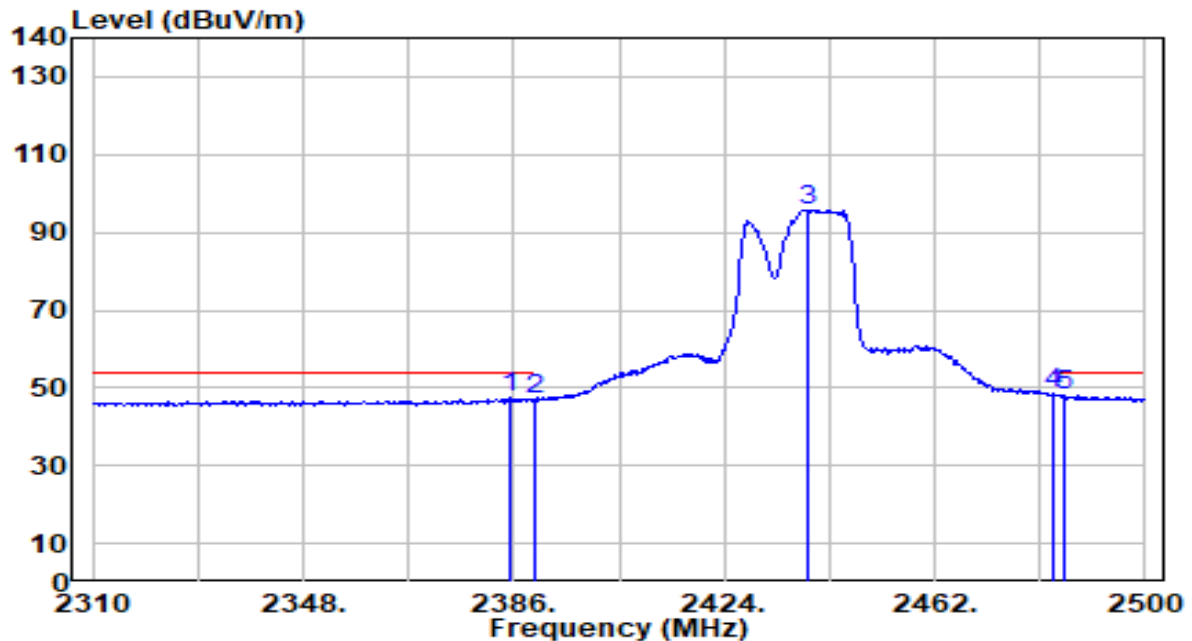


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.430	16.92	30.43	47.36	-6.64	54.00	165	201	Average
2	2390.000	16.58	30.45	47.03	-6.97	54.00	165	201	Average
3	2439.200	65.33	30.53	95.86	N/A	N/A	165	201	Average
4	* 2483.500	17.76	30.59	48.35	-5.65	54.00	165	201	Average
5	2485.370	17.54	30.59	48.13	-5.87	54.00	165	201	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

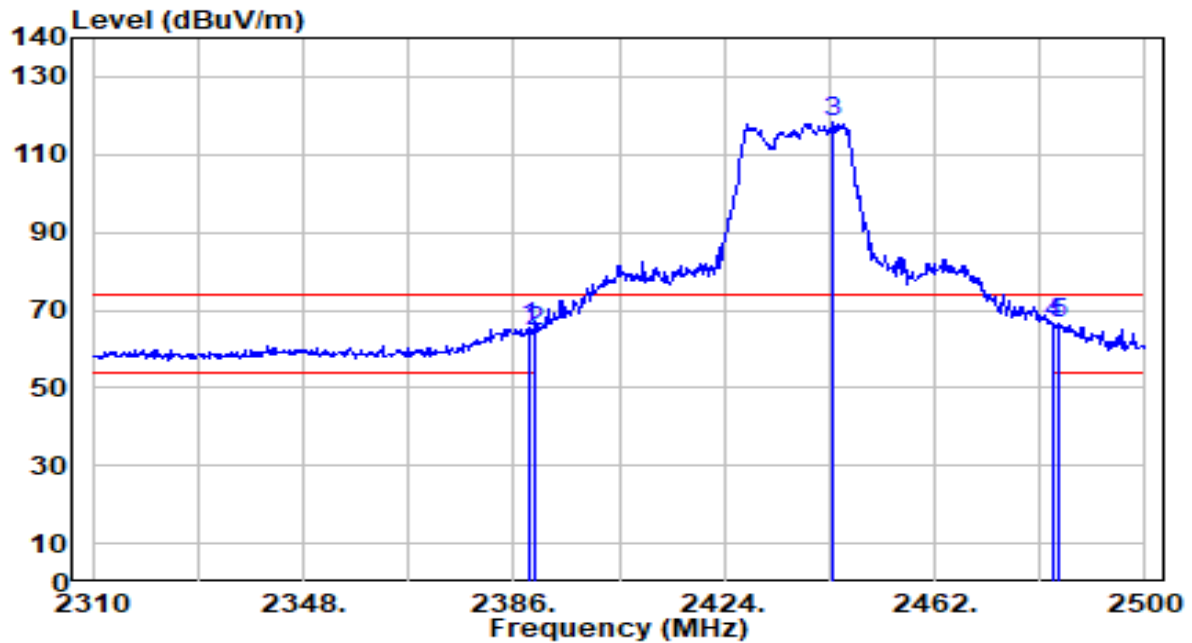


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	35.02	30.44	65.47	-8.53	74.00	156	289	Peak
2	2390.000	34.03	30.45	64.48	-9.52	74.00	156	289	Peak
3	2443.760	87.71	30.53	118.25	N/A	N/A	156	289	Peak
4	* 2483.500	35.88	30.59	66.47	-7.53	74.00	156	289	Peak
5	2484.610	35.83	30.59	66.42	-7.58	74.00	156	289	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

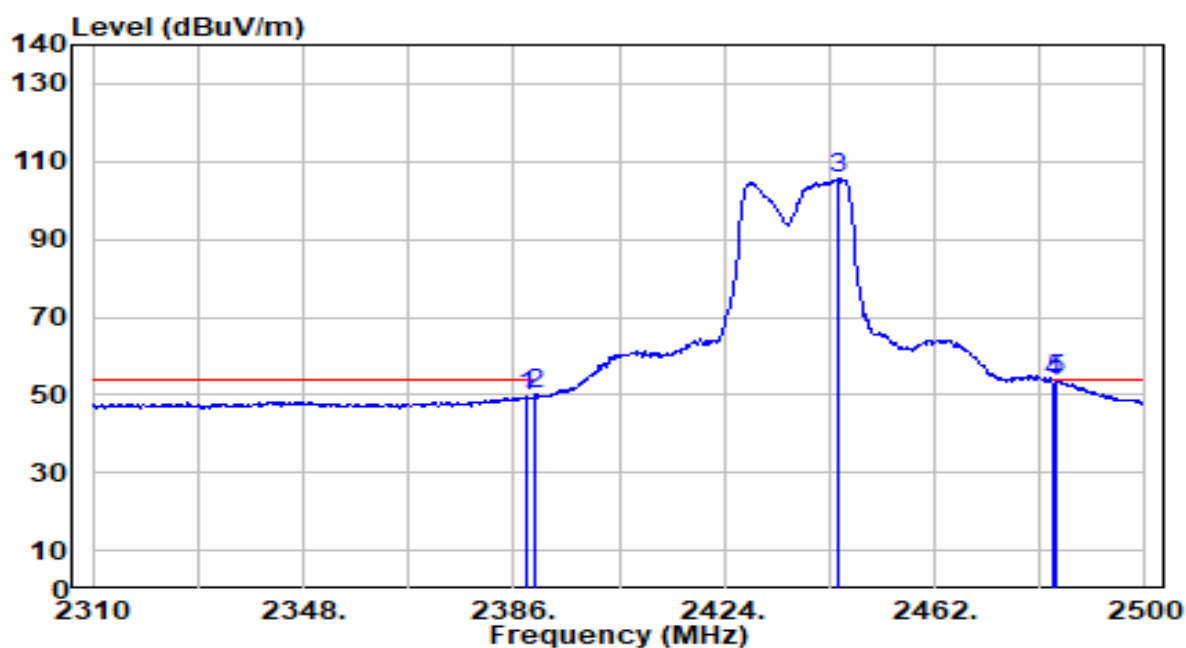


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.280	19.09	30.44	49.53	-4.47	54.00	156	289	Average
2	2390.000	19.50	30.45	49.94	-4.06	54.00	156	289	Average
3	2444.710	74.92	30.54	105.46	N/A	N/A	156	289	Average
4	2483.500	22.86	30.59	53.45	-0.55	54.00	156	289	Average
5	* 2484.040	23.17	30.59	53.76	-0.24	54.00	156	289	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

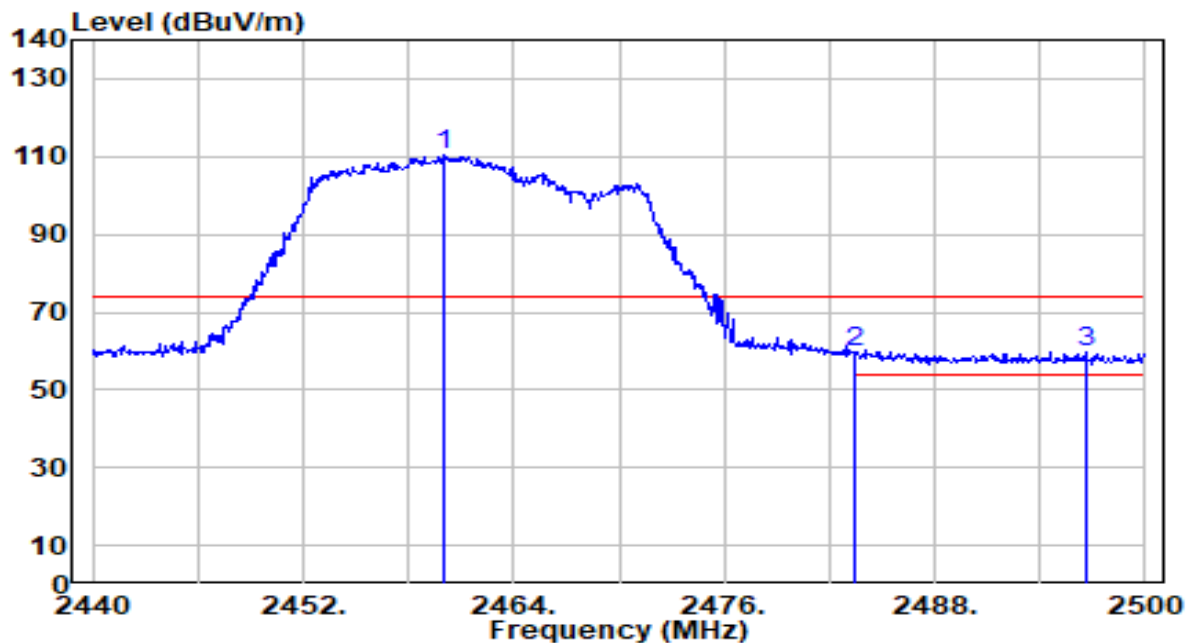


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.980	79.61	30.56	110.17	N/A	N/A	179	310	Peak
2	2483.500	28.95	30.59	59.54	-14.46	74.00	179	310	Peak
3	* 2496.580	29.35	30.61	59.96	-14.04	74.00	179	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

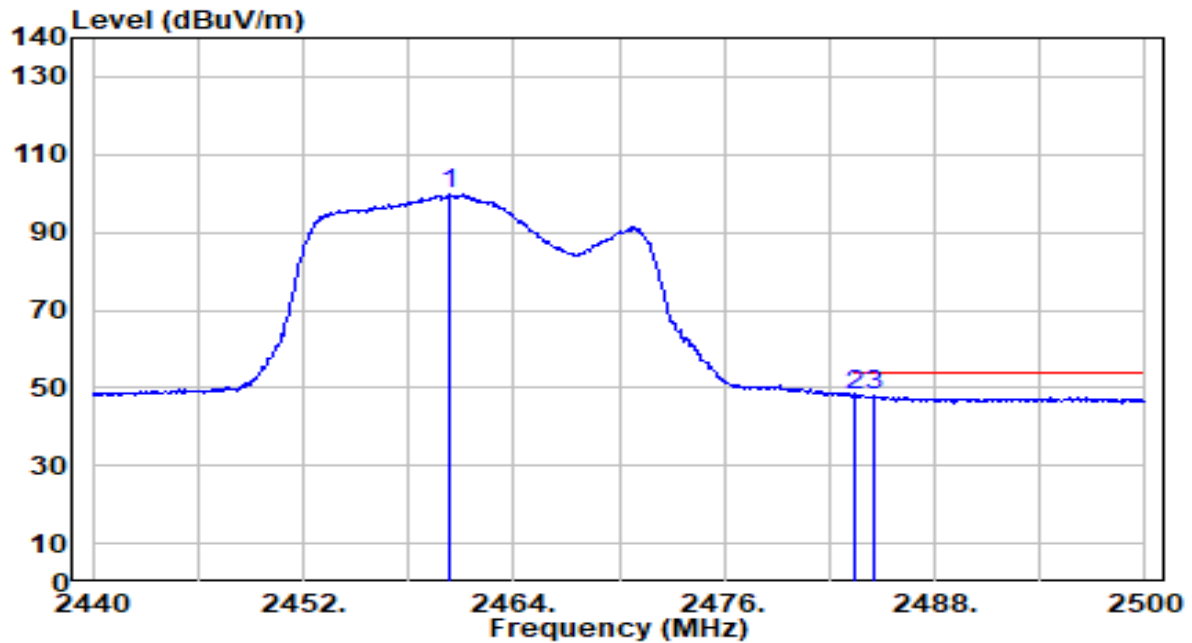


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.340	69.12	30.56	99.67	N/A	N/A	179	310	Average
2	2483.500	17.38	30.59	47.97	-6.03	54.00	179	310	Average
3	* 2484.520	17.48	30.59	48.06	-5.94	54.00	179	310	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

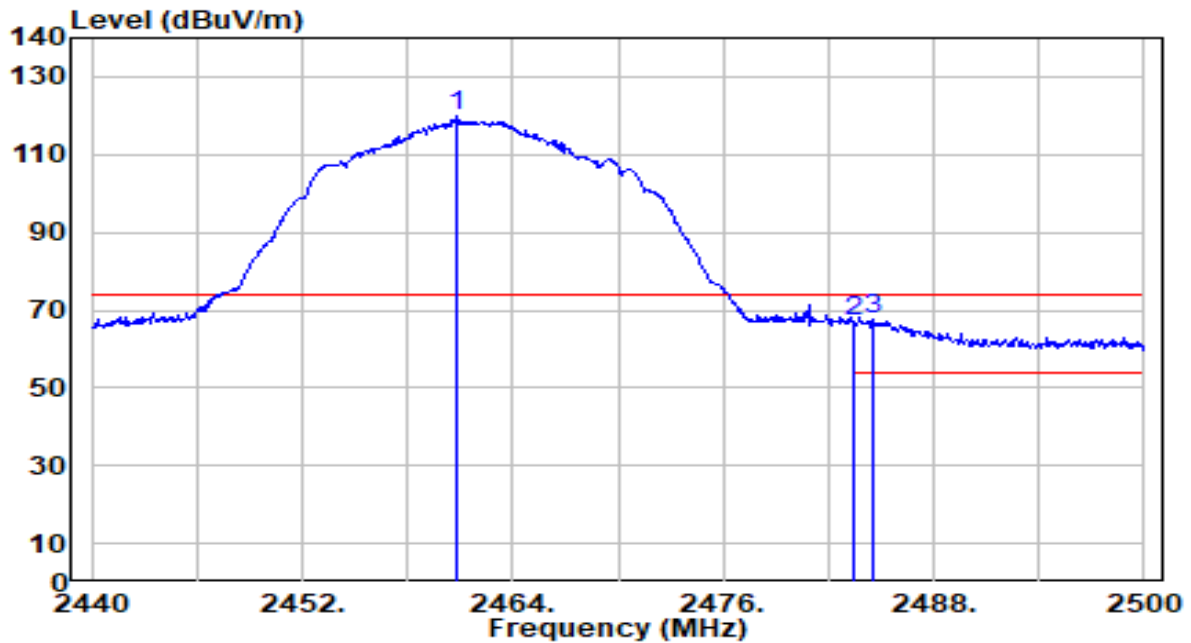


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.880	89.36	30.56	119.92	N/A	N/A	100	54	Peak
2	2483.500	36.44	30.59	67.03	-6.97	74.00	100	54	Peak
3	* 2484.520	37.10	30.59	67.69	-6.31	74.00	100	54	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

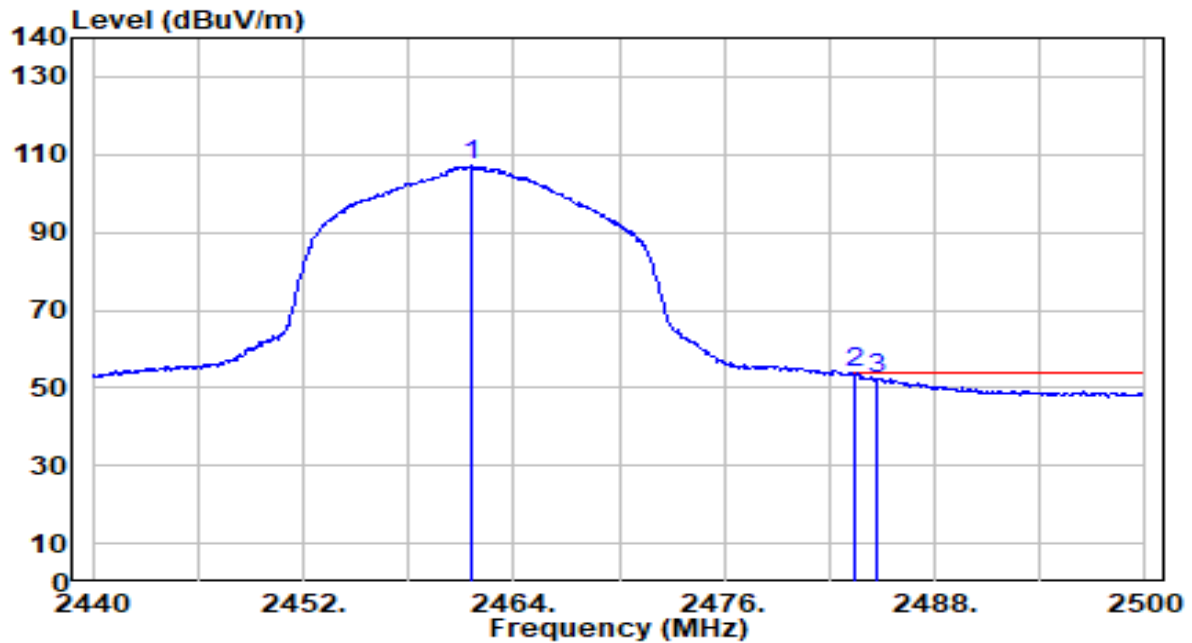


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2461.540	76.72	30.56	107.28	N/A	N/A	100	54	Average
2	*	2483.500	23.17	30.59	53.76	-0.24	54.00	100	54	Average
3		2484.640	21.84	30.59	52.43	-1.57	54.00	100	54	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

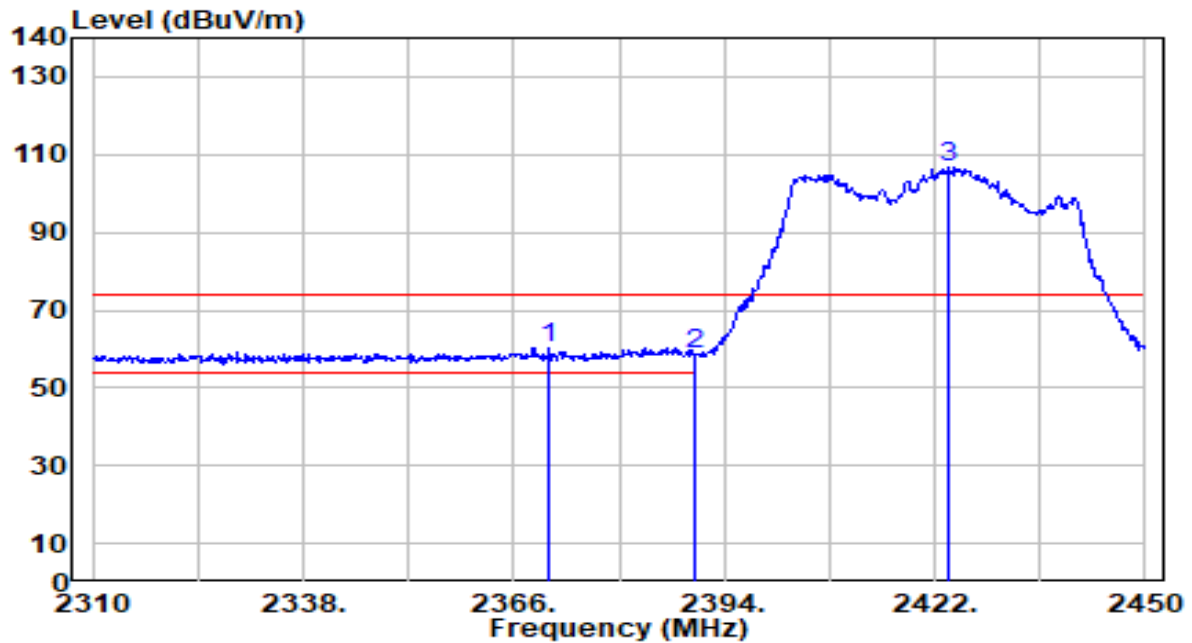


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2370.620	29.95	30.39	60.34	-13.66	74.00	138	310	Peak
2		2390.000	28.03	30.45	58.48	-15.52	74.00	138	310	Peak
3		2423.820	75.99	30.51	106.49	N/A	N/A	138	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

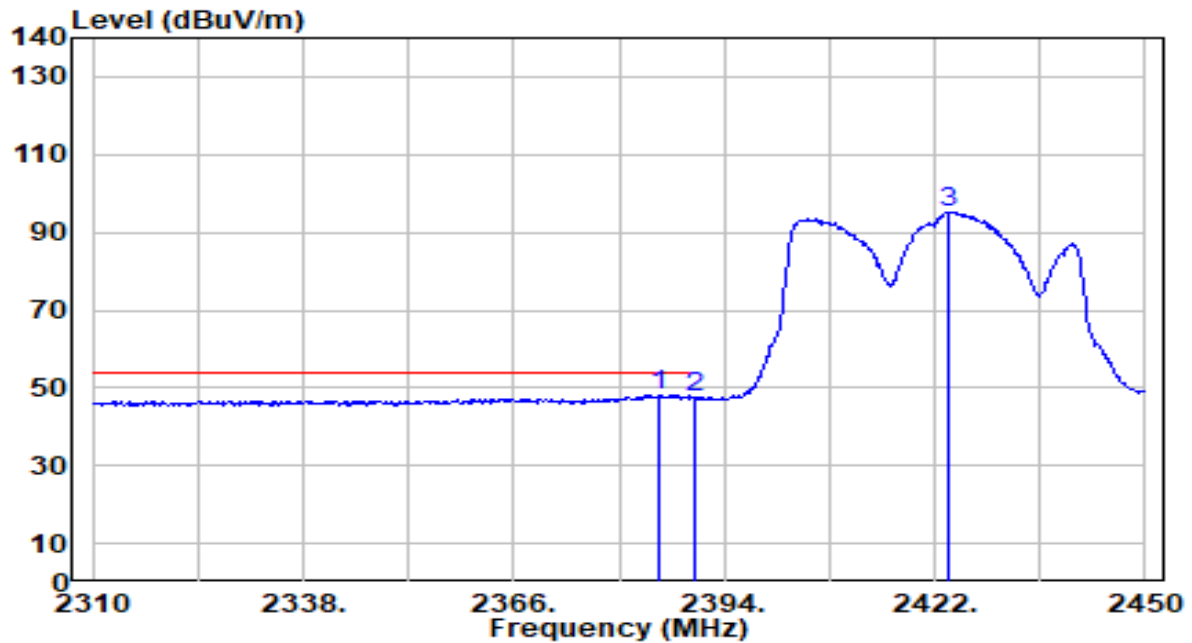


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.320	17.66	30.43	48.10	-5.90	54.00	138	310	Average
2		2390.000	16.84	30.45	47.28	-6.72	54.00	138	310	Average
3		2423.960	64.80	30.51	95.31	N/A	N/A	138	310	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

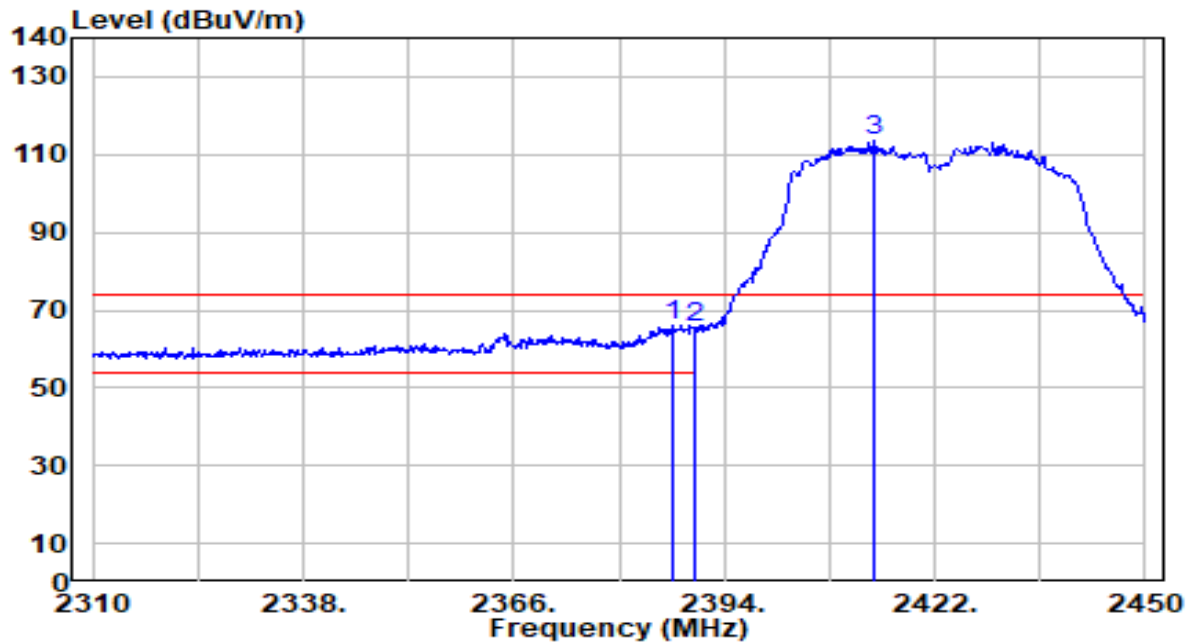


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.280	35.69	30.44	66.13	-7.87	74.00	100	58	Peak
2		2390.000	35.28	30.45	65.72	-8.28	74.00	100	58	Peak
3		2413.880	82.87	30.49	113.36	N/A	N/A	100	58	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

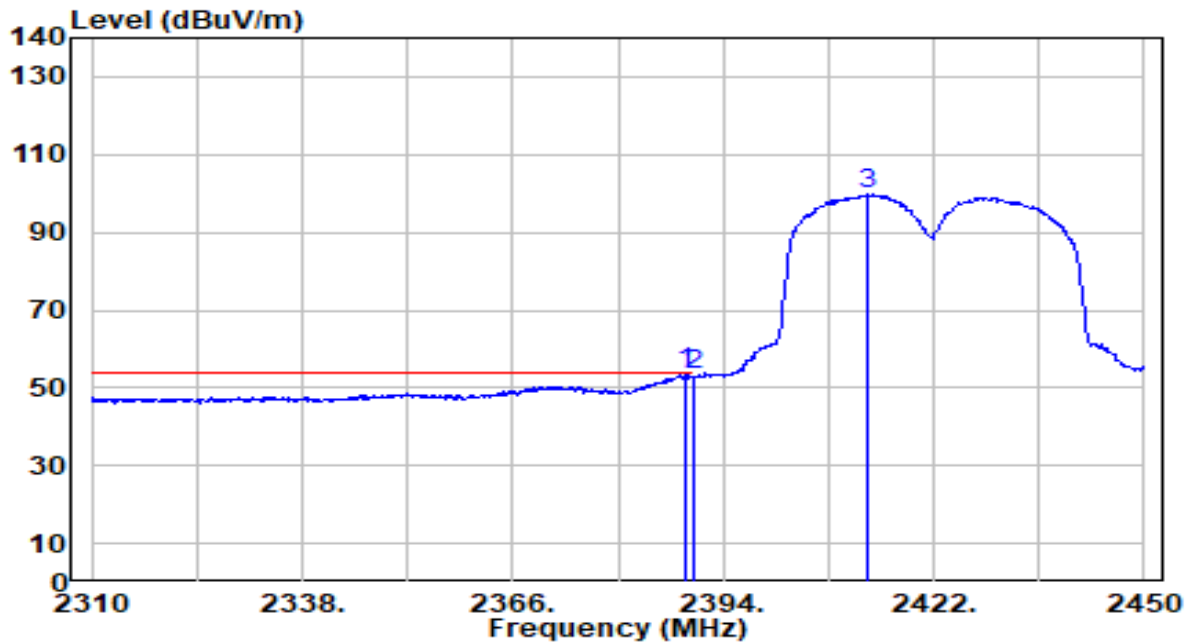


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.820	23.34	30.44	53.78	-0.22	54.00	100	58	Average
2		2390.000	22.79	30.45	53.24	-0.76	54.00	100	58	Average
3		2413.320	69.26	30.49	99.75	N/A	N/A	100	58	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

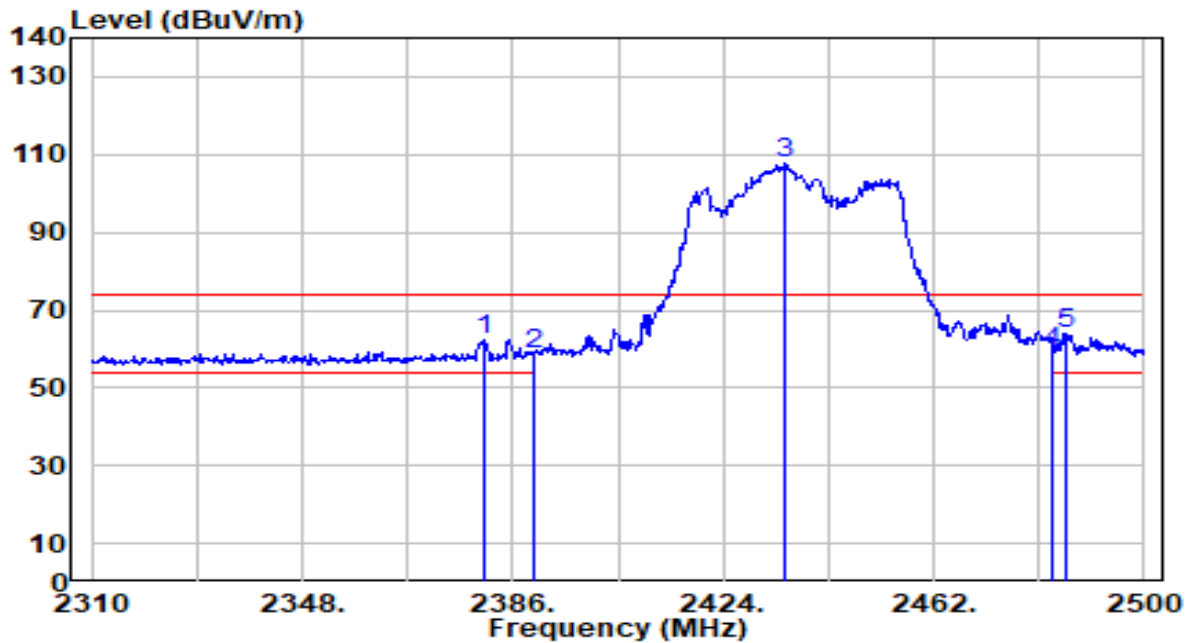


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2380.680	32.07	30.42	62.49	-11.51	74.00	165	201	Peak
2		2390.000	27.98	30.45	58.43	-15.57	74.00	165	201	Peak
3		2435.210	77.00	30.52	107.52	N/A	N/A	165	201	Peak
4		2483.500	28.66	30.59	59.25	-14.75	74.00	165	201	Peak
5		2485.940	33.16	30.59	63.76	-10.24	74.00	165	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

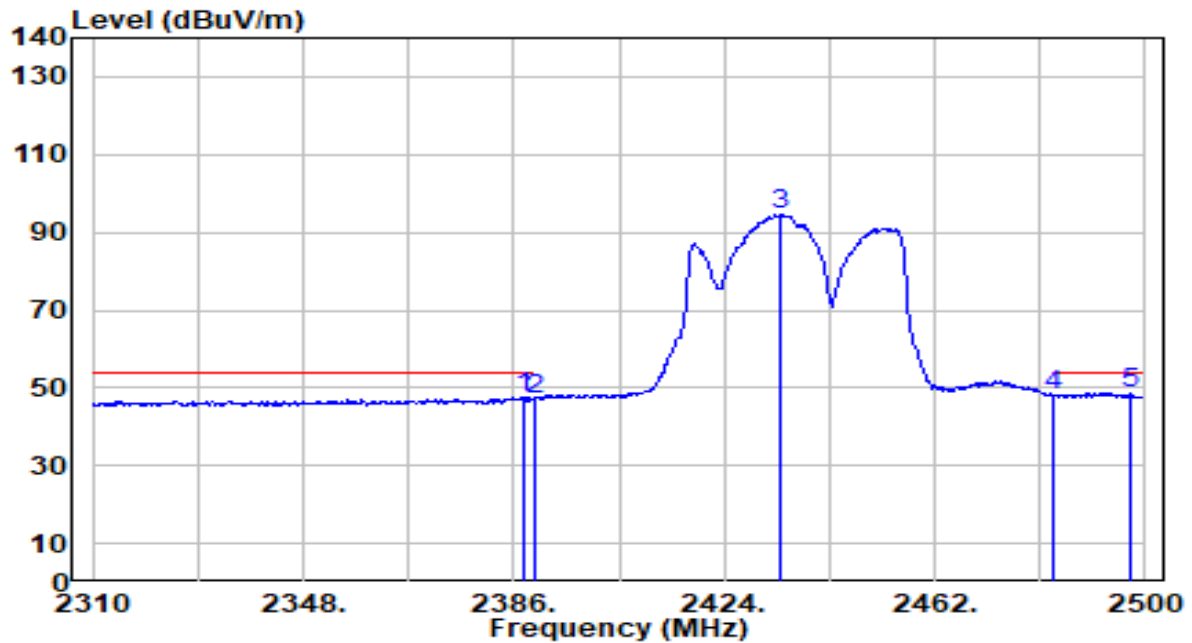


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	17.18	30.44	47.62	-6.38	54.00	165	201	Average
2	2390.000	16.63	30.45	47.08	-6.92	54.00	165	201	Average
3	2434.260	64.07	30.52	94.59	N/A	N/A	165	201	Average
4	2483.500	17.42	30.59	48.01	-5.99	54.00	165	201	Average
5	* 2497.150	17.97	30.61	48.57	-5.43	54.00	165	201	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

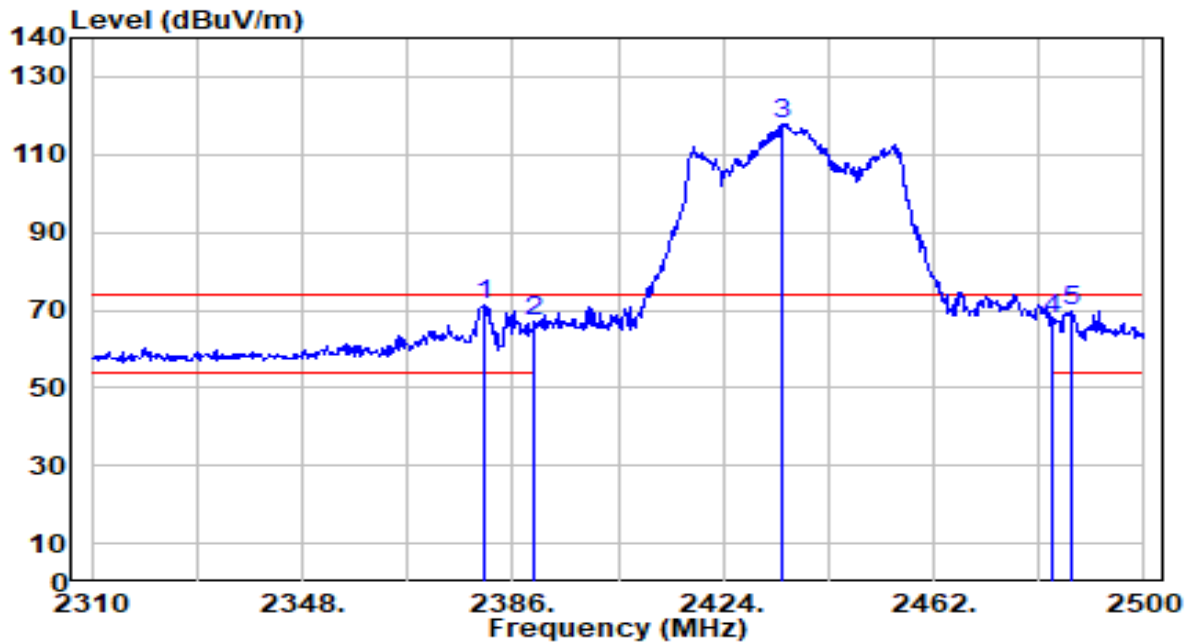


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2381.060	41.10	30.42	71.52	-2.48	74.00	156	289	Peak
2		2390.000	36.57	30.45	67.02	-6.98	74.00	156	289	Peak
3		2434.640	87.49	30.52	118.01	N/A	N/A	156	289	Peak
4		2483.500	37.17	30.59	67.76	-6.24	74.00	156	289	Peak
5		2487.080	39.24	30.59	69.83	-4.17	74.00	156	289	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

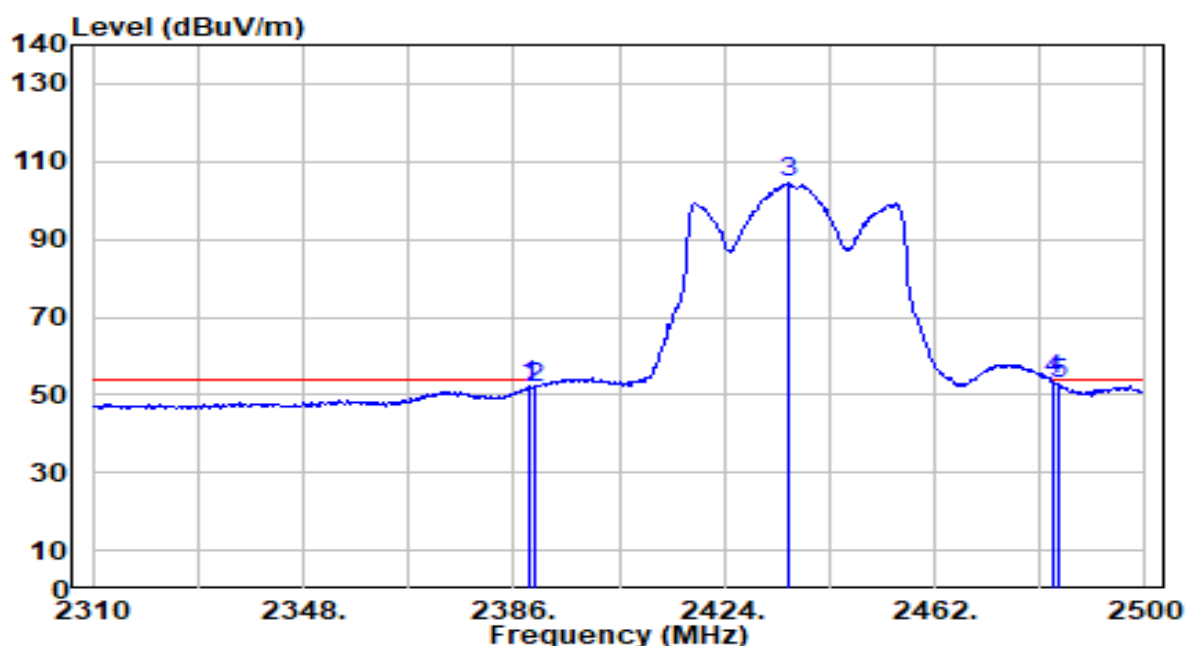


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	21.75	30.44	52.19	-1.81	54.00	156	289	Average
2	2390.000	21.53	30.45	51.98	-2.02	54.00	156	289	Average
3	2435.590	74.10	30.52	104.62	N/A	N/A	156	289	Average
4	* 2483.500	23.16	30.59	53.74	-0.26	54.00	156	289	Average
5	2484.610	22.29	30.59	52.88	-1.12	54.00	156	289	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

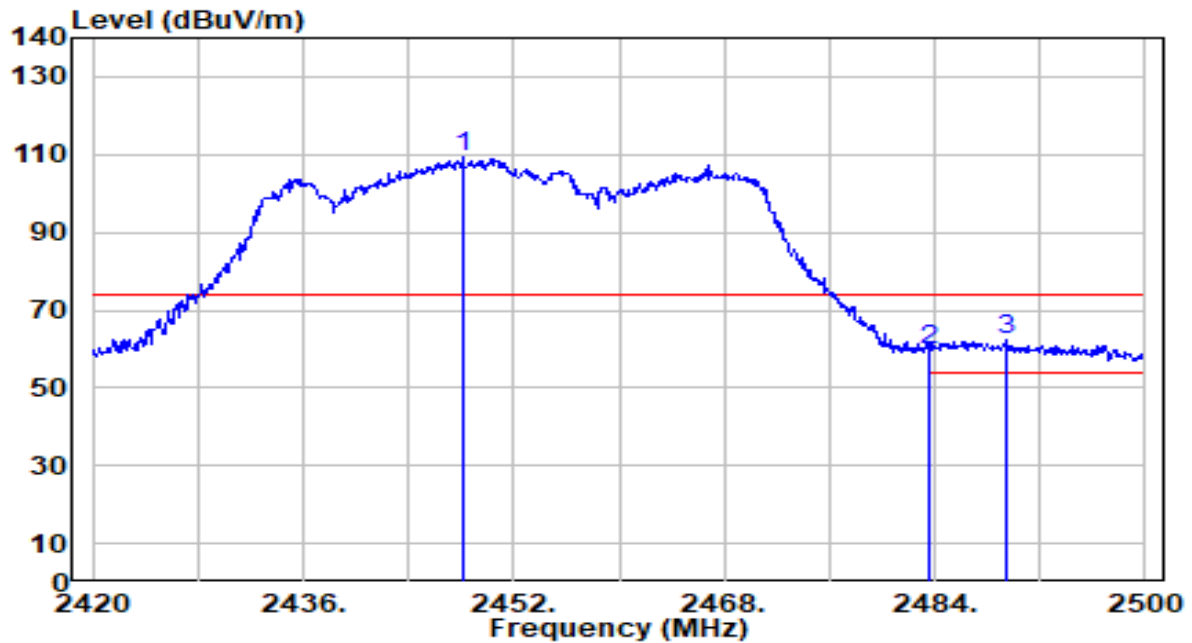


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.080	78.80	30.54	109.34	N/A	N/A	179	310	Peak
2	2483.500	29.21	30.59	59.80	-14.20	74.00	179	310	Peak
3	* 2489.520	31.82	30.60	62.42	-11.58	74.00	179	310	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

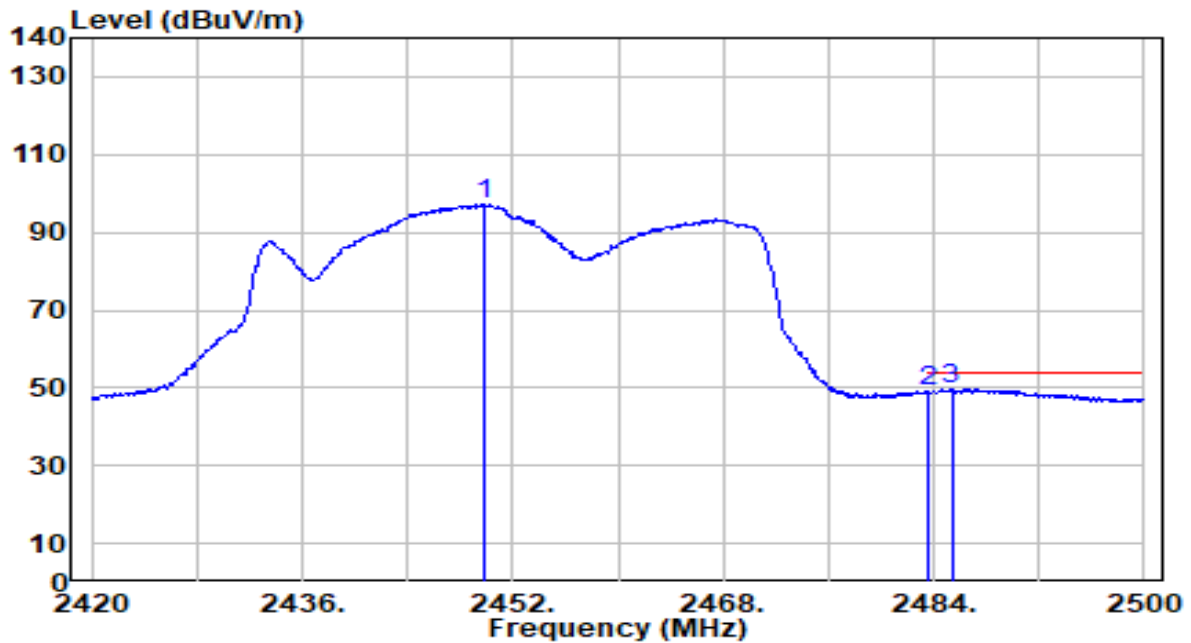


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.840	66.62	30.54	97.16	N/A	N/A	179	310	Average
2	2483.500	18.32	30.59	48.91	-5.09	54.00	179	310	Average
3	* 2485.360	18.97	30.59	49.56	-4.44	54.00	179	310	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

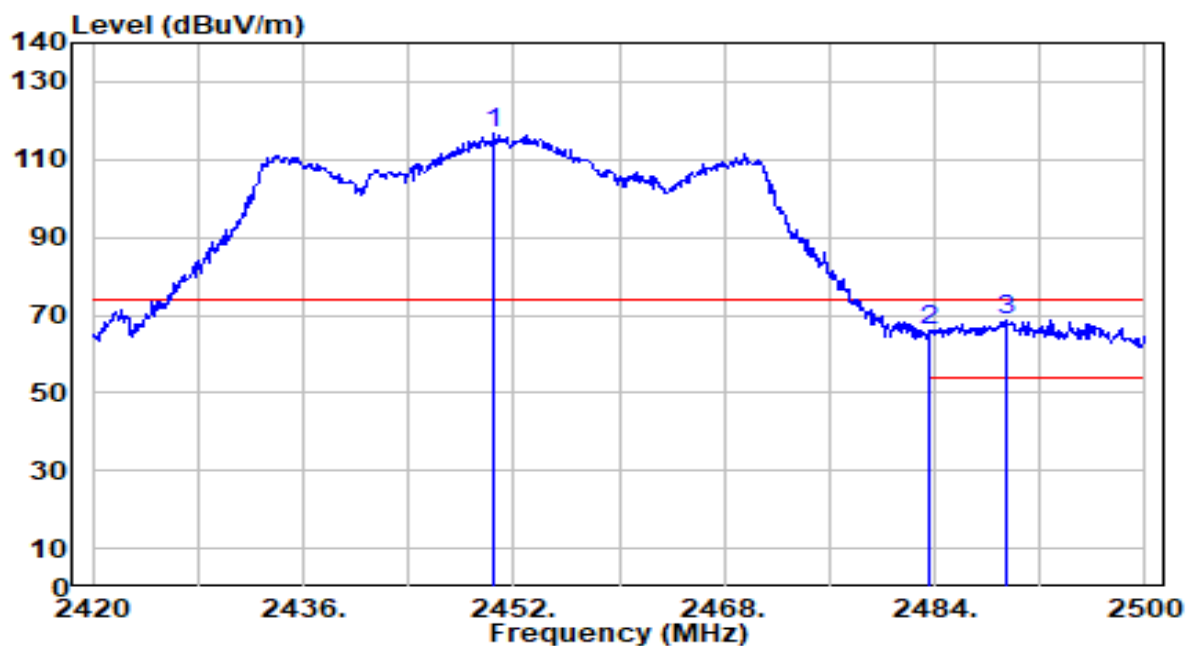


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.480	86.03	30.54	116.58	N/A	N/A	100	54	Peak
2	2483.500	35.56	30.59	66.15	-7.85	74.00	100	54	Peak
3	* 2489.520	38.31	30.60	68.90	-5.10	74.00	100	54	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router	Date of Test	2024-07-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant	Test Voltage	AC 120V/60Hz

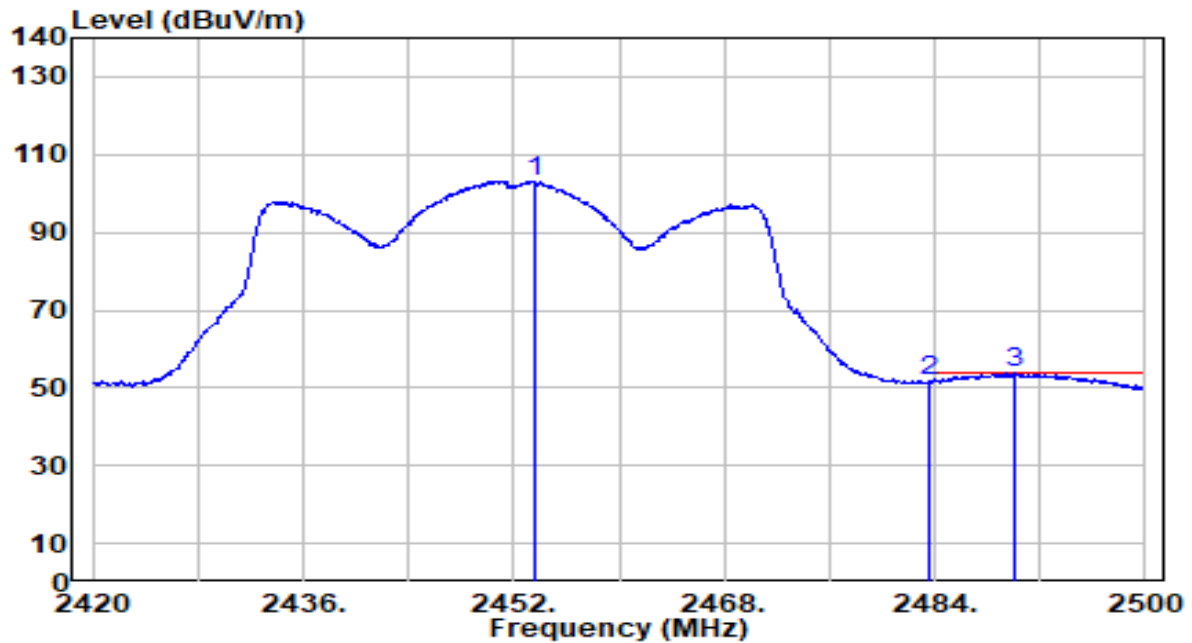

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.520	72.61	30.55	103.16	N/A	N/A	100	54	Average
2	2483.500	21.10	30.59	51.69	-2.31	54.00	100	54	Average
3	* 2490.160	23.26	30.60	53.86	-0.14	54.00	100	54	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.8.2. Test Setup

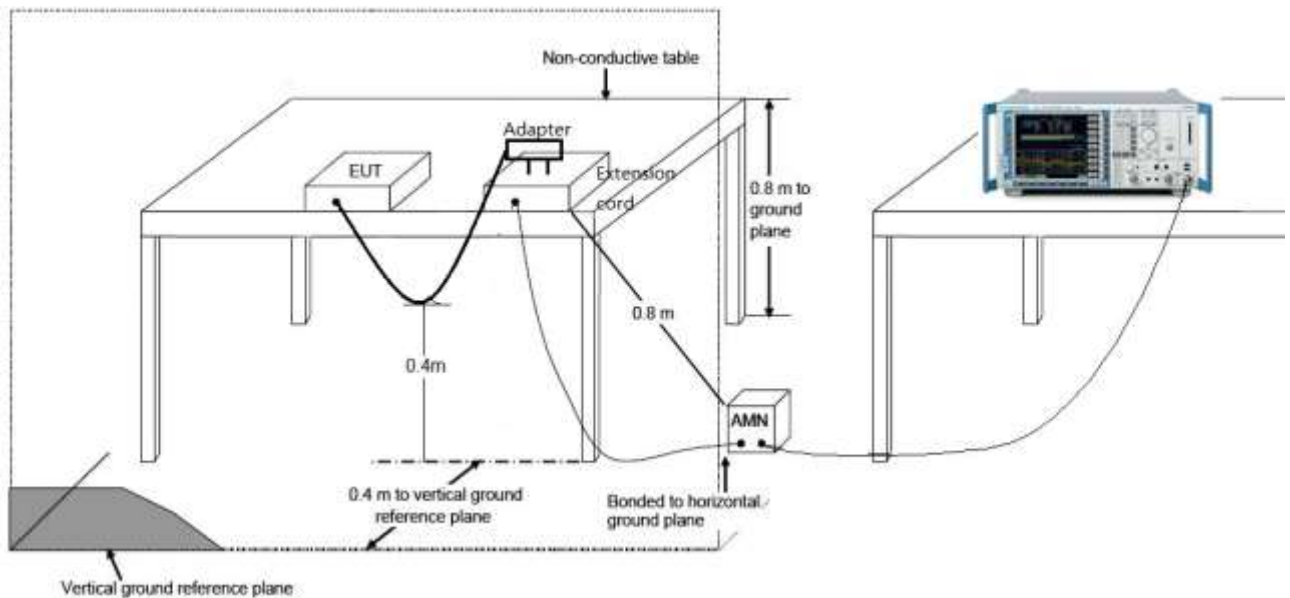

7.8.3.Test Result

Horizontal Antenna Data

EUT	BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router	Date of Test	2024-08-14
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.8°C /52%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Horizontal Ant	Test Voltage	AC 120V/60Hz

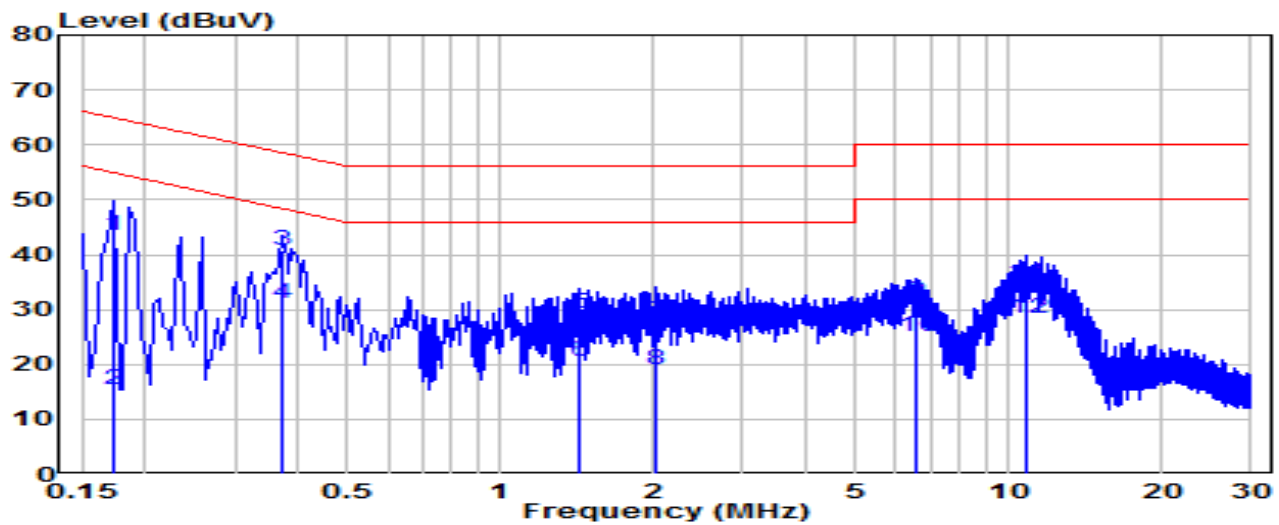


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.172	33.83	9.63	43.46	-21.37	64.84	QP
2	0.172	5.83	9.63	15.46	-39.37	54.84	Average
3	* 0.370	31.16	9.64	40.80	-17.69	58.49	QP
4	* 0.370	21.34	9.64	30.98	-17.51	48.49	Average
5	1.423	19.51	9.69	29.20	-26.80	56.00	QP
6	1.423	10.97	9.69	20.66	-25.34	46.00	Average
7	2.013	18.00	9.70	27.70	-28.30	56.00	QP
8	2.013	9.26	9.70	18.96	-27.04	46.00	Average
9	6.553	21.65	9.78	31.44	-28.56	60.00	QP
10	6.553	15.25	9.78	25.03	-24.97	50.00	Average
11	10.809	24.81	9.87	34.69	-25.31	60.00	QP
12	10.809	18.59	9.87	28.47	-21.53	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).

3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router	Date of Test	2024-08-14
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.8°C /52%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Horizontal Ant	Test Voltage	AC 120V/60Hz

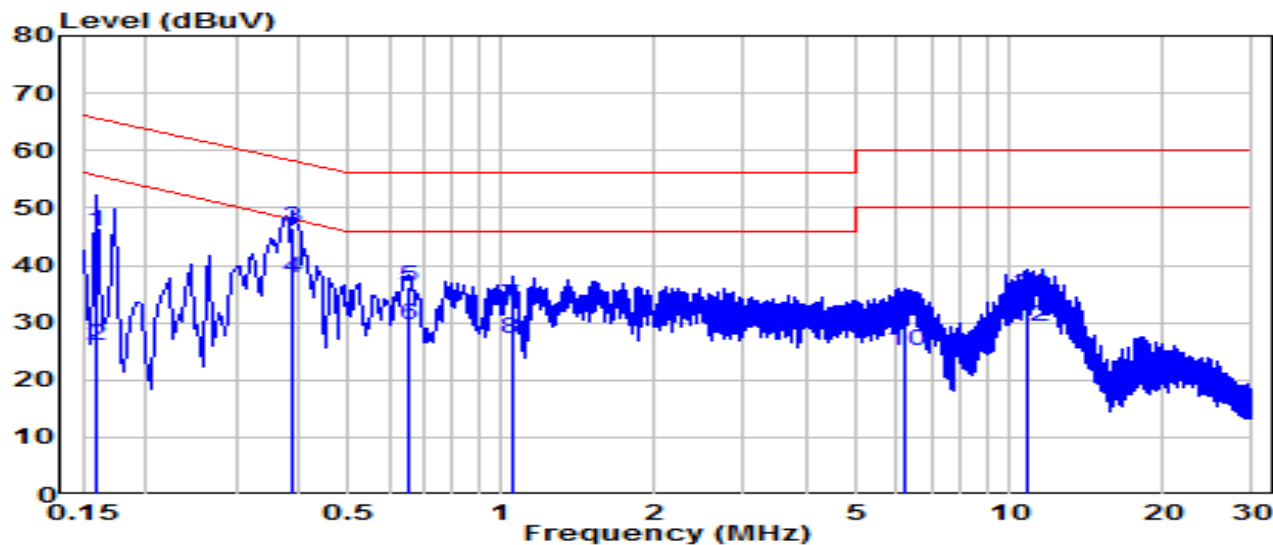


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.159	36.13	9.63	45.76	-19.76	65.52	QP
2	0.159	16.24	9.63	25.87	-29.64	55.52	Average
3	* 0.388	36.88	9.64	46.52	-11.58	58.10	QP
4	* 0.388	28.03	9.64	37.68	-10.42	48.10	Average
5	0.654	26.57	9.66	36.23	-19.77	56.00	QP
6	0.654	19.91	9.66	29.57	-16.43	46.00	Average
7	1.045	23.26	9.68	32.94	-23.06	56.00	QP
8	1.045	17.40	9.68	27.08	-18.92	46.00	Average
9	6.211	21.78	9.79	31.57	-28.43	60.00	QP
10	6.211	15.19	9.79	24.98	-25.02	50.00	Average
11	10.899	25.00	9.90	34.90	-25.10	60.00	QP
12	10.899	19.41	9.90	29.31	-20.69	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router	Date of Test	2024-08-14
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.8°C /52%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Horizontal Ant	Test Voltage	AC 240V/60Hz

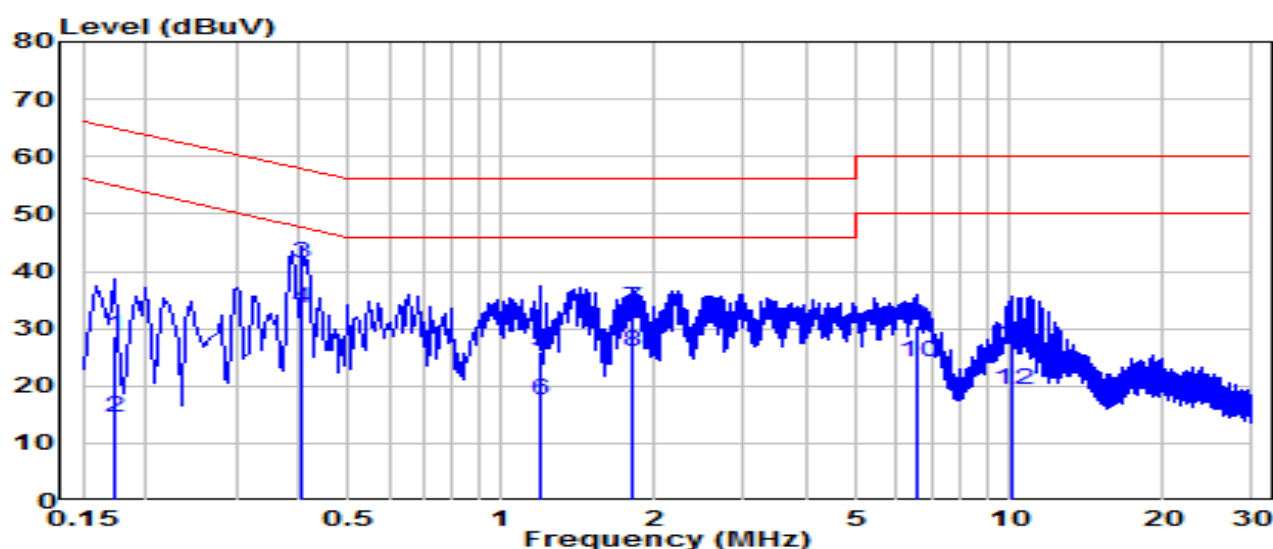


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.172	18.93	9.63	28.56	-36.28	64.84	QP
2	0.172	4.74	9.63	14.37	-40.47	54.84	Average
3	* 0.406	31.65	9.64	41.30	-16.42	57.72	QP
4	* 0.406	23.89	9.64	33.53	-14.19	47.72	Average
5	1.194	16.25	9.68	25.94	-30.06	56.00	QP
6	1.194	7.77	9.68	17.46	-28.54	46.00	Average
7	1.801	23.79	9.70	33.48	-22.52	56.00	QP
8	1.801	16.37	9.70	26.07	-19.93	46.00	Average
9	6.611	20.76	9.79	30.54	-29.46	60.00	QP
10	6.611	14.40	9.79	24.19	-25.81	50.00	Average
11	10.152	17.22	9.87	27.09	-32.91	60.00	QP
12	10.152	9.34	9.87	19.21	-30.79	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router	Date of Test	2024-08-14
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.8°C /52%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Horizontal Ant	Test Voltage	AC 240V/60Hz

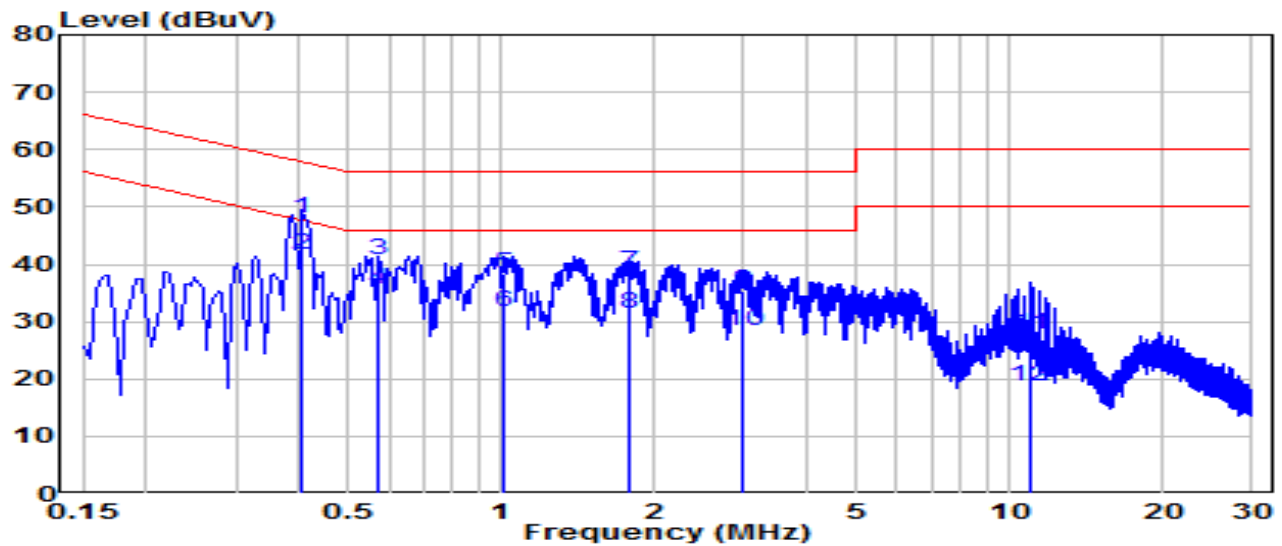


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.406	38.41	9.64	48.05	-9.67	57.72	QP
2	*	0.406	32.01	9.64	41.66	-6.06	47.72	Average
3		0.573	31.05	9.66	40.71	-15.29	56.00	QP
4		0.573	25.99	9.66	35.65	-10.35	46.00	Average
5		1.014	28.79	9.68	38.47	-17.53	56.00	QP
6		1.014	21.88	9.68	31.57	-14.43	46.00	Average
7		1.792	29.03	9.70	38.73	-17.27	56.00	QP
8		1.792	21.63	9.70	31.34	-14.66	46.00	Average
9		2.994	25.55	9.72	35.28	-20.72	56.00	QP
10		2.994	18.54	9.72	28.26	-17.74	46.00	Average
11		10.922	17.75	9.90	27.65	-32.35	60.00	QP
12		10.922	8.78	9.90	18.68	-31.32	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

Vertical Antenna Data

EUT	BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router	Date of Test	2024-08-14
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.8°C /52%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

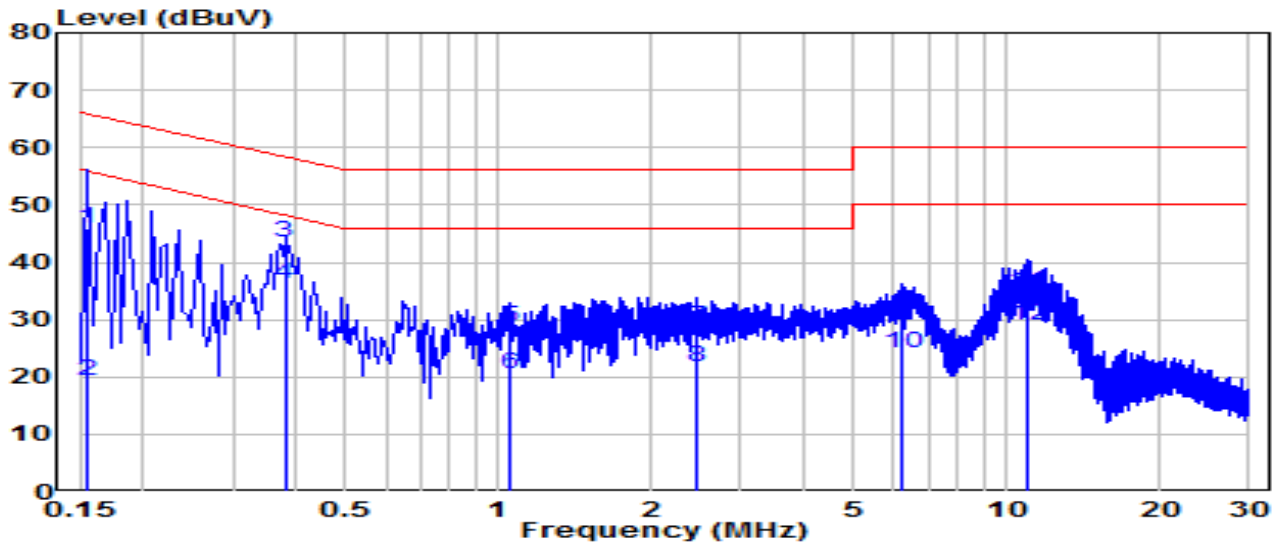


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.154	36.40	9.63	46.03	-19.72	65.75	QP
2	0.154	9.78	9.63	19.41	-36.34	55.75	Average
3	* 0.379	33.68	9.64	43.32	-14.97	58.29	QP
4	* 0.379	26.71	9.64	36.35	-11.94	48.29	Average
5	1.054	19.08	9.68	28.76	-27.24	56.00	QP
6	1.054	10.75	9.68	20.43	-25.57	46.00	Average
7	2.449	18.99	9.71	28.70	-27.30	56.00	QP
8	2.449	12.04	9.71	21.75	-24.25	46.00	Average
9	6.251	20.91	9.78	30.68	-29.32	60.00	QP
10	6.251	14.44	9.78	24.22	-25.78	50.00	Average
11	10.931	24.83	9.88	34.71	-25.29	60.00	QP
12	10.931	19.00	9.88	28.88	-21.12	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router	Date of Test	2024-08-14
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.8°C /52%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Vertical Ant	Test Voltage	AC 120V/60Hz

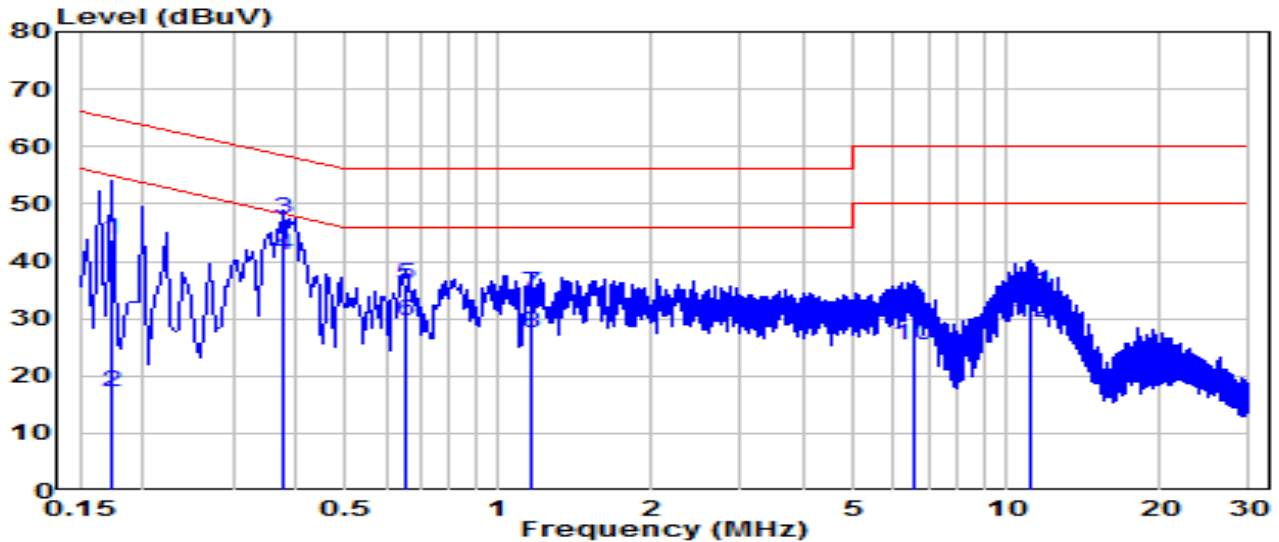


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.172	34.12	9.63	43.75	-21.09	64.84	QP
2	0.172	7.56	9.63	17.19	-37.64	54.84	Average
3	* 0.375	37.75	9.64	47.39	-11.00	58.39	QP
4	* 0.375	31.30	9.64	40.94	-7.45	48.39	Average
5	0.654	26.39	9.66	36.05	-19.95	56.00	QP
6	0.654	20.04	9.66	29.70	-16.30	46.00	Average
7	1.158	24.87	9.68	34.56	-21.44	56.00	QP
8	1.158	17.90	9.68	27.58	-18.42	46.00	Average
9	6.535	21.89	9.80	31.69	-28.31	60.00	QP
10	6.535	15.45	9.80	25.25	-24.75	50.00	Average
11	11.178	24.93	9.90	34.84	-25.16	60.00	QP
12	11.178	19.30	9.90	29.21	-20.79	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router	Date of Test	2024-08-14
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.8°C /52%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Vertical Ant	Test Voltage	AC 240V/60Hz

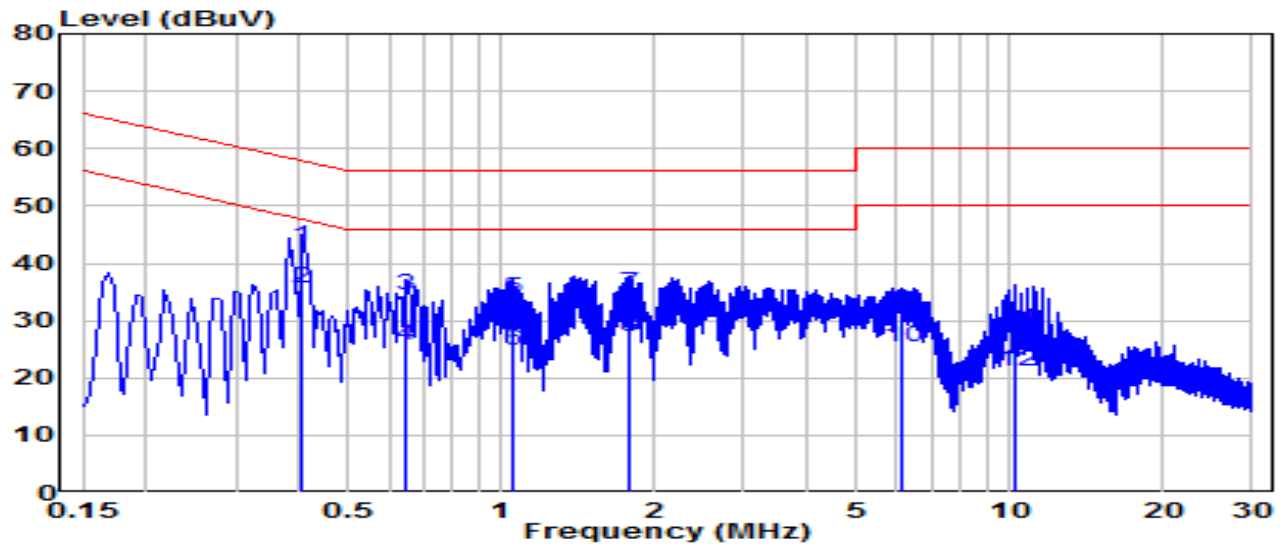


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.406	33.15	9.64	42.79	-14.93	57.72	QP
2	*	0.406	25.87	9.64	35.51	-12.21	47.72	Average
3		0.649	24.77	9.66	34.43	-21.57	56.00	QP
4		0.649	16.01	9.66	25.67	-20.33	46.00	Average
5		1.054	24.25	9.68	33.93	-22.07	56.00	QP
6		1.054	15.00	9.68	24.68	-21.32	46.00	Average
7		1.788	24.99	9.70	34.69	-21.31	56.00	QP
8		1.788	17.55	9.70	27.24	-18.76	46.00	Average
9		6.143	22.04	9.77	31.81	-28.19	60.00	QP
10		6.143	15.59	9.77	25.36	-24.64	50.00	Average
11		10.287	18.56	9.87	28.43	-31.57	60.00	QP
12		10.287	11.13	9.87	21.00	-29.00	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router	Date of Test	2024-08-14
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.8°C /52%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Vertical Ant	Test Voltage	AC 240V/60Hz

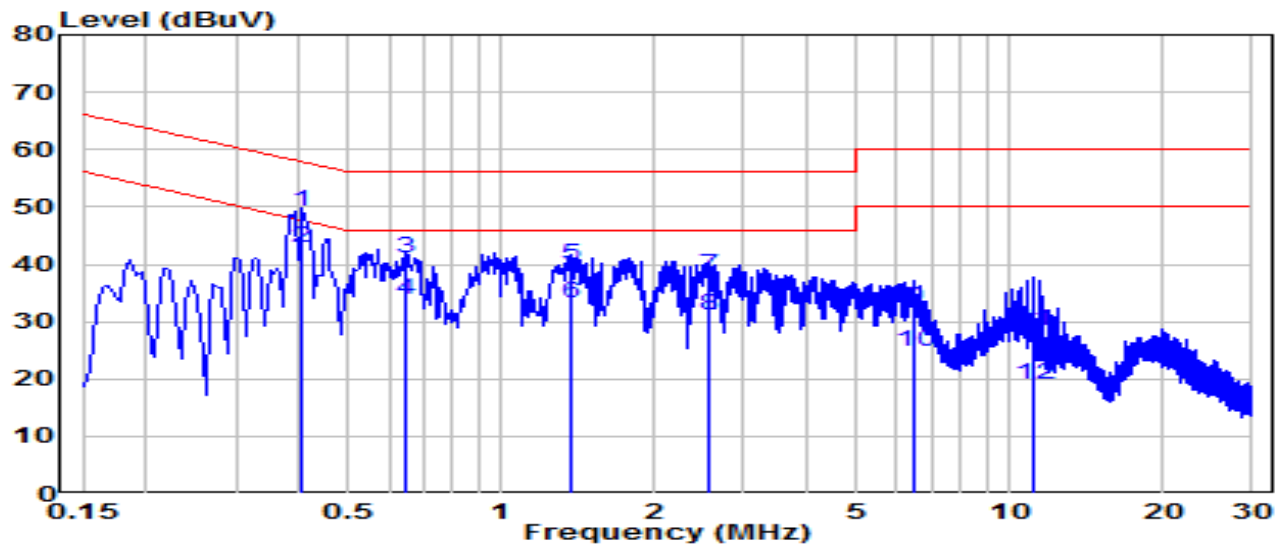

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.406	39.44	9.64	49.08	-8.64	57.72	QP
2	*	0.406	33.27	9.64	42.91	-4.81	47.72	Average
3		0.649	31.40	9.66	41.06	-14.94	56.00	QP
4		0.649	24.06	9.66	33.72	-12.28	46.00	Average
5		1.378	30.27	9.69	39.96	-16.04	56.00	QP
6		1.378	23.63	9.69	33.32	-12.68	46.00	Average
7		2.571	28.27	9.72	37.99	-18.01	56.00	QP
8		2.571	21.37	9.72	31.09	-14.91	46.00	Average
9		6.449	22.42	9.80	32.22	-27.78	60.00	QP
10		6.449	15.07	9.80	24.87	-25.13	50.00	Average
11		11.133	18.47	9.90	28.37	-31.63	60.00	QP
12		11.133	9.27	9.90	19.17	-30.83	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2406TW0101-UT” file.

Appendix B : External Photograph

Refer to “2406TW0101-UE” file.

Appendix C : Internal Photograph

Refer to “2406TW0101-UI” file.

_____ The End _____