



RADIO TEST REPORT

FCC ID : 2BCGWBE65V2
Equipment : BE11000 Whole Home Mesh Wi-Fi 7 System
Brand Name : tp-link
Model Name : Deco BE65, Deco BE63, Deco BE11000, Deco BE65 Pro
Applicant : TP-LINK CORPORATION PTE.LTD.
7 Temasek Boulevard #29-03 Suntec Tower One,
Singapore 038987
Manufacturer : TP-LINK CORPORATION PTE.LTD.
7 Temasek Boulevard #29-03 Suntec Tower One,
Singapore 038987
Standard : 47 CFR FCC Part 15.407

The product was received on Jul. 31, 2024, and testing was started from Aug. 14, 2024 and completed on Oct. 21, 2024. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	11
1.3 Testing Location Information	11
1.4 Measurement Uncertainty	11
2 Test Configuration of EUT	12
2.1 Test Channel Mode	12
2.2 The Worst Case Measurement Configuration	14
2.3 EUT Operation during Test	15
2.4 Accessories	15
2.5 Support Equipment.....	15
2.6 Test Setup Diagram	16
3 Transmitter Test Result	19
3.1 AC Power-line Conducted Emissions	19
3.2 Emission Bandwidth	21
3.3 Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	22
3.4 Peak Power Spectral Density (E.I.R.P.)	24
3.5 Unwanted Emissions.....	27
4 Test Equipment and Calibration Data	32
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	
Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_5 Ver1.1



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	PASS	-
-	15.407(a)	Proper Power Adjustment	N/A	Standard Power AP w/o test
3.4	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
-	15.407(d)	Contention-Based Protocol	N/A	Standard Power AP w/o test

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen**Report Producer: Sandy Chuang**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925-6425	ax (HEW20), be (EHT20)	6115-6415	33-93 [16]
6525-6875		6535-6855	117-181 [17]
5925-6425	ax (HEW40), be (EHT40)	6125-6405	35-91 [8]
6525-6875		6565-6845	123-179 [8]
5925-6425	ax (HEW80), be (EHT80)	6145-6385	39-87 [4]
6525-6875		6625-6785	135-167 [3]
5925-6425	ax (HEW160), be (EHT160)	6185-6345	47-79 [2]
6525-6875		6665	143 [1]
5925-6425	be (EHT320)	6265	63 [1]

Band	Mode	BWch (MHz)	Nant
5925-6425 / 6525-6875 MHz	802.11ax HEW20	20	2TX
5925-6425 / 6525-6875 MHz	802.11ax HEW20-BF	20	2TX
5925-6425 / 6525-6875 MHz	802.11be EHT20	20	2TX
5925-6425 / 6525-6875 MHz	802.11be EHT20-BF	20	2TX
5925-6425 / 6525-6875 MHz	802.11ax HEW40	40	2TX
5925-6425 / 6525-6875 MHz	802.11ax HEW40-BF	40	2TX
5925-6425 / 6525-6875 MHz	802.11be EHT40	40	2TX
5925-6425 / 6525-6875 MHz	802.11be EHT40-BF	40	2TX
5925-6425 / 6525-6875 MHz	802.11ax HEW80	80	2TX
5925-6425 / 6525-6875 MHz	802.11ax HEW80-BF	80	2TX
5925-6425 / 6525-6875 MHz	802.11be EHT80	80	2TX
5925-6425 / 6525-6875 MHz	802.11be EHT80-BF	80	2TX
5925-6425 / 6525-6875 MHz	802.11ax HEW160	160	2TX
5925-6425 / 6525-6875 MHz	802.11ax HEW160-BF	160	2TX
5925-6425 / 6525-6875 MHz	802.11be EHT160	160	2TX
5925-6425 / 6525-6875 MHz	802.11be EHT160-BF	160	2TX
5925-6425 MHz	802.11be EHT320	320	2TX
5925-6425 MHz	802.11be EHT320-BF	320	2TX

**Note:**

- ♦ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80 and EHT160, EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

**1.1.2 Antenna Information**

Ant.	Port			Brand	Model Name	Ant. Type	Connector	Gain (dBi)
	2.4GHz	5GHz	6GHz					
1	-	-	-	TP-Link	Deco BE63	Dipole	I-PEX	Note 1
2	-	-	2	TP-Link	Deco BE63	Franklin	I-PEX	
3	-	-	-	TP-Link	Deco BE63	Dipole	I-PEX	
4	-	-	1	TP-Link	Deco BE63	Franklin	I-PEX	

Note 1

Ant.	Gain (dBi)		
	2.4GHz	5GHz	6GHz
		UNII 1 ~ UNII 3	UNII 5 ~ UNII 8
1	1.98	3.00	-
2	-	-	3.00
3	1.85	3.00	-
4	-	-	3.00

Note 2: The above information was declared by manufacturer.

Note 3: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$Directional\ IGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$Directional\ IGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$Directional\ IGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$Directional\ IGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,3) = 10^{G3/20} ; NSS1(g1,4) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

$$6G\ UNII-5 / 7\ G1 = 3.0\ dBi; G2 = 3.0\ dBi;$$

$$6G\ UNII-5 / 7\ DG = 6.01\ dBi$$

Note 4

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11a/n/ac/ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20_Nss1,(MCS0)	0.986	0.06	5.14m	10
802.11be EHT40_Nss1,(MCS0)	0.947	0.24	5.303m	300
802.11be EHT80_Nss1,(MCS0)	0.981	0.08	5.39m	10
802.11be EHT160_Nss1,(MCS0)	0.981	0.08	5.193m	10
802.11be EHT320_Nss1,(MCS0)	0.935	0.29	2.64m	1k
802.11be EHT20_Nss2,(MCS0)	0.977	0.1	5.32m	300
802.11be EHT40_Nss2,(MCS0)	0.982	0.08	5.403m	10
802.11be EHT80_Nss2,(MCS0)	0.977	0.1	5.208m	300
802.11be EHT160_Nss2,(MCS0)	0.951	0.22	2.65m	1k
802.11be EHT320_Nss2,(MCS0)	0.945	0.25	2.135m	1k
802.11be EHT20-BF_Nss1,(MCS0)	0.986	0.06	5.14m	10
802.11be EHT40-BF_Nss1,(MCS0)	0.947	0.24	5.303m	300
802.11be EHT80-BF_Nss1,(MCS0)	0.981	0.08	5.39m	10
802.11be EHT160-BF_Nss1,(MCS0)	0.981	0.08	5.193m	10
802.11be EHT320-BF_Nss1,(MCS0)	0.935	0.29	2.64m	1k

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From Power Adapter			
Beamforming Function	☒	With beamforming	☐	Without beamforming
	The product has beamforming function for n/VHT/be in 2.4GHz, n/ac/ax/be in 5GHz and ax/be in 6GHz.			
Device Type	☒	Indoor Access Point	☒	Subordinate
	☐	Indoor Client	☒	Standard Power Access Point
	☐	Dual Client	☐	Standard Client
	☐	Fixed Client	☐	Very Low Power
Condition of EUT	☒	Indoor	☐	Outdoor
Channel Puncturing Function	☐	Supported Static Puncturing		
	☐	Supported Dynamic Puncturing		
	☒	Unsupported		
Support RU	☒	Full RU	☐	Partial RU
Test Software Version	QSPR 5.0-00202			

Note: The above information was declared by manufacturer.

1.1.5 Table for EUT supports function

Function
AP Router
Mesh

Note: The above information was declared by manufacturer.

1.1.6 Table for Multiple Listing

Model Name	Description
Deco BE65, Deco BE63, Deco BE11000, Deco BE65 Pro	a) The Deco BE63 and Deco BE11000 is exactly the same as the Deco BE65 except for the model. b) The Deco BE65 Pro has the different USB port, PHY/Switch solutions and the power for FEM from the Deco BE65, but the RF curcirt (including the schematic, layout, antenna, antenna position and RF parameters) is exactly the same as the Deco BE65.

Note 1: From the above models, model: Deco BE65 was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 987594 D02 v03
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISCED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH02-CB	KJ Chang	23.7~25.6 / 61~63	Aug. 16, 2024
Radiated	03CH01-CB	Alex Kuo	22-23 / 55-58	Aug. 14, 2024~Aug. 20, 2024
AC Conduction	CO01-CB	Joe Chu	22~23 / 49~50	Oct. 21, 2024

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.0 dB	Confidence levels of 95%
Conducted Emission	3.1 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.1 dB	Confidence levels of 95%
Bandwidth Measurement	2.1 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11be EHT20_Nss1,(MCS0)
6115MHz
6195MHz
6415MHz
6535MHz
6695MHz
6855MHz
802.11be EHT40_Nss1,(MCS0)
6125MHz
6205MHz
6405MHz
6565MHz
6685MHz
6845MHz
802.11be EHT80_Nss1,(MCS0)
6145MHz
6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11be EHT160_Nss1,(MCS0)
6185MHz
6345MHz
6665MHz
802.11be EHT320_Nss1,(MCS0)
6265MHz
802.11be EHT20_Nss2,(MCS0)
6115MHz
6195MHz
6415MHz
6535MHz
6695MHz
6855MHz
802.11be EHT40_Nss2,(MCS0)
6125MHz
6205MHz
6405MHz
6565MHz
6685MHz
6845MHz
802.11be EHT80_Nss2,(MCS0)
6145MHz



6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11be EHT160_Nss2,(MCS0)
6185MHz
6345MHz
6665MHz
802.11be EHT320_Nss2,(MCS0)
6265MHz
802.11be EHT20-BF_Nss1,(MCS0)
6115MHz
6195MHz
6415MHz
6535MHz
6695MHz
6855MHz
802.11be EHT40-BF_Nss1,(MCS0)
6125MHz
6205MHz
6405MHz
6565MHz
6685MHz
6845MHz
802.11be EHT80-BF_Nss1,(MCS0)
6145MHz
6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11be EHT160-BF_Nss1,(MCS0)
6185MHz
6345MHz
6665MHz
802.11be EHT320-BF_Nss1,(MCS0)
6265MHz

- ♦ EHT20 / EHT40 / EHT80 / EHT160 covers HEW40 / HEW80 / HEW160 due to similar modulation. The power setting for HEW20 / HEW40 / HEW80 / HEW160 is the same or lower than EHT20 / EHT40 / EHT80 / EHT160.
- ♦ The EUT supports beamforming and CDD modes, and the CDD mode is the worst case. Therefore, all items of CDD mode are evaluated in the report. The beamforming mode only evaluates the output power.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	EUT

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Equivalent Isotopically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.)
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
After evaluating, EUT in Y axis was the worst case, so the measurement will follow this same test configuration.	
1	EUT in Y axis
Operating Mode > 1GHz	CTX
After evaluating, EUT in Y axis was the worst case, so the measurement will follow this same test configuration.	
1	EUT in Y axis

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission MASK
Test Condition	Conducted measurement at transmit chains



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz UNII 1~3 + WLAN 6GHz UNII 5/7
Refer to Sporton Test Report No.: FA470122 for Co-location RF Exposure Evaluation.	

2.3 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

2.4 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter	tp-link	T120250-2B4	INPUT: 100-240V~50/60Hz, 0.8A OUTPUT: 12V, 2.5A
Other			
RJ-45 cable*1: Non-shielded, 1.2m			

2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Flash disk3.0	Transcend	JetFlash-703	N/A
B	LAN NB	DELL	E6430	N/A


For Radiated:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A

For RF Conducted:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A

2.6 Test Setup Diagram

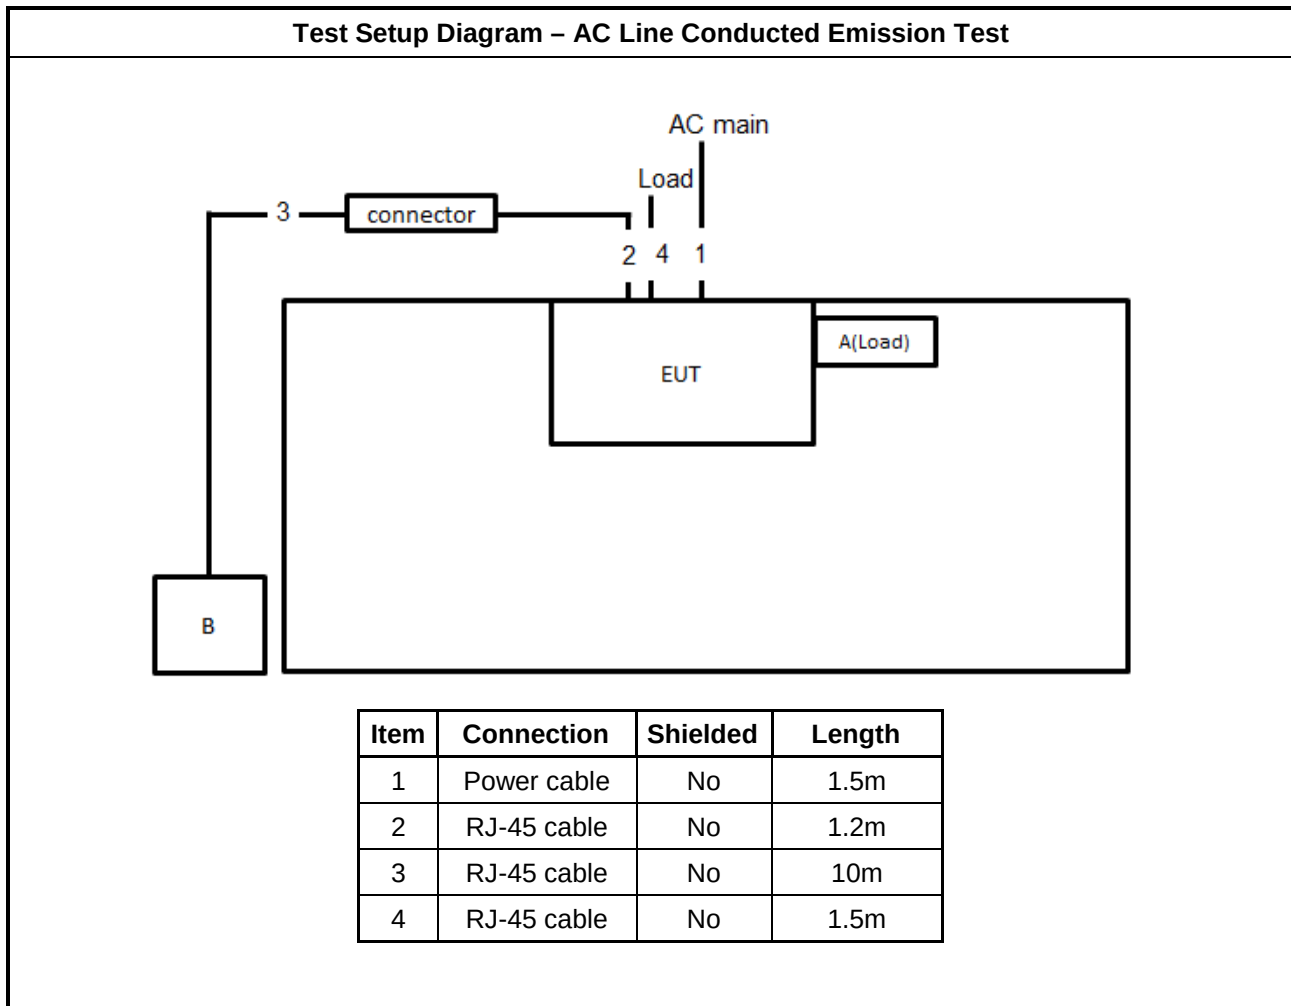

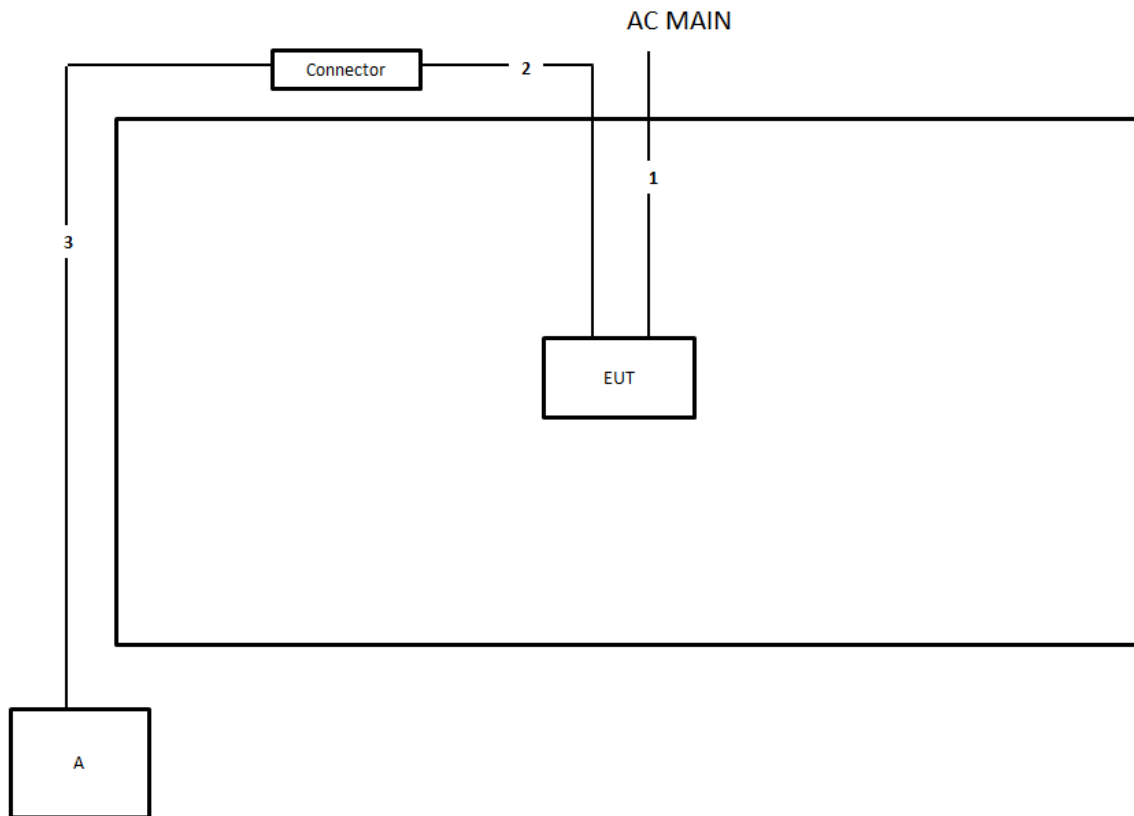Test Setup Diagram - Radiated Test Below 1GHz


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	1.2m
3	RJ-45 cable	No	10m

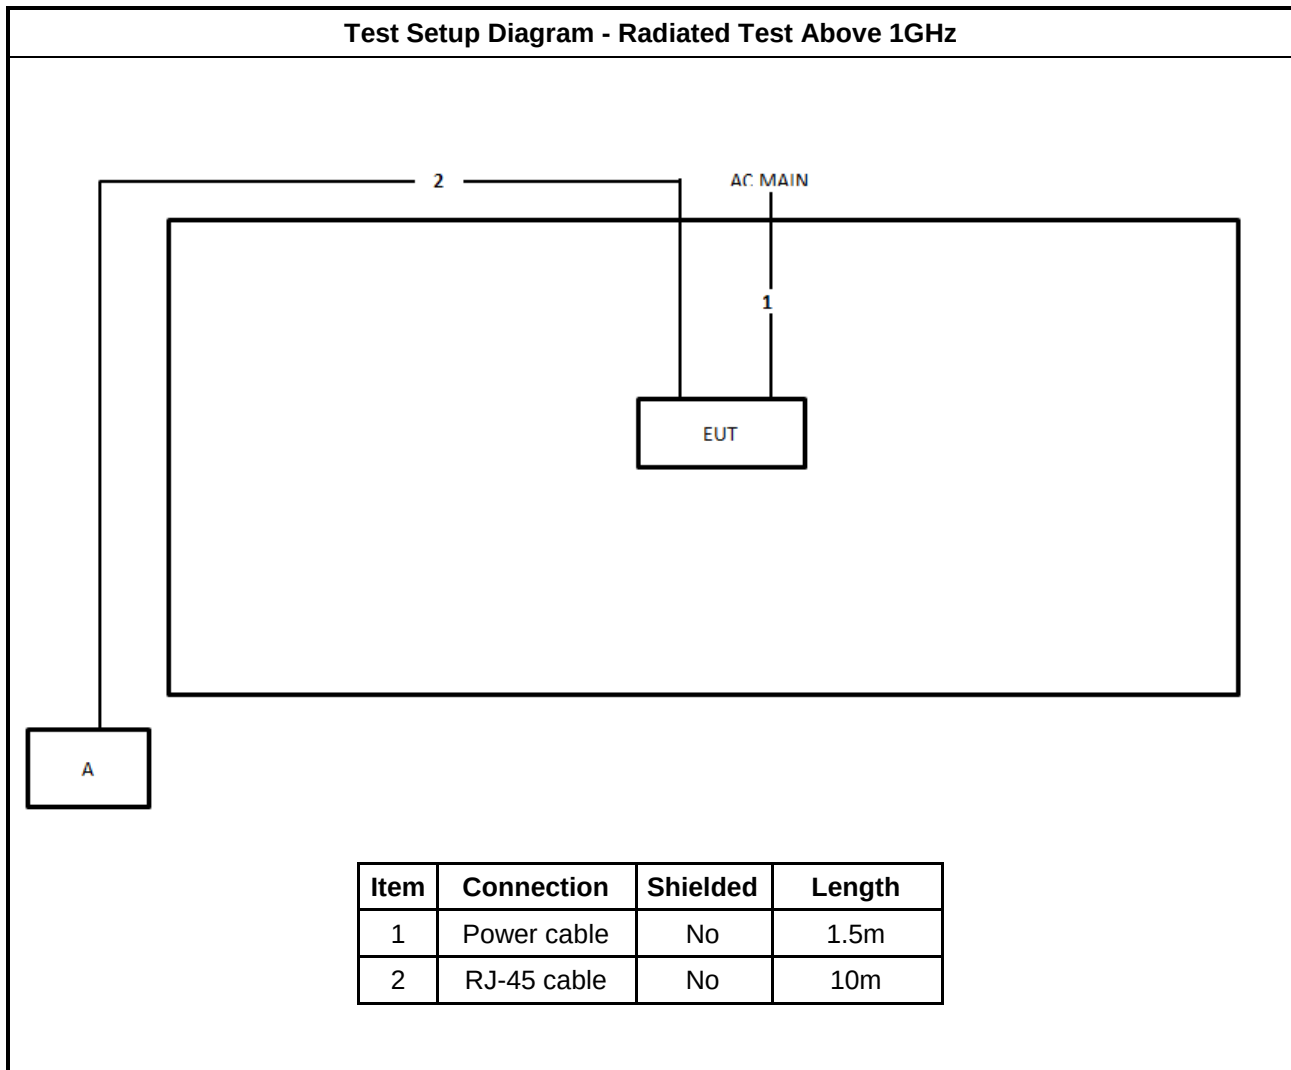Test Setup Diagram - Radiated Test Above 1GHz




3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

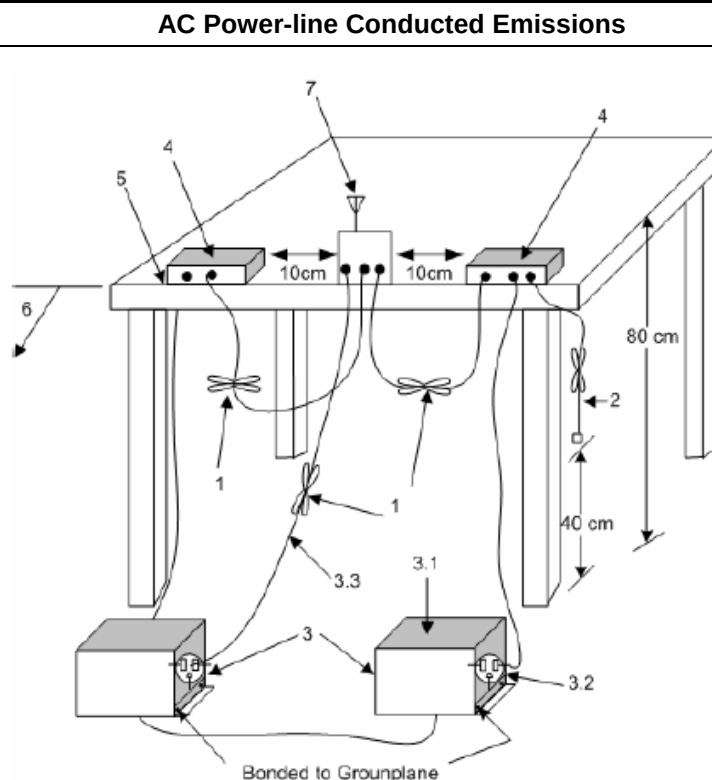

1—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long.

2—The I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

3—EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN may be placed on top of, or immediately beneath, reference ground plane.

3.1—All other equipment powered from additional LISN(s).

3.2—A multiple-outlet strip may be used for multiple power cords of non-EUT equipment.

3.3—LISN at least 80 cm from nearest part of EUT chassis.

4—Non-EUT components of EUT system being tested.

5—Rear of EUT, including peripherals, shall all be aligned and flush with edge of tabletop.

6—Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

7—Antenna can be integral or detachable. If detachable, then the antenna shall be attached for this test.

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading (dBUV) = LISN Factor + Cable Loss + Read Level = Level
- Margin = - Limit + (Read Level + LISN Factor + Cable Loss)

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5925-6425 GHz band, N/A
☐	For the 6425-6525 GHz band, N/A
☒	For the 6525-6875 GHz band, N/A
☐	For the 6875-7125 GHz band, N/A
RLAN Devices	
☐	For the 5925-6425 GHz band, N/A
☐	For the 6425-6525 GHz band, N/A
☐	For the 6525-6875 GHz band, N/A
☐	For the 6875-7125 GHz band, N/A


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪ For the emission bandwidth shall be measured using one of the options below:	
☒	According to FCC KDB 987594 D02 clause II.C, measurement procedure shall refer to FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

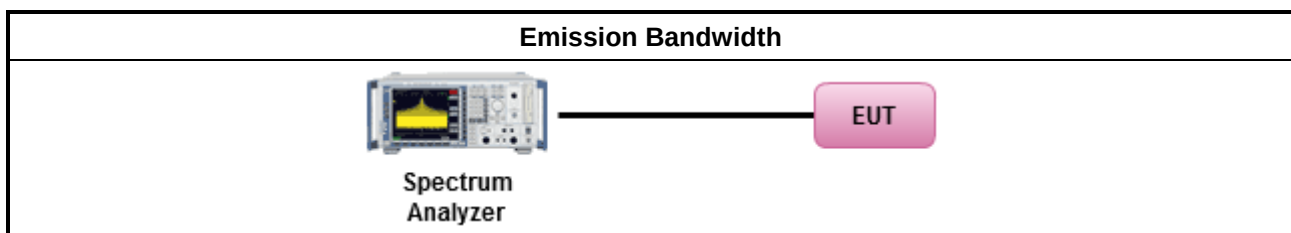

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.3.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☐ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☐ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 30 dBm .
	■ For low-power client devices < 24 dBm.
☐ For the 5.925 ~ 6.875 GHz band:	
	■ For standard-power access points & fixed client devices < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For standard client devices < 30 dBm.


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 clause II.E, the test measurement procedure shall refer to KDB 789033.	
Average over on/off periods with duty factor	
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging). Spectrum analyzer setting: RBW/VBW : 1/3MHz ; Detector : RMS ; Trace mode : Average ; Sweep Count 100.
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
☒ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	
☐ For radiated measurement.	
Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"	
Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.	
Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.	

3.3.4 Test Setup

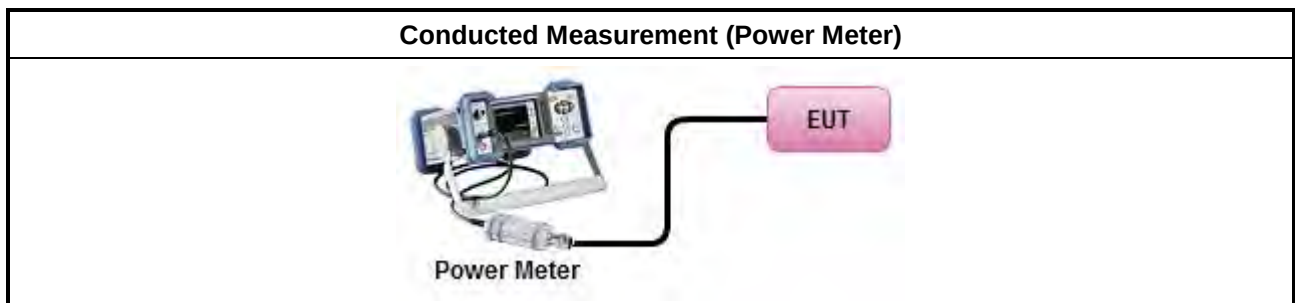

3.3.5 Test Result of Maximum Equivalent Isotopically Radiated Power (E.I.R.P)

Refer as Appendix C



3.4 Peak Power Spectral Density (E.I.R.P.)

3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☐ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☐ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 5 dBm / MHz.
	■ For low-power client devices < -1 dBm / MHz.
☐ For the 5.925 ~ 6.875 GHz band:	
	■ For standard-power access points & fixed client devices < 23 dBm / MHz.
	■ For standard client devices < 17 dBm / MHz.

3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.4.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒	For conducted measurement.
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	
☐	For radiated measurement.
- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.	

Test Method	
	Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.4.4 Test Setup

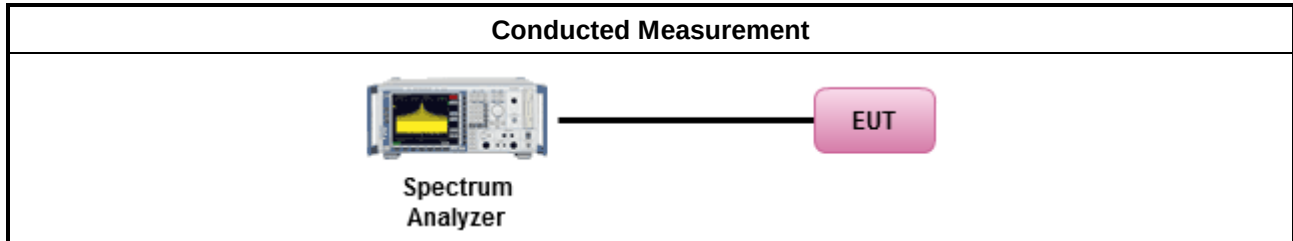

3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit


Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = $54\text{dBuV/m at 3m} + 9.54\text{dB} = 63.54\text{ dBuV/m at 1m}$.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.945 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = $68.2\text{dBuV/m at 3m} + 9.54\text{dB} = 77.74\text{ dBuV/m at 1m}$. Note 2:-27 dBm EIRP OOBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

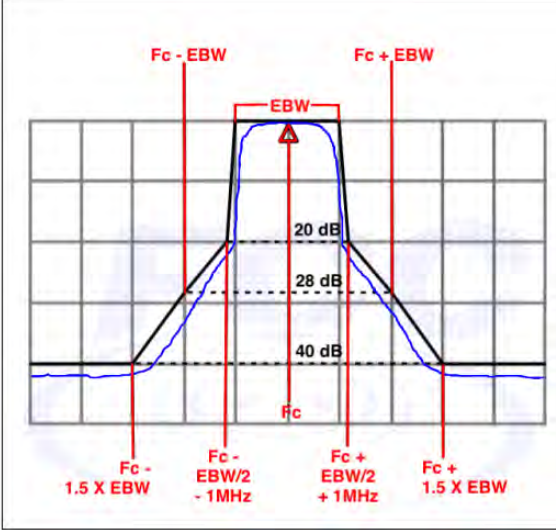Frequency	Emission MASK Limit
5.945 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. 




3.5.2 Measuring Instruments



Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK). Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
Refer as FCC KDB 789033 D02, clause G)3)d)ii) for Band edge Integration measurements.	
For emission MASK shall be measured using following options below:	
	☒ Refer as FCC KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.5.4 Test Setup

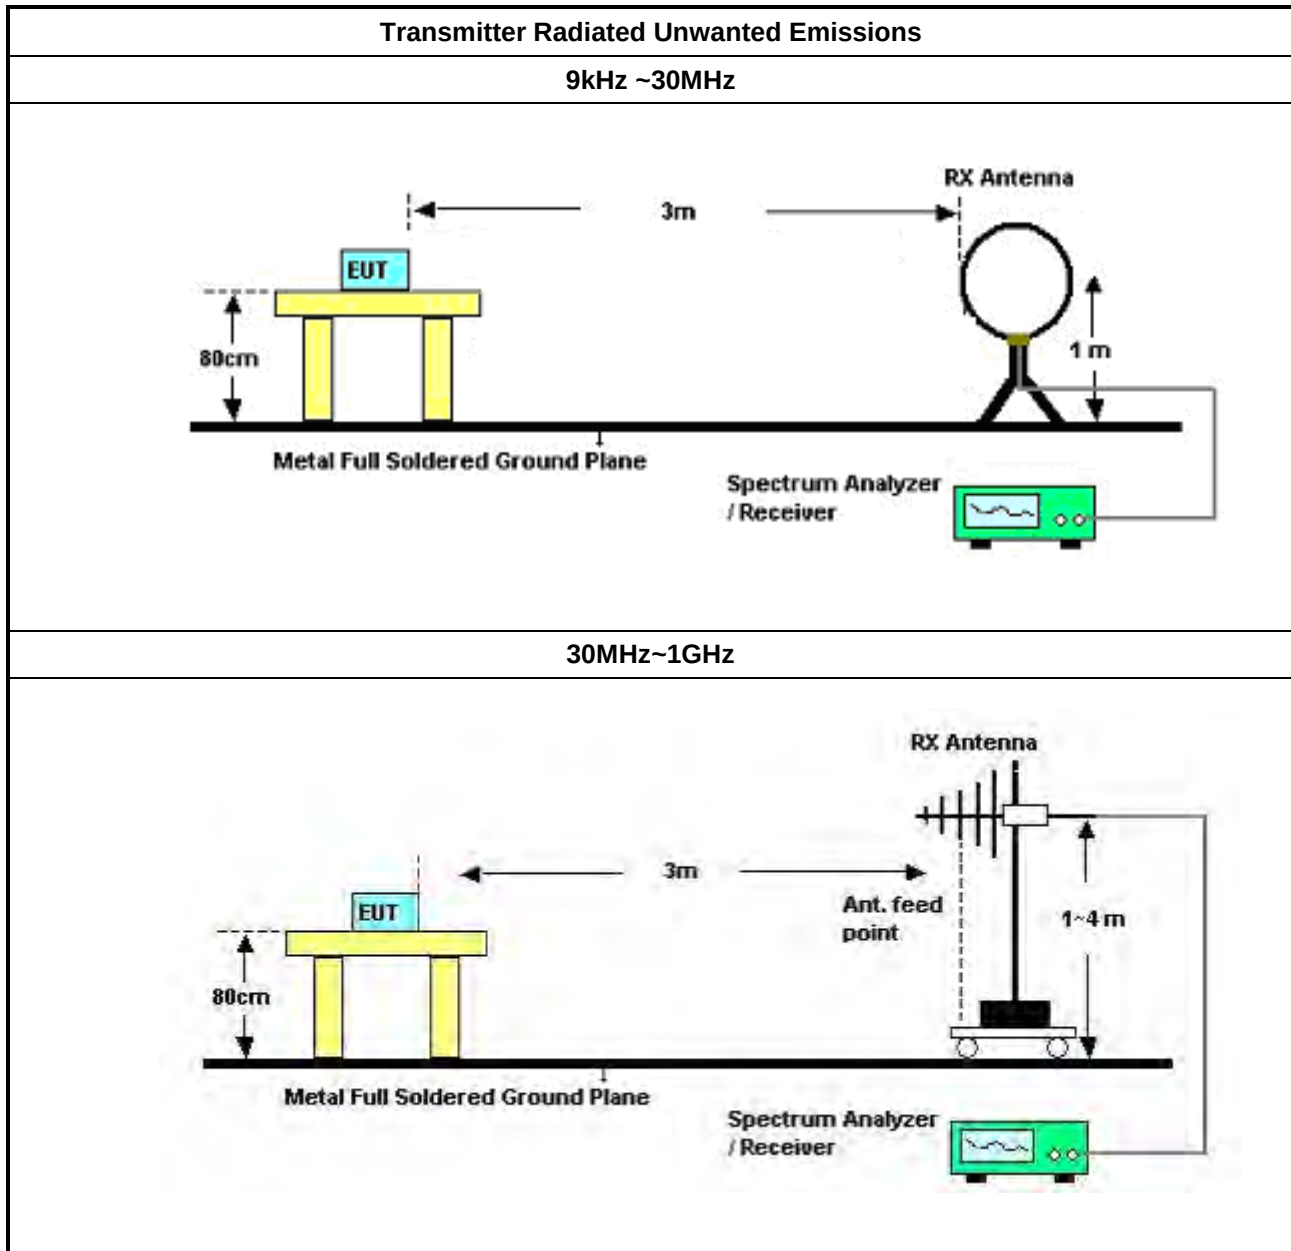

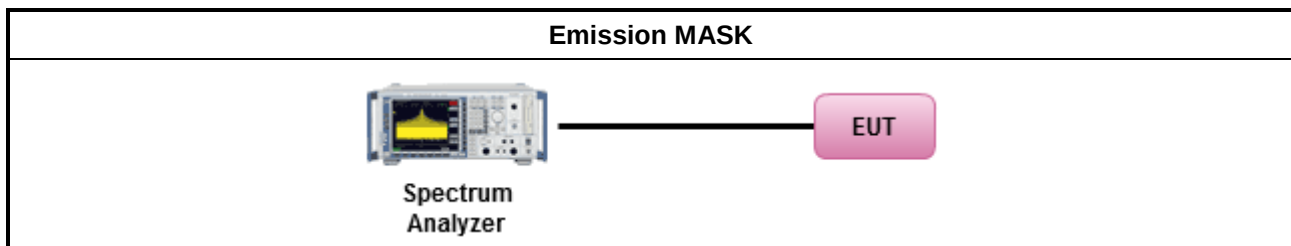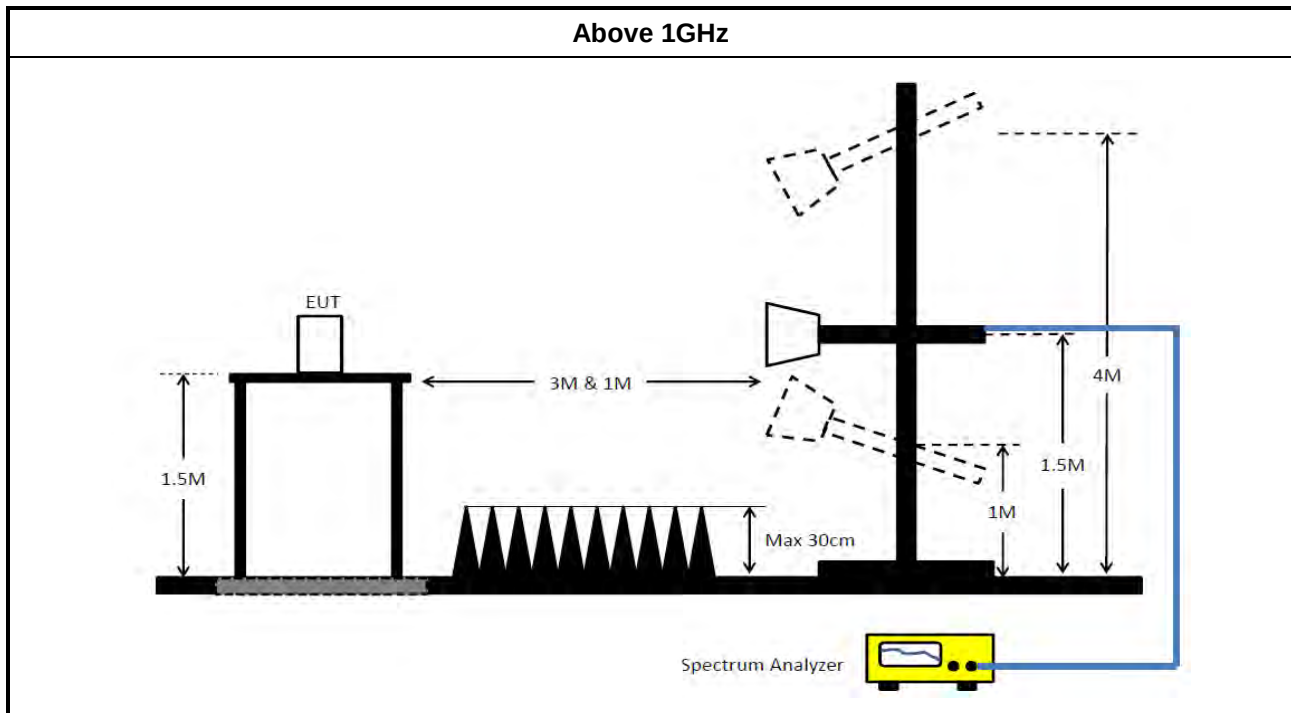

3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable)
= Level

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 01, 2024	Feb. 28, 2025	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 19, 2024	Feb. 18, 2025	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Apr. 24, 2024	Apr. 23, 2025	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Feb. 08, 2024	Feb. 07, 2025	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30 MHz	Oct. 13, 2023	Oct. 12, 2024	Radiation (03CH01-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH01-CB	30 MHz ~ 1 GHz	Jan. 18, 2024	Jan. 17, 2025	Radiation (03CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH01-CB	1GHz ~18GHz 3m	May 04, 2024	May 03, 2025	Radiation (03CH01-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMCI	CBL6112D N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Feb. 18, 2024	Feb. 17, 2025	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120D-01816	1GHz~18GHz	Dec. 20, 2023	Dec. 19, 2024	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 04, 2023	Sep. 03, 2024	Radiation (03CH01-CB)
Pre-Amplifier	SGH	SGH0301	20230109-2	10M~1GHz	Jun. 22, 2024	Jun. 21, 2025	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 17, 2024	May 16, 2025	Radiation (03CH01-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 24, 2023	Nov. 23, 2024	Radiation (03CH01-CB)
Signal Analyzer	R&S	FSV3044	101437	10kHz ~ 44GHz	Nov. 28, 2023	Nov. 27, 2024	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESR7	102172	9kHz ~ 7GHz	Oct. 20, 2023	Oct. 19, 2024	Radiation (03CH01-CB)
RF Cable-low	Woken	RG402	Low Cable-31+32	30 MHz ~ 1 GHz	Nov. 06, 2023	Nov. 05, 2024	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16	1 GHz ~ 18 GHz	Nov. 06, 2023	Nov. 05, 2024	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16+17	1 GHz ~ 18 GHz	Nov. 06, 2023	Nov. 05, 2024	Radiation (03CH01-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Jan. 11, 2024	Jan. 10, 2025	Radiation (03CH01-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Radiation (03CH01-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11.19	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH01-CB)
Signal Analyzer	R&S	FSV40	101904	9kHz ~ 40GHz	Apr. 26, 2024	Apr. 25, 2025	Conducted (TH02-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Oct. 19, 2023	Oct. 18, 2024	Conducted (TH02-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Oct. 19, 2023	Oct. 18, 2024	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-01	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-02	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-03	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-05	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH02-CB)
Band Rejector	MTJ	6G Band Rejector	6G-BRJ-01	1 ~ 18GHz	Oct. 03, 2023	Oct. 02, 2024	Conducted (TH02-CB)
Band Rejector	MTJ	6G Band Rejector	6G-BRJ-02	1 ~ 18GHz	Oct. 03, 2023	Oct. 02, 2024	Conducted (TH02-CB)
Switch	SPTCB	SP-SWI	SWI-02	1 –26.5 GHz	Oct. 03, 2023	Oct. 02, 2024	Conducted (TH02-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11.19	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Conducted (TH02-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	6.711M	42.85	50.00	-7.15	Line

Mode 1

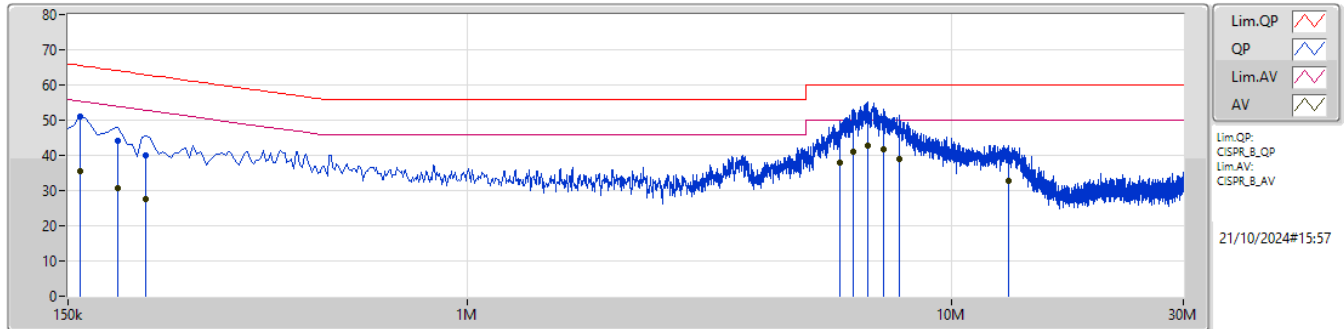

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	159k	51.04	65.52	-14.48	10.04	Line	-	41.00	0.04	0.08	9.92						
AV	159k	35.68	55.52	-19.84	10.04	Line	-	25.64	0.04	0.08	9.92						
QP	190.5k	44.16	64.01	-19.85	10.05	Line	-	34.11	0.04	0.07	9.94						
AV	190.5k	30.78	54.01	-23.23	10.05	Line	-	20.73	0.04	0.07	9.94						
QP	217.5k	40.03	62.92	-22.89	10.07	Line	-	29.96	0.04	0.07	9.96						
AV	217.5k	27.64	52.92	-25.28	10.07	Line	-	17.57	0.04	0.07	9.96						
QP	5.861M	46.27	60.00	-13.73	10.19	Line	-	36.08	0.17	0.15	9.87						
AV	5.861M	37.91	50.00	-12.09	10.19	Line	-	27.72	0.17	0.15	9.87						
QP	6.27M	49.32	60.00	-10.68	10.19	Line	-	39.13	0.18	0.15	9.86						
AV	6.27M	40.97	50.00	-9.03	10.19	Line	-	30.78	0.18	0.15	9.86						
QP	6.711M	51.01	60.00	-8.99	10.19	Line	-	40.82	0.19	0.15	9.85						
AV	6.711M	42.85	50.00	-7.15	10.19	Line	"Worst"	32.66	0.19	0.15	9.85						
QP	7.229M	49.64	60.00	-10.36	10.19	Line	-	39.45	0.19	0.15	9.85						
AV	7.229M	41.88	50.00	-8.12	10.19	Line	-	31.69	0.19	0.15	9.85						
QP	7.8M	46.79	60.00	-13.21	10.19	Line	-	36.60	0.20	0.15	9.84						
AV	7.8M	39.11	50.00	-10.89	10.19	Line	-	28.92	0.20	0.15	9.84						
QP	13.07M	39.70	60.00	-20.30	10.35	Line	-	29.35	0.26	0.20	9.89						
AV	13.07M	32.63	50.00	-17.37	10.35	Line	-	22.28	0.26	0.20	9.89						

Mode 1

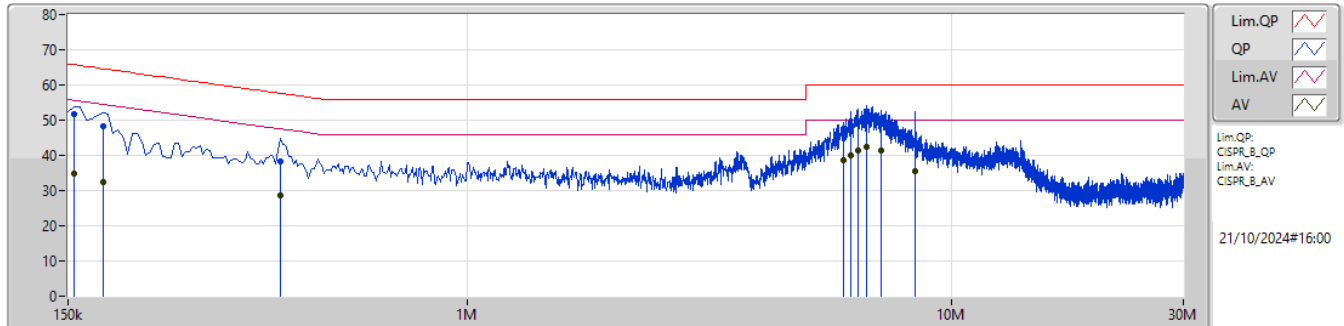

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	154.5k	51.56	65.75	-14.19	10.06	Neutral	-	41.50	0.06	0.08	9.92						
AV	154.5k	34.74	55.75	-21.01	10.06	Neutral	-	24.68	0.06	0.08	9.92						
QP	177k	48.42	64.62	-16.20	10.06	Neutral	-	38.36	0.06	0.07	9.93						
AV	177k	32.41	54.62	-22.21	10.06	Neutral	-	22.35	0.06	0.07	9.93						
QP	411k	38.28	57.63	-19.35	10.22	Neutral	-	28.06	0.06	0.10	10.06						
AV	411k	28.67	47.63	-18.96	10.22	Neutral	-	18.45	0.06	0.10	10.06						
QP	5.96M	46.74	60.00	-13.26	10.20	Neutral	-	36.54	0.18	0.15	9.87						
AV	5.96M	38.67	50.00	-11.33	10.20	Neutral	-	28.47	0.18	0.15	9.87						
QP	6.167M	48.23	60.00	-11.77	10.19	Neutral	-	38.04	0.18	0.15	9.86						
AV	6.167M	40.04	50.00	-9.96	10.19	Neutral	-	29.85	0.18	0.15	9.86						
QP	6.383M	49.48	60.00	-10.52	10.20	Neutral	-	39.28	0.19	0.15	9.86						
AV	6.383M	41.32	50.00	-8.68	10.20	Neutral	-	31.12	0.19	0.15	9.86						
QP	6.68M	50.62	60.00	-9.38	10.20	Neutral	-	40.42	0.19	0.15	9.86						
AV	6.68M	42.43	50.00	-7.57	10.20	Neutral	"Worst"	32.23	0.19	0.15	9.86						
QP	7.148M	49.08	60.00	-10.92	10.20	Neutral	-	38.88	0.20	0.15	9.85						
AV	7.148M	41.36	50.00	-8.64	10.20	Neutral	-	31.16	0.20	0.15	9.85						
QP	8.408M	43.08	60.00	-16.92	10.21	Neutral	-	32.87	0.22	0.15	9.84						
AV	8.408M	35.48	50.00	-14.52	10.21	Neutral	-	25.27	0.22	0.15	9.84						

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	51.37M	33.758M	33M8D1D	35.475M	19.19M
802.11be EHT20_Nss2,(MCS0)_2TX	51.15M	33.858M	33M9D1D	33.11M	19.165M
802.11be EHT40_Nss1,(MCS0)_2TX	104.72M	68.716M	68M7D1D	42.13M	38.081M
802.11be EHT40_Nss2,(MCS0)_2TX	102.19M	68.266M	68M3D1D	42.68M	38.031M
802.11be EHT80_Nss1,(MCS0)_2TX	210.54M	136.832M	137MD1D	105.82M	77.761M
802.11be EHT80_Nss2,(MCS0)_2TX	214.94M	134.133M	134MD1D	93.72M	77.861M
802.11be EHT160_Nss1,(MCS0)_2TX	317.24M	158.321M	158MD1D	264M	157.721M
802.11be EHT160_Nss2,(MCS0)_2TX	306.24M	158.921M	159MD1D	254.76M	157.921M
802.11be EHT320_Nss1,(MCS0)_2TX	639.76M	317.041M	317MD1D	484.88M	315.842M
802.11be EHT320_Nss2,(MCS0)_2TX	660.88M	317.441M	317MD1D	572.88M	316.642M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	53.57M	35.357M	35M4D1D	35.145M	19.115M
802.11be EHT20_Nss2,(MCS0)_2TX	51.865M	34.383M	34M4D1D	38.225M	19.165M
802.11be EHT40_Nss1,(MCS0)_2TX	103.73M	69.365M	69M4D1D	90.31M	51.774M
802.11be EHT40_Nss2,(MCS0)_2TX	106.81M	69.015M	69M0D1D	88.66M	50.725M
802.11be EHT80_Nss1,(MCS0)_2TX	216.92M	138.831M	139MD1D	193.16M	103.048M
802.11be EHT80_Nss2,(MCS0)_2TX	223.08M	139.53M	140MD1D	194.7M	103.148M
802.11be EHT160_Nss1,(MCS0)_2TX	172.92M	156.922M	157MD1D	170.72M	156.722M
802.11be EHT160_Nss2,(MCS0)_2TX	171.6M	156.922M	157MD1D	168.96M	156.722M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result



Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6115MHz	Pass	Inf	50.38M	29.285M	51.37M	33.758M
6195MHz	Pass	Inf	49.775M	30.485M	46.255M	24.188M
6415MHz	Pass	Inf	40.7M	19.34M	35.475M	19.19M
6535MHz	Pass	Inf	37.235M	19.115M	35.145M	19.49M
6695MHz	Pass	Inf	50.325M	28.586M	53.57M	35.357M
6855MHz	Pass	Inf	51.48M	30.66M	47.135M	26.637M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6125MHz	Pass	Inf	99.11M	58.371M	104.72M	68.716M
6205MHz	Pass	Inf	96.8M	59.47M	86.46M	44.928M
6405MHz	Pass	Inf	45.87M	38.181M	42.13M	38.081M
6565MHz	Pass	Inf	100.21M	62.769M	103.18M	67.766M
6685MHz	Pass	Inf	100.65M	58.021M	103.73M	69.365M
6845MHz	Pass	Inf	97.9M	60.62M	90.31M	51.774M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6145MHz	Pass	Inf	199.32M	118.241M	210.54M	136.832M
6225MHz	Pass	Inf	206.8M	118.241M	175.12M	90.655M
6385MHz	Pass	Inf	181.06M	78.461M	105.82M	77.761M
6625MHz	Pass	Inf	203.5M	126.037M	216.48M	138.831M
6705MHz	Pass	Inf	208.12M	121.139M	216.92M	138.131M
6785MHz	Pass	Inf	193.16M	103.848M	193.82M	103.048M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6185MHz	Pass	Inf	299.2M	158.321M	317.24M	157.921M
6345MHz	Pass	Inf	307.12M	158.321M	264M	157.721M
6665MHz	Pass	Inf	172.92M	156.922M	170.72M	156.722M
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6265MHz	Pass	Inf	639.76M	317.041M	484.88M	315.842M
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
6115MHz	Pass	Inf	48.455M	27.961M	51.15M	33.858M
6195MHz	Pass	Inf	49.555M	30.21M	47.74M	22.789M
6415MHz	Pass	Inf	40.205M	19.84M	33.11M	19.165M
6535MHz	Pass	Inf	38.225M	19.165M	39.765M	19.84M
6695MHz	Pass	Inf	49.775M	28.686M	51.865M	34.383M
6855MHz	Pass	Inf	49.005M	30.36M	46.42M	26.187M
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
6125MHz	Pass	Inf	95.92M	56.822M	102.19M	68.266M
6205MHz	Pass	Inf	98.78M	59.37M	92.84M	45.677M
6405MHz	Pass	Inf	47.3M	38.131M	42.68M	38.031M
6565MHz	Pass	Inf	104.39M	61.619M	106.81M	68.366M
6685MHz	Pass	Inf	88.66M	58.021M	102.3M	69.015M
6845MHz	Pass	Inf	98.23M	59.42M	98.01M	50.725M
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
6145MHz	Pass	Inf	203.94M	117.941M	214.94M	134.133M
6225MHz	Pass	Inf	207.68M	119.34M	175.34M	91.054M
6385MHz	Pass	Inf	133.98M	78.561M	93.72M	77.861M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
6625MHz	Pass	Inf	209.66M	124.138M	209.88M	138.431M
6705MHz	Pass	Inf	207.24M	119.84M	223.08M	139.53M
6785MHz	Pass	Inf	194.7M	104.248M	199.1M	103.148M
802.11be EHT160_Nss2,(MCS0)_2TX	-	-	-	-	-	-
6185MHz	Pass	Inf	287.76M	158.921M	254.76M	158.321M
6345MHz	Pass	Inf	255.2M	158.321M	306.24M	157.921M
6665MHz	Pass	Inf	168.96M	156.722M	171.6M	156.922M
802.11be EHT320_Nss2,(MCS0)_2TX	-	-	-	-	-	-
6265MHz	Pass	Inf	660.88M	317.441M	572.88M	316.642M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6115MHz

16/08/2024

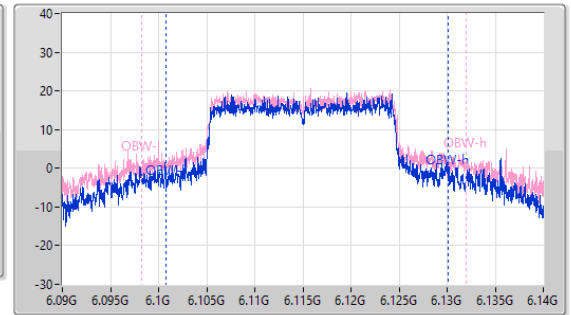
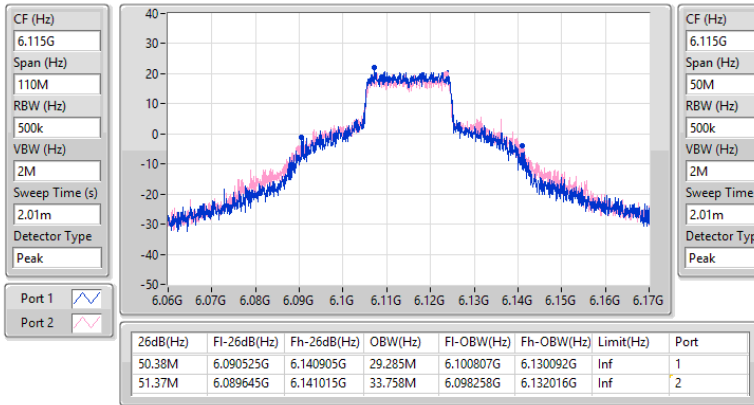

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6195MHz

16/08/2024

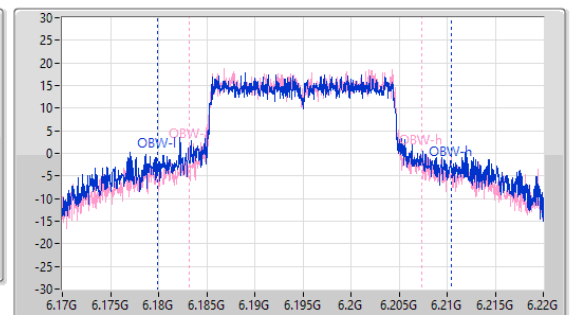
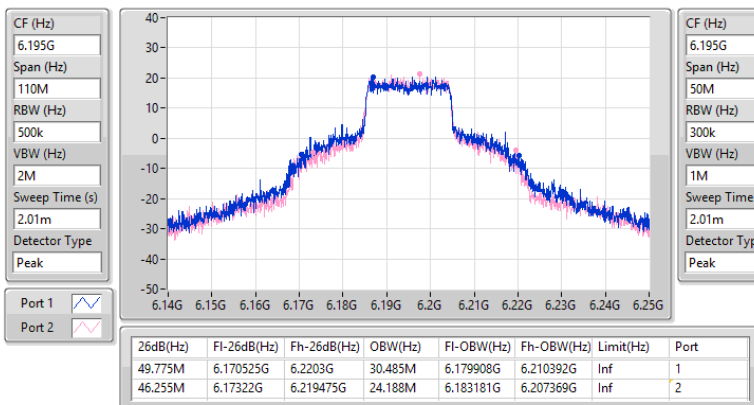


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6415MHz

16/08/2024

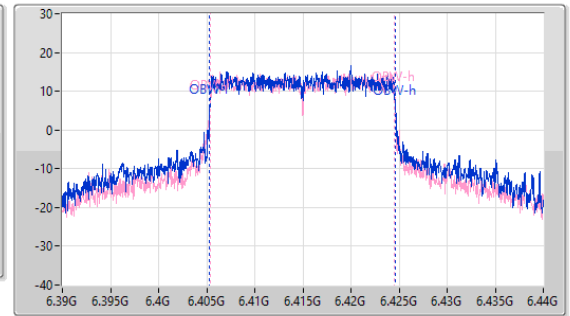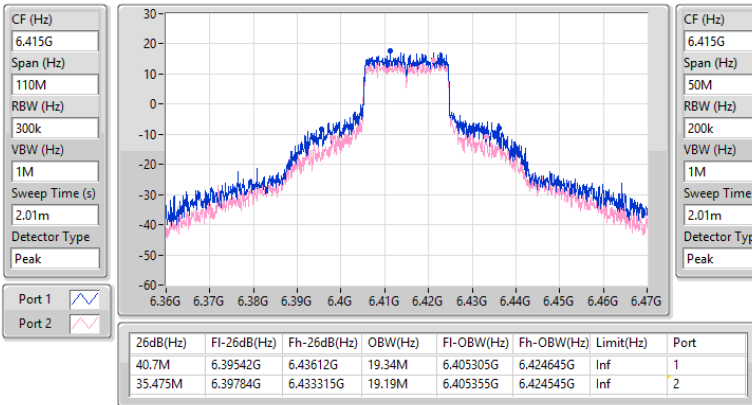

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6535MHz

16/08/2024

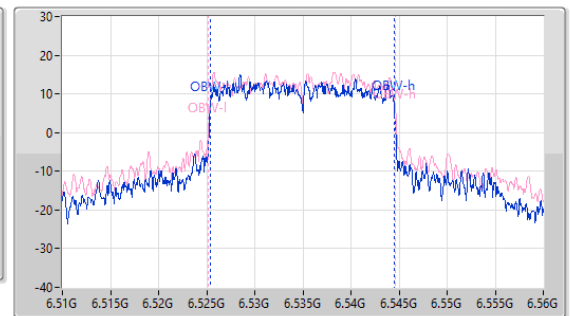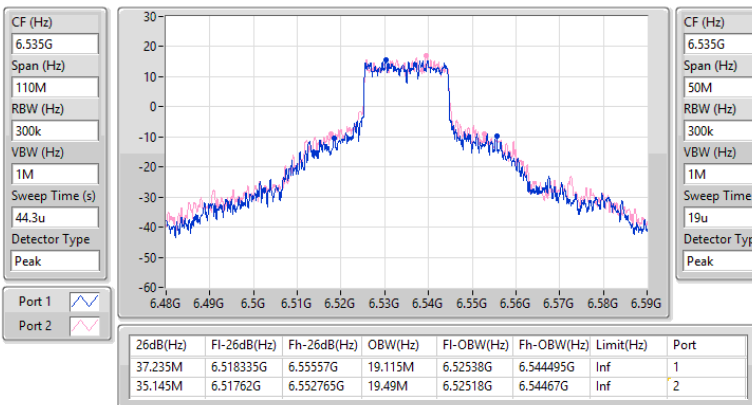


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6695MHz

16/08/2024


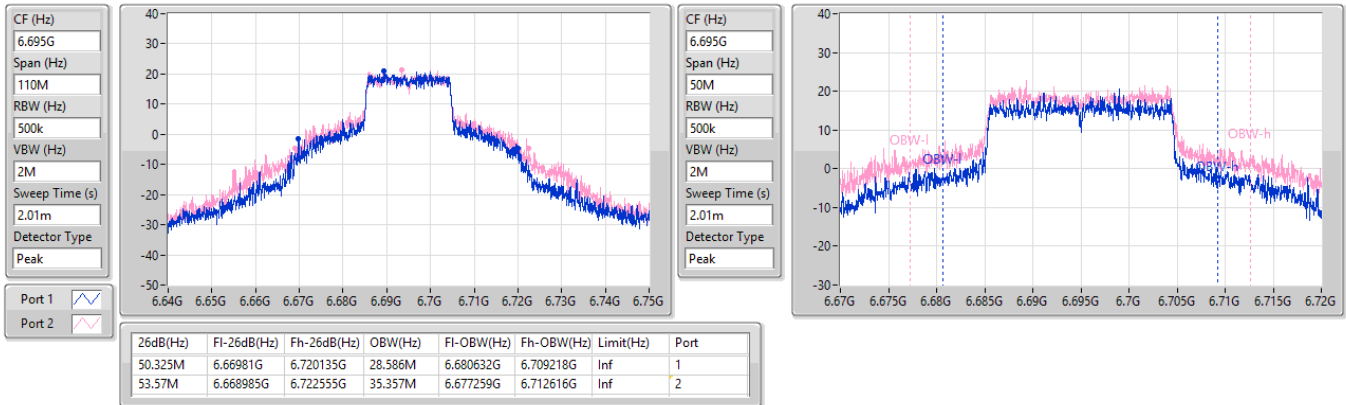

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6855MHz

16/08/2024


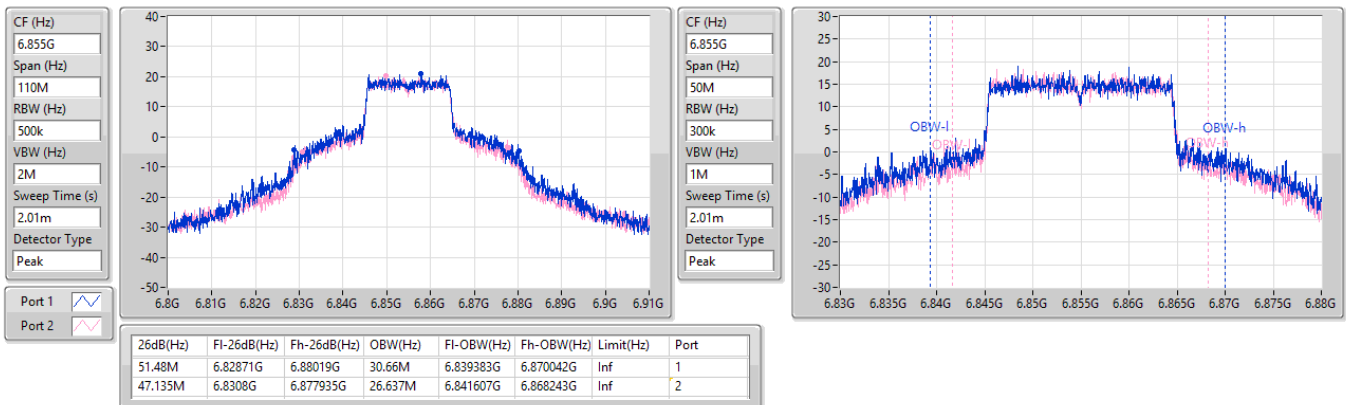


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6125MHz

16/08/2024

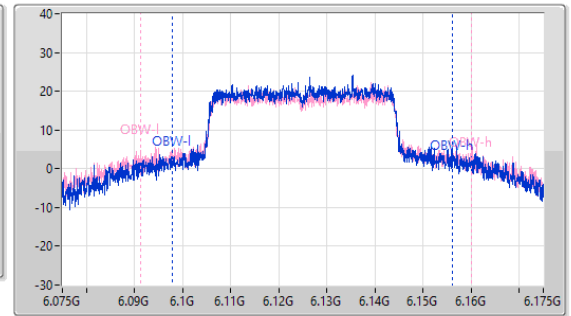
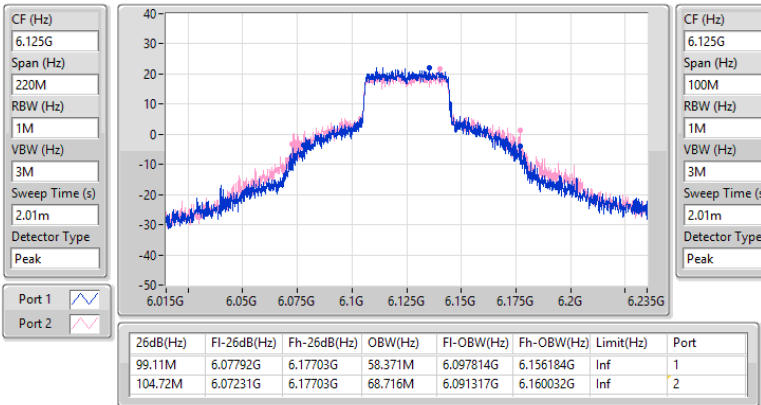

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6205MHz

16/08/2024

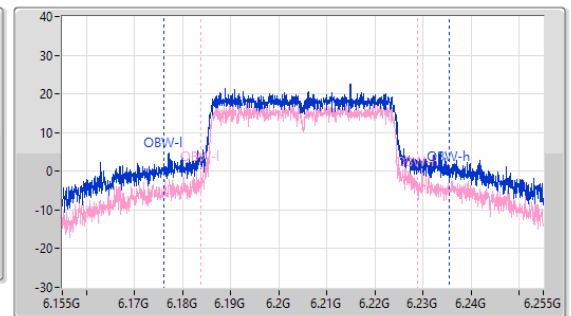
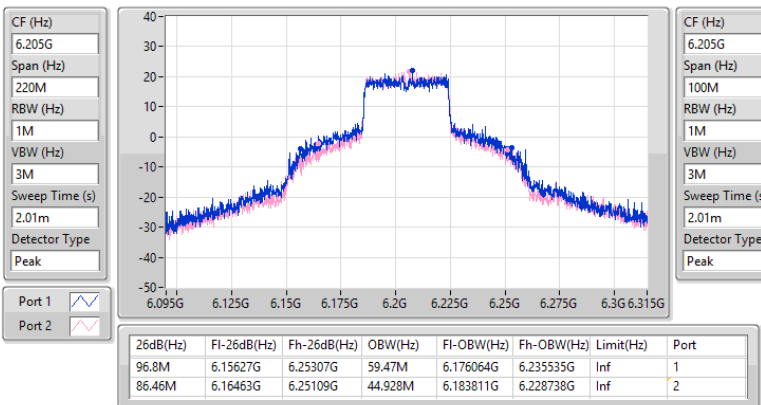


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6405MHz

16/08/2024

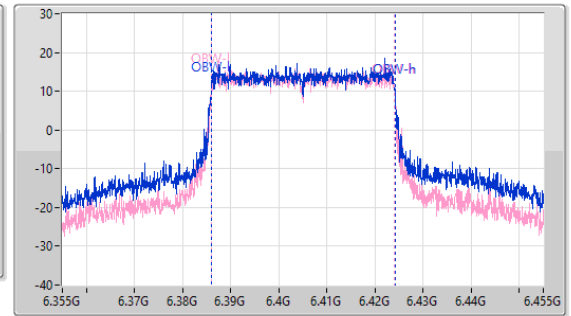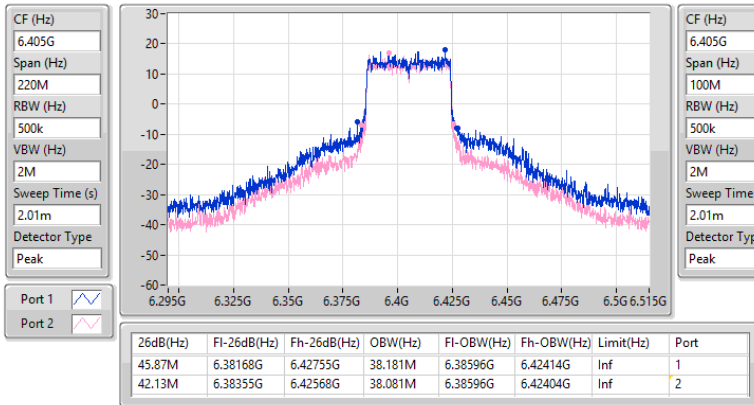

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6565MHz

16/08/2024

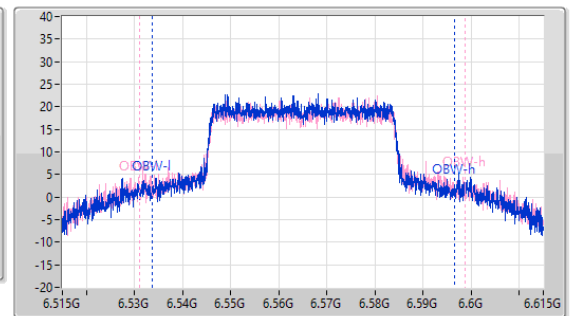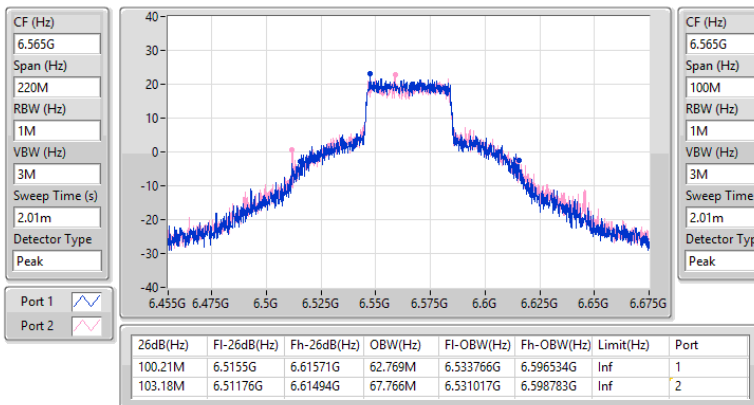


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6685MHz

16/08/2024

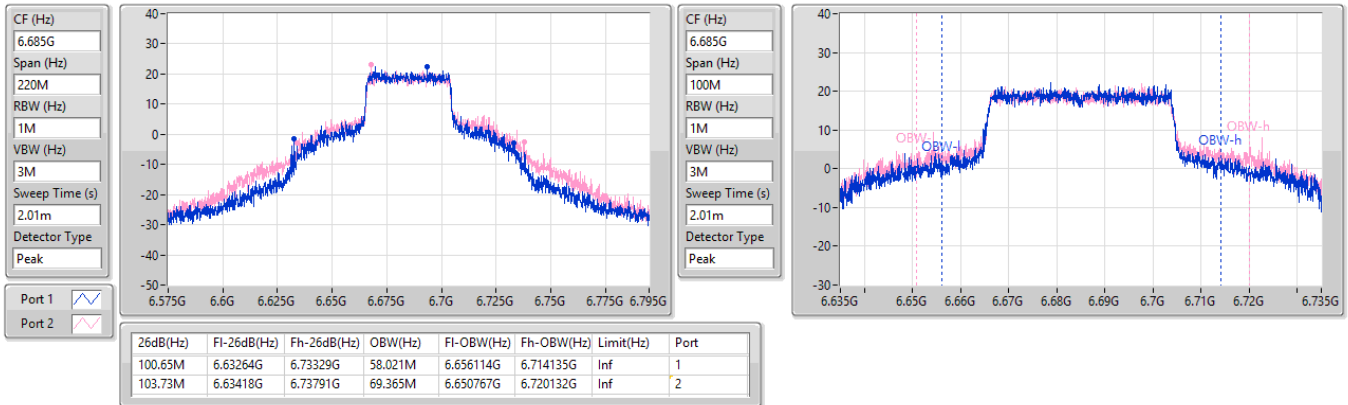
6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6845MHz

16/08/2024


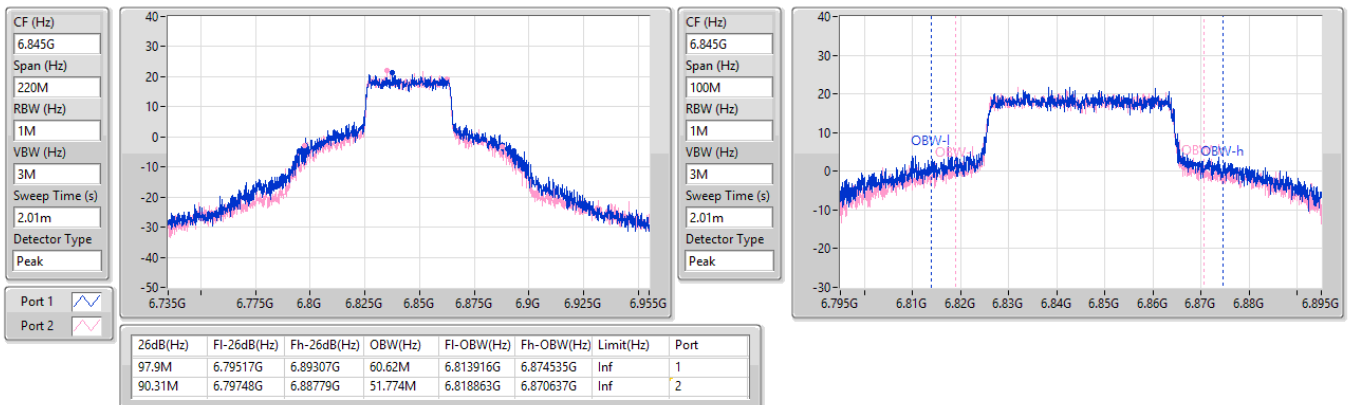


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

6145MHz

16/08/2024

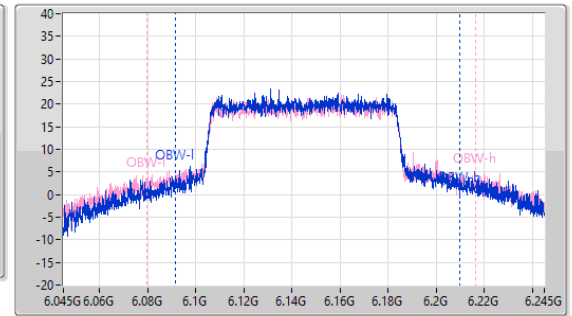
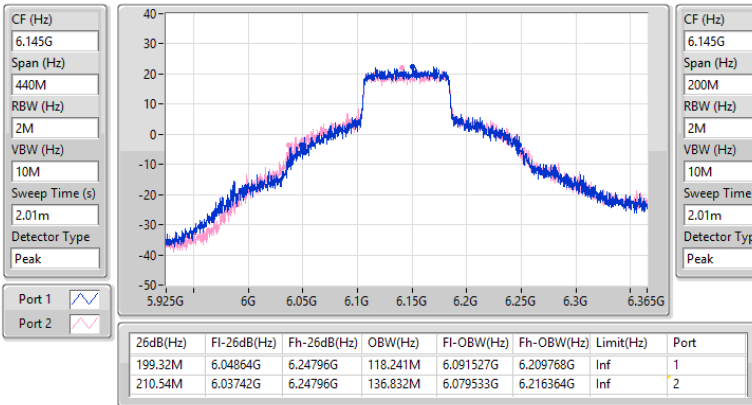


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

6225MHz

16/08/2024

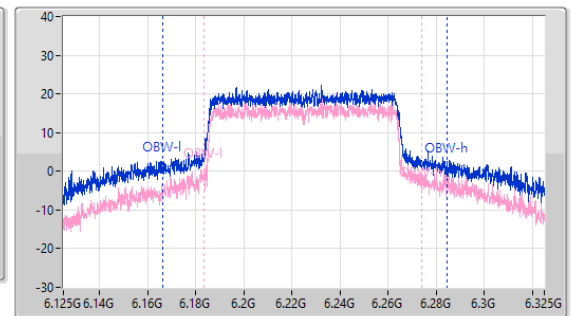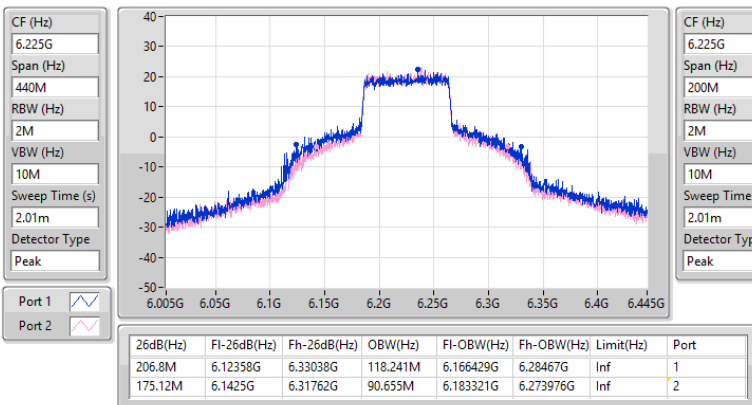


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

6385MHz

16/08/2024

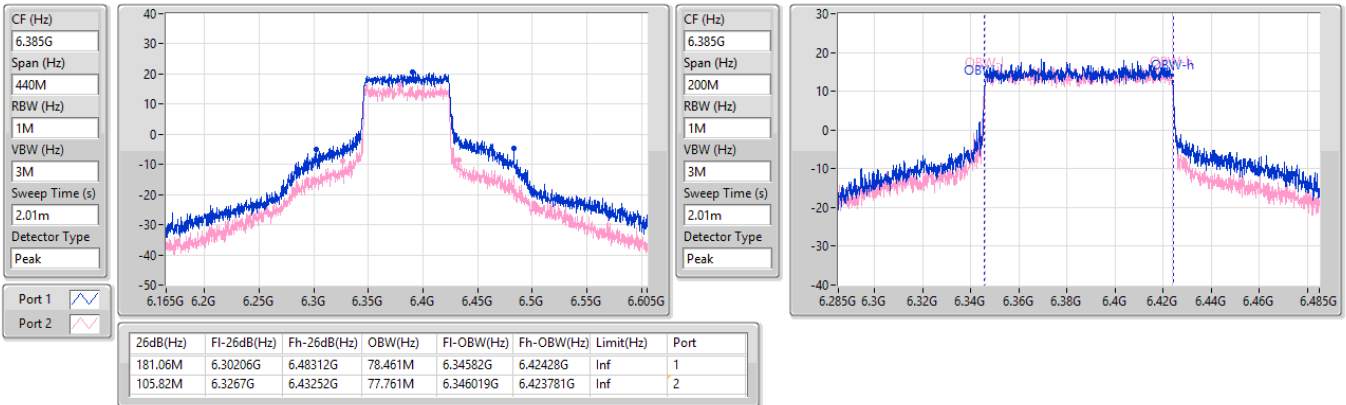


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW



6625MHz

16/08/2024


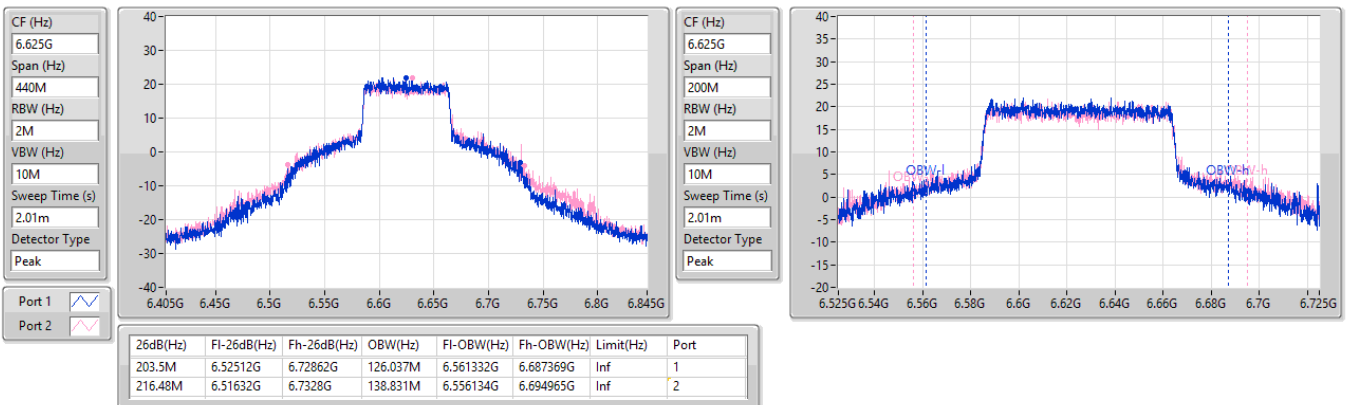


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6705MHz

16/08/2024

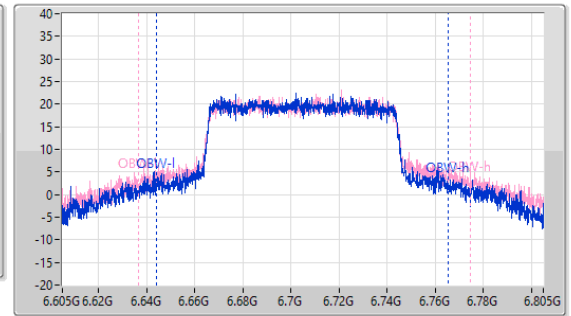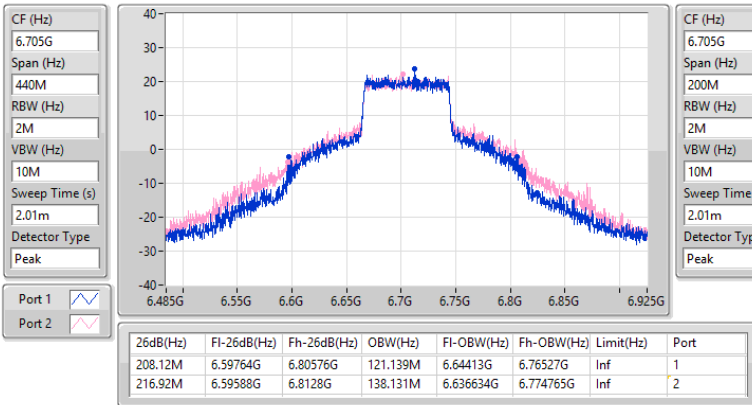

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6785MHz

16/08/2024

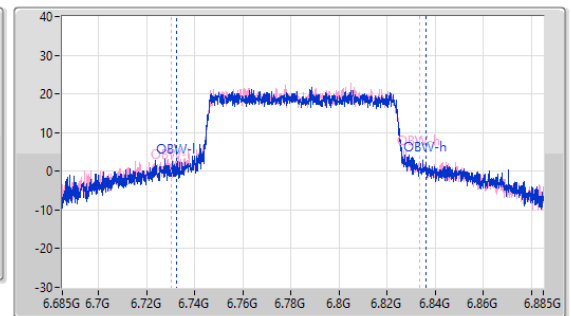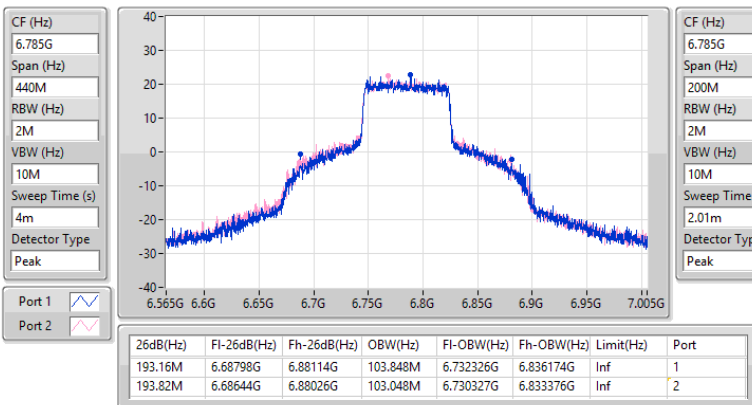


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
6185MHz

16/08/2024


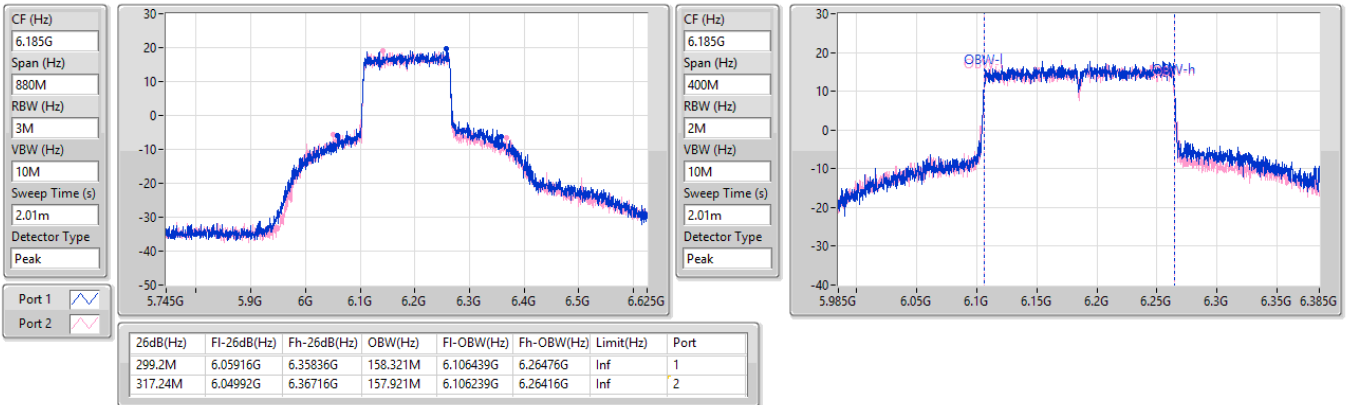

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
6345MHz

16/08/2024


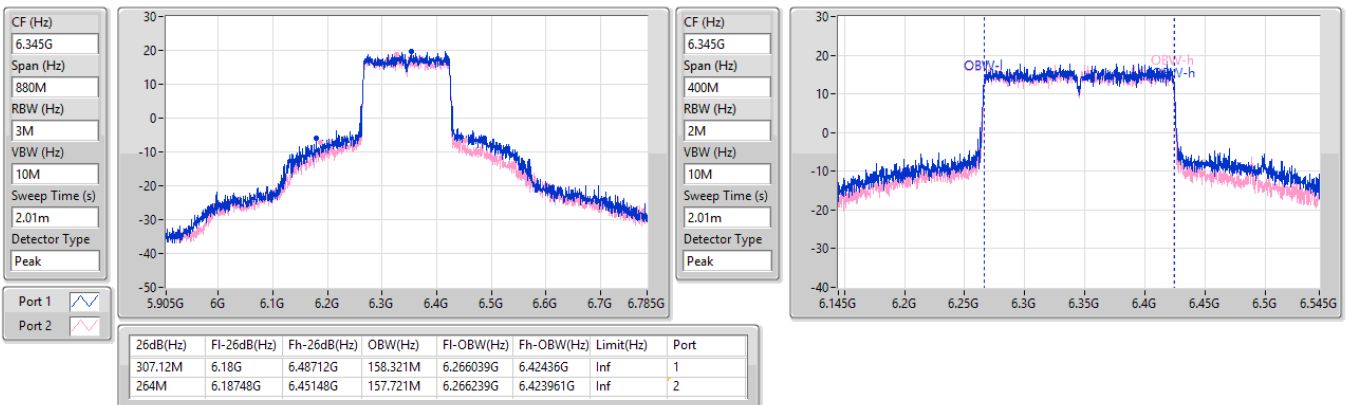


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
6665MHz

16/08/2024

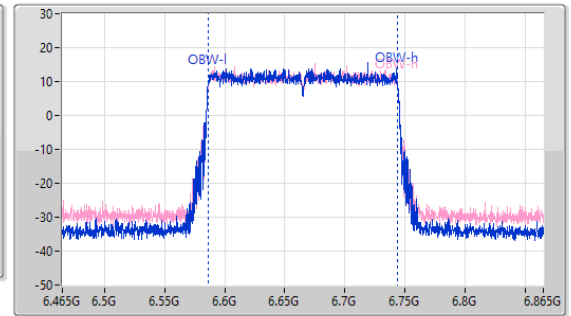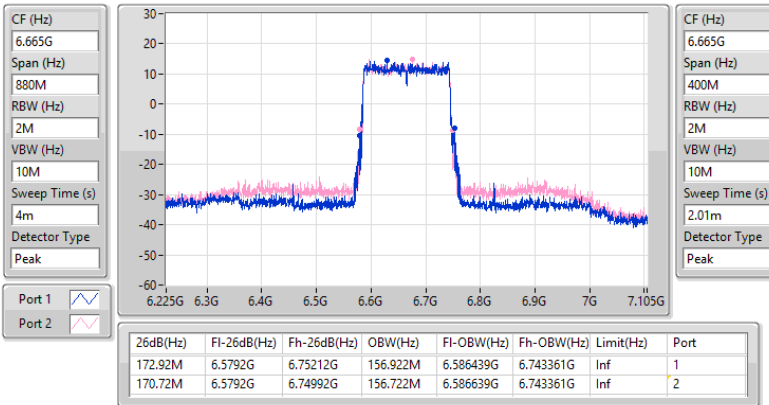

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX
EBW
6265MHz

16/08/2024

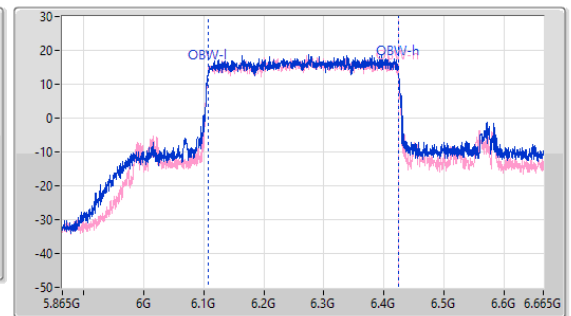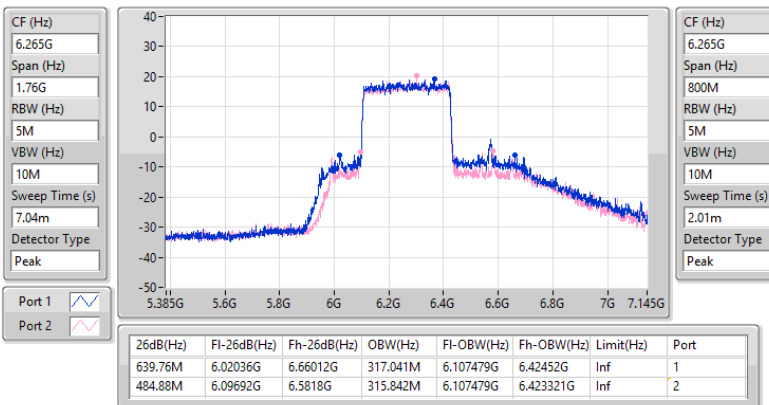


5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
6115MHz

16/08/2024


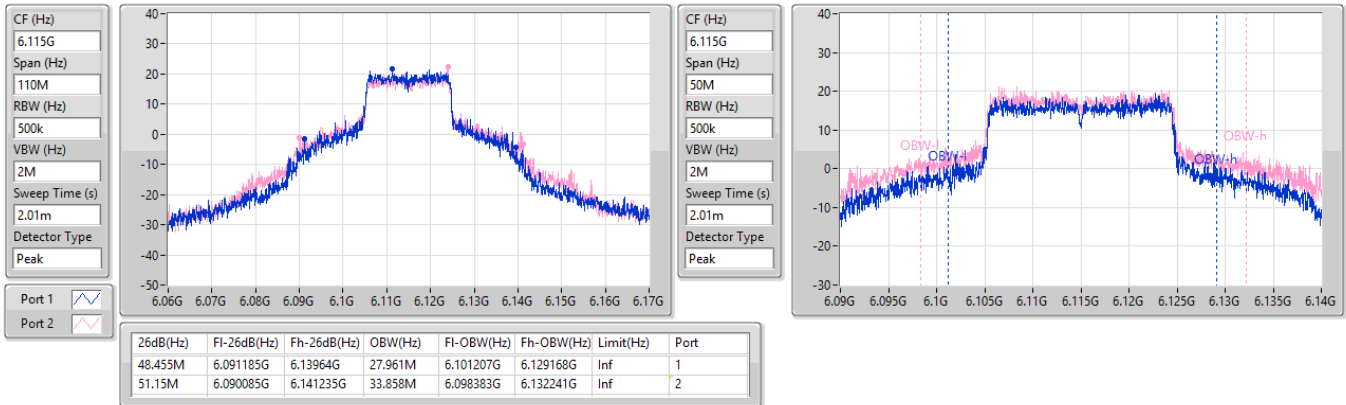

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
6195MHz

16/08/2024


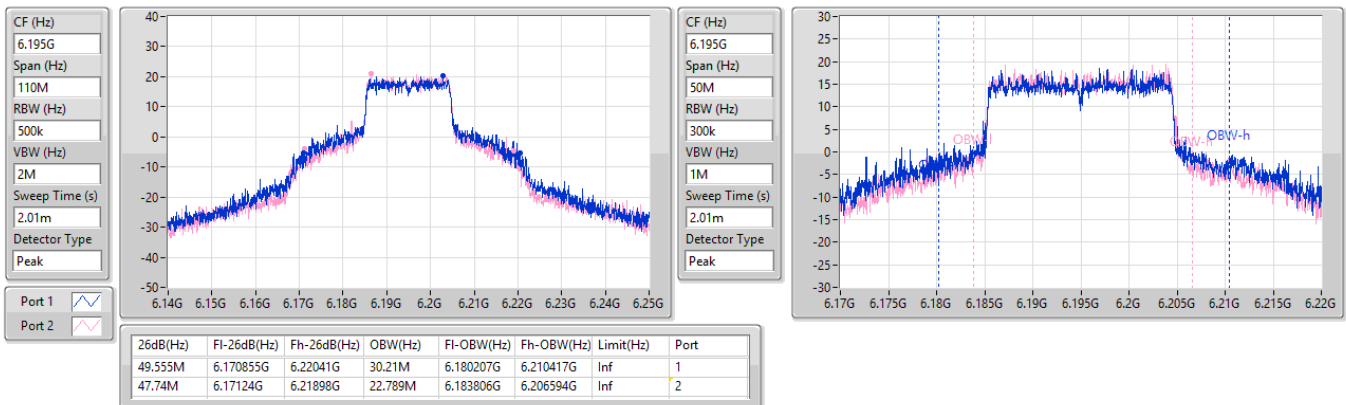


5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
6415MHz

16/08/2024

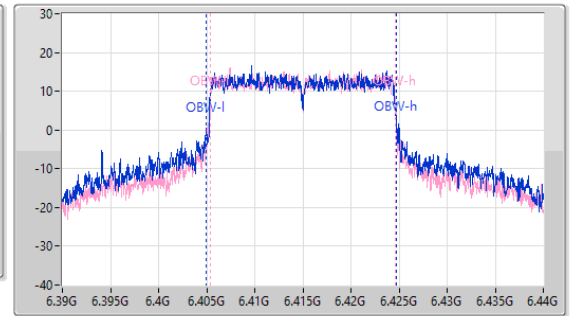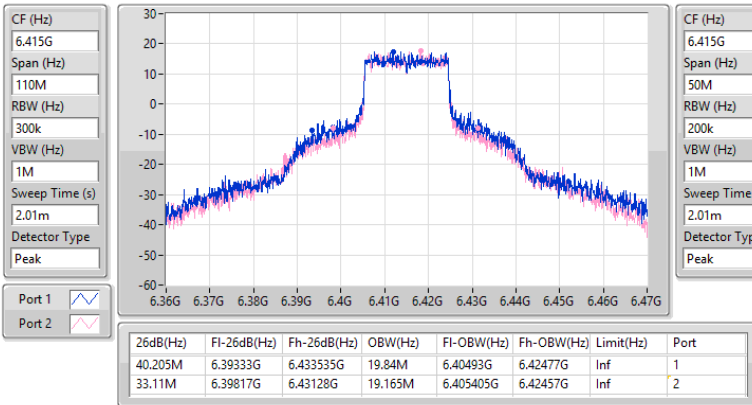

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
6535MHz

16/08/2024

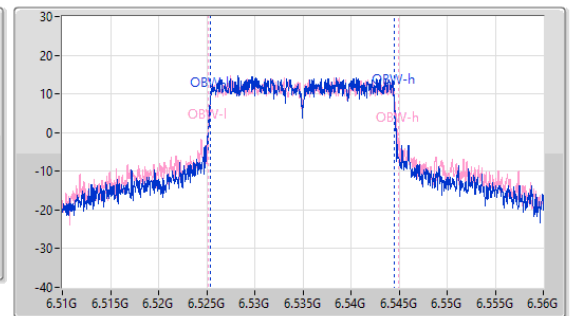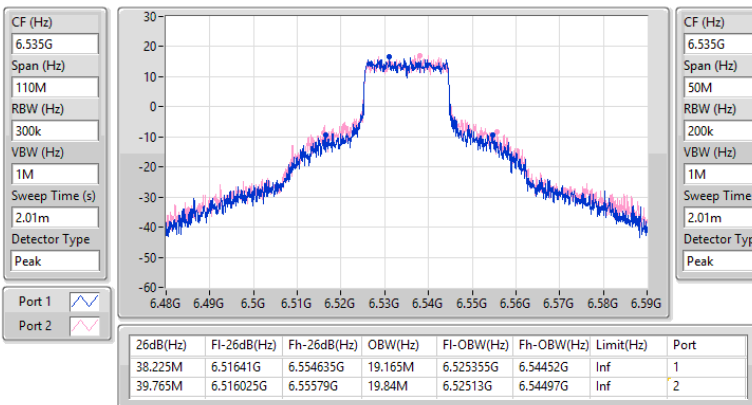


6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
6695MHz

16/08/2024


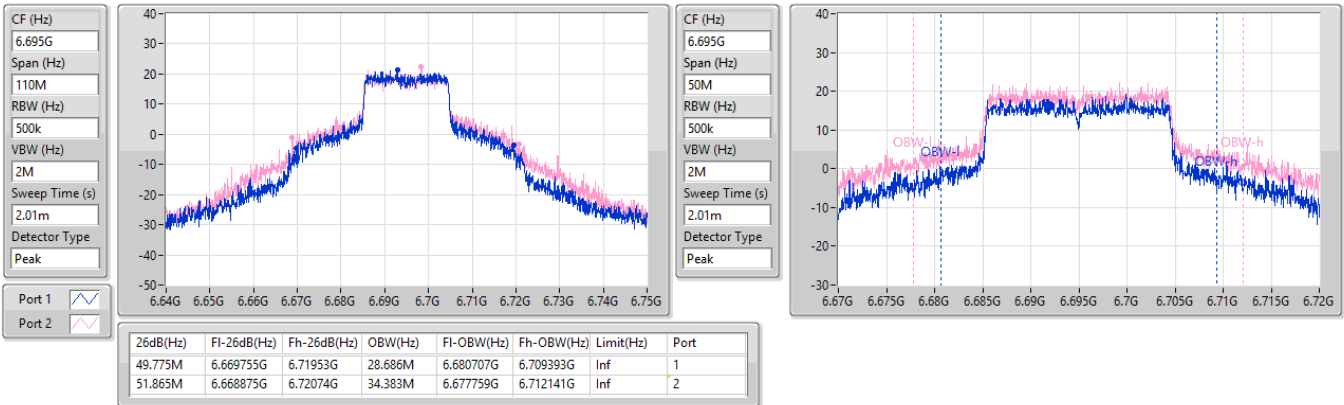

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX
EBW
6855MHz

16/08/2024


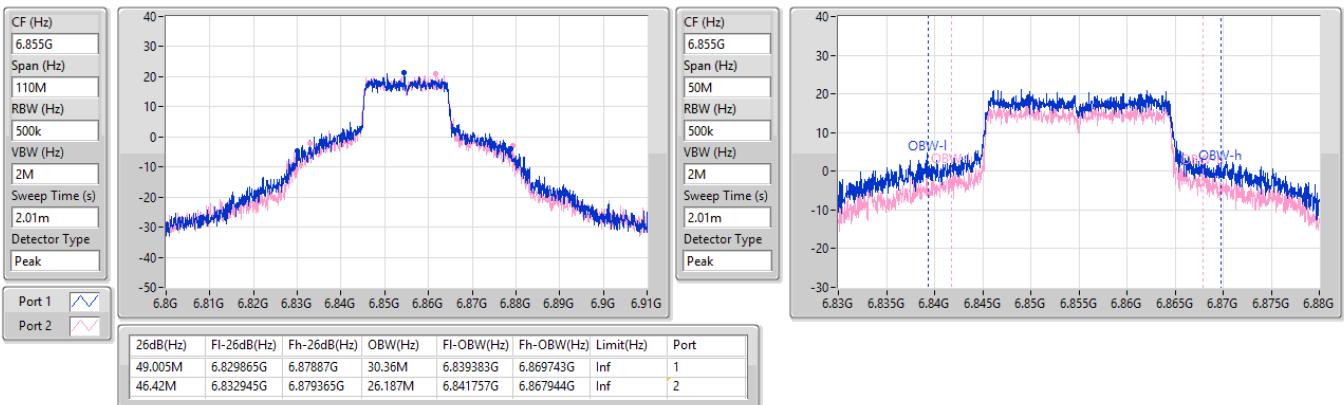


5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX
EBW
6125MHz

16/08/2024

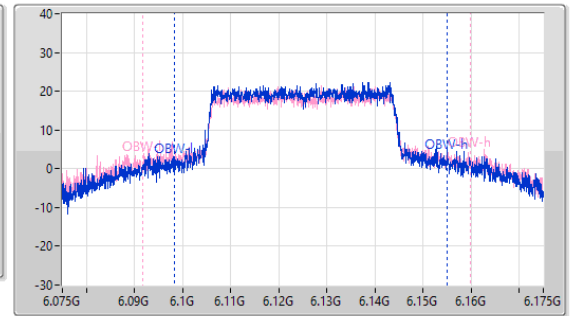
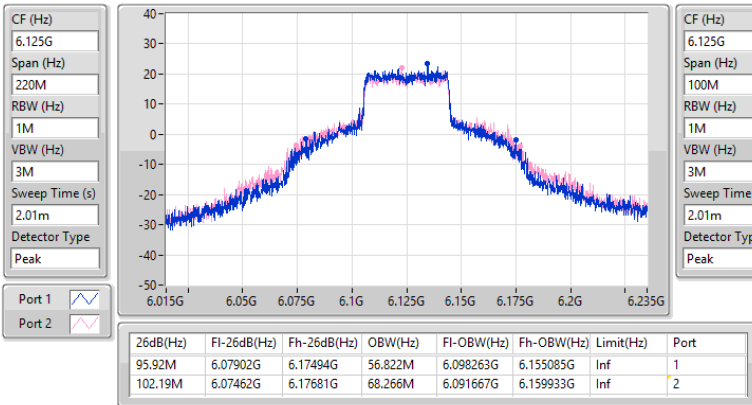

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX
EBW
6205MHz

16/08/2024

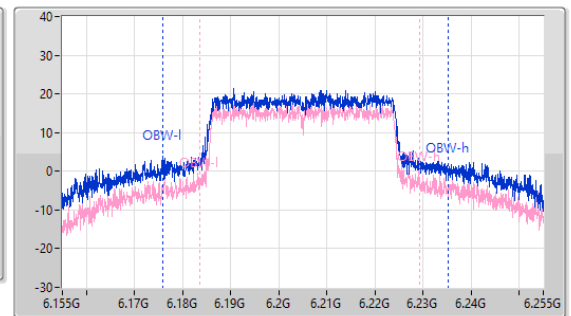
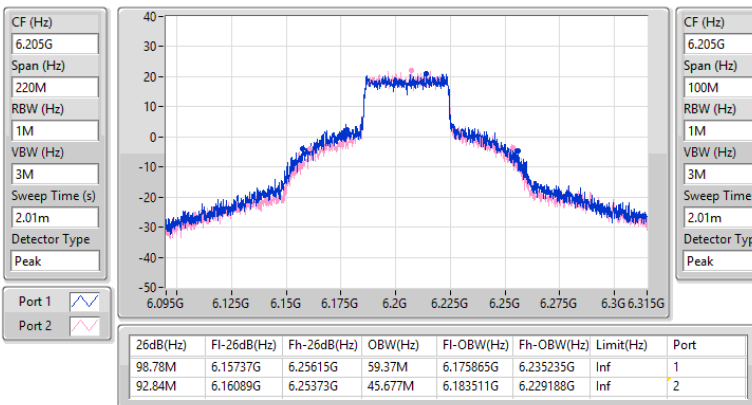


5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX
EBW
6405MHz

16/08/2024

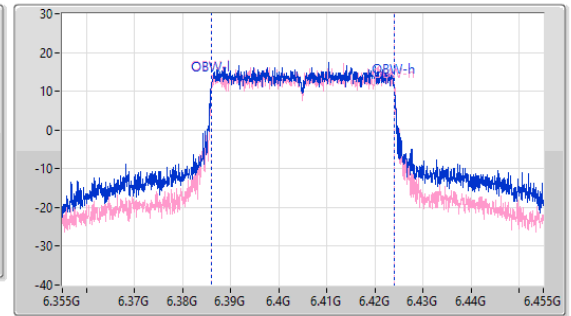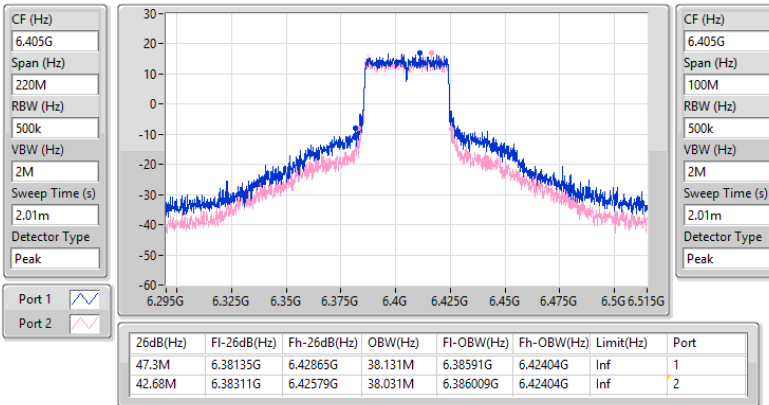
6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX
EBW
6565MHz

16/08/2024

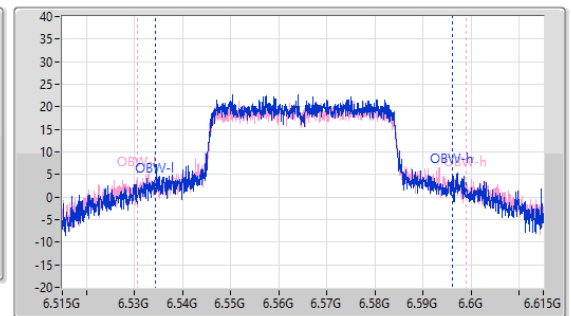
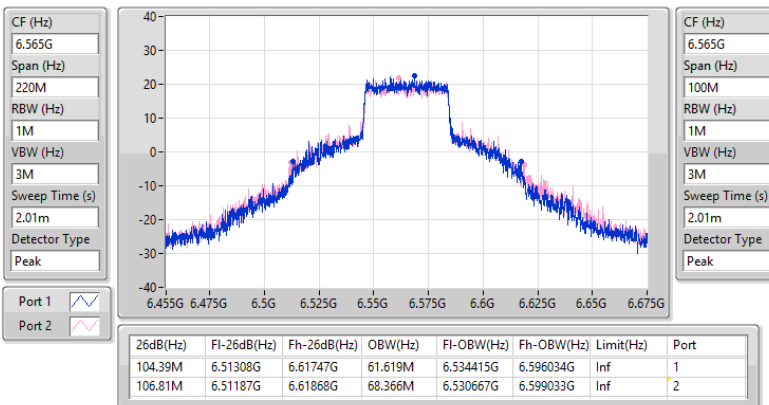


6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW

6685MHz

16/08/2024

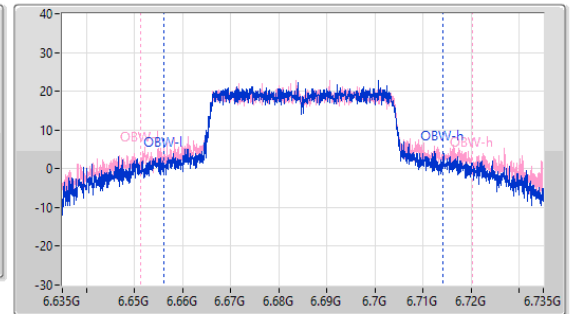
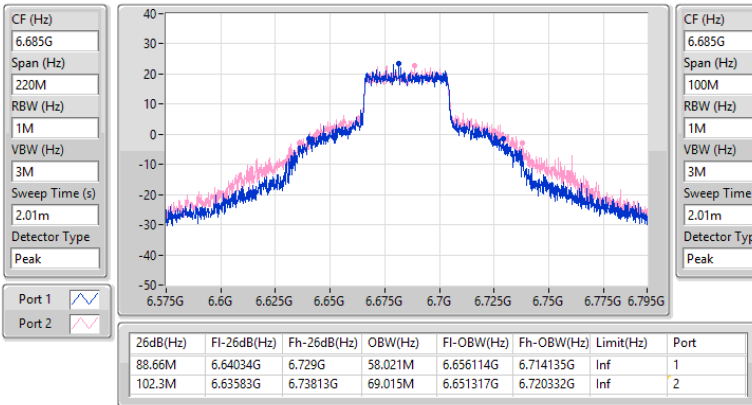


6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW



6845MHz

16/08/2024

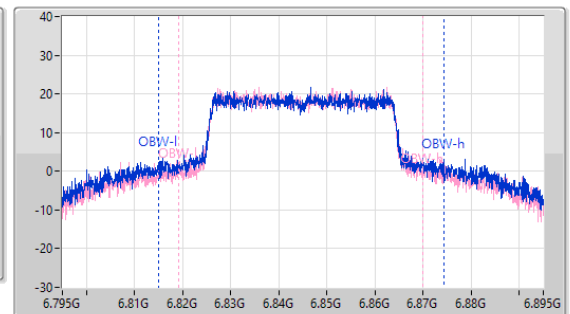
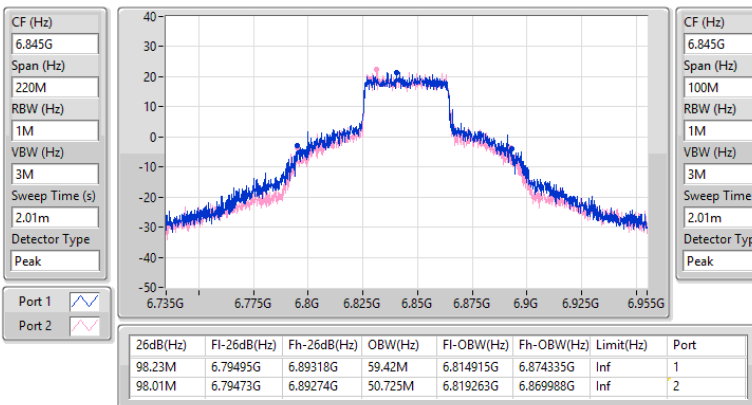


5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX
EBW
6145MHz

16/08/2024

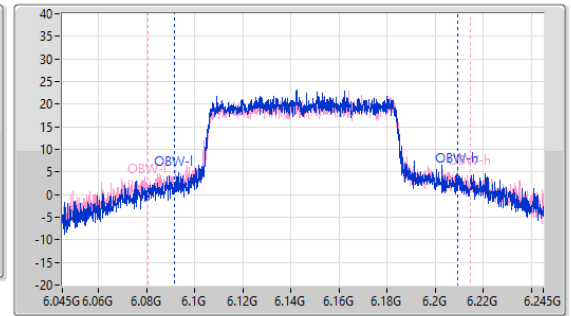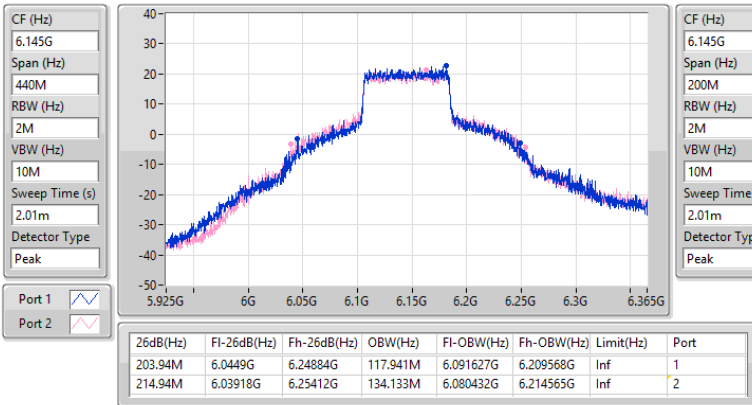
5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX
EBW
6225MHz

16/08/2024

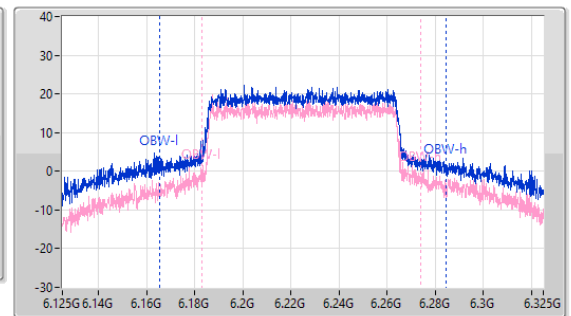
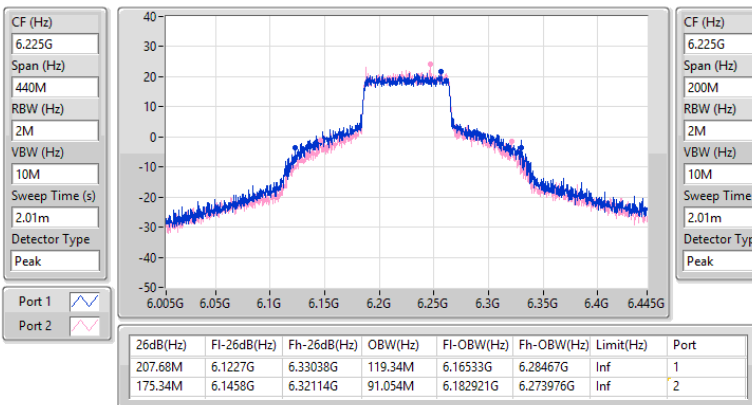


5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW

6385MHz

16/08/2024

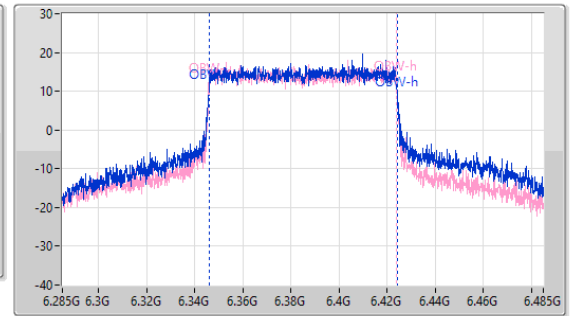
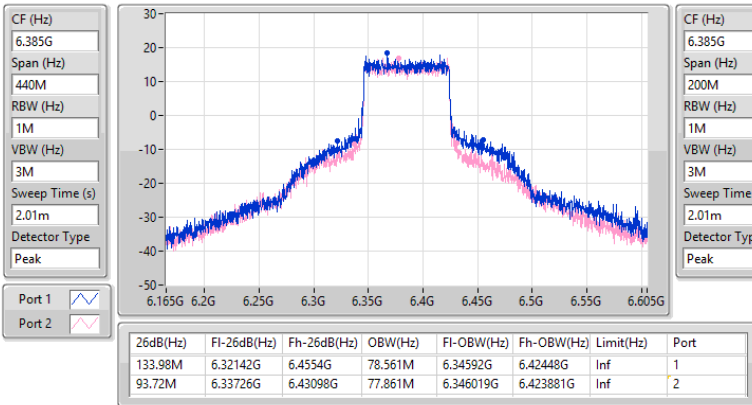


6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW



6625MHz

16/08/2024

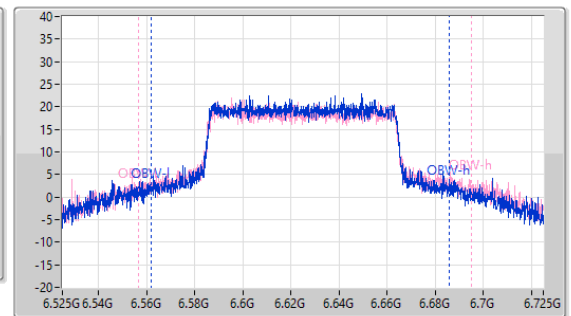
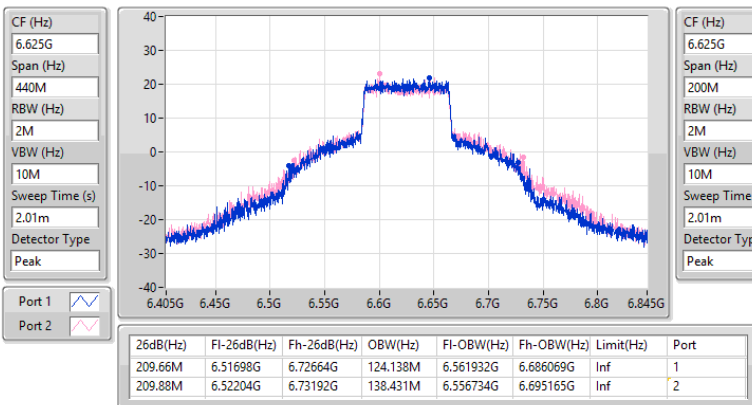


6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX
EBW
6705MHz

16/08/2024

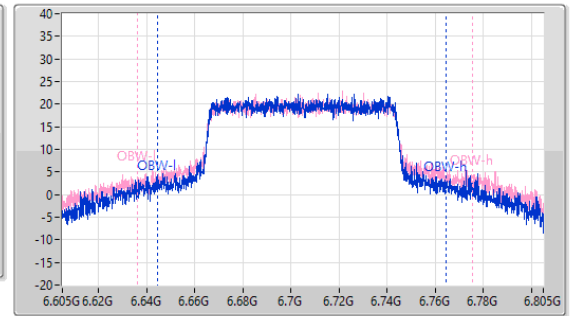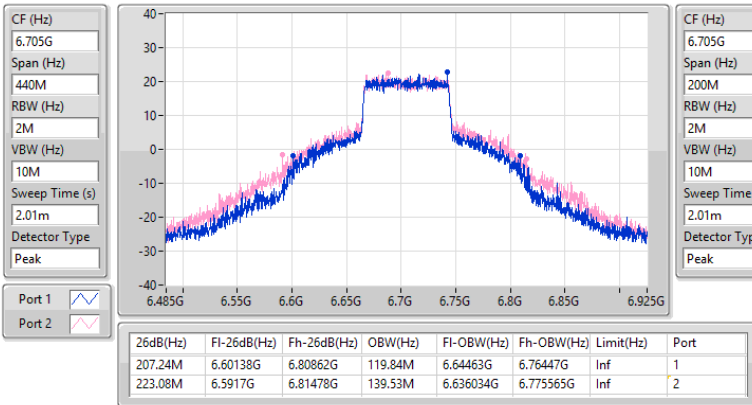
6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX
EBW
6785MHz

16/08/2024

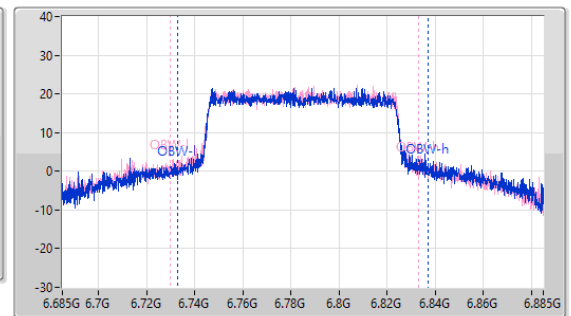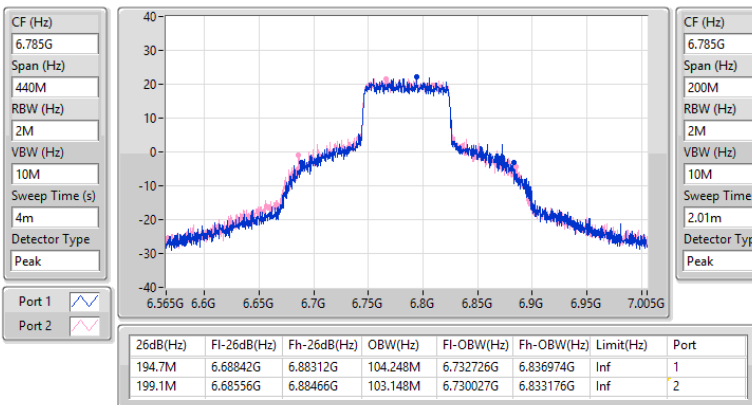


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

EBW

6185MHz

16/08/2024

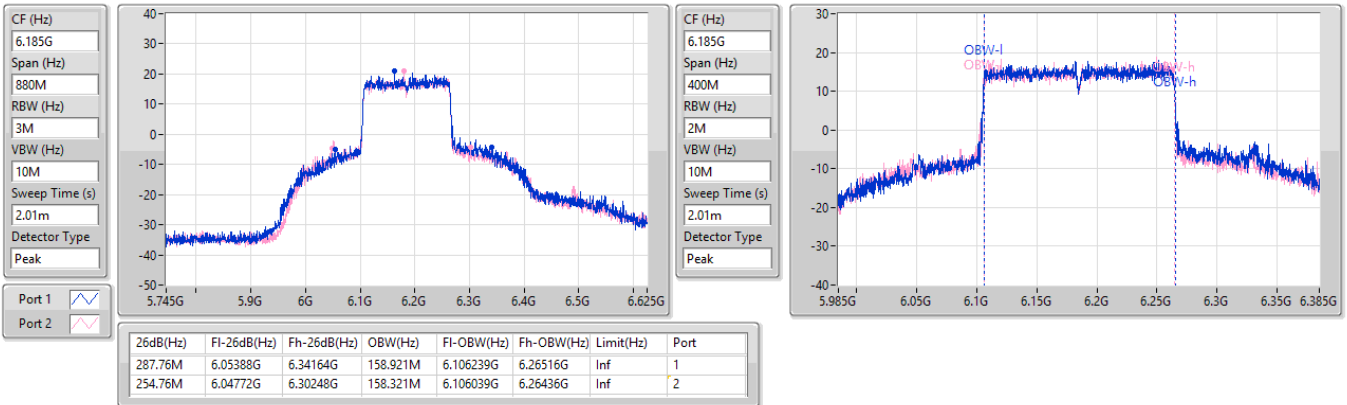


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

EBW



6345MHz

16/08/2024


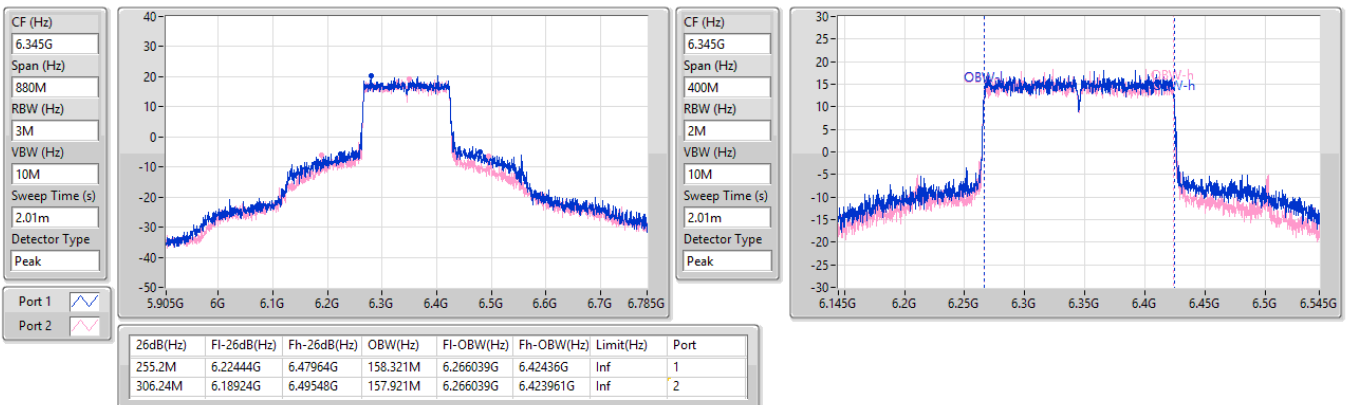


6.525-6.875GHz_802.11be EHT160_Nss2,(MCS0)_2TX
EBW
6665MHz

16/08/2024

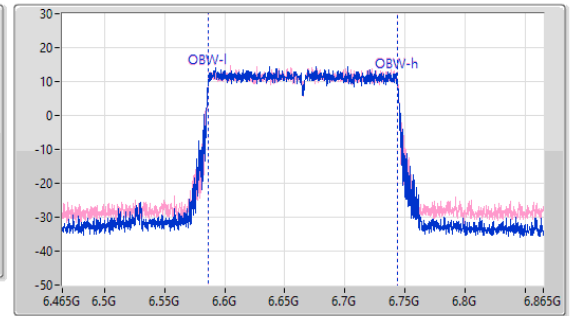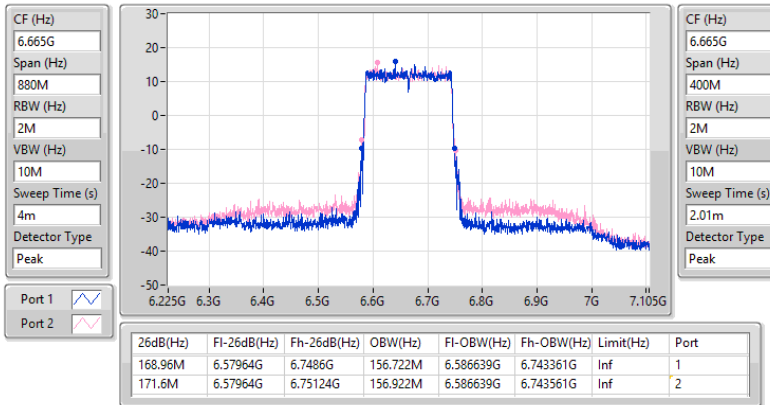
5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0)_2TX
EBW
6265MHz

16/08/2024

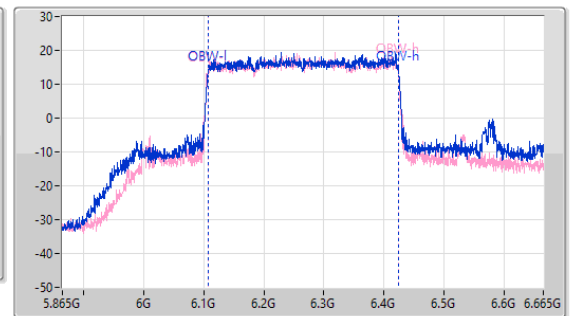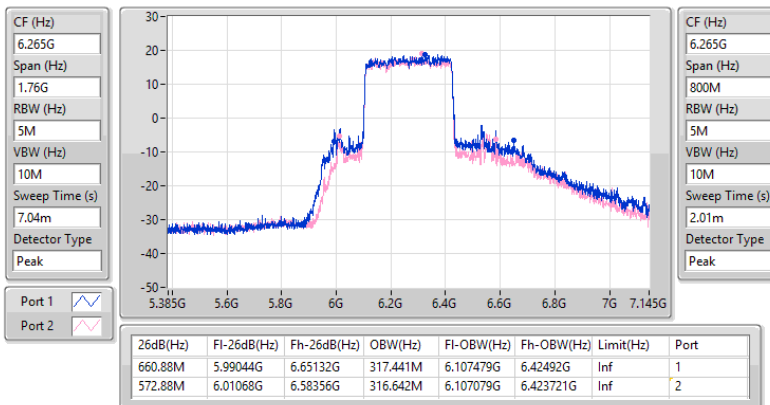

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	30.75	1.18850	33.75	2.37137
802.11be EHT20_Nss2,(MCS0)_2TX	30.90	1.23027	33.90	2.45471
802.11be EHT20-BF_Nss1,(MCS0)_2TX	29.88	0.97275	35.89	3.88150
802.11be EHT40_Nss1,(MCS0)_2TX	30.99	1.25603	33.99	2.50611
802.11be EHT40_Nss2,(MCS0)_2TX	30.92	1.23595	33.92	2.46604
802.11be EHT40-BF_Nss1,(MCS0)_2TX	29.82	0.95940	35.83	3.82825
802.11be EHT80_Nss1,(MCS0)_2TX	30.96	1.24738	33.96	2.48886
802.11be EHT80_Nss2,(MCS0)_2TX	30.88	1.22462	33.88	2.44343
802.11be EHT80-BF_Nss1,(MCS0)_2TX	29.92	0.98175	35.93	3.91742
802.11be EHT160_Nss1,(MCS0)_2TX	29.01	0.79616	32.01	1.58855
802.11be EHT160_Nss2,(MCS0)_2TX	29.05	0.80353	32.05	1.60325
802.11be EHT160-BF_Nss1,(MCS0)_2TX	29.01	0.79616	35.02	3.17687
802.11be EHT320_Nss1,(MCS0)_2TX	28.18	0.65766	31.18	1.31220
802.11be EHT320_Nss2,(MCS0)_2TX	28.39	0.69024	31.39	1.37721
802.11be EHT320-BF_Nss1,(MCS0)_2TX	28.18	0.65766	34.19	2.62422
6.525-6.875GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	31.20	1.31826	34.20	2.63027
802.11be EHT20_Nss2,(MCS0)_2TX	31.19	1.31522	34.19	2.62422
802.11be EHT20-BF_Nss1,(MCS0)_2TX	29.91	0.97949	35.92	3.90841
802.11be EHT40_Nss1,(MCS0)_2TX	31.13	1.29718	34.13	2.58821
802.11be EHT40_Nss2,(MCS0)_2TX	31.23	1.32739	34.23	2.64850
802.11be EHT40-BF_Nss1,(MCS0)_2TX	29.69	0.93111	35.70	3.71535
802.11be EHT80_Nss1,(MCS0)_2TX	31.31	1.35207	34.31	2.69774
802.11be EHT80_Nss2,(MCS0)_2TX	31.33	1.35831	34.33	2.71019
802.11be EHT80-BF_Nss1,(MCS0)_2TX	29.80	0.95499	35.81	3.81066
802.11be EHT160_Nss1,(MCS0)_2TX	25.61	0.36392	28.61	0.72611
802.11be EHT160_Nss2,(MCS0)_2TX	25.82	0.38194	28.82	0.76208
802.11be EHT160-BF_Nss1,(MCS0)_2TX	25.61	0.36392	31.62	1.45211

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6115MHz	Pass	3.00	28.24	27.17	30.75	33.75	36.00
6195MHz	Pass	3.00	27.15	27.50	30.34	33.34	36.00
6415MHz	Pass	3.00	26.62	26.48	29.56	32.56	36.00
6535MHz	Pass	3.00	26.19	26.15	29.18	32.18	36.00
6695MHz	Pass	3.00	28.23	28.14	31.20	34.20	36.00
6855MHz	Pass	3.00	27.62	27.46	30.55	33.55	36.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6125MHz	Pass	3.00	28.45	27.46	30.99	33.99	36.00
6205MHz	Pass	3.00	27.16	27.59	30.39	33.39	36.00
6405MHz	Pass	3.00	26.29	25.56	28.95	31.95	36.00
6565MHz	Pass	3.00	28.37	27.76	31.09	34.09	36.00
6685MHz	Pass	3.00	28.20	28.03	31.13	34.13	36.00
6845MHz	Pass	3.00	27.62	27.47	30.56	33.56	36.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6145MHz	Pass	3.00	28.29	27.59	30.96	33.96	36.00
6225MHz	Pass	3.00	27.23	27.57	30.41	33.41	36.00
6385MHz	Pass	3.00	26.53	25.85	29.21	32.21	36.00
6625MHz	Pass	3.00	28.15	27.52	30.86	33.86	36.00
6705MHz	Pass	3.00	28.31	28.29	31.31	34.31	36.00
6785MHz	Pass	3.00	27.37	27.65	30.52	33.52	36.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6185MHz	Pass	3.00	26.05	25.69	28.88	31.88	36.00
6345MHz	Pass	3.00	26.32	25.66	29.01	32.01	36.00
6665MHz	Pass	3.00	22.48	22.72	25.61	28.61	36.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6265MHz	Pass	3.00	25.42	24.90	28.18	31.18	36.00
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
6115MHz	Pass	3.00	28.37	27.36	30.90	33.90	36.00
6195MHz	Pass	3.00	27.12	27.49	30.32	33.32	36.00
6415MHz	Pass	3.00	26.86	26.58	29.73	32.73	36.00
6535MHz	Pass	3.00	26.20	26.04	29.13	32.13	36.00
6695MHz	Pass	3.00	28.20	28.16	31.19	34.19	36.00
6855MHz	Pass	3.00	27.59	27.45	30.53	33.53	36.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
6125MHz	Pass	3.00	28.33	27.45	30.92	33.92	36.00
6205MHz	Pass	3.00	27.11	27.64	30.39	33.39	36.00
6405MHz	Pass	3.00	26.35	25.64	29.02	32.02	36.00
6565MHz	Pass	3.00	28.42	27.84	31.15	34.15	36.00
6685MHz	Pass	3.00	28.24	28.19	31.23	34.23	36.00
6845MHz	Pass	3.00	27.59	27.53	30.57	33.57	36.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
6145MHz	Pass	3.00	28.16	27.55	30.88	33.88	36.00
6225MHz	Pass	3.00	27.34	27.68	30.52	33.52	36.00
6385MHz	Pass	3.00	26.58	25.94	29.28	32.28	36.00
6625MHz	Pass	3.00	28.15	27.49	30.84	33.84	36.00
6705MHz	Pass	3.00	28.30	28.34	31.33	34.33	36.00
6785MHz	Pass	3.00	27.38	27.67	30.54	33.54	36.00
802.11be EHT160_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
6185MHz	Pass	3.00	26.04	25.81	28.94	31.94	36.00
6345MHz	Pass	3.00	26.28	25.78	29.05	32.05	36.00
6665MHz	Pass	3.00	22.69	22.92	25.82	28.82	36.00
802.11be EHT320_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
6265MHz	Pass	3.00	25.61	25.13	28.39	31.39	36.00
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6115MHz	Pass	6.01	26.82	26.88	29.86	35.87	36.00
6195MHz	Pass	6.01	26.98	26.76	29.88	35.89	36.00
6415MHz	Pass	6.01	26.62	26.48	29.56	35.57	36.00
6535MHz	Pass	6.01	26.19	26.15	29.18	35.19	36.00
6695MHz	Pass	6.01	26.77	27.03	29.91	35.92	36.00
6855MHz	Pass	6.01	26.99	26.44	29.73	35.74	36.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6125MHz	Pass	6.01	26.65	26.78	29.73	35.74	36.00
6205MHz	Pass	6.01	27.05	26.56	29.82	35.83	36.00
6405MHz	Pass	6.01	26.29	25.56	28.95	34.96	36.00
6565MHz	Pass	6.01	26.70	26.39	29.56	35.57	36.00
6685MHz	Pass	6.01	26.47	26.88	29.69	35.70	36.00
6845MHz	Pass	6.01	26.90	26.24	29.59	35.60	36.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6145MHz	Pass	6.01	26.84	26.56	29.71	35.72	36.00
6225MHz	Pass	6.01	26.95	26.86	29.92	35.93	36.00
6385MHz	Pass	6.01	26.53	25.85	29.21	35.22	36.00
6625MHz	Pass	6.01	26.69	26.67	29.69	35.70	36.00
6705MHz	Pass	6.01	26.58	26.83	29.72	35.73	36.00
6785MHz	Pass	6.01	26.75	26.83	29.80	35.81	36.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6185MHz	Pass	6.01	26.05	25.69	28.88	34.89	36.00
6345MHz	Pass	6.01	26.32	25.66	29.01	35.02	36.00
6665MHz	Pass	6.01	22.48	22.72	25.61	31.62	36.00
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6265MHz	Pass	6.01	25.42	24.90	28.18	34.19	36.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	16.78	22.79
802.11be EHT20_Nss2,(MCS0)_2TX	17.02	20.02
802.11be EHT40_Nss1,(MCS0)_2TX	14.13	20.14
802.11be EHT40_Nss2,(MCS0)_2TX	14.01	17.01
802.11be EHT80_Nss1,(MCS0)_2TX	10.93	16.94
802.11be EHT80_Nss2,(MCS0)_2TX	10.96	13.96
802.11be EHT160_Nss1,(MCS0)_2TX	6.31	12.32
802.11be EHT160_Nss2,(MCS0)_2TX	6.45	9.45
802.11be EHT320_Nss1,(MCS0)_2TX	2.93	8.94
802.11be EHT320_Nss2,(MCS0)_2TX	3.07	6.07
6.525-6.875GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	16.83	22.84
802.11be EHT20_Nss2,(MCS0)_2TX	17.00	20.00
802.11be EHT40_Nss1,(MCS0)_2TX	14.16	20.17
802.11be EHT40_Nss2,(MCS0)_2TX	14.12	17.12
802.11be EHT80_Nss1,(MCS0)_2TX	10.99	17.00
802.11be EHT80_Nss2,(MCS0)_2TX	11.03	14.03
802.11be EHT160_Nss1,(MCS0)_2TX	2.85	8.86
802.11be EHT160_Nss2,(MCS0)_2TX	3.07	6.07

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6115MHz	Pass	6.01	14.41	13.12	16.78	22.79	23.00
6195MHz	Pass	6.01	13.18	13.66	16.37	22.38	23.00
6415MHz	Pass	6.01	12.73	12.62	15.62	21.63	23.00
6535MHz	Pass	6.01	12.21	12.10	15.09	21.10	23.00
6695MHz	Pass	6.01	13.96	13.78	16.83	22.84	23.00
6855MHz	Pass	6.01	13.30	13.20	16.20	22.21	23.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6125MHz	Pass	6.01	11.70	10.61	14.13	20.14	23.00
6205MHz	Pass	6.01	10.42	10.95	13.67	19.68	23.00
6405MHz	Pass	6.01	9.62	8.92	12.22	18.23	23.00
6565MHz	Pass	6.01	11.61	10.87	14.16	20.17	23.00
6685MHz	Pass	6.01	11.23	10.92	14.03	20.04	23.00
6845MHz	Pass	6.01	10.59	10.45	13.51	19.52	23.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6145MHz	Pass	6.01	8.34	7.58	10.93	16.94	23.00
6225MHz	Pass	6.01	7.41	7.75	10.54	16.55	23.00
6385MHz	Pass	6.01	6.58	5.96	9.15	15.16	23.00
6625MHz	Pass	6.01	7.95	7.25	10.58	16.59	23.00
6705MHz	Pass	6.01	8.20	7.92	10.99	17.00	23.00
6785MHz	Pass	6.01	7.45	7.58	10.49	16.50	23.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6185MHz	Pass	6.01	3.42	3.24	6.31	12.32	23.00
6345MHz	Pass	6.01	3.53	3.06	6.21	12.22	23.00
6665MHz	Pass	6.01	-0.07	-0.20	2.85	8.86	23.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6265MHz	Pass	6.01	0.26	-0.16	2.93	8.94	23.00
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
6115MHz	Pass	3.00	14.52	13.46	17.02	20.02	23.00
6195MHz	Pass	3.00	13.25	13.78	16.48	19.48	23.00
6415MHz	Pass	3.00	12.97	12.91	15.90	18.90	23.00
6535MHz	Pass	3.00	12.37	12.18	15.29	18.29	23.00
6695MHz	Pass	3.00	14.10	13.97	17.00	20.00	23.00
6855MHz	Pass	3.00	13.38	13.34	16.33	19.33	23.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
6125MHz	Pass	3.00	11.52	10.48	14.01	17.01	23.00
6205MHz	Pass	3.00	10.37	10.91	13.59	16.59	23.00
6405MHz	Pass	3.00	9.52	8.79	12.16	15.16	23.00
6565MHz	Pass	3.00	11.49	10.86	14.12	17.12	23.00
6685MHz	Pass	3.00	11.05	10.94	13.94	16.94	23.00
6845MHz	Pass	3.00	10.39	10.38	13.38	16.38	23.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
6145MHz	Pass	3.00	8.36	7.66	10.96	13.96	23.00
6225MHz	Pass	3.00	7.46	7.86	10.62	13.62	23.00
6385MHz	Pass	3.00	6.66	6.09	9.30	12.30	23.00
6625MHz	Pass	3.00	7.95	7.35	10.64	13.64	23.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6705MHz	Pass	3.00	8.14	8.03	11.03	14.03	23.00
6785MHz	Pass	3.00	7.39	7.70	10.53	13.53	23.00
802.11be EHT160_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
6185MHz	Pass	3.00	3.61	3.54	6.45	9.45	23.00
6345MHz	Pass	3.00	3.72	3.20	6.45	9.45	23.00
6665MHz	Pass	3.00	0.25	0.11	3.07	6.07	23.00
802.11be EHT320_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-
6265MHz	Pass	3.00	0.37	0.02	3.07	6.07	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6115MHz

16/08/2024

CF (Hz)
6.115G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
51.901

Detector Type
RMS

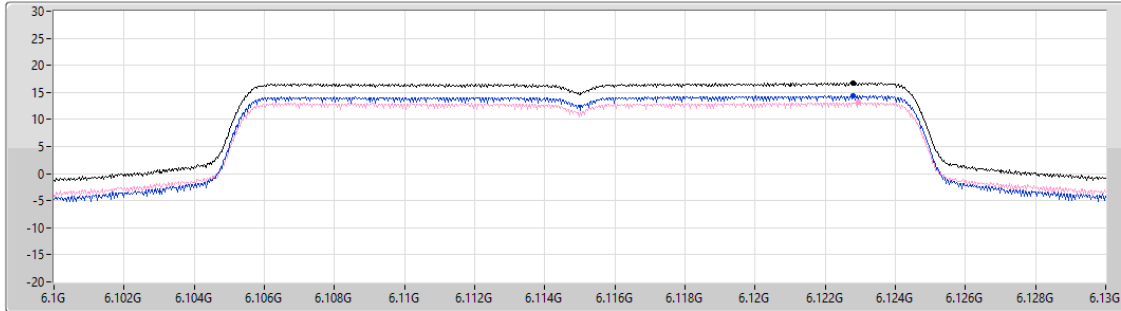

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
16.78	16.78	14.41	13.12

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6195MHz

16/08/2024

CF (Hz)
6.195G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
51.901

Detector Type
RMS

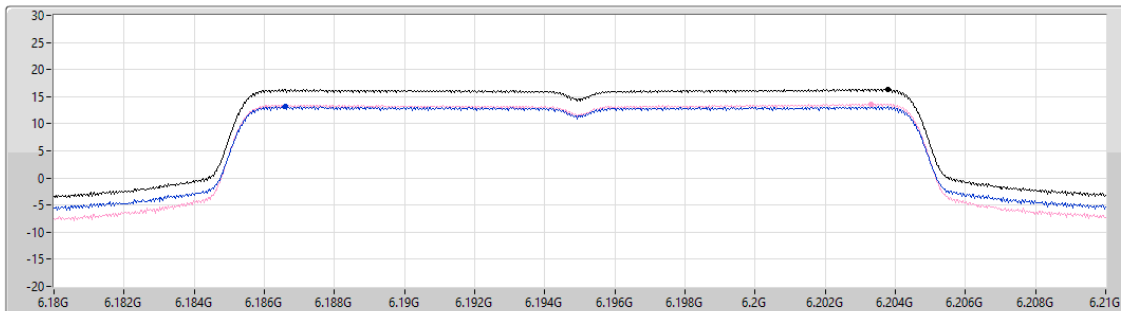

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
16.37	16.37	13.18	13.66


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6415MHz

16/08/2024

CF (Hz)
6.415G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
51.901
Detector Type
RMS

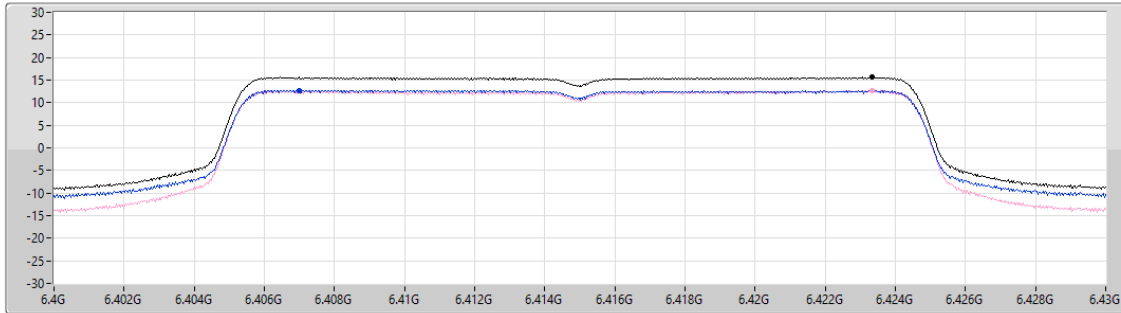

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.62	15.62	12.73	12.62

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6535MHz

16/08/2024

CF (Hz)
6.535G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
51.901
Detector Type
RMS

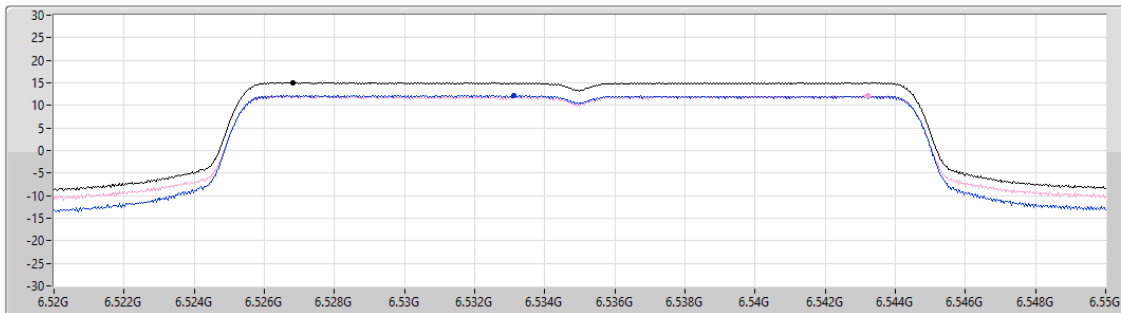

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.09	15.09	12.21	12.10

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6695MHz

16/08/2024

CF (Hz)
6.695G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
51.901
Detector Type
RMS

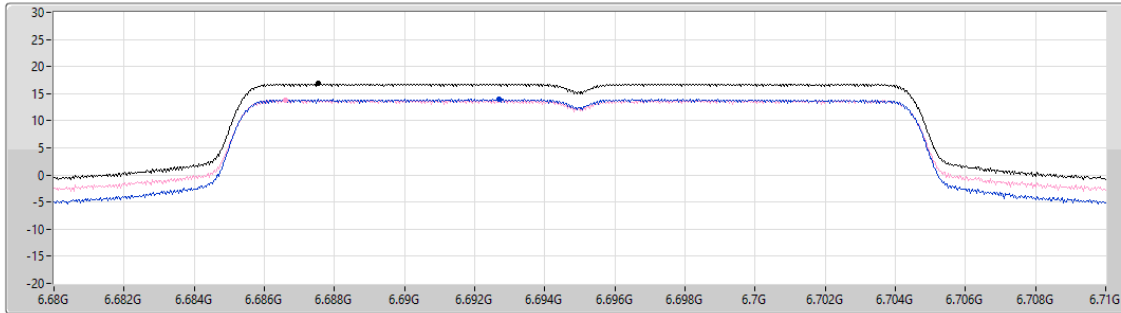

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.83	16.83	13.96	13.78

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6855MHz

16/08/2024

CF (Hz)
6.855G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
51.901
Detector Type
RMS

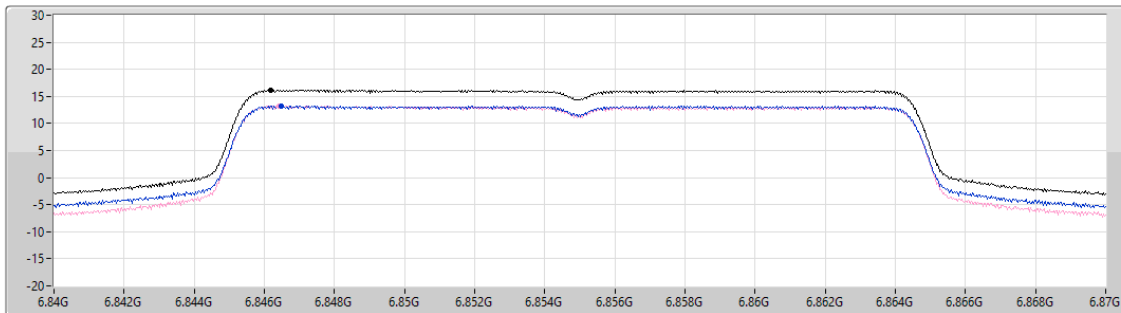

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.20	16.20	13.30	13.20

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6125MHz

16/08/2024

CF (Hz)
6.125G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.259
Detector Type
RMS

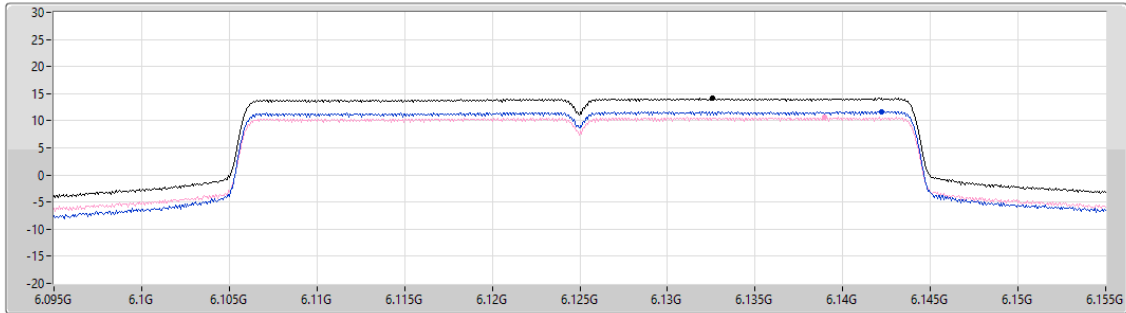

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.13	14.13	11.70	10.61

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6205MHz

16/08/2024

CF (Hz)
6.205G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.259
Detector Type
RMS

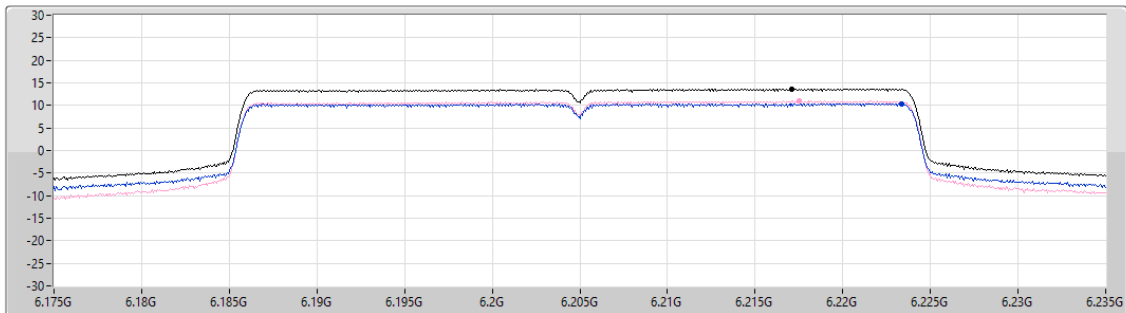

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.67	13.67	10.42	10.95

Sum
Port 1
Port 2

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6405MHz

16/08/2024

CF (Hz)
6.405G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.259

Detector Type
RMS

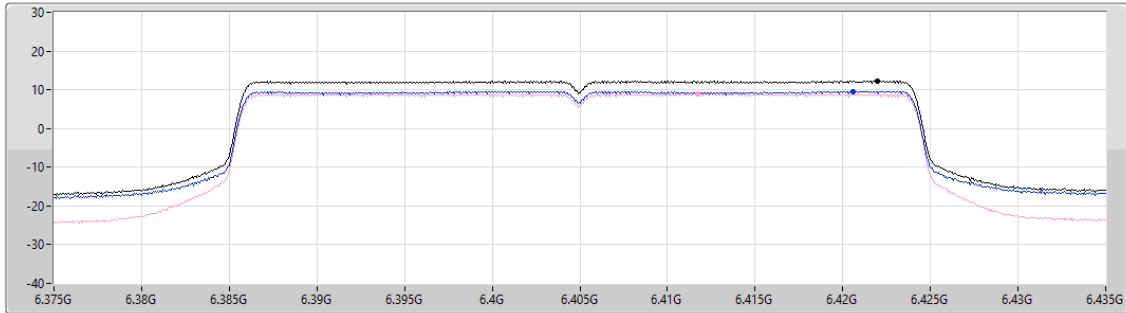

Sum (dBm/100kHz)	PD (dBm/100kHz)	Port 1 (dBm/100kHz)	Port 2 (dBm/100kHz)
12.22	12.22	9.62	8.92

Sum 

Port 1 

Port 2 

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6565MHz

16/08/2024

CF (Hz)
6.565G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.259

Detector Type
RMS

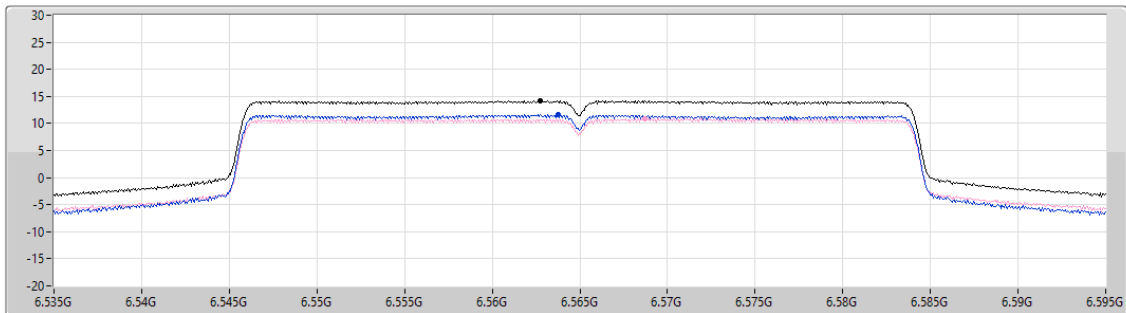

Sum (dBm/100kHz)	PD (dBm/100kHz)	Port 1 (dBm/100kHz)	Port 2 (dBm/100kHz)
14.16	14.16	11.61	10.87

Sum 

Port 1 


Port 2 

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6685MHz

16/08/2024

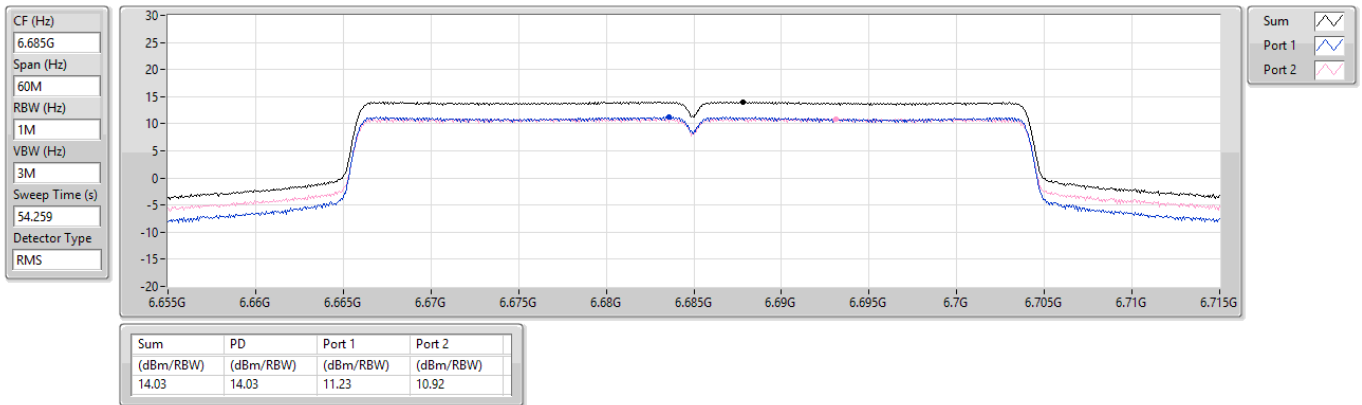


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6845MHz

16/08/2024

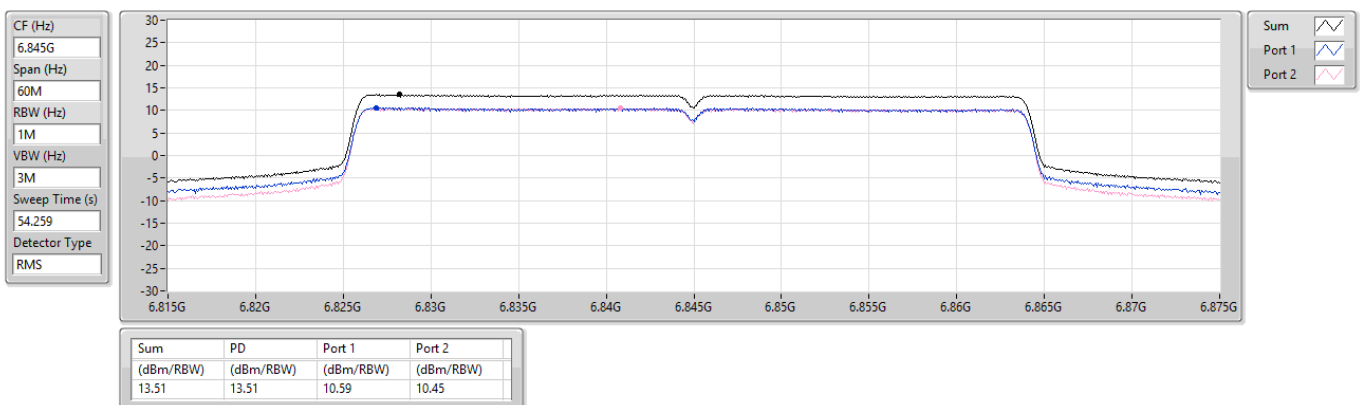


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6145MHz

16/08/2024

CF (Hz)
6.145G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.754
Detector Type
RMS

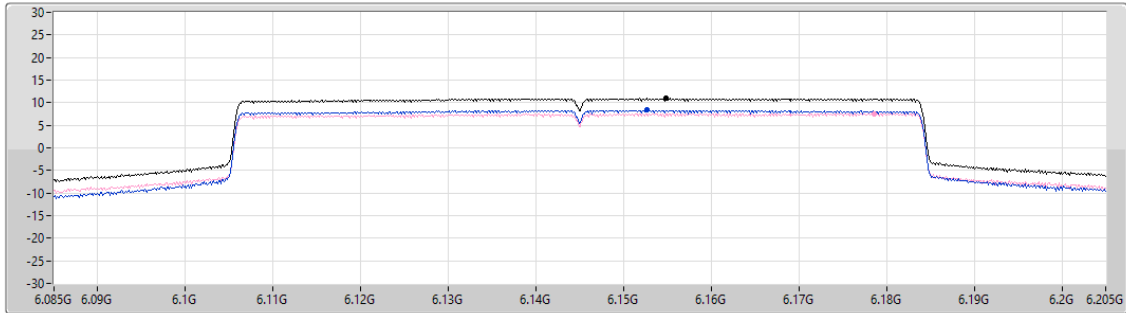

Sum (dBm/100kHz)	PD (dBm/100kHz)	Port 1 (dBm/100kHz)	Port 2 (dBm/100kHz)
10.93	10.93	8.34	7.58


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6225MHz

16/08/2024

CF (Hz)
6.225G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.754
Detector Type
RMS

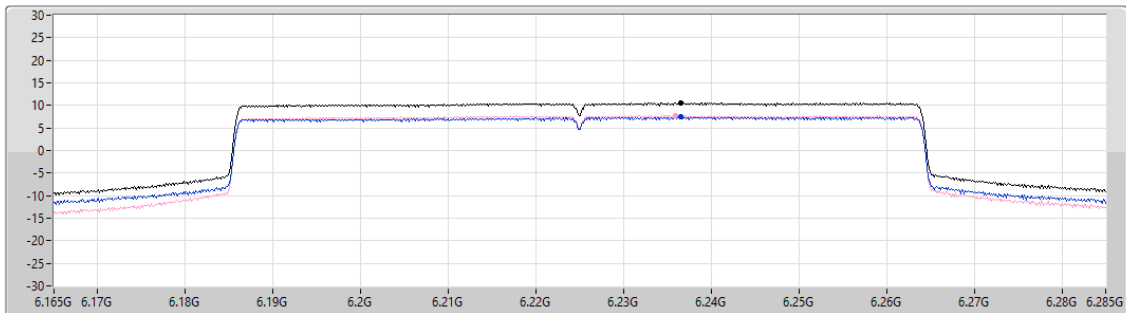

Sum (dBm/100kHz)	PD (dBm/100kHz)	Port 1 (dBm/100kHz)	Port 2 (dBm/100kHz)
10.54	10.54	7.41	7.75


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6385MHz

16/08/2024

CF (Hz)
6.385G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.754
Detector Type
RMS

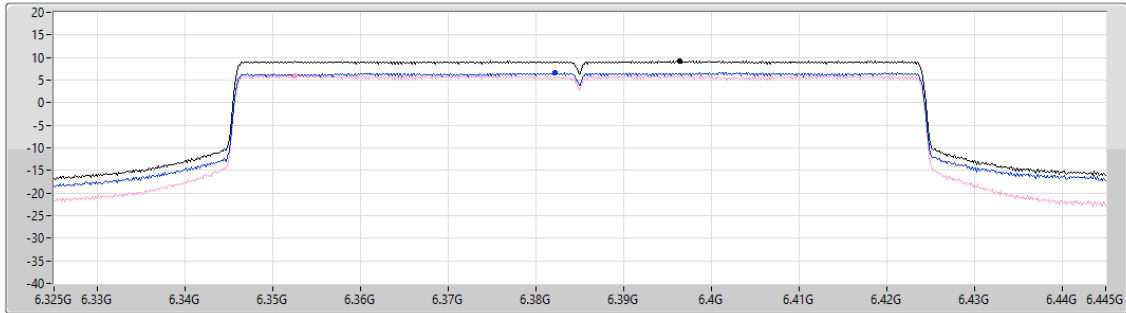

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.15	9.15	6.58	5.96


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6625MHz

16/08/2024

CF (Hz)
6.625G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.754
Detector Type
RMS

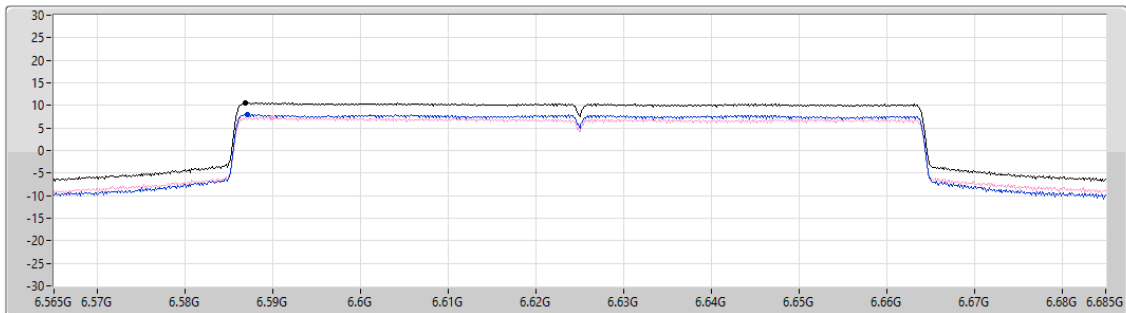

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.58	10.58	7.95	7.25


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6705MHz

16/08/2024

CF (Hz)
6.705G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.754
Detector Type
RMS

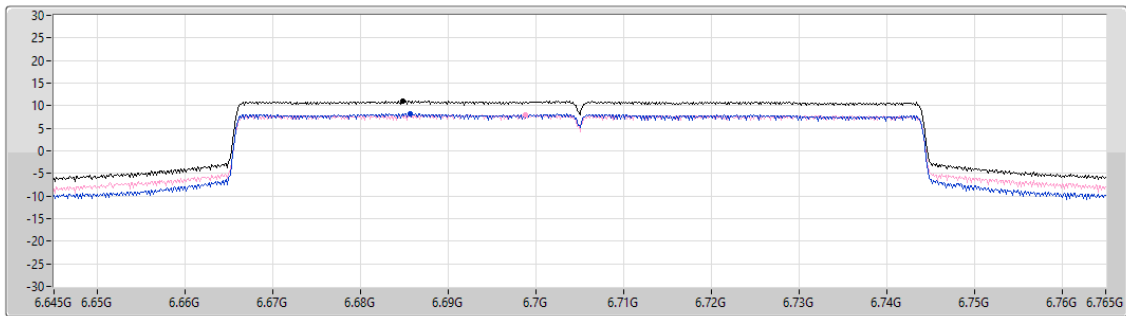

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.99	10.99	8.20	7.92

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6785MHz

16/08/2024

CF (Hz)
6.785G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.754
Detector Type
RMS

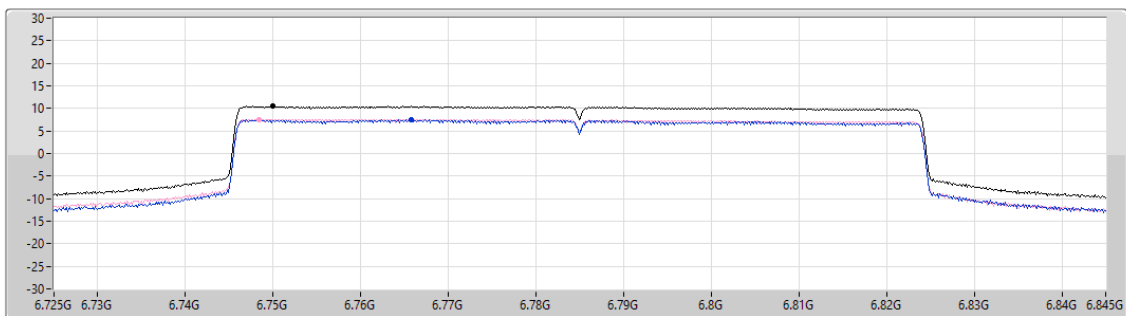

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.49	10.49	7.45	7.58

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6185MHz

16/08/2024

CF (Hz)
6.185G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
52.432
Detector Type
RMS

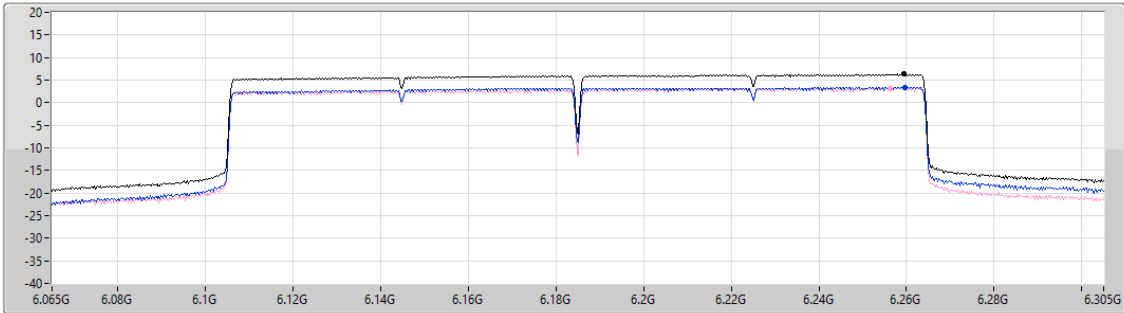

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.31	6.31	3.42	3.24

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6345MHz

16/08/2024

CF (Hz)
6.345G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
52.432
Detector Type
RMS

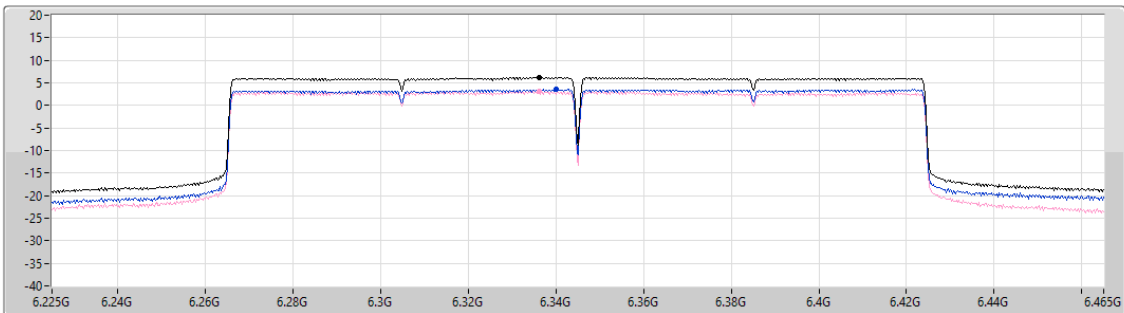

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.21	6.21	3.53	3.06

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6665MHz

16/08/2024

CF (Hz)
6.665G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
52.432
Detector Type
RMS

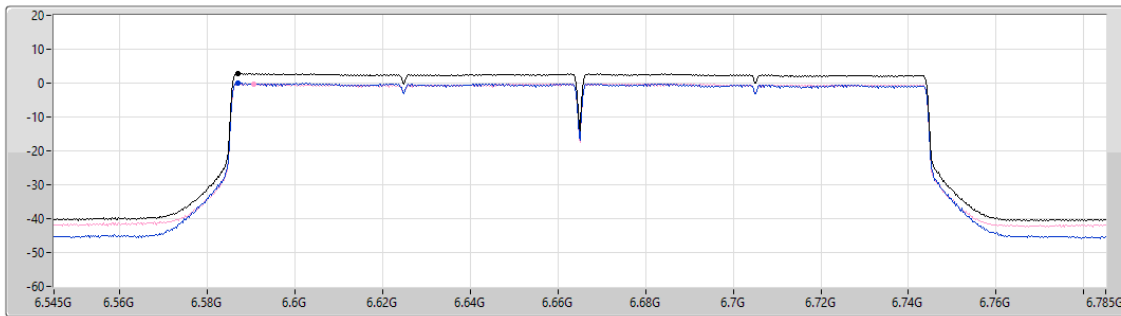

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.85	2.85	-0.07	-0.20

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6265MHz

16/08/2024

CF (Hz)
6.265G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
26.976
Detector Type
RMS

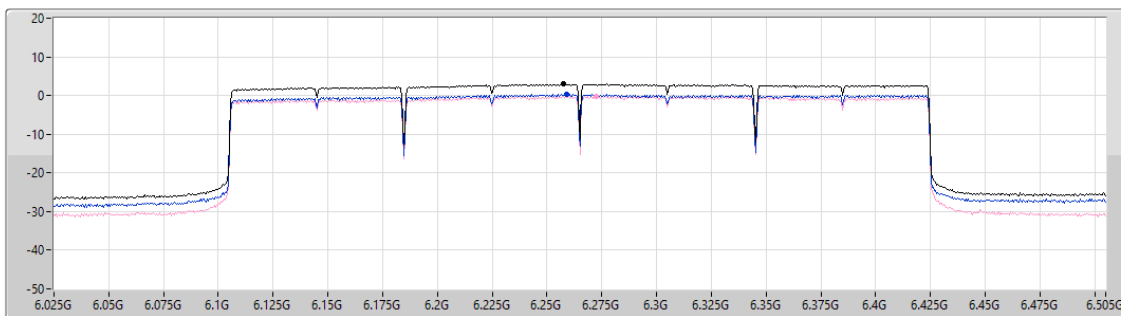

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.93	2.93	0.26	-0.16

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

6115MHz

16/08/2024

CF (Hz)
6.115G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
53.978
Detector Type
RMS

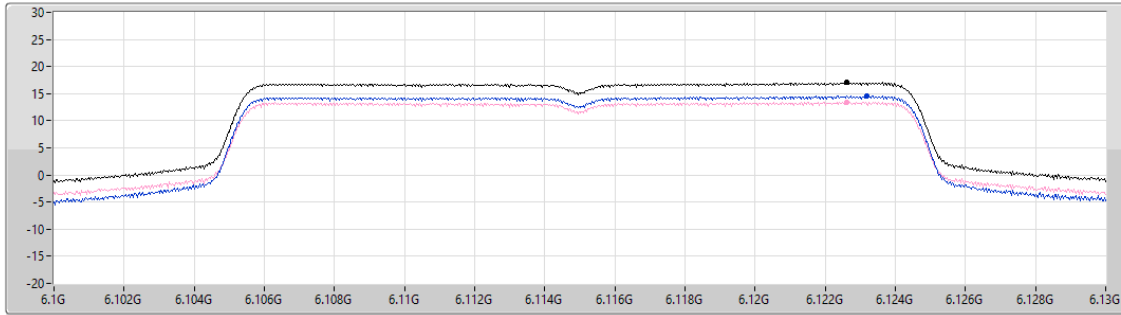

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
17.02	17.02	14.52	13.46


5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

6195MHz

16/08/2024

CF (Hz)
6.195G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
53.978
Detector Type
RMS

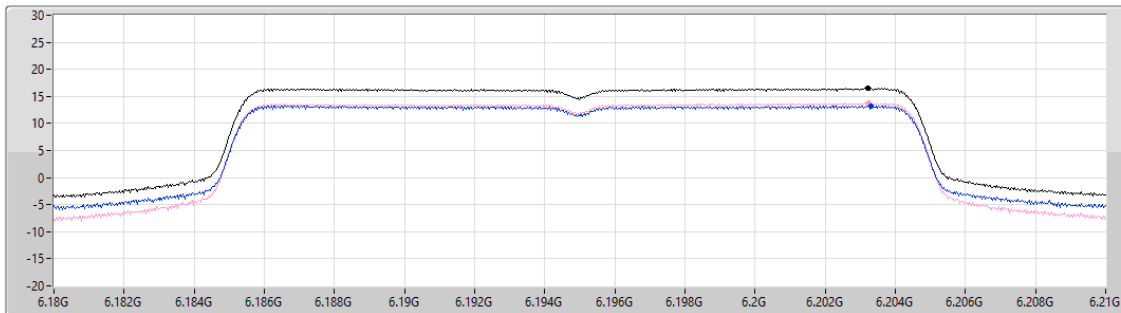

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
16.48	16.48	13.25	13.78


5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

6415MHz

16/08/2024

CF (Hz)
6.415G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
53.978
Detector Type
RMS

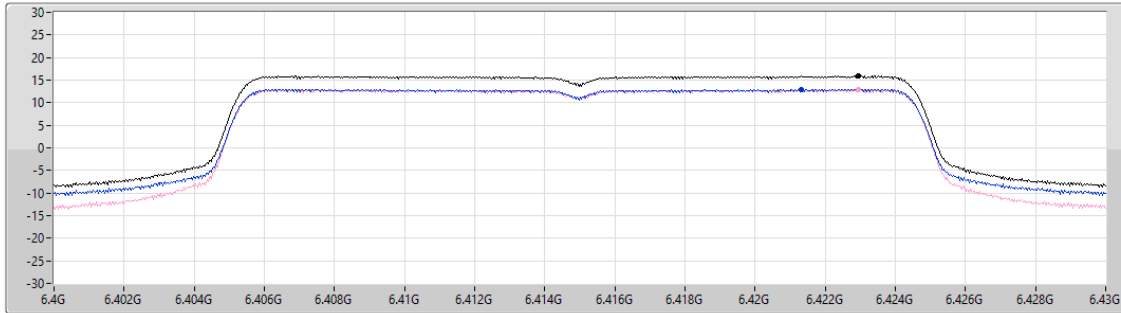

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.90	15.90	12.97	12.91

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

6535MHz

16/08/2024

CF (Hz)
6.535G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
53.978
Detector Type
RMS

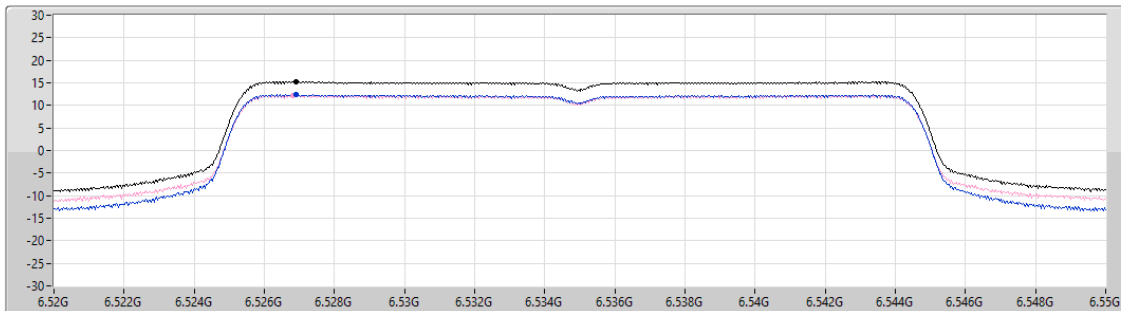

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.29	15.29	12.37	12.18

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

6695MHz

16/08/2024

CF (Hz)
6.695G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
53.978
Detector Type
RMS

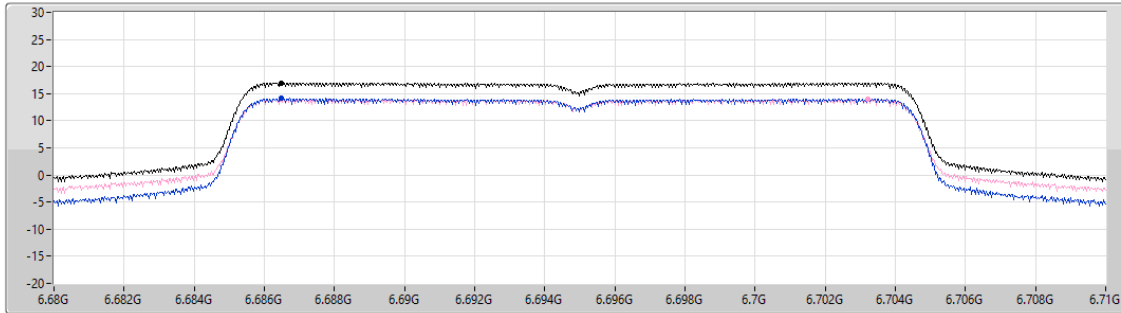

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
17.00	17.00	14.10	13.97

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

6855MHz

16/08/2024

CF (Hz)
6.855G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
53.978
Detector Type
RMS

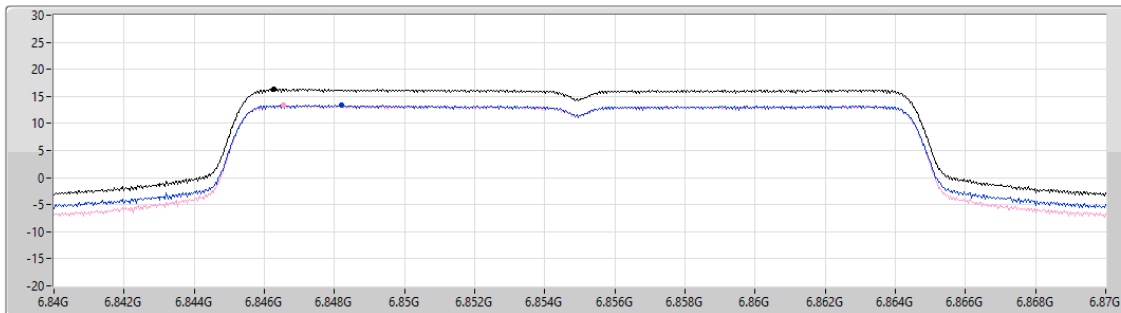

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.33	16.33	13.38	13.34

Sum
Port 1
Port 2

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6125MHz

16/08/2024

CF (Hz)
6.125G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.909

Detector Type
RMS

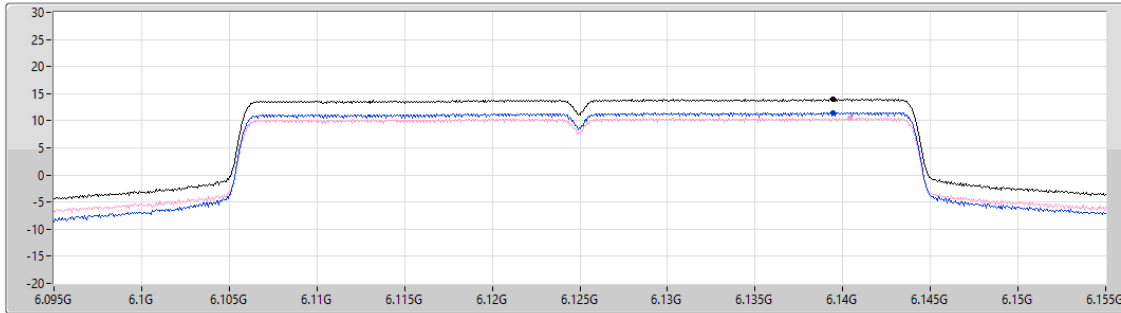

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
14.01	14.01	11.52	10.48

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6205MHz

16/08/2024

CF (Hz)
6.205G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.909

Detector Type
RMS

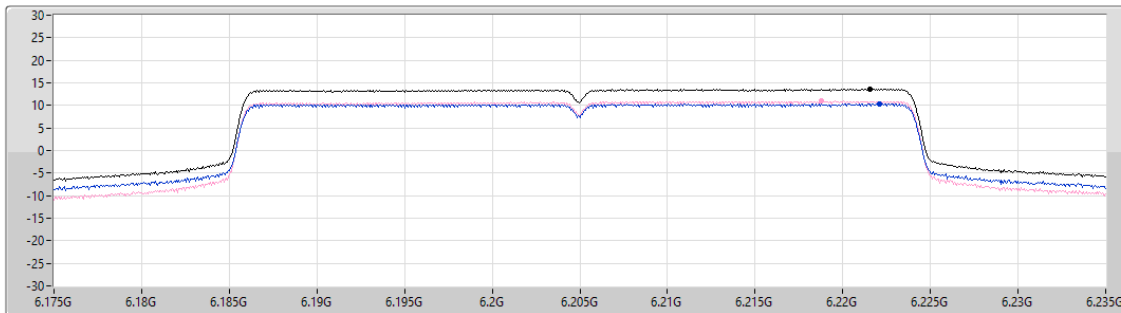

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
13.59	13.59	10.37	10.91


5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6405MHz

16/08/2024

CF (Hz)
6.405G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.909
Detector Type
RMS

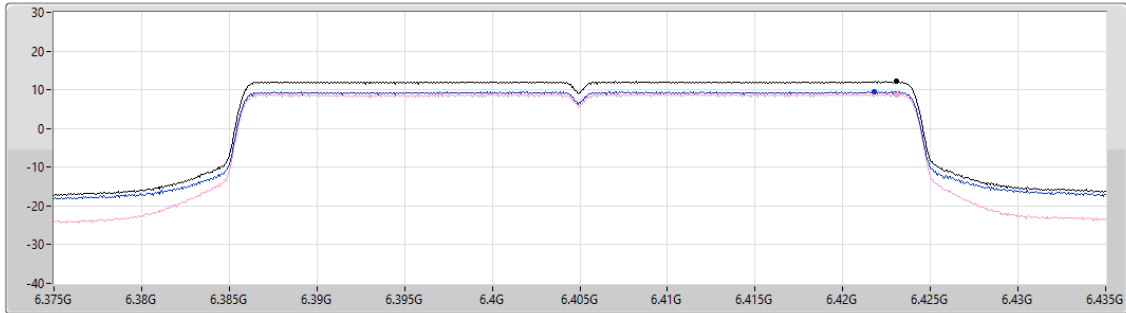

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.16	12.16	9.52	8.79


6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6565MHz

16/08/2024

CF (Hz)
6.565G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.909
Detector Type
RMS

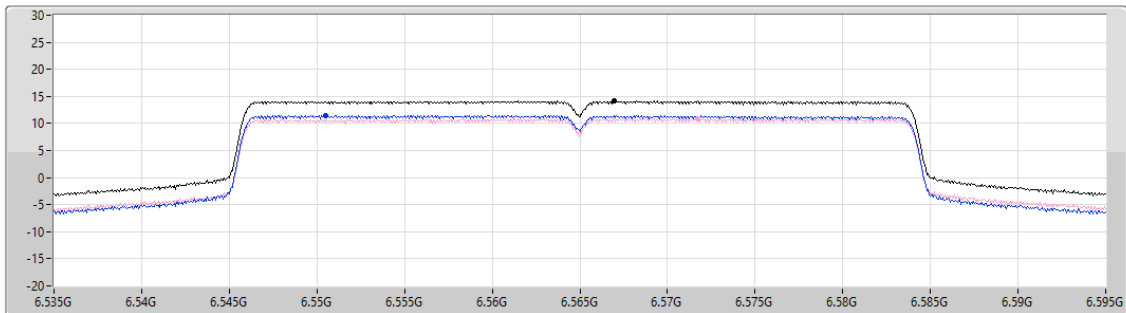

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.12	14.12	11.49	10.86


6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6685MHz

16/08/2024

CF (Hz)
6.685G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.909
Detector Type
RMS

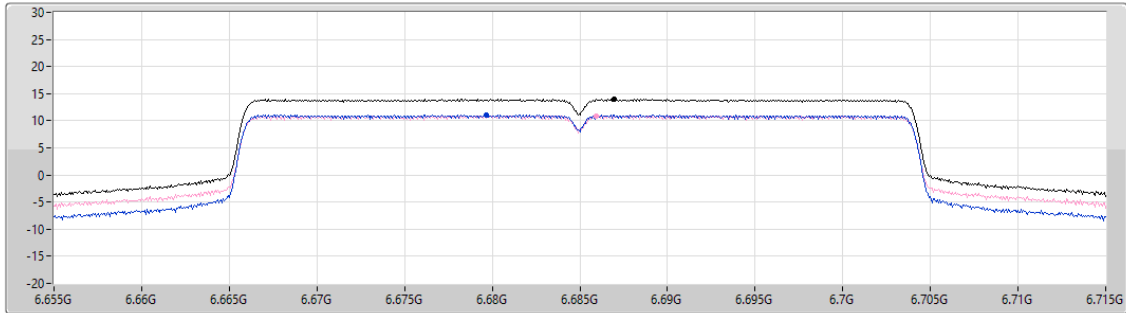

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
13.94	13.94	11.05	10.94

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6845MHz

16/08/2024

CF (Hz)
6.845G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.909
Detector Type
RMS

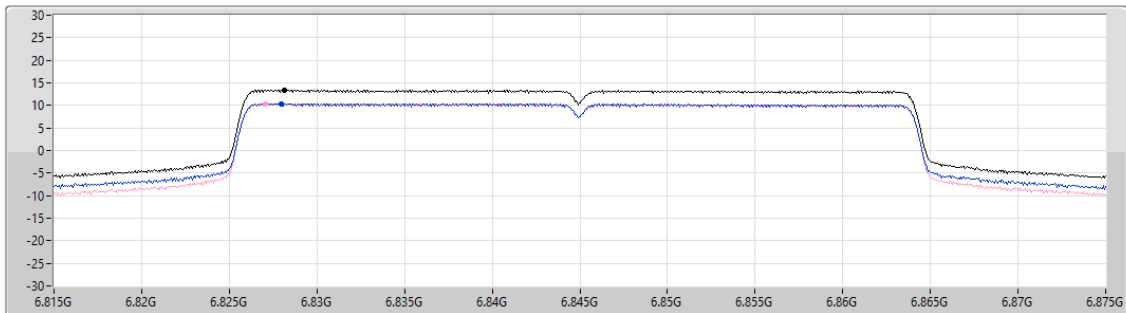

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
13.38	13.38	10.39	10.38

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6145MHz

16/08/2024

CF (Hz)
6.145G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
53.133
Detector Type
RMS

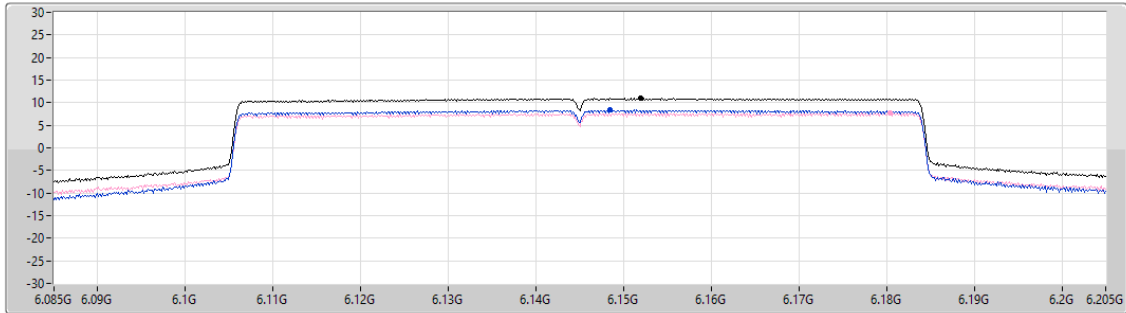

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.96	10.96	8.36	7.66

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6225MHz

16/08/2024

CF (Hz)
6.225G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
53.133
Detector Type
RMS

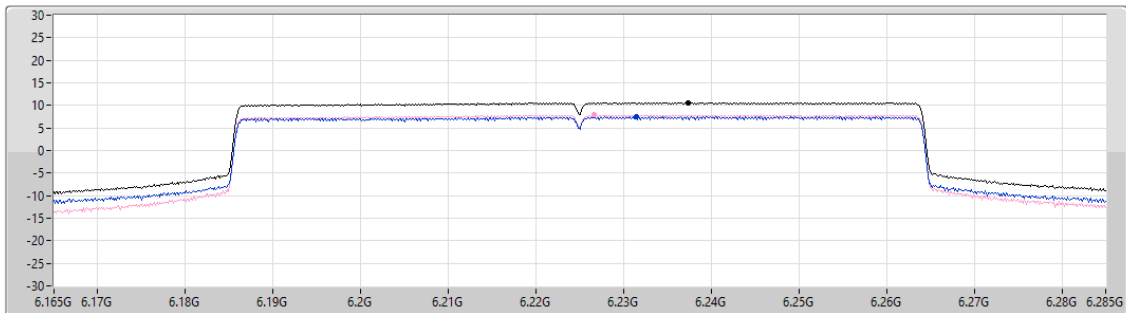

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.62	10.62	7.46	7.86

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6385MHz

16/08/2024

CF (Hz)
6.385G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
53.133
Detector Type
RMS

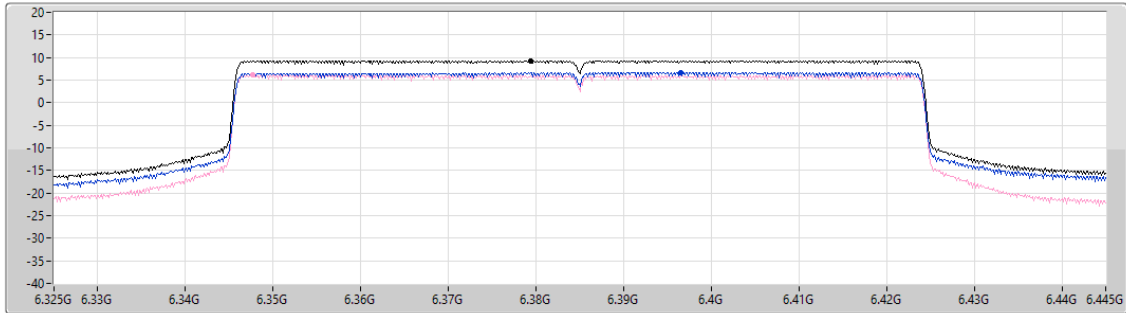

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.30	9.30	6.66	6.09

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6625MHz

16/08/2024

CF (Hz)
6.625G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
53.133
Detector Type
RMS

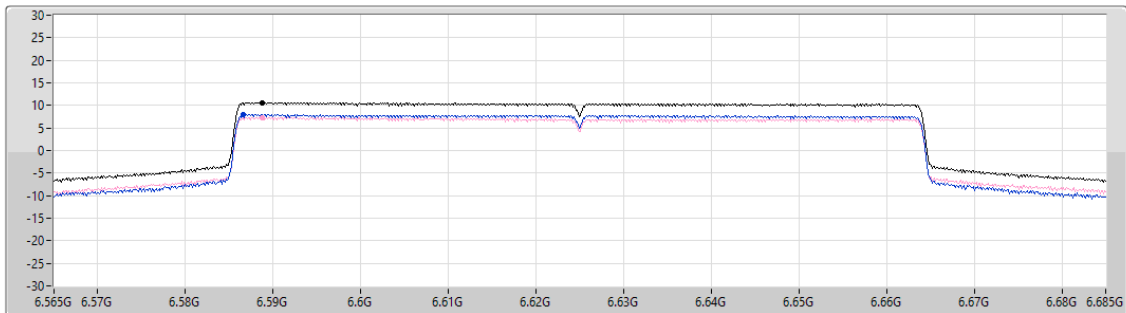

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.64	10.64	7.95	7.35

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6705MHz

16/08/2024

CF (Hz)
6.705G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
53.133
Detector Type
RMS

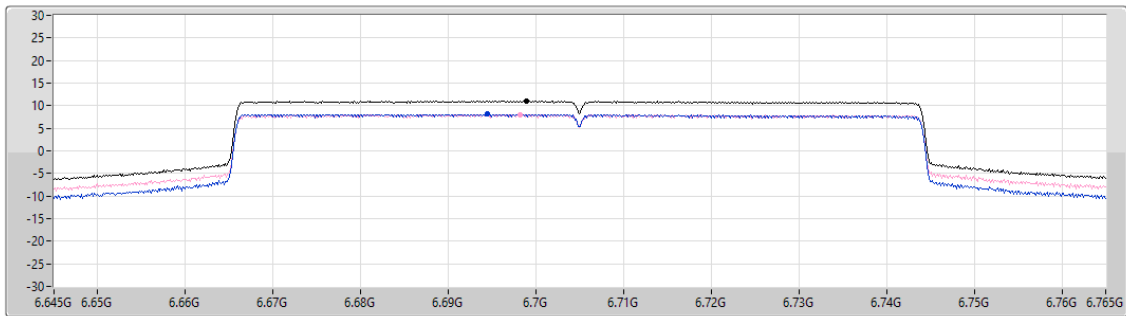

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
11.03	11.03	8.14	8.03

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6785MHz

16/08/2024

CF (Hz)
6.785G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
53.133
Detector Type
RMS

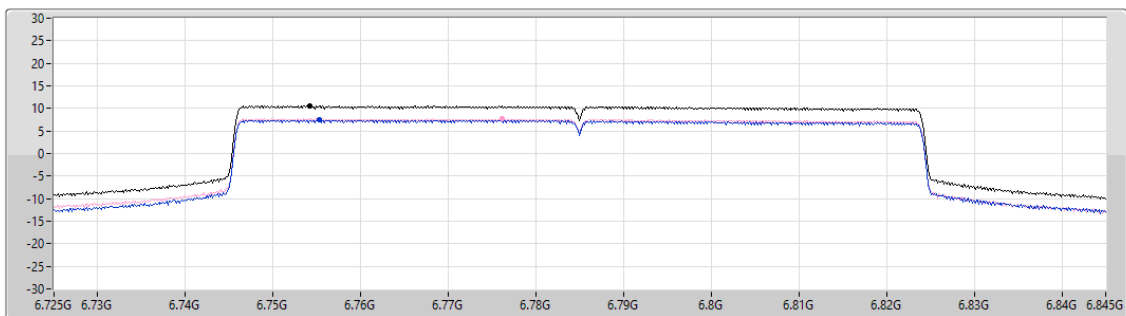

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
10.53	10.53	7.39	7.70

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD

6185MHz

16/08/2024

CF (Hz)
6.185G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
27.352
Detector Type
RMS

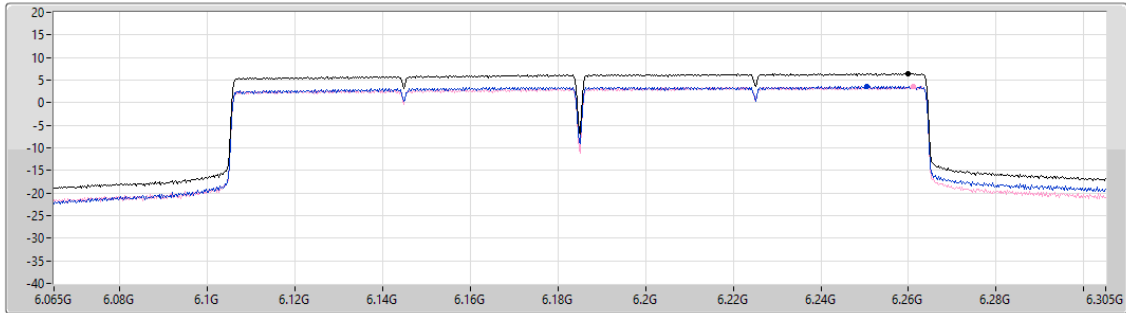

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.45	6.45	3.61	3.54

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD

6345MHz

16/08/2024

CF (Hz)
6.345G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
27.352
Detector Type
RMS

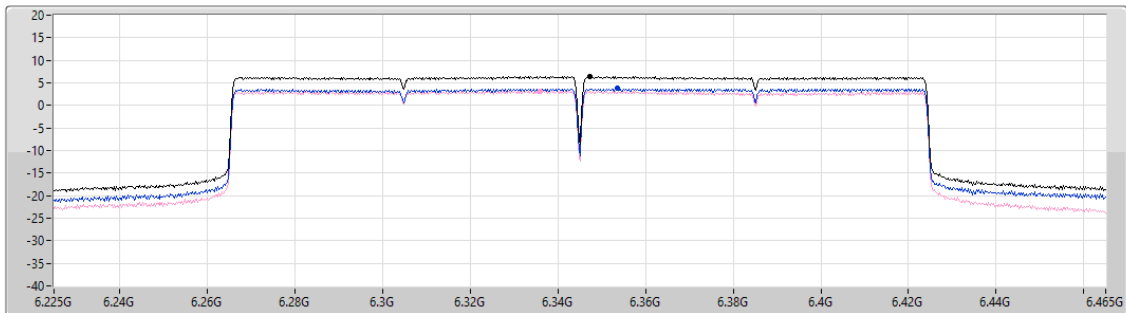

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.45	6.45	3.72	3.20

Sum
Port 1
Port 2


6.525-6.875GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD

6665MHz

16/08/2024

CF (Hz)
6.665G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
27.352
Detector Type
RMS

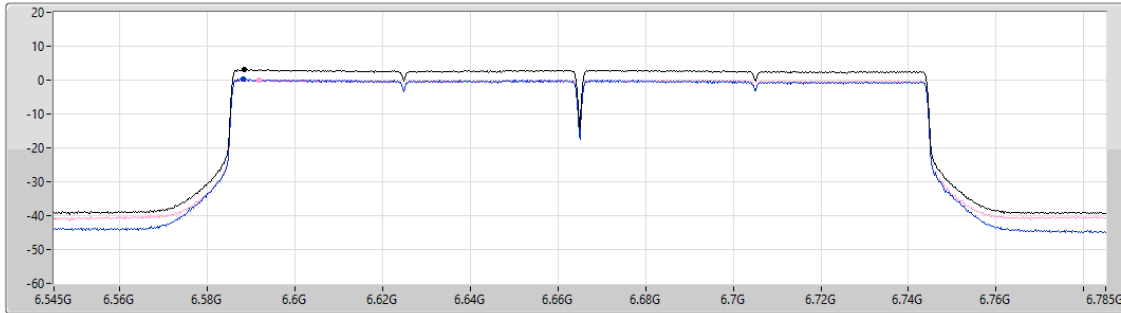

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.07	3.07	0.25	0.11

Sum
Port 1
Port 2


5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0)_2TX

PSD

6265MHz

16/08/2024

CF (Hz)
6.265G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
22.097
Detector Type
RMS

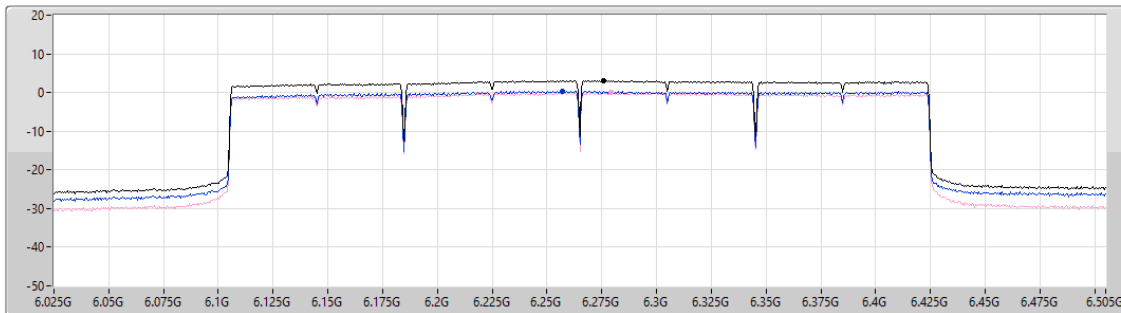

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.07	3.07	0.37	0.02

Sum
Port 1
Port 2




Radiated Emissions below 1GHz

Appendix E.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	534.4M	39.85	46.00	-6.15	Horizontal

Mode 1

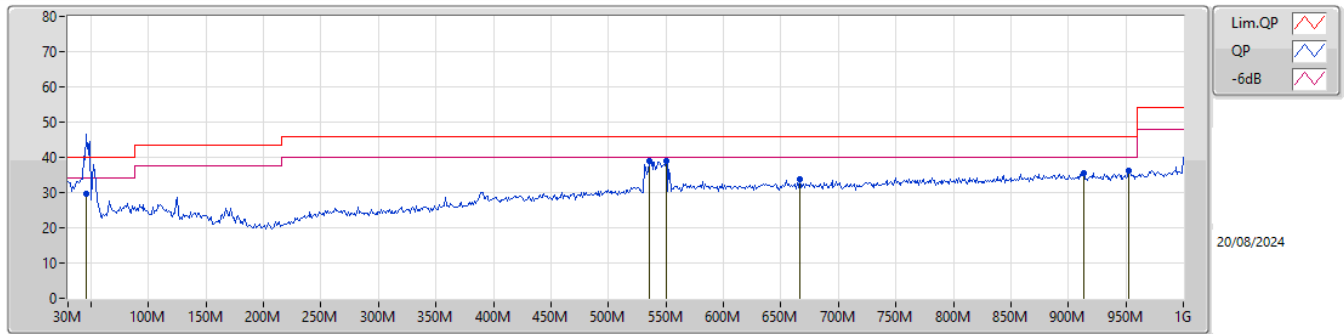

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
QP	45.52M	29.71	40.00	-10.29	-27.31	3	Vertical	122	1.50	-	57.02	16.00	1.38	44.69		
PK	535.37M	38.83	46.00	-7.17	-16.35	3	Vertical	65	1.00	-	55.18	23.05	4.68	44.08		
PK	549.92M	38.87	46.00	-7.13	-15.37	3	Vertical	13	1.00	"Worst"	54.24	24.10	4.74	44.21		
PK	666.32M	33.86	46.00	-12.14	-14.06	3	Vertical	10	1.25	-	47.92	24.44	5.23	43.73		
PK	913.67M	35.54	46.00	-10.46	-11.51	3	Vertical	14	1.50	-	47.05	25.91	6.18	43.60		
PK	952.47M	36.05	46.00	-9.95	-11.21	3	Vertical	291	1.50	-	47.26	26.25	6.30	43.76		

Mode 1

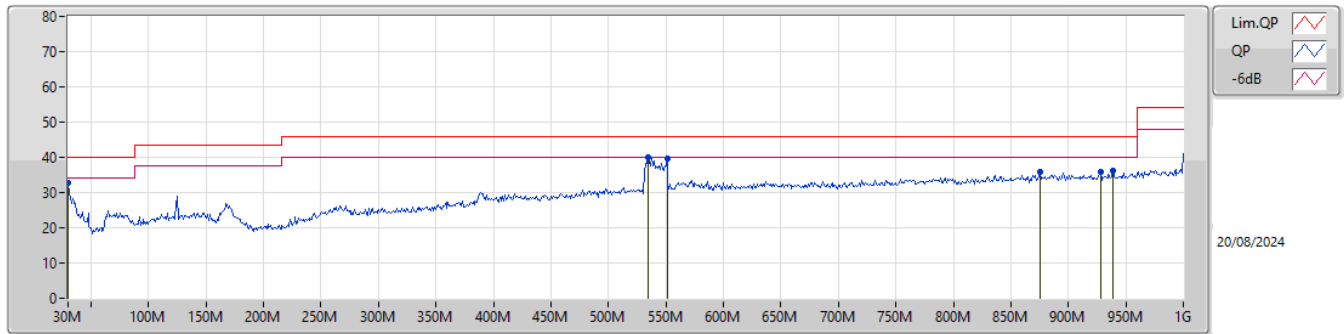

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	30M	32.68	40.00	-7.32	-19.25	3	Horizontal	247	1.00	-	51.93	24.06	1.14	44.45		
PK	534.4M	39.85	46.00	-6.15	-16.38	3	Horizontal	45	1.25	"Worst"	56.23	23.02	4.67	44.07		
PK	550.89M	39.60	46.00	-6.40	-15.33	3	Horizontal	165	1.50	-	54.93	24.13	4.74	44.20		
PK	875.84M	35.76	46.00	-10.24	-11.71	3	Horizontal	210	1.00	-	47.47	25.82	6.04	43.57		
PK	928.22M	35.71	46.00	-10.29	-11.44	3	Horizontal	244	3.00	-	47.15	26.01	6.22	43.67		
PK	938.89M	36.05	46.00	-9.95	-11.36	3	Horizontal	172	3.00	-	47.41	26.10	6.26	43.72		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
6.525-6.875GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	Pass	AV	13.38982G	49.04	54.00	-4.96	3	Horizontal	278	1.80	-

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6115MHz_TX

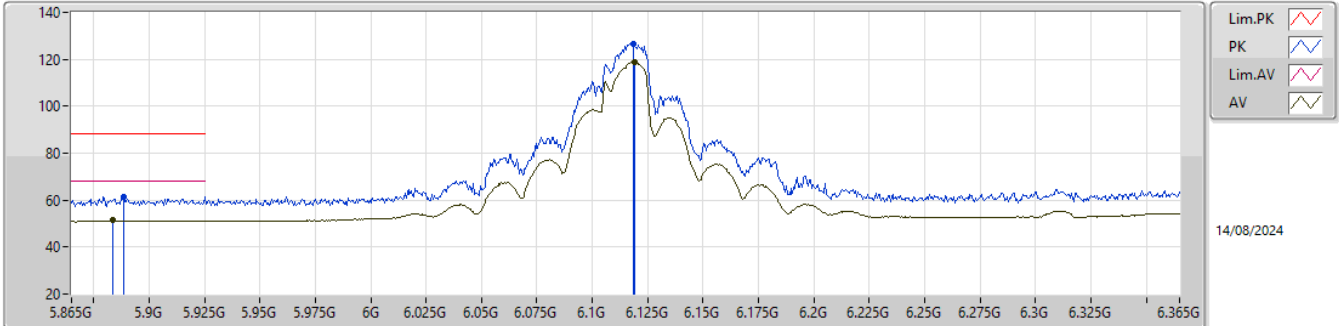


EUT_Y_2TX
Setting 29
01-I-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.8885G	61.40	88.20	-26.80	53.87	3	Vertical	214	1.80	-	32.35	7.62	32.44			
RMS	5.8835G	51.31	68.20	-16.89	43.80	3	Vertical	214	1.80	-	32.33	7.62	32.44			
PK	6.1185G	126.76	Inf	-Inf	118.92	3	Vertical	214	1.80	-	32.57	7.70	32.43			
RMS	6.119G	118.71	Inf	-Inf	110.86	3	Vertical	214	1.80	-	32.58	7.70	32.43			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6115MHz_TX

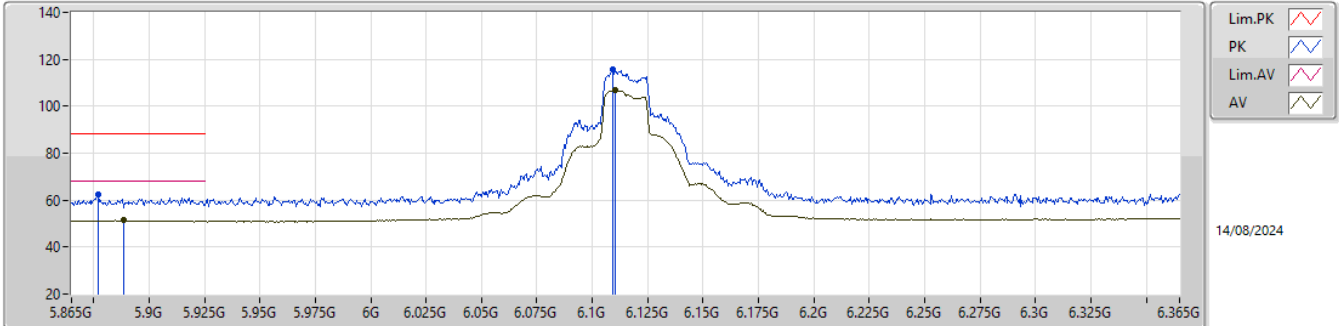


EUT_Y_2TX
Setting 29
01-I-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.877G	62.29	88.20	-25.91	54.80	3	Horizontal	35	1.80	-	32.31	7.62	32.44			
RMS	5.8885G	51.37	68.20	-16.83	43.84	3	Horizontal	35	1.80	-	32.35	7.62	32.44			
PK	6.109G	115.46	Inf	-Inf	107.65	3	Horizontal	35	1.80	-	32.54	7.70	32.43			
RMS	6.1105G	106.78	Inf	-Inf	98.97	3	Horizontal	35	1.80	-	32.54	7.70	32.43			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6115MHz_TX

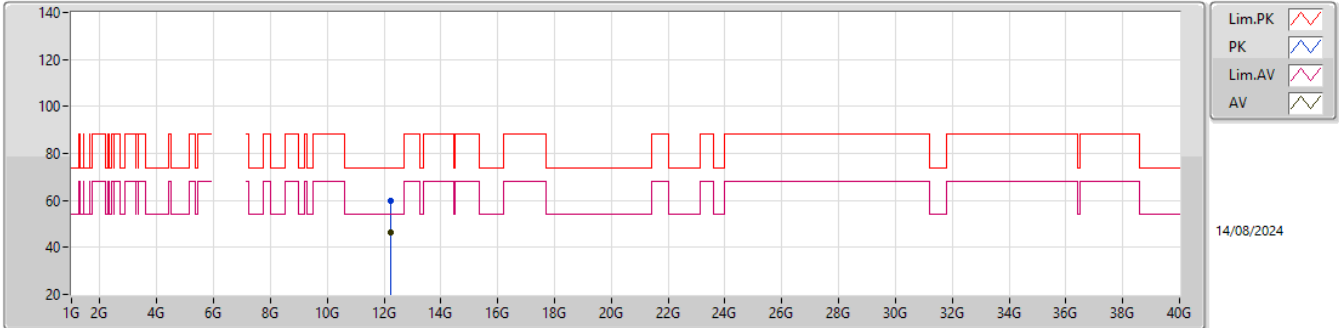


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.22364G	59.80	74.00	-14.20	41.98	3	Vertical	4	1.80	-	39.10	11.20	32.48			
AV	12.2395G	46.43	54.00	-7.57	28.58	3	Vertical	4	1.80	-	39.10	11.21	32.46			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6115MHz_TX

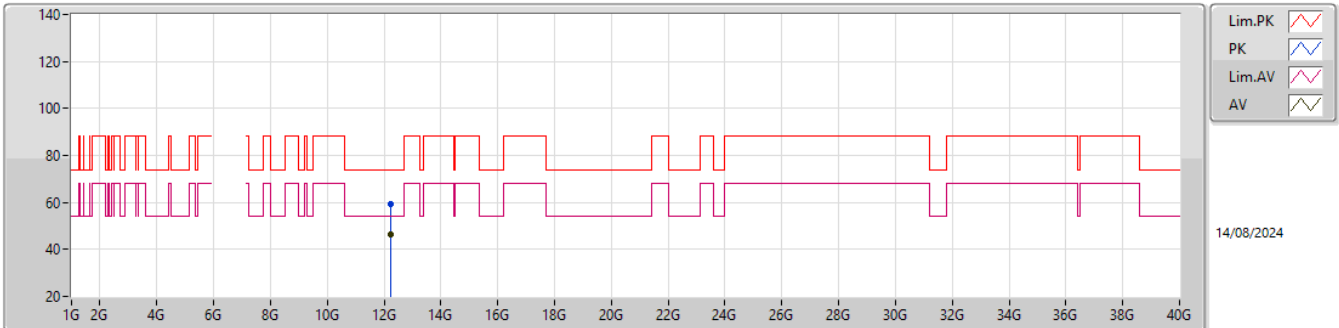


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.22654G	59.37	74.00	-14.63	41.53	3	Horizontal	40	1.79	-	39.10	11.21	32.47			
AV	12.2399G	46.44	54.00	-7.56	28.58	3	Horizontal	40	1.79	-	39.10	11.21	32.45			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6115MHz_TX

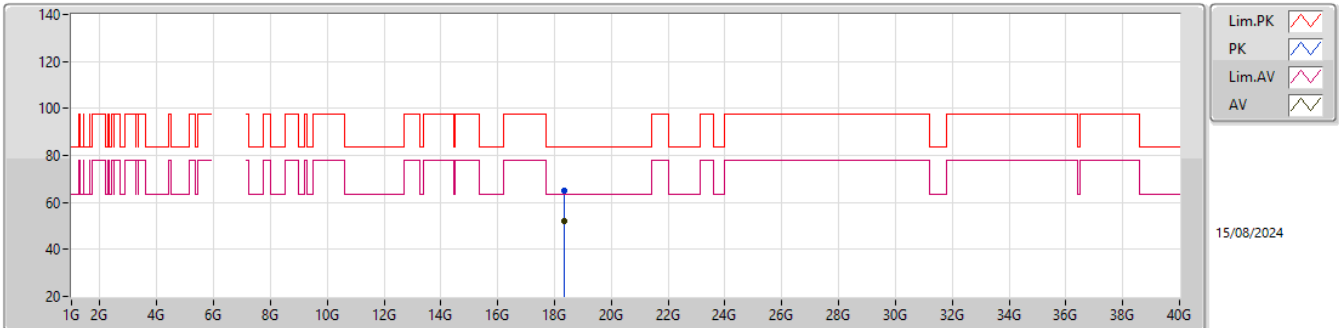EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.35116G	64.90	83.54	-18.64	61.72	1	Vertical	281.6	1.63	-	37.51	15.28	49.61			
AV	18.34696G	52.10	63.54	-11.44	48.93	1	Vertical	281.6	1.63	-	37.50	15.28	49.61			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6115MHz_TX

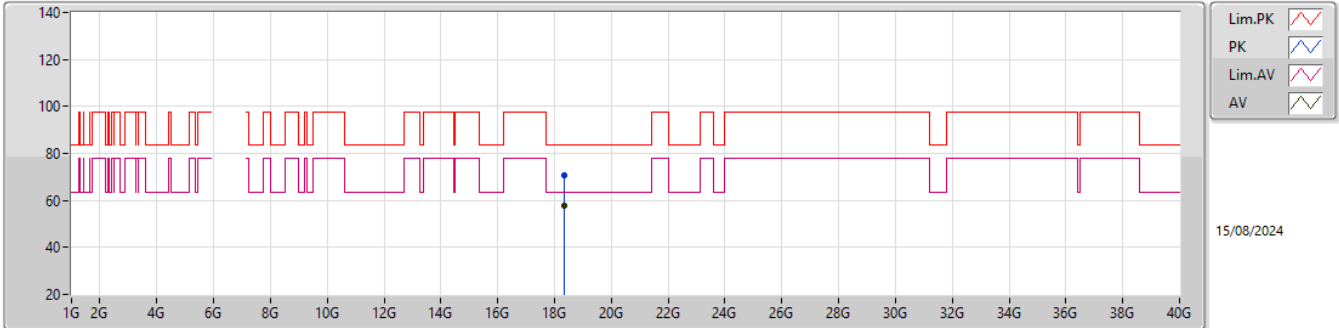


EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.34178G	70.71	83.54	-12.83	67.53	1	Horizontal	241	1.63	-	37.50	15.28	49.60			
AV	18.3464G	57.67	63.54	-5.87	54.50	1	Horizontal	241	1.63	-	37.50	15.28	49.61			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

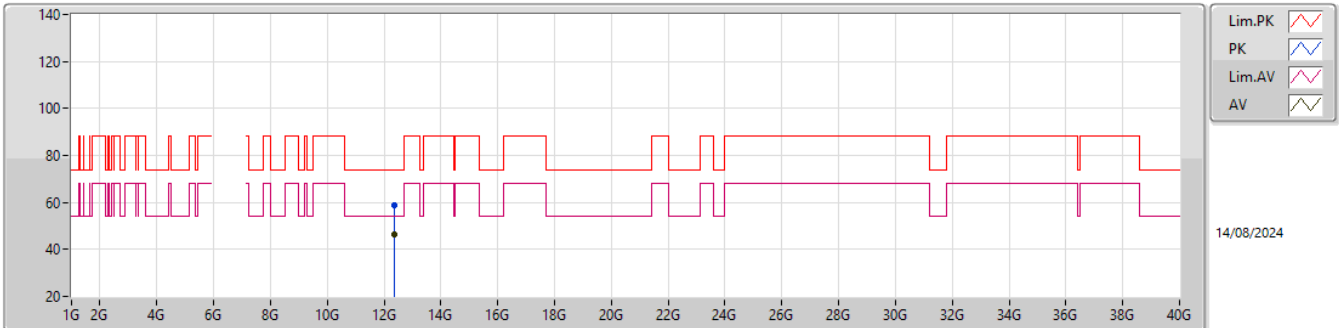


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.38156G	58.94	74.00	-15.06	41.09	3	Vertical	338	1.11	-	38.84	11.26	32.25			
AV	12.38196G	46.46	54.00	-7.54	28.60	3	Vertical	338	1.11	-	38.84	11.27	32.25			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6195MHz_TX

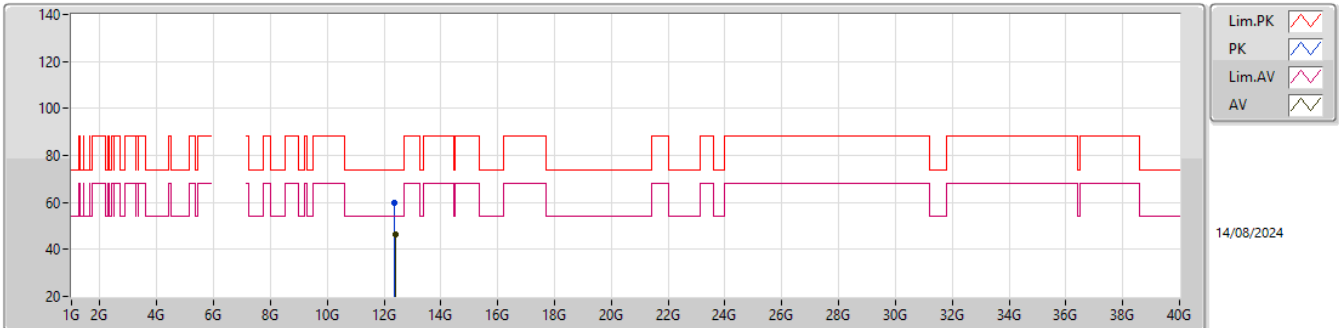EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.38098G	59.58	74.00	-14.42	41.73	3	Horizontal	230	2.71	-	38.84	11.26	32.25			
AV	12.39466G	46.51	54.00	-7.49	28.66	3	Horizontal	230	2.71	-	38.81	11.27	32.23			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6195MHz_TX

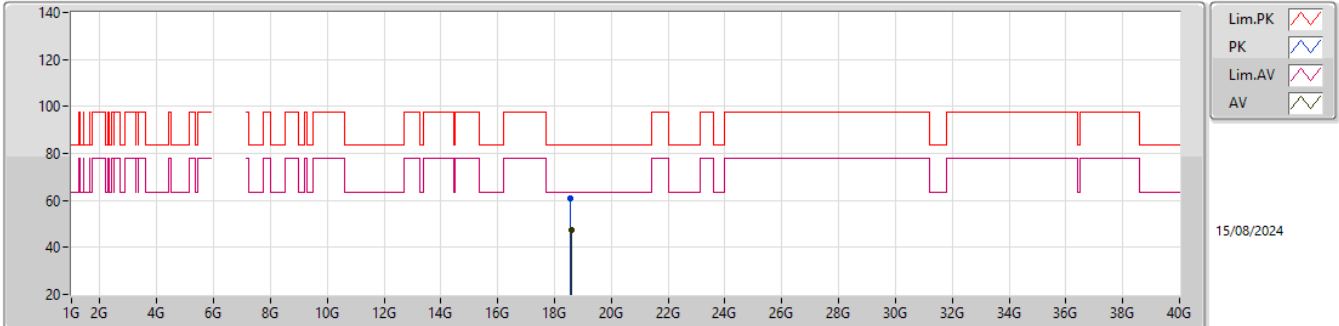EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.57058G	60.65	83.54	-22.89	57.31	1	Vertical	276	1.65	-	37.70	15.27	49.63			
AV	18.58836G	47.16	63.54	-16.38	43.81	1	Vertical	276	1.65	-	37.70	15.27	49.62			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6195MHz_TX

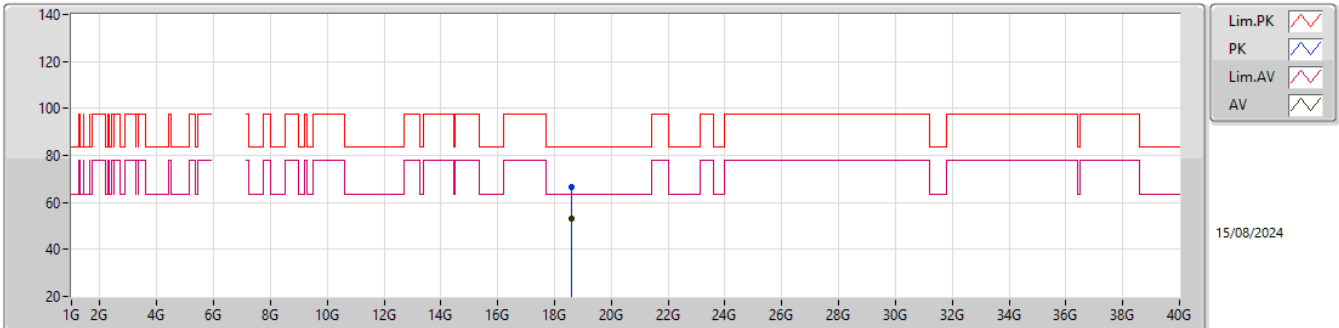EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.58668G	66.67	83.54	-16.87	63.32	1	Horizontal	230	1.55	-	37.70	15.27	49.62			
AV	18.58584G	53.33	63.54	-10.21	49.98	1	Horizontal	230	1.55	-	37.70	15.27	49.62			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

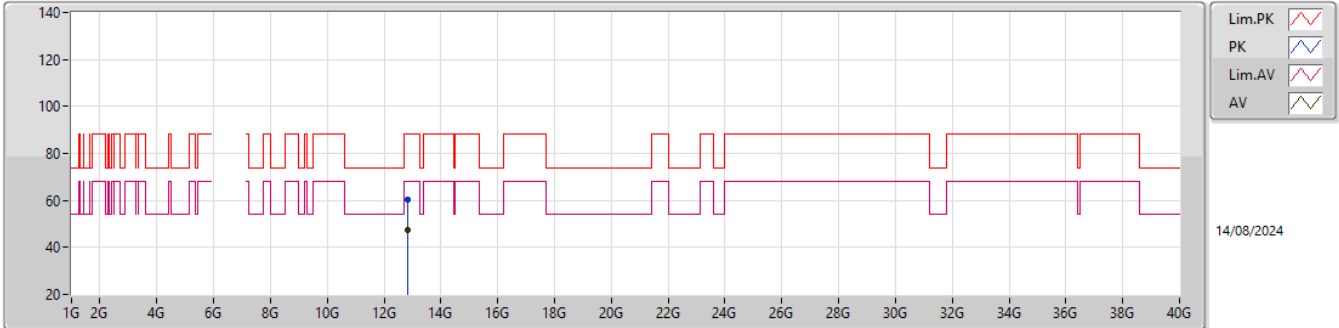


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8232G	60.12	88.20	-28.08	41.20	3	Vertical	34	1.80	-	39.25	11.43	31.76			
RMS	12.83928G	47.54	68.20	-20.66	28.56	3	Vertical	34	1.80	-	39.28	11.44	31.74			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6415MHz_TX

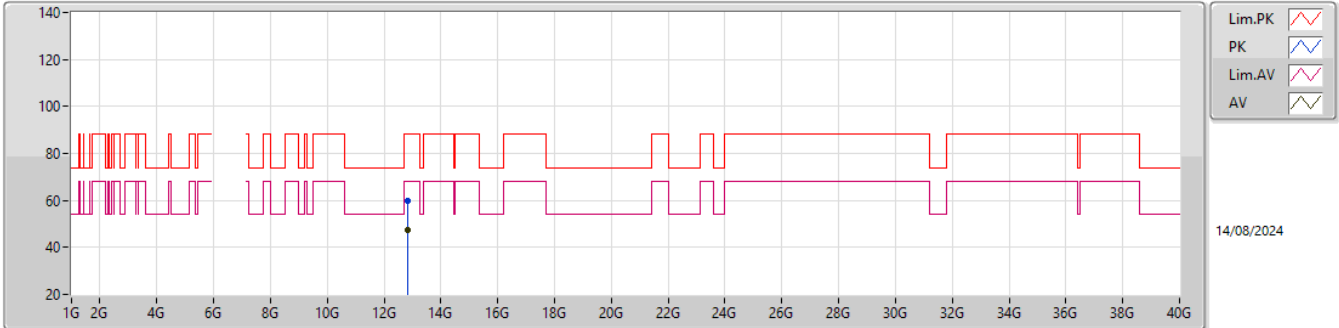


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.83614G	59.97	88.20	-28.23	41.00	3	Horizontal	97	1.99	-	39.27	11.44	31.74			
RMS	12.83602G	47.47	68.20	-20.73	28.50	3	Horizontal	97	1.99	-	39.27	11.44	31.74			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6415MHz_TX

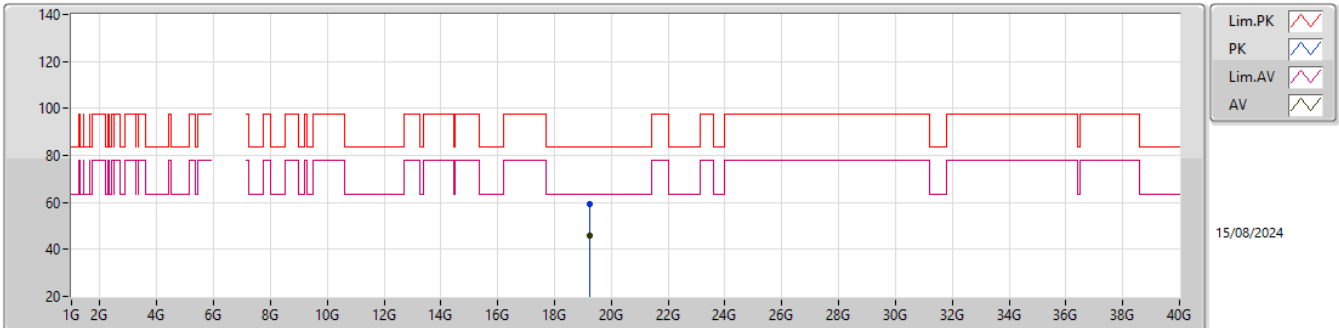EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.23982G	59.19	83.54	-24.35	55.53	1	Vertical	122.8	1.68	-	37.92	15.24	49.50			
AV	19.23982G	45.69	63.54	-17.85	42.03	1	Vertical	122.8	1.68	-	37.92	15.24	49.50			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6415MHz_TX

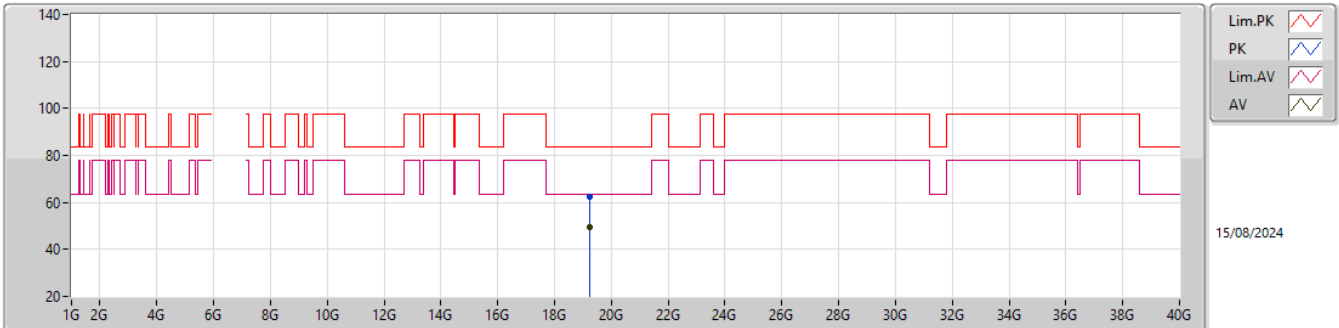EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.24024G	62.26	83.54	-21.28	58.60	1	Horizontal	218.1	1.57	-	37.92	15.24	49.50			
AV	19.24178G	49.48	63.54	-14.06	45.82	1	Horizontal	218.1	1.57	-	37.92	15.24	49.50			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6535MHz_TX

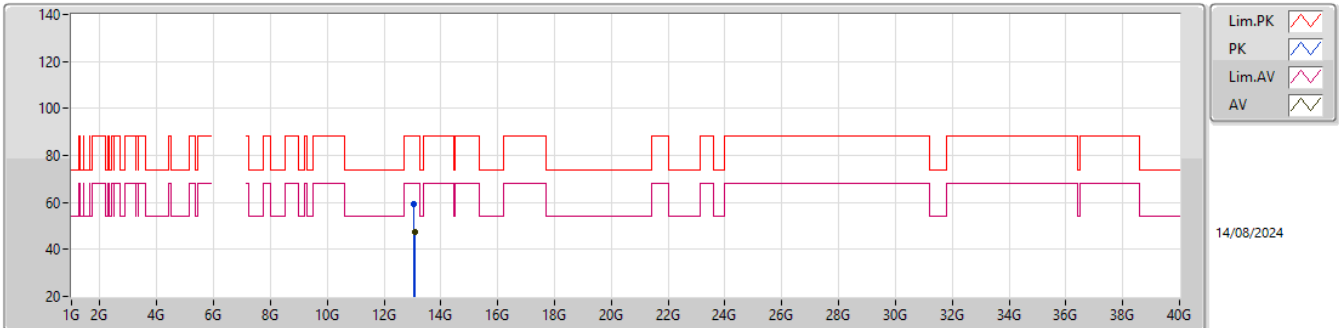EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.06694G	59.23	88.20	-28.97	40.14	3	Vertical	45	1.59	-	39.07	11.53	31.51			
RMS	13.0798G	47.63	68.20	-20.57	28.47	3	Vertical	45	1.59	-	39.12	11.53	31.49			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6535MHz_TX

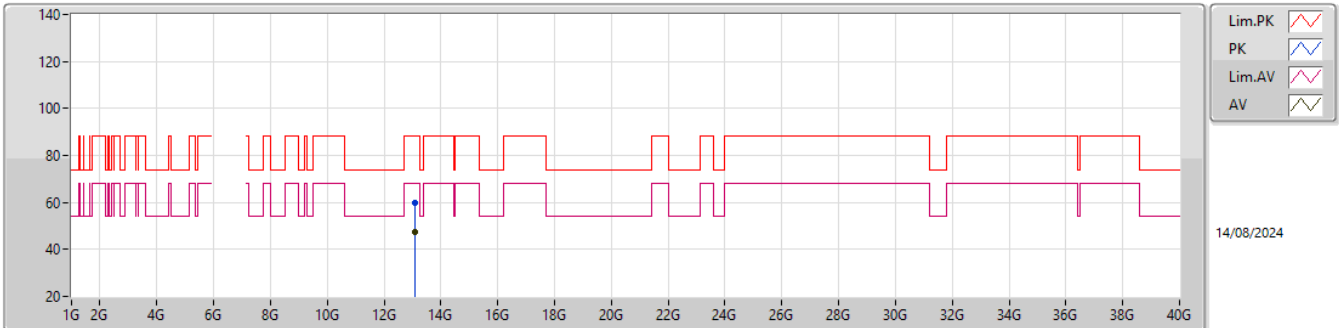EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.06816G	59.76	88.20	-28.44	40.67	3	Horizontal	321	1.54	-	39.07	11.53	31.51			
RMS	13.0799G	47.32	68.20	-20.88	28.16	3	Horizontal	321	1.54	-	39.12	11.53	31.49			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6535MHz_TX

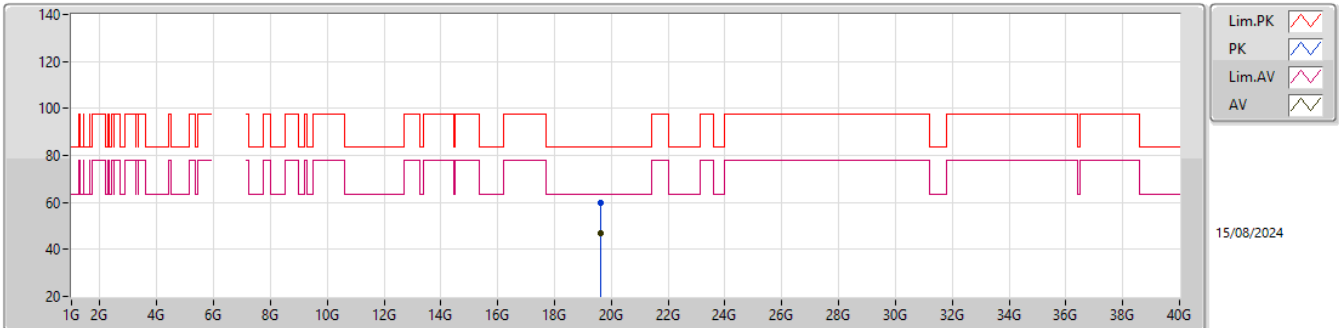EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.6071G	60.03	83.54	-23.51	56.56	1	Vertical	348.8	1.65	-	37.84	15.22	49.59			
AV	19.60654G	47.03	63.54	-16.51	43.56	1	Vertical	348.8	1.65	-	37.84	15.22	49.59			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6535MHz_TX

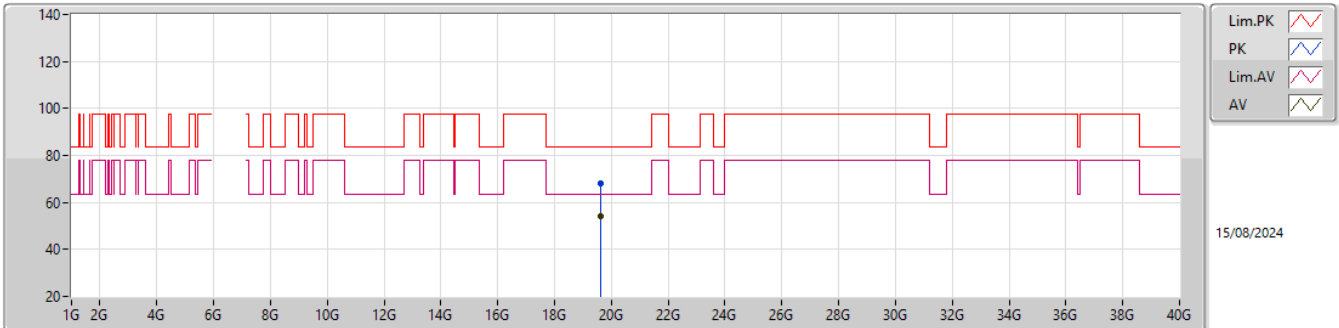EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60472G	67.98	83.54	-15.56	64.52	1	Horizontal	246	1.70	-	37.83	15.22	49.59			
AV	19.60304G	54.29	63.54	-9.25	50.85	1	Horizontal	246	1.70	-	37.82	15.22	49.60			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

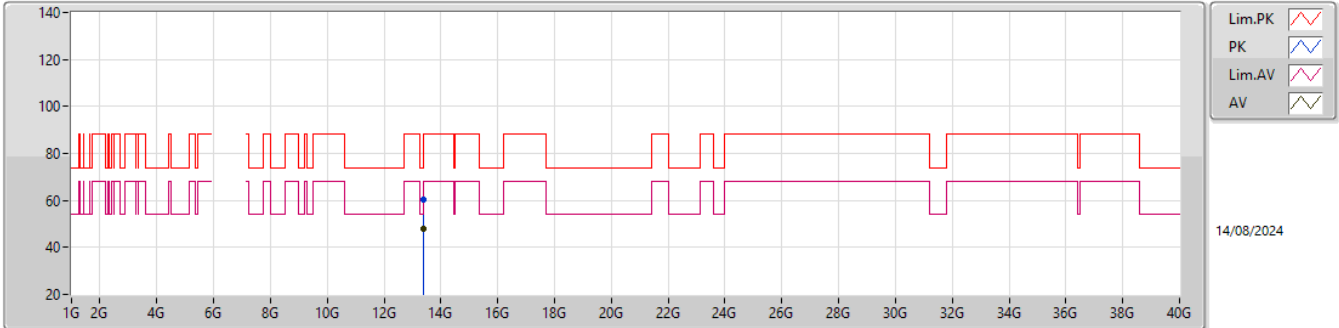


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.38094G	60.25	74.00	-13.75	40.02	3	Vertical	99	1.76	-	39.76	11.64	31.17			
AV	13.3983G	47.93	54.00	-6.07	27.63	3	Vertical	99	1.76	-	39.80	11.65	31.15			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6695MHz_TX

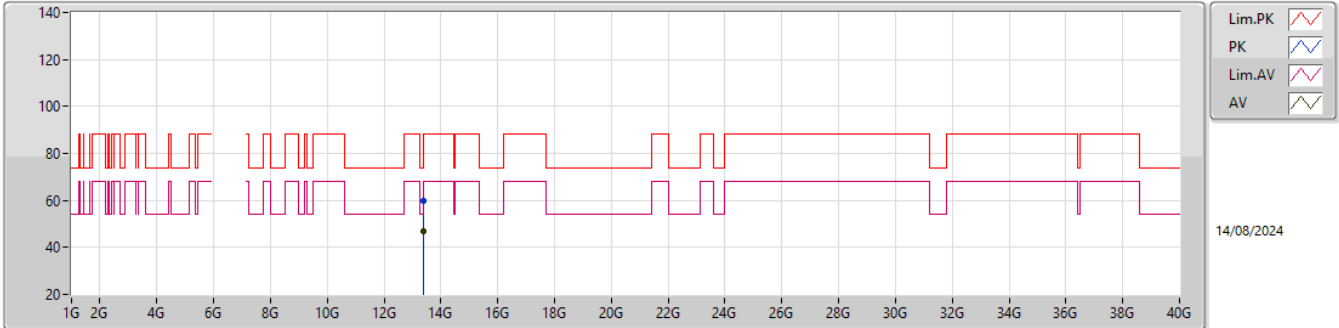


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.39156G	59.92	74.00	-14.08	39.65	3	Horizontal	108	1.87	-	39.78	11.65	31.16			
AV	13.39776G	46.65	54.00	-7.35	26.35	3	Horizontal	108	1.87	-	39.80	11.65	31.15			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6695MHz_TX

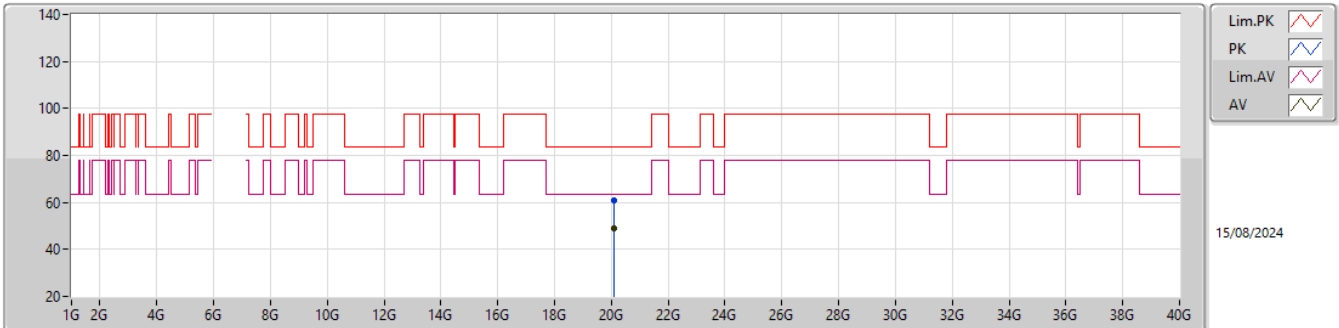EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.08906G	61.00	83.54	-22.54	57.12	1	Vertical	245.4	1.65	-	37.86	15.27	49.25			
AV	20.08598G	48.81	63.54	-14.73	44.95	1	Vertical	245.4	1.65	-	37.84	15.27	49.25			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6695MHz_TX

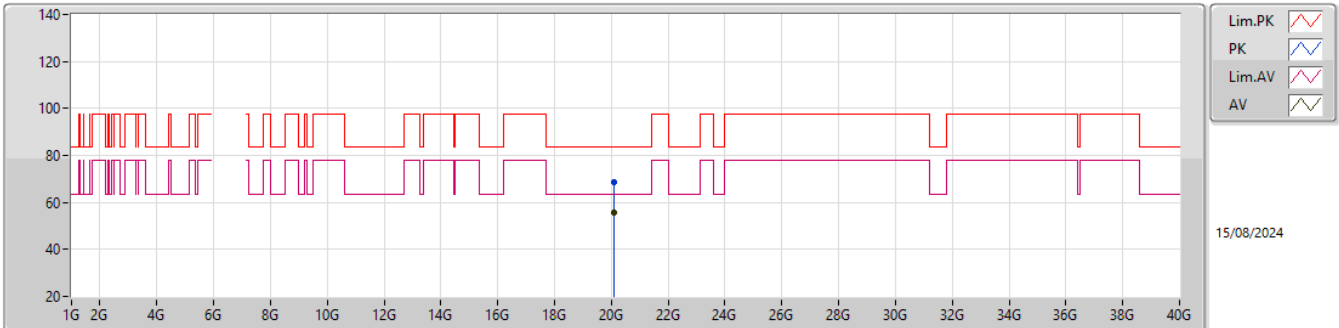EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.07618G	68.44	83.54	-15.10	64.63	1	Horizontal	239	1.63	-	37.80	15.26	49.25			
AV	20.08192G	55.80	63.54	-7.74	51.95	1	Horizontal	239	1.63	-	37.83	15.27	49.25			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6855MHz_TX

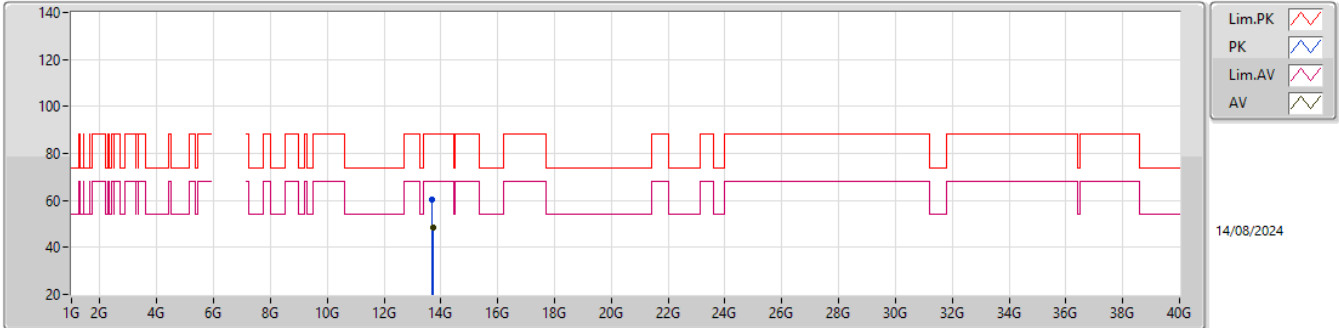


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.70426G	60.35	88.20	-27.85	39.60	3	Vertical	43	1.37	-	40.11	11.77	31.13			
RMS	13.7129G	48.42	68.20	-19.78	27.65	3	Vertical	43	1.37	-	40.13	11.77	31.13			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6855MHz_TX

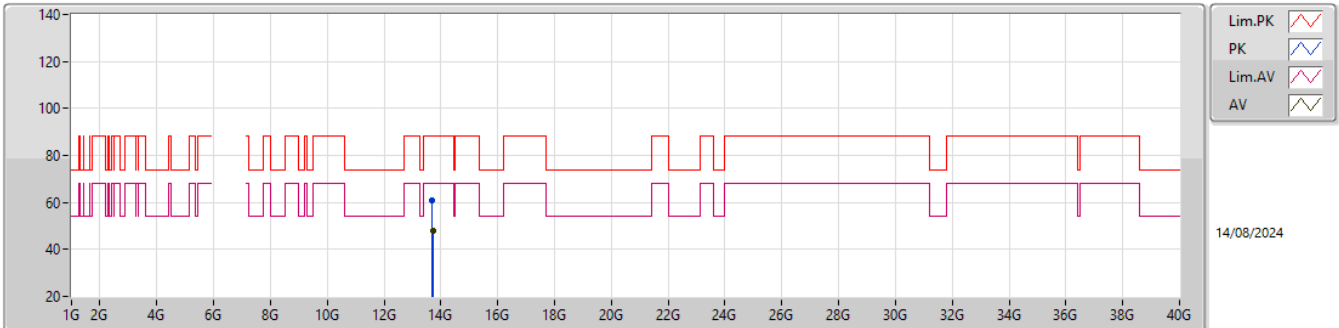EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.70234G	60.81	88.20	-27.39	40.07	3	Horizontal	181	1.91	-	40.10	11.77	31.13			
RMS	13.71956G	48.02	68.20	-20.18	27.25	3	Horizontal	181	1.91	-	40.14	11.77	31.14			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6855MHz_TX

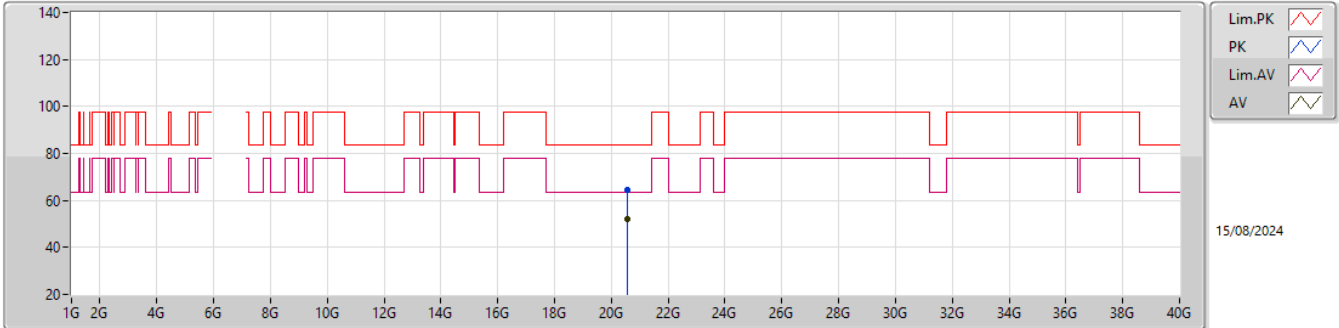


EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.56346G	64.31	83.54	-19.23	59.84	1	Vertical	124	1.69	-	37.93	15.65	49.11			
AV	20.56724G	52.12	63.54	-11.42	47.65	1	Vertical	124	1.69	-	37.93	15.65	49.11			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX


6855MHz_TX

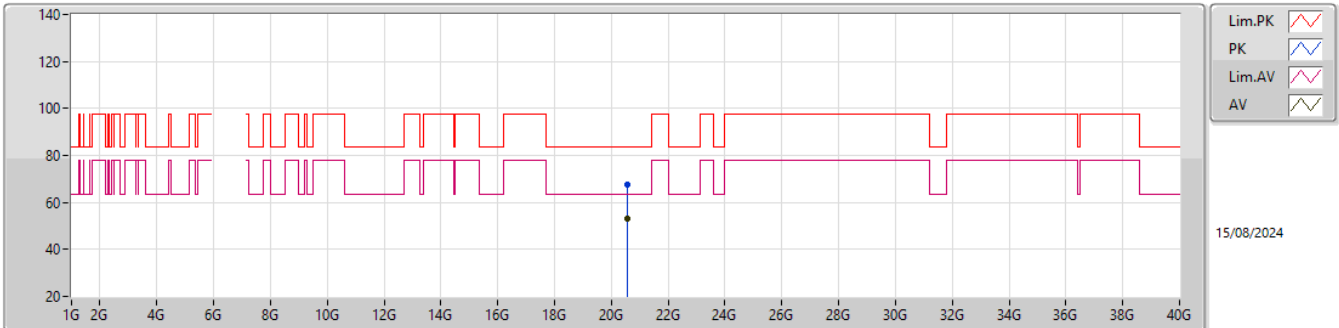EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.57004G	67.47	83.54	-16.07	62.97	1	Horizontal	241.5	1.65	-	37.94	15.66	49.10			
AV	20.56766G	53.13	63.54	-10.41	48.64	1	Horizontal	241.5	1.65	-	37.94	15.65	49.10			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6125MHz_TX

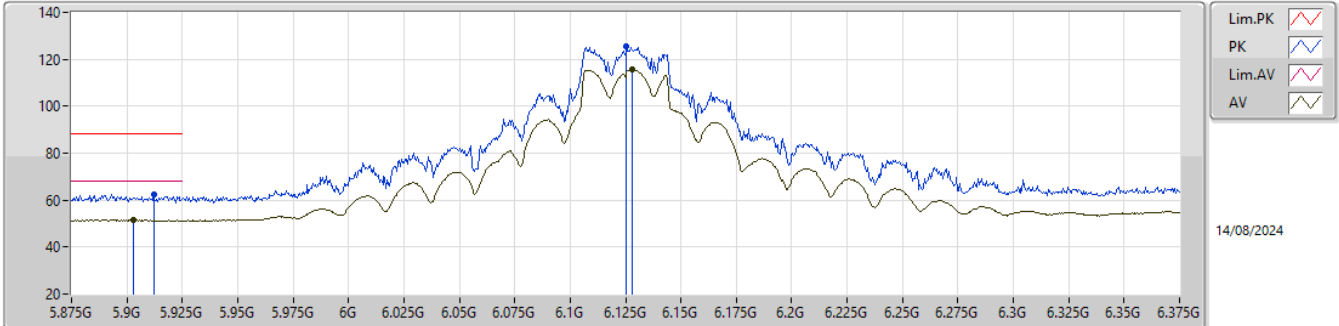


EUT_Y_2TX
Setting 29
01-I-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.912G	62.63	88.20	-25.57	55.03	3	Vertical	213	1.80	-	32.40	7.64	32.44			
RMS	5.903G	51.51	68.20	-16.69	43.92	3	Vertical	213	1.80	-	32.40	7.63	32.44			
PK	6.1255G	125.53	Inf	-Inf	117.64	3	Vertical	213	1.80	-	32.60	7.71	32.42			
RMS	6.128G	115.66	Inf	-Inf	107.76	3	Vertical	213	1.80	-	32.61	7.71	32.42			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6125MHz_TX

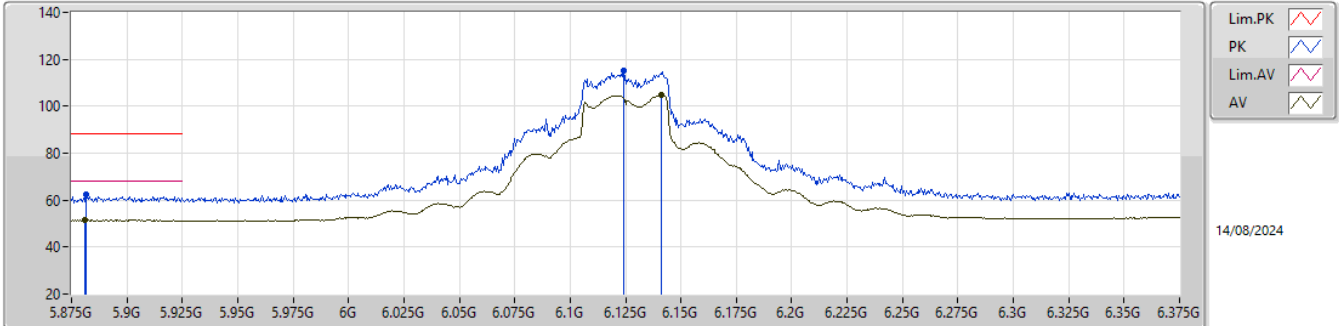EUT_Y_2TX
Setting 29
01-I-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.8815G	62.64	88.20	-25.56	55.13	3	Horizontal	36	1.80	-	32.33	7.62	32.44			
RMS	5.881G	51.48	68.20	-16.72	43.98	3	Horizontal	36	1.80	-	32.32	7.62	32.44			
PK	6.124G	115.00	Inf	-Inf	107.13	3	Horizontal	36	1.80	-	32.60	7.70	32.43			
RMS	6.141G	104.58	Inf	-Inf	96.63	3	Horizontal	36	1.80	-	32.66	7.71	32.42			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6125MHz_TX

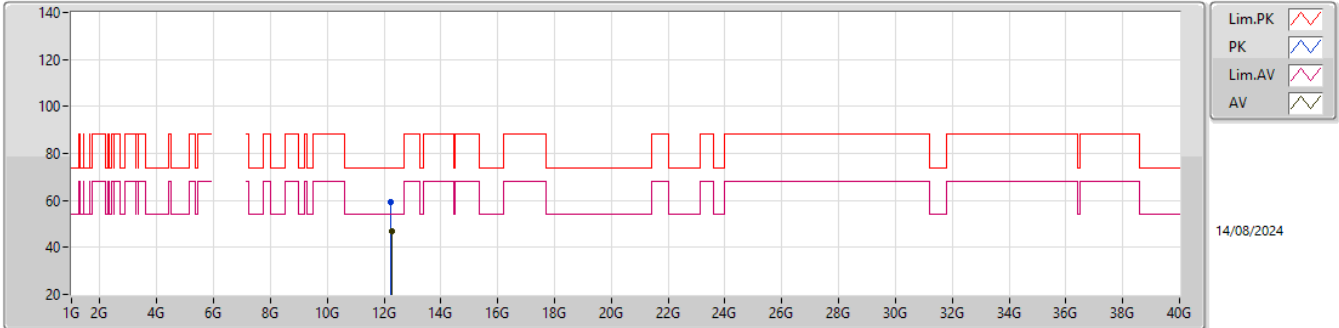


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.24054G	59.50	74.00	-14.50	41.64	3	Vertical	345	1.80	-	39.10	11.21	32.45			
AV	12.2573G	46.85	54.00	-7.15	28.97	3	Vertical	345	1.80	-	39.09	11.22	32.43			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6125MHz_TX

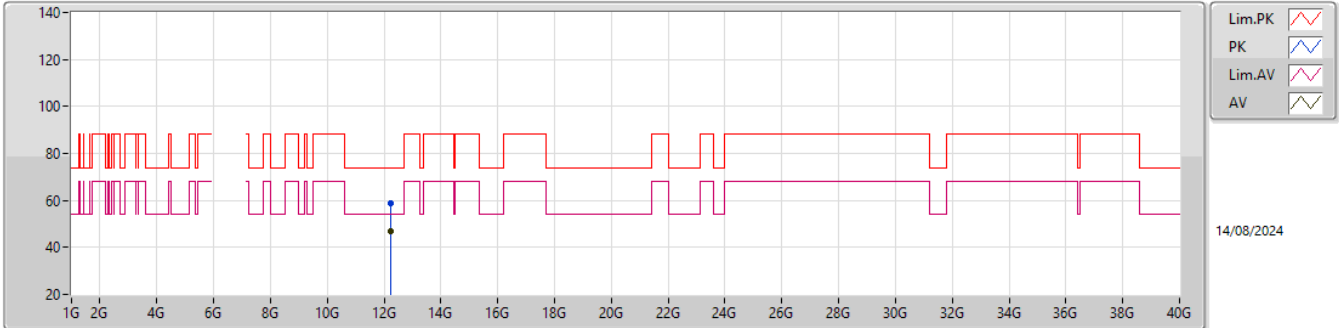


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.25474G	58.94	74.00	-15.06	41.06	3	Horizontal	277	1.58	-	39.09	11.22	32.43			
AV	12.25466G	46.80	54.00	-7.20	28.92	3	Horizontal	277	1.58	-	39.09	11.22	32.43			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6125MHz_TX

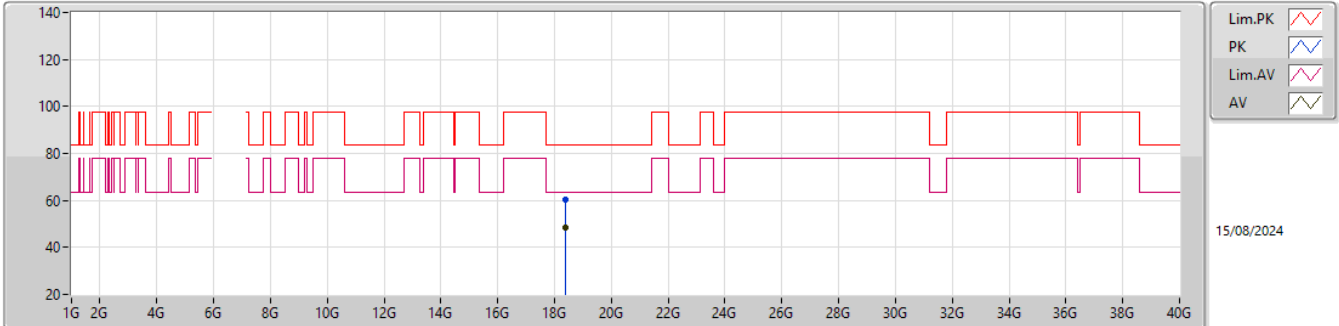


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.39474G	60.47	83.54	-23.07	57.05	1	Vertical	281	1.65	-	37.77	15.28	49.63			
AV	18.37766G	48.27	63.54	-15.27	44.94	1	Vertical	281	1.65	-	37.67	15.28	49.62			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6125MHz_TX

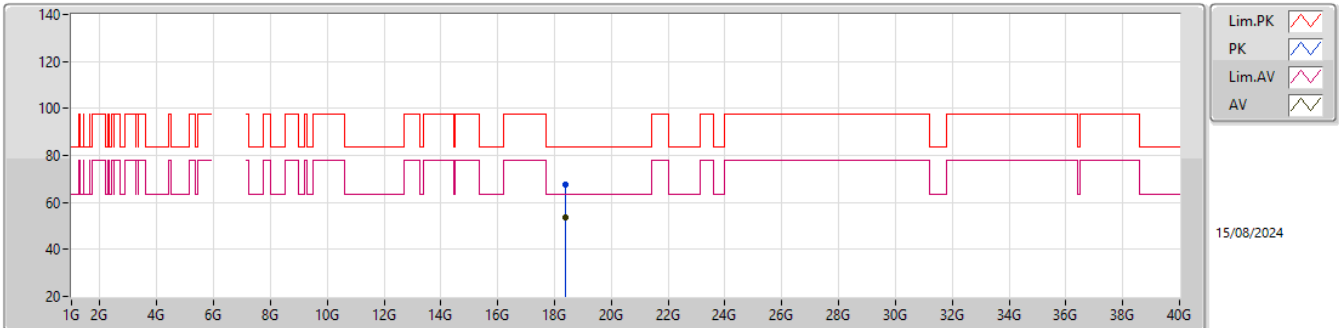


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.37724G	67.66	83.54	-15.88	64.34	1	Horizontal	241	1.62	-	37.66	15.28	49.62			
AV	18.37682G	53.53	63.54	-10.01	50.21	1	Horizontal	241	1.62	-	37.66	15.28	49.62			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6205MHz_TX

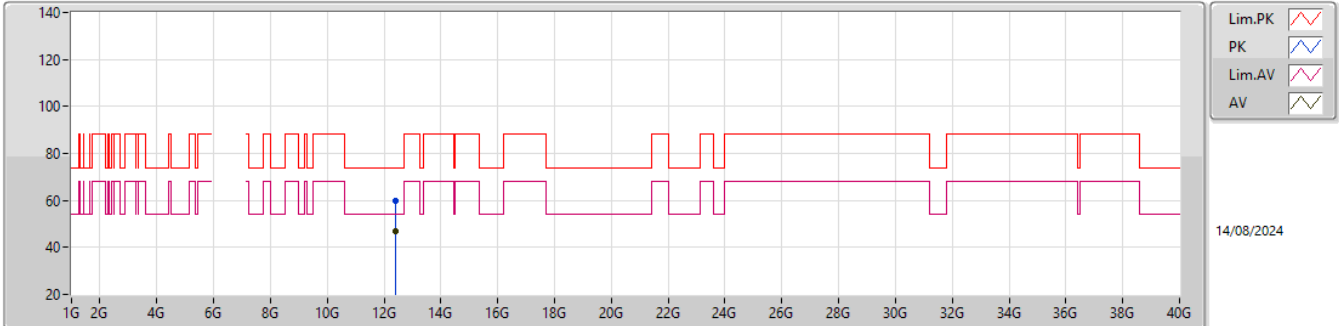


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.4109G	59.73	74.00	-14.27	41.93	3	Vertical	64	1.85	-	38.73	11.28	32.21			
AV	12.40004G	46.76	54.00	-7.24	28.91	3	Vertical	64	1.85	-	38.80	11.27	32.22			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6205MHz_TX

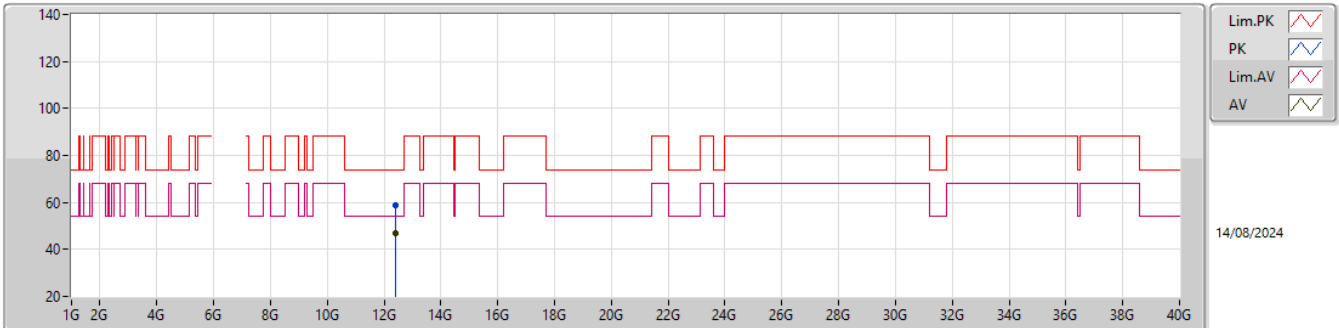EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.41362G	58.76	74.00	-15.24	40.96	3	Horizontal	308	1.43	-	38.72	11.28	32.20			
AV	12.4087G	46.80	54.00	-7.20	28.98	3	Horizontal	308	1.43	-	38.75	11.28	32.21			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6205MHz_TX

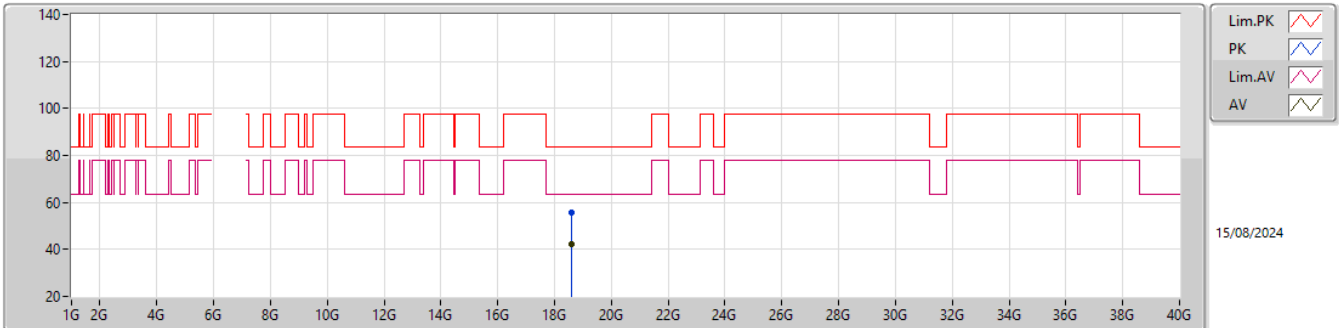EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.59932G	55.56	83.54	-27.98	52.20	1	Vertical	279	1.63	-	37.70	15.27	49.61			
AV	18.61696G	42.04	63.54	-21.50	38.64	1	Vertical	279	1.63	-	37.73	15.27	49.60			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6205MHz_TX

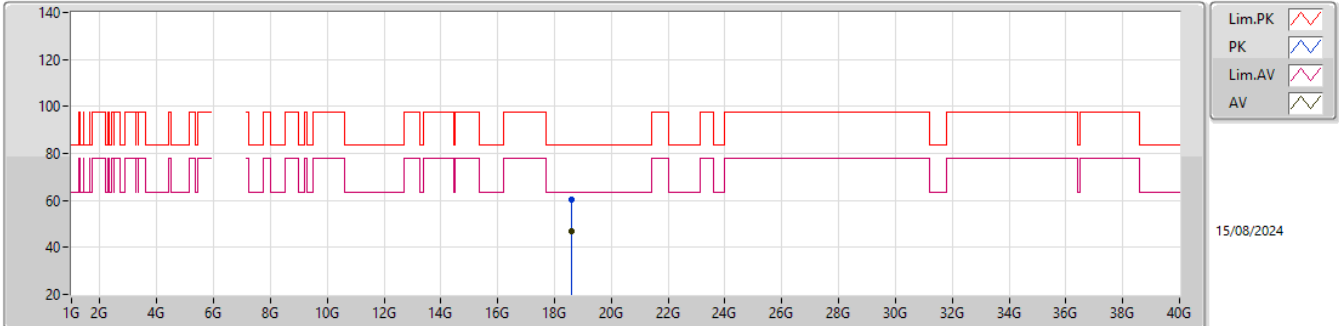


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.59232G	60.10	83.54	-23.44	56.75	1	Horizontal	236	1.53	-	37.70	15.27	49.62			
AV	18.6115G	47.10	63.54	-16.44	43.71	1	Horizontal	236	1.53	-	37.72	15.27	49.60			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6405MHz_TX

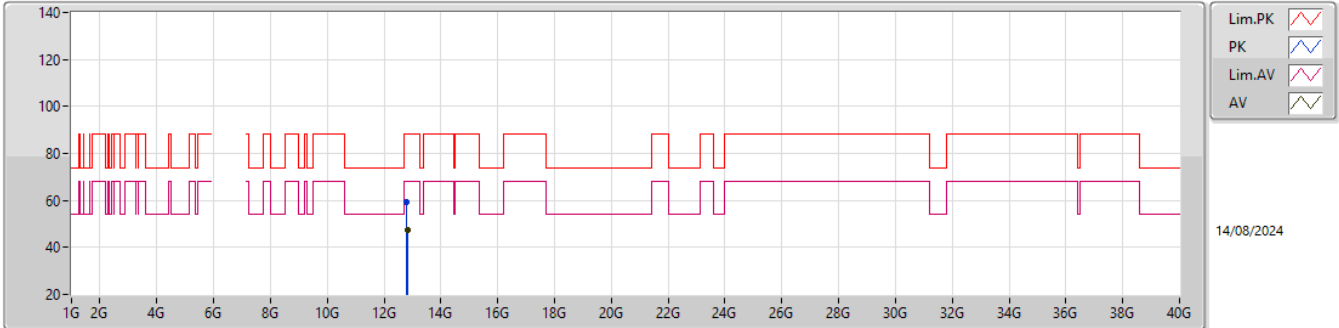


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.80794G	59.39	88.20	-28.81	40.51	3	Vertical	322	1.40	-	39.22	11.43	31.77			
RMS	12.81678G	47.45	68.20	-20.75	28.55	3	Vertical	322	1.40	-	39.23	11.43	31.76			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6405MHz_TX

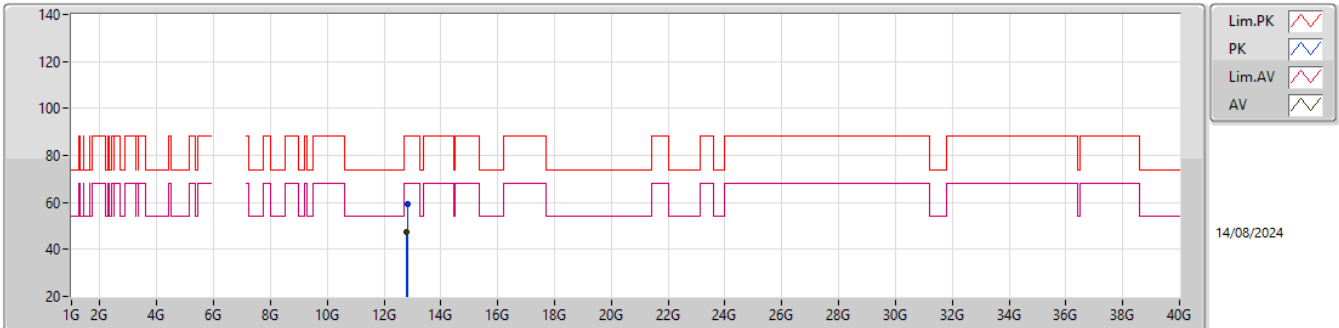EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.81108G	59.43	88.20	-28.77	40.55	3	Horizontal	334	1.41	-	39.22	11.43	31.77			
RMS	12.80072G	47.47	68.20	-20.73	28.63	3	Horizontal	334	1.41	-	39.20	11.42	31.78			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6405MHz_TX

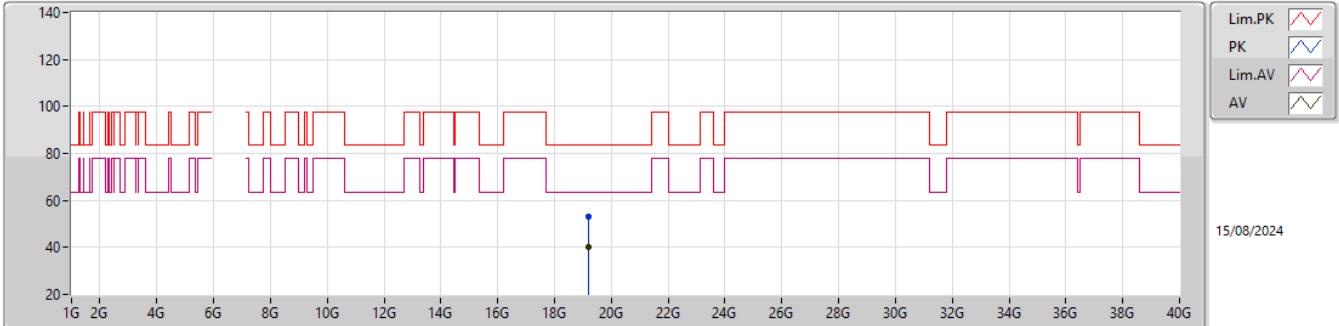EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.21136G	53.10	83.54	-30.44	49.36	1	Vertical	121	1.69	-	37.98	15.24	49.48			
AV	19.20954G	40.28	63.54	-23.26	36.54	1	Vertical	121	1.69	-	37.98	15.24	49.48			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6405MHz_TX

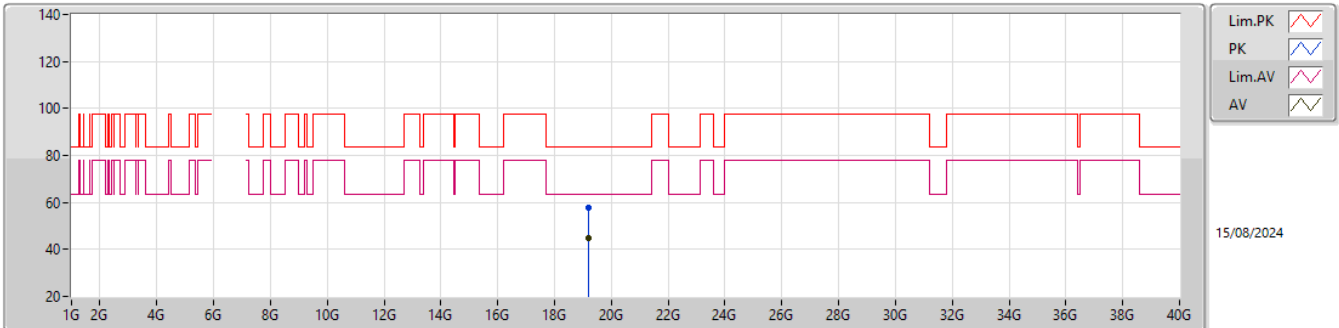EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.2129G	57.82	83.54	-25.72	54.09	1	Horizontal	232	1.64	-	37.97	15.24	49.48			
AV	19.21262G	44.82	63.54	-18.72	41.09	1	Horizontal	232	1.64	-	37.97	15.24	49.48			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6565MHz_TX

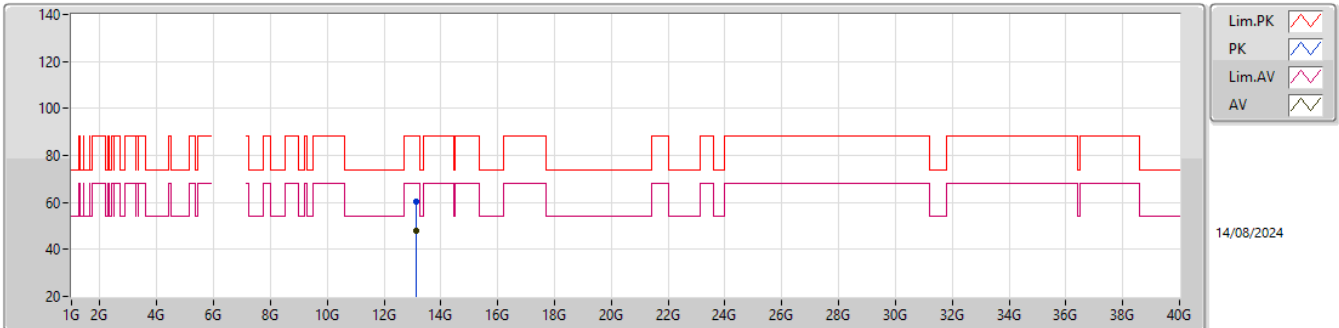EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.13226G	60.18	88.20	-28.02	40.74	3	Vertical	293	1.46	-	39.33	11.55	31.44			
RMS	13.13055G	47.82	68.20	-20.38	28.39	3	Vertical	293	1.46	-	39.32	11.55	31.44			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6565MHz_TX

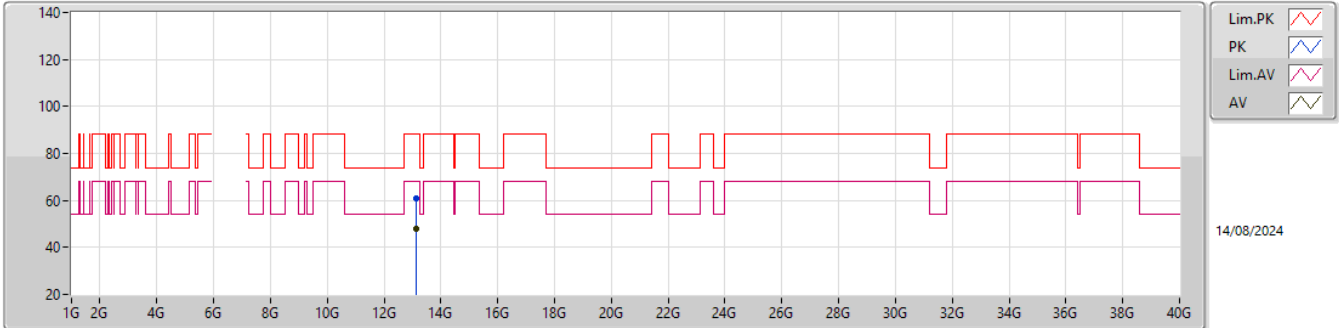


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.12613G	60.66	88.20	-27.54	41.25	3	Horizontal	332	1.16	-	39.30	11.55	31.44			
RMS	13.13401G	47.96	68.20	-20.24	28.51	3	Horizontal	332	1.16	-	39.34	11.55	31.44			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6565MHz_TX

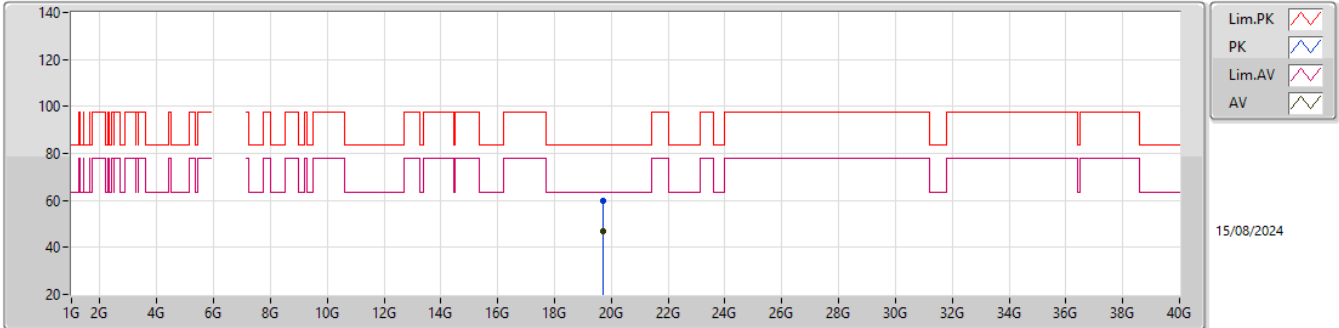


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.71684G	59.69	83.54	-23.85	56.15	1	Vertical	348	1.65	-	37.83	15.21	49.50			
AV	19.69542G	46.94	63.54	-16.60	43.41	1	Vertical	348	1.65	-	37.83	15.22	49.52			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6565MHz_TX

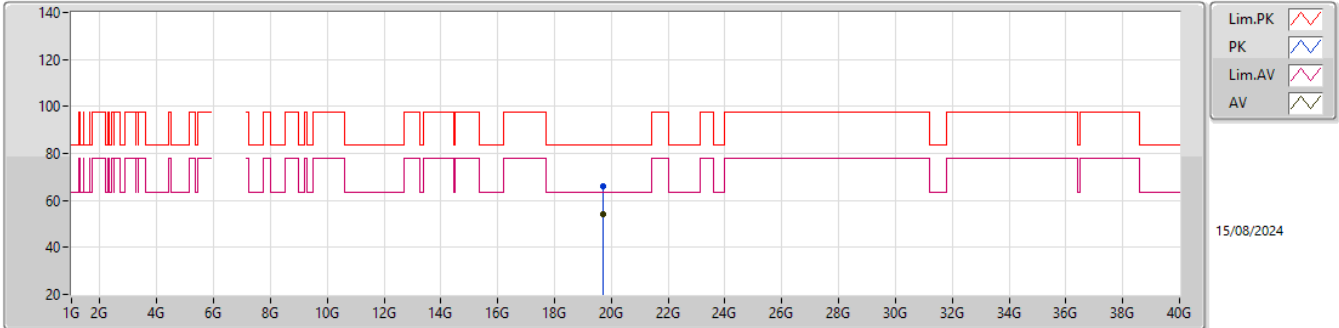


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.71558G	65.94	83.54	-17.60	62.40	1	Horizontal	245	1.61	-	37.83	15.21	49.50			
AV	19.69556G	54.04	63.54	-9.50	50.51	1	Horizontal	245	1.61	-	37.83	15.22	49.52			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6685MHz_TX

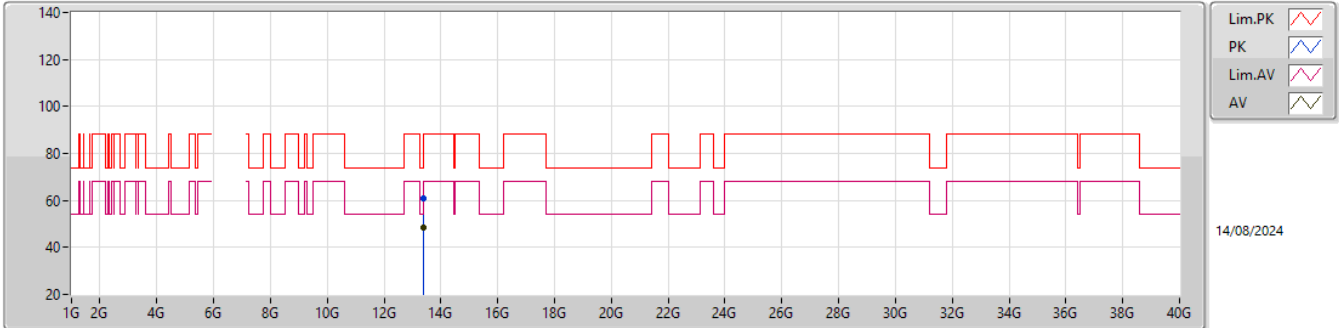


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.37257G	60.66	74.00	-13.34	40.45	3	Vertical	53	1.73	-	39.75	11.64	31.18			
AV	13.3698G	48.53	54.00	-5.47	28.33	3	Vertical	53	1.73	-	39.74	11.64	31.18			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6685MHz_TX

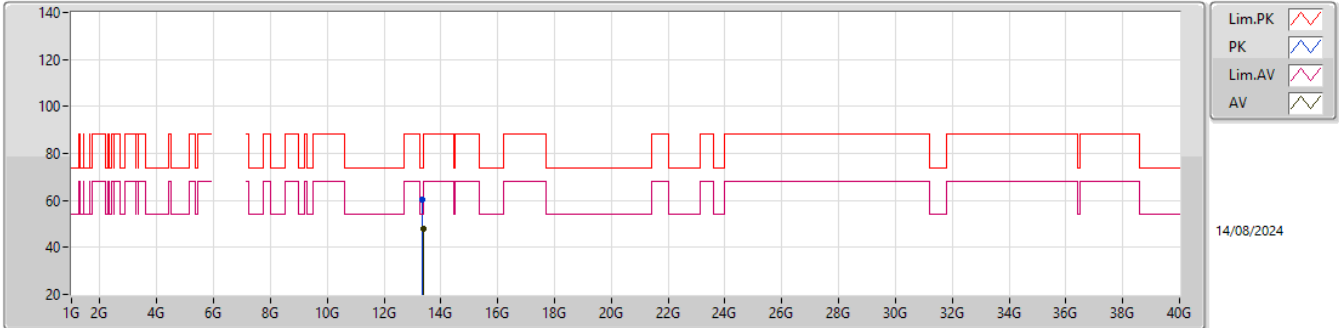


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.36583G	60.46	74.00	-13.54	40.27	3	Horizontal	305	1.41	-	39.73	11.64	31.18			
AV	13.37089G	48.09	54.00	-5.91	27.89	3	Horizontal	305	1.41	-	39.74	11.64	31.18			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6685MHz_TX

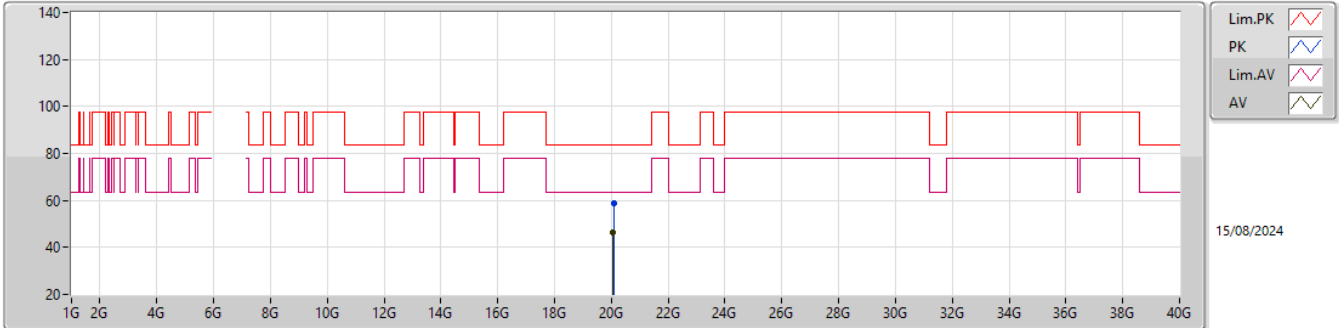


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.07348G	58.80	83.54	-24.74	55.00	1	Vertical	244	1.65	-	37.79	15.26	49.25			
AV	20.05556G	46.22	63.54	-17.32	42.52	1	Vertical	244	1.65	-	37.72	15.24	49.26			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6685MHz_TX

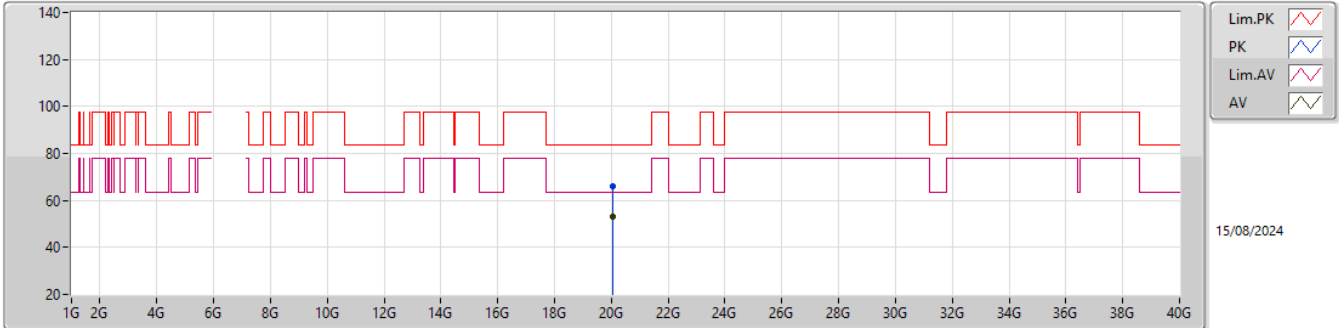


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.0501G	66.26	83.54	-17.28	62.58	1	Horizontal	239	1.63	-	37.70	15.24	49.26			
AV	20.05052G	53.10	63.54	-10.44	49.42	1	Horizontal	239	1.63	-	37.70	15.24	49.26			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6845MHz_TX

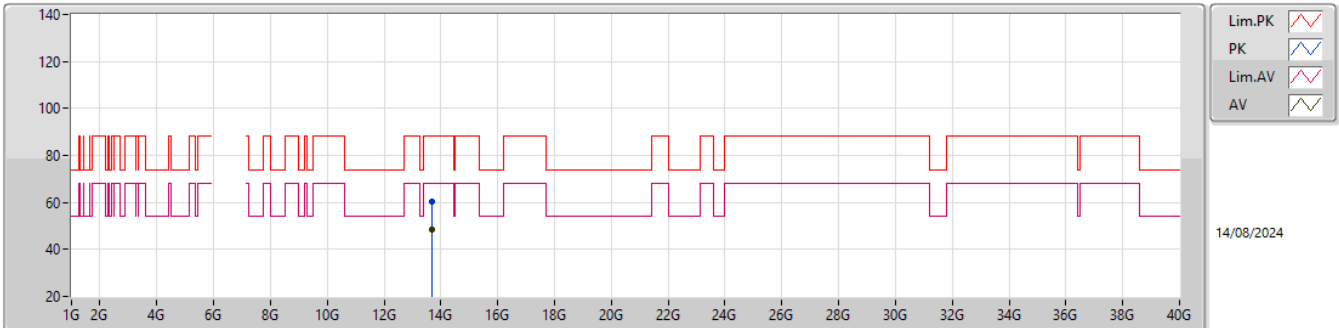EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.68789G	60.54	88.20	-27.66	39.80	3	Vertical	1	1.39	-	40.10	11.76	31.12			
RMS	13.69234G	48.29	68.20	-19.91	27.55	3	Vertical	1	1.39	-	40.10	11.76	31.12			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6845MHz_TX

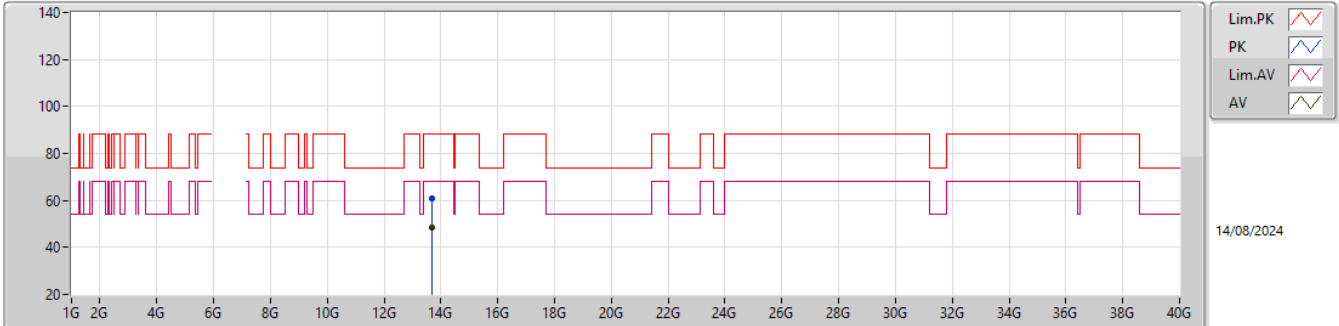


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.69118G	61.01	88.20	-27.19	40.27	3	Horizontal	292	2.16	-	40.10	11.76	31.12			
RMS	13.68741G	48.34	68.20	-19.86	27.60	3	Horizontal	292	2.16	-	40.10	11.76	31.12			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX


6845MHz_TX

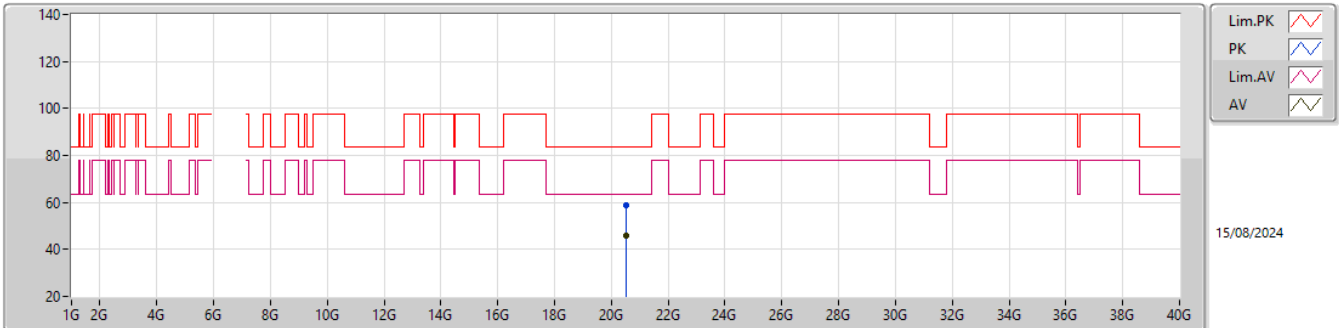EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.54186G	58.66	83.54	-24.88	54.30	1	Vertical	37	1.66	-	37.85	15.63	49.12			
AV	20.53962G	45.67	63.54	-17.87	41.32	1	Vertical	37	1.66	-	37.84	15.63	49.12			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6845MHz_TX

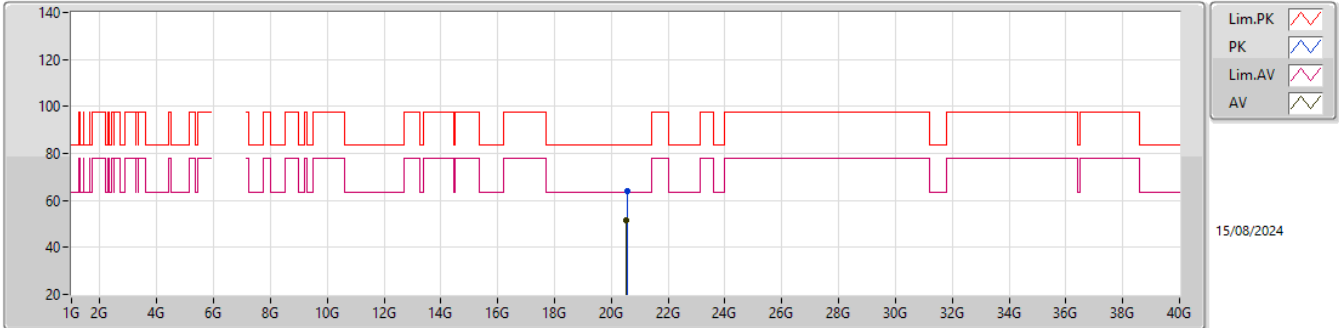


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.54298G	63.72	83.54	-19.82	59.35	1	Horizontal	241	1.63	-	37.86	15.63	49.12			
AV	20.53864G	51.68	63.54	-11.86	47.34	1	Horizontal	241	1.63	-	37.83	15.63	49.12			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6145MHz_TX

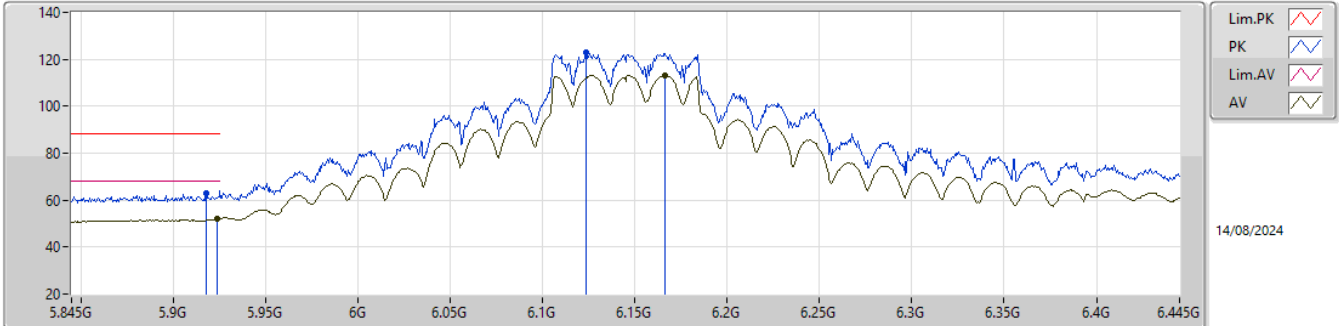


EUT_Y_2TX
Setting 29
01-I-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9182G	62.81	88.20	-25.39	55.21	3	Vertical	211	1.80	-	32.40	7.64	32.44			
RMS	5.9236G	52.19	68.20	-16.01	44.59	3	Vertical	211	1.80	-	32.40	7.64	32.44			
PK	6.1234G	122.95	Inf	-Inf	115.09	3	Vertical	211	1.80	-	32.59	7.70	32.43			
RMS	6.1666G	113.30	Inf	-Inf	105.28	3	Vertical	211	1.80	-	32.73	7.71	32.42			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6145MHz_TX

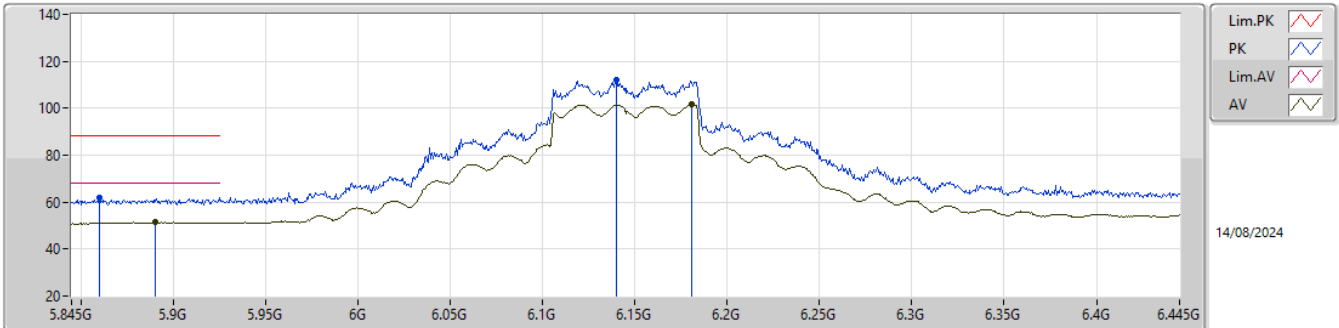


EUT_Y_2TX
Setting 29
01-I-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.86G	61.67	88.20	-26.53	54.27	3	Horizontal	36	1.80	-	32.24	7.61	32.45			
RMS	5.8906G	51.38	68.20	-16.82	43.83	3	Horizontal	36	1.80	-	32.36	7.63	32.44			
PK	6.1402G	112.27	Inf	-Inf	104.32	3	Horizontal	36	1.80	-	32.66	7.71	32.42			
RMS	6.181G	101.59	Inf	-Inf	93.53	3	Horizontal	36	1.80	-	32.76	7.72	32.42			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6145MHz_TX

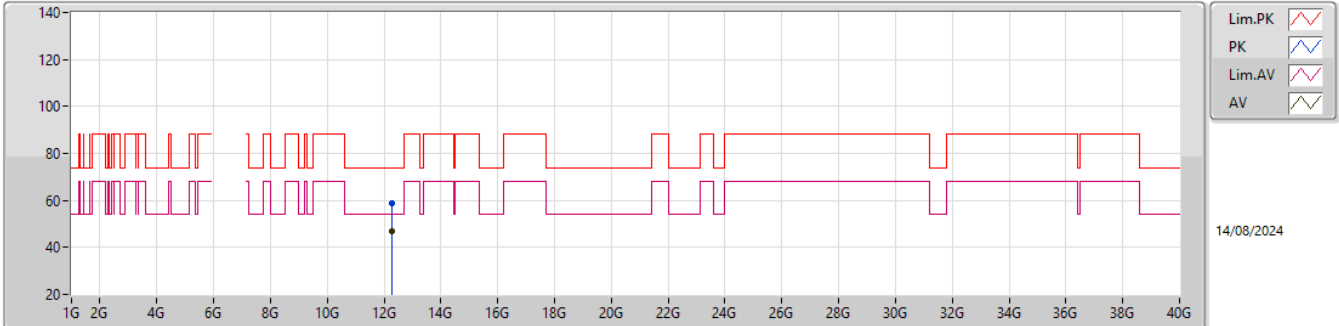


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.29433G	58.98	74.00	-15.02	41.12	3	Vertical	263	2.92	-	39.01	11.23	32.38			
AV	12.29058G	46.71	54.00	-7.29	28.84	3	Vertical	263	2.92	-	39.02	11.23	32.38			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6145MHz_TX

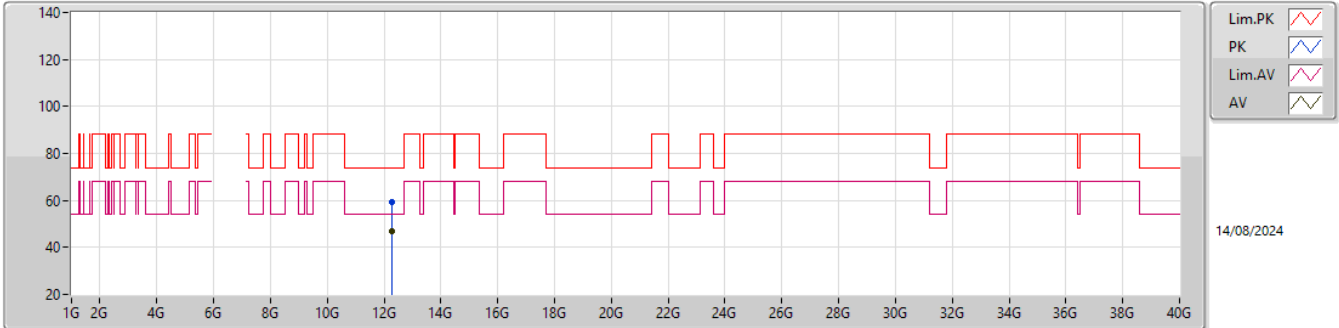


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.28927G	59.16	74.00	-14.84	41.29	3	Horizontal	49	1.34	-	39.02	11.23	32.38			
AV	12.28656G	46.67	54.00	-7.33	28.80	3	Horizontal	49	1.34	-	39.03	11.23	32.39			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6145MHz_TX

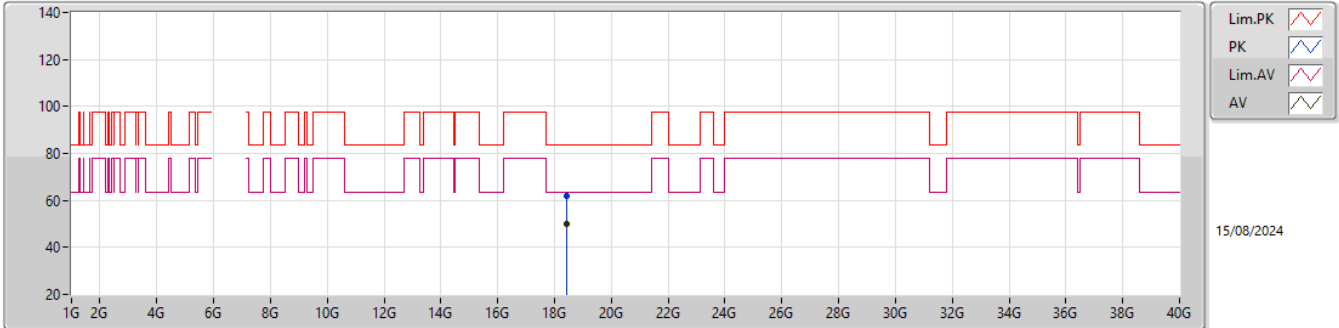


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.43332G	61.93	83.54	-21.61	58.57	1	Vertical	119	1.59	-	37.73	15.28	49.65			
AV	18.43584G	49.80	63.54	-13.74	46.44	1	Vertical	119	1.59	-	37.73	15.28	49.65			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6145MHz_TX

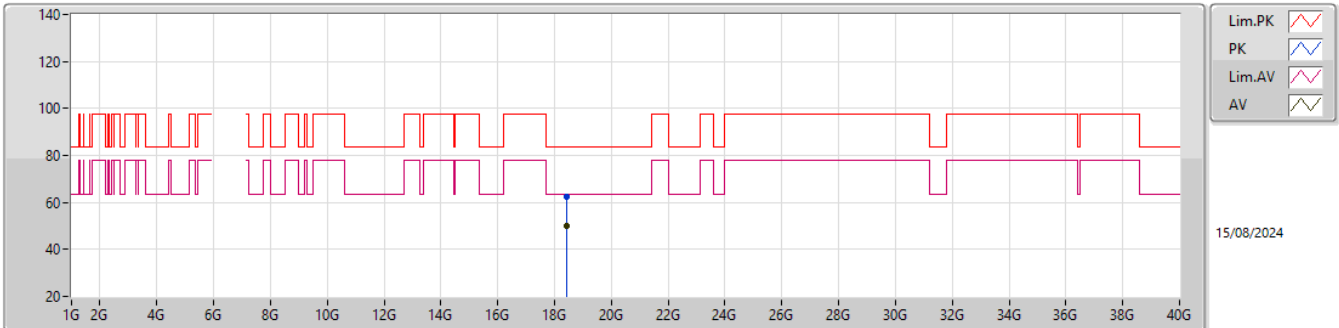EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.41666G	62.50	83.54	-21.04	59.09	1	Horizontal	240	1.62	-	37.77	15.28	49.64			
AV	18.43598G	49.76	63.54	-13.78	46.40	1	Horizontal	240	1.62	-	37.73	15.28	49.65			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6225MHz_TX

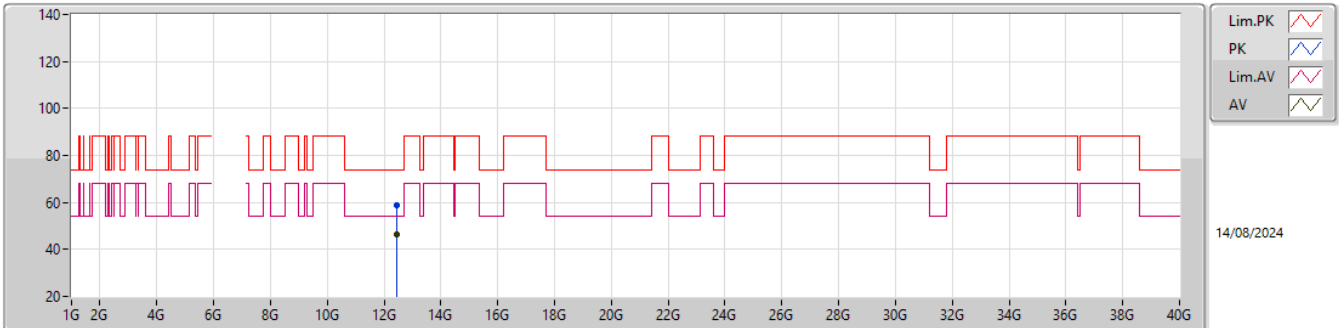EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.44538G	59.05	74.00	-14.95	41.39	3	Vertical	140	1.15	-	38.53	11.29	32.16			
AV	12.44608G	46.27	54.00	-7.73	28.62	3	Vertical	140	1.15	-	38.52	11.29	32.16			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6225MHz_TX

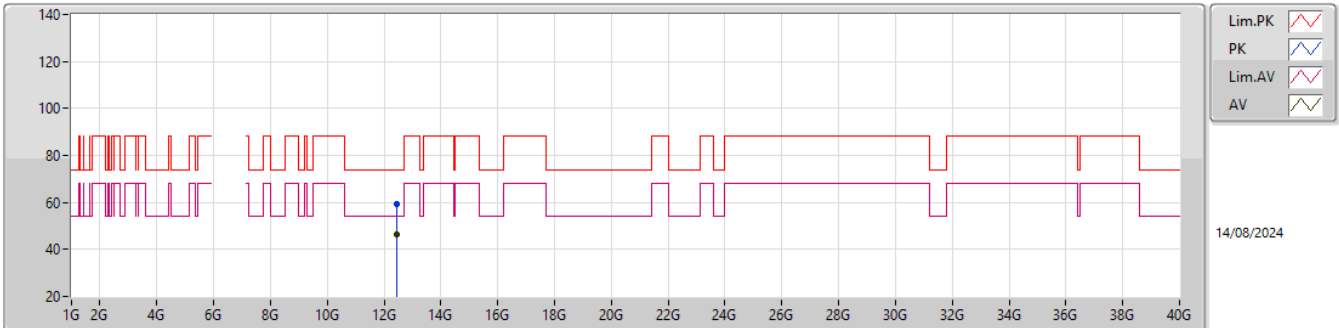


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.455G	59.07	74.00	-14.93	41.42	3	Horizontal	142	1.86	-	38.50	11.29	32.14			
AV	12.44866G	46.29	54.00	-7.71	28.64	3	Horizontal	142	1.86	-	38.51	11.29	32.15			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6225MHz_TX

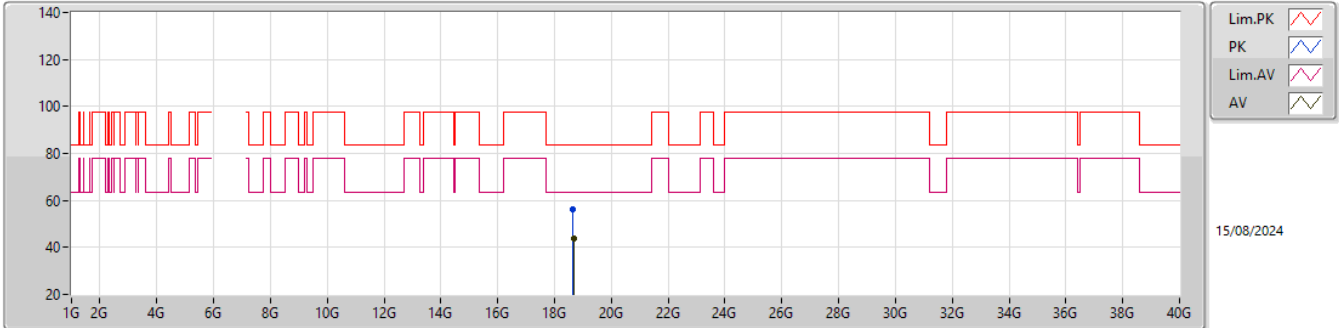


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.6526G	56.40	83.54	-27.14	52.92	1	Vertical	182	1.59	-	37.79	15.27	49.58			
AV	18.67374G	43.95	63.54	-19.59	40.53	1	Vertical	182	1.59	-	37.71	15.27	49.56			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6225MHz_TX

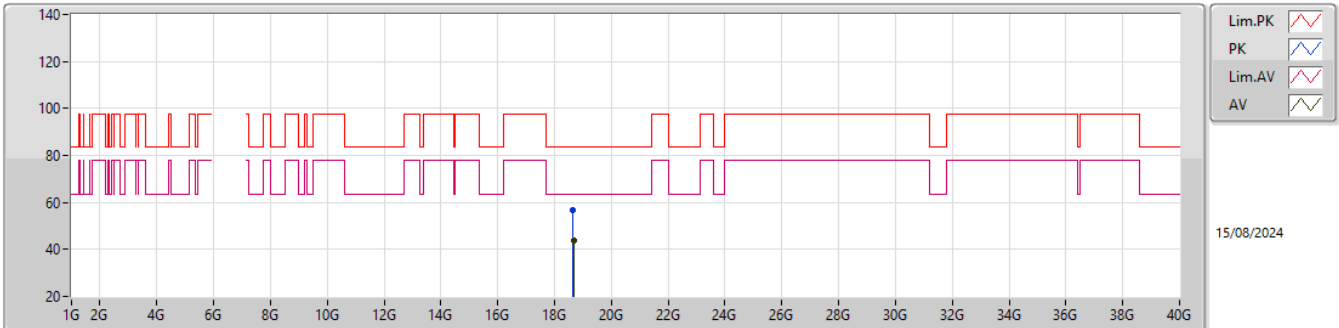EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.65358G	56.90	83.54	-26.64	53.42	1	Horizontal	231	1.65	-	37.79	15.27	49.58			
AV	18.67402G	43.96	63.54	-19.58	40.55	1	Horizontal	231	1.65	-	37.70	15.27	49.56			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6385MHz_TX

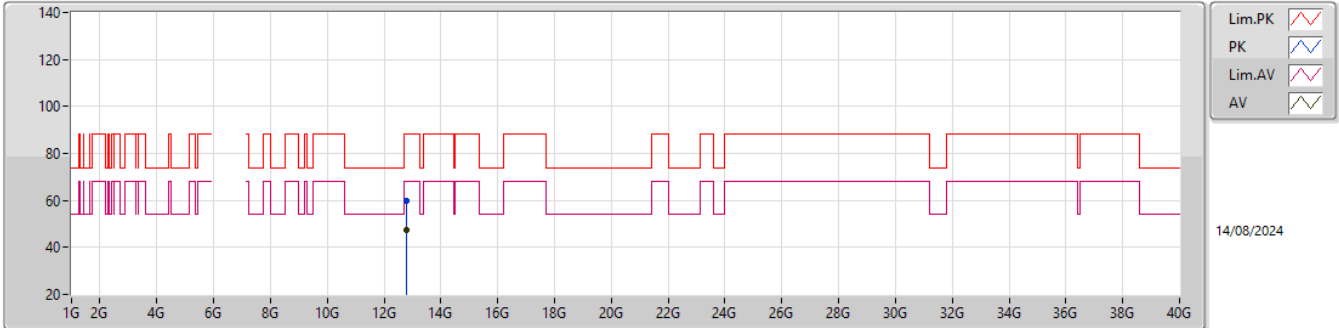


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.77459G	59.68	88.20	-28.52	41.03	3	Vertical	214	2.65	-	39.05	11.41	31.81			
RMS	12.7746G	47.19	68.20	-21.01	28.54	3	Vertical	214	2.65	-	39.05	11.41	31.81			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6385MHz_TX

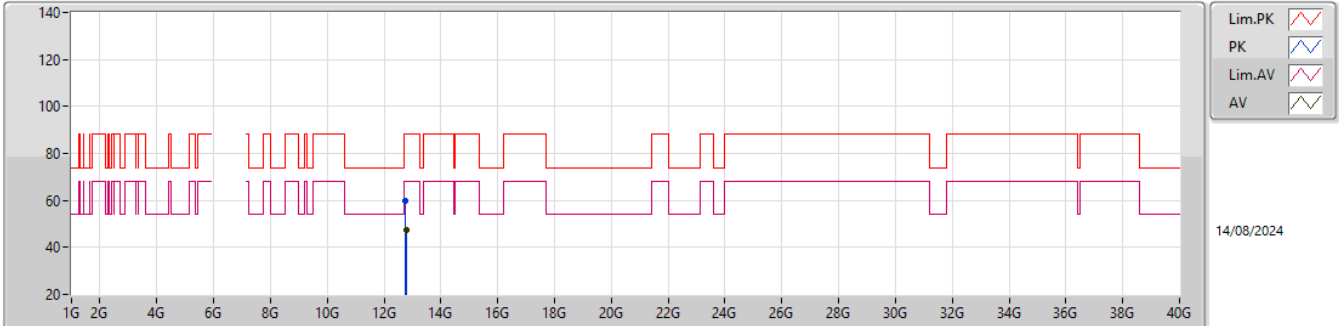


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.76748G	59.86	88.20	-28.34	41.26	3	Horizontal	275	2.95	-	39.00	11.41	31.81			
RMS	12.77439G	47.52	68.20	-20.68	28.87	3	Horizontal	275	2.95	-	39.05	11.41	31.81			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6385MHz_TX

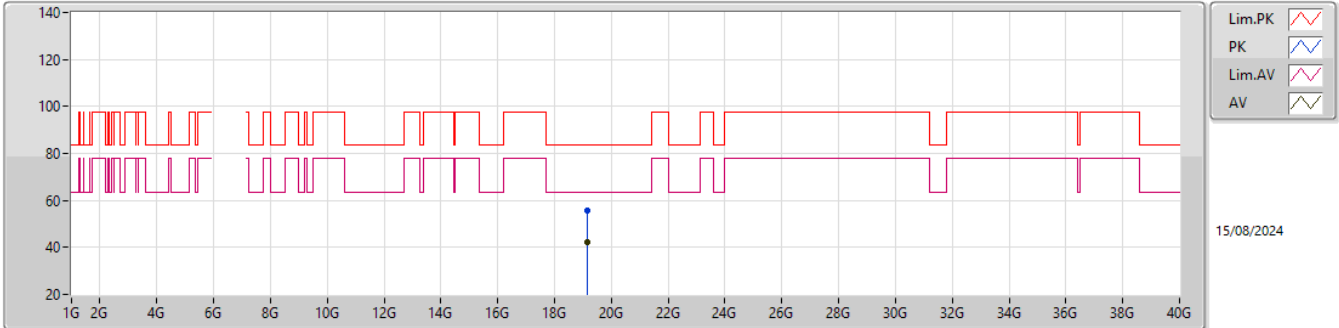


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.14352G	55.44	83.54	-28.10	51.91	1	Vertical	179	1.81	-	37.73	15.24	49.44			
AV	19.1522G	42.03	63.54	-21.51	38.52	1	Vertical	179	1.81	-	37.71	15.24	49.44			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6385MHz_TX

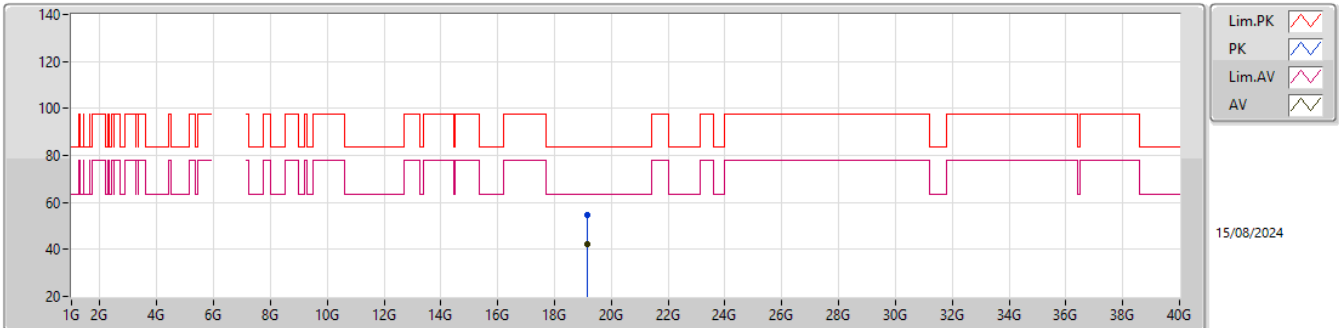EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.13358G	54.82	83.54	-28.72	51.24	1	Horizontal	237	1.65	-	37.77	15.24	49.43			
AV	19.15094G	42.00	63.54	-21.54	38.49	1	Horizontal	237	1.65	-	37.71	15.24	49.44			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6625MHz_TX

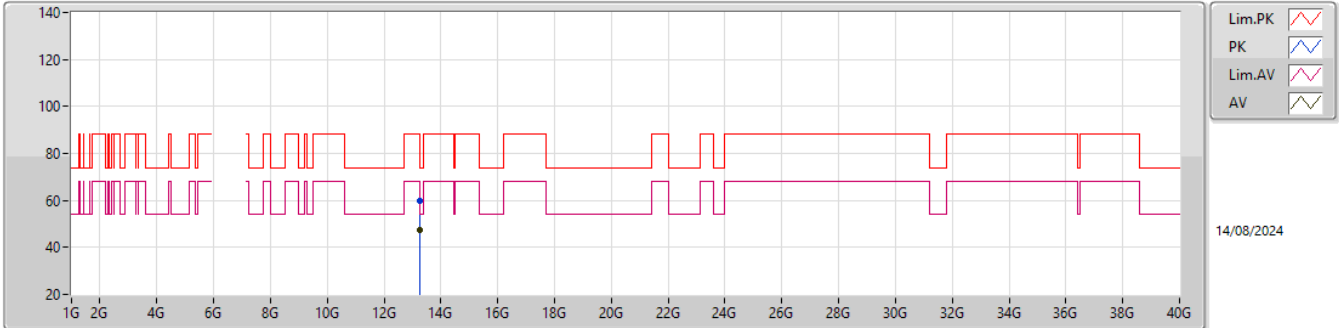


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.25416G	59.65	74.00	-14.35	40.14	3	Vertical	136	2.80	-	39.22	11.60	31.31			
AV	13.25G	47.21	54.00	-6.79	27.72	3	Vertical	136	2.80	-	39.20	11.60	31.31			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6625MHz_TX

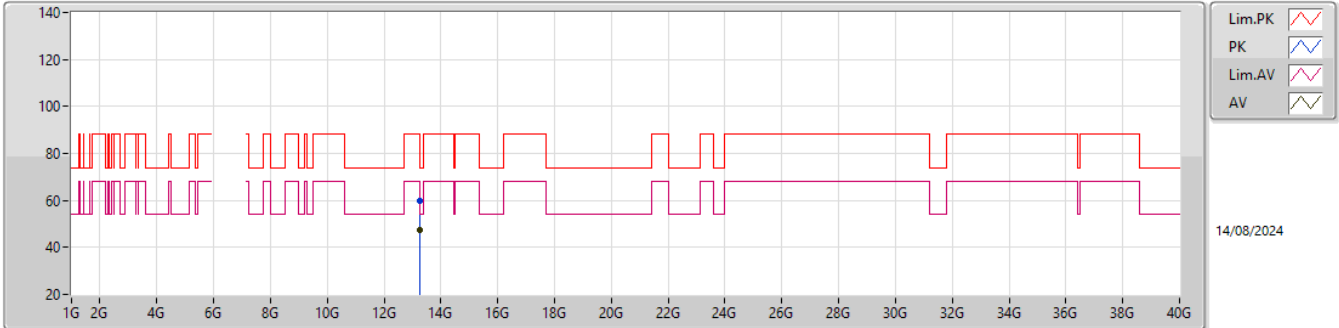


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.25386G	60.00	74.00	-14.00	40.49	3	Horizontal	199	2.58	-	39.22	11.60	31.31			
AV	13.25G	47.58	54.00	-6.42	28.09	3	Horizontal	199	2.58	-	39.20	11.60	31.31			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6625MHz_TX

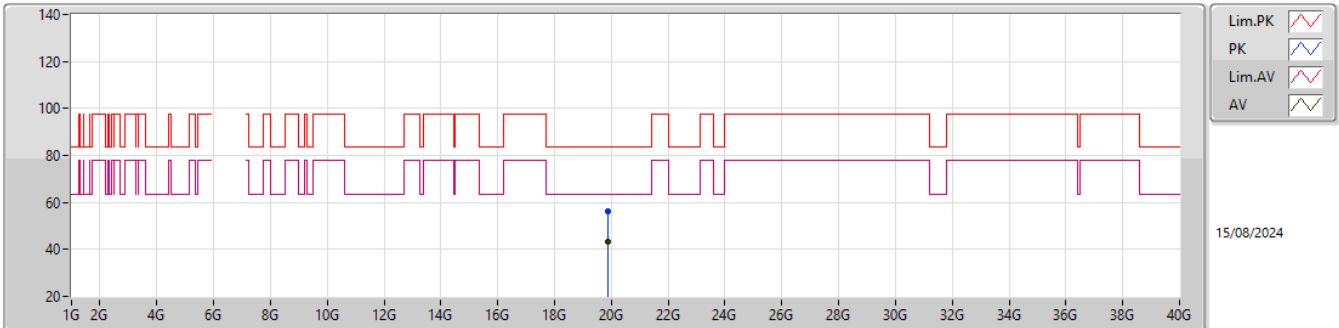EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.86352G	56.00	83.54	-27.54	52.49	1	Vertical	280	1.65	-	37.68	15.21	49.38			
AV	19.87108G	43.46	63.54	-20.08	39.90	1	Vertical	280	1.65	-	37.73	15.21	49.38			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6625MHz_TX

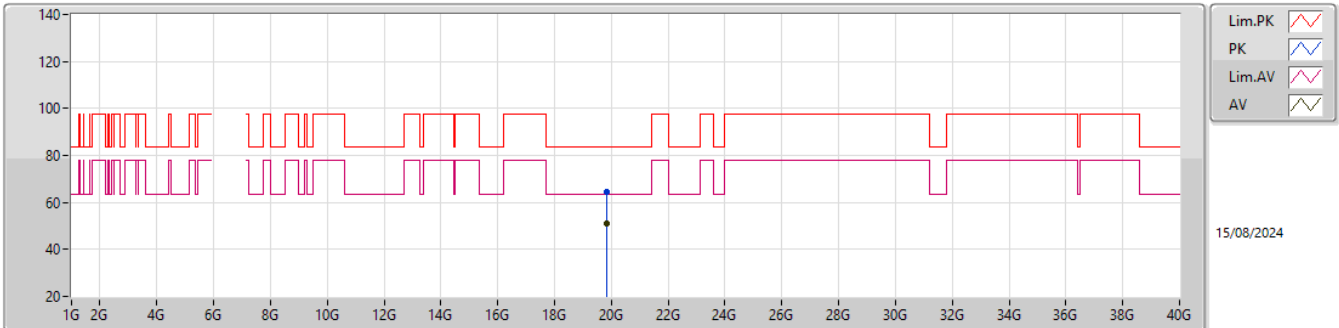


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.8519G	64.63	83.54	-18.91	61.20	1	Horizontal	244	1.63	-	37.61	15.21	49.39			
AV	19.84868G	51.26	63.54	-12.28	47.83	1	Horizontal	244	1.63	-	37.61	15.21	49.39			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6705MHz_TX

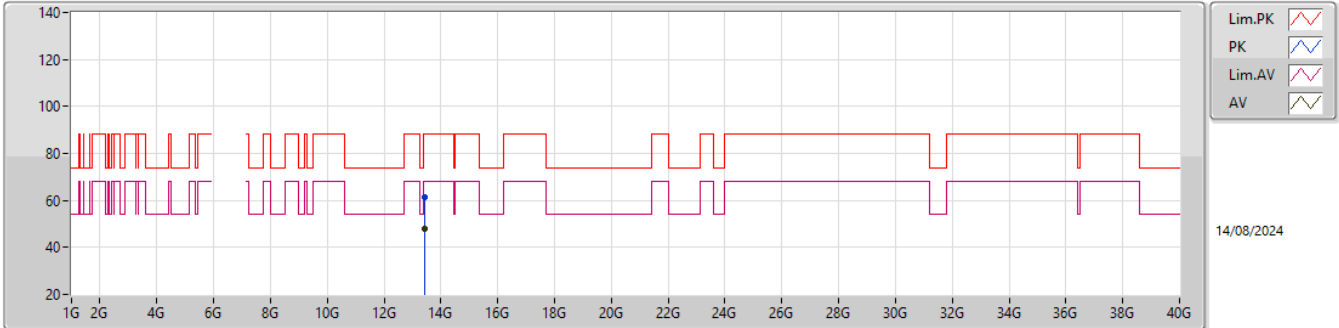


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.41416G	61.38	88.20	-26.82	40.99	3	Vertical	335	1.57	-	39.86	11.66	31.13			
RMS	13.41459G	48.10	68.20	-20.10	27.71	3	Vertical	335	1.57	-	39.86	11.66	31.13			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6705MHz_TX

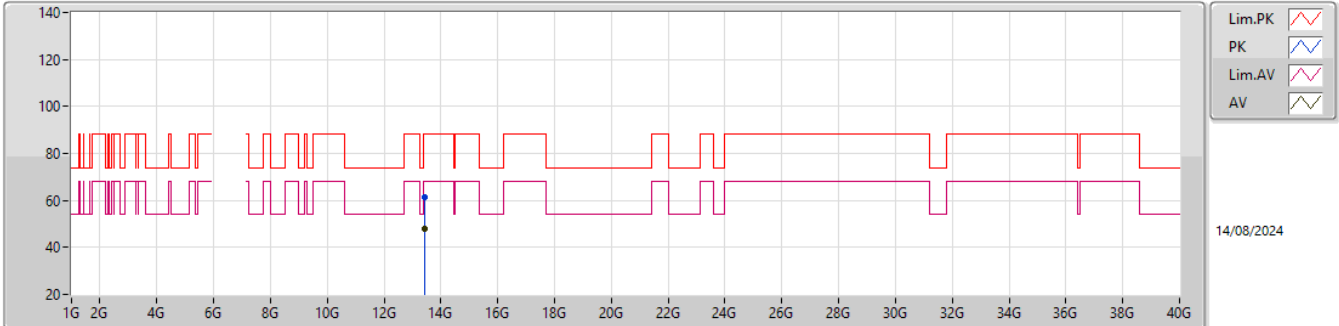


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.41097G	61.55	88.20	-26.65	41.19	3	Horizontal	153	2.48	-	39.84	11.66	31.14			
RMS	13.4123G	48.09	68.20	-20.11	27.71	3	Horizontal	153	2.48	-	39.85	11.66	31.13			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6705MHz_TX

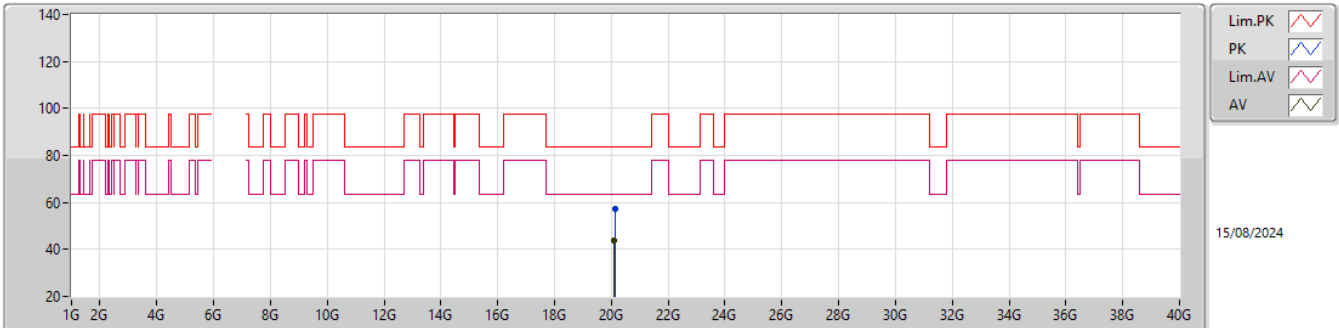EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.11654G	57.21	83.54	-26.33	53.36	1	Vertical	244	1.67	-	37.80	15.29	49.24			
AV	20.09736G	43.91	63.54	-19.63	39.98	1	Vertical	244	1.67	-	37.89	15.28	49.24			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6705MHz_TX

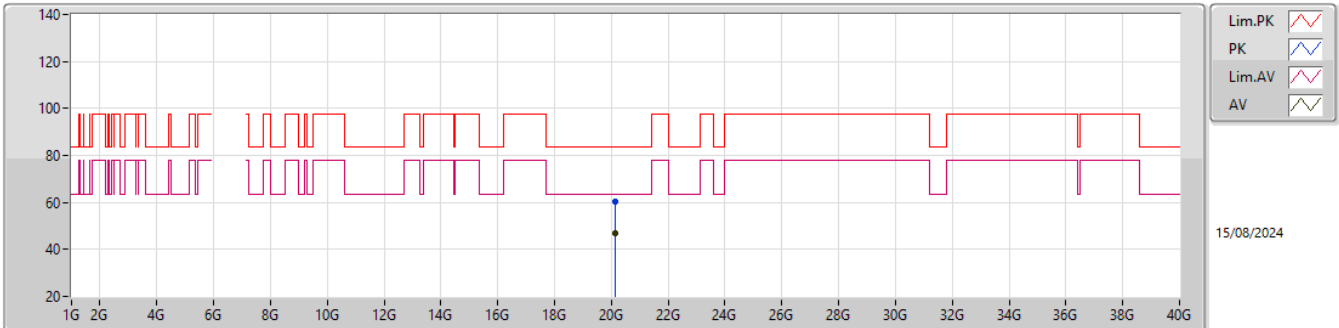EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.1241G	60.44	83.54	-23.10	56.62	1	Horizontal	168	1.65	-	37.76	15.30	49.24			
AV	20.12256G	46.98	63.54	-16.56	43.16	1	Horizontal	168	1.65	-	37.76	15.30	49.24			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6785MHz_TX

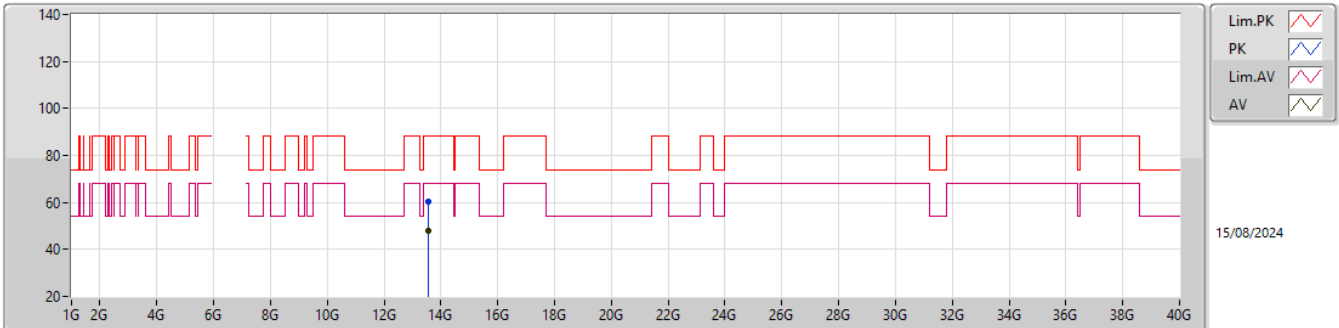EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.57154G	60.40	88.20	-27.80	39.54	3	Vertical	160	1.78	-	40.21	11.72	31.07			
RMS	13.56624G	47.96	68.20	-20.24	27.07	3	Vertical	160	1.78	-	40.24	11.72	31.07			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX


6785MHz_TX

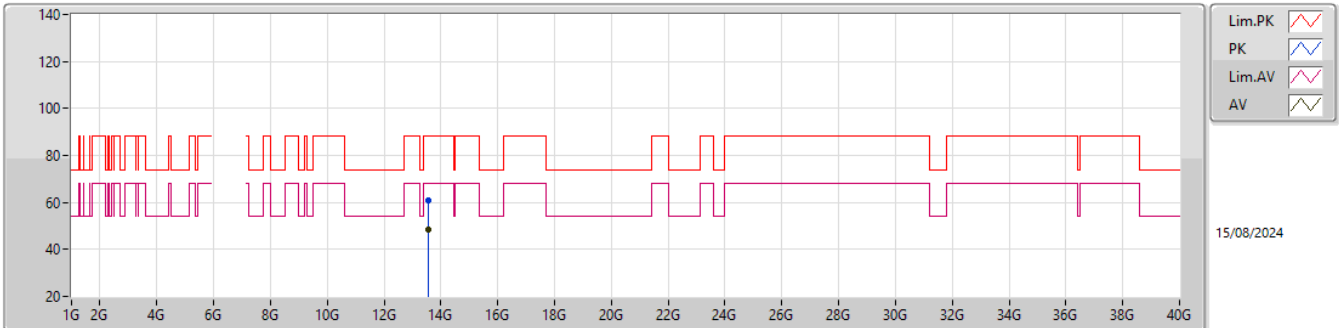EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.56733G	60.72	88.20	-27.48	39.84	3	Horizontal	279	2.42	-	40.23	11.72	31.07			
RMS	13.56952G	48.25	68.20	-19.95	27.38	3	Horizontal	279	2.42	-	40.22	11.72	31.07			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6785MHz_TX

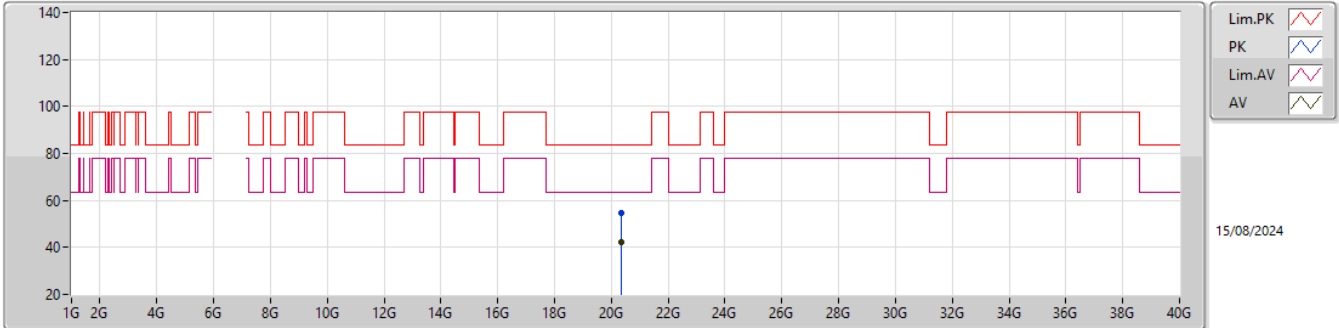


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.34226G	54.91	83.54	-28.63	50.50	1	Vertical	179	1.41	-	38.12	15.47	49.18			
AV	20.36172G	42.17	63.54	-21.37	37.78	1	Vertical	179	1.41	-	38.08	15.49	49.18			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6785MHz_TX

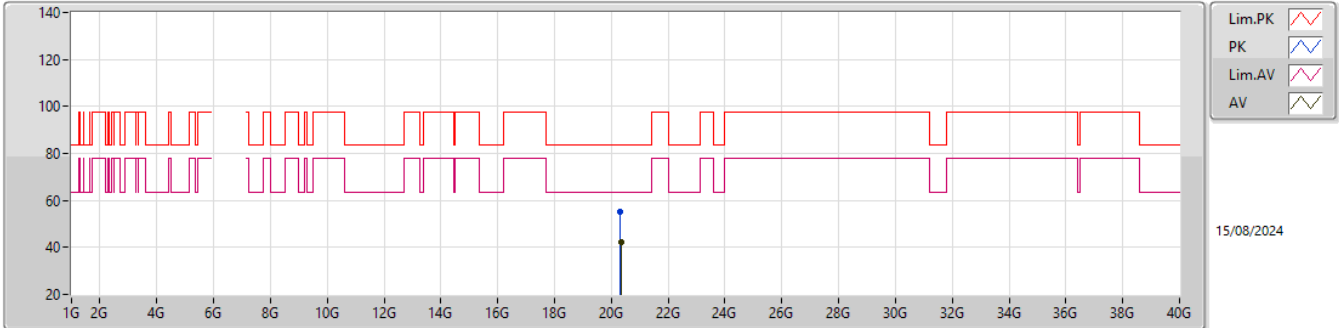


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.32476G	54.94	83.54	-28.60	50.52	1	Horizontal	166	1.65	-	38.15	15.46	49.19			
AV	20.34114G	42.11	63.54	-21.43	37.70	1	Horizontal	166	1.65	-	38.12	15.47	49.18			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6185MHz_TX

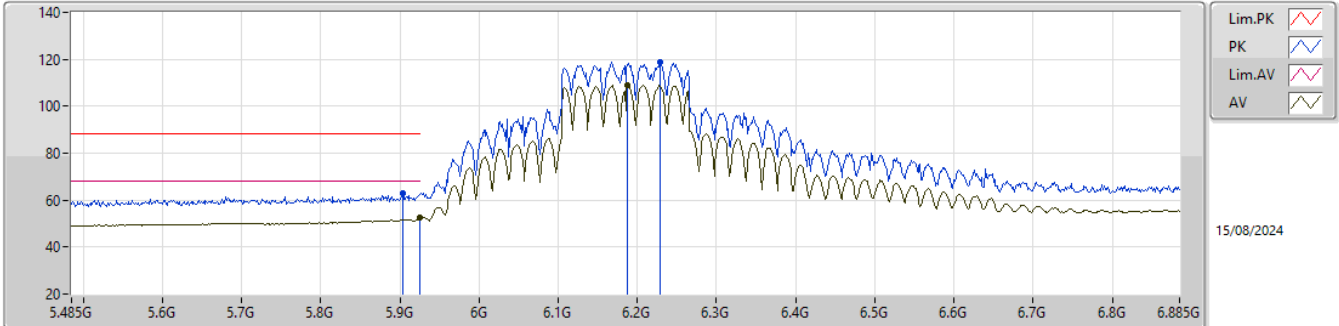


EUT_Y_2TX
Setting 29
01-I-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9036G	62.93	88.20	-25.27	55.34	3	Vertical	45	1.80	-	32.40	7.63	32.44			
RMS	5.9246G	52.66	68.20	-15.54	45.06	3	Vertical	45	1.80	-	32.40	7.64	32.44			
PK	6.2284G	118.88	Inf	-Inf	110.62	3	Vertical	45	1.80	-	32.91	7.76	32.41			
RMS	6.1878G	109.13	Inf	-Inf	101.05	3	Vertical	45	1.80	-	32.78	7.72	32.42			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6185MHz_TX

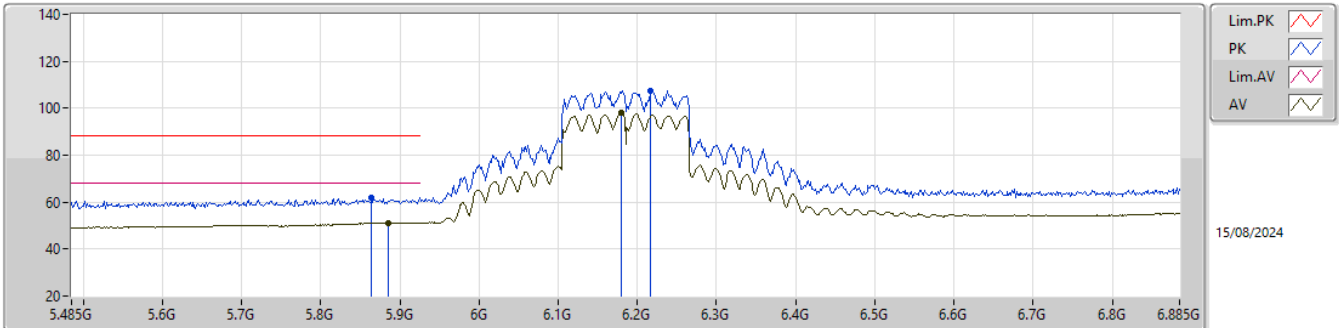


EUT_Y_2TX
Setting 29
01-I-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.8644G	61.84	88.20	-26.36	54.42	3	Horizontal	41	1.80	-	32.26	7.61	32.45			
RMS	5.8854G	51.28	68.20	-16.92	43.76	3	Horizontal	41	1.80	-	32.34	7.62	32.44			
PK	6.2172G	107.37	Inf	-Inf	99.17	3	Horizontal	41	1.80	-	32.87	7.74	32.41			
RMS	6.1794G	97.86	Inf	-Inf	89.80	3	Horizontal	41	1.80	-	32.76	7.72	32.42			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6185MHz_TX

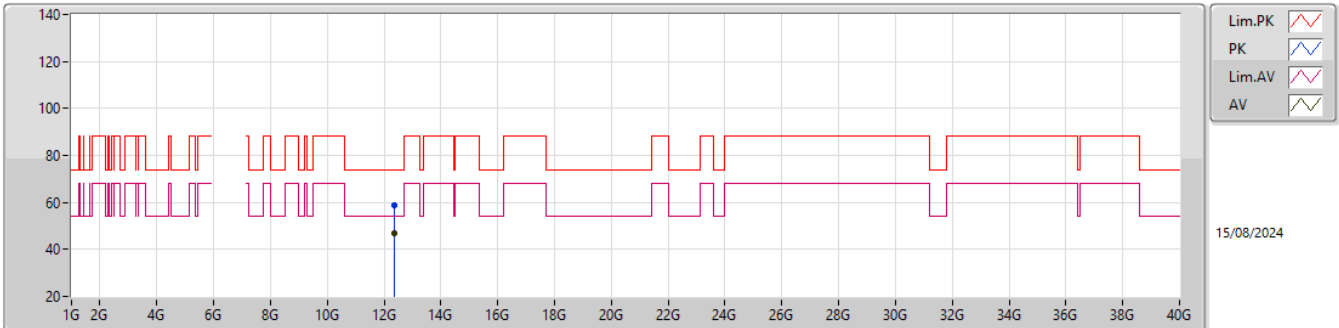EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.36661G	58.84	74.00	-15.16	40.98	3	Vertical	179	2.21	-	38.87	11.26	32.27			
AV	12.37489G	46.88	54.00	-7.12	29.03	3	Vertical	179	2.21	-	38.85	11.26	32.26			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6185MHz_TX

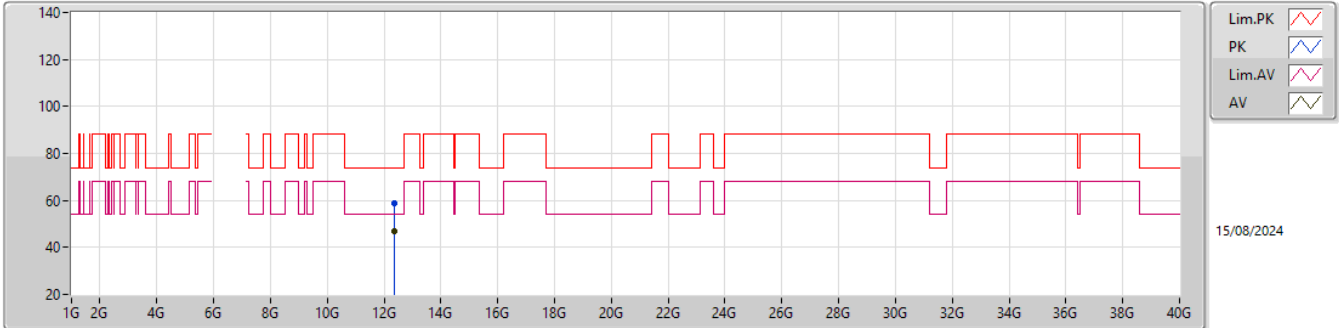


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.36631G	58.86	74.00	-15.14	41.00	3	Horizontal	239	2.52	-	38.87	11.26	32.27			
AV	12.37169G	46.73	54.00	-7.27	28.87	3	Horizontal	239	2.52	-	38.86	11.26	32.26			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6185MHz_TX

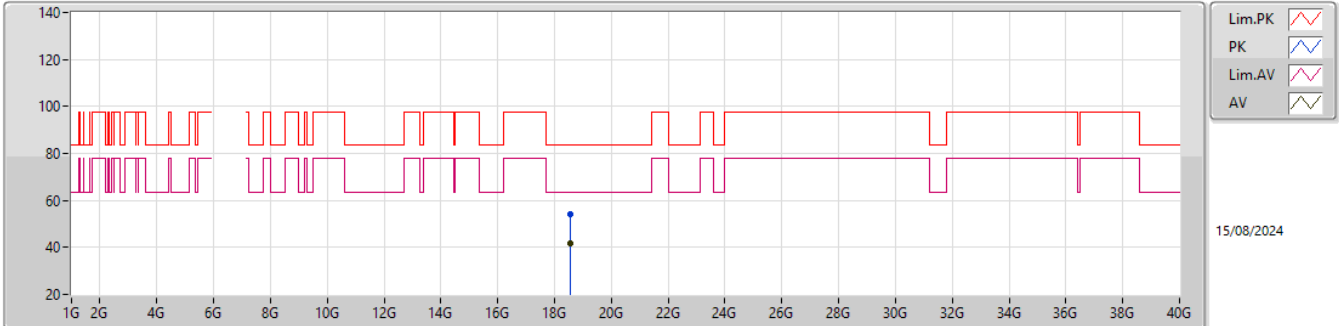EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.57628G	54.32	83.54	-29.22	50.98	1	Vertical	119	1.37	-	37.70	15.27	49.63			
AV	18.5536G	41.52	63.54	-22.02	38.19	1	Vertical	119	1.37	-	37.70	15.27	49.64			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6185MHz_TX

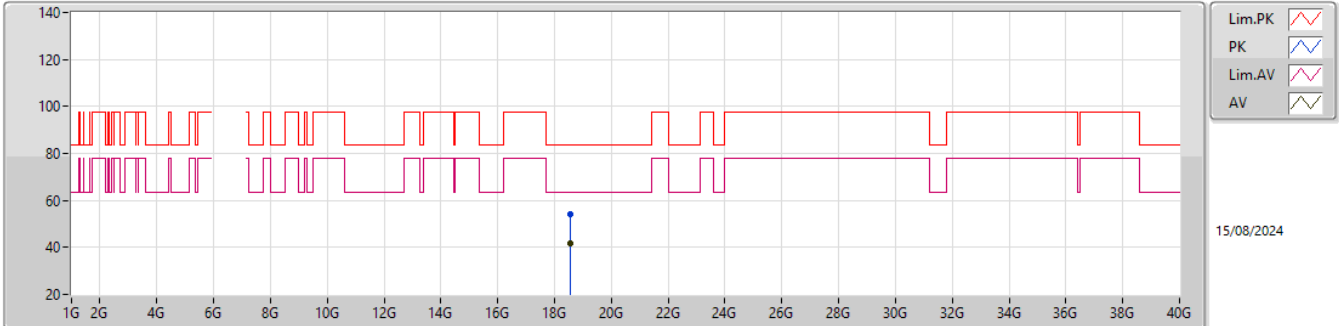


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.57278G	54.03	83.54	-29.51	50.69	1	Horizontal	69	1.64	-	37.70	15.27	49.63			
AV	18.55514G	41.52	63.54	-22.02	38.19	1	Horizontal	69	1.64	-	37.70	15.27	49.64			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6345MHz_TX

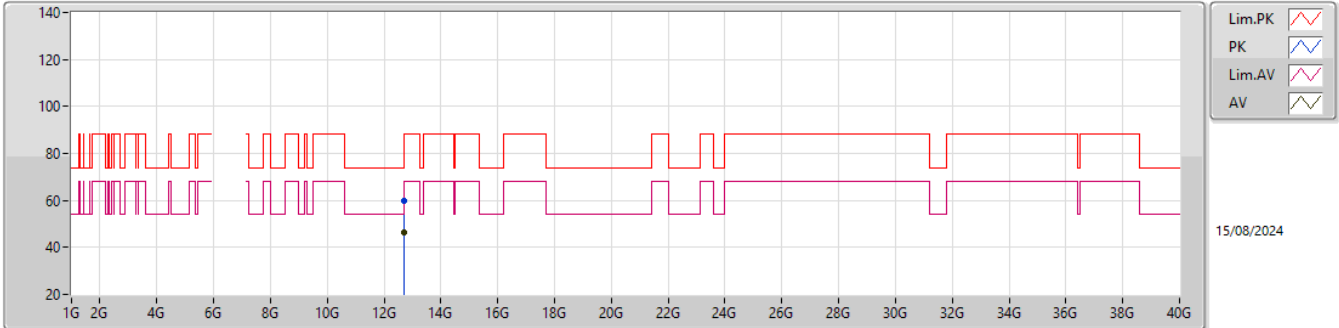


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.69296G	59.60	74.00	-14.40	41.31	3	Vertical	203	2.05	-	38.80	11.38	31.89			
AV	12.68511G	46.58	54.00	-7.42	28.29	3	Vertical	203	2.05	-	38.80	11.38	31.89			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6345MHz_TX

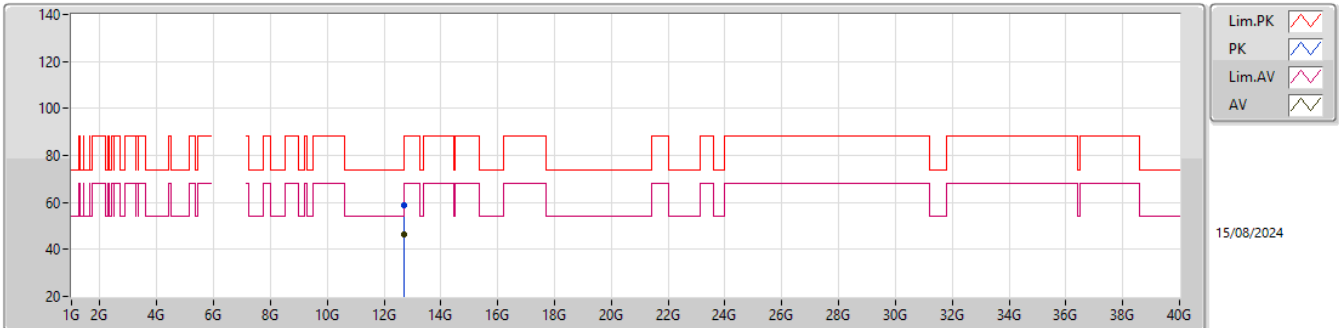EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.69384G	58.74	74.00	-15.26	40.45	3	Horizontal	278	1.85	-	38.80	11.38	31.89			
AV	12.685G	46.20	54.00	-7.80	27.91	3	Horizontal	278	1.85	-	38.80	11.38	31.89			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6345MHz_TX

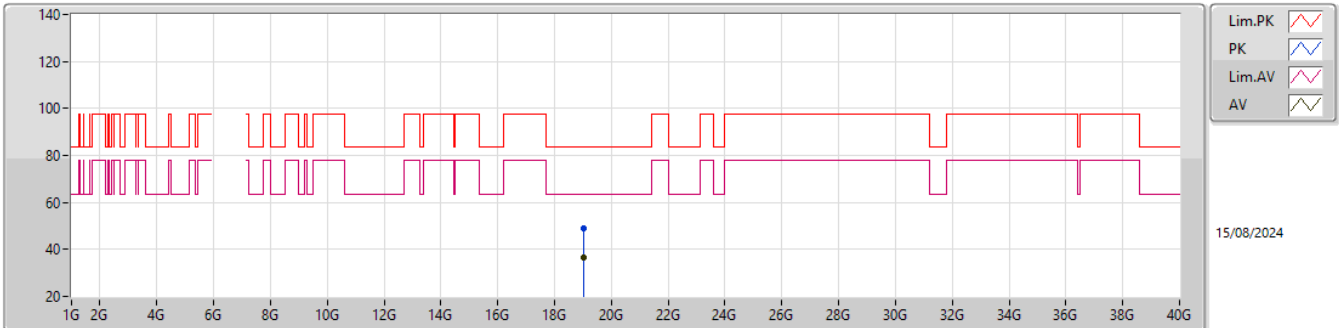EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.03638G	49.13	83.54	-34.41	45.34	1	Vertical	153	2.00	-	37.90	15.25	49.36			
AV	19.03513G	36.76	63.54	-26.78	32.97	1	Vertical	153	2.00	-	37.90	15.25	49.36			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6345MHz_TX

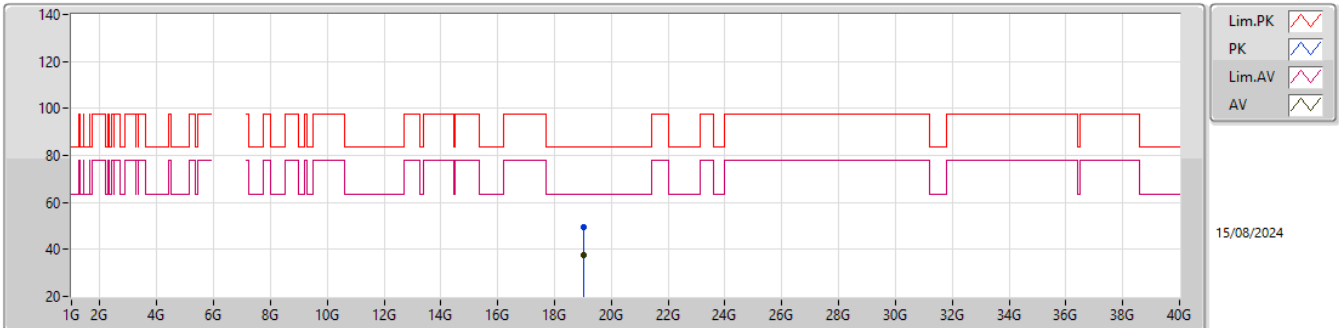EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.03376G	49.59	83.54	-33.95	45.80	1	Horizontal	191	1.46	-	37.90	15.25	49.36			
AV	19.03471G	37.76	63.54	-25.78	33.97	1	Horizontal	191	1.46	-	37.90	15.25	49.36			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6665MHz_TX

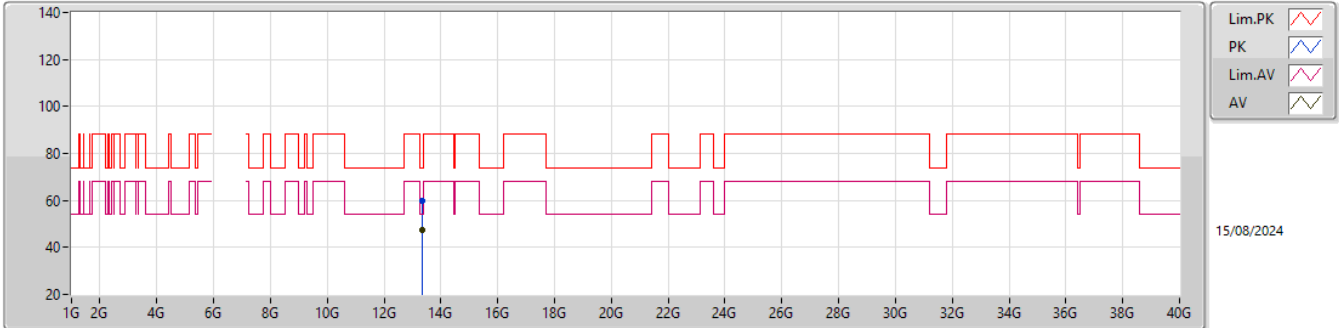


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.32974G	59.69	74.00	-14.31	39.70	3	Vertical	208	2.55	-	39.58	11.63	31.22			
AV	13.33348G	47.34	54.00	-6.66	27.33	3	Vertical	208	2.55	-	39.60	11.63	31.22			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6665MHz_TX

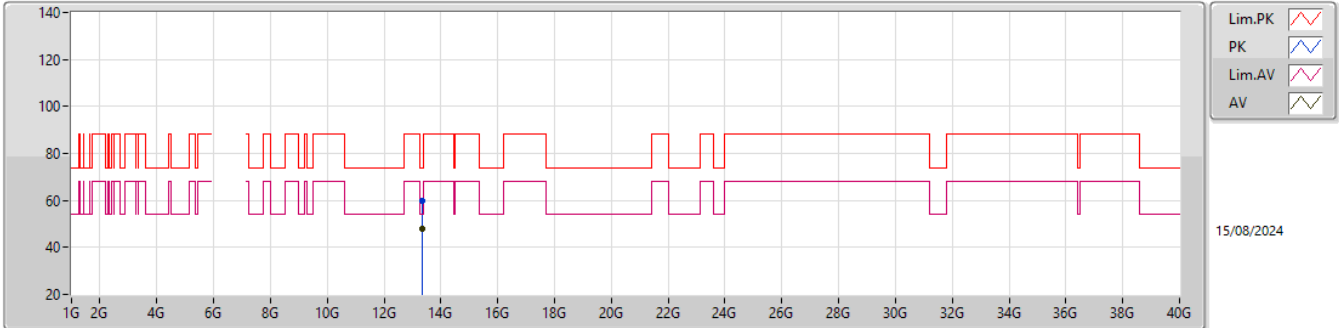


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.32663G	60.00	74.00	-14.00	40.05	3	Horizontal	185	1.21	-	39.56	11.62	31.23			
AV	13.33364G	47.85	54.00	-6.15	27.84	3	Horizontal	185	1.21	-	39.60	11.63	31.22			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6665MHz_TX

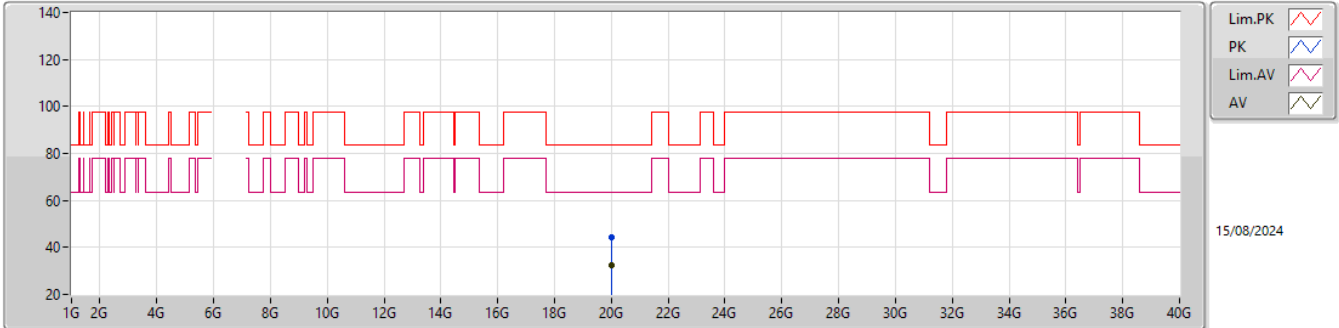


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.99649G	44.46	83.54	-39.08	40.73	1	Vertical	163	1.55	-	37.80	15.20	49.27			
AV	19.99274G	32.26	63.54	-31.28	28.54	1	Vertical	163	1.55	-	37.80	15.20	49.28			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX


6665MHz_TX

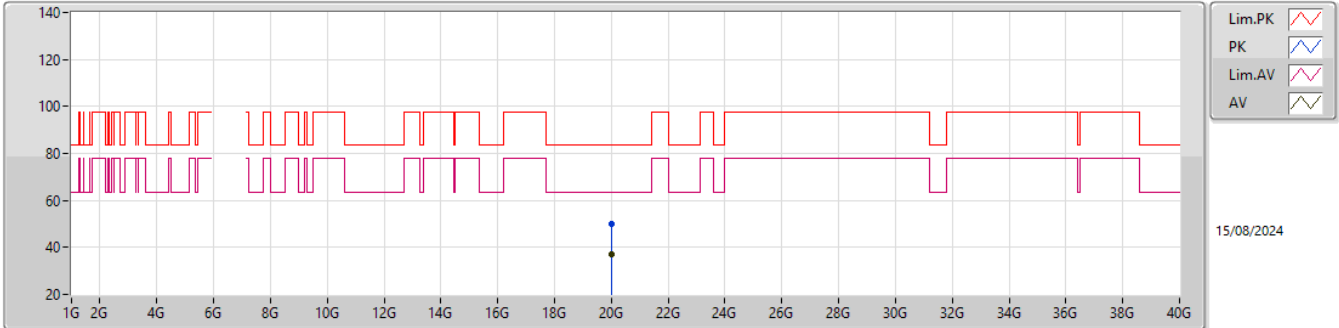EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.99519G	49.97	83.54	-33.57	46.24	1	Horizontal	297	1.46	-	37.80	15.20	49.27			
AV	19.99273G	37.26	63.54	-26.28	33.54	1	Horizontal	297	1.46	-	37.80	15.20	49.28			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

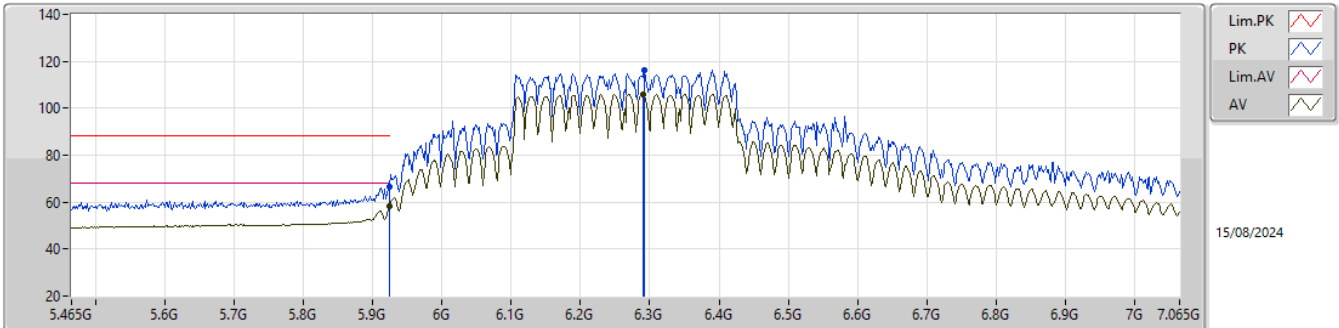


EUT_Y_2TX
Setting 29
01-I-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9242G	66.32	88.20	-21.88	58.72	3	Vertical	41	1.80	-	32.40	7.64	32.44			
RMS	5.9242G	58.26	68.20	-9.94	50.66	3	Vertical	41	1.80	-	32.40	7.64	32.44			
PK	6.2922G	116.05	Inf	-Inf	107.61	3	Vertical	41	1.80	-	33.00	7.84	32.40			
RMS	6.2906G	105.90	Inf	-Inf	97.47	3	Vertical	41	1.80	-	33.00	7.84	32.41			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

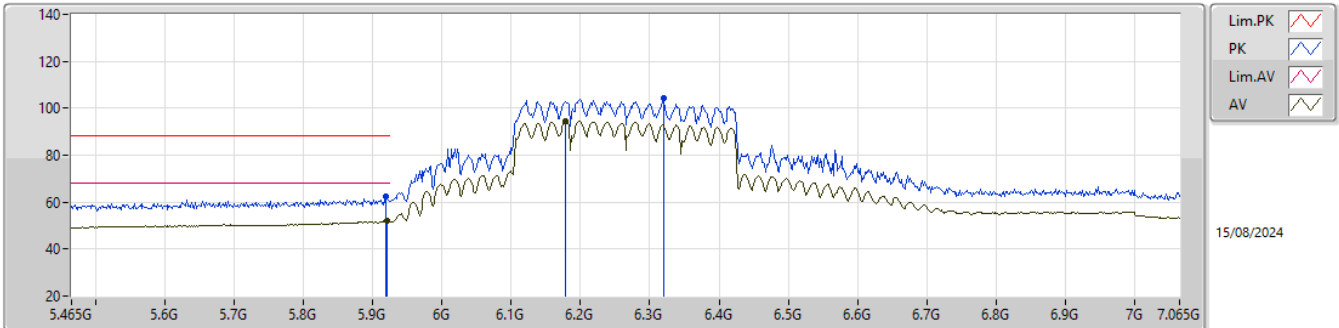


EUT_Y_2TX
Setting 29
01-I-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9194G	62.25	88.20	-25.95	54.65	3	Horizontal	41	1.80	-	32.40	7.64	32.44			
RMS	5.921G	52.13	68.20	-16.07	44.53	3	Horizontal	41	1.80	-	32.40	7.64	32.44			
PK	6.3194G	104.08	Inf	-Inf	95.48	3	Horizontal	41	1.80	-	33.12	7.88	32.40			
RMS	6.1786G	94.45	Inf	-Inf	86.39	3	Horizontal	41	1.80	-	32.76	7.72	32.42			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

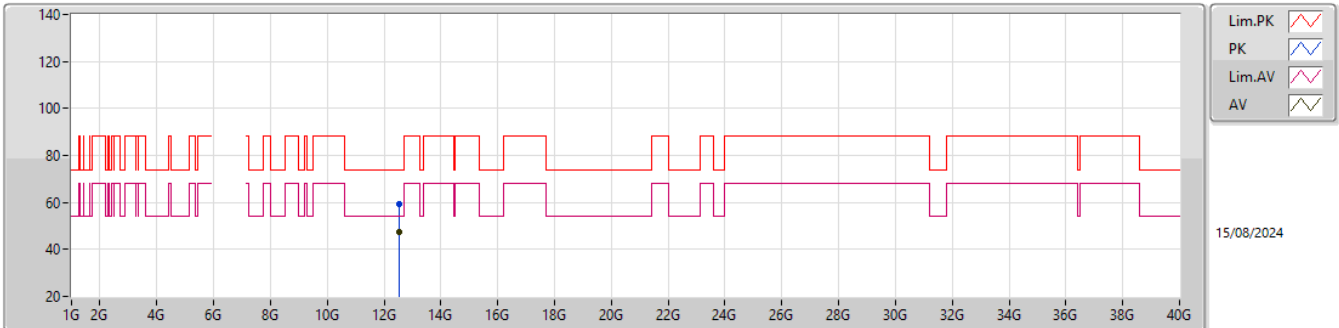


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.52505G	59.22	74.00	-14.78	41.45	3	Vertical	337	2.30	-	38.50	11.32	32.05			
AV	12.52673G	47.36	54.00	-6.64	29.59	3	Vertical	337	2.30	-	38.50	11.32	32.05			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

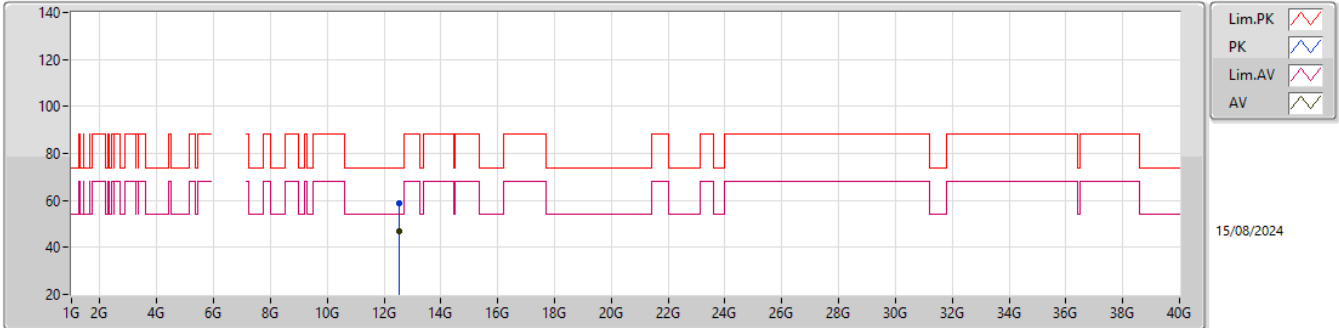


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.52563G	58.84	74.00	-15.16	41.07	3	Horizontal	94	1.31	-	38.50	11.32	32.05			
AV	12.52962G	46.94	54.00	-7.06	29.17	3	Horizontal	94	1.31	-	38.50	11.32	32.05			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX


6265MHz_TX

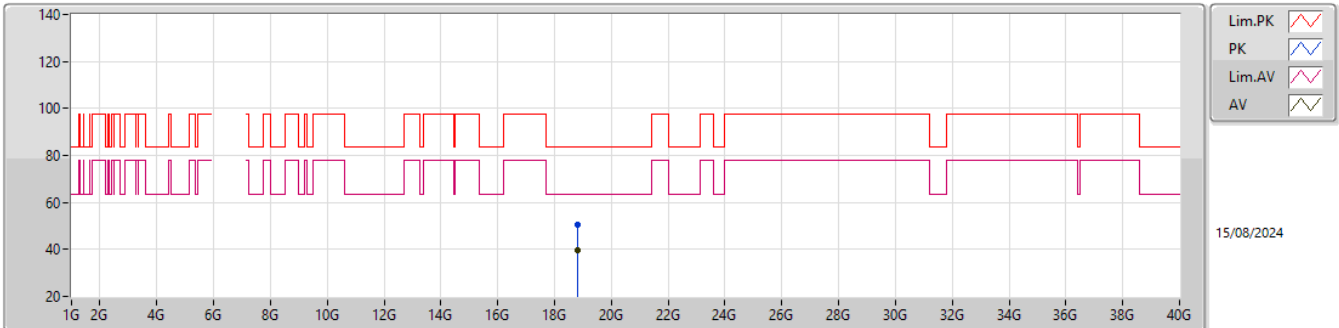EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.79722G	50.66	83.54	-32.88	47.08	1	Vertical	217	1.36	-	37.80	15.26	49.48			
AV	18.7948G	39.43	63.54	-24.11	35.85	1	Vertical	217	1.36	-	37.80	15.26	49.48			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX


6265MHz_TX

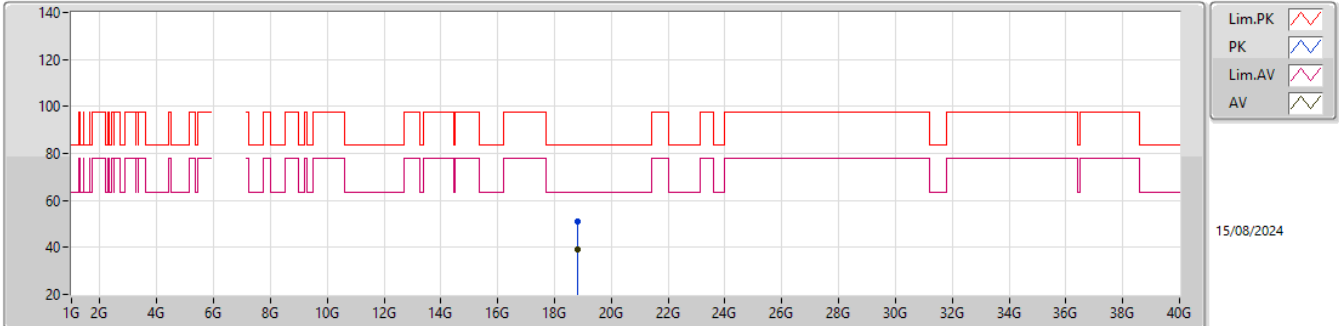EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.79584G	51.03	83.54	-32.51	47.45	1	Horizontal	240	1.84	-	37.80	15.26	49.48			
AV	18.79405G	39.27	63.54	-24.27	35.69	1	Horizontal	240	1.84	-	37.80	15.26	49.48			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6115MHz_TX

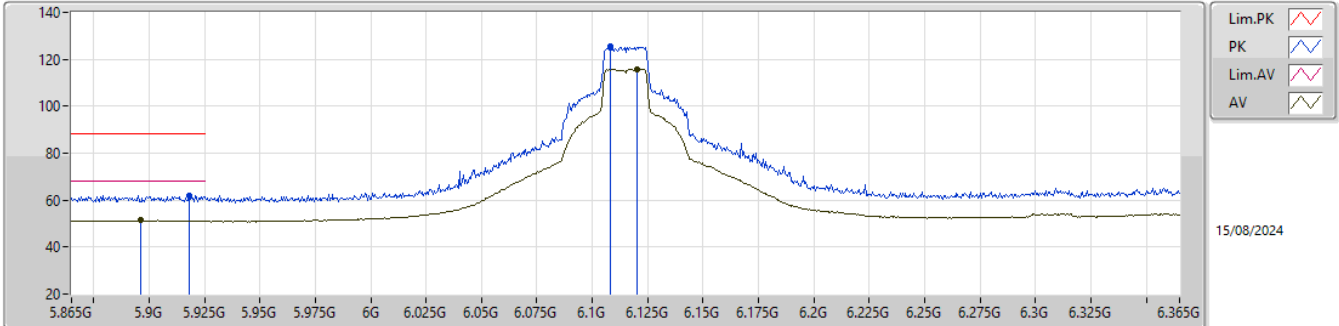EUT_Y_2TX
Setting 29
01-I-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.918G	62.14	88.20	-26.06	54.54	3	Vertical	208	1.80	-	32.40	7.64	32.44			
RMS	5.896G	51.33	68.20	-16.87	43.76	3	Vertical	208	1.80	-	32.38	7.63	32.44			
PK	6.108G	125.28	Inf	-Inf	117.48	3	Vertical	208	1.80	-	32.53	7.70	32.43			
RMS	6.12G	115.90	Inf	-Inf	108.05	3	Vertical	208	1.80	-	32.58	7.70	32.43			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6115MHz_TX

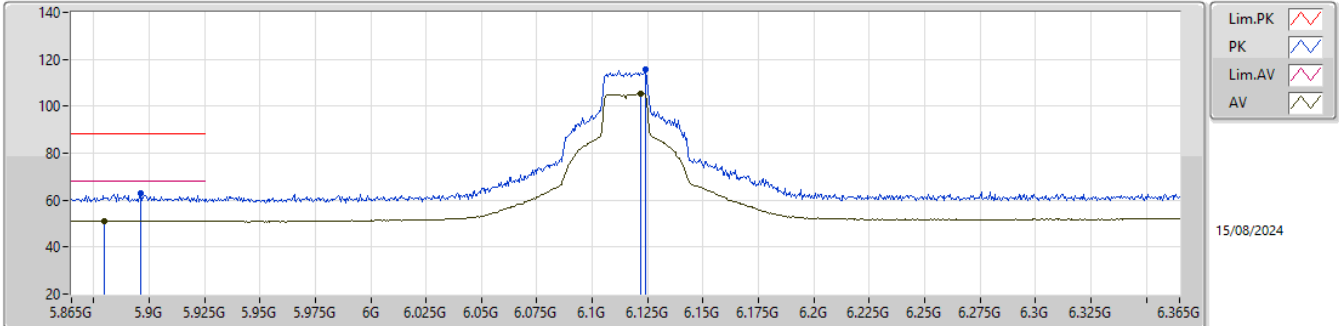


EUT_Y_2TX
Setting 29
01-I-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.896G	62.80	88.20	-25.40	55.23	3	Horizontal	34	1.80	-	32.38	7.63	32.44			
RMS	5.88G	51.27	68.20	-16.93	43.77	3	Horizontal	34	1.80	-	32.32	7.62	32.44			
PK	6.124G	115.45	Inf	-Inf	107.58	3	Horizontal	34	1.80	-	32.60	7.70	32.43			
RMS	6.122G	105.31	Inf	-Inf	97.45	3	Horizontal	34	1.80	-	32.59	7.70	32.43			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6115MHz_TX

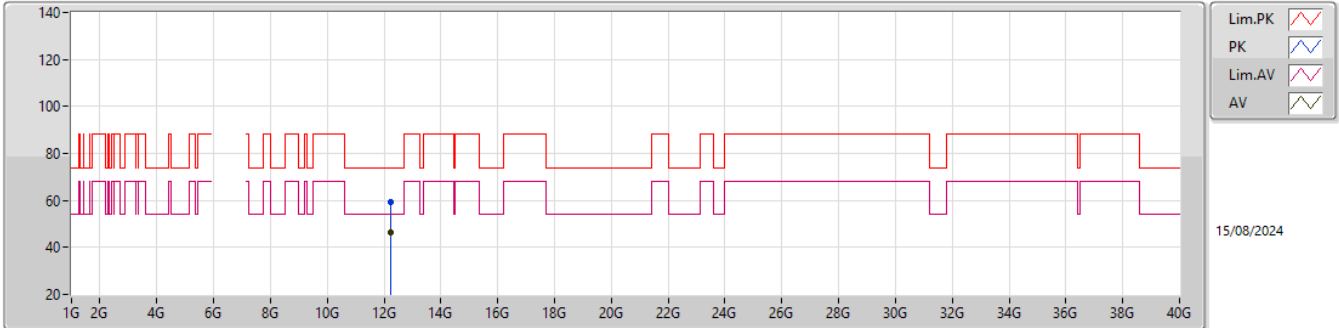


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.22388G	59.20	74.00	-14.80	41.37	3	Vertical	266	1.80	-	39.10	11.21	32.48			
AV	12.24407G	46.48	54.00	-7.52	28.62	3	Vertical	266	1.80	-	39.10	11.21	32.45			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6115MHz_TX

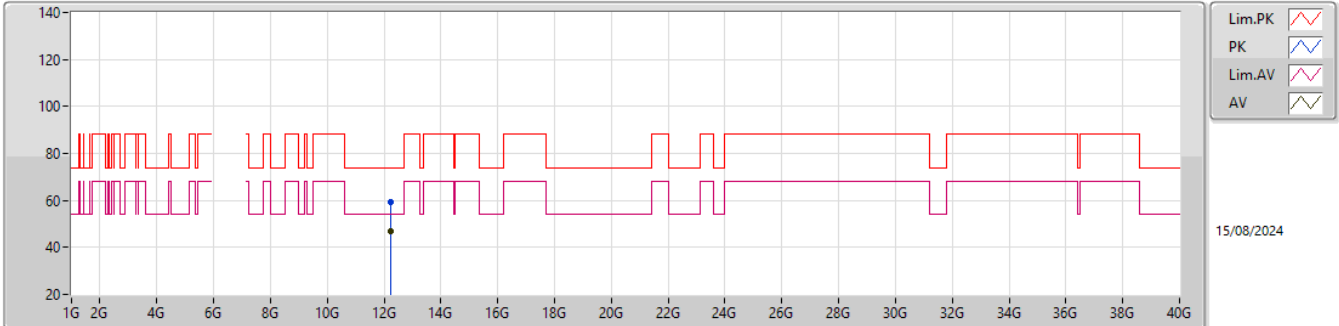


EUT Y_2TX
Setting 29
01-I-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.22604G	59.30	74.00	-14.70	41.46	3	Horizontal	230	1.77	-	39.10	11.21	32.47			
AV	12.23909G	46.68	54.00	-7.32	28.83	3	Horizontal	230	1.77	-	39.10	11.21	32.46			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6115MHz_TX

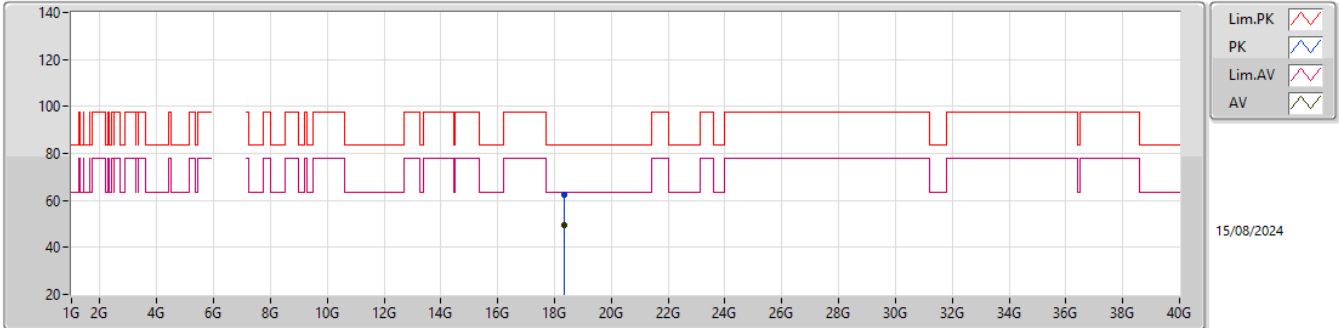


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.3343G	62.42	83.54	-21.12	59.24	1	Vertical	279	1.63	-	37.50	15.28	49.60			
AV	18.3423G	49.61	63.54	-13.93	46.43	1	Vertical	279	1.63	-	37.50	15.28	49.60			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6115MHz_TX

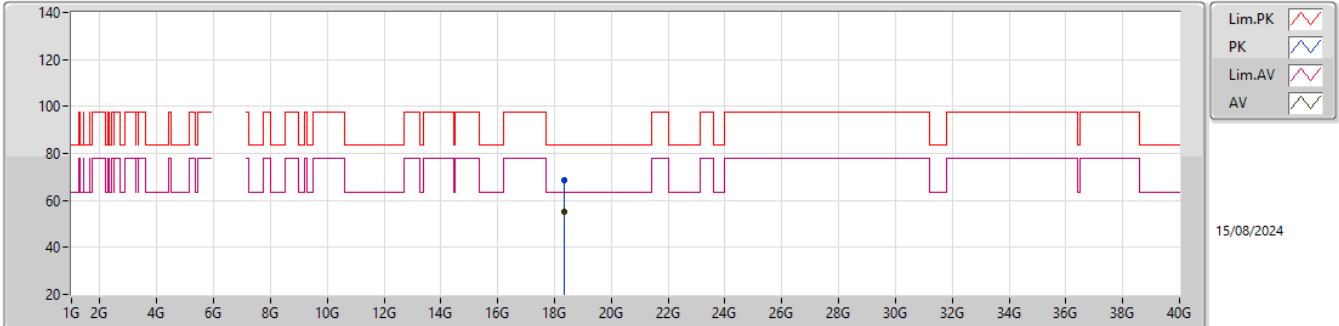EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.3397G	68.82	83.54	-14.72	65.64	1	Horizontal	242	1.62	-	37.50	15.28	49.60			
AV	18.3433G	55.11	63.54	-8.43	51.93	1	Horizontal	242	1.62	-	37.50	15.28	49.60			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6195MHz_TX

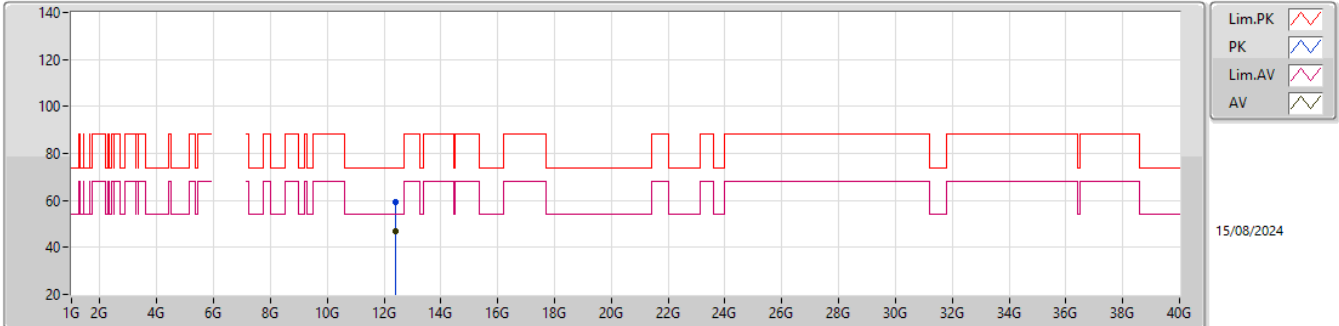


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39108G	59.09	74.00	-14.91	41.24	3	Vertical	351	1.80	-	38.82	11.27	32.24			
AV	12.38868G	46.64	54.00	-7.36	28.79	3	Vertical	351	1.80	-	38.82	11.27	32.24			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6195MHz_TX

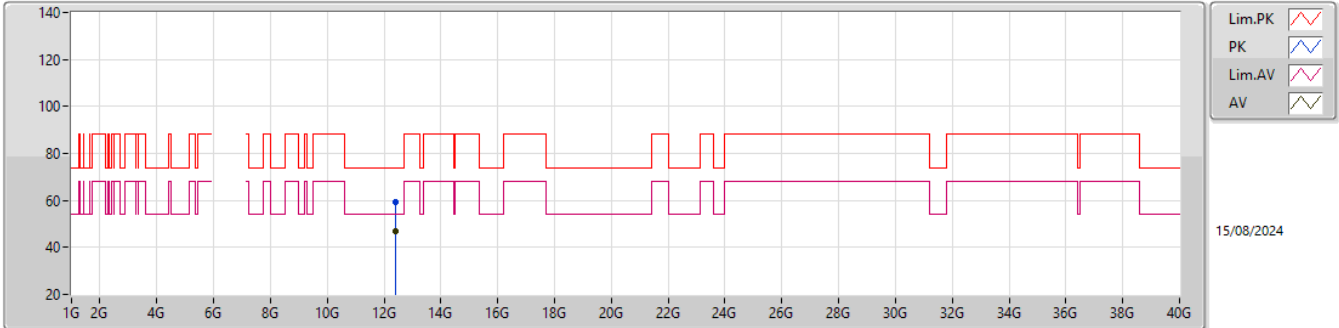


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39996G	59.54	74.00	-14.46	41.69	3	Horizontal	237	1.80	-	38.80	11.27	32.22			
AV	12.39639G	46.82	54.00	-7.18	28.97	3	Horizontal	237	1.80	-	38.81	11.27	32.23			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6195MHz_TX

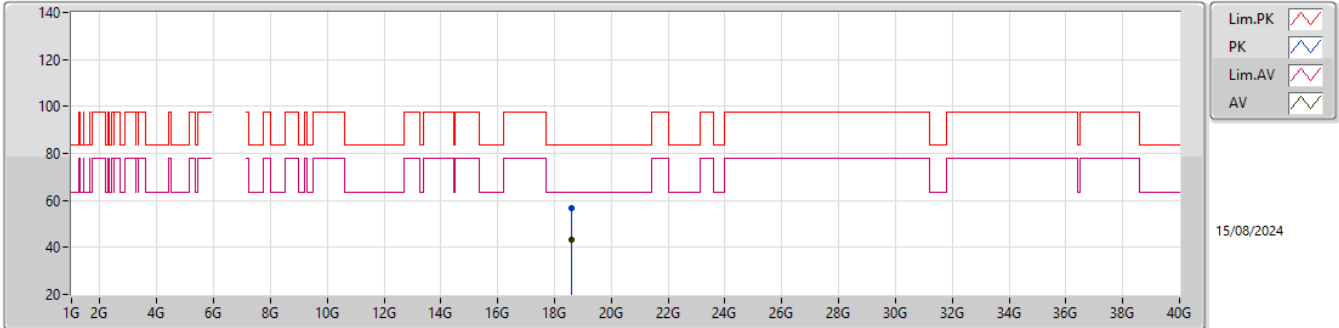


EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.5848G	56.67	83.54	-26.87	53.32	1	Vertical	281	1.63	-	37.70	15.27	49.62			
AV	18.5824G	43.38	63.54	-20.16	40.03	1	Vertical	281	1.63	-	37.70	15.27	49.62			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6195MHz_TX

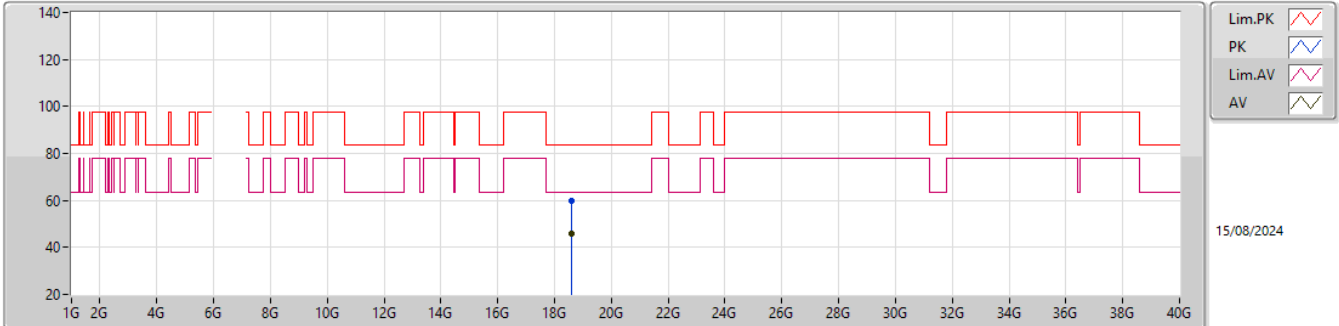EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.5845G	60.03	83.54	-23.51	56.68	1	Horizontal	229	1.69	-	37.70	15.27	49.62			
AV	18.5827G	46.00	63.54	-17.54	42.65	1	Horizontal	229	1.69	-	37.70	15.27	49.62			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6415MHz_TX

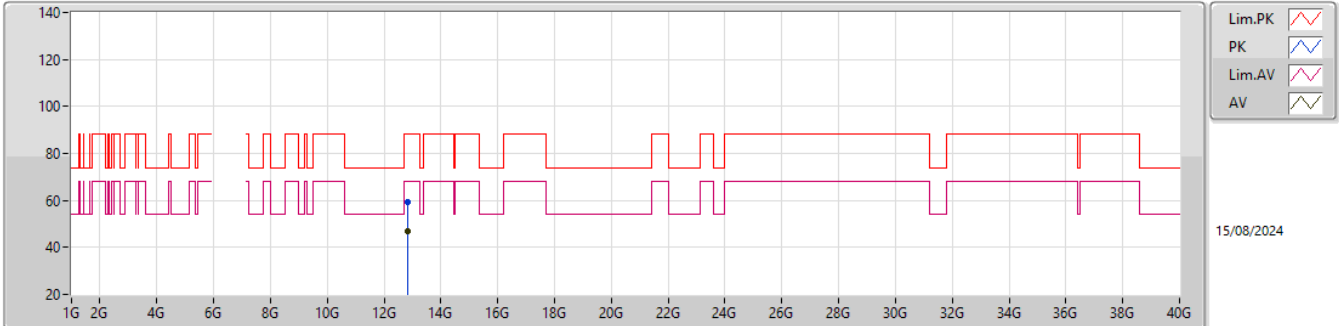


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.83267G	59.21	88.20	-28.99	40.25	3	Vertical	238	1.32	-	39.27	11.44	31.75			
RMS	12.83927G	47.04	68.20	-21.16	28.06	3	Vertical	238	1.32	-	39.28	11.44	31.74			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6415MHz_TX

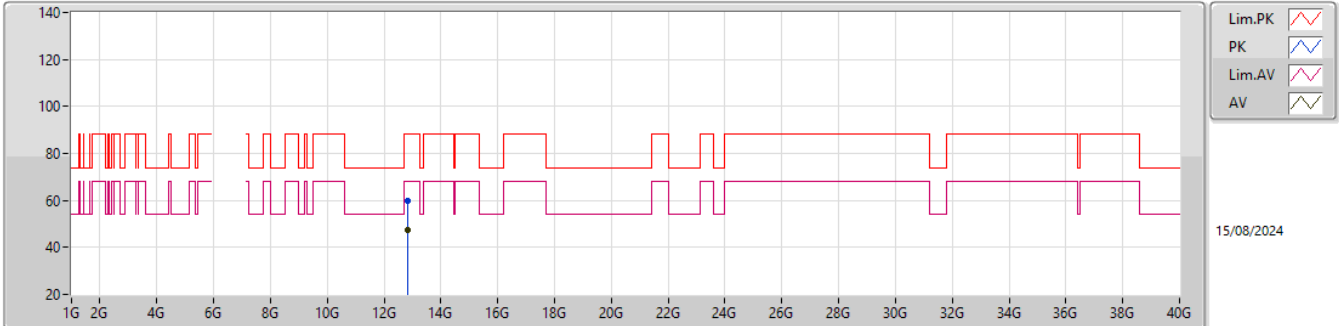


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.82859G	59.67	88.20	-28.53	40.73	3	Horizontal	244	1.76	-	39.26	11.43	31.75			
RMS	12.82979G	47.44	68.20	-20.76	28.49	3	Horizontal	244	1.76	-	39.26	11.44	31.75			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6415MHz_TX

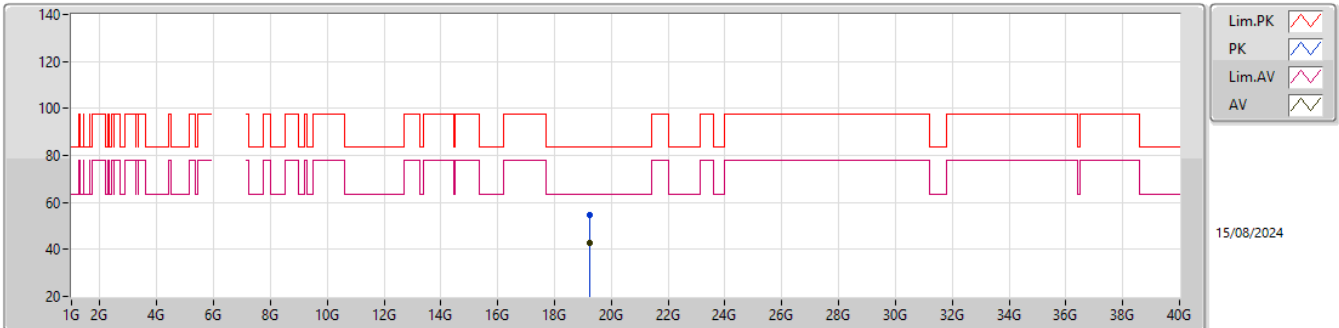EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.2445G	54.76	83.54	-28.78	51.12	1	Vertical	122	1.69	-	37.91	15.24	49.51			
AV	19.2423G	42.60	63.54	-20.94	38.94	1	Vertical	122	1.69	-	37.92	15.24	49.50			

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6415MHz_TX

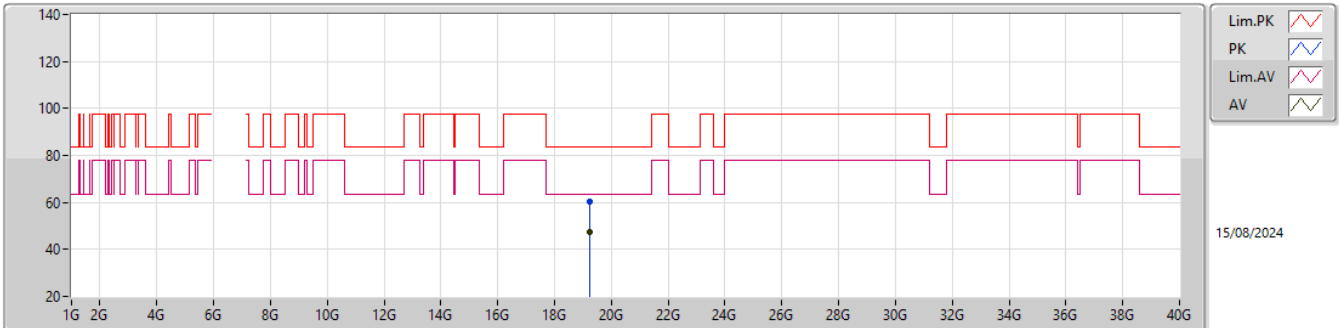EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.239G	60.13	83.54	-23.41	56.47	1	Horizontal	240	1.55	-	37.92	15.24	49.50			
AV	19.243G	47.23	63.54	-16.31	43.59	1	Horizontal	240	1.55	-	37.91	15.24	49.51			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6535MHz_TX

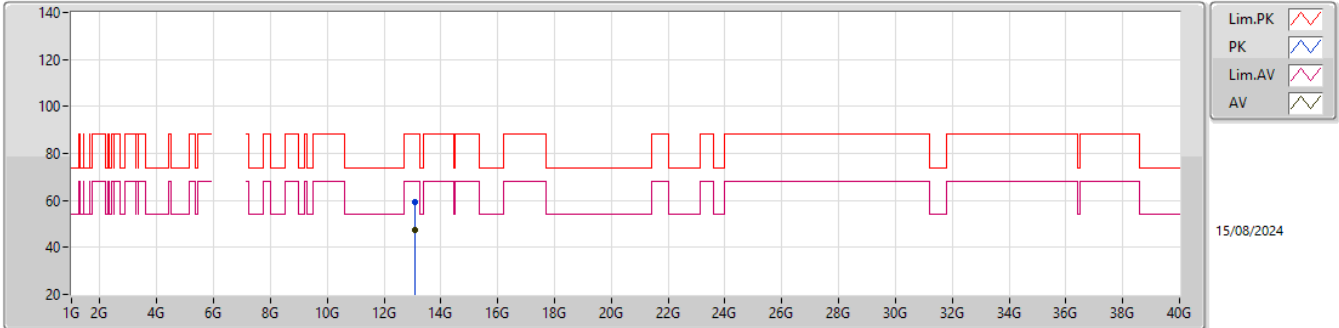


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.08062G	59.56	88.20	-28.64	40.40	3	Vertical	70	1.83	-	39.12	11.53	31.49			
RMS	13.08053G	47.24	68.20	-20.96	28.08	3	Vertical	70	1.83	-	39.12	11.53	31.49			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6535MHz_TX

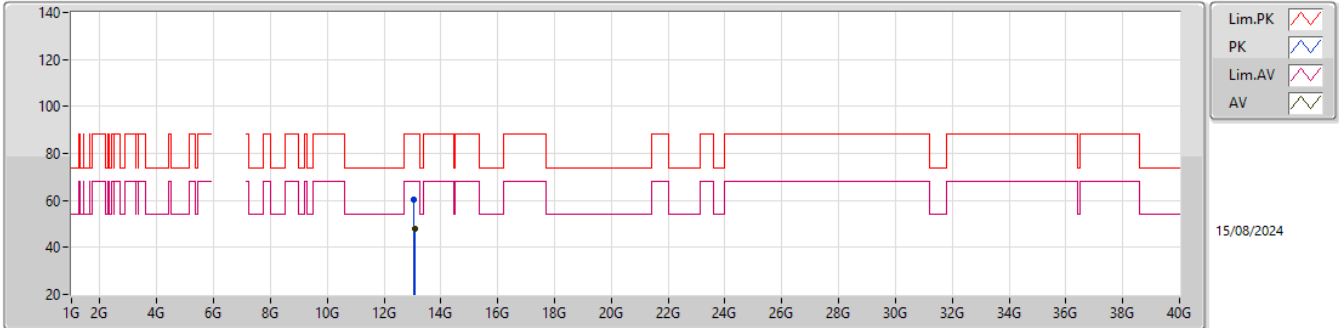


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.05554G	60.26	88.20	-27.94	41.24	3	Horizontal	250	2.98	-	39.02	11.52	31.52			
RMS	13.06994G	48.12	68.20	-20.08	29.01	3	Horizontal	250	2.98	-	39.08	11.53	31.50			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6535MHz_TX

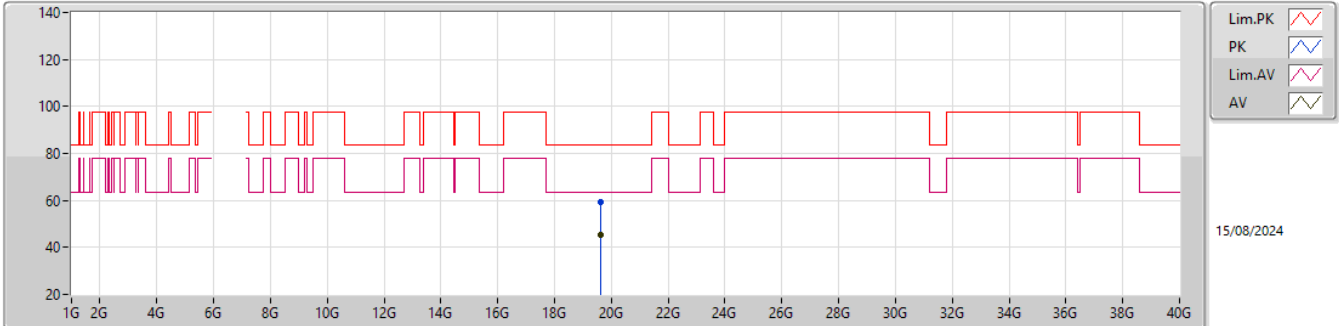EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.6169G	59.08	83.54	-24.46	55.54	1	Vertical	348	1.65	-	37.90	15.22	49.58			
AV	19.6049G	45.48	63.54	-18.06	42.02	1	Vertical	348	1.65	-	37.83	15.22	49.59			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6535MHz_TX

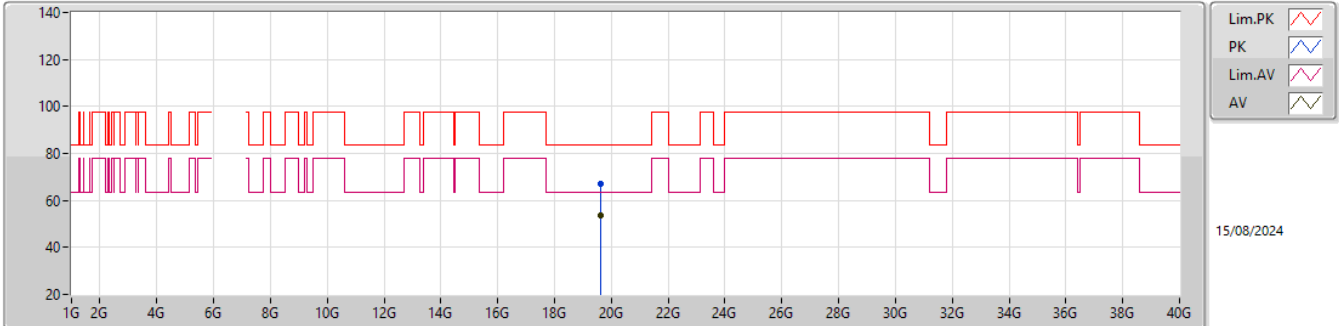EUT_Y_2TX
Setting 29
01-I-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.6126G	67.06	83.54	-16.48	63.55	1	Horizontal	243	1.71	-	37.88	15.22	49.59			
AV	19.6048G	53.64	63.54	-9.90	50.18	1	Horizontal	243	1.71	-	37.83	15.22	49.59			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6695MHz_TX

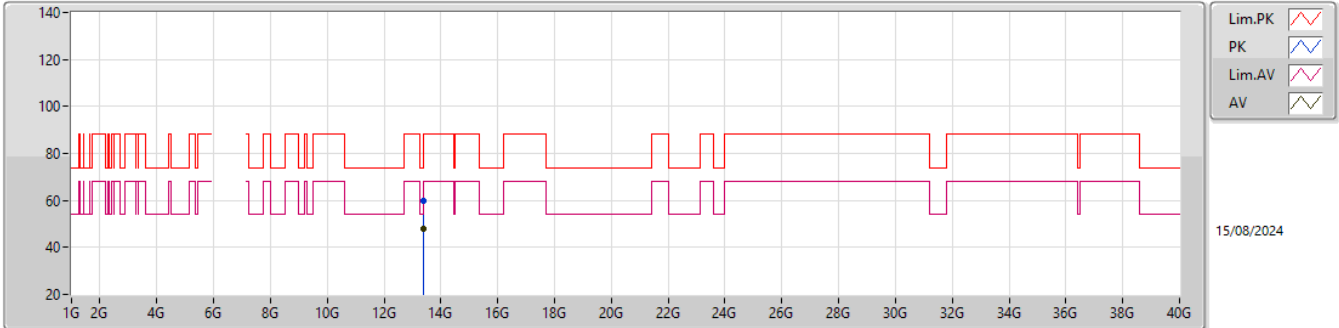


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.39902G	59.73	74.00	-14.27	39.43	3	Vertical	136	2.99	-	39.80	11.65	31.15			
AV	13.39597G	47.69	54.00	-6.31	27.40	3	Vertical	136	2.99	-	39.79	11.65	31.15			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6695MHz_TX

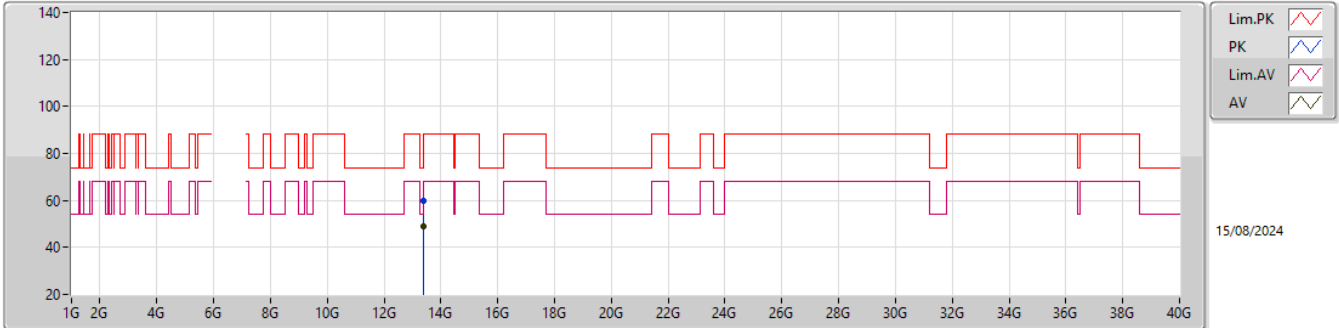


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.39488G	59.94	74.00	-14.06	39.65	3	Horizontal	278	1.80	-	39.79	11.65	31.15			
AV	13.38982G	49.04	54.00	-4.96	28.77	3	Horizontal	278	1.80	-	39.78	11.65	31.16			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6695MHz_TX

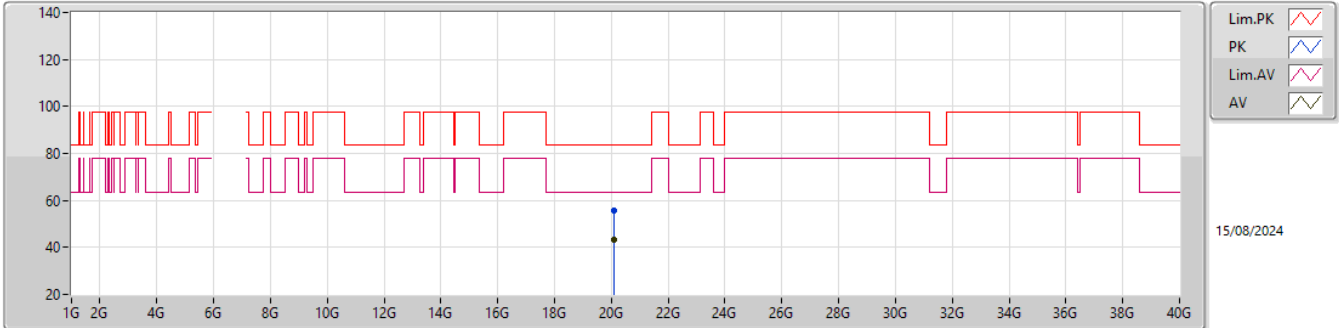


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.08976G	55.61	83.54	-27.93	51.73	1	Vertical	245	1.69	-	37.86	15.27	49.25			
AV	20.08024G	43.46	63.54	-20.08	39.63	1	Vertical	245	1.69	-	37.82	15.26	49.25			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6695MHz_TX

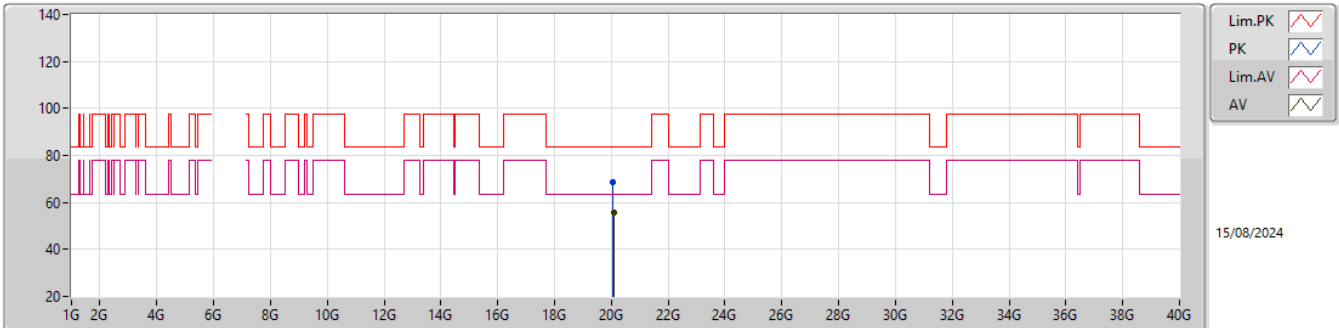EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.07002G	68.66	83.54	-14.88	64.87	1	Horizontal	237	1.63	-	37.78	15.26	49.25			
AV	20.08514G	55.46	63.54	-8.08	51.60	1	Horizontal	237	1.63	-	37.84	15.27	49.25			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6855MHz_TX

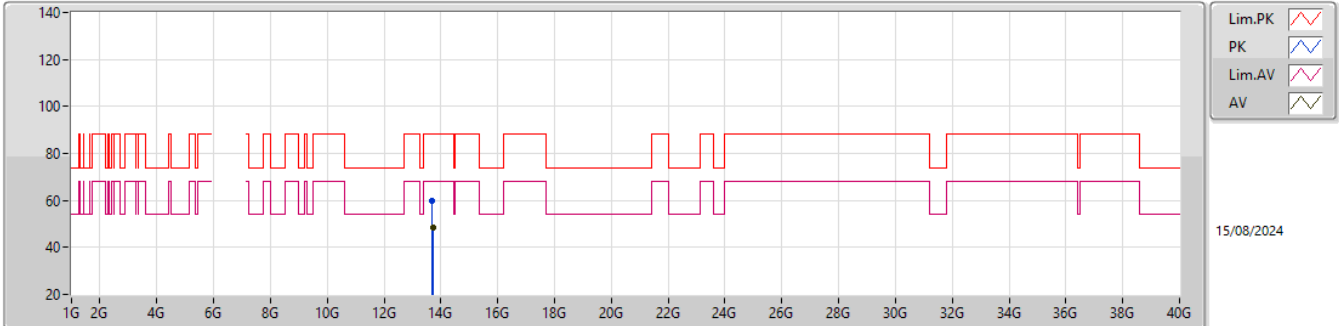


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.70655G	60.06	88.20	-28.14	39.31	3	Vertical	230	2.66	-	40.11	11.77	31.13			
RMS	13.71408G	48.25	68.20	-19.95	27.48	3	Vertical	230	2.66	-	40.13	11.77	31.13			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

6855MHz_TX

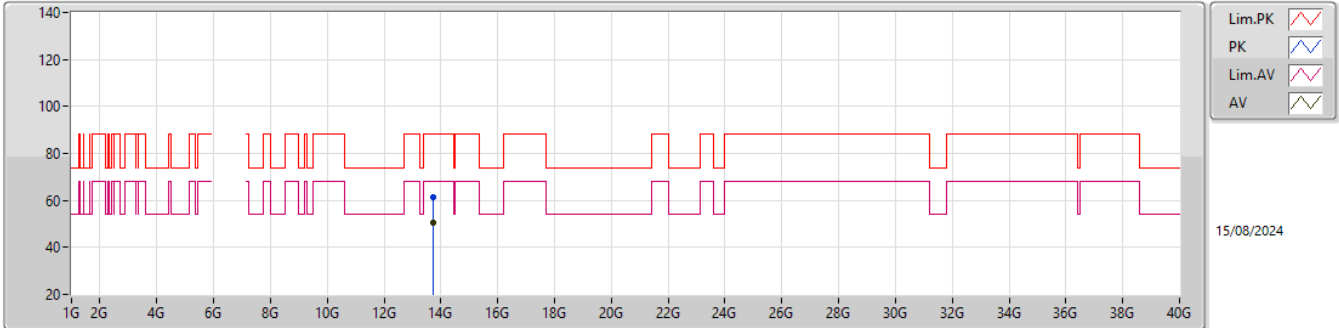


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.71012G	61.42	88.20	-26.78	40.66	3	Horizontal	300	1.71	-	40.12	11.77	31.13			
RMS	13.70997G	50.76	68.20	-17.44	30.00	3	Horizontal	300	1.71	-	40.12	11.77	31.13			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6855MHz_TX

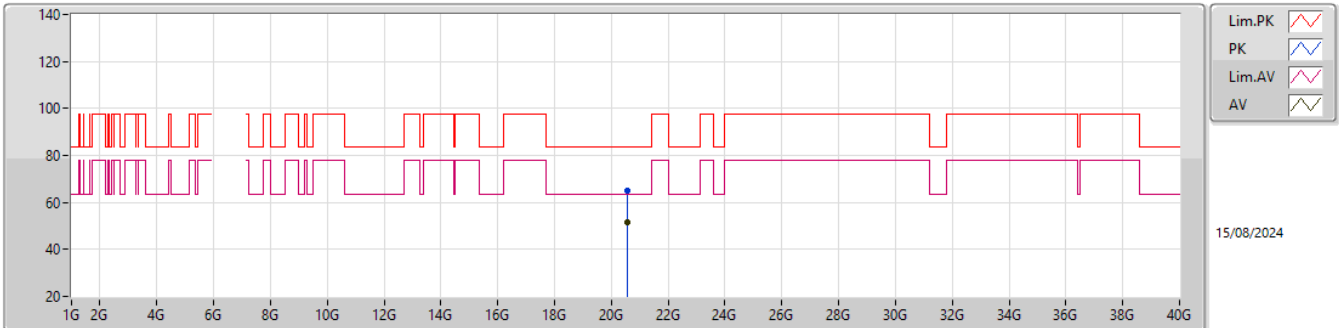EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.5636G	65.00	83.54	-18.54	60.53	1	Vertical	146	1.65	-	37.93	15.65	49.11			
AV	20.5678G	51.72	63.54	-11.82	47.23	1	Vertical	146	1.65	-	37.94	15.65	49.10			

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX


6855MHz_TX

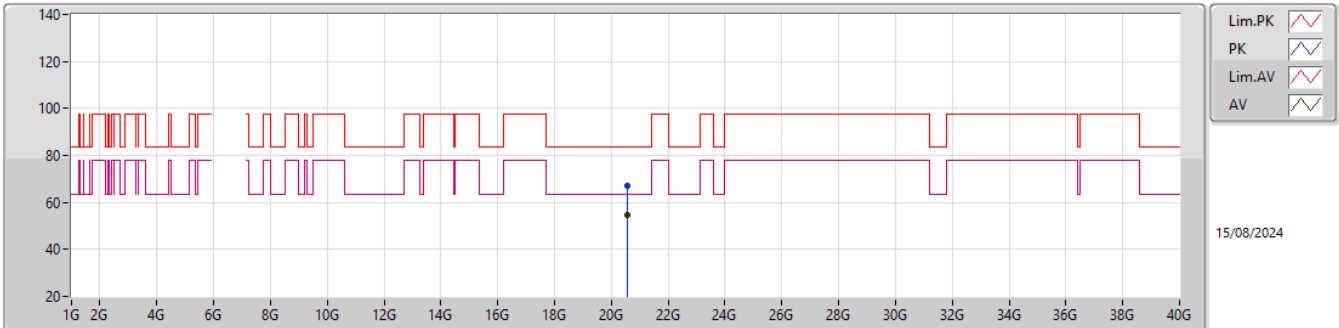EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.5601G	66.95	83.54	-16.59	62.49	1	Horizontal	243.1	1.63	-	37.92	15.65	49.11			
AV	20.56094G	54.49	63.54	-9.05	50.03	1	Horizontal	243.1	1.63	-	37.92	15.65	49.11			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6125MHz_TX

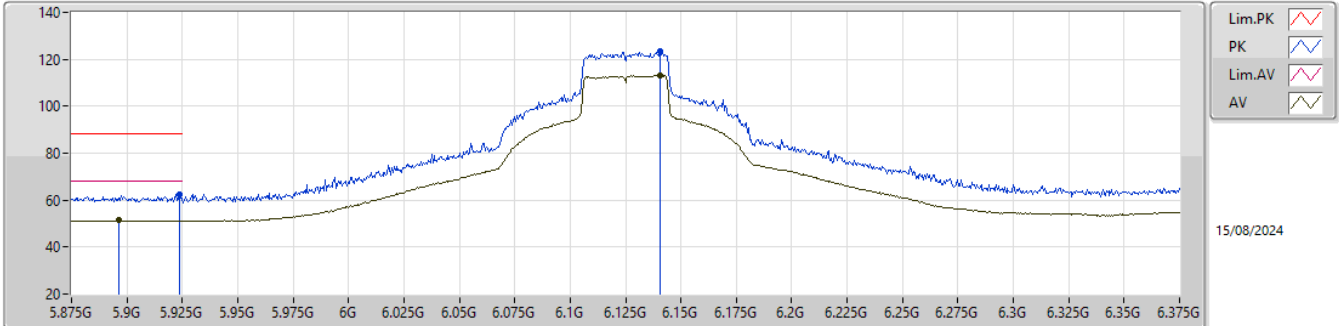


EUT_Y_2TX
Setting 29
01-I-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9235G	62.34	88.20	-25.86	54.74	3	Vertical	214	1.80	-	32.40	7.64	32.44			
RMS	5.8965G	51.35	68.20	-16.85	43.77	3	Vertical	214	1.80	-	32.39	7.63	32.44			
PK	6.1405G	123.20	Inf	-Inf	115.25	3	Vertical	214	1.80	-	32.66	7.71	32.42			
RMS	6.1405G	113.04	Inf	-Inf	105.09	3	Vertical	214	1.80	-	32.66	7.71	32.42			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6125MHz_TX

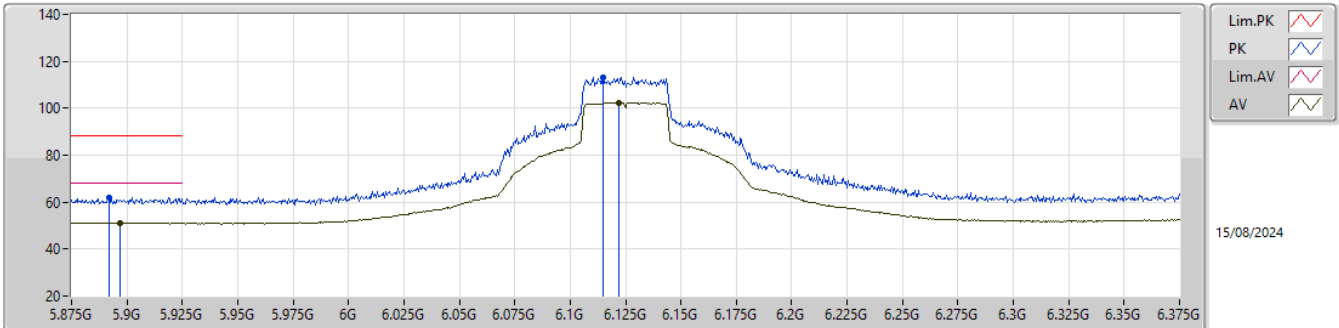


EUT_Y_2TX
Setting 29
01-I-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.892G	61.81	88.20	-26.39	54.25	3	Horizontal	30	1.80	-	32.37	7.63	32.44			
RMS	5.897G	51.27	68.20	-16.93	43.69	3	Horizontal	30	1.80	-	32.39	7.63	32.44			
PK	6.115G	113.07	Inf	-Inf	105.24	3	Horizontal	30	1.80	-	32.56	7.70	32.43			
RMS	6.122G	102.42	Inf	-Inf	94.56	3	Horizontal	30	1.80	-	32.59	7.70	32.43			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6125MHz_TX

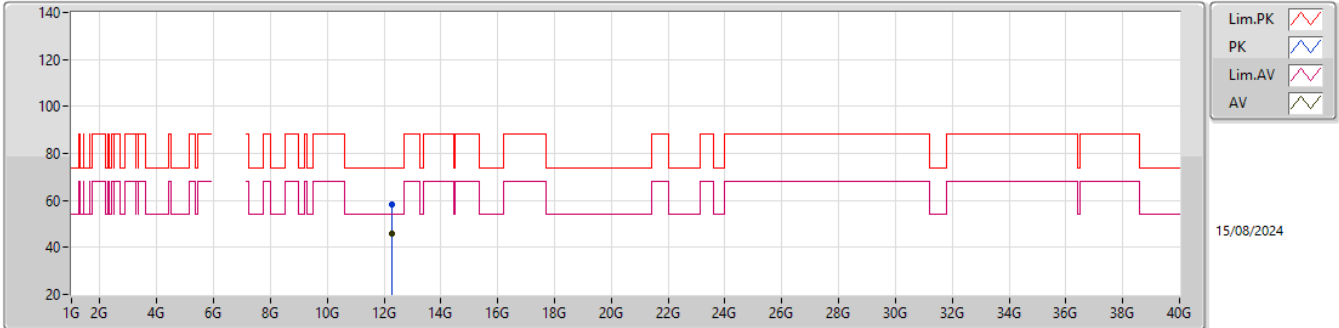


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.26188G	58.47	74.00	-15.53	40.59	3	Vertical	234	1.80	-	39.08	11.22	32.42			
AV	12.25843G	46.11	54.00	-7.89	28.24	3	Vertical	234	1.80	-	39.08	11.22	32.43			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6125MHz_TX

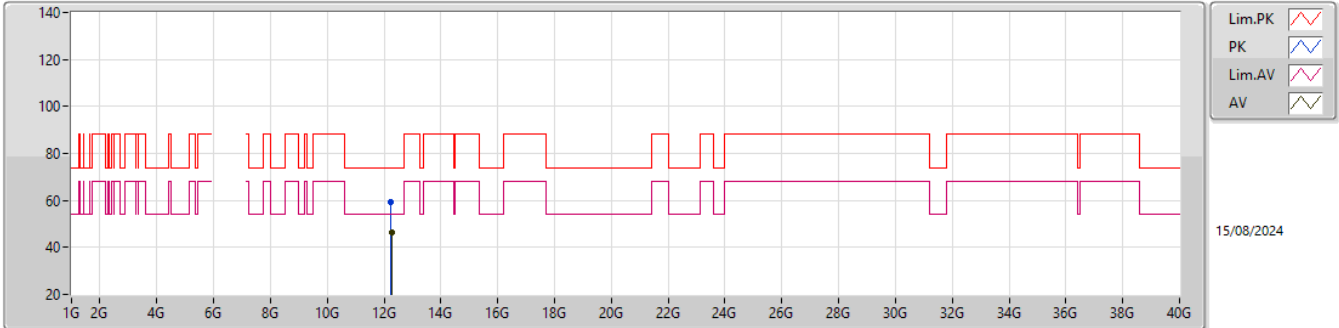


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.24094G	59.35	74.00	-14.65	41.49	3	Horizontal	228	2.80	-	39.10	11.21	32.45			
AV	12.2644G	46.14	54.00	-7.86	28.27	3	Horizontal	228	2.80	-	39.07	11.22	32.42			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6125MHz_TX

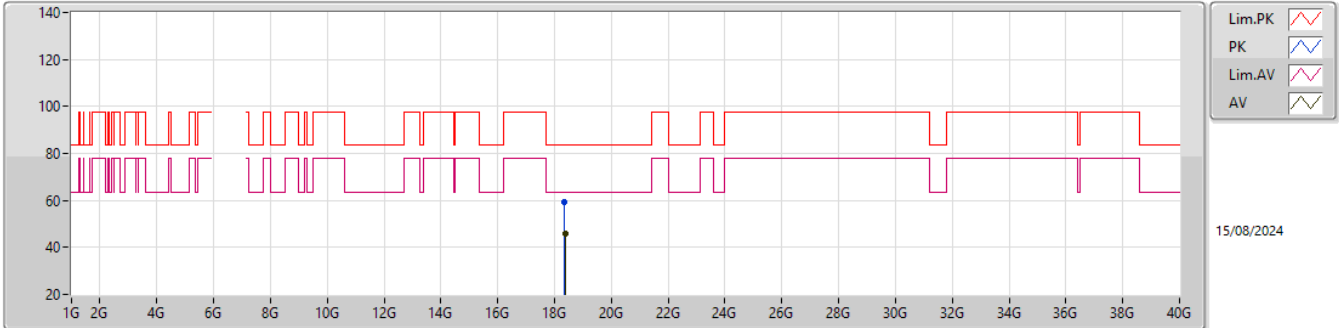


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.34616G	59.38	83.54	-24.16	56.21	1	Vertical	280	1.65	-	37.50	15.28	49.61			
AV	18.36912G	45.96	63.54	-17.58	42.69	1	Vertical	280	1.65	-	37.61	15.28	49.62			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6125MHz_TX

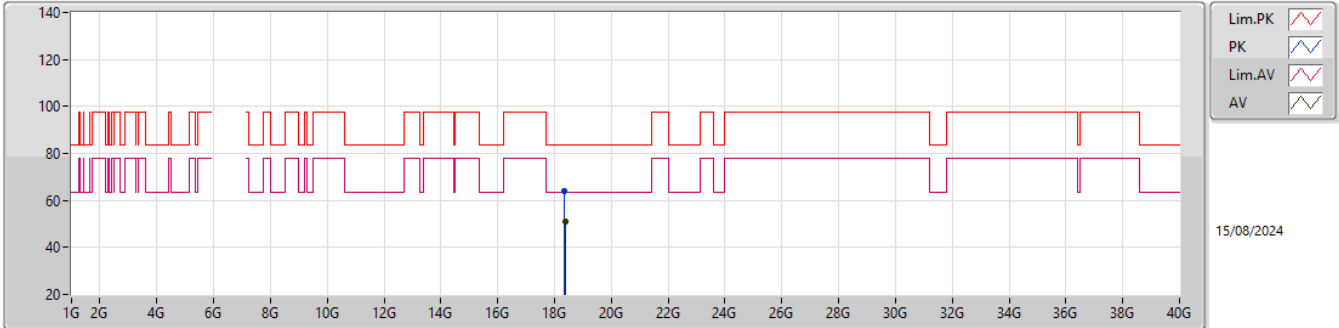


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.36086G	63.93	83.54	-19.61	60.69	1	Horizontal	240	1.63	-	37.57	15.28	49.61			
AV	18.3694G	51.21	63.54	-12.33	47.93	1	Horizontal	240	1.63	-	37.62	15.28	49.62			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6205MHz_TX

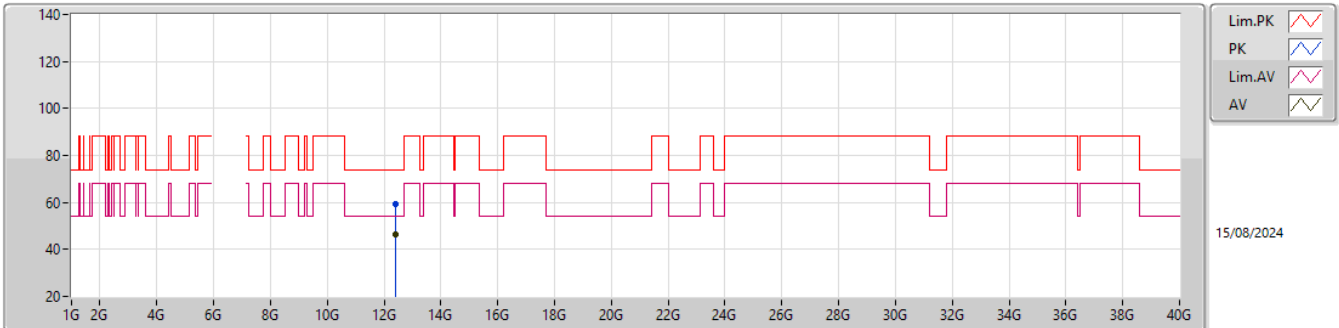EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.41765G	59.34	74.00	-14.66	41.57	3	Vertical	158	2.98	-	38.69	11.28	32.20			
AV	12.40454G	46.21	54.00	-7.79	28.39	3	Vertical	158	2.98	-	38.77	11.27	32.22			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6205MHz_TX

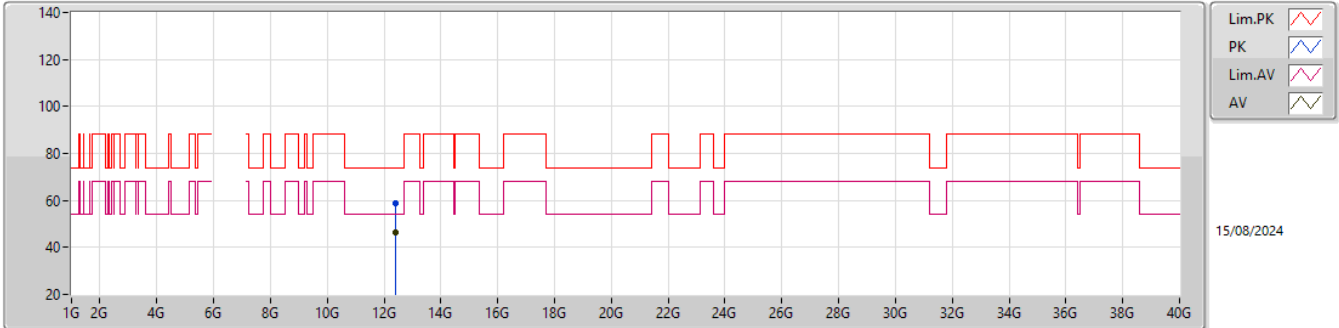


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.40919G	59.04	74.00	-14.96	41.23	3	Horizontal	241	1.94	-	38.74	11.28	32.21			
AV	12.4082G	46.32	54.00	-7.68	28.50	3	Horizontal	241	1.94	-	38.75	11.28	32.21			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6205MHz_TX

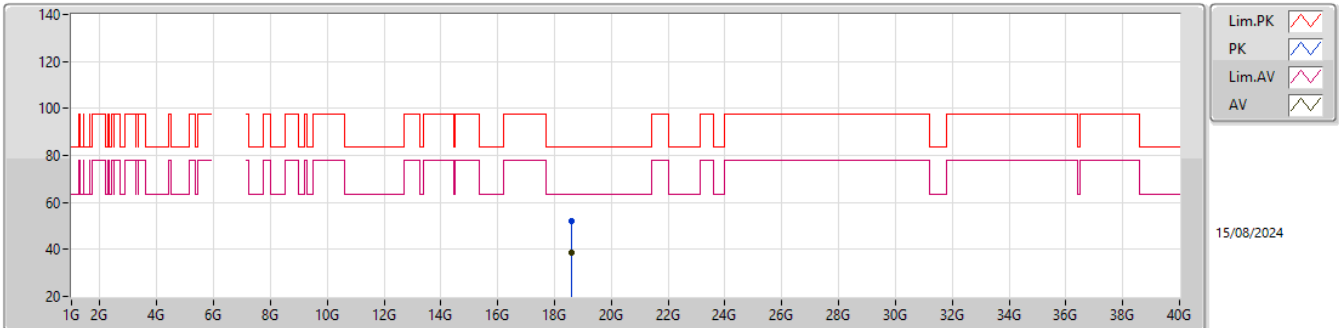EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.6024G	51.93	83.54	-31.61	48.57	1	Vertical	280	1.65	-	37.70	15.27	49.61			
AV	18.60086G	38.76	63.54	-24.78	35.40	1	Vertical	280	1.65	-	37.70	15.27	49.61			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6205MHz_TX

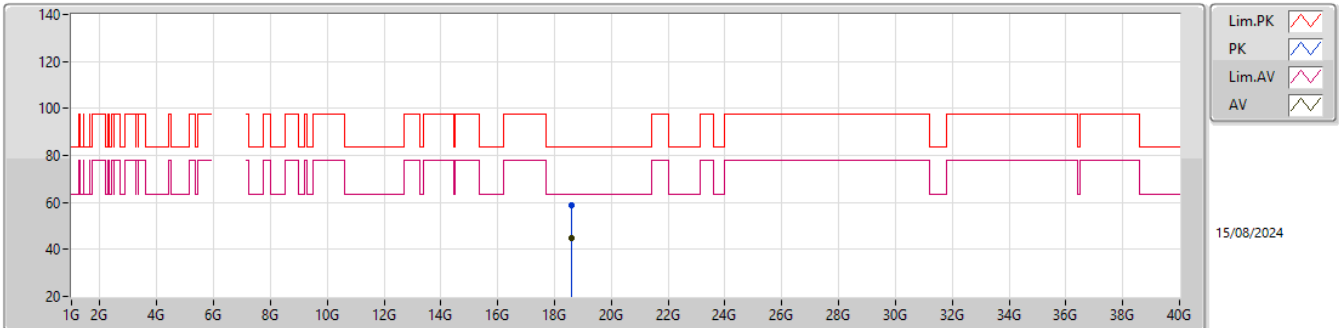EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.59316G	58.71	83.54	-24.83	55.36	1	Horizontal	231	1.65	-	37.70	15.27	49.62			
AV	18.60492G	44.90	63.54	-18.64	41.53	1	Horizontal	231	1.65	-	37.71	15.27	49.61			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6405MHz_TX

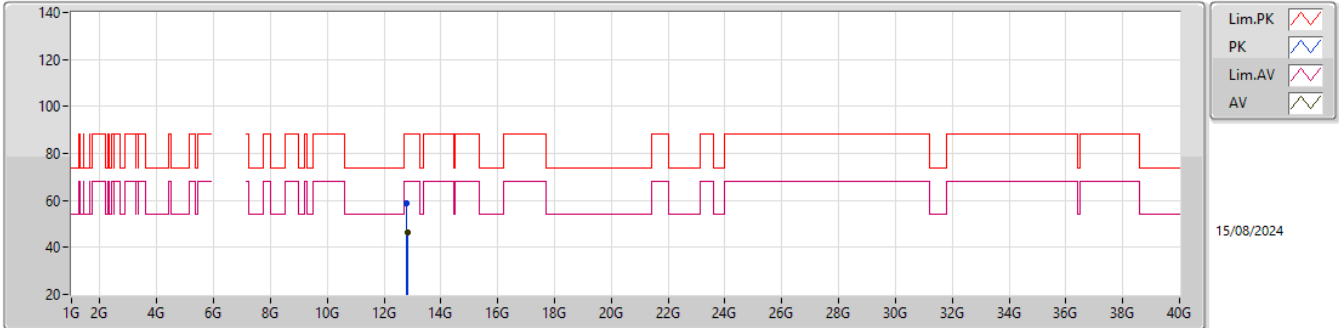


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.80019G	58.85	88.20	-29.35	40.01	3	Vertical	216	1.80	-	39.20	11.42	31.78			
RMS	12.81339G	46.50	68.20	-21.70	27.61	3	Vertical	216	1.80	-	39.23	11.43	31.77			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6405MHz_TX

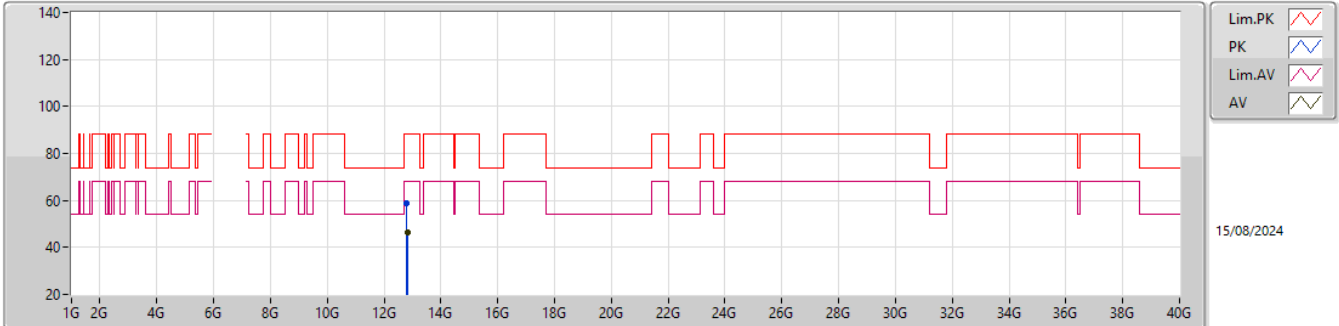


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.81081G	58.71	88.20	-29.49	39.83	3	Horizontal	200	1.80	-	39.22	11.43	31.77			
RMS	12.81627G	46.56	68.20	-21.64	27.66	3	Horizontal	200	1.80	-	39.23	11.43	31.76			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6405MHz_TX

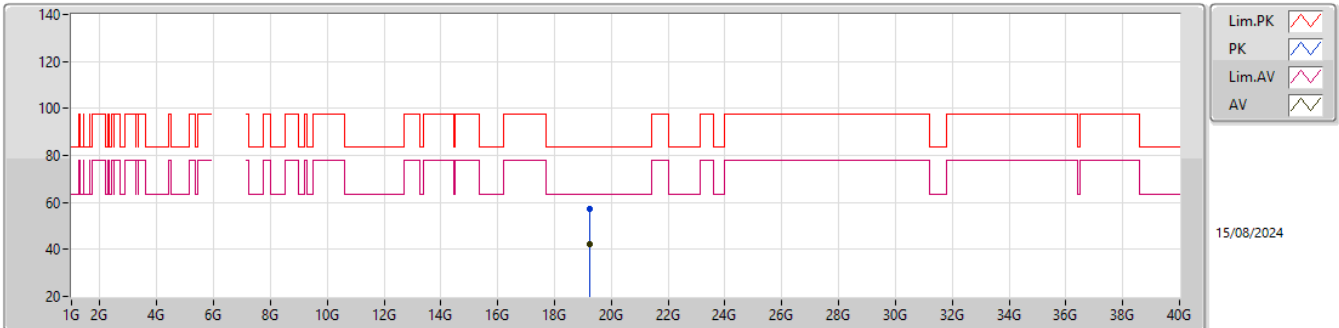EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.21878G	57.03	83.54	-26.51	53.32	1	Vertical	132	1.81	-	37.96	15.24	49.49			
AV	19.21878G	42.11	63.54	-21.43	38.40	1	Vertical	132	1.81	-	37.96	15.24	49.49			

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6405MHz_TX

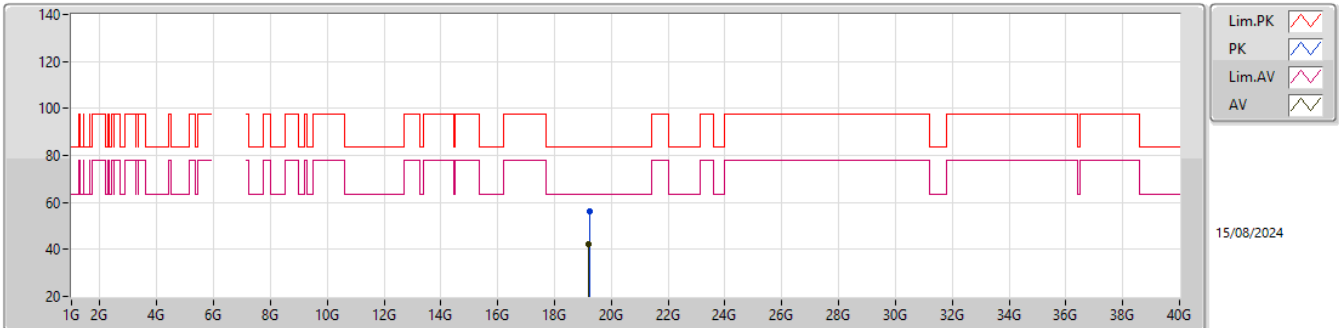EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.21878G	56.13	83.54	-27.41	52.42	1	Horizontal	235	1.64	-	37.96	15.24	49.49			
AV	19.21584G	42.19	63.54	-21.35	38.47	1	Horizontal	235	1.64	-	37.97	15.24	49.49			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6565MHz_TX

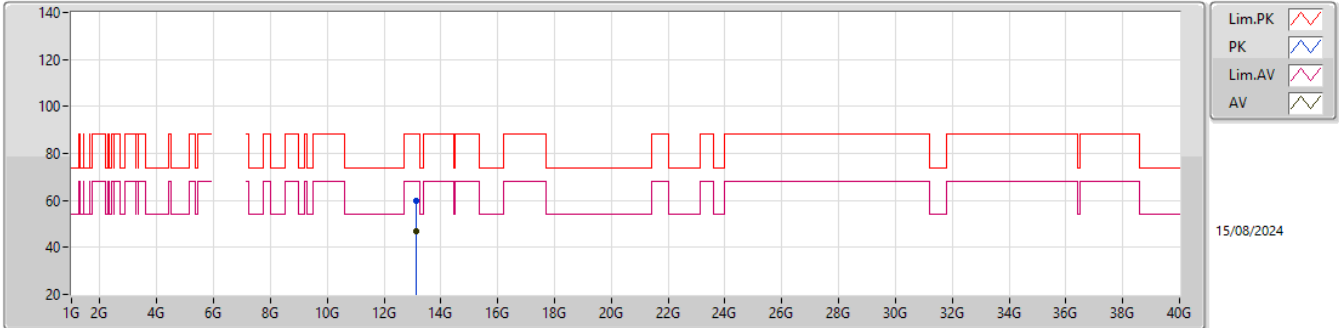


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.11863G	59.75	88.20	-28.45	40.38	3	Vertical	173	1.80	-	39.27	11.55	31.45			
RMS	13.12964G	46.88	68.20	-21.32	27.45	3	Vertical	173	1.80	-	39.32	11.55	31.44			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6565MHz_TX

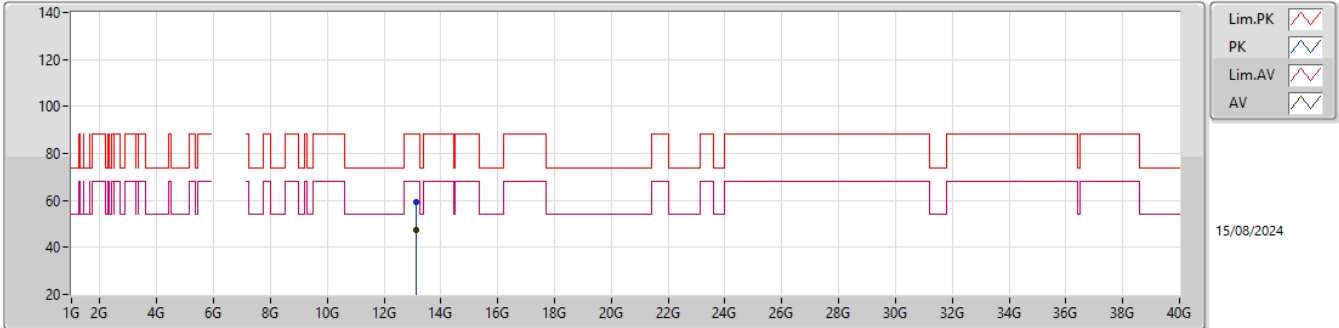


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.11869G	59.41	88.20	-28.79	40.04	3	Horizontal	272	1.80	-	39.27	11.55	31.45			
RMS	13.12976G	47.57	68.20	-20.63	28.14	3	Horizontal	272	1.80	-	39.32	11.55	31.44			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6565MHz_TX

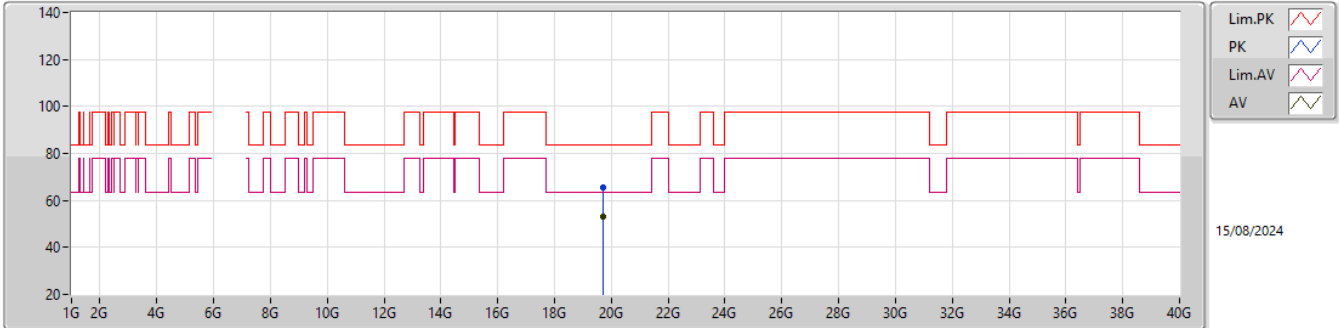


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.70382G	65.74	83.54	-17.80	62.23	1	Vertical	226	1.76	-	37.81	15.21	49.51			
AV	19.69094G	52.86	63.54	-10.68	49.31	1	Vertical	226	1.76	-	37.85	15.22	49.52			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6565MHz_TX

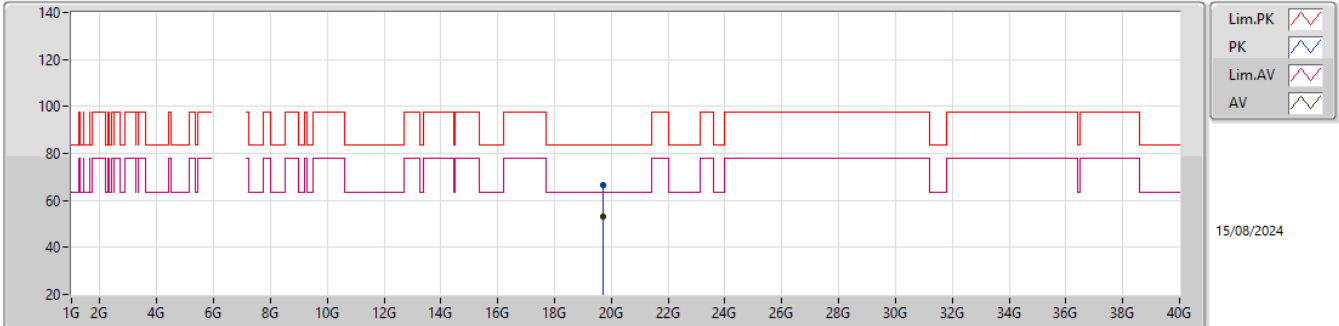EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.6957G	66.58	83.54	-16.96	63.05	1	Horizontal	244	1.64	-	37.83	15.22	49.52			
AV	19.69766G	52.95	63.54	-10.59	49.44	1	Horizontal	244	1.64	-	37.81	15.22	49.52			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6685MHz_TX

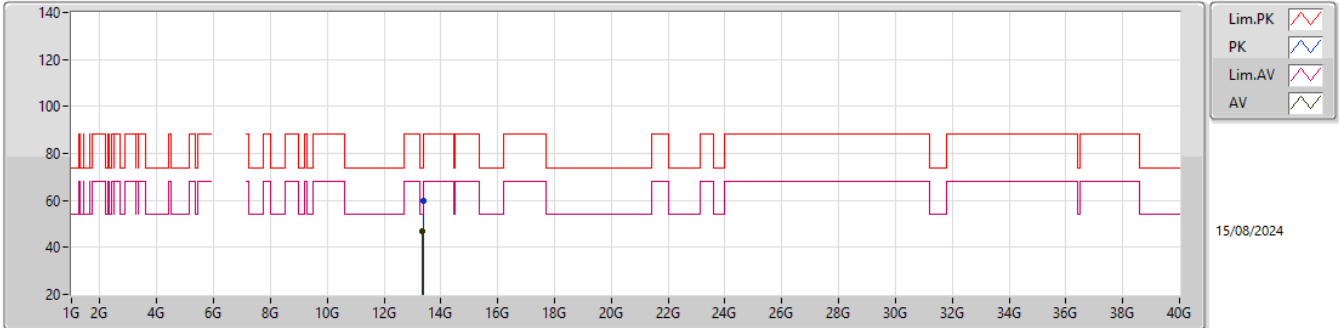


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.37474G	59.89	74.00	-14.11	39.68	3	Vertical	0	1.49	-	39.75	11.64	31.18			
AV	13.35947G	47.08	54.00	-6.92	26.91	3	Vertical	0	1.49	-	39.72	11.64	31.19			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6685MHz_TX

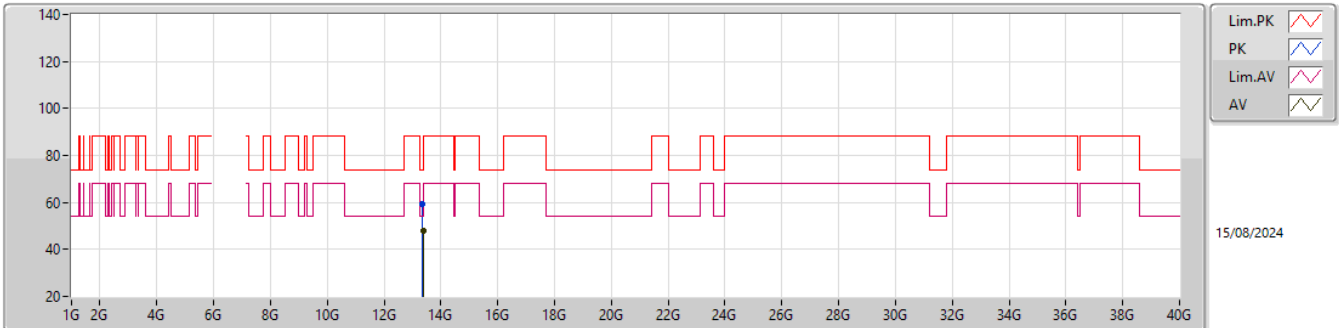EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.35521G	59.52	74.00	-14.48	39.38	3	Horizontal	282	1.80	-	39.71	11.63	31.20			
AV	13.36979G	48.17	54.00	-5.83	27.97	3	Horizontal	282	1.80	-	39.74	11.64	31.18			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6685MHz_TX

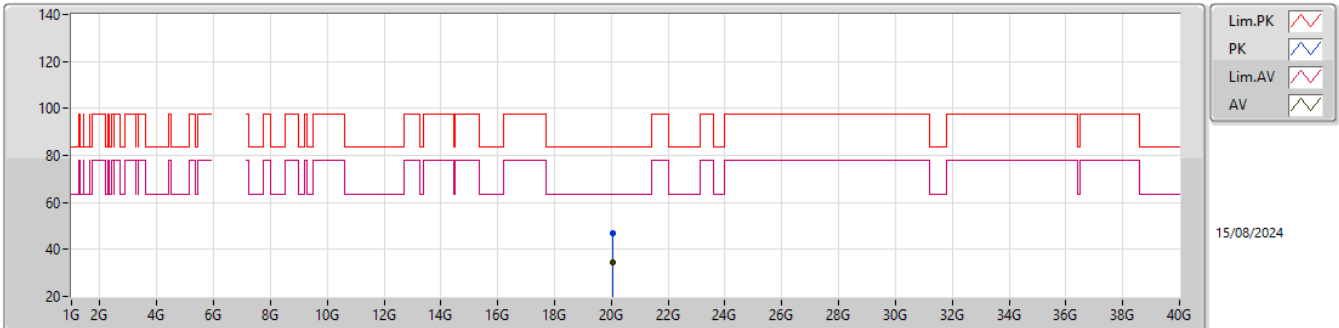EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.05388G	46.74	83.54	-36.80	43.04	1	Vertical	339	1.67	-	37.72	15.24	49.26			
AV	20.03918G	34.56	63.54	-28.98	30.87	1	Vertical	339	1.67	-	37.72	15.23	49.26			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6685MHz_TX

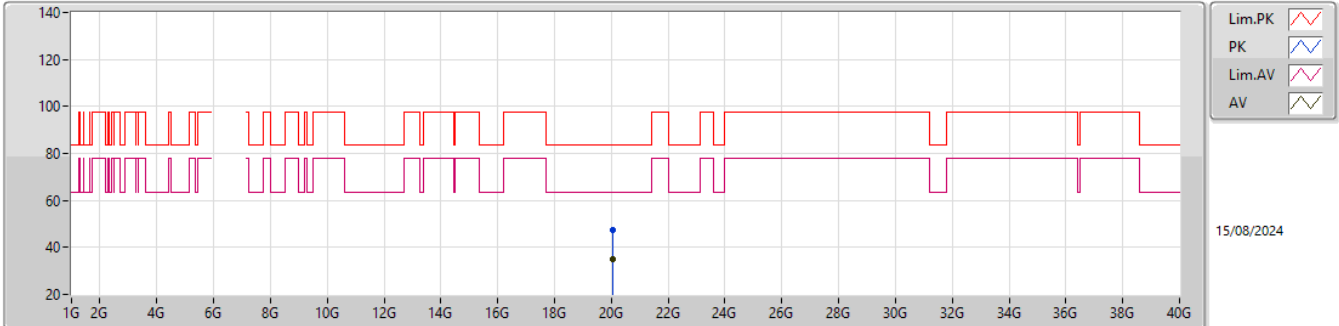EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.06774G	47.50	83.54	-36.04	43.73	1	Horizontal	325	1.65	-	37.77	15.25	49.25			
AV	20.04086G	34.84	63.54	-28.70	31.15	1	Horizontal	325	1.65	-	37.72	15.23	49.26			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6845MHz_TX

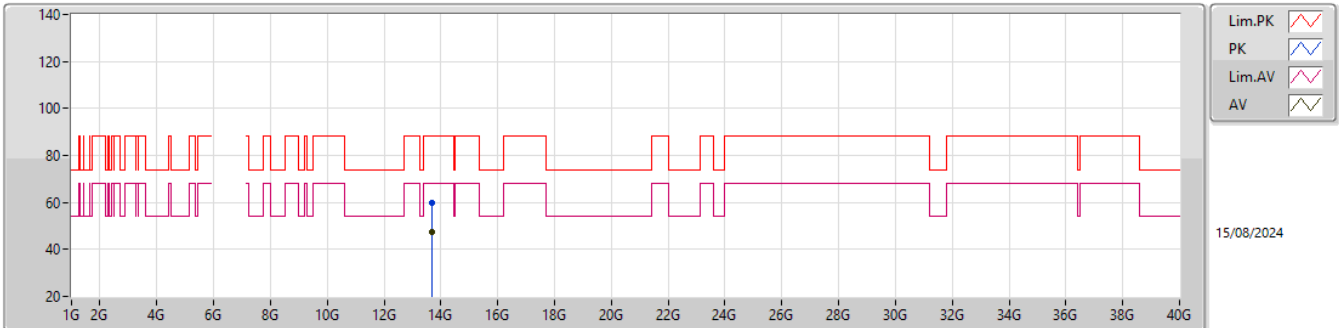EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.68391G	59.99	88.20	-28.21	39.25	3	Vertical	260	1.55	-	40.10	11.76	31.12			
RMS	13.67506G	47.52	68.20	-20.68	26.78	3	Vertical	260	1.55	-	40.10	11.76	31.12			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

6845MHz_TX

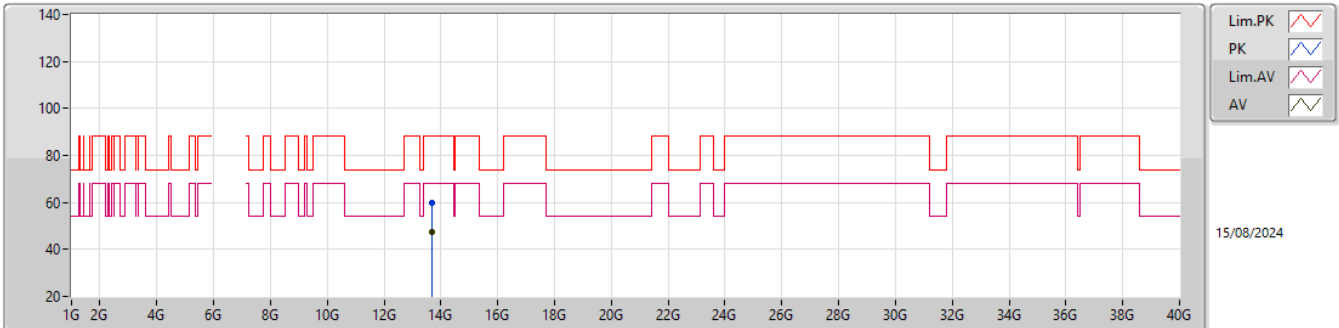


EUT_Y_2TX
Setting 29
01-I-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.70167G	59.96	88.20	-28.24	39.22	3	Horizontal	34	1.96	-	40.10	11.77	31.13			
RMS	13.6828G	47.64	68.20	-20.56	26.90	3	Horizontal	34	1.96	-	40.10	11.76	31.12			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6845MHz_TX

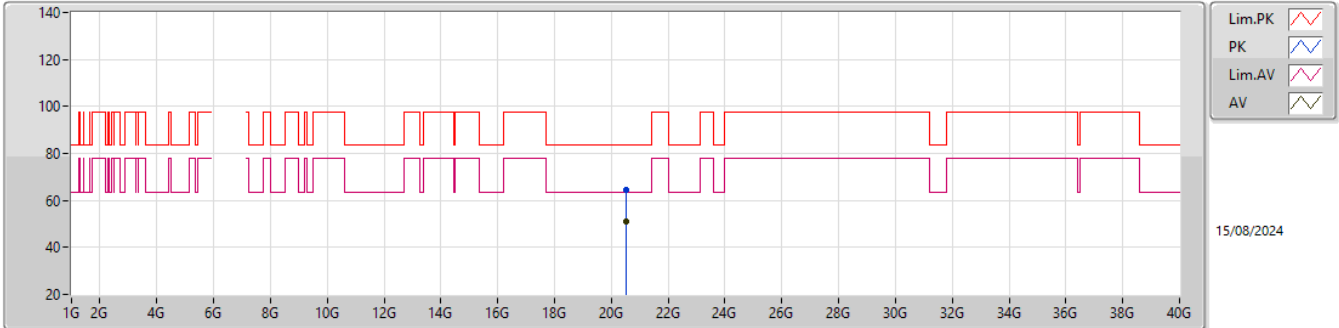
EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.53234G	64.30	83.54	-19.24	60.00	1	Vertical	225	1.73	-	37.79	15.63	49.12			
AV	20.53836G	50.80	63.54	-12.74	46.46	1	Vertical	225	1.73	-	37.83	15.63	49.12			

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX


6845MHz_TX

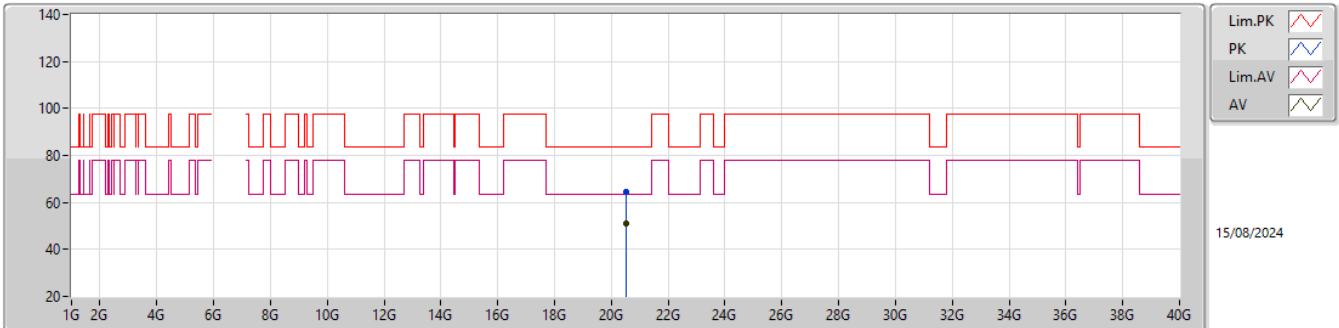EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.54256G	64.23	83.54	-19.31	59.86	1	Horizontal	244	1.64	-	37.86	15.63	49.12			
AV	20.53402G	50.80	63.54	-12.74	46.49	1	Horizontal	244	1.64	-	37.80	15.63	49.12			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6145MHz_TX

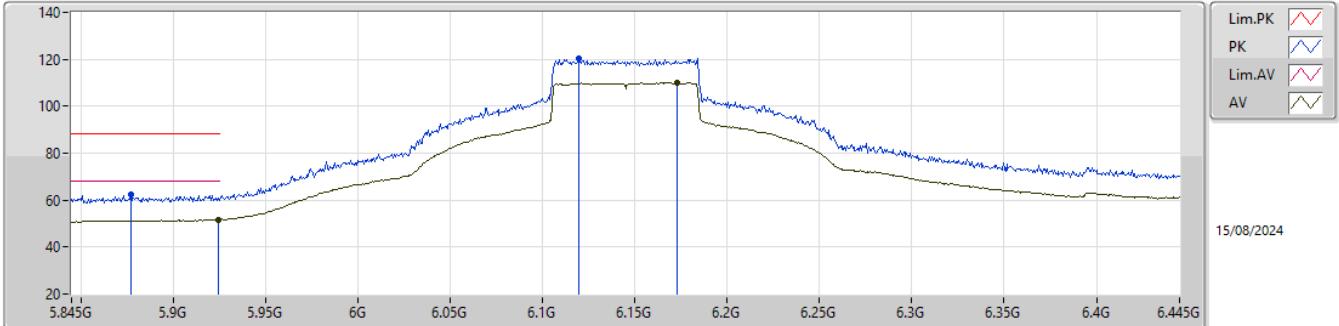


EUT_Y_2TX
Setting 29
01-I-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.8774G	62.54	88.20	-25.66	55.05	3	Vertical	210	1.80	-	32.31	7.62	32.44			
RMS	5.9242G	51.62	68.20	-16.58	44.02	3	Vertical	210	1.80	-	32.40	7.64	32.44			
PK	6.1198G	120.54	Inf	-Inf	112.69	3	Vertical	210	1.80	-	32.58	7.70	32.43			
RMS	6.1732G	109.90	Inf	-Inf	101.86	3	Vertical	210	1.80	-	32.75	7.71	32.42			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6145MHz_TX

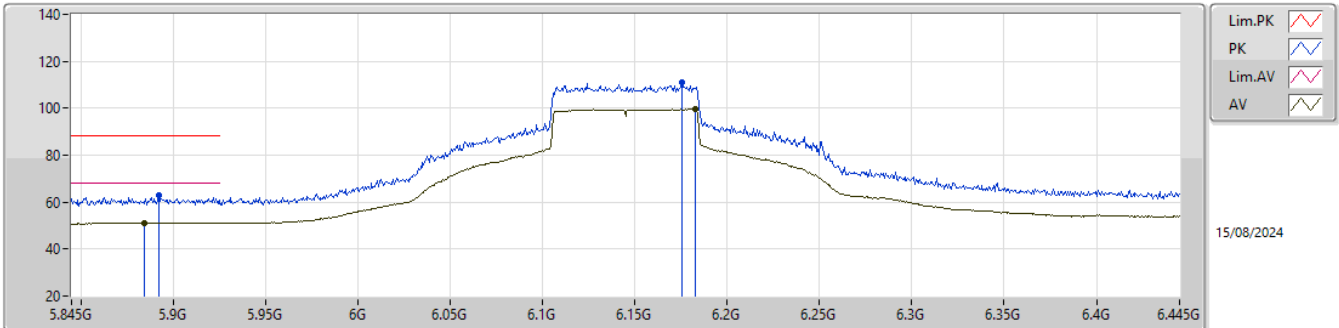EUT_Y_2TX
Setting 29
01-I-A-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.8924G	62.70	88.20	-25.50	55.14	3	Horizontal	31	1.80	-	32.37	7.63	32.44			
RMS	5.8846G	51.29	68.20	-16.91	43.77	3	Horizontal	31	1.80	-	32.34	7.62	32.44			
PK	6.1756G	110.91	Inf	-Inf	102.86	3	Horizontal	31	1.80	-	32.75	7.72	32.42			
RMS	6.1828G	99.71	Inf	-Inf	91.64	3	Horizontal	31	1.80	-	32.77	7.72	32.42			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6145MHz_TX

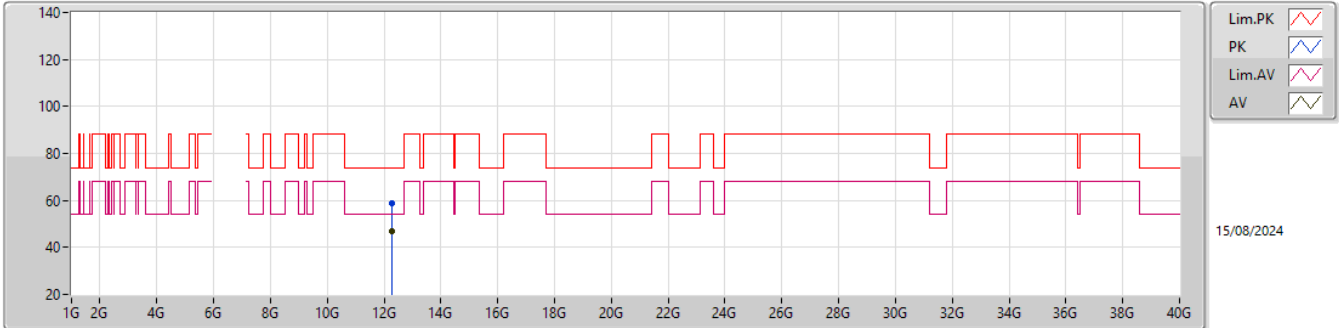


EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.27527G	58.90	74.00	-15.10	41.03	3	Vertical	186	1.01	-	39.05	11.22	32.40			
AV	12.27923G	46.65	54.00	-7.35	28.78	3	Vertical	186	1.01	-	39.04	11.23	32.40			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6145MHz_TX

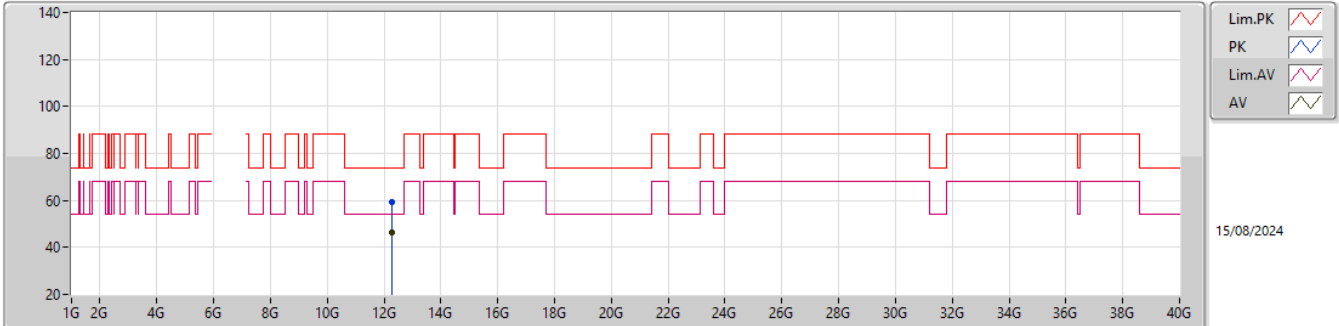


EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.28517G	59.22	74.00	-14.78	41.35	3	Horizontal	70	1.80	-	39.03	11.23	32.39			
AV	12.28139G	46.57	54.00	-7.43	28.69	3	Horizontal	70	1.80	-	39.04	11.23	32.39			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6145MHz_TX

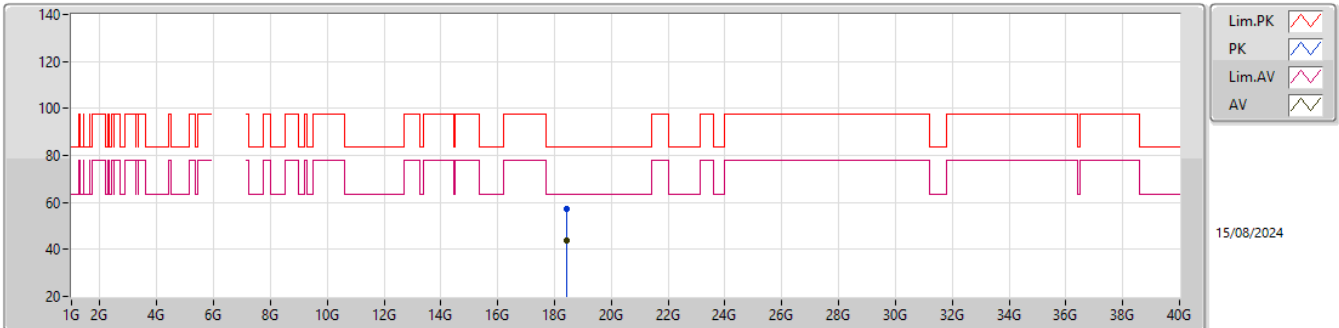EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.44312G	57.32	83.54	-26.22	53.98	1	Vertical	278	1.64	-	37.71	15.28	49.65			
AV	18.42968G	43.95	63.54	-19.59	40.58	1	Vertical	278	1.64	-	37.74	15.28	49.65			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6145MHz_TX

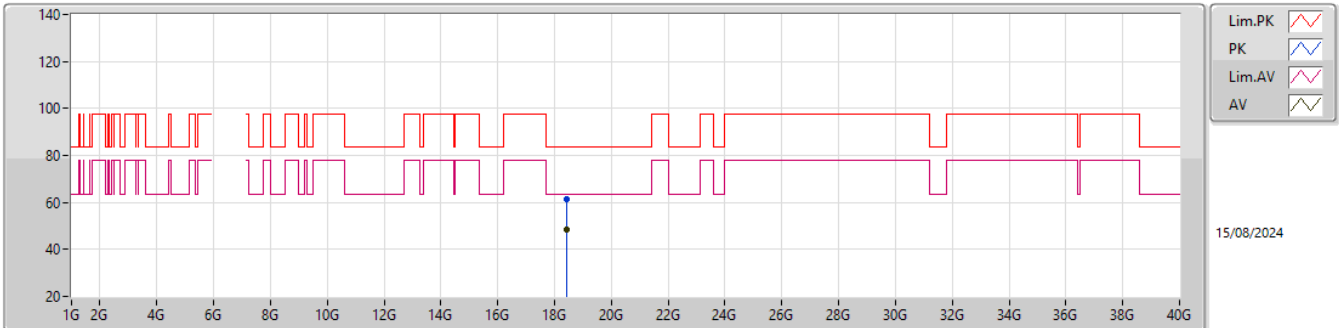EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.428G	61.61	83.54	-21.93	58.24	1	Horizontal	242	1.64	-	37.74	15.28	49.65			
AV	18.43416G	48.20	63.54	-15.34	44.84	1	Horizontal	242	1.64	-	37.73	15.28	49.65			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6225MHz_TX

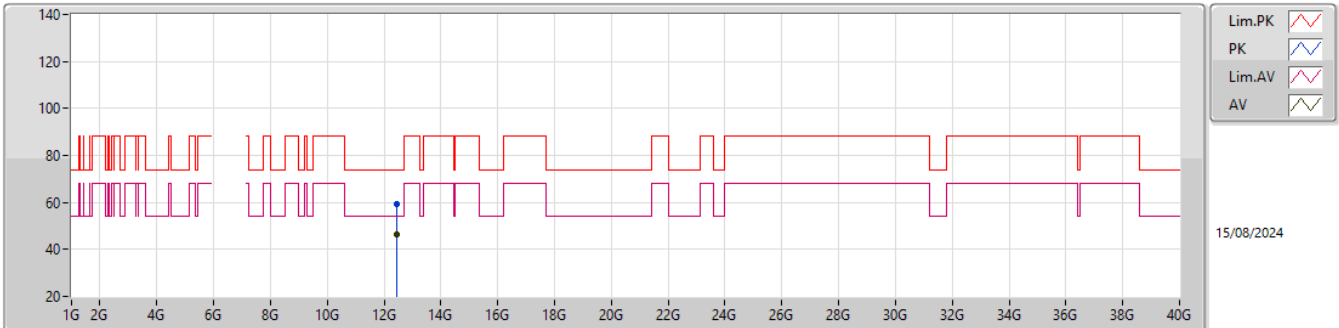EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.43998G	59.08	74.00	-14.92	41.40	3	Vertical	192	2.89	-	38.56	11.29	32.17			
AV	12.43524G	46.33	54.00	-7.67	28.62	3	Vertical	192	2.89	-	38.59	11.29	32.17			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6225MHz_TX

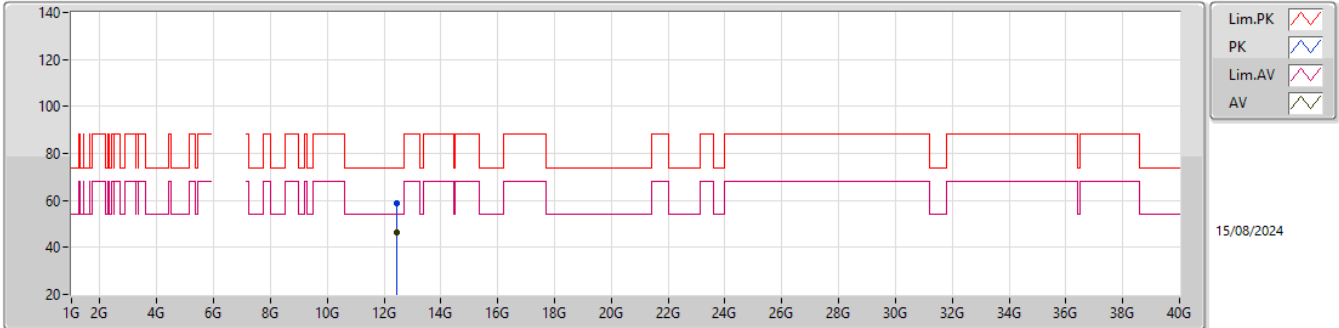


EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.44184G	58.77	74.00	-15.23	41.09	3	Horizontal	187	1.73	-	38.55	11.29	32.16			
AV	12.43623G	46.41	54.00	-7.59	28.71	3	Horizontal	187	1.73	-	38.58	11.29	32.17			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6225MHz_TX

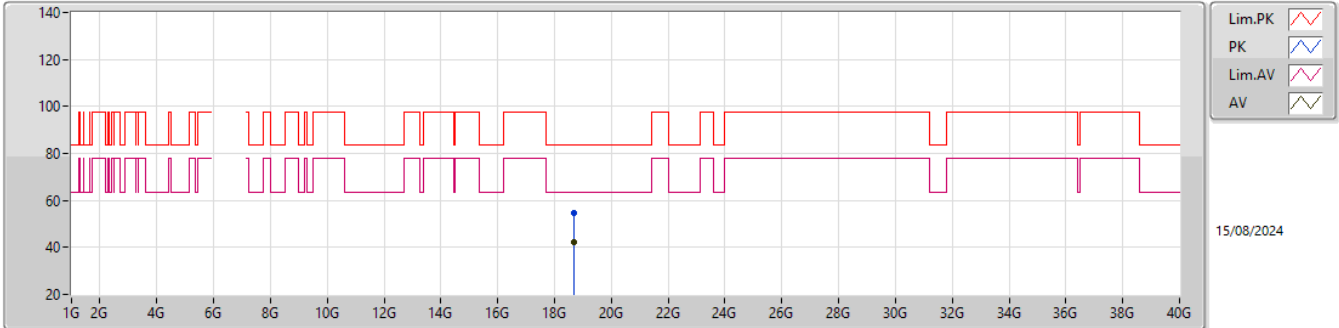


EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.6813G	54.67	83.54	-28.87	51.29	1	Vertical	316	1.78	-	37.67	15.27	49.56			
AV	18.67276G	42.11	63.54	-21.43	38.69	1	Vertical	316	1.78	-	37.71	15.27	49.56			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6225MHz_TX

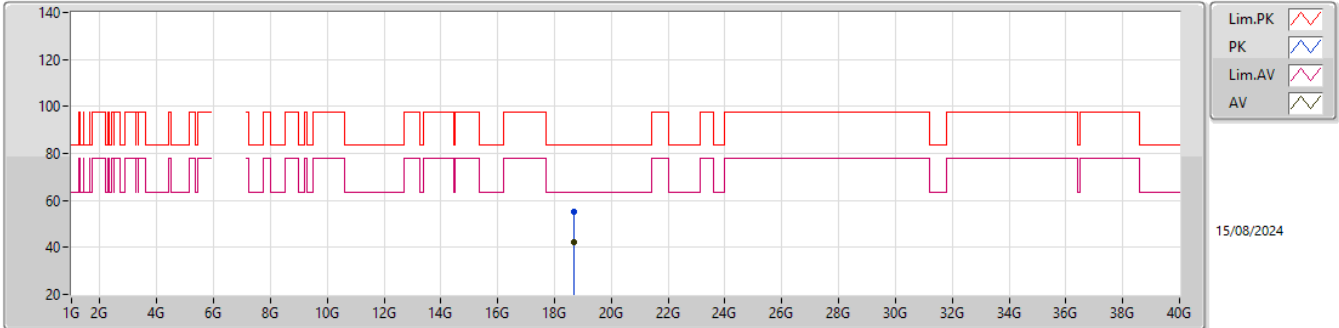EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.66688G	55.30	83.54	-28.24	51.87	1	Horizontal	234	1.65	-	37.73	15.27	49.57			
AV	18.67472G	42.15	63.54	-21.39	38.74	1	Horizontal	234	1.65	-	37.70	15.27	49.56			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6385MHz_TX

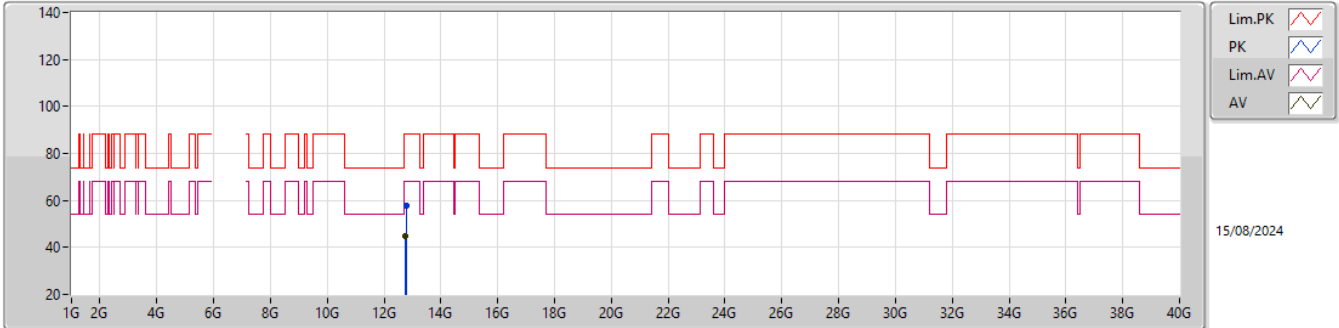


EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.77033G	57.73	88.20	-30.47	39.11	3	Vertical	335	1.02	-	39.02	11.41	31.81			
RMS	12.75875G	44.87	68.20	-23.33	26.33	3	Vertical	335	1.02	-	38.95	11.41	31.82			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6385MHz_TX

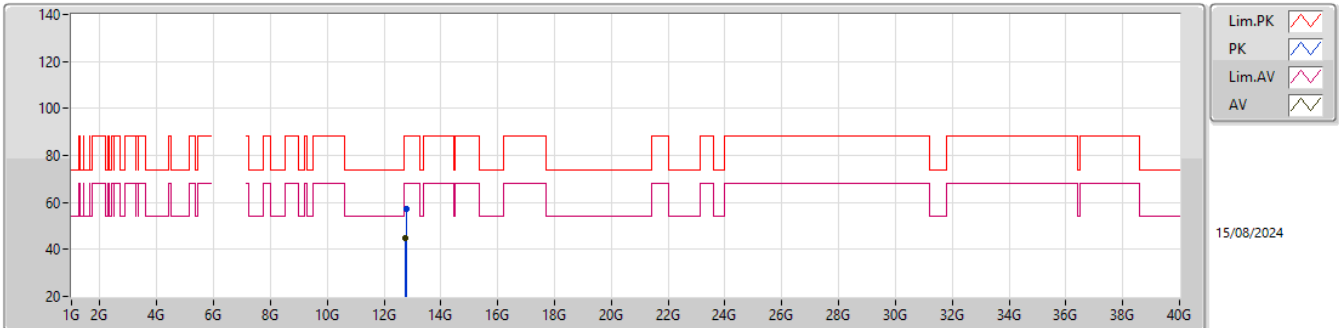EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.77324G	57.36	88.20	-30.84	38.72	3	Horizontal	44	1.80	-	39.04	11.41	31.81			
RMS	12.75809G	44.86	68.20	-23.34	26.32	3	Horizontal	44	1.80	-	38.95	11.41	31.82			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6385MHz_TX

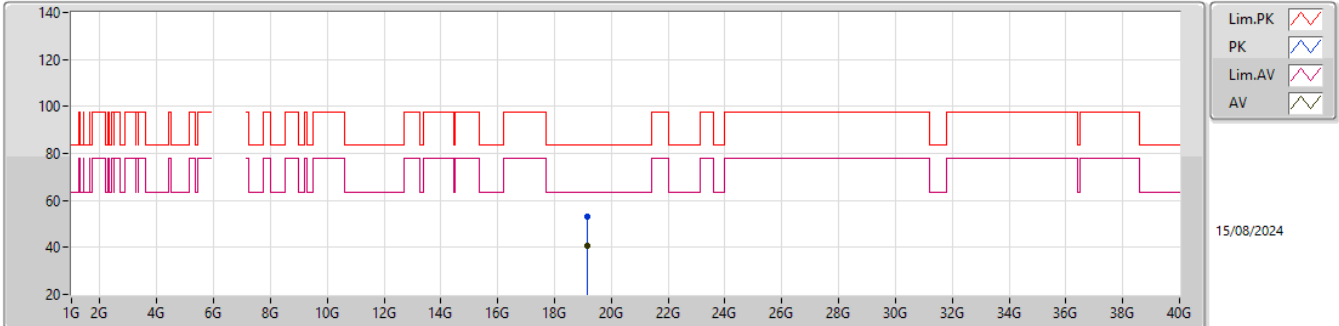EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.16186G	53.22	83.54	-30.32	49.66	1	Vertical	347	1.62	-	37.77	15.24	49.45			
AV	19.14408G	40.47	63.54	-23.07	36.95	1	Vertical	347	1.62	-	37.72	15.24	49.44			

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6385MHz_TX

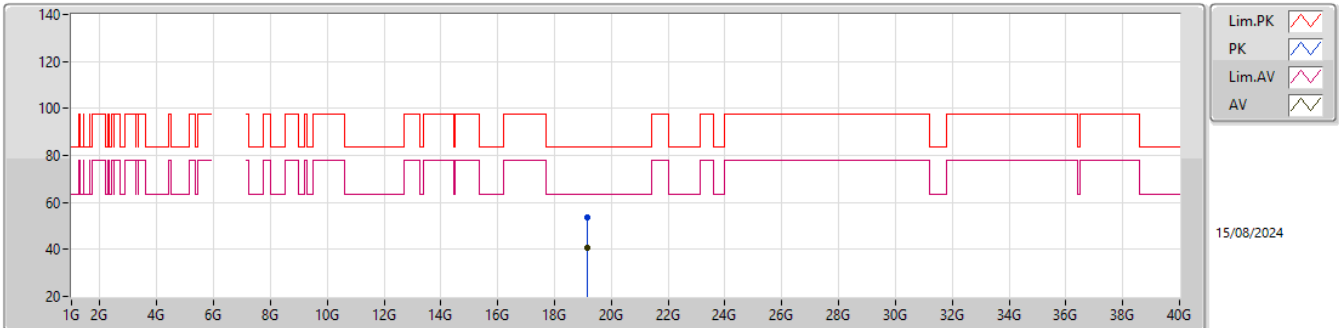EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.14926G	53.81	83.54	-29.73	50.31	1	Horizontal	234	1.64	-	37.70	15.24	49.44			
AV	19.14394G	40.54	63.54	-23.00	37.02	1	Horizontal	234	1.64	-	37.72	15.24	49.44			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6625MHz_TX

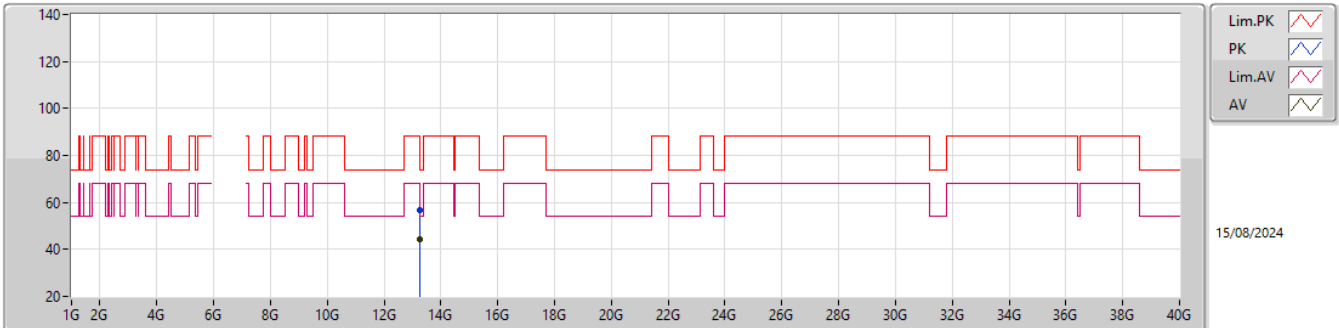EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.24145G	56.82	88.20	-31.38	37.35	3	Vertical	168	1.81	-	39.20	11.59	31.32			
RMS	13.24982G	44.43	68.20	-23.77	24.95	3	Vertical	168	1.81	-	39.20	11.59	31.31			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6625MHz_TX

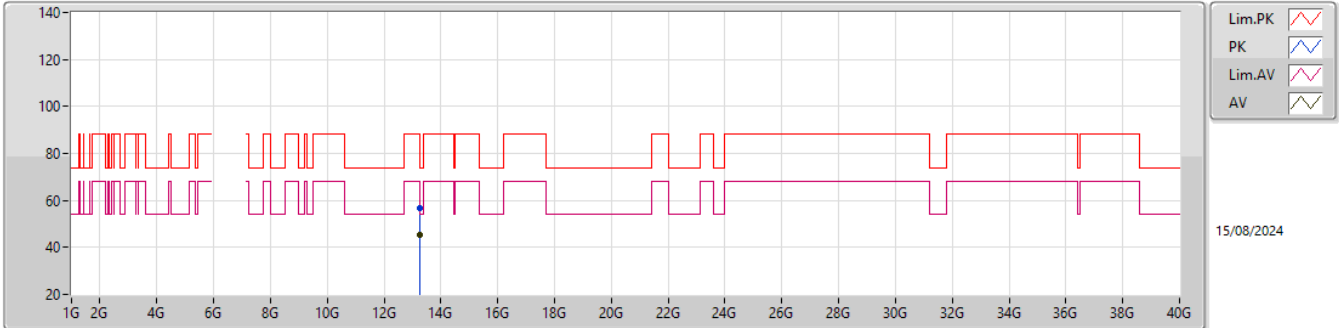


EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.24178G	56.95	88.20	-31.25	37.48	3	Horizontal	274	1.80	-	39.20	11.59	31.32			
RMS	13.24988G	45.34	68.20	-22.86	25.86	3	Horizontal	274	1.80	-	39.20	11.59	31.31			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6625MHz_TX

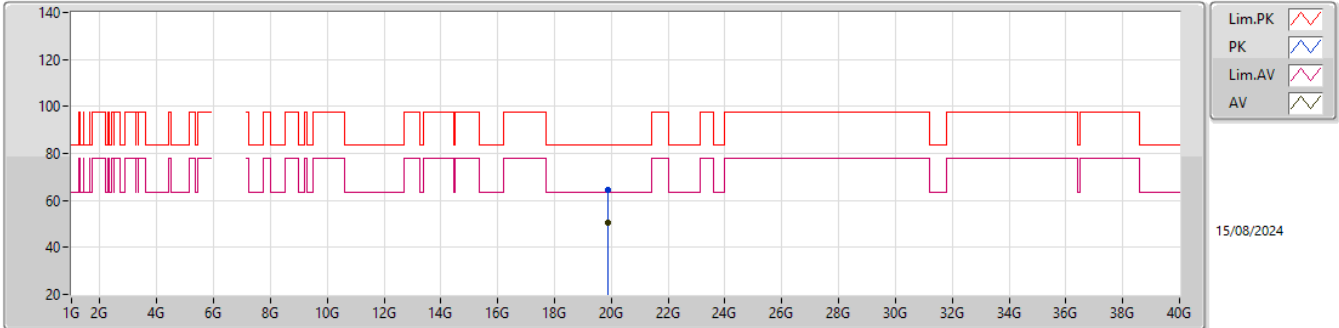


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.87248G	64.28	83.54	-19.26	60.71	1	Vertical	167	1.43	-	37.73	15.21	49.37			
AV	19.8673G	50.72	63.54	-12.82	47.19	1	Vertical	167	1.43	-	37.70	15.21	49.38			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6625MHz_TX

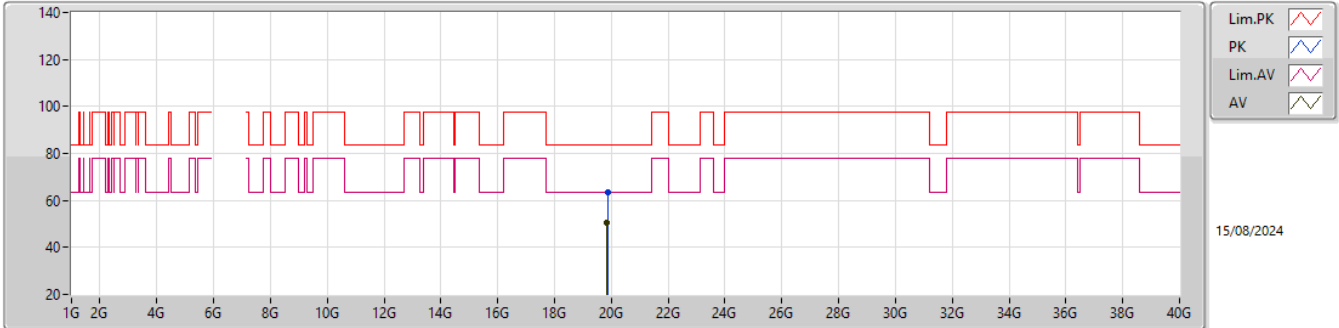


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.8687G	63.39	83.54	-20.15	59.85	1	Horizontal	17	1.46	-	37.71	15.21	49.38			
AV	19.85764G	50.72	63.54	-12.82	47.25	1	Horizontal	17	1.46	-	37.65	15.21	49.39			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6705MHz_TX

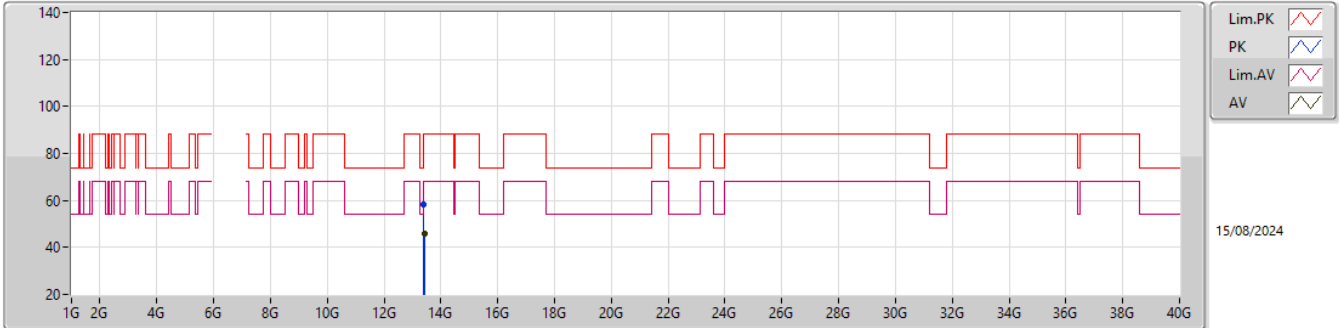


EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.40796G	58.12	88.20	-30.08	37.77	3	Vertical	51	2.94	-	39.83	11.66	31.14			
RMS	13.42224G	45.89	68.20	-22.31	25.46	3	Vertical	51	2.94	-	39.89	11.66	31.12			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6705MHz_TX

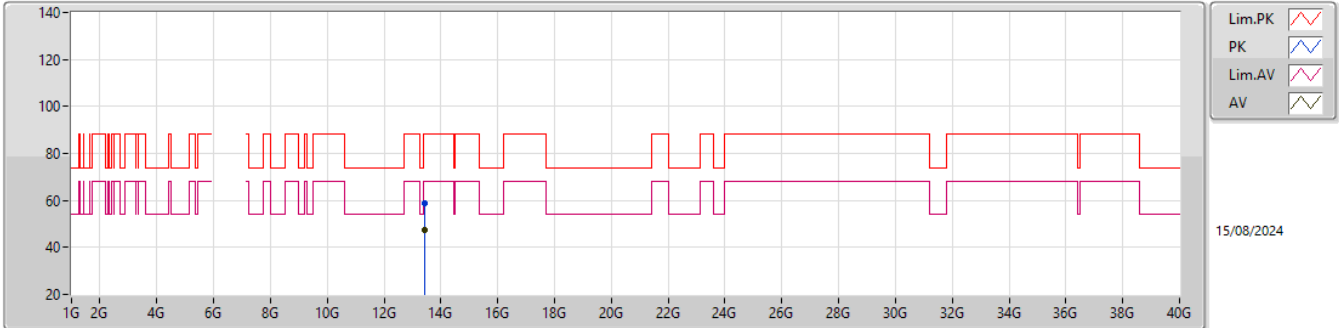


EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.40988G	58.95	88.20	-29.25	38.59	3	Horizontal	278	1.80	-	39.84	11.66	31.14			
RMS	13.40973G	47.54	68.20	-20.66	27.18	3	Horizontal	278	1.80	-	39.84	11.66	31.14			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6705MHz_TX

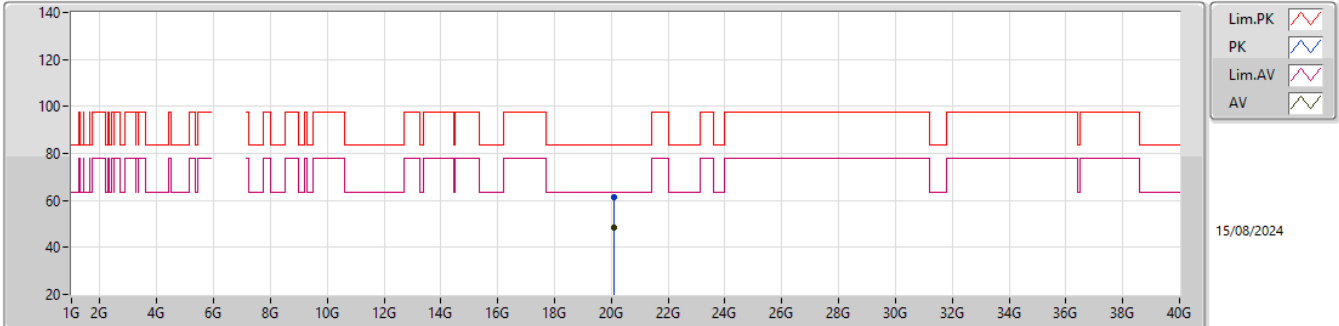


EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.09302G	61.48	83.54	-22.06	57.59	1	Vertical	46	1.72	-	37.87	15.27	49.25			
AV	20.10016G	48.61	63.54	-14.93	44.67	1	Vertical	46	1.72	-	37.90	15.28	49.24			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX


6705MHz_TX

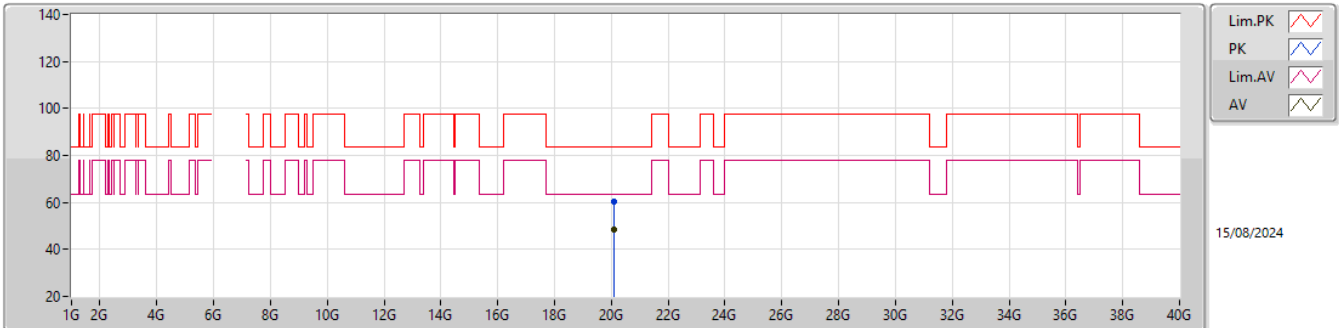EUT_Y_2TX
Setting 29
01-I-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.09442G	60.54	83.54	-23.00	56.63	1	Horizontal	198	1.93	-	37.88	15.28	49.25			
AV	20.09848G	48.62	63.54	-14.92	44.69	1	Horizontal	198	1.93	-	37.89	15.28	49.24			

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

6785MHz_TX

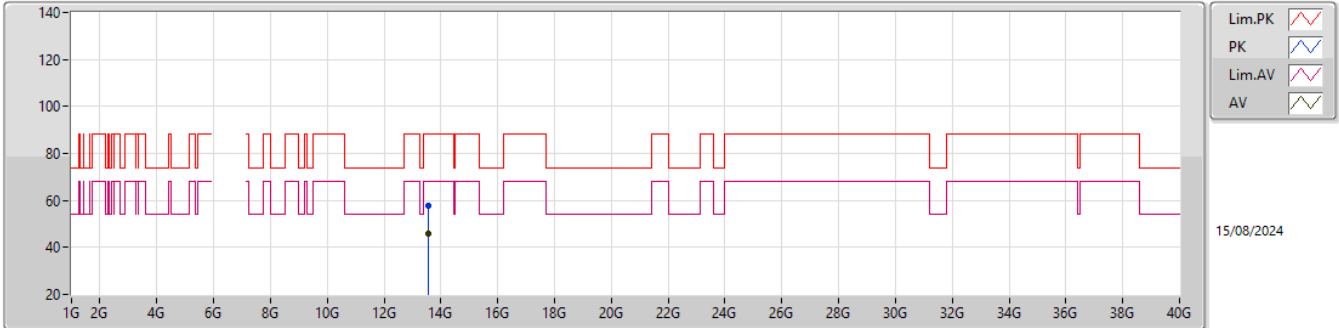

EUT_Y_2TX
Setting 29
01-I-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.558G	57.93	88.20	-30.27	37.02	3	Vertical	246	1.80	-	40.27	11.71	31.07			
RMS	13.55536G	45.71	68.20	-22.49	24.78	3	Vertical	246	1.80	-	40.28	11.71	31.06			