




802.11 ax20 CH01 (2412MHz)

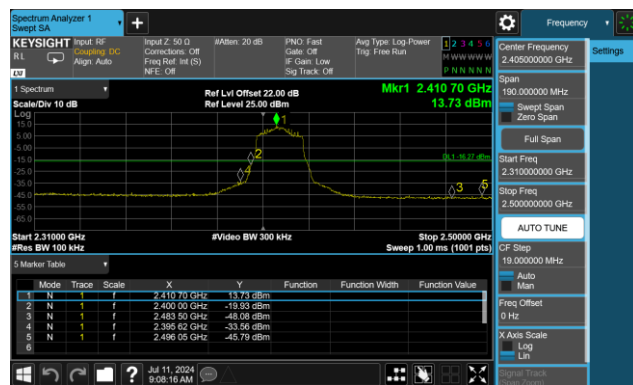


802.11 ax20 CH01 (2412MHz)

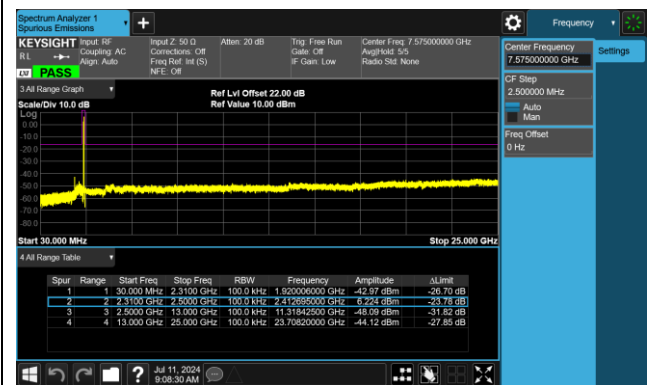


802.11 ax20 CH06 (2437MHz)

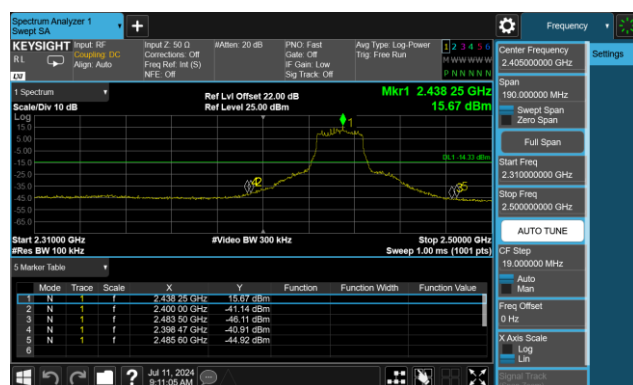


802.11 ax20 CH06 (2437MHz)

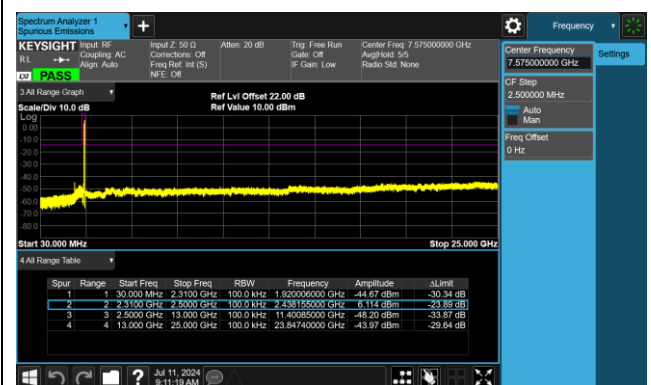


802.11 ax20 CH11 (2462MHz)

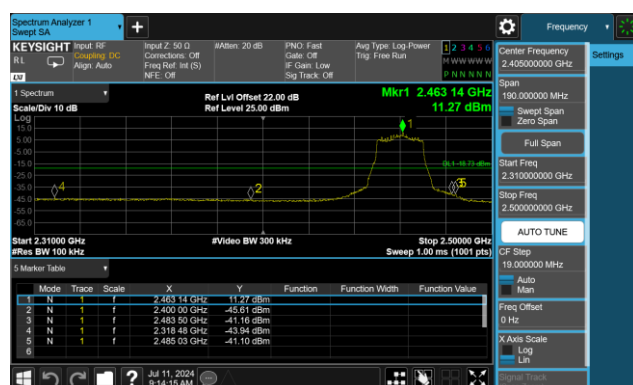


802.11 ax20 CH11 (2462MHz)

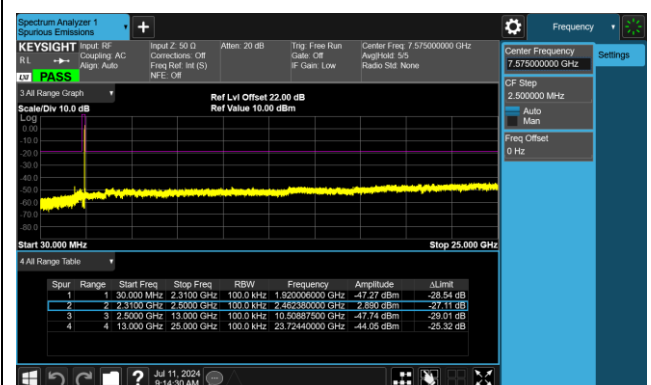


802.11 ax40 CH03 (2422MHz)

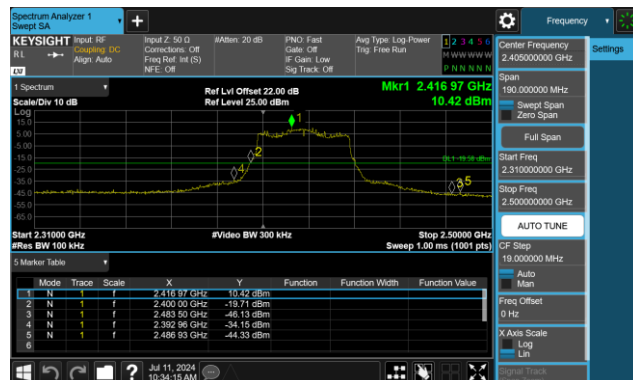


802.11 ax40 CH03 (2422MHz)

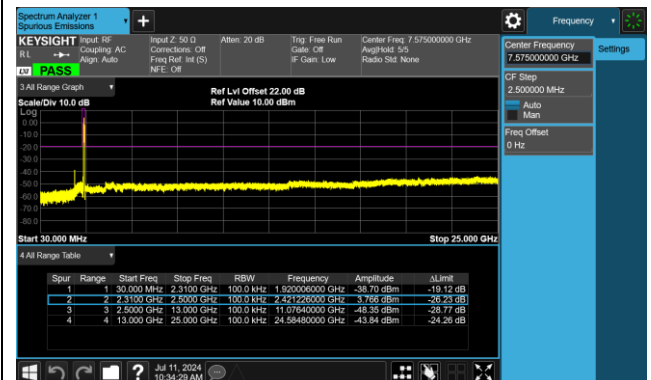


802.11 ax40 CH06 (2437MHz)

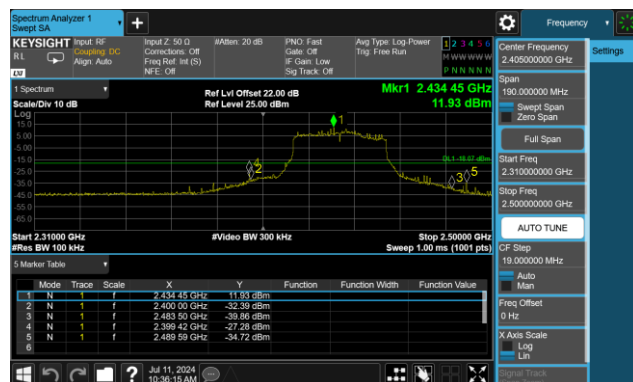


802.11 ax40 CH06 (2437MHz)

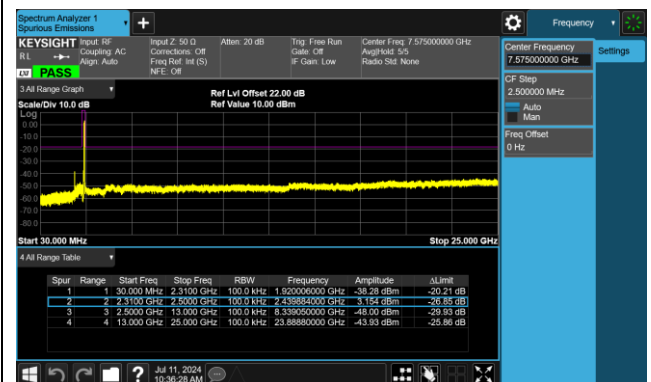


802.11 ax40 CH09 (2452MHz)

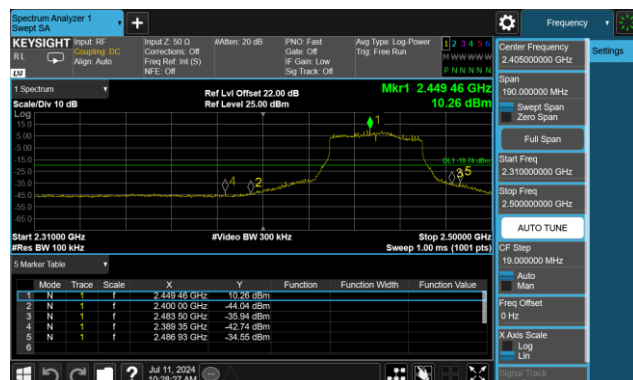


802.11 ax40 CH09 (2452MHz)

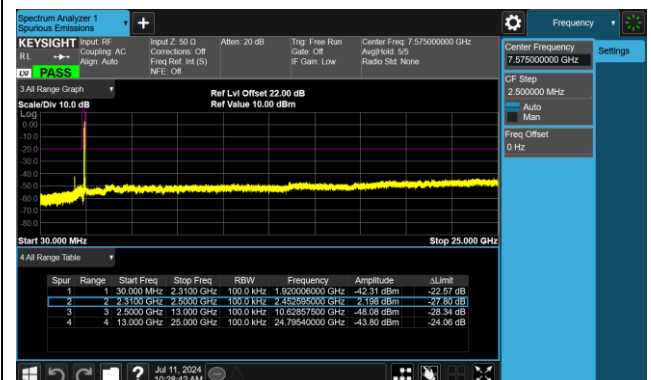

802.11 be20 CH01 (2412MHz)

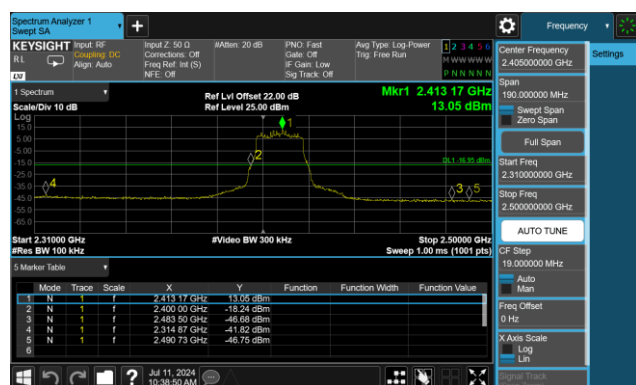


802.11 be20 CH01 (2412MHz)

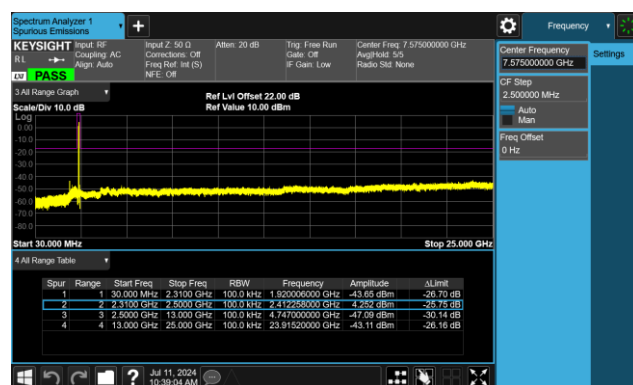


802.11 be20 CH06 (2437MHz)




802.11 be20 CH06 (2437MHz)

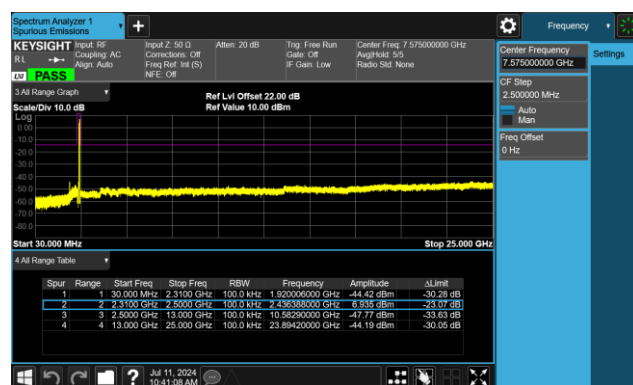


802.11 be20 CH11 (2462MHz)

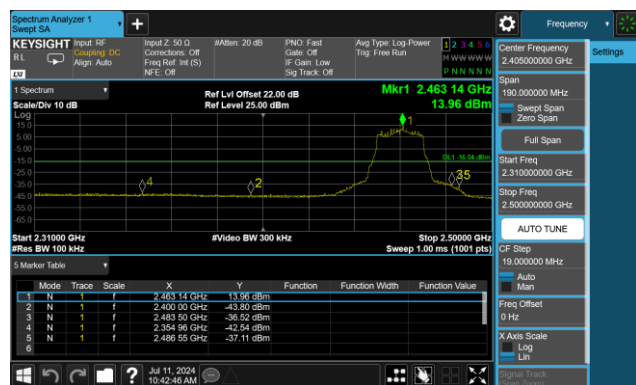


802.11 be20 CH11 (2462MHz)

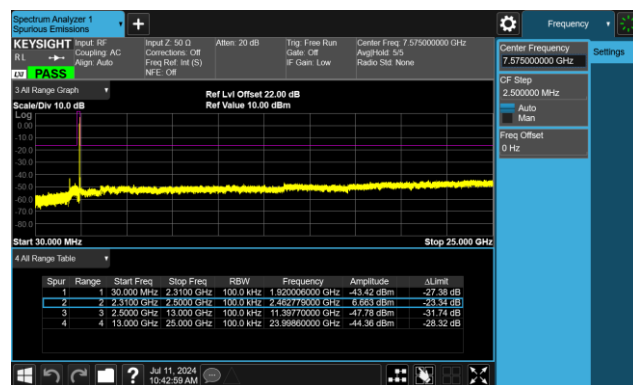

802.11 be40 CH03 (2422MHz)

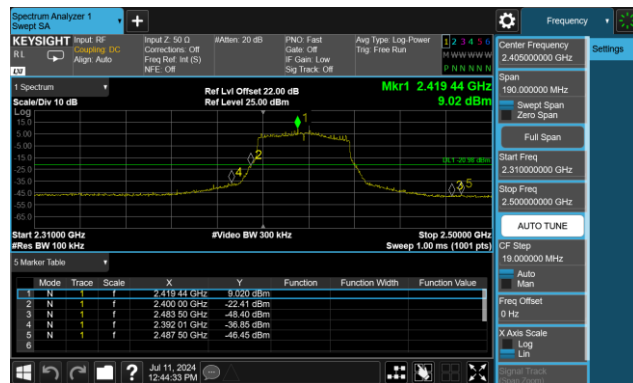


802.11 be40 CH03 (2422MHz)

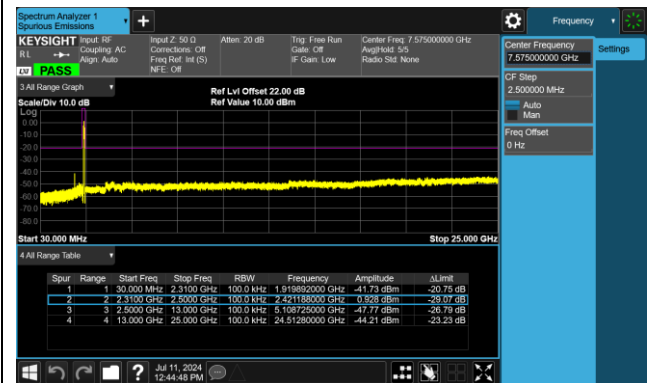


802.11 be40 CH06 (2437MHz)




802.11 be40 CH06 (2437MHz)

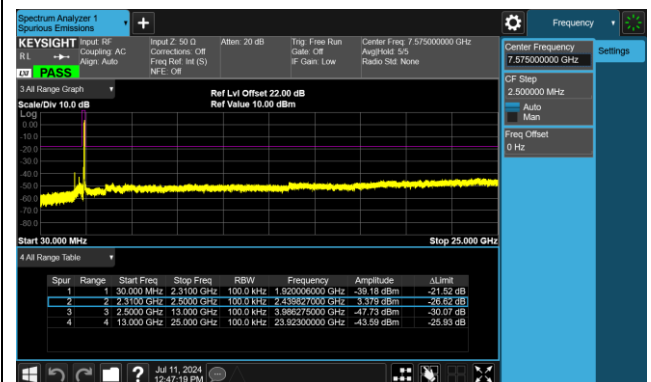

802.11 be40 CH09 (2452MHz)

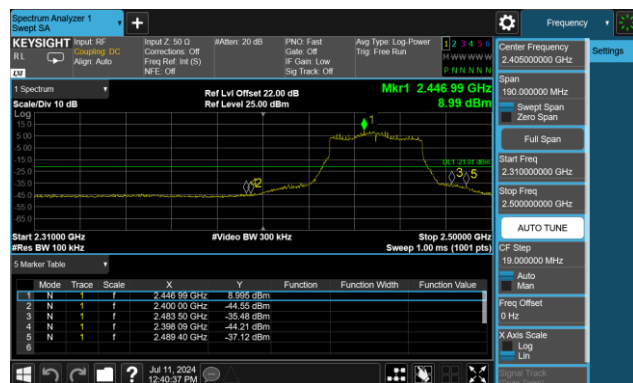

802.11 be40 CH09 (2452MHz)

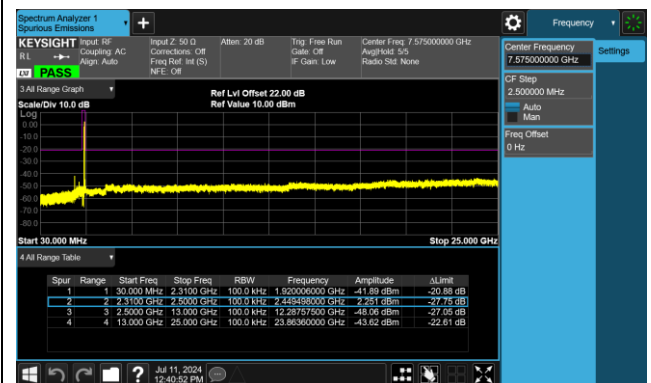

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 Section 11.11 & 11.12

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup

Below 1GHz Test Setup:

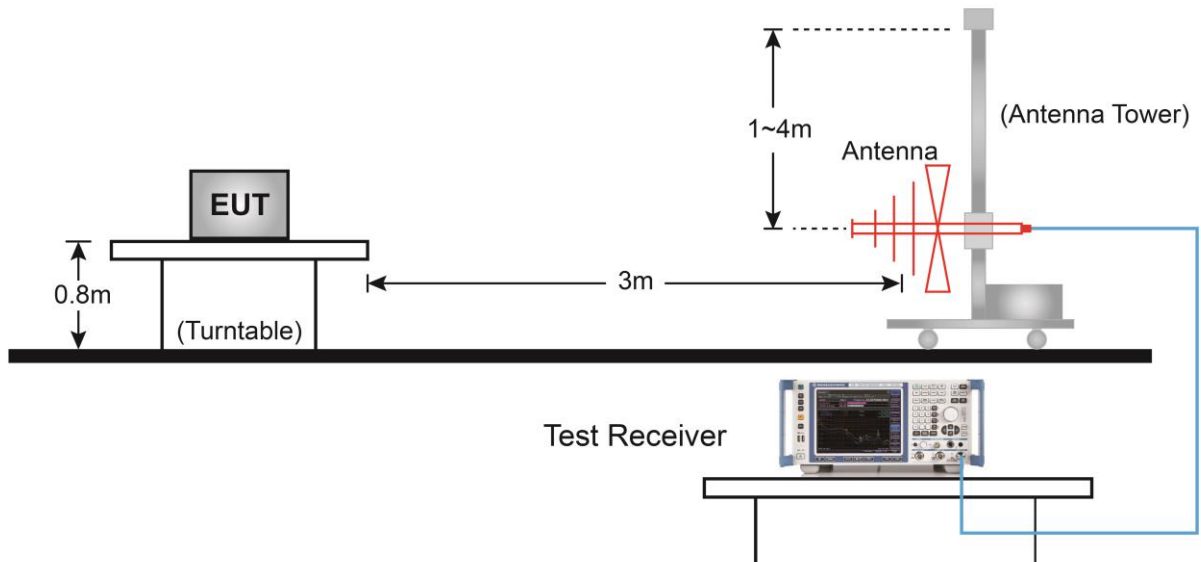


Above 1GHz Test Setup:

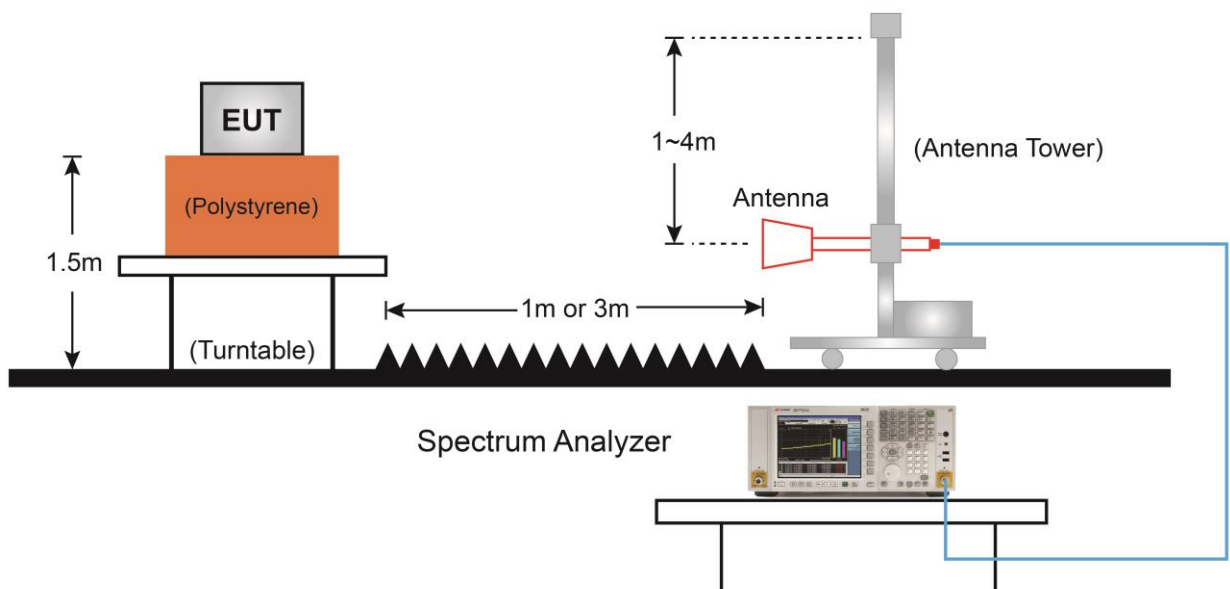

7.6.5. Test Result

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-31
Factor	VULB 9162	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

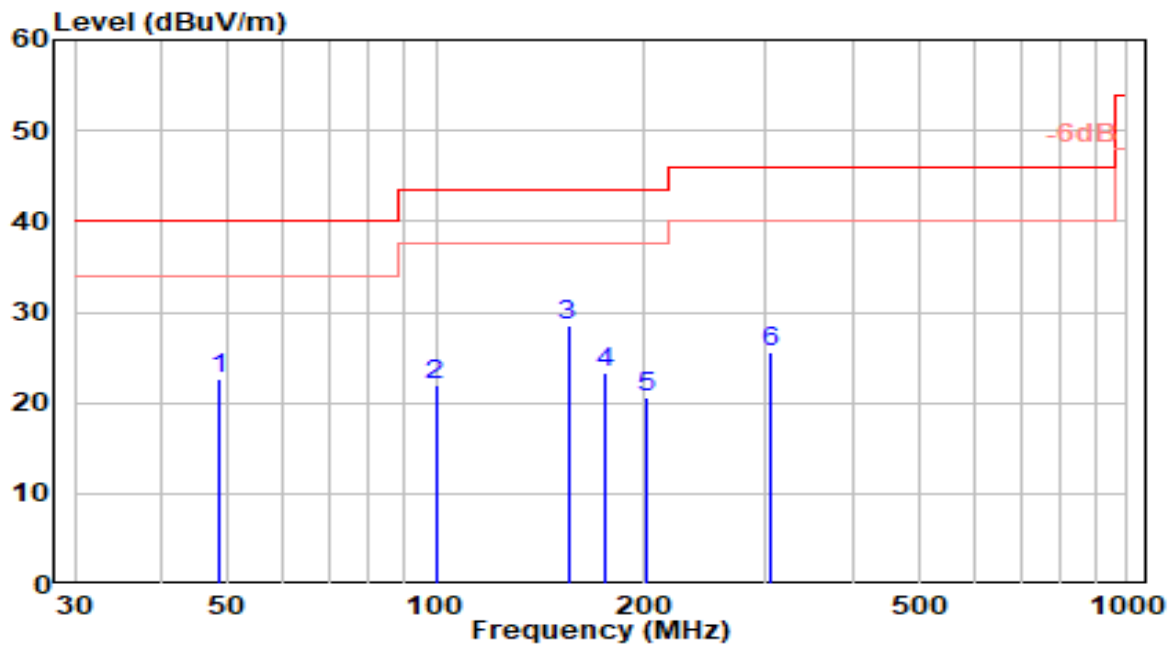


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	48.430	2.06	20.47	22.54	-17.46	40.00	150	0	QP
2	99.840	3.64	18.29	21.92	-21.58	43.50	300	83	QP
3	* 155.130	13.15	15.32	28.47	-15.03	43.50	200	360	QP
4	175.500	7.31	16.11	23.42	-20.08	43.50	100	91	QP
5	201.690	2.59	17.95	20.54	-22.96	43.50	200	80	QP
6	305.480	4.80	20.81	25.61	-20.39	46.00	100	80	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-31
Factor	VULB 9162	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

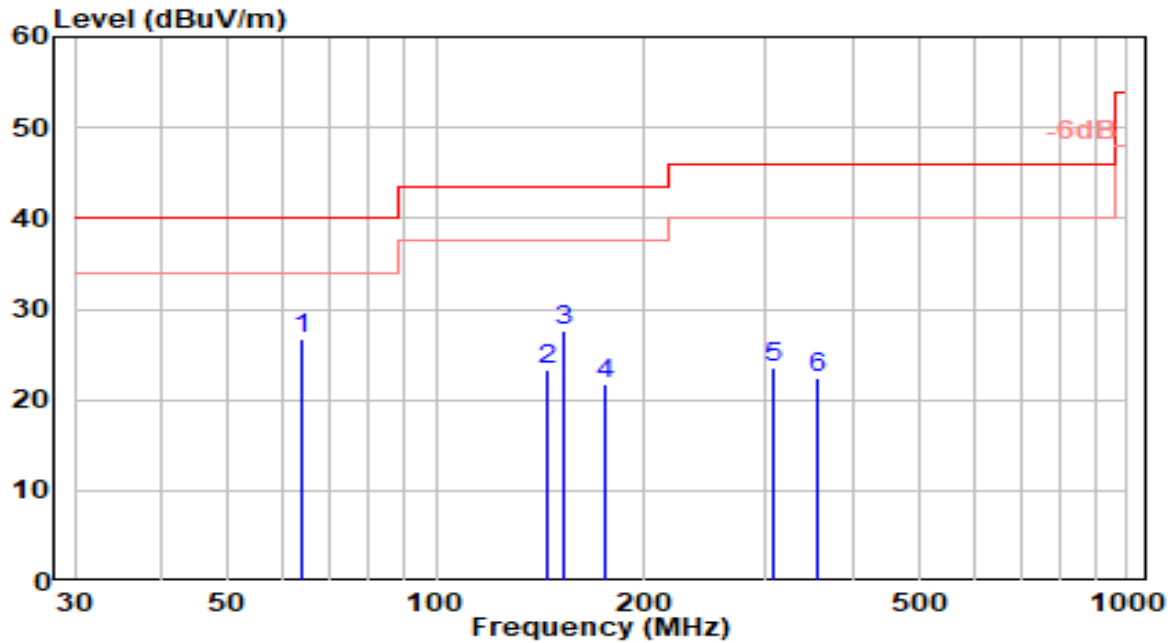


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	63.950	8.82	17.80	26.62	-13.38	40.00	150	0	QP
2		144.460	8.45	14.93	23.38	-20.12	43.50	100	245	QP
3		153.190	12.43	15.26	27.69	-15.81	43.50	100	232	QP
4		175.500	5.65	16.11	21.77	-21.73	43.50	100	277	QP
5		306.450	2.70	20.85	23.55	-22.45	46.00	200	5	QP
6		357.860	-0.16	22.60	22.44	-23.56	46.00	200	19	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-06
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11b_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

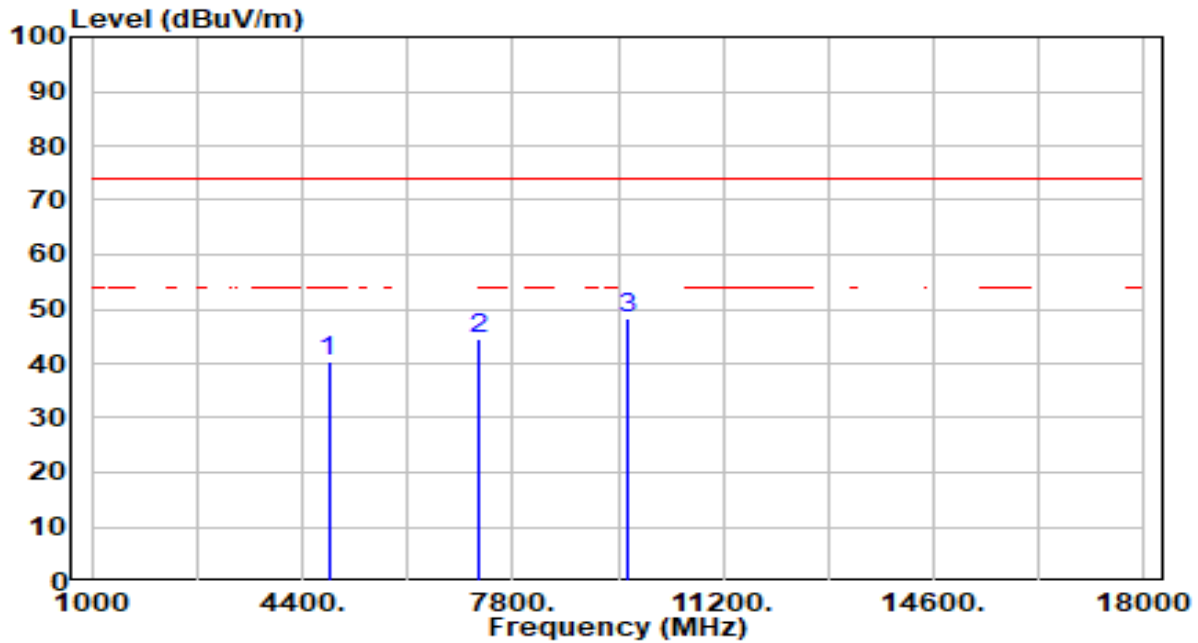


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.20	0.23	40.43	-33.57	74.00	100	107	Peak
2	7236.000	39.07	5.54	44.61	-29.39	74.00	100	0	Peak
3	* 9648.000	42.95	5.30	48.25	-25.75	74.00	100	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-06
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11b_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

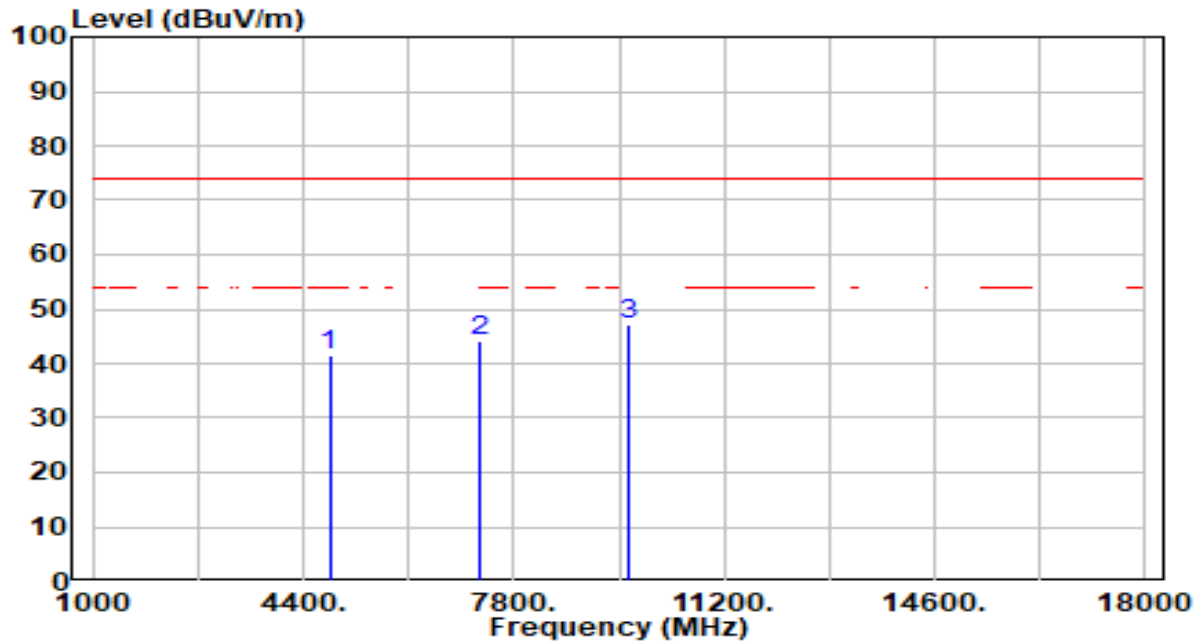


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.37	0.23	41.60	-32.40	74.00	100	136	Peak
2	7236.000	38.45	5.54	44.00	-30.00	74.00	100	136	Peak
3	* 9648.000	41.70	5.30	47.00	-27.00	74.00	100	164	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-06
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11b_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

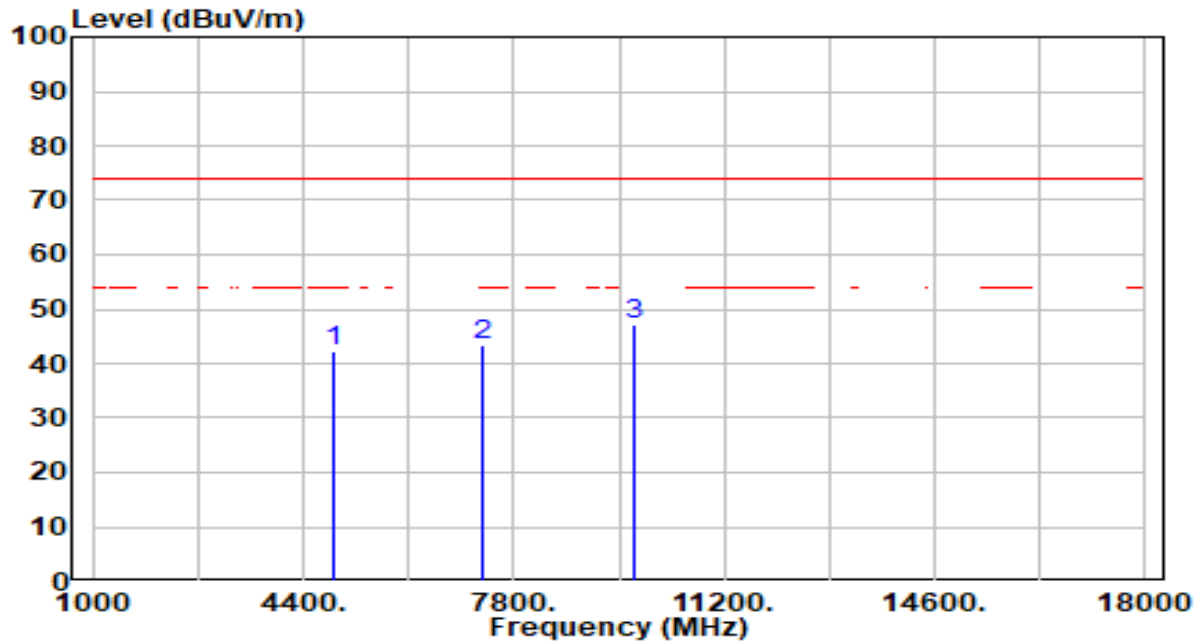


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.73	0.36	42.09	-31.91	74.00	100	0	Peak
2	7311.000	37.88	5.59	43.47	-30.53	74.00	100	221	Peak
3	* 9748.000	41.96	5.34	47.31	-26.69	74.00	100	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-06
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11b_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

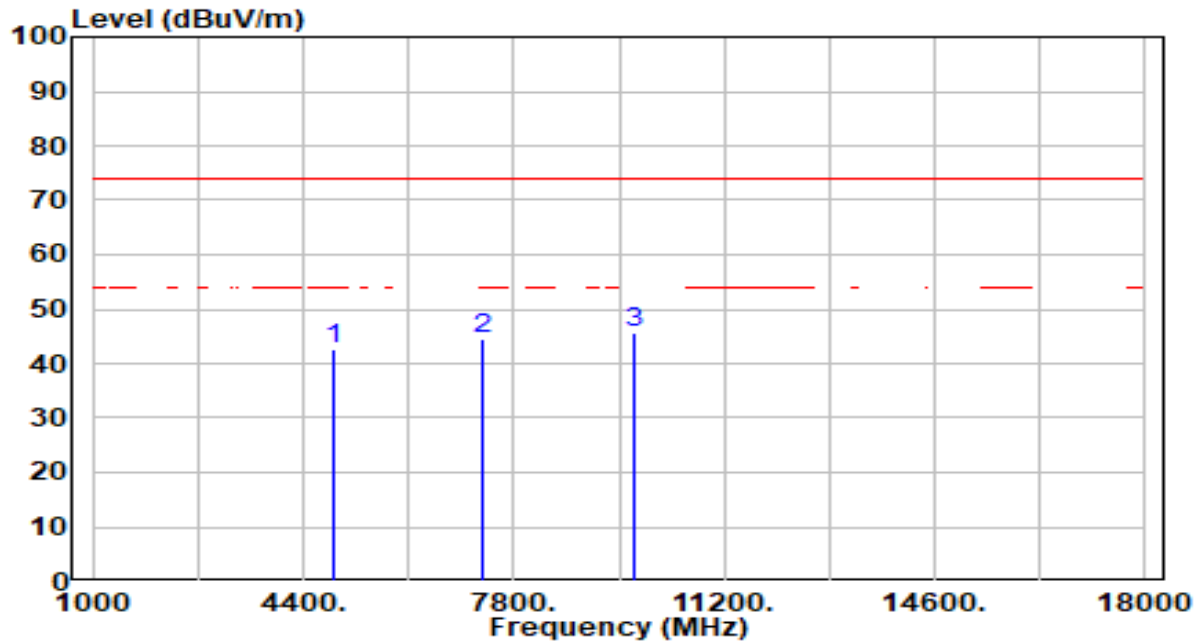


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.16	0.36	42.52	-31.48	74.00	100	155	Peak
2	7311.000	38.95	5.59	44.54	-29.46	74.00	100	275	Peak
3	* 9748.000	40.45	5.34	45.80	-28.20	74.00	100	44	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-06
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11b_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

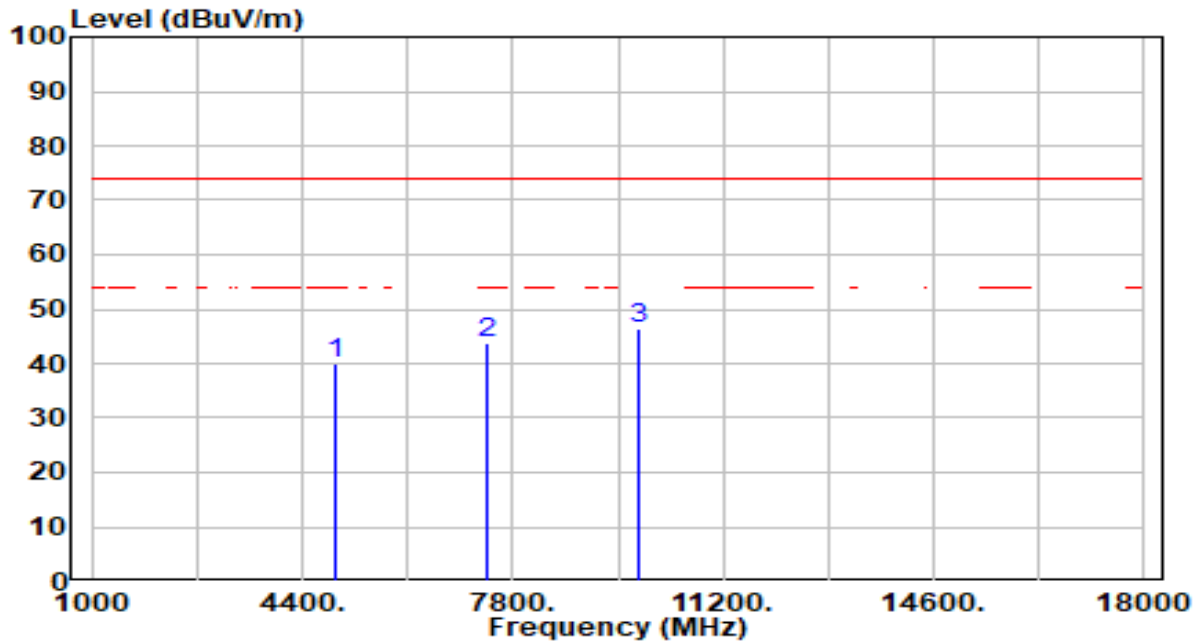


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.67	0.49	40.16	-33.84	74.00	100	46	Peak
2	7386.000	38.05	5.64	43.69	-30.31	74.00	100	219	Peak
3	* 9848.000	41.19	5.39	46.57	-27.43	74.00	100	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-06
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11b_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

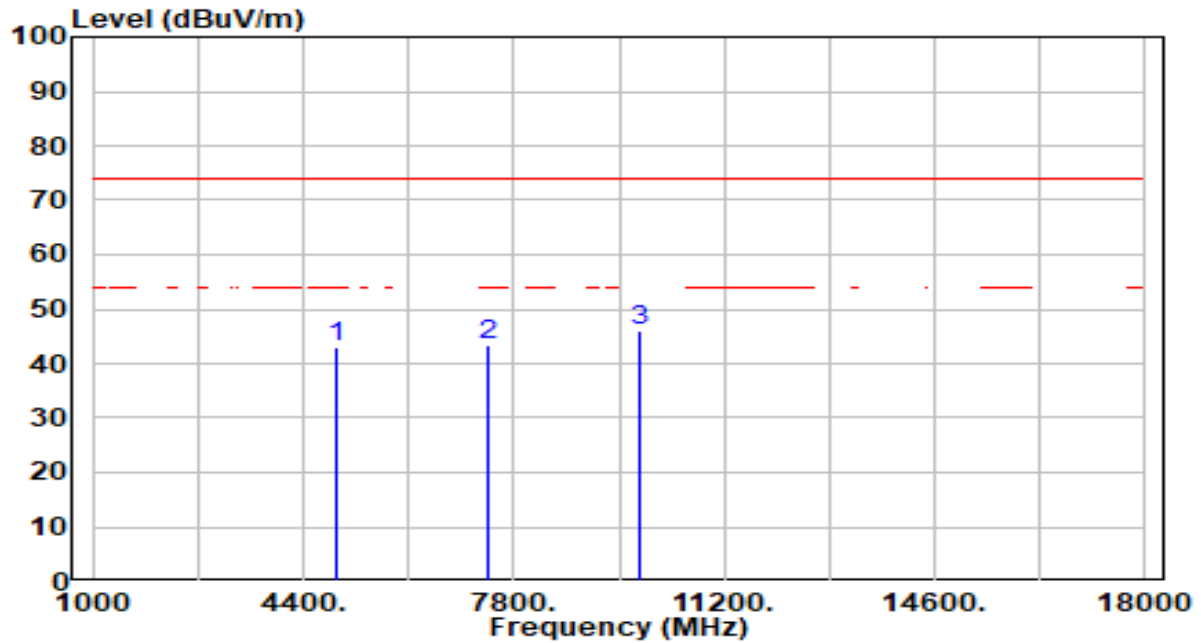


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	42.36	0.49	42.86	-31.14	74.00	100	199	Peak
2	7386.000	37.91	5.64	43.55	-30.45	74.00	100	42	Peak
3	* 9848.000	40.72	5.39	46.10	-27.90	74.00	100	142	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-06
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11g_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

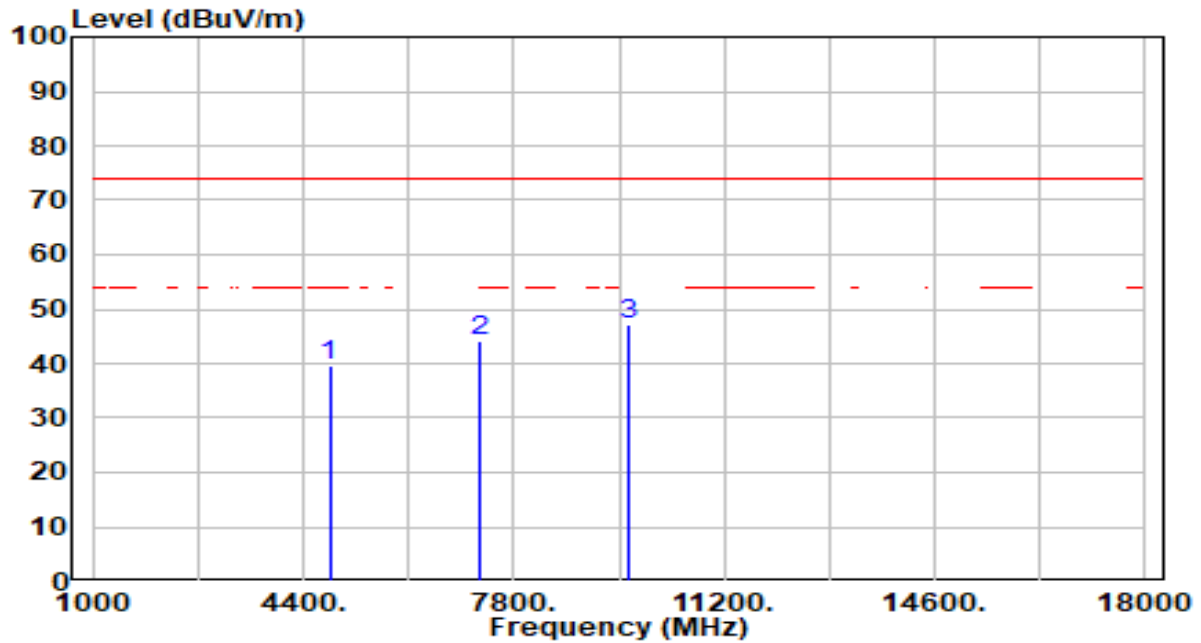


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.22	0.23	39.45	-34.55	74.00	100	58	Peak
2	7236.000	38.76	5.54	44.30	-29.70	74.00	100	255	Peak
3	* 9648.000	41.91	5.30	47.22	-26.78	74.00	100	27	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-06
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11g_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

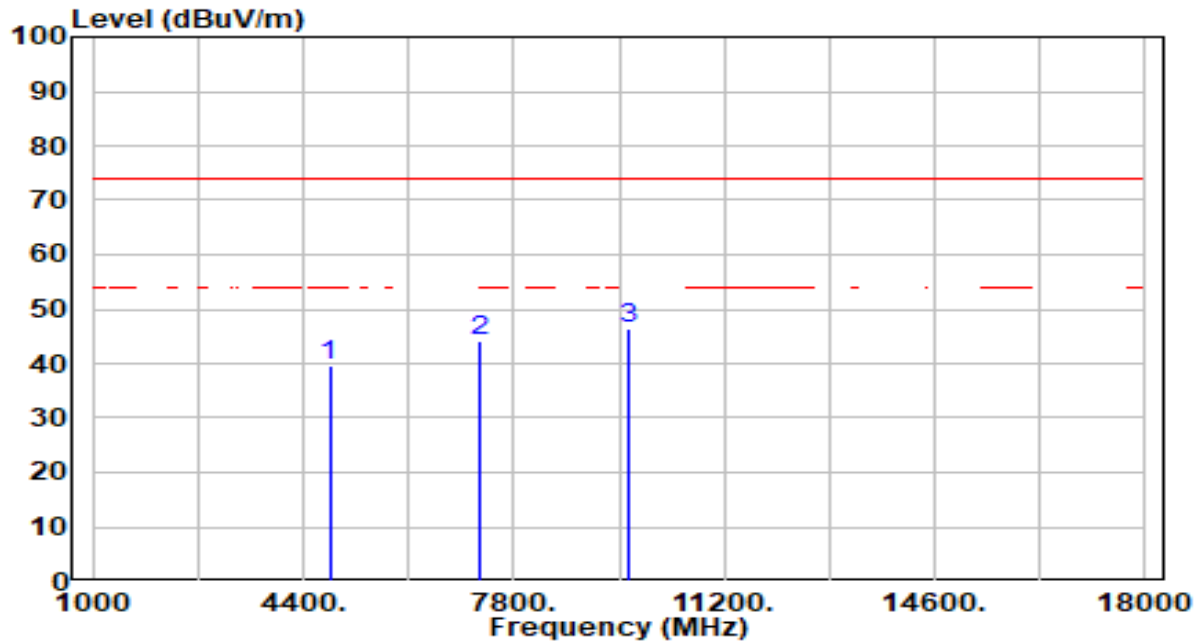


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.22	0.23	39.45	-34.55	74.00	100	186	Peak
2	7236.000	38.64	5.54	44.19	-29.81	74.00	100	32	Peak
3	* 9648.000	41.15	5.30	46.45	-27.55	74.00	100	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-06
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11g_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

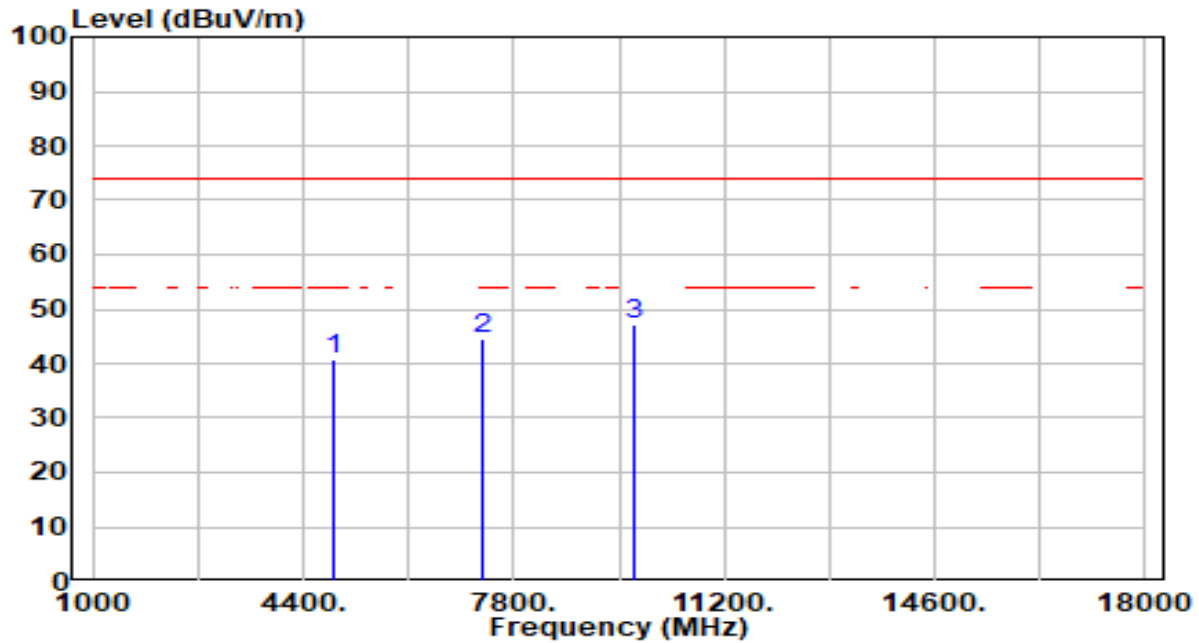


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.40	0.36	40.77	-33.23	74.00	100	320	Peak
2	7311.000	38.75	5.59	44.34	-29.66	74.00	100	46	Peak
3	* 9748.000	41.79	5.34	47.13	-26.87	74.00	100	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-06
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11g_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

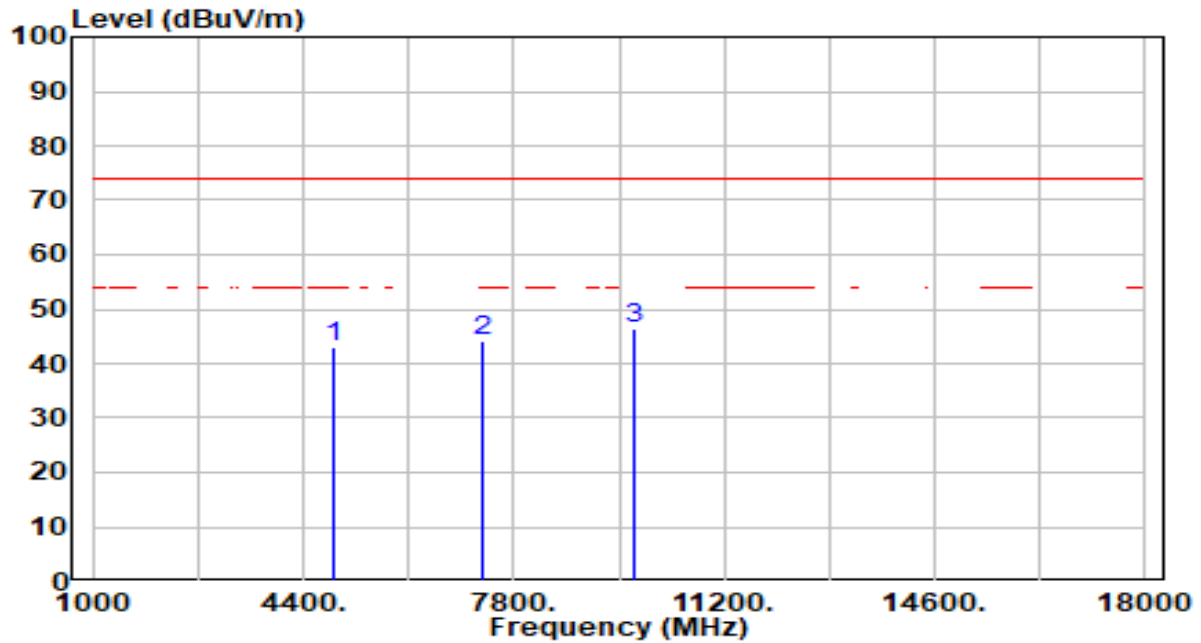


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.62	0.36	42.98	-31.02	74.00	100	233	Peak
2	7311.000	38.62	5.59	44.21	-29.79	74.00	100	87	Peak
3	* 9748.000	40.93	5.34	46.28	-27.72	74.00	100	166	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-06
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11g_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

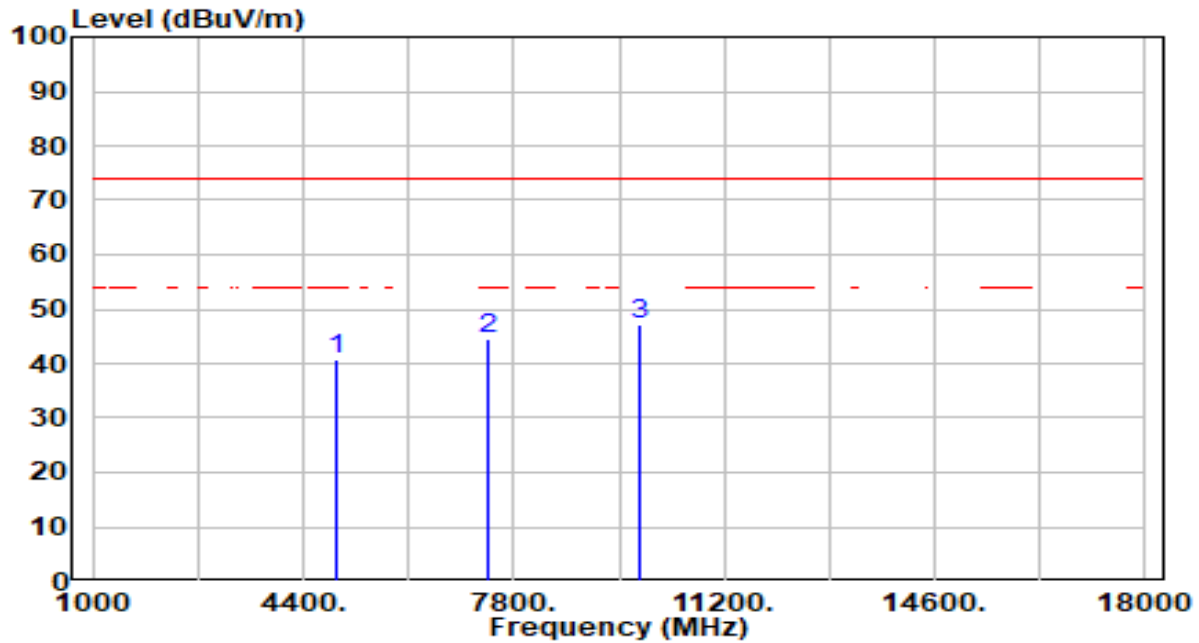


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.29	0.49	40.79	-33.21	74.00	100	193	Peak
2	7386.000	38.81	5.64	44.45	-29.55	74.00	100	228	Peak
3	* 9848.000	41.72	5.39	47.10	-26.90	74.00	100	208	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-06
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11g_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

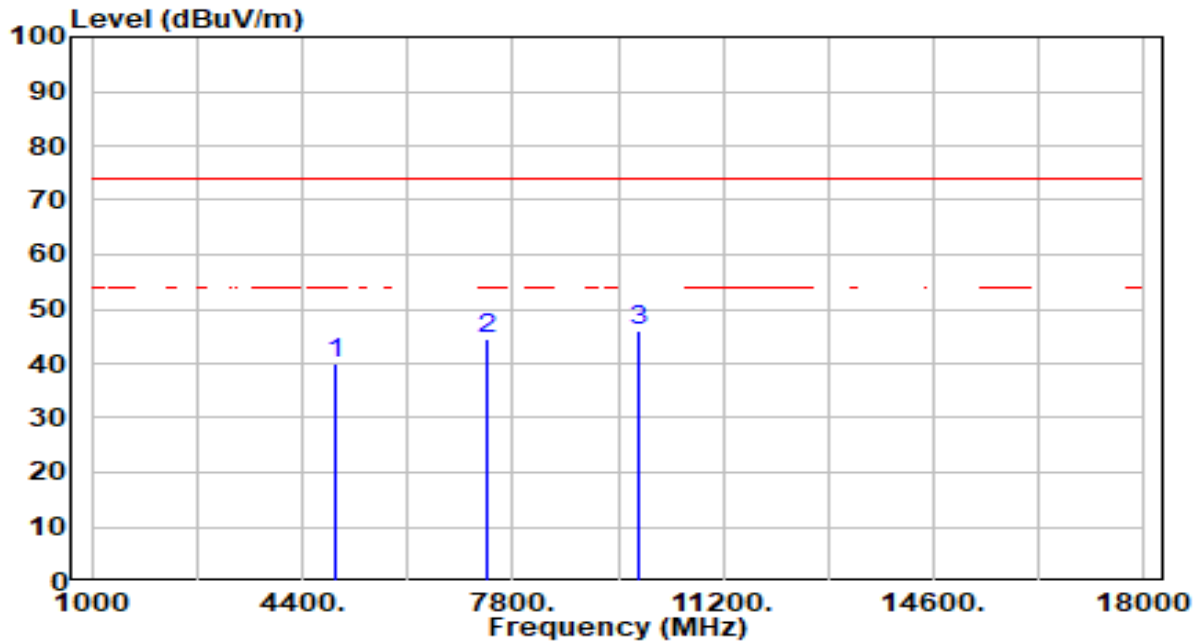


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.44	0.49	39.93	-34.07	74.00	100	116	Peak
2	7386.000	38.98	5.64	44.62	-29.38	74.00	100	197	Peak
3	* 9848.000	40.74	5.39	46.12	-27.88	74.00	100	107	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

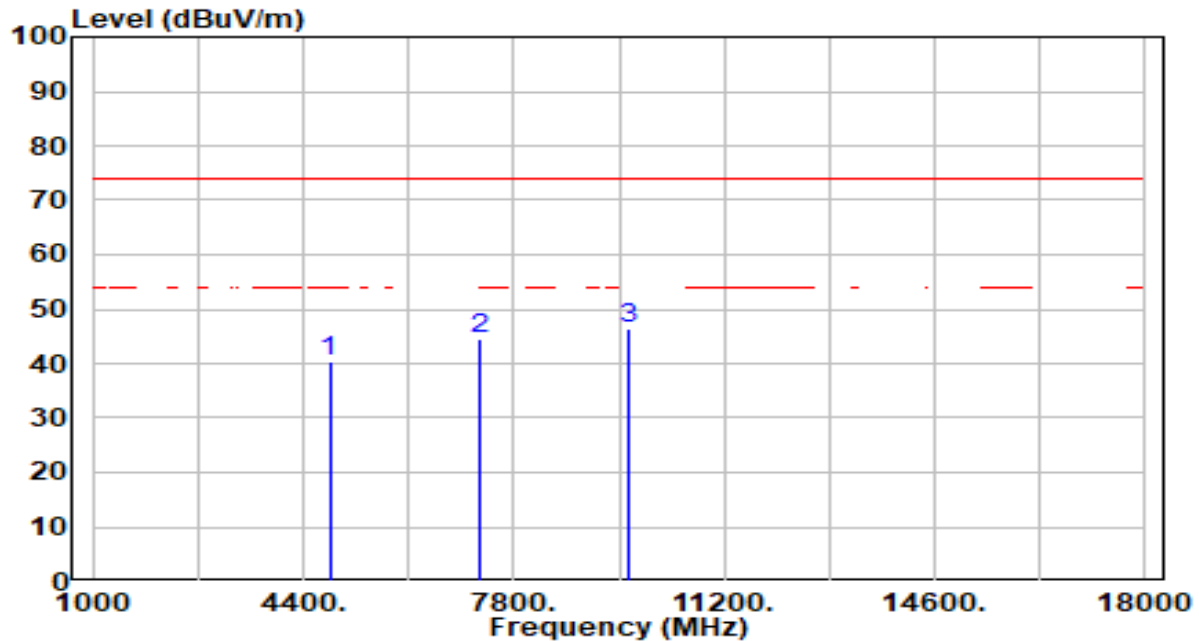


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.02	0.23	40.25	-33.75	74.00	100	280	Peak
2	7236.000	39.09	5.54	44.63	-29.37	74.00	100	78	Peak
3	* 9648.000	41.19	5.30	46.49	-27.51	74.00	100	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

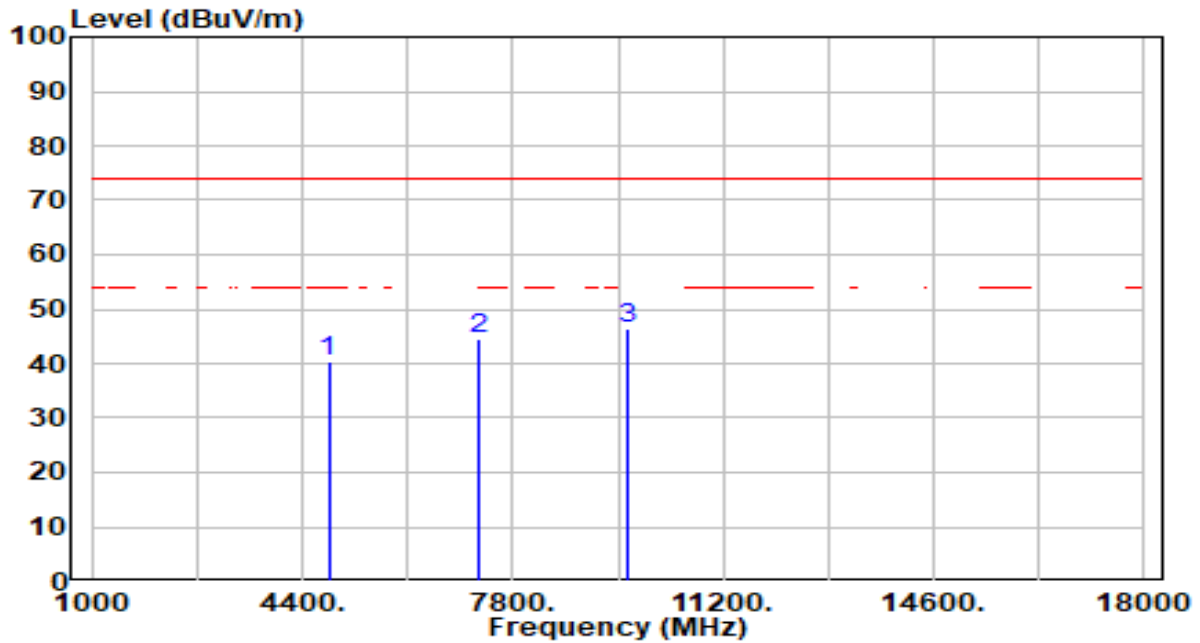


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.98	0.23	40.21	-33.79	74.00	100	260	Peak
2	7236.000	39.02	5.54	44.57	-29.43	74.00	100	354	Peak
3	* 9648.000	41.00	5.30	46.30	-27.70	74.00	100	227	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

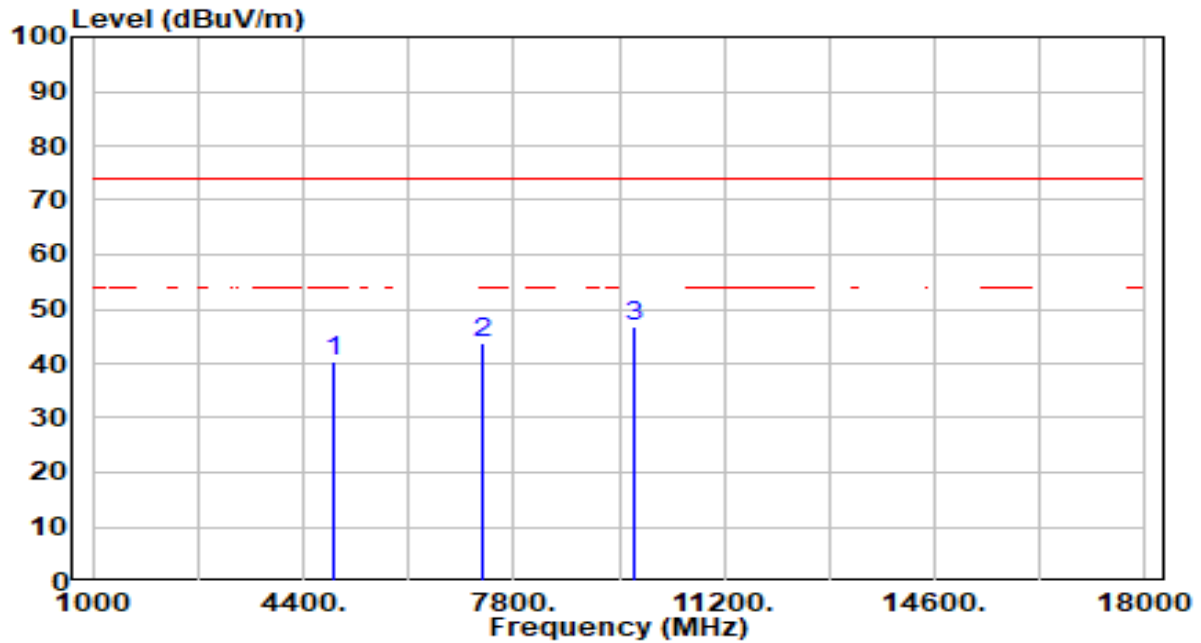


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.17	0.36	40.53	-33.47	74.00	100	131	Peak
2	7311.000	38.15	5.59	43.74	-30.26	74.00	100	34	Peak
3	* 9748.000	41.42	5.34	46.76	-27.24	74.00	100	162	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

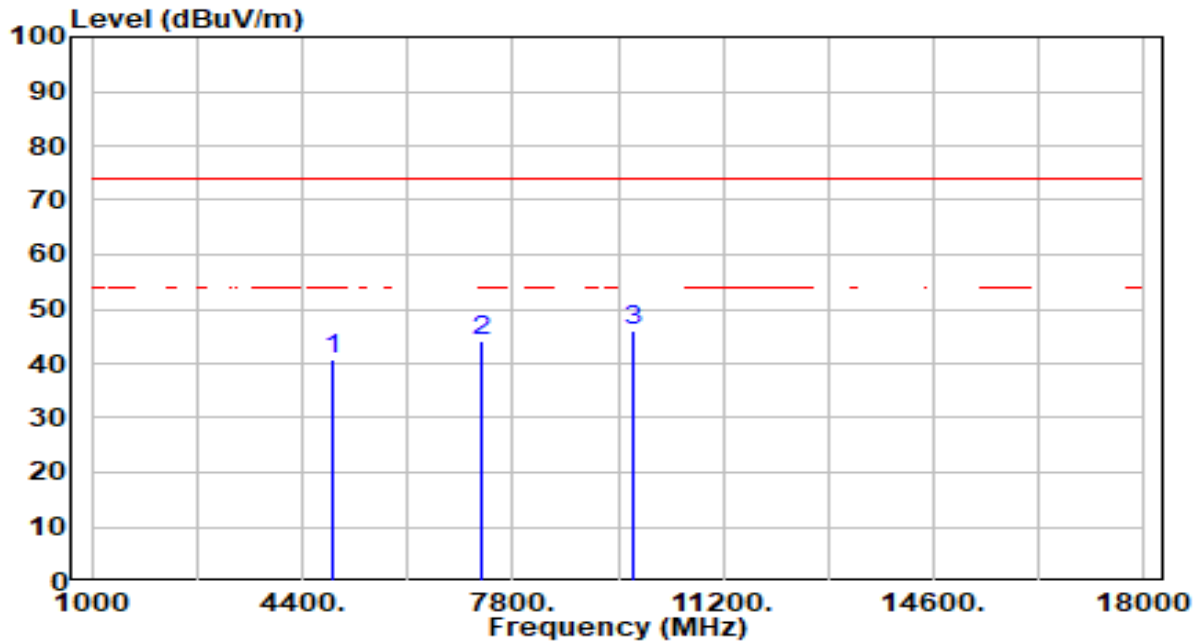


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.34	0.36	40.70	-33.30	74.00	100	188	Peak
2	7311.000	38.47	5.59	44.06	-29.94	74.00	100	145	Peak
3	* 9748.000	40.77	5.34	46.11	-27.89	74.00	100	128	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

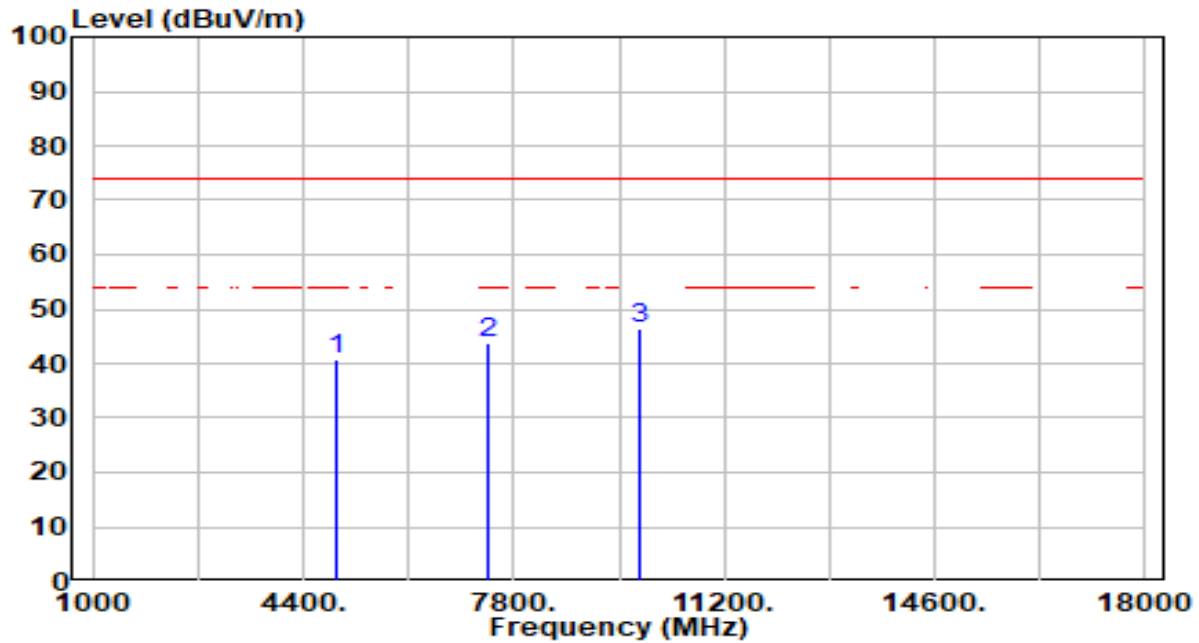


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.33	0.49	40.83	-33.17	74.00	100	1	Peak
2	7386.000	38.10	5.64	43.73	-30.27	74.00	100	343	Peak
3	* 9848.000	41.14	5.39	46.52	-27.48	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

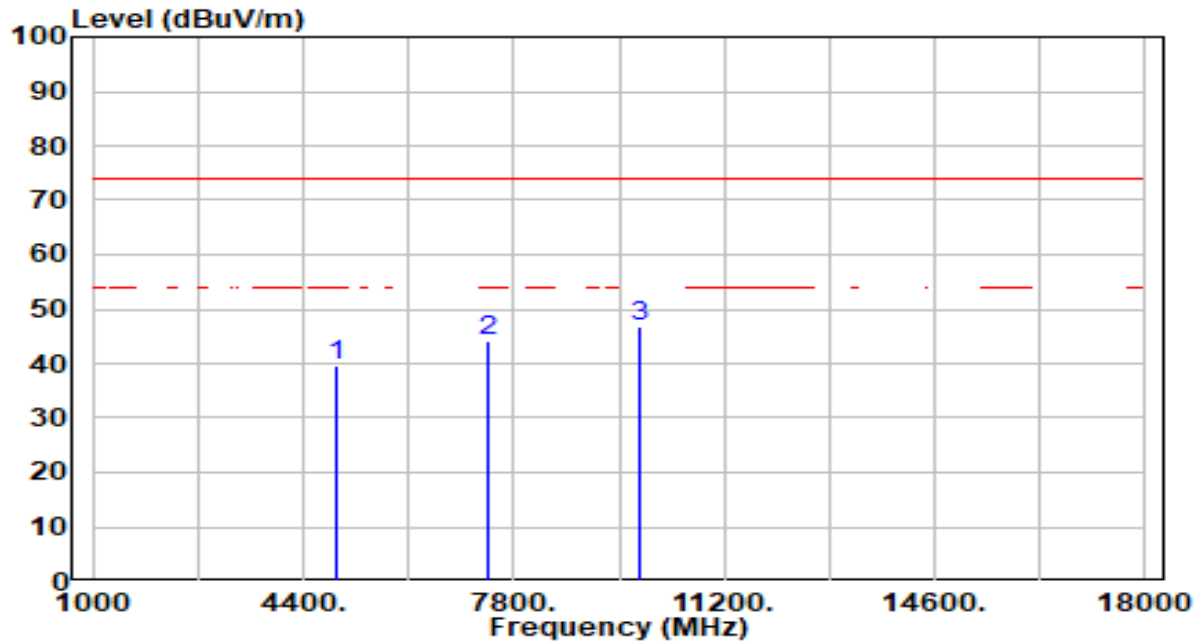


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.21	0.49	39.70	-34.30	74.00	100	202	Peak
2	7386.000	38.64	5.64	44.28	-29.72	74.00	100	179	Peak
3	* 9848.000	41.49	5.39	46.87	-27.13	74.00	100	62	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-40MHz_TX_CH 3 ANT 0+1	Test Voltage	AC 120V/60Hz

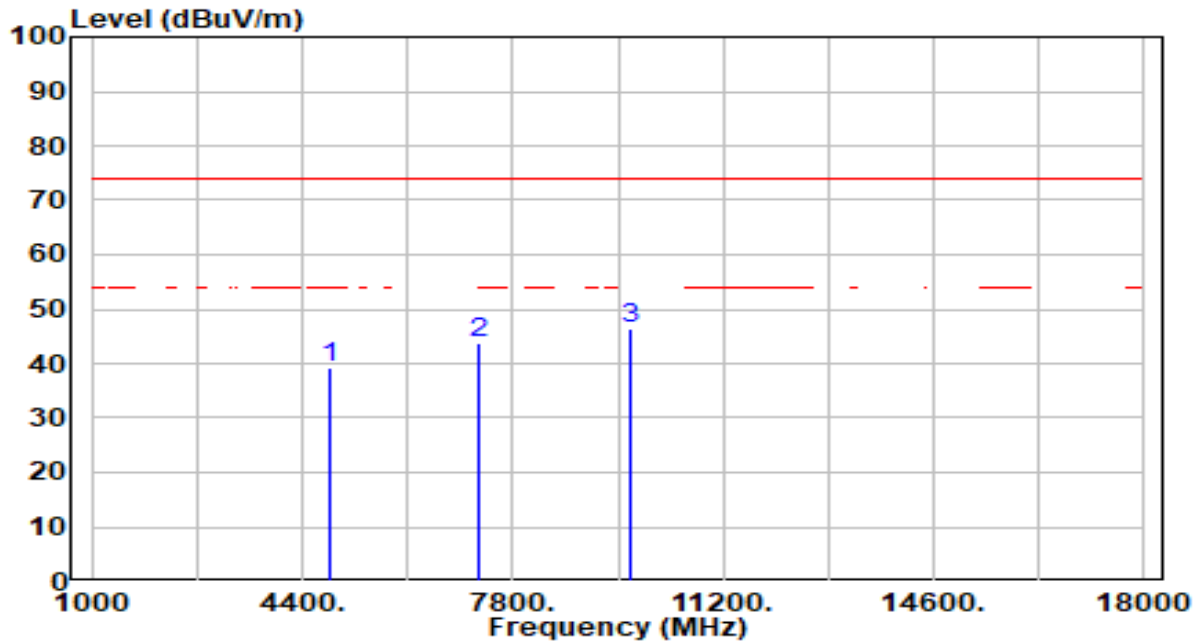


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	38.99	0.28	39.28	-34.72	74.00	100	360	Peak
2	7266.000	38.23	5.56	43.79	-30.21	74.00	100	360	Peak
3	* 9688.000	40.98	5.32	46.30	-27.70	74.00	100	209	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-40MHz_TX_CH 3 ANT 0+1	Test Voltage	AC 120V/60Hz

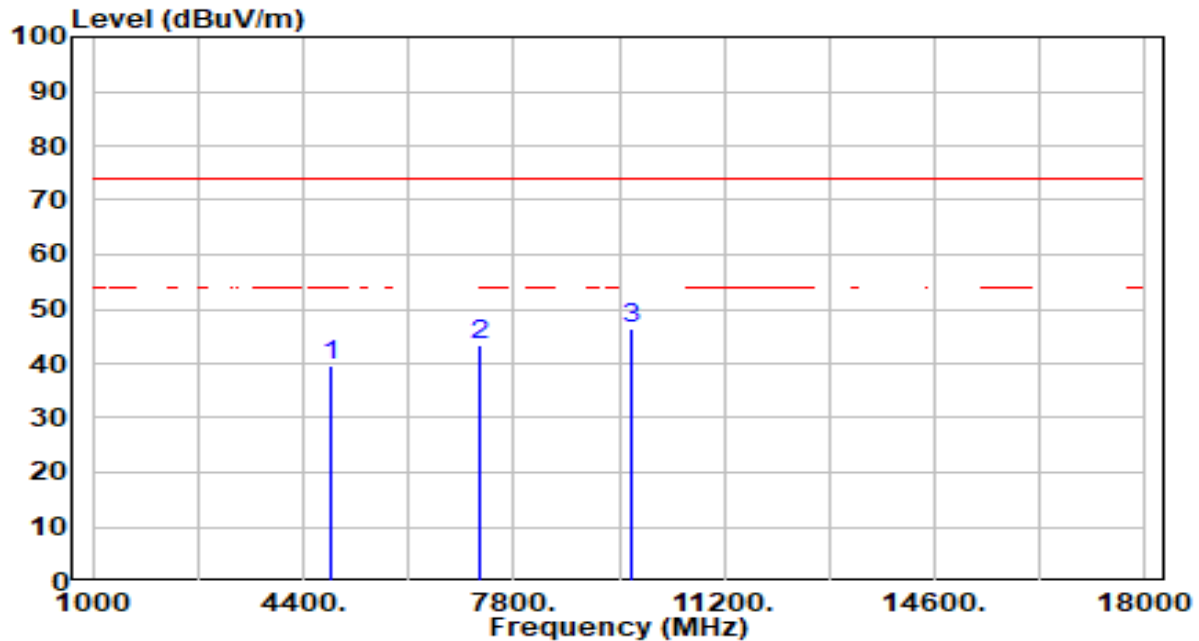


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	39.15	0.28	39.44	-34.56	74.00	100	219	Peak
2	7266.000	38.01	5.56	43.57	-30.43	74.00	100	0	Peak
3	* 9688.000	41.10	5.32	46.42	-27.58	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-40MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

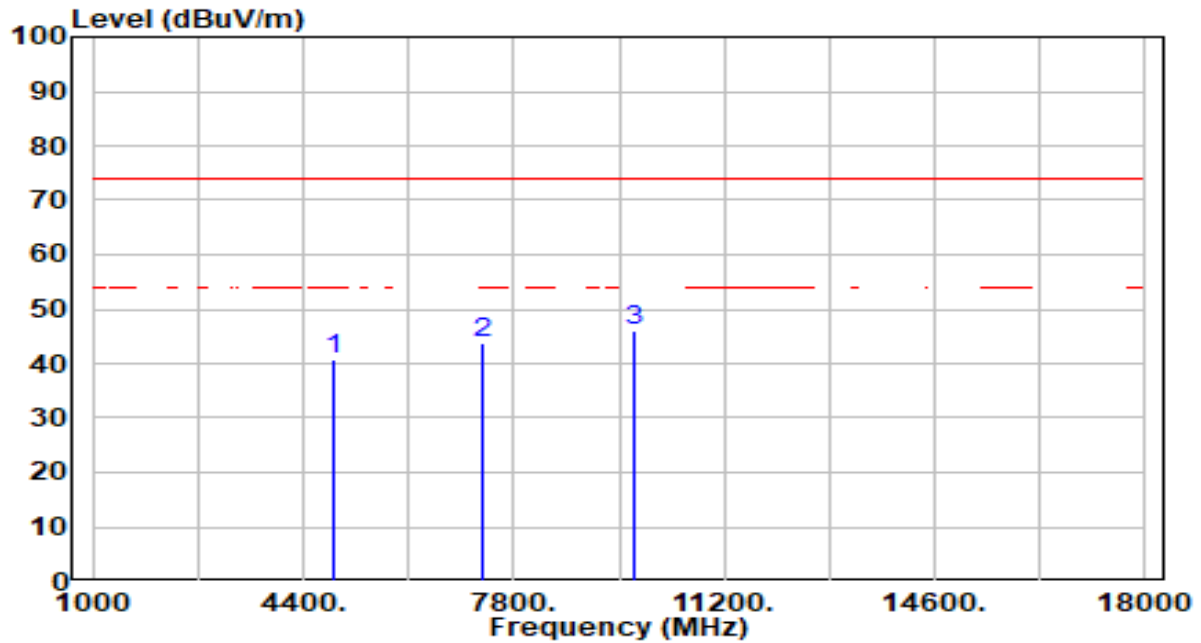


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.21	0.36	40.57	-33.43	74.00	100	347	Peak
2	7311.000	38.26	5.59	43.85	-30.15	74.00	100	344	Peak
3	* 9748.000	40.78	5.34	46.13	-27.87	74.00	100	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-40MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

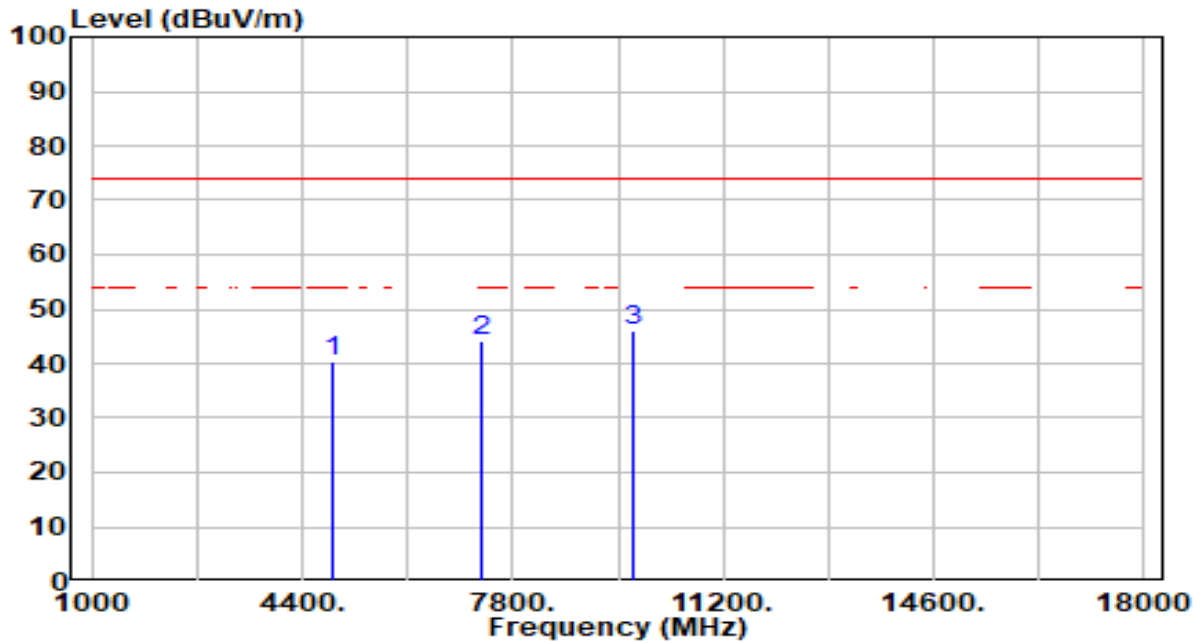


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.95	0.36	40.31	-33.69	74.00	100	251	Peak
2	7311.000	38.67	5.59	44.26	-29.74	74.00	100	88	Peak
3	* 9748.000	40.67	5.34	46.01	-27.99	74.00	100	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-40MHz_TX_CH 9 ANT 0+1	Test Voltage	AC 120V/60Hz

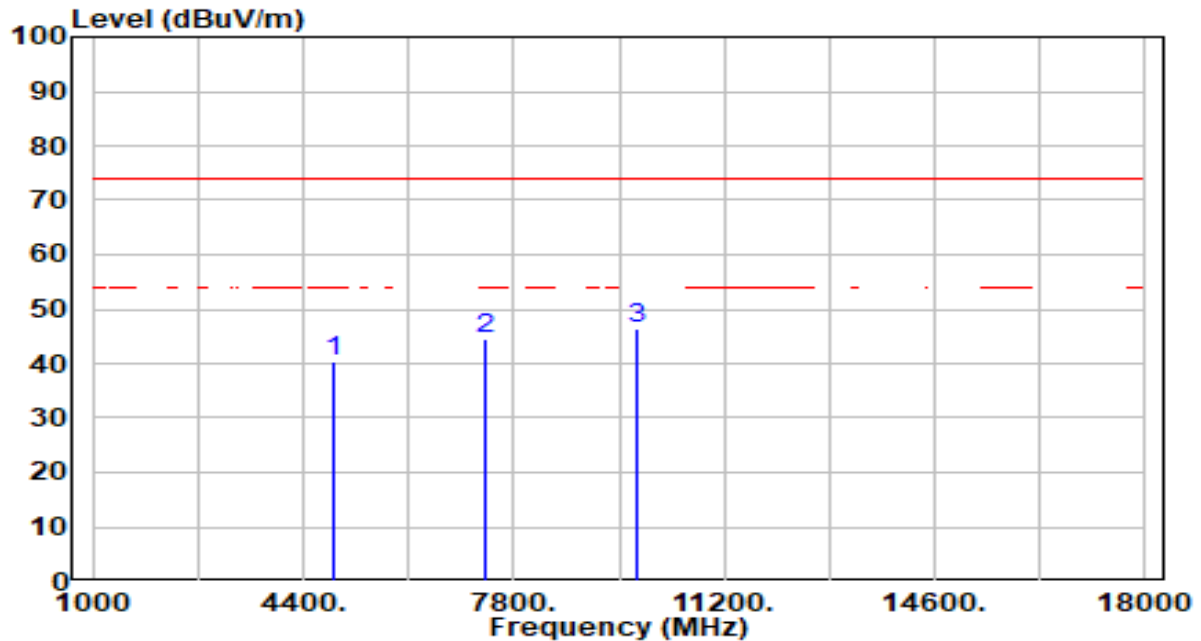


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4904.000	39.89	0.44	40.33	-33.67	74.00	100	48	Peak
2		7356.000	38.80	5.62	44.41	-29.59	74.00	100	45	Peak
3	*	9808.000	41.09	5.37	46.46	-27.54	74.00	100	262	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-40MHz_TX_CH 9 ANT 0+1	Test Voltage	AC 120V/60Hz

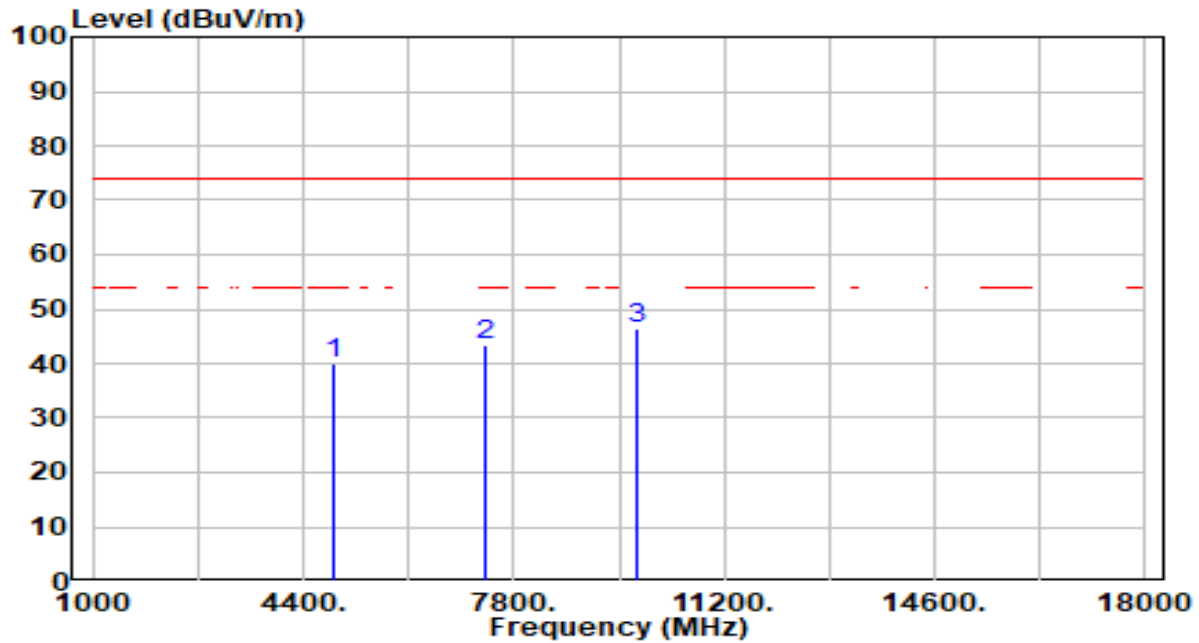


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	39.68	0.44	40.12	-33.88	74.00	100	318	Peak
2	7356.000	37.88	5.62	43.50	-30.50	74.00	100	78	Peak
3	* 9808.000	40.93	5.37	46.30	-27.70	74.00	100	252	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

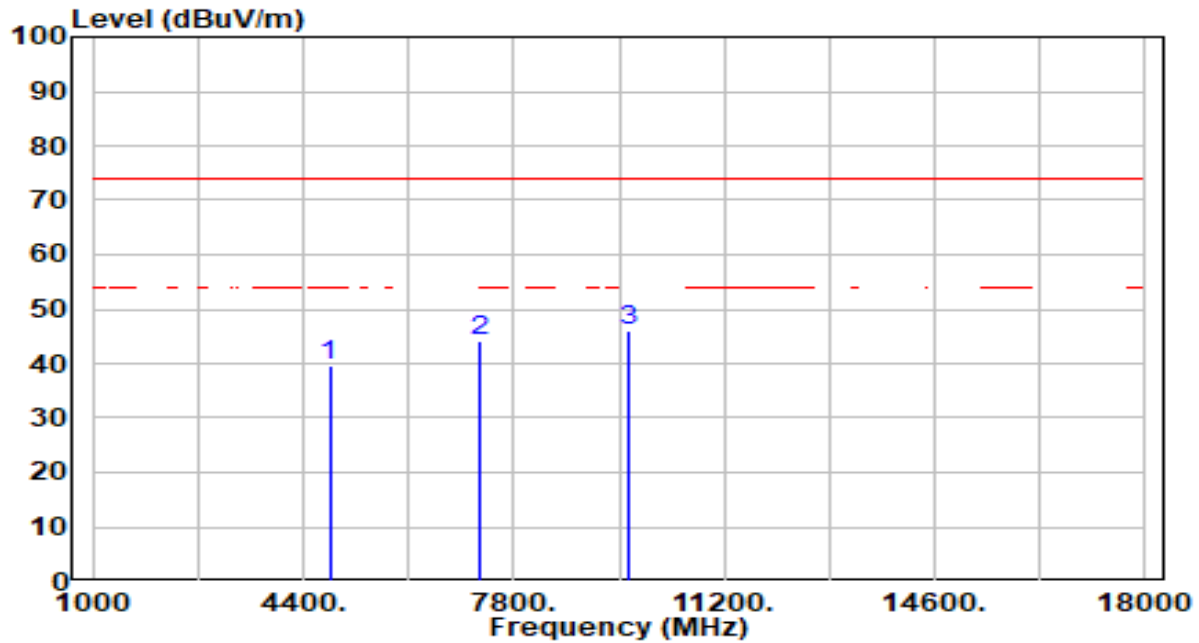


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.25	0.23	39.49	-34.51	74.00	100	5	Peak
2	7236.000	38.54	5.54	44.08	-29.92	74.00	100	269	Peak
3	* 9648.000	40.81	5.30	46.11	-27.89	74.00	100	203	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

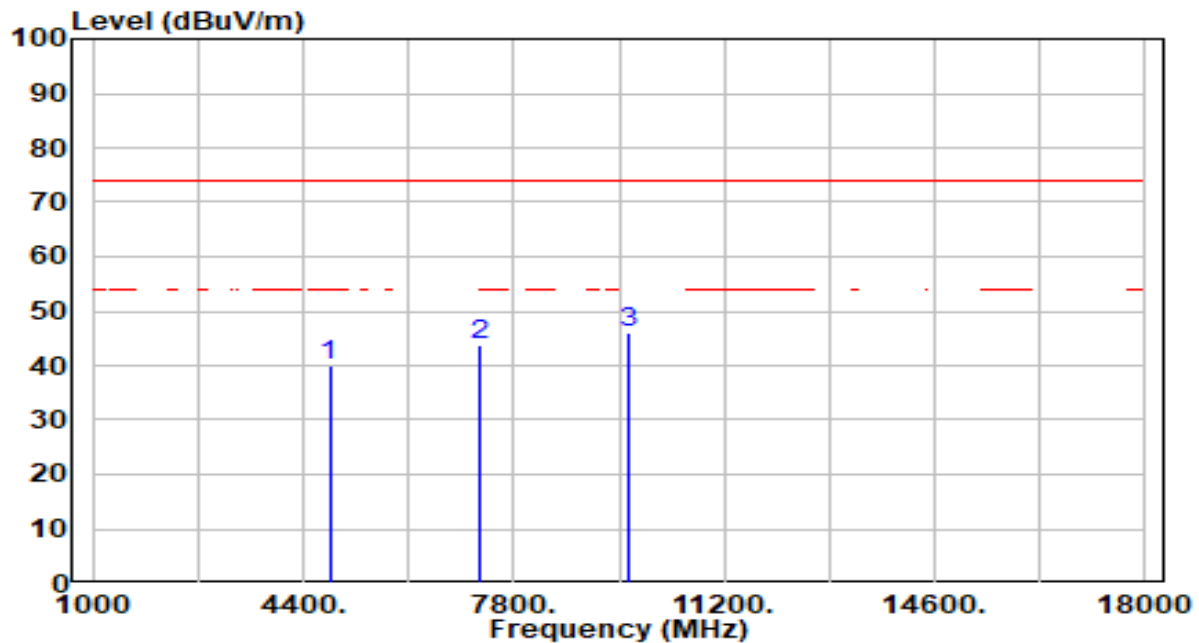


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.89	0.23	40.13	-33.87	74.00	100	206	Peak
2	7236.000	38.28	5.54	43.82	-30.18	74.00	100	267	Peak
3	* 9648.000	40.91	5.30	46.21	-27.79	74.00	100	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20Mhz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

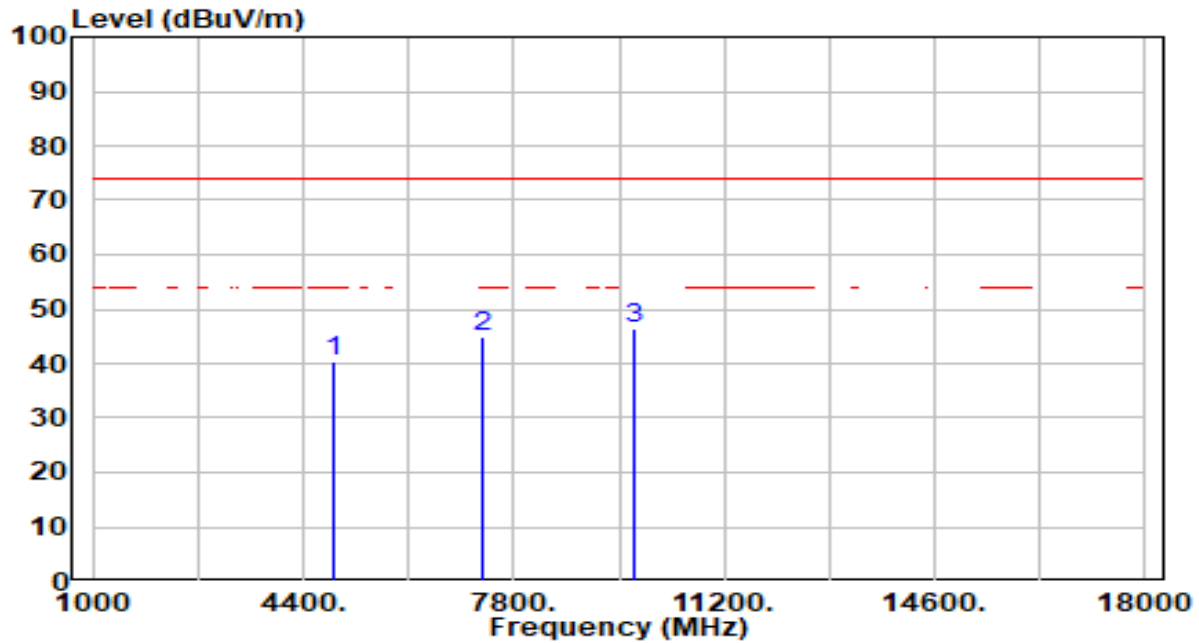


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.15	0.36	40.51	-33.49	74.00	100	200	Peak
2	7311.000	39.25	5.59	44.84	-29.16	74.00	100	197	Peak
3	* 9748.000	40.98	5.34	46.32	-27.68	74.00	100	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20Mhz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

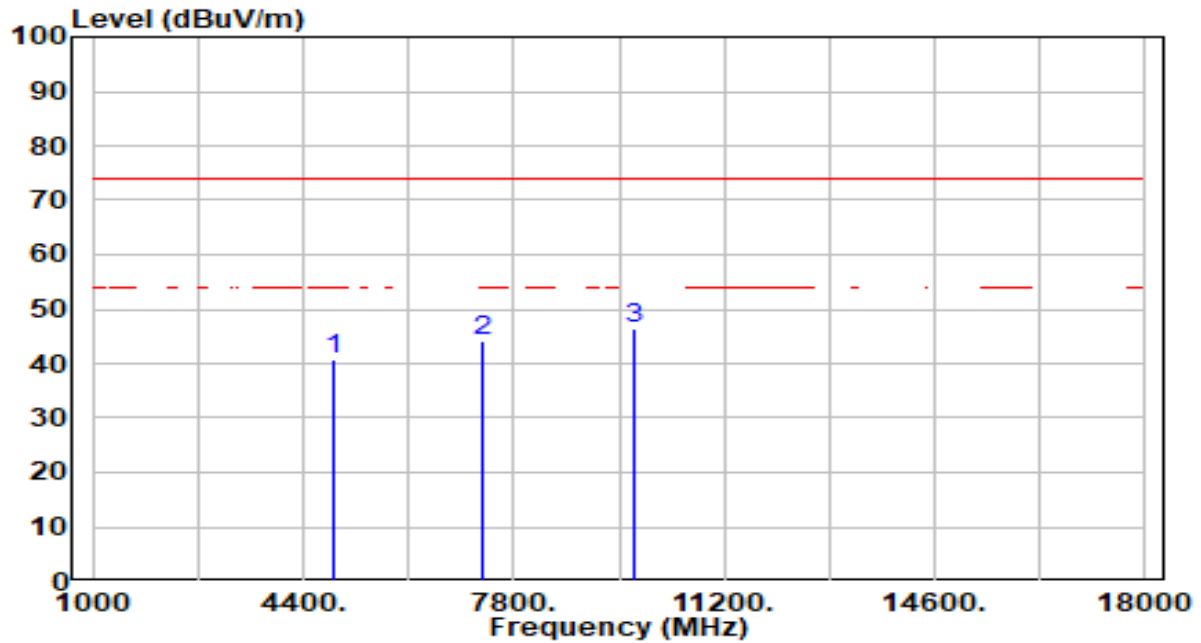


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.45	0.36	40.81	-33.19	74.00	100	198	Peak
2	7311.000	38.55	5.59	44.14	-29.86	74.00	100	358	Peak
3	* 9748.000	41.16	5.34	46.50	-27.50	74.00	100	41	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

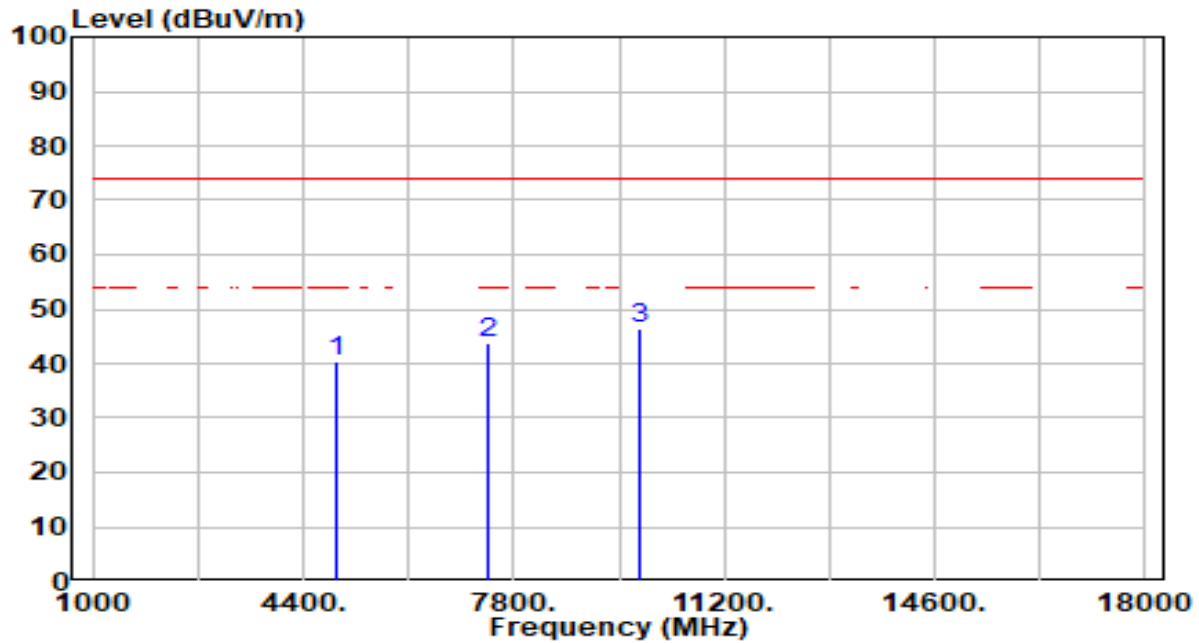


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.71	0.49	40.21	-33.79	74.00	100	254	Peak
2	7386.000	38.21	5.64	43.84	-30.16	74.00	100	237	Peak
3	* 9848.000	41.14	5.39	46.53	-27.47	74.00	100	141	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

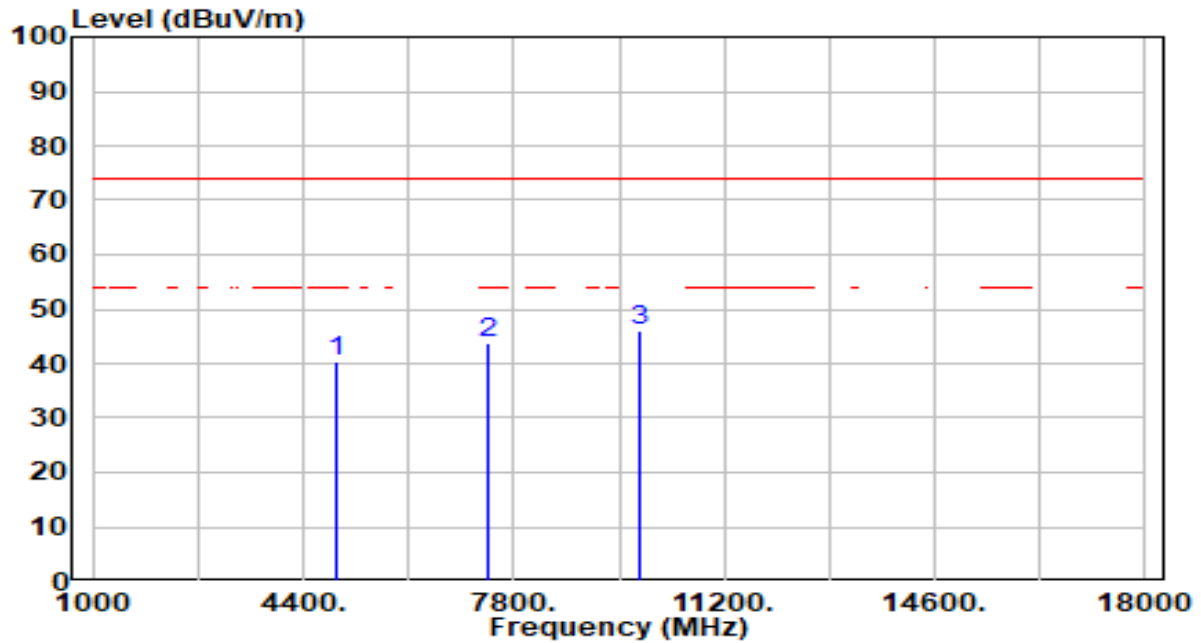


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.04	0.49	40.53	-33.47	74.00	100	167	Peak
2	7386.000	38.04	5.64	43.67	-30.33	74.00	100	179	Peak
3	* 9848.000	40.71	5.39	46.10	-27.90	74.00	100	278	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_TX_CH 3 ANT 0+1	Test Voltage	AC 120V/60Hz

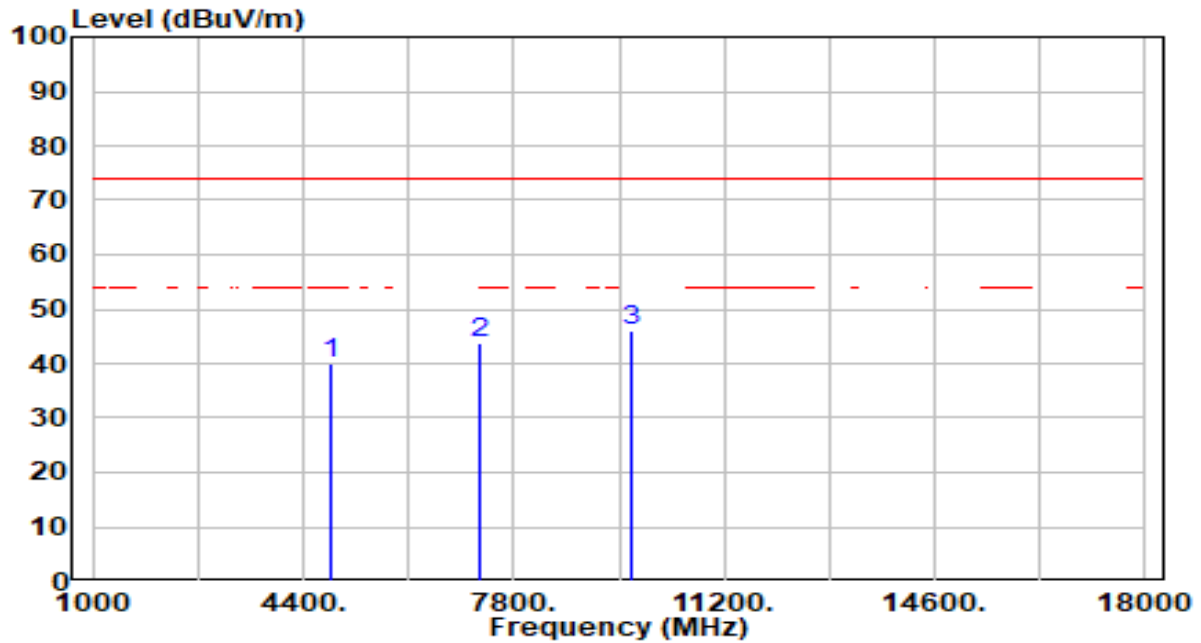


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	39.69	0.28	39.97	-34.03	74.00	100	204	Peak
2	7266.000	38.22	5.56	43.78	-30.22	74.00	100	128	Peak
3	* 9688.000	40.85	5.32	46.17	-27.83	74.00	100	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_TX_CH 3 ANT 0+1	Test Voltage	AC 120V/60Hz

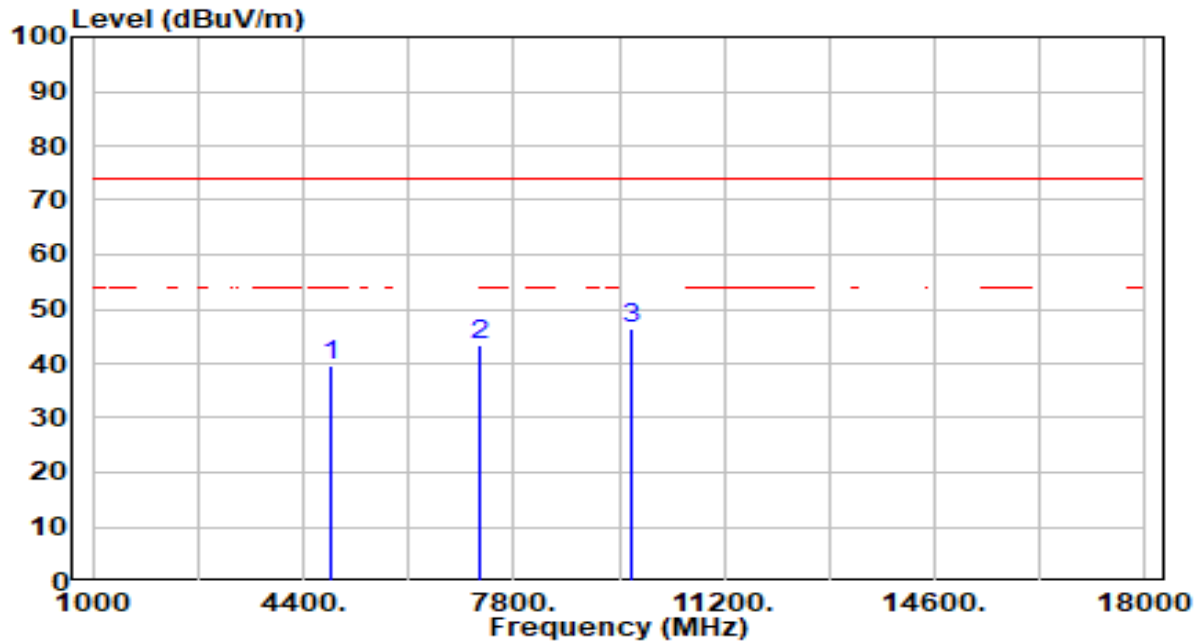


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	39.31	0.28	39.60	-34.40	74.00	100	147	Peak
2	7266.000	37.99	5.56	43.55	-30.45	74.00	100	211	Peak
3	* 9688.000	41.00	5.32	46.32	-27.68	74.00	100	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

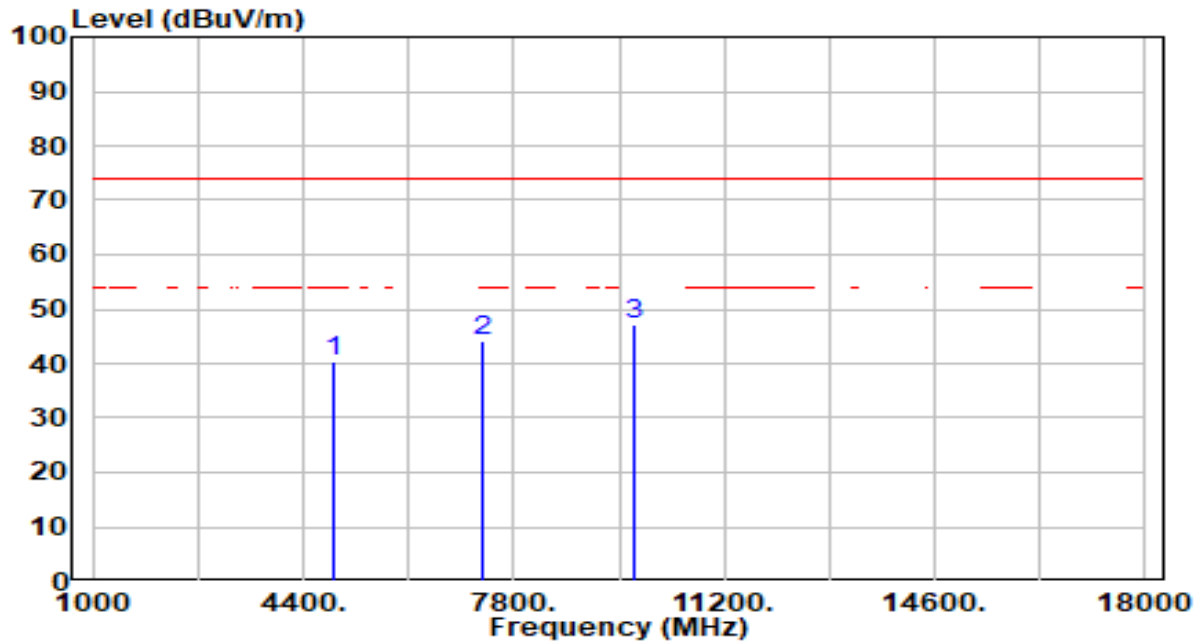


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.18	0.36	40.54	-33.46	74.00	100	360	Peak
2	7311.000	38.52	5.59	44.11	-29.89	74.00	100	104	Peak
3	* 9748.000	41.68	5.34	47.02	-26.98	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

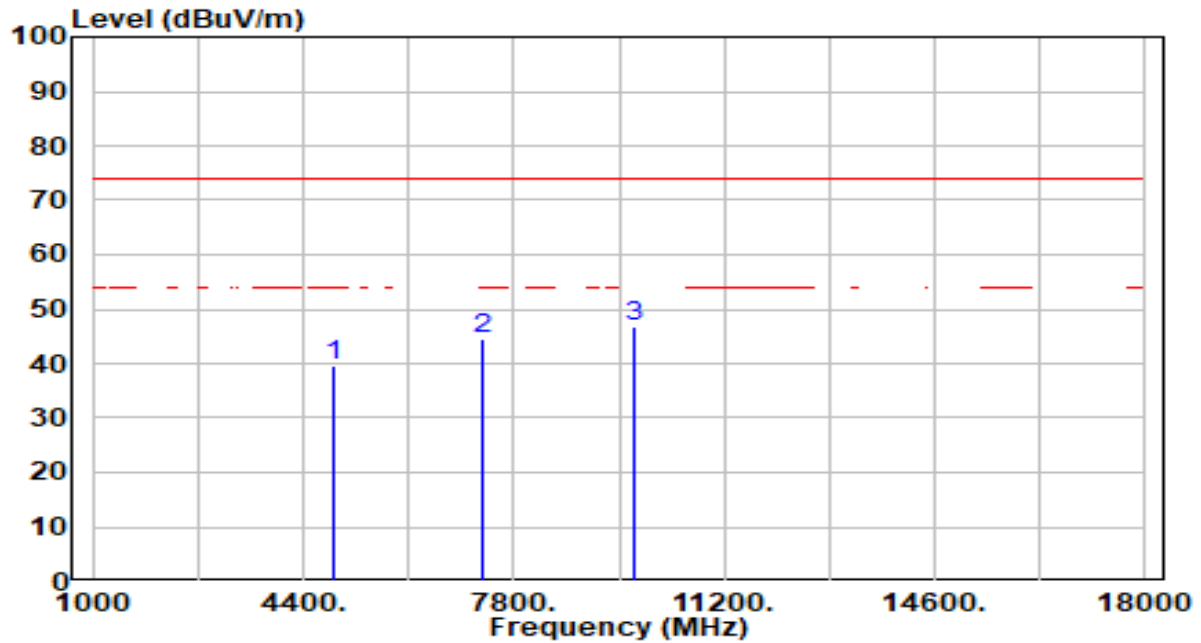


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.30	0.36	39.66	-34.34	74.00	100	232	Peak
2	7311.000	38.85	5.59	44.44	-29.56	74.00	100	270	Peak
3	* 9748.000	41.40	5.34	46.75	-27.25	74.00	100	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_TX_CH 9 ANT 0+1	Test Voltage	AC 120V/60Hz

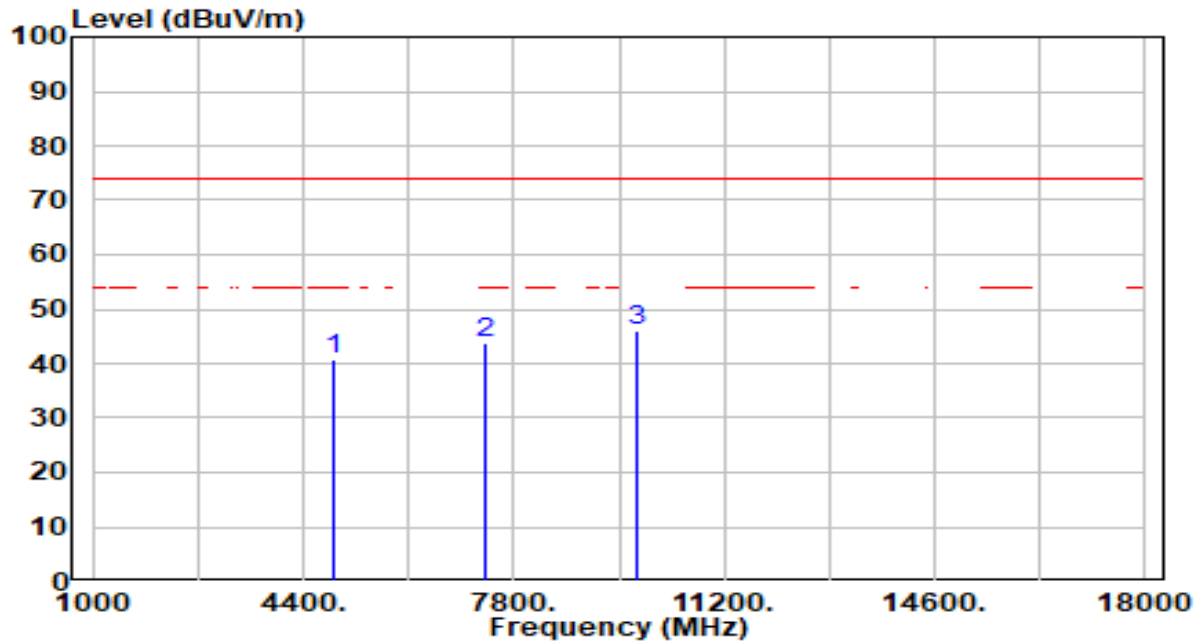


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.46	0.44	40.91	-33.09	74.00	100	59	Peak
2	7356.000	37.99	5.62	43.60	-30.40	74.00	100	161	Peak
3	* 9808.000	40.81	5.37	46.18	-27.82	74.00	100	347	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_TX_CH 9 ANT 0+1	Test Voltage	AC 120V/60Hz

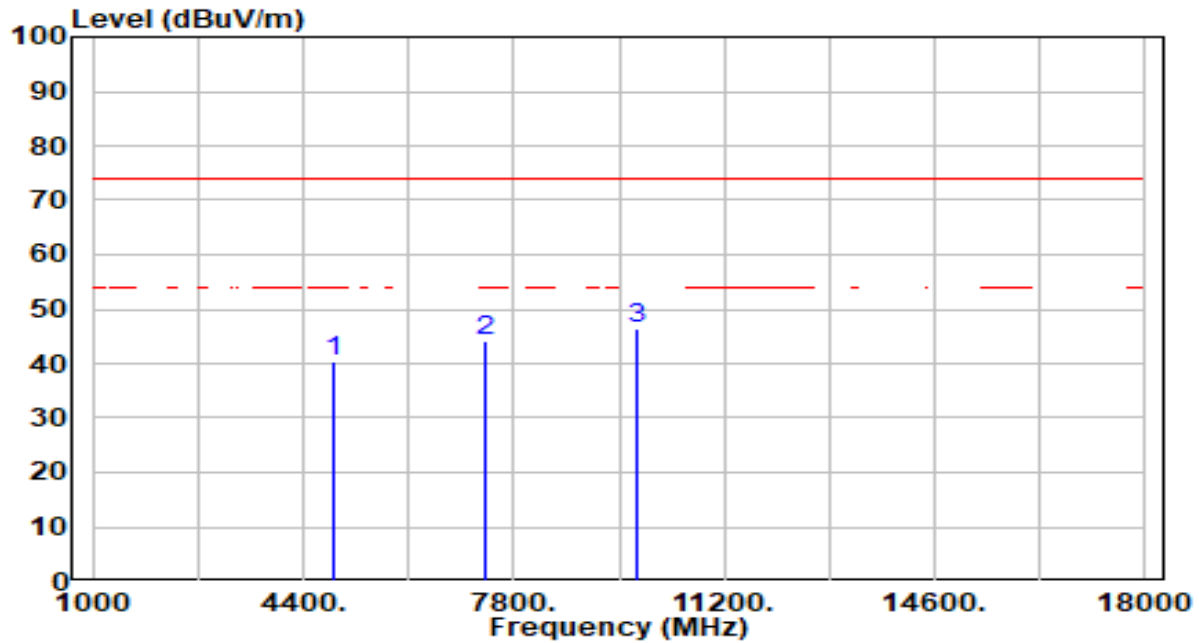


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	39.98	0.44	40.42	-33.58	74.00	100	117	Peak
2	7356.000	38.49	5.62	44.11	-29.89	74.00	100	251	Peak
3	* 9808.000	40.88	5.37	46.25	-27.75	74.00	100	42	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

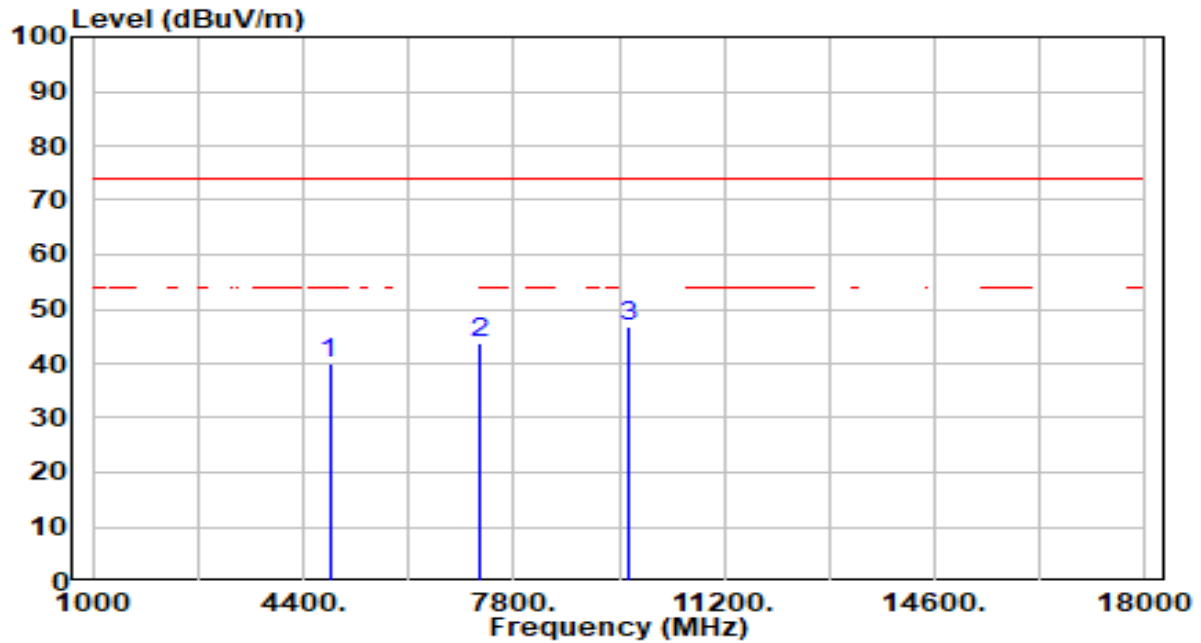


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.68	0.23	39.91	-34.09	74.00	100	313	Peak
2	7236.000	38.38	5.54	43.93	-30.07	74.00	100	135	Peak
3	* 9648.000	41.67	5.30	46.97	-27.03	74.00	100	141	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

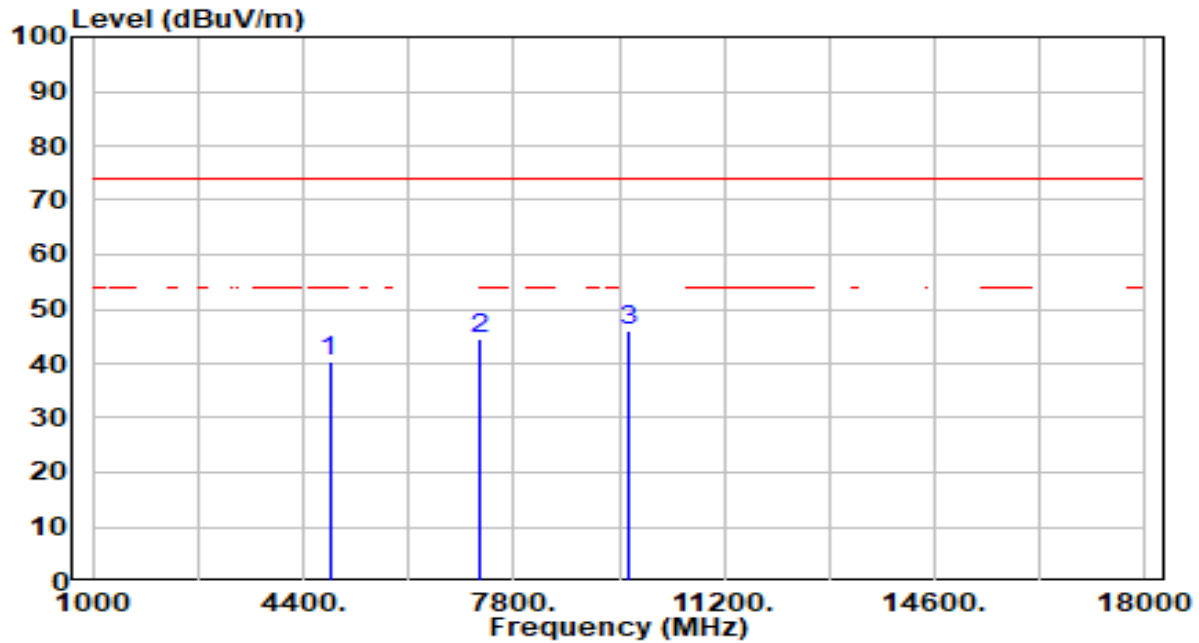


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.13	0.23	40.36	-33.64	74.00	100	26	Peak
2	7236.000	39.05	5.54	44.60	-29.40	74.00	100	288	Peak
3	* 9648.000	40.66	5.30	45.96	-28.04	74.00	100	49	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20Mhz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

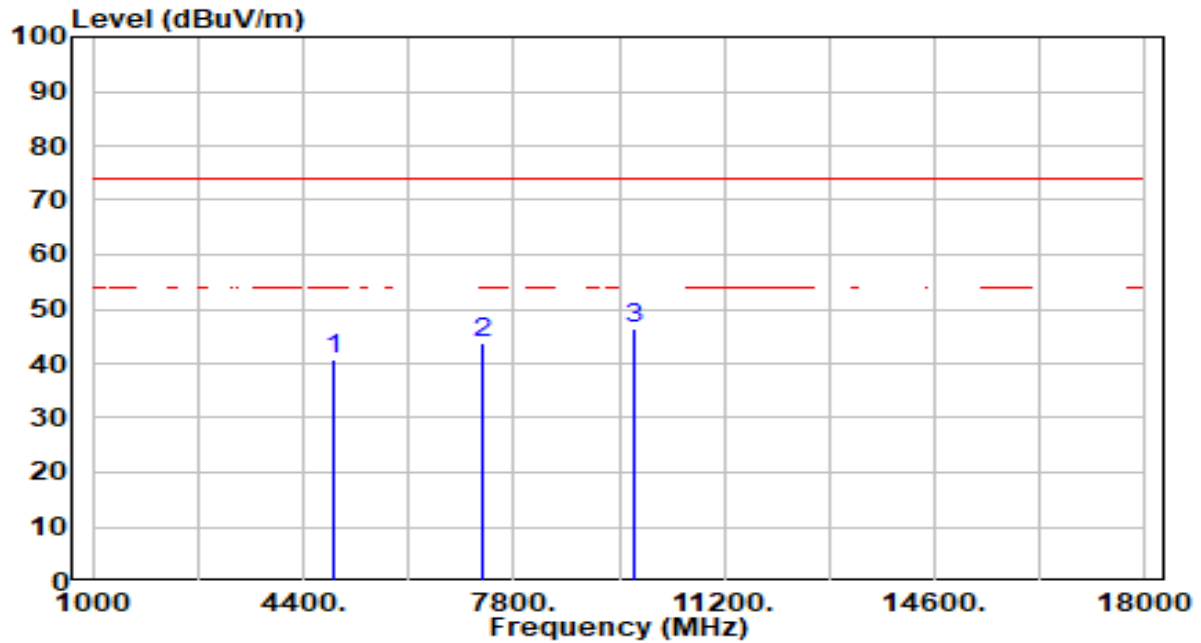


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.35	0.36	40.71	-33.29	74.00	100	52	Peak
2	7311.000	38.19	5.59	43.78	-30.22	74.00	100	332	Peak
3	* 9748.000	41.20	5.34	46.55	-27.45	74.00	100	196	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20Mhz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

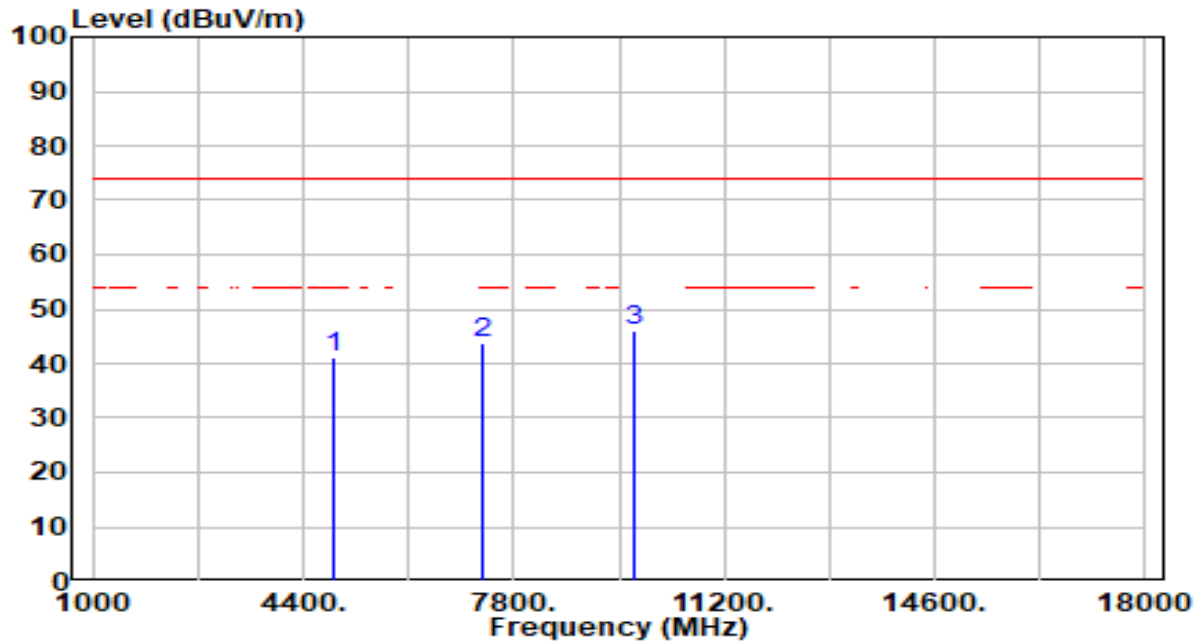


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.90	0.36	41.27	-32.73	74.00	100	136	Peak
2	7311.000	38.35	5.59	43.94	-30.06	74.00	100	241	Peak
3	* 9748.000	40.71	5.34	46.06	-27.94	74.00	100	22	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

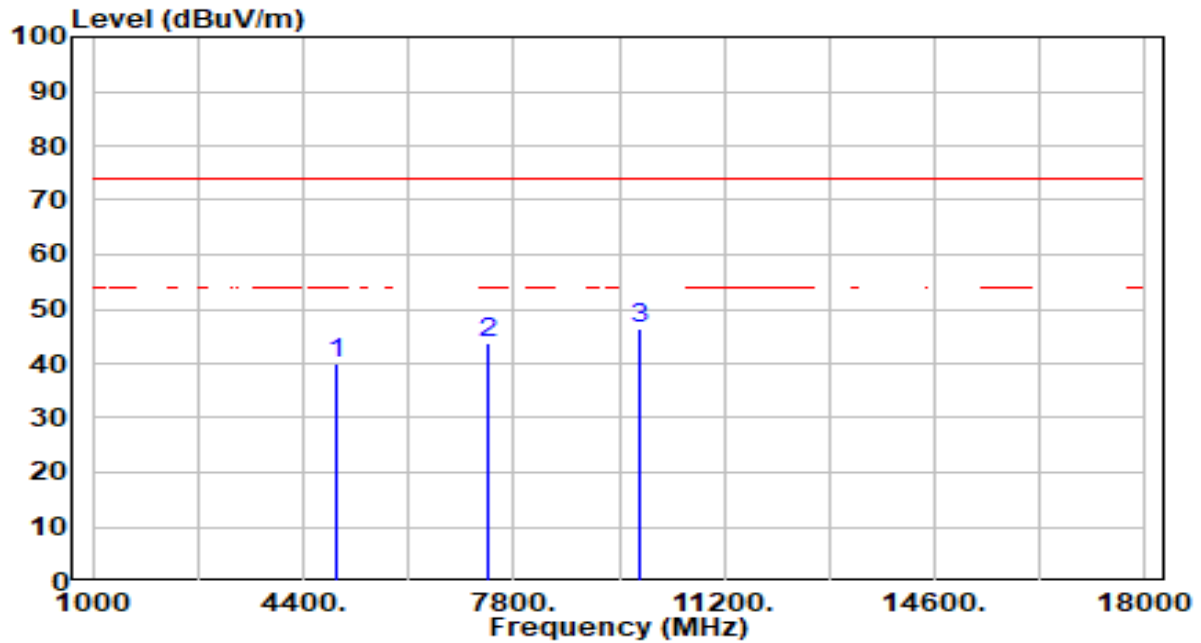


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.34	0.49	39.83	-34.17	74.00	100	195	Peak
2	7386.000	38.21	5.64	43.85	-30.15	74.00	100	178	Peak
3	* 9848.000	41.18	5.39	46.56	-27.44	74.00	100	288	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

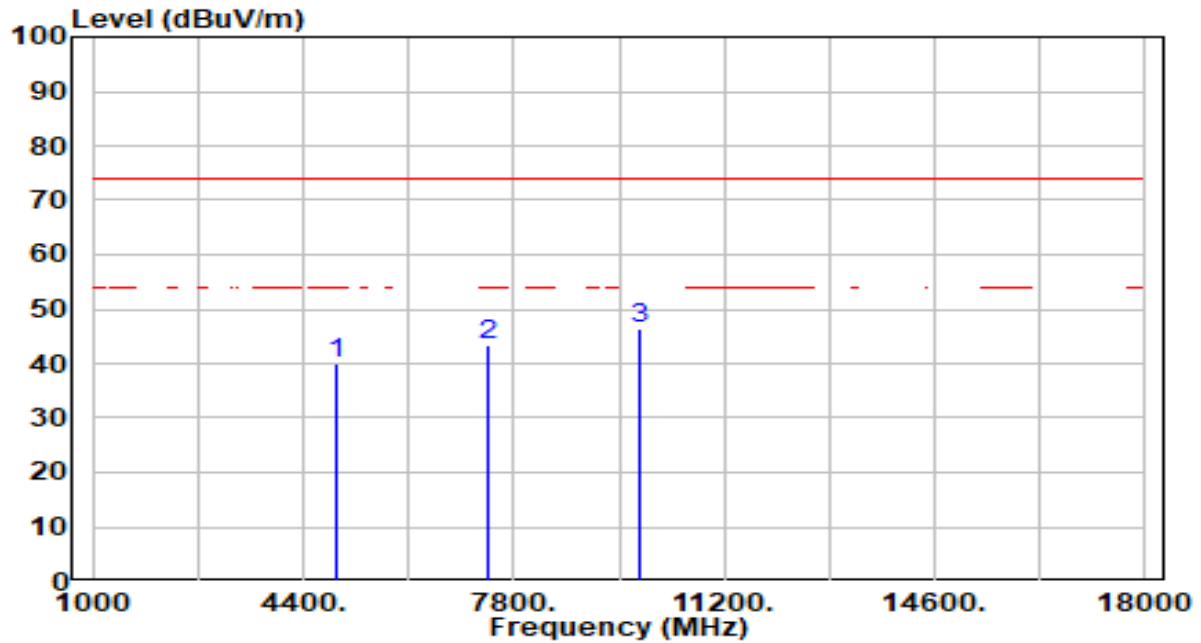


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.69	0.49	40.19	-33.81	74.00	100	134	Peak
2	7386.000	37.88	5.64	43.51	-30.49	74.00	100	114	Peak
3	* 9848.000	40.94	5.39	46.33	-27.67	74.00	100	38	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 3 ANT 0+1	Test Voltage	AC 120V/60Hz

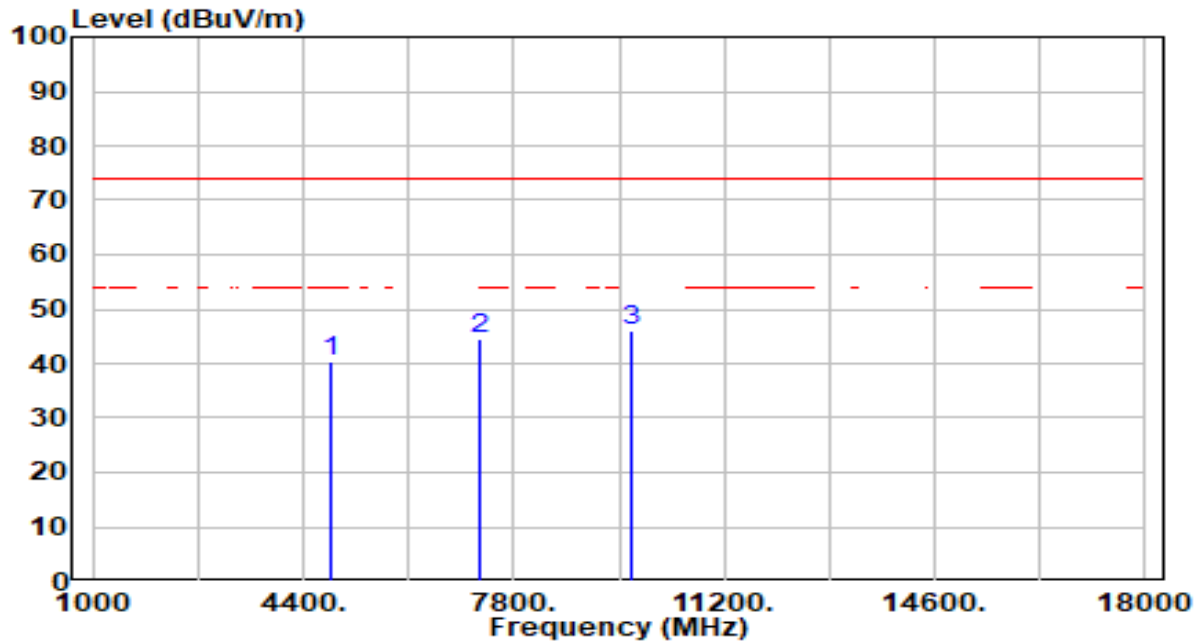


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.22	0.28	40.51	-33.49	74.00	100	256	Peak
2	7266.000	38.94	5.56	44.51	-29.49	74.00	100	133	Peak
3	* 9688.000	40.55	5.32	45.87	-28.13	74.00	100	264	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 3 ANT 0+1	Test Voltage	AC 120V/60Hz

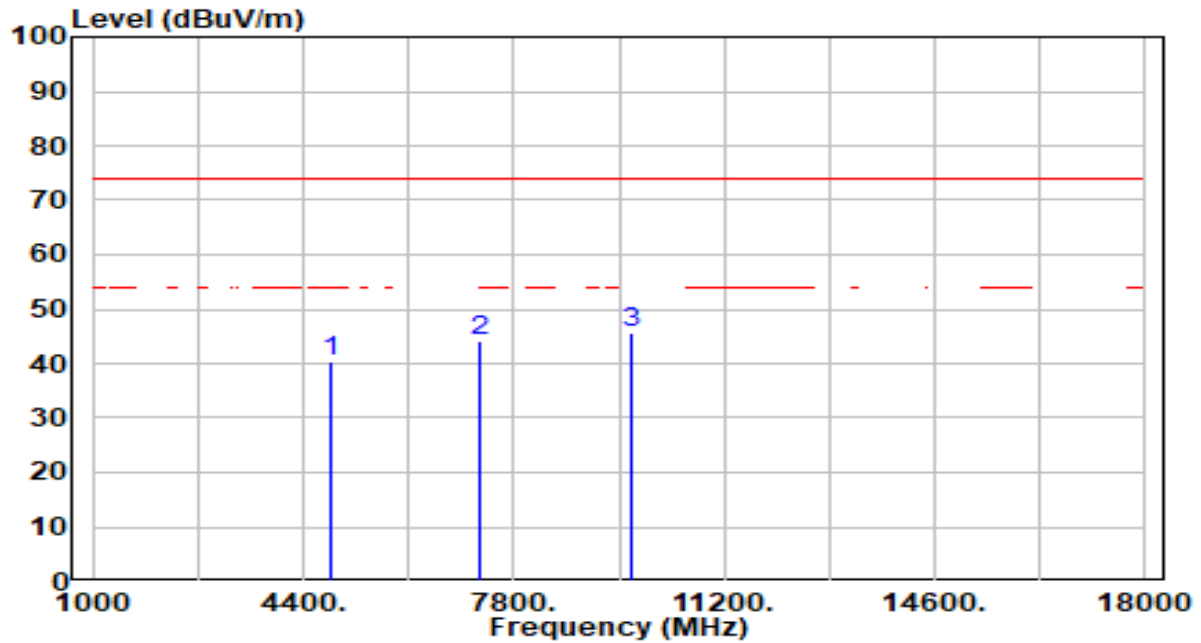


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	39.92	0.28	40.20	-33.80	74.00	100	237	Peak
2	7266.000	38.65	5.56	44.21	-29.79	74.00	100	140	Peak
3	* 9688.000	40.30	5.32	45.62	-28.38	74.00	100	42	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

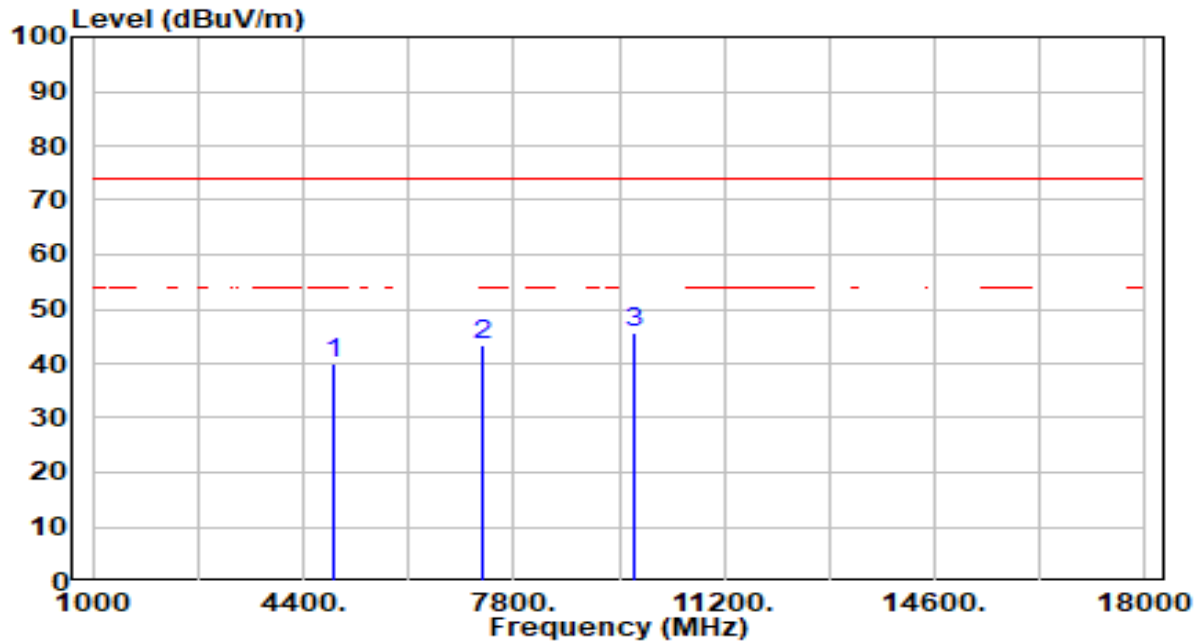


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.56	0.36	39.93	-34.07	74.00	100	209	Peak
2	7311.000	37.76	5.59	43.35	-30.65	74.00	100	209	Peak
3	* 9748.000	40.46	5.34	45.81	-28.19	74.00	100	311	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

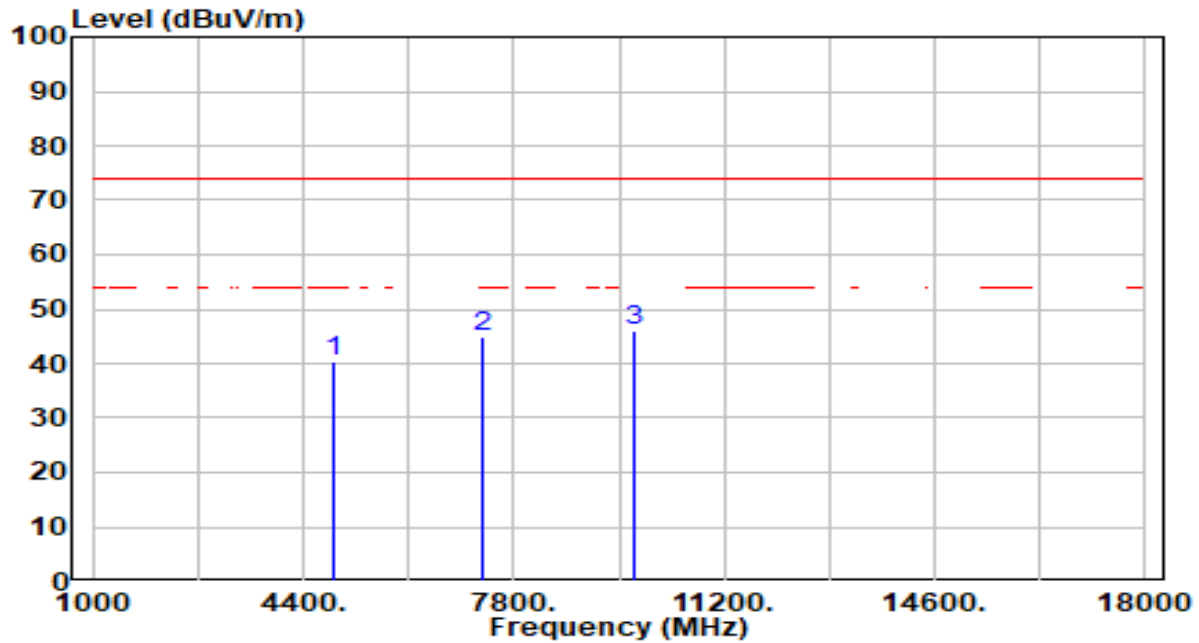


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.00	0.36	40.36	-33.64	74.00	100	228	Peak
2	7311.000	39.35	5.59	44.94	-29.06	74.00	100	0	Peak
3	* 9748.000	40.82	5.34	46.16	-27.84	74.00	100	51	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 9 ANT 0+1	Test Voltage	AC 120V/60Hz

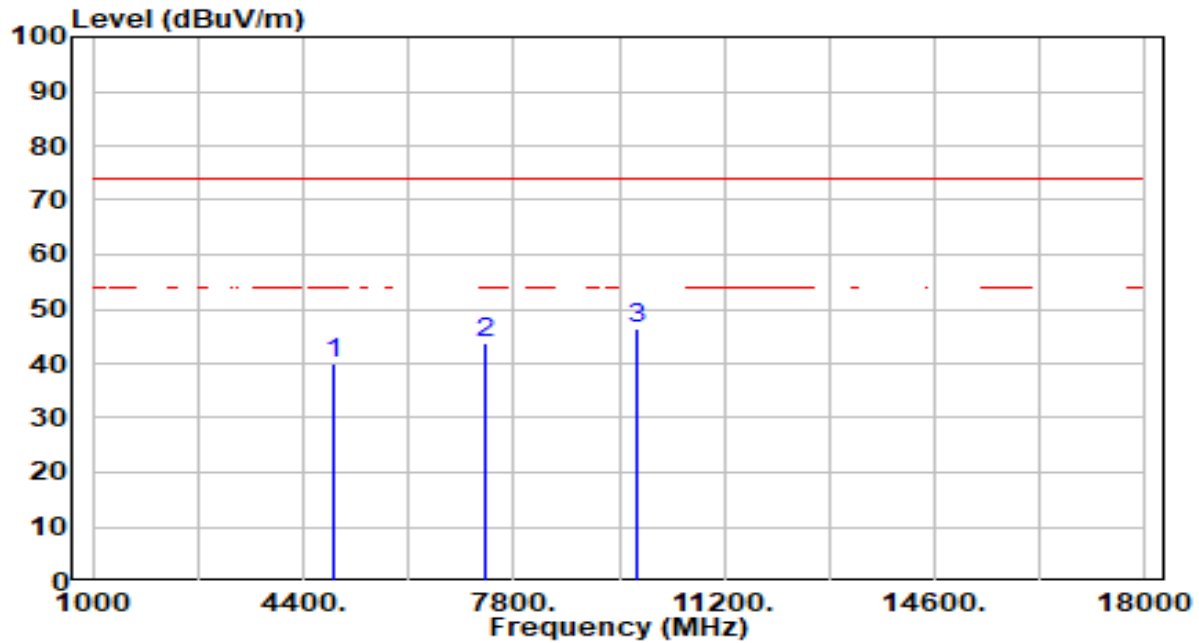


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	39.54	0.44	39.98	-34.02	74.00	100	277	Peak
2	7356.000	38.11	5.62	43.73	-30.27	74.00	100	87	Peak
3	* 9808.000	41.13	5.37	46.50	-27.50	74.00	100	314	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 9 ANT 0+1	Test Voltage	AC 120V/60Hz

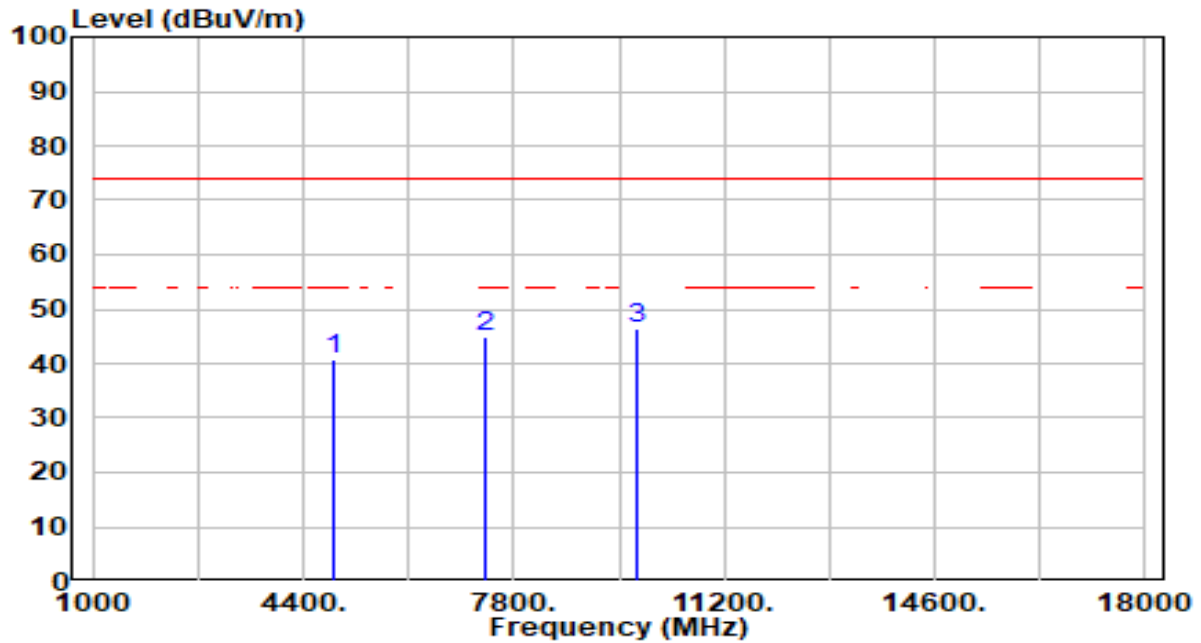


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.25	0.44	40.69	-33.31	74.00	100	301	Peak
2	7356.000	39.36	5.62	44.98	-29.02	74.00	100	243	Peak
3	* 9808.000	41.17	5.37	46.54	-27.46	74.00	100	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-26
Factor	BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

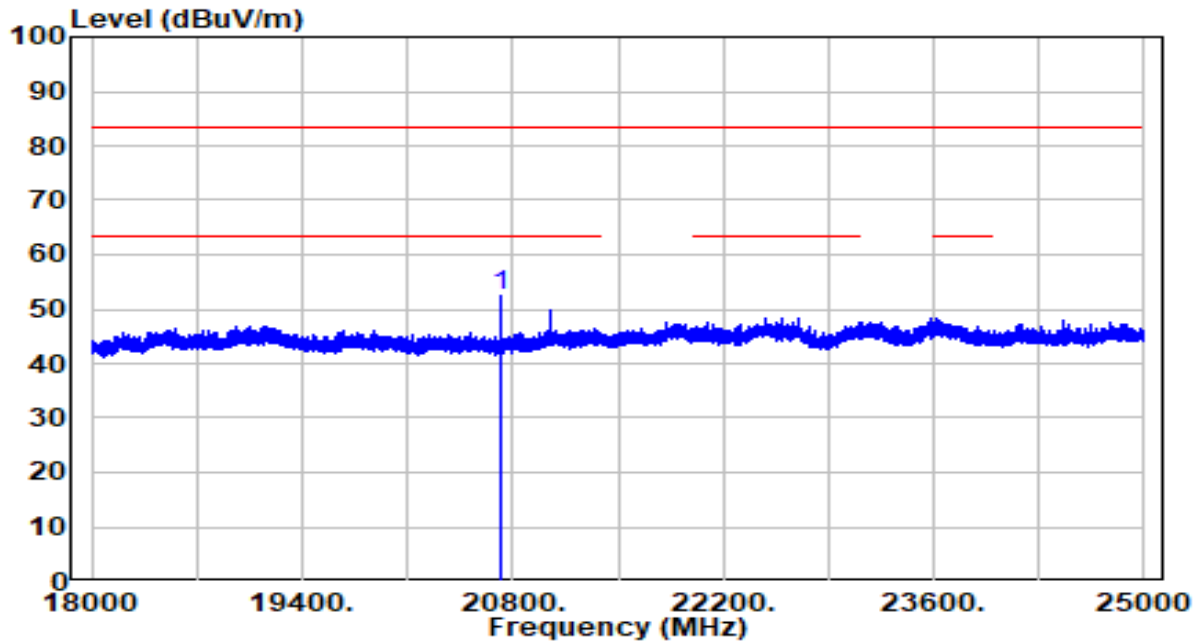


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	20719.750	41.61	10.74	52.35	-31.15	83.50	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-26
Factor	BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

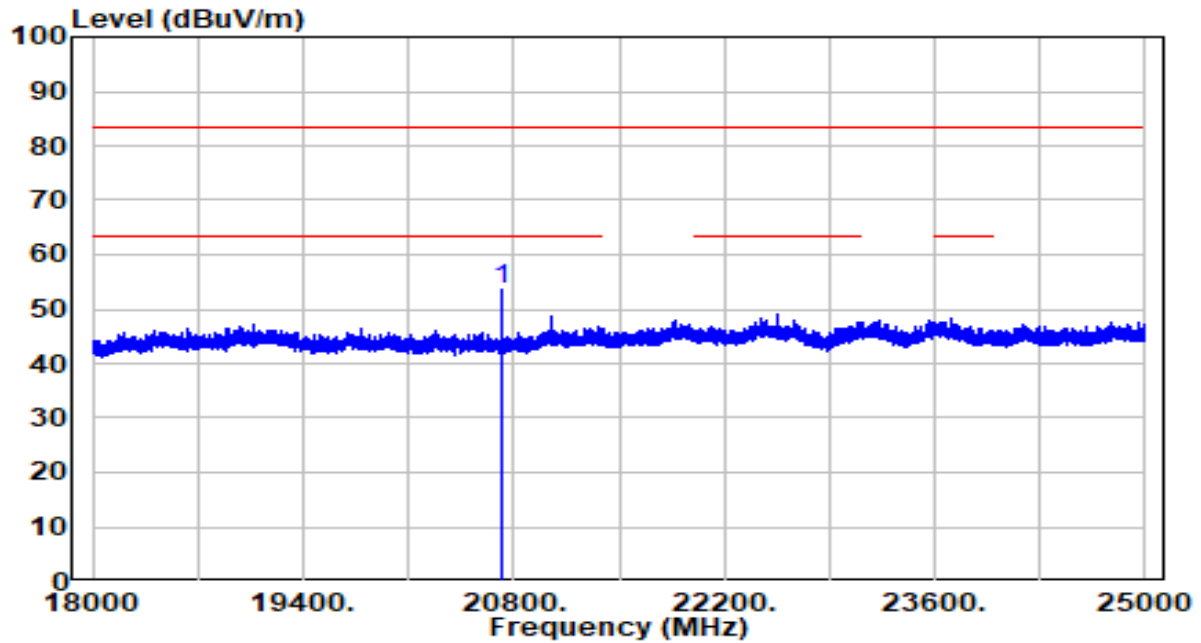

No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	20719.750	42.90	10.74	53.64	-29.86	83.50	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2.Test Procedure Used

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

7.7.3.Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.


If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.

4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

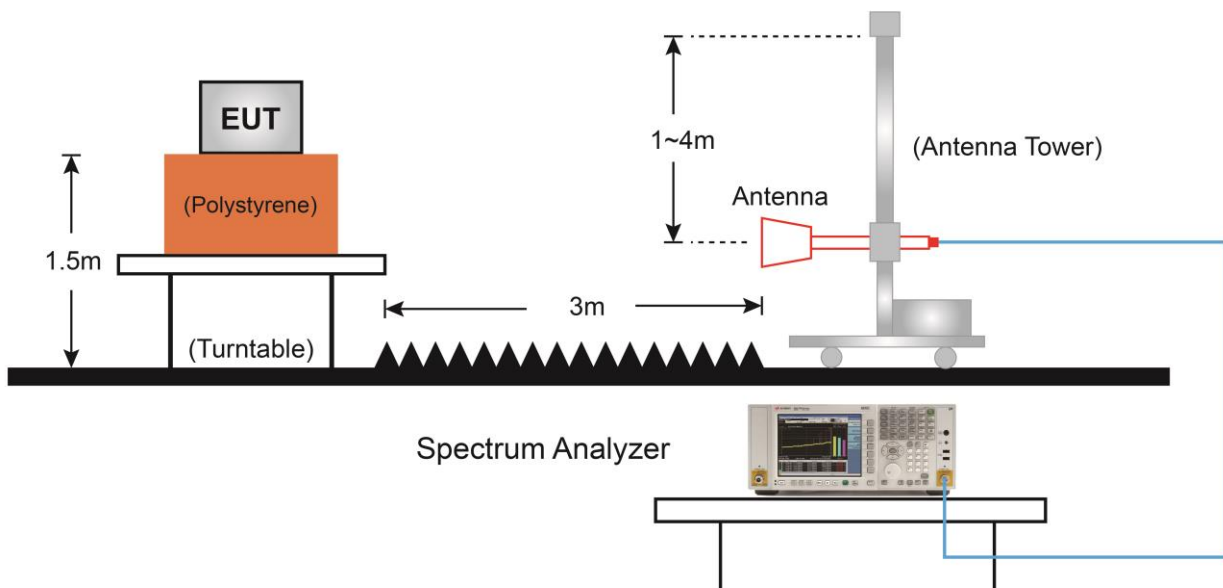7.7.4.Test Setup

7.7.5.Test Result

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11b_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

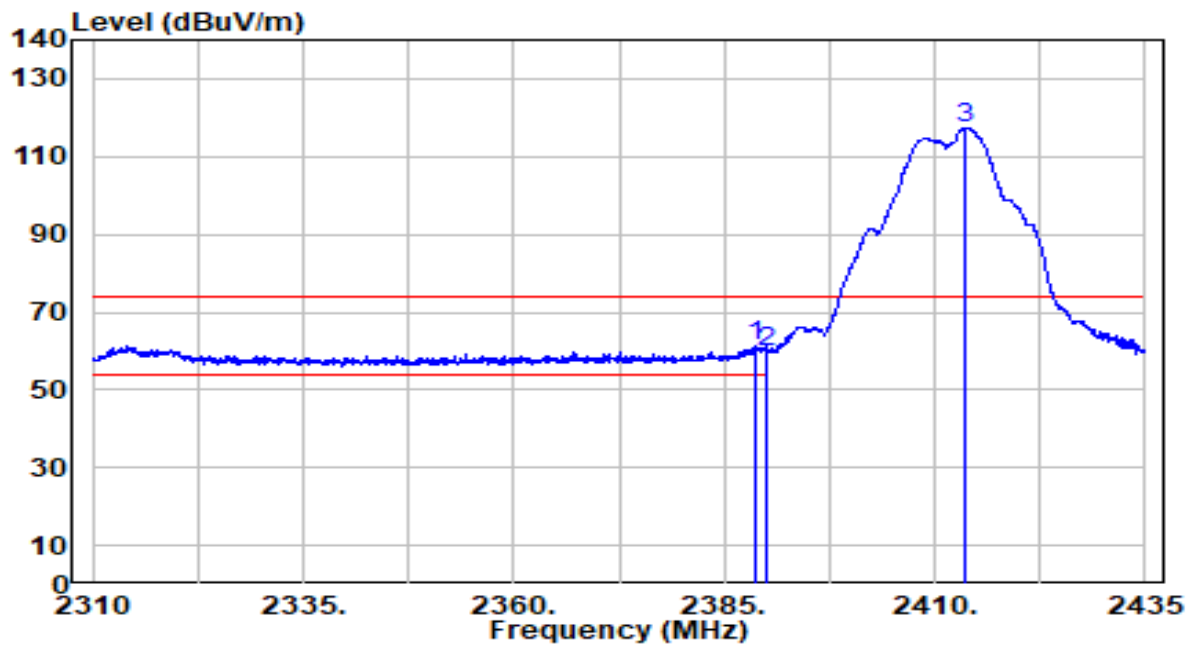


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.688	30.68	30.44	61.12	-12.88	74.00	111	211	Peak
2		2390.000	29.46	30.45	59.90	-14.10	74.00	111	211	Peak
3		2413.625	86.99	30.49	117.48	N/A	N/A	111	211	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11b_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

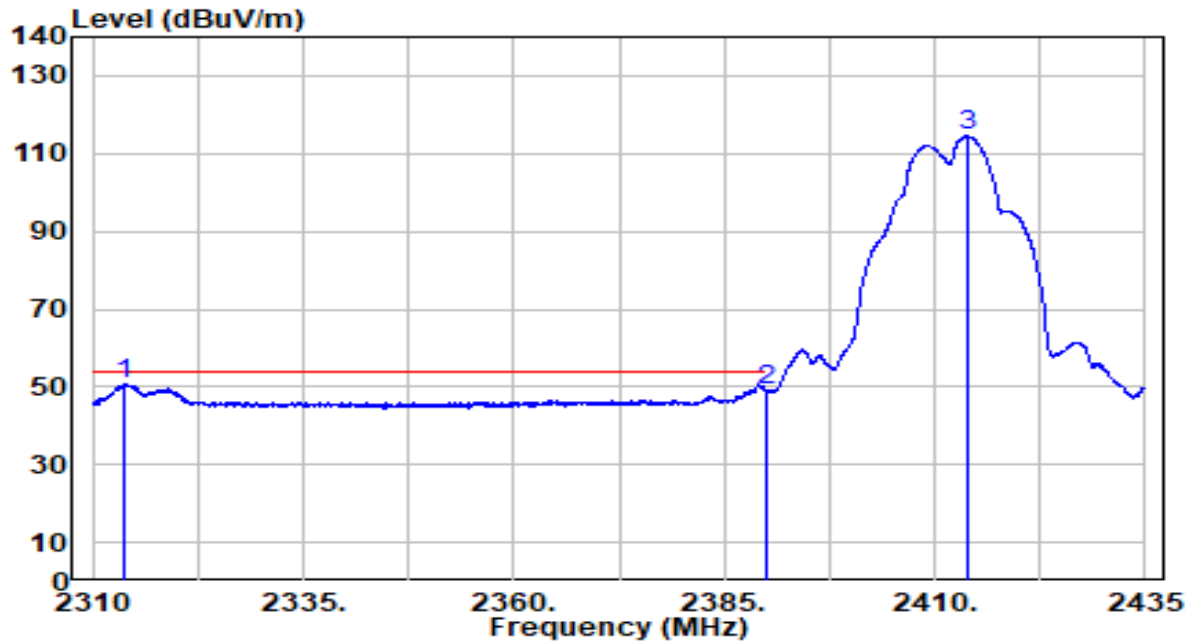


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2313.750	20.37	30.23	50.60	-3.40	54.00	111	211	Average
2		2390.000	18.50	30.45	48.95	-5.05	54.00	111	211	Average
3		2413.813	83.96	30.49	114.45	N/A	N/A	111	211	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11b_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

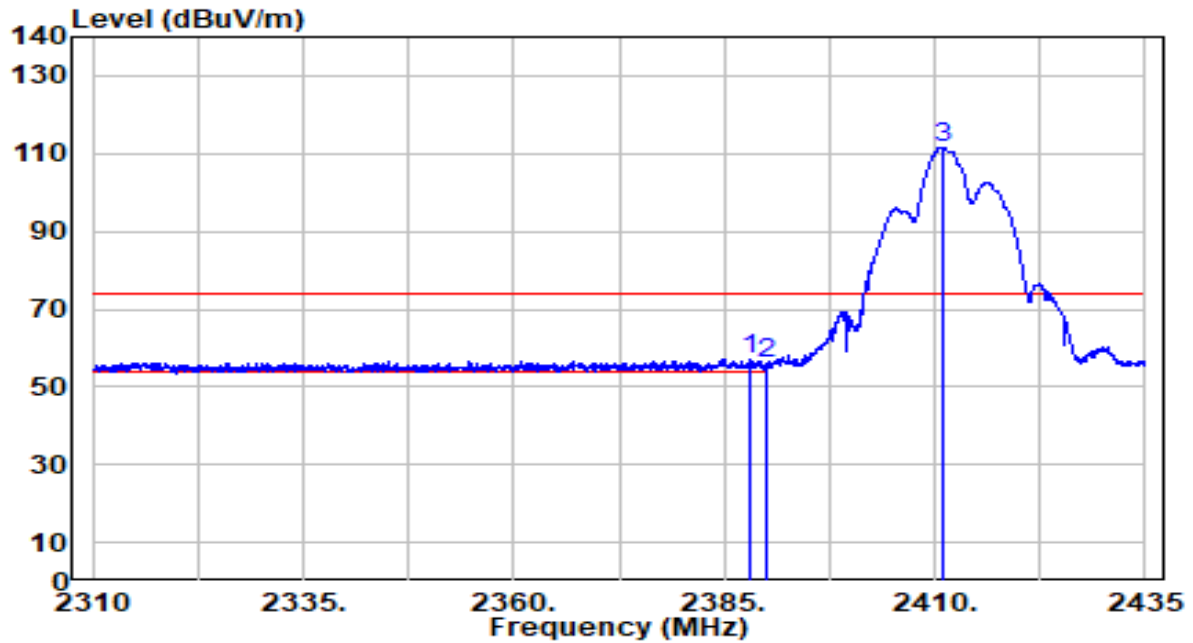


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.938	26.70	30.44	57.14	-16.86	74.00	175	131	Peak
2		2390.000	25.53	30.45	55.98	-18.02	74.00	175	131	Peak
3		2410.938	81.20	30.49	111.70	N/A	N/A	175	131	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11b_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

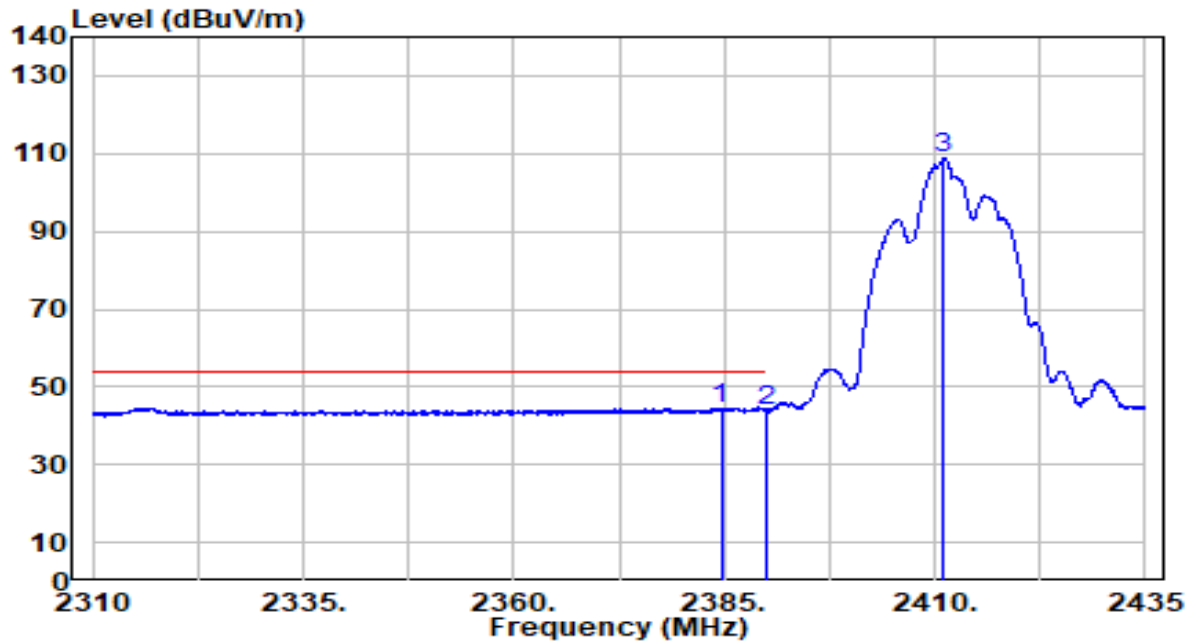


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.625	14.19	30.43	44.62	-9.38	54.00	175	131	Average
2		2390.000	13.51	30.45	43.96	-10.04	54.00	175	131	Average
3		2410.938	78.26	30.49	108.75	N/A	N/A	175	131	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11b_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

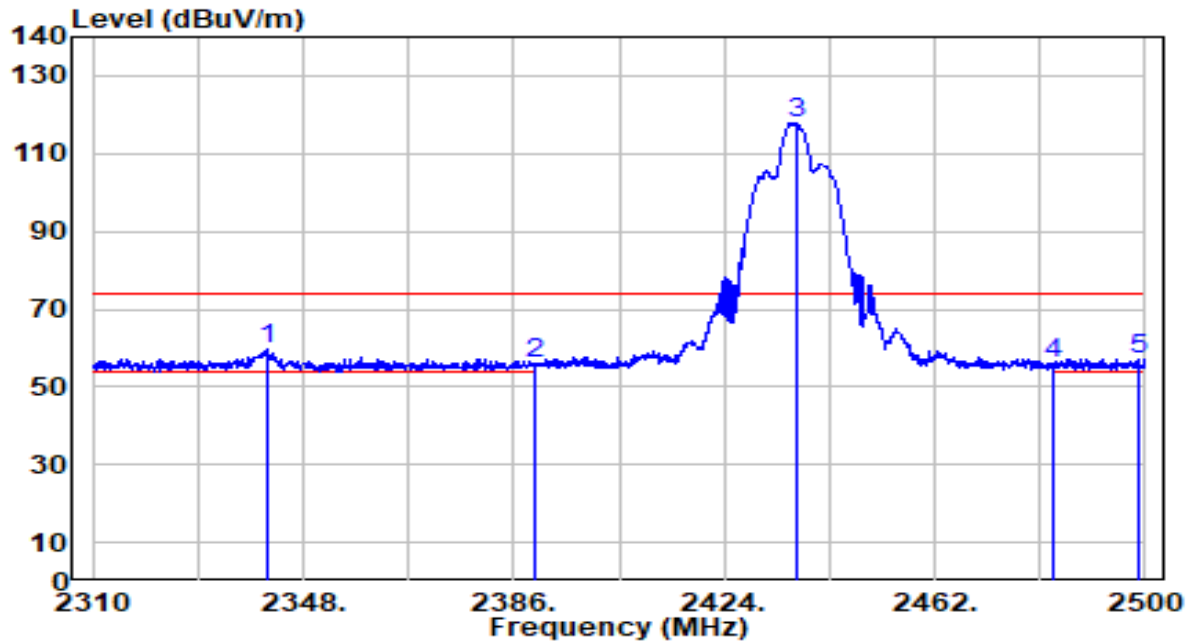


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2341.540	29.37	30.31	59.68	-14.32	74.00	124	153	Peak
2		2390.000	25.35	30.45	55.80	-18.20	74.00	124	153	Peak
3		2437.015	87.43	30.53	117.96	N/A	N/A	124	153	Peak
4		2483.500	25.17	30.59	55.76	-18.24	74.00	124	153	Peak
5		2498.860	26.55	30.61	57.15	-16.85	74.00	124	153	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11b_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

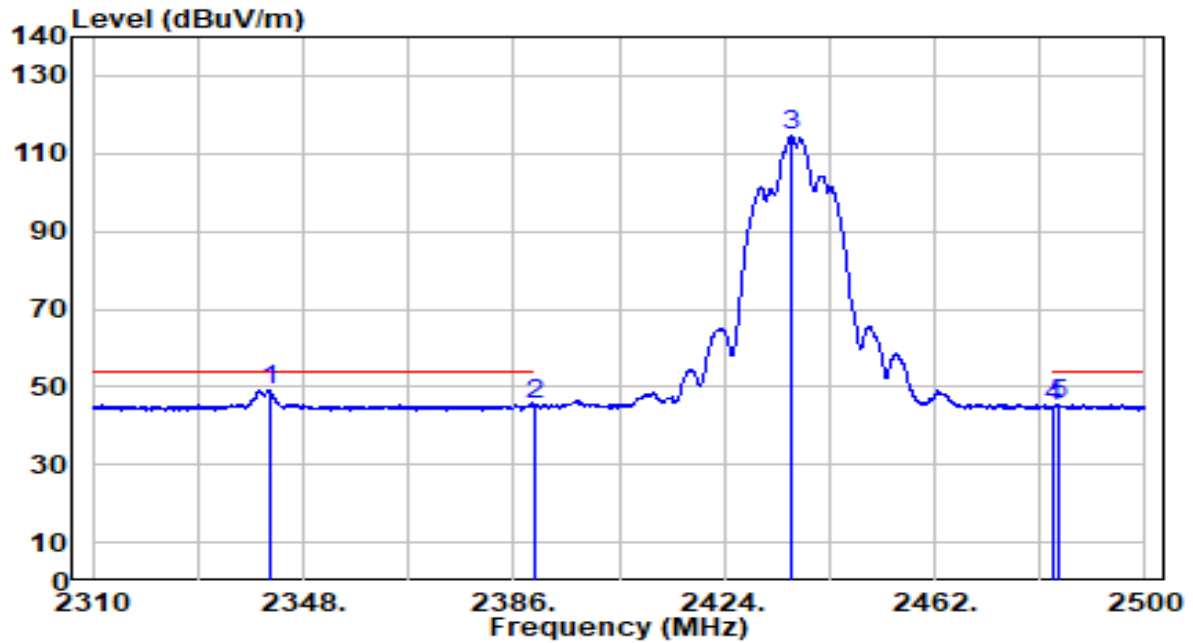


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2341.825	18.74	30.31	49.05	-4.95	54.00	124	153	Average
2		2390.000	15.05	30.45	45.50	-8.50	54.00	124	153	Average
3		2436.065	84.26	30.52	114.79	N/A	N/A	124	153	Average
4		2483.500	14.39	30.59	44.98	-9.02	54.00	124	153	Average
5		2484.610	15.04	30.59	45.63	-8.37	54.00	124	153	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11b_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

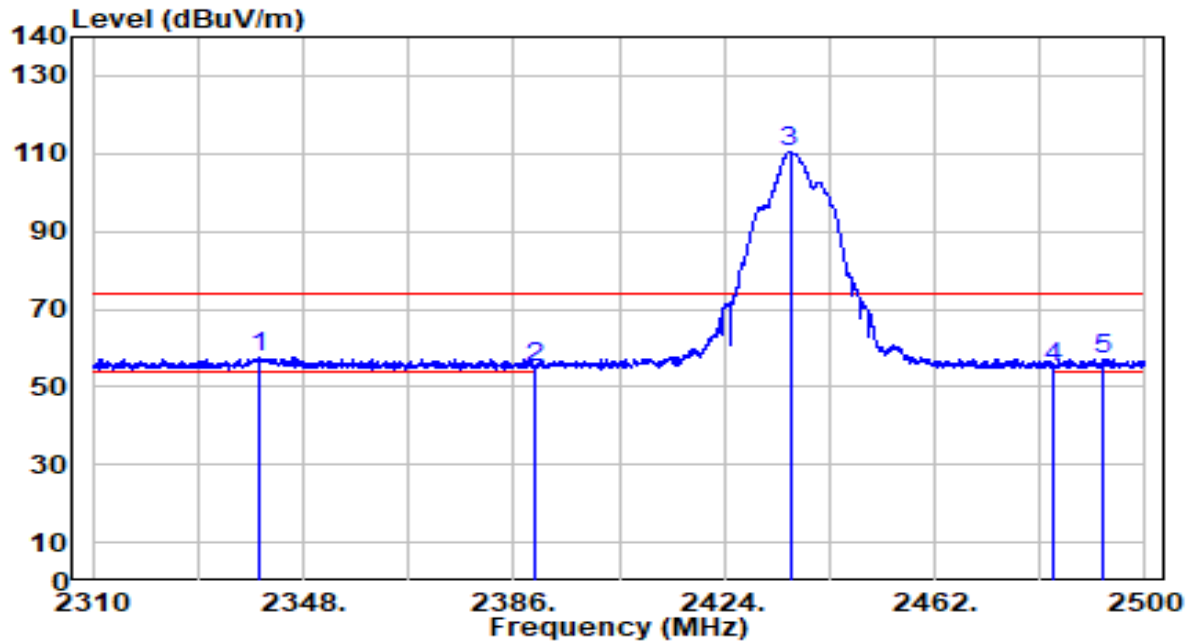


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2339.925	27.26	30.31	57.57	-16.43	74.00	110	45	Peak
2		2390.000	24.42	30.45	54.87	-19.13	74.00	110	45	Peak
3		2435.875	80.11	30.52	110.64	N/A	N/A	110	45	Peak
4		2483.500	24.52	30.59	55.11	-18.89	74.00	110	45	Peak
5		2492.495	26.64	30.60	57.24	-16.76	74.00	110	45	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11b_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

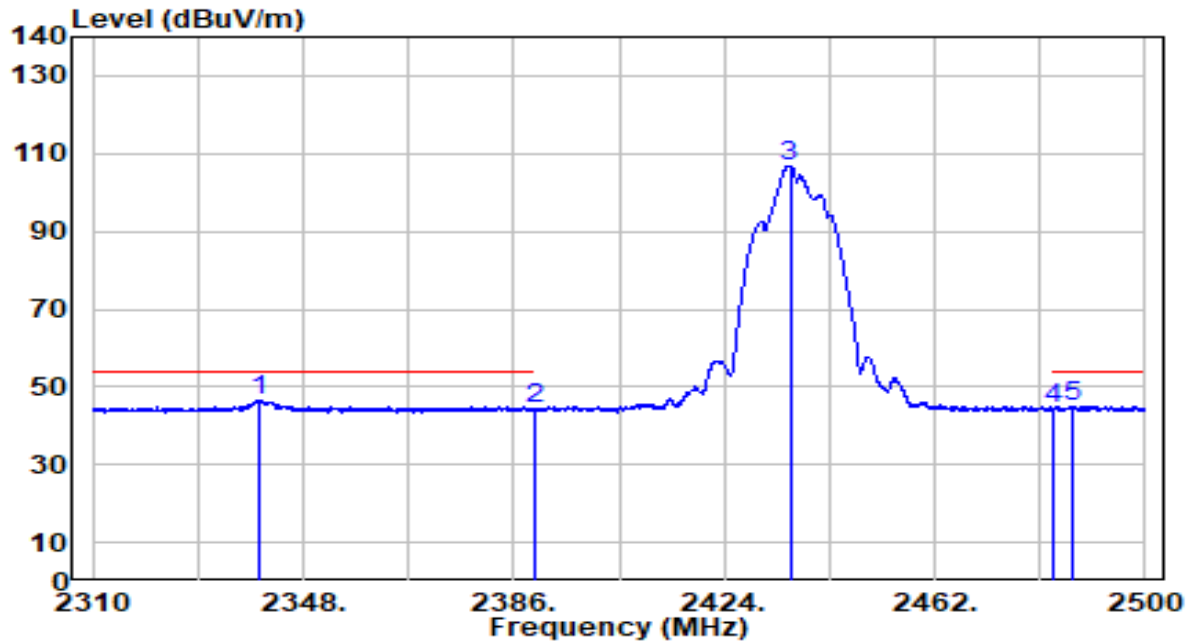


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.020	16.43	30.31	46.74	-7.26	54.00	110	45	Average
2		2390.000	14.13	30.45	44.58	-9.42	54.00	110	45	Average
3		2435.875	76.42	30.52	106.94	N/A	N/A	110	45	Average
4		2483.500	14.03	30.59	44.61	-9.39	54.00	110	45	Average
5		2486.890	14.41	30.59	45.00	-9.00	54.00	110	45	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11b_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

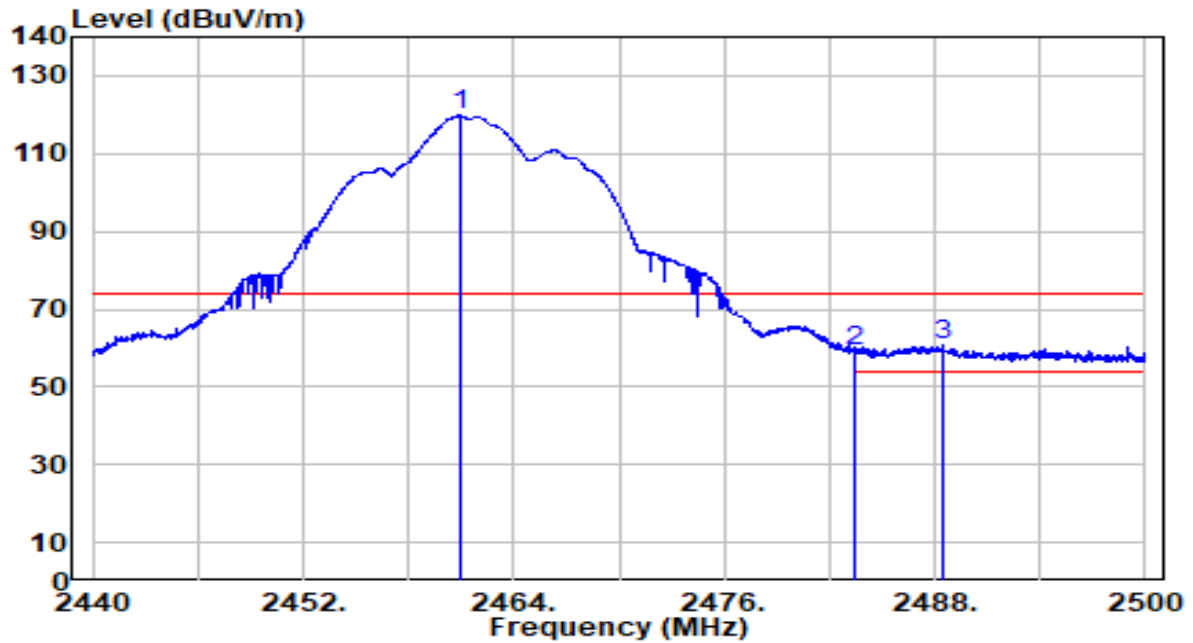


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.940	89.16	30.56	119.71	N/A	N/A	104	217	Peak
2	2483.500	28.52	30.59	59.11	-14.89	74.00	104	217	Peak
3	* 2488.510	29.98	30.59	60.57	-13.43	74.00	104	217	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11b_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

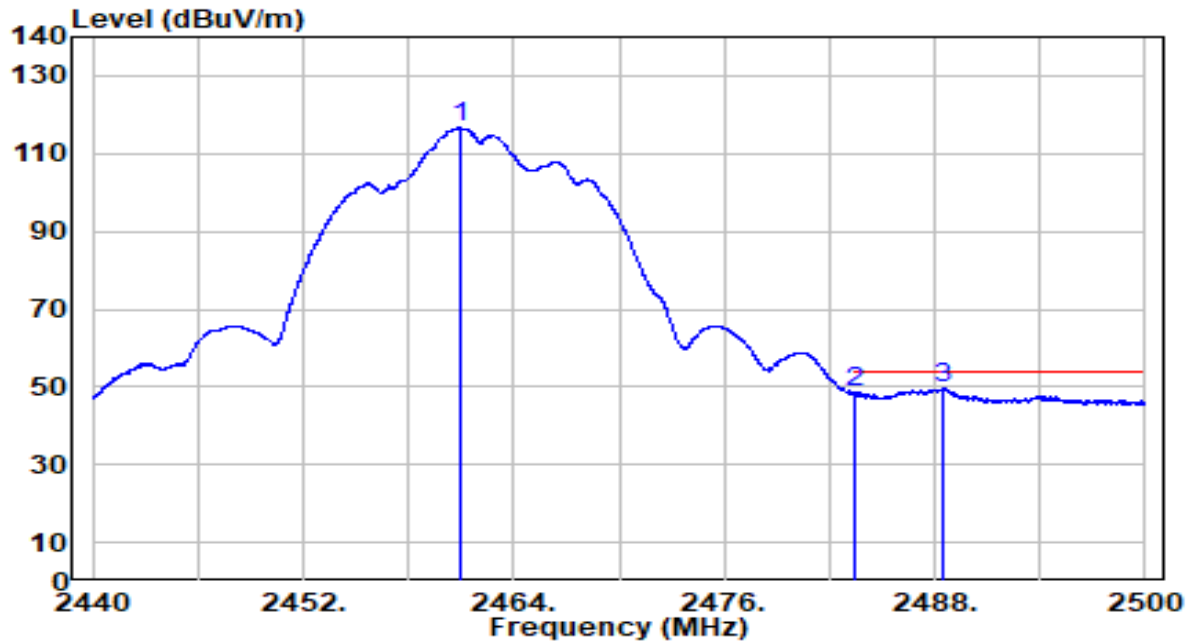


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.910	86.21	30.56	116.77	N/A	N/A	104	217	Average
2	2483.500	17.88	30.59	48.46	-5.54	54.00	104	217	Average
3	* 2488.420	18.90	30.59	49.50	-4.50	54.00	104	217	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11b_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

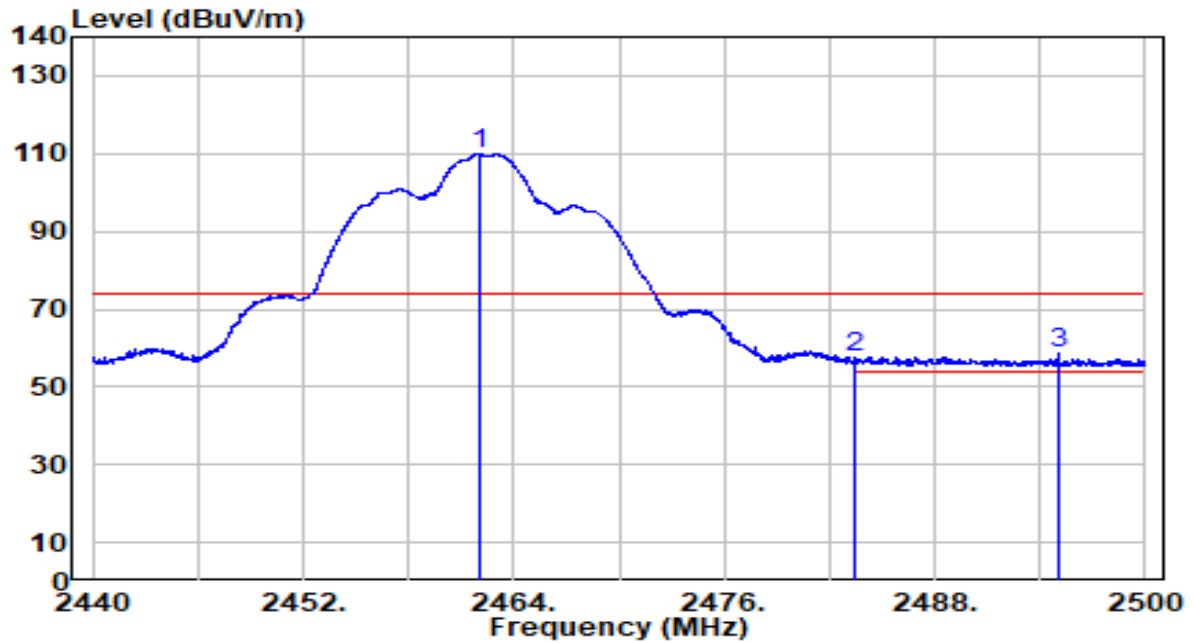


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.050	79.46	30.56	110.02	N/A	N/A	100	310	Peak
2	2483.500	26.74	30.59	57.33	-16.67	74.00	100	310	Peak
3	* 2495.080	27.90	30.60	58.50	-15.50	74.00	100	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11b_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

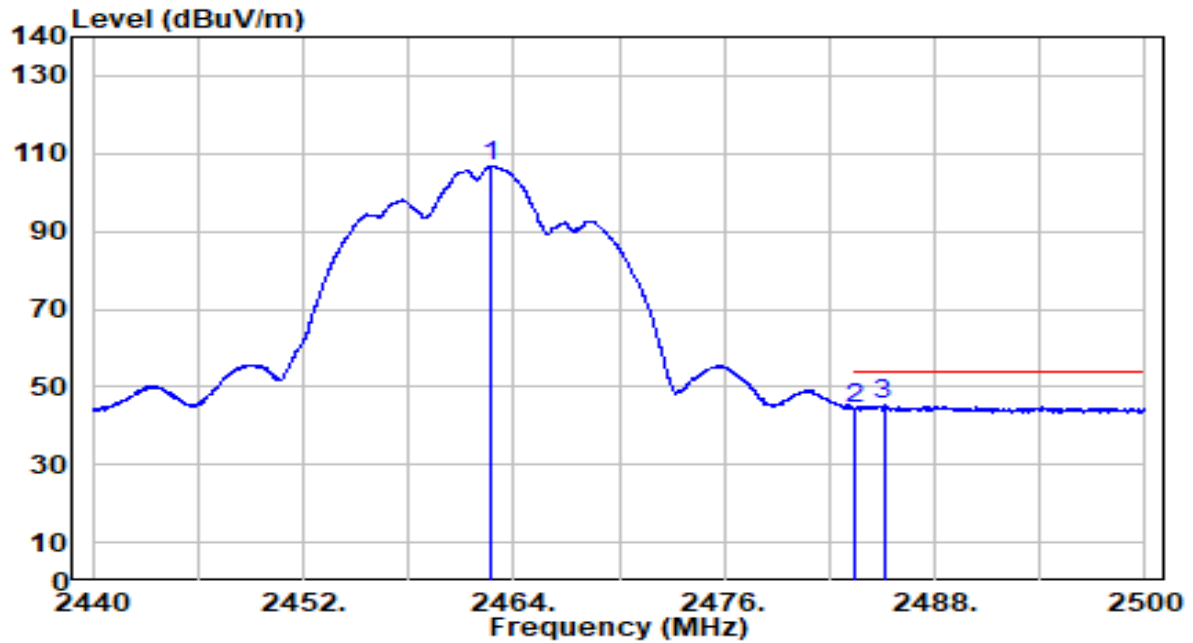


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.710	76.31	30.56	106.87	N/A	N/A	100	310	Average
2	2483.500	13.76	30.59	44.35	-9.65	54.00	100	310	Average
3	* 2485.090	14.63	30.59	45.22	-8.78	54.00	100	310	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11g_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

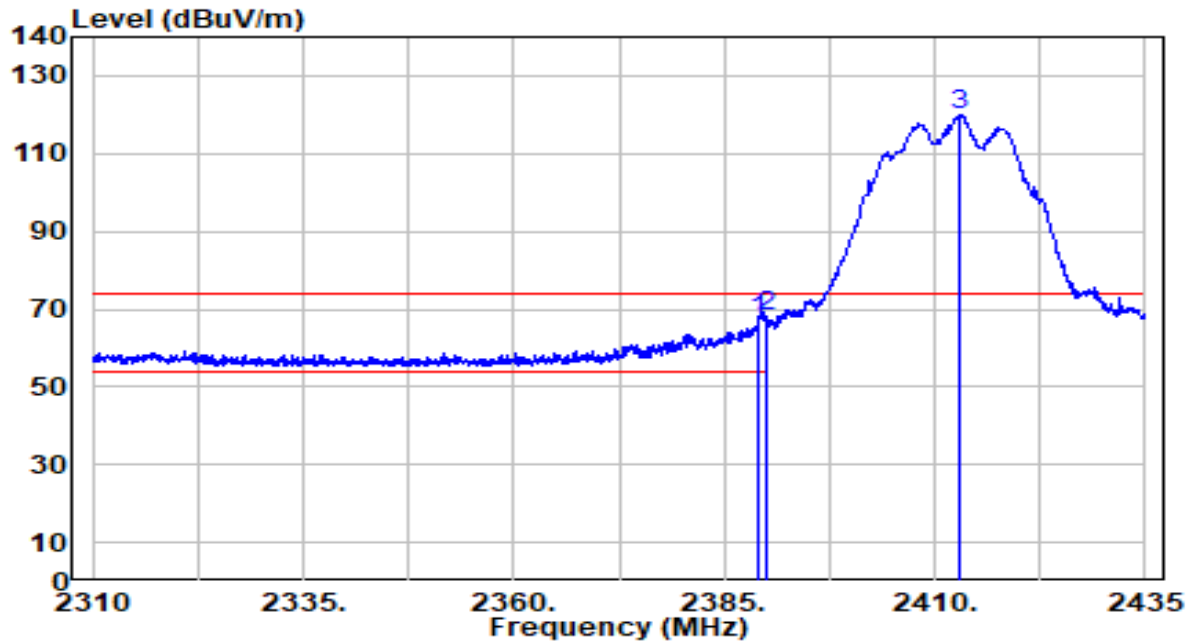


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.938	36.43	30.44	66.87	-7.13	74.00	139	186	Peak
2	*	2390.000	37.88	30.45	68.33	-5.67	74.00	139	186	Peak
3		2413.063	89.36	30.49	119.85	N/A	N/A	139	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11g_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

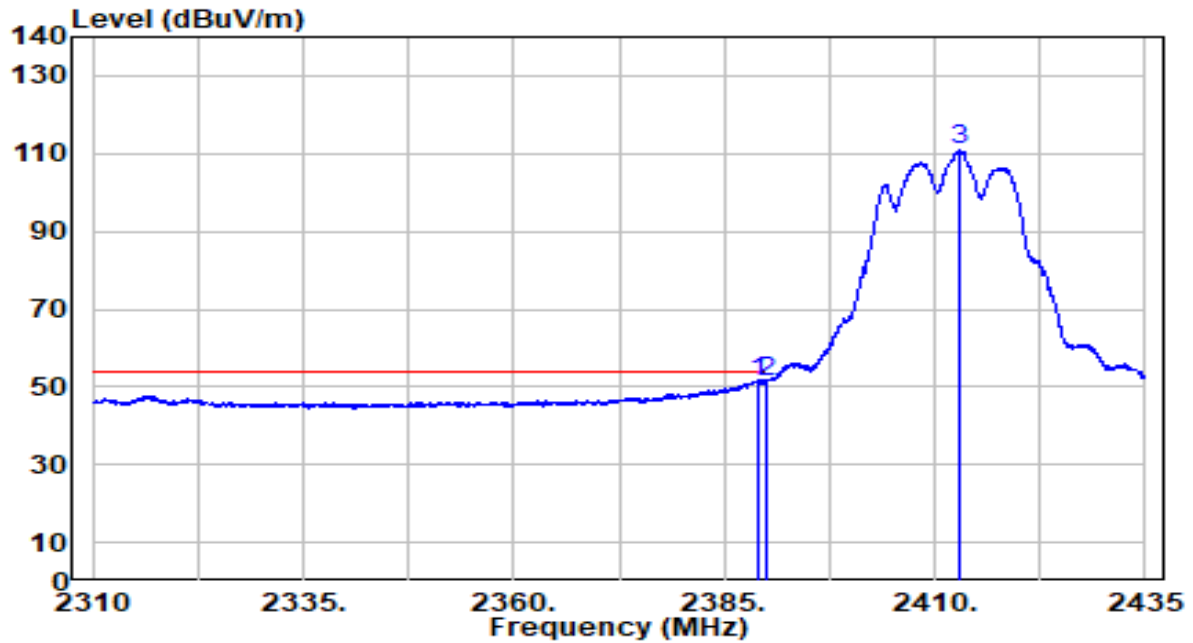


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.000	20.93	30.44	51.38	-2.62	54.00	139	186	Average
2		2390.000	20.86	30.45	51.31	-2.69	54.00	139	186	Average
3		2412.938	80.63	30.49	111.12	N/A	N/A	139	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11g_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

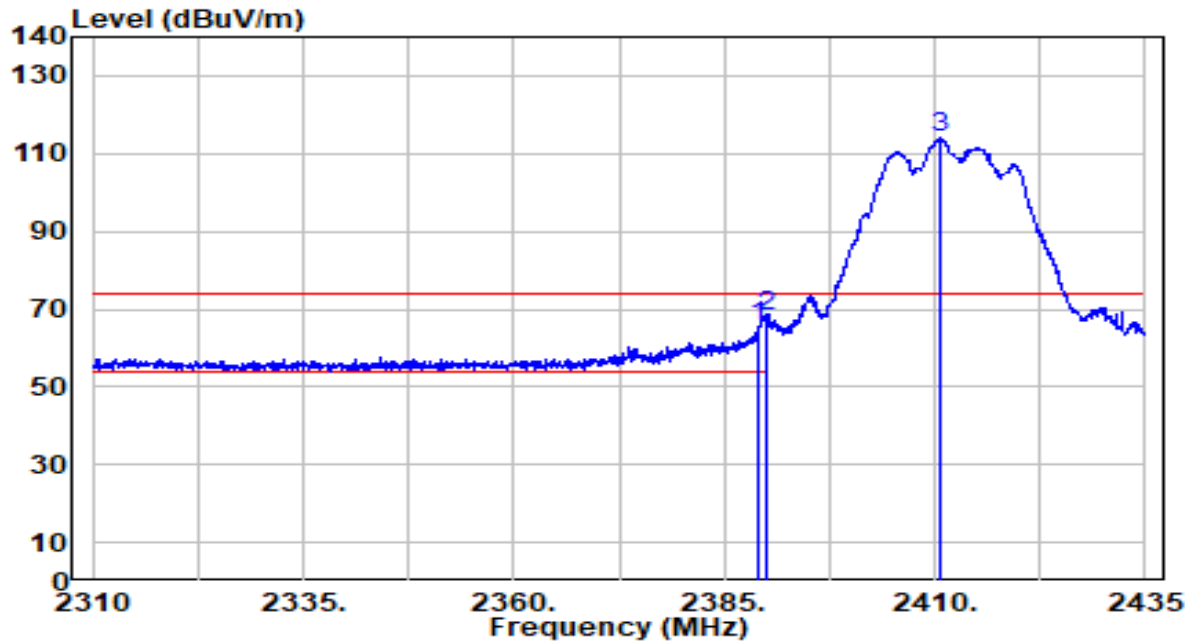


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.938	34.99	30.44	65.43	-8.57	74.00	106	130	Peak
2	* 2390.000	37.51	30.45	67.96	-6.04	74.00	106	130	Peak
3	2410.750	83.41	30.49	113.90	N/A	N/A	106	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11g_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

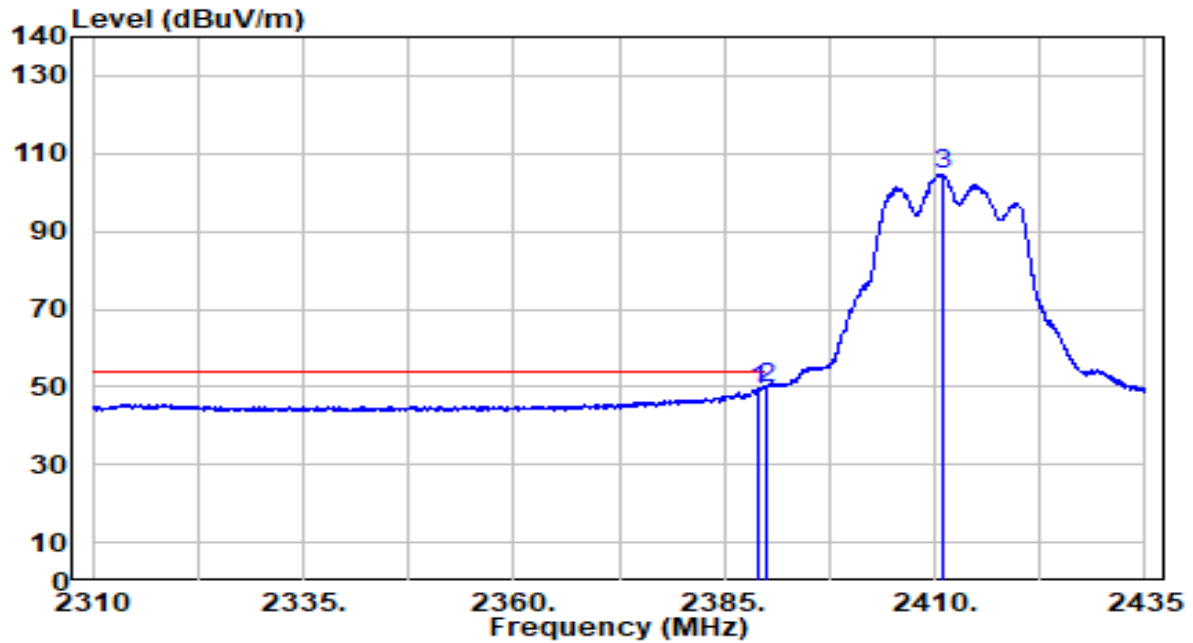


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	18.95	30.44	49.39	-4.61	54.00	106	130	Average
2	*	2390.000	19.45	30.45	49.90	-4.10	54.00	106	130	Average
3		2410.875	74.19	30.49	104.68	N/A	N/A	106	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11g_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

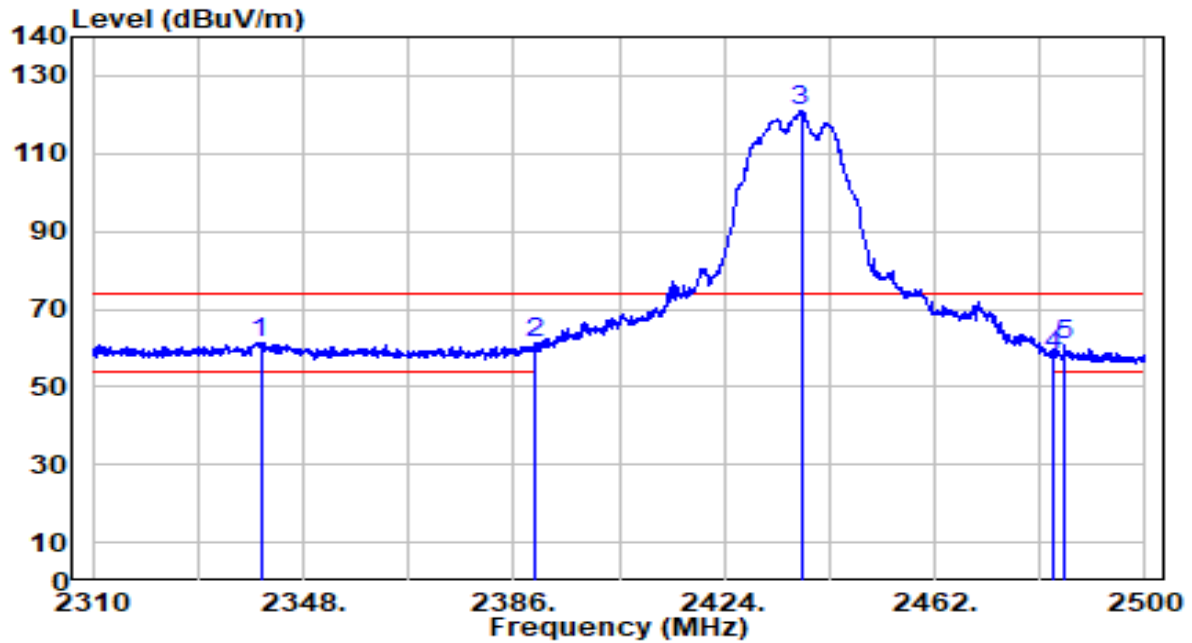


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2340.305	30.84	30.31	61.15	-12.85	74.00	124	216	Peak
2	*	2390.000	30.77	30.45	61.22	-12.78	74.00	124	216	Peak
3		2437.870	90.44	30.53	120.97	N/A	N/A	124	216	Peak
4		2483.500	27.40	30.59	57.99	-16.01	74.00	124	216	Peak
5		2485.370	30.33	30.59	60.92	-13.08	74.00	124	216	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11g_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

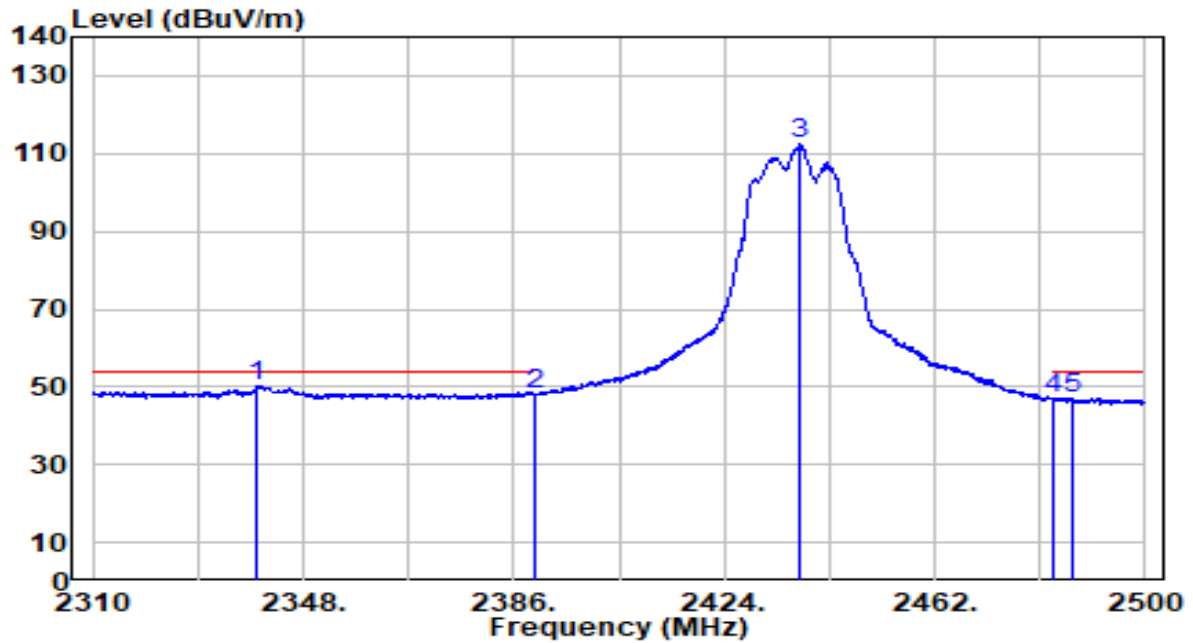


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2339.545	19.94	30.30	50.25	-3.75	54.00	124	216	Average
2		2390.000	17.80	30.45	48.24	-5.76	54.00	124	216	Average
3		2437.585	81.84	30.53	112.36	N/A	N/A	124	216	Average
4		2483.500	16.25	30.59	46.84	-7.16	54.00	124	216	Average
5		2486.985	16.38	30.59	46.98	-7.02	54.00	124	216	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11g_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

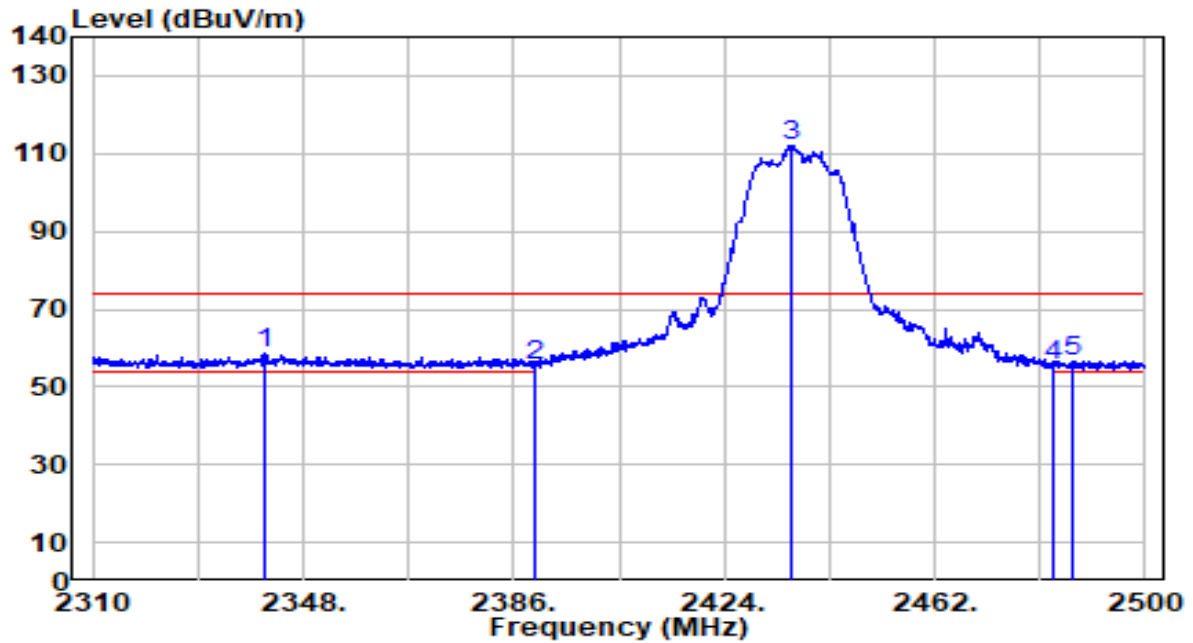


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2341.255	28.18	30.31	58.49	-15.51	74.00	110	120	Peak
2		2390.000	25.19	30.45	55.63	-18.37	74.00	110	120	Peak
3		2436.065	81.65	30.52	112.18	N/A	N/A	110	120	Peak
4		2483.500	24.69	30.59	55.28	-18.72	74.00	110	120	Peak
5		2486.700	26.13	30.59	56.72	-17.28	74.00	110	120	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11g_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

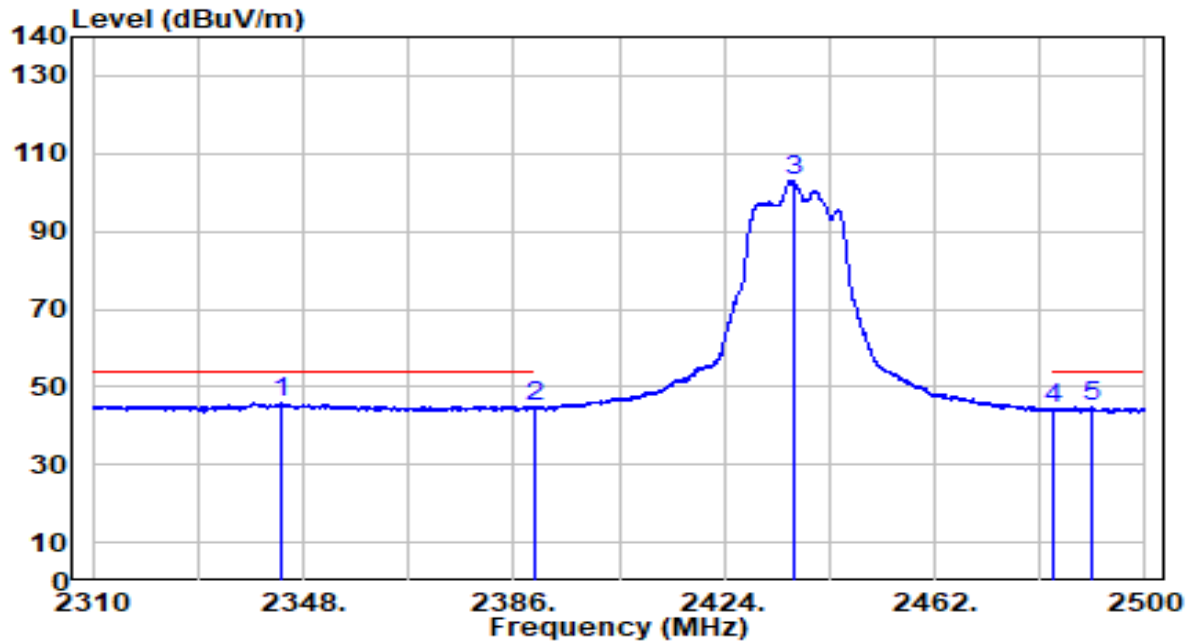


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2344.105	15.56	30.32	45.88	-8.12	54.00	110	120	Average
2		2390.000	14.21	30.45	44.66	-9.35	54.00	110	120	Average
3		2436.540	72.40	30.52	102.93	N/A	N/A	110	120	Average
4		2483.500	13.72	30.59	44.31	-9.69	54.00	110	120	Average
5		2490.215	14.07	30.60	44.67	-9.33	54.00	110	120	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11g_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

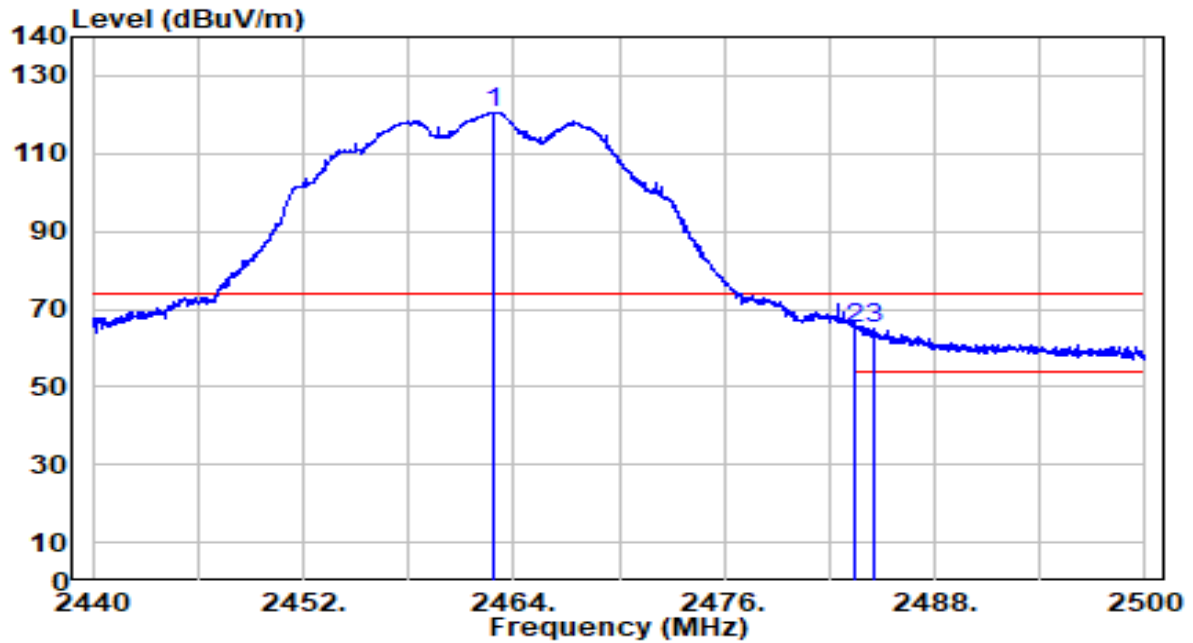


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.860	90.15	30.56	120.71	N/A	N/A	108	217	Peak
2		2483.500	34.44	30.59	65.03	-8.97	74.00	108	217	Peak
3	*	2484.580	34.52	30.59	65.11	-8.89	74.00	108	217	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11g_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

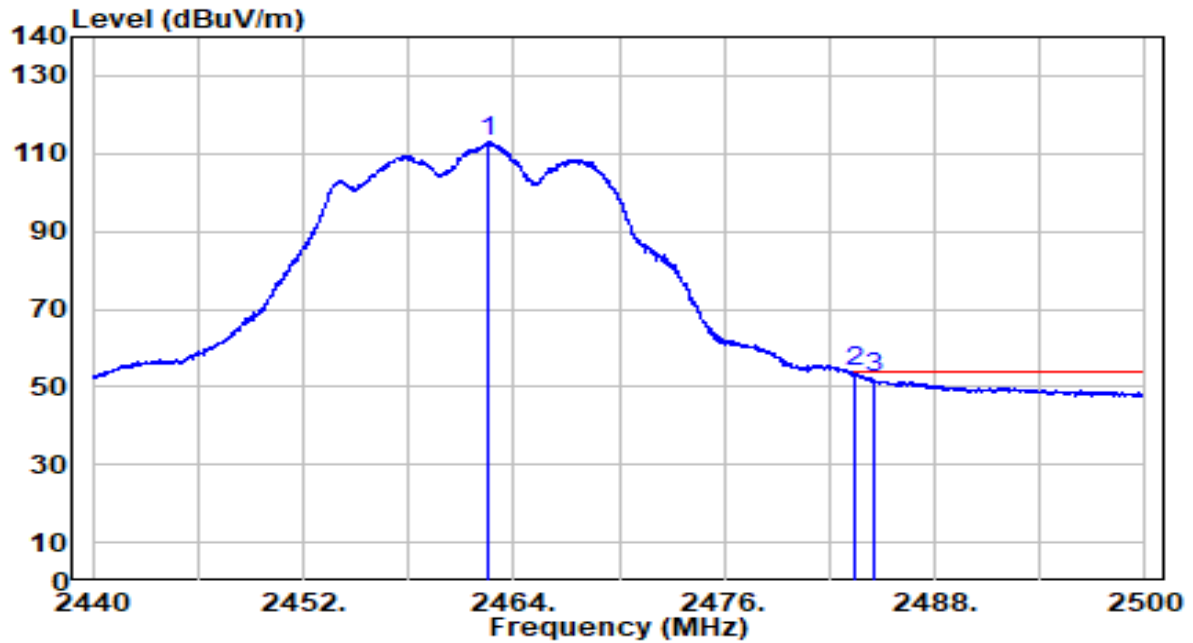


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.530	82.32	30.56	112.88	N/A	N/A	108	217	Average
2	*	2483.500	23.18	30.59	53.76	-0.24	54.00	108	217	Average
3		2484.610	21.78	30.59	52.37	-1.63	54.00	108	217	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11g_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

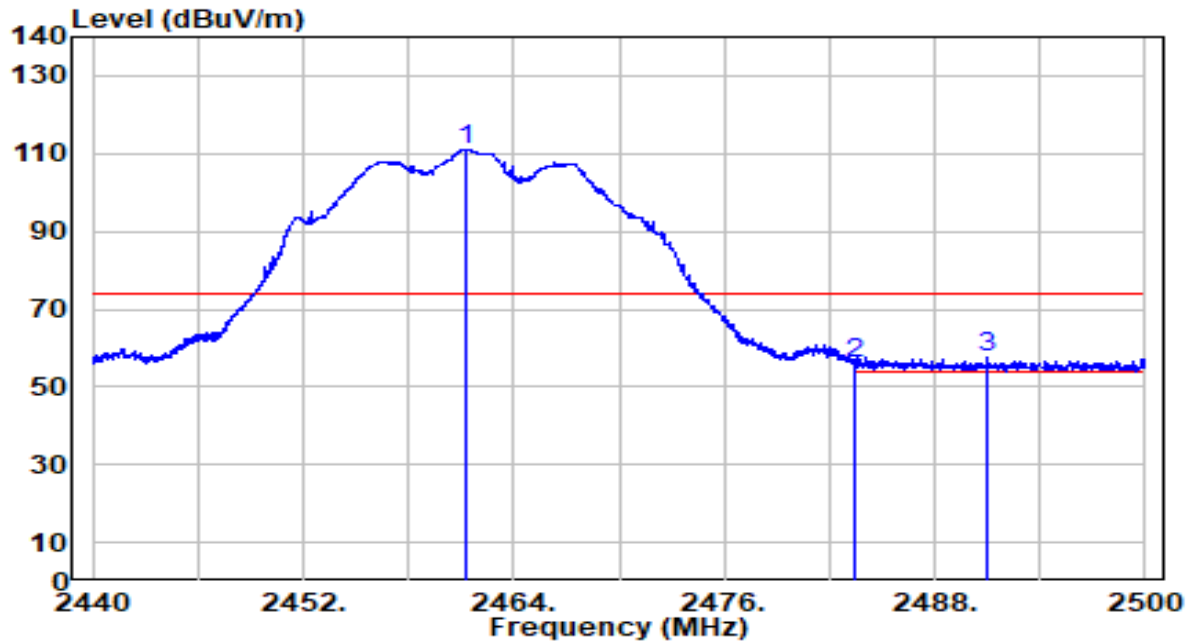


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.270	80.58	30.56	111.13	N/A	N/A	102	308	Peak
2	2483.500	25.64	30.59	56.23	-17.77	74.00	102	308	Peak
3	* 2490.970	27.06	30.60	57.66	-16.34	74.00	102	308	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11g_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

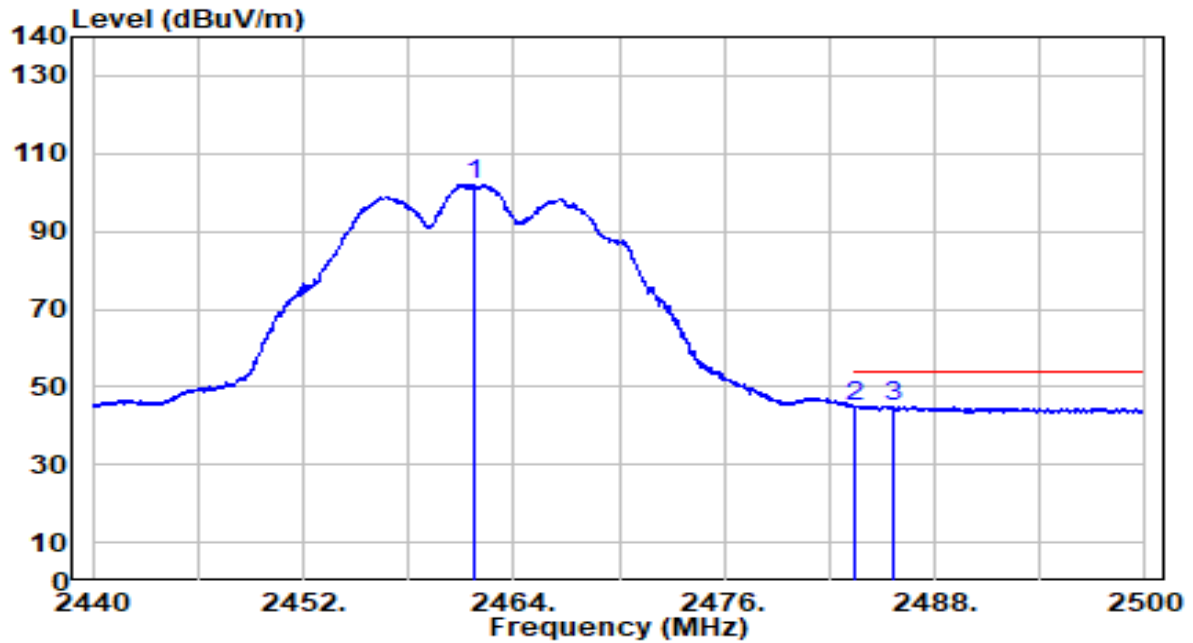


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.690	71.48	30.56	102.04	N/A	N/A	102	308	Average
2	2483.500	14.39	30.59	44.97	-9.03	54.00	102	308	Average
3	* 2485.600	14.45	30.59	45.04	-8.96	54.00	102	308	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

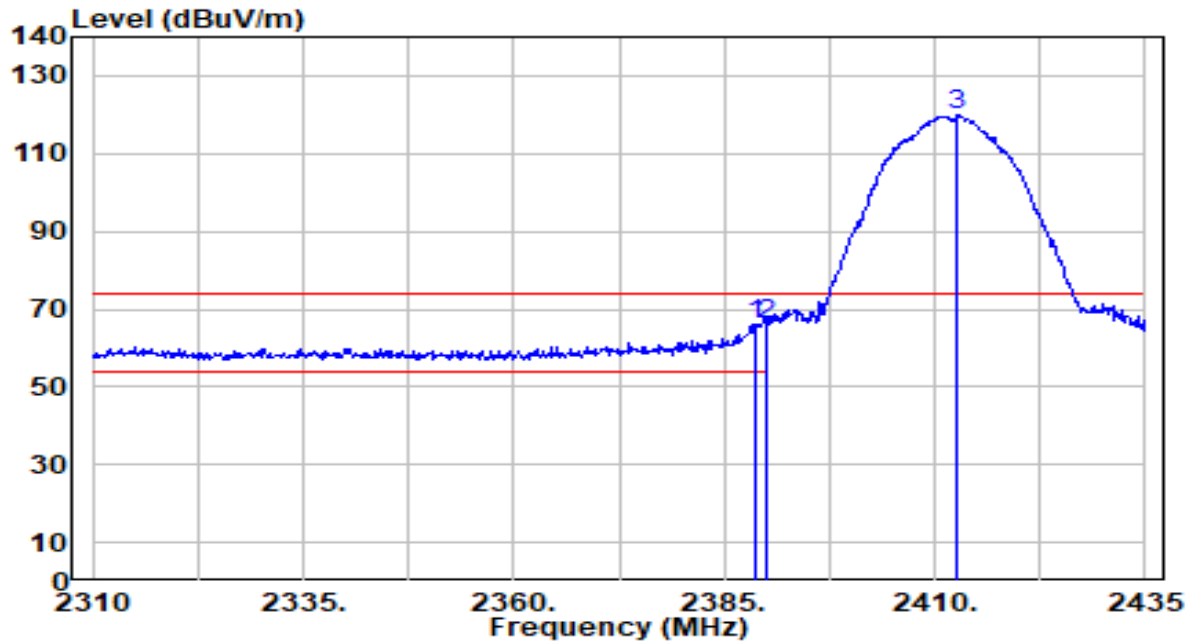


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.625	35.60	30.44	66.05	-7.95	74.00	104	161	Peak
2	*	2390.000	35.66	30.45	66.11	-7.89	74.00	104	161	Peak
3		2412.625	89.34	30.49	119.84	N/A	N/A	104	161	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

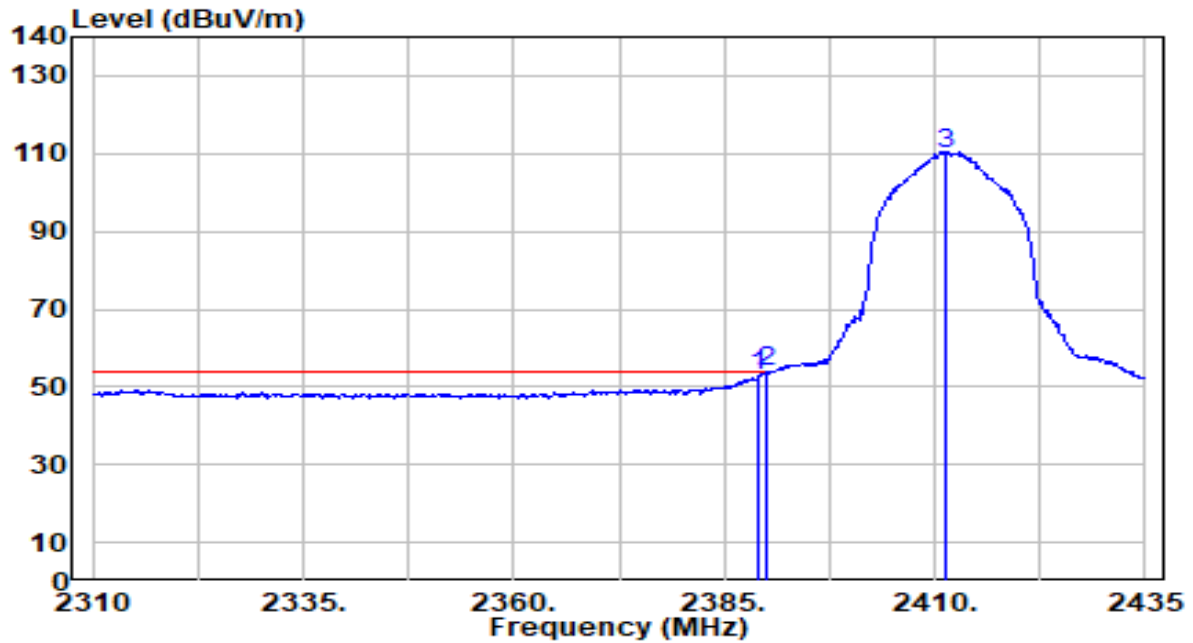


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	22.53	30.44	52.97	-1.03	54.00	104	161	Average
2	*	2390.000	23.27	30.45	53.72	-0.28	54.00	104	161	Average
3		2411.375	79.24	30.49	109.73	N/A	N/A	104	161	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

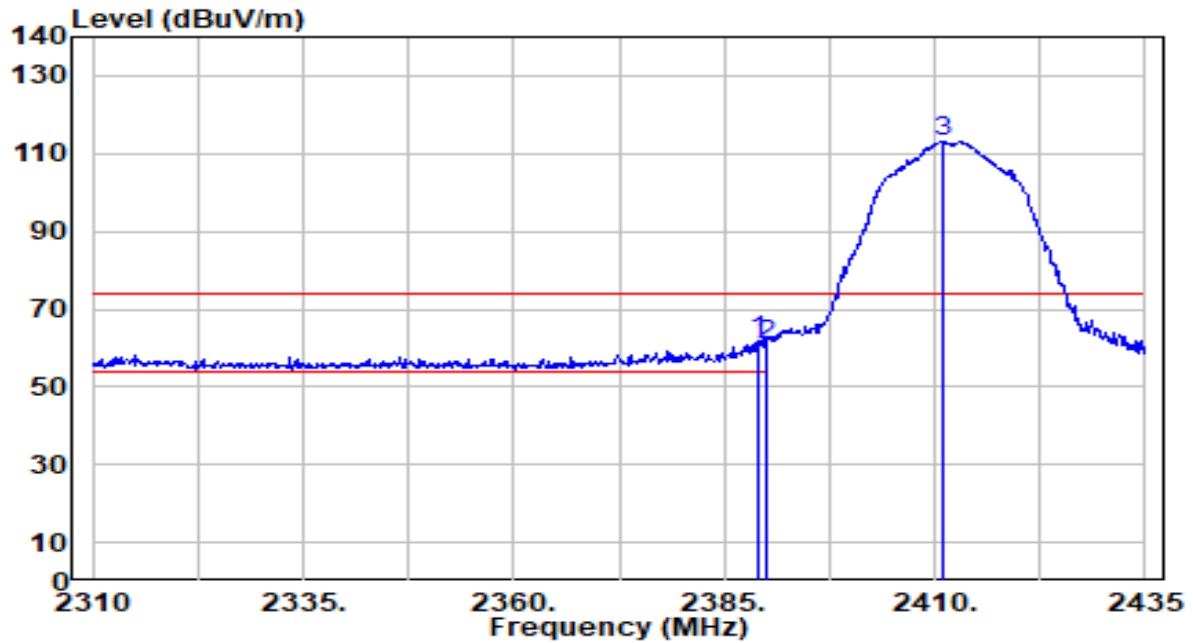


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.000	31.51	30.44	61.95	-12.05	74.00	109	30	Peak
2		2390.000	30.50	30.45	60.95	-13.05	74.00	109	30	Peak
3		2411.000	82.71	30.49	113.20	N/A	N/A	109	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

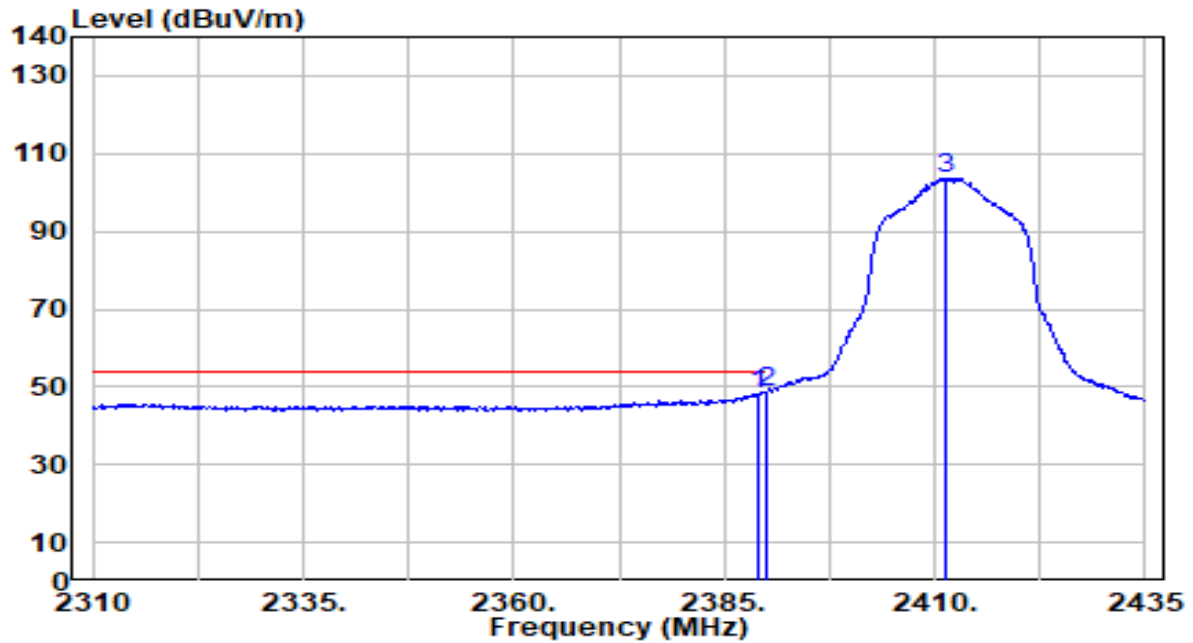


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	17.87	30.44	48.31	-5.69	54.00	109	30	Average
2	*	2390.000	18.07	30.45	48.52	-5.48	54.00	109	30	Average
3		2411.250	73.25	30.49	103.74	N/A	N/A	109	30	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

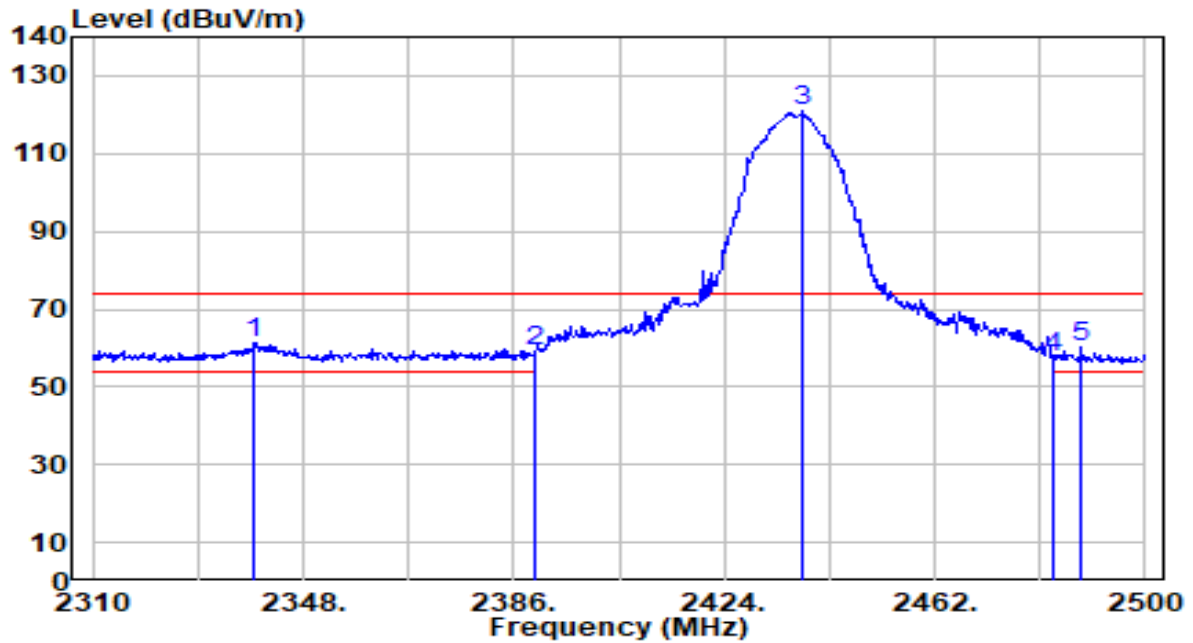


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2339.260	30.90	30.30	61.20	-12.80	74.00	126	162	Peak
2		2390.000	28.88	30.45	59.32	-14.68	74.00	126	162	Peak
3		2438.060	90.21	30.53	120.73	N/A	N/A	126	162	Peak
4		2483.500	27.18	30.59	57.77	-16.23	74.00	126	162	Peak
5		2488.600	29.71	30.59	60.30	-13.70	74.00	126	162	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

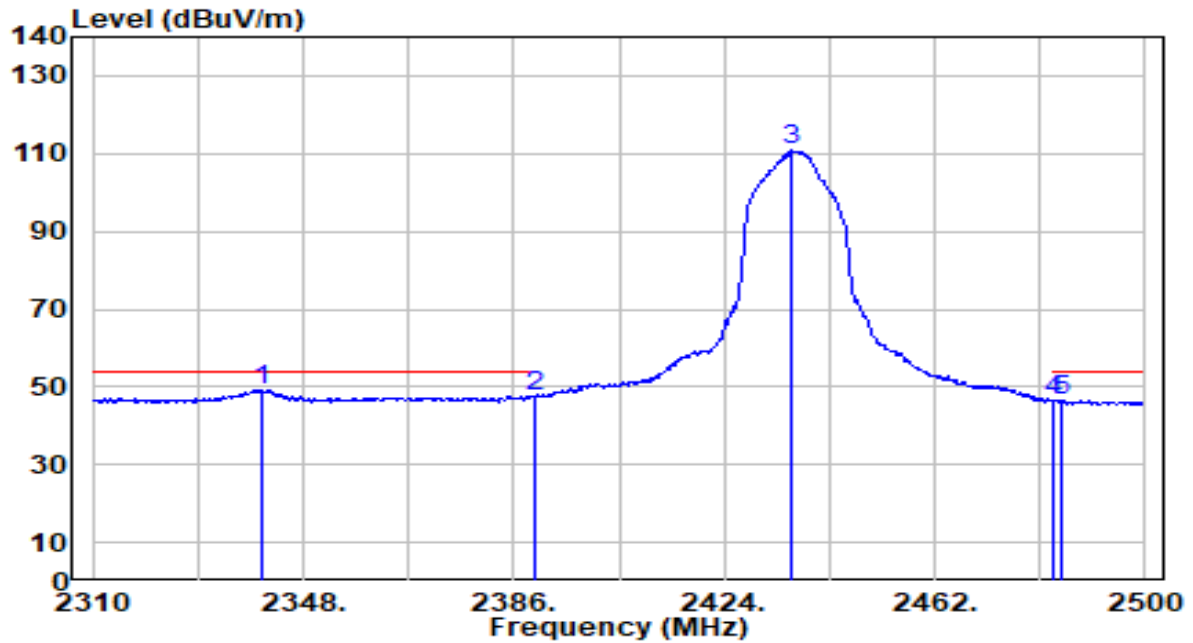


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.400	18.87	30.31	49.18	-4.82	54.00	126	162	Average
2		2390.000	16.98	30.45	47.43	-6.57	54.00	126	162	Average
3		2436.160	80.20	30.52	110.73	N/A	N/A	126	162	Average
4		2483.500	15.65	30.59	46.23	-7.77	54.00	126	162	Average
5		2484.990	15.82	30.59	46.41	-7.59	54.00	126	162	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

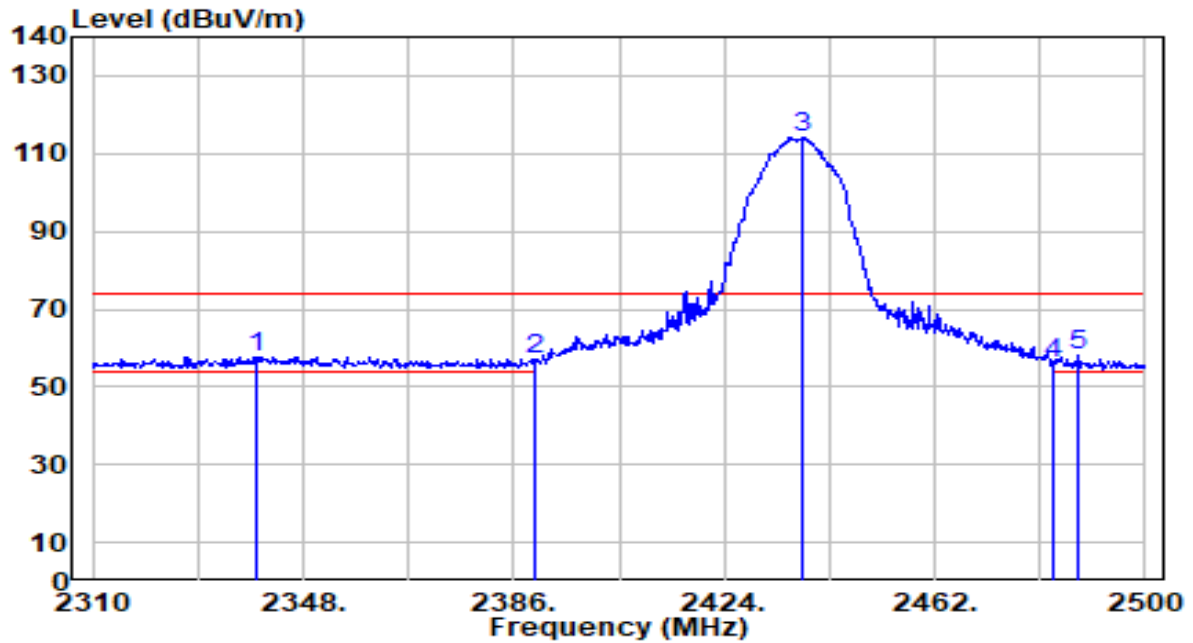


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2339.450	27.52	30.30	57.83	-16.17	74.00	102	36	Peak
2	2390.000	26.69	30.45	57.13	-16.87	74.00	102	36	Peak
3	2438.250	83.68	30.53	114.21	N/A	N/A	102	36	Peak
4	2483.500	25.62	30.59	56.20	-17.80	74.00	102	36	Peak
5	* 2487.840	27.62	30.59	58.21	-15.79	74.00	102	36	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

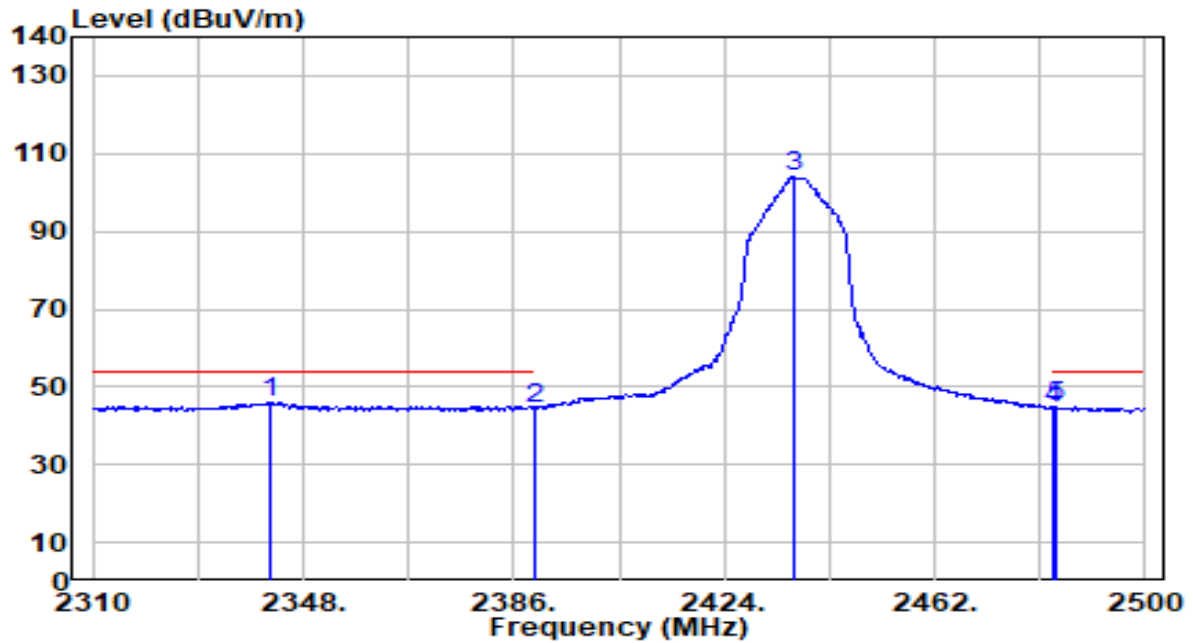


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2341.920	15.66	30.31	45.98	-8.02	54.00	102	36	Average
2		2390.000	14.07	30.45	44.52	-9.48	54.00	102	36	Average
3		2436.540	73.41	30.52	103.93	N/A	N/A	102	36	Average
4		2483.500	13.85	30.59	44.43	-9.57	54.00	102	36	Average
5		2484.040	14.28	30.59	44.86	-9.14	54.00	102	36	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

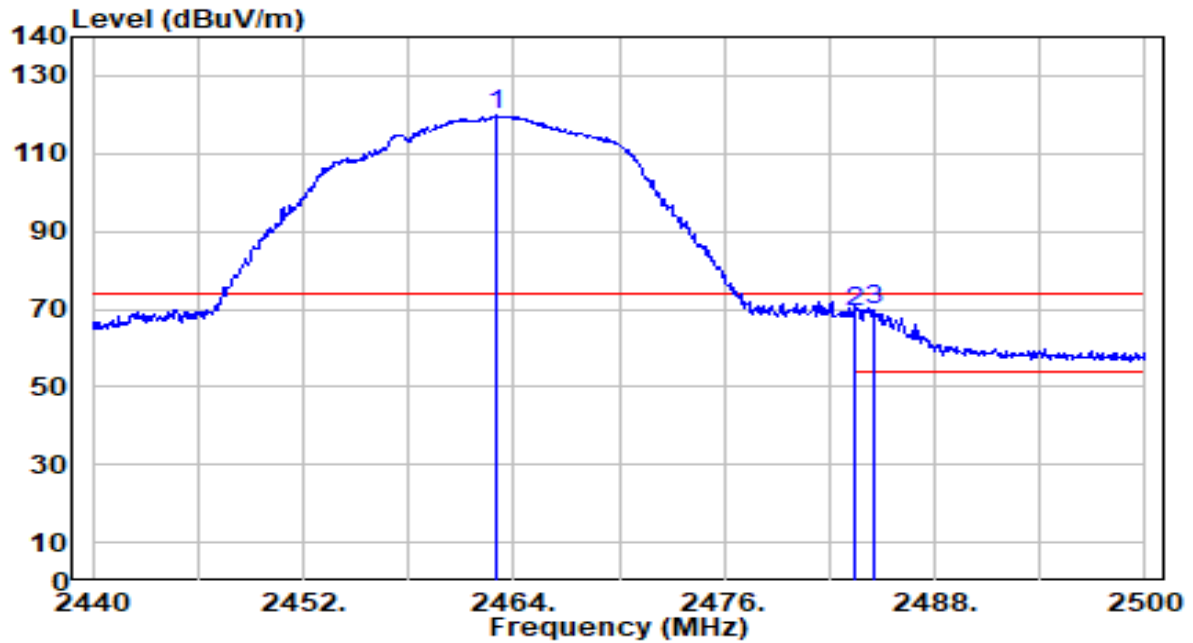


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.040	89.16	30.56	119.72	N/A	N/A	130	218	Peak
2	2483.500	38.46	30.59	69.05	-4.95	74.00	130	218	Peak
3	* 2484.520	39.25	30.59	69.84	-4.16	74.00	130	218	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

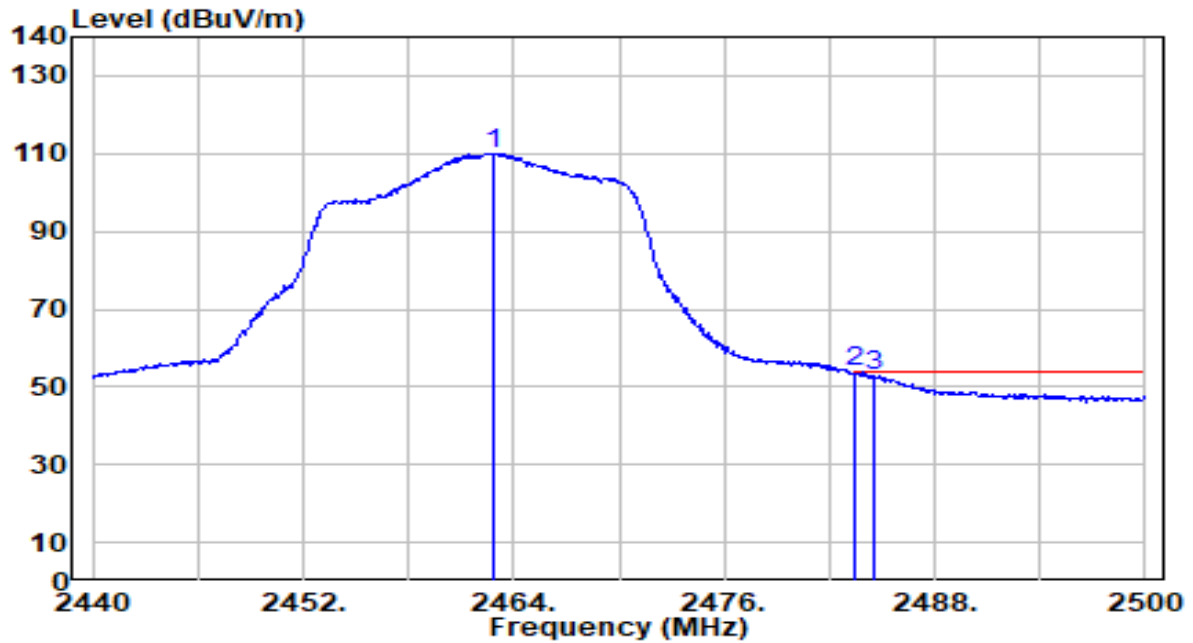


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.800	79.52	30.56	110.08	N/A	N/A	130	218	Average
2	*	2483.500	23.14	30.59	53.73	-0.27	54.00	130	218	Average
3		2484.580	22.18	30.59	52.77	-1.23	54.00	130	218	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

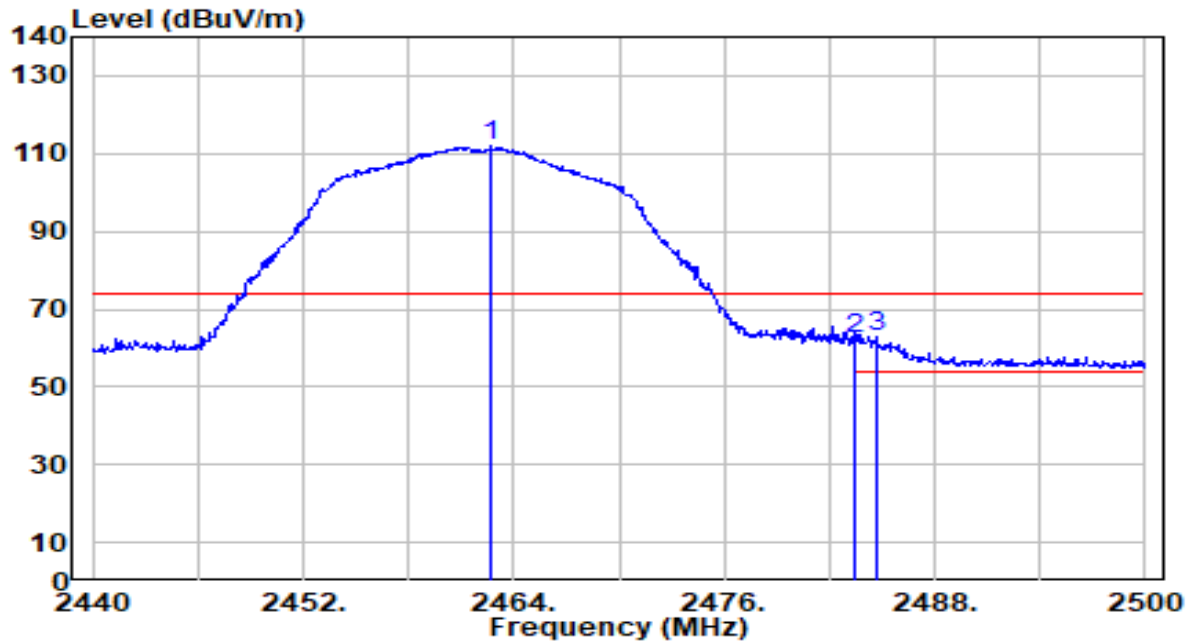


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.740	81.35	30.56	111.91	N/A	N/A	112	94	Peak
2	2483.500	31.63	30.59	62.22	-11.78	74.00	112	94	Peak
3	* 2484.640	32.13	30.59	62.72	-11.28	74.00	112	94	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-20MHz_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

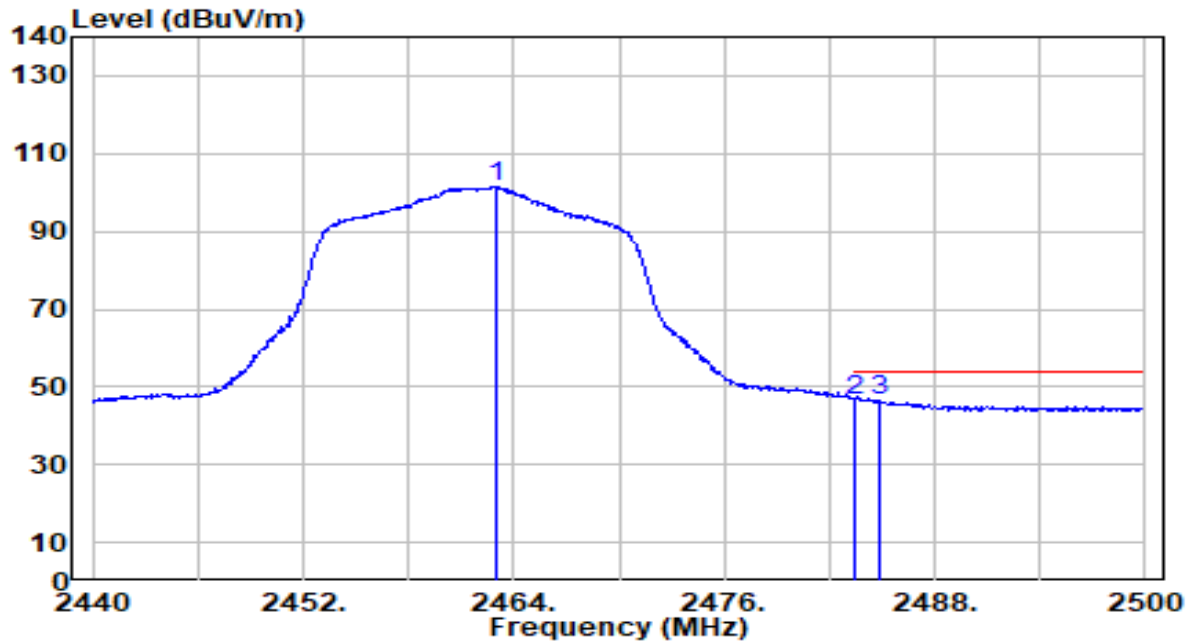


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.040	70.93	30.56	101.49	N/A	N/A	112	94	Average
2	*	2483.500	16.13	30.59	46.72	-7.28	54.00	112	94	Average
3		2484.820	15.87	30.59	46.46	-7.54	54.00	112	94	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-40MHz_TX_CH 3 ANT 0+1	Test Voltage	AC 120V/60Hz

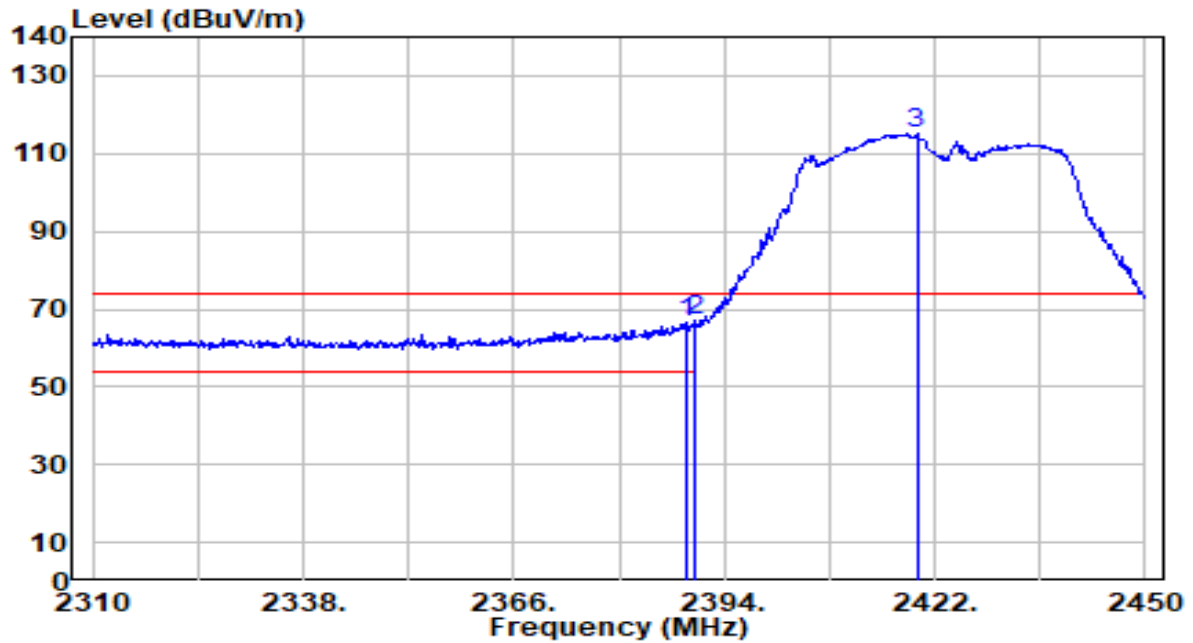


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.820	35.93	30.44	66.38	-7.62	74.00	116	208	Peak
2	*	2390.000	36.73	30.45	67.18	-6.82	74.00	116	208	Peak
3		2419.620	84.41	30.50	114.92	N/A	N/A	116	208	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-40MHz_TX_CH 3 ANT 0+1	Test Voltage	AC 120V/60Hz

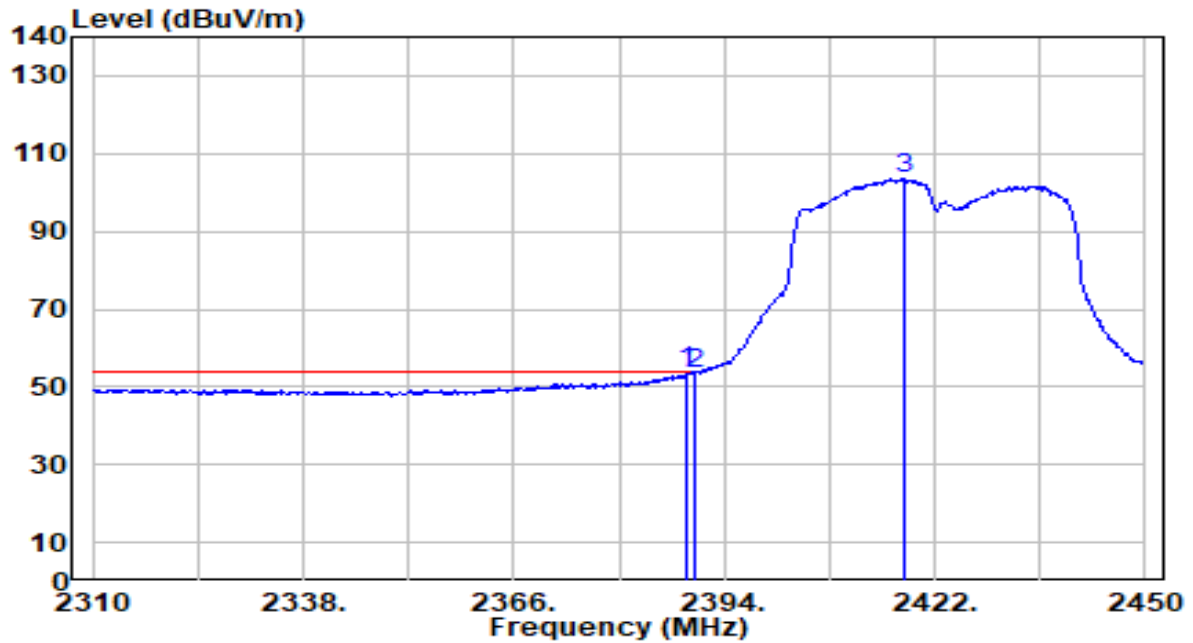


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.960	23.27	30.44	53.71	-0.29	54.00	116	208	Average
2		2390.000	22.85	30.45	53.30	-0.70	54.00	116	208	Average
3		2418.080	72.88	30.50	103.38	N/A	N/A	116	208	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-40MHz_TX_CH 3 ANT 0+1	Test Voltage	AC 120V/60Hz

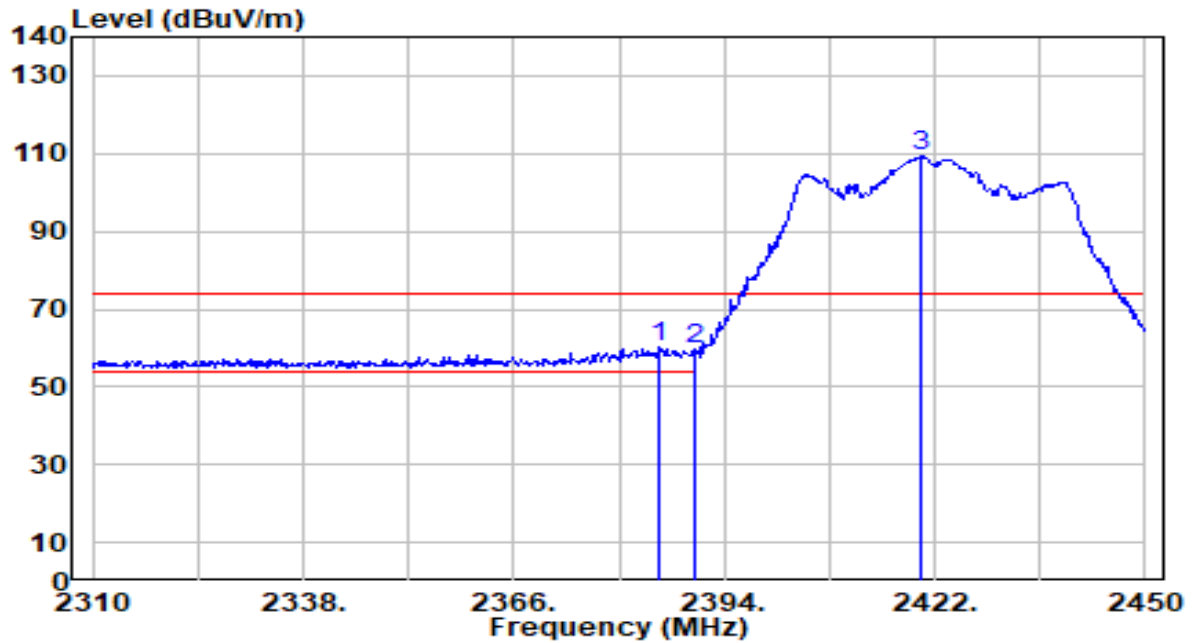


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.180	29.87	30.43	60.30	-13.70	74.00	113	27	Peak
2		2390.000	29.33	30.45	59.78	-14.22	74.00	113	27	Peak
3		2420.180	78.78	30.50	109.28	N/A	N/A	113	27	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-40MHz_TX_CH 3 ANT 0+1	Test Voltage	AC 120V/60Hz

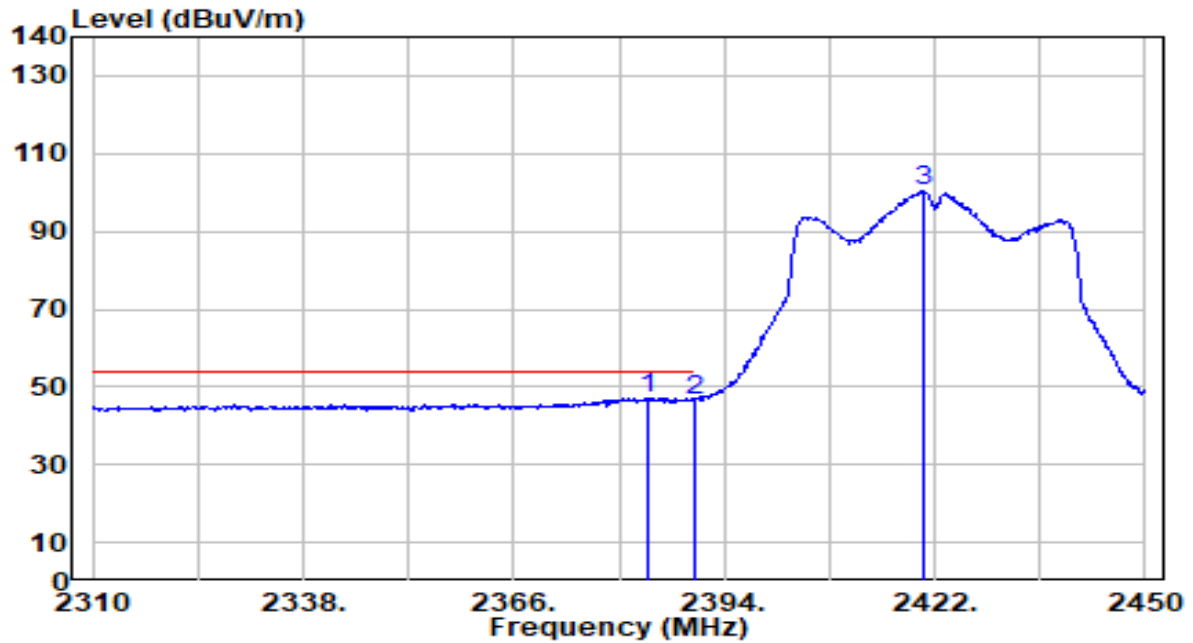


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.920	16.61	30.43	47.04	-6.96	54.00	113	27	Average
2		2390.000	16.11	30.45	46.56	-7.44	54.00	113	27	Average
3		2420.600	69.91	30.50	100.42	N/A	N/A	113	27	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-40MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

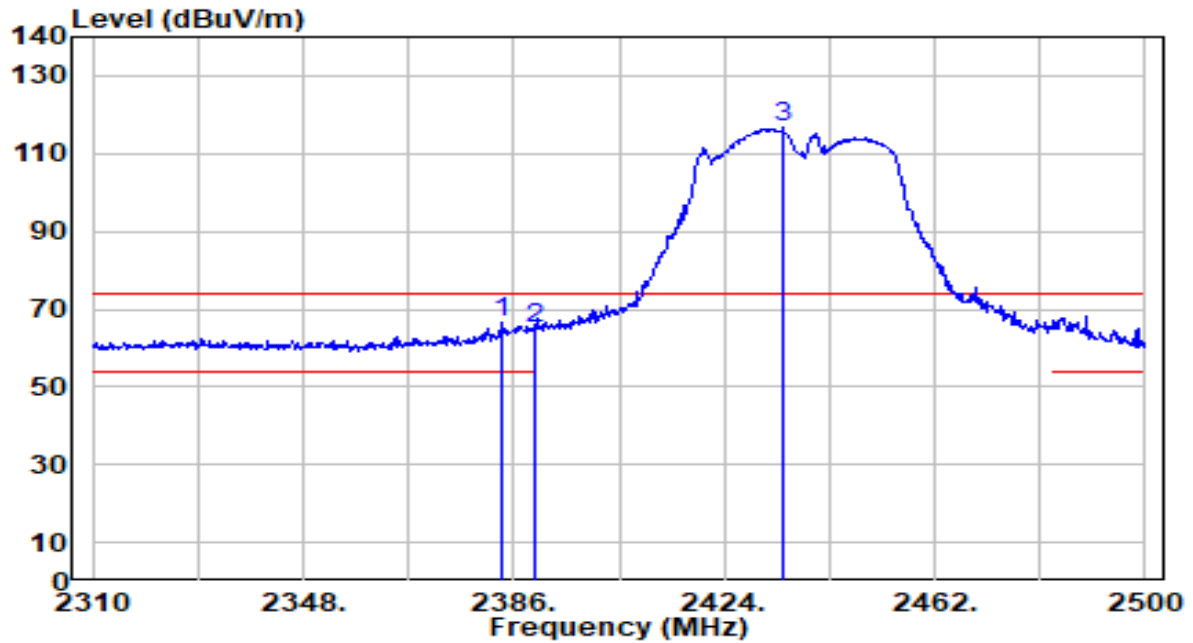


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.910	36.12	30.43	66.55	-7.45	74.00	106	209	Peak
2		2390.000	34.63	30.45	65.07	-8.93	74.00	106	209	Peak
3		2434.640	86.49	30.52	117.01	N/A	N/A	106	209	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-40MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

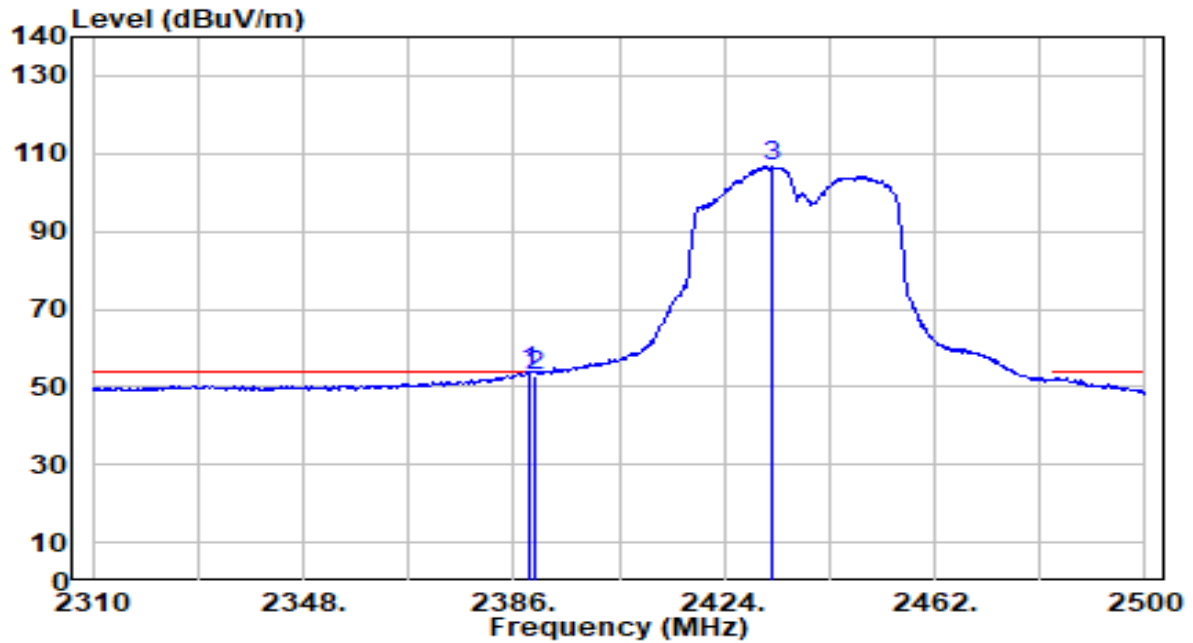


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.660	23.26	30.44	53.71	-0.29	54.00	106	209	Average
2		2390.000	22.61	30.45	53.05	-0.95	54.00	106	209	Average
3		2432.740	76.28	30.52	106.80	N/A	N/A	106	209	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-40MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

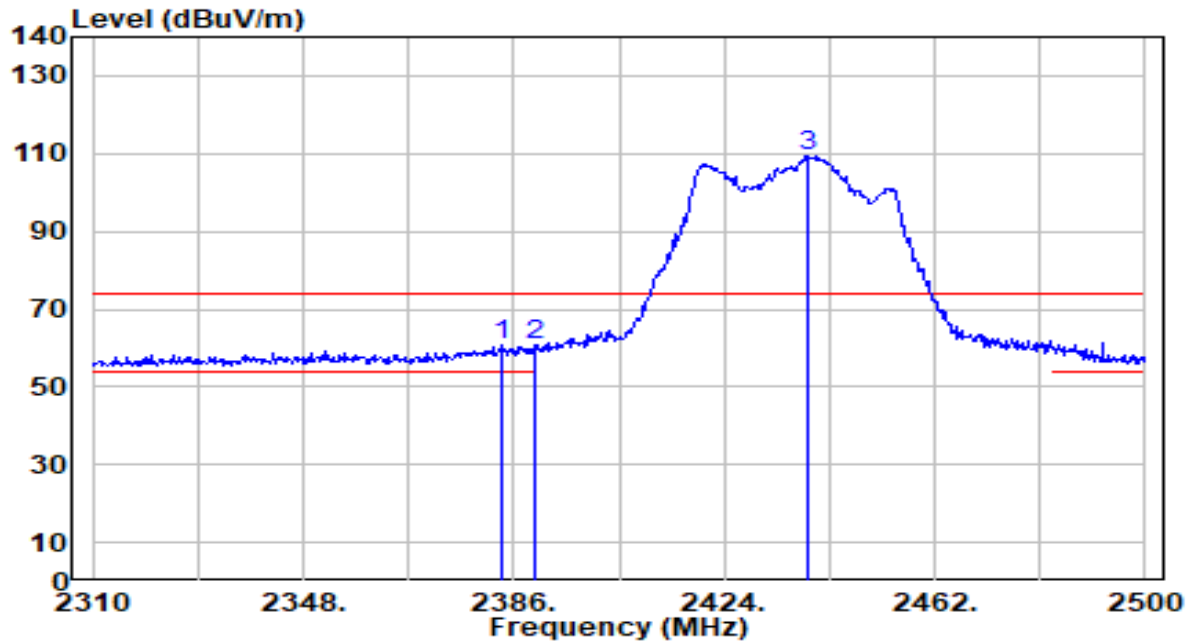


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.720	30.43	30.43	60.86	-13.14	74.00	109	132	Peak
2		2390.000	30.21	30.45	60.66	-13.34	74.00	109	132	Peak
3		2439.200	78.67	30.53	109.20	N/A	N/A	109	132	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-40MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

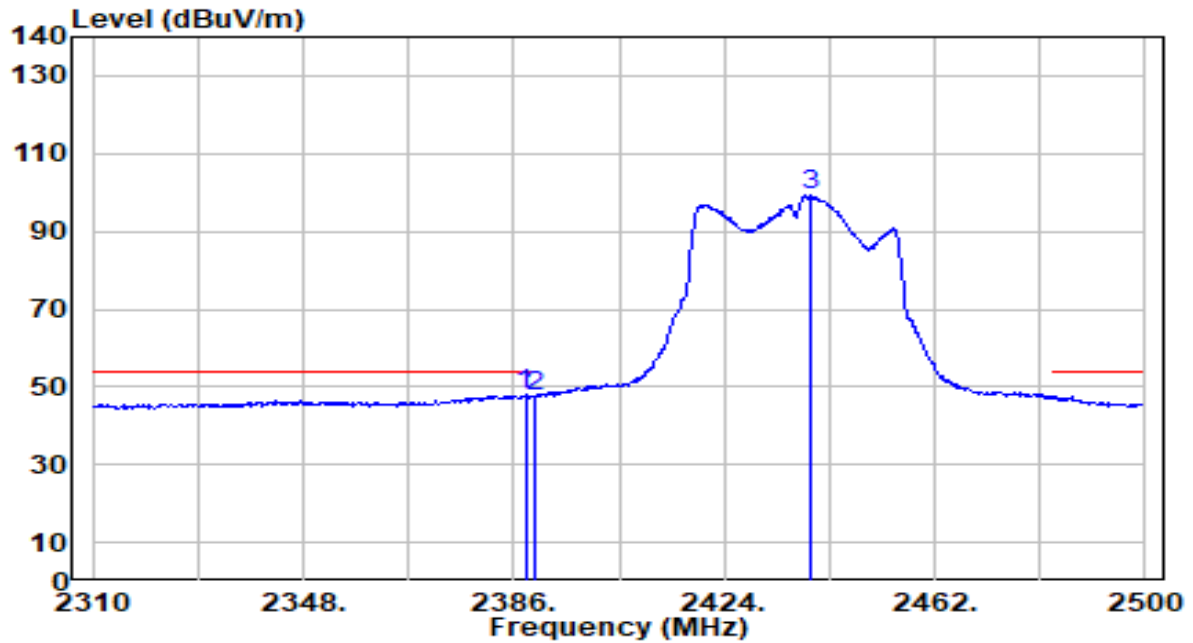


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.090	17.38	30.44	47.82	-6.18	54.00	109	132	Average
2		2390.000	16.90	30.45	47.35	-6.65	54.00	109	132	Average
3		2439.580	68.60	30.53	99.13	N/A	N/A	109	132	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-40MHz_TX_CH 9 ANT 0+1	Test Voltage	AC 120V/60Hz

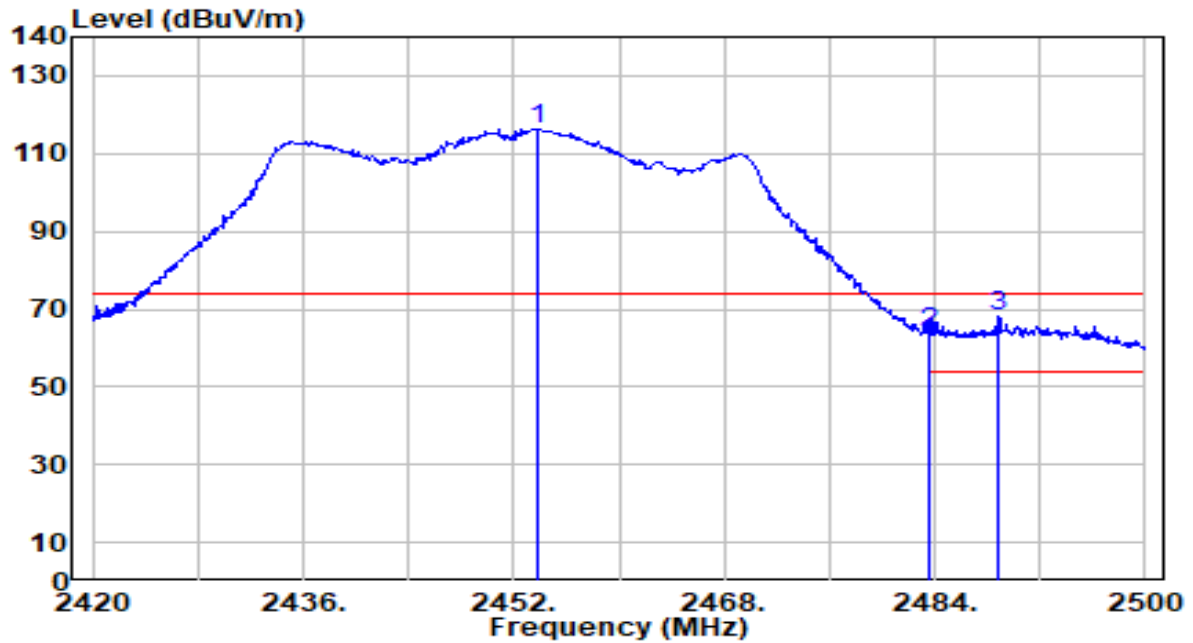


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.840	85.74	30.55	116.29	N/A	N/A	106	233	Peak
2	2483.500	33.45	30.59	64.04	-9.96	74.00	106	233	Peak
3	* 2488.800	37.77	30.59	68.37	-5.63	74.00	106	233	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11n-40MHz_TX_CH 9 ANT 0+1	Test Voltage	AC 120V/60Hz

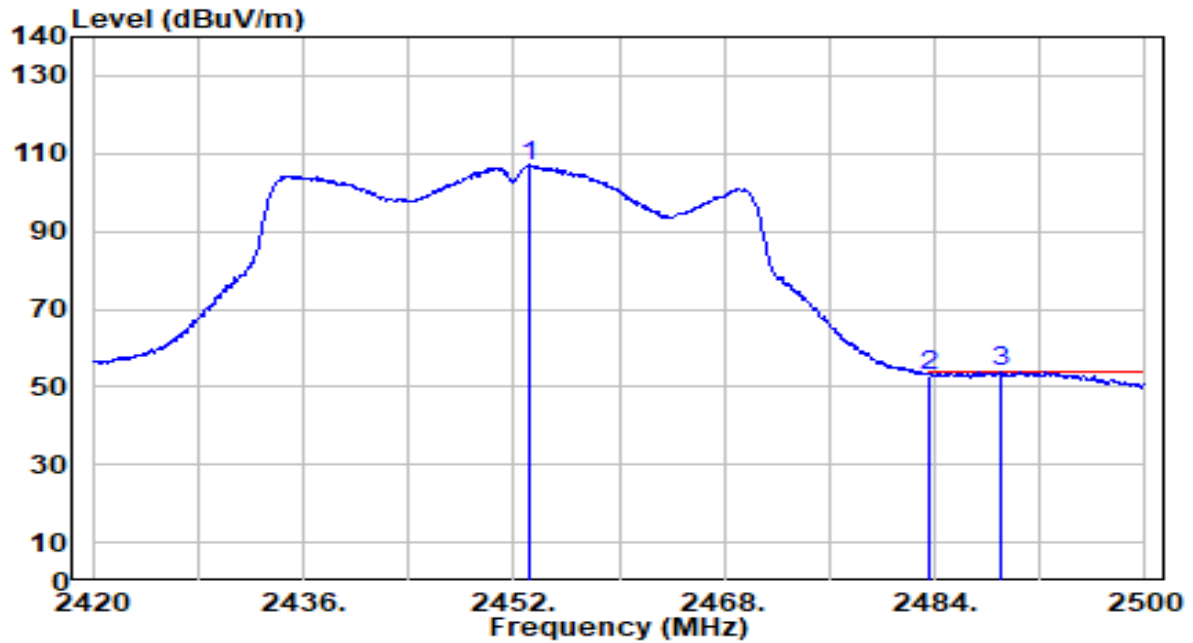


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.200	76.22	30.55	106.76	N/A	N/A	106	233	Average
2	2483.500	22.45	30.59	53.03	-0.97	54.00	106	233	Average
3	* 2489.120	23.18	30.60	53.78	-0.22	54.00	106	233	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-40MHz_TX_CH 9 ANT 0+1	Test Voltage	AC 120V/60Hz

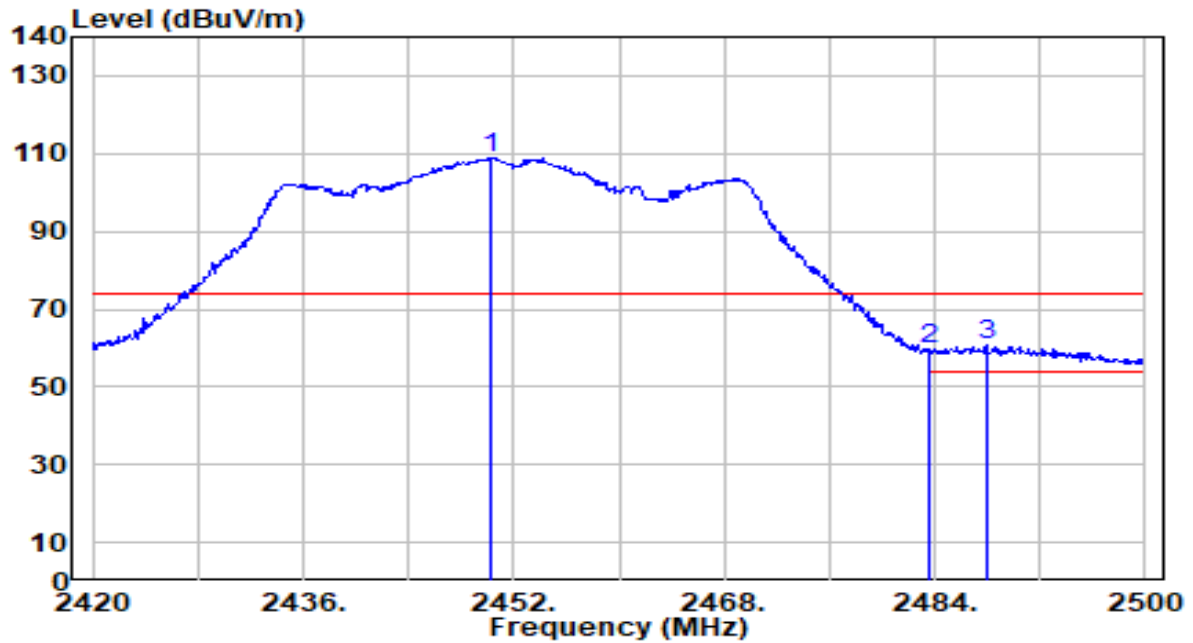


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.240	78.28	30.54	108.82	N/A	N/A	139	92	Peak
2	2483.500	29.06	30.59	59.64	-14.36	74.00	139	92	Peak
3	* 2488.000	30.38	30.59	60.97	-13.03	74.00	139	92	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11n-40MHz_TX_CH 9 ANT 0+1	Test Voltage	AC 120V/60Hz

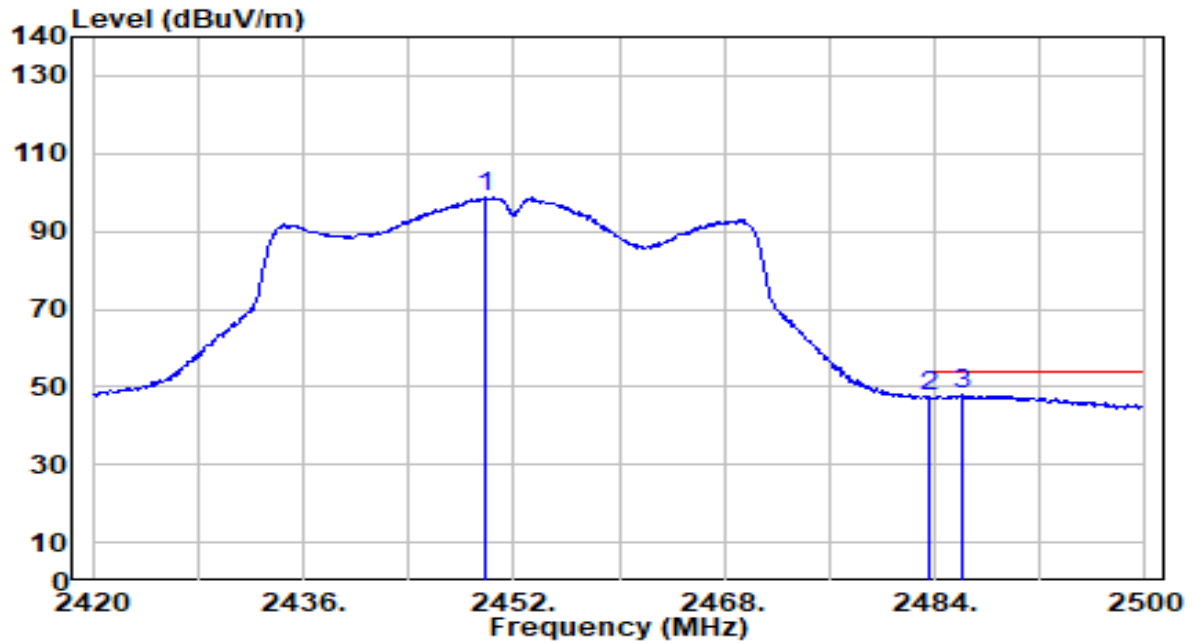


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.920	68.10	30.54	98.64	N/A	N/A	139	92	Average
2	2483.500	16.94	30.59	47.52	-6.48	54.00	139	92	Average
3	* 2486.080	17.27	30.59	47.86	-6.14	54.00	139	92	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

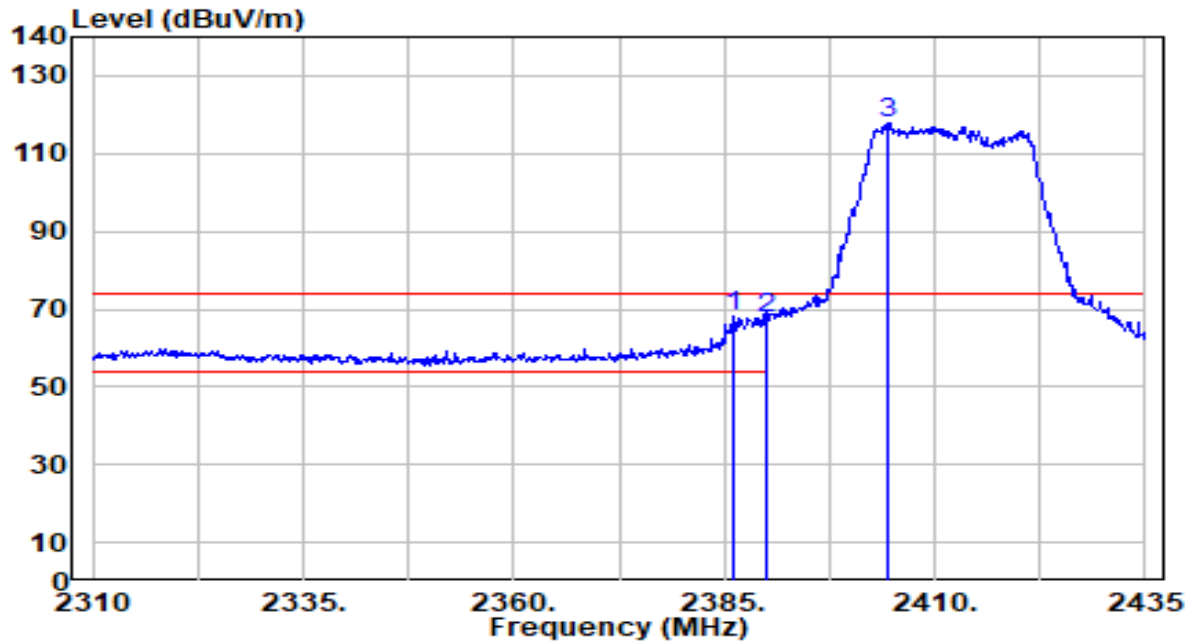


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.000	37.46	30.44	67.90	-6.10	74.00	109	229	Peak
2		2390.000	37.18	30.45	67.63	-6.37	74.00	109	229	Peak
3		2404.375	87.16	30.48	117.64	N/A	N/A	109	229	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

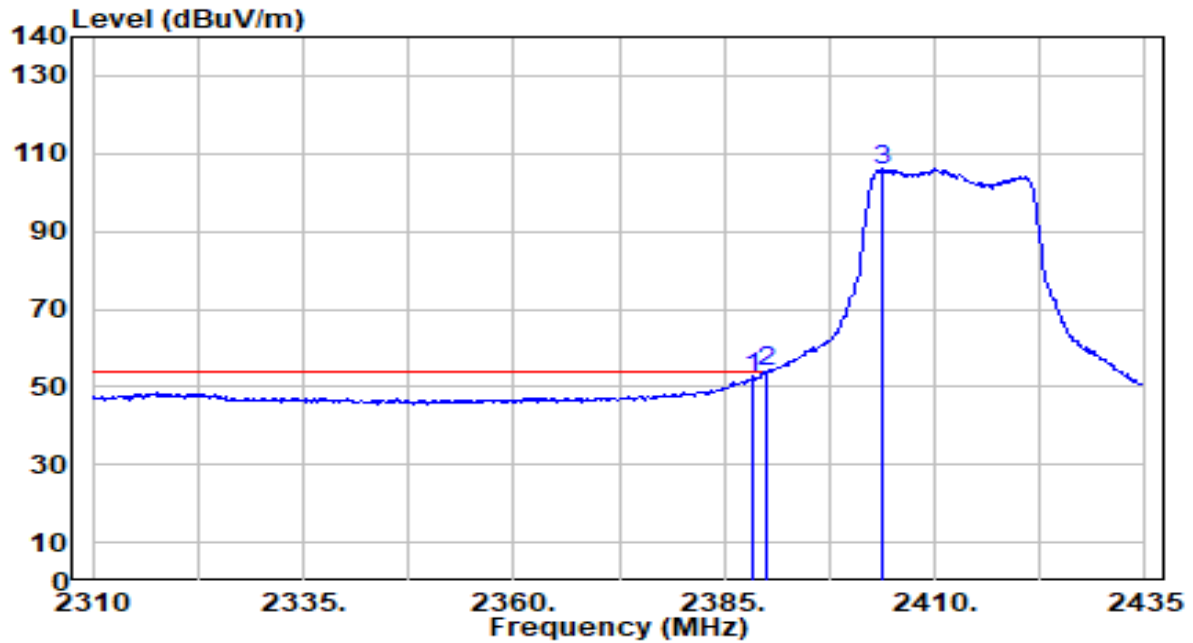


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.375	22.06	30.44	52.50	-1.50	54.00	109	229	Average
2	*	2390.000	23.27	30.45	53.72	-0.28	54.00	109	229	Average
3		2403.875	75.19	30.48	105.67	N/A	N/A	109	229	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

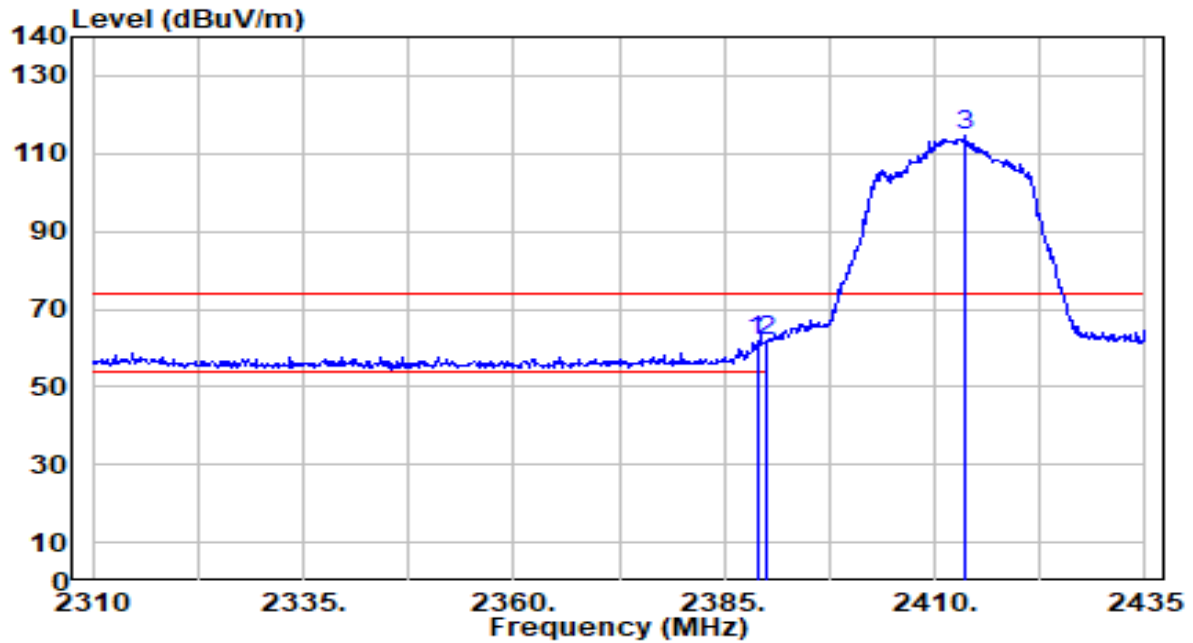


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.875	31.34	30.44	61.79	-12.21	74.00	107	42	Peak
2		2390.000	31.18	30.45	61.63	-12.37	74.00	107	42	Peak
3		2413.750	83.96	30.49	114.45	N/A	N/A	107	42	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

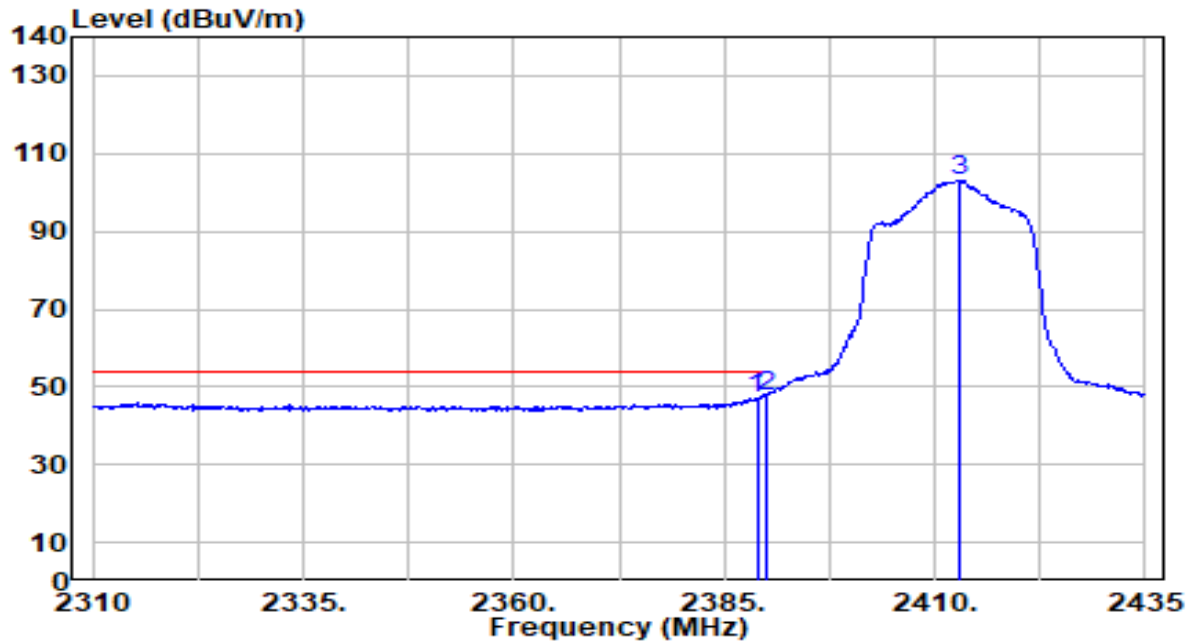


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.875	16.70	30.44	47.15	-6.85	54.00	107	42	Average
2	*	2390.000	17.18	30.45	47.63	-6.37	54.00	107	42	Average
3		2413.000	72.53	30.49	103.02	N/A	N/A	107	42	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

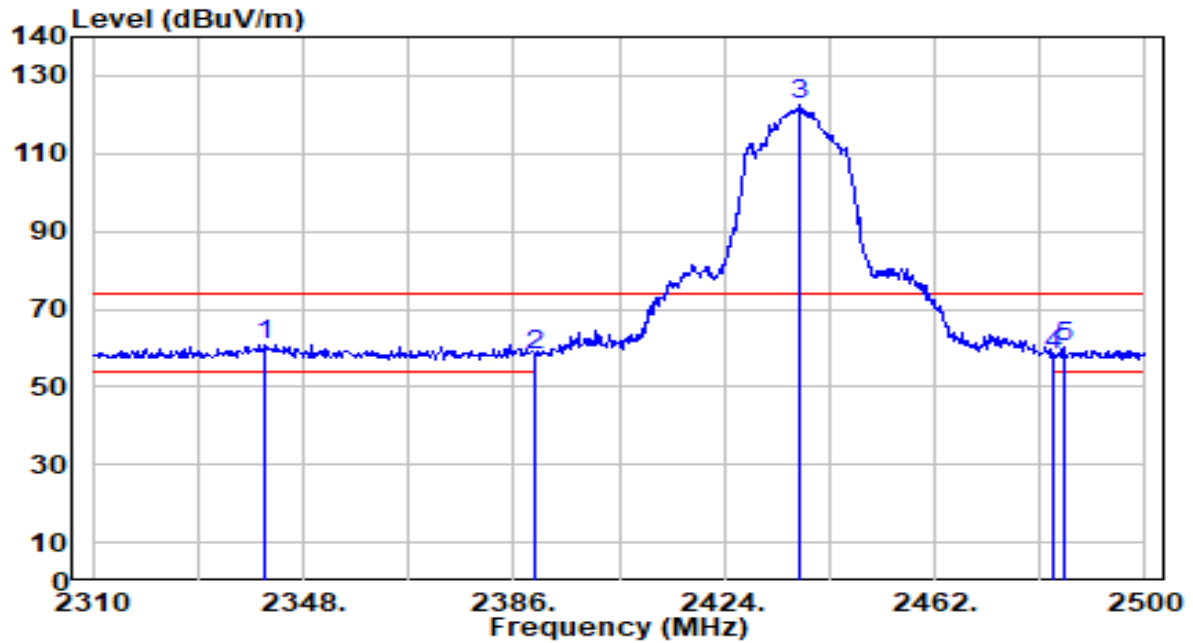


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2341.160	30.40	30.31	60.71	-13.29	74.00	107	153	Peak
2		2390.000	27.73	30.45	58.18	-15.82	74.00	107	153	Peak
3		2437.490	91.99	30.53	122.52	N/A	N/A	107	153	Peak
4		2483.500	27.43	30.59	58.01	-15.99	74.00	107	153	Peak
5		2485.180	29.43	30.59	60.02	-13.98	74.00	107	153	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

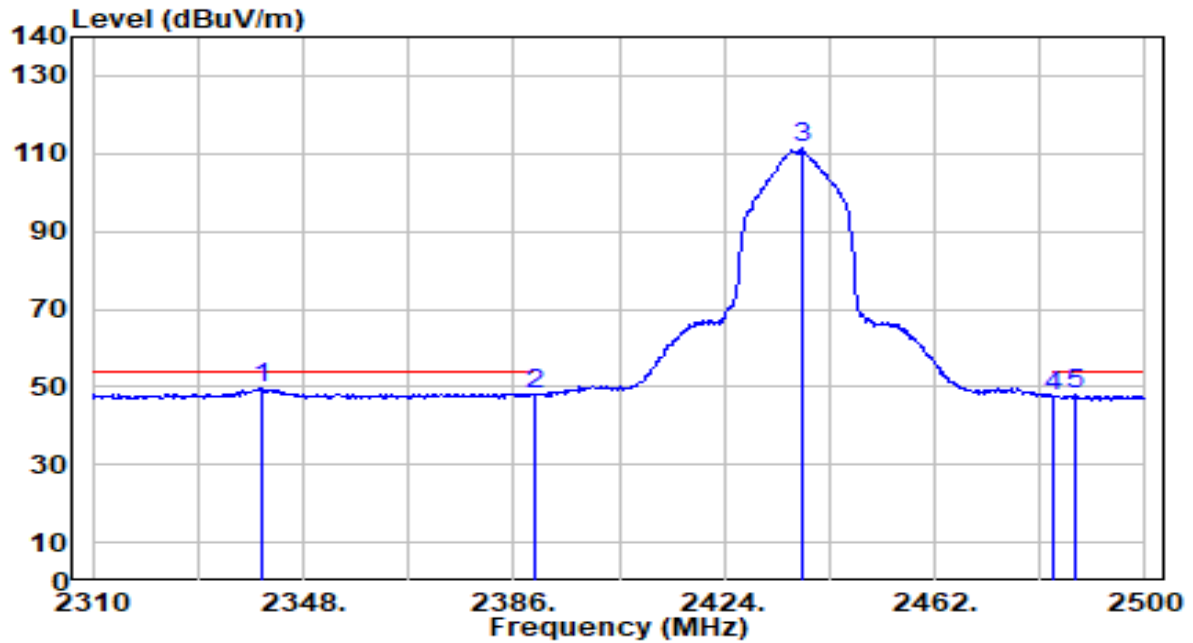


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.590	19.23	30.31	49.54	-4.46	54.00	107	153	Average
2		2390.000	17.70	30.45	48.15	-5.85	54.00	107	153	Average
3		2438.250	80.73	30.53	111.26	N/A	N/A	107	153	Average
4		2483.500	17.10	30.59	47.69	-6.31	54.00	107	153	Average
5		2487.460	17.26	30.59	47.85	-6.15	54.00	107	153	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

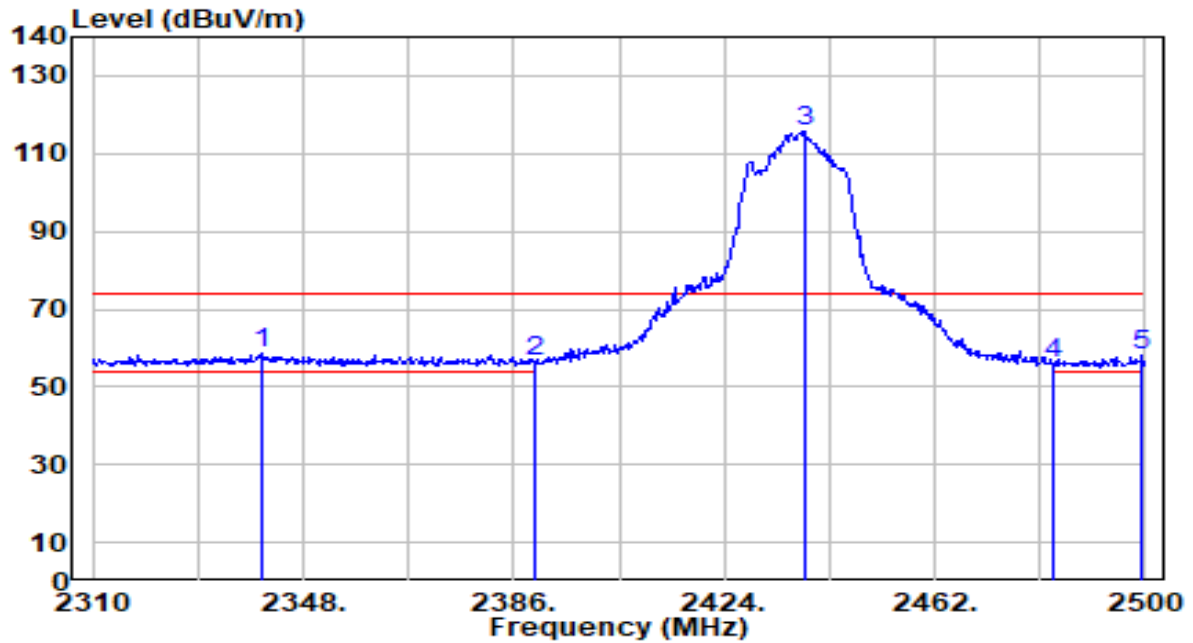


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.400	28.20	30.31	58.51	-15.49	74.00	105	42	Peak
2		2390.000	25.99	30.45	56.44	-17.56	74.00	105	42	Peak
3		2438.630	85.13	30.53	115.66	N/A	N/A	105	42	Peak
4		2483.500	25.38	30.59	55.97	-18.03	74.00	105	42	Peak
5		2499.430	27.54	30.61	58.15	-15.85	74.00	105	42	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

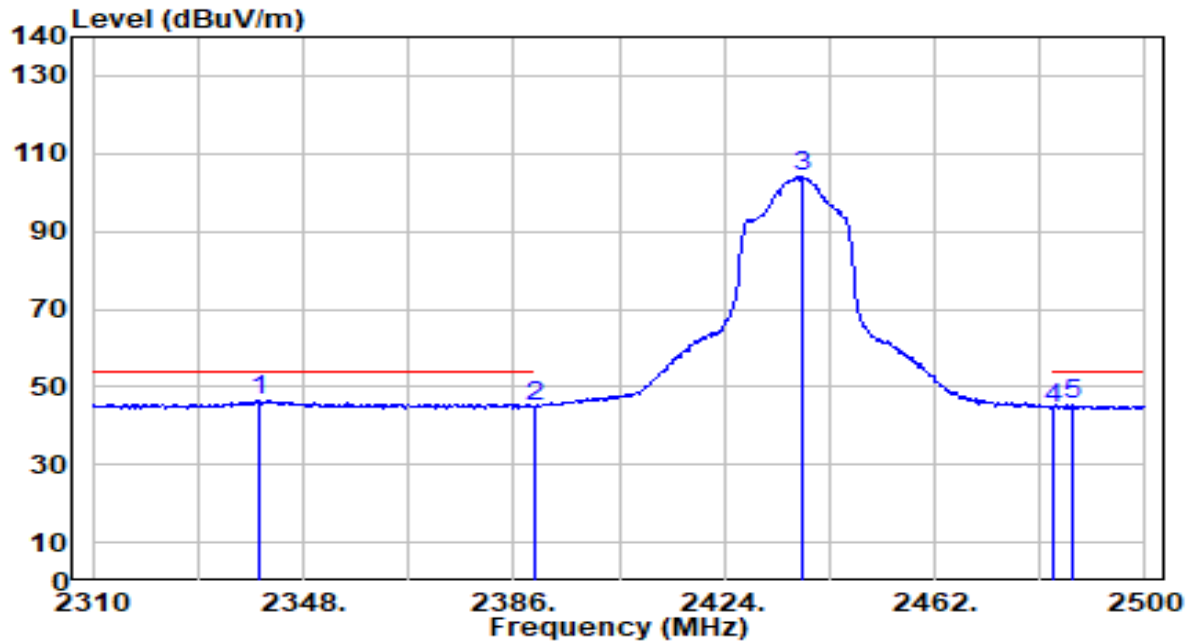


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.020	16.14	30.31	46.44	-7.56	54.00	105	42	Average
2		2390.000	14.40	30.45	44.85	-9.15	54.00	105	42	Average
3		2438.060	73.60	30.53	104.12	N/A	N/A	105	42	Average
4		2483.500	13.94	30.59	44.53	-9.47	54.00	105	42	Average
5		2487.080	14.70	30.59	45.29	-8.71	54.00	105	42	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 10 ANT 0+1	Test Voltage	AC 120V/60Hz

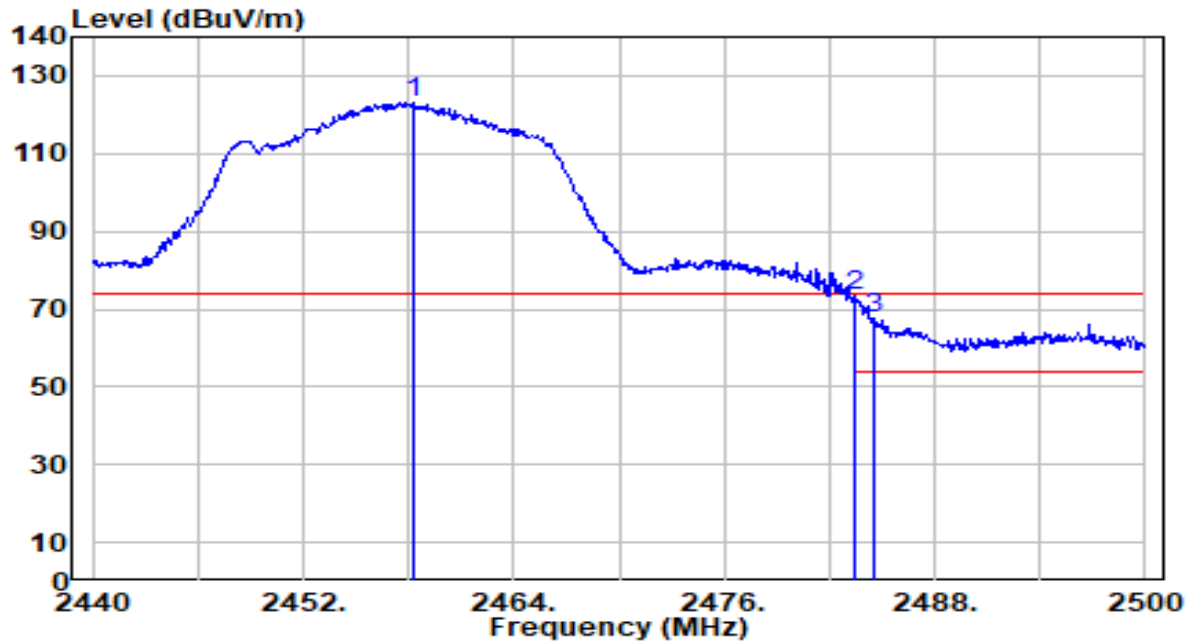


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2458.240	92.54	30.55	123.09	N/A	N/A	107	140	Peak
2	*	2483.500	42.64	30.59	73.23	-0.77	74.00	107	140	Peak
3		2484.520	37.23	30.59	67.82	-6.18	74.00	107	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 10 ANT 0+1	Test Voltage	AC 120V/60Hz

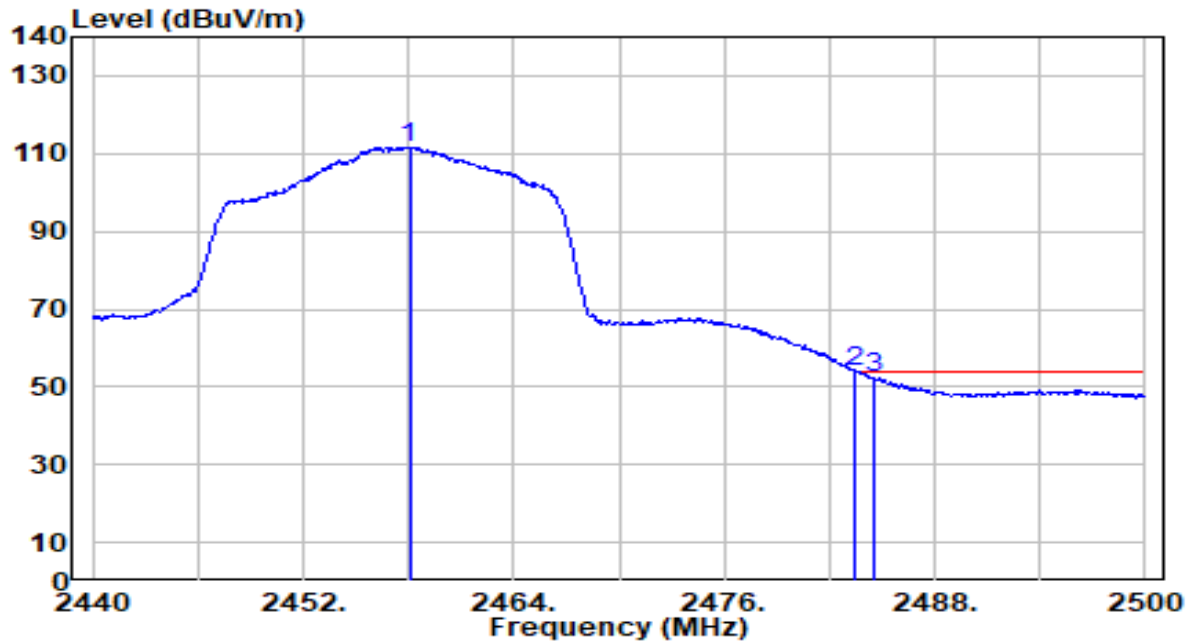


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2458.060	81.17	30.55	111.73	N/A	N/A	107	140	Average
2	*	2483.500	23.19	30.59	53.78	-0.22	54.00	107	140	Average
3		2484.580	21.71	30.59	52.30	-1.70	54.00	107	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 10 ANT 0+1	Test Voltage	AC 120V/60Hz

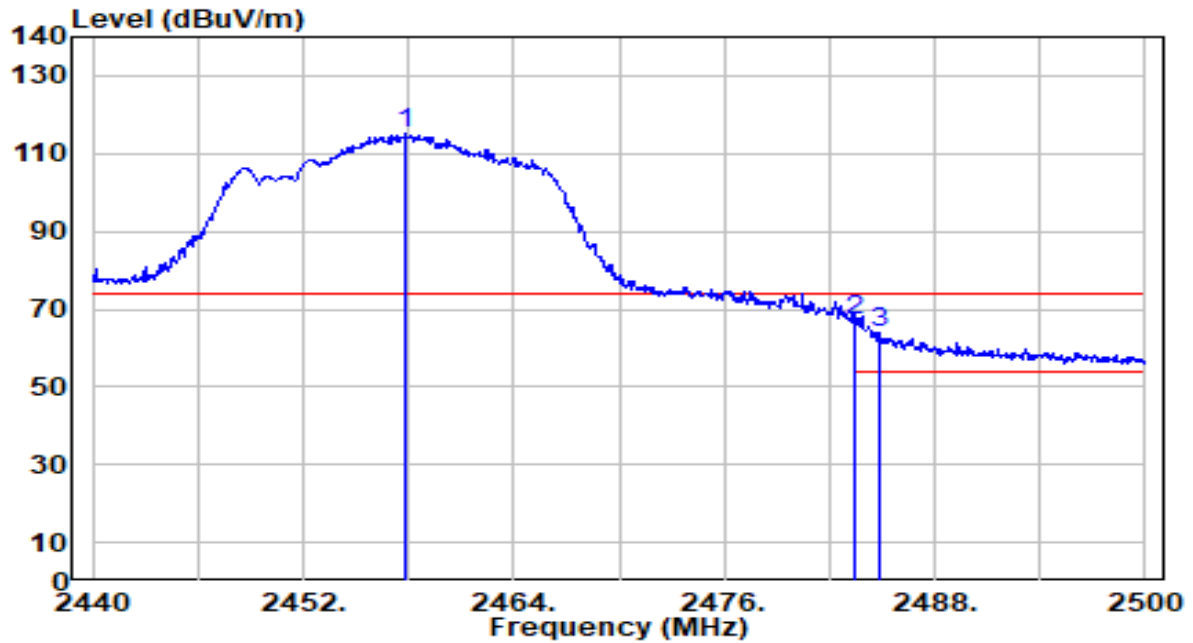


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2457.880	84.63	30.55	115.19	N/A	N/A	119	140	Peak
2	*	2483.500	36.32	30.59	66.91	-7.09	74.00	119	140	Peak
3		2484.880	33.43	30.59	64.02	-9.98	74.00	119	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 10 ANT 0+1	Test Voltage	AC 120V/60Hz

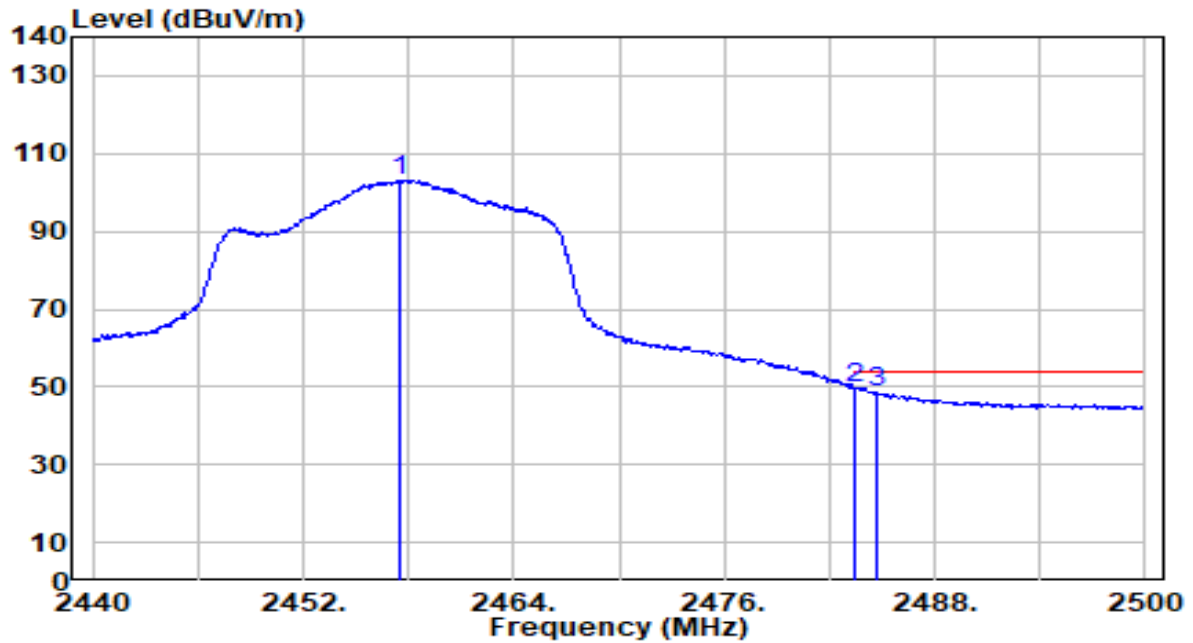


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2457.460	72.67	30.55	103.22	N/A	N/A	119	140	Average
2	*	2483.500	19.24	30.59	49.83	-4.17	54.00	119	140	Average
3		2484.640	17.88	30.59	48.47	-5.53	54.00	119	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

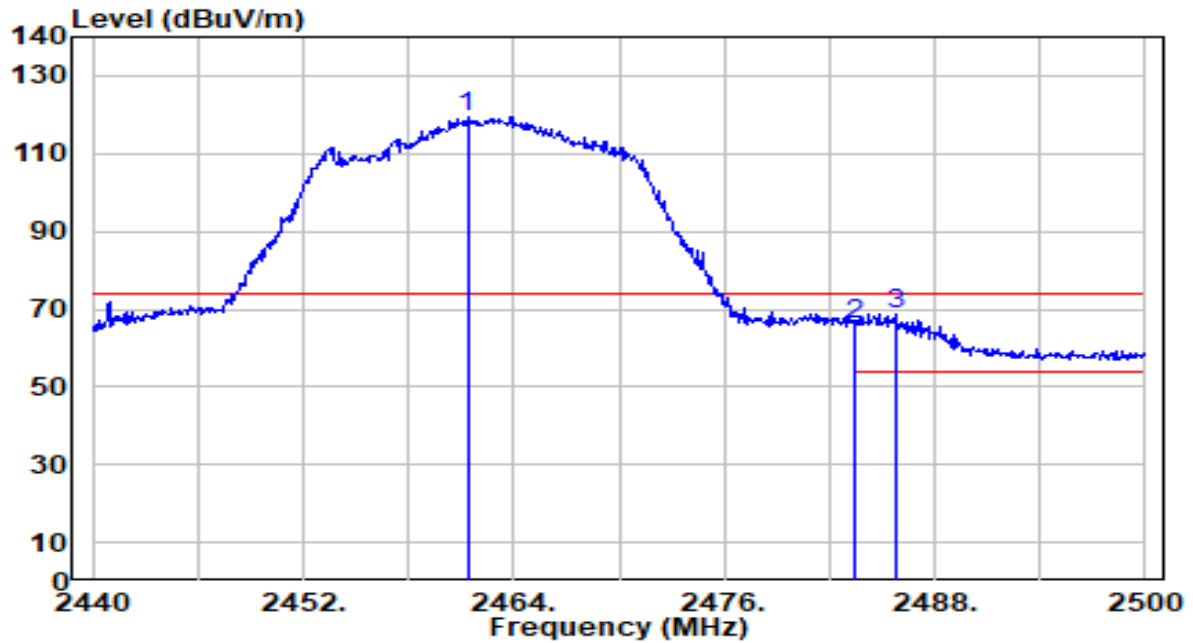


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.360	88.92	30.56	119.48	N/A	N/A	118	217	Peak
2	2483.500	35.53	30.59	66.11	-7.89	74.00	118	217	Peak
3	* 2485.780	37.98	30.59	68.57	-5.43	74.00	118	217	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

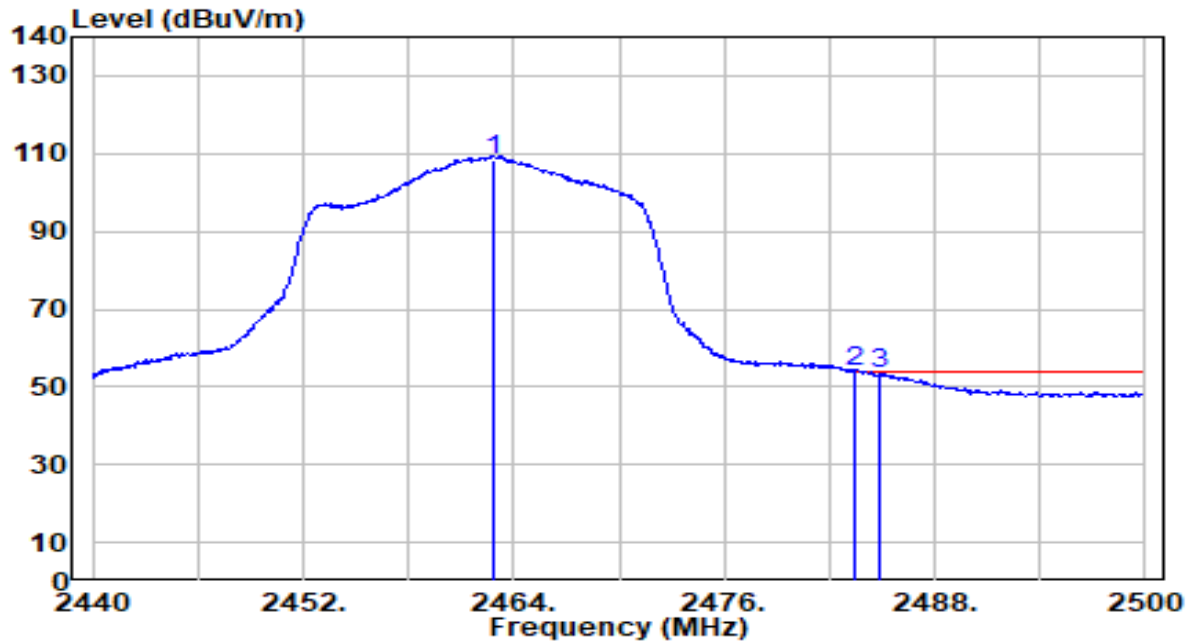


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.860	77.93	30.56	108.49	N/A	N/A	118	217	Average
2	*	2483.500	23.20	30.59	53.79	-0.21	54.00	118	217	Average
3		2484.820	22.77	30.59	53.36	-0.64	54.00	118	217	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

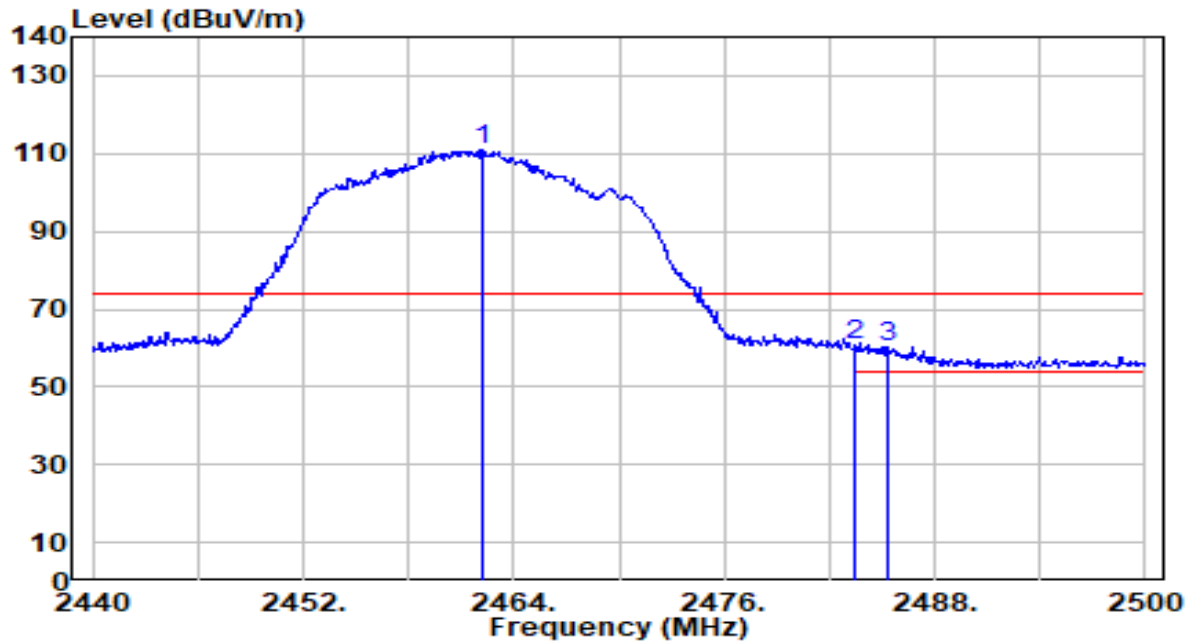


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.260	80.60	30.56	111.16	N/A	N/A	100	94	Peak
2	*	2483.500	30.22	30.59	60.81	-13.19	74.00	100	94	Peak
3		2485.360	29.85	30.59	60.44	-13.56	74.00	100	94	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

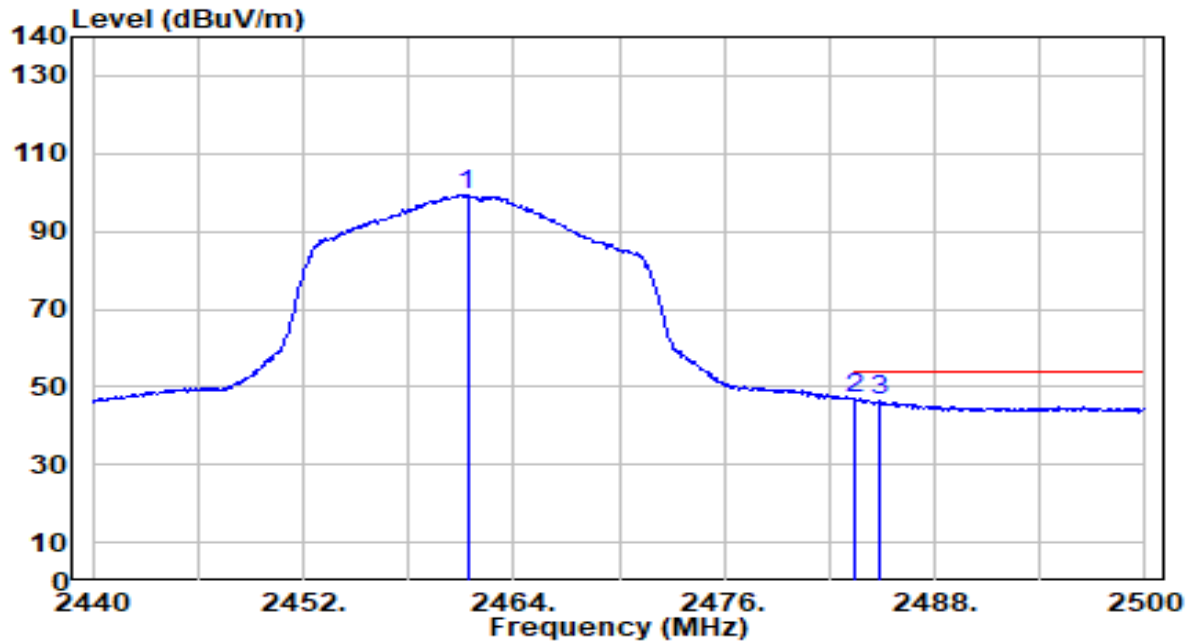


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2461.360	68.94	30.56	99.50	N/A	N/A	100	94	Average
2	*	2483.500	16.37	30.59	46.96	-7.04	54.00	100	94	Average
3		2484.820	15.75	30.59	46.33	-7.67	54.00	100	94	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_TX_CH 3 ANT 0+1	Test Voltage	AC 120V/60Hz

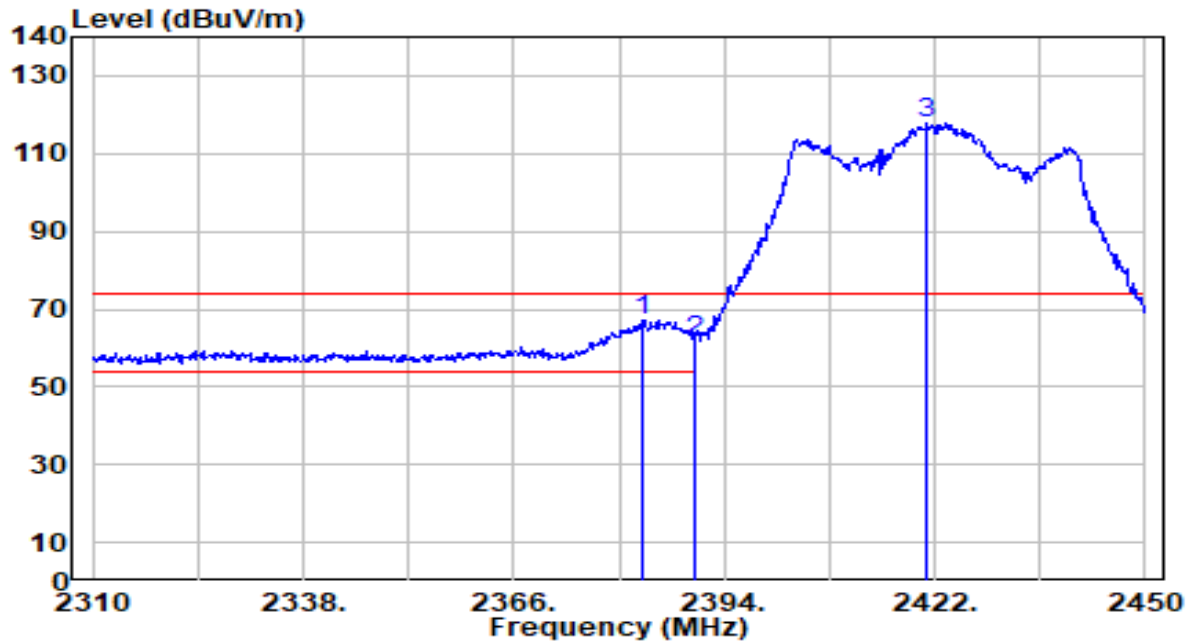


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.080	36.71	30.43	67.14	-6.86	74.00	108	151	Peak
2		2390.000	31.41	30.45	61.86	-12.14	74.00	108	151	Peak
3		2421.020	87.55	30.50	118.05	N/A	N/A	108	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_TX_CH 3 ANT 0+1	Test Voltage	AC 120V/60Hz

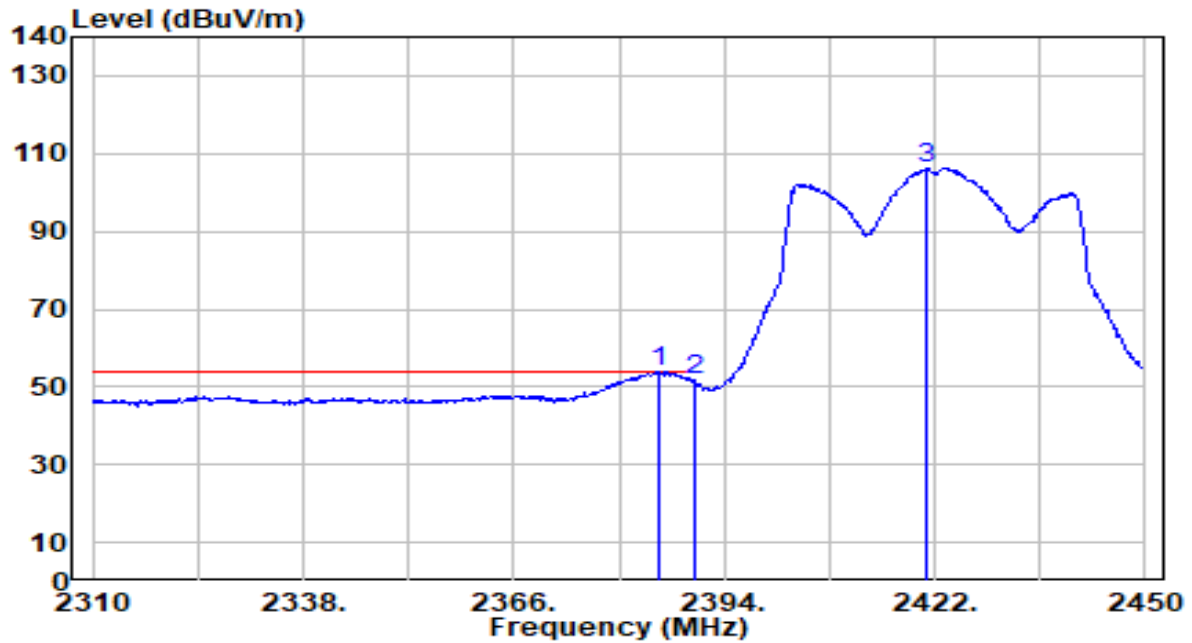


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.320	23.42	30.43	53.86	-0.14	54.00	108	151	Average
2		2390.000	21.14	30.45	51.59	-2.41	54.00	108	151	Average
3		2421.020	75.69	30.50	106.19	N/A	N/A	108	151	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_TX_CH 3 ANT 0+1	Test Voltage	AC 120V/60Hz

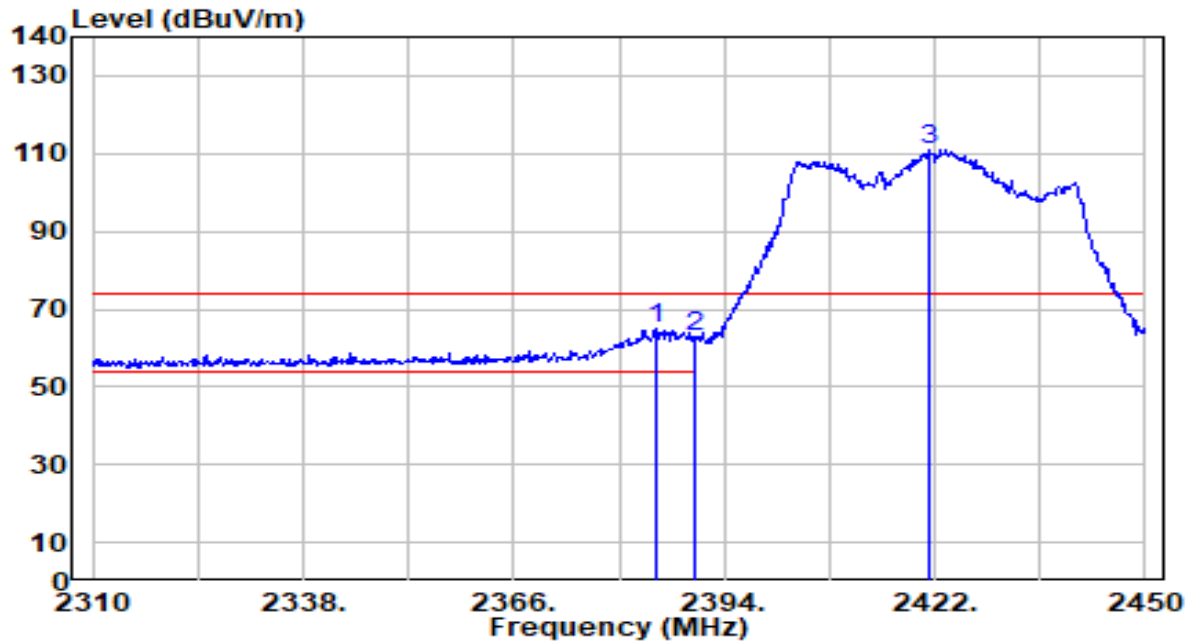


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.040	34.63	30.43	65.06	-8.94	74.00	108	134	Peak
2		2390.000	32.19	30.45	62.64	-11.36	74.00	108	134	Peak
3		2421.160	80.60	30.50	111.11	N/A	N/A	108	134	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_TX_CH 3 ANT 0+1	Test Voltage	AC 120V/60Hz

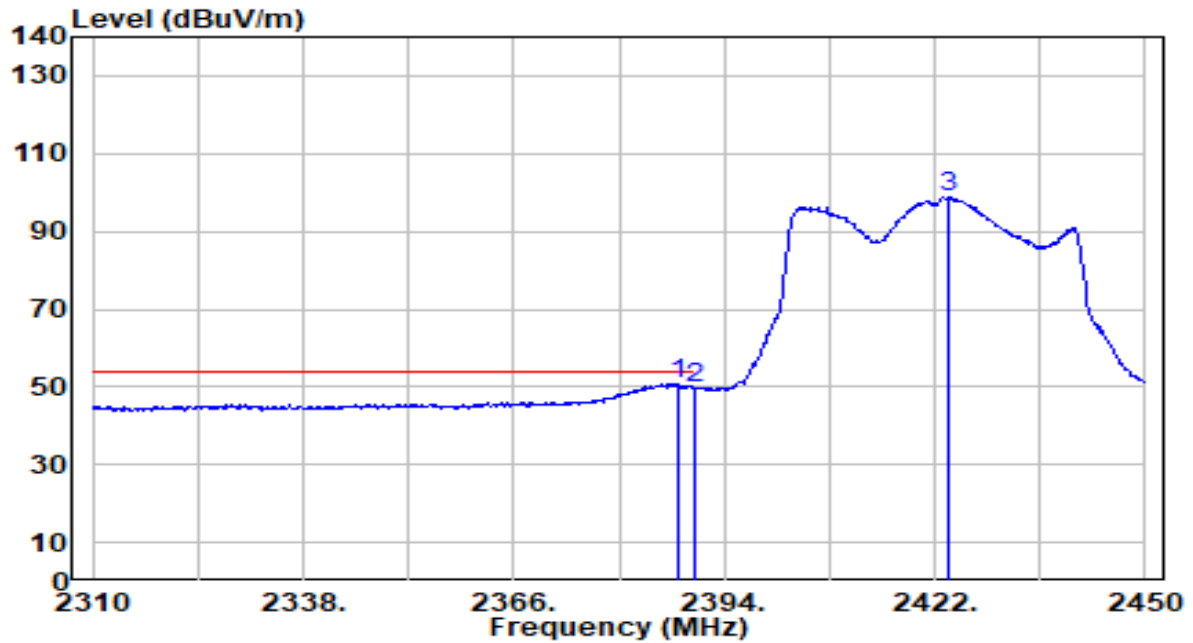


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.980	20.31	30.44	50.75	-3.25	54.00	108	134	Average
2		2390.000	19.38	30.45	49.83	-4.17	54.00	108	134	Average
3		2423.960	68.53	30.51	99.04	N/A	N/A	108	134	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

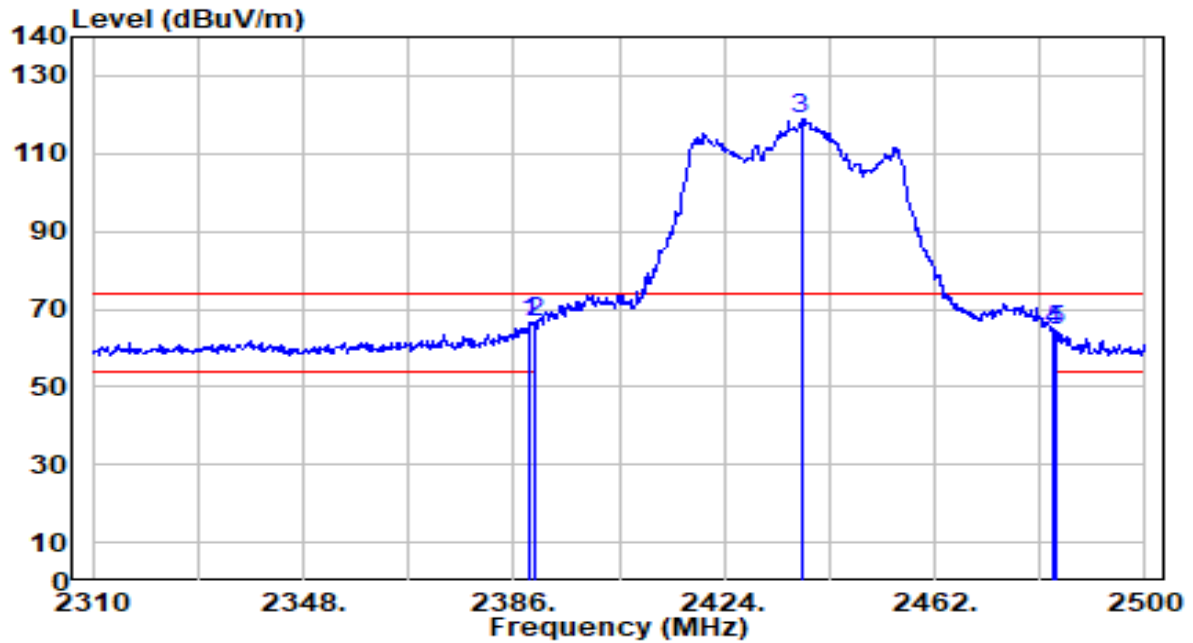


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.040	35.95	30.44	66.40	-7.60	74.00	108	229	Peak
2		2390.000	35.93	30.45	66.37	-7.63	74.00	108	229	Peak
3		2437.870	88.35	30.53	118.87	N/A	N/A	108	229	Peak
4		2483.500	33.62	30.59	64.21	-9.79	74.00	108	229	Peak
5		2484.040	34.05	30.59	64.64	-9.36	74.00	108	229	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

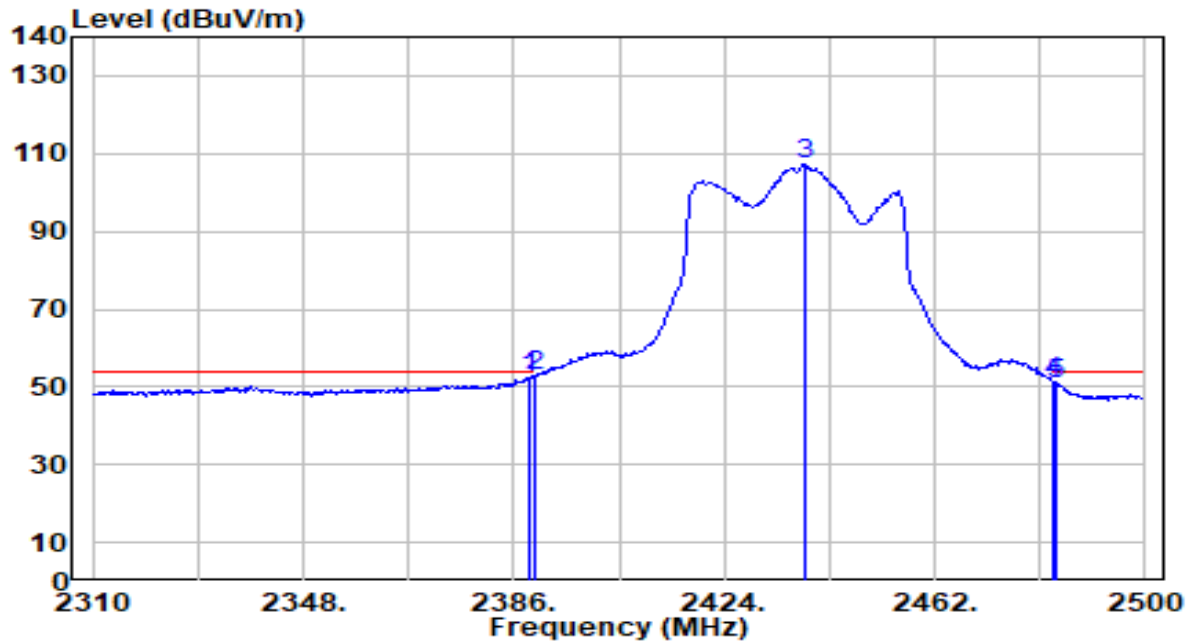


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.040	21.87	30.44	52.31	-1.69	54.00	108	229	Average
2	*	2390.000	22.40	30.45	52.85	-1.15	54.00	108	229	Average
3		2438.440	76.65	30.53	107.18	N/A	N/A	108	229	Average
4		2483.500	20.69	30.59	51.28	-2.72	54.00	108	229	Average
5		2484.040	20.03	30.59	50.62	-3.38	54.00	108	229	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

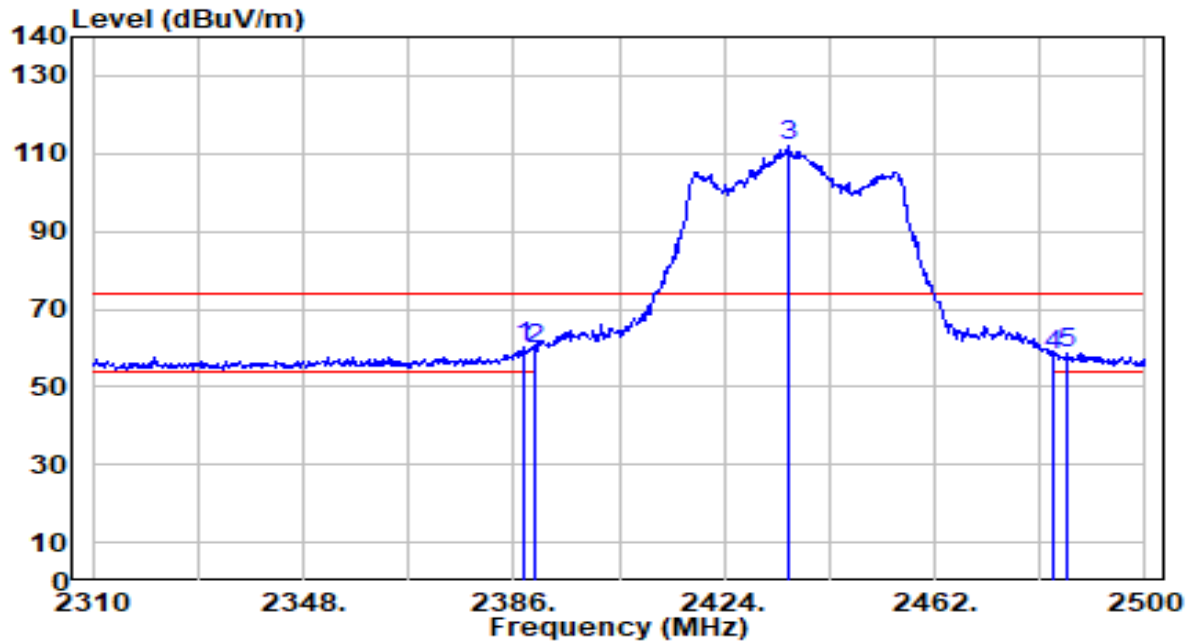


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.710	29.59	30.44	60.04	-13.96	74.00	107	96	Peak
2		2390.000	29.44	30.45	59.89	-14.11	74.00	107	96	Peak
3		2435.590	81.25	30.52	111.78	N/A	N/A	107	96	Peak
4		2483.500	27.37	30.59	57.96	-16.04	74.00	107	96	Peak
5		2485.750	28.11	30.59	58.70	-15.30	74.00	107	96	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

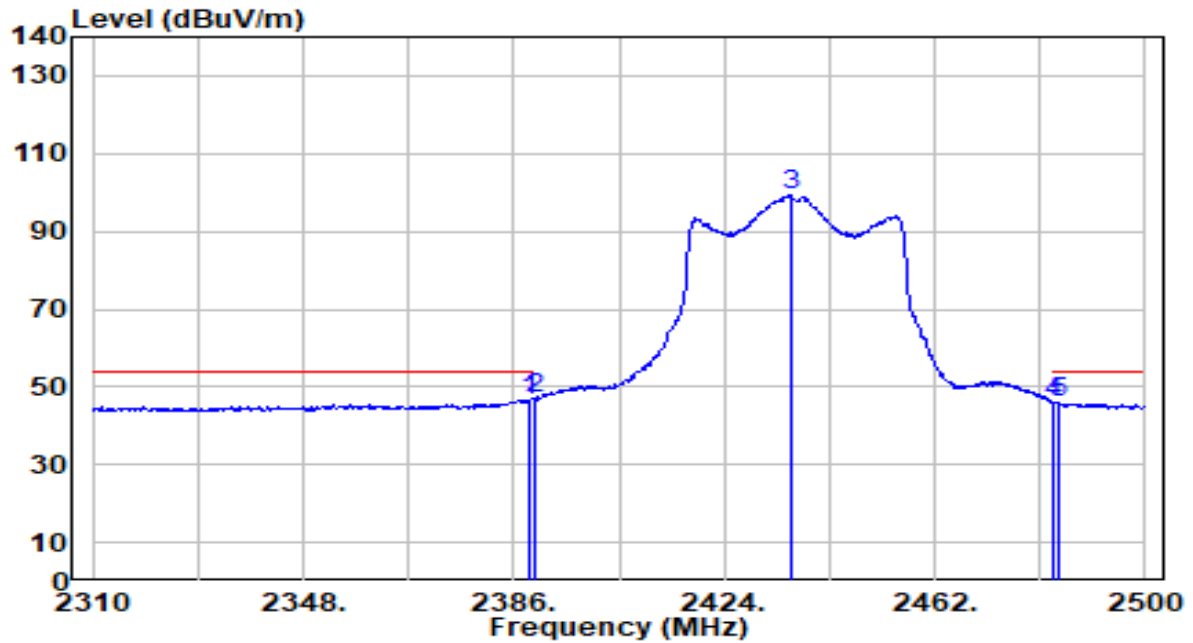


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.040	16.29	30.44	46.74	-7.26	54.00	107	96	Average
2	*	2390.000	16.39	30.45	46.84	-7.16	54.00	107	96	Average
3		2436.160	68.86	30.52	99.39	N/A	N/A	107	96	Average
4		2483.500	15.60	30.59	46.19	-7.81	54.00	107	96	Average
5		2484.610	15.45	30.59	46.04	-7.96	54.00	107	96	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_TX_CH 9 ANT 0+1	Test Voltage	AC 120V/60Hz

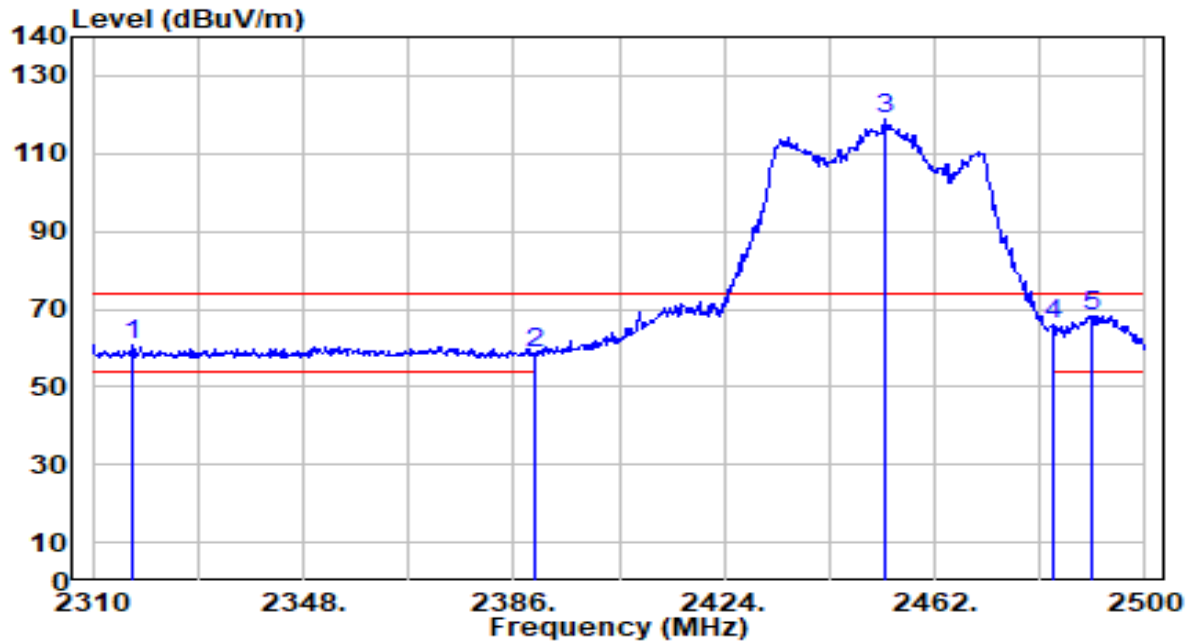


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2317.030	30.58	30.24	60.82	-13.18	74.00	111	227	Peak
2	2390.000	28.38	30.45	58.82	-15.18	74.00	111	227	Peak
3	2452.880	88.21	30.55	118.76	N/A	N/A	111	227	Peak
4	2483.500	35.55	30.59	66.14	-7.86	74.00	111	227	Peak
5	* 2490.310	37.72	30.60	68.32	-5.68	74.00	111	227	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_TX_CH 9 ANT 0+1	Test Voltage	AC 120V/60Hz

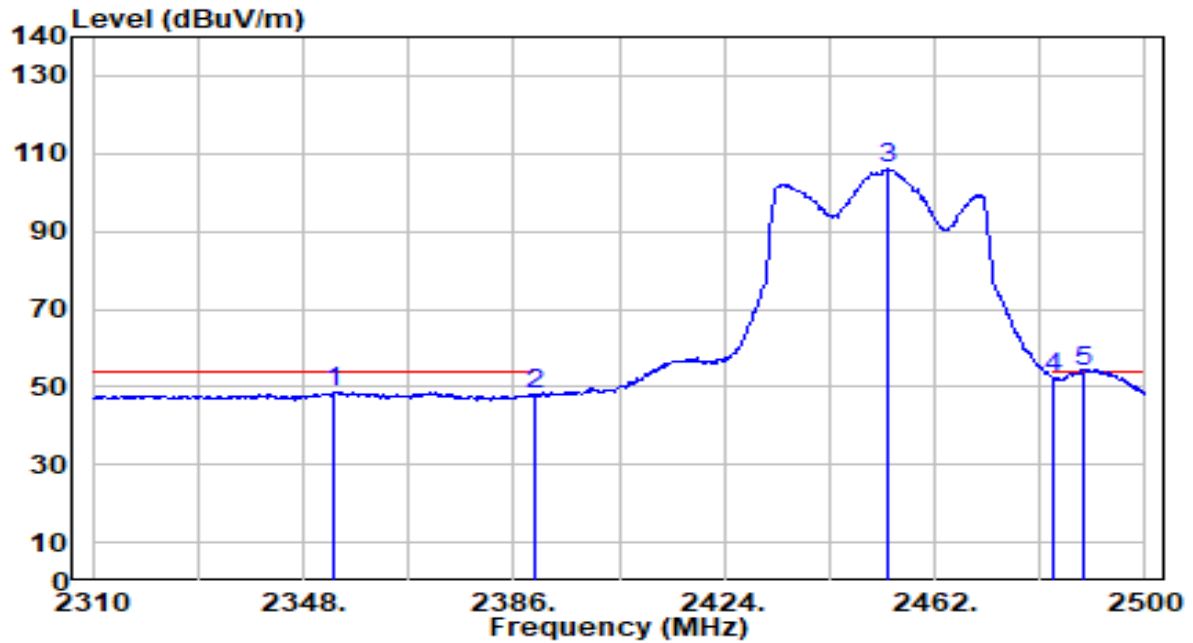


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2353.510	18.38	30.34	48.72	-5.28	54.00	111	227	Average
2	2390.000	17.48	30.45	47.93	-6.07	54.00	111	227	Average
3	2453.640	75.45	30.55	106.00	N/A	N/A	111	227	Average
4	2483.500	21.70	30.59	52.28	-1.72	54.00	111	227	Average
5	* 2488.790	23.17	30.59	53.77	-0.23	54.00	111	227	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_TX_CH 9 ANT 0+1	Test Voltage	AC 120V/60Hz

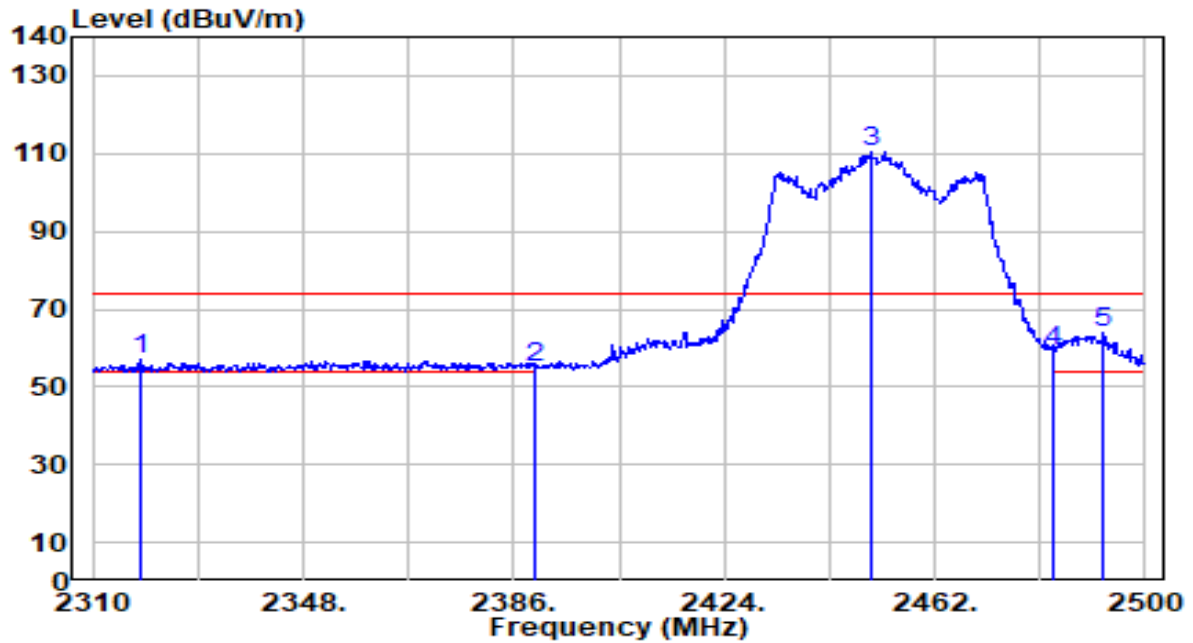


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2318.550	26.94	30.24	57.19	-16.81	74.00	107	94	Peak
2	2390.000	24.27	30.45	54.72	-19.28	74.00	107	94	Peak
3	2450.600	79.99	30.54	110.53	N/A	N/A	107	94	Peak
4	2483.500	28.77	30.59	59.36	-14.64	74.00	107	94	Peak
5	* 2492.590	33.37	30.60	63.97	-10.03	74.00	107	94	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_TX_CH 9 ANT 0+1	Test Voltage	AC 120V/60Hz

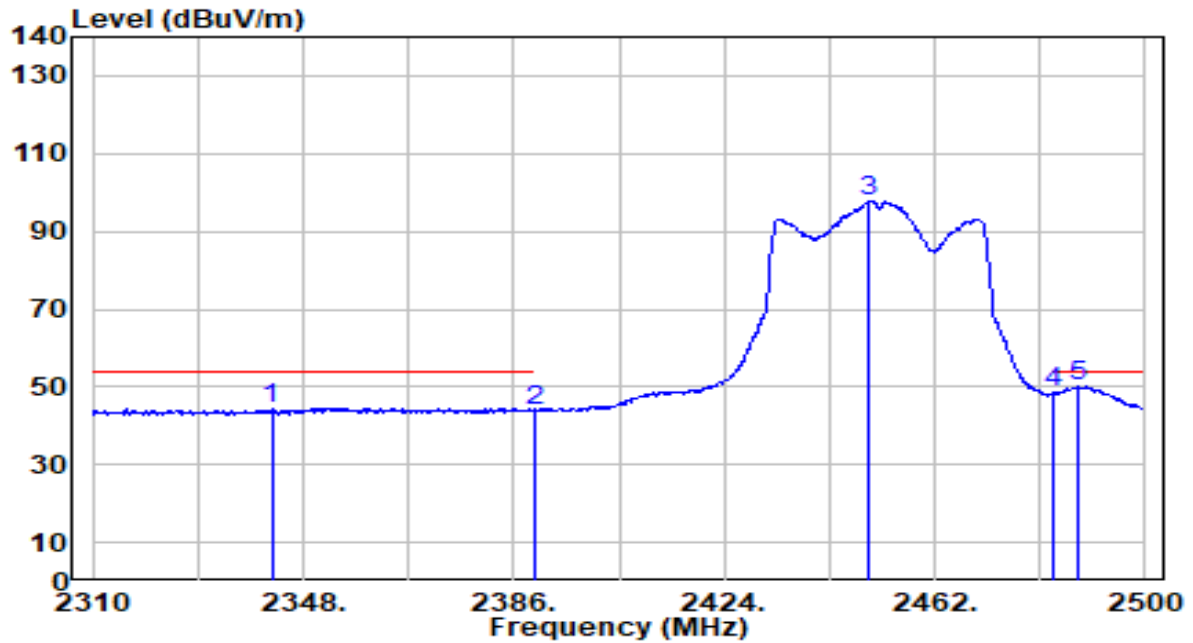


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2342.300	14.10	30.31	44.41	-9.59	54.00	107	94	Average
2	2390.000	13.31	30.45	43.75	-10.25	54.00	107	94	Average
3	2450.220	67.38	30.54	97.93	N/A	N/A	107	94	Average
4	2483.500	17.90	30.59	48.49	-5.51	54.00	107	94	Average
5	* 2487.840	19.54	30.59	50.13	-3.87	54.00	107	94	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

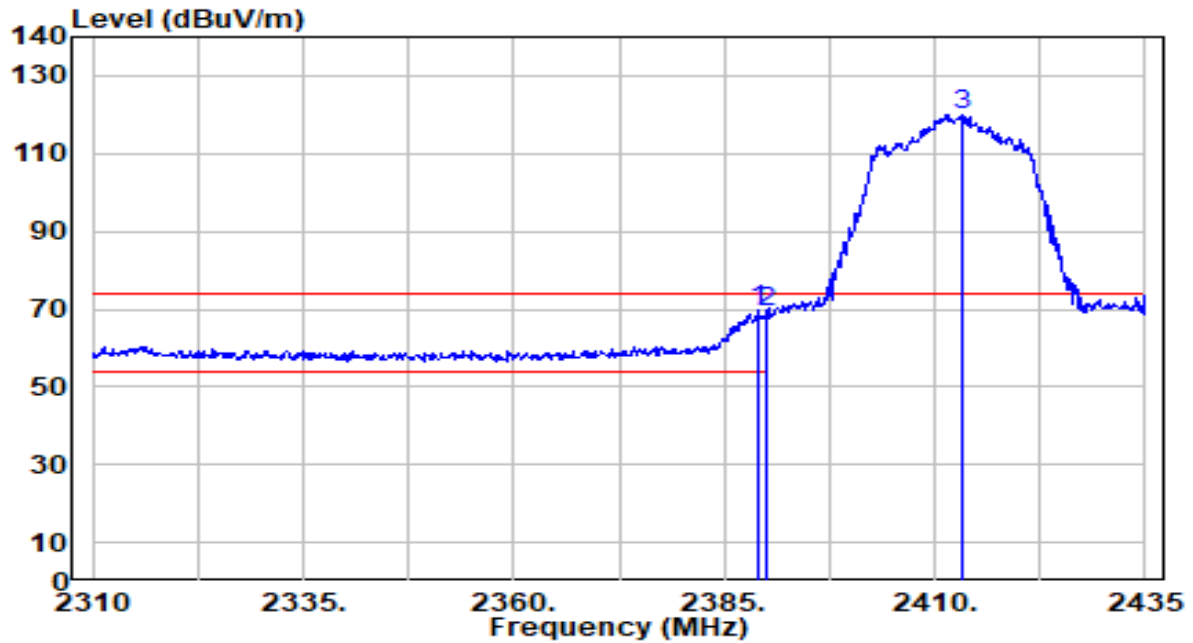


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.000	39.37	30.44	69.81	-4.19	74.00	103	231	Peak
2		2390.000	38.74	30.45	69.18	-4.82	74.00	103	231	Peak
3		2413.375	89.60	30.49	120.10	N/A	N/A	103	231	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

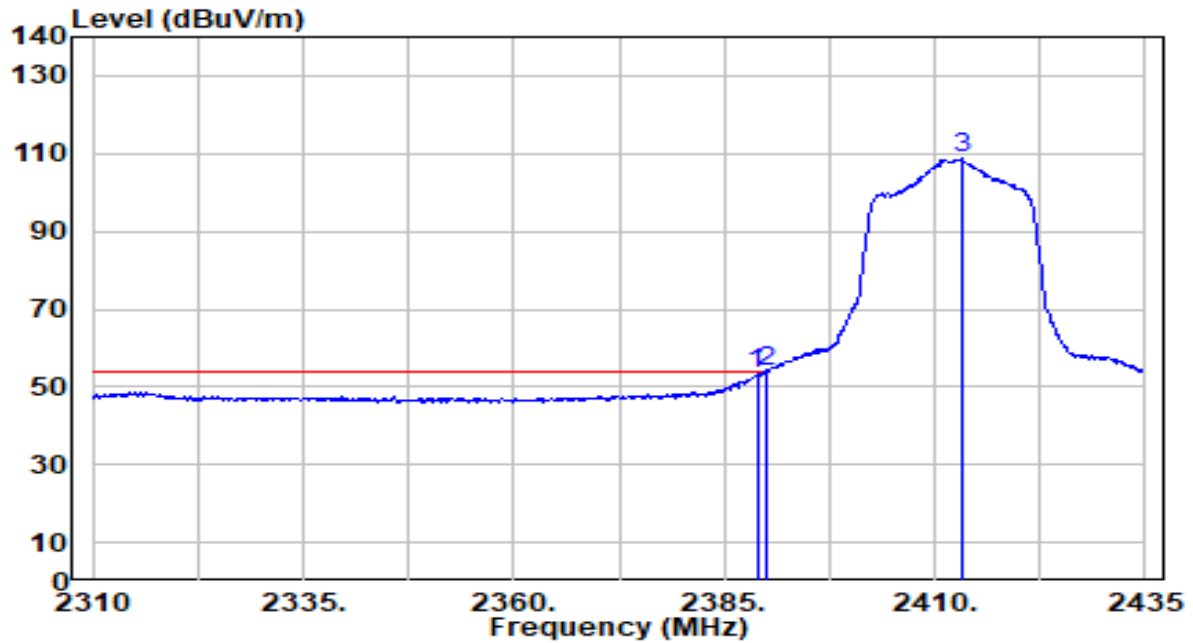


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.875	22.83	30.44	53.27	-0.73	54.00	103	231	Average
2	*	2390.000	23.44	30.45	53.89	-0.11	54.00	103	231	Average
3		2413.125	78.23	30.49	108.73	N/A	N/A	103	231	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

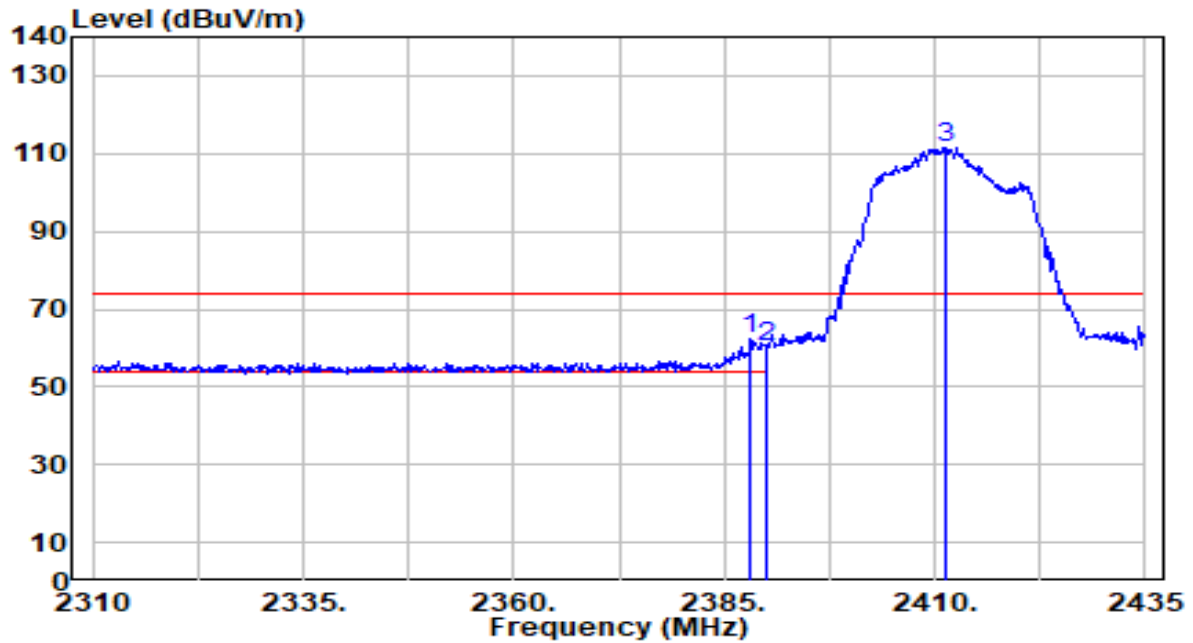


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.125	31.98	30.44	62.42	-11.58	74.00	109	96	Peak
2		2390.000	29.58	30.45	60.03	-13.97	74.00	109	96	Peak
3		2411.250	80.89	30.49	111.38	N/A	N/A	109	96	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_TX_CH 1 ANT 0+1	Test Voltage	AC 120V/60Hz

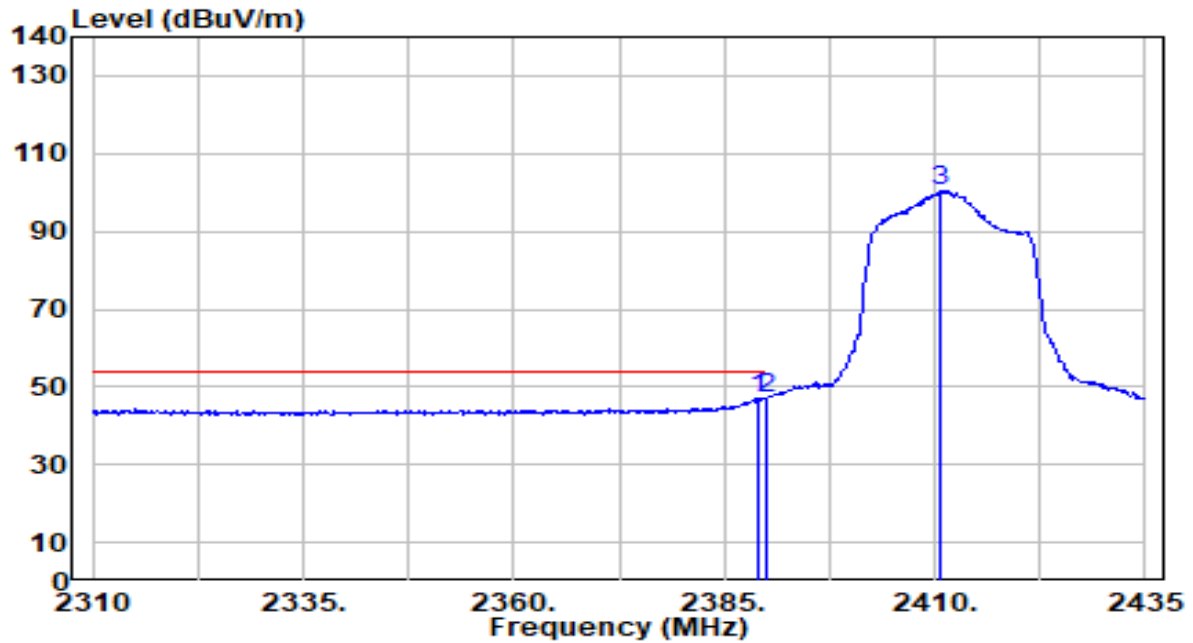


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.000	16.58	30.44	47.02	-6.98	54.00	109	96	Average
2		2390.000	16.33	30.45	46.78	-7.22	54.00	109	96	Average
3		2410.625	70.01	30.49	100.50	N/A	N/A	109	96	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

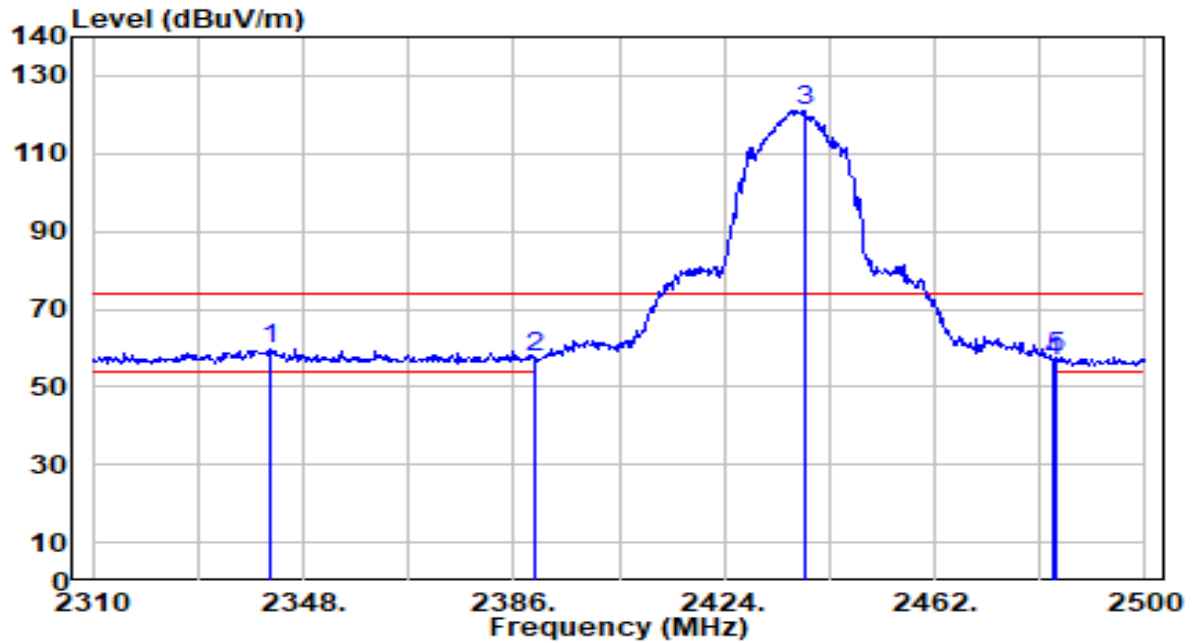


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2342.110	29.34	30.31	59.65	-14.35	74.00	106	155	Peak
2		2390.000	27.34	30.45	57.79	-16.21	74.00	106	155	Peak
3		2438.440	90.68	30.53	121.21	N/A	N/A	106	155	Peak
4		2483.500	26.04	30.59	56.63	-17.37	74.00	106	155	Peak
5		2484.040	27.17	30.59	57.75	-16.25	74.00	106	155	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

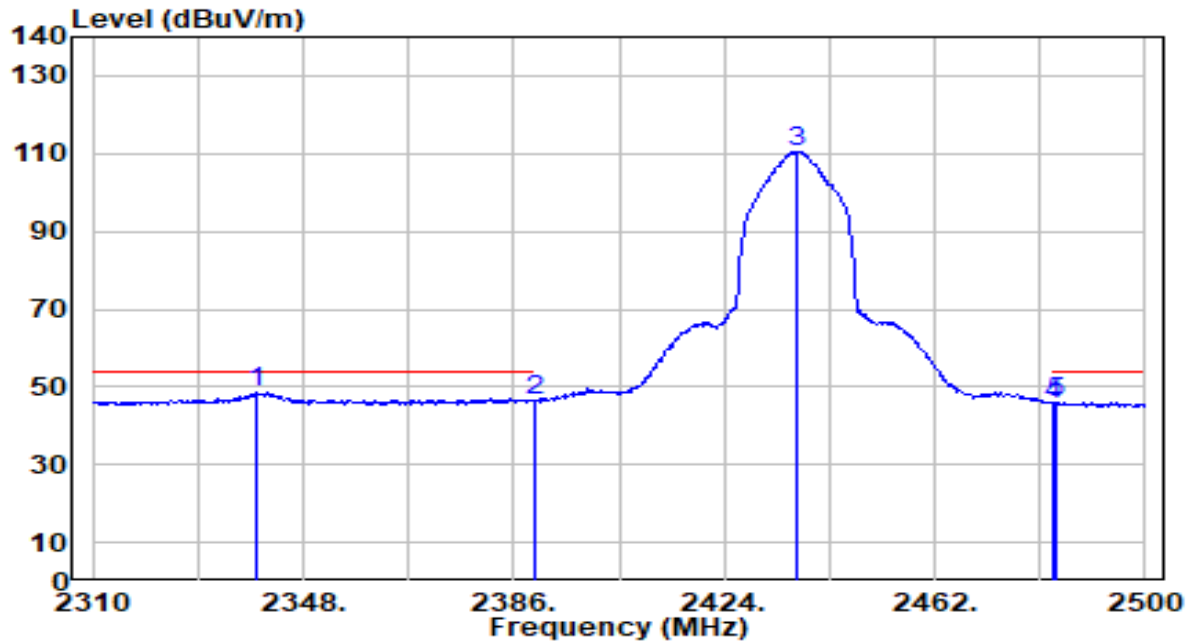


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2339.640	18.32	30.30	48.62	-5.38	54.00	106	155	Average
2		2390.000	16.02	30.45	46.47	-7.53	54.00	106	155	Average
3		2436.920	79.97	30.53	110.50	N/A	N/A	106	155	Average
4		2483.500	15.07	30.59	45.66	-8.34	54.00	106	155	Average
5		2484.040	15.52	30.59	46.11	-7.89	54.00	106	155	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

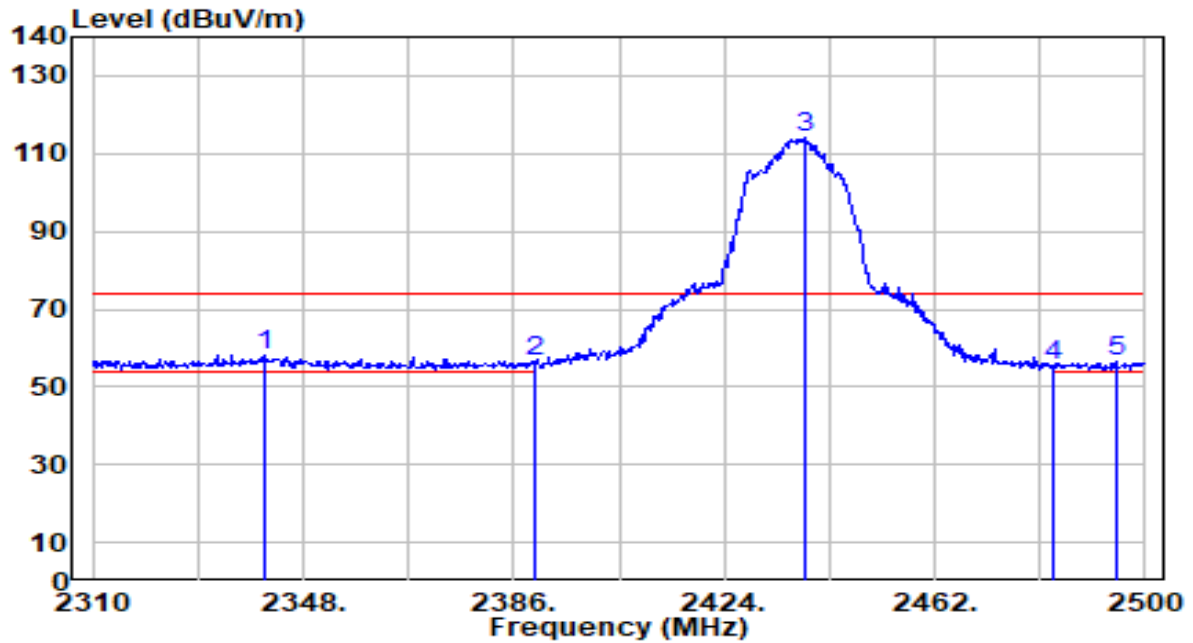


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.970	27.62	30.31	57.93	-16.07	74.00	107	31	Peak
2		2390.000	26.00	30.45	56.45	-17.55	74.00	107	31	Peak
3		2438.440	83.37	30.53	113.90	N/A	N/A	107	31	Peak
4		2483.500	24.94	30.59	55.52	-18.48	74.00	107	31	Peak
5		2494.870	25.81	30.60	56.42	-17.58	74.00	107	31	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

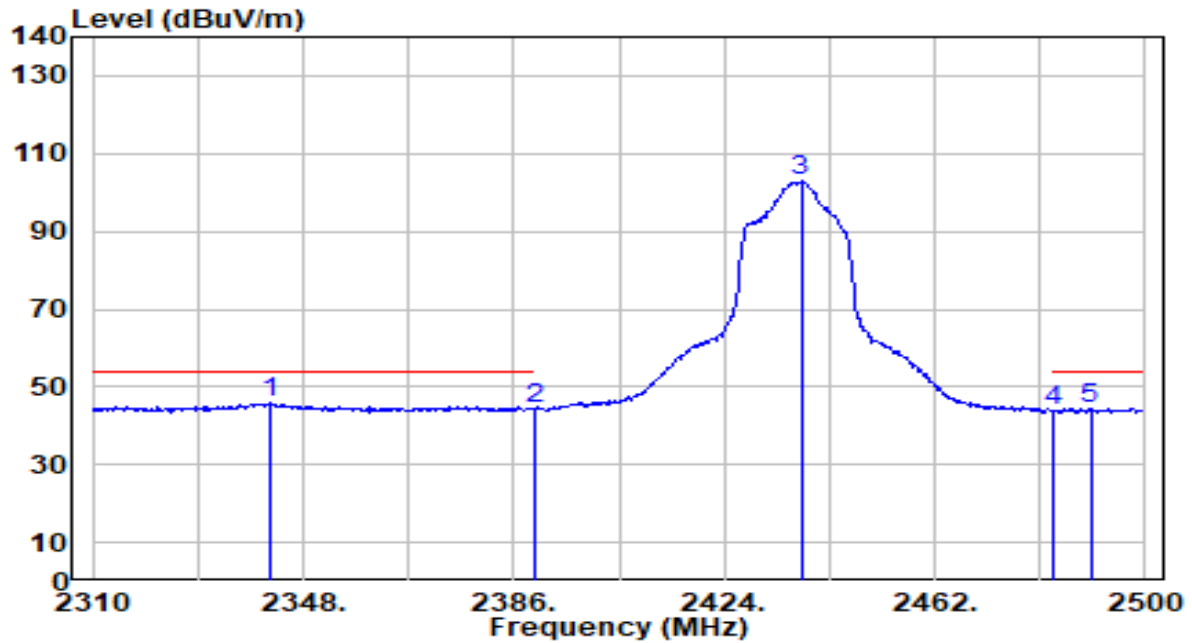


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2342.110	15.48	30.31	45.79	-8.21	54.00	107	31	Average
2		2390.000	13.70	30.45	44.15	-9.85	54.00	107	31	Average
3		2437.870	72.30	30.53	102.83	N/A	N/A	107	31	Average
4		2483.500	13.34	30.59	43.93	-10.07	54.00	107	31	Average
5		2490.120	13.90	30.60	44.50	-9.50	54.00	107	31	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

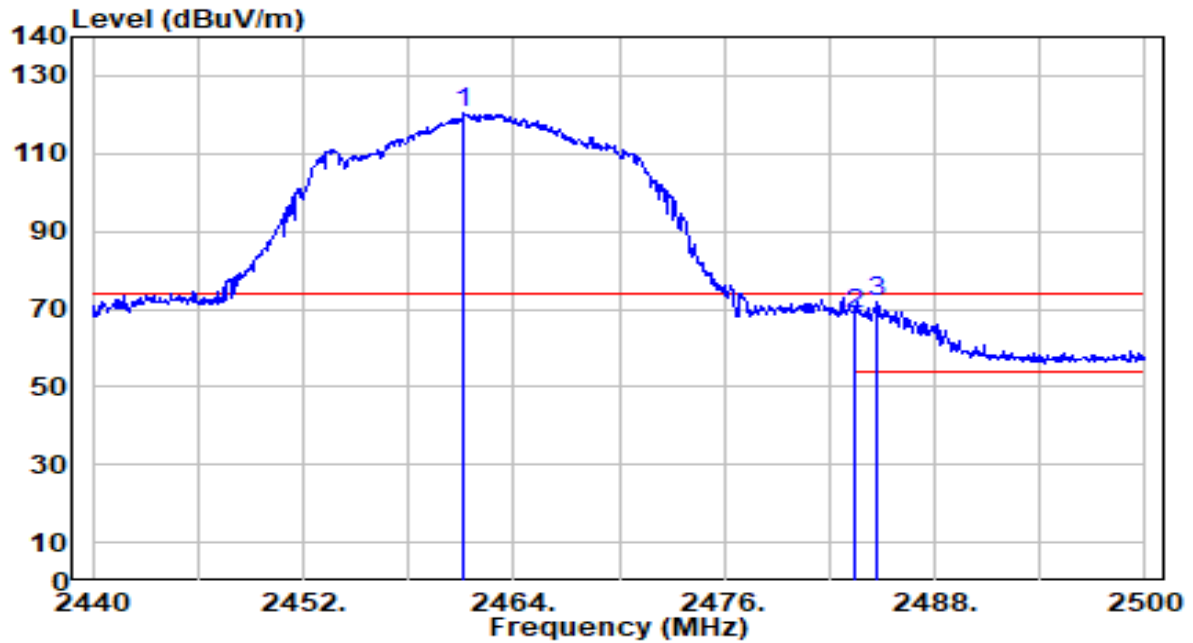


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.180	89.89	30.56	120.45	N/A	N/A	126	150	Peak
2	2483.500	38.18	30.59	68.76	-5.24	74.00	126	150	Peak
3	* 2484.760	41.44	30.59	72.03	-1.97	74.00	126	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

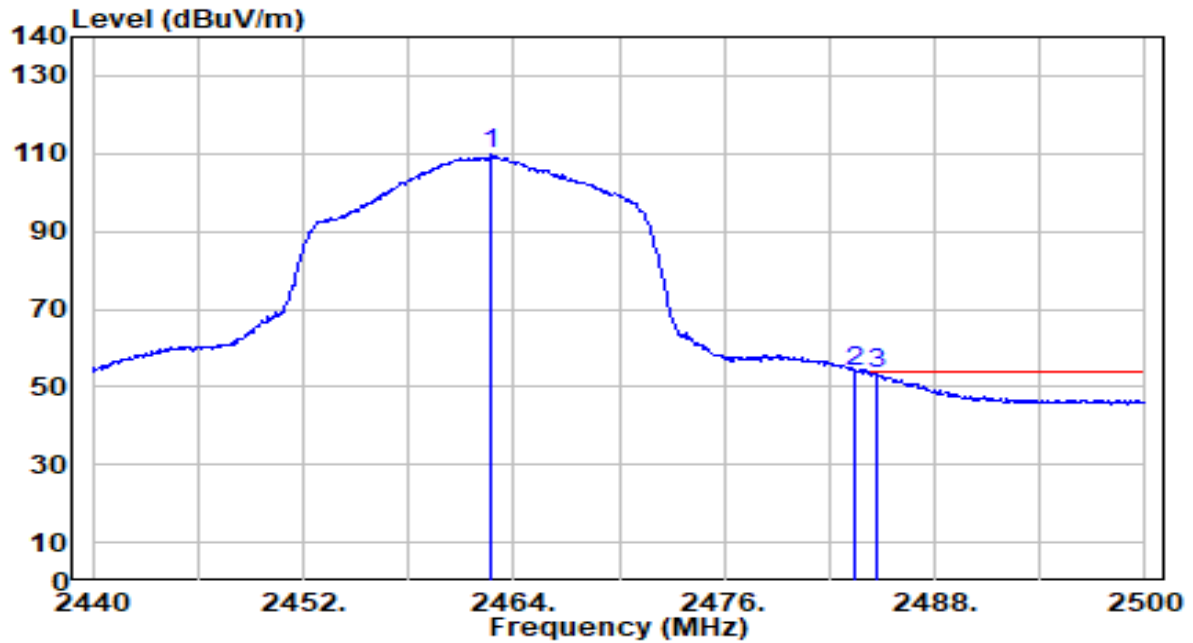


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.680	79.35	30.56	109.91	N/A	N/A	126	150	Average
2	*	2483.500	23.18	30.59	53.77	-0.23	54.00	126	150	Average
3		2484.760	22.75	30.59	53.34	-0.66	54.00	126	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

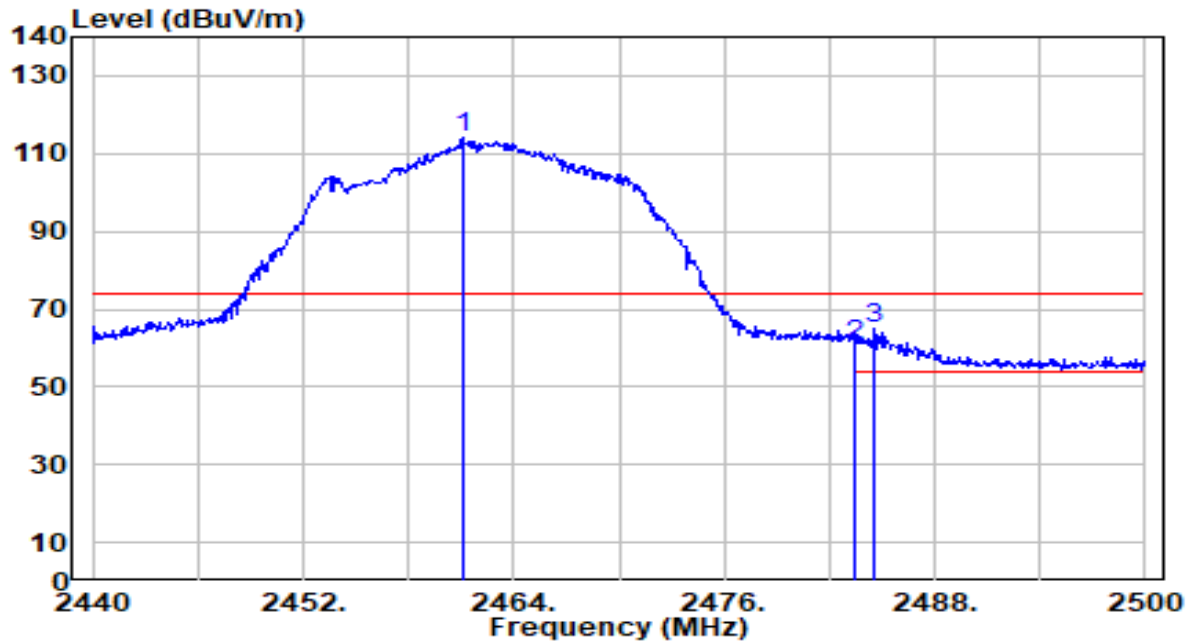


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.060	83.46	30.56	114.02	N/A	N/A	102	144	Peak
2	2483.500	30.33	30.59	60.92	-13.08	74.00	102	144	Peak
3	* 2484.580	34.51	30.59	65.10	-8.90	74.00	102	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_TX_CH 11 ANT 0+1	Test Voltage	AC 120V/60Hz

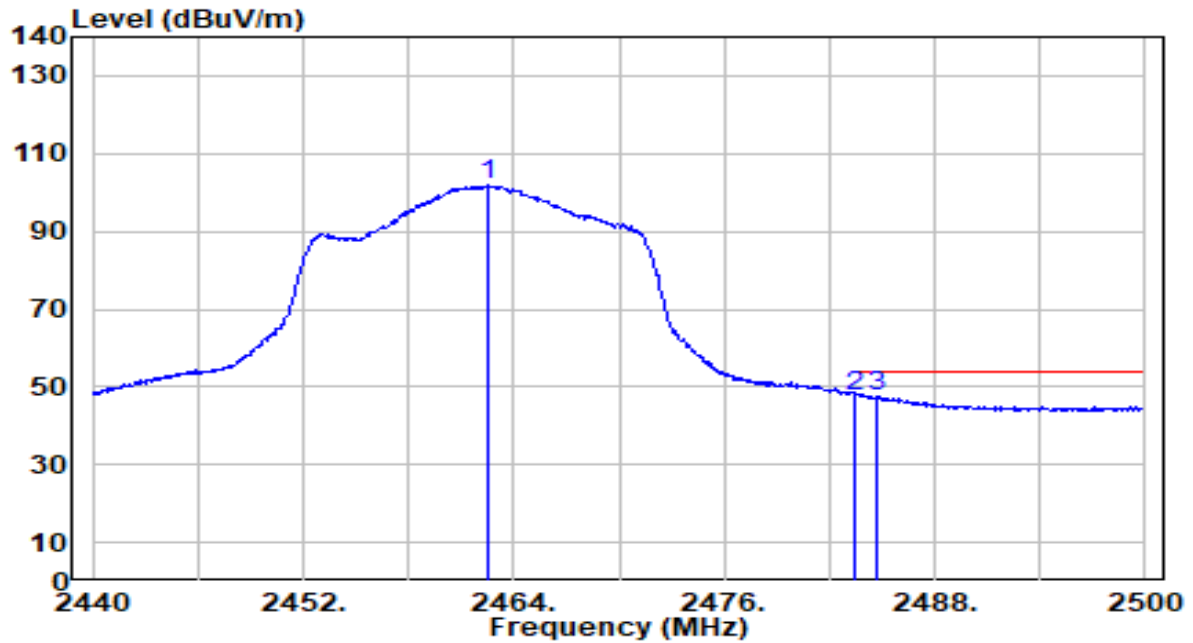


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.500	71.15	30.56	101.71	N/A	N/A	102	144	Average
2	2483.500	16.98	30.59	47.56	-6.44	54.00	102	144	Average
3	* 2484.700	16.99	30.59	47.58	-6.42	54.00	102	144	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 3 ANT 0+1	Test Voltage	AC 120V/60Hz

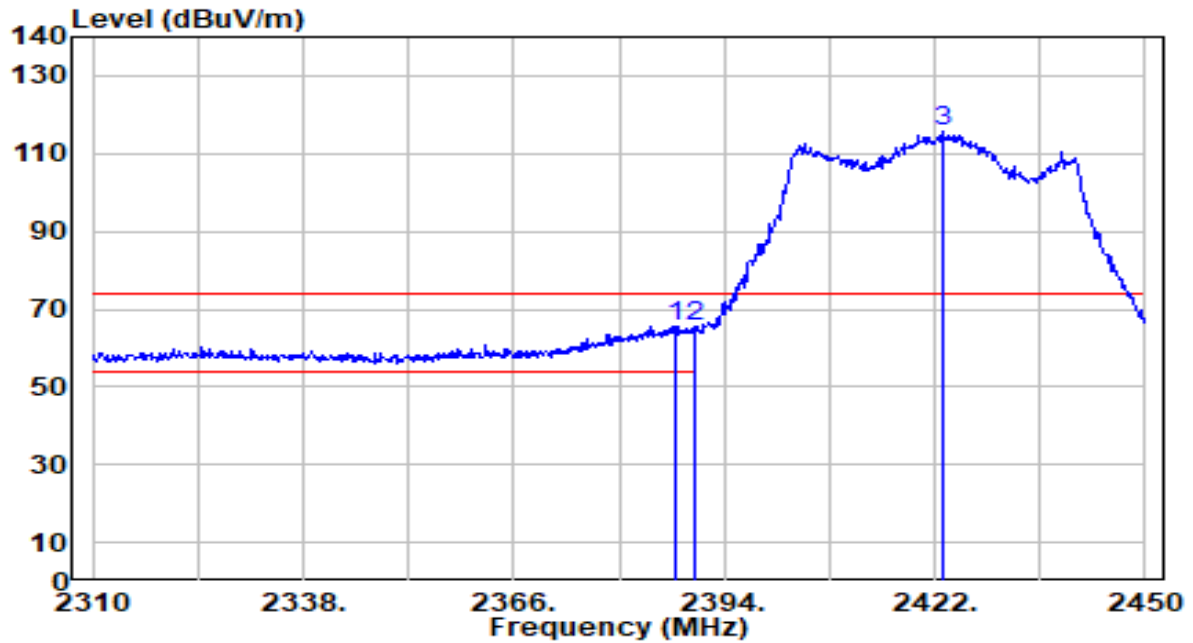


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.420	35.19	30.44	65.63	-8.37	74.00	107	230	Peak
2		2390.000	34.98	30.45	65.43	-8.57	74.00	107	230	Peak
3		2422.980	84.98	30.51	115.49	N/A	N/A	107	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 3 ANT 0+1	Test Voltage	AC 120V/60Hz

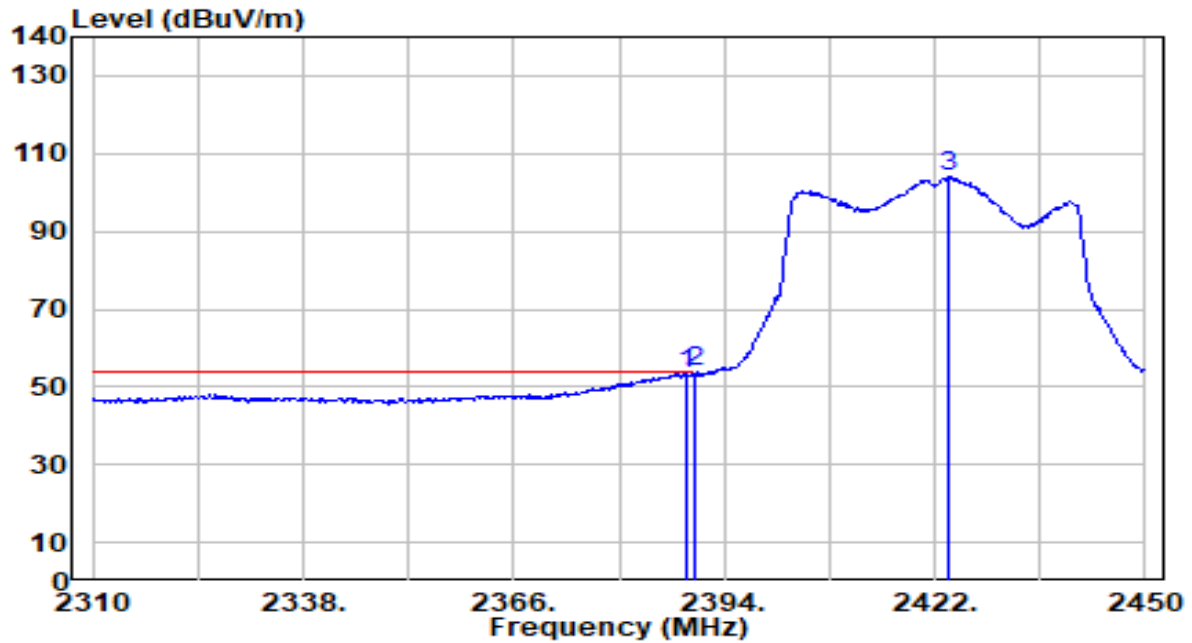


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.820	23.03	30.44	53.47	-0.53	54.00	107	230	Average
2	*	2390.000	23.27	30.45	53.71	-0.29	54.00	107	230	Average
3		2423.680	73.51	30.51	104.01	N/A	N/A	107	230	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 3 ANT 0+1	Test Voltage	AC 120V/60Hz

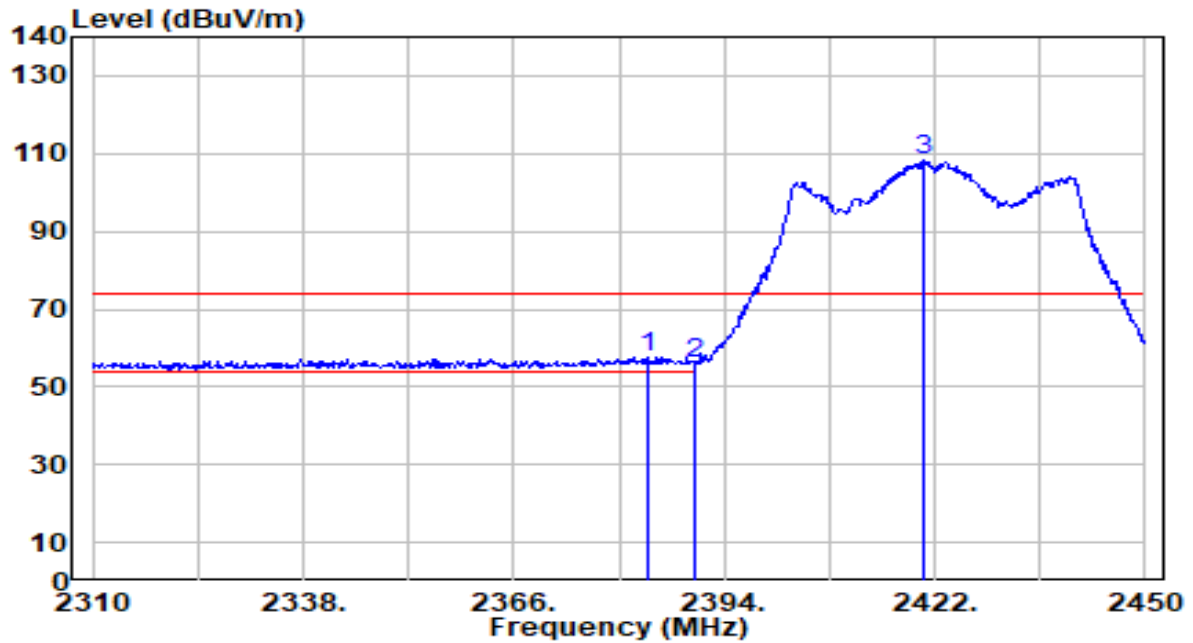


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.920	27.17	30.43	57.60	-16.40	74.00	112	312	Peak
2		2390.000	25.37	30.45	55.81	-18.19	74.00	112	312	Peak
3		2420.460	77.61	30.50	108.11	N/A	N/A	112	312	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 3 ANT 0+1	Test Voltage	AC 120V/60Hz

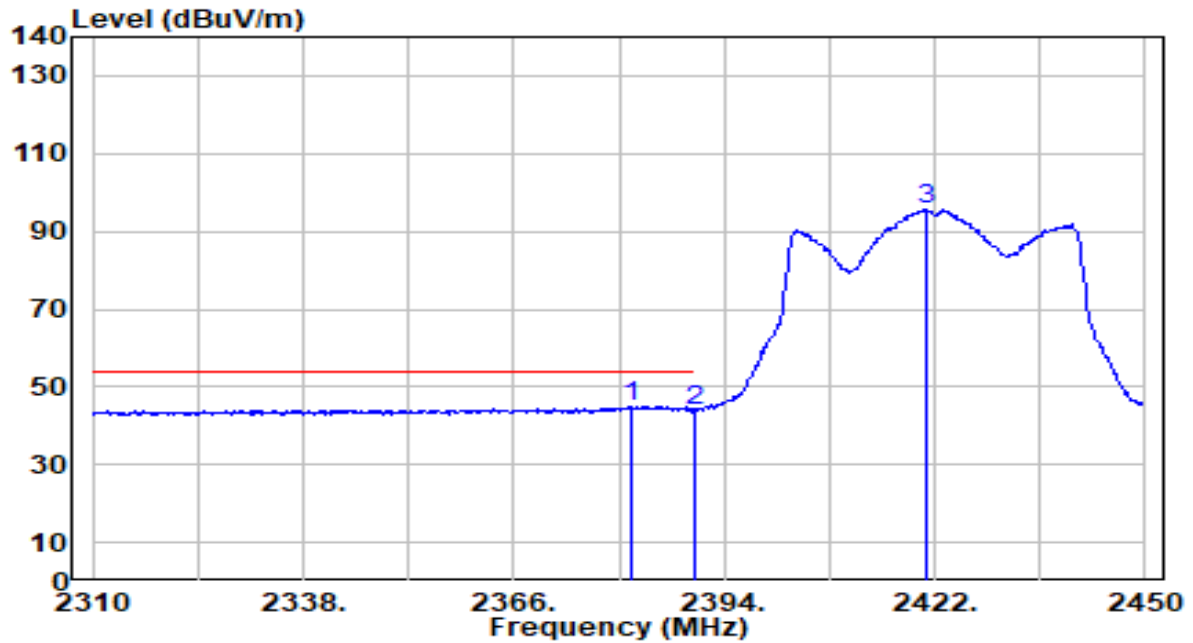


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2381.820	14.58	30.42	45.01	-8.99	54.00	112	312	Average
2		2390.000	13.57	30.45	44.01	-9.99	54.00	112	312	Average
3		2420.880	65.34	30.50	95.84	N/A	N/A	112	312	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 4 ANT 0+1	Test Voltage	AC 120V/60Hz

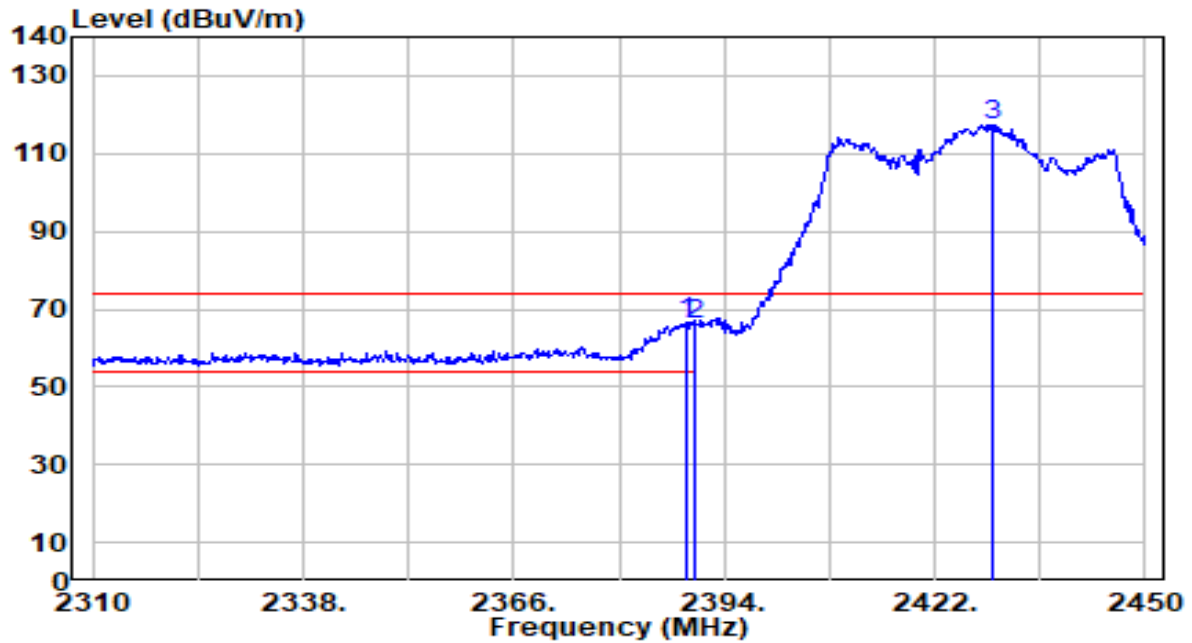


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.820	36.01	30.44	66.45	-7.55	74.00	116	141	Peak
2		2390.000	35.42	30.45	65.87	-8.13	74.00	116	141	Peak
3		2429.560	86.86	30.52	117.38	N/A	N/A	116	141	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 4 ANT 0+1	Test Voltage	AC 120V/60Hz

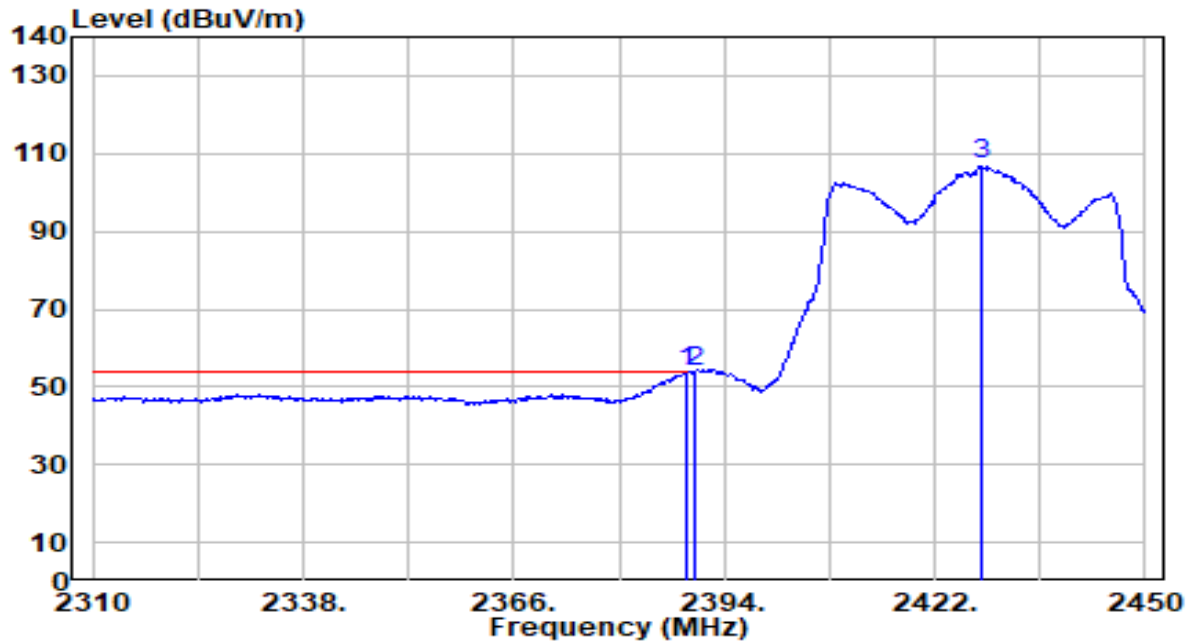


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.820	23.37	30.44	53.82	-0.18	54.00	116	141	Average
2		2390.000	23.33	30.45	53.78	-0.22	54.00	116	141	Average
3		2428.160	76.53	30.51	107.04	N/A	N/A	116	141	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 4 ANT 0+1	Test Voltage	AC 120V/60Hz

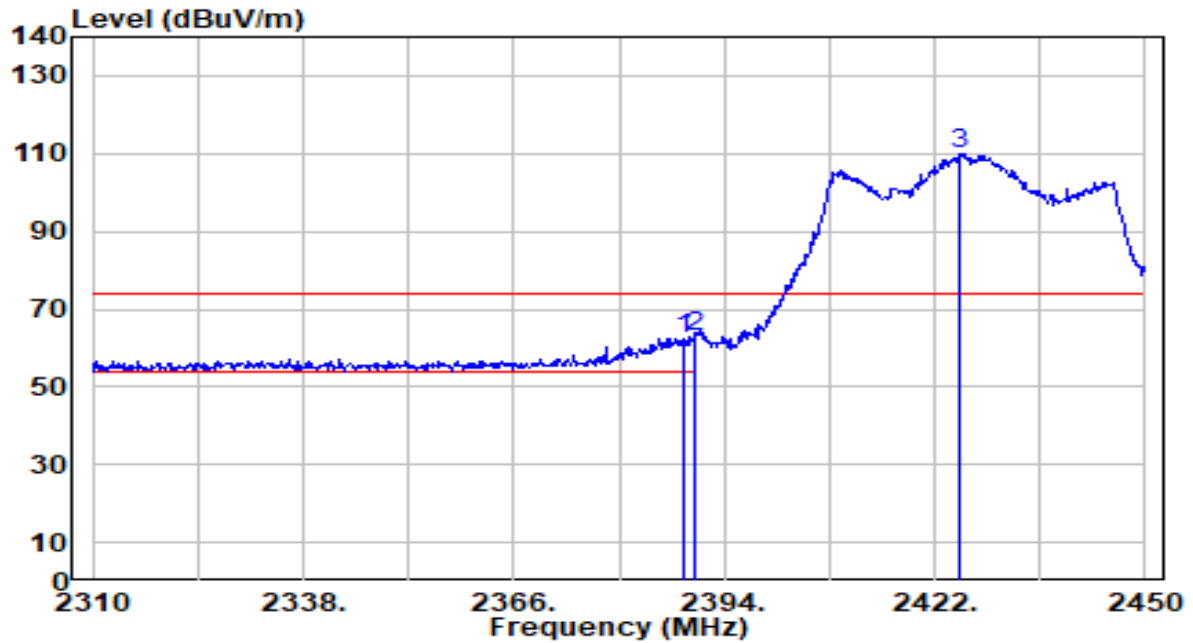


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.540	32.14	30.44	62.59	-11.41	74.00	115	29	Peak
2	*	2390.000	32.59	30.45	63.04	-10.96	74.00	115	29	Peak
3		2425.220	79.39	30.51	109.90	N/A	N/A	115	29	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 4 ANT 0+1	Test Voltage	AC 120V/60Hz

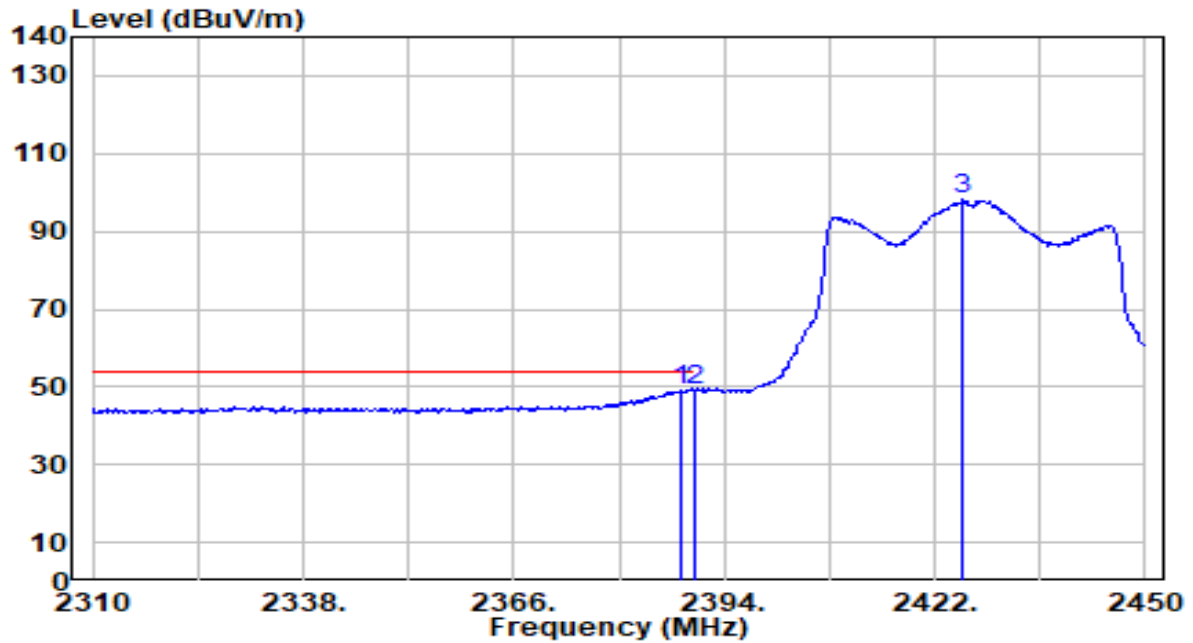


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.260	18.90	30.44	49.34	-4.66	54.00	115	29	Average
2		2390.000	18.86	30.45	49.30	-4.70	54.00	115	29	Average
3		2425.640	67.53	30.51	98.04	N/A	N/A	115	29	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

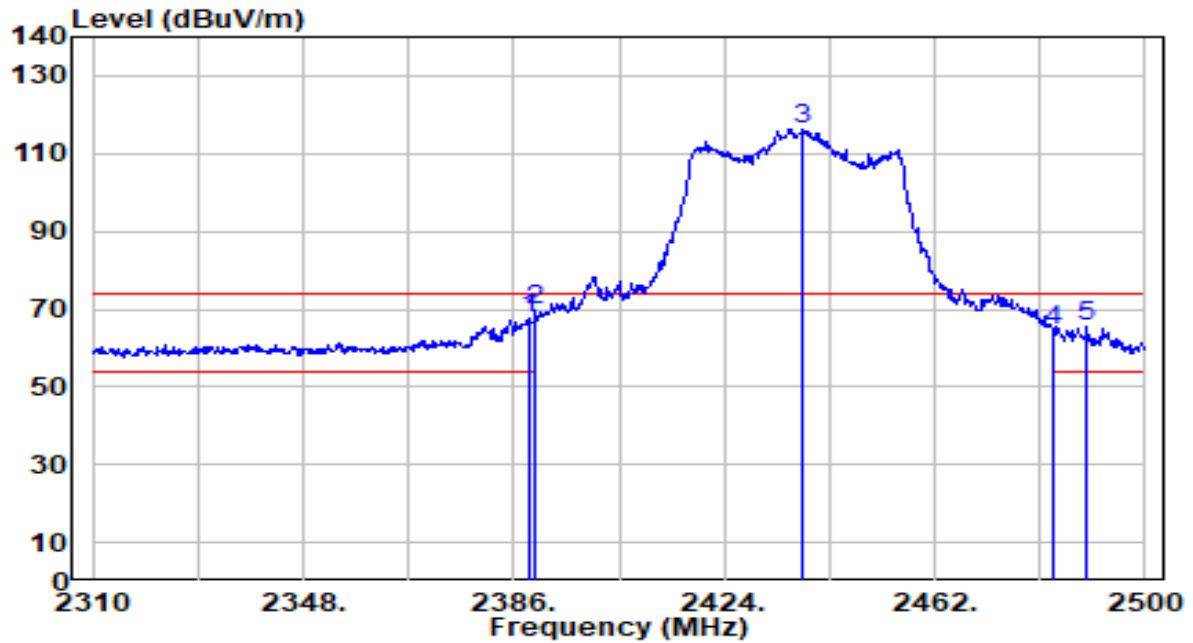


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.660	37.41	30.44	67.86	-6.14	74.00	193	230	Peak
2	*	2390.000	39.35	30.45	69.80	-4.20	74.00	193	230	Peak
3		2438.250	85.89	30.53	116.42	N/A	N/A	193	230	Peak
4		2483.500	34.12	30.59	64.71	-9.29	74.00	193	230	Peak
5		2489.360	34.79	30.60	65.38	-8.62	74.00	193	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

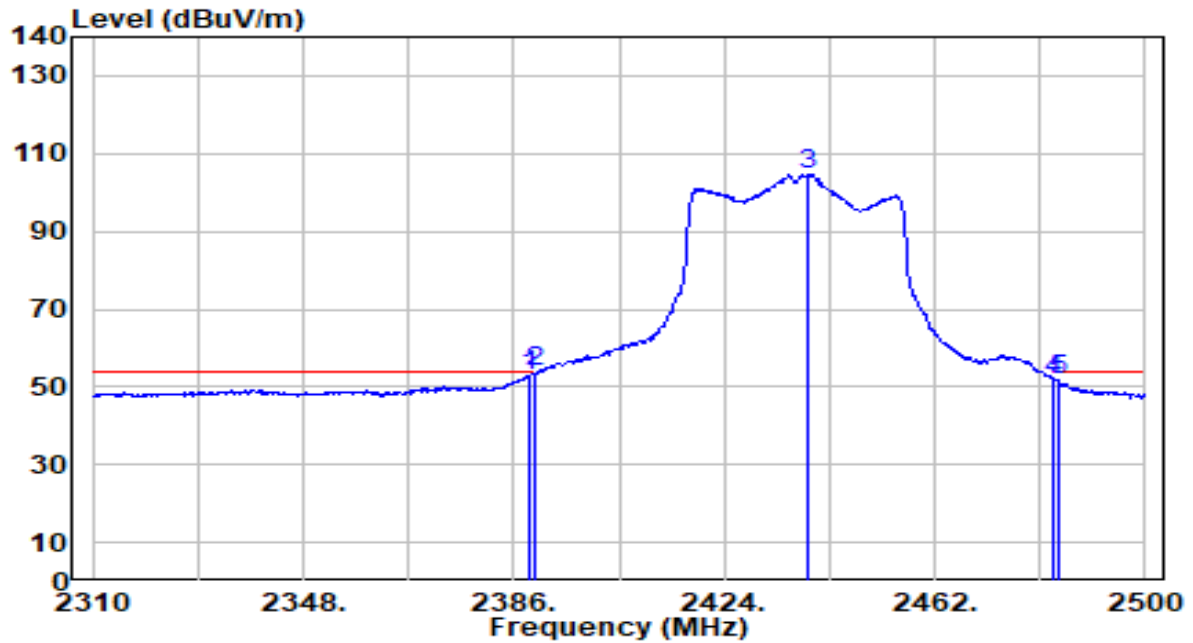


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.040	22.48	30.44	52.92	-1.08	54.00	193	230	Average
2	*	2390.000	23.26	30.45	53.71	-0.29	54.00	193	230	Average
3		2439.200	74.03	30.53	104.56	N/A	N/A	193	230	Average
4		2483.500	21.03	30.59	51.62	-2.38	54.00	193	230	Average
5		2484.420	21.09	30.59	51.68	-2.32	54.00	193	230	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

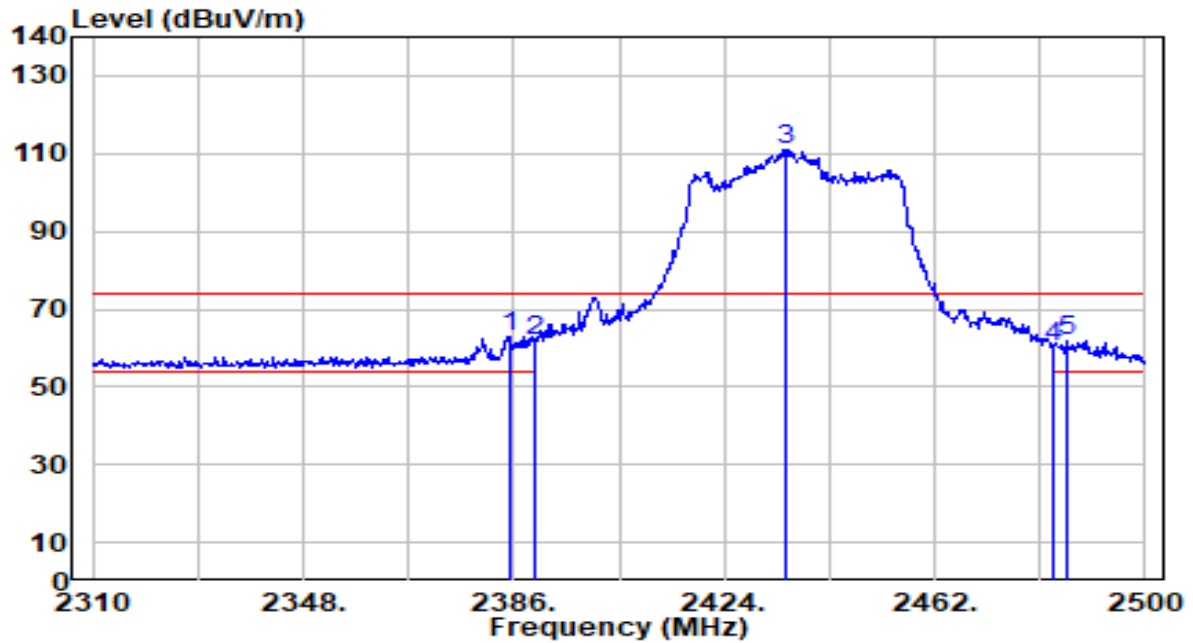


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.240	32.42	30.43	62.85	-11.15	74.00	108	102	Peak
2		2390.000	31.19	30.45	61.64	-12.36	74.00	108	102	Peak
3		2435.210	80.64	30.52	111.16	N/A	N/A	108	102	Peak
4		2483.500	29.76	30.59	60.35	-13.65	74.00	108	102	Peak
5		2485.750	31.38	30.59	61.97	-12.03	74.00	108	102	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 6 ANT 0+1	Test Voltage	AC 120V/60Hz

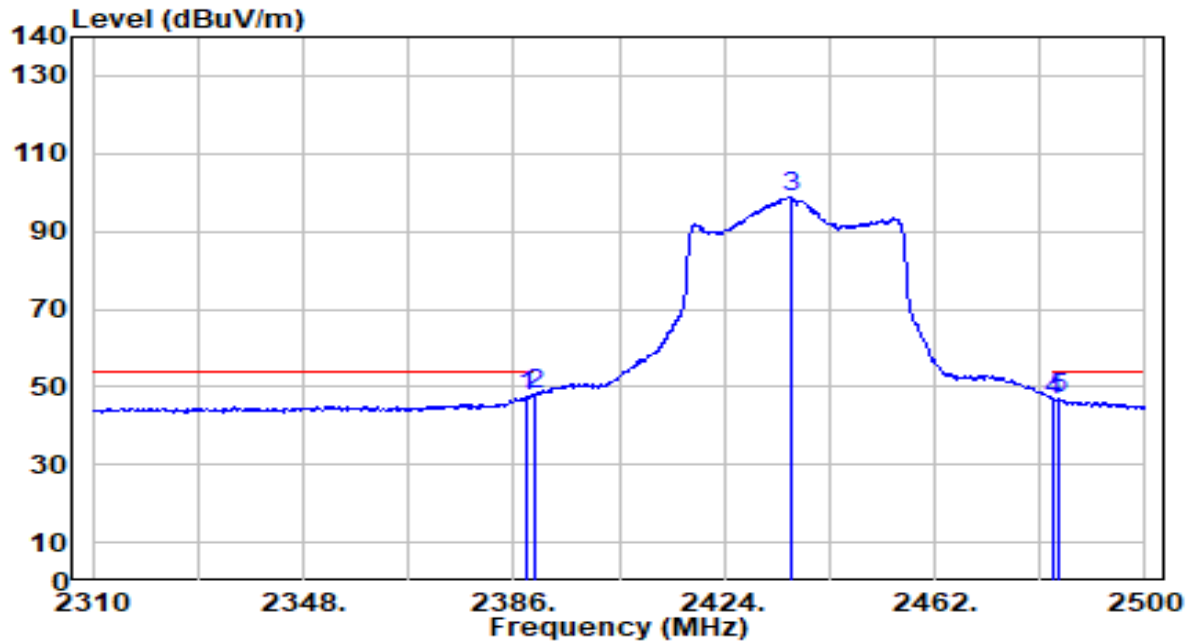


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.470	17.26	30.44	47.71	-6.29	54.00	108	102	Average
2	*	2390.000	17.53	30.45	47.98	-6.02	54.00	108	102	Average
3		2435.970	68.36	30.52	98.89	N/A	N/A	108	102	Average
4		2483.500	16.16	30.59	46.75	-7.25	54.00	108	102	Average
5		2484.420	16.58	30.59	47.17	-6.83	54.00	108	102	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 9 ANT 0+1	Test Voltage	AC 120V/60Hz

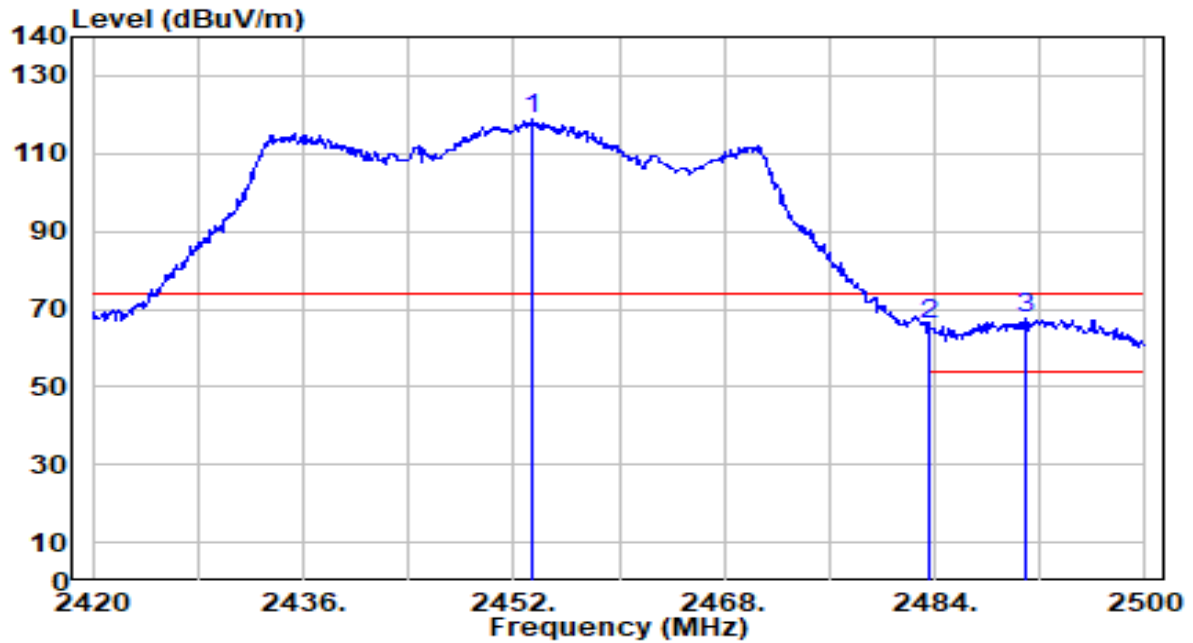


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.360	88.39	30.55	118.93	N/A	N/A	106	216	Peak
2	2483.500	35.61	30.59	66.20	-7.80	74.00	106	216	Peak
3	* 2490.960	36.84	30.60	67.44	-6.56	74.00	106	216	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 9 ANT 0+1	Test Voltage	AC 120V/60Hz

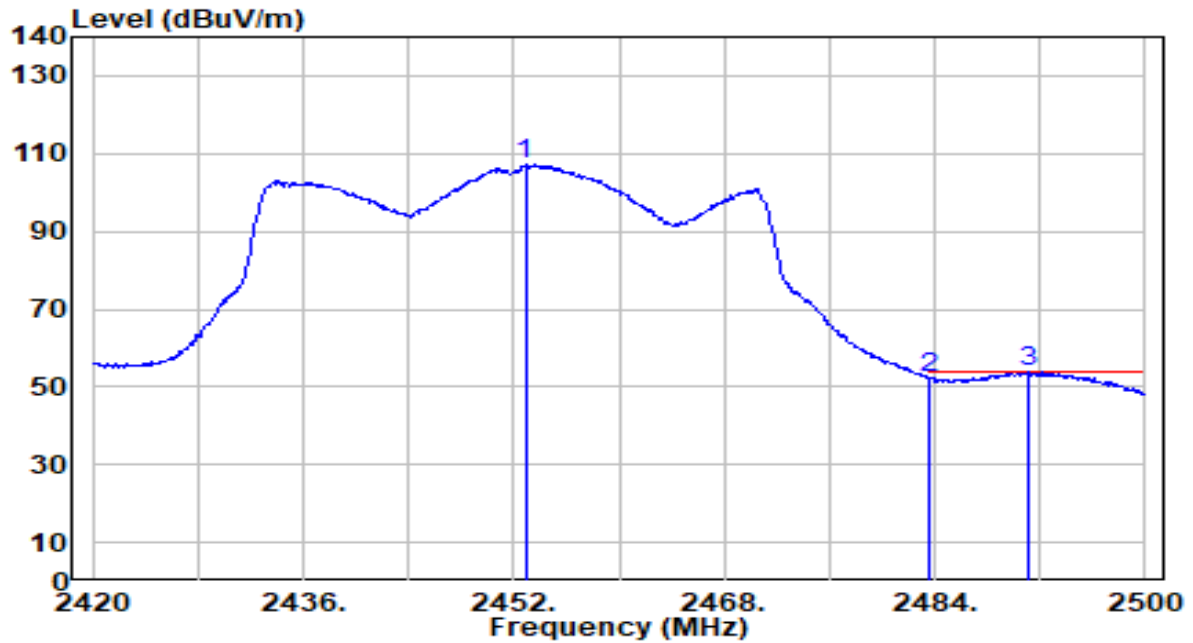


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2452.880	76.84	30.55	107.38	N/A	N/A	106	216	Average
2	2483.500	21.92	30.59	52.51	-1.49	54.00	106	216	Average
3	* 2491.120	23.19	30.60	53.79	-0.21	54.00	106	216	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 9 ANT 0+1	Test Voltage	AC 120V/60Hz

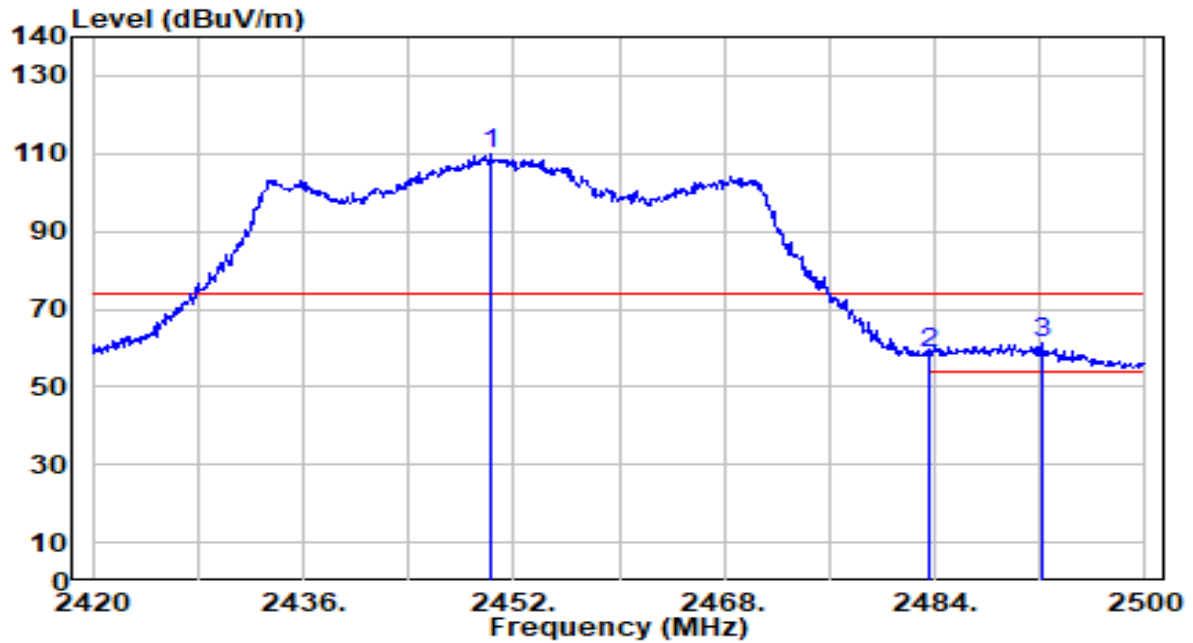


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.160	79.09	30.54	109.63	N/A	N/A	144	96	Peak
2	2483.500	28.11	30.59	58.70	-15.30	74.00	144	96	Peak
3	* 2492.080	30.59	30.60	61.19	-12.81	74.00	144	96	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-08
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_TX_CH 9 ANT 0+1	Test Voltage	AC 120V/60Hz

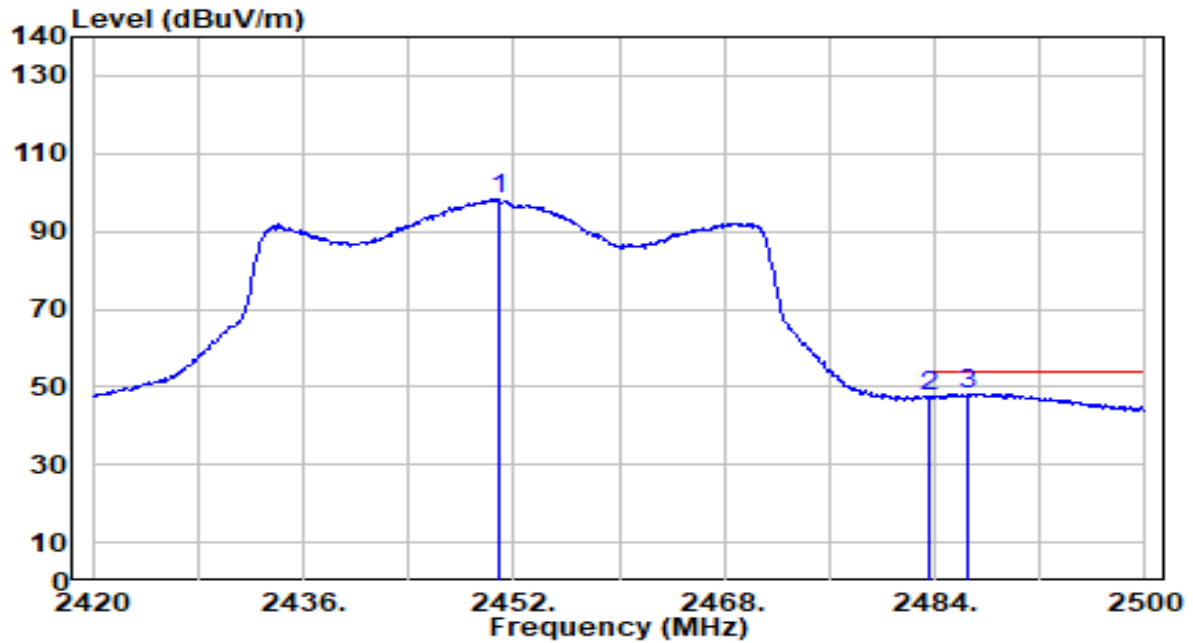

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.800	67.78	30.54	98.32	N/A	N/A	144	96	Average
2	2483.500	16.72	30.59	47.31	-6.69	54.00	144	96	Average
3	* 2486.480	17.61	30.59	48.21	-5.79	54.00	144	96	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

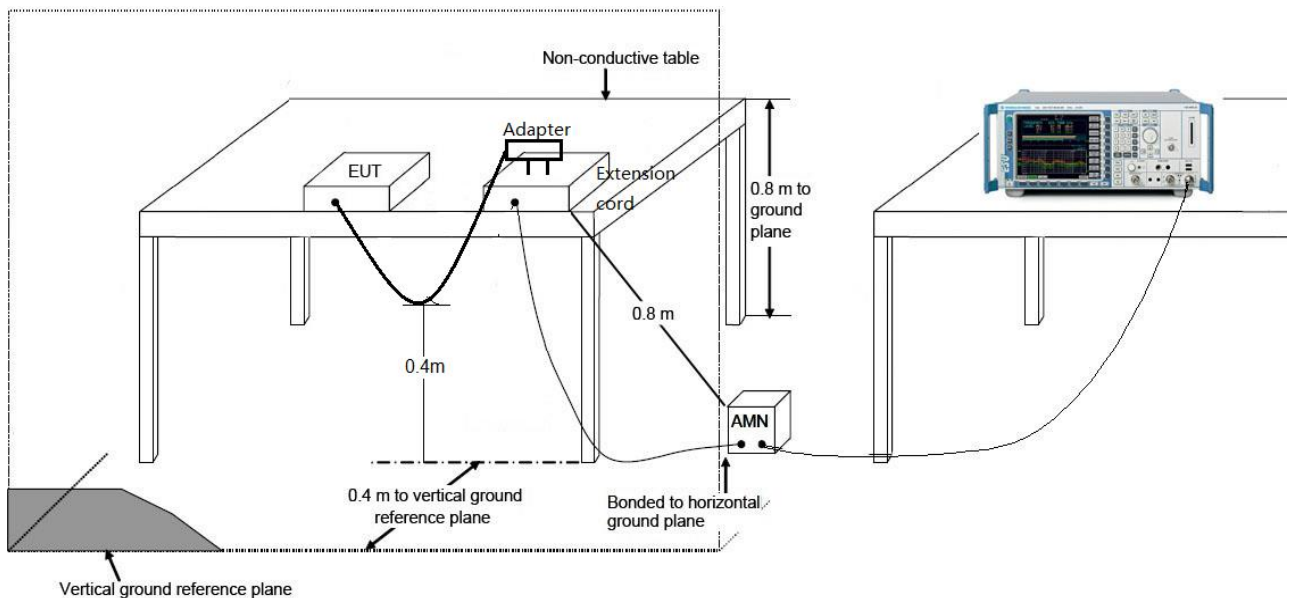

7.8.3.Test Result

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-08-02
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.2°C /47%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

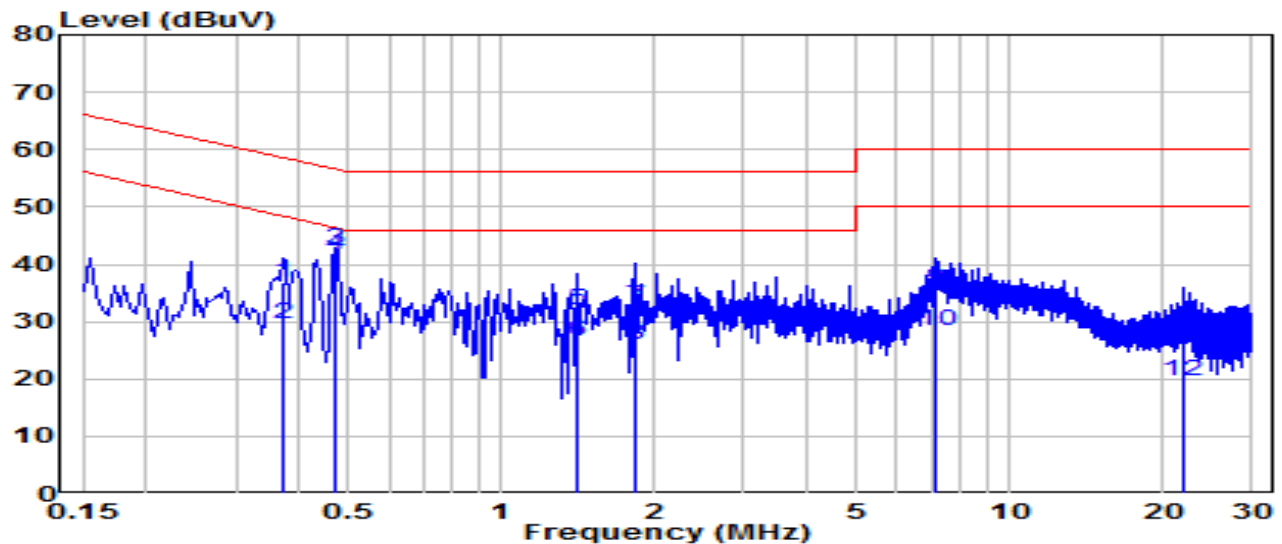


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.370	27.30	9.64	36.94	-21.55	58.49	QP
2	0.370	19.95	9.64	29.59	-18.90	48.49	Average
3	* 0.469	32.79	9.65	42.44	-14.09	56.52	QP
4	* 0.469	31.88	9.65	41.53	-4.99	46.52	Average
5	1.405	22.20	9.69	31.89	-24.11	56.00	QP
6	1.405	16.76	9.69	26.45	-19.55	46.00	Average
7	1.833	23.06	9.70	32.75	-23.25	56.00	QP
8	1.833	16.23	9.70	25.92	-20.08	46.00	Average
9	7.160	25.90	9.80	35.70	-24.30	60.00	QP
10	7.160	18.70	9.80	28.50	-21.50	50.00	Average
11	21.856	16.54	9.93	26.47	-33.53	60.00	QP
12	21.856	9.84	9.93	19.77	-30.23	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-08-02
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.2°C /47%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

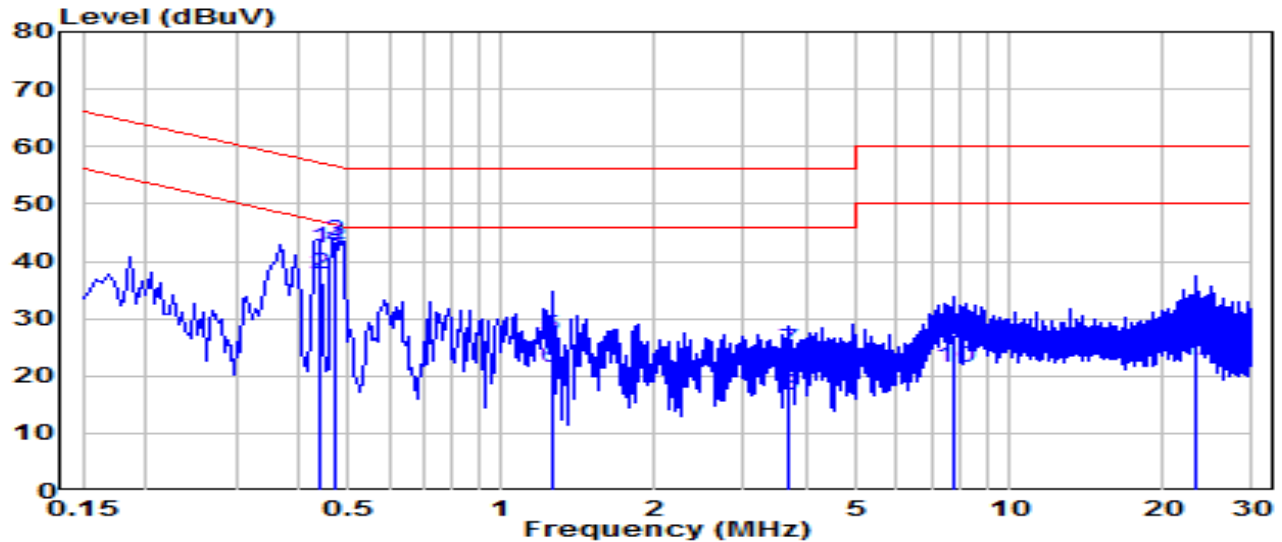


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.438	32.48	9.65	42.13	-14.97	57.10	QP
2	0.438	28.07	9.65	37.72	-9.38	47.10	Average
3	* 0.469	33.88	9.65	43.53	-12.99	56.52	QP
4	* 0.469	32.52	9.65	42.17	-4.36	46.52	Average
5	1.252	17.27	9.69	26.96	-29.04	56.00	QP
6	1.252	11.61	9.69	21.30	-24.70	46.00	Average
7	3.660	14.81	9.73	24.55	-31.45	56.00	QP
8	3.660	6.81	9.73	16.54	-29.46	46.00	Average
9	7.777	17.31	9.83	27.14	-32.86	60.00	QP
10	7.777	11.59	9.83	21.42	-28.58	50.00	Average
11	23.341	19.43	10.01	29.44	-30.56	60.00	QP
12	23.341	12.58	10.01	22.59	-27.41	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-08-02
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.2°C /47%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

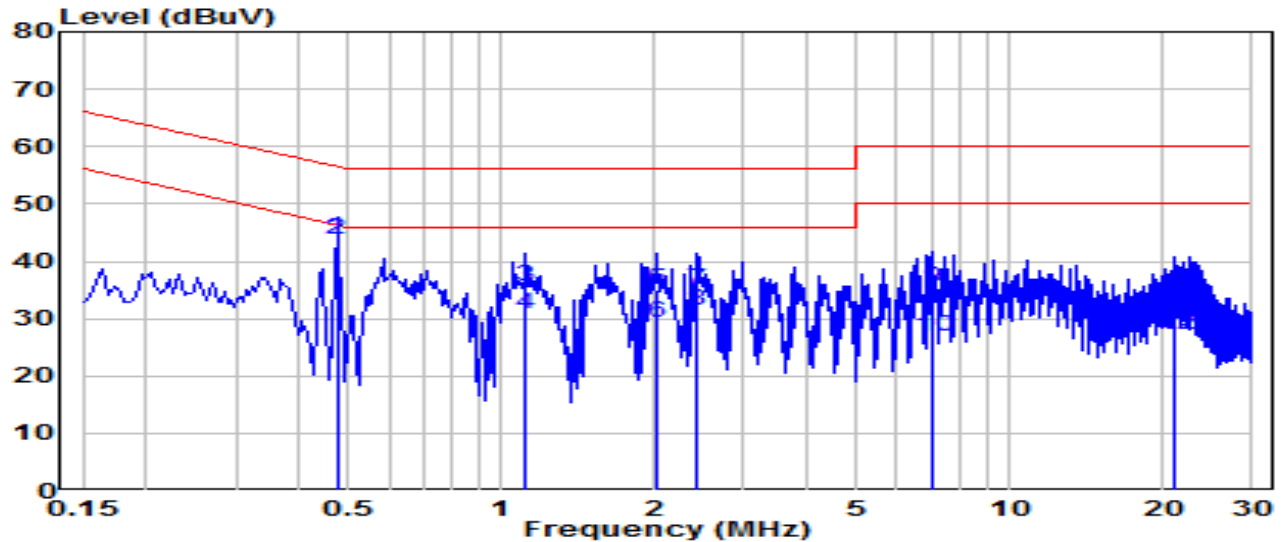


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.474	34.37	9.65	44.02	-12.42	56.44	QP
2	*	0.474	34.15	9.65	43.80	-2.64	46.44	Average
3		1.117	25.95	9.68	35.63	-20.37	56.00	QP
4		1.117	21.17	9.68	30.85	-15.15	46.00	Average
5		2.017	25.25	9.70	34.96	-21.04	56.00	QP
6		2.017	19.52	9.70	29.22	-16.78	46.00	Average
7		2.431	25.44	9.71	35.15	-20.85	56.00	QP
8		2.431	21.83	9.71	31.53	-14.47	46.00	Average
9		7.007	25.59	9.80	35.38	-24.62	60.00	QP
10		7.007	17.13	9.80	26.92	-23.08	50.00	Average
11		21.172	23.92	9.94	33.85	-26.15	60.00	QP
12		21.172	17.11	9.94	27.05	-22.95	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-08-02
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.2°C /47%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

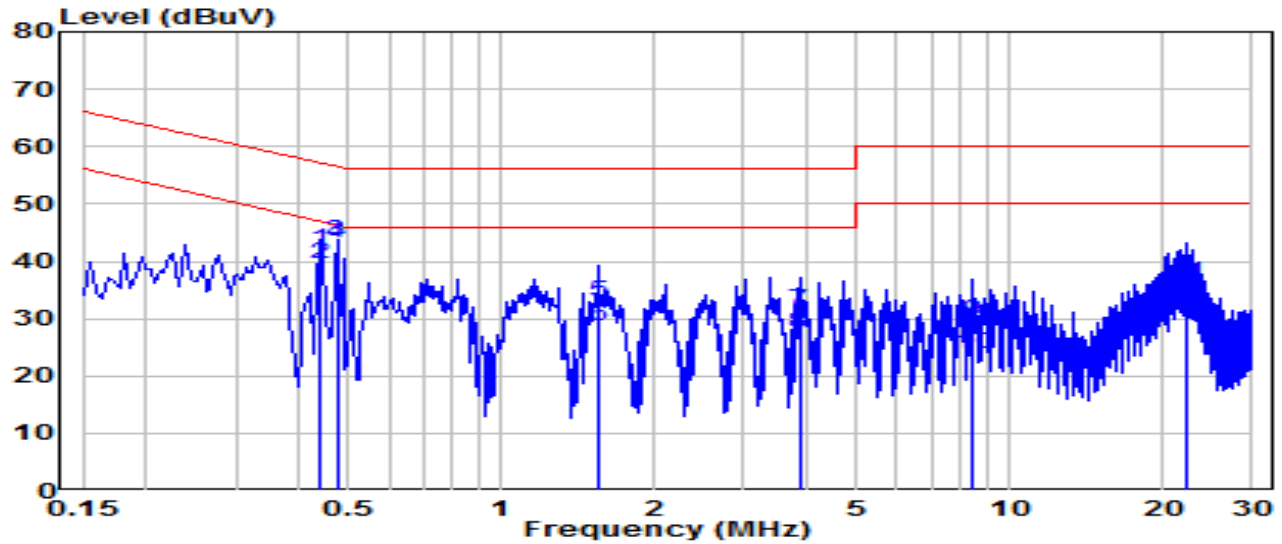

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.438	32.27	9.65	41.92	-15.18	57.10	QP
2	0.438	29.96	9.65	39.61	-7.49	47.10	Average
3	* 0.474	33.85	9.65	43.50	-12.94	56.44	QP
4	* 0.474	33.61	9.65	43.26	-3.18	46.44	Average
5	1.558	23.09	9.70	32.79	-23.21	56.00	QP
6	1.558	18.99	9.70	28.68	-17.32	46.00	Average
7	3.853	21.55	9.74	31.28	-24.72	56.00	QP
8	3.853	17.59	9.74	27.33	-18.67	46.00	Average
9	8.434	19.67	9.85	29.52	-30.48	60.00	QP
10	8.434	13.88	9.85	23.72	-26.28	50.00	Average
11	22.256	26.28	10.01	36.28	-23.72	60.00	QP
12	22.256	21.03	10.01	31.04	-18.96	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2308TW0121-UT” file.

Appendix B : External Photograph

Refer to “2308TW0121-UE” file.

Appendix C : Internal Photograph

Refer to “2308TW0121-UI” file.

_____ The End _____