


EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band2_TX_CH 58 ANT 0+1	Test Voltage	AC 120V/60Hz

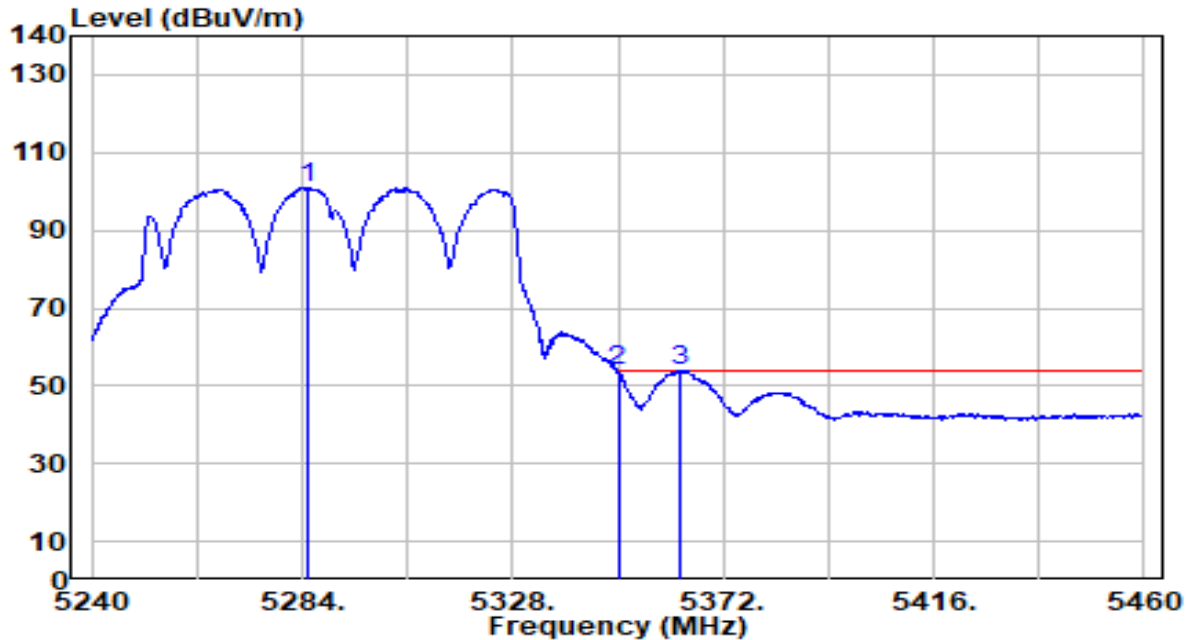


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5285.320	100.24	0.58	100.81	N/A	N/A	140	182	Average
2	5350.000	53.18	0.51	53.68	-0.32	54.00	140	182	Average
3	* 5363.200	53.31	0.49	53.80	-0.20	54.00	140	182	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	AC 120V/60Hz

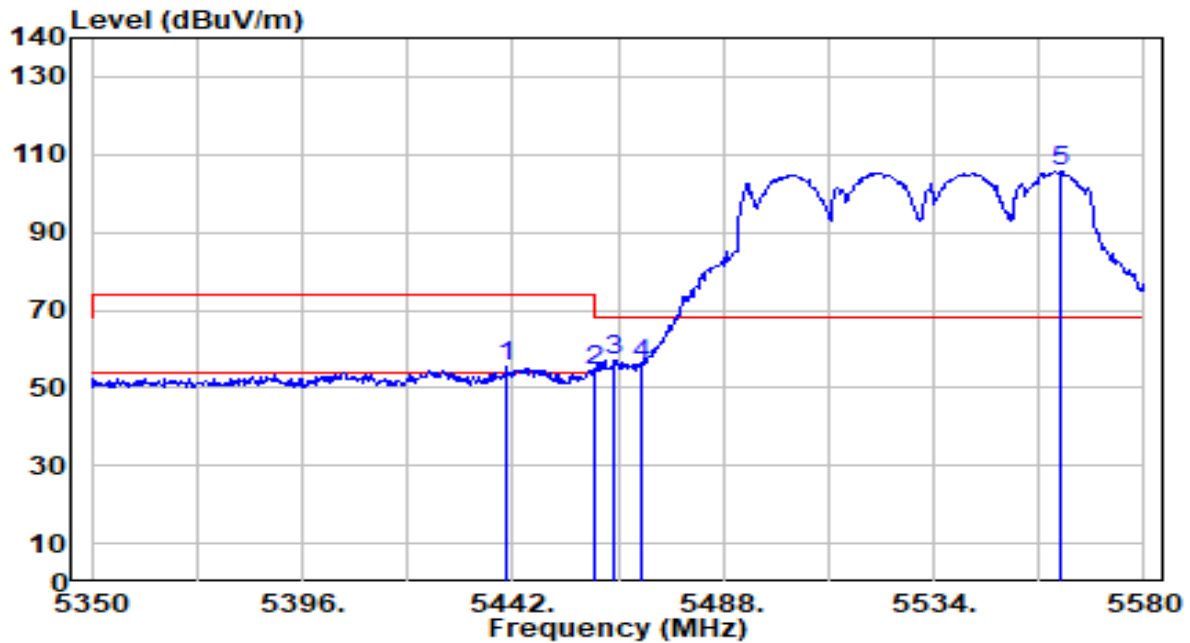


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5440.620	54.82	0.59	55.41	-18.59	74.00	112	123	Peak
2	5460.000	53.72	0.65	54.37	-19.63	74.00	112	123	Peak
3	* 5464.310	56.57	0.67	57.24	-10.96	68.20	112	123	Peak
4	5470.000	55.51	0.69	56.19	-12.01	68.20	112	123	Peak
5	5561.830	104.79	1.02	105.80	N/A	N/A	112	123	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	AC 120V/60Hz

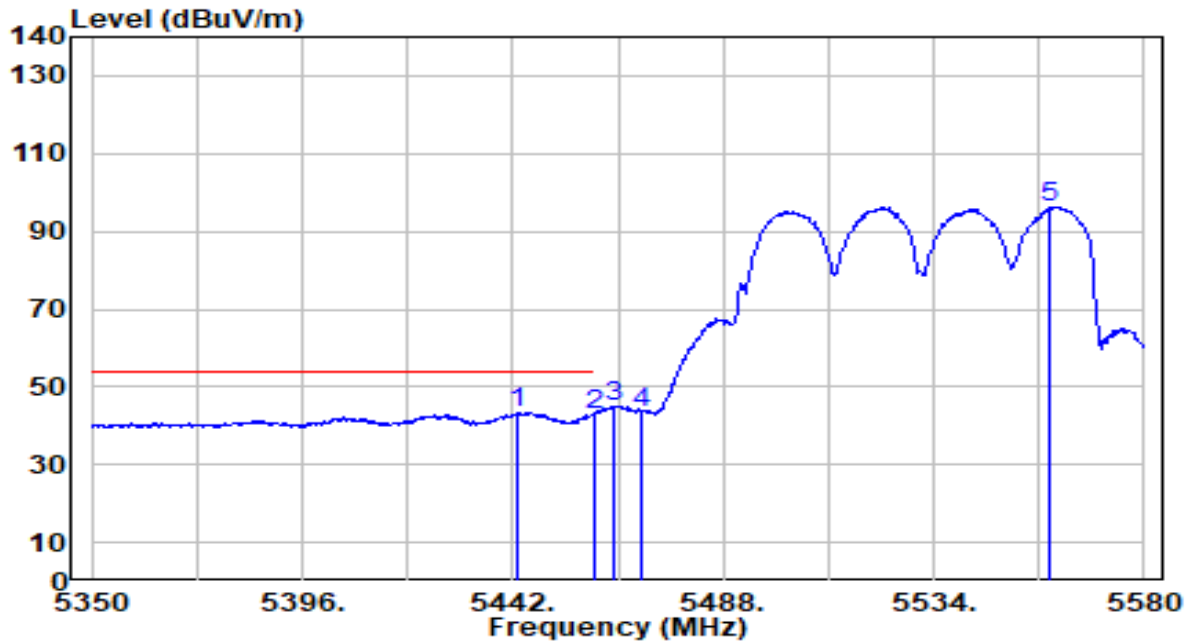


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5442.920	42.90	0.60	43.50	-10.50	54.00	112	123	Average
2		5460.000	42.35	0.65	43.00	-11.00	54.00	112	123	Average
3		5464.310	44.01	0.67	44.67	N/A	N/A	112	123	Average
4		5470.000	42.79	0.69	43.47	N/A	N/A	112	123	Average
5		5559.300	95.20	1.01	96.20	N/A	N/A	112	123	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	AC 120V/60Hz

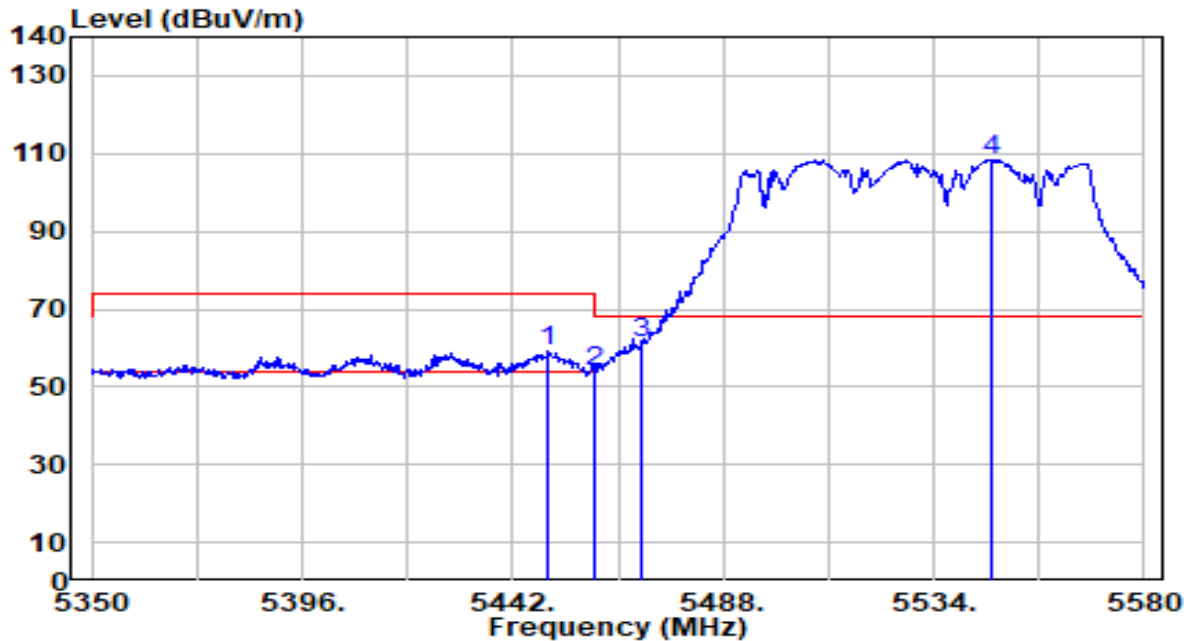


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5449.820	58.73	0.62	59.35	-14.65	74.00	185	192	Peak
2	5460.000	53.44	0.65	54.09	-19.91	74.00	185	192	Peak
3	* 5470.000	60.71	0.69	61.40	-6.80	68.20	185	192	Peak
4	5546.420	107.52	0.96	108.48	N/A	N/A	185	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	AC 120V/60Hz

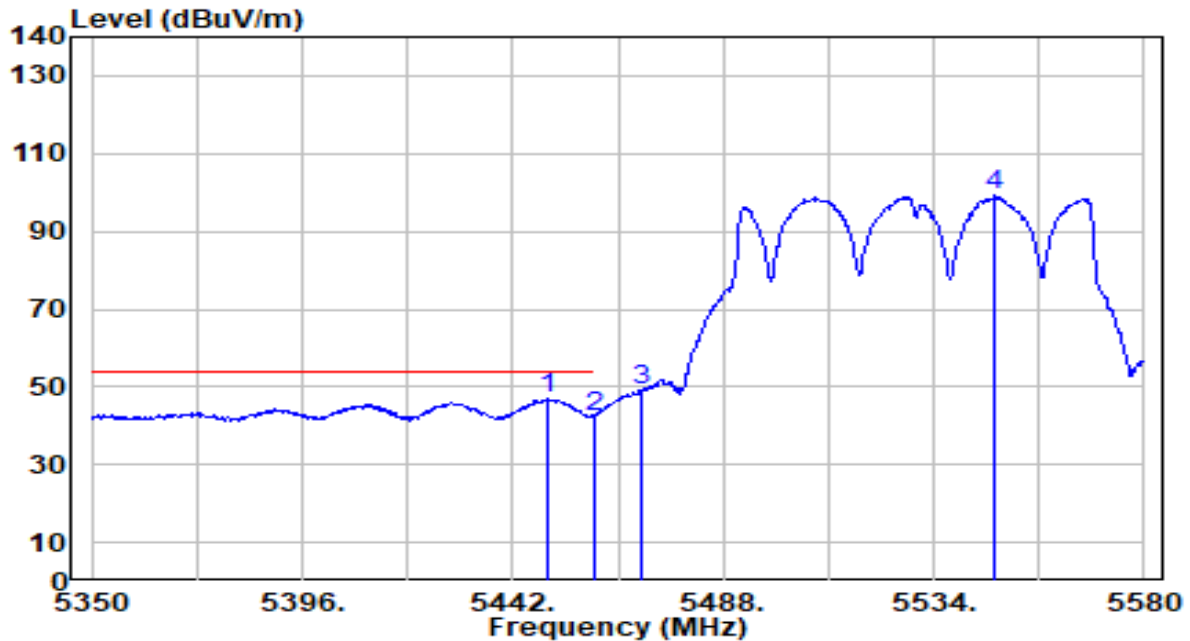


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5449.590	46.20	0.62	46.82	-7.18	54.00	185	192	Average
2		5460.000	41.82	0.65	42.48	-11.52	54.00	185	192	Average
3		5470.000	48.22	0.69	48.91	N/A	N/A	185	192	Average
4		5547.340	98.35	0.96	99.31	N/A	N/A	185	192	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band4_TX_CH 155 ANT 0+1	Test Voltage	AC 120V/60Hz

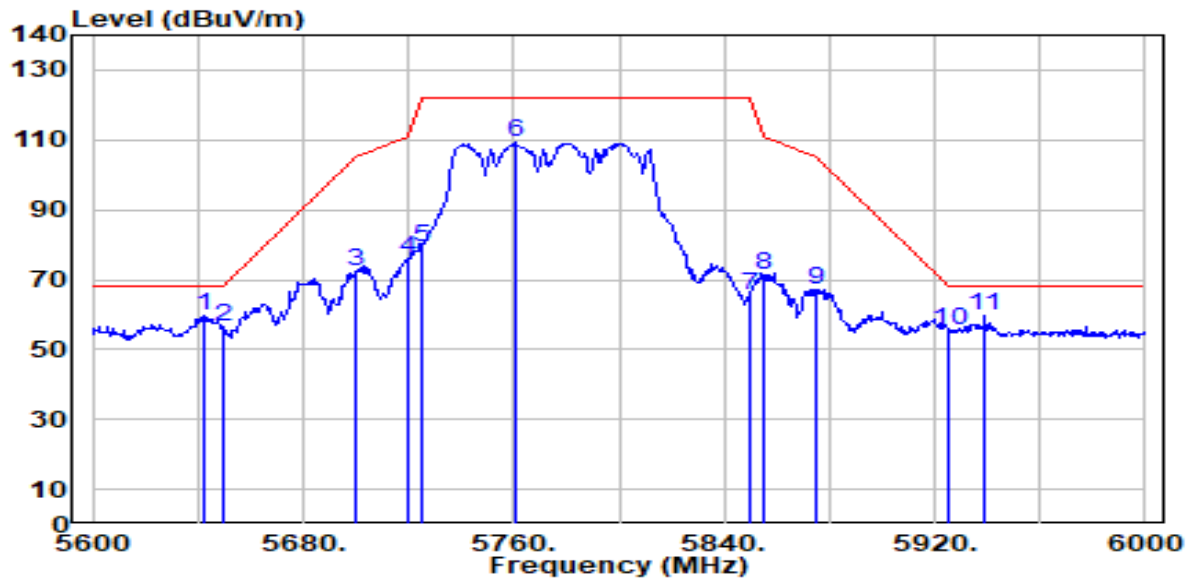


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5642.800	58.35	1.40	59.74	-8.46	68.20	114	115	Peak
2		5650.000	54.92	1.44	56.36	-11.84	68.20	114	115	Peak
3		5700.000	70.73	1.72	72.45	-32.75	105.20	114	115	Peak
4		5720.000	74.43	1.84	76.27	-34.53	110.80	114	115	Peak
5		5725.000	77.64	1.86	79.51	-42.69	122.20	114	115	Peak
6		5760.400	107.08	2.06	109.14	N/A	N/A	114	115	Peak
7		5850.000	63.44	2.27	65.71	-56.49	122.20	114	115	Peak
8		5855.000	68.79	2.27	71.06	-39.74	110.80	114	115	Peak
9		5875.000	64.67	2.26	66.93	-38.27	105.20	114	115	Peak
10		5925.000	53.11	2.25	55.36	-12.84	68.20	114	115	Peak
11		5938.800	57.21	2.24	59.45	-8.75	68.20	114	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band4_TX_CH 155 ANT 0+1	Test Voltage	AC 120V/60Hz

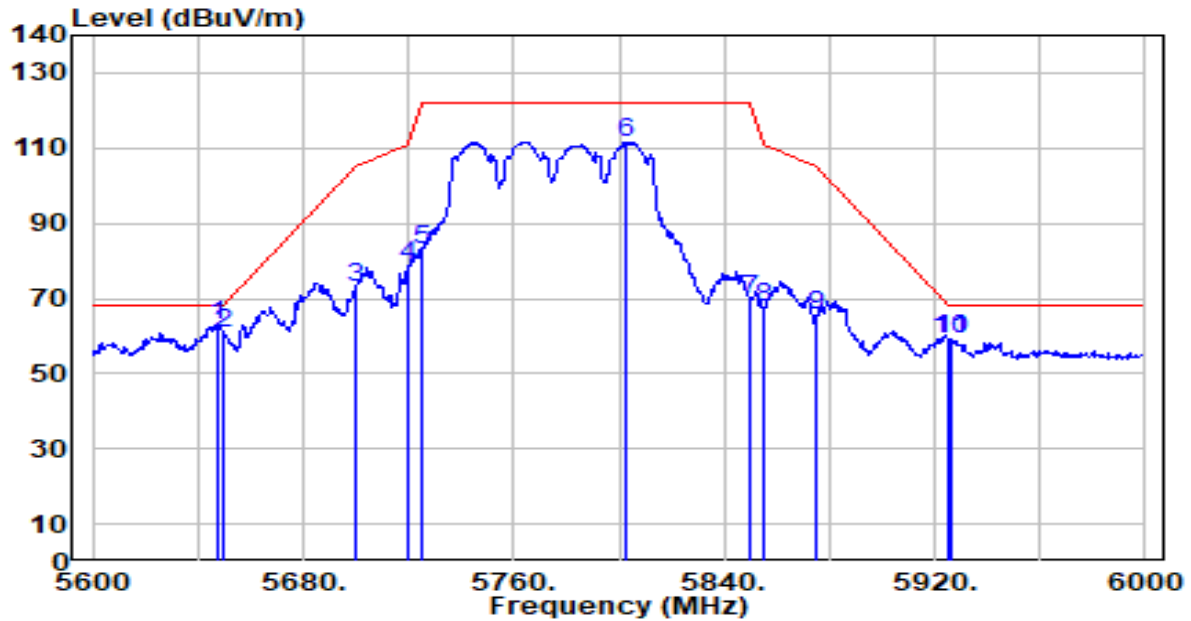


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.000	61.30	1.43	62.72	-5.48	68.20	115	177	Peak
2		5650.000	59.16	1.44	60.60	-7.60	68.20	115	177	Peak
3		5700.000	71.23	1.72	72.95	-32.25	105.20	115	177	Peak
4		5720.000	76.81	1.84	78.65	-32.15	110.80	115	177	Peak
5		5725.000	81.09	1.86	82.95	-39.25	122.20	115	177	Peak
6		5802.800	109.41	2.29	111.69	N/A	N/A	115	177	Peak
7		5850.000	67.72	2.27	69.99	-52.21	122.20	115	177	Peak
8		5855.000	65.55	2.27	67.82	-42.98	110.80	115	177	Peak
9		5875.000	63.10	2.26	65.36	-39.84	105.20	115	177	Peak
10		5925.000	56.96	2.25	59.21	-8.99	68.20	115	177	Peak
11		5926.400	57.00	2.25	59.24	-8.96	68.20	115	177	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	AC 120V/60Hz

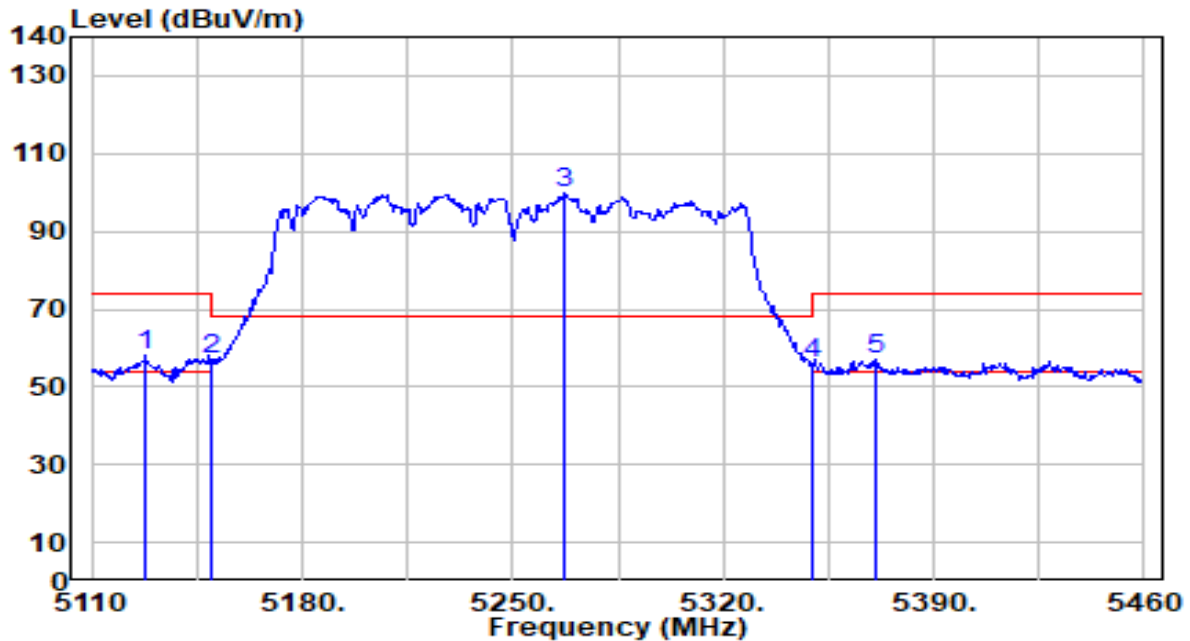


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5127.850	57.60	0.68	58.27	-15.73	74.00	109	211	Peak
2		5150.000	56.42	0.68	57.09	-16.91	74.00	109	211	Peak
3		5267.150	99.07	0.60	99.66	N/A	N/A	109	211	Peak
4		5350.000	55.36	0.51	55.87	-18.13	74.00	109	211	Peak
5		5370.400	56.31	0.48	56.79	-17.21	74.00	109	211	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	AC 120V/60Hz

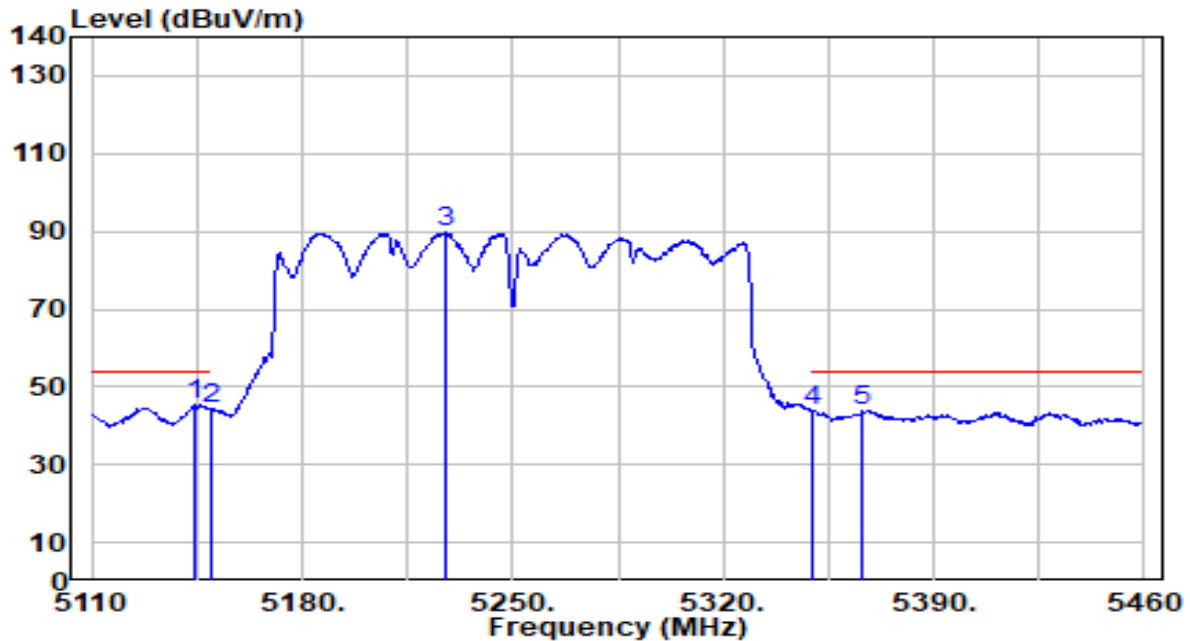


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.300	44.70	0.68	45.38	-8.62	54.00	109	211	Average
2		5150.000	43.85	0.68	44.52	-9.48	54.00	109	211	Average
3		5227.600	89.07	0.64	89.71	N/A	N/A	109	211	Average
4		5350.000	43.48	0.51	43.98	-10.02	54.00	109	211	Average
5		5366.550	43.33	0.49	43.82	-10.18	54.00	109	211	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	AC 120V/60Hz

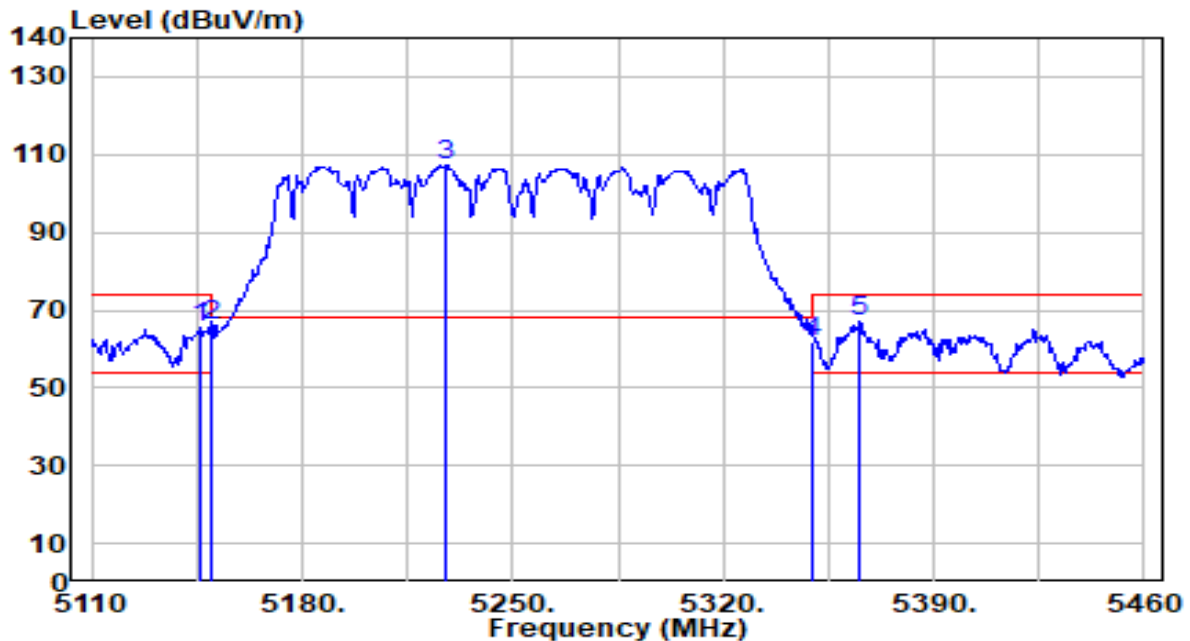


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5145.700	64.62	0.68	65.30	-8.70	74.00	148	183	Peak
2	5150.000	65.17	0.68	65.85	-8.15	74.00	148	183	Peak
3	5227.950	106.65	0.64	107.29	N/A	N/A	148	183	Peak
4	5350.000	61.56	0.51	62.06	-11.94	74.00	148	183	Peak
5	* 5365.150	66.58	0.49	67.07	-6.93	74.00	148	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	AC 120V/60Hz

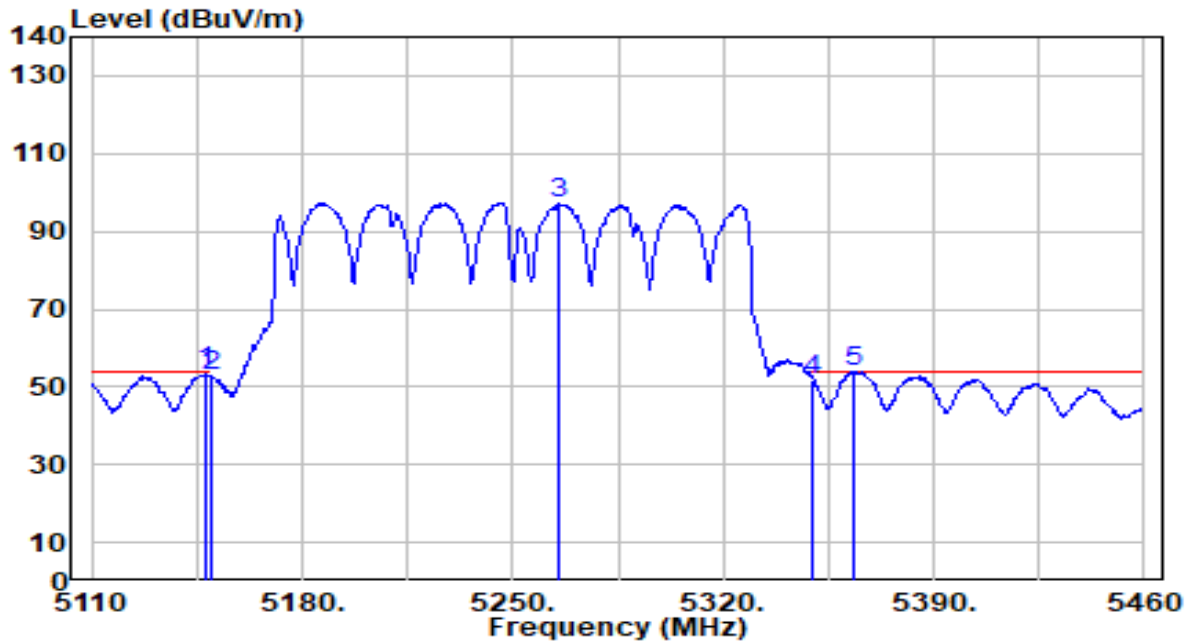


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.150	53.05	0.68	53.72	-0.28	54.00	148	183	Average
2	5150.000	52.09	0.68	52.76	-1.24	54.00	148	183	Average
3	5265.050	96.68	0.60	97.28	N/A	N/A	148	183	Average
4	5350.000	51.26	0.51	51.77	-2.23	54.00	148	183	Average
5	* 5363.050	53.33	0.49	53.82	-0.18	54.00	148	183	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	AC 120V/60Hz

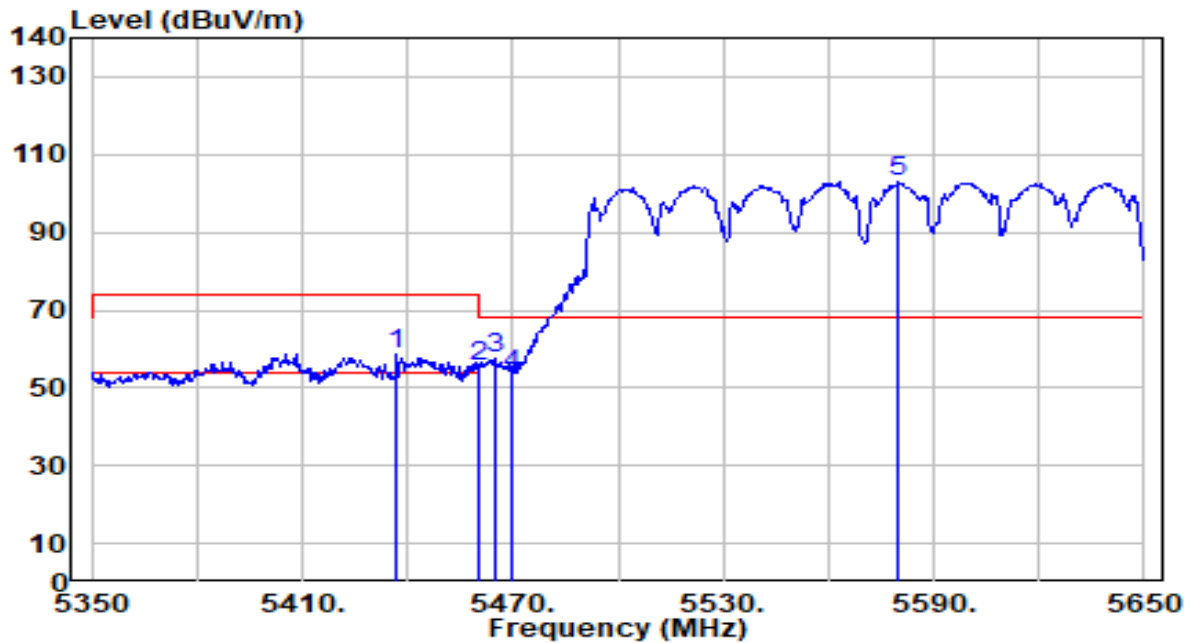


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5437.000	57.99	0.58	58.57	-15.43	74.00	115	119	Peak
2	5460.000	54.82	0.65	55.48	-18.52	74.00	115	119	Peak
3	* 5464.900	56.66	0.67	57.33	-10.87	68.20	115	119	Peak
4	5470.000	52.78	0.69	53.47	-14.73	68.20	115	119	Peak
5	5580.100	101.76	1.08	102.84	N/A	N/A	115	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	AC 120V/60Hz

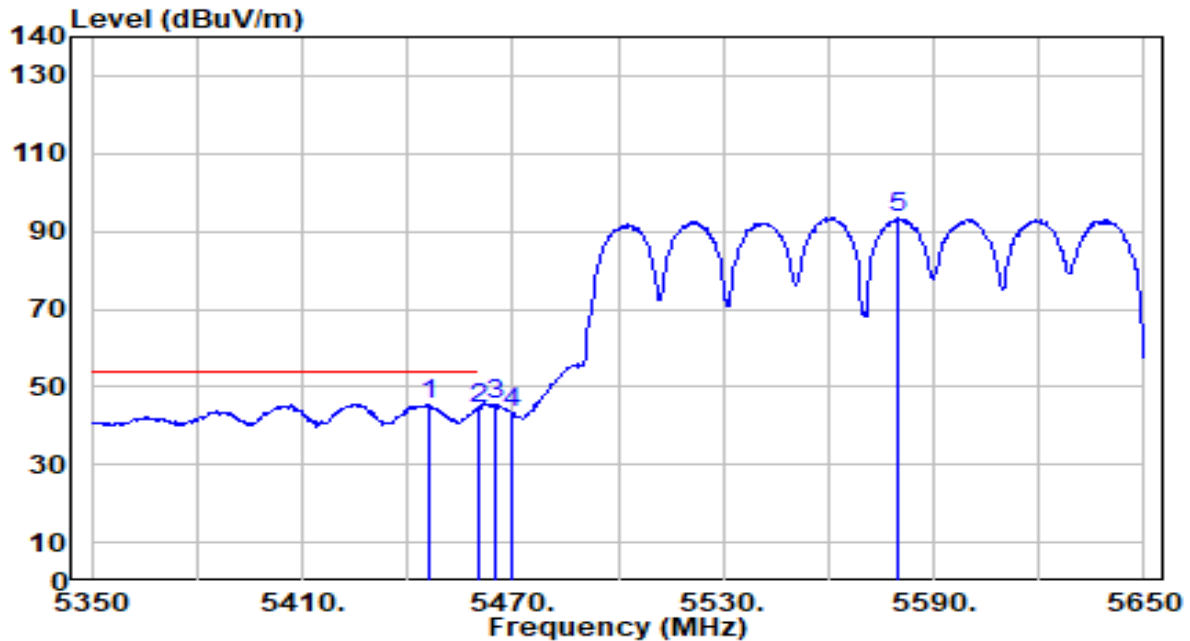


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5446.000	44.92	0.61	45.52	-8.48	54.00	115	119	Average
2		5460.000	43.51	0.65	44.16	-9.84	54.00	115	119	Average
3		5464.900	44.70	0.67	45.37	N/A	N/A	115	119	Average
4		5470.000	42.79	0.69	43.47	N/A	N/A	115	119	Average
5		5579.800	92.34	1.08	93.43	N/A	N/A	115	119	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	AC 120V/60Hz

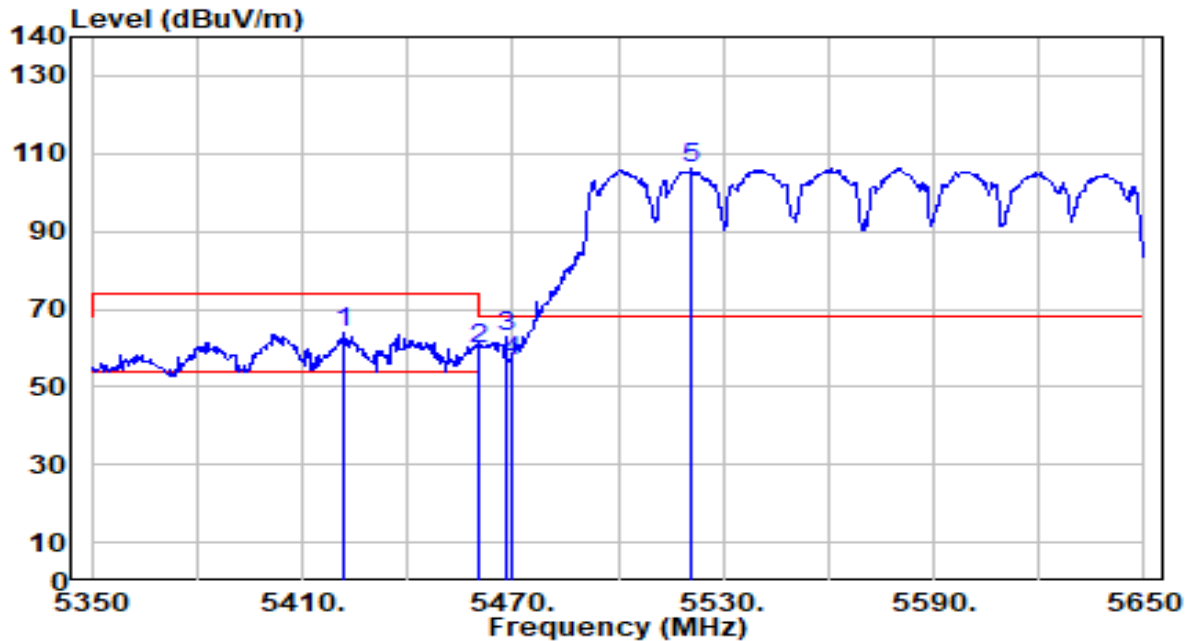


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5422.000	63.33	0.52	63.86	-10.14	74.00	120	138	Peak
2	5460.000	59.17	0.65	59.82	-14.18	74.00	120	138	Peak
3	* 5468.200	62.14	0.68	62.82	-5.38	68.20	120	138	Peak
4	5470.000	55.87	0.69	56.56	-11.64	68.20	120	138	Peak
5	5521.000	105.32	0.87	106.19	N/A	N/A	120	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	AC 120V/60Hz

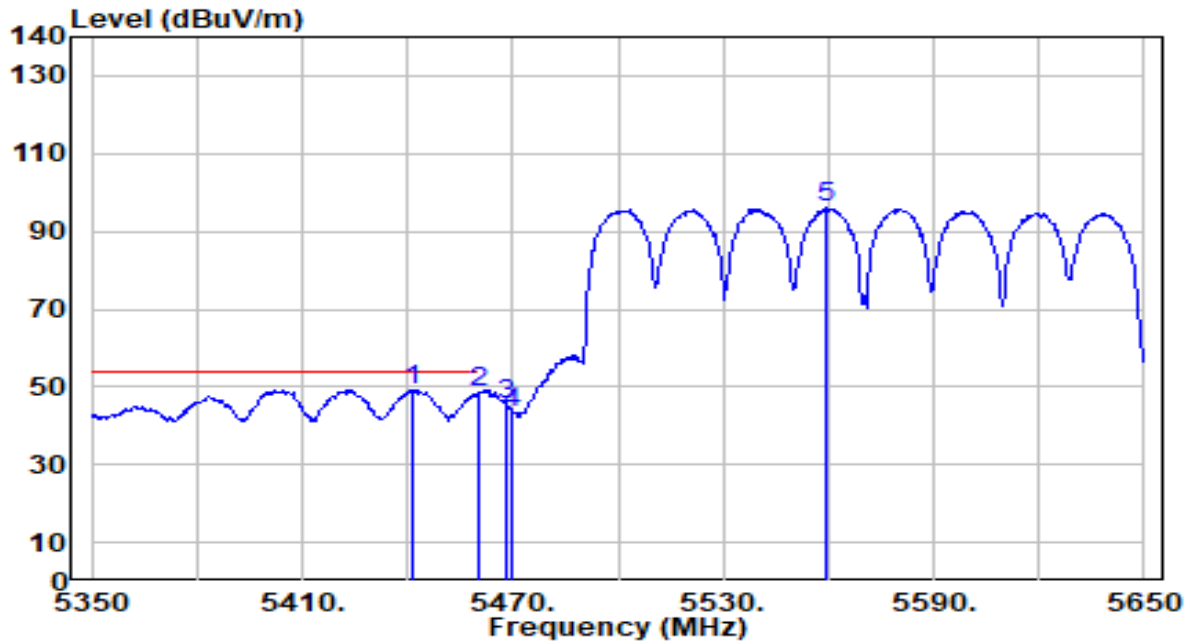


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5441.200	48.65	0.59	49.24	-4.76	54.00	120	138	Average
2		5460.000	47.80	0.65	48.46	-5.54	54.00	120	138	Average
3		5468.200	44.79	0.68	45.48	N/A	N/A	120	138	Average
4		5470.000	42.69	0.69	43.38	N/A	N/A	120	138	Average
5		5559.100	95.04	1.01	96.05	N/A	N/A	120	138	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band1_TX_CH 36 ANT 0+1	Test Voltage	AC 120V/60Hz

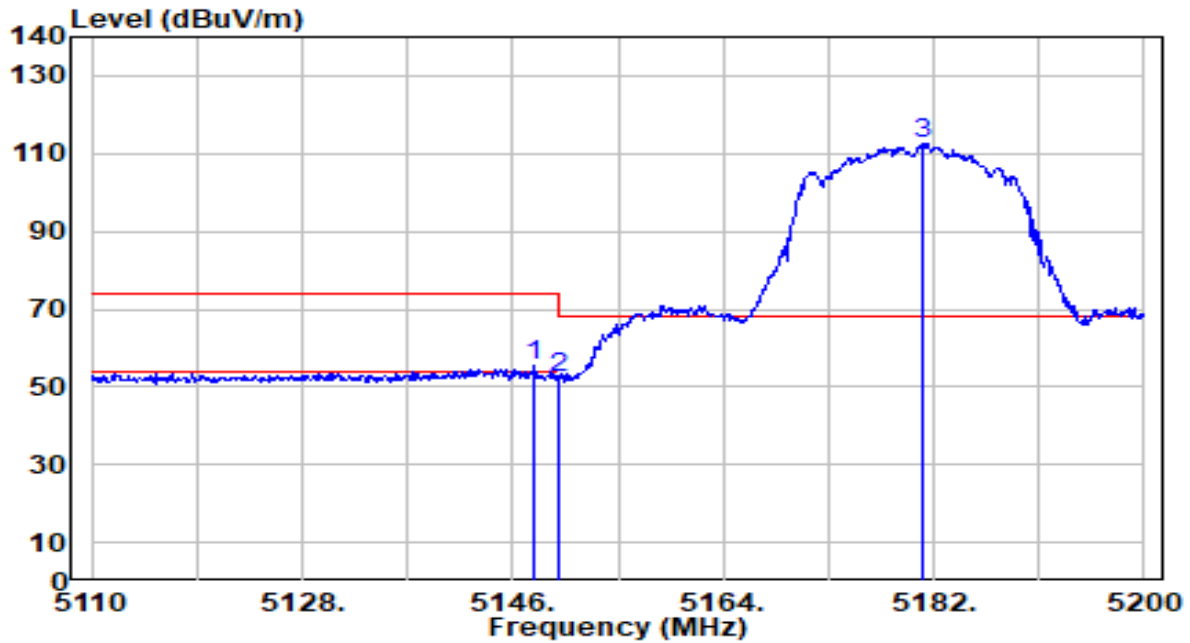


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.890	54.59	0.68	55.26	-18.74	74.00	110	187	Peak
2		5150.000	51.62	0.68	52.30	-21.70	74.00	110	187	Peak
3		5181.010	111.78	0.67	112.45	N/A	N/A	110	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band1_TX_CH 36 ANT 0+1	Test Voltage	AC 120V/60Hz

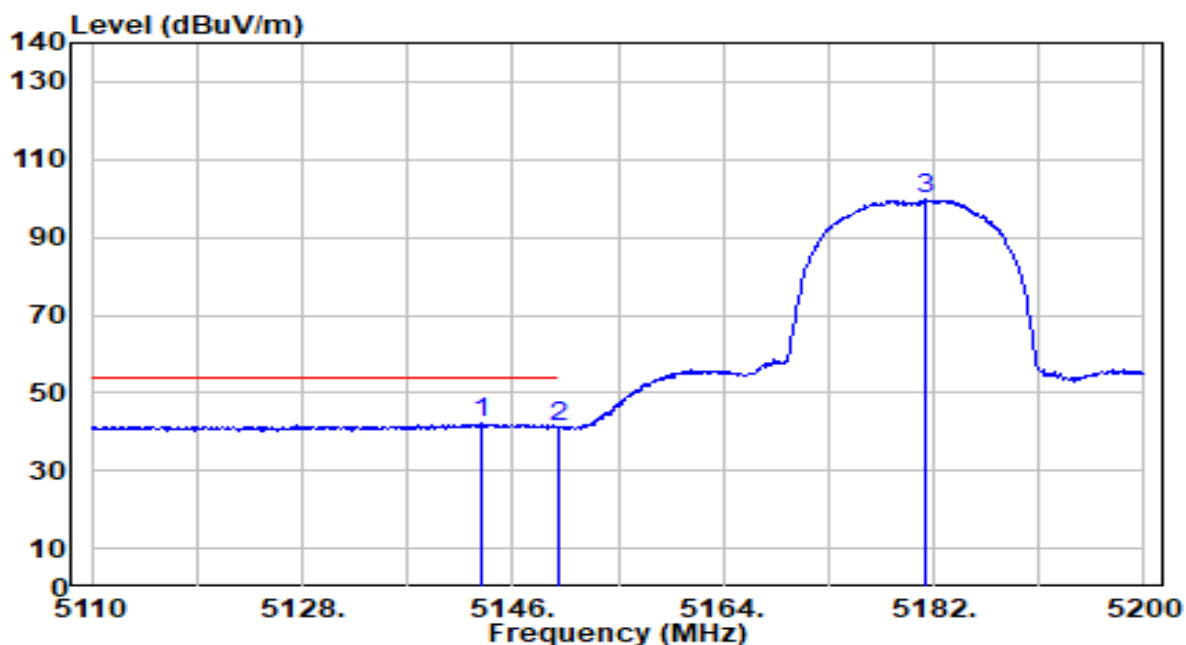


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.300	41.52	0.68	42.20	-11.80	54.00	110	187	Average
2		5150.000	40.31	0.68	40.99	-13.01	54.00	110	187	Average
3		5181.280	99.24	0.67	99.92	N/A	N/A	110	187	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band1_TX_CH 36 ANT 0+1	Test Voltage	AC 120V/60Hz

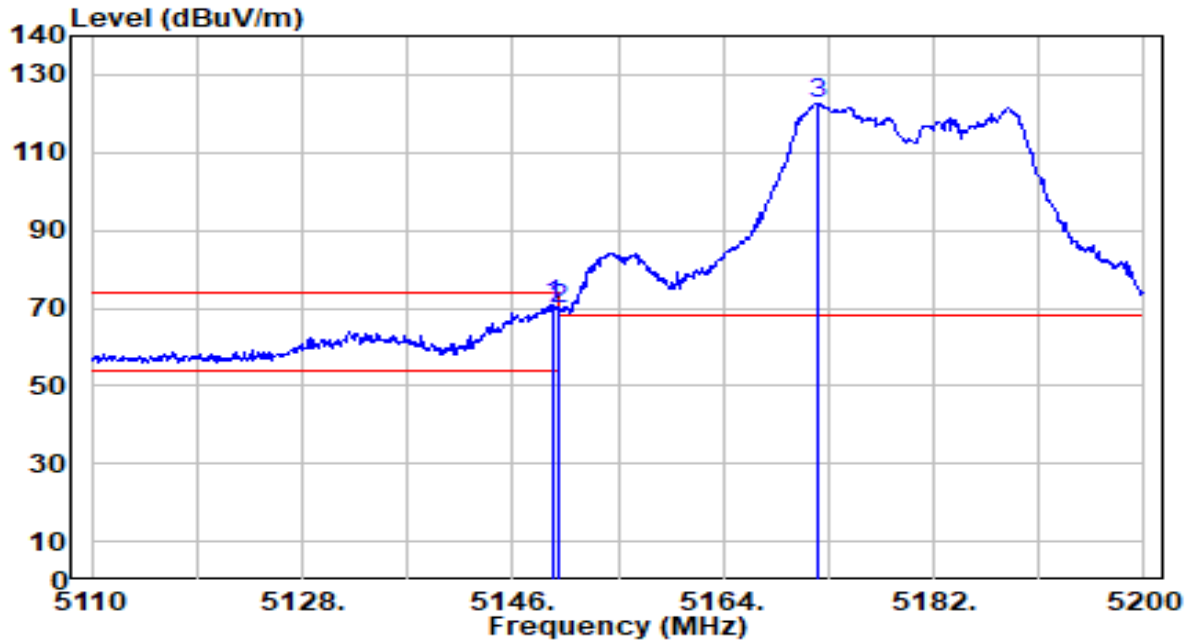


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	70.31	0.68	70.98	-3.02	74.00	118	173	Peak
2		5150.000	68.82	0.68	69.50	-4.50	74.00	118	173	Peak
3		5172.010	122.10	0.67	122.77	N/A	N/A	118	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band1_TX_CH 36 ANT 0+1	Test Voltage	AC 120V/60Hz

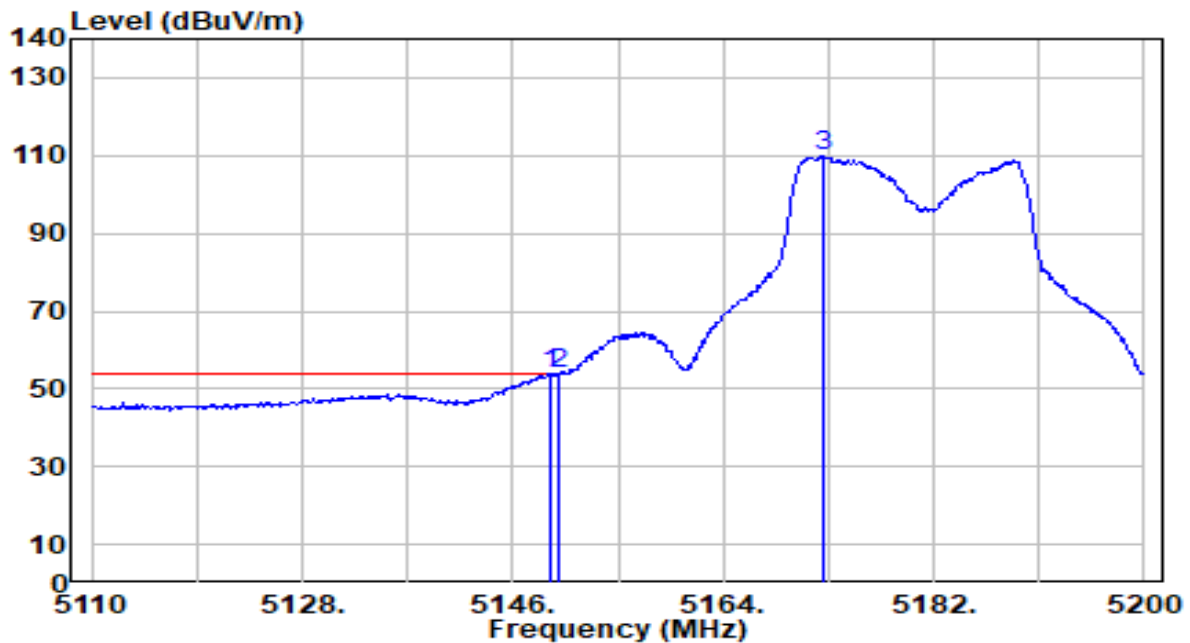


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.330	53.20	0.68	53.88	-0.12	54.00	118	173	Average
2		5150.000	53.17	0.68	53.84	-0.16	54.00	118	173	Average
3		5172.550	109.27	0.67	109.94	N/A	N/A	118	173	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band2_TX_CH 64 ANT 0+1	Test Voltage	AC 120V/60Hz

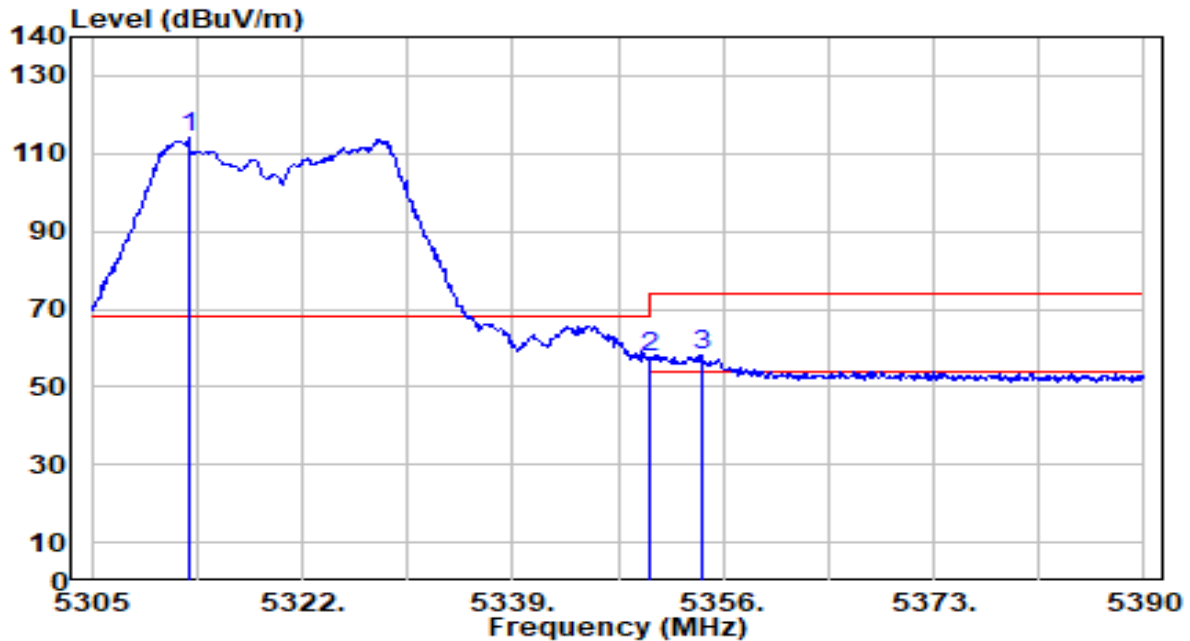


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.820	113.33	0.55	113.88	N/A	N/A	191	122	Peak
2	5350.000	57.32	0.51	57.82	-16.18	74.00	191	122	Peak
3	* 5354.215	57.45	0.50	57.95	-16.05	74.00	191	122	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band2_TX_CH 64 ANT 0+1	Test Voltage	AC 120V/60Hz

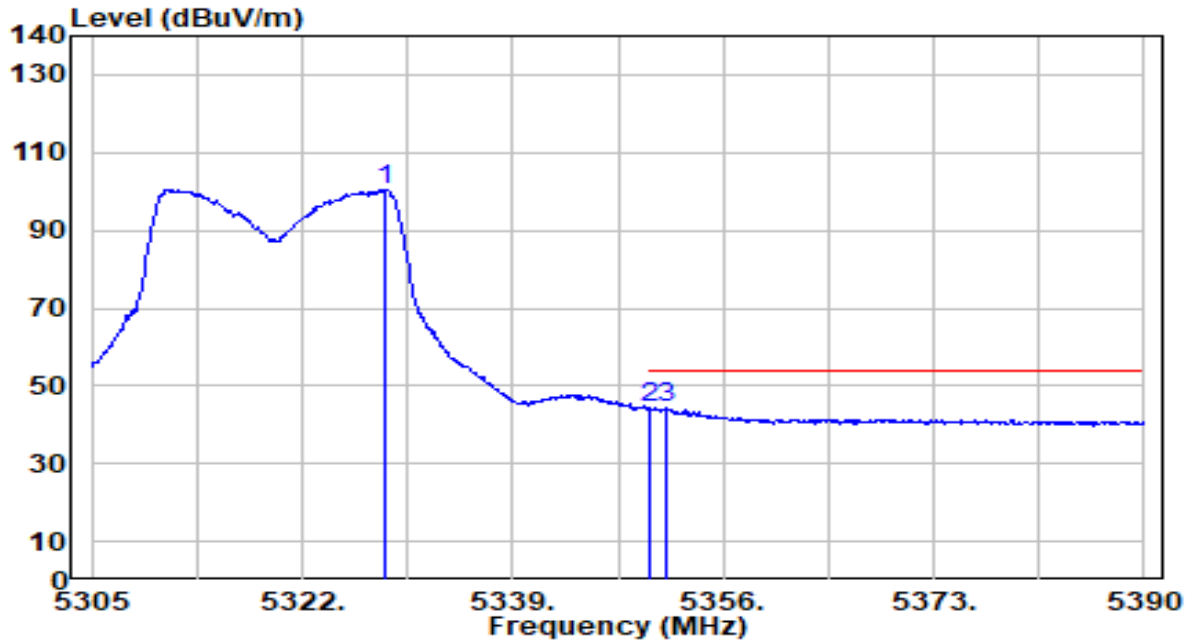


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5328.715	100.08	0.53	100.61	N/A	N/A	191	122	Average
2	*	5350.000	43.85	0.51	44.35	-9.65	54.00	191	122	Average
3		5351.495	43.61	0.50	44.12	-9.88	54.00	191	122	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band2_TX_CH 64 ANT 0+1	Test Voltage	AC 120V/60Hz

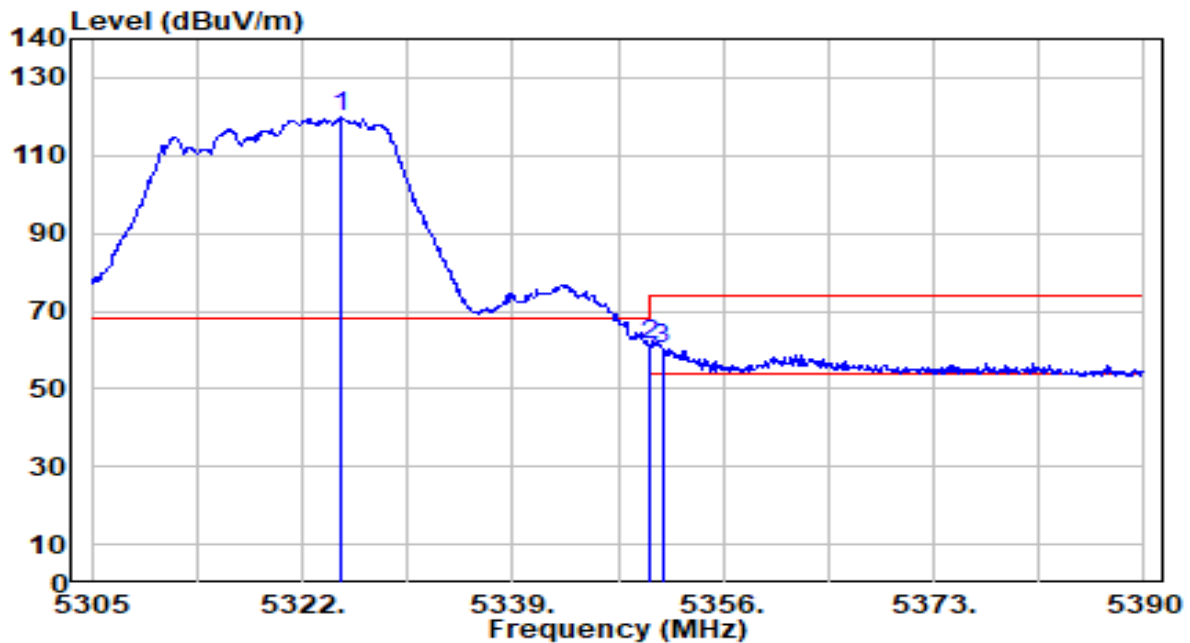


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5325.060	119.35	0.53	119.88	N/A	N/A	113	162	Peak
2	*	5350.000	61.00	0.51	61.51	-12.49	74.00	113	162	Peak
3		5351.070	59.81	0.50	60.31	-13.69	74.00	113	162	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band2_TX_CH 64 ANT 0+1	Test Voltage	AC 120V/60Hz

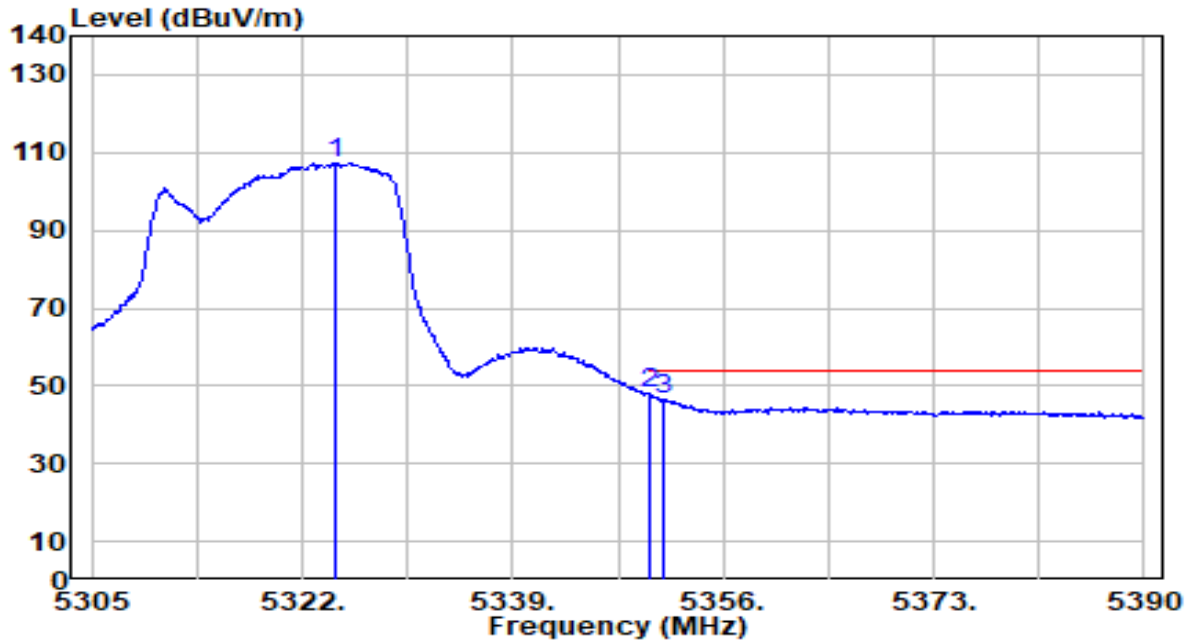


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5324.635	106.92	0.53	107.45	N/A	N/A	113	162	Average
2	*	5350.000	47.50	0.51	48.00	-6.00	54.00	113	162	Average
3		5351.155	45.97	0.50	46.48	-7.52	54.00	113	162	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 100 ANT 0+1	Test Voltage	AC 120V/60Hz

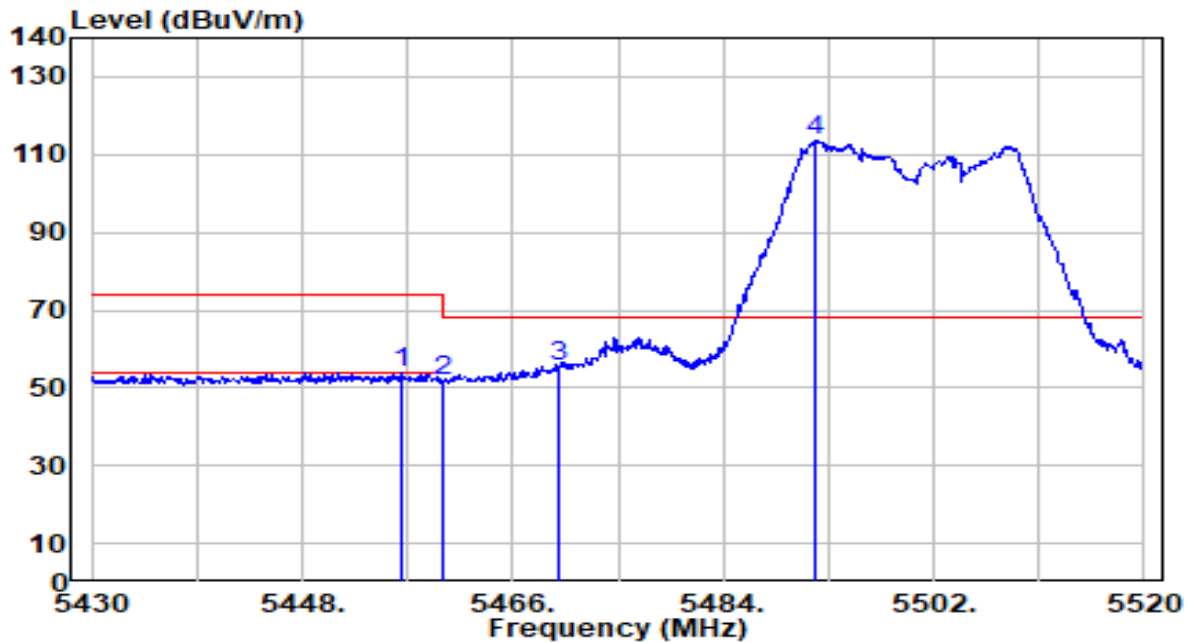


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.550	53.50	0.64	54.15	-19.85	74.00	112	120	Peak
2	5460.000	51.07	0.65	51.73	-22.27	74.00	112	120	Peak
3	* 5470.000	54.88	0.69	55.57	-12.63	68.20	112	120	Peak
4	5491.920	112.88	0.76	113.64	N/A	N/A	112	120	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 100 ANT 0+1	Test Voltage	AC 120V/60Hz

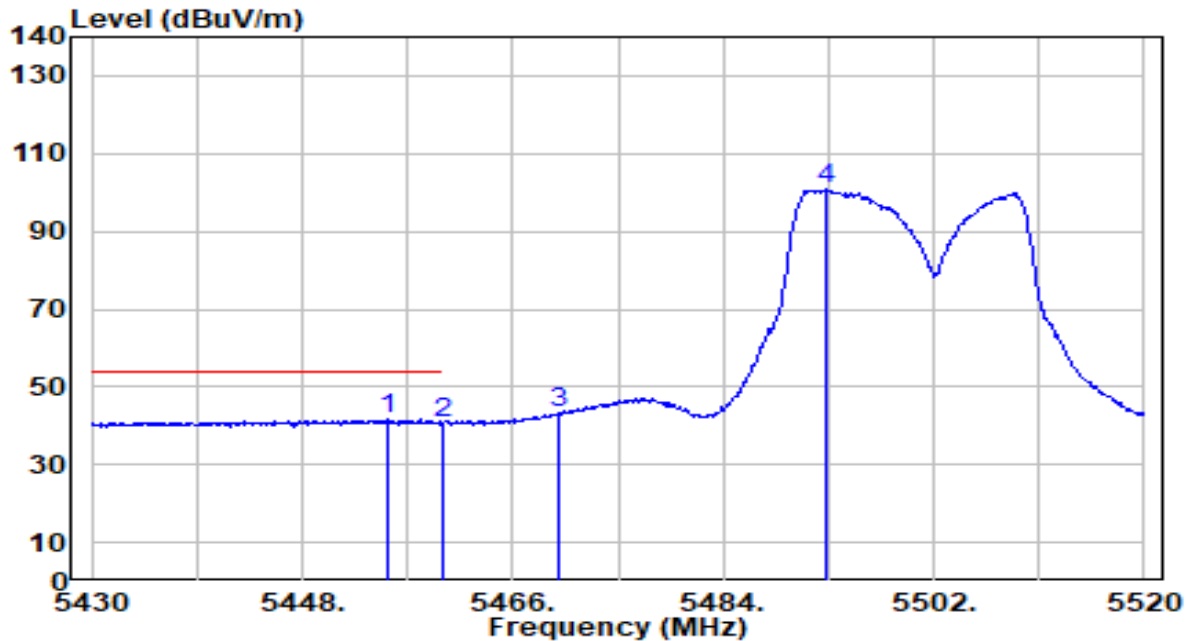


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.290	40.84	0.64	41.48	-12.52	54.00	112	120	Average
2		5460.000	40.11	0.65	40.76	-13.24	54.00	112	120	Average
3		5470.000	42.41	0.69	43.09	N/A	N/A	112	120	Average
4		5492.730	100.03	0.77	100.79	N/A	N/A	112	120	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 100 ANT 0+1	Test Voltage	AC 120V/60Hz

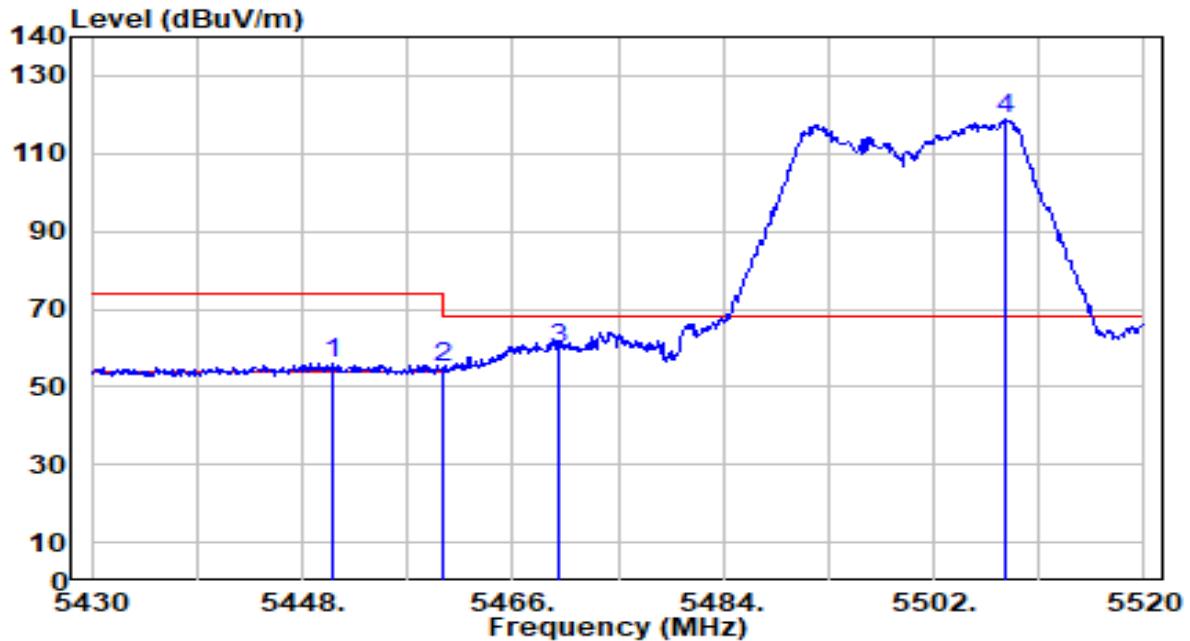


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.520	55.63	0.62	56.25	-17.75	74.00	110	171	Peak
2	5460.000	54.40	0.65	55.05	-18.95	74.00	110	171	Peak
3	* 5470.000	59.09	0.69	59.78	-8.42	68.20	110	171	Peak
4	5508.210	117.96	0.82	118.78	N/A	N/A	110	171	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 100 ANT 0+1	Test Voltage	AC 120V/60Hz

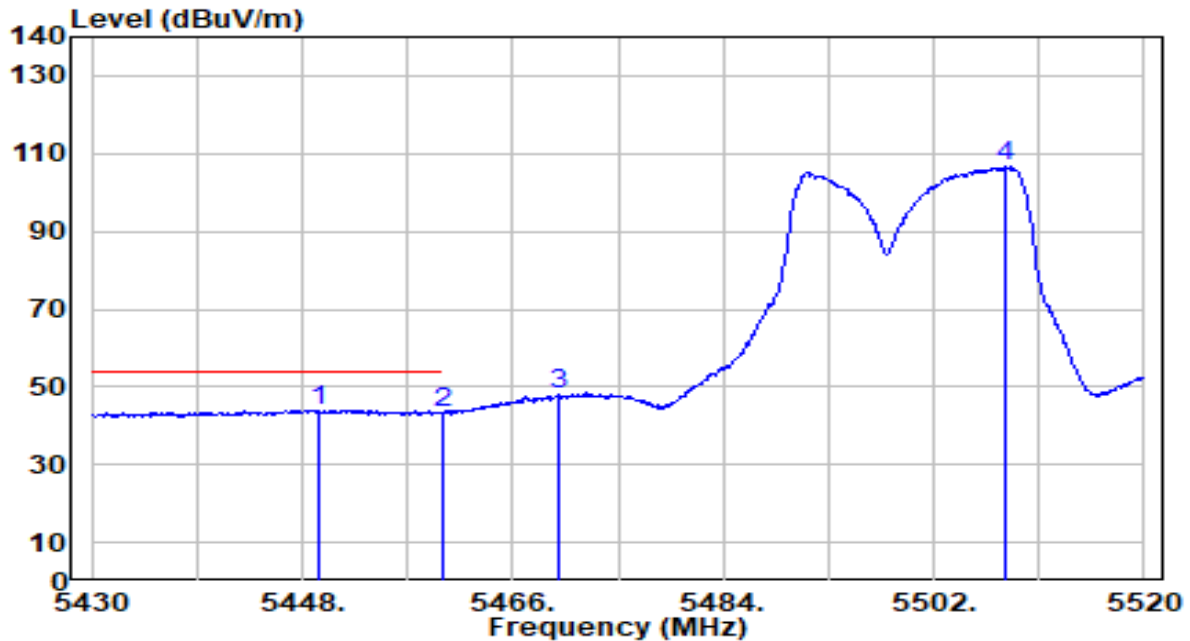


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5449.350	43.35	0.62	43.97	-10.03	54.00	110	171	Average
2		5460.000	42.68	0.65	43.34	-10.66	54.00	110	171	Average
3		5470.000	47.36	0.69	48.05	N/A	N/A	110	171	Average
4		5508.120	105.79	0.82	106.61	N/A	N/A	110	171	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 140 ANT 0+1	Test Voltage	AC 120V/60Hz

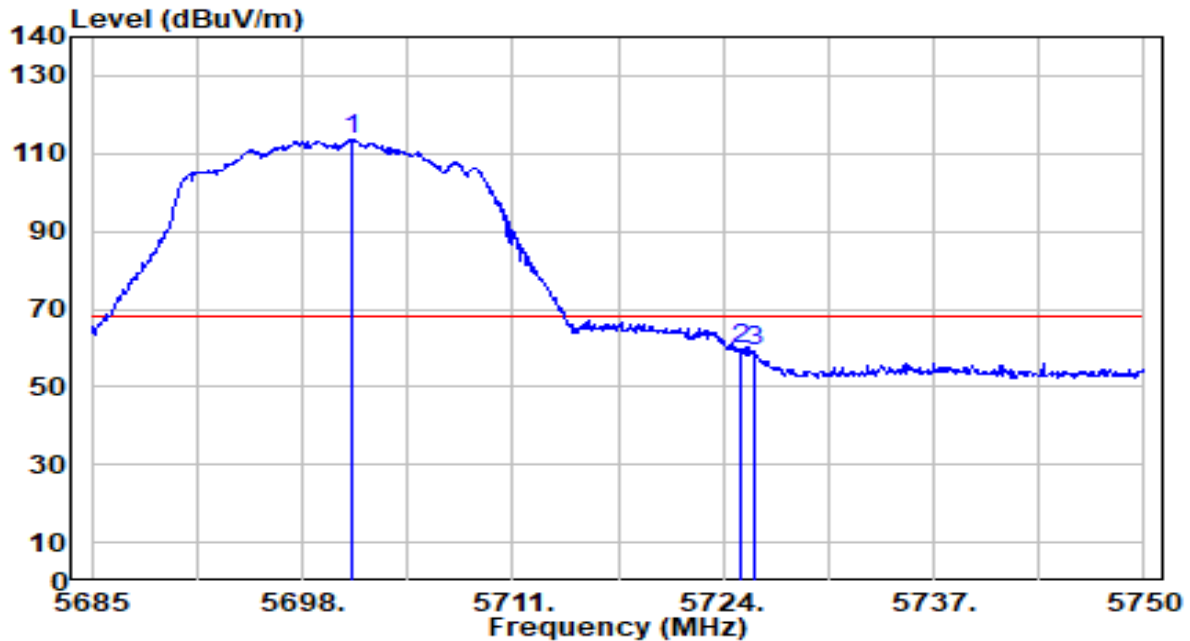


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5701.055	111.81	1.73	113.54	N/A	N/A	110	247	Peak
2	*	5725.000	57.84	1.86	59.70	-8.50	68.20	110	247	Peak
3		5725.950	57.37	1.87	59.24	-8.96	68.20	110	247	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 140 ANT 0+1	Test Voltage	AC 120V/60Hz

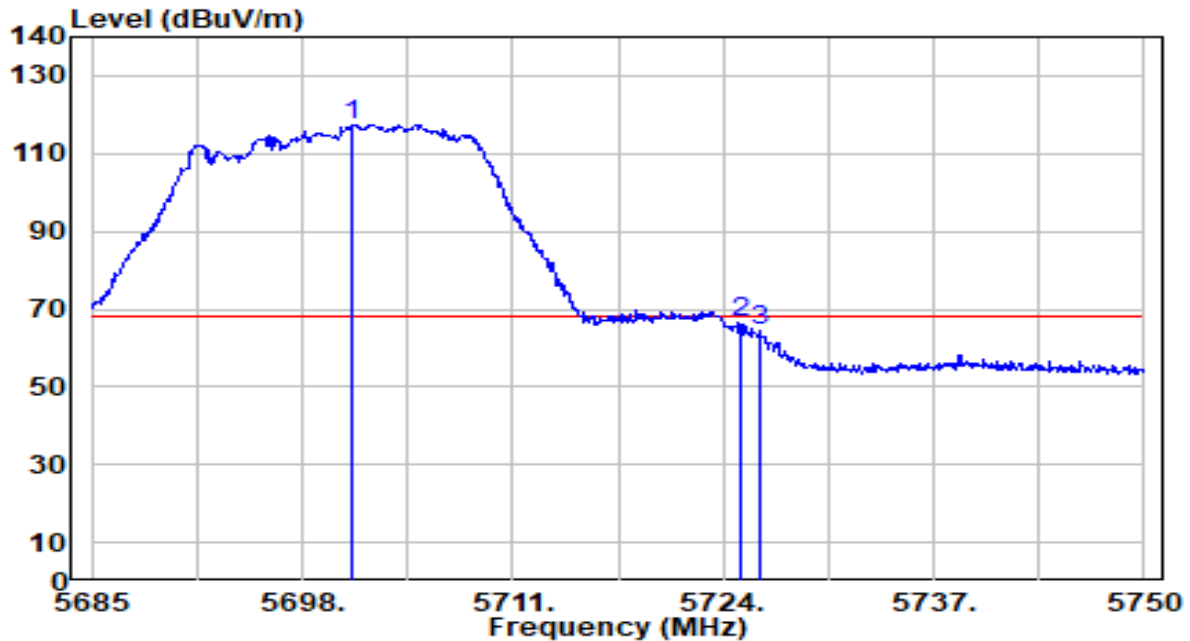


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5701.120	115.80	1.73	117.53	N/A	N/A	108	168	Peak
2	*	5725.000	64.89	1.86	66.76	-1.44	68.20	108	168	Peak
3		5726.210	62.43	1.87	64.30	-3.90	68.20	108	168	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 149 ANT 0+1	Test Voltage	AC 120V/60Hz

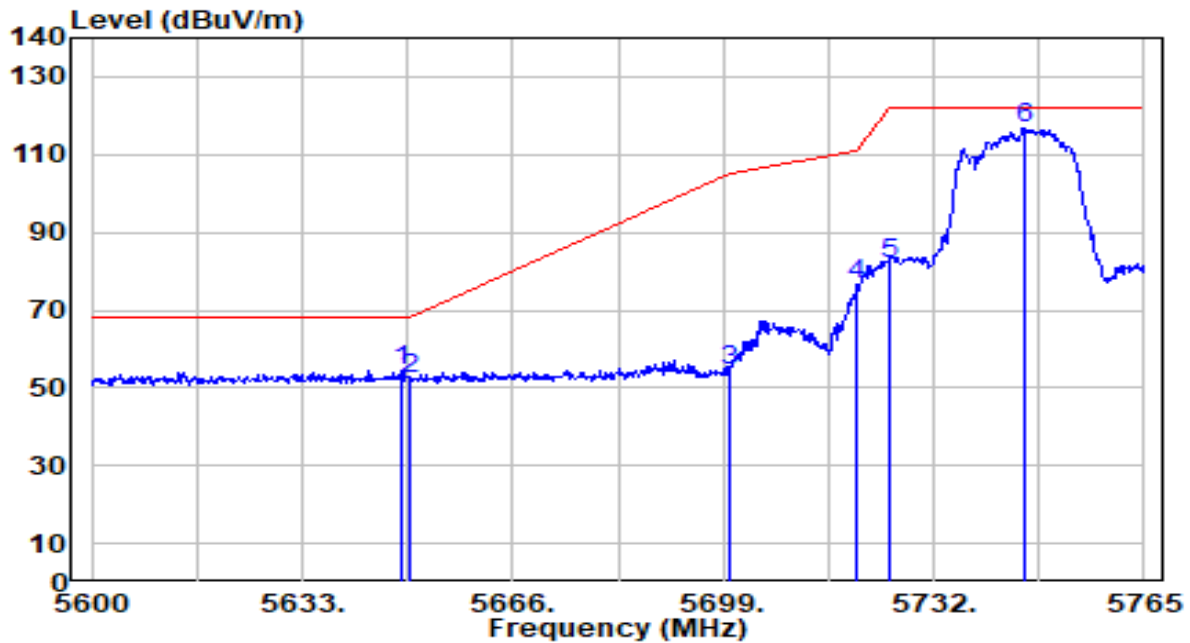


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.675	52.99	1.43	54.42	-13.78	68.20	102	260	Peak
2		5650.000	51.05	1.44	52.49	-15.71	68.20	102	260	Peak
3		5700.000	52.67	1.72	54.39	-50.81	105.20	102	260	Peak
4		5720.000	74.51	1.84	76.34	-34.46	110.80	102	260	Peak
5		5725.000	80.06	1.86	81.92	-40.28	122.20	102	260	Peak
6		5746.190	114.95	1.98	116.94	N/A	N/A	102	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 149 ANT 0+1	Test Voltage	AC 120V/60Hz

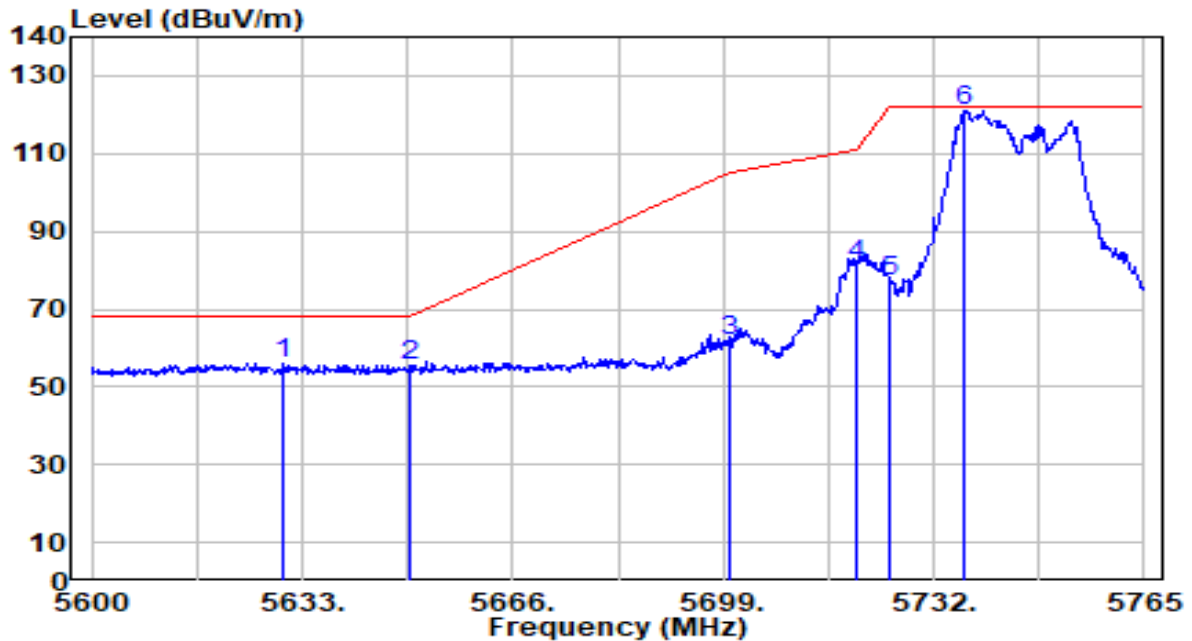


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5630.030	54.54	1.33	55.87	-12.33	68.20	106	148	Peak
2		5650.000	53.83	1.44	55.27	-12.93	68.20	106	148	Peak
3		5700.000	59.95	1.72	61.68	-43.52	105.20	106	148	Peak
4		5720.000	79.59	1.84	81.43	-29.37	110.80	106	148	Peak
5		5725.000	75.04	1.86	76.90	-45.30	122.20	106	148	Peak
6		5736.950	119.18	1.93	121.11	N/A	N/A	106	148	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 165 ANT 0+1	Test Voltage	AC 120V/60Hz

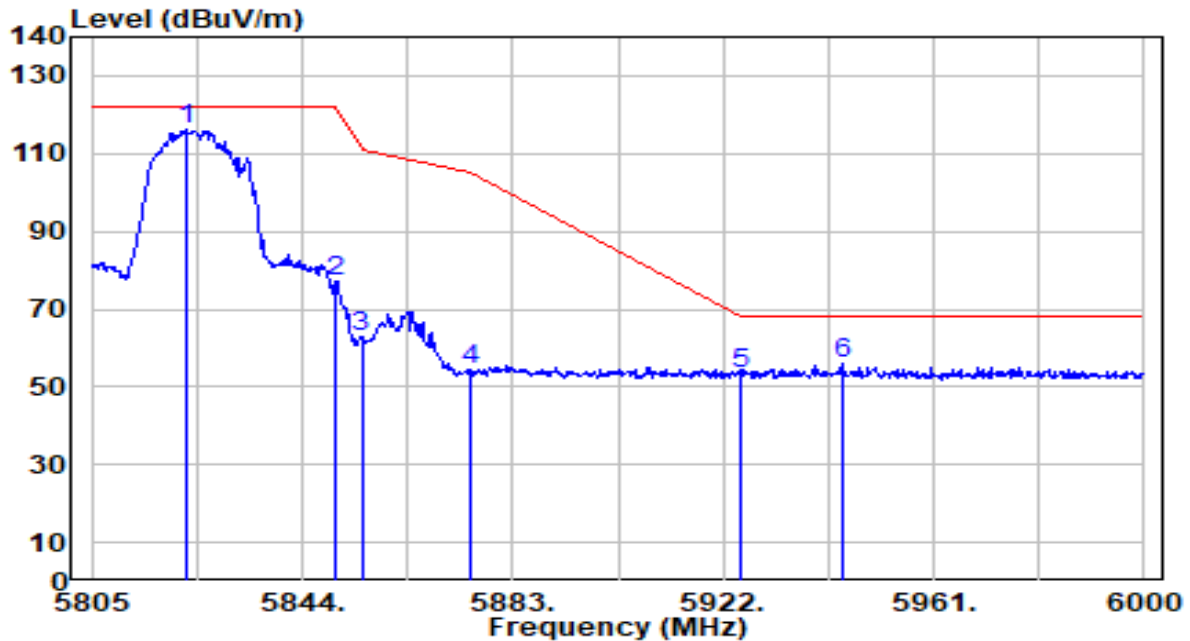


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5822.355	113.94	2.28	116.22	N/A	N/A	120	246	Peak
2	5850.000	75.02	2.27	77.30	-44.90	122.20	120	246	Peak
3	5855.000	60.86	2.27	63.13	-47.67	110.80	120	246	Peak
4	5875.000	51.95	2.26	54.21	-50.99	105.20	120	246	Peak
5	5925.000	51.13	2.25	53.38	-14.82	68.20	120	246	Peak
6	* 5944.035	53.95	2.24	56.19	-12.01	68.20	120	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 165 ANT 0+1	Test Voltage	AC 120V/60Hz

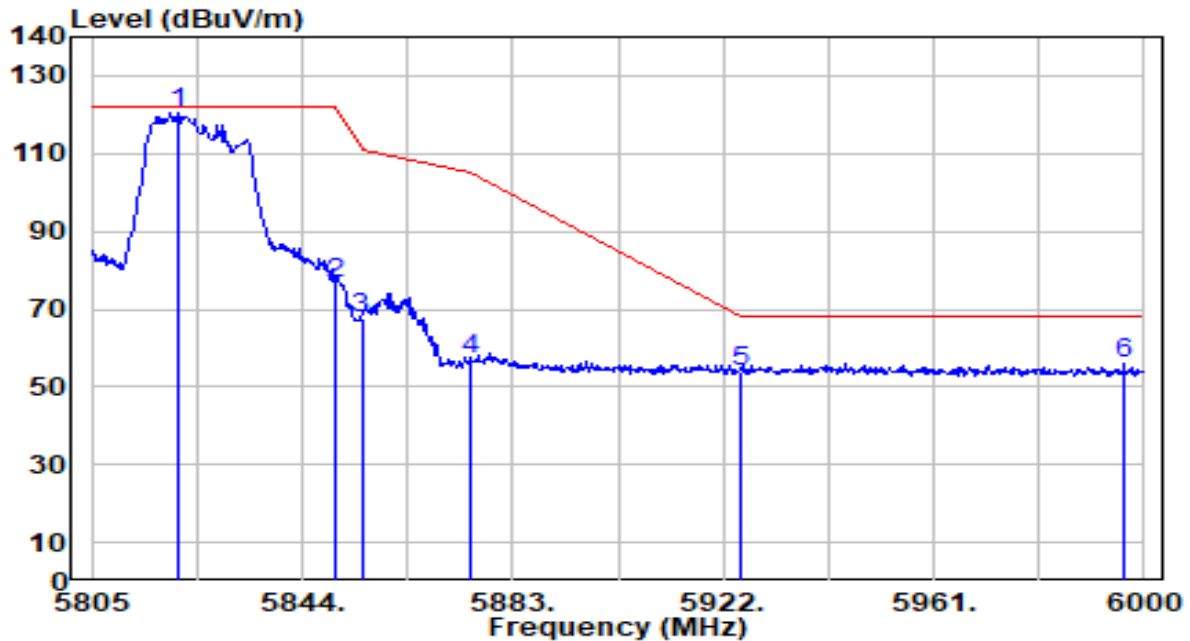


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.795	118.42	2.28	120.70	N/A	N/A	121	156	Peak
2	5850.000	74.44	2.27	76.71	-45.49	122.20	121	156	Peak
3	5855.000	65.35	2.27	67.62	-43.18	110.80	121	156	Peak
4	5875.000	54.97	2.26	57.23	-47.97	105.20	121	156	Peak
5	5925.000	51.67	2.25	53.91	-14.29	68.20	121	156	Peak
6	* 5996.295	53.56	2.22	55.78	-12.42	68.20	121	156	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band1_TX_CH 38 ANT 0+1	Test Voltage	AC 120V/60Hz

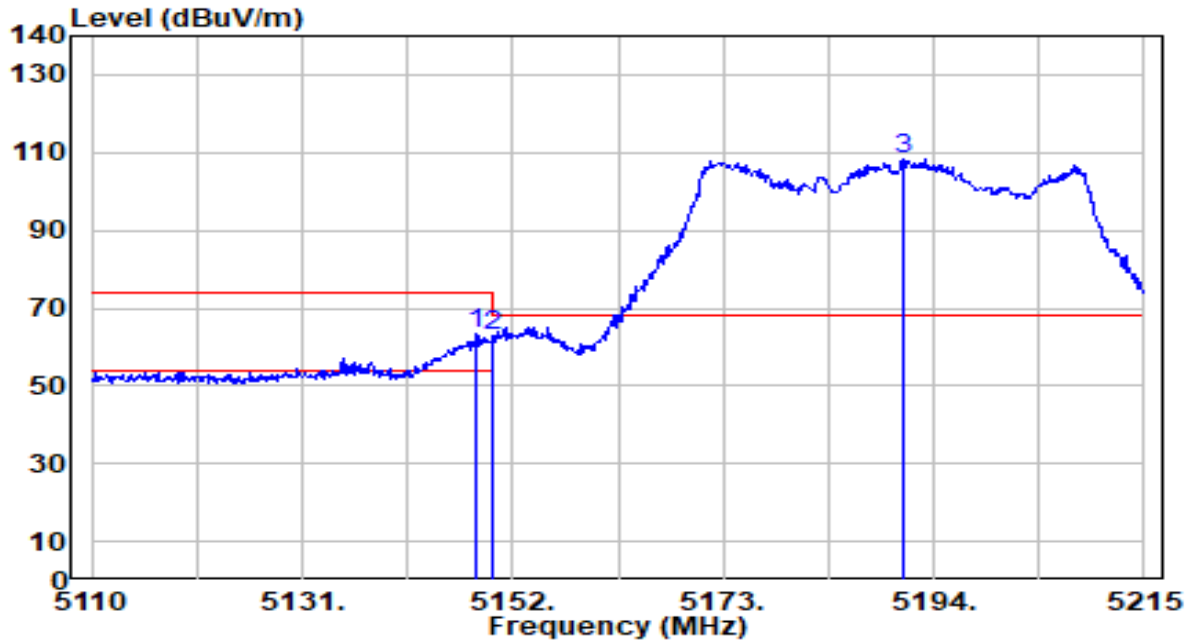


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.325	62.49	0.68	63.16	-10.84	74.00	111	189	Peak
2		5150.000	62.34	0.68	63.01	-10.99	74.00	111	189	Peak
3		5191.060	107.80	0.67	108.47	N/A	N/A	111	189	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band1_TX_CH 38 ANT 0+1	Test Voltage	AC 120V/60Hz

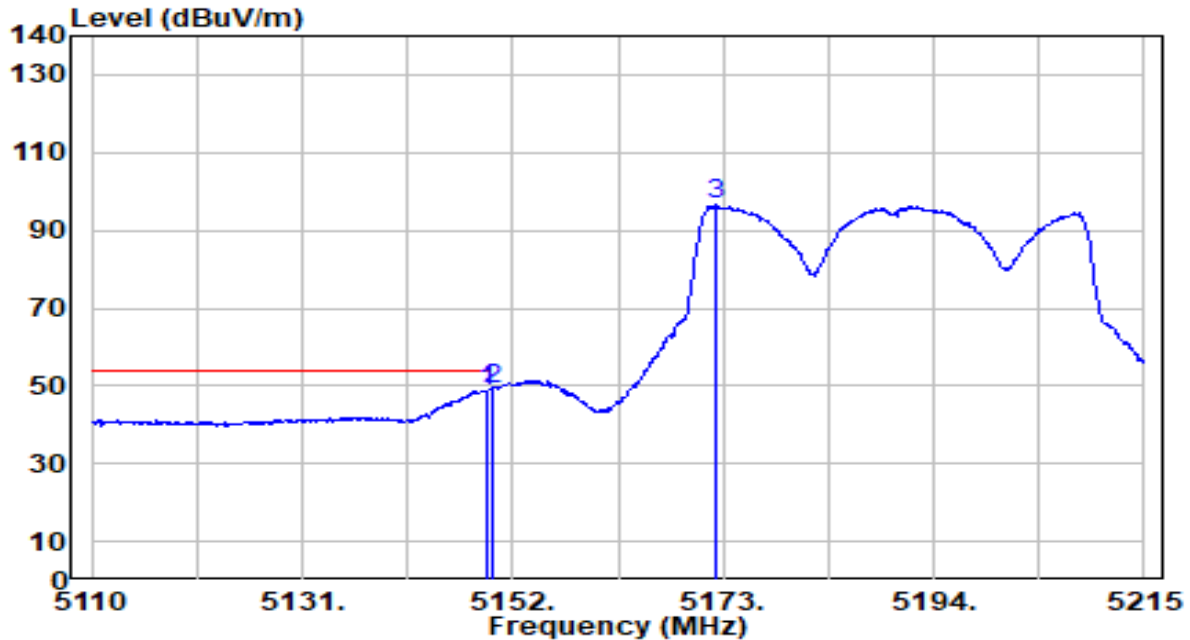


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.480	48.10	0.68	48.78	-5.22	54.00	111	189	Average
2	*	5150.000	48.24	0.68	48.91	-5.09	54.00	111	189	Average
3		5172.160	95.78	0.67	96.46	N/A	N/A	111	189	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band1_TX_CH 38 ANT 0+1	Test Voltage	AC 120V/60Hz

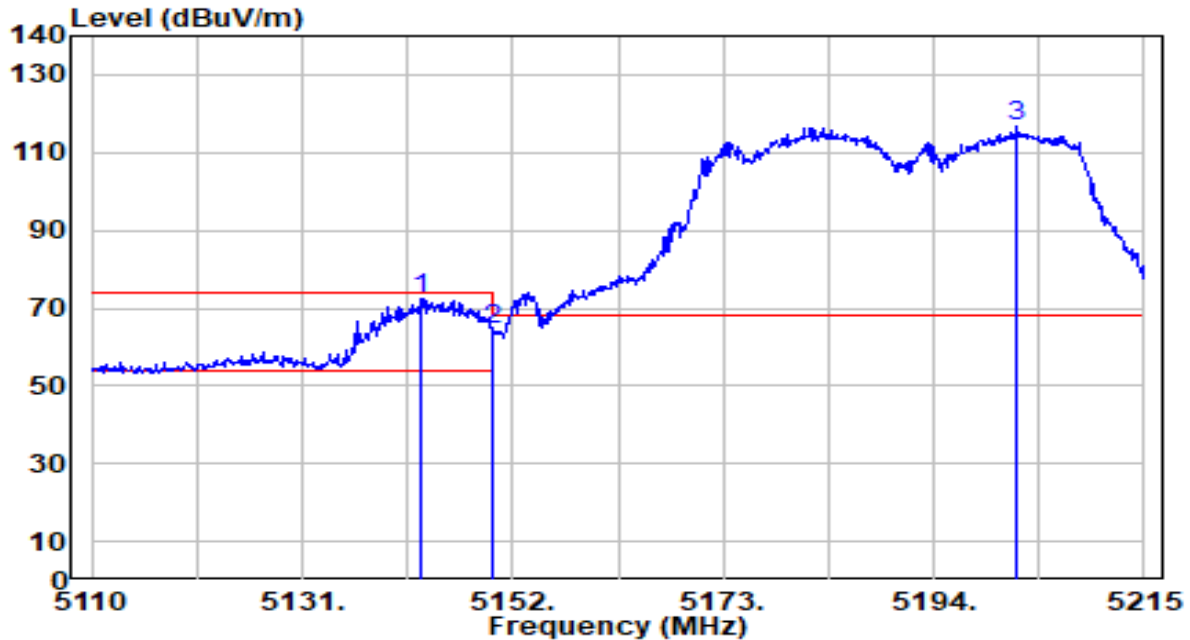


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5142.970	71.63	0.68	72.30	-1.70	74.00	113	139	Peak
2		5150.000	63.64	0.68	64.31	-9.69	74.00	113	139	Peak
3		5202.295	115.84	0.67	116.51	N/A	N/A	113	139	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band1_TX_CH 38 ANT 0+1	Test Voltage	AC 120V/60Hz

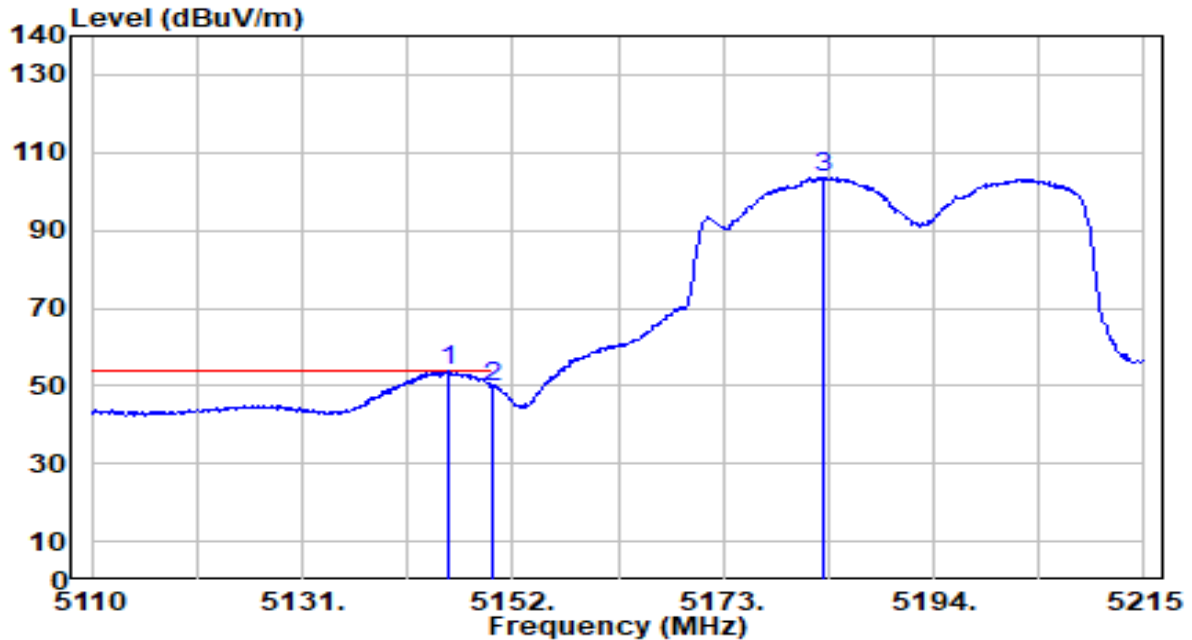


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.490	53.09	0.68	53.77	-0.23	54.00	113	139	Average
2		5150.000	49.16	0.68	49.84	-4.16	54.00	113	139	Average
3		5183.080	102.88	0.67	103.56	N/A	N/A	113	139	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band2_TX_CH 62 ANT 0+1	Test Voltage	AC 120V/60Hz

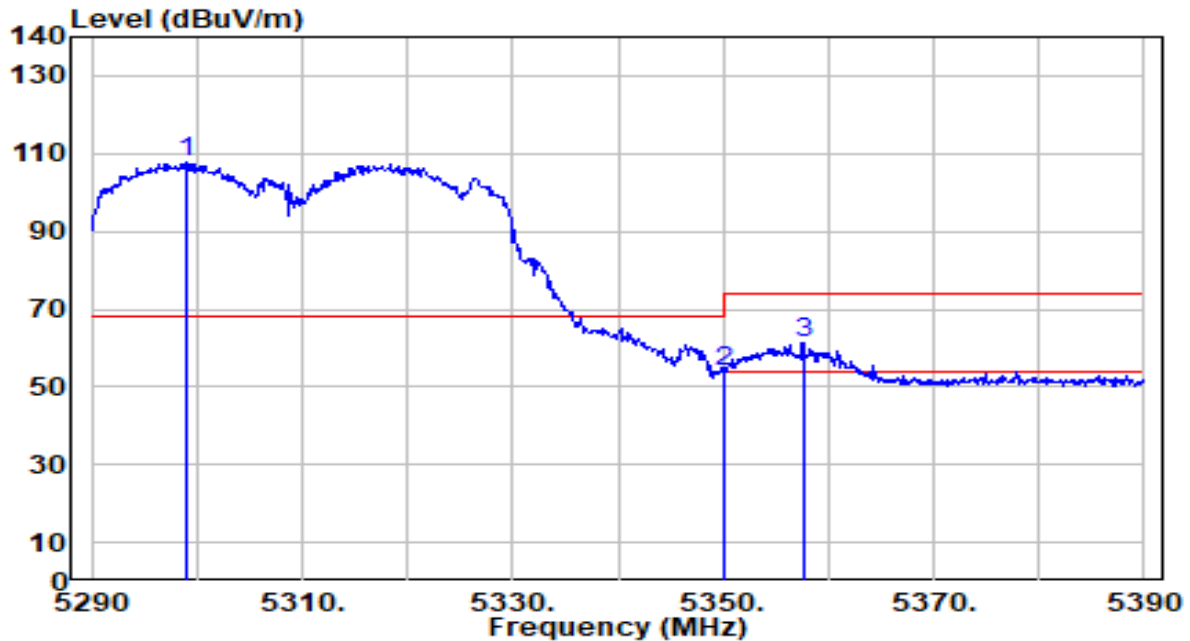


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5299.100	107.27	0.56	107.83	N/A	N/A	190	114	Peak
2	5350.000	53.61	0.51	54.11	-19.89	74.00	190	114	Peak
3	* 5357.600	60.90	0.50	61.40	-12.60	74.00	190	114	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band2_TX_CH 62 ANT 0+1	Test Voltage	AC 120V/60Hz

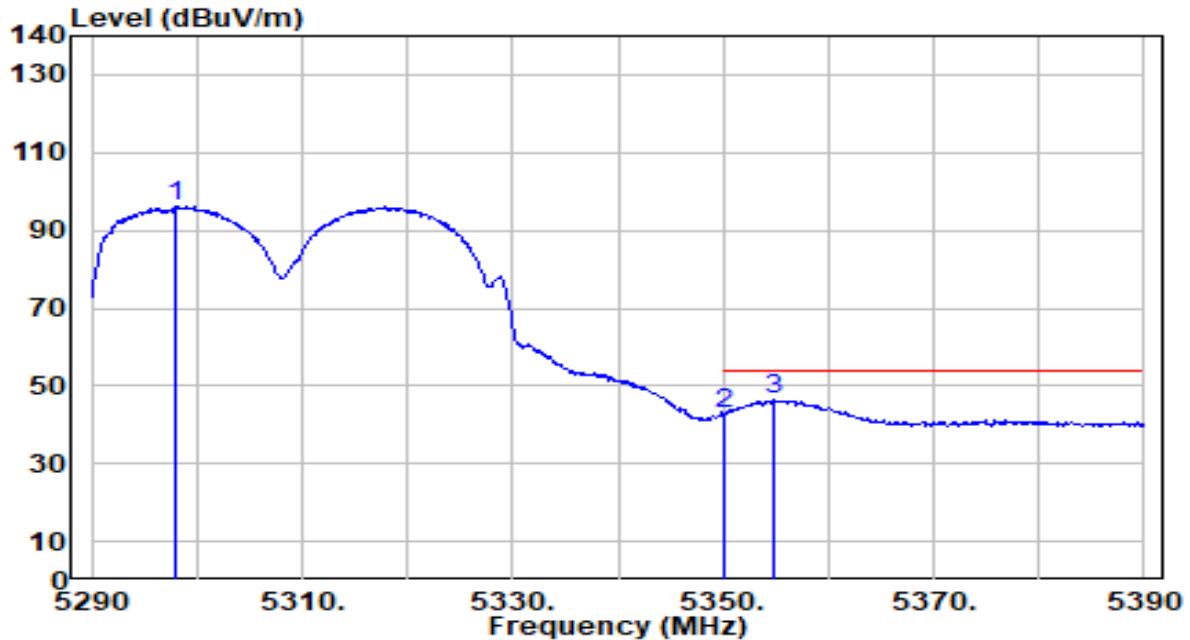


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5298.000	95.50	0.56	96.06	N/A	N/A	190	114	Average
2	5350.000	42.18	0.51	42.69	-11.31	54.00	190	114	Average
3	* 5354.800	46.13	0.50	46.63	-7.37	54.00	190	114	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band2_TX_CH 62 ANT 0+1	Test Voltage	AC 120V/60Hz

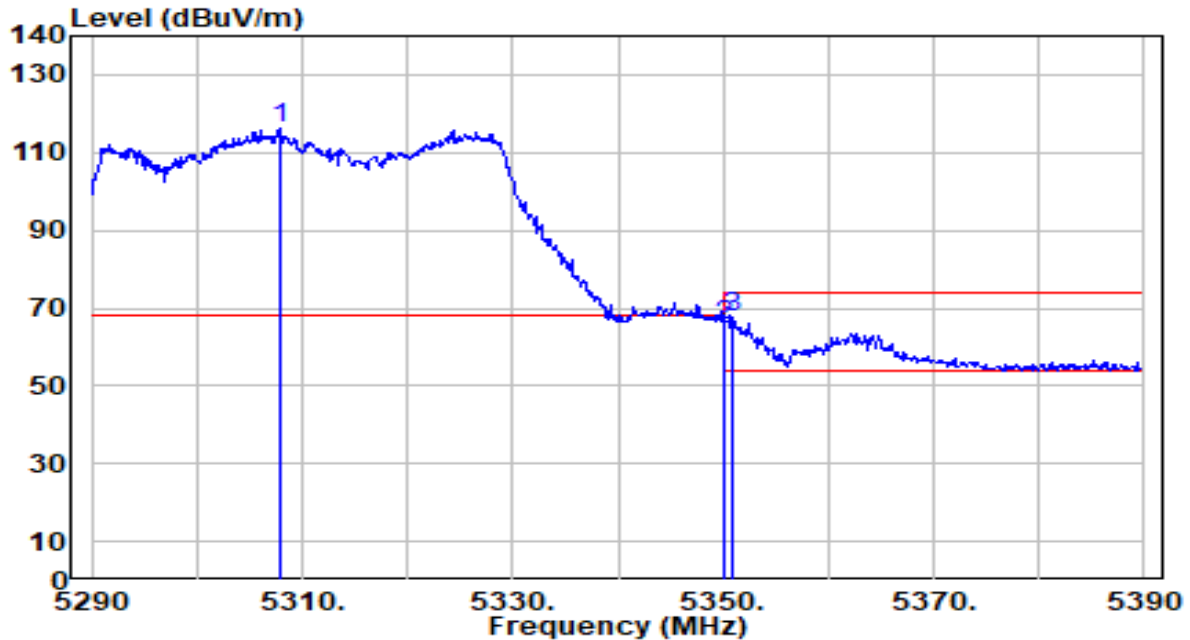


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5307.800	115.66	0.55	116.21	N/A	N/A	128	184	Peak
2	5350.000	65.05	0.51	65.56	-8.44	74.00	128	184	Peak
3	* 5351.000	66.92	0.50	67.42	-6.58	74.00	128	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band2_TX_CH 62 ANT 0+1	Test Voltage	AC 120V/60Hz

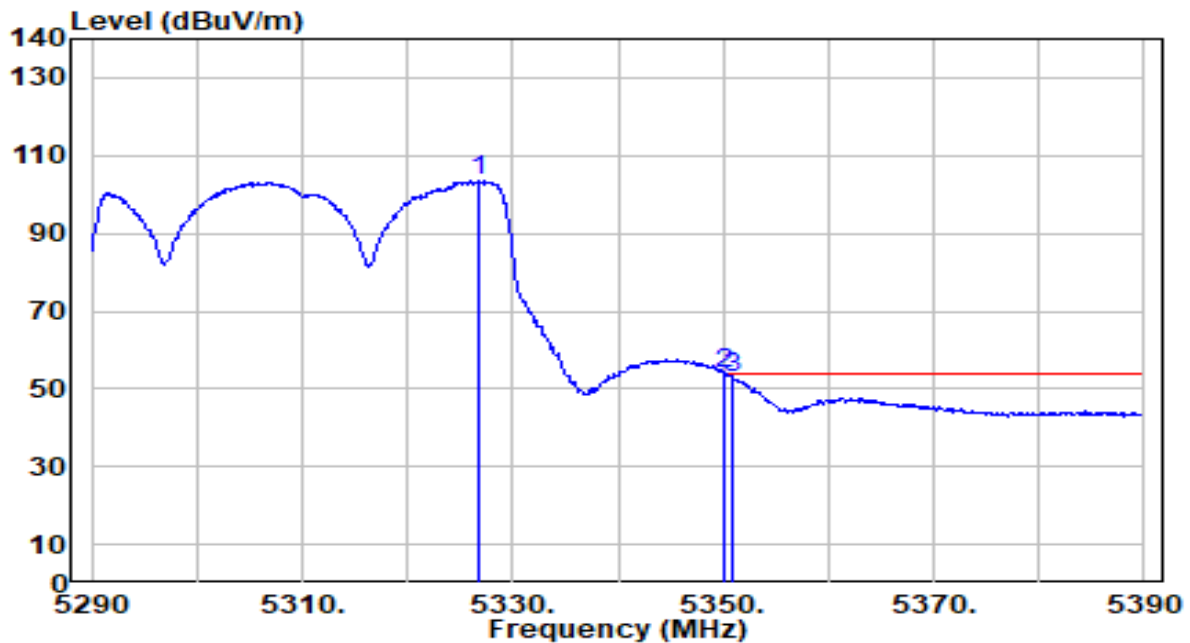


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5326.700	102.92	0.53	103.45	N/A	N/A	128	184	Average
2	*	5350.000	53.34	0.51	53.85	-0.15	54.00	128	184	Average
3		5351.000	52.38	0.50	52.89	-1.11	54.00	128	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 102 ANT 0+1	Test Voltage	AC 120V/60Hz

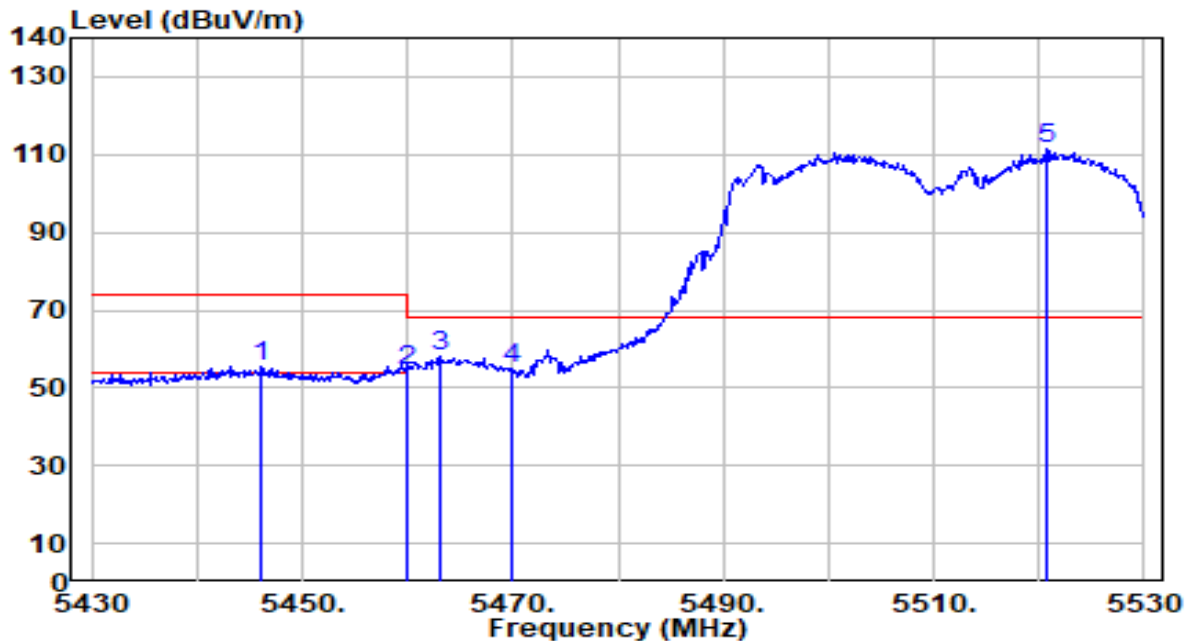


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5446.200	54.87	0.61	55.48	-18.52	74.00	100	123	Peak
2	5460.000	54.00	0.65	54.65	-19.35	74.00	100	123	Peak
3	* 5463.200	57.64	0.66	58.30	-9.90	68.20	100	123	Peak
4	5470.000	54.18	0.69	54.86	-13.34	68.20	100	123	Peak
5	5520.800	110.59	0.87	111.45	N/A	N/A	100	123	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 102 ANT 0+1	Test Voltage	AC 120V/60Hz

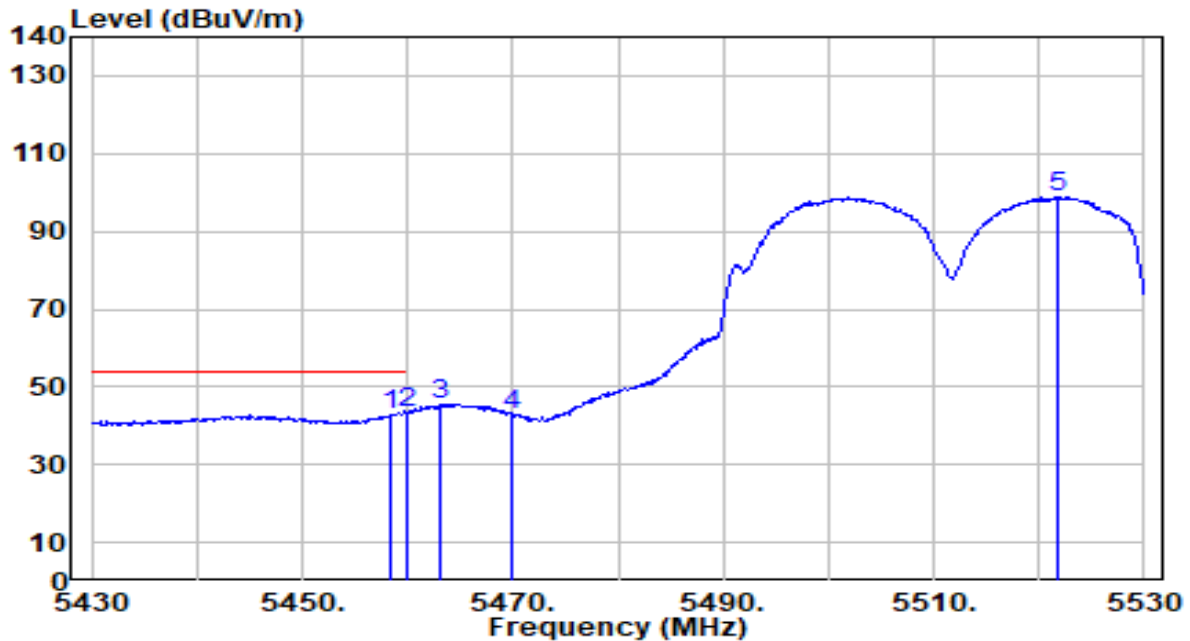


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.400	42.31	0.65	42.96	-11.04	54.00	100	123	Average
2	*	5460.000	42.55	0.65	43.20	-10.80	54.00	100	123	Average
3		5463.200	44.66	0.66	45.32	N/A	N/A	100	123	Average
4		5470.000	42.02	0.69	42.71	N/A	N/A	100	123	Average
5		5521.700	97.95	0.87	98.82	N/A	N/A	100	123	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 102 ANT 0+1	Test Voltage	AC 120V/60Hz

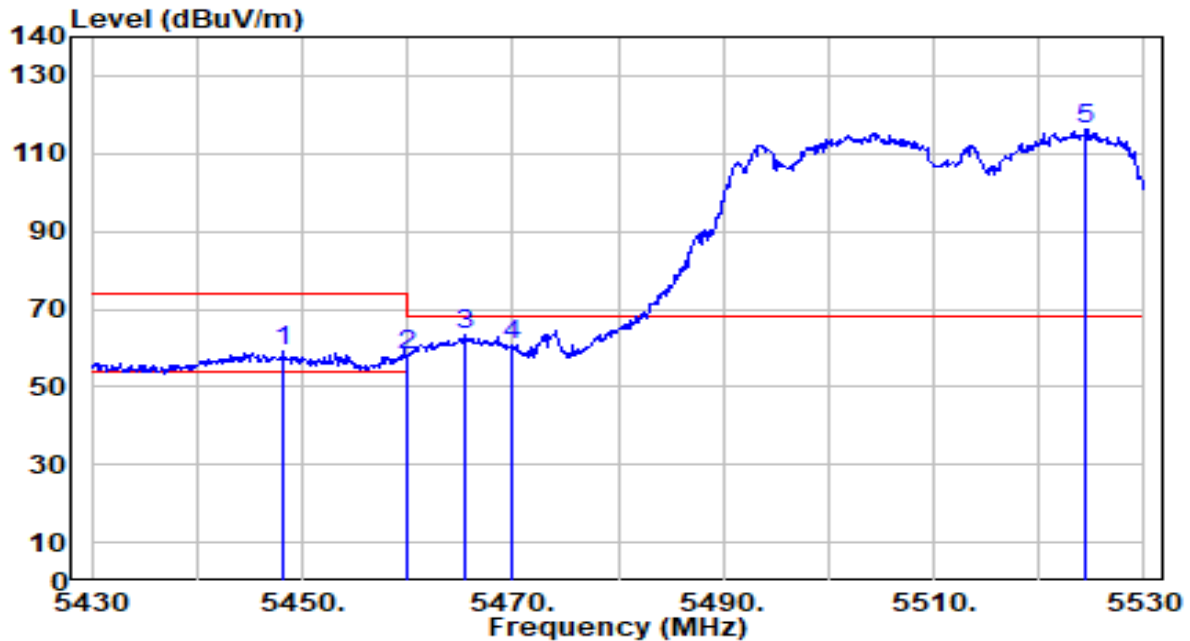


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.200	58.42	0.61	59.04	-14.96	74.00	110	182	Peak
2	5460.000	57.46	0.65	58.11	-15.89	74.00	110	182	Peak
3	* 5465.400	62.90	0.67	63.57	-4.63	68.20	110	182	Peak
4	5470.000	60.15	0.69	60.83	-7.37	68.20	110	182	Peak
5	5524.500	115.38	0.88	116.26	N/A	N/A	110	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 102 ANT 0+1	Test Voltage	AC 120V/60Hz

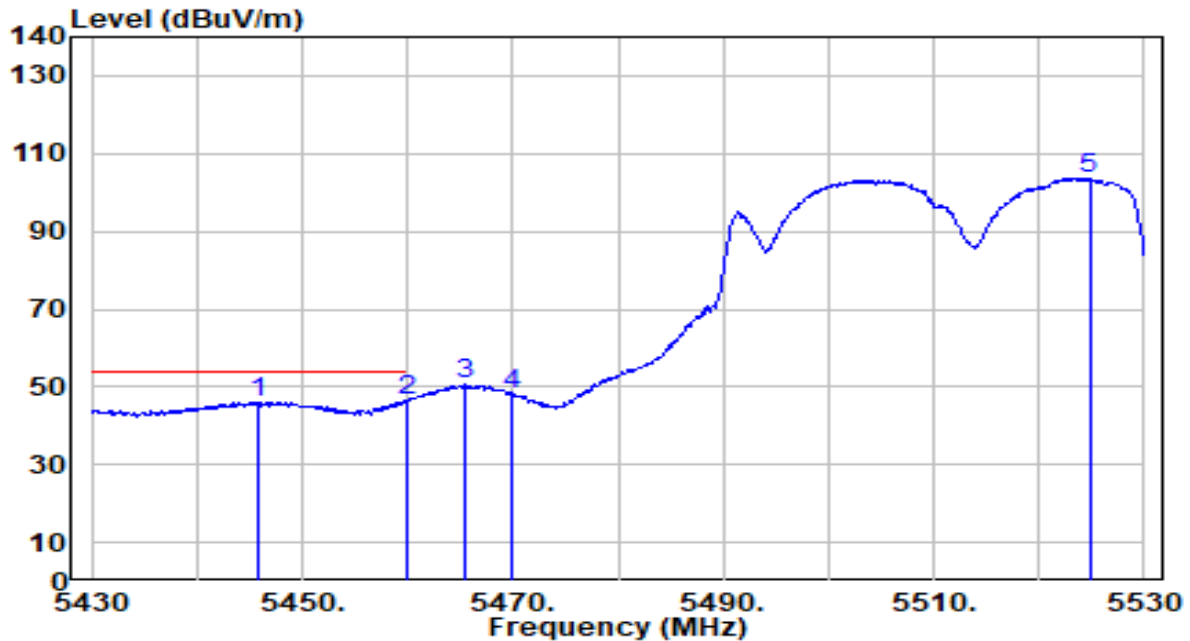


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5445.800	45.51	0.61	46.11	-7.89	54.00	110	182	Average
2	*	5460.000	45.88	0.65	46.53	-7.47	54.00	110	182	Average
3		5465.400	50.02	0.67	50.70	N/A	N/A	110	182	Average
4		5470.000	47.46	0.69	48.15	N/A	N/A	110	182	Average
5		5524.800	102.87	0.88	103.75	N/A	N/A	110	182	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 134 ANT 0+1	Test Voltage	AC 120V/60Hz

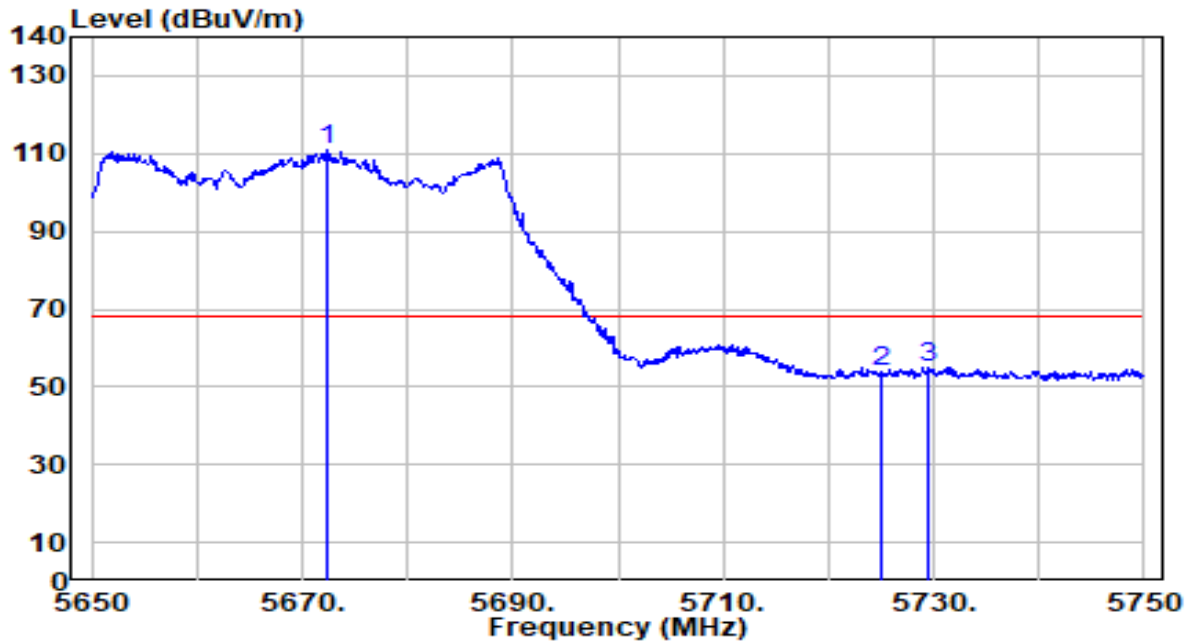


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5672.400	109.33	1.57	110.89	N/A	N/A	101	257	Peak
2	5725.000	52.25	1.86	54.11	-14.09	68.20	101	257	Peak
3	* 5729.500	53.24	1.89	55.13	-13.07	68.20	101	257	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 134 ANT 0+1	Test Voltage	AC 120V/60Hz

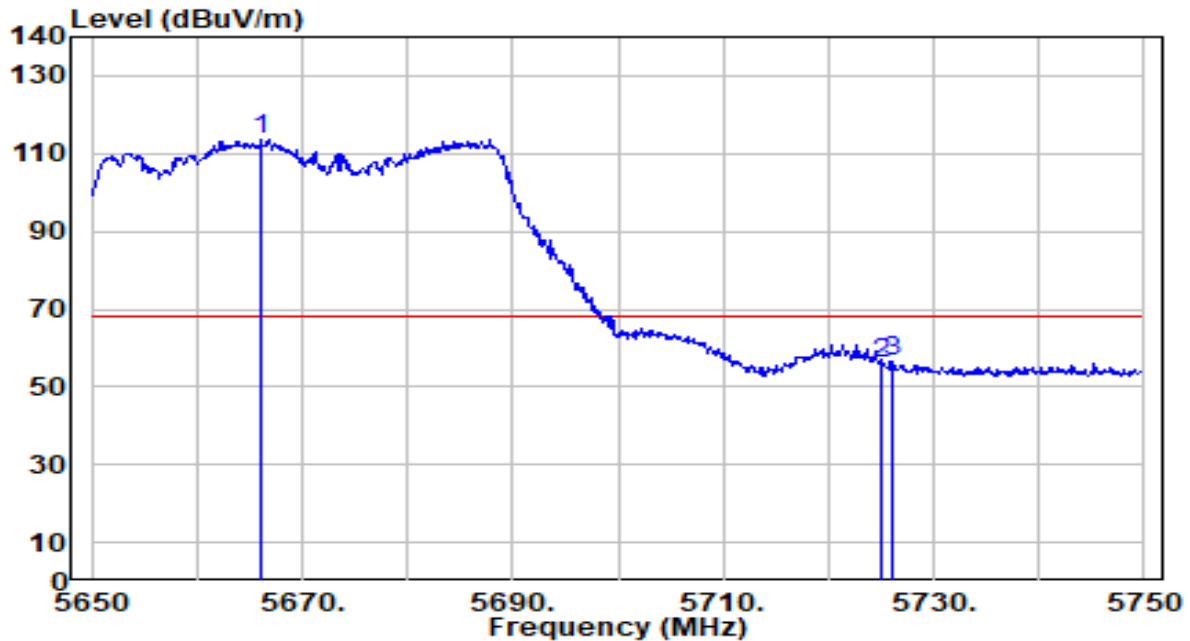


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5666.100	112.17	1.53	113.70	N/A	N/A	115	188	Peak
2	5725.000	54.30	1.86	56.16	-12.04	68.20	115	188	Peak
3	* 5726.100	54.66	1.87	56.53	-11.67	68.20	115	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 151 ANT 0+1	Test Voltage	AC 120V/60Hz

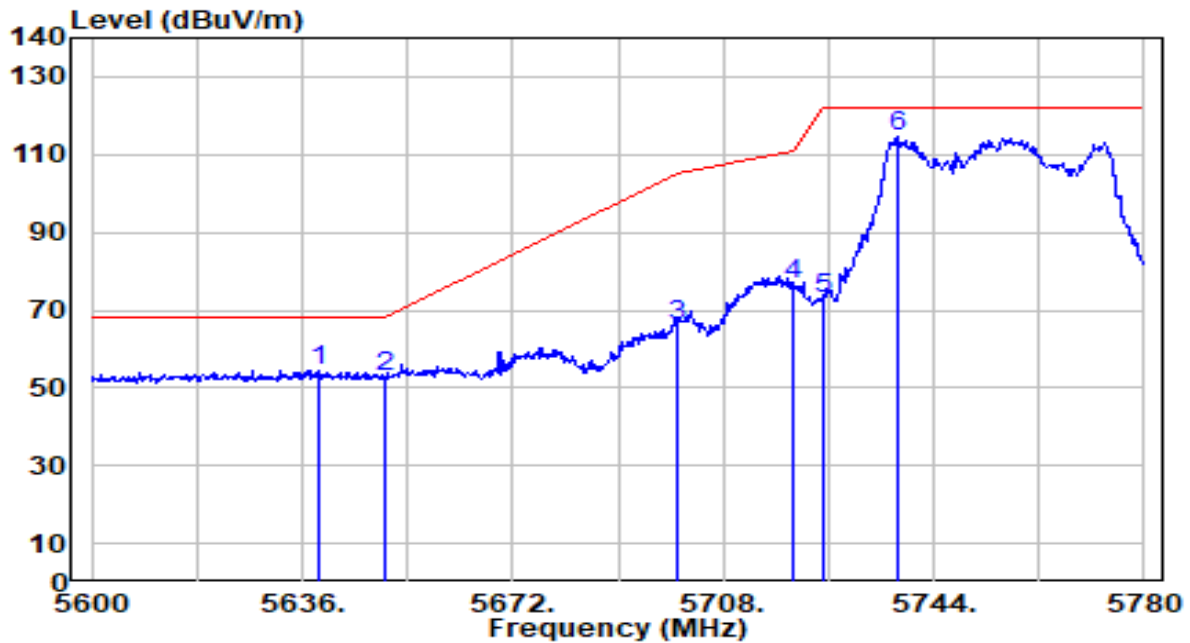


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5639.060	53.03	1.38	54.41	-13.79	68.20	114	254	Peak
2		5650.000	51.33	1.44	52.77	-15.43	68.20	114	254	Peak
3		5700.000	64.33	1.72	66.05	-39.15	105.20	114	254	Peak
4		5720.000	74.64	1.84	76.48	-34.32	110.80	114	254	Peak
5		5725.000	70.94	1.86	72.80	-49.40	122.20	114	254	Peak
6		5737.880	112.85	1.94	114.78	N/A	N/A	114	254	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 151 ANT 0+1	Test Voltage	AC 120V/60Hz

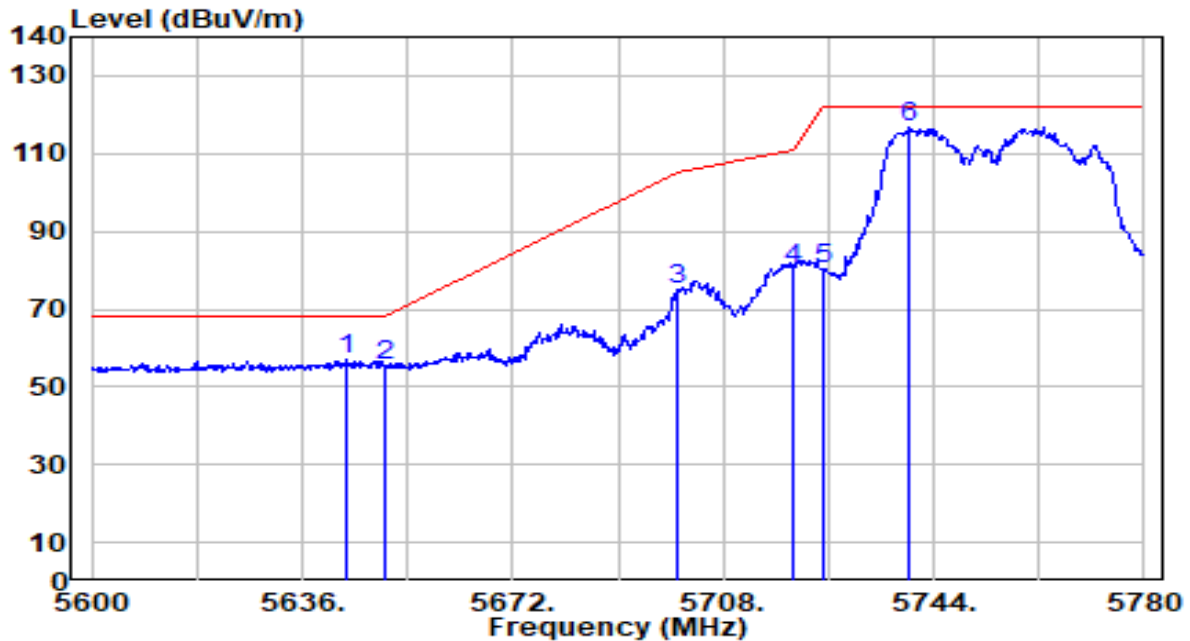


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5643.560	55.60	1.40	57.01	-11.19	68.20	112	134	Peak
2		5650.000	53.96	1.44	55.39	-12.81	68.20	112	134	Peak
3		5700.000	73.25	1.72	74.97	-30.23	105.20	112	134	Peak
4		5720.000	78.33	1.84	80.17	-30.63	110.80	112	134	Peak
5		5725.000	78.63	1.86	80.49	-41.71	122.20	112	134	Peak
6		5739.860	114.69	1.95	116.64	N/A	N/A	112	134	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 159 ANT 0+1	Test Voltage	AC 120V/60Hz

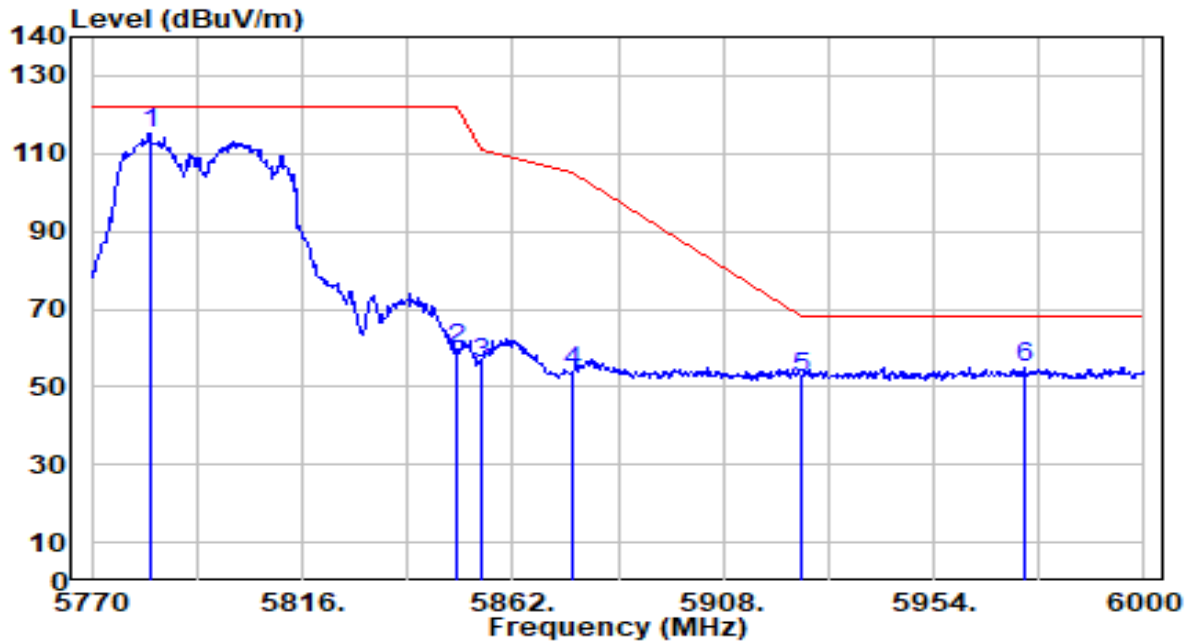


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5782.650	113.07	2.19	115.26	N/A	N/A	109	127	Peak
2	5850.000	57.52	2.27	59.79	-62.41	122.20	109	127	Peak
3	5855.000	53.95	2.27	56.22	-54.58	110.80	109	127	Peak
4	5875.000	51.62	2.26	53.89	-51.31	105.20	109	127	Peak
5	5925.000	50.25	2.25	52.50	-15.70	68.20	109	127	Peak
6	* 5973.780	52.85	2.23	55.08	-13.12	68.20	109	127	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 159 ANT 0+1	Test Voltage	AC 120V/60Hz

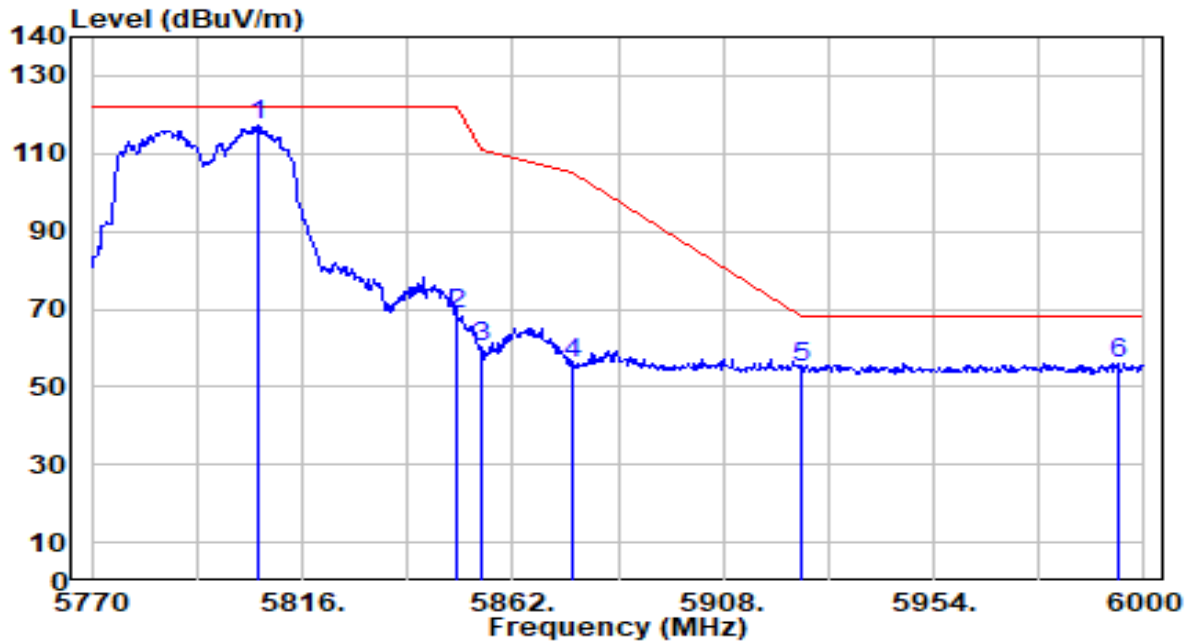


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5806.340	115.07	2.29	117.35	N/A	N/A	114	180	Peak
2	5850.000	66.22	2.27	68.49	-53.71	122.20	114	180	Peak
3	5855.000	57.85	2.27	60.12	-50.68	110.80	114	180	Peak
4	5875.000	53.99	2.26	56.26	-48.94	105.20	114	180	Peak
5	5925.000	52.95	2.25	55.19	-13.01	68.20	114	180	Peak
6	* 5994.250	53.77	2.22	55.99	-12.21	68.20	114	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band1_TX_CH 42 ANT 0+1	Test Voltage	AC 120V/60Hz

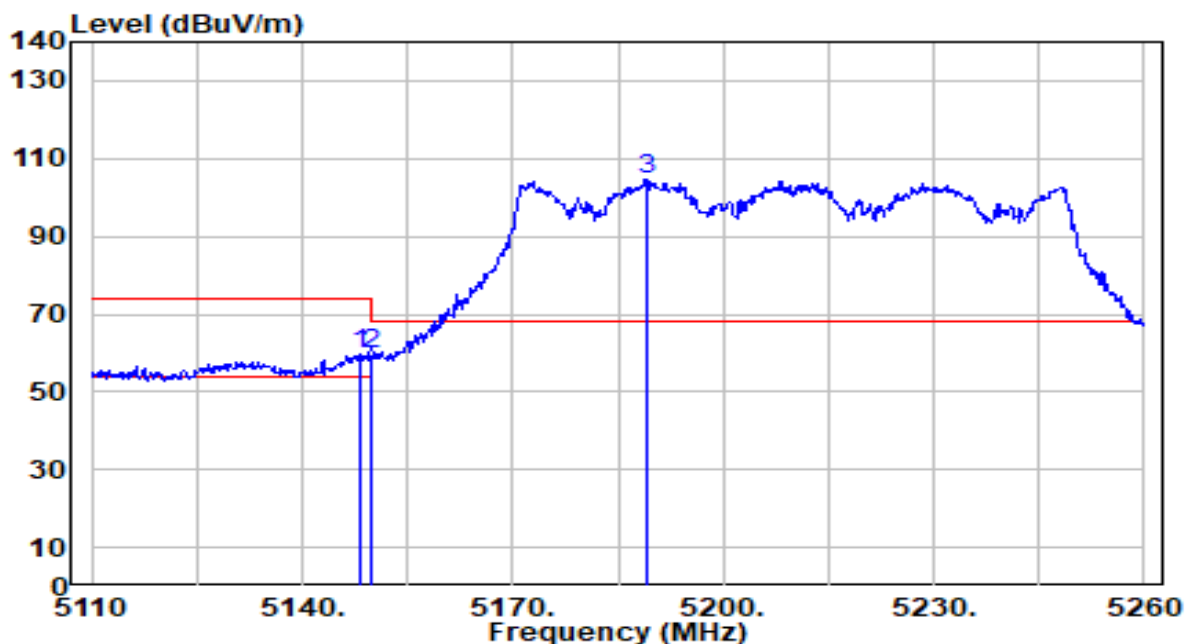


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.100	58.92	0.68	59.59	-14.41	74.00	118	187	Peak
2		5150.000	58.77	0.68	59.45	-14.55	74.00	118	187	Peak
3		5189.200	103.90	0.67	104.57	N/A	N/A	118	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band1_TX_CH 42 ANT 0+1	Test Voltage	AC 120V/60Hz

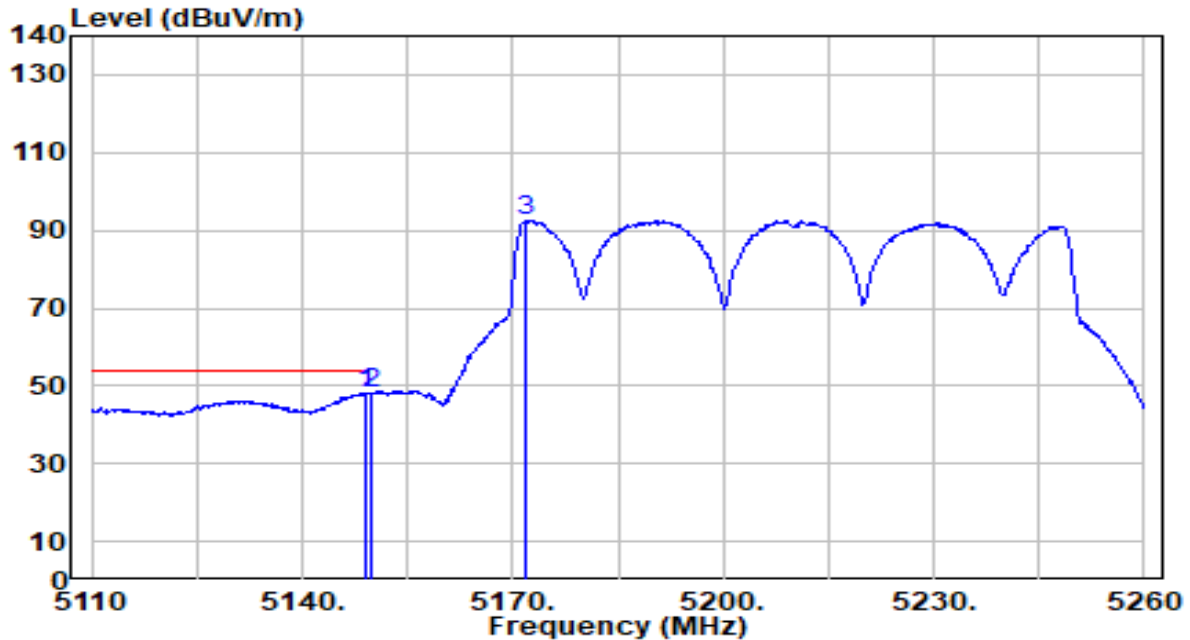


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.150	47.46	0.68	48.13	-5.87	54.00	118	187	Average
2		5150.000	47.26	0.68	47.93	-6.07	54.00	118	187	Average
3		5171.800	92.02	0.67	92.69	N/A	N/A	118	187	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band1_TX_CH 42 ANT 0+1	Test Voltage	AC 120V/60Hz

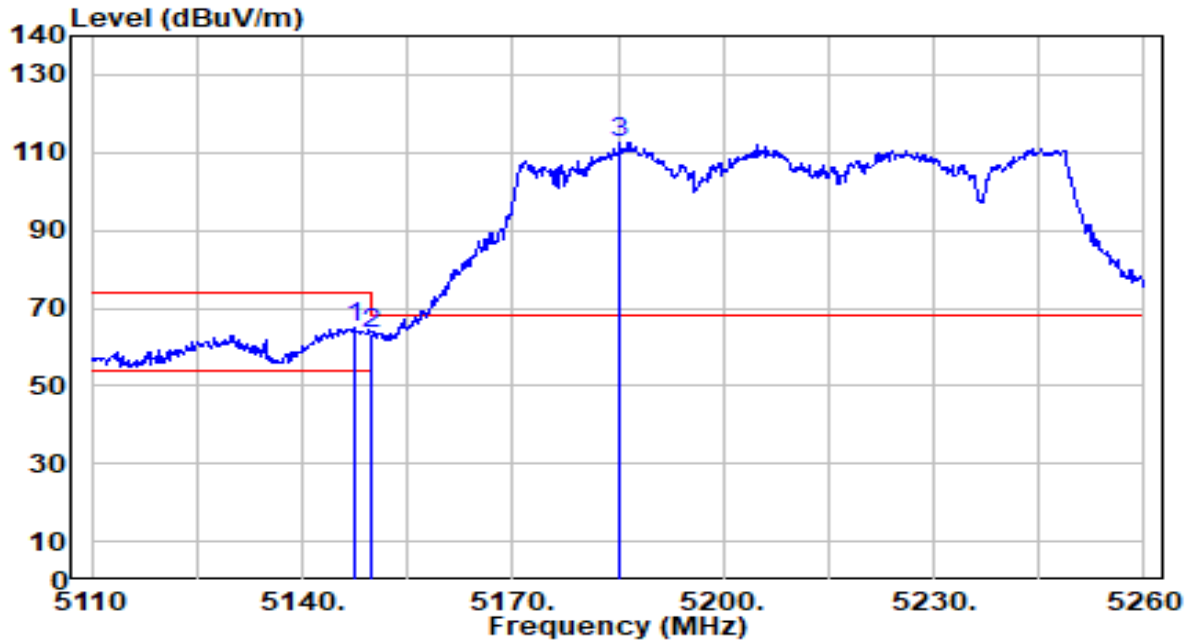


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.650	64.18	0.68	64.86	-9.14	74.00	141	183	Peak
2		5150.000	62.48	0.68	63.15	-10.85	74.00	141	183	Peak
3		5185.150	111.74	0.67	112.41	N/A	N/A	141	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band1_TX_CH 42 ANT 0+1	Test Voltage	AC 120V/60Hz

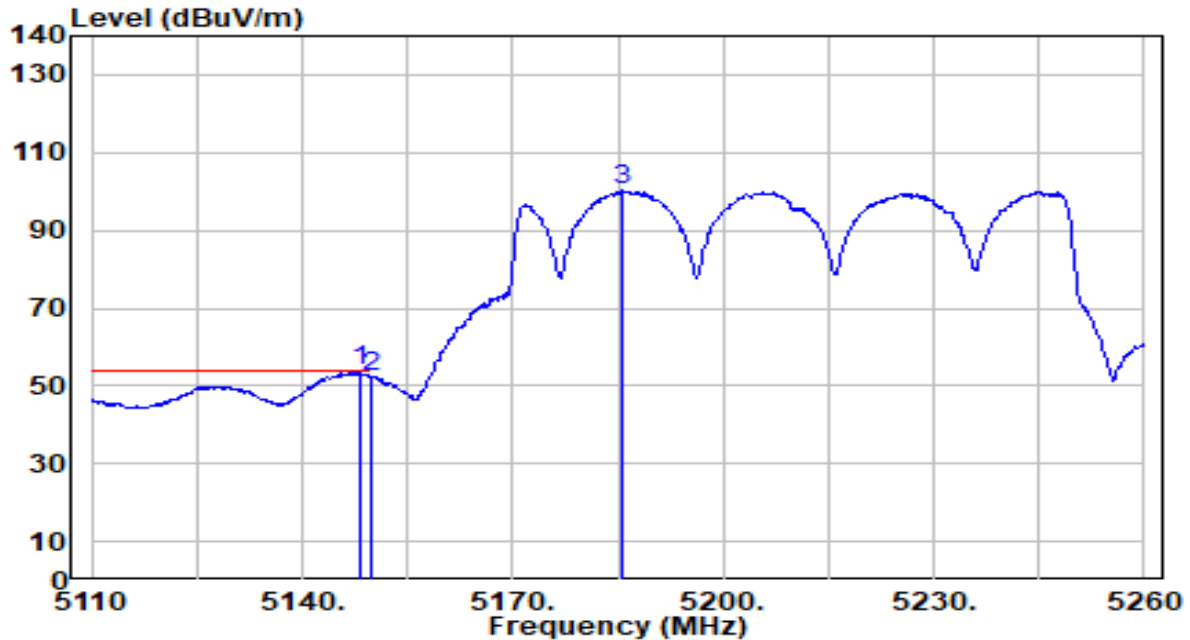


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.100	53.06	0.68	53.74	-0.26	54.00	141	183	Average
2		5150.000	51.56	0.68	52.24	-1.76	54.00	141	183	Average
3		5185.450	99.68	0.67	100.35	N/A	N/A	141	183	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band2_TX_CH 58 ANT 0+1	Test Voltage	AC 120V/60Hz

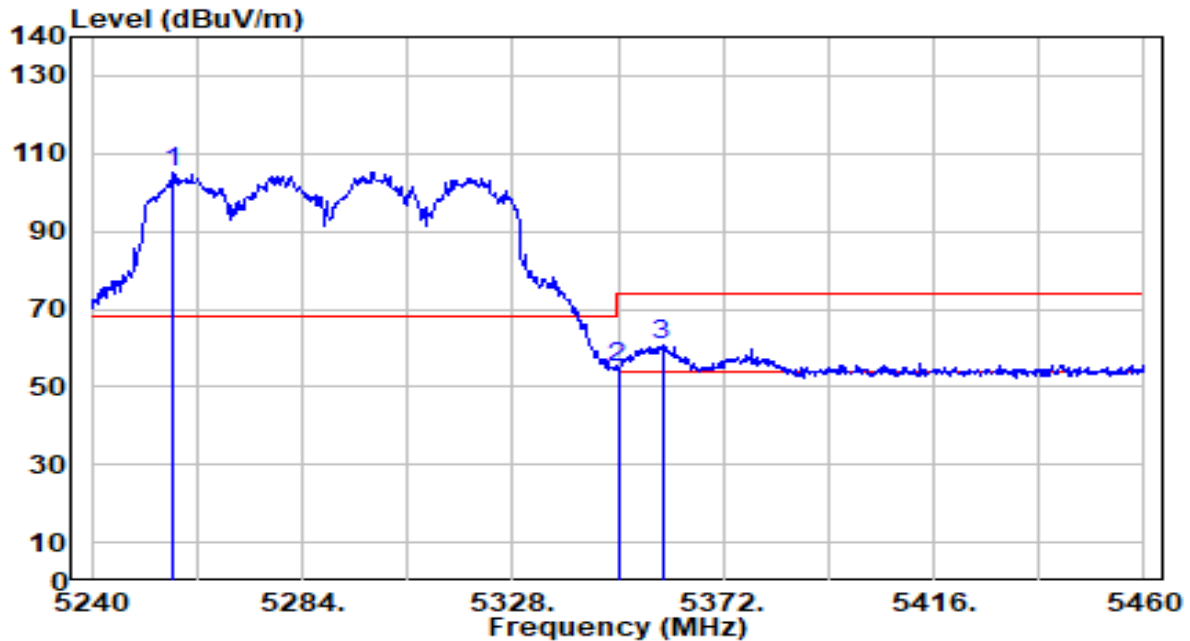


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5257.160	104.58	0.61	105.18	N/A	N/A	200	116	Peak
2	5350.000	54.18	0.51	54.68	-19.32	74.00	200	116	Peak
3	* 5359.240	60.26	0.49	60.75	-13.25	74.00	200	116	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band2_TX_CH 58 ANT 0+1	Test Voltage	AC 120V/60Hz

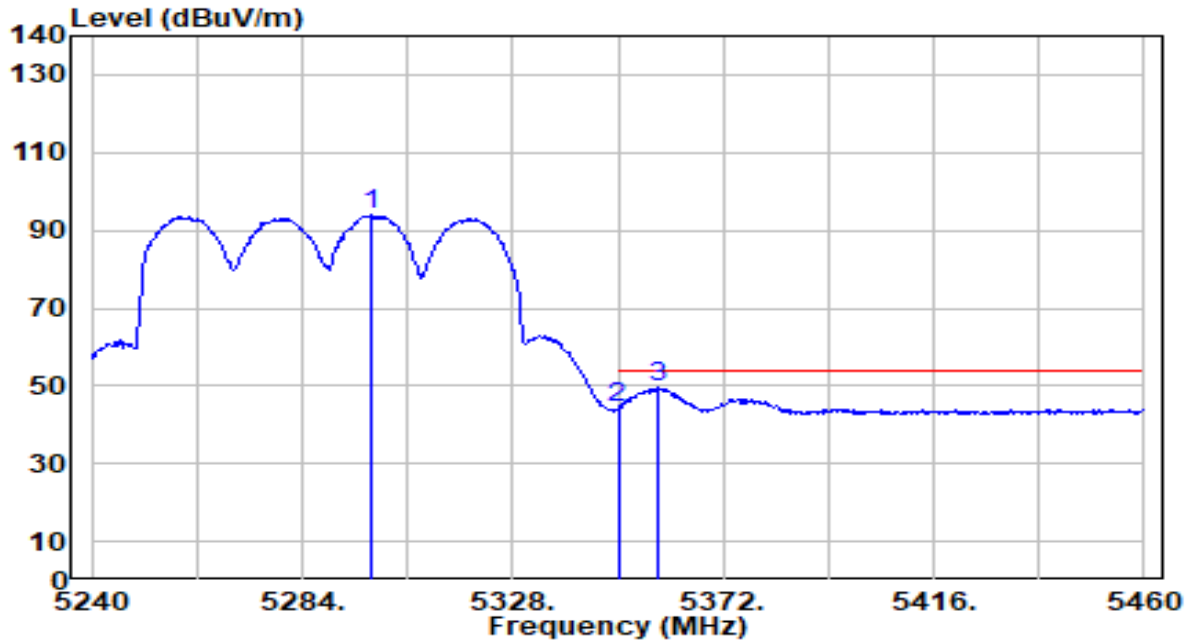


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5298.300	93.42	0.56	93.98	N/A	N/A	200	116	Average
2	5350.000	43.70	0.51	44.21	-9.79	54.00	200	116	Average
3	* 5358.140	48.92	0.50	49.42	-4.58	54.00	200	116	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band2_TX_CH 58 ANT 0+1	Test Voltage	AC 120V/60Hz

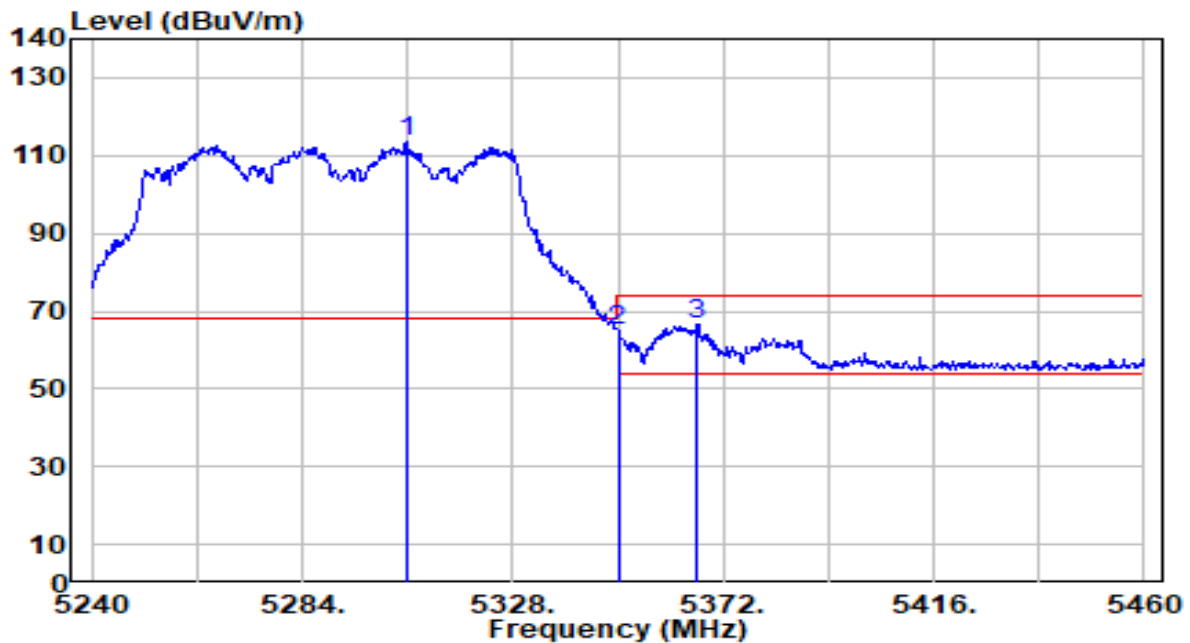


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5305.780	112.91	0.55	113.46	N/A	N/A	140	182	Peak
2	5350.000	64.38	0.51	64.88	-9.12	74.00	140	182	Peak
3	* 5366.500	66.15	0.49	66.64	-7.36	74.00	140	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band2_TX_CH 58 ANT 0+1	Test Voltage	AC 120V/60Hz

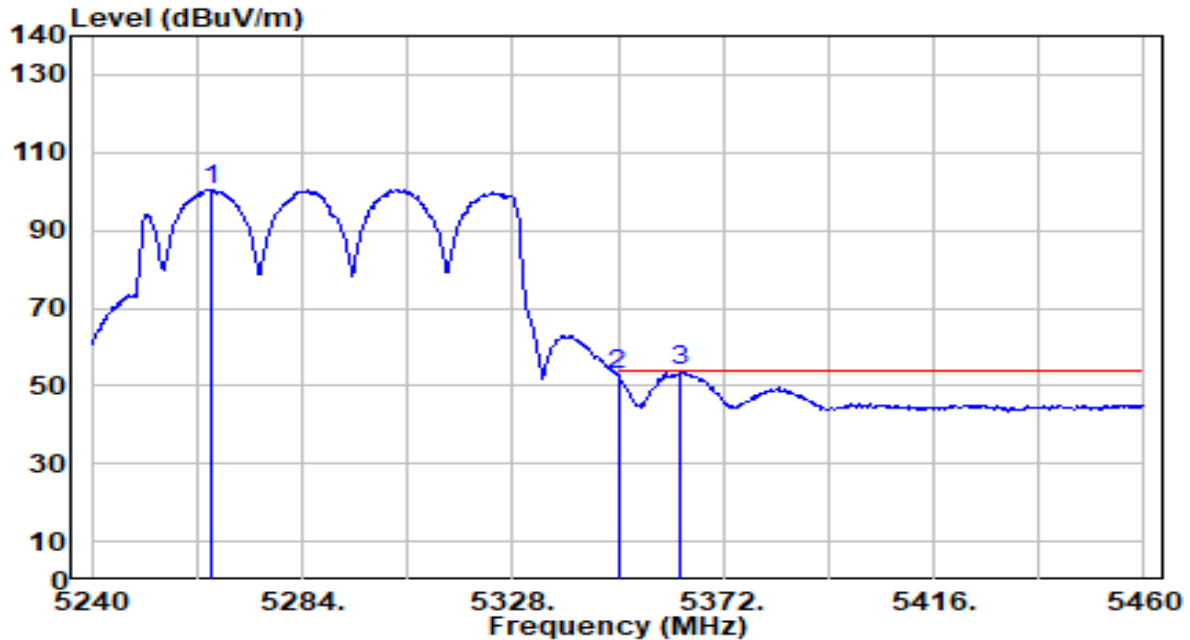


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5264.860	99.96	0.60	100.56	N/A	N/A	140	182	Average
2	5350.000	52.08	0.51	52.59	-1.41	54.00	140	182	Average
3	* 5362.980	53.22	0.49	53.71	-0.29	54.00	140	182	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	AC 120V/60Hz

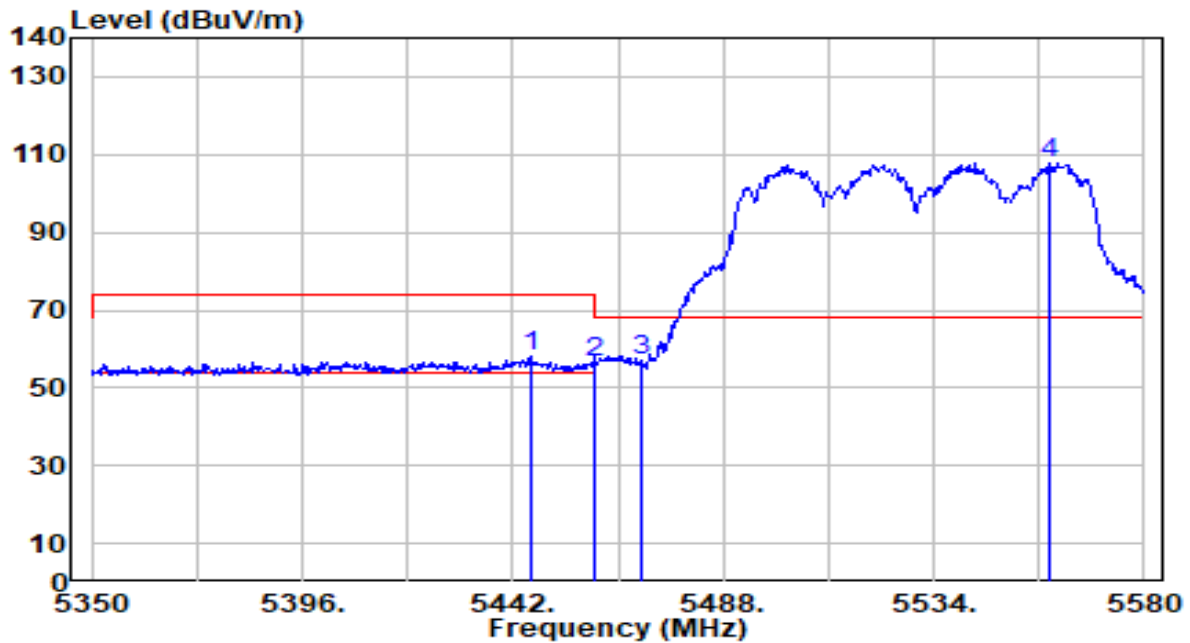


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5445.910	57.25	0.61	57.86	-16.14	74.00	112	123	Peak
2	5460.000	56.05	0.65	56.70	-17.30	74.00	112	123	Peak
3	* 5470.000	56.41	0.69	57.10	-11.10	68.20	112	123	Peak
4	5559.070	106.57	1.01	107.58	N/A	N/A	112	123	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	AC 120V/60Hz

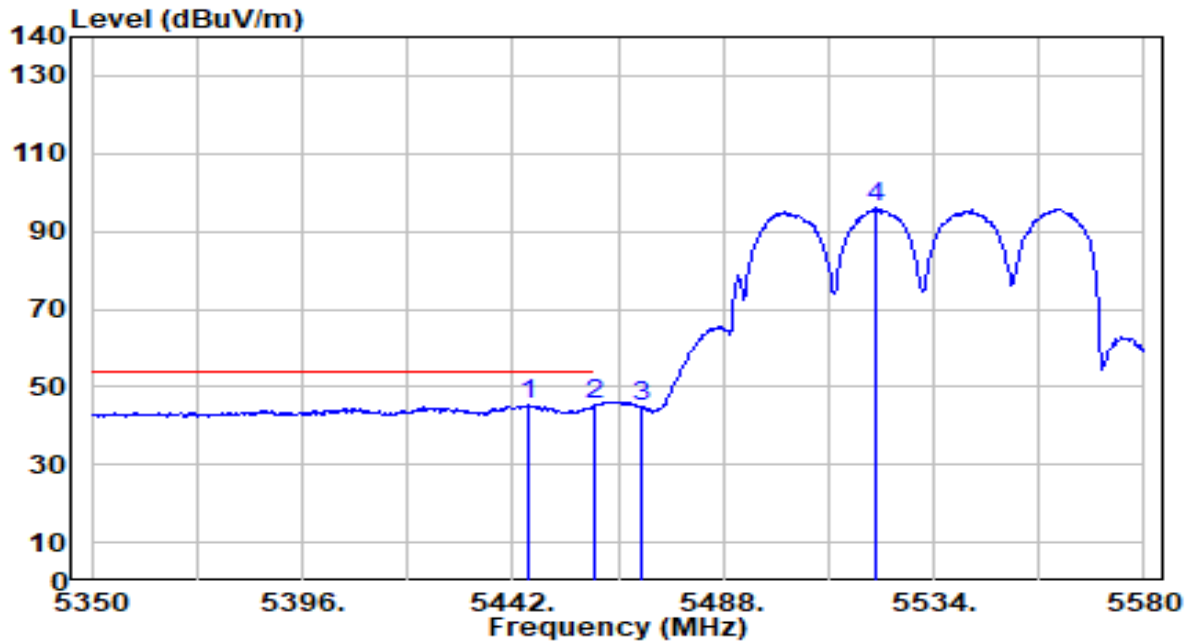


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5445.680	44.77	0.61	45.37	-8.63	54.00	112	123	Average
2	*	5460.000	44.84	0.65	45.49	-8.51	54.00	112	123	Average
3		5470.000	43.98	0.69	44.67	N/A	N/A	112	123	Average
4		5521.120	95.04	0.87	95.90	N/A	N/A	112	123	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	AC 120V/60Hz

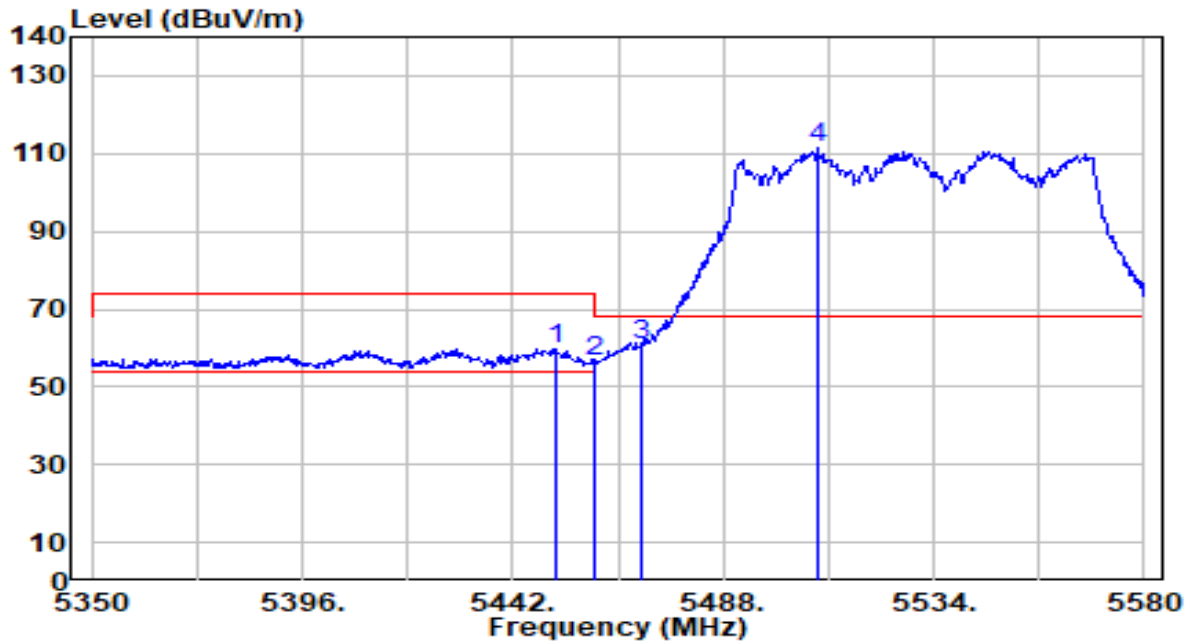


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5451.200	58.93	0.62	59.56	-14.44	74.00	185	192	Peak
2	5460.000	56.08	0.65	56.74	-17.26	74.00	185	192	Peak
3	* 5470.000	60.29	0.69	60.98	-7.22	68.20	185	192	Peak
4	5508.470	110.58	0.82	111.40	N/A	N/A	185	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	AC 120V/60Hz

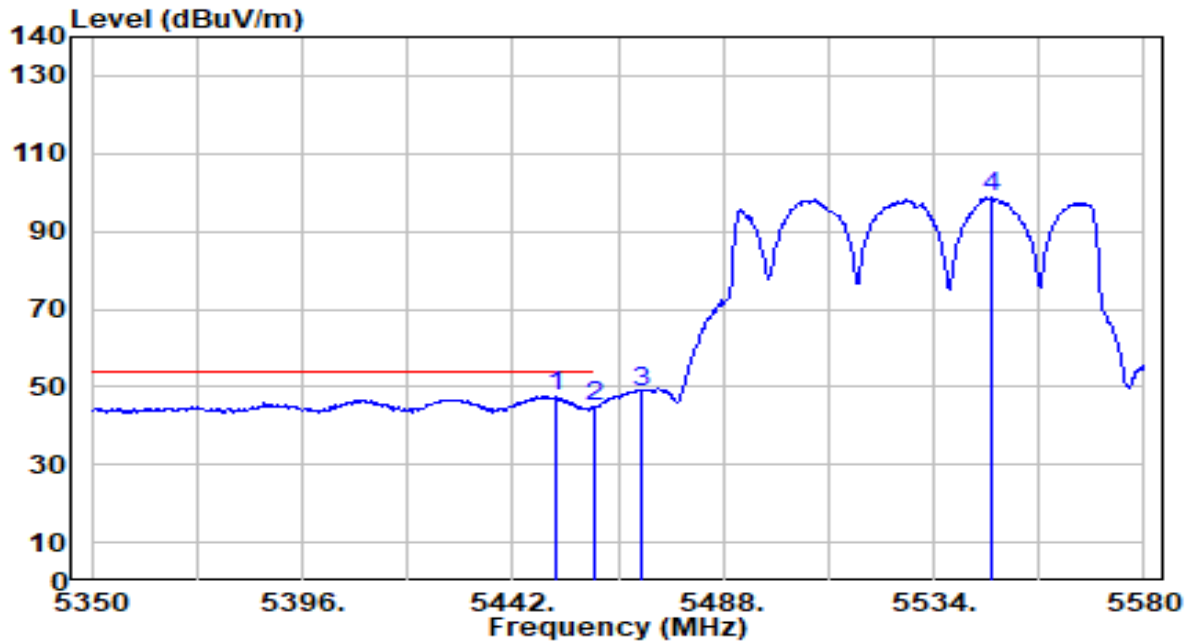


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5451.200	46.91	0.62	47.53	-6.47	54.00	185	192	Average
2		5460.000	44.04	0.65	44.70	-9.30	54.00	185	192	Average
3		5470.000	47.67	0.69	48.36	N/A	N/A	185	192	Average
4		5546.650	97.77	0.96	98.73	N/A	N/A	185	192	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band4_TX_CH 155 ANT 0+1	Test Voltage	AC 120V/60Hz

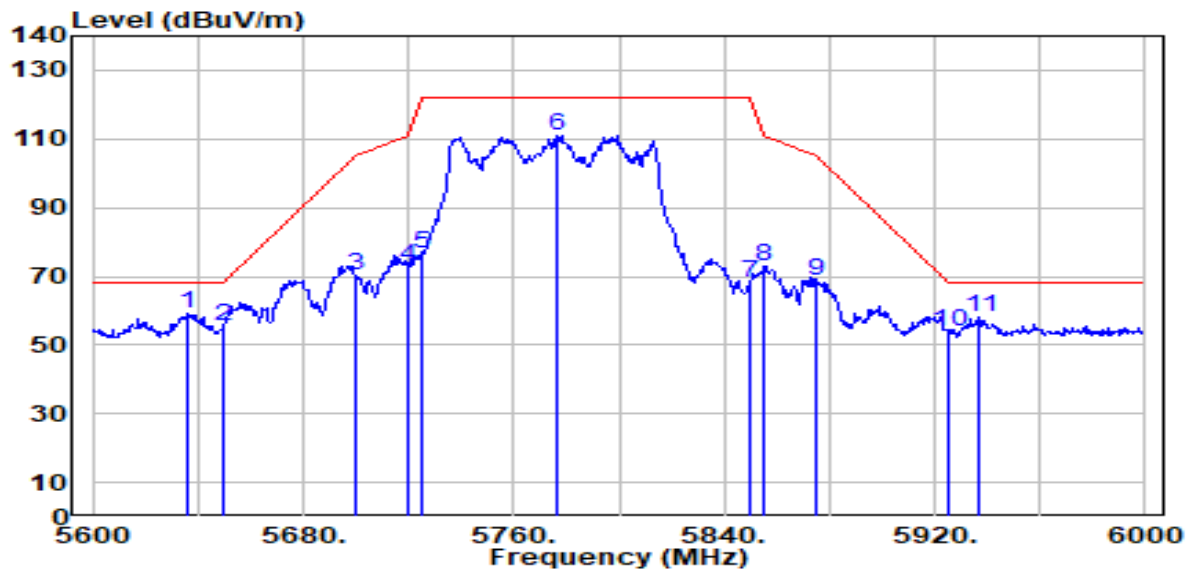


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.400	57.93	1.36	59.29	-8.91	68.20	106	258	Peak
2		5650.000	54.01	1.44	55.45	-12.75	68.20	106	258	Peak
3		5700.000	68.29	1.72	70.01	-35.19	105.20	106	258	Peak
4		5720.000	71.29	1.84	73.12	-37.68	110.80	106	258	Peak
5		5725.000	74.80	1.86	76.66	-45.54	122.20	106	258	Peak
6		5776.000	109.02	2.15	111.17	N/A	N/A	106	258	Peak
7		5850.000	65.92	2.27	68.19	-54.01	122.20	106	258	Peak
8		5855.000	70.81	2.27	73.07	-37.73	110.80	106	258	Peak
9		5875.000	66.49	2.26	68.75	-36.45	105.20	106	258	Peak
10		5925.000	51.80	2.25	54.04	-14.16	68.20	106	258	Peak
11		5937.200	55.63	2.24	57.87	-10.33	68.20	106	258	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band4_TX_CH 155 ANT 0+1	Test Voltage	AC 120V/60Hz

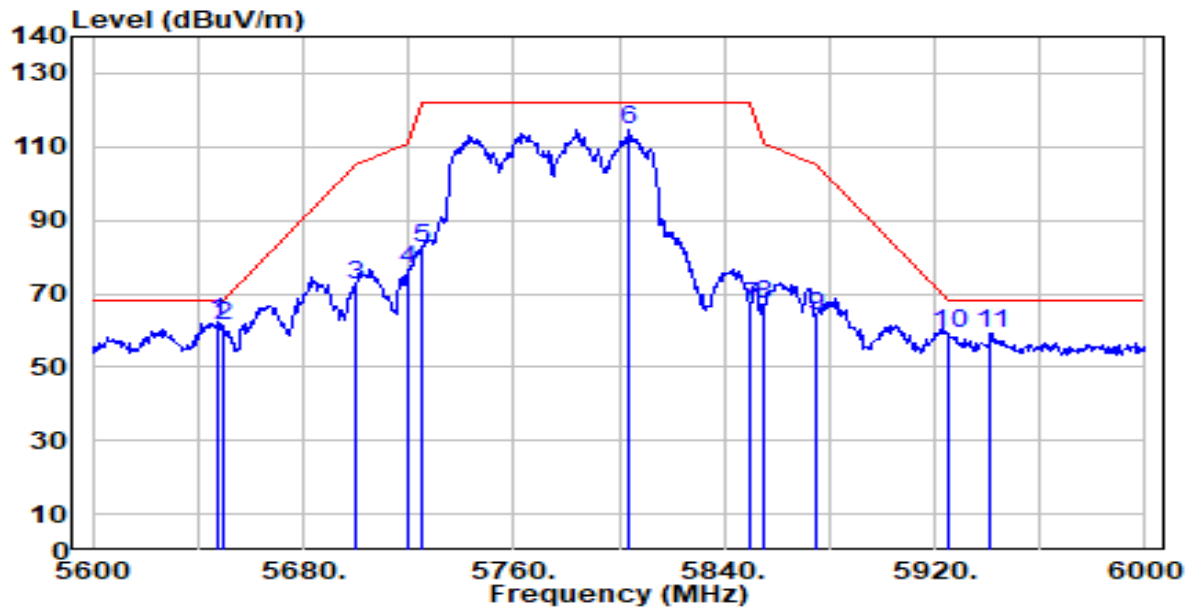


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.600	61.04	1.43	62.47	-5.73	68.20	109	142	Peak
2		5650.000	59.60	1.44	61.04	-7.16	68.20	109	142	Peak
3		5700.000	70.55	1.72	72.27	-32.93	105.20	109	142	Peak
4		5720.000	74.80	1.84	76.63	-34.17	110.80	109	142	Peak
5		5725.000	80.65	1.86	82.51	-39.69	122.20	109	142	Peak
6		5804.000	112.24	2.29	114.53	N/A	N/A	109	142	Peak
7		5850.000	64.44	2.27	66.72	-55.48	122.20	109	142	Peak
8		5855.000	65.01	2.27	67.28	-43.52	110.80	109	142	Peak
9		5875.000	61.71	2.26	63.98	-41.22	105.20	109	142	Peak
10		5925.000	56.88	2.25	59.12	-9.08	68.20	109	142	Peak
11		5941.200	56.96	2.24	59.20	-9.00	68.20	109	142	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	AC 120V/60Hz

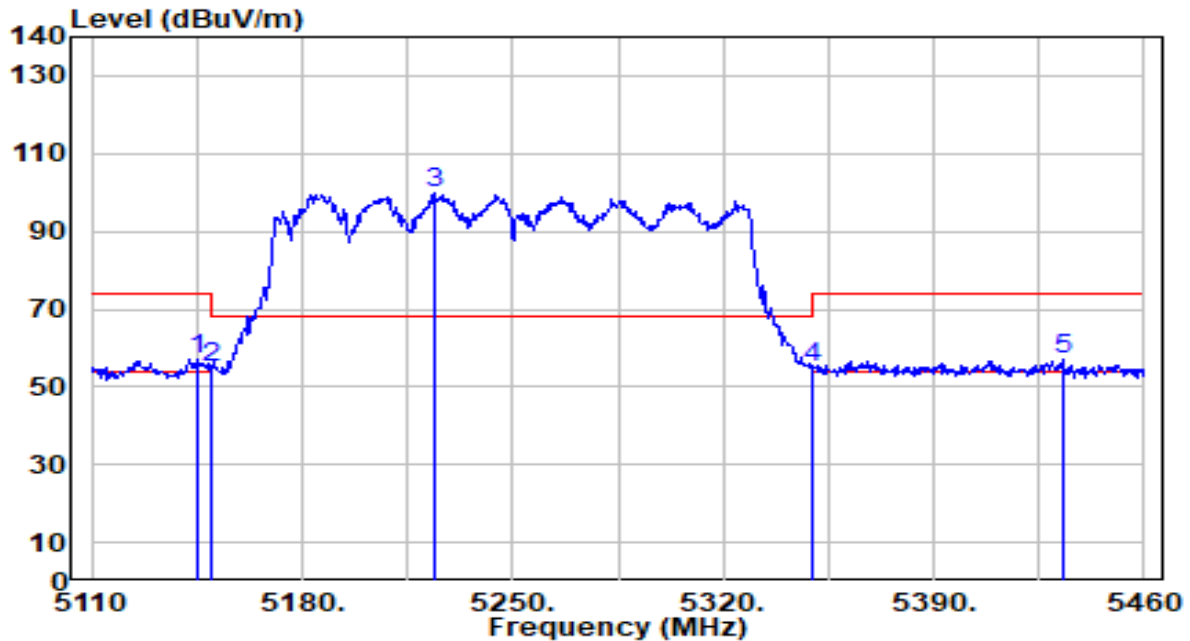


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.350	56.26	0.68	56.94	-17.06	74.00	109	211	Peak
2		5150.000	54.30	0.68	54.98	-19.02	74.00	109	211	Peak
3		5224.100	99.44	0.64	100.08	N/A	N/A	109	211	Peak
4		5350.000	54.45	0.51	54.96	-19.04	74.00	109	211	Peak
5		5432.700	56.28	0.56	56.85	-17.15	74.00	109	211	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	AC 120V/60Hz

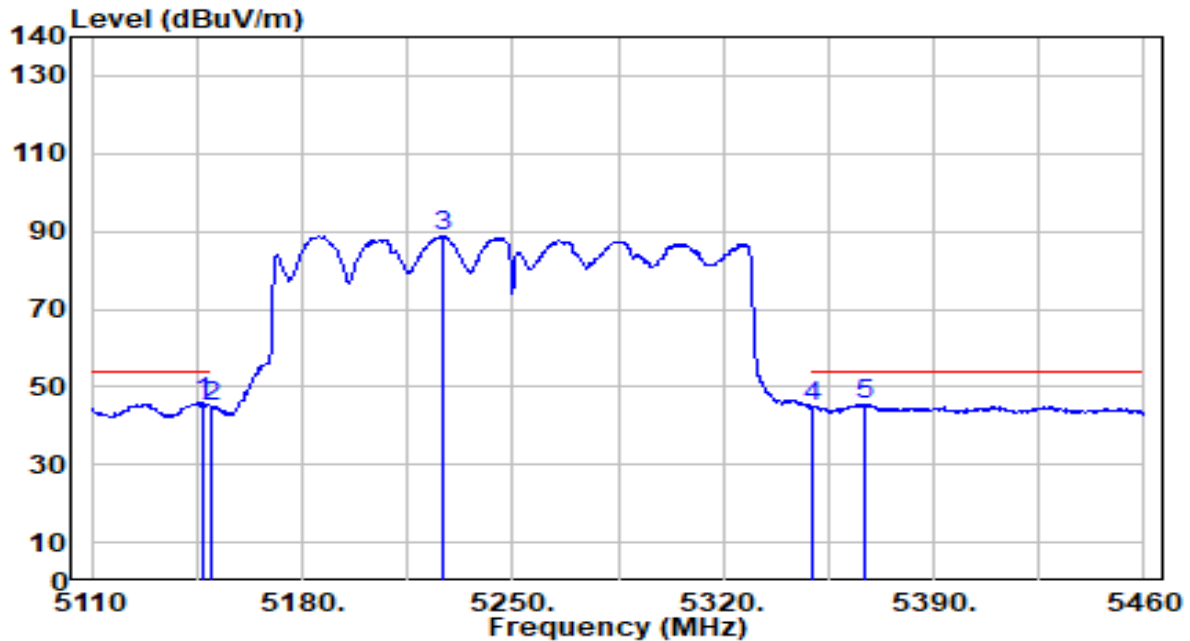


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.100	45.47	0.68	46.14	-7.86	54.00	109	211	Average
2		5150.000	44.17	0.68	44.85	-9.15	54.00	109	211	Average
3		5226.550	88.21	0.64	88.85	N/A	N/A	109	211	Average
4		5350.000	44.21	0.51	44.71	-9.29	54.00	109	211	Average
5		5366.900	45.11	0.49	45.60	-8.40	54.00	109	211	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	AC 120V/60Hz

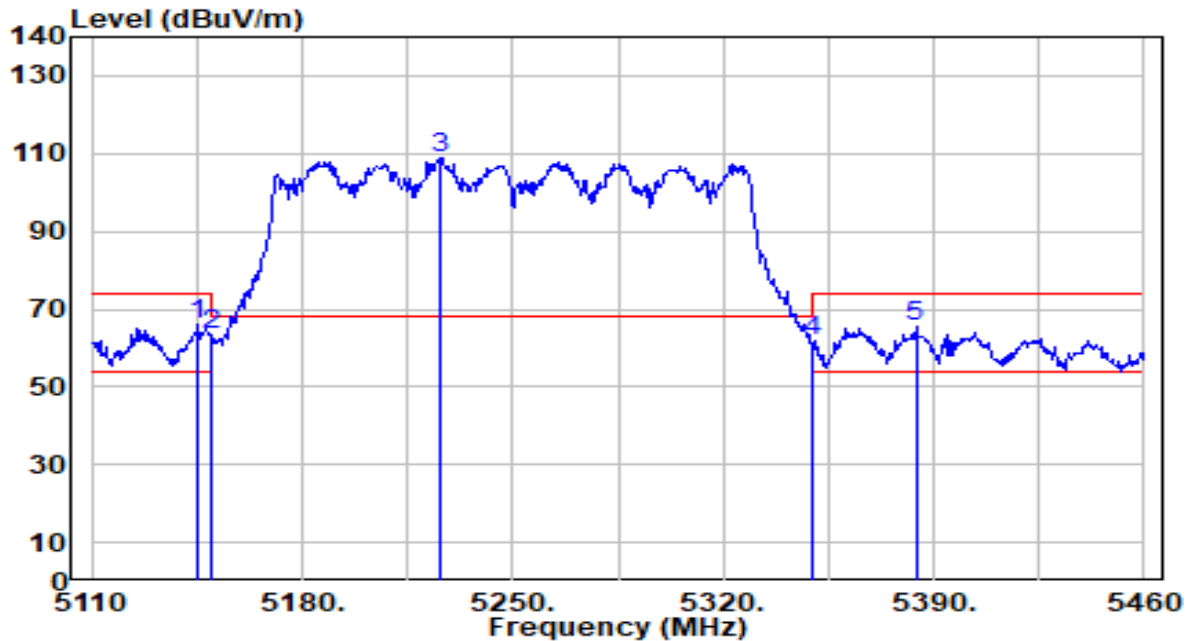


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.350	65.15	0.68	65.83	-8.17	74.00	148	183	Peak
2		5150.000	62.59	0.68	63.26	-10.74	74.00	148	183	Peak
3		5225.500	108.07	0.64	108.71	N/A	N/A	148	183	Peak
4		5350.000	61.11	0.51	61.62	-12.38	74.00	148	183	Peak
5		5384.050	64.93	0.47	65.40	-8.60	74.00	148	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	AC 120V/60Hz

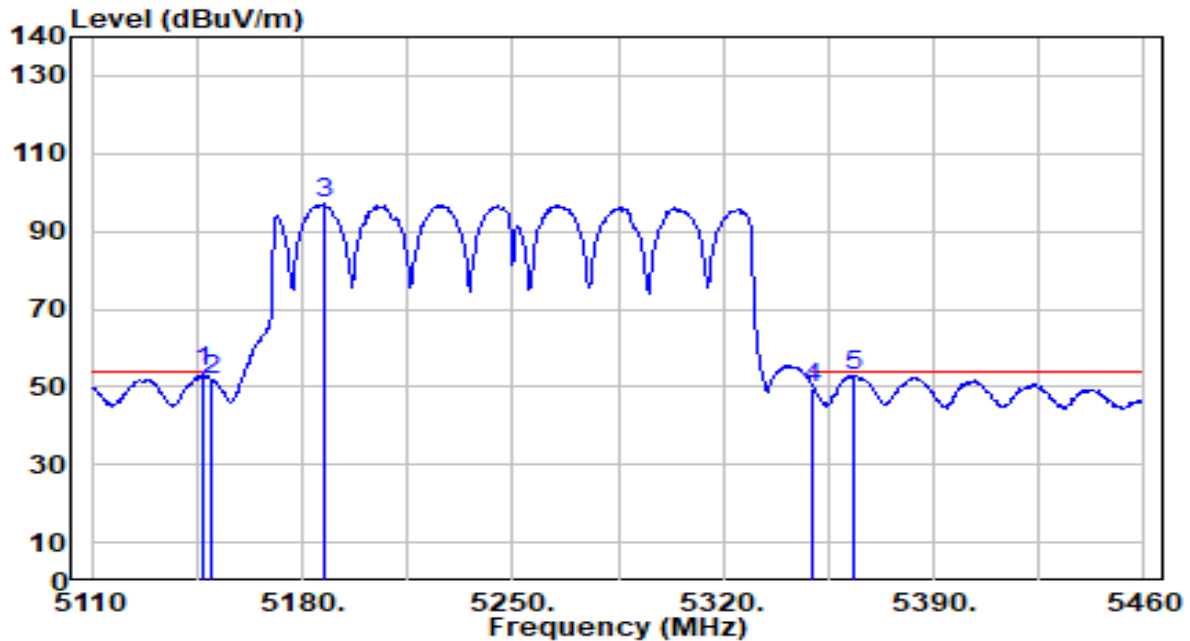


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.450	53.08	0.68	53.75	-0.25	54.00	148	183	Average
2		5150.000	51.18	0.68	51.86	-2.14	54.00	148	183	Average
3		5187.000	96.29	0.67	96.96	N/A	N/A	148	183	Average
4		5350.000	49.25	0.51	49.76	-4.24	54.00	148	183	Average
5		5363.750	52.33	0.49	52.82	-1.18	54.00	148	183	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	AC 120V/60Hz

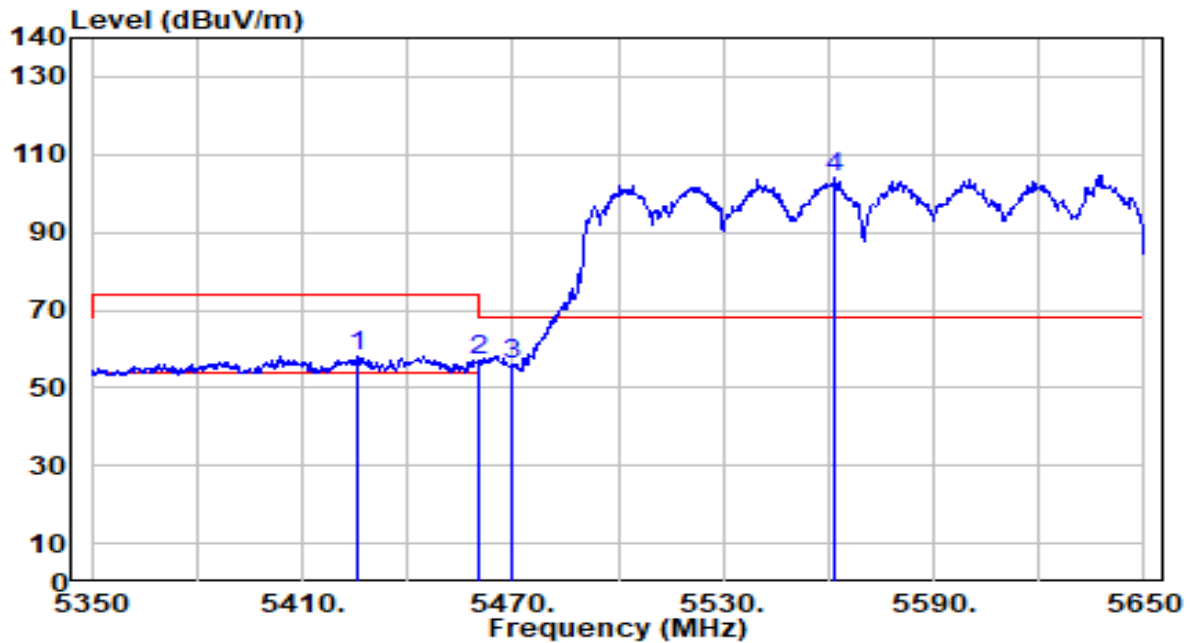


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5425.600	57.73	0.54	58.27	-15.73	74.00	115	119	Peak
2	5460.000	56.62	0.65	57.27	-16.73	74.00	115	119	Peak
3	* 5470.000	55.44	0.69	56.13	-12.07	68.20	115	119	Peak
4	5561.800	102.95	1.02	103.96	N/A	N/A	115	119	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	AC 120V/60Hz

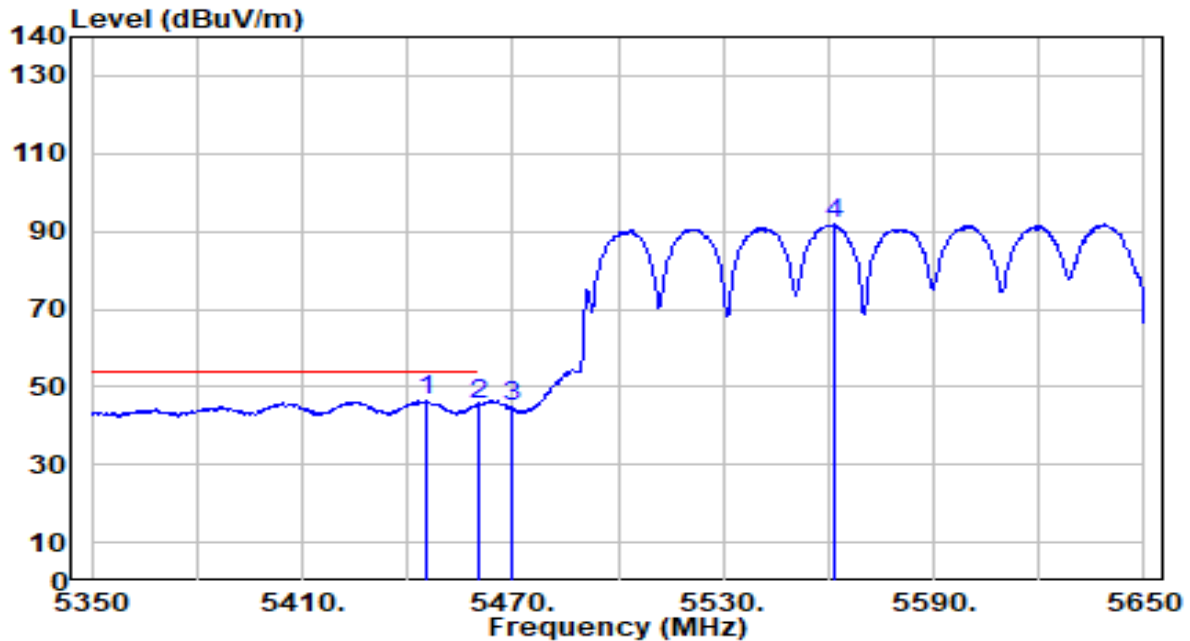


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5445.100	45.75	0.60	46.35	-7.65	54.00	115	119	Average
2		5460.000	44.93	0.65	45.58	-8.42	54.00	115	119	Average
3		5470.000	44.15	0.69	44.83	N/A	N/A	115	119	Average
4		5561.500	90.86	1.02	91.87	N/A	N/A	115	119	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	AC 120V/60Hz

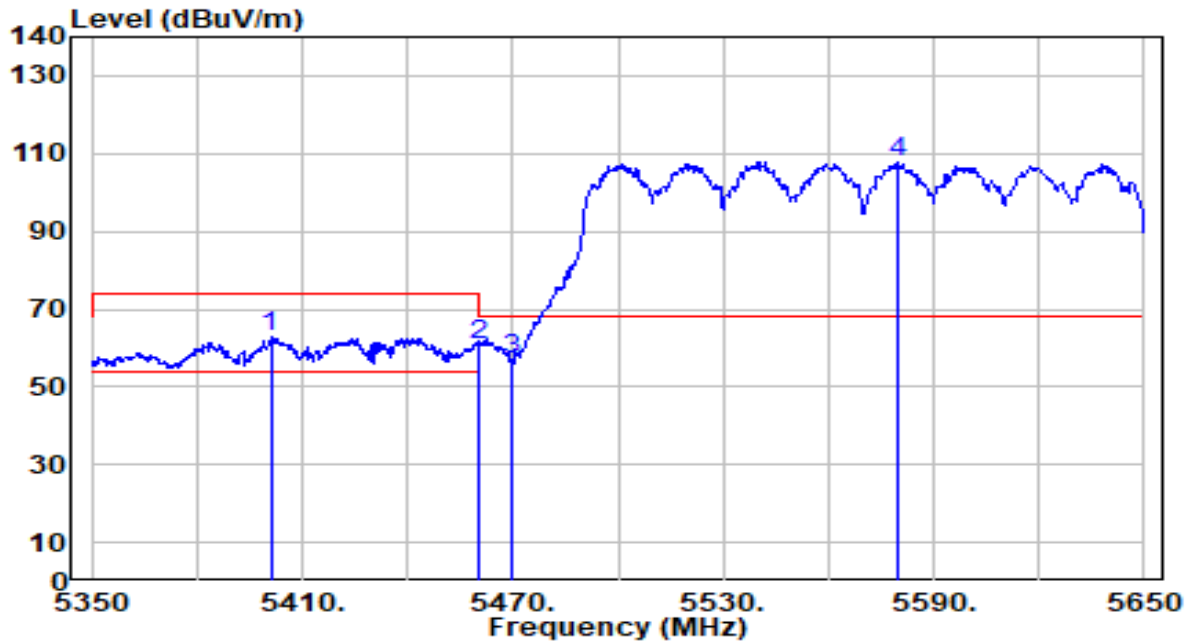


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5401.000	62.20	0.45	62.66	-11.34	74.00	120	138	Peak
2	5460.000	59.92	0.65	60.58	-13.42	74.00	120	138	Peak
3	* 5470.000	56.60	0.69	57.29	-10.91	68.20	120	138	Peak
4	5579.800	106.78	1.08	107.87	N/A	N/A	120	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	AC 120V/60Hz

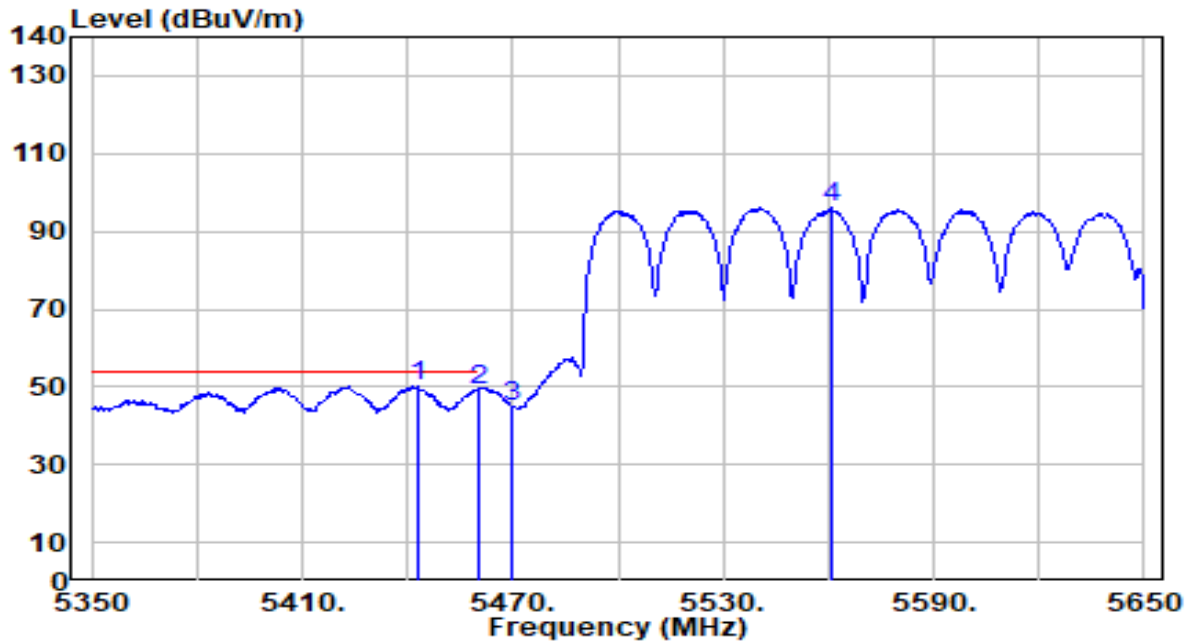


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5442.700	49.56	0.60	50.15	-3.85	54.00	120	138	Average
2		5460.000	48.58	0.65	49.24	-4.76	54.00	120	138	Average
3		5470.000	44.17	0.69	44.86	N/A	N/A	120	138	Average
4		5561.200	94.93	1.01	95.94	N/A	N/A	120	138	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band1_TX_CH 36 ANT 0+1	Test Voltage	AC 120V/60Hz

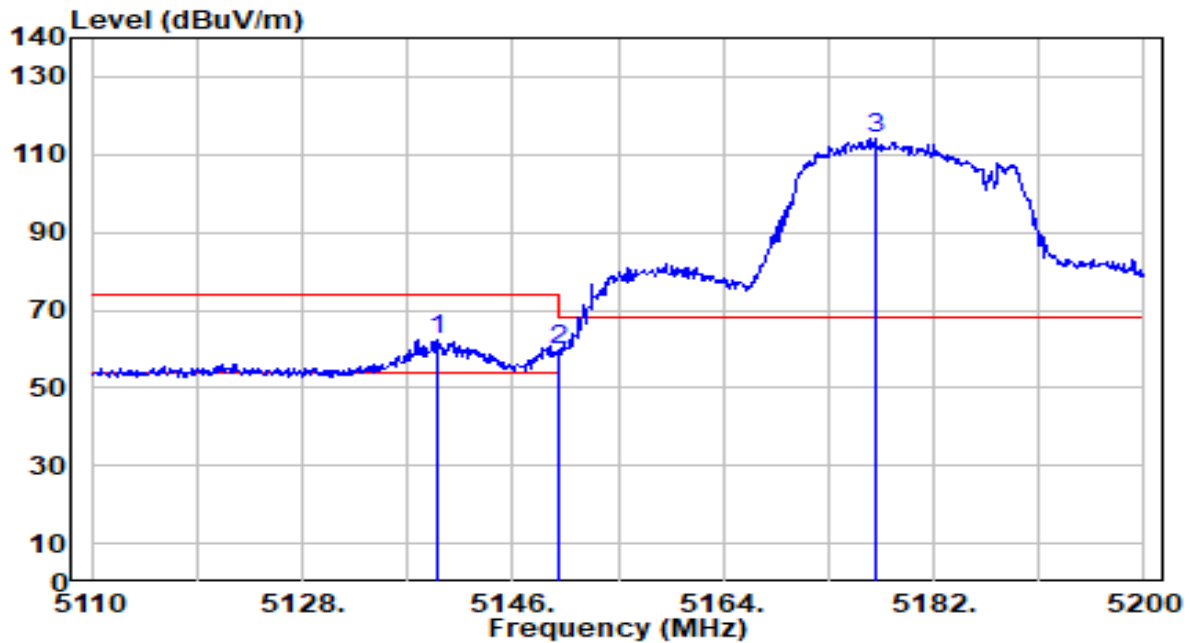


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5139.610	61.80	0.68	62.47	-11.53	74.00	161	180	Peak
2		5150.000	58.90	0.68	59.58	-14.42	74.00	161	180	Peak
3		5177.050	113.54	0.67	114.21	N/A	N/A	161	180	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band1_TX_CH 36 ANT 0+1	Test Voltage	AC 120V/60Hz

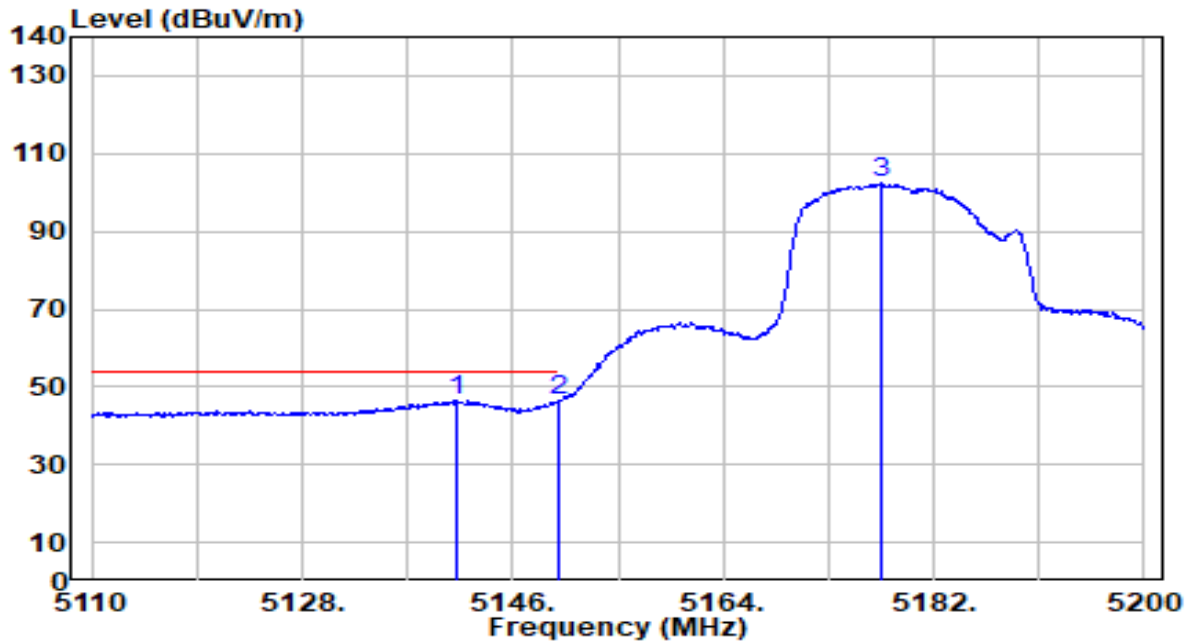


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5141.230	45.95	0.68	46.62	-7.38	54.00	161	180	Average
2		5150.000	45.74	0.68	46.42	-7.58	54.00	161	180	Average
3		5177.500	101.78	0.67	102.46	N/A	N/A	161	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band1_TX_CH 36 ANT 0+1	Test Voltage	AC 120V/60Hz

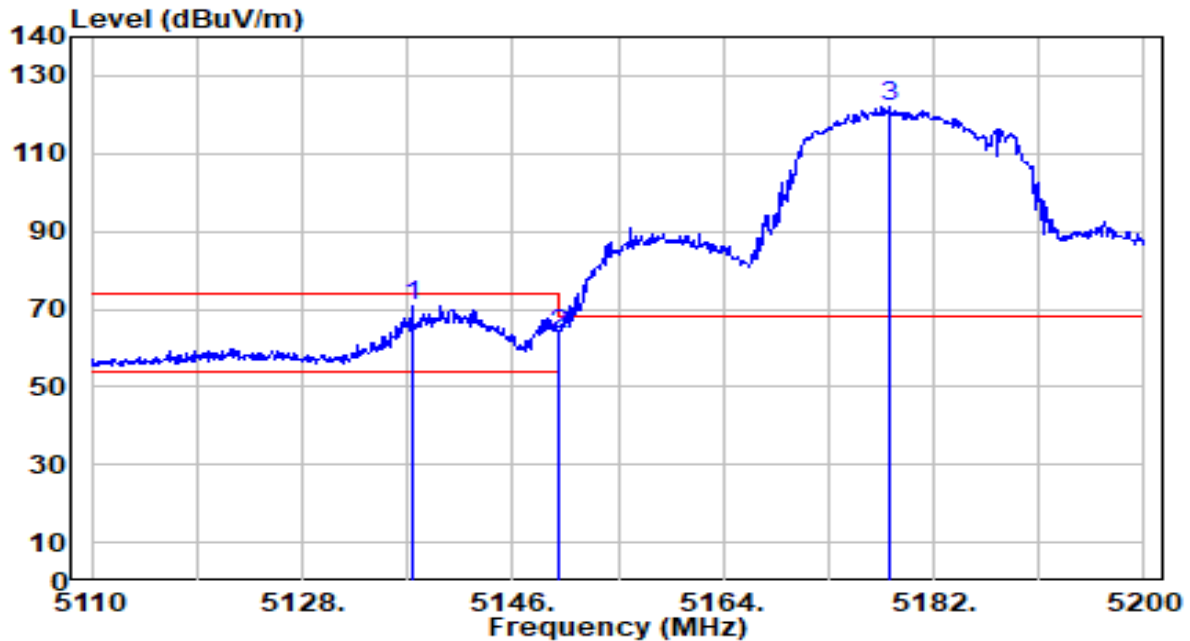


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5137.450	70.38	0.68	71.05	-2.95	74.00	116	187	Peak
2		5150.000	62.53	0.68	63.20	-10.80	74.00	116	187	Peak
3		5178.310	121.26	0.67	121.93	N/A	N/A	116	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band1_TX_CH 36 ANT 0+1	Test Voltage	AC 120V/60Hz

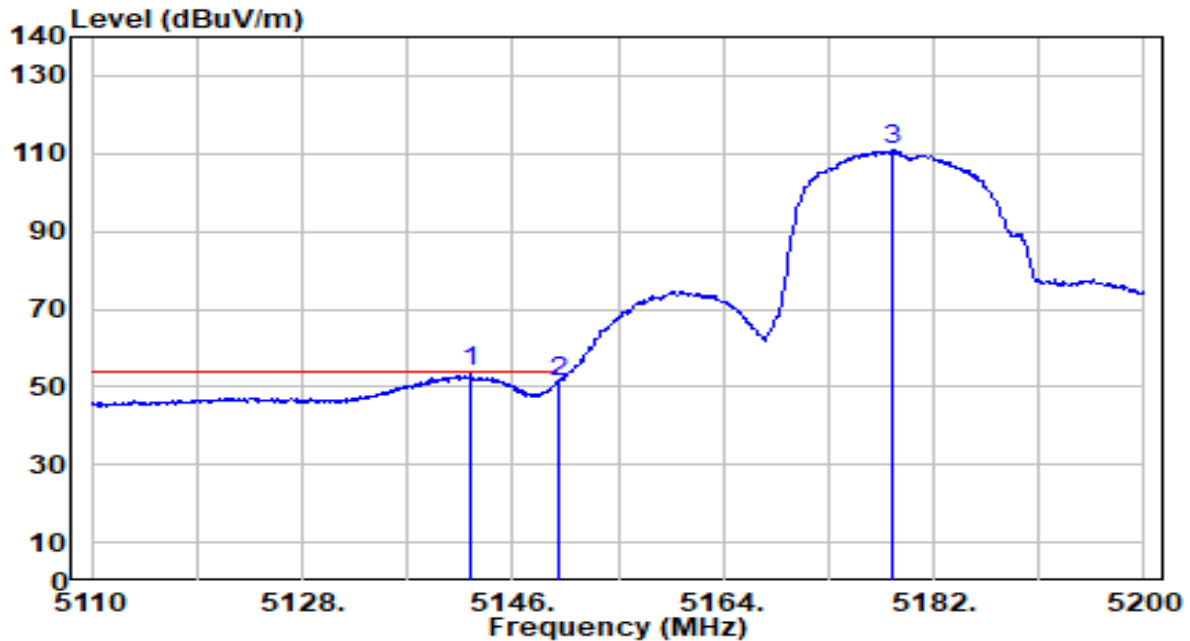


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5142.400	53.08	0.68	53.75	-0.25	54.00	116	187	Average
2		5150.000	50.55	0.68	51.23	-2.77	54.00	116	187	Average
3		5178.490	110.11	0.67	110.78	N/A	N/A	116	187	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band2_TX_CH 64 ANT 0+1	Test Voltage	AC 120V/60Hz

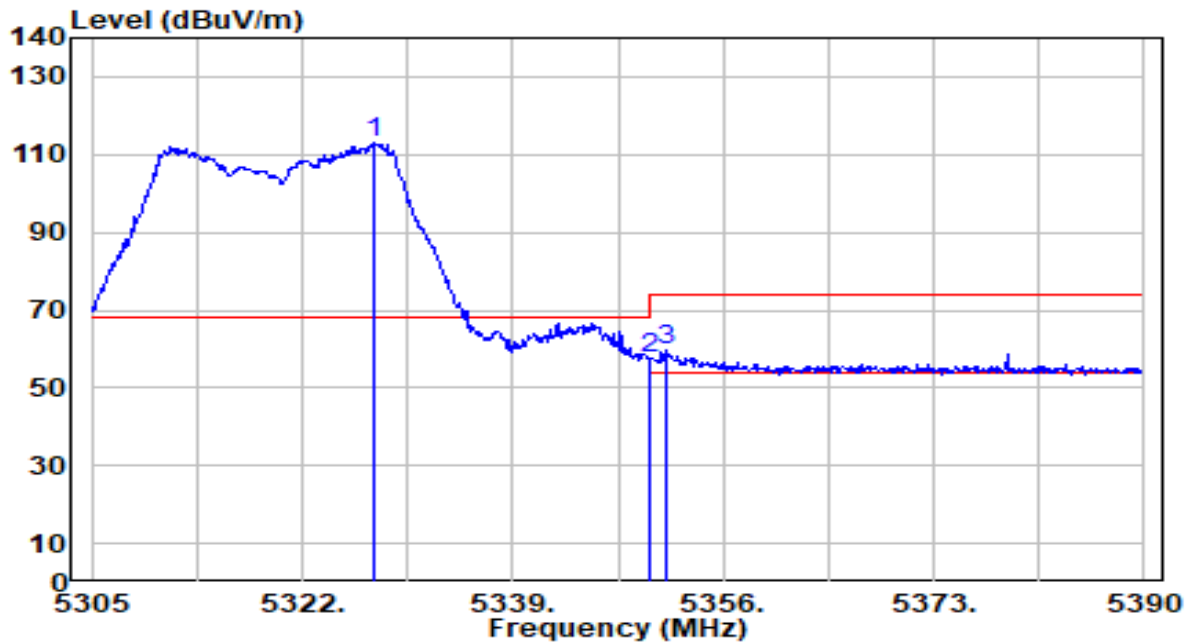


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.865	112.27	0.53	112.80	N/A	N/A	194	119	Peak
2	5350.000	56.99	0.51	57.49	-16.51	74.00	194	119	Peak
3	* 5351.325	59.02	0.50	59.52	-14.48	74.00	194	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band2_TX_CH 64 ANT 0+1	Test Voltage	AC 120V/60Hz

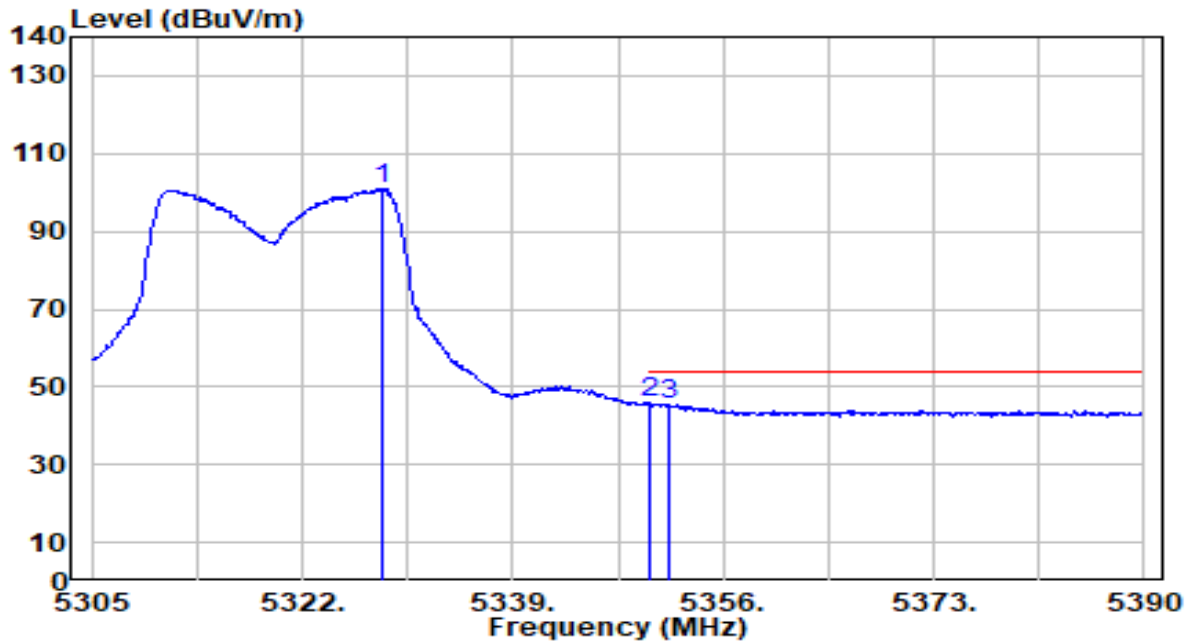


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5328.375	100.33	0.53	100.86	N/A	N/A	194	119	Average
2	*	5350.000	45.28	0.51	45.78	-8.22	54.00	194	119	Average
3		5351.580	44.84	0.50	45.34	-8.66	54.00	194	119	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band2_TX_CH 64 ANT 0+1	Test Voltage	AC 120V/60Hz

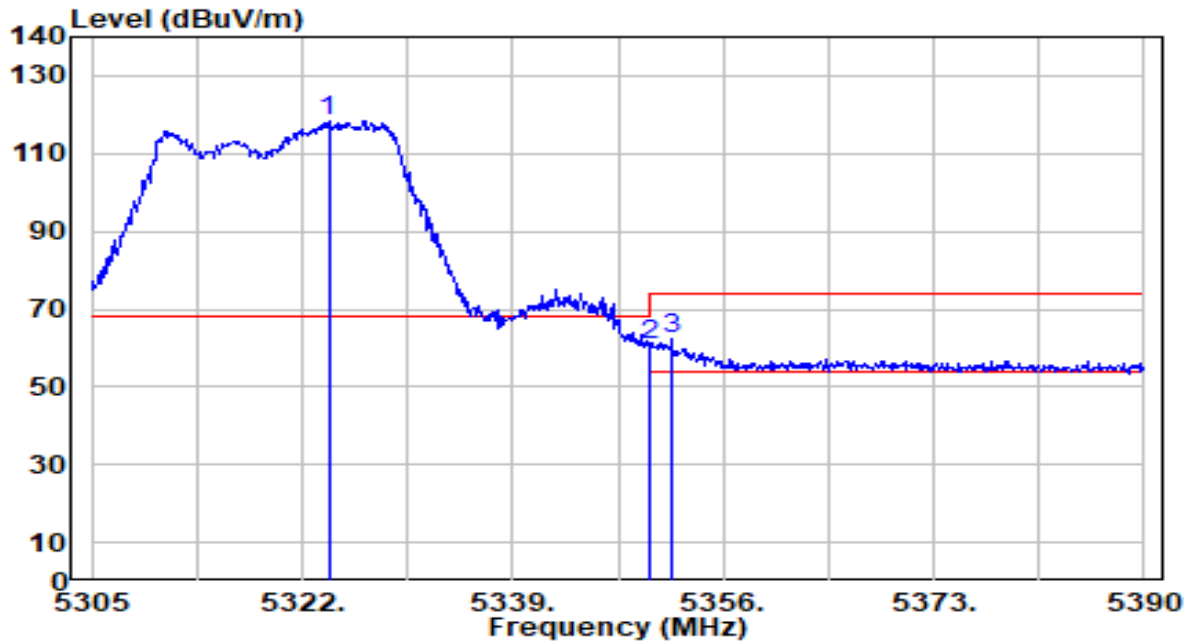


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5324.125	117.85	0.53	118.38	N/A	N/A	107	167	Peak
2	5350.000	60.04	0.51	60.54	-13.46	74.00	107	167	Peak
3	* 5351.835	61.64	0.50	62.14	-11.86	74.00	107	167	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band2_TX_CH 64 ANT 0+1	Test Voltage	AC 120V/60Hz

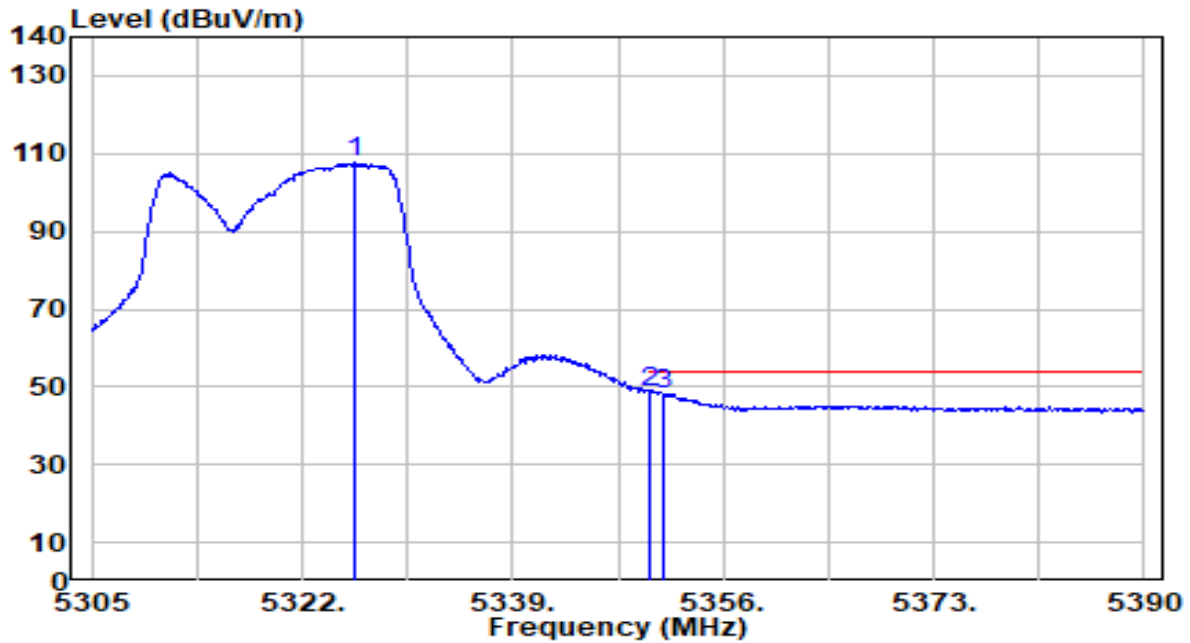


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5326.335	107.01	0.53	107.55	N/A	N/A	107	167	Average
2	*	5350.000	48.31	0.51	48.82	-5.18	54.00	107	167	Average
3		5351.155	47.75	0.50	48.26	-5.74	54.00	107	167	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 100 ANT 0+1	Test Voltage	AC 120V/60Hz

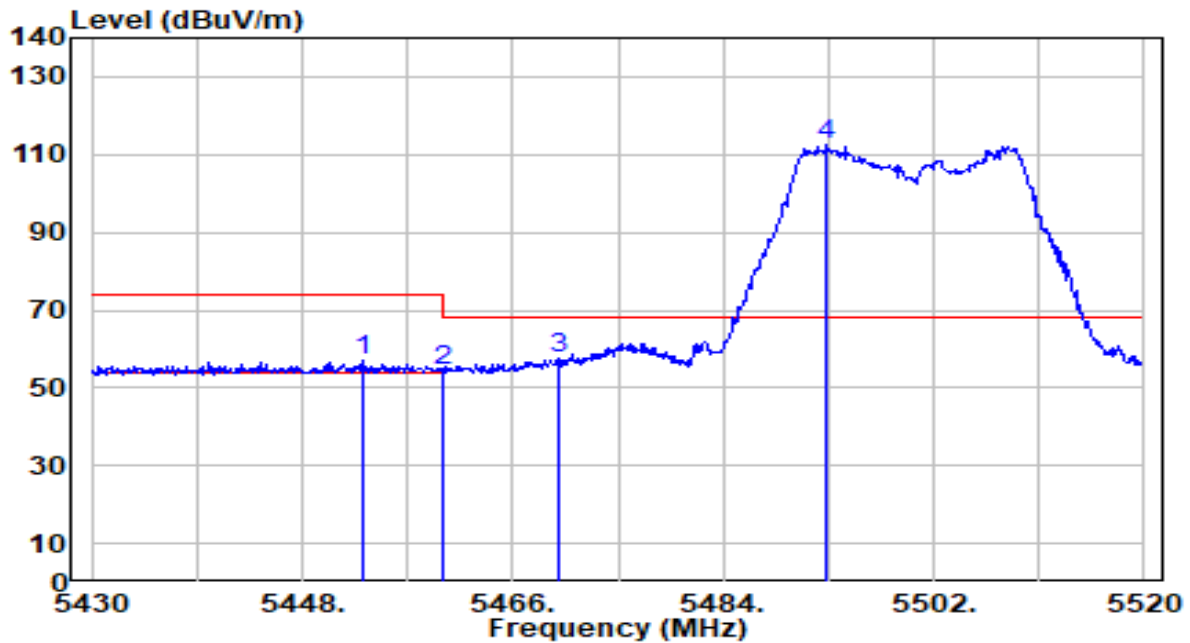


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.220	56.43	0.63	57.06	-16.94	74.00	101	117	Peak
2	5460.000	53.73	0.65	54.38	-19.62	74.00	101	117	Peak
3	* 5470.000	56.65	0.69	57.34	-10.86	68.20	101	117	Peak
4	5492.910	111.54	0.77	112.31	N/A	N/A	101	117	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 100 ANT 0+1	Test Voltage	AC 120V/60Hz

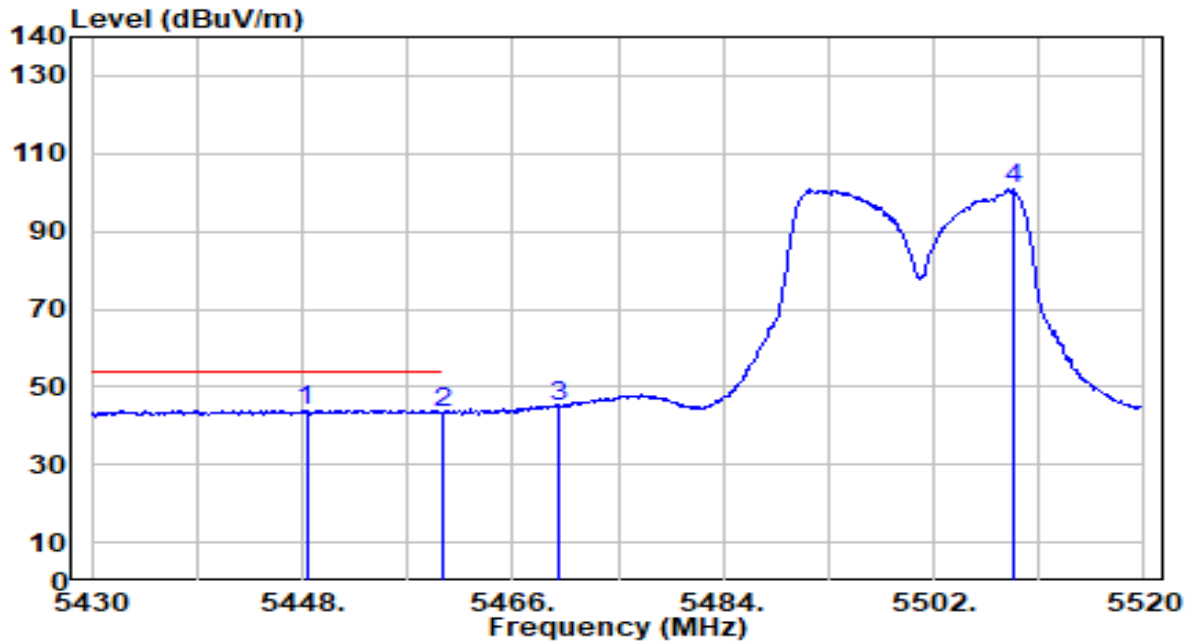


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5448.360	43.42	0.61	44.04	-9.96	54.00	101	117	Average
2		5460.000	42.76	0.65	43.42	-10.58	54.00	101	117	Average
3		5470.000	44.17	0.69	44.86	N/A	N/A	101	117	Average
4		5508.840	99.97	0.82	100.80	N/A	N/A	101	117	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 100 ANT 0+1	Test Voltage	AC 120V/60Hz

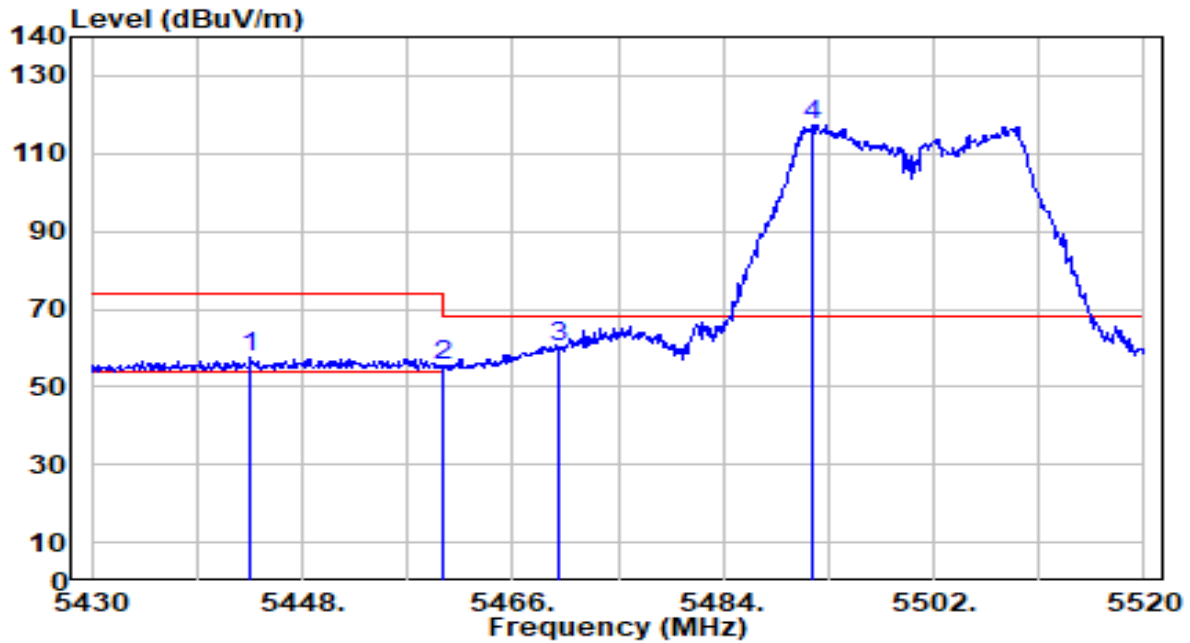


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5443.500	56.78	0.60	57.38	-16.62	74.00	144	178	Peak
2	5460.000	55.02	0.65	55.68	-18.32	74.00	144	178	Peak
3	* 5470.000	59.43	0.69	60.12	-8.08	68.20	144	178	Peak
4	5491.650	116.59	0.76	117.35	N/A	N/A	144	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 100 ANT 0+1	Test Voltage	AC 120V/60Hz

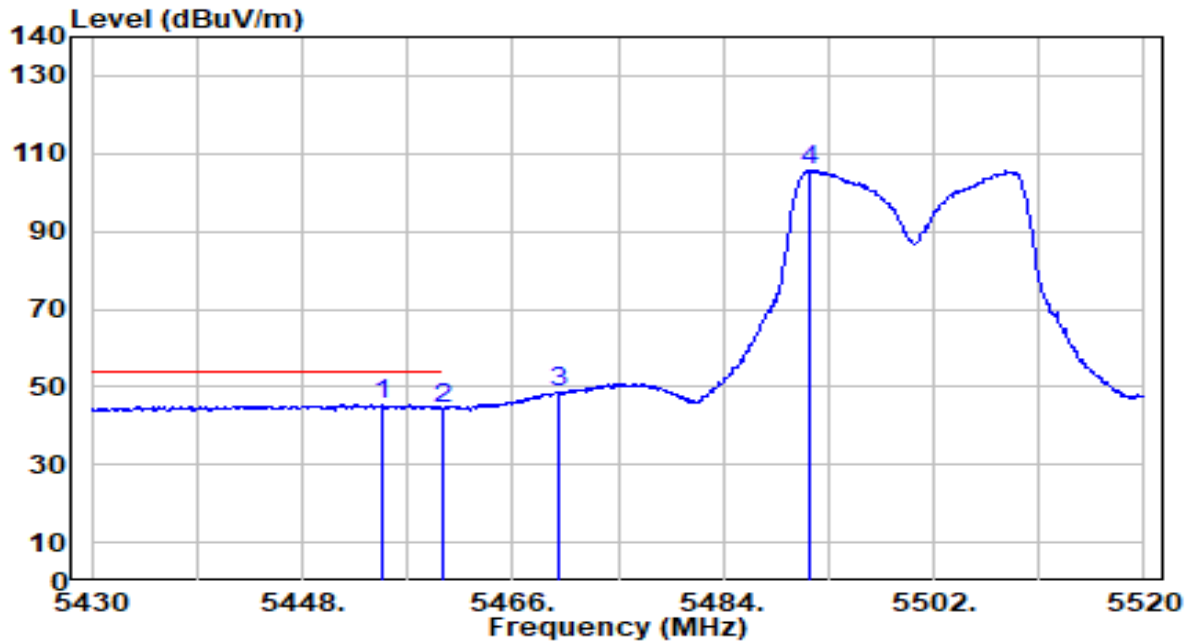


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.930	44.87	0.64	45.51	-8.49	54.00	144	178	Average
2		5460.000	43.90	0.65	44.56	-9.44	54.00	144	178	Average
3		5470.000	48.13	0.69	48.82	N/A	N/A	144	178	Average
4		5491.470	104.96	0.76	105.72	N/A	N/A	144	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 140 ANT 0+1	Test Voltage	AC 120V/60Hz

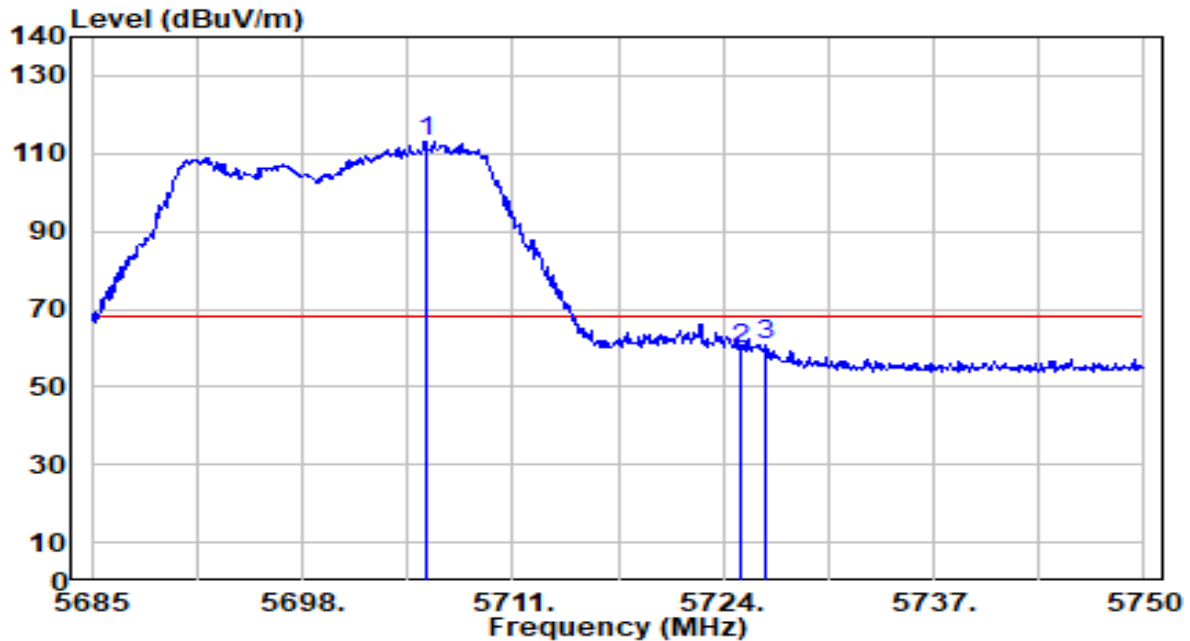


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5705.605	111.22	1.75	112.97	N/A	N/A	111	117	Peak
2	5725.000	57.83	1.86	59.69	-8.51	68.20	111	117	Peak
3	* 5726.600	59.09	1.87	60.96	-7.24	68.20	111	117	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_Band3_TX_CH 140 ANT 0+1	Test Voltage	AC 120V/60Hz

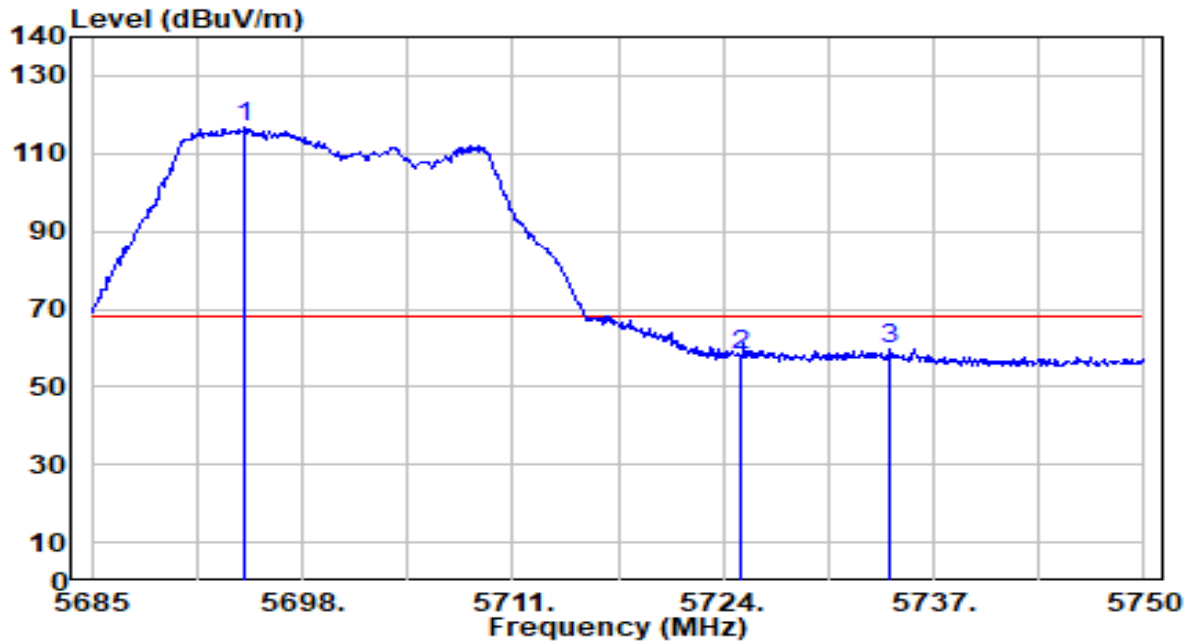


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5694.425	114.96	1.69	116.65	N/A	N/A	113	187	Peak
2	5725.000	56.16	1.86	58.02	-10.18	68.20	113	187	Peak
3	* 5734.270	57.96	1.92	59.88	-8.32	68.20	113	187	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band4_TX_CH 149 ANT 0+1	Test Voltage	AC 120V/60Hz

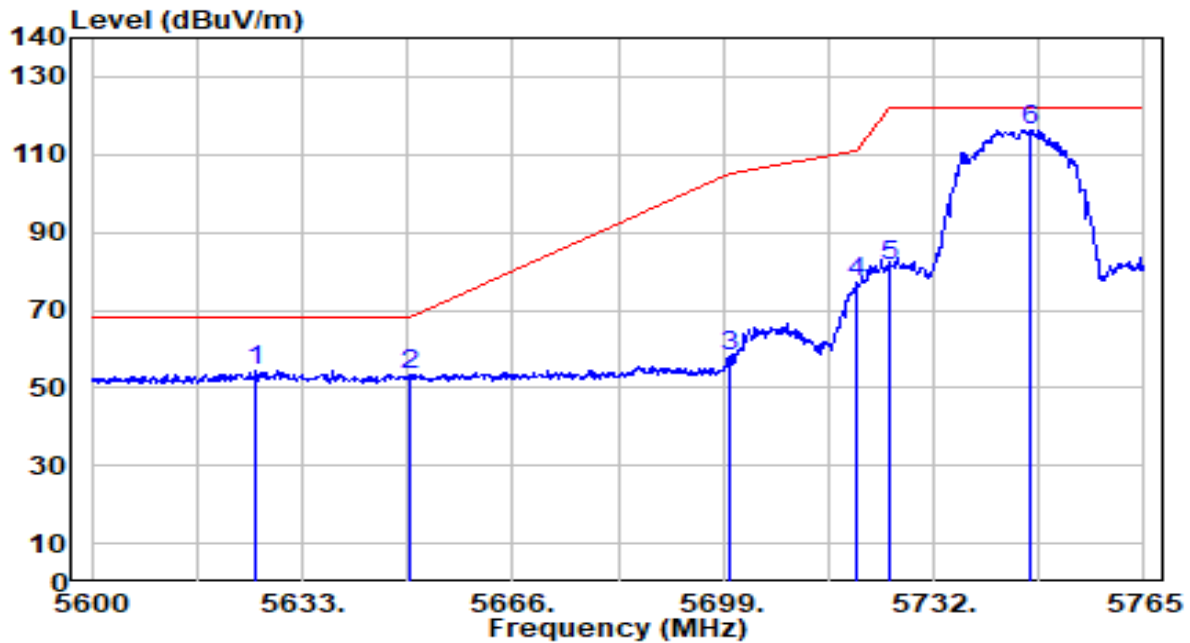


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5625.740	53.37	1.30	54.67	-13.53	68.20	121	251	Peak
2		5650.000	51.78	1.44	53.22	-14.98	68.20	121	251	Peak
3		5700.000	56.24	1.72	57.96	-47.24	105.20	121	251	Peak
4		5720.000	75.23	1.84	77.07	-33.73	110.80	121	251	Peak
5		5725.000	79.49	1.86	81.35	-40.85	122.20	121	251	Peak
6		5747.180	114.43	1.99	116.42	N/A	N/A	121	251	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band4_TX_CH 149 ANT 0+1	Test Voltage	AC 120V/60Hz

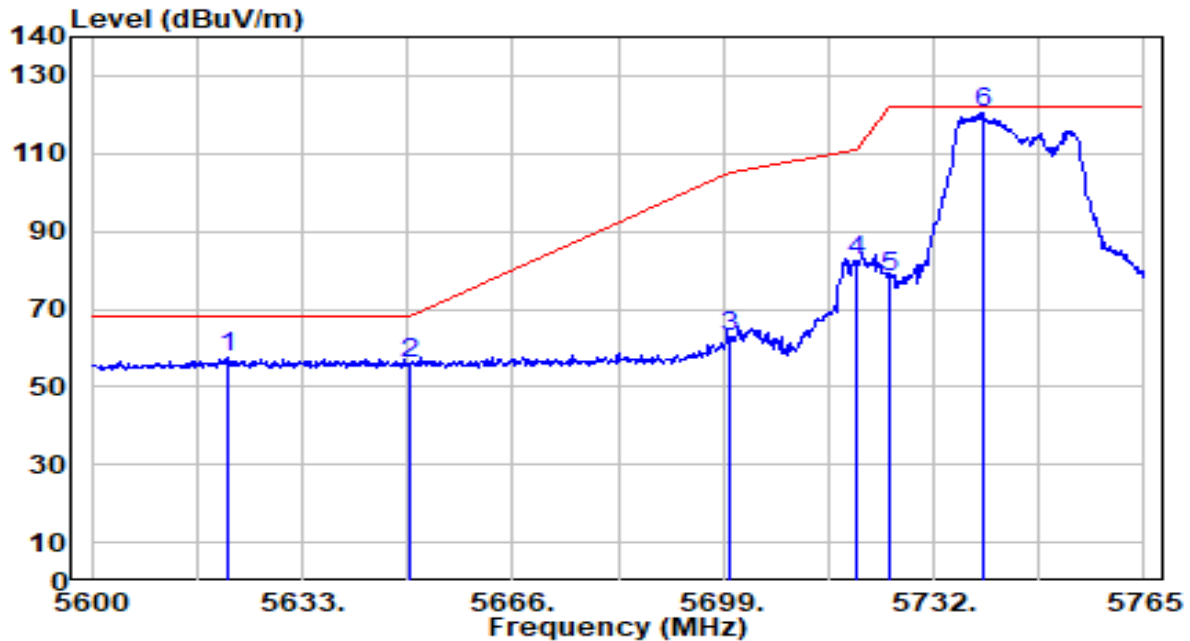


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5621.285	56.14	1.28	57.42	-10.78	68.20	113	151	Peak
2		5650.000	54.62	1.44	56.06	-12.14	68.20	113	151	Peak
3		5700.000	61.19	1.72	62.91	-42.29	105.20	113	151	Peak
4		5720.000	80.50	1.84	82.33	-28.47	110.80	113	151	Peak
5		5725.000	76.54	1.86	78.41	-43.79	122.20	113	151	Peak
6		5739.590	118.53	1.95	120.48	N/A	N/A	113	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band4_TX_CH 165 ANT 0+1	Test Voltage	AC 120V/60Hz

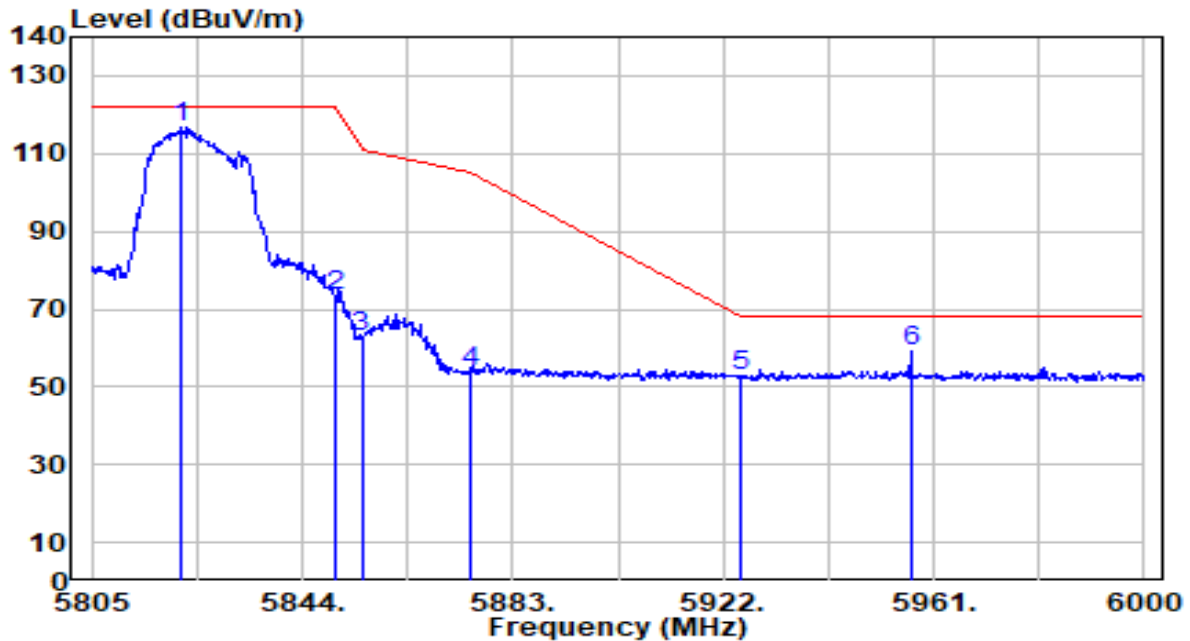


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5821.575	114.49	2.28	116.77	N/A	N/A	188	243	Peak
2	5850.000	71.22	2.27	73.49	-48.71	122.20	188	243	Peak
3	5855.000	60.44	2.27	62.71	-48.09	110.80	188	243	Peak
4	5875.000	51.68	2.26	53.94	-51.26	105.20	188	243	Peak
5	5925.000	50.50	2.25	52.74	-15.46	68.20	188	243	Peak
6	* 5956.710	56.99	2.23	59.22	-8.98	68.20	188	243	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band4_TX_CH 165 ANT 0+1	Test Voltage	AC 120V/60Hz

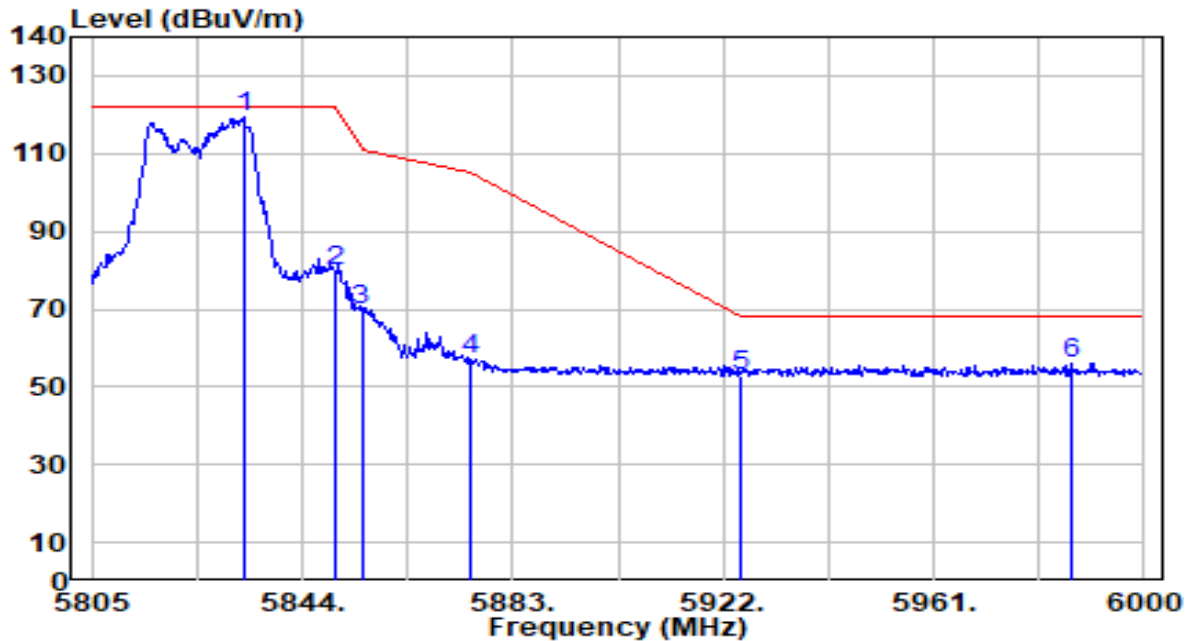


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5833.080	117.02	2.28	119.30	N/A	N/A	102	139	Peak
2	5850.000	77.49	2.27	79.76	-42.44	122.20	102	139	Peak
3	5855.000	67.54	2.27	69.81	-40.99	110.80	102	139	Peak
4	5875.000	54.54	2.26	56.81	-48.39	105.20	102	139	Peak
5	5925.000	50.74	2.25	52.98	-15.22	68.20	102	139	Peak
6	* 5986.545	53.92	2.22	56.15	-12.05	68.20	102	139	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band1_TX_CH 38 ANT 0+1	Test Voltage	AC 120V/60Hz

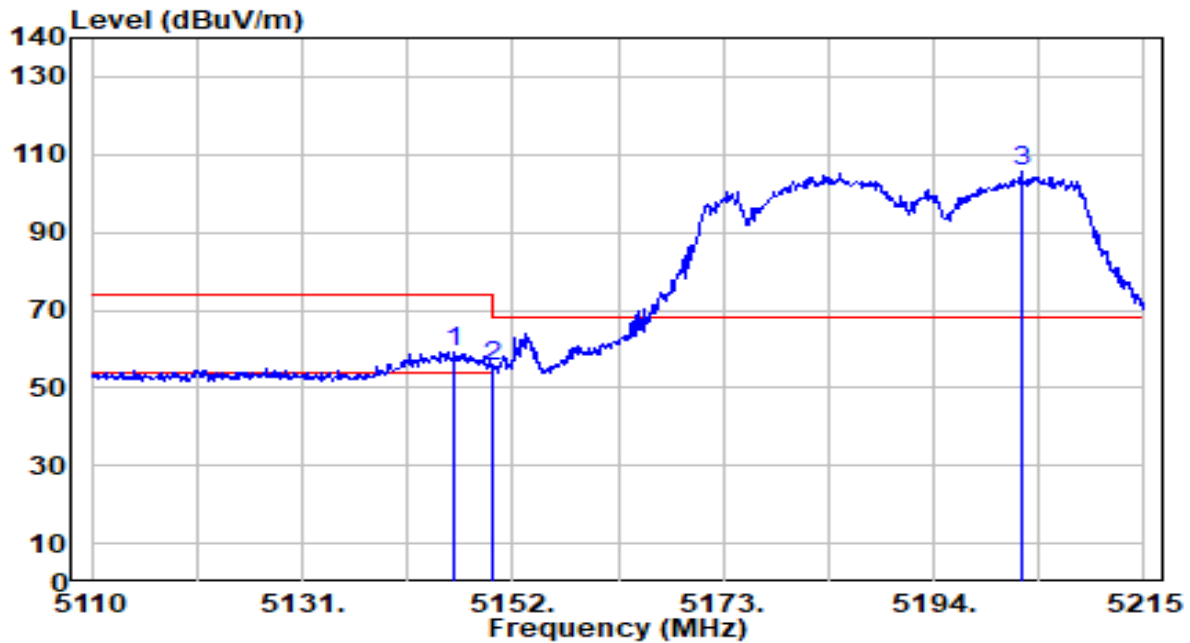


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.225	58.43	0.68	59.10	-14.90	74.00	119	207	Peak
2		5150.000	54.57	0.68	55.25	-18.75	74.00	119	207	Peak
3		5202.715	104.74	0.67	105.41	N/A	N/A	119	207	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band1_TX_CH 38 ANT 0+1	Test Voltage	AC 120V/60Hz

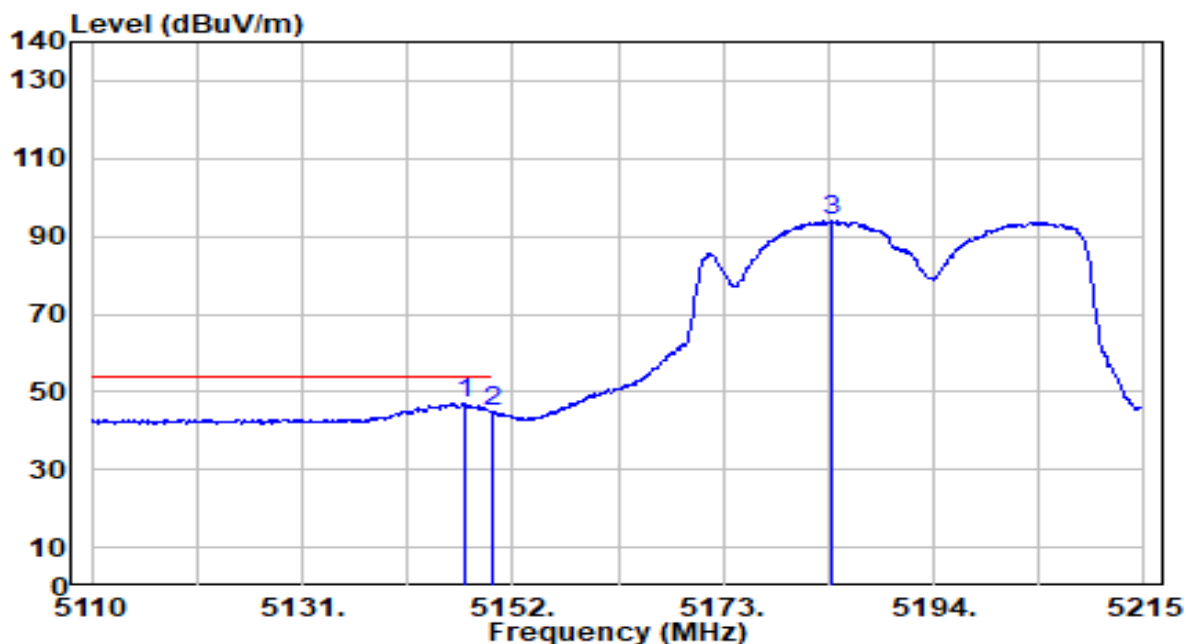


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.170	46.31	0.68	46.99	-7.01	54.00	119	207	Average
2		5150.000	44.03	0.68	44.70	-9.30	54.00	119	207	Average
3		5183.710	93.35	0.67	94.02	N/A	N/A	119	207	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band1_TX_CH 38 ANT 0+1	Test Voltage	AC 120V/60Hz

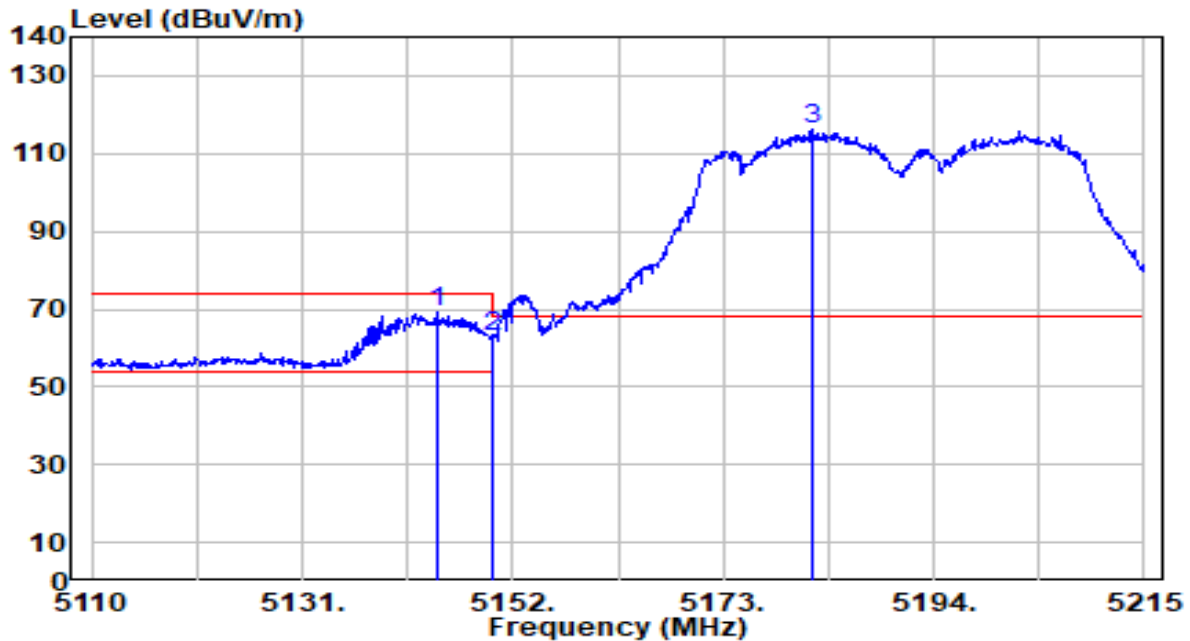


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.440	68.46	0.68	69.13	-4.87	74.00	112	176	Peak
2		5150.000	62.01	0.68	62.69	-11.31	74.00	112	176	Peak
3		5181.925	115.30	0.67	115.97	N/A	N/A	112	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band1_TX_CH 38 ANT 0+1	Test Voltage	AC 120V/60Hz

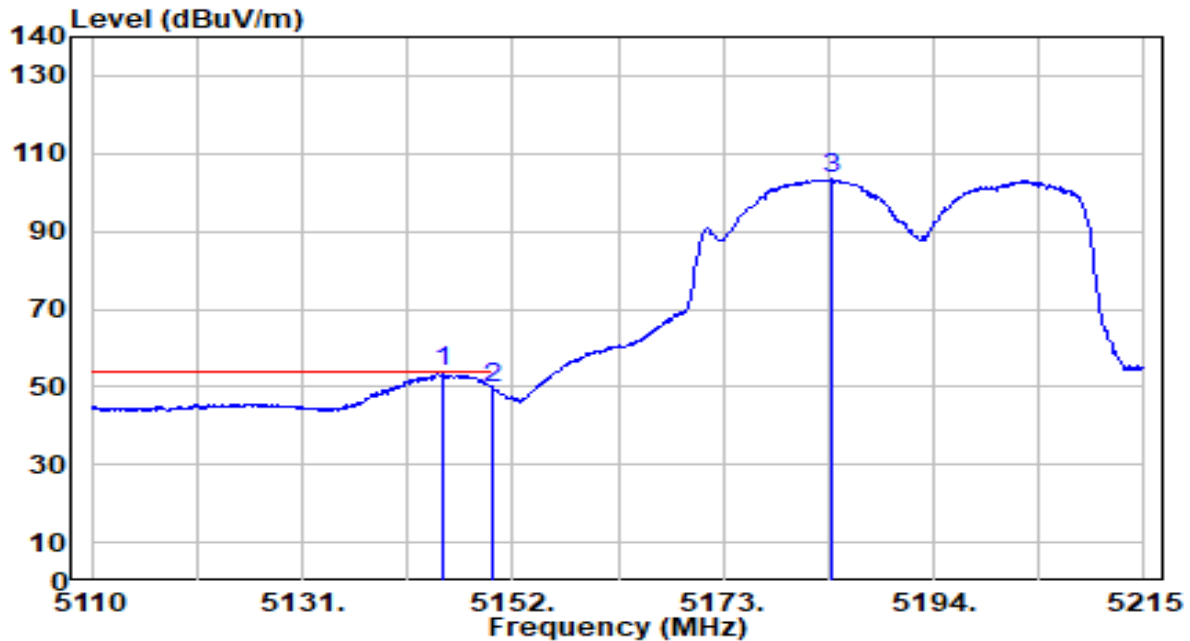


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.070	53.04	0.68	53.71	-0.29	54.00	112	176	Average
2		5150.000	49.18	0.68	49.86	-4.14	54.00	112	176	Average
3		5183.815	102.67	0.67	103.34	N/A	N/A	112	176	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band2_TX_CH 62 ANT 0+1	Test Voltage	AC 120V/60Hz

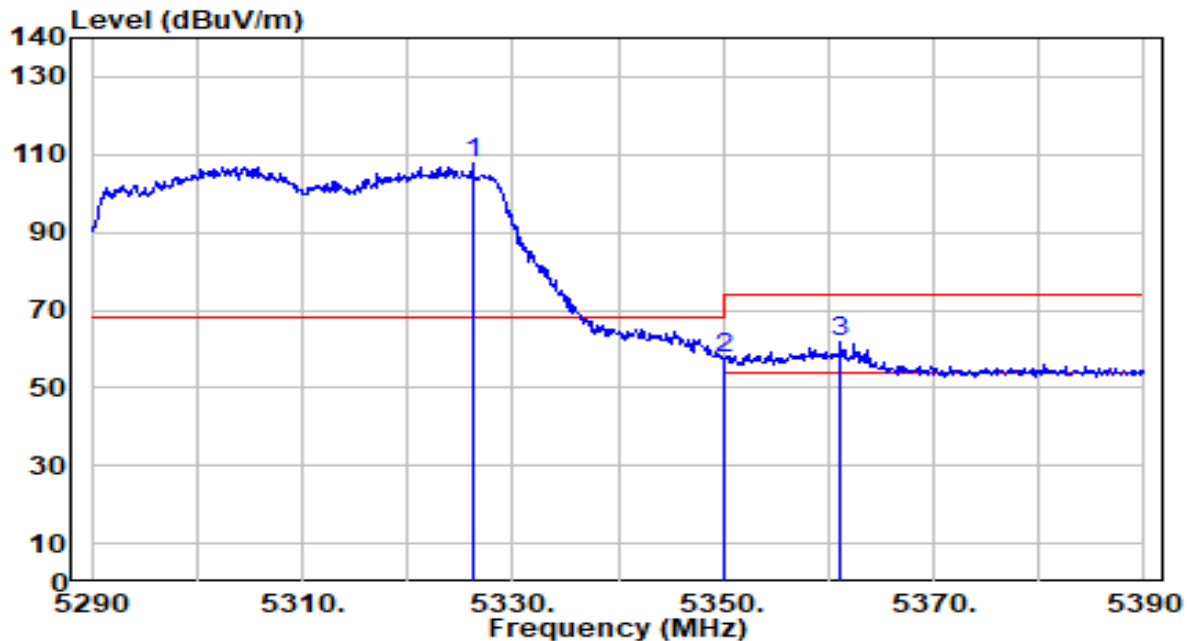


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.200	107.29	0.53	107.82	N/A	N/A	101	111	Peak
2	5350.000	57.27	0.51	57.78	-16.22	74.00	101	111	Peak
3	* 5361.200	61.45	0.49	61.94	-12.06	74.00	101	111	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band2_TX_CH 62 ANT 0+1	Test Voltage	AC 120V/60Hz

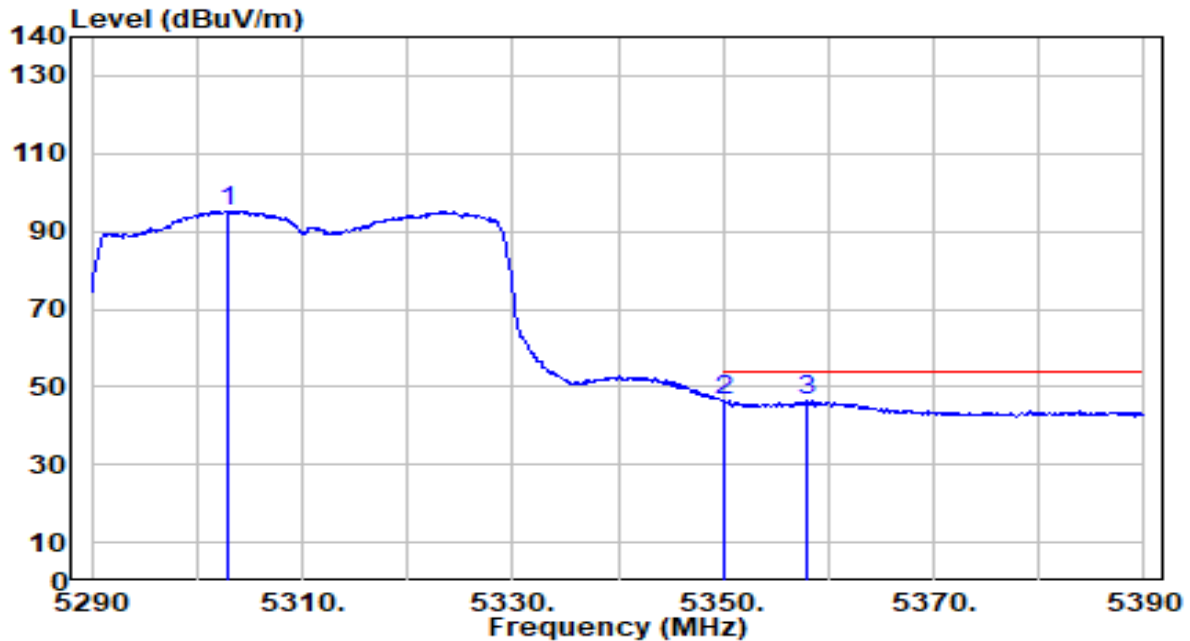


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5303.000	94.76	0.56	95.31	N/A	N/A	101	111	Average
2	5350.000	46.00	0.51	46.50	-7.50	54.00	101	111	Average
3	* 5357.900	46.04	0.50	46.54	-7.46	54.00	101	111	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band2_TX_CH 62 ANT 0+1	Test Voltage	AC 120V/60Hz

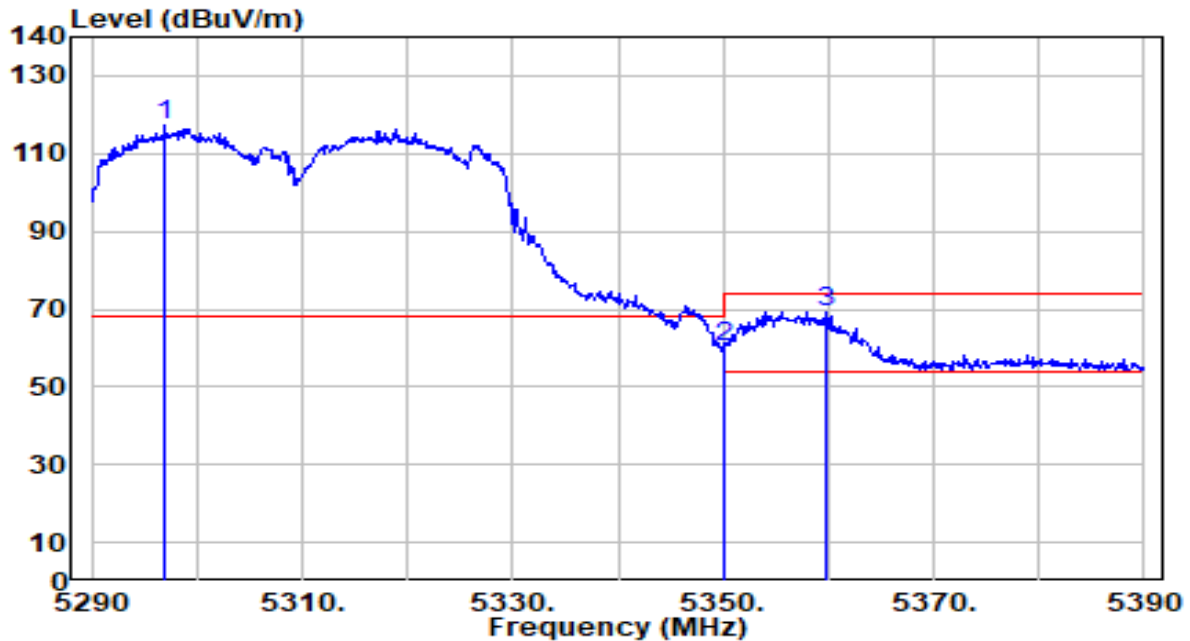


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5296.900	116.67	0.56	117.23	N/A	N/A	102	170	Peak
2	5350.000	59.57	0.51	60.07	-13.93	74.00	102	170	Peak
3	* 5359.900	68.95	0.49	69.44	-4.56	74.00	102	170	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band2_TX_CH 62 ANT 0+1	Test Voltage	AC 120V/60Hz

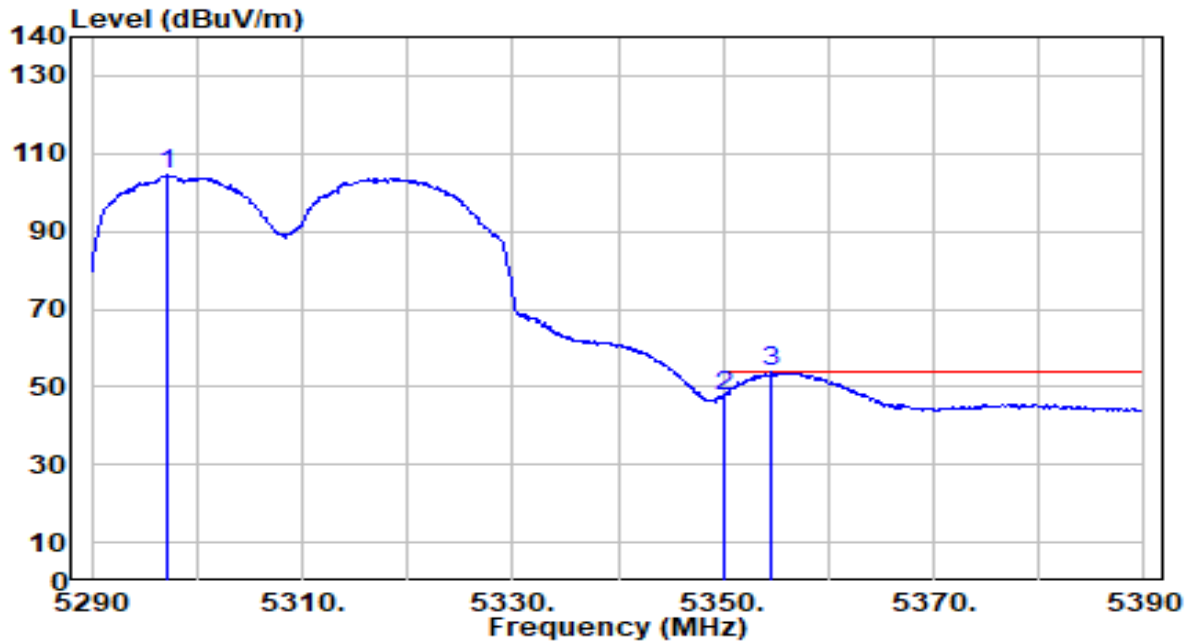


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5297.200	103.96	0.56	104.52	N/A	N/A	102	170	Average
2	5350.000	47.24	0.51	47.75	-6.25	54.00	102	170	Average
3	* 5354.600	53.23	0.50	53.73	-0.27	54.00	102	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 102 ANT 0+1	Test Voltage	AC 120V/60Hz

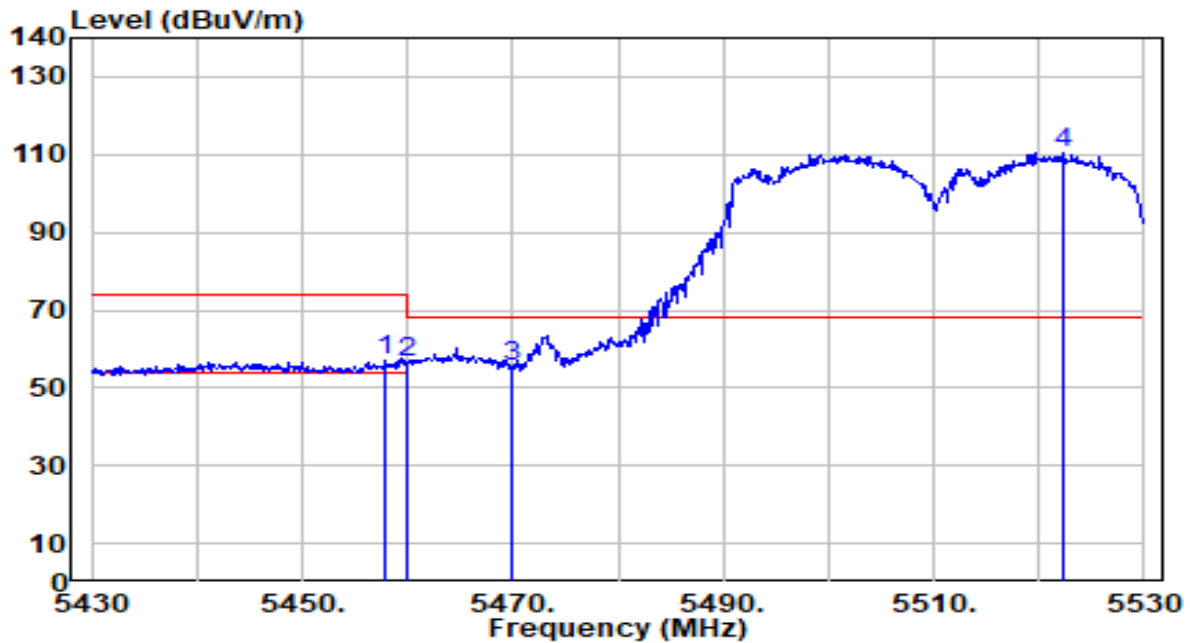


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.900	56.21	0.65	56.86	-17.14	74.00	100	120	Peak
2	5460.000	55.94	0.65	56.60	-17.40	74.00	100	120	Peak
3	* 5470.000	54.59	0.69	55.27	-12.93	68.20	100	120	Peak
4	5522.400	109.76	0.87	110.63	N/A	N/A	100	120	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 102 ANT 0+1	Test Voltage	AC 120V/60Hz

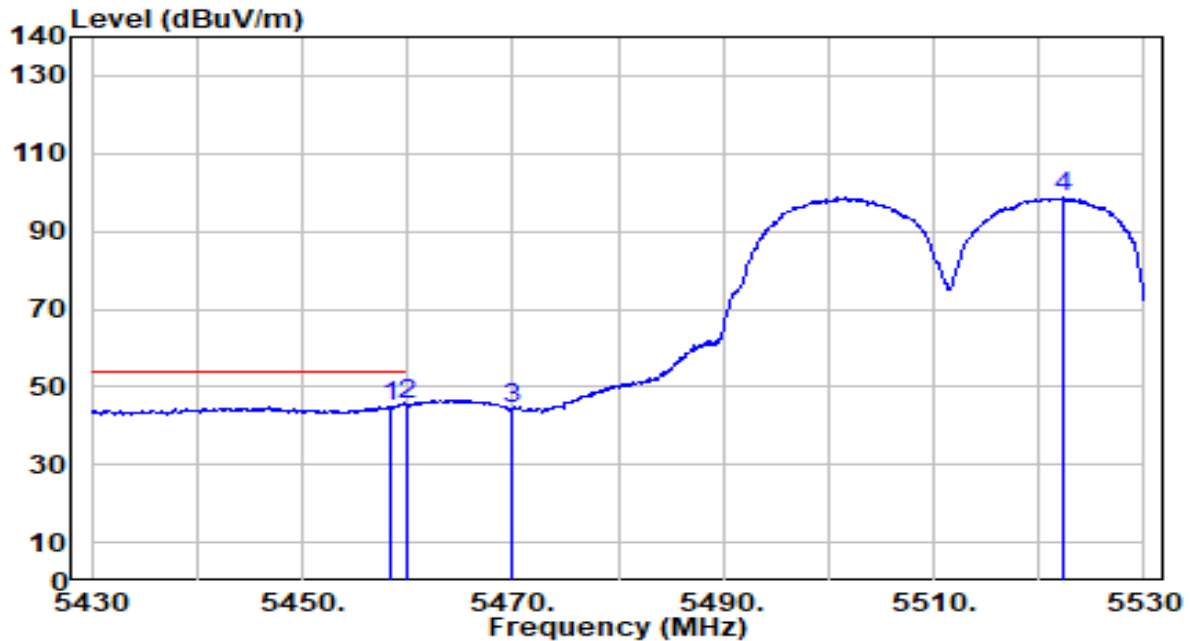


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.500	44.32	0.65	44.97	-9.03	54.00	100	120	Average
2	*	5460.000	44.82	0.65	45.47	-8.53	54.00	100	120	Average
3		5470.000	43.90	0.69	44.59	N/A	N/A	100	120	Average
4		5522.300	98.13	0.87	99.00	N/A	N/A	100	120	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 102 ANT 0+1	Test Voltage	AC 120V/60Hz

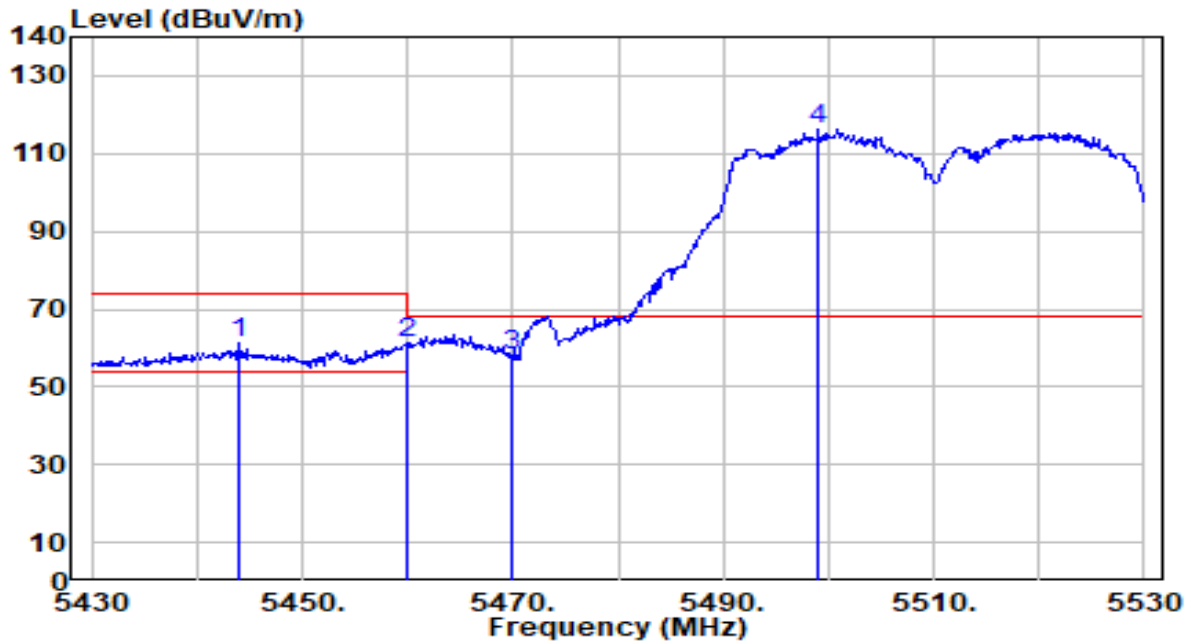


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5444.100	60.58	0.60	61.18	-12.82	74.00	109	177	Peak
2	5460.000	60.60	0.65	61.25	-12.75	74.00	109	177	Peak
3	* 5470.000	57.28	0.69	57.97	-10.23	68.20	109	177	Peak
4	5499.100	115.56	0.79	116.34	N/A	N/A	109	177	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 102 ANT 0+1	Test Voltage	AC 120V/60Hz

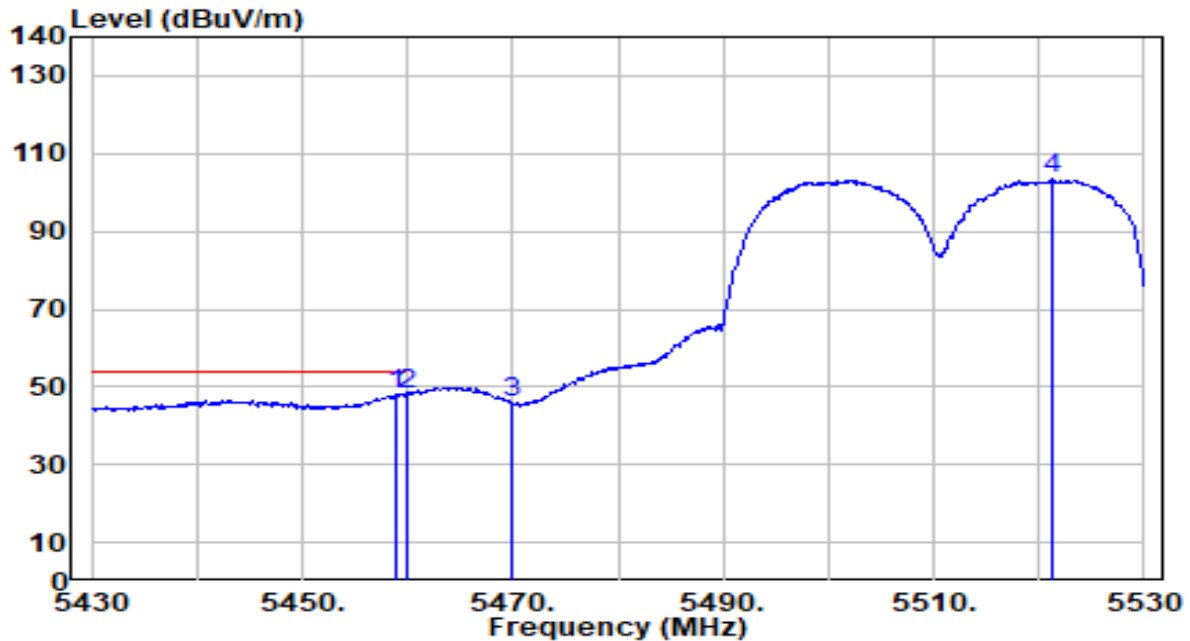


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.900	47.20	0.65	47.85	-6.15	54.00	109	177	Average
2	*	5460.000	47.48	0.65	48.14	-5.86	54.00	109	177	Average
3		5470.000	45.01	0.69	45.70	N/A	N/A	109	177	Average
4		5521.200	102.45	0.87	103.32	N/A	N/A	109	177	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 134 ANT 0+1	Test Voltage	AC 120V/60Hz

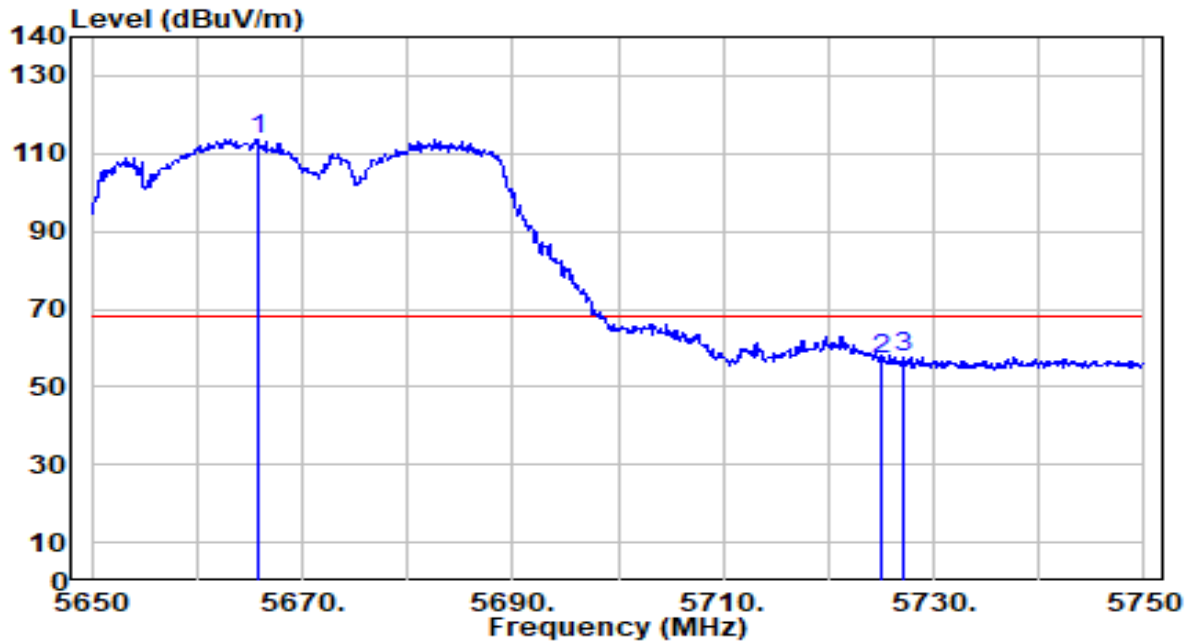


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5665.700	112.29	1.53	113.81	N/A	N/A	117	186	Peak
2	5725.000	55.03	1.86	56.89	-11.31	68.20	117	186	Peak
3	* 5727.000	55.86	1.87	57.73	-10.47	68.20	117	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_Band3_TX_CH 134 ANT 0+1	Test Voltage	AC 120V/60Hz

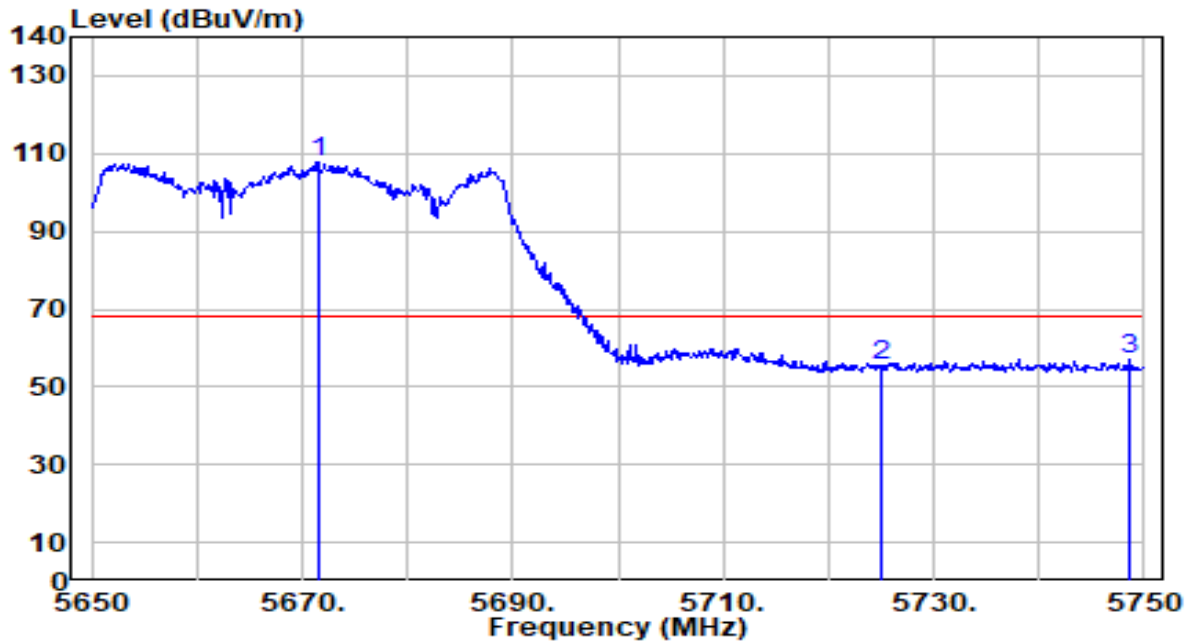


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5671.500	106.19	1.56	107.75	N/A	N/A	104	259	Peak
2	5725.000	53.50	1.86	55.36	-12.84	68.20	104	259	Peak
3	* 5748.700	55.12	2.00	57.11	-11.09	68.20	104	259	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_Band4_TX_CH 151 ANT 0+1	Test Voltage	AC 120V/60Hz

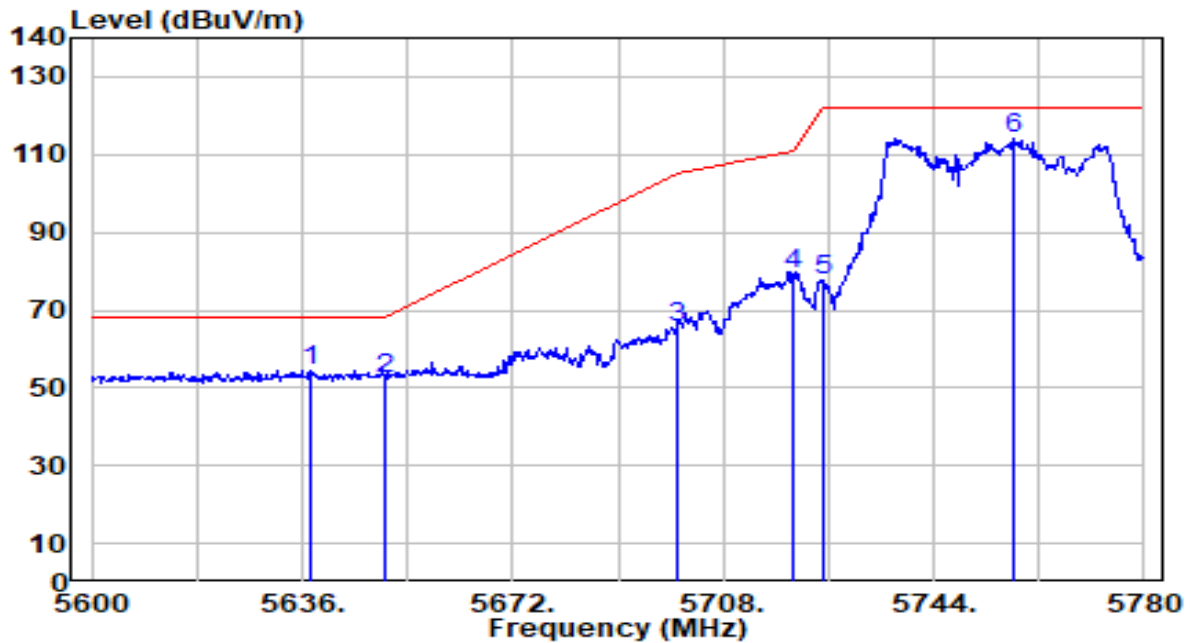


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5637.620	53.17	1.37	54.54	-13.66	68.20	100	255	Peak
2		5650.000	51.09	1.44	52.52	-15.68	68.20	100	255	Peak
3		5700.000	63.95	1.72	65.67	-39.53	105.20	100	255	Peak
4		5720.000	77.62	1.84	79.45	-31.35	110.80	100	255	Peak
5		5725.000	75.85	1.86	77.72	-44.48	122.20	100	255	Peak
6		5757.860	112.04	2.05	114.09	N/A	N/A	100	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_Band4_TX_CH 151 ANT 0+1	Test Voltage	AC 120V/60Hz

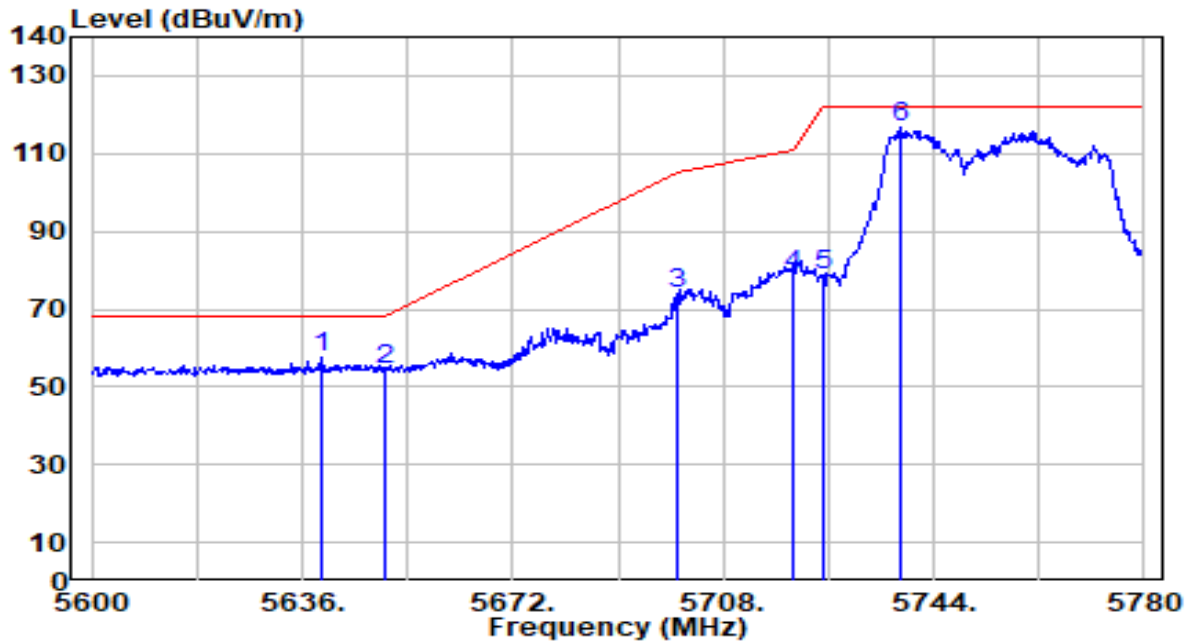


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5639.240	56.23	1.38	57.61	-10.59	68.20	108	130	Peak
2		5650.000	52.75	1.44	54.19	-14.01	68.20	108	130	Peak
3		5700.000	72.11	1.72	73.83	-31.37	105.20	108	130	Peak
4		5720.000	76.83	1.84	78.67	-32.13	110.80	108	130	Peak
5		5725.000	76.96	1.86	78.83	-43.37	122.20	108	130	Peak
6		5738.240	114.59	1.94	116.53	N/A	N/A	108	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_Band4_TX_CH 159 ANT 0+1	Test Voltage	AC 120V/60Hz

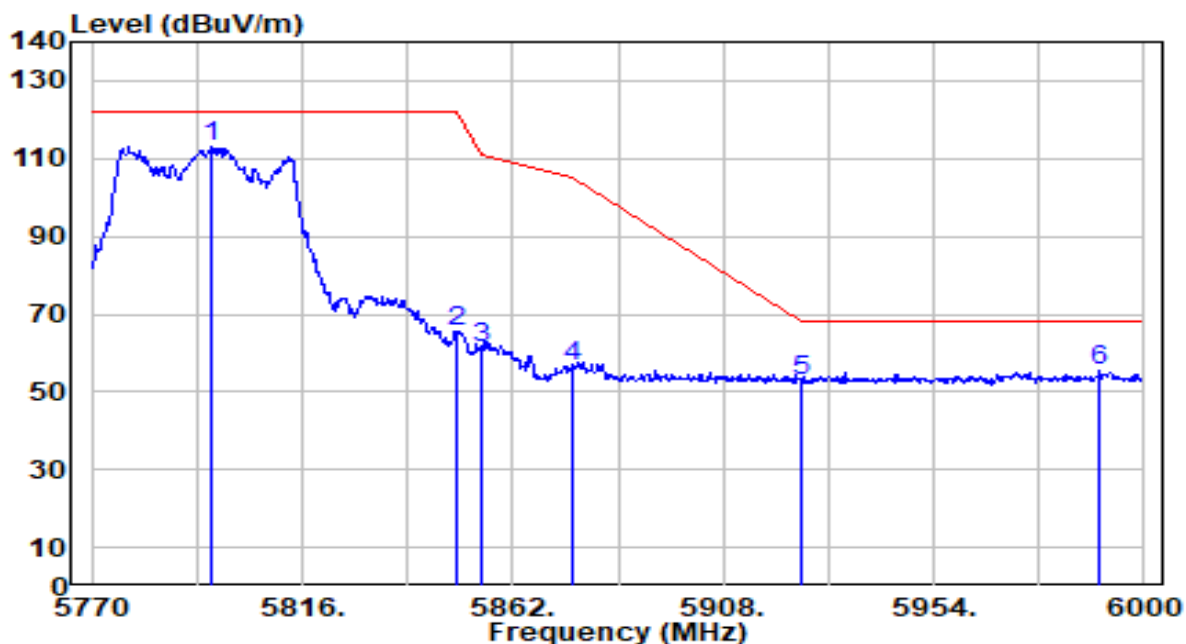


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5796.220	110.58	2.27	112.85	N/A	N/A	128	259	Peak
2	5850.000	63.31	2.27	65.58	-56.62	122.20	128	259	Peak
3	5855.000	59.00	2.27	61.27	-49.53	110.80	128	259	Peak
4	5875.000	54.32	2.26	56.59	-48.61	105.20	128	259	Peak
5	5925.000	50.83	2.25	53.08	-15.12	68.20	128	259	Peak
6	* 5990.110	52.99	2.22	55.21	-12.99	68.20	128	259	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_Band4_TX_CH 159 ANT 0+1	Test Voltage	AC 120V/60Hz

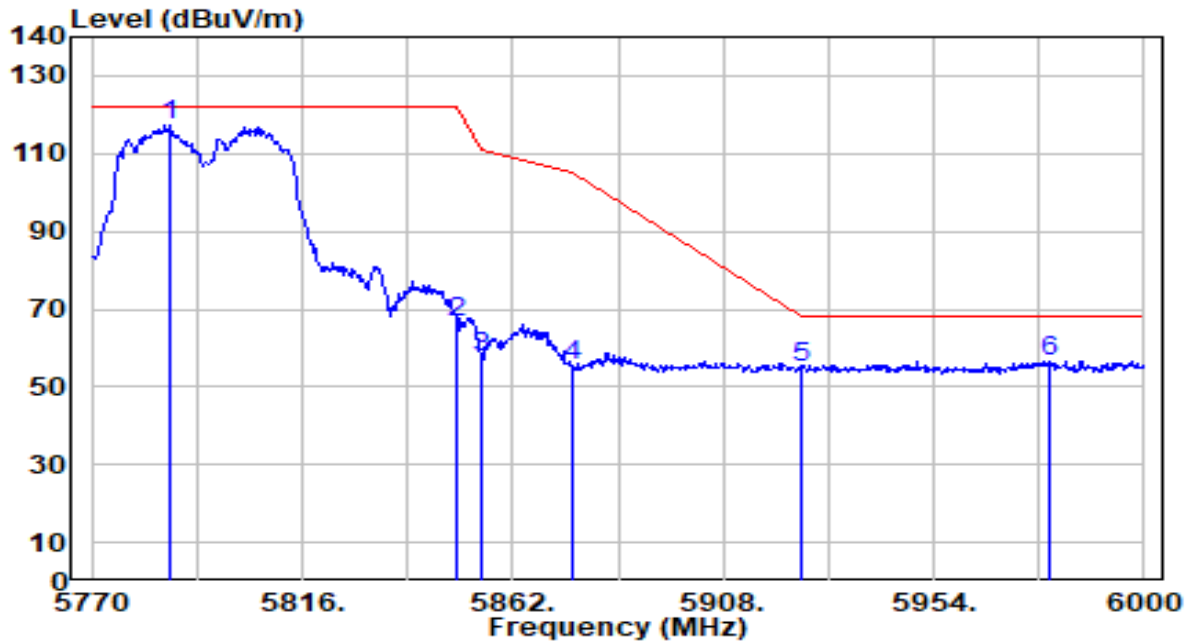


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5787.250	114.92	2.22	117.14	N/A	N/A	107	145	Peak
2	5850.000	64.16	2.27	66.43	-55.77	122.20	107	145	Peak
3	5855.000	55.33	2.27	57.60	-53.20	110.80	107	145	Peak
4	5875.000	53.28	2.26	55.54	-49.66	105.20	107	145	Peak
5	5925.000	52.66	2.25	54.90	-13.30	68.20	107	145	Peak
6	* 5979.070	54.52	2.23	56.74	-11.46	68.20	107	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band1_TX_CH 42 ANT 0+1	Test Voltage	AC 120V/60Hz

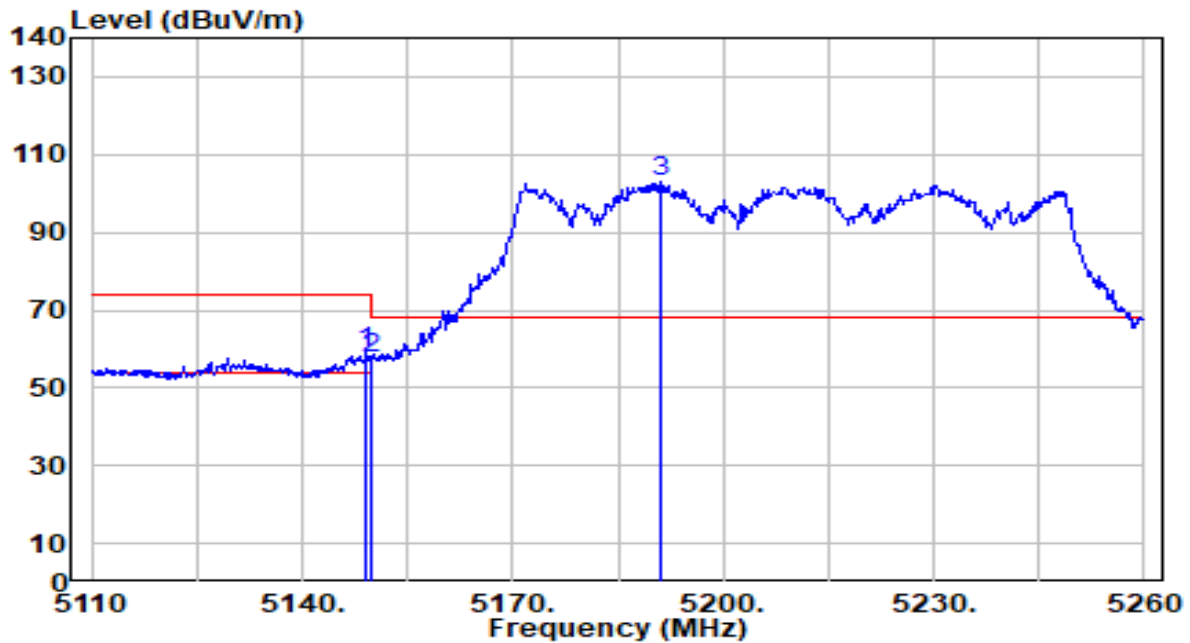


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.150	58.45	0.68	59.12	-14.88	74.00	118	187	Peak
2		5150.000	56.71	0.68	57.38	-16.62	74.00	118	187	Peak
3		5191.000	102.31	0.67	102.99	N/A	N/A	118	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band1_TX_CH 42 ANT 0+1	Test Voltage	AC 120V/60Hz

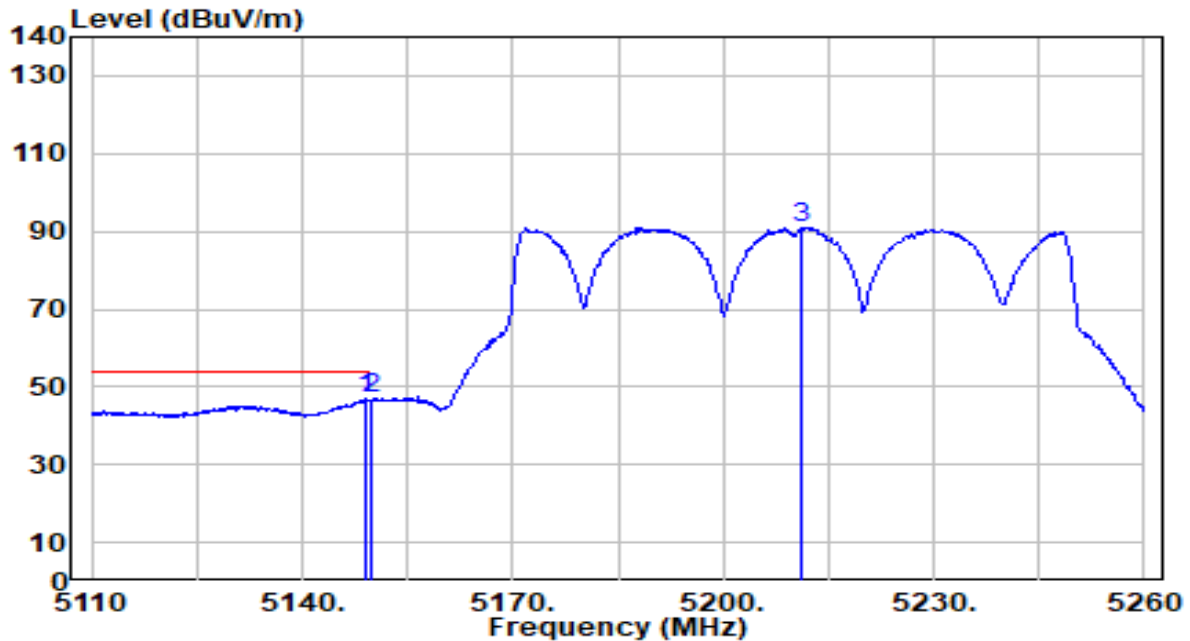


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.150	46.45	0.68	47.13	-6.87	54.00	118	187	Average
2		5150.000	46.08	0.68	46.75	-7.25	54.00	118	187	Average
3		5211.100	90.26	0.66	90.92	N/A	N/A	118	187	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band1_TX_CH 42 ANT 0+1	Test Voltage	AC 120V/60Hz

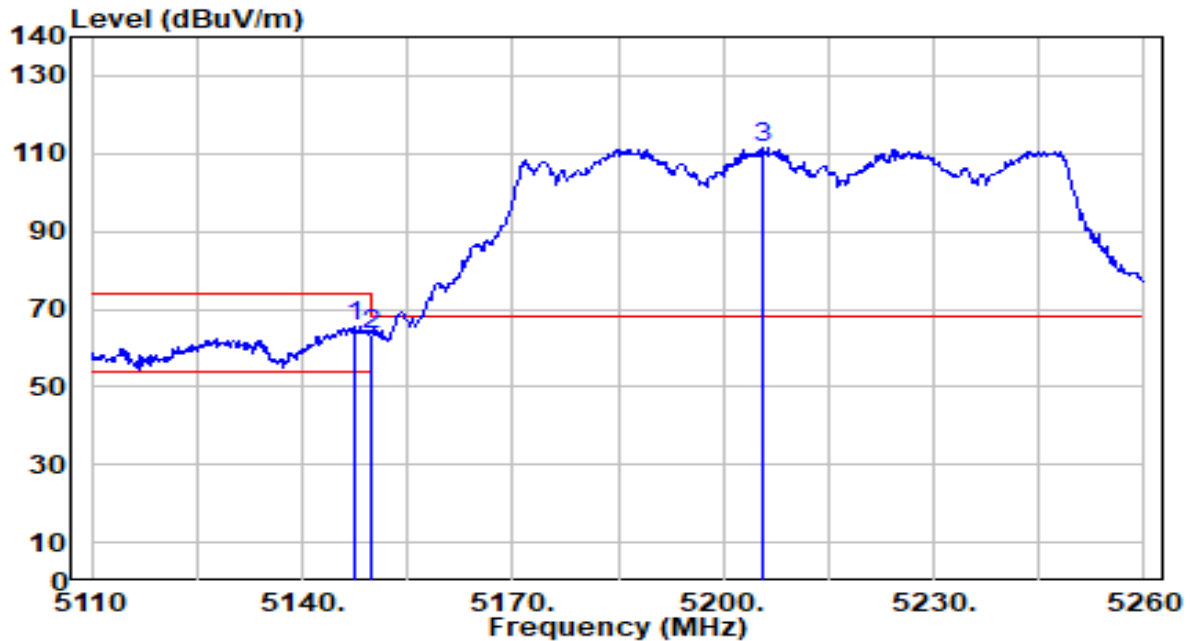


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.650	64.99	0.68	65.67	-8.33	74.00	141	183	Peak
2		5150.000	62.91	0.68	63.58	-10.42	74.00	141	183	Peak
3		5205.550	110.87	0.66	111.53	N/A	N/A	141	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band1_TX_CH 42 ANT 0+1	Test Voltage	AC 120V/60Hz

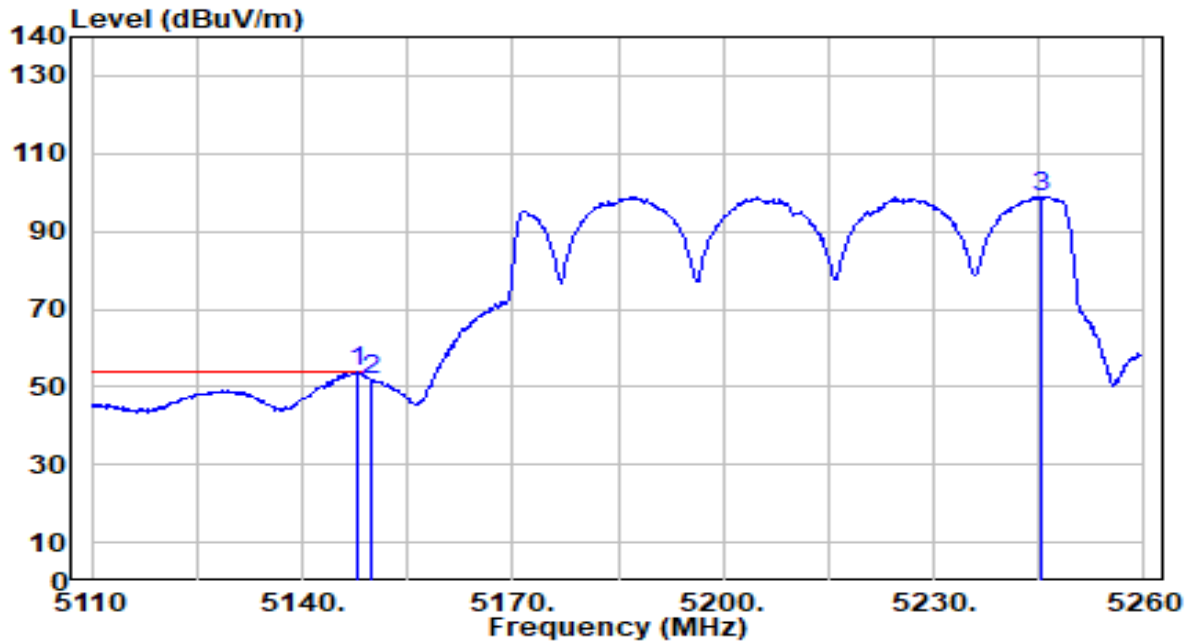


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.950	53.08	0.68	53.75	-0.25	54.00	141	183	Average
2		5150.000	50.99	0.68	51.66	-2.34	54.00	141	183	Average
3		5245.450	98.40	0.62	99.02	N/A	N/A	141	183	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band2_TX_CH 58 ANT 0+1	Test Voltage	AC 120V/60Hz

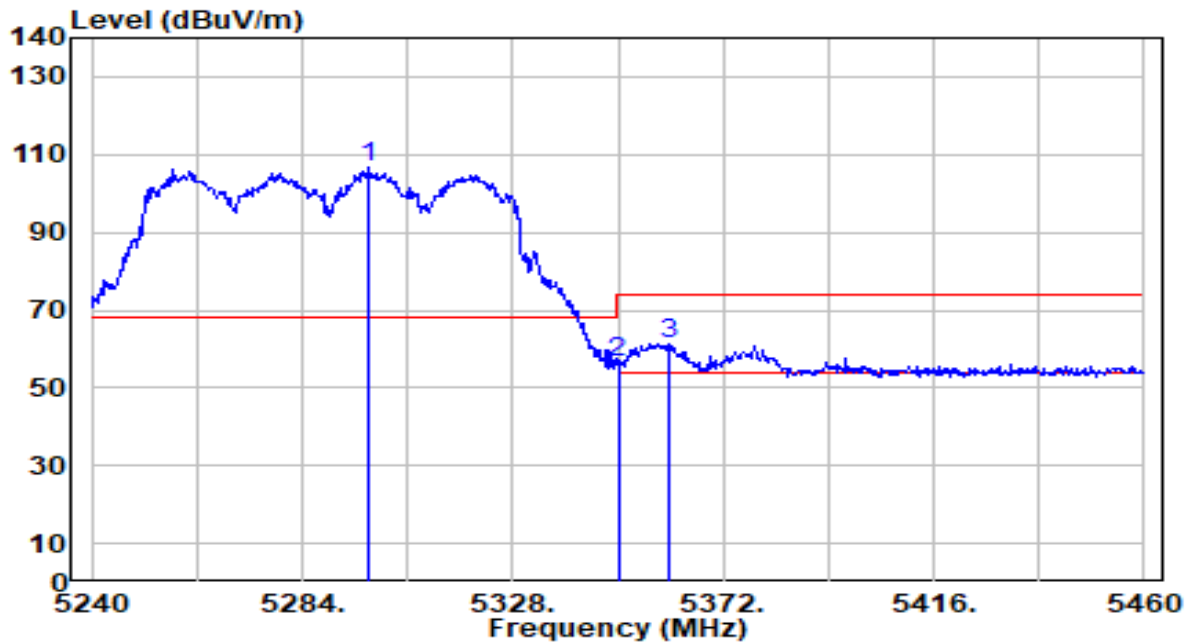


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5298.080	106.26	0.56	106.82	N/A	N/A	200	116	Peak
2	5350.000	55.83	0.51	56.34	-17.66	74.00	200	116	Peak
3	* 5360.780	60.81	0.49	61.30	-12.70	74.00	200	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band2_TX_CH 58 ANT 0+1	Test Voltage	AC 120V/60Hz

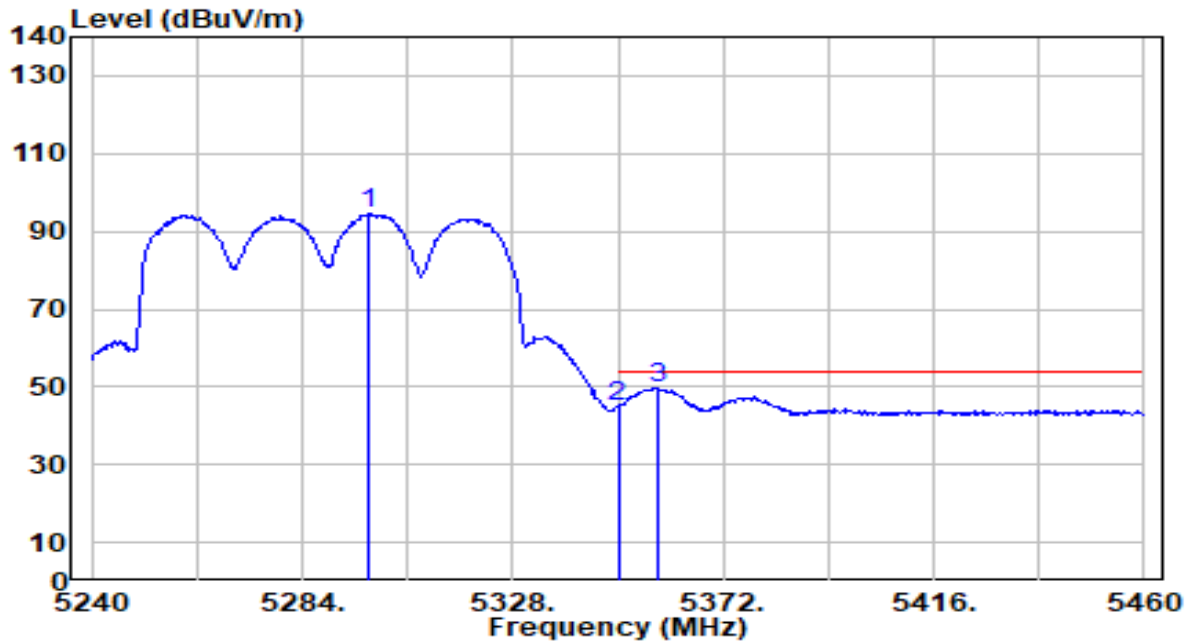


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5298.080	93.92	0.56	94.49	N/A	N/A	200	116	Average
2	5350.000	44.50	0.51	45.00	-9.00	54.00	200	116	Average
3	* 5358.140	49.34	0.50	49.84	-4.16	54.00	200	116	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band2_TX_CH 58 ANT 0+1	Test Voltage	AC 120V/60Hz

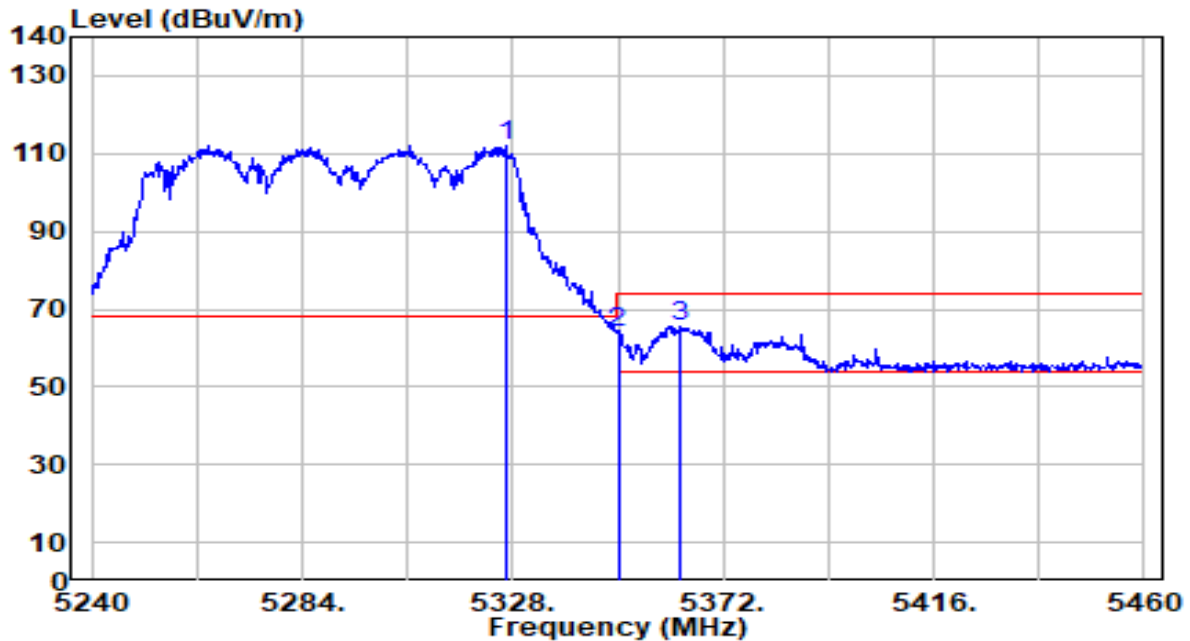


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.460	111.62	0.53	112.15	N/A	N/A	140	182	Peak
2	5350.000	63.41	0.51	63.91	-10.09	74.00	140	182	Peak
3	* 5363.200	65.22	0.49	65.71	-8.29	74.00	140	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band2_TX_CH 58 ANT 0+1	Test Voltage	AC 120V/60Hz

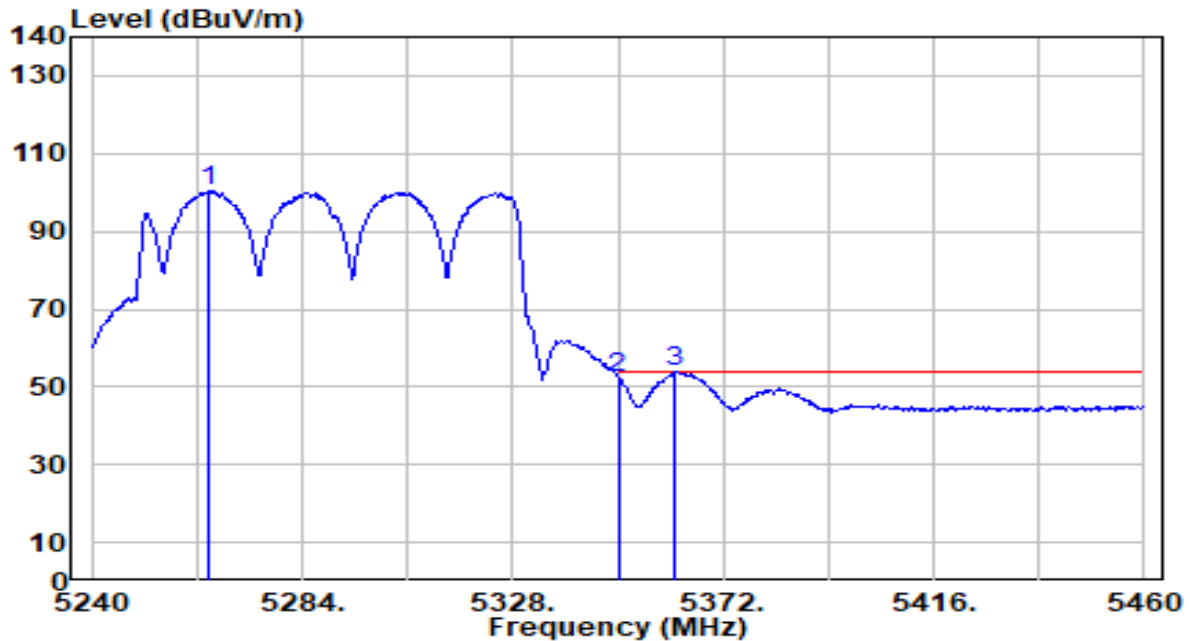


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5264.420	99.77	0.60	100.37	N/A	N/A	140	182	Average
2	5350.000	51.78	0.51	52.28	-1.72	54.00	140	182	Average
3	* 5361.880	53.21	0.49	53.70	-0.30	54.00	140	182	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	AC 120V/60Hz

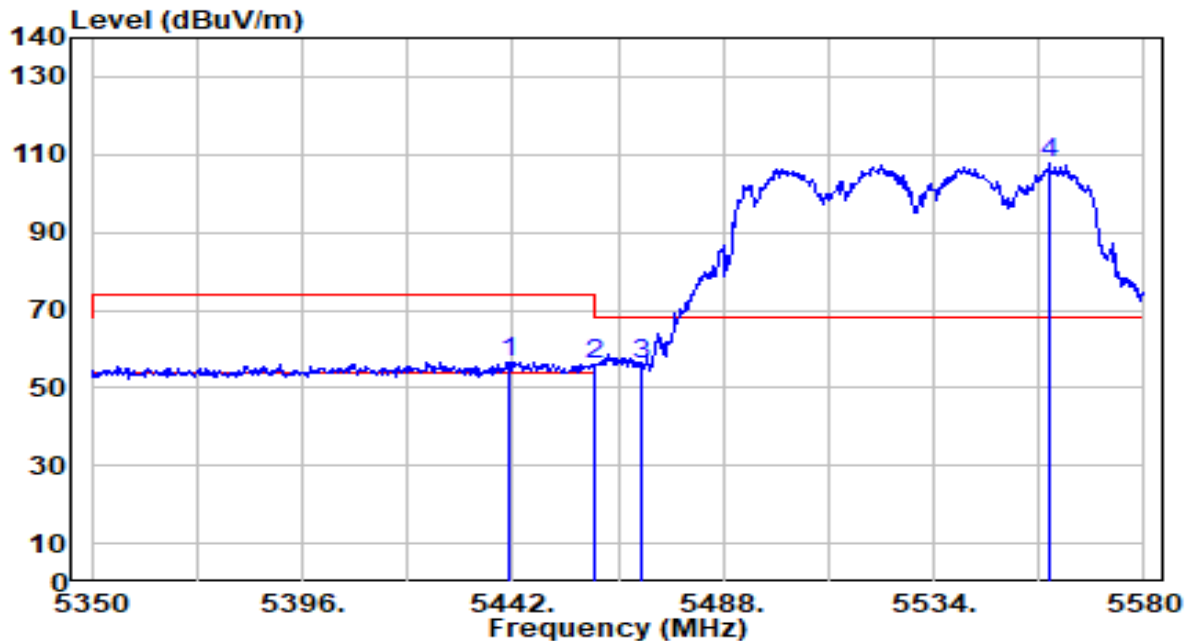


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5441.310	55.98	0.59	56.57	-17.43	74.00	112	123	Peak
2	5460.000	55.49	0.65	56.14	-17.86	74.00	112	123	Peak
3	* 5470.000	55.13	0.69	55.82	-12.38	68.20	112	123	Peak
4	5559.300	106.58	1.01	107.58	N/A	N/A	112	123	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	AC 120V/60Hz

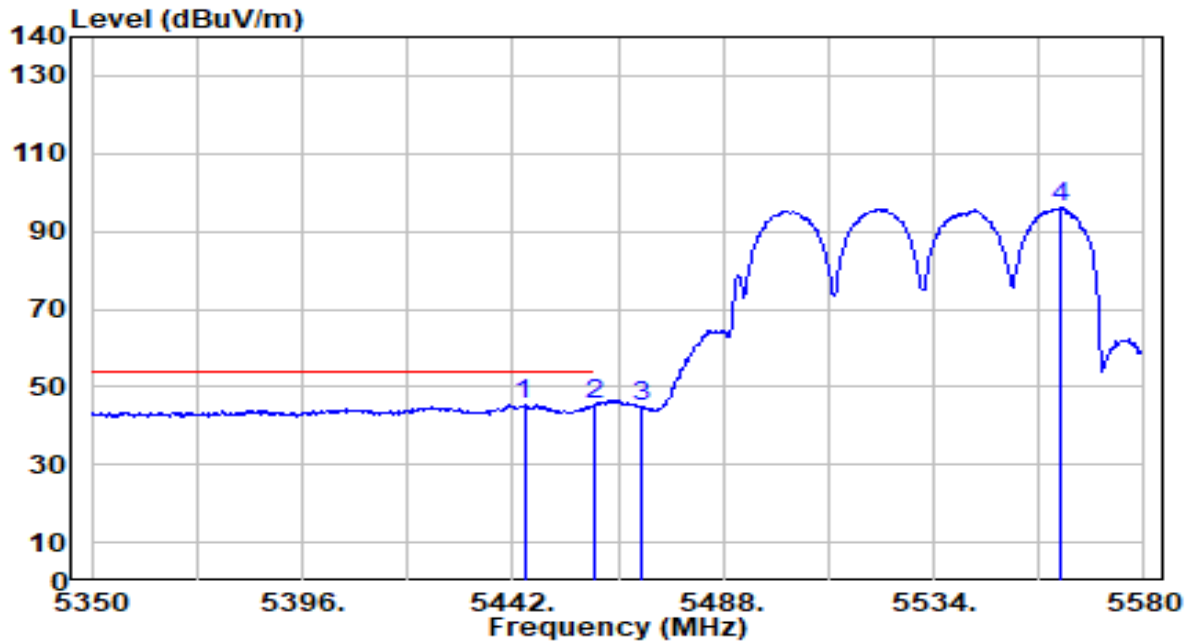


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5444.530	44.75	0.60	45.35	-8.65	54.00	112	123	Average
2		5460.000	44.61	0.65	45.26	-8.74	54.00	112	123	Average
3		5470.000	44.15	0.69	44.84	N/A	N/A	112	123	Average
4		5561.830	95.17	1.02	96.19	N/A	N/A	112	123	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	AC 120V/60Hz

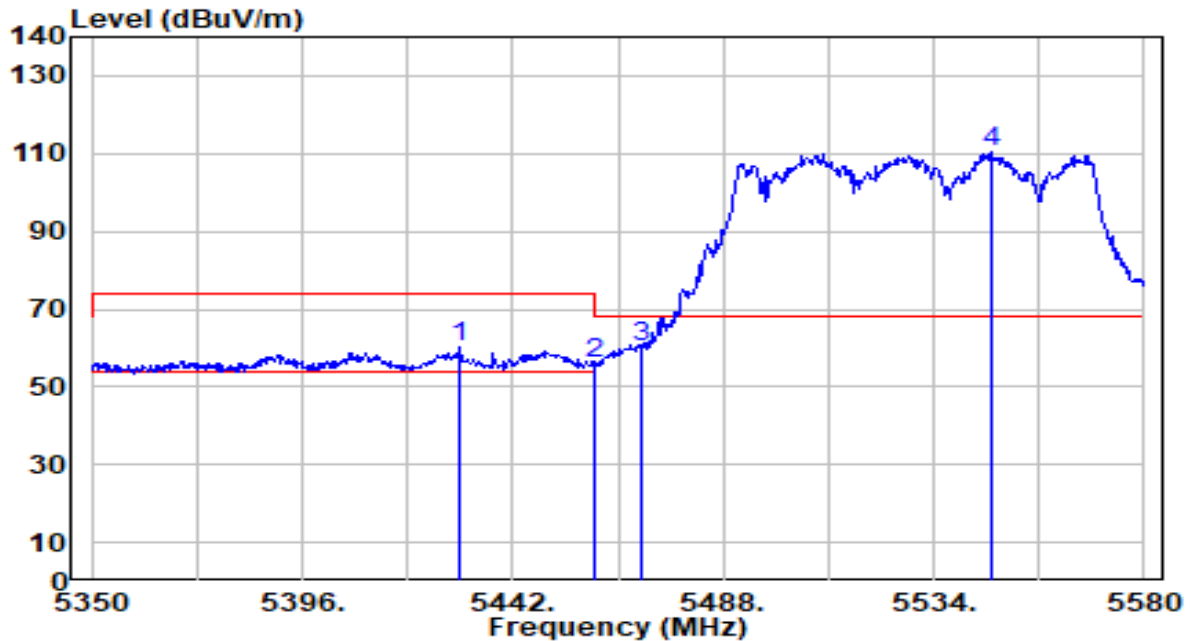


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5430.270	59.63	0.55	60.18	-13.82	74.00	185	192	Peak
2	5460.000	55.31	0.65	55.96	-18.04	74.00	185	192	Peak
3	* 5470.000	59.64	0.69	60.33	-7.87	68.20	185	192	Peak
4	5546.650	109.27	0.96	110.24	N/A	N/A	185	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	AC 120V/60Hz

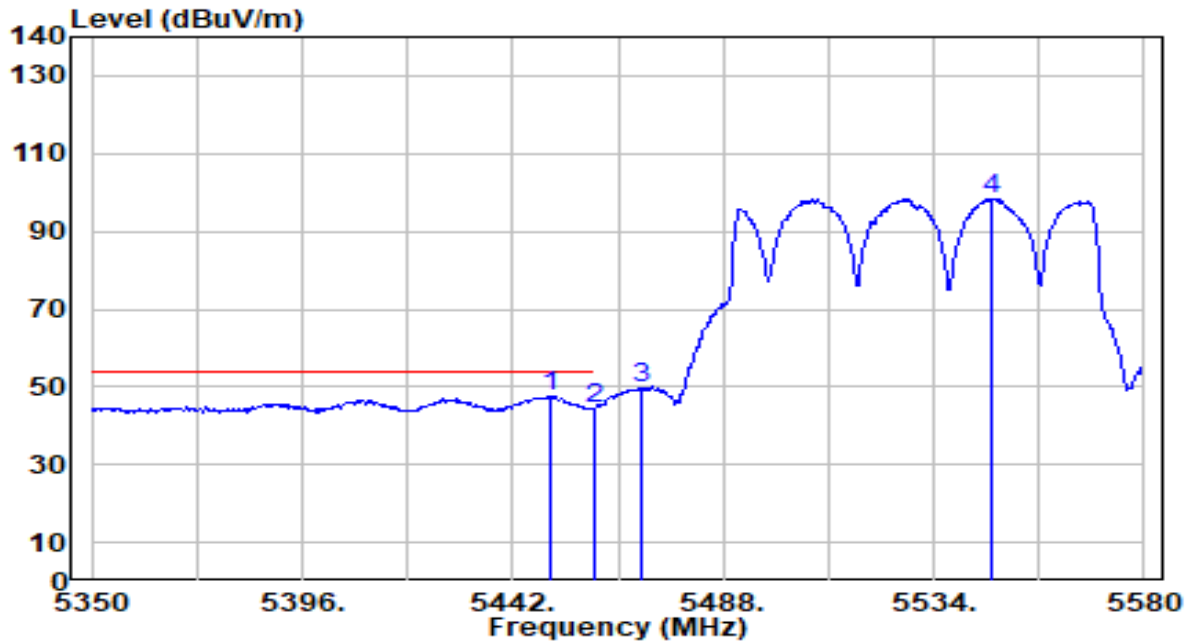


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5450.050	46.93	0.62	47.55	-6.45	54.00	185	192	Average
2		5460.000	43.95	0.65	44.60	-9.40	54.00	185	192	Average
3		5470.000	48.78	0.69	49.47	N/A	N/A	185	192	Average
4		5546.880	97.39	0.96	98.35	N/A	N/A	185	192	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-80MHz_Band4_TX_CH 155 ANT 0+1	Test Voltage	AC 120V/60Hz

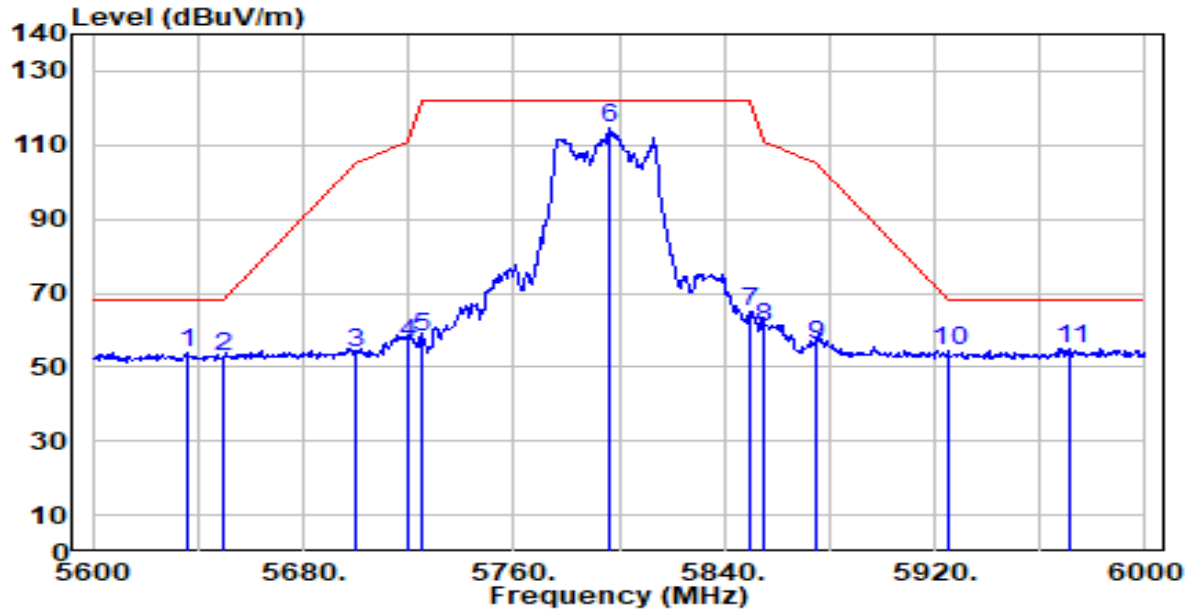


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5635.600	52.53	1.36	53.89	-14.31	68.20	110	260	Peak
2	5650.000	51.14	1.44	52.58	-15.62	68.20	110	260	Peak
3	5700.000	52.13	1.72	53.85	-51.35	105.20	110	260	Peak
4	5720.000	54.84	1.84	56.68	-54.12	110.80	110	260	Peak
5	5725.000	56.34	1.86	58.21	-63.99	122.20	110	260	Peak
6	5796.800	112.26	2.27	114.53	N/A	N/A	110	260	Peak
7	5850.000	62.63	2.27	64.90	-57.30	122.20	110	260	Peak
8	5855.000	58.35	2.27	60.62	-50.18	110.80	110	260	Peak
9	5875.000	53.67	2.26	55.93	-49.27	105.20	110	260	Peak
10	5925.000	52.20	2.25	54.45	-13.75	68.20	110	260	Peak
11	* 5971.600	52.76	2.23	54.99	-13.21	68.20	110	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-80MHz_Band4_TX_CH 155 ANT 0+1	Test Voltage	AC 120V/60Hz

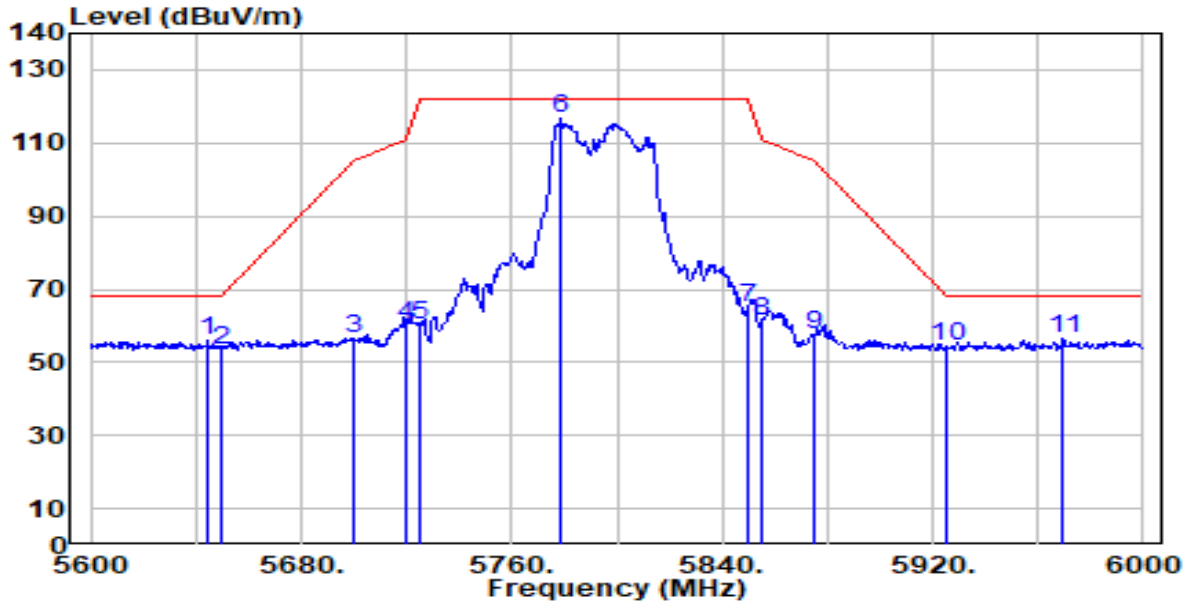


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5644.800	54.44	1.41	55.85	-12.35	68.20	108	132	Peak
2	5650.000	52.12	1.44	53.55	-14.65	68.20	108	132	Peak
3	5700.000	54.62	1.72	56.34	-48.86	105.20	108	132	Peak
4	5720.000	58.46	1.84	60.30	-50.50	110.80	108	132	Peak
5	5725.000	58.39	1.86	60.25	-61.95	122.20	108	132	Peak
6	5778.800	114.46	2.17	116.63	N/A	N/A	108	132	Peak
7	5850.000	62.89	2.27	65.16	-57.04	122.20	108	132	Peak
8	5855.000	59.22	2.27	61.49	-49.31	110.80	108	132	Peak
9	5875.000	55.26	2.26	57.52	-47.68	105.20	108	132	Peak
10	5925.000	52.03	2.25	54.28	-13.92	68.20	108	132	Peak
11 *	5969.600	54.37	2.23	56.60	-11.60	68.20	108	132	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	AC 120V/60Hz

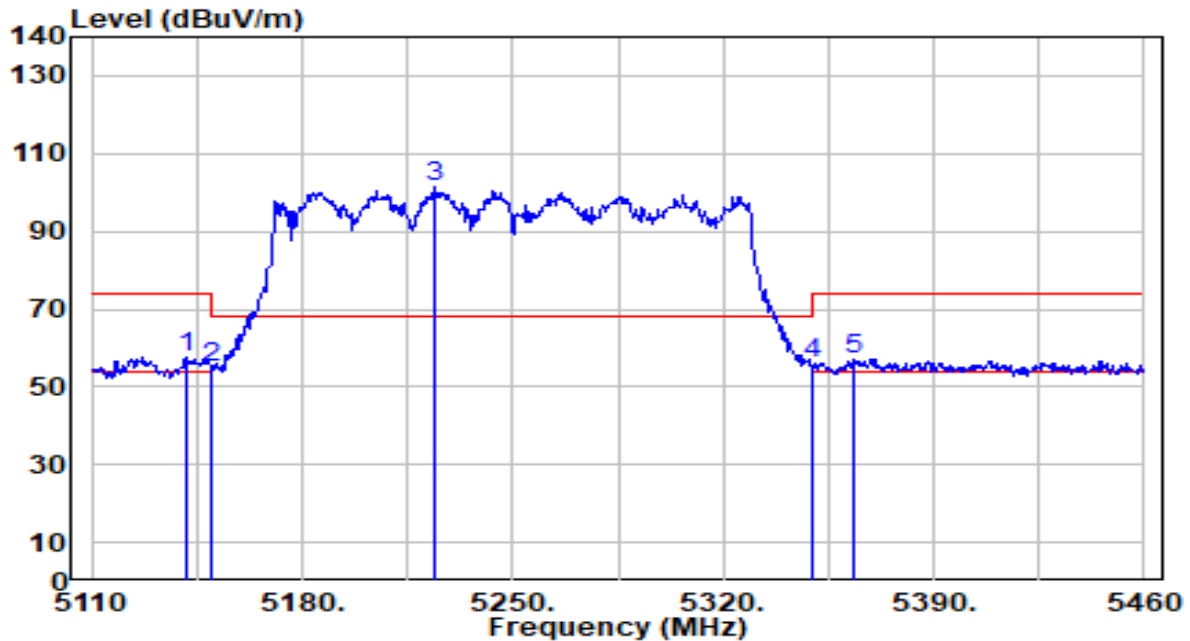


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5141.150	56.76	0.68	57.43	-16.57	74.00	109	211	Peak
2		5150.000	54.53	0.68	55.20	-18.80	74.00	109	211	Peak
3		5224.450	100.68	0.64	101.33	N/A	N/A	109	211	Peak
4		5350.000	55.46	0.51	55.96	-18.04	74.00	109	211	Peak
5		5363.400	56.82	0.49	57.31	-16.69	74.00	109	211	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	AC 120V/60Hz

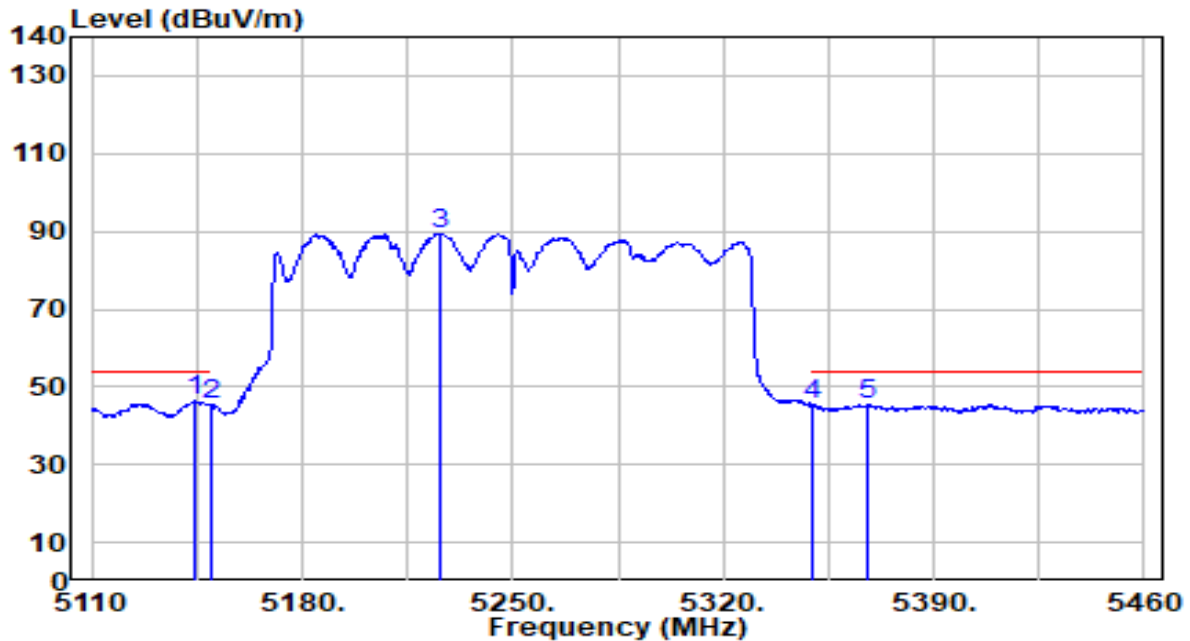


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.650	45.69	0.68	46.36	-7.64	54.00	109	211	Average
2		5150.000	44.74	0.68	45.41	-8.59	54.00	109	211	Average
3		5225.850	88.90	0.64	89.55	N/A	N/A	109	211	Average
4		5350.000	44.94	0.51	45.44	-8.56	54.00	109	211	Average
5		5368.300	45.01	0.48	45.50	-8.50	54.00	109	211	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	AC 120V/60Hz

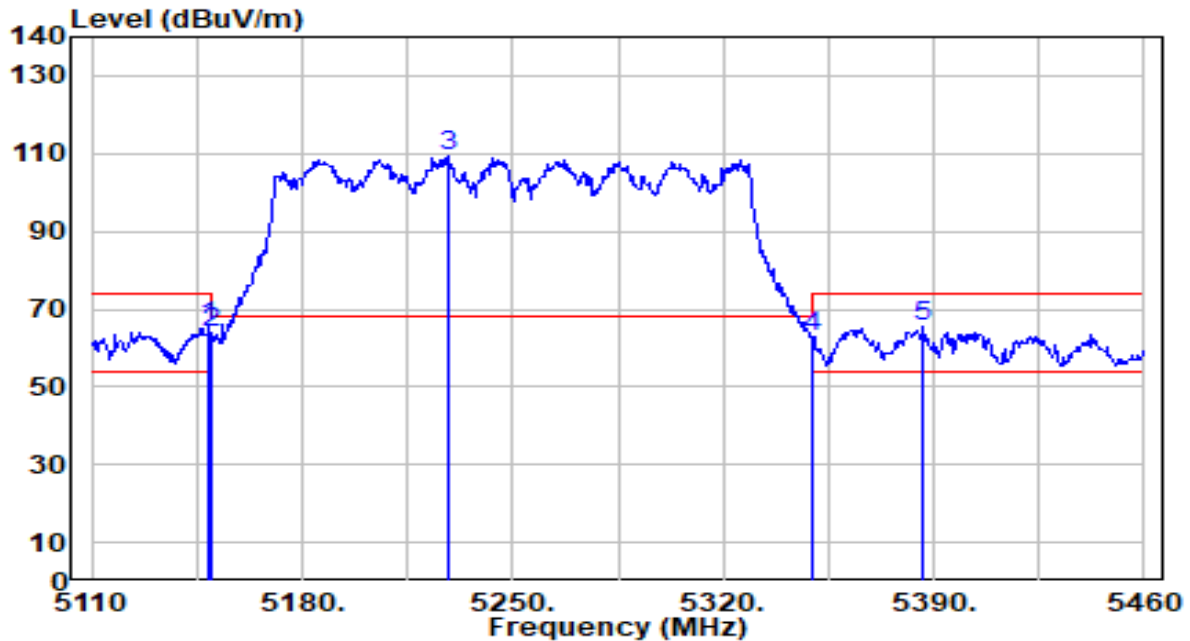


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.850	64.77	0.68	65.44	-8.56	74.00	148	183	Peak
2	5150.000	63.13	0.68	63.80	-10.20	74.00	148	183	Peak
3	5228.300	108.63	0.64	109.27	N/A	N/A	148	183	Peak
4	5350.000	62.11	0.51	62.61	-11.39	74.00	148	183	Peak
5	* 5386.500	65.00	0.46	65.47	-8.53	74.00	148	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	AC 120V/60Hz

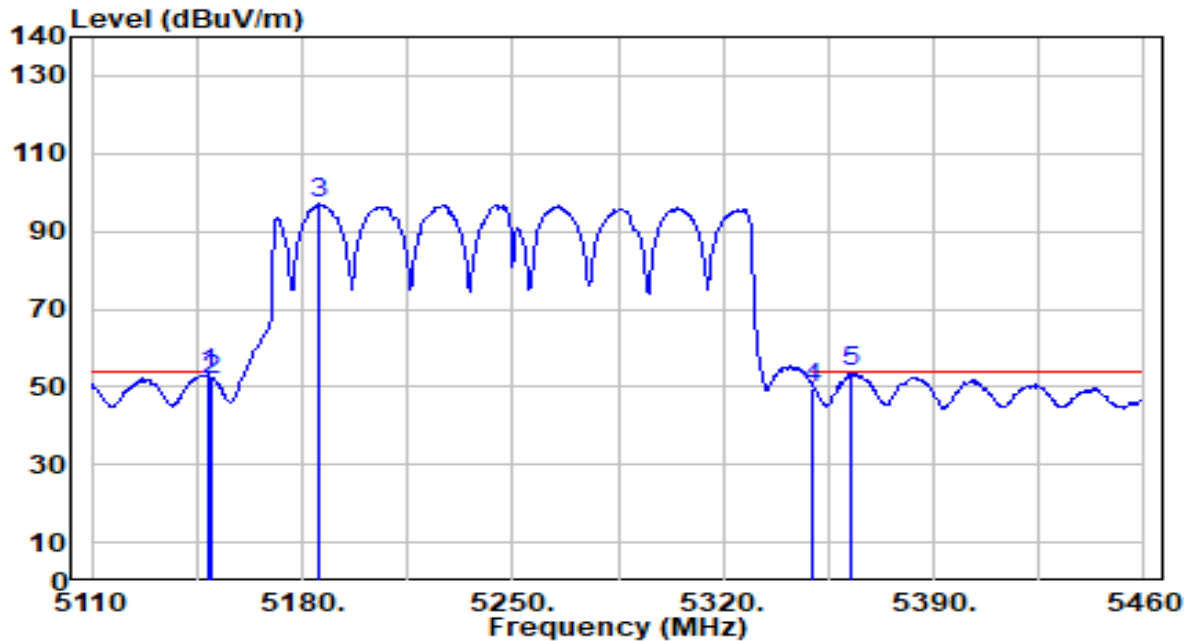


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.850	52.52	0.68	53.19	-0.81	54.00	148	183	Average
2	5150.000	51.35	0.68	52.02	-1.98	54.00	148	183	Average
3	5185.950	96.44	0.67	97.11	N/A	N/A	148	183	Average
4	5350.000	49.31	0.51	49.81	-4.19	54.00	148	183	Average
5	* 5362.700	53.23	0.49	53.72	-0.28	54.00	148	183	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	AC 120V/60Hz

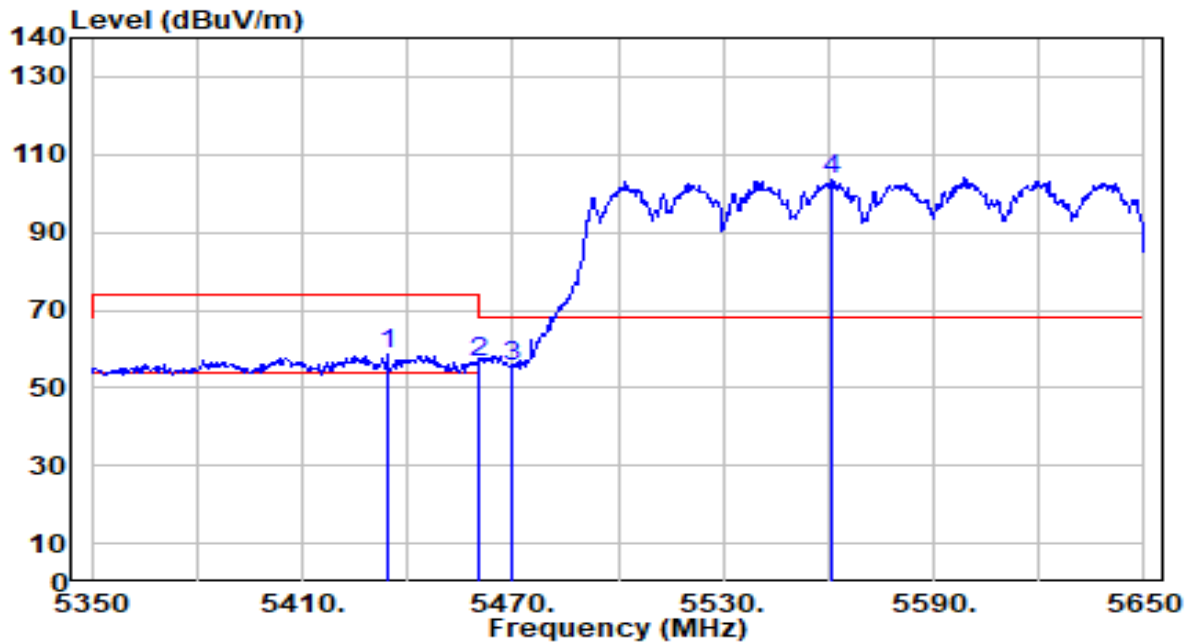


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5434.300	58.13	0.57	58.70	-15.30	74.00	115	119	Peak
2	5460.000	56.00	0.65	56.65	-17.35	74.00	115	119	Peak
3	* 5470.000	54.92	0.69	55.61	-12.59	68.20	115	119	Peak
4	5560.600	102.44	1.01	103.45	N/A	N/A	115	119	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	AC 120V/60Hz

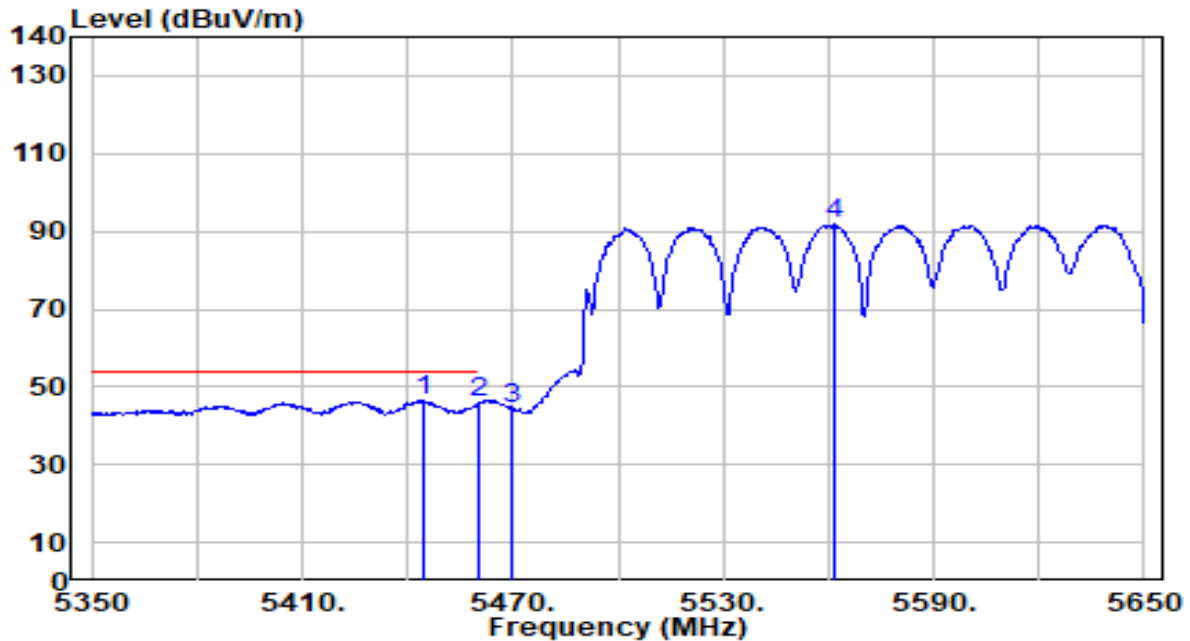


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5444.800	45.83	0.60	46.43	-7.57	54.00	115	119	Average
2		5460.000	45.23	0.65	45.88	-8.12	54.00	115	119	Average
3		5470.000	43.55	0.69	44.24	N/A	N/A	115	119	Average
4		5561.500	90.82	1.02	91.83	N/A	N/A	115	119	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	AC 120V/60Hz

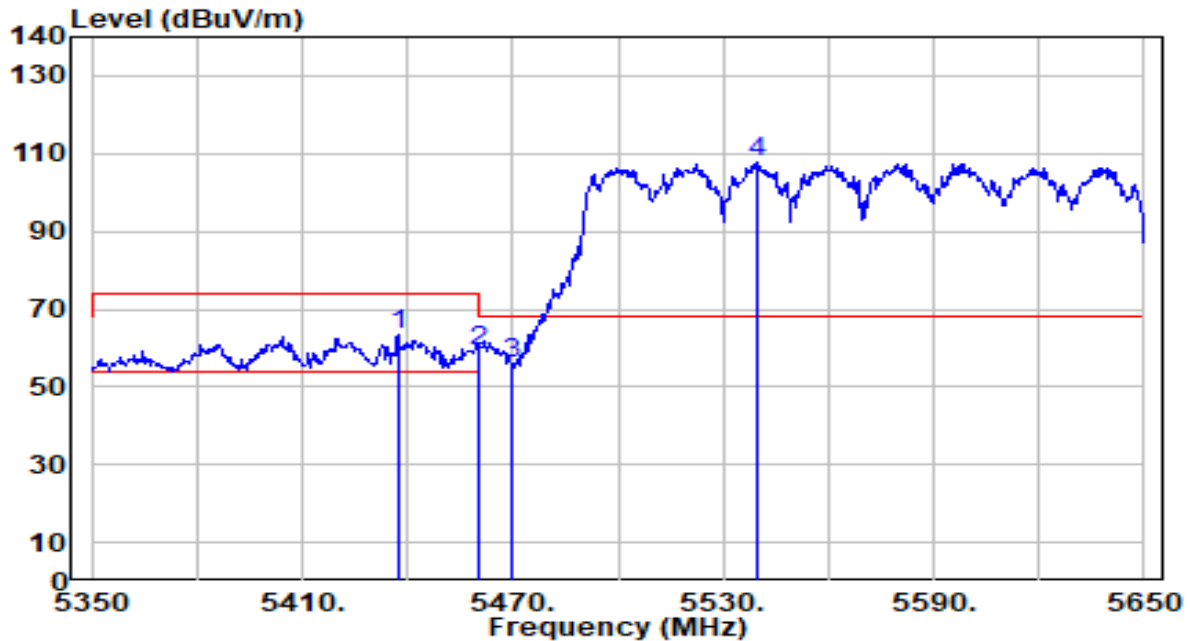


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5437.300	62.96	0.58	63.54	-10.46	74.00	120	138	Peak
2		5460.000	58.65	0.65	59.30	-14.70	74.00	120	138	Peak
3		5470.000	55.52	0.69	56.21	-11.99	68.20	120	138	Peak
4		5539.600	106.81	0.93	107.75	N/A	N/A	120	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	AC 120V/60Hz

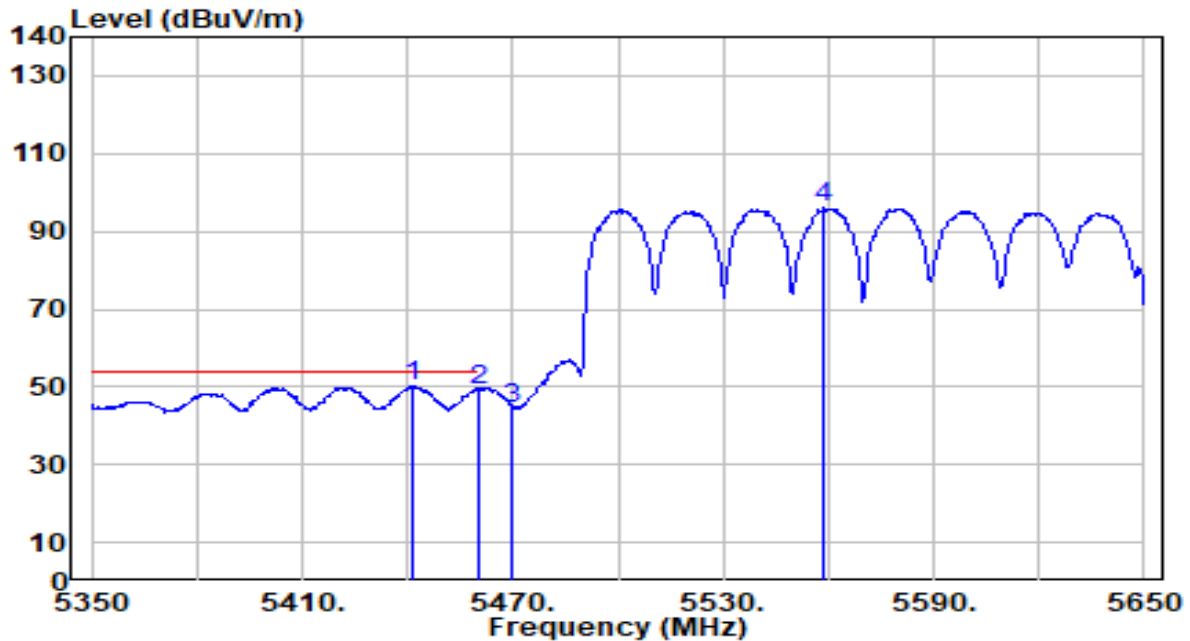


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5441.800	49.47	0.59	50.06	-3.94	54.00	120	138	Average
2		5460.000	48.58	0.65	49.23	-4.77	54.00	120	138	Average
3		5470.000	43.95	0.69	44.64	N/A	N/A	120	138	Average
4		5558.800	94.90	1.01	95.90	N/A	N/A	120	138	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-240MHz_Band3_TX_CH 130 ANT 0+1	Test Voltage	AC 120V/60Hz

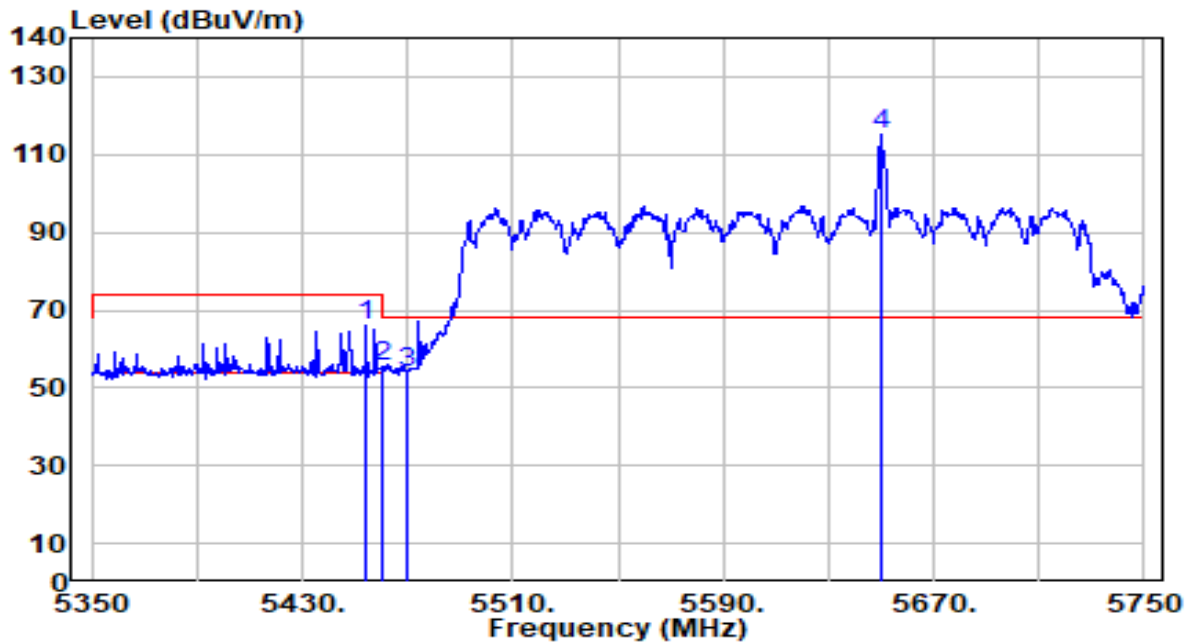


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.000	65.20	0.63	65.83	-8.17	74.00	115	119	Peak
2	5460.000	55.06	0.65	55.71	-18.29	74.00	115	119	Peak
3	5470.000	53.37	0.69	54.06	-14.14	68.20	115	119	Peak
4	* 5649.600	113.67	1.44	115.11	N/A	N/A	115	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-240MHz_Band3_TX_CH 130 ANT 0+1	Test Voltage	AC 120V/60Hz

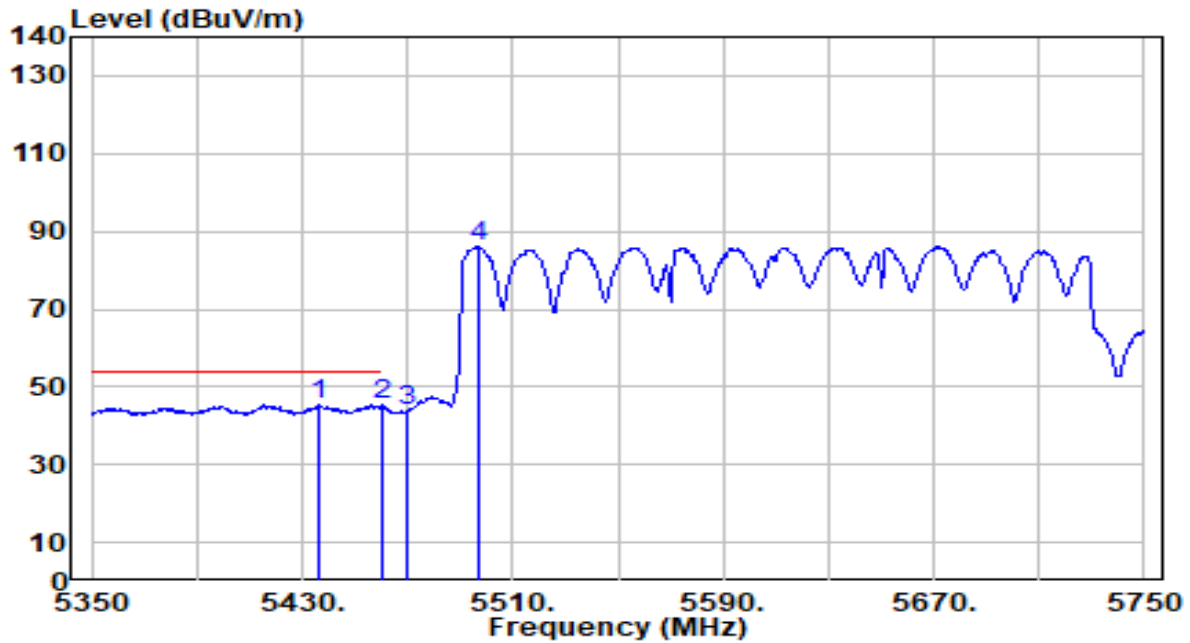


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5436.000	44.84	0.57	45.41	-8.59	54.00	115	119	Average
2		5460.000	44.52	0.65	45.18	-8.82	54.00	115	119	Average
3		5470.000	43.02	0.69	43.71	N/A	N/A	115	119	Average
4		5496.800	85.54	0.78	86.32	N/A	N/A	115	119	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-240MHz_Band3_TX_CH 130 ANT 0+1	Test Voltage	AC 120V/60Hz

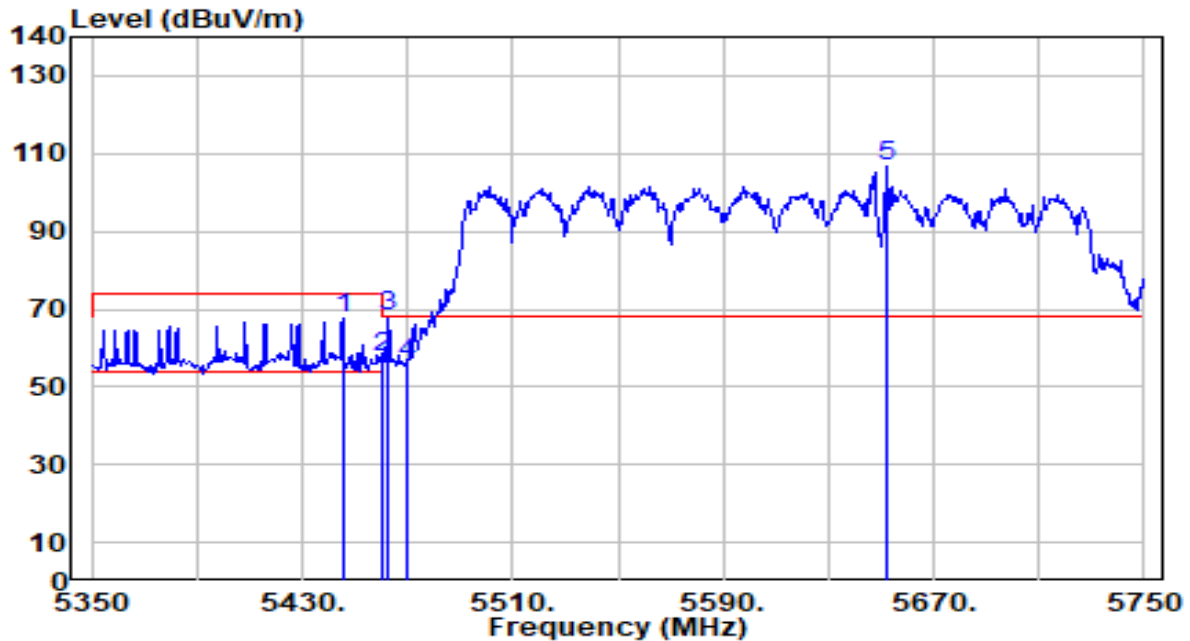


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5445.600	67.02	0.61	67.63	-6.37	74.00	120	138	Peak
2	5460.000	56.91	0.65	57.56	-16.44	74.00	120	138	Peak
3	* 5462.800	67.25	0.66	67.92	-0.28	68.20	120	138	Peak
4	5470.000	55.07	0.69	55.76	-12.44	68.20	120	138	Peak
5	5652.000	105.03	1.45	106.48	N/A	N/A	120	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-07-10
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-240MHz_Band3_TX_CH 130 ANT 0+1	Test Voltage	AC 120V/60Hz

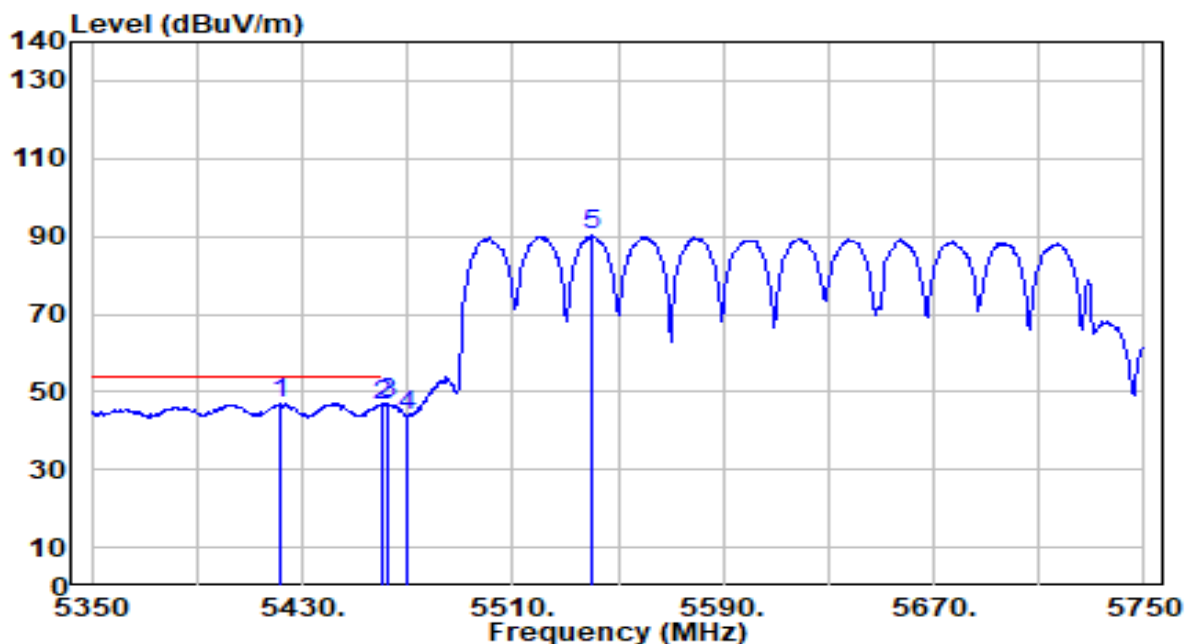

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5422.000	46.51	0.52	47.03	-6.97	54.00	120	138	Average
2		5460.000	46.01	0.65	46.67	-7.33	54.00	120	138	Average
3		5462.800	46.13	0.66	46.80	N/A	N/A	120	138	Average
4		5470.000	43.16	0.69	43.85	N/A	N/A	120	138	Average
5		5539.600	89.15	0.93	90.08	N/A	N/A	120	138	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10.AC Conducted Emissions Measurement

7.10.1.Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBμV)	AV (dBμV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.10.2.Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

7.10.3. Test Setup

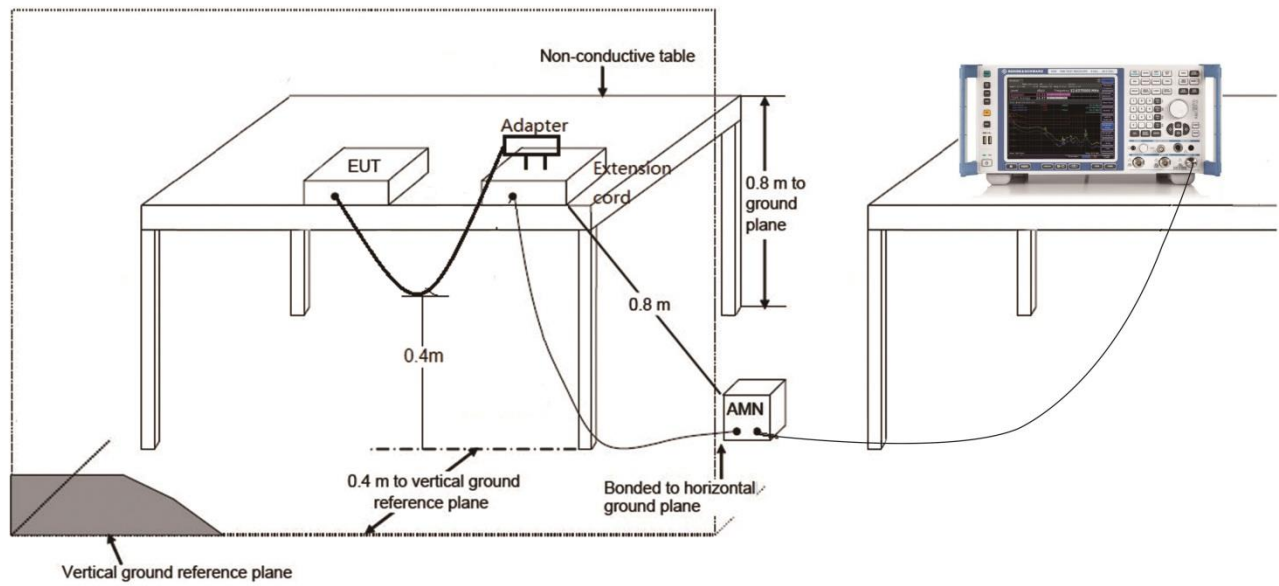

7.10.4.Test Result

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-08-02
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.2°C /47%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

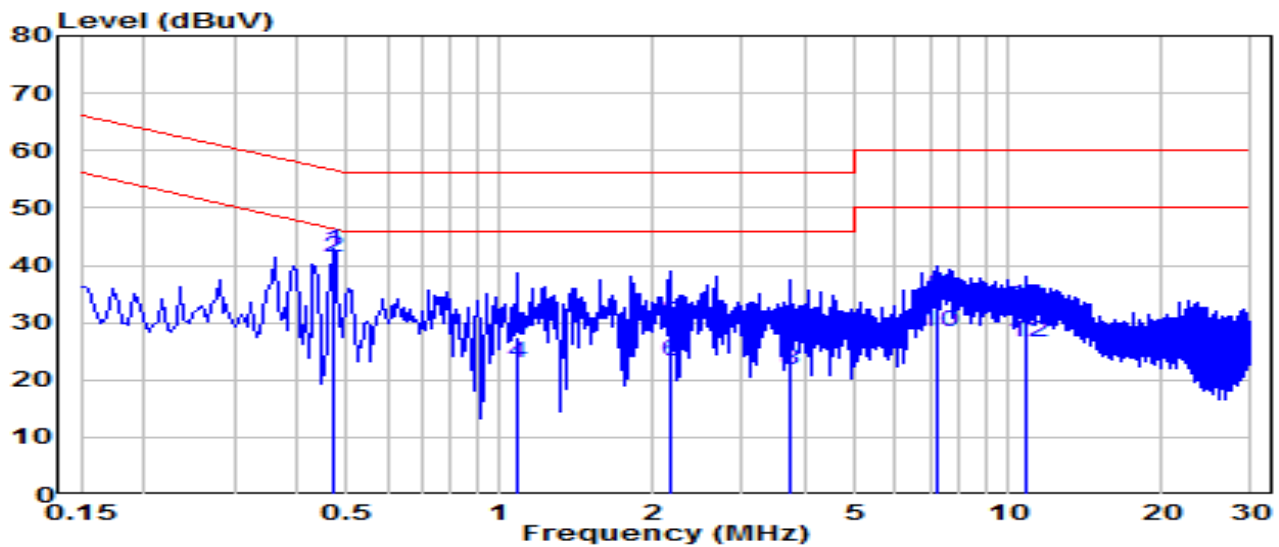


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.469	32.82	9.65	42.47	-14.06	56.52	QP
2	*	0.469	31.80	9.65	41.45	-5.07	46.52	Average
3		1.077	17.93	9.68	27.62	-28.38	56.00	QP
4		1.077	13.33	9.68	23.02	-22.98	46.00	Average
5		2.152	20.05	9.70	29.75	-26.25	56.00	QP
6		2.152	13.63	9.70	23.34	-22.66	46.00	Average
7		3.741	18.48	9.73	28.21	-27.79	56.00	QP
8		3.741	11.90	9.73	21.63	-24.37	46.00	Average
9		7.241	25.03	9.80	34.83	-25.17	60.00	QP
10		7.241	18.63	9.80	28.43	-21.57	50.00	Average
11		10.841	23.12	9.88	32.99	-27.01	60.00	QP
12		10.841	16.64	9.88	26.51	-23.49	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-08-02
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.2°C /47%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

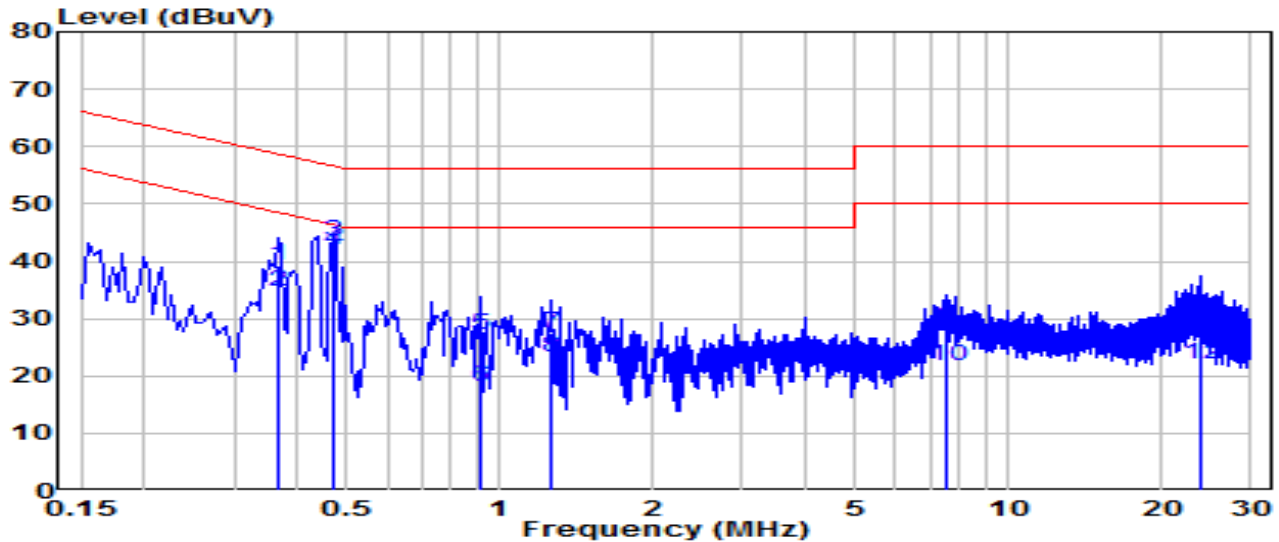


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.366	29.69	9.64	39.34	-19.26	58.59	QP
2	0.366	25.10	9.64	34.74	-13.85	48.59	Average
3	* 0.469	33.91	9.65	43.56	-12.96	56.52	QP
4	* 0.469	32.43	9.65	42.08	-4.44	46.52	Average
5	0.915	17.52	9.68	27.19	-28.81	56.00	QP
6	0.915	8.35	9.68	18.03	-27.97	46.00	Average
7	1.257	17.92	9.69	27.61	-28.39	56.00	QP
8	1.257	13.49	9.69	23.17	-22.83	46.00	Average
9	7.570	18.45	9.83	28.28	-31.72	60.00	QP
10	7.570	11.94	9.83	21.77	-28.23	50.00	Average
11	24.043	18.62	10.01	28.63	-31.37	60.00	QP
12	24.043	12.13	10.01	22.14	-27.86	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-08-02
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.2°C /47%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 240V/60Hz

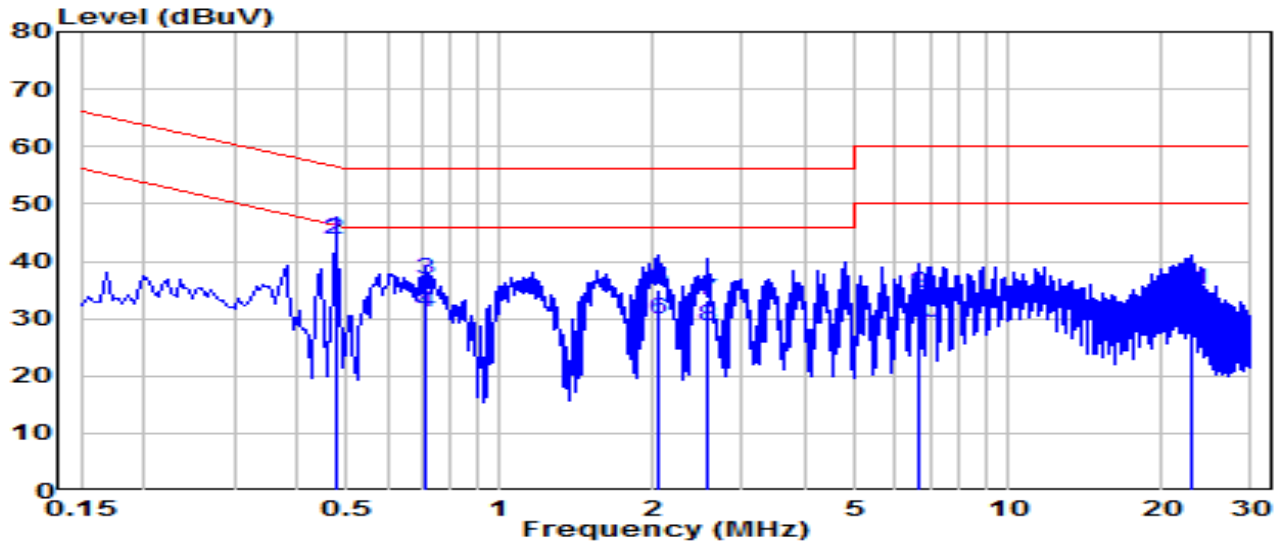


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	*	0.474	34.51	9.65	44.16	-12.29	56.44	QP
2	*	0.474	34.24	9.65	43.89	-2.55	46.44	Average
3		0.712	27.31	9.66	36.98	-19.02	56.00	QP
4		0.712	21.56	9.66	31.22	-14.78	46.00	Average
5		2.058	25.35	9.70	35.05	-20.95	56.00	QP
6		2.058	20.07	9.70	29.77	-16.23	46.00	Average
7		2.575	23.41	9.71	33.12	-22.88	56.00	QP
8		2.575	19.01	9.71	28.72	-17.28	46.00	Average
9		6.629	24.53	9.79	34.31	-25.69	60.00	QP
10		6.629	19.54	9.79	29.32	-20.68	50.00	Average
11		22.900	24.97	9.93	34.90	-25.10	60.00	QP
12		22.900	16.75	9.93	26.68	-23.32	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2024-08-02
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.2°C /47%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 240V/60Hz

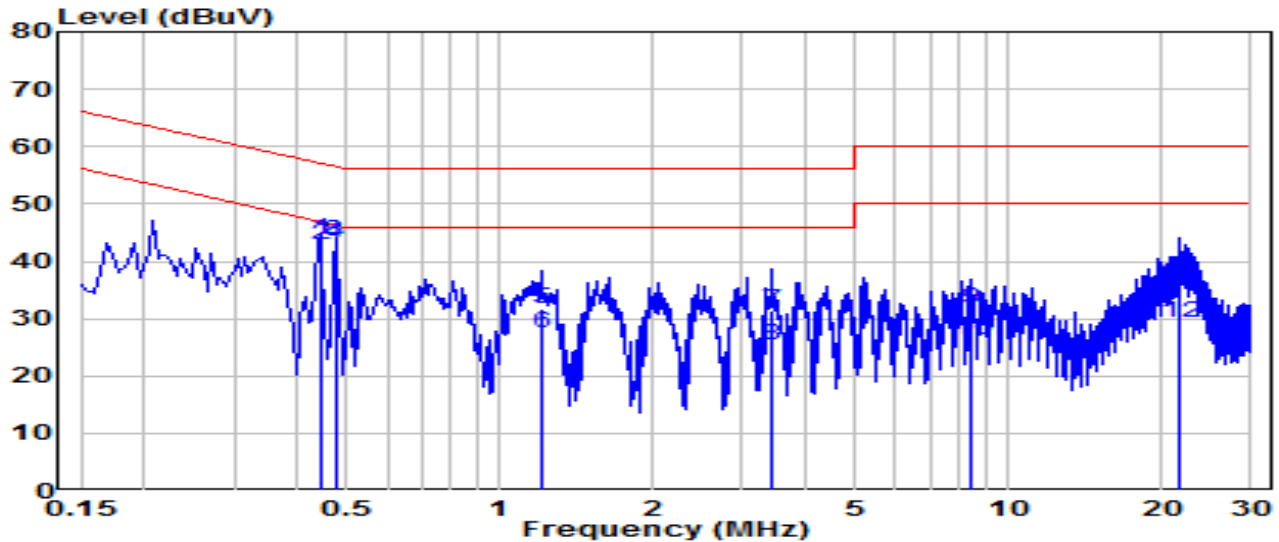

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.442	34.00	9.65	43.65	-13.37	57.02	QP
2	0.442	33.29	9.65	42.94	-4.08	47.02	Average
3	* 0.474	33.92	9.65	43.57	-12.88	56.44	QP
4	* 0.474	33.51	9.65	43.16	-3.28	46.44	Average
5	1.212	21.94	9.69	31.63	-24.37	56.00	QP
6	1.212	17.81	9.69	27.49	-18.51	46.00	Average
7	3.412	21.76	9.73	31.49	-24.51	56.00	QP
8	3.412	15.73	9.73	25.46	-20.54	46.00	Average
9	8.416	21.87	9.85	31.72	-28.28	60.00	QP
10	8.416	16.52	9.85	26.37	-23.63	50.00	Average
11	21.703	26.18	10.01	36.18	-23.82	60.00	QP
12	21.703	19.25	10.01	29.26	-20.74	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2407TW0101-UT” file.

Appendix B : EUT Photograph

Refer to “2407TW0101-UE” file.

Appendix C : Internal Photograph

Refer to “2407TW0101-UI” file.

_____ The End _____