

MEASUREMENT REPORT

FCC ID : 2BCGWEAP725WALL

Applicant : TP-LINK CORPORATION PTE. LTD.

Application Type : Certification

Product : BE5000 Wall Plate Wi-Fi 7 Access Point

Model No. : EAP725-Wall

Brand Name : tp-link

Trademark : 

FCC Classification : Unlicensed National Information Infrastructure (NII)

FCC Rule Part(s) : Part15 Subpart E (Section 15.407)

Received Date : August 12, 2024

Test Date : August 14, 2024 ~ October 28, 2024

Test By : Owen Tsai
(Owen Tsai)

Reviewed By : Paddy Chen
(Paddy Chen)

Approved By : Chenz Ker
(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v02r01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2408TW0107-U4	1.0	Original Report	2024-11-20	Valid

CONTENTS

Description	Page
1. INTRODUCTION	7
1.1. Scope	7
1.2. MRT Test Location	7
2. PRODUCT INFORMATION	8
2.1. Equipment Description.....	8
2.2. Product Specification Subjective to this Report.....	8
2.3. Working Frequencies for this report	9
2.4. Description of Available Antennas.....	10
2.5. Test Mode	11
2.6. Configuration of Test System.....	12
2.7. Test System Details.....	13
2.8. Description of Test Software	13
2.9. Applied Standards	13
2.10. Duty Cycle	14
2.11. Test Configuration	17
2.12. EMI Suppression Device(s)/Modifications.....	17
2.13. Labeling Requirements.....	17
3. DESCRIPTION OF TEST	18
3.1. Evaluation Procedure	18
3.2. AC Line Conducted Emissions	18
3.3. Radiated Emissions.....	19
4. ANTENNA REQUIREMENTS.....	20
5. TEST EQUIPMENT CALIBRATION DATE.....	21
6. MEASUREMENT UNCERTAINTY.....	23
7. TEST RESULT	24
7.1. Summary	24
7.2. 26dB Bandwidth Measurement.....	25
7.2.1. Test Limit	25
7.2.2. Test Procedure used.....	25
7.2.3. Test Setting.....	25
7.2.4. Test Setup	25
7.2.5. Test Result.....	26
7.3. 6dB Bandwidth Measurement.....	48

7.3.1. Test Limit	48
7.3.2. Test Procedure used	48
7.3.3. Test Setting.....	48
7.3.4. Test Setup	48
7.3.5. TestResult.....	49
7.4. Output Power Measurement	56
7.4.1. Test Limit	56
7.4.2. Test Procedure Used	56
7.4.3. Test Setting.....	56
7.4.4. Test Setup	56
7.4.5. Test Result.....	57
7.5. Transmit Power Control	65
7.5.1. Test Limit	65
7.5.2. Test Procedure Used	65
7.5.3. Test Setting.....	65
7.5.4. Test Setup	65
7.5.5. Test Result.....	65
7.6. Power Spectral Density Measurement	66
7.6.1. Test Limit	66
7.6.2. Test Procedure Used	66
7.6.3. Test Setting.....	66
7.6.4. Test Setup	67
7.6.5. Test Result.....	68
7.7. Frequency Stability Measurement.....	108
7.7.1. Test Limit	108
7.7.2. Test Limit	108
7.7.3. Test Setup	109
7.7.4. Test Result.....	109
7.8. Radiated Spurious Emission Measurement	110
7.8.1. Test Limit	110
7.8.2. Test Procedure Used	110
7.8.3. Test Setting.....	110
7.8.4. Test Setup	112
7.8.5. Test Result.....	113
7.9. Radiated Restricted Band Edge Measurement	331
7.9.1. Test Limit	331
7.9.2. Test Procedure Used	332
7.9.3. Test Setting.....	332
7.9.4. Test Setup	333

7.9.5. Test Result.....	334
7.10. AC Conducted Emissions Measurement.....	530
7.10.1. Test Limit	530
7.10.2. Test Procedure	530
7.10.3. Test Setup	531
7.10.4. Test Result.....	532
8. CONCLUSION.....	536
Appendix A : Test Setup Photograph	537
Appendix B : EUT Photograph.....	537
Appendix C : Internal Photograph	537

General Information

Applicant	TP-LINK CORPORATION PTE. LTD.
Applicant Address	7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987
Manufacturer	TP-LINK CORPORATION PTE. LTD.
Manufacturer Address	7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
FCC Rule Part(s)	Part 15.407

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Canada, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

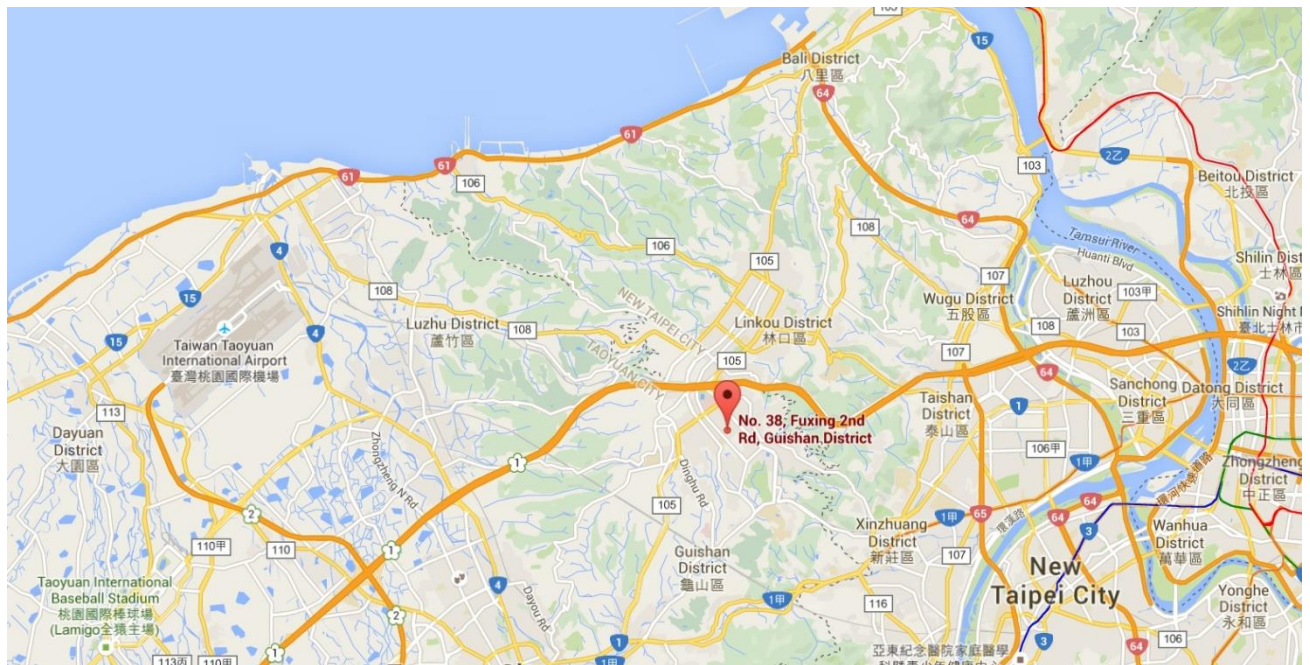

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	BE5000 Wall Plate Wi-Fi 7 Access Point
Model No.:	EAP725-Wall
Brand Name:	tp-link
Trademark	
Bluetooth Specification	Bluetooth Mode: V5.2 Single mode
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
EUT Identification No.	#1-1 (Conducted) #1-2 (Radiated)
Power Supply	42.5-57V 0.95A 802.3at/bt

2.2. Product Specification Subjective to this Report

Frequency Range:	For 802.11a/n-HT20/ac-VHT20/ax-HE20/be-EHT20: 5180~5240MHz, 5260~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40/ax-HE40/be-EHT40: 5190~5230MHz, 5270~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80/ax-HE80/be-EHT80: 5210MHz, 5290MHz, 5530MHz, 5610 MHz, 5690MHz, 5775MHz For 802.11ac-VHT160/ax-HE160/be-EHT160: 5250MHz, 5570MHz For 802.11be-EHT240: 5650MHz
Type of Modulation:	802.11a/n/ac: OFDM 802.11ax/be: OFDMA
Data Rate:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 1733.3Mbps 802.11ax: up to 2402Mbps 802.11be: up to 4323.5Mbps

Note: For other features of this EUT, test report will be issued separately.

2.3. Working Frequencies for this report

802.11a/n-HT20/ac-VHT20/ax-HE20/be-EHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

802.11n-HT40/ac-VHT40/ax-HE40/be-EHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

802.11ac-VHT80/ax-HE80/be-EHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

802.11ac-VHT160/ax-HE160/be-EHT160

Channel	Frequency	Channel	Frequency	Channel	Frequency
50	5250MHz	114	5570 MHz	--	--

802.11be-EHT240

Channel	Frequency	Channel	Frequency	Channel	Frequency
130	5650 MHz	--	--	--	--

2.4. Description of Available Antennas

Antenna Type	Frequency Band (MHz)	T _x Paths	Number of spatial streams	Max Antenna Gain (dBi)	Beamforming Directional Gain (dBi)	CDD Directional Gain (dBi)	
						For Power	For PSD
Wi-Fi Antenna							
Dipole	2412 ~ 2462	2	1	3.00	6.01	3.00	6.01
	5150 ~ 5850	2	1	3.00	6.01	3.00	6.01

Remark:

- The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.
If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.
 - For power spectral density (PSD) measurements on all devices,
Array Gain = $10 \log (N_{ANT} / N_{SS})$ dB;
 - For power measurements on IEEE 802.11 devices,
Array Gain = 0 dB for $N_{ANT} \leq 4$;
- The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax/be, not include 802.11a/b/g. BF Directional gain = $G_{ANT} + 10 \log (N_{ANT})$.
- The information as above is from the antenna report.

Test Mode	Tx Paths	CDD Mode	Beamforming Mode
802.11b/g (DTS)	2	√	X
802.11n/ax/be (DTS)	2	√	√
802.11a (NII)	2	√	X
802.11n/ac/ax/be (NII)	2	√	√


2.5. Test Mode

CDD Mode
Mode 1: Transmit by 802.11a_Nss=1 (6Mbps) (CDD mode)
Mode 2: Transmit by 802.11ac-VHT20_Nss=1 (MCS0) (CDD mode)
Mode 3: Transmit by 802.11ac-VHT40_Nss=1 (MCS0) (CDD mode)
Mode 4: Transmit by 802.11ac-VHT80_Nss=1 (MCS0) (CDD mode)
Mode 5: Transmit by 802.11ac-VHT160_Nss=1 (MCS0) (CDD mode)
Mode 6: Transmit by 802.11ax-HE20_Nss=1 (MCS0) (CDD mode)
Mode 7: Transmit by 802.11ax-HE40_Nss=1 (MCS0) (CDD mode)
Mode 8: Transmit by 802.11ax-HE80_Nss=1 (MCS0) (CDD mode)
Mode 9: Transmit by 802.11ax-HE160_Nss=1 (MCS0) (CDD mode)
Mode 10: Transmit by 802.11be-EHT20_Nss=1 (MCS0) (CDD mode)
Mode 11: Transmit by 802.11be-EHT40_Nss=1 (MCS0) (CDD mode)
Mode 12: Transmit by 802.11be-EHT80_Nss=1 (MCS0) (CDD mode)
Mode 13: Transmit by 802.11be-EHT160_Nss=1 (MCS0) (CDD mode)
Mode 14: Transmit by 802.11be-EHT240_Nss=1 (MCS0) (CDD mode)
Beamforming Mode
Mode 15: Transmit by 802.11ac-VHT20_Nss=1 (MCS0) (Beamforming Mode)
Mode 16: Transmit by 802.11ac-VHT40_Nss=1 (MCS0) (Beamforming Mode)
Mode 17: Transmit by 802.11ac-VHT80_Nss=1 (MCS0) (Beamforming Mode)
Mode 18: Transmit by 802.11ac-VHT160_Nss=1 (MCS0) (Beamforming Mode)
Mode 19: Transmit by 802.11ax-HE20_Nss=1 (MCS0) (Beamforming Mode)
Mode 20: Transmit by 802.11ax-HE40_Nss=1 (MCS0) (Beamforming Mode)
Mode 21: Transmit by 802.11ax-HE80_Nss=1 (MCS0) (Beamforming Mode)
Mode 22: Transmit by 802.11ax-HE160_Nss=1 (MCS0) (Beamforming Mode)
Mode 23: Transmit by 802.11be-EHT20_Nss=1 (MCS0) (Beamforming Mode)
Mode 24: Transmit by 802.11be-EHT40_Nss=1 (MCS0) (Beamforming Mode)
Mode 25: Transmit by 802.11be-EHT80_Nss=1 (MCS0) (Beamforming Mode)
Mode 26: Transmit by 802.11be-EHT160_Nss=1 (MCS0) (Beamforming Mode)
Mode 27: Transmit by 802.11be-EHT240_Nss=1 (MCS0) (Beamforming Mode)
Remark:
1. For Radiated emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.
2. This device supports 2 N _{SS} and power level of 2 N _{SS} is less than or equal to the power of 1 N _{SS} . The worst case is N _{SS} =1.
3. Due to CDD mode was the worst mode, so all test items were evaluated in this report. The beamforming mode only evaluated the RF output power.

4. EUT supports one configuration only in 802.11ax/be full RU mode.
5. 802.11n and 802.11ac have same modulation type and same power value, so we only show 802.11ac test data in report.
6. As Designated by manufacturer, the lowest data rate was the worst condition, so all the tests were done with lowest data rate.

2.6. Configuration of Test System

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

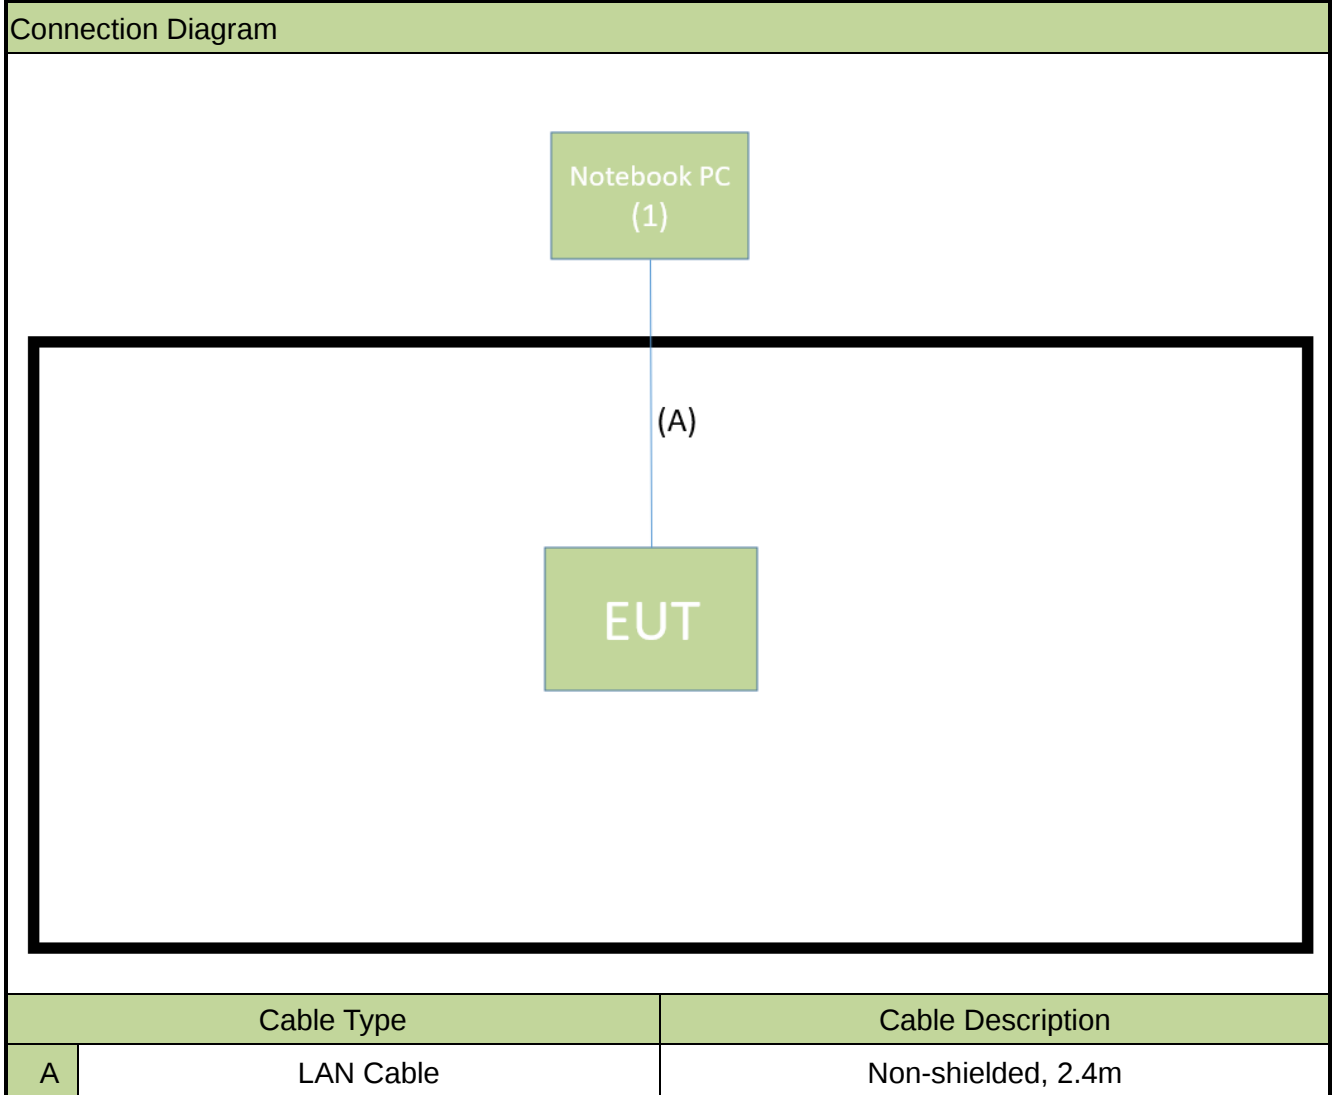

2.7. Test System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

No.	Product	Brand	Model No.	Serial No.	Power Cord
1	Notebook PC	Lenovo	V14G3ABA	N/A	Non-shielded, 0.8m

2.8. Description of Test Software

The test utility software used during testing was “Tera Term”, the version is ver4.98.

Note: Final power setting please refer to operational description.

2.9. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.407
- KDB 789033 D02v02r01
- KDB 662911 D01v02r01
- ANSI C63.10-2013


2.10. Duty Cycle

5GHz (NII) operation is possible in 20MHz, 40MHz, 80MHz, 160MHz and 240MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:


Test Mode	Duty Cycle	Packet
802.11a	98.44%	tx99
802.11ac-VHT20	99.08%	tx100
802.11ac-VHT40	99.08%	tx100
802.11ac-VHT80	99.35%	tx99
802.11ac-VHT160	99.45%	tx99
802.11ax-HE20	98.72%	tx99
802.11ax-HE40	99.26%	tx99
802.11ax-HE80	99.08%	tx99
802.11ax-HE160	99.63%	tx99
802.11be-EHT20	99.45%	tx100
802.11be-EHT 40	99.08%	tx100
802.11be-EHT 80	98.53%	tx99
802.11be-EHT 160	99.27%	tx99
802.11be-EHT 240	98.90%	tx99

Duty Cycle (T = Transmission Duration)


802.11a

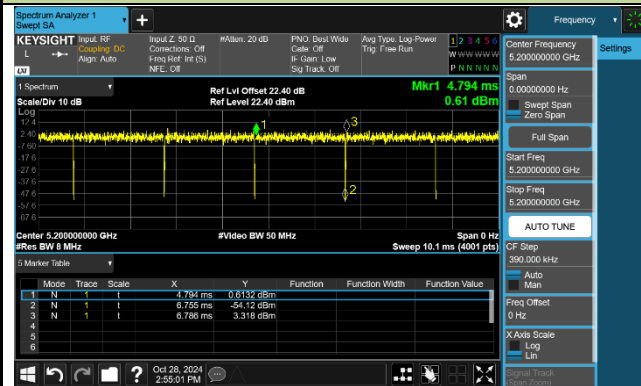


802.11ac-VHT20

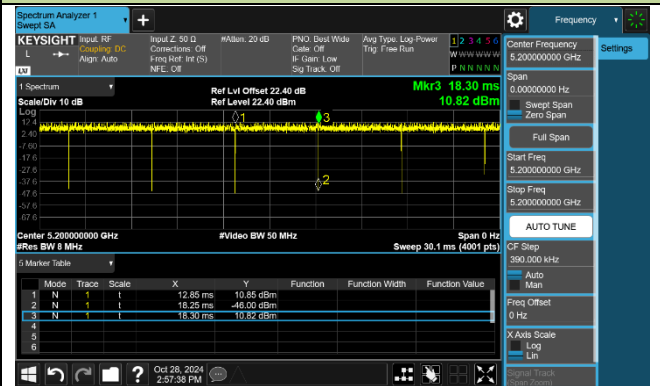


802.11ac-VHT40

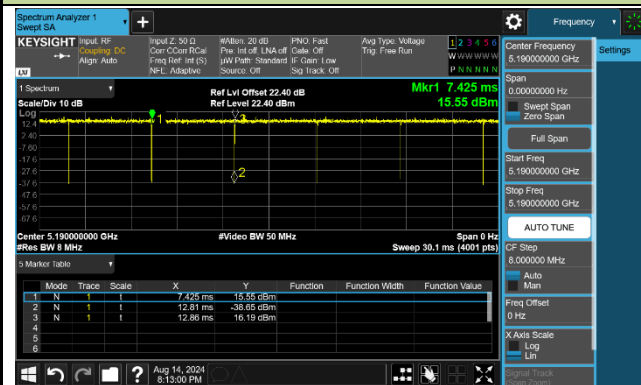


802.11ac-VHT80

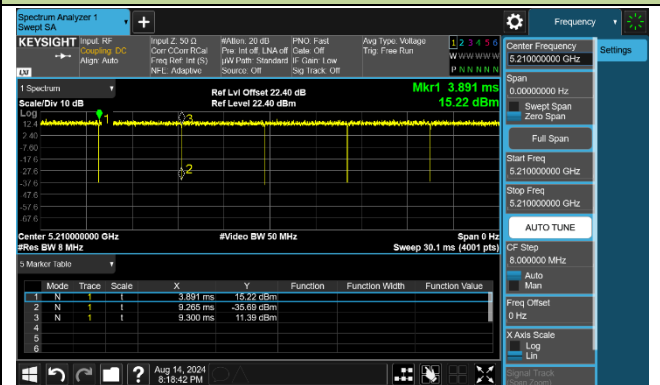


802.11ac-VHT160

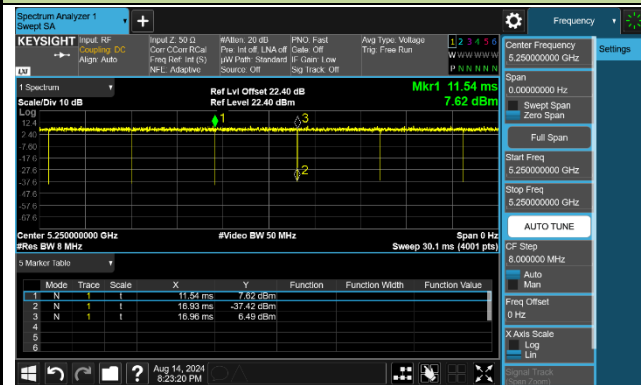


802.11ax-HE20

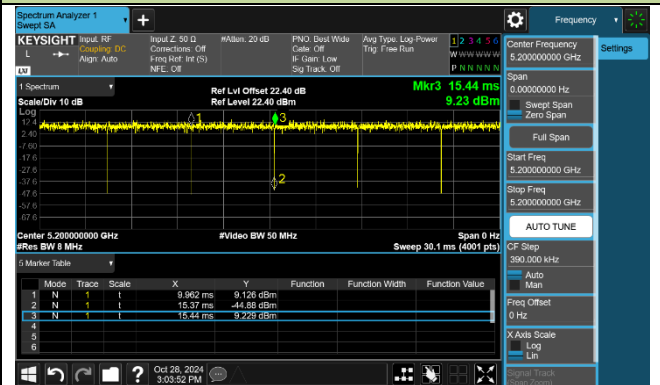


802.11ax-HE40

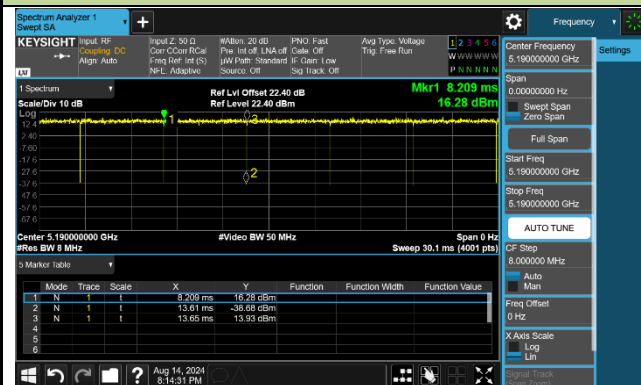

802.11ax-HE80

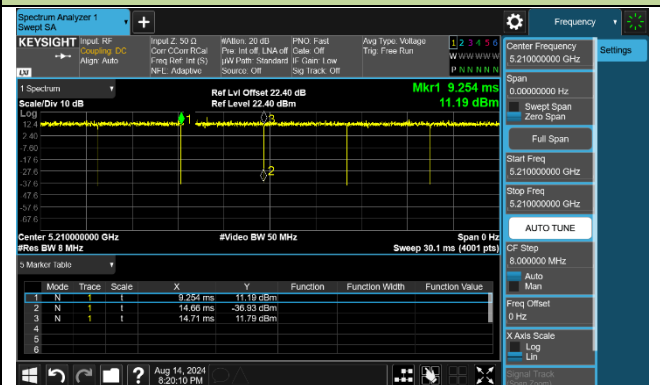

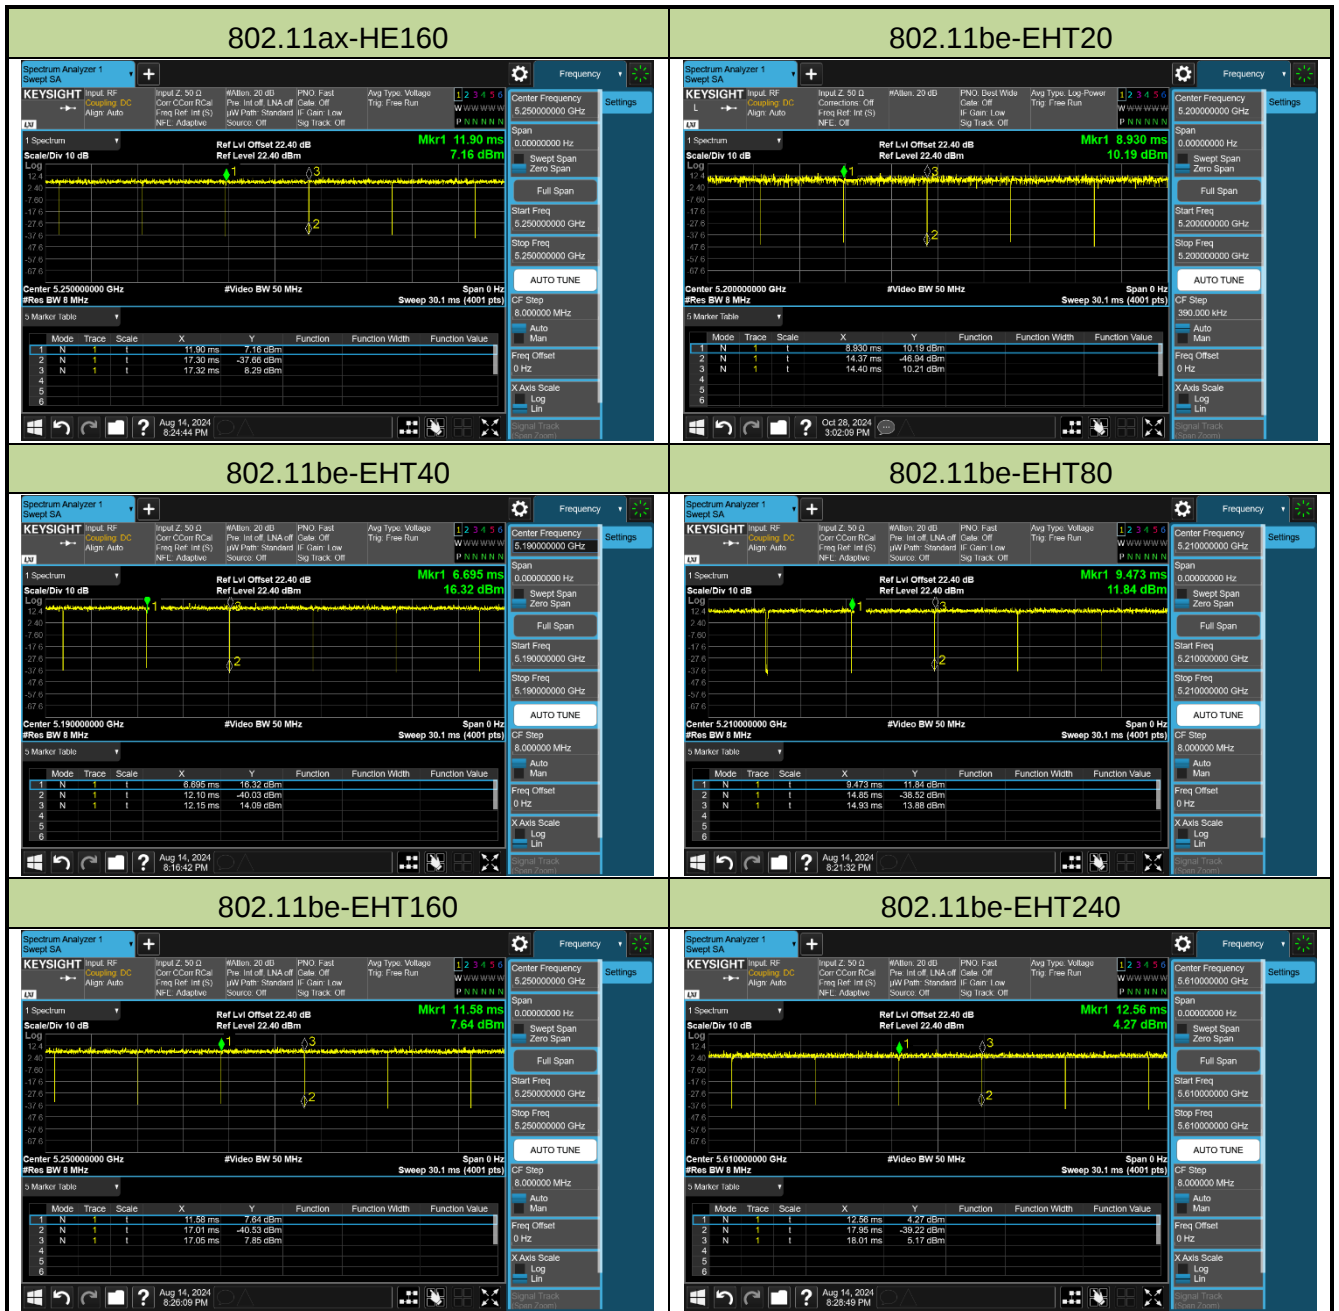

2.11. Test Configuration

The device was tested per the guidance of KDB 789033 D02v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.12. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.13. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlets supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v02r01 were used in the measurement.

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50 Ω /50 μ H Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remotecontrolled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2025/3/5
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2025/4/21
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2025/5/14
DIVA PLUS Funk-Wetterstation	TFA	35.1083	MRTTWA00050	1 year	2025/6/2

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2025/5/7
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2024/10/31
Broadband Hornantenna	RFSPIN	DRH18-E	MRTTWA00087	1 year	2025/5/20
Broadband Preamplifier	EMC Instruments corporation	EMC118A45SE	MRTTWA00088	1 year	2025/5/14
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2025/3/26
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2025/3/21
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2025/3/5
Signal Analyzer	R&S	FSVA3044	MRTTWA00092	1 year	2025/6/20
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00034	1 year	2025/6/25
Cable	HUBERSUHNER	EMC105-NM-N M-3000	MRTTWE00035	1 year	2025/6/25
Temperature/Humidity Meter	TFA	35.1083	MRTTWA00050	1 year	2025/6/2

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2025/4/16
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2024/10/17
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2025/8/12
Attenuator	WTI	218FS-20	MRTTWE00026	1 year	2024/11/1
Attenuator	WTI	218FS-10	MRTTWE00027	1 year	2025/6/13
Temperature & Humidity Chamber	TEN BILLION	TTH-B3UP	MRTTWA00036	1 year	2025/6/6
DIVA PLUS Funk-Wetterstation	TFA	35.1083	MRTTWA00050	1 year	2025/6/2

Software	Version	Function
e3	9.160520a	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 150kHz~30MHz: $\pm 2.53\text{dB}$
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz ~ 1GHz: $\pm 4.25\text{dB}$ 1GHz ~ 40GHz: $\pm 4.45\text{dB}$
Conducted Power (Carrier Power / Power Density)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.84\text{dB}$
Conducted Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 2.65\text{ dB}$
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 3.3\%$
Temp. / Humidity
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.82^\circ\text{C} / \pm 3\%$
Frequency Error
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 78.4\text{Hz}$

7. TEST RESULT

7.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	$\geq 500\text{kHz}$		Pass	Section 7.3
15.407(a)(1)(ii), (2), (3)	Maximum Conducted Output Power	Refer to section 7.4		Pass	Section 7.4
15.407(h)(1)	Transmit Power Control	$\leq 24\text{ dBm}$		Pass	Section 7.5
15.407(a)(1)(ii), (2), (3), (12)	Peak Power Spectral Density	Refer to section 7.6		Pass	Section 7.6
15.407(g)	Frequency Stability	N/A		Pass	Section 7.7
15.407(b)(1), (2), (3), (4)(i)	Undesirable Emissions	Refer to Section 7.8	Radiated	Pass	Section 7.8 & 7.9
15.205, 15.209 15.407(b)(8), (9), (10)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.10

Notes:

- Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

7.2. 26dB Bandwidth Measurement

7.2.1. Test Limit

N/A

7.2.2. Test Procedure used


KDB 789033 D02v02r01- Section II)C.1) (26dB Bandwidth)

KDB 789033 D02v02r01- Section II)D) (99% Bandwidth)

7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. $VBW \geq 3 \times RBW$.
4. Detector = Peak.
5. Trace mode = max hold.

7.2.4. Test Setup

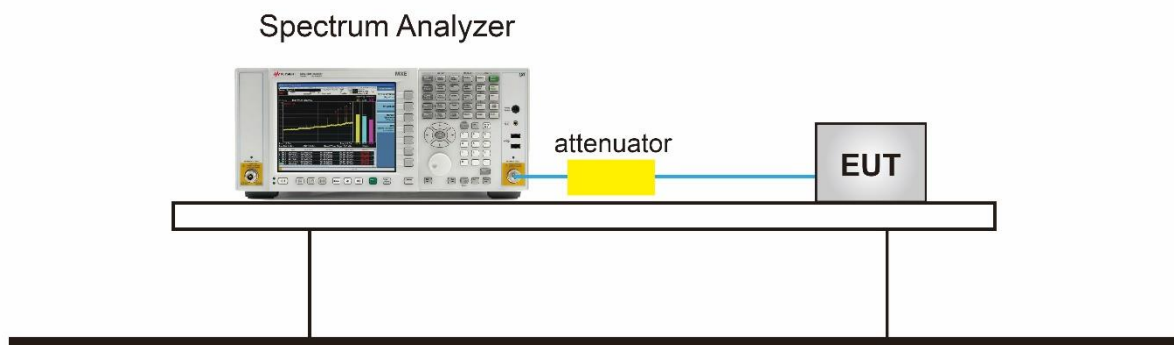

7.2.5.Test Result

Product	BE5000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Owen
Test Site	SR6	Test Date	2024/8/28~2024/8/29

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 0					
802.11a	6Mbps	36	5180	22.050	16.799
802.11a	6Mbps	40	5200	21.710	16.701
802.11a	6Mbps	48	5240	26.730	16.975
802.11a	6Mbps	52	5260	21.410	16.652
802.11a	6Mbps	60	5300	22.450	16.720
802.11a	6Mbps	64	5320	22.010	16.766
802.11a	6Mbps	100	5500	21.950	16.739
802.11a	6Mbps	116	5580	21.710	16.766
802.11a	6Mbps	140	5700	21.370	16.667
802.11a	6Mbps	144	5720	22.060	16.705
802.11a	6Mbps	149	5745	23.430	17.079
802.11a	6Mbps	157	5785	22.300	16.787
802.11a	6Mbps	165	5825	22.220	16.731
802.11ac-VHT20	MCS0	36	5180	23.760	17.966
802.11ac-VHT20	MCS0	40	5200	25.170	18.075
802.11ac-VHT20	MCS0	48	5240	23.980	18.270
802.11ac-VHT20	MCS0	52	5260	22.010	17.889
802.11ac-VHT20	MCS0	60	5300	22.420	17.883
802.11ac-VHT20	MCS0	64	5320	22.460	17.869
802.11ac-VHT20	MCS0	100	5500	21.170	17.776
802.11ac-VHT20	MCS0	116	5580	21.960	17.772
802.11ac-VHT20	MCS0	140	5700	21.640	17.846
802.11ac-VHT20	MCS0	144	5720	21.880	17.885
802.11ac-VHT20	MCS0	149	5745	24.470	18.089
802.11ac-VHT20	MCS0	157	5785	24.660	18.073
802.11ac-VHT20	MCS0	165	5825	25.120	18.182


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 0					
802.11ac-VHT40	MCS0	38	5190	43.980	36.354
802.11ac-VHT40	MCS0	46	5230	62.430	36.742
802.11ac-VHT40	MCS0	54	5270	44.430	36.405
802.11ac-VHT40	MCS0	62	5310	43.920	36.389
802.11ac-VHT40	MCS0	102	5510	43.190	36.510
802.11ac-VHT40	MCS0	110	5550	43.110	36.481
802.11ac-VHT40	MCS0	134	5670	43.290	36.392
802.11ac-VHT40	MCS0	142	5710	43.960	36.428
802.11ac-VHT40	MCS0	151	5755	46.060	36.661
802.11ac-VHT40	MCS0	159	5795	46.570	36.723
802.11ac-VHT80	MCS0	42	5210	87.440	75.907
802.11ac-VHT80	MCS0	58	5290	91.330	76.007
802.11ac-VHT80	MCS0	106	5530	87.940	76.164
802.11ac-VHT80	MCS0	122	5610	90.400	76.157
802.11ac-VHT80	MCS0	138	5690	89.070	76.220
802.11ac-VHT80	MCS0	155	5775	90.220	76.057
802.11ac-VHT160	MCS0	50	5250	171.800	155.250
802.11ac-VHT160	MCS0	114	5570	173.700	155.410
802.11ax-HE20	MCS0	36	5180	22.600	19.020
802.11ax-HE20	MCS0	40	5200	22.910	19.120
802.11ax-HE20	MCS0	48	5240	34.970	19.156
802.11ax-HE20	MCS0	52	5260	22.490	19.055
802.11ax-HE20	MCS0	60	5300	22.880	19.039
802.11ax-HE20	MCS0	64	5320	22.640	19.042
802.11ax-HE20	MCS0	100	5500	22.380	18.947
802.11ax-HE20	MCS0	116	5580	22.020	18.997
802.11ax-HE20	MCS0	140	5700	22.050	18.988
802.11ax-HE20	MCS0	144	5720	22.160	19.019
802.11ax-HE20	MCS0	149	5745	22.540	19.041
802.11ax-HE20	MCS0	157	5785	25.980	19.114
802.11ax-HE20	MCS0	165	5825	24.710	19.104

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 0					
802.11ax-HE40	MCS0	38	5190	42.450	37.843
802.11ax-HE40	MCS0	46	5230	54.520	38.167
802.11ax-HE40	MCS0	54	5270	42.530	37.962
802.11ax-HE40	MCS0	62	5310	41.950	37.945
802.11ax-HE40	MCS0	102	5510	41.210	37.964
802.11ax-HE40	MCS0	110	5550	42.430	38.013
802.11ax-HE40	MCS0	134	5670	41.990	37.939
802.11ax-HE40	MCS0	142	5710	42.130	37.979
802.11ax-HE40	MCS0	151	5755	41.310	37.899
802.11ax-HE40	MCS0	159	5795	42.770	37.974
802.11ax-HE80	MCS0	42	5210	83.750	77.422
802.11ax-HE80	MCS0	58	5290	83.190	77.502
802.11ax-HE80	MCS0	106	5530	83.030	77.688
802.11ax-HE80	MCS0	122	5610	86.780	77.633
802.11ax-HE80	MCS0	138	5690	83.590	77.438
802.11ax-HE80	MCS0	155	5775	86.540	77.765
802.11ax-HE160	MCS0	50	5250	165.900	156.960
802.11ax-HE160	MCS0	114	5570	169.400	156.990
802.11be-EHT20	MCS0	36	5180	23.000	19.028
802.11be-EHT20	MCS0	40	5200	25.920	19.148
802.11be-EHT20	MCS0	48	5240	26.910	19.149
802.11be-EHT20	MCS0	52	5260	22.230	19.045
802.11be-EHT20	MCS0	60	5300	21.990	19.057
802.11be-EHT20	MCS0	64	5320	22.510	19.046
802.11be-EHT20	MCS0	100	5500	21.440	18.929
802.11be-EHT20	MCS0	116	5580	21.710	18.940
802.11be-EHT20	MCS0	140	5700	22.480	18.997
802.11be-EHT20	MCS0	144	5720	22.050	19.007
802.11be-EHT20	MCS0	149	5745	24.450	19.112
802.11be-EHT20	MCS0	157	5785	28.860	19.133
802.11be-EHT20	MCS0	165	5825	23.130	19.113


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 0					
802.11be-EHT40	MCS0	38	5190	42.600	37.875
802.11be-EHT40	MCS0	46	5230	66.410	38.015
802.11be-EHT40	MCS0	54	5270	43.260	37.935
802.11be-EHT40	MCS0	62	5310	41.970	37.936
802.11be-EHT40	MCS0	102	5510	42.180	38.013
802.11be-EHT40	MCS0	110	5550	42.560	37.988
802.11be-EHT40	MCS0	134	5670	42.230	37.947
802.11be-EHT40	MCS0	142	5710	42.310	37.939
802.11be-EHT40	MCS0	151	5755	43.090	38.001
802.11be-EHT40	MCS0	159	5795	75.730	38.466
802.11be-EHT80	MCS0	42	5210	83.750	77.457
802.11be-EHT80	MCS0	58	5290	85.030	77.496
802.11be-EHT80	MCS0	106	5530	86.230	77.745
802.11be-EHT80	MCS0	122	5610	84.210	77.640
802.11be-EHT80	MCS0	138	5690	84.470	77.503
802.11be-EHT80	MCS0	155	5775	85.200	77.435
802.11be-EHT160	MCS0	50	5250	173.900	157.110
802.11be-EHT160	MCS0	114	5570	168.500	156.880
802.11be-EHT240	MCS0	130	5650	252.800	234.850

802.11a 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

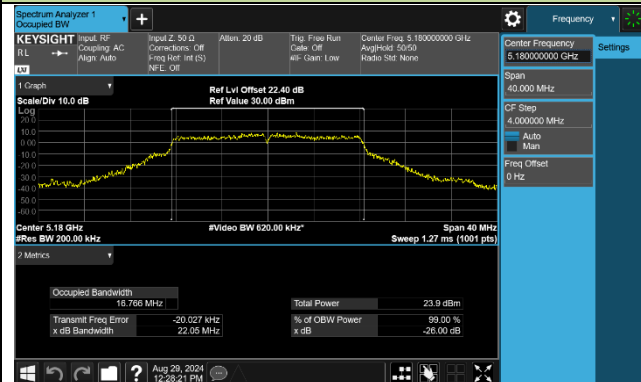


Channel 40 (5200MHz)

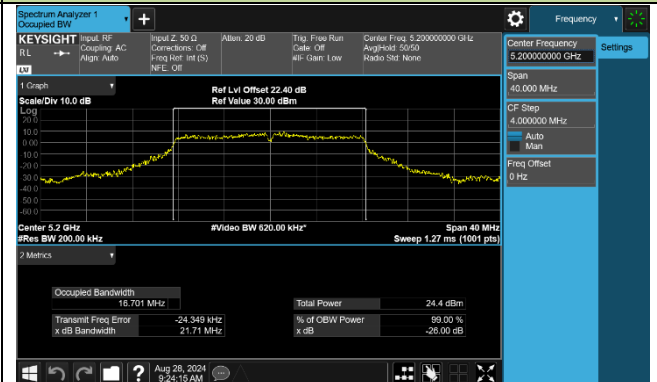


Channel 48 (5240MHz)

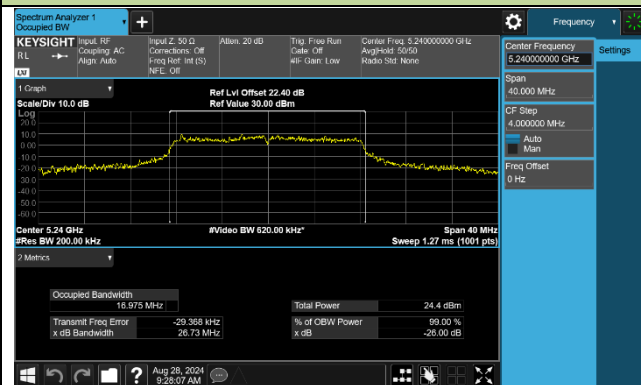


Channel 52 (5260MHz)

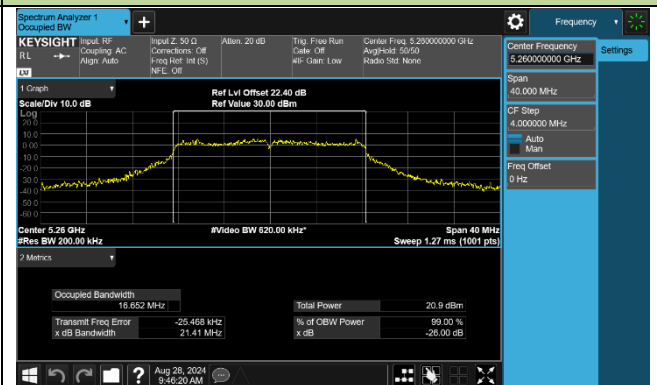


Channel 60 (5300MHz)

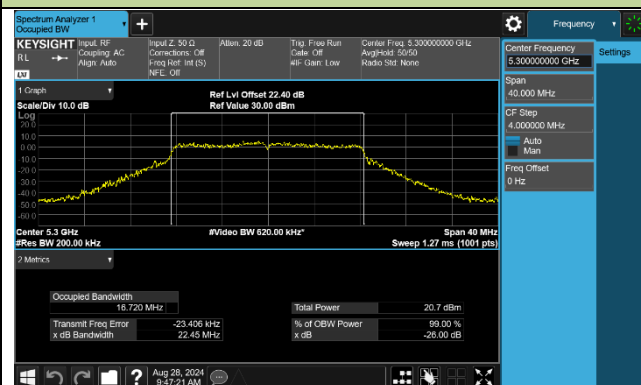


Channel 64 (5320MHz)

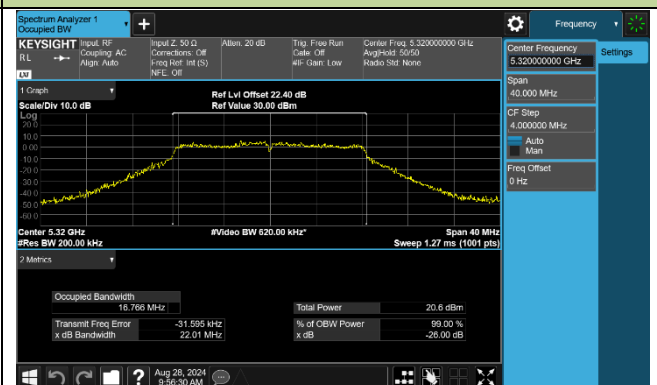


Channel 100 (5500MHz)

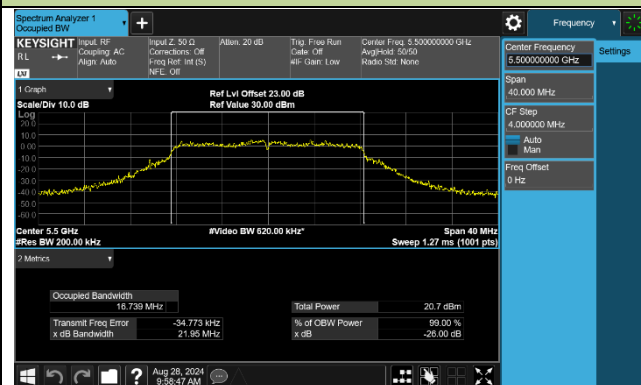


Channel 116 (5580MHz)

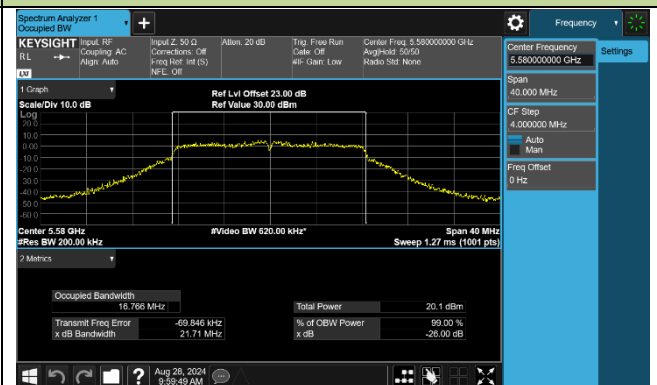

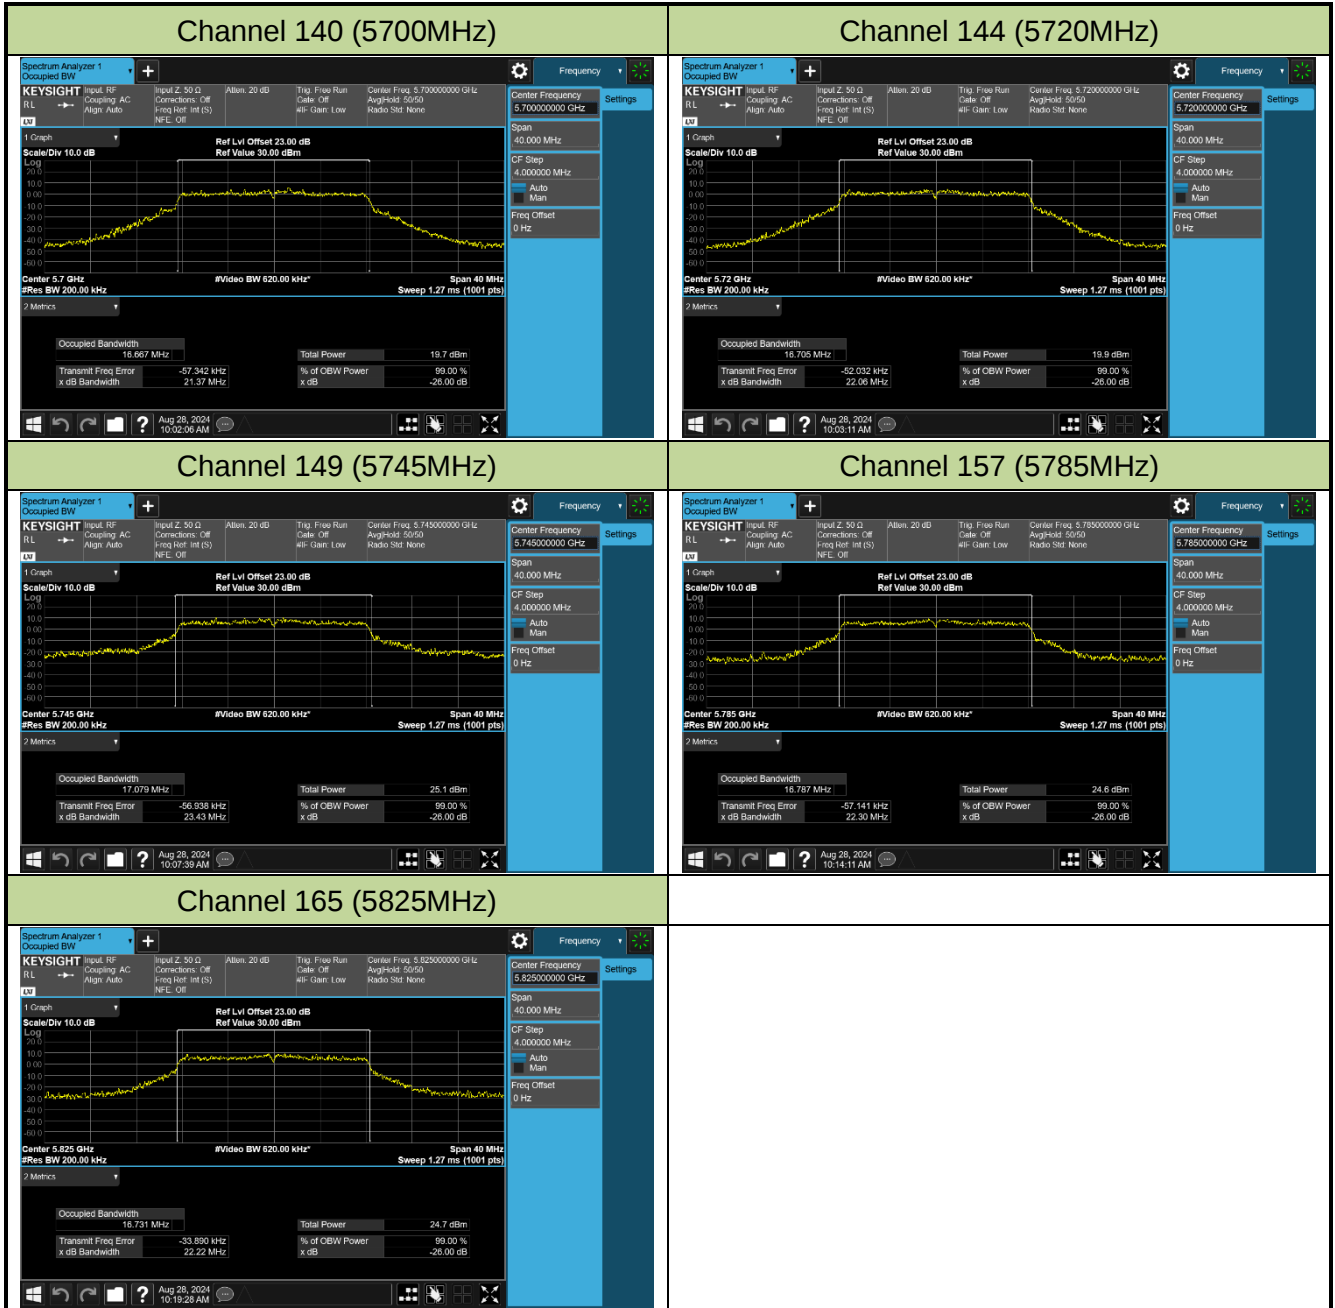


802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

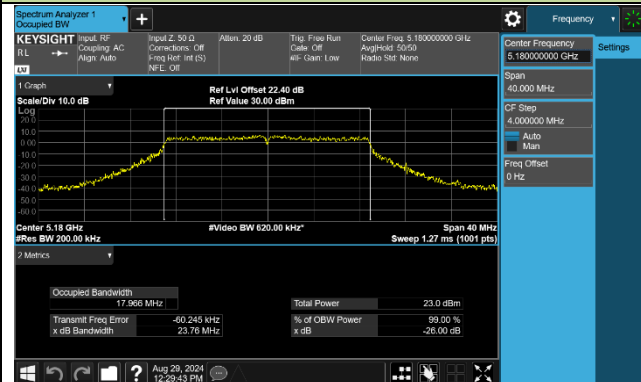


Channel 40 (5200MHz)

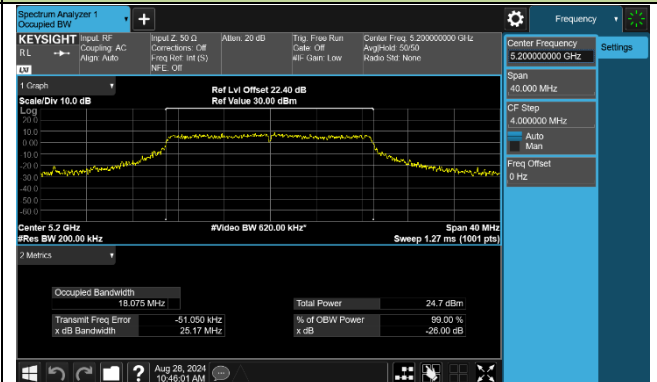


Channel 48 (5240MHz)

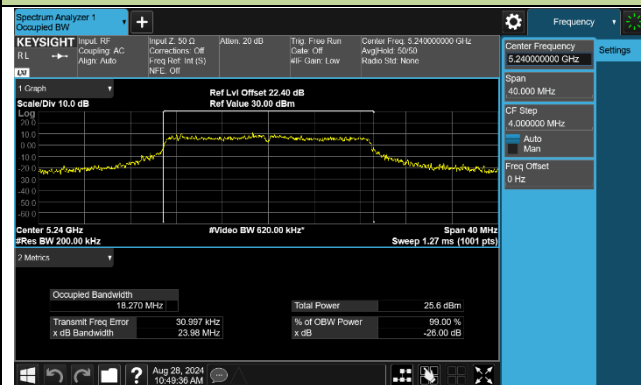


Channel 52 (5260MHz)

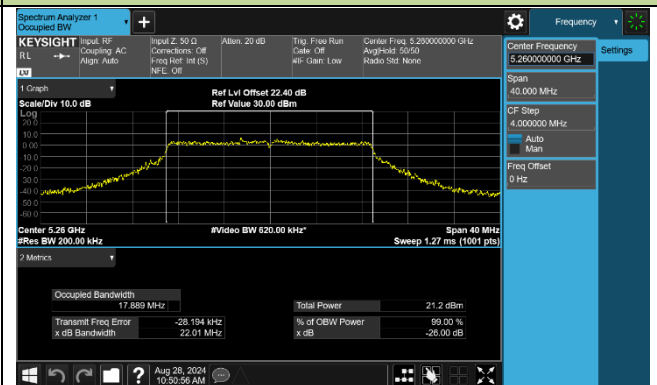


Channel 60 (5300MHz)

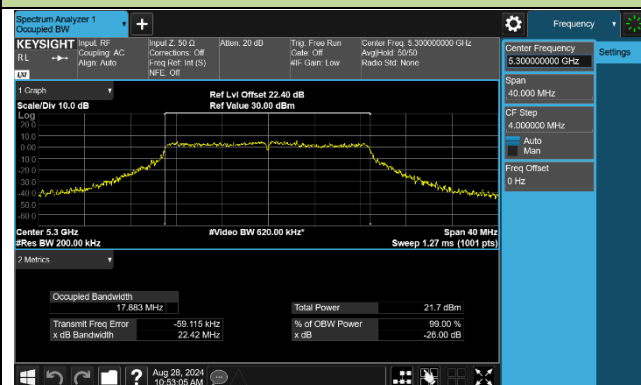


Channel 64 (5320MHz)

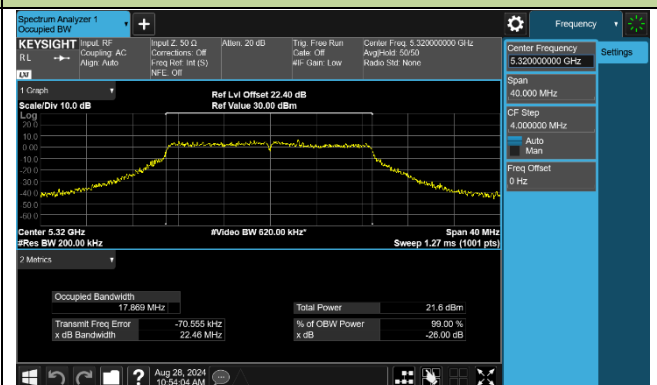


Channel 100 (5500MHz)

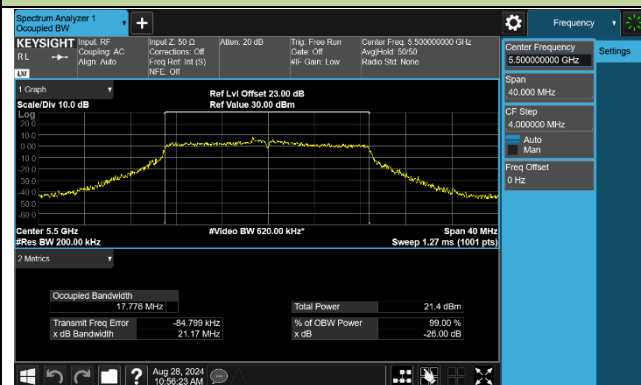


Channel 116 (5580MHz)

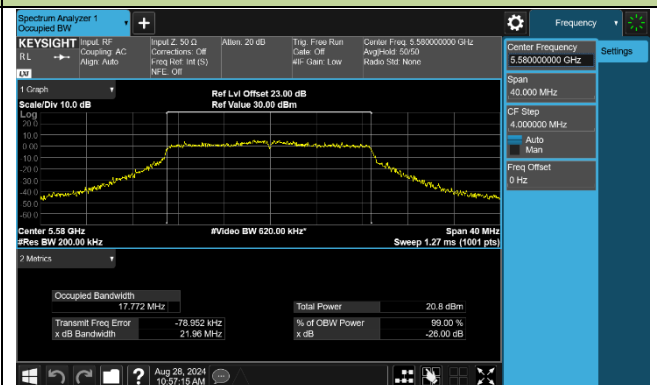

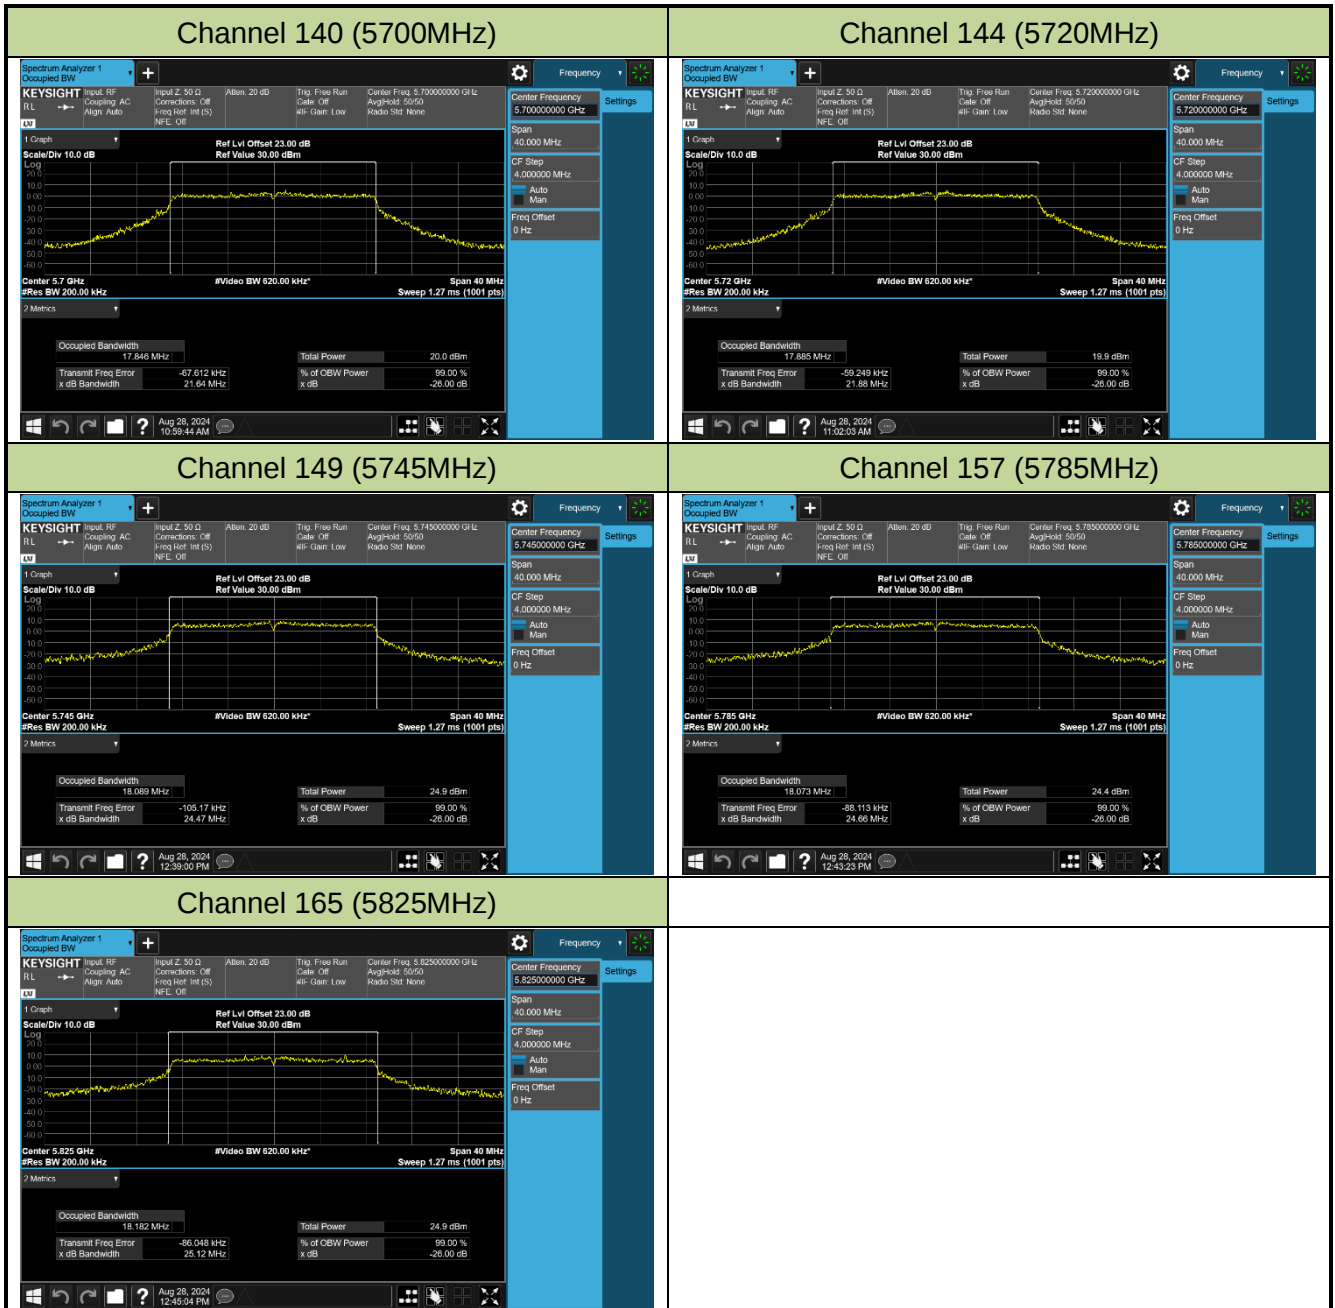


802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth


Channel 38 (5190MHz)

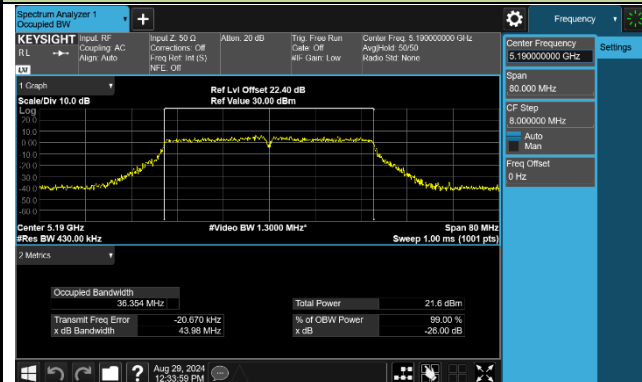


Channel 46 (5230MHz)

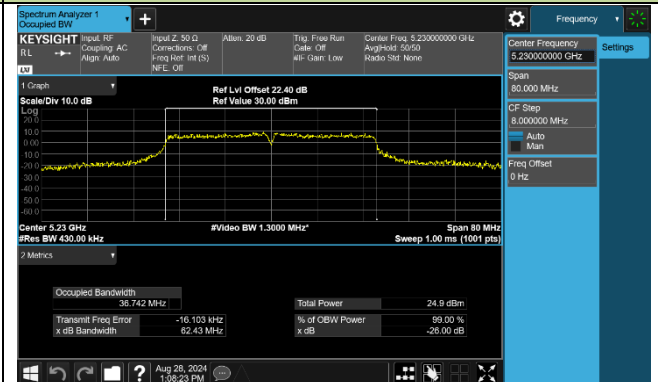


Channel 54 (5270MHz)

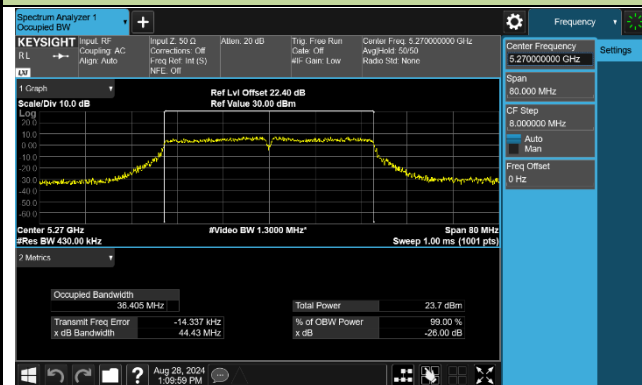


Channel 62 (5310MHz)

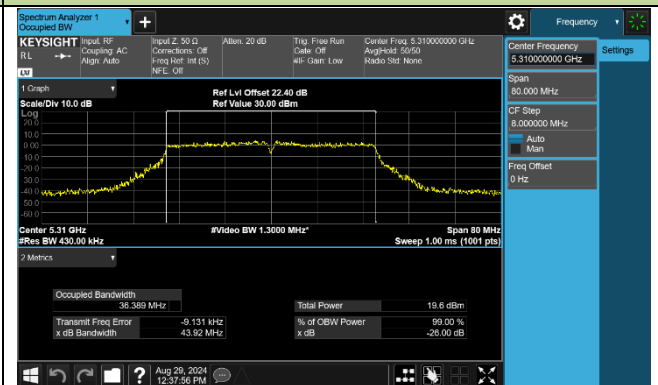


Channel 102 (5510MHz)

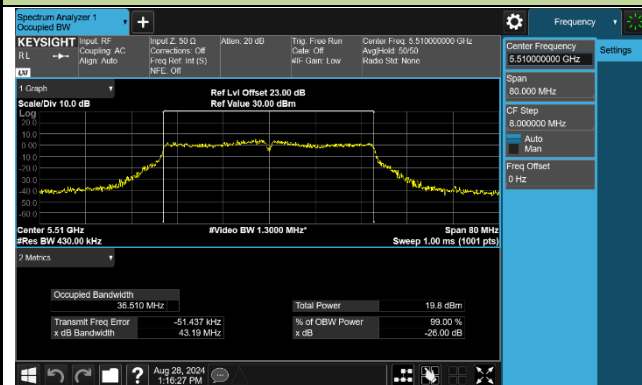


Channel 110 (5550MHz)

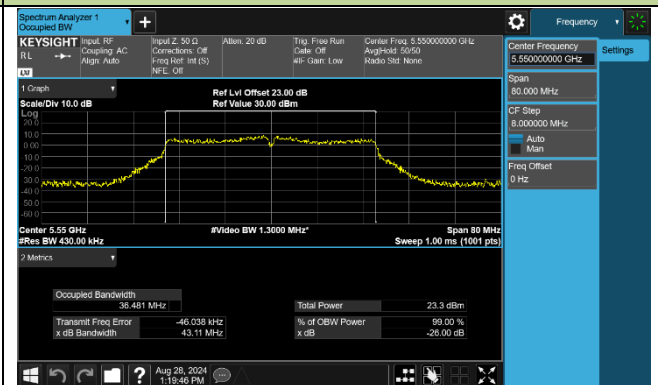


Channel 134 (5670MHz)

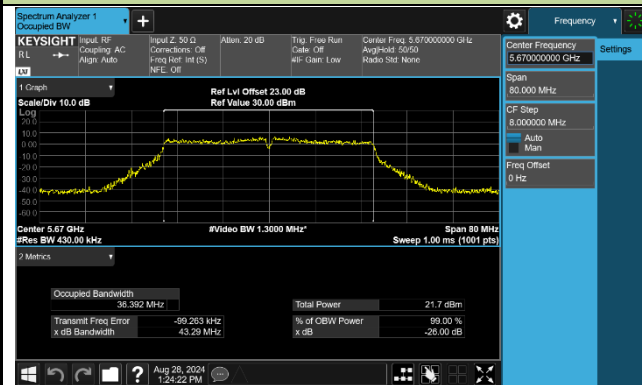


Channel 142 (5710MHz)

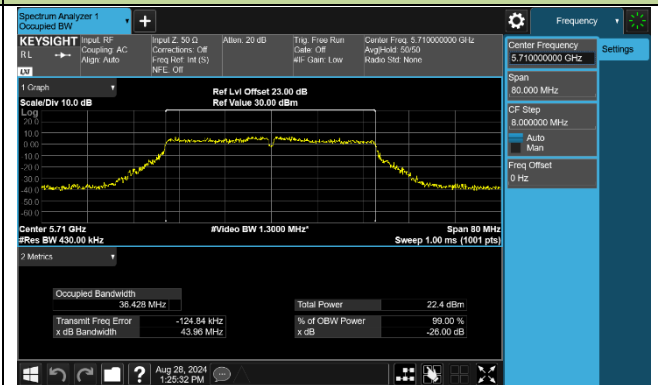

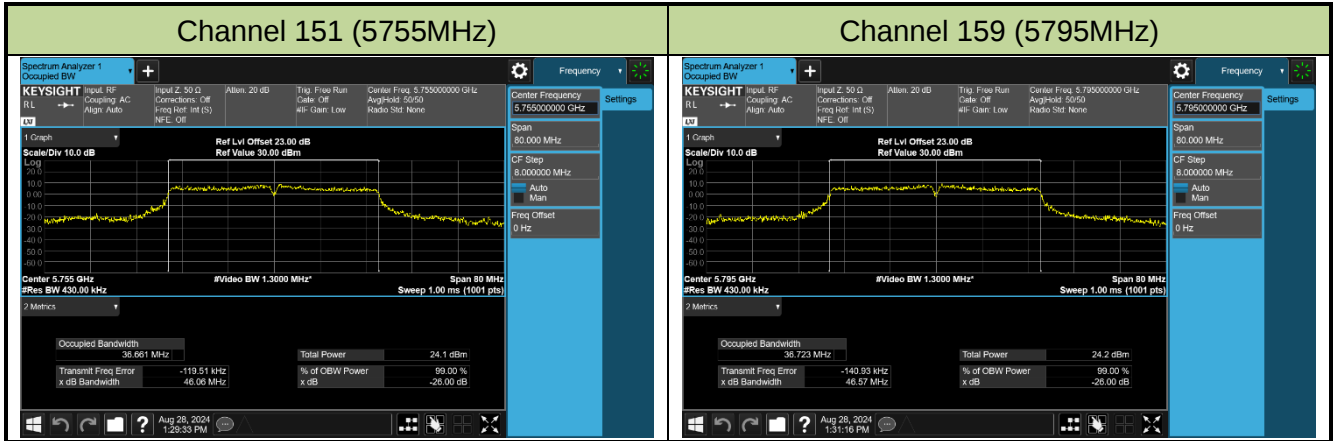


802.11ac-VHT80 26dB Bandwidth & 99% Bandwidth


Channel 42 (5210MHz)

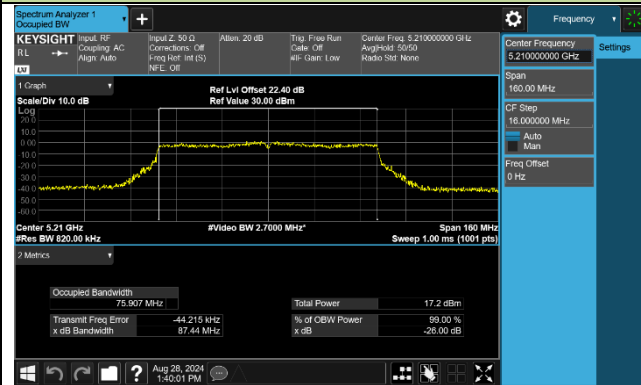


Channel 58 (5290MHz)

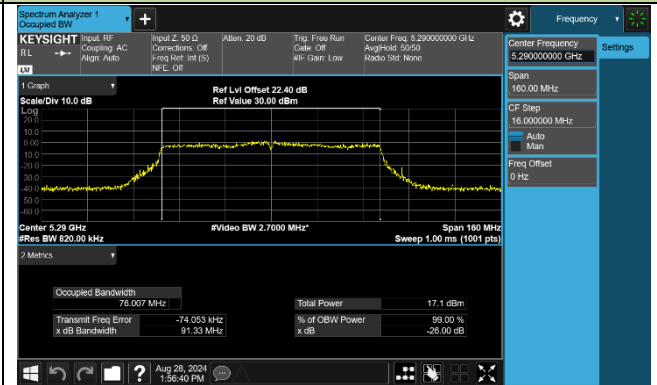


Channel 106 (5530MHz)

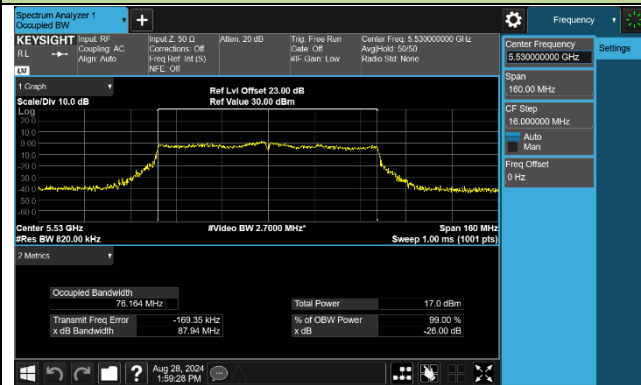


Channel 122 (5610MHz)

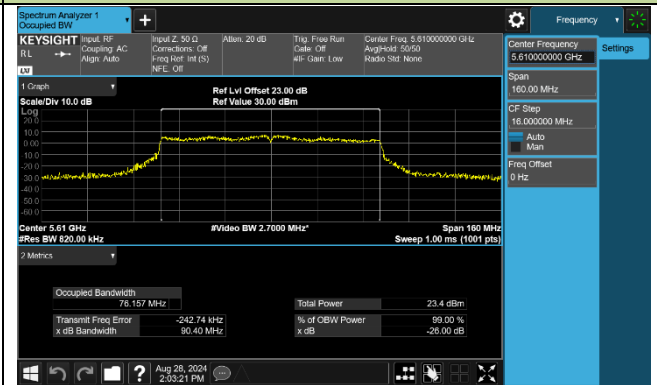

Channel 138 (5690MHz)

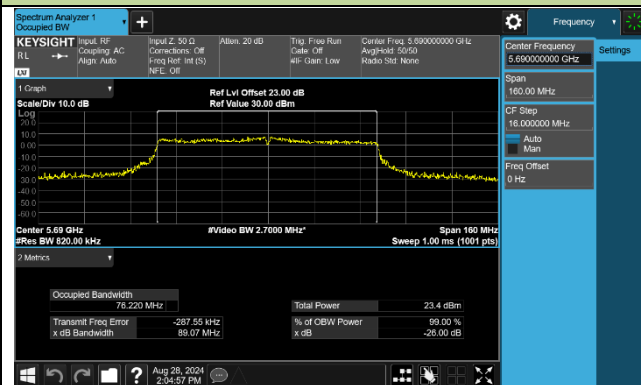


Channel 155 (5775MHz)

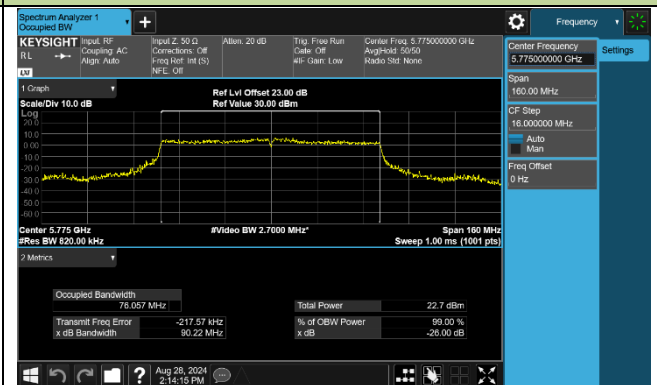


802.11ac-VHT160 26dB Bandwidth & 99% Bandwidth

Channel 50 (5250MHz)

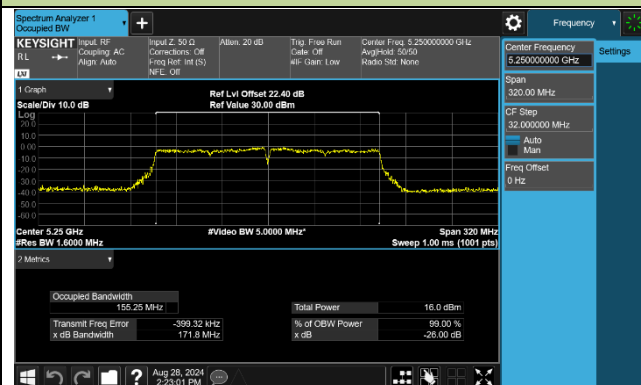


Channel 114 (5570MHz)

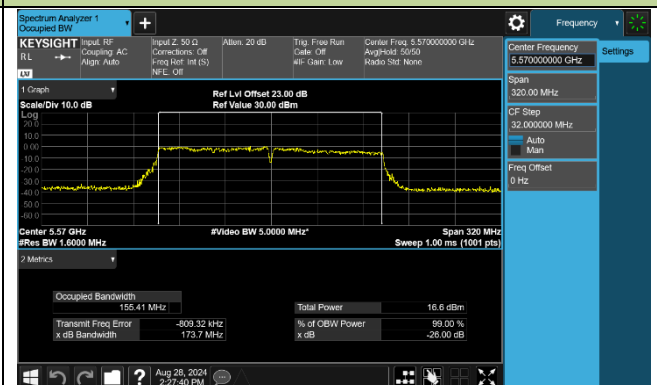


802.11ax-HE20 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

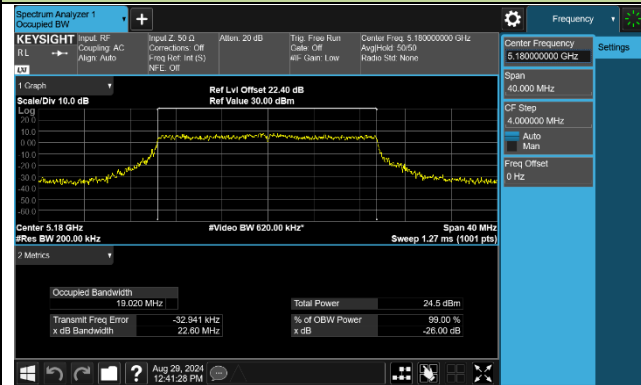


Channel 40 (5200MHz)

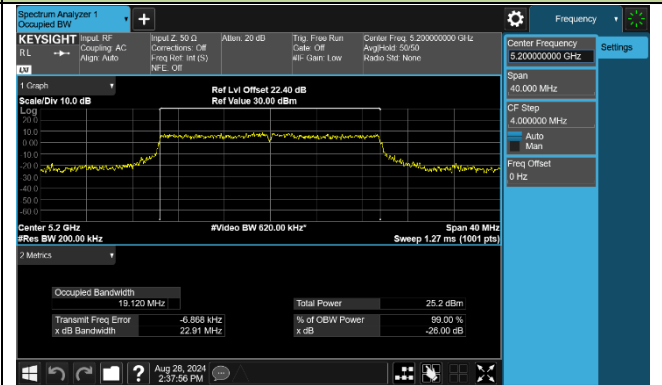


Channel 48 (5240MHz)

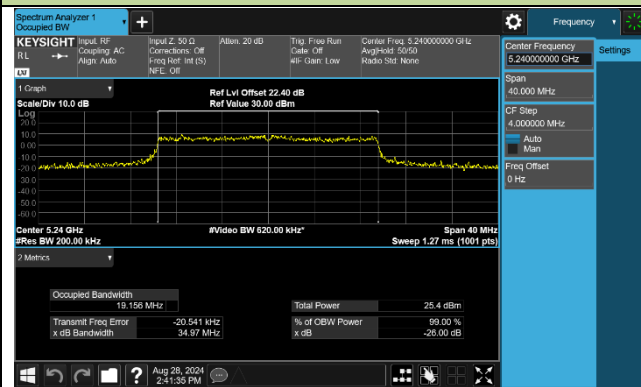


Channel 52 (5260MHz)

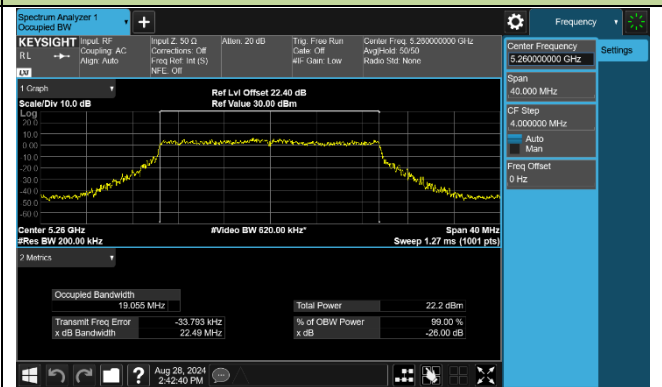


Channel 60 (5300MHz)

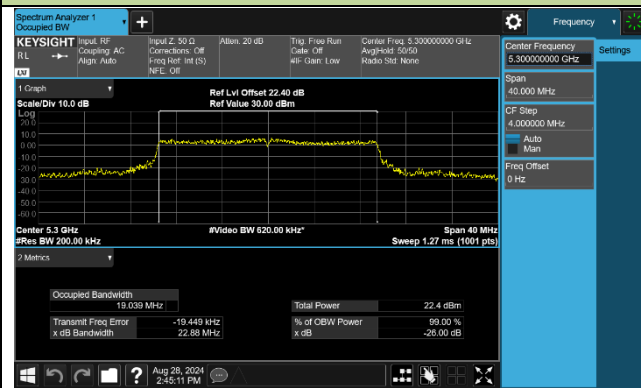


Channel 64 (5320MHz)

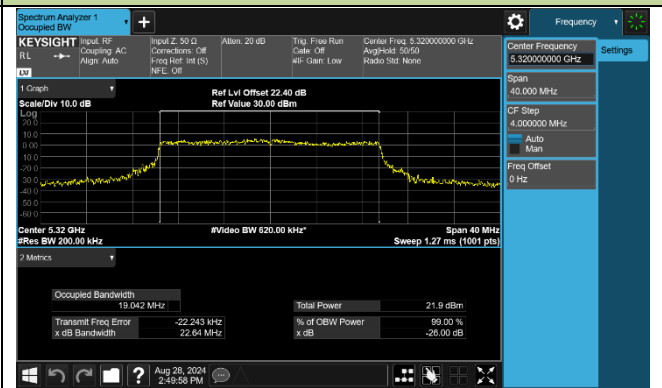


Channel 100 (5500MHz)

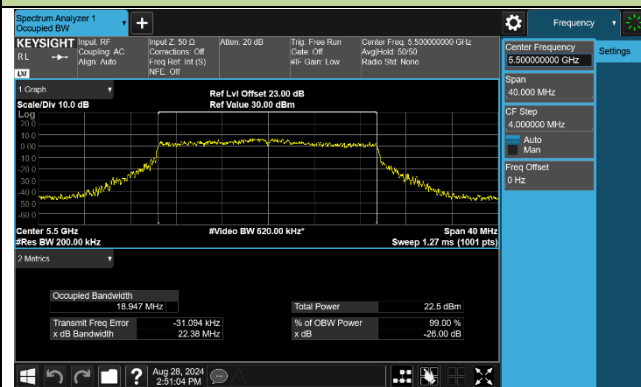


Channel 116 (5580MHz)

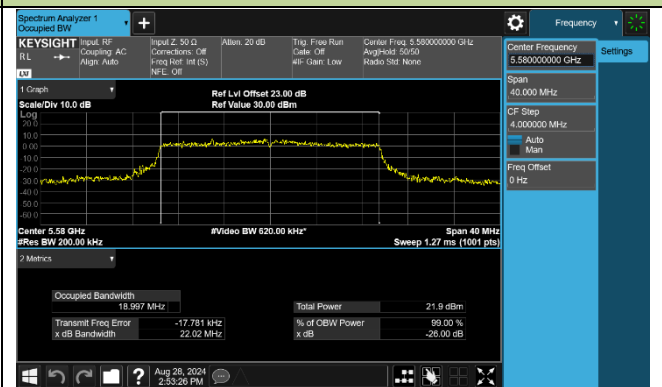

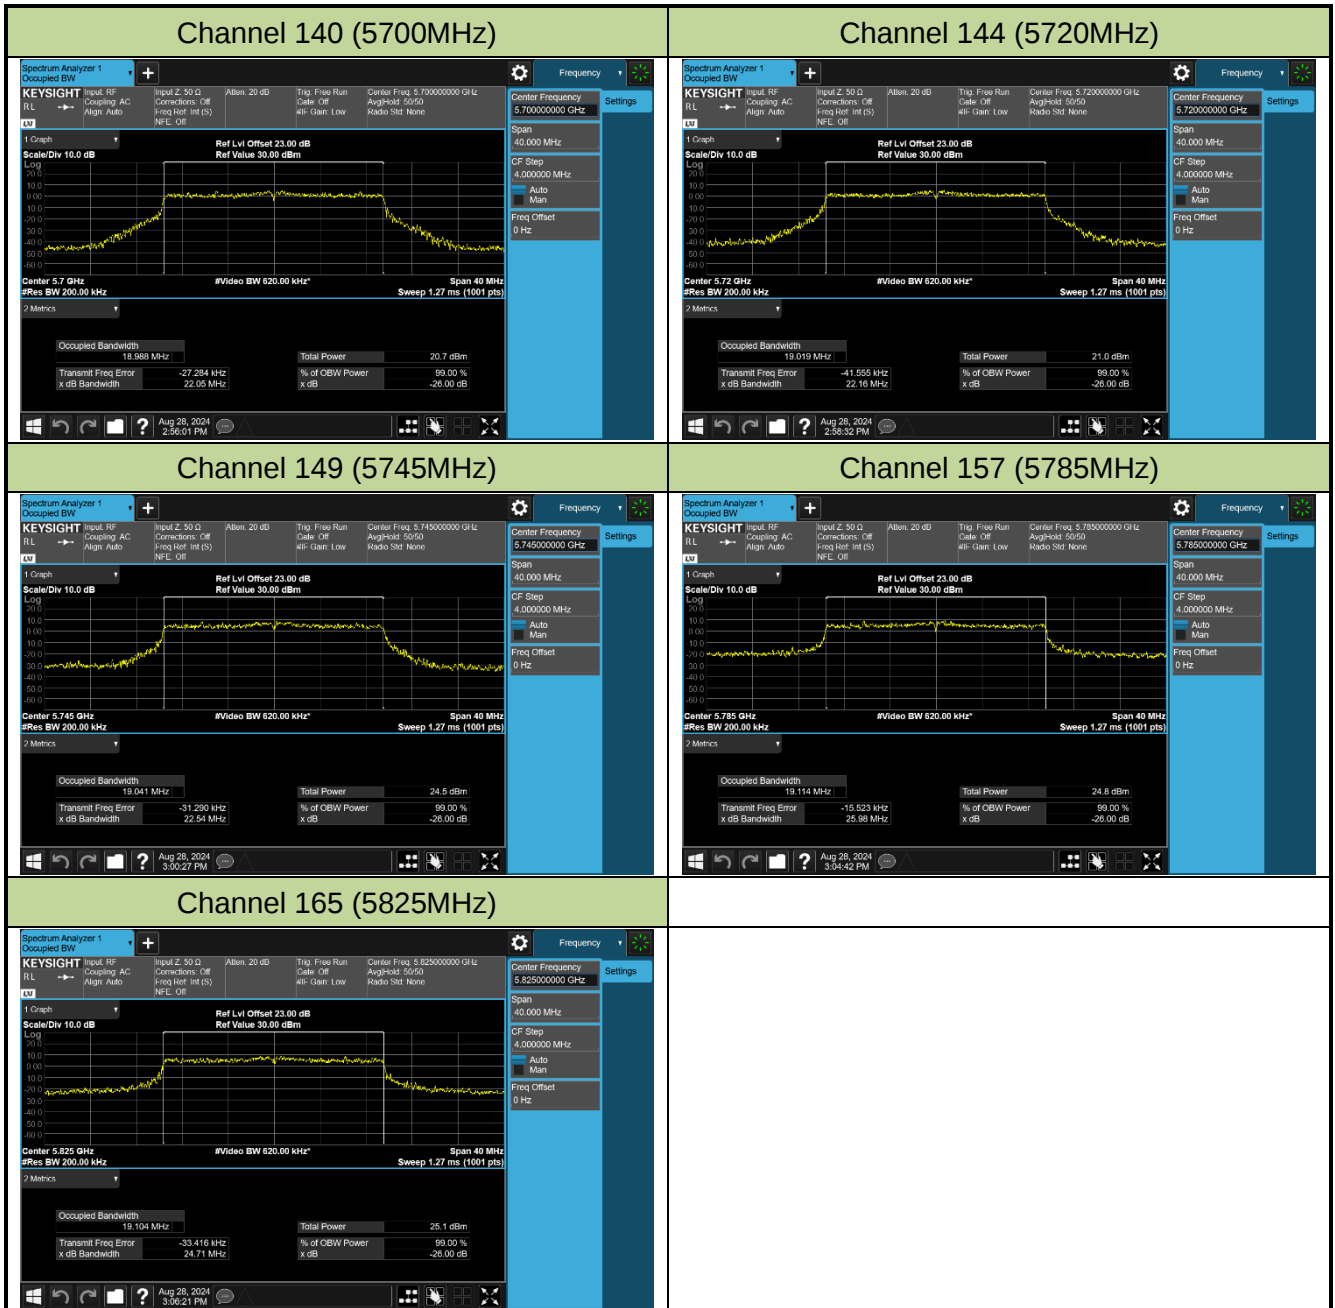


802.11ax-HE40 26dB Bandwidth & 99% Bandwidth


Channel 38 (5190MHz)

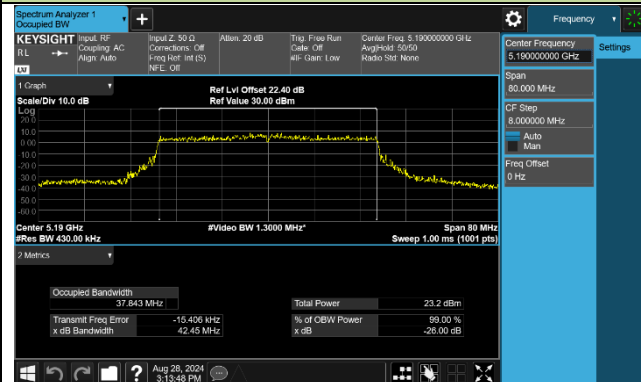


Channel 46 (5230MHz)

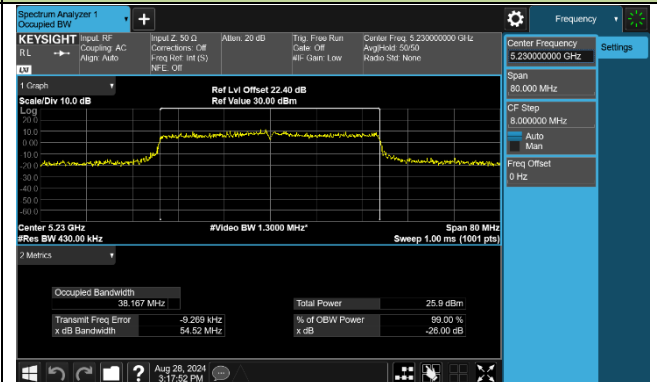


Channel 54 (5270MHz)

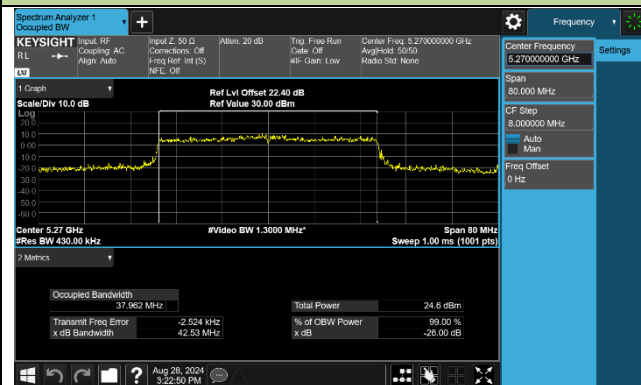


Channel 62 (5310MHz)

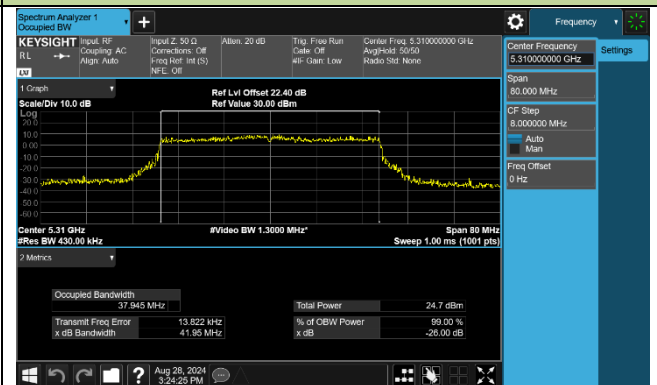


Channel 102 (5510MHz)

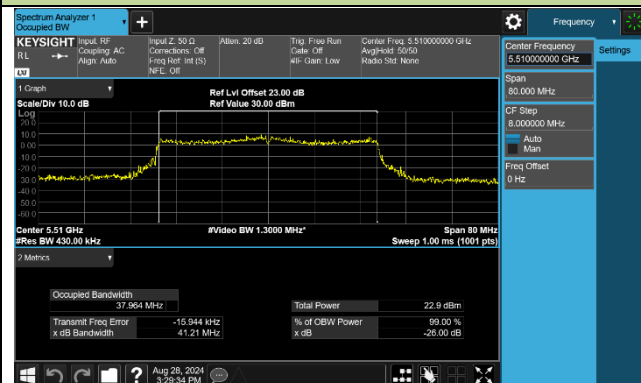

Channel 110 (5550MHz)

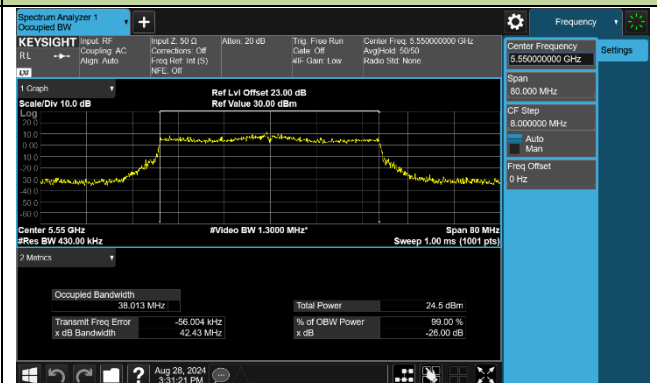

Channel 134 (5670MHz)

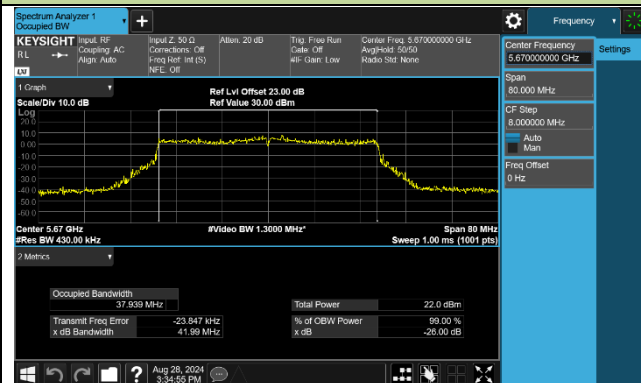

Channel 142 (5710MHz)

