



RADIO TEST REPORT

FCC ID : 2BCGWEAP772V2
Equipment : BE11000 Ceiling Mount Wi-Fi 7 Access Point
Brand Name : tp-link
Model Name : EAP772
Applicant : TP-LINK CORPORATION PTE.LTD.
7 Temasek Boulevard #29-03 Suntec Tower One,
Singapore 038987
Manufacturer : TP-LINK CORPORATION PTE.LTD.
7 Temasek Boulevard #29-03 Suntec Tower One,
Singapore 038987
Standard : 47 CFR FCC Part 15.407

The product was received on Oct. 29, 2024, and testing was started from Nov. 09, 2024 and completed on Feb. 26, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	10
1.3 Testing Location Information	10
1.4 Measurement Uncertainty	11
2 Test Configuration of EUT	12
2.1 Test Channel Mode	12
2.2 The Worst Case Measurement Configuration	14
2.3 EUT Operation during Test	15
2.4 Accessories	15
2.5 Support Equipment.....	15
2.6 Test Setup Diagram	16
3 Transmitter Test Result	19
3.1 AC Power-line Conducted Emissions	19
3.2 Emission Bandwidth	21
3.3 Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	22
3.4 Peak Power Spectral Density (E.I.R.P.)	24
3.5 Unwanted Emissions.....	27
4 Test Equipment and Calibration Data	32
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	
Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Results of Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_5 Ver2.0



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	PASS	-
-	15.407(a)	Proper Power Adjustment	N/A	Non-Dual Client Device or non-Standard Client Device w/o test
-	15.407(a)	Transmit Power Control	N/A	Non-Very Low Power Device w/o test
3.4	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
-	15.407(d)	Contention-Based Protocol	N/A	Standard Power AP w/o test

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen

Report Producer: Cathy Chiu



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925-6425	ax (HEW20), be (EHT20)	6115-6415	33-93 [16]
6525-6875		6535-6855	117-181 [17]
5925-6425	ax (HEW40), be (EHT40)	6125-6405	35-91 [8]
6525-6875		6565-6845	123-179 [8]
5925-6425	ax (HEW80), be (EHT80)	6145-6385	39-87 [4]
6525-6875		6625-6785	135-167 [3]
5925-6425	ax (HEW160), be (EHT160)	6185-6345	47-79 [2]
6525-6875		6665	143 [1]
5925-6425	be (EHT320)	6265	63 [1]

Band	Mode	BWch (MHz)	Nant
5.925-6.425GHz	802.11ax HEW20	20	2TX
5.925-6.425GHz	802.11ax HEW20-BF	20	2TX
5.925-6.425GHz	802.11be EHT20	20	2TX
5.925-6.425GHz	802.11be EHT20-BF	20	2TX
5.925-6.425GHz	802.11ax HEW40	40	2TX
5.925-6.425GHz	802.11ax HEW40-BF	40	2TX
5.925-6.425GHz	802.11be EHT40	40	2TX
5.925-6.425GHz	802.11be EHT40-BF	40	2TX
5.925-6.425GHz	802.11ax HEW80	80	2TX
5.925-6.425GHz	802.11ax HEW80-BF	80	2TX
5.925-6.425GHz	802.11be EHT80	80	2TX
5.925-6.425GHz	802.11be EHT80-BF	80	2TX
5.925-6.425GHz	802.11ax HEW160	160	2TX
5.925-6.425GHz	802.11ax HEW160-BF	160	2TX
5.925-6.425GHz	802.11be EHT160	160	2TX
5.925-6.425GHz	802.11be EHT160-BF	160	2TX
5.925-6.425GHz	802.11be EHT320	320	2TX
5.925-6.425GHz	802.11be EHT320-BF	320	2TX
6.525-6.875GHz	802.11ax HEW20	20	2TX
6.525-6.875GHz	802.11ax HEW20-BF	20	2TX



6.525-6.875GHz	802.11be EHT20	20	2TX
6.525-6.875GHz	802.11be EHT20-BF	20	2TX
6.525-6.875GHz	802.11ax HEW40	40	2TX
6.525-6.875GHz	802.11ax HEW40-BF	40	2TX
6.525-6.875GHz	802.11be EHT40	40	2TX
6.525-6.875GHz	802.11be EHT40-BF	40	2TX
6.525-6.875GHz	802.11ax HEW80	80	2TX
6.525-6.875GHz	802.11ax HEW80-BF	80	2TX
6.525-6.875GHz	802.11be EHT80	80	2TX
6.525-6.875GHz	802.11be EHT80-BF	80	2TX
6.525-6.875GHz	802.11ax HEW160	160	2TX
6.525-6.875GHz	802.11ax HEW160-BF	160	2TX
6.525-6.875GHz	802.11be EHT160	160	2TX
6.525-6.875GHz	802.11be EHT160-BF	160	2TX

Note:

- ♦ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80 and EHT160, EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

**1.1.2 Antenna Information**

Ant.	Port		Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	2.4GHz /5GHz	6GHz					
1	-	-	TP-Link	EAP772	PIFA Antenna	N/A	Note1
2	-	-	TP-Link	EAP772	PIFA Antenna	N/A	
3	-	2	TP-Link	EAP772	PIFA Antenna	N/A	
4	-	1	TP-Link	EAP772	PIFA Antenna	N/A	

Note1:

Ant.	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz UNII 5	WLAN 6GHz UNII 6	WLAN 6GHz UNII 7	WLAN 6GHz UNII 8
1	3.0	3.0	2.9	2.8	2.8	-	-	-	-
2	3.0	2.8	3.0	2.6	2.4	-	-	-	-
3	-	-	-	-	-	3.0	2.9	2.9	2.7
4	-	-	-	-	-	3.0	2.9	2.9	2.7

Note2: The above information was declared by manufacturer.

Note3: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{ANT}} \mathcal{E}_{j,k} \right]^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{ANT}} \mathcal{E}_{j,k} \right]^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{ANT}} \mathcal{E}_{j,k} \right]^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{ANT}} \mathcal{E}_{j,k} \right]^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,3) = 10^{G3/20} ; NSS1(g1,4) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

6G UNII-5 G1 = 3 dBi; G2 = 3 dBi;

6G UNII-7 G1 = 2.9 dBi; G2 = 2.9 dBi;

6G UNII-5 DG = 6.01 dBi

6G UNII-7 DG = 5.91 dBi

For 2.4GHz:

For IEEE 802.11b/g/n/ax/be mode (2TX/2RX):

Port 1~2 can be used as transmitting/receiving antenna.

Port 1~2 could transmit/receive simultaneously.

For 5GHz:

For IEEE 802.11a/n/ac/ax/be mode (2TX/2RX):

Port 1~2 can be used as transmitting/receiving antenna.

Port 1~2 could transmit/receive simultaneously.

For 6GHz:

For IEEE 802.11ax/be mode (2TX/2RX):

Port 1~2 can be used as transmitting/receiving antenna.

Port 1~2 could transmit/receive simultaneously.

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20	0.981	0.08	5.453m	10Hz (DC>=0.98)
802.11be EHT20-BF	0.981	0.08	5.453m	10Hz (DC>=0.98)
802.11be EHT40	0.987	0.06	5.453m	10Hz (DC>=0.98)
802.11be EHT40-BF	0.987	0.06	5.453m	10Hz (DC>=0.98)
802.11be EHT80	0.981	0.08	5.453m	10Hz (DC>=0.98)
802.11be EHT80-BF	0.981	0.08	5.453m	10Hz (DC>=0.98)
802.11be EHT160	0.997	0.01	5.453m	10Hz (DC>=0.98)
802.11be EHT160-BF	0.997	0.01	5.453m	10Hz (DC>=0.98)
802.11be EHT320	0.981	0.08	5.457m	10Hz (DC>=0.98)
802.11be EHT320-BF	0.981	0.08	5.457m	10Hz (DC>=0.98)

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From Power Adapter or PoE	
Beamforming Function	☒ With beamforming	☐ Without beamforming
	The product has beamforming function for ax/be in 6GHz.	
Device Type	☐ Indoor Access Point	☐ Subordinate
	☐ Indoor Client	☒ Standard Power Access Point
	☐ Dual Client	☐ Standard Client
	☐ Fixed Client	☐ Very Low Power
Condition of EUT	☒ Indoor	☐ Outdoor
Channel Puncturing Function	☐ Supported Static Puncturing	
	☐ Supported Dynamic Puncturing	
	☒ Unsupported	
Support RU	☒ Full RU	☐ Partial RU
Test Software Version	QSPR 5.0-00202	

Note: The above information was declared by manufacturer.

1.1.5 Table for EUT Support Function

Function
AP Router
Mesh

Note 1: For above table list, only AP Router mode was tested and recorded in this test.

Note 2: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 987594 D02 v03
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted (For other tests)	TH01-CB	Ken Yeh	21.5~22.3 / 58~59	Dec. 11, 2024~ Feb. 19, 2025
Radiated (Below 1GHz)	03CH05-CB	Edmund Tsai	21.9~22.4 / 60~62	Feb. 25, 2025
Radiated (Above 1GHz)	03CH03-CB	Edmund Tsai	22.2~22.6 / 59~61	Nov. 09, 2024~ Nov. 12, 2024
AC Conduction	CO01-CB	Allen Chung	22~23 / 62~63	Feb. 26, 2025



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.0 dB	Confidence levels of 95%
Conducted Emission	3.1 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.1 dB	Confidence levels of 95%
Bandwidth Measurement	2.1 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11be EHT20_Nss1,(MCS0)_2TX
6115MHz
6195MHz
6415MHz
6535MHz
6695MHz
6855MHz
802.11be EHT40_Nss1,(MCS0)_2TX
6125MHz
6205MHz
6405MHz
6565MHz
6685MHz
6845MHz
802.11be EHT80_Nss1,(MCS0)_2TX
6145MHz
6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11be EHT160_Nss1,(MCS0)_2TX
6185MHz
6345MHz
6665MHz
802.11be EHT320_Nss1,(MCS0)_2TX
6265MHz Straddle 5.925-6.425GHz
802.11be EHT20-BF_Nss1,(MCS0)_2TX
6115MHz
6195MHz
6415MHz
6535MHz
6695MHz
6855MHz
802.11be EHT40-BF_Nss1,(MCS0)_2TX
6125MHz
6205MHz
6405MHz
6565MHz
6685MHz
6845MHz
802.11be EHT80-BF_Nss1,(MCS0)_2TX



6145MHz
6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11be EHT160-BF_Nss1,(MCS0)_2TX
6185MHz
6345MHz
6665MHz
802.11be EHT320-BF_Nss1,(MCS0)_2TX
6265MHz Straddle 5.925-6.425GHz

Note:

- ♦ Evaluated EHT20/EHT40/EHT80/EHT160 mode only due to the similar modulation. The power setting of HEW20/HEW40/HEW80/HEW160 mode are the same or lower than EHT20/EHT40/EHT80/EHT160.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	EUT + PoE
2	EUT + Adapter
For operating mode 2 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Equivalent Isotopically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.)
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
After evaluating, the worst case was found at X axis from Unwanted Emissions above 1GHz, thus the measurement will follow this same test configuration.	
1	EUT in X axis + PoE
2	EUT in X axis + Adapter
For operating mode 2 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
After evaluating, the worst case was found at Z axis for bandedge, X axis for harmonic, so it was selected to perform test and its test result was written in the report.	
1	EUT in Z axis for bandedge / in X axis for harmonic

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission MASK
Test Condition	Conducted measurement at transmit chains



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz
Refer to Sporton Test Report No.: FA482803 for Co-location RF Exposure Evaluation.	

Note: The adapter is for measurement only, would not be marketed.

The information of adapter as below:

Power	Brand Name	Model Name
Adapter	tp-link	T120200-2B4

2.3 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

2.4 Accessories

N/A

2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E6230	N/A
B	Adapter	tp-link	T120200-2B4	N/A

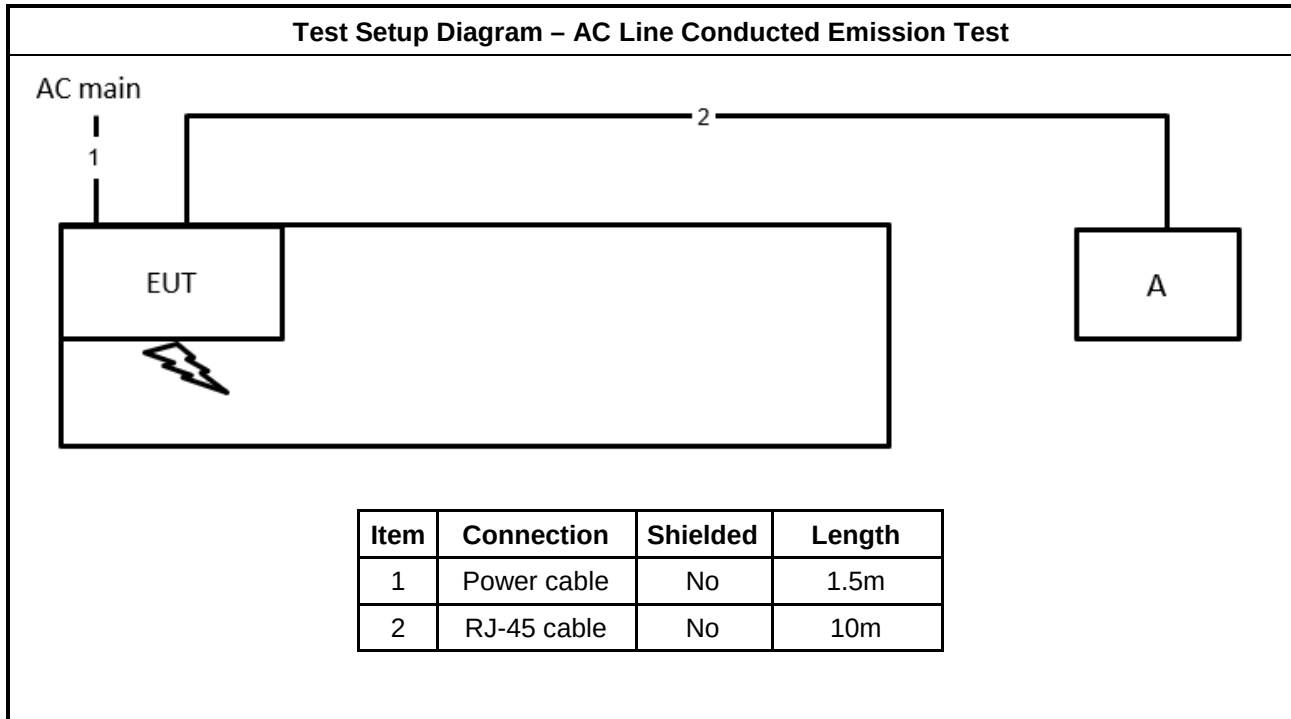
For Radiated (below 1GHz):

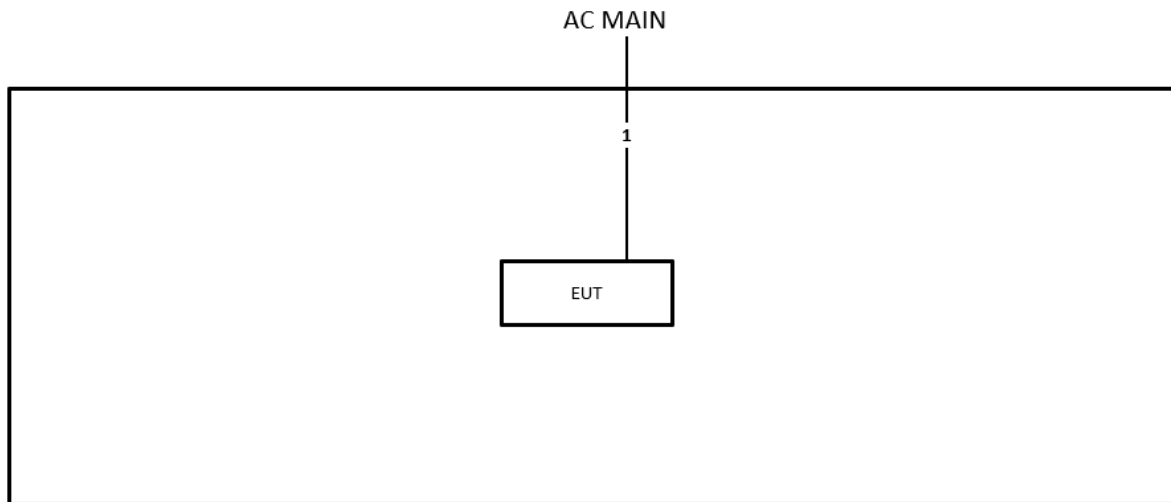
Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Adapter	tp-link	T120200-2B4	N/A

For Radiated (above 1GHz) and RF Conducted (Other tests):

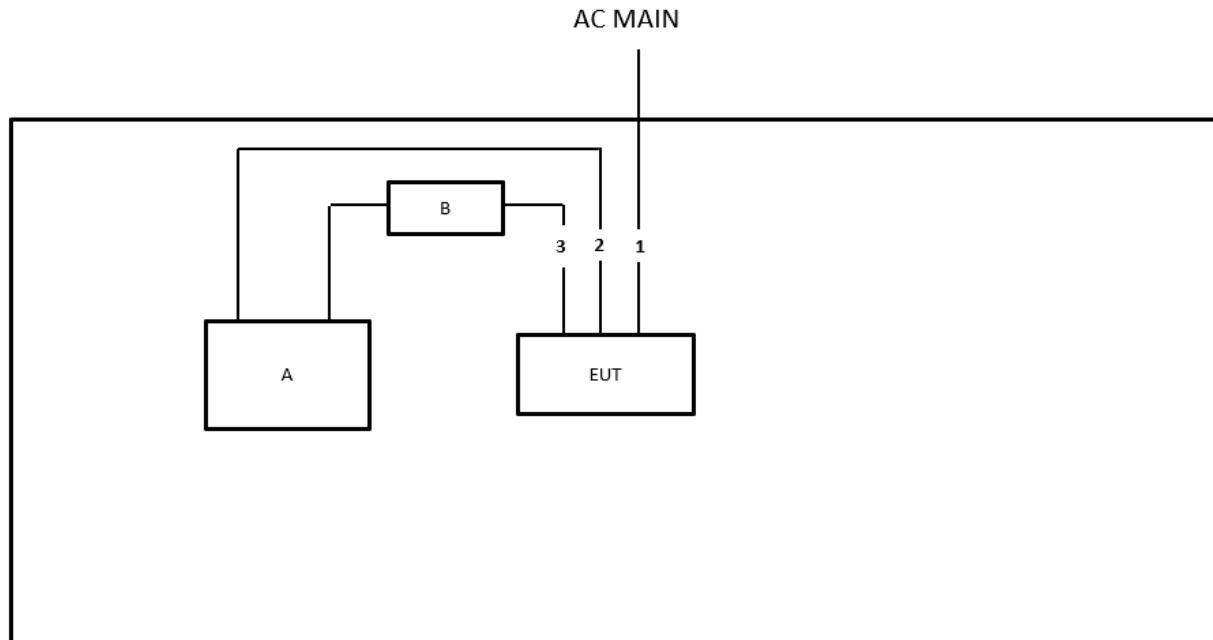
Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Fixture	KINWONG	H140A	N/A
C	Adapter	tp-link	T120200-2B4	N/A

2.6 Test Setup Diagram



Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	Power cable	No	1.5m

Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ45 cable	No	1m
3	Console cable (RS232 to RJ45)	No	1m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

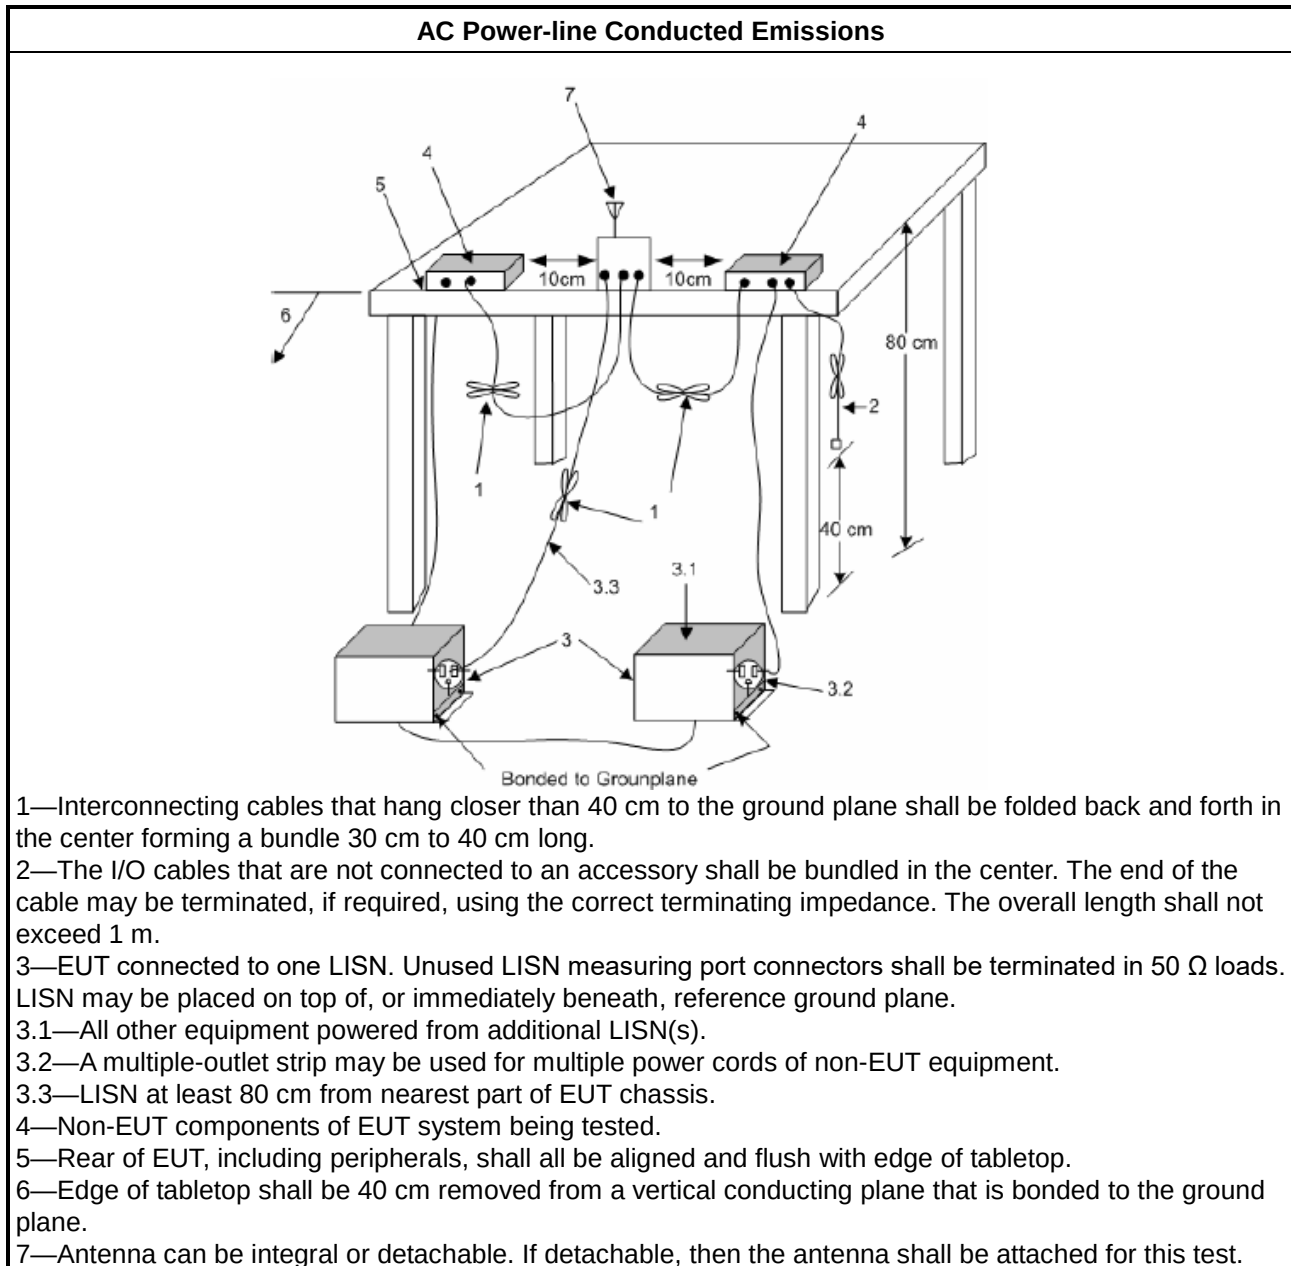
3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup



3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level
- Margin = - Limit + (Read Level + LISN Factor + Cable Loss)

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5925-6425 GHz band, N/A
☐	For the 6425-6525 GHz band, N/A
☒	For the 6525-6875 GHz band, N/A
☐	For the 6875-7125 GHz band, N/A
RLAN Devices	
☐	For the 5925-6425 GHz band, N/A
☐	For the 6425-6525 GHz band, N/A
☐	For the 6525-6875 GHz band, N/A
☐	For the 6875-7125 GHz band, N/A

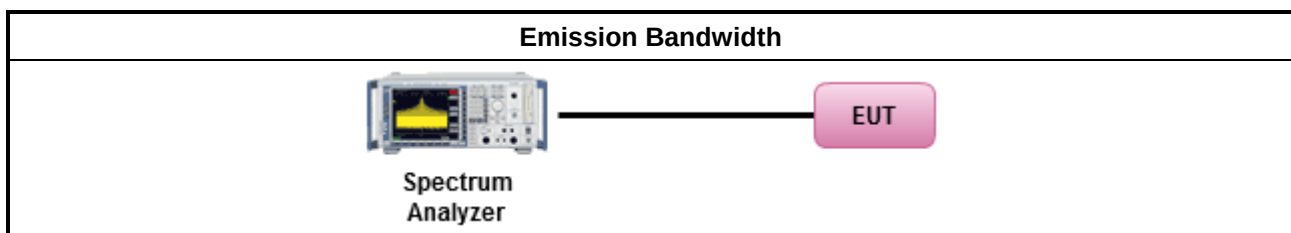
3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪ For the emission bandwidth shall be measured using one of the options below:	
☒	According to FCC KDB 987594 D02 clause II.C, measurement procedure shall refer to FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup



3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.3.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☐ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☐ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 30 dBm .
	■ For low-power client devices < 24 dBm.
	■ For very low-power devices < 14 dBm.
☐ For the 5.925 ~ 6.875 GHz band:	
	■ For standard-power access points & fixed client devices < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For standard client devices < 30 dBm.

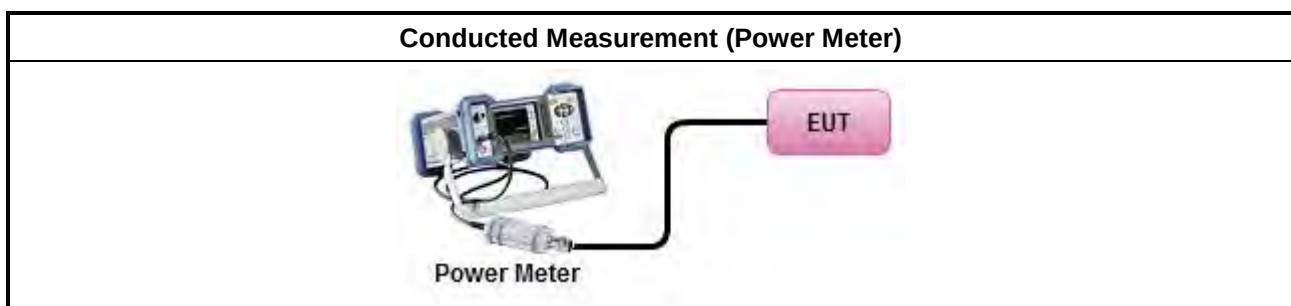
3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 clause II.E, the test measurement procedure shall refer to KDB 789033.	
Average over on/off periods with duty factor	
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging). Spectrum analyzer setting: RBW/VBW : 1/3MHz ; Detector : RMS ; Trace mode : Average ; Sweep Count 100.
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
☒ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	
☐ For radiated measurement.	
Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"	
Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.	
Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.	

3.3.4 Test Setup



3.3.5 Test Result of Maximum Equivalent Isotopically Radiated Power (E.I.R.P)

Refer as Appendix C



3.4 Peak Power Spectral Density (E.I.R.P.)

3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☐ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☐ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 5 dBm / MHz.
	■ For low-power client devices < -1 dBm / MHz.
	■ For very low-power devices < -5 dBm / MHz.
☐ For the 5.925 ~ 6.875 GHz band:	
	■ For standard-power access points & fixed client devices < 23 dBm / MHz.
	■ For standard client devices < 17 dBm / MHz.

3.4.2 Measuring Instruments

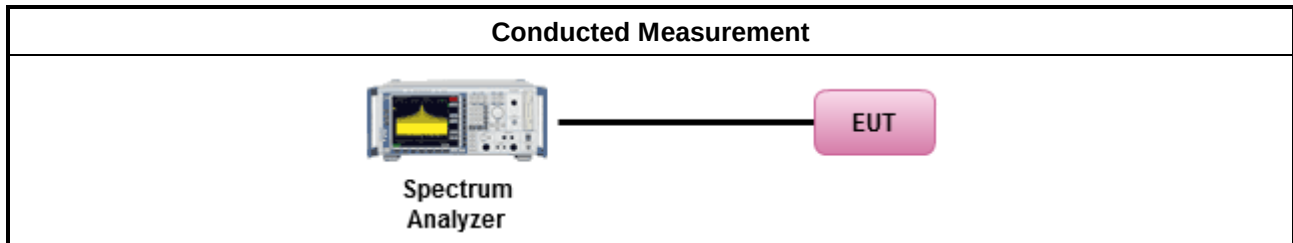
Refer a test equipment and calibration data table in this test report.

**3.4.3 Test Procedures**

Test Method	
According to FCC KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒	For conducted measurement.
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	
☐	For radiated measurement.
- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.	

Test Method	
	Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.4.4 Test Setup



3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit

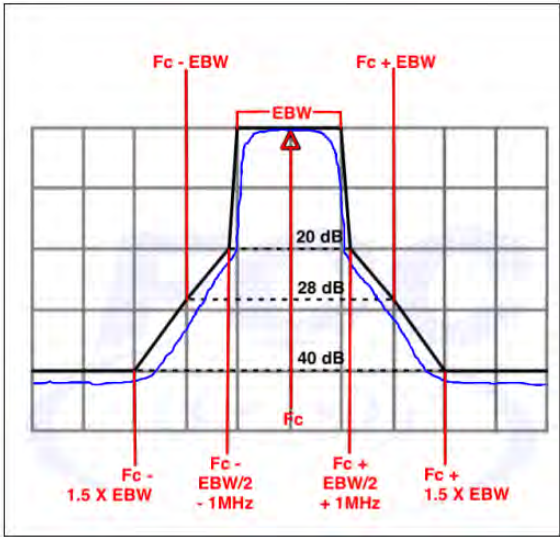
Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = $54\text{dBuV/m at 3m} + 9.54\text{dB} = 63.54\text{dBuV/m at 1m}$.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.945 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = $68.2\text{dBuV/m at 3m} + 9.54\text{dB} = 77.74\text{dBuV/m at 1m}$. Note 2:-27 dBm EIRP OOBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

Frequency	Emission MASK Limit
5.945 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. 



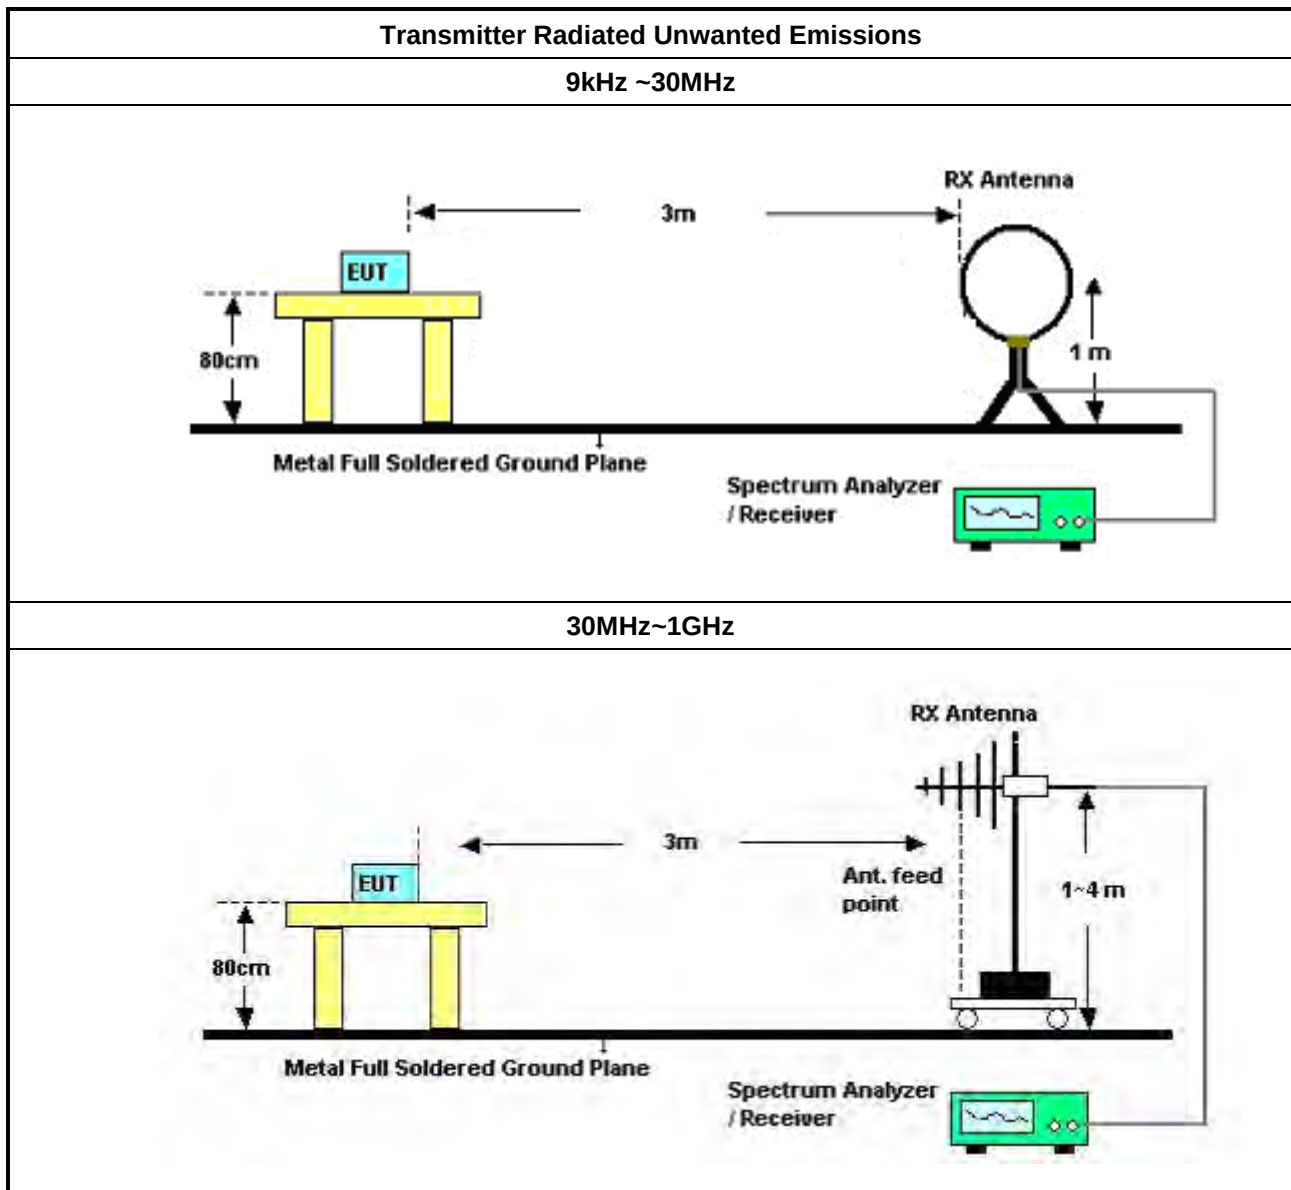
3.5.2 Measuring Instruments

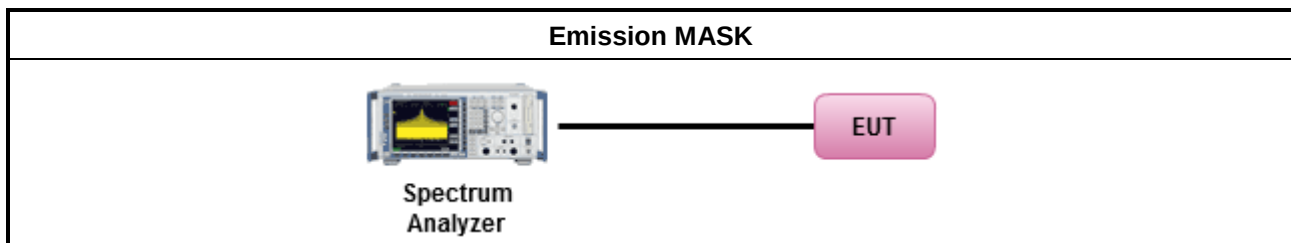
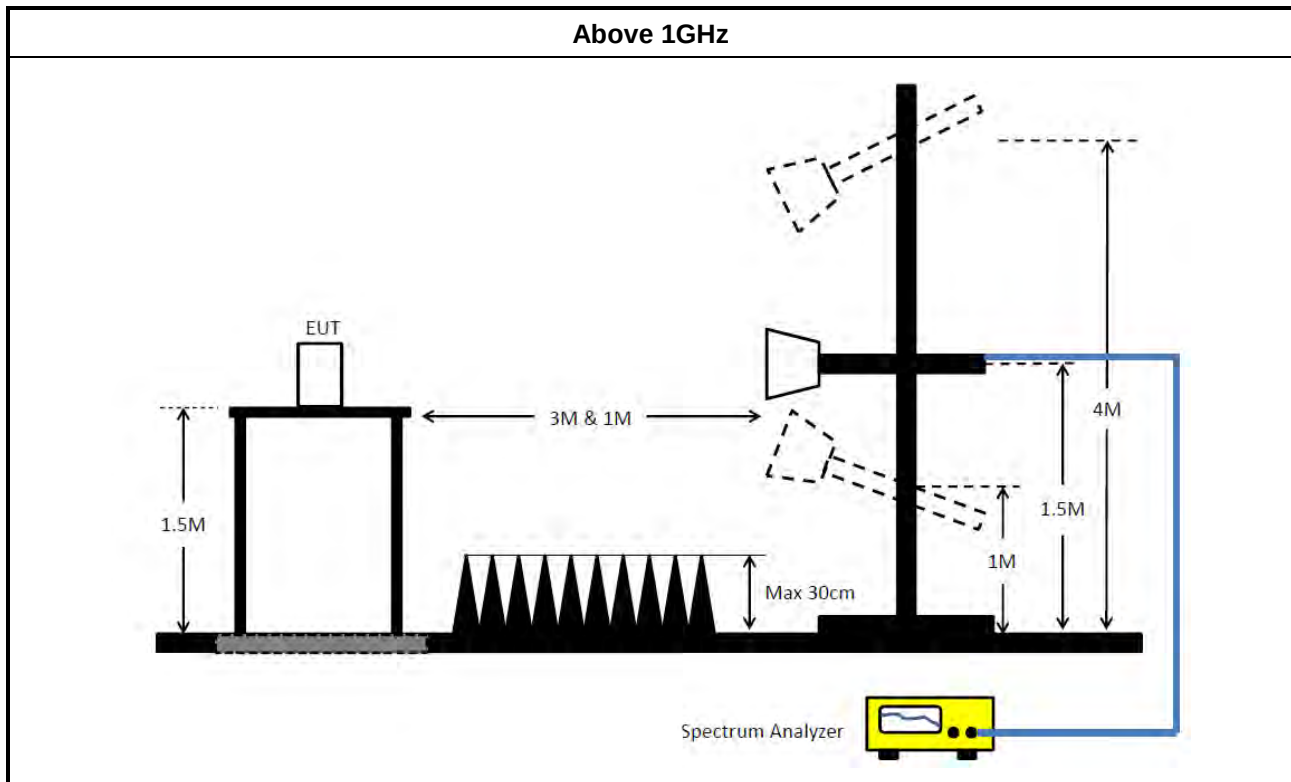
Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK). Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
Refer as FCC KDB 789033 D02, clause G)3)d)ii) for Band edge Integration measurements.	
For emission MASK shall be measured using following options below:	
	☒ Refer as FCC KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.5.4 Test Setup





3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable)
= Level

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 01, 2024	Feb. 28, 2025	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 18, 2025	Feb. 17, 2026	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Apr. 24, 2024	Apr. 23, 2025	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 16, 2024	Oct. 15, 2025	Radiation (03CH05-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH05-CB	30 MHz ~ 1 GHz	Aug. 01, 2024	Jul. 31, 2025	Radiation (03CH05-CB)
Bilog Antenna with 6dB Attenuator	TESEQ & EMCI	CBL 6112D & N-6-06	35236 & AT-N0610	30MHz ~ 2GHz	Mar. 23, 2024	Mar. 22, 2025	Radiation (03CH05-CB)
Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	May 02, 2024	May 01, 2025	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Apr. 17, 2024	Apr. 16, 2025	Radiation (03CH05-CB)
EMI Test Receiver	R&S	ESR7	102172	9kHz ~ 7GHz	Oct. 21, 2024	Oct. 20, 2025	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	Low Cable-04+23	30MHz~1GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.8	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 03, 2024	May 02, 2025	Radiation (03CH03-CB)
Horn Antenna	ETS-Lindgren	3115	6821	750MHz~18GHz	Jan. 24, 2024	Jan. 23, 2025	Radiation (03CH03-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA917025 2	15GHz ~ 40GHz	Sep. 23, 2024	Sep. 22, 2025	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jun. 29, 2024	Jun. 28, 2025	Radiation (03CH03-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 24, 2023	Nov. 23, 2024	Radiation (03CH03-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jun. 11, 2024	Jun. 10, 2025	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-20+29	1GHz ~ 18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-29	1GHz ~ 18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH03-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE-1540 7_NII	V5.11. 23	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH03-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 27, 2024	May 26, 2025	Conducted (TH01-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1 ~ 18GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH01-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1~ 18GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH01-CB)
Switch	SPTCB	SP-SWI	SWI-01	1~18 GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
Cable 9k-18G	Woken	RG402	Cable-95	9 kHz –18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Mar. 01, 2024	Feb. 28, 2025	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	MY45100745	50MHz~18GHz	Jul. 12, 2024	Jul. 11, 2025	Conducted (TH01-CB)
Test Software	SPORTON	SENSE-1540 7_NII	V5.11. 23	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.



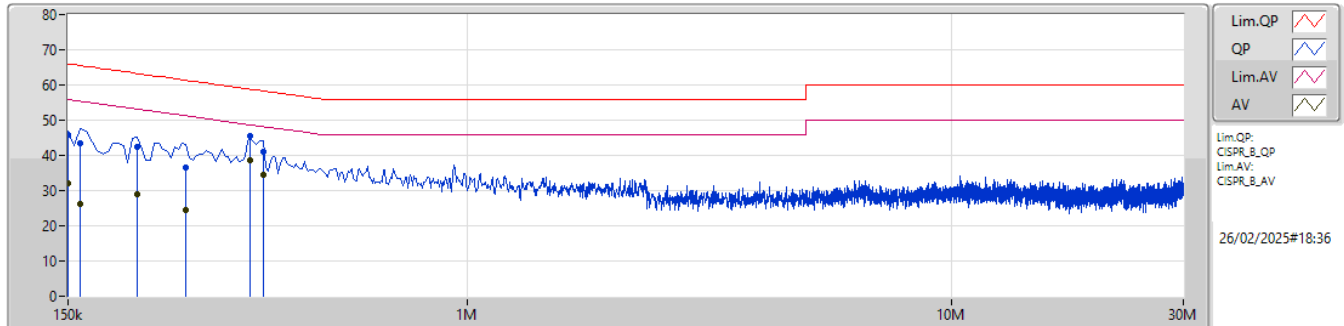
Conducted Emissions at Powerline

Appendix A

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 2	Pass	AV	357k	38.58	48.79	-10.21	Line

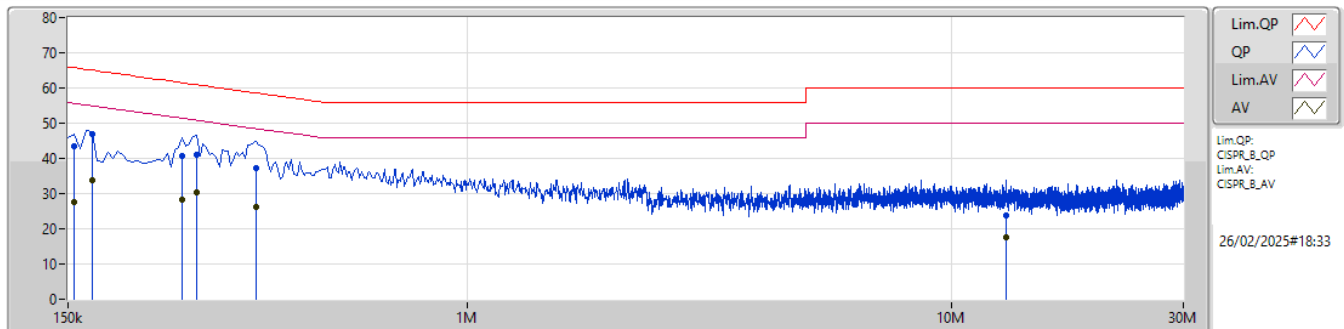
Mode 2



NO : A
FIIT : Omada FAP772 (6G 2T2R)

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	150k	45.97	66.00	-20.03	10.03	Line	-	35.94	0.04	0.08	9.91						
AV	150k	32.06	56.00	-23.94	10.03	Line	-	22.03	0.04	0.08	9.91						
QP	159k	43.39	65.52	-22.13	10.04	Line	-	33.35	0.04	0.08	9.92						
AV	159k	26.32	55.52	-29.20	10.04	Line	-	16.28	0.04	0.08	9.92						
QP	208.5k	42.41	63.27	-20.86	10.07	Line	-	32.34	0.04	0.07	9.96						
AV	208.5k	29.02	53.27	-24.25	10.07	Line	-	18.95	0.04	0.07	9.96						
QP	262.5k	36.51	61.35	-24.84	10.11	Line	-	26.40	0.04	0.08	9.99						
AV	262.5k	24.55	51.35	-26.80	10.11	Line	-	14.44	0.04	0.08	9.99						
QP	357k	45.36	58.79	-13.43	10.19	Line	-	35.17	0.05	0.10	10.04						
AV	357k	38.58	48.79	-10.21	10.19	Line	"Worst"	28.39	0.05	0.10	10.04						
QP	379.5k	40.97	58.29	-17.32	10.20	Line	-	30.77	0.05	0.10	10.05						
AV	379.5k	34.37	48.29	-13.92	10.20	Line	-	24.17	0.05	0.10	10.05						

Mode 2



NO : A
EUT : Omada EAP772 (6G 2T2R)

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	154.5k	43.44	65.75	-22.31	10.06	Neutral	-	33.38	0.06	0.08	9.92						
AV	154.5k	27.70	55.75	-28.05	10.06	Neutral	-	17.64	0.06	0.08	9.92						
QP	168k	46.77	65.06	-18.29	10.07	Neutral	"Worst"	36.70	0.06	0.08	9.93						
AV	168k	33.88	55.06	-21.18	10.07	Neutral	-	23.81	0.06	0.08	9.93						
QP	258k	40.62	61.49	-20.87	10.13	Neutral	-	30.49	0.06	0.08	9.99						
AV	258k	28.13	51.49	-23.36	10.13	Neutral	-	18.00	0.06	0.08	9.99						
QP	276k	40.93	60.93	-20.00	10.14	Neutral	-	30.79	0.06	0.08	10.00						
AV	276k	30.51	50.93	-20.42	10.14	Neutral	-	20.37	0.06	0.08	10.00						
QP	366k	37.39	58.60	-21.21	10.21	Neutral	-	27.18	0.06	0.10	10.05						
AV	366k	26.16	48.60	-22.44	10.21	Neutral	-	15.95	0.06	0.10	10.05						
QP	12.957M	23.69	60.00	-36.31	10.33	Neutral	-	13.36	0.26	0.19	9.88						
AV	12.957M	17.51	50.00	-32.49	10.33	Neutral	-	7.18	0.26	0.19	9.88						

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	45.54M	24.063M	24M1D1D	29.81M	19.165M
802.11be EHT40_Nss1,(MCS0)_2TX	100.1M	53.073M	53M1D1D	53.35M	38.281M
802.11be EHT80_Nss1,(MCS0)_2TX	174.9M	79.06M	79M1D1D	87.56M	77.661M
802.11be EHT160_Nss1,(MCS0)_2TX	312.4M	158.121M	158MD1D	170.28M	156.922M
802.11be EHT320_Nss1,(MCS0)_2TX	576.4M	318.401M	318MD1D	533.28M	317.521M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	44.33M	21.364M	21M4D1D	23.485M	19.09M
802.11be EHT40_Nss1,(MCS0)_2TX	96.25M	42.479M	42M5D1D	75.02M	38.831M
802.11be EHT80_Nss1,(MCS0)_2TX	177.98M	79.66M	79M7D1D	84.7M	77.661M
802.11be EHT160_Nss1,(MCS0)_2TX	308.88M	158.521M	159MD1D	305.8M	158.121M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

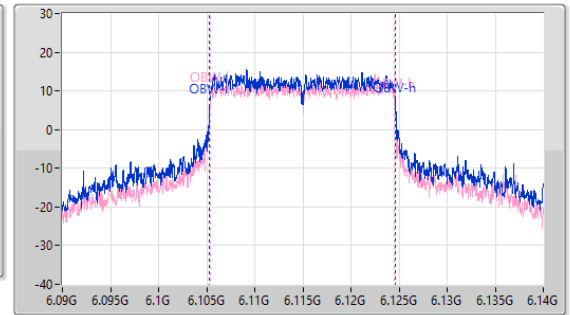
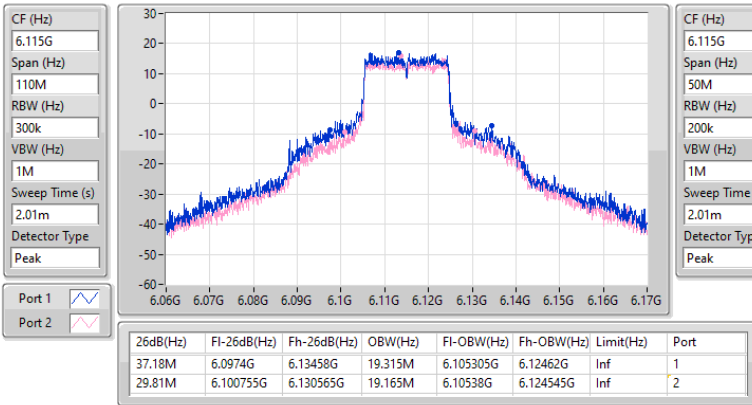
Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6115MHz	Pass	Inf	37.18M	19.315M	29.81M	19.165M
6195MHz	Pass	Inf	45.54M	24.063M	41.14M	19.415M
6415MHz	Pass	Inf	35.255M	19.315M	44.935M	19.965M
6535MHz	Pass	Inf	43.175M	19.29M	23.485M	19.09M
6695MHz	Pass	Inf	42.405M	19.365M	43.285M	21.364M
6855MHz	Pass	Inf	44.11M	19.69M	44.33M	19.715M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6125MHz	Pass	Inf	70.4M	38.481M	64.24M	38.281M
6205MHz	Pass	Inf	100.1M	53.073M	96.8M	39.88M
6405MHz	Pass	Inf	53.35M	38.281M	68.64M	38.531M
6565MHz	Pass	Inf	96.25M	42.479M	95.7M	40.48M
6685MHz	Pass	Inf	81.18M	38.981M	81.51M	40.58M
6845MHz	Pass	Inf	75.02M	38.831M	87.56M	40.78M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6145MHz	Pass	Inf	87.56M	77.761M	89.1M	77.761M
6225MHz	Pass	Inf	174.9M	78.861M	94.38M	77.661M
6385MHz	Pass	Inf	139.04M	78.161M	169.84M	79.06M
6625MHz	Pass	Inf	177.98M	79.66M	171.6M	78.861M
6705MHz	Pass	Inf	84.7M	77.761M	91.52M	77.761M
6785MHz	Pass	Inf	88.66M	77.661M	130.02M	78.361M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6185MHz	Pass	Inf	270.16M	158.121M	170.28M	156.922M
6345MHz	Pass	Inf	253.88M	157.521M	312.4M	157.521M
6665MHz	Pass	Inf	308.88M	158.121M	305.8M	158.521M
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6265MHz Straddle 5.925-6.425GHz	Pass	Inf	533.28M	318.401M	576.4M	317.521M

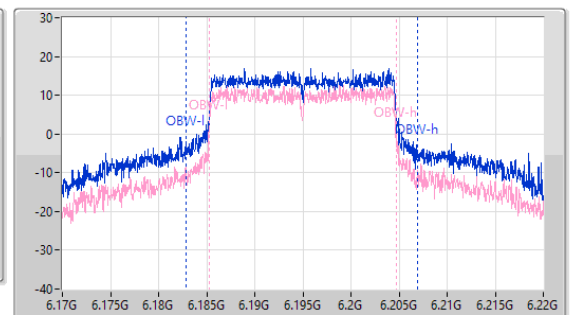
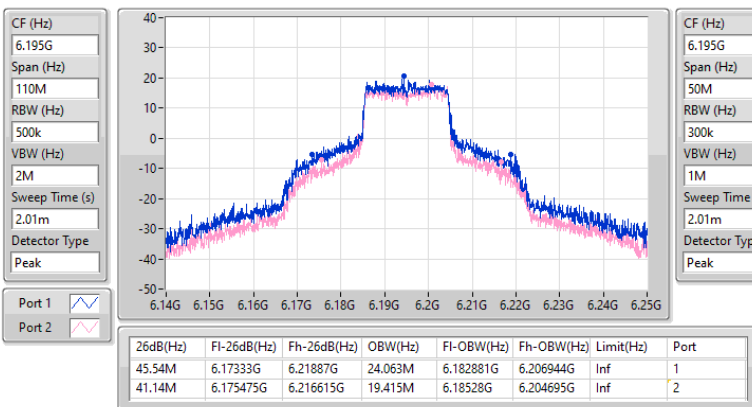
Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6115MHz

19/02/2025


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6195MHz

19/02/2025

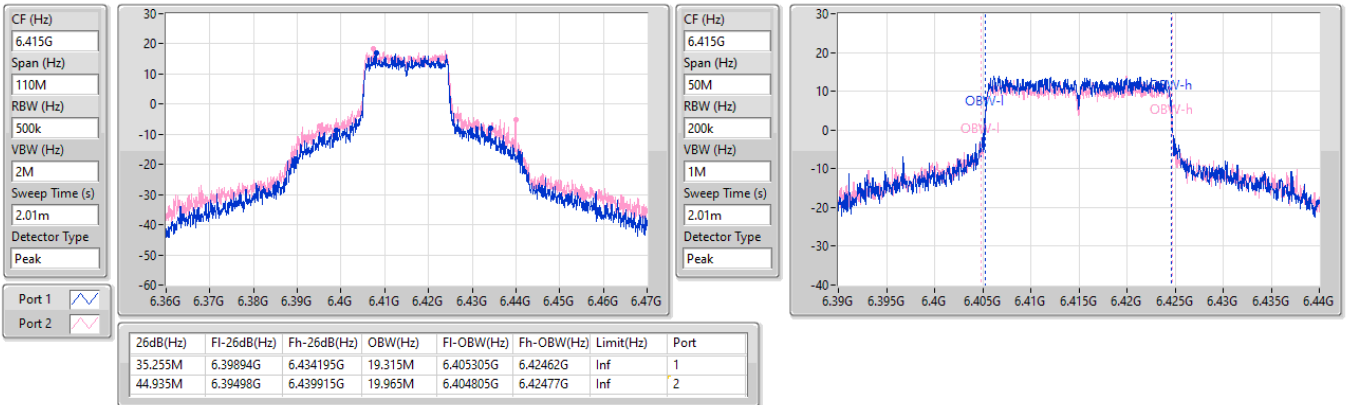


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

6415MHz

19/02/2025

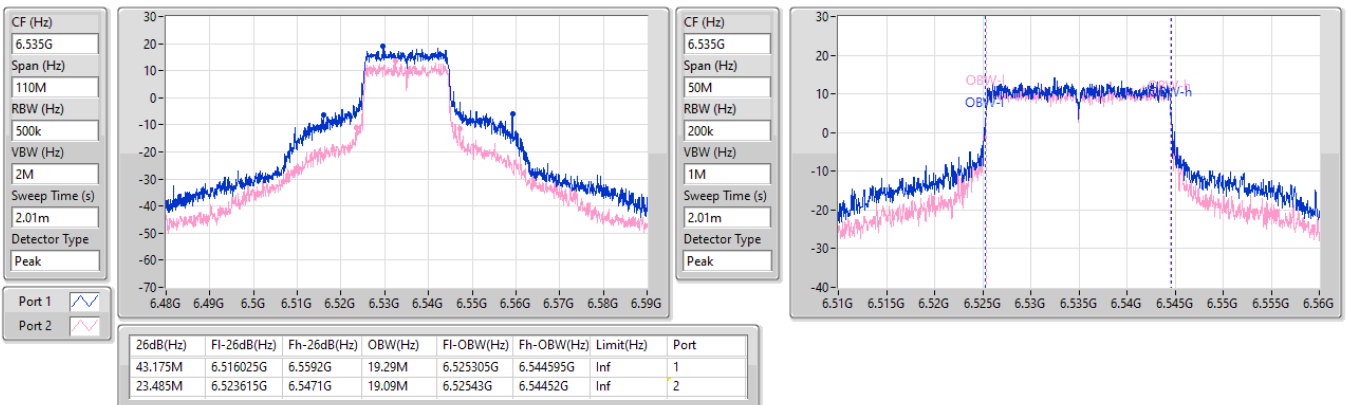


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

6535MHz

19/02/2025

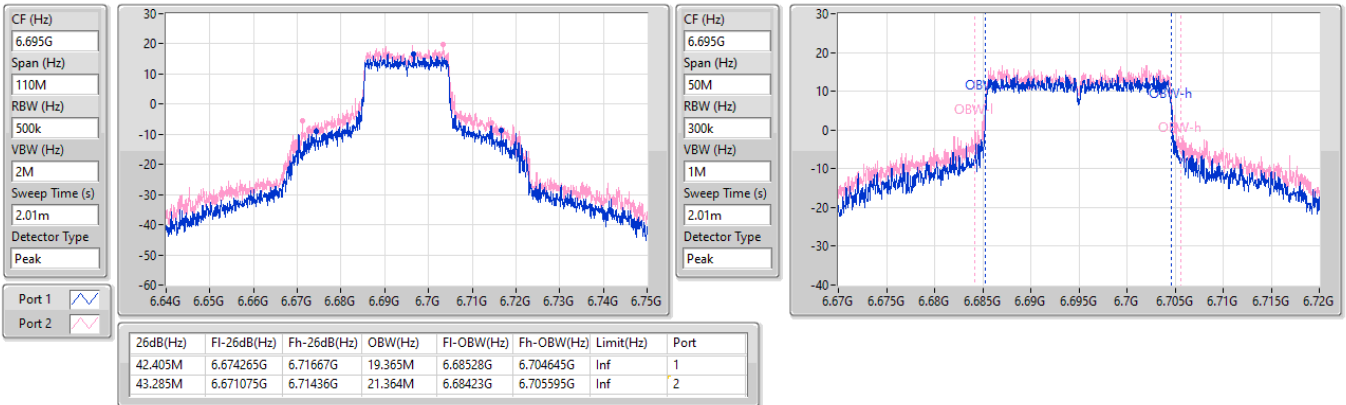


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

6695MHz

19/02/2025

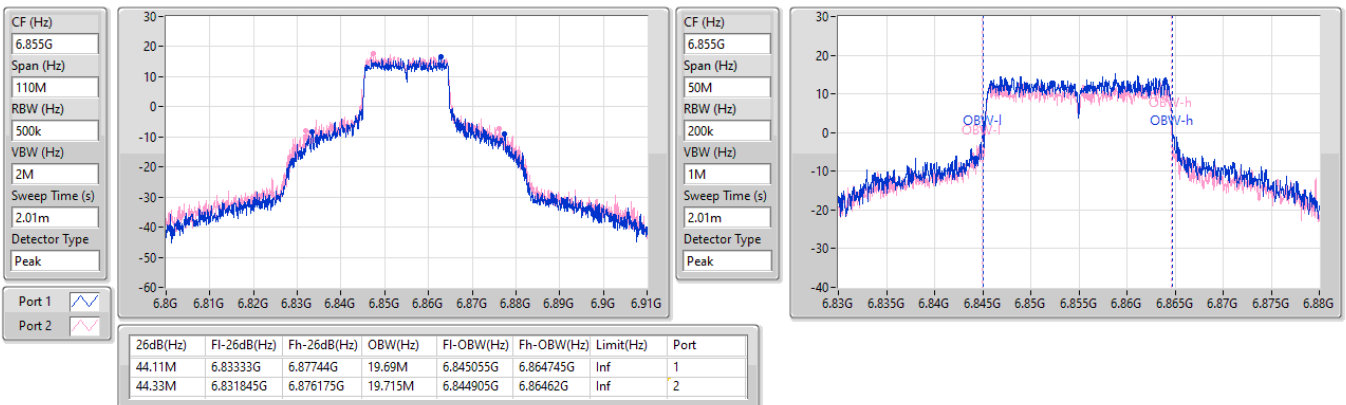


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

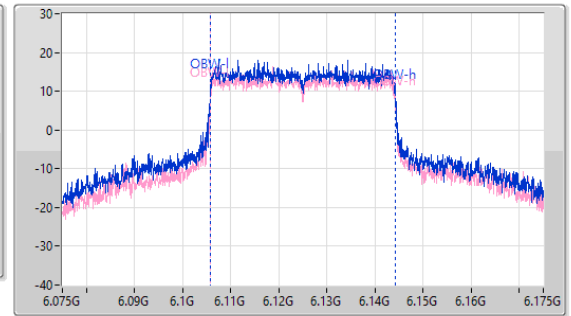
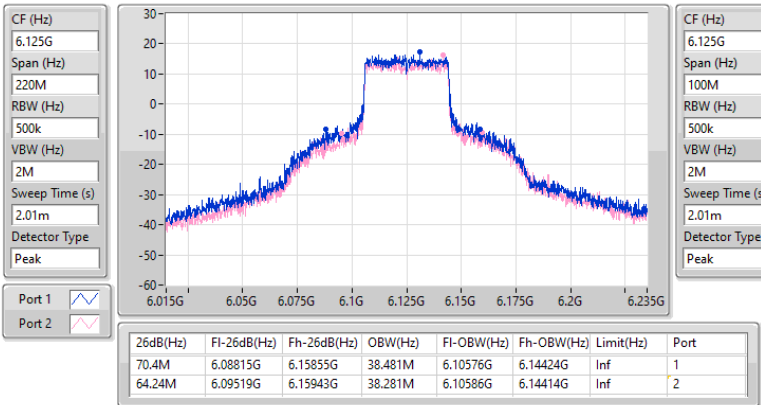
6855MHz

19/02/2025

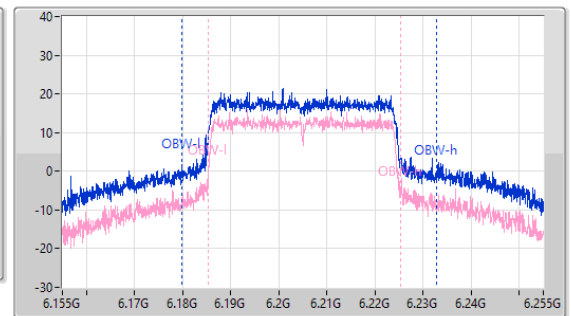
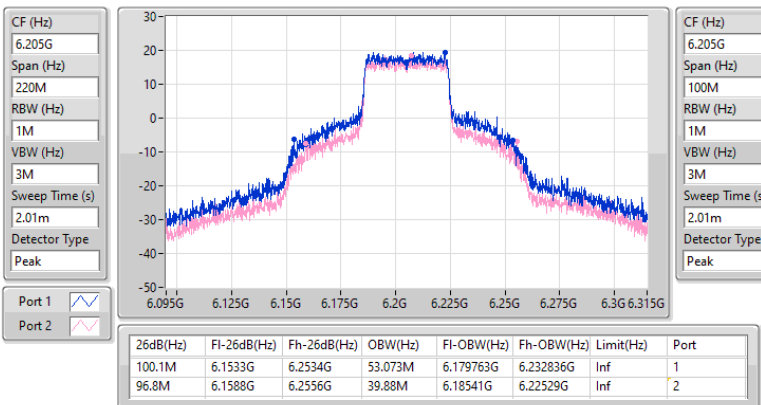


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6125MHz

19/02/2025

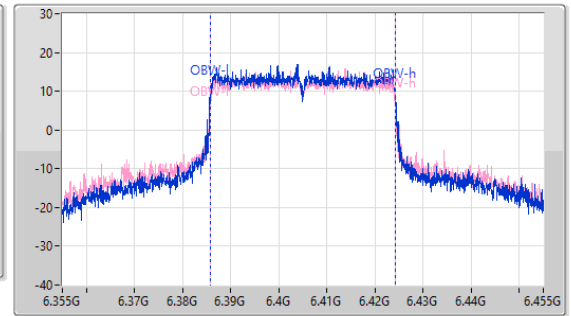
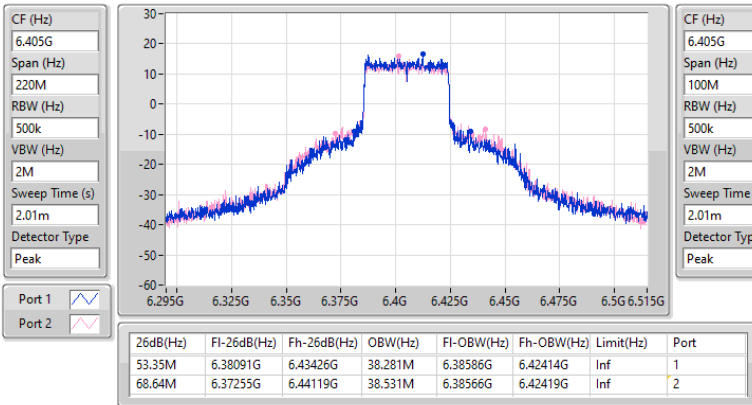

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6205MHz

19/02/2025

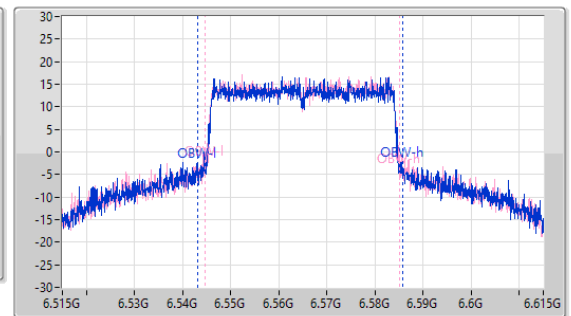
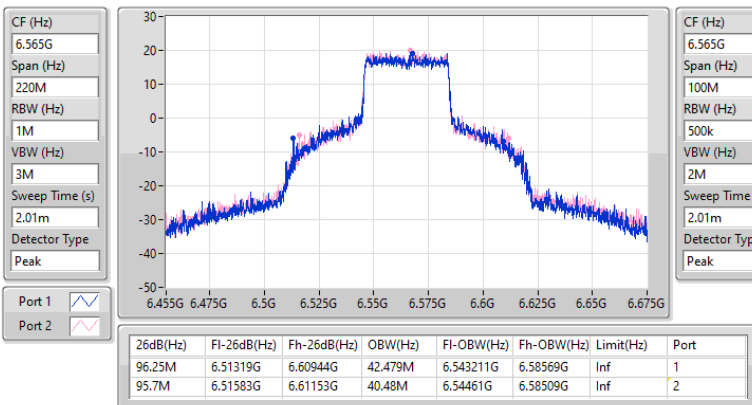


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6405MHz

19/02/2025


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6565MHz

19/02/2025

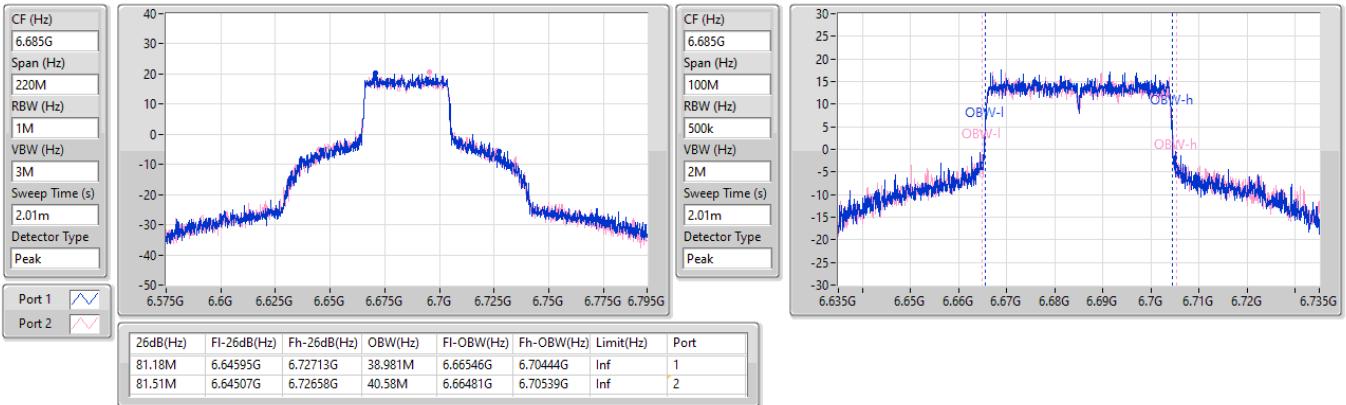


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6685MHz

19/02/2025

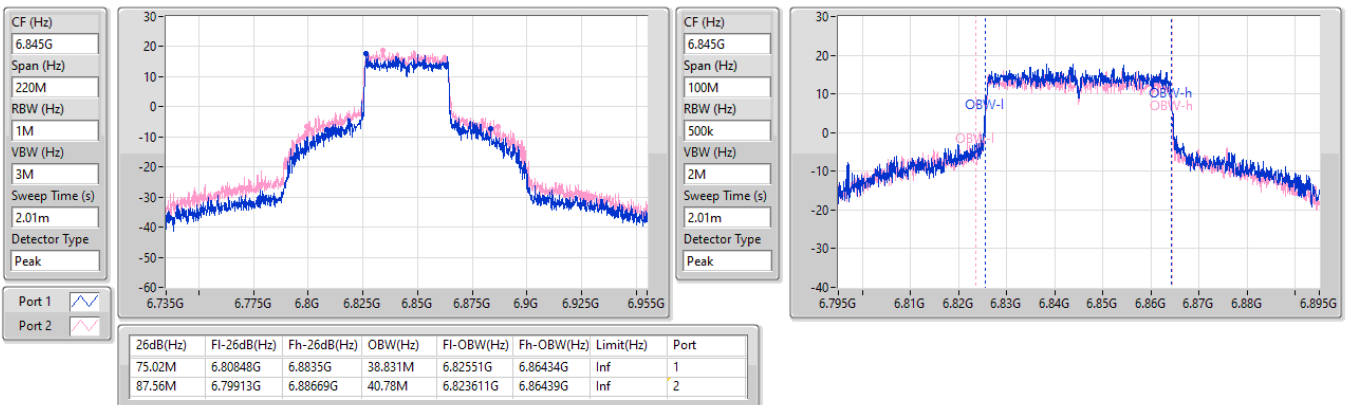


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6845MHz

19/02/2025

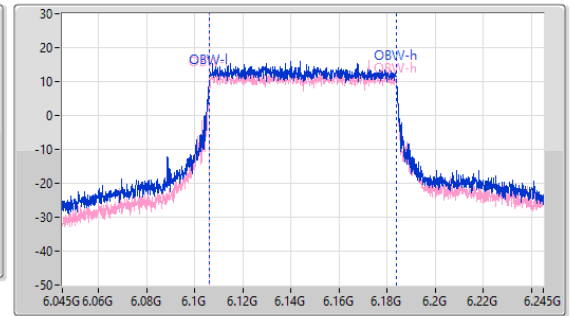
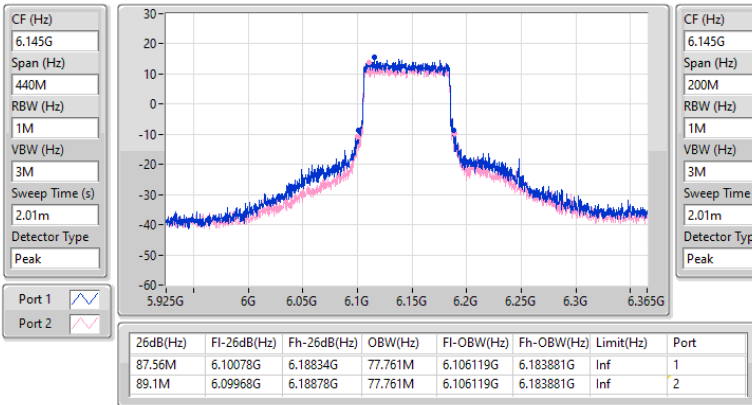


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

6145MHz

19/02/2025

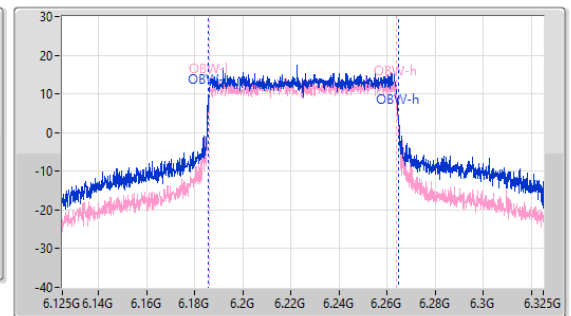
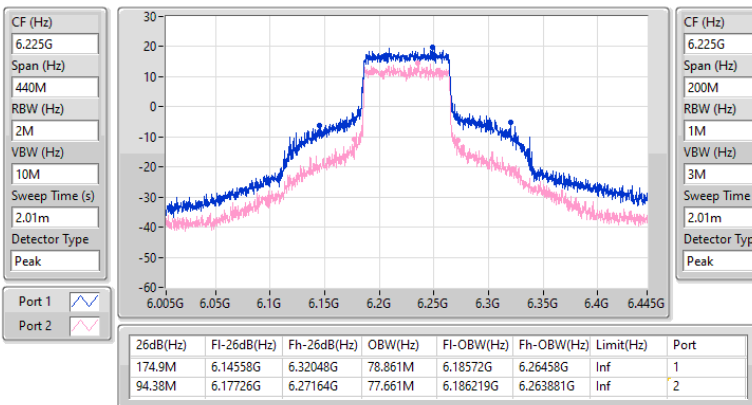


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

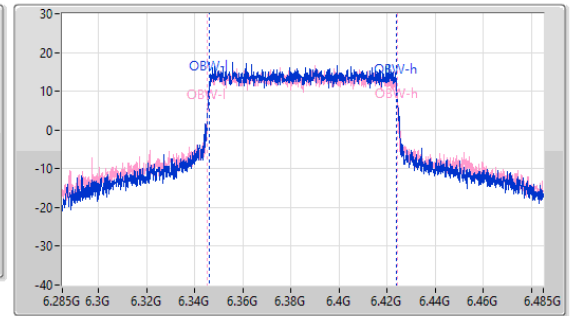
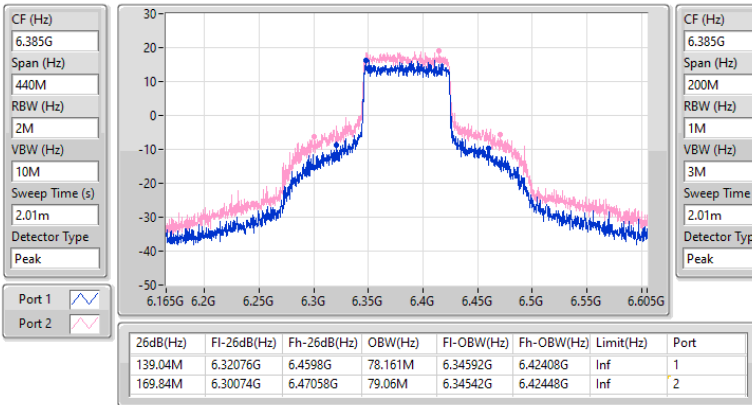
6225MHz

19/02/2025

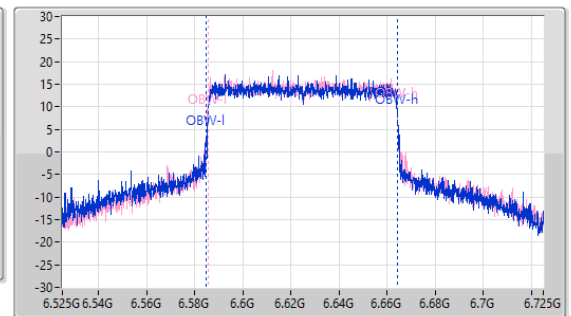
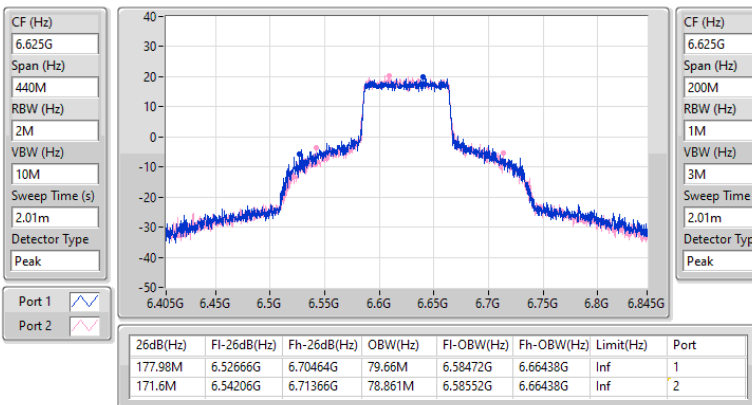


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6385MHz

19/02/2025

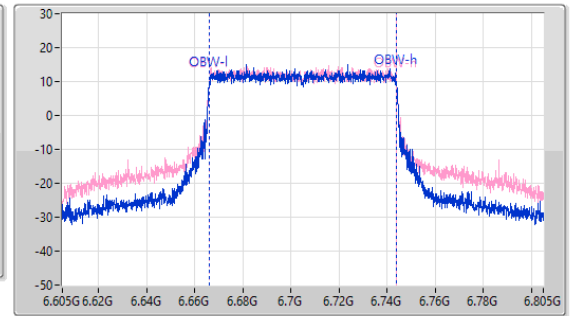
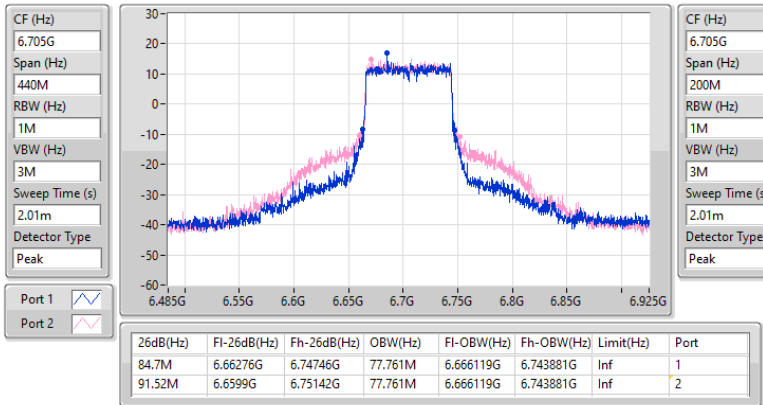

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6625MHz

19/02/2025

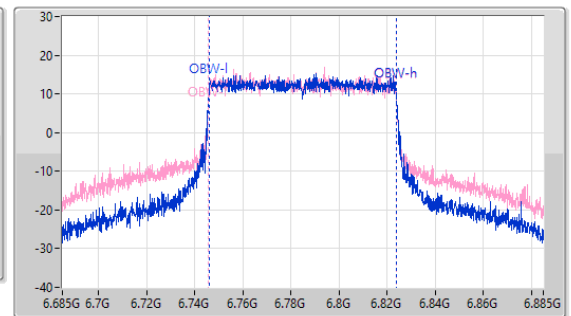
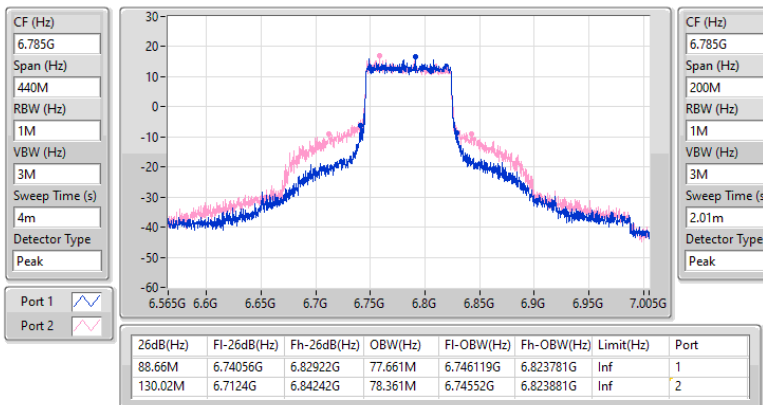


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6705MHz

19/02/2025


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6785MHz

19/02/2025

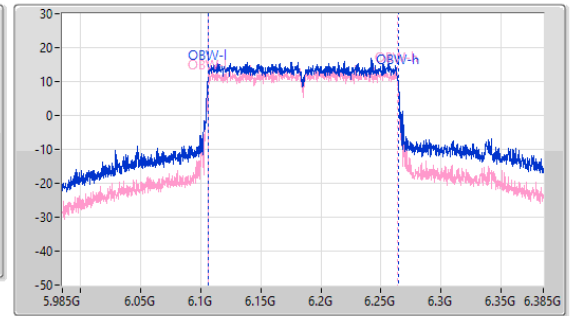
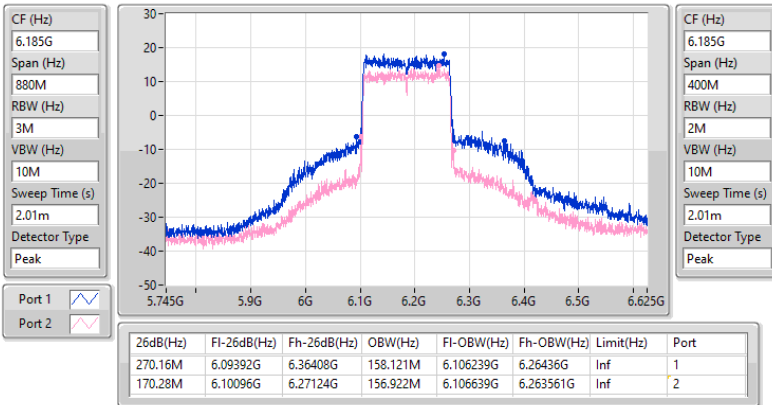


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6185MHz

19/02/2025

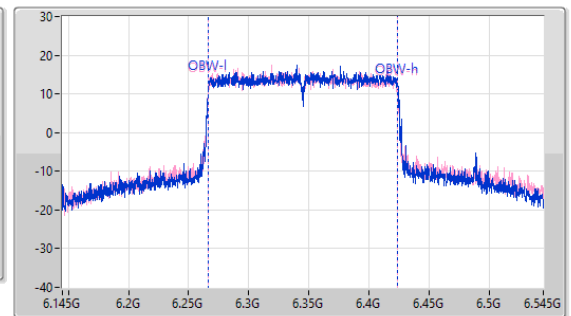
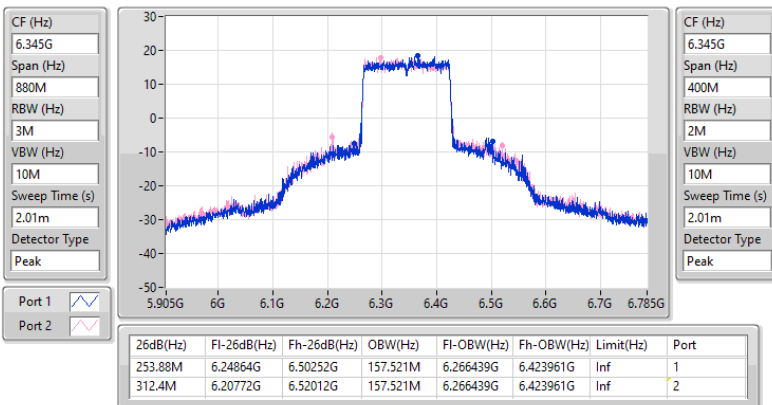


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

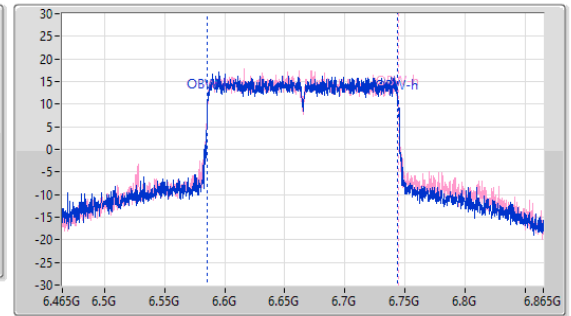
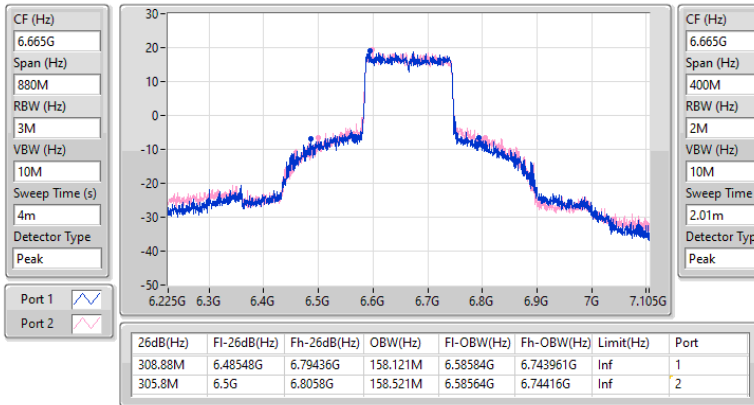
6345MHz

19/02/2025

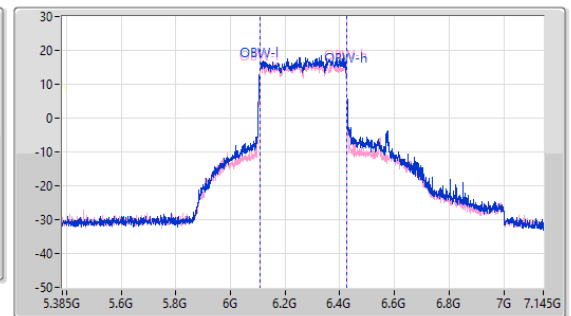
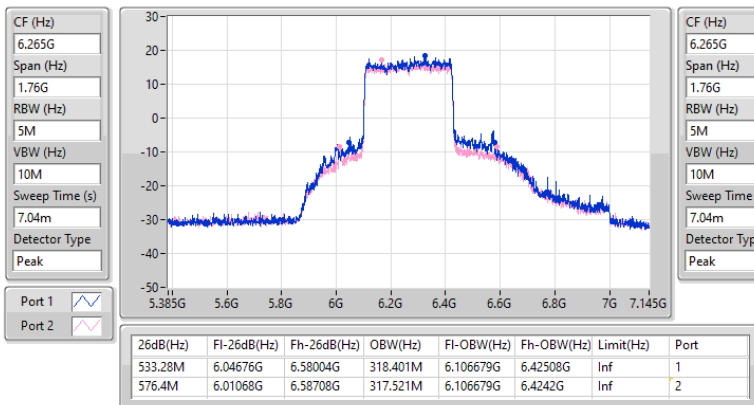


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
6665MHz

19/02/2025


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX
EBW
6265MHz Straddle 5.925-6.425GHz

19/02/2025



Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	28.17	0.65615	31.17	1.30918
802.11be EHT20-BF_Nss1,(MCS0)_2TX	28.17	0.65615	34.18	2.61818
802.11be EHT40_Nss1,(MCS0)_2TX	28.16	0.65464	31.16	1.30617
802.11be EHT40-BF_Nss1,(MCS0)_2TX	28.16	0.65464	34.17	2.61216
802.11be EHT80_Nss1,(MCS0)_2TX	27.79	0.60117	30.79	1.19950
802.11be EHT80-BF_Nss1,(MCS0)_2TX	27.79	0.60117	33.80	2.39883
802.11be EHT160_Nss1,(MCS0)_2TX	27.37	0.54576	30.37	1.08893
802.11be EHT160-BF_Nss1,(MCS0)_2TX	27.37	0.54576	33.38	2.17771
802.11be EHT320_Nss1,(MCS0)_2TX	26.81	0.47973	29.81	0.95719
802.11be EHT320-BF_Nss1,(MCS0)_2TX	26.81	0.47973	32.82	1.91426
6.525-6.875GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	28.40	0.69183	31.30	1.34896
802.11be EHT20-BF_Nss1,(MCS0)_2TX	28.40	0.69183	34.31	2.69774
802.11be EHT40_Nss1,(MCS0)_2TX	28.61	0.72611	31.51	1.41579
802.11be EHT40-BF_Nss1,(MCS0)_2TX	28.61	0.72611	34.52	2.83139
802.11be EHT80_Nss1,(MCS0)_2TX	28.38	0.68865	31.28	1.34276
802.11be EHT80-BF_Nss1,(MCS0)_2TX	28.38	0.68865	34.29	2.68534
802.11be EHT160_Nss1,(MCS0)_2TX	27.88	0.61376	30.78	1.19674
802.11be EHT160-BF_Nss1,(MCS0)_2TX	27.88	0.61376	33.79	2.39332



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6115MHz	Pass	3.00	25.91	24.24	28.17	31.17	36.00
6195MHz	Pass	3.00	25.46	23.8	27.72	30.72	36.00
6415MHz	Pass	3.00	25.11	23.97	27.59	30.59	36.00
6535MHz	Pass	2.90	24.42	23.71	27.09	29.99	36.00
6695MHz	Pass	2.90	25.59	25.18	28.40	31.30	36.00
6855MHz	Pass	2.90	25.75	24	27.97	30.87	36.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6125MHz	Pass	3.00	25.84	24.34	28.16	31.16	36.00
6205MHz	Pass	3.00	25.83	24.35	28.16	31.16	36.00
6405MHz	Pass	3.00	24.87	23.94	27.44	30.44	36.00
6565MHz	Pass	2.90	25.15	25.59	28.39	31.29	36.00
6685MHz	Pass	2.90	25.83	25.35	28.61	31.51	36.00
6845MHz	Pass	2.90	26.01	24.59	28.37	31.27	36.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6145MHz	Pass	3.00	23.82	22.19	26.09	29.09	36.00
6225MHz	Pass	3.00	24.6	23.05	26.90	29.90	36.00
6385MHz	Pass	3.00	25.1	24.44	27.79	30.79	36.00
6625MHz	Pass	2.90	25.05	25.67	28.38	31.28	36.00
6705MHz	Pass	2.90	22.97	23.43	26.22	29.12	36.00
6785MHz	Pass	2.90	23.86	23.74	26.81	29.71	36.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6185MHz	Pass	3.00	24.33	22.4	26.48	29.48	36.00
6345MHz	Pass	3.00	24.48	24.24	27.37	30.37	36.00
6665MHz	Pass	2.90	24.8	24.94	27.88	30.78	36.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6265MHz Straddle 5.925-6.425GHz	Pass	3.00	24.31	23.21	26.81	29.81	36.00
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6115MHz	Pass	6.01	25.91	24.24	28.17	34.18	36.00
6195MHz	Pass	6.01	25.46	23.8	27.72	33.73	36.00
6415MHz	Pass	6.01	25.11	23.97	27.59	33.60	36.00
6535MHz	Pass	5.91	24.42	23.71	27.09	33.00	36.00
6695MHz	Pass	5.91	25.59	25.18	28.40	34.31	36.00
6855MHz	Pass	5.91	25.75	24	27.97	33.88	36.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6125MHz	Pass	6.01	25.84	24.34	28.16	34.17	36.00
6205MHz	Pass	6.01	25.83	24.35	28.16	34.17	36.00
6405MHz	Pass	6.01	24.87	23.94	27.44	33.45	36.00
6565MHz	Pass	5.91	25.15	25.59	28.39	34.30	36.00
6685MHz	Pass	5.91	25.83	25.35	28.61	34.52	36.00
6845MHz	Pass	5.91	26.01	24.59	28.37	34.28	36.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6145MHz	Pass	6.01	23.82	22.19	26.09	32.10	36.00
6225MHz	Pass	6.01	24.6	23.05	26.90	32.91	36.00
6385MHz	Pass	6.01	25.1	24.44	27.79	33.80	36.00
6625MHz	Pass	5.91	25.05	25.67	28.38	34.29	36.00
6705MHz	Pass	5.91	22.97	23.43	26.22	32.13	36.00
6785MHz	Pass	5.91	23.86	23.74	26.81	32.72	36.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6185MHz	Pass	6.01	24.33	22.4	26.48	32.49	36.00
6345MHz	Pass	6.01	24.48	24.24	27.37	33.38	36.00
6665MHz	Pass	5.91	24.8	24.94	27.88	33.79	36.00
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6265MHz Straddle 5.925-6.425GHz	Pass	6.01	24.31	23.21	26.81	32.82	36.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	14.70	20.71
802.11be EHT40_Nss1,(MCS0)_2TX	11.64	17.65
802.11be EHT80_Nss1,(MCS0)_2TX	8.14	14.15
802.11be EHT160_Nss1,(MCS0)_2TX	4.87	10.88
802.11be EHT320_Nss1,(MCS0)_2TX	1.43	7.44
6.525-6.875GHz	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	14.61	20.52
802.11be EHT40_Nss1,(MCS0)_2TX	11.97	17.88
802.11be EHT80_Nss1,(MCS0)_2TX	8.54	14.45
802.11be EHT160_Nss1,(MCS0)_2TX	5.35	11.26

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6115MHz	Pass	6.01	12.43	10.84	14.70	20.71	23.00
6195MHz	Pass	6.01	11.80	10.29	14.05	20.06	23.00
6415MHz	Pass	6.01	11.54	10.66	14.10	20.11	23.00
6535MHz	Pass	5.91	10.86	10.30	13.56	19.47	23.00
6695MHz	Pass	5.91	11.80	11.45	14.61	20.52	23.00
6855MHz	Pass	5.91	12.10	10.48	14.33	20.24	23.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6125MHz	Pass	6.01	9.43	7.76	11.64	17.65	23.00
6205MHz	Pass	6.01	9.16	7.66	11.40	17.41	23.00
6405MHz	Pass	6.01	8.28	7.44	10.85	16.86	23.00
6565MHz	Pass	5.91	8.81	9.18	11.97	17.88	23.00
6685MHz	Pass	5.91	9.10	8.69	11.79	17.70	23.00
6845MHz	Pass	5.91	9.27	8.08	11.69	17.60	23.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6145MHz	Pass	6.01	4.48	2.69	6.60	12.61	23.00
6225MHz	Pass	6.01	4.87	3.30	7.08	13.09	23.00
6385MHz	Pass	6.01	5.47	4.91	8.14	14.15	23.00
6625MHz	Pass	5.91	5.37	5.88	8.54	14.45	23.00
6705MHz	Pass	5.91	3.18	3.71	6.37	12.28	23.00
6785MHz	Pass	5.91	4.22	4.56	7.37	13.28	23.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6185MHz	Pass	6.01	1.91	-0.05	3.83	9.84	23.00
6345MHz	Pass	6.01	2.01	1.79	4.87	10.88	23.00
6665MHz	Pass	5.91	2.33	2.44	5.35	11.26	23.00
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
6265MHz Straddle 5.925-6.425GHz	Pass	6.01	-1.03	-2.01	1.43	7.44	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

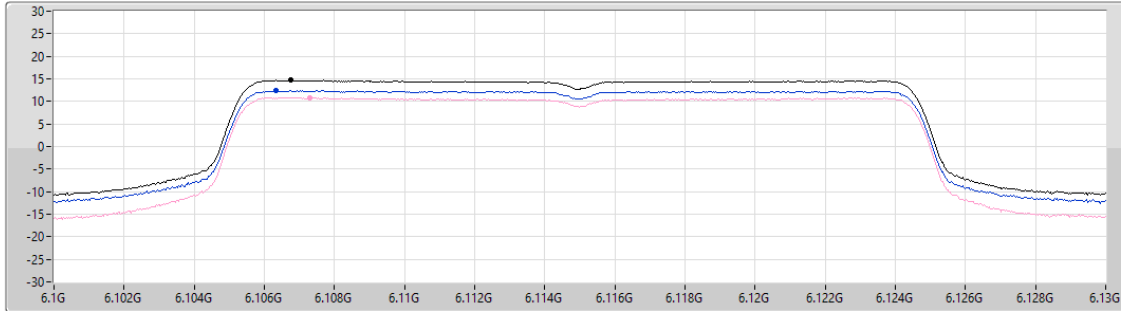
5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6115MHz

19/02/2025

CF (Hz)
6.115G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.70	14.70	12.43	10.84

Sum
Port 1
Port 2

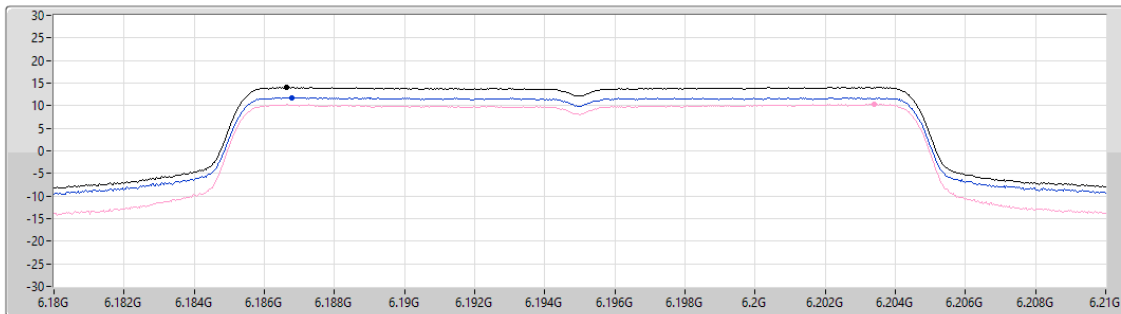
5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6195MHz

19/02/2025

CF (Hz)
6.195G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.05	14.05	11.80	10.29

Sum
Port 1
Port 2

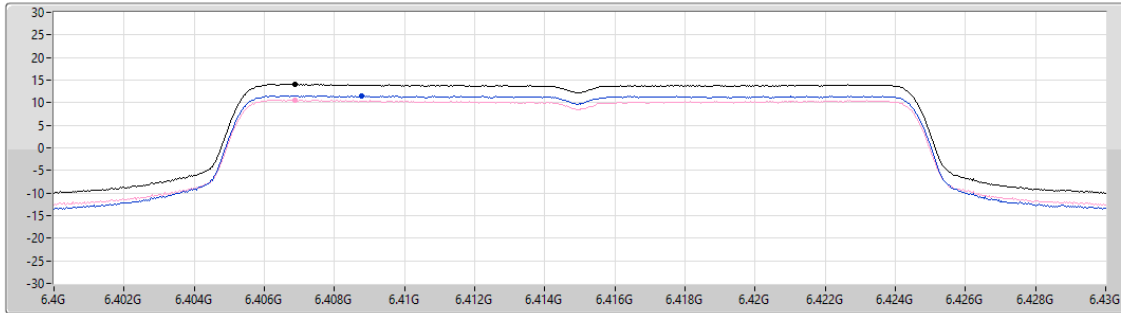
5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6415MHz

19/02/2025

CF (Hz)
6.415G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
14.10	14.10	11.54	10.66

Sum
Port 1
Port 2

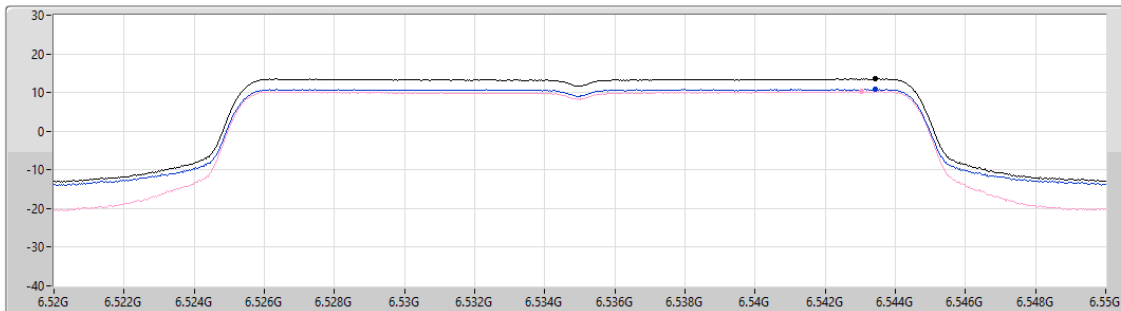
6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6535MHz

19/02/2025

CF (Hz)
6.535G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
13.56	13.56	10.86	10.30

Sum
Port 1
Port 2

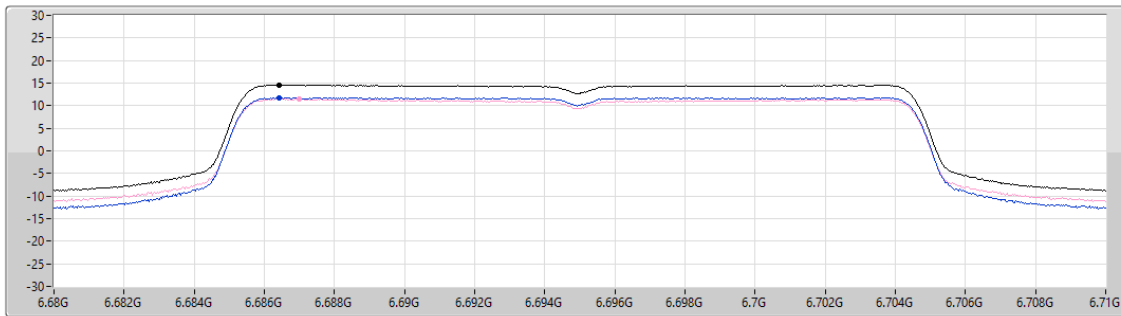
6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6695MHz

19/02/2025

CF (Hz)
6.695G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
14.61	14.61	11.80	11.45

Sum
Port 1
Port 2

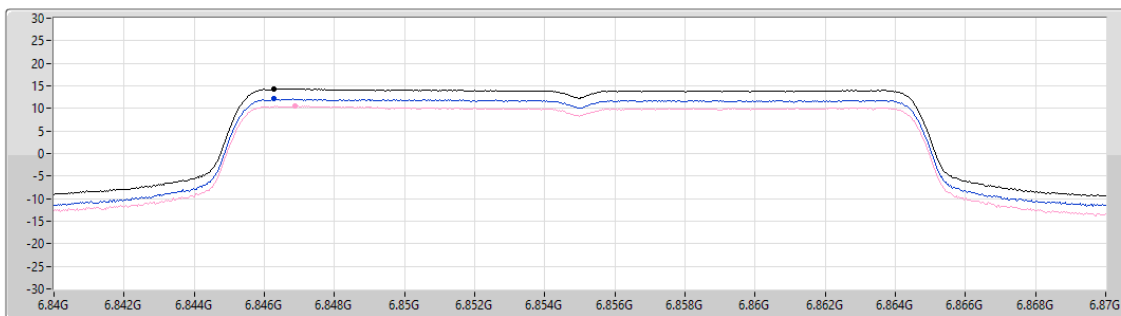
6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

6855MHz

19/02/2025

CF (Hz)
6.855G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
14.33	14.33	12.10	10.48

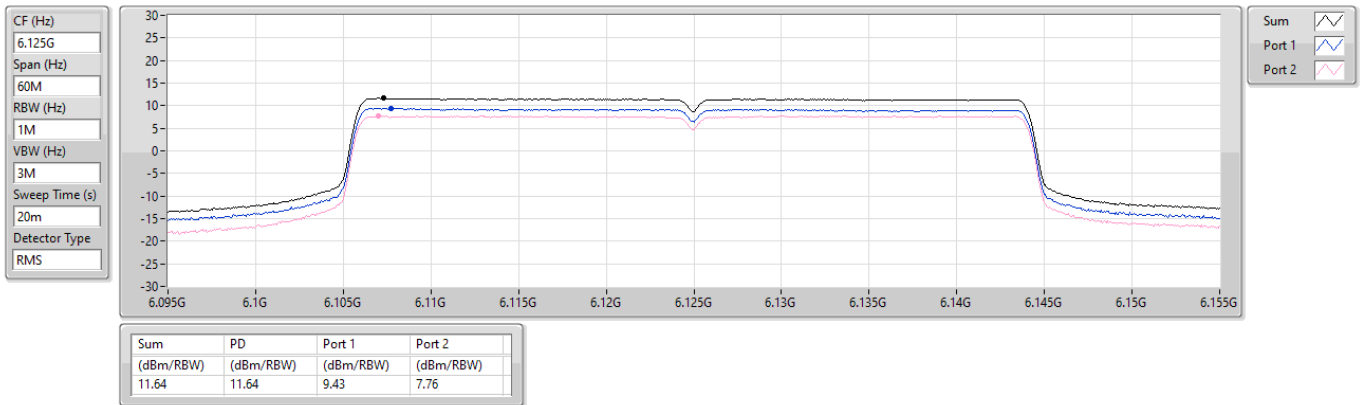
Sum
Port 1
Port 2

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6125MHz

19/02/2025

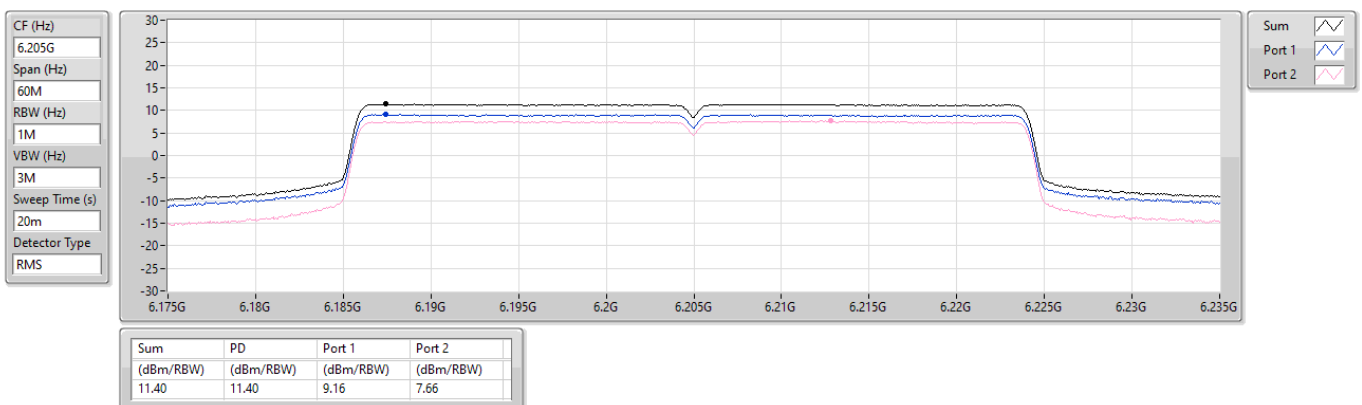


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6205MHz

19/02/2025



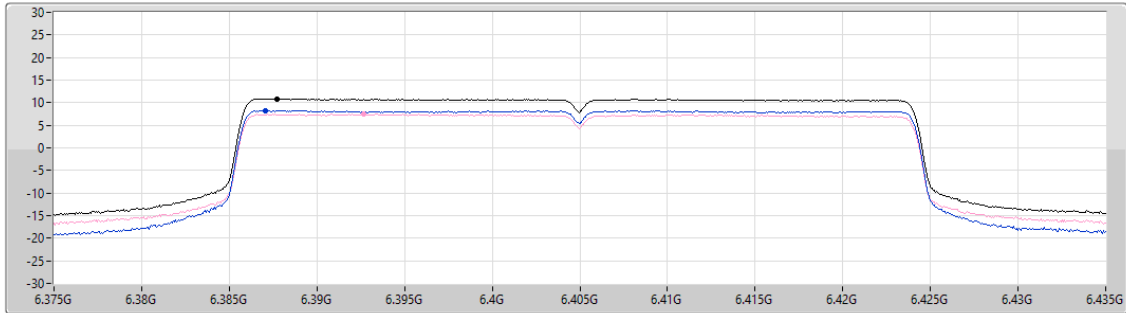
5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6405MHz

19/02/2025

CF (Hz)
6.405G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS



Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
10.85	10.85	8.28	7.44

Sum
Port 1
Port 2

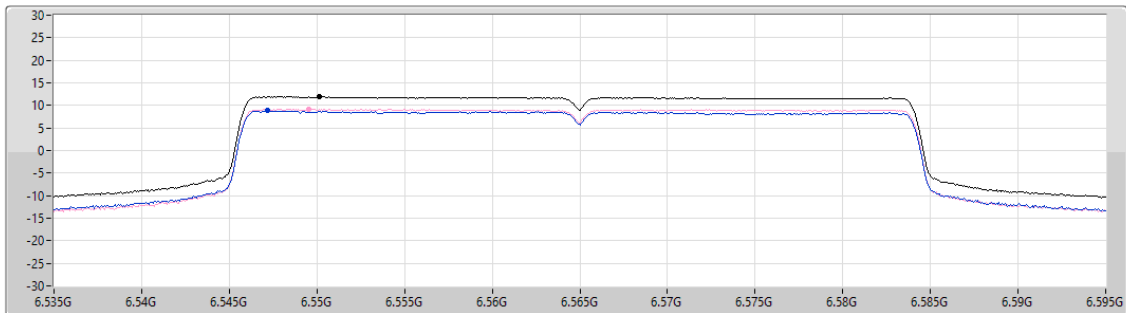
6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6565MHz

19/02/2025

CF (Hz)
6.565G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS



Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
11.97	11.97	8.81	9.18

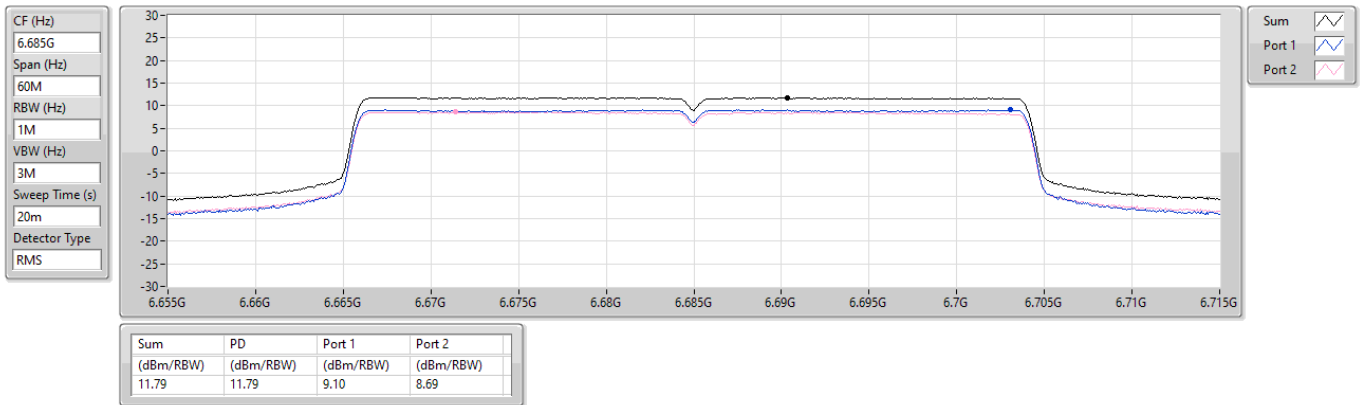
Sum
Port 1
Port 2

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6685MHz

19/02/2025

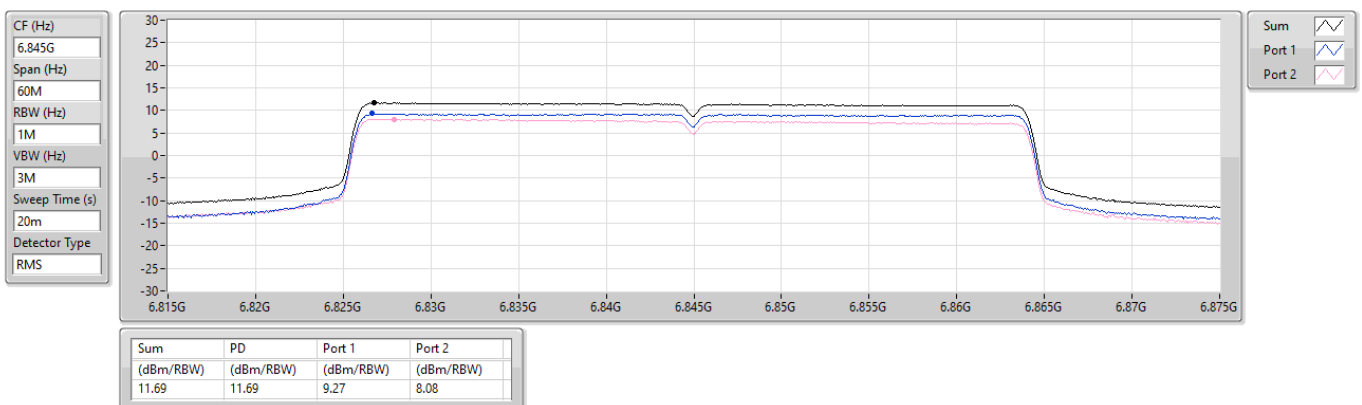


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

6845MHz

19/02/2025



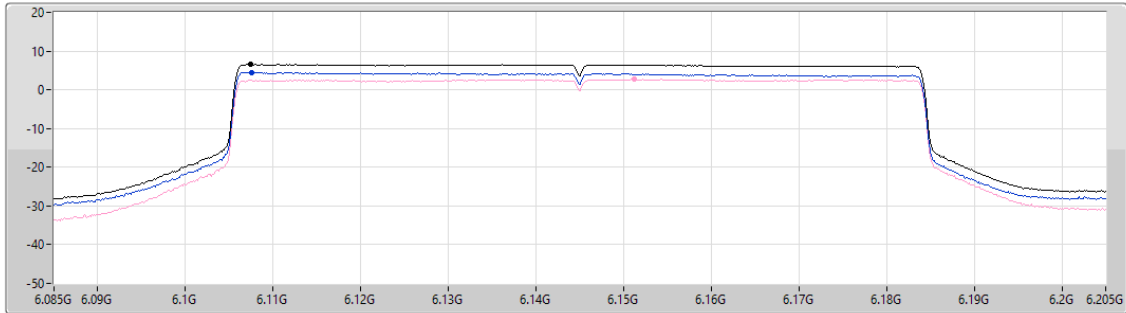
5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6145MHz

19/02/2025

CF (Hz)
6.145G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.60	6.60	4.48	2.69

Sum
Port 1
Port 2

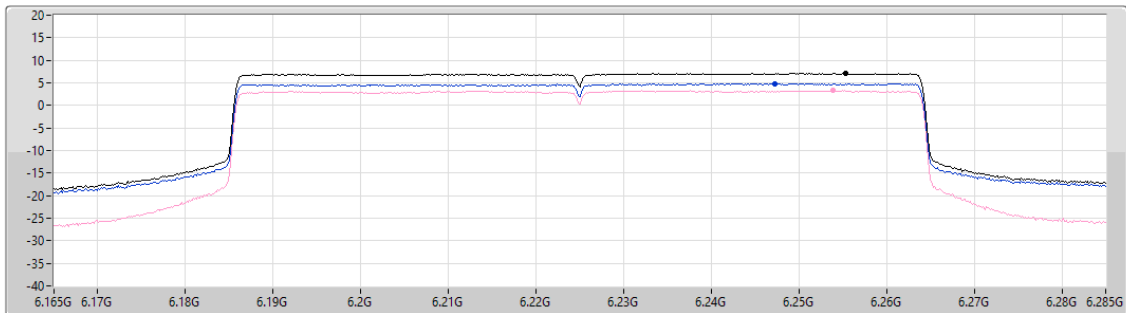
5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6225MHz

19/02/2025

CF (Hz)
6.225G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.08	7.08	4.87	3.30

Sum
Port 1
Port 2

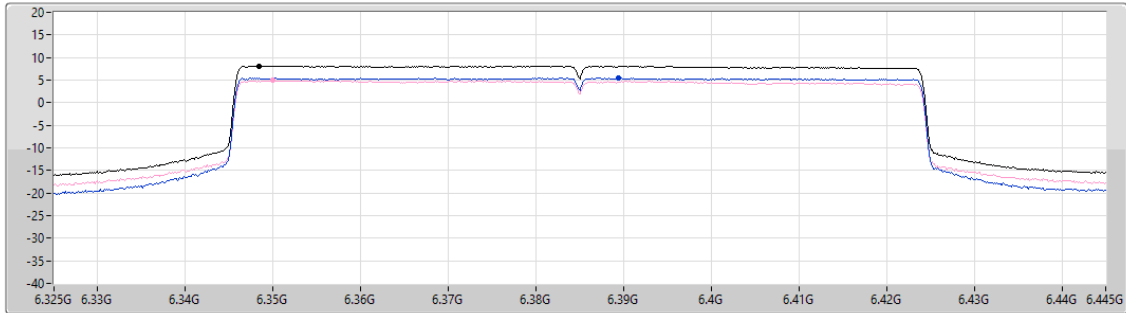
5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6385MHz

19/02/2025

CF (Hz)
6.385G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS



Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
8.14	8.14	5.47	4.91

Sum
Port 1
Port 2

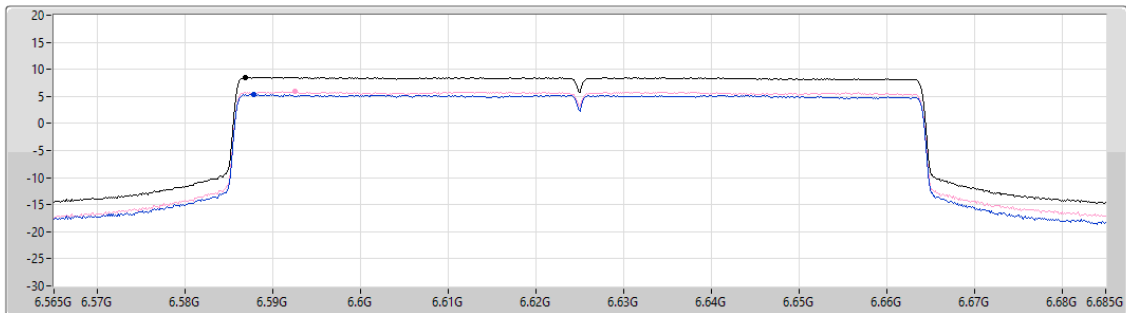
6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6625MHz

19/02/2025

CF (Hz)
6.625G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS



Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
8.54	8.54	5.37	5.88

Sum
Port 1
Port 2

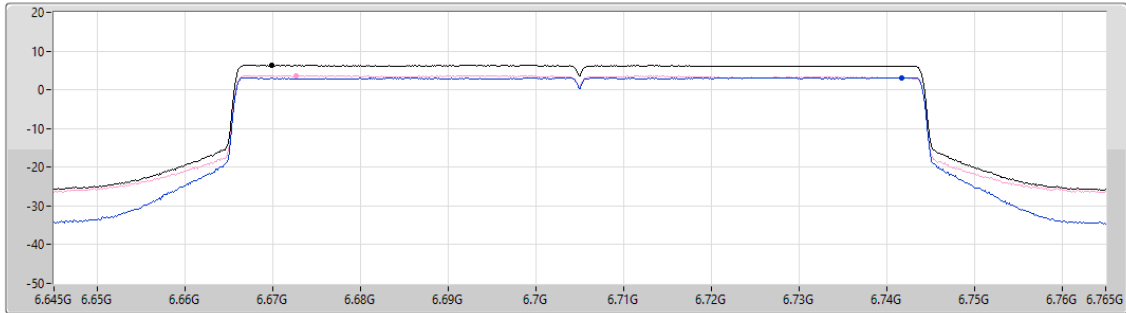
6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6705MHz

19/02/2025

CF (Hz)
6.705G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.37	6.37	3.18	3.71

Sum
Port 1
Port 2

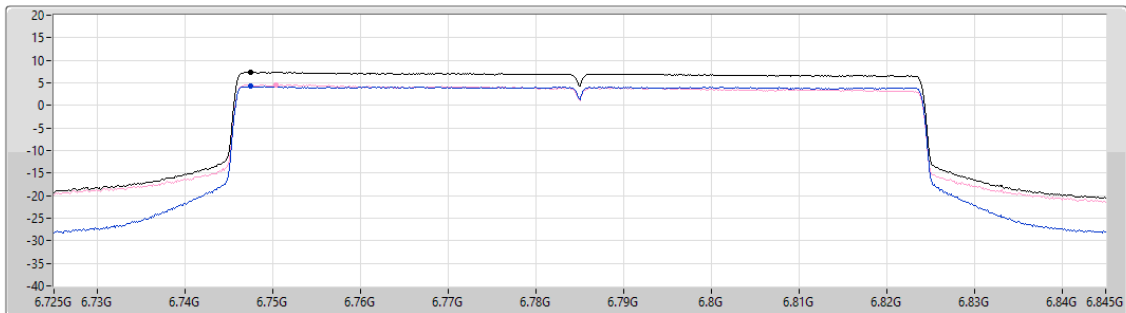
6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

6785MHz

19/02/2025

CF (Hz)
6.785G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS



Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.37	7.37	4.22	4.56

Sum
Port 1
Port 2

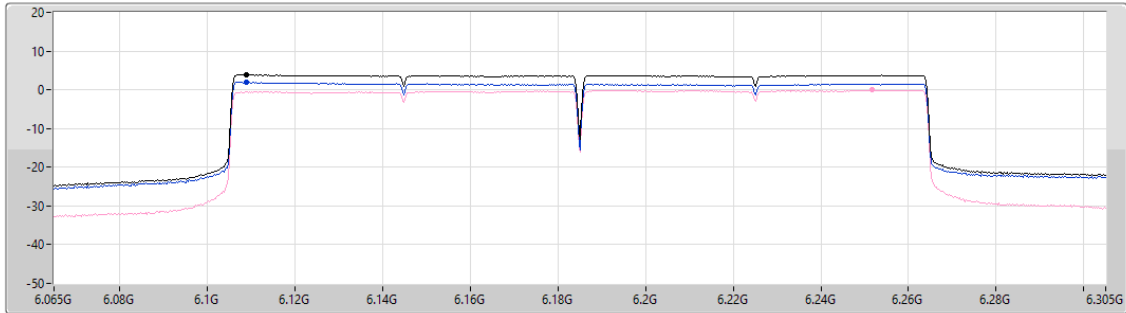
5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6185MHz

19/02/2025

CF (Hz)
6.185G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS



Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
3.83	3.83	1.91	-0.05

Sum
Port 1
Port 2

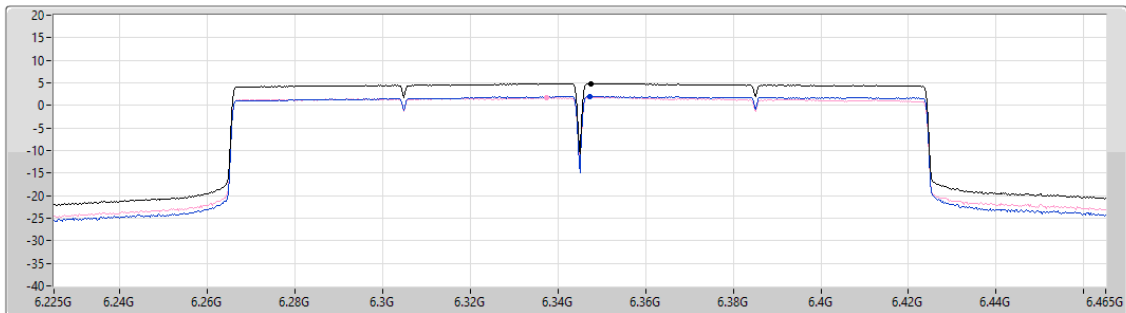
5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6345MHz

19/02/2025

CF (Hz)
6.345G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS



Sum (dBm/Hz)	PD (dBm/Hz)	Port 1 (dBm/Hz)	Port 2 (dBm/Hz)
4.87	4.87	2.01	1.79

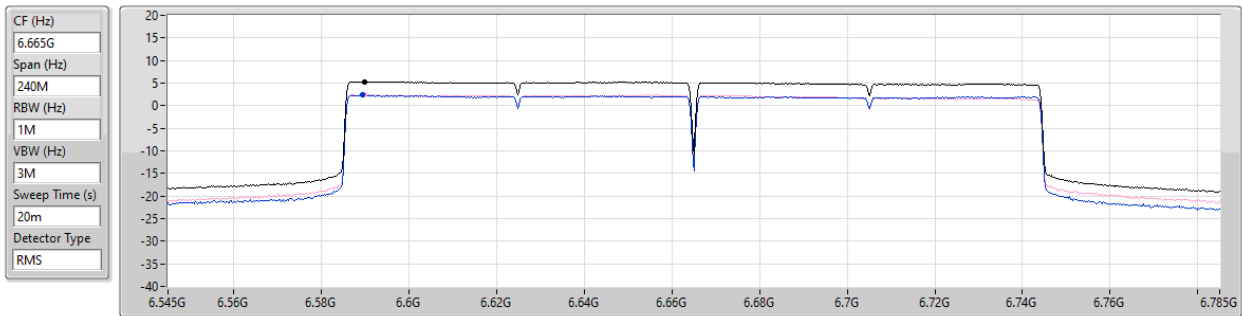
Sum
Port 1
Port 2

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

6665MHz

19/02/2025

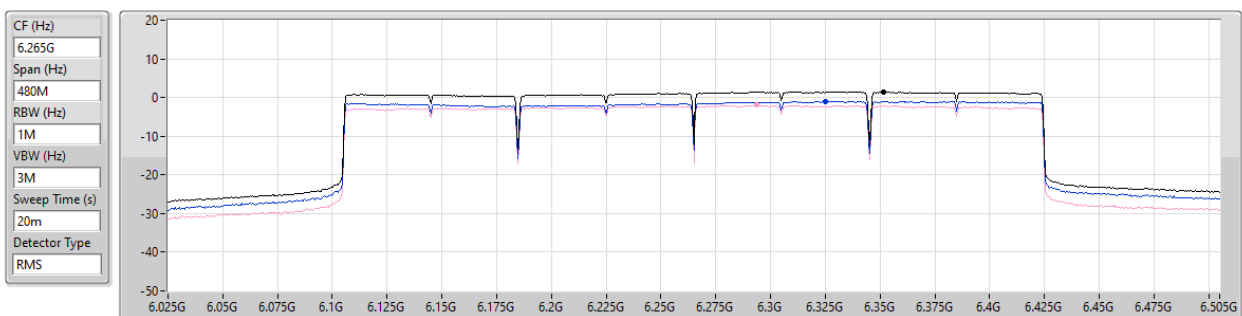


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

PSD

6265MHz Straddle 5.925-6.425GHz

19/02/2025





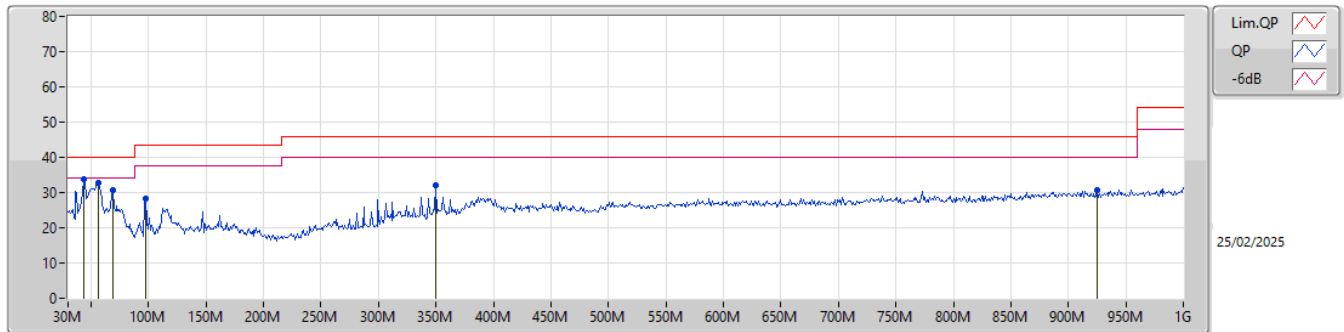
Radiated Emissions below 1GHz

Appendix E.1

Summary

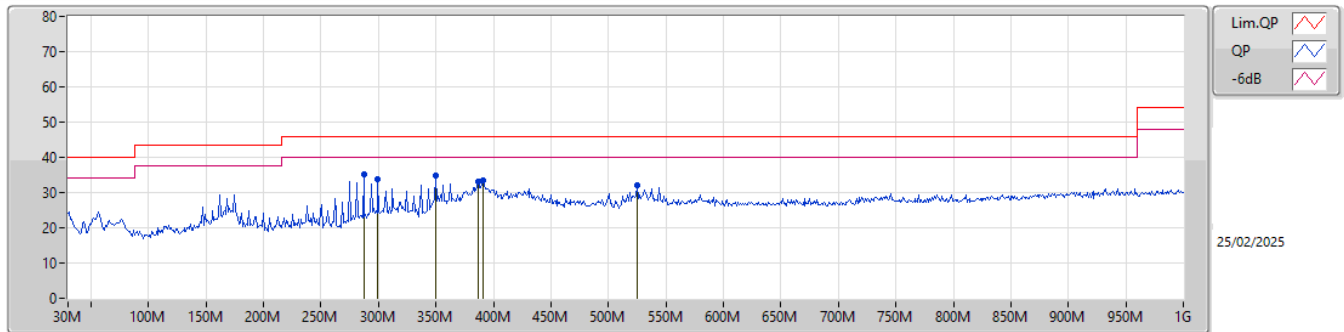
Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 2	Pass	PK	43.58M	33.84	40.00	-6.16	Vertical

Mode 2



Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	43.58M	33.84	40.00	-6.16	-13.39	3	Vertical	313	2.00	"Worst"	47.23	17.10	1.10	31.59		
PK	56.19M	32.74	40.00	-7.26	-17.56	3	Vertical	341	1.00	-	50.30	12.89	1.21	31.66		
PK	68.8M	30.62	40.00	-9.38	-17.81	3	Vertical	221	1.25	-	48.43	12.58	1.31	31.70		
PK	97.9M	28.43	43.50	-15.07	-13.74	3	Vertical	99	1.25	-	42.17	16.48	1.52	31.74		
PK	350.1M	32.21	46.00	-13.79	-8.78	3	Vertical	288	1.25	-	40.99	20.28	2.87	31.93		
PK	925.31M	30.59	46.00	-15.41	-1.18	3	Vertical	356	3.00	-	31.77	26.42	4.73	32.33		

Mode 2



Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	287.05M	35.17	46.00	-10.83	-10.40	3	Horizontal	10	1.25	"Worst"	45.57	18.85	2.58	31.83		
PK	299.66M	33.94	46.00	-12.06	-10.08	3	Horizontal	32	1.25	-	44.02	19.12	2.64	31.84		
PK	350.1M	34.81	46.00	-11.19	-8.78	3	Horizontal	319	1.00	-	43.59	20.28	2.87	31.93		
PK	386.96M	33.22	46.00	-12.78	-7.96	3	Horizontal	144	1.00	-	41.18	20.99	3.02	31.97		
PK	390.84M	33.29	46.00	-12.71	-7.83	3	Horizontal	144	1.00	-	41.12	21.12	3.03	31.98		
PK	524.7M	32.21	46.00	-13.79	-5.35	3	Horizontal	66	2.00	-	37.56	23.29	3.50	32.14		

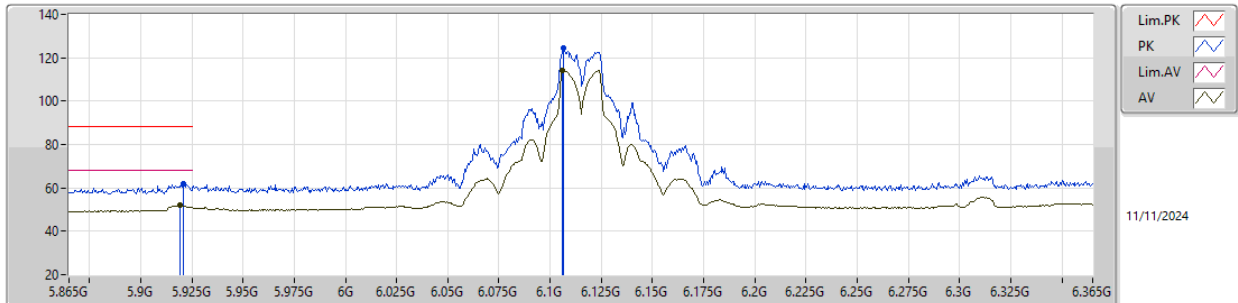


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1.(MCS0)_2TX	Pass	RMS	5.925G	68.07	68.20	-0.13	3	Vertical	103	2.48	-

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

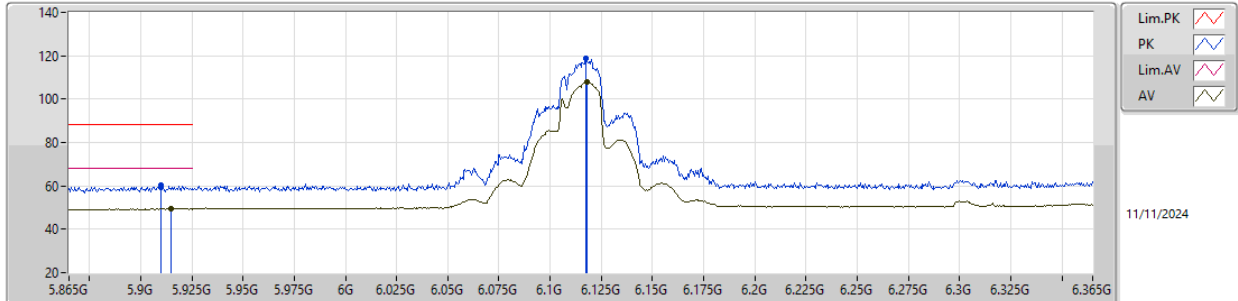
6115MHz_TX

EUT_Z_2TX
Setting Z6
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.921G	61.72	88.20	-26.48	54.29	3	Vertical	357	2.56	-	34.54	8.09	35.20			
RMS	5.919G	51.94	68.20	-16.26	44.52	3	Vertical	357	2.56	-	34.54	8.08	35.20			
PK	6.1065G	124.28	Inf	-Inf	116.25	3	Vertical	357	2.56	-	34.90	8.33	35.20			
RMS	6.106G	114.33	Inf	-Inf	106.30	3	Vertical	357	2.56	-	34.90	8.33	35.20			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

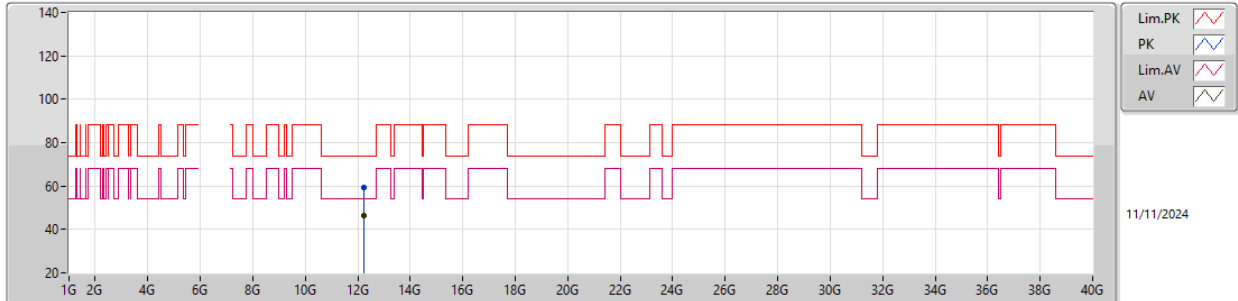
6115MHz_TX

EUT_Z_2TX
Setting Z6
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.91G	60.17	88.20	-28.03	52.77	3	Horizontal	91	2.94	-	34.52	8.08	35.20			
RMS	5.915G	49.57	68.20	-18.63	42.16	3	Horizontal	91	2.94	-	34.53	8.08	35.20			
PK	6.1175G	119.02	Inf	-Inf	110.97	3	Horizontal	91	2.94	-	34.90	8.35	35.20			
RMS	6.118G	107.83	Inf	-Inf	99.78	3	Horizontal	91	2.94	-	34.90	8.35	35.20			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

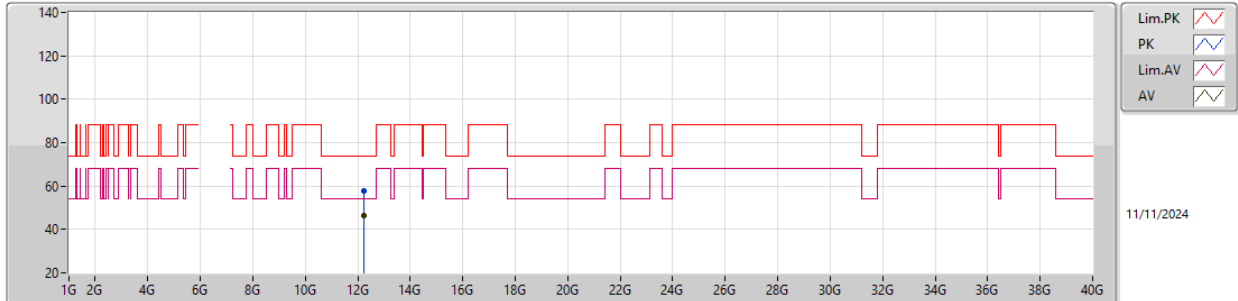
6115MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.23198G	59.27	74.00	-14.73	43.07	3	Vertical	250	1.70	-	38.76	11.81	34.37			
AV	12.23105G	46.14	54.00	-7.86	29.95	3	Vertical	250	1.70	-	38.76	11.81	34.38			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

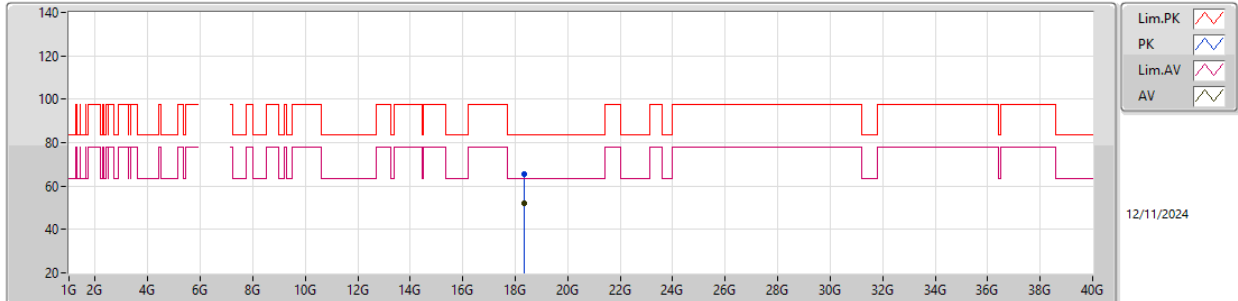
6115MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.21647G	57.83	74.00	-16.17	41.69	3	Horizontal	164	1.95	-	38.73	11.81	34.40			
AV	12.23507G	46.16	54.00	-7.84	29.95	3	Horizontal	164	1.95	-	38.77	11.81	34.37			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

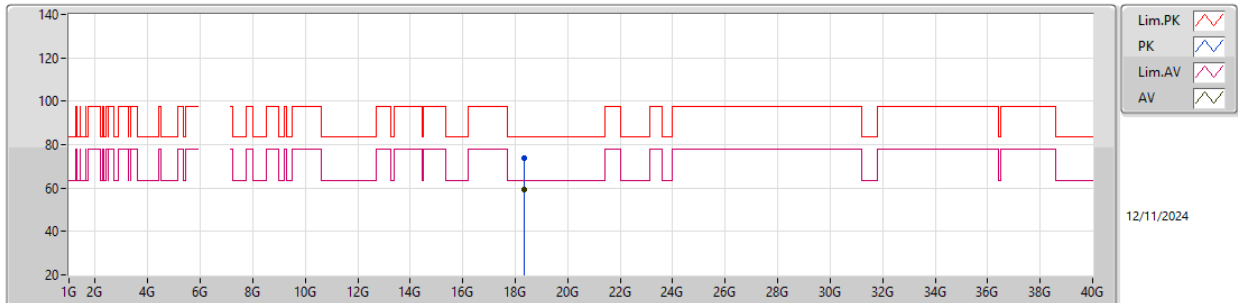
6115MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.34866G	65.49	83.54	-18.05	62.12	1	Vertical	132	1.43	-	37.70	15.28	49.61			
AV	18.35322G	52.29	63.54	-11.25	48.92	1	Vertical	132	1.43	-	37.70	15.28	49.61			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

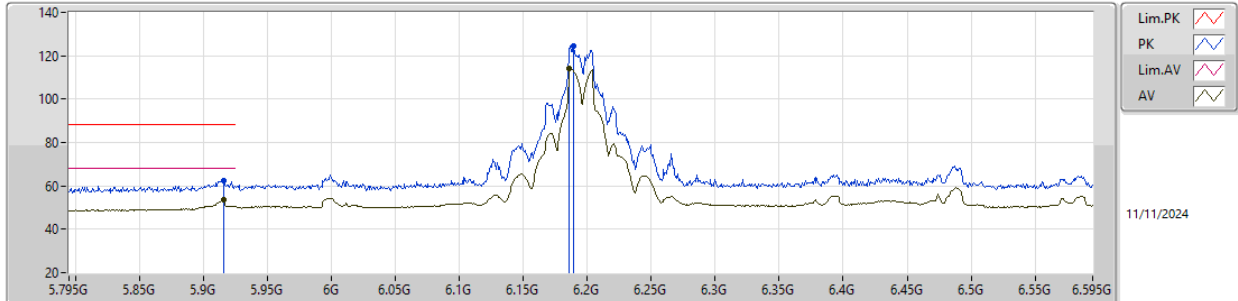
6115MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.35579G	73.77	83.54	-9.77	70.40	1	Horizontal	340	1.87	-	37.70	15.28	49.61			
AV	18.35769G	59.41	63.54	-4.13	56.04	1	Horizontal	340	1.87	-	37.70	15.28	49.61			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

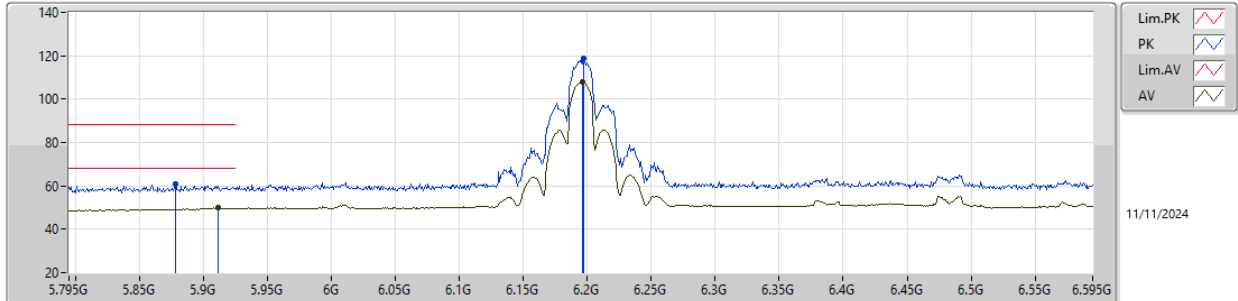


EUT_Z_2TX
Setting Z6
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9158G	62.62	88.20	-25.58	55.21	3	Vertical	356	2.55	-	34.53	8.08	35.20			
RMS	5.9158G	53.58	68.20	-14.62	46.17	3	Vertical	356	2.55	-	34.53	8.08	35.20			
PK	6.1894G	124.62	Inf	-Inf	116.39	3	Vertical	356	2.55	-	34.98	8.45	35.20			
RMS	6.1862G	114.21	Inf	-Inf	105.99	3	Vertical	356	2.55	-	34.97	8.45	35.20			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

6195MHz_TX

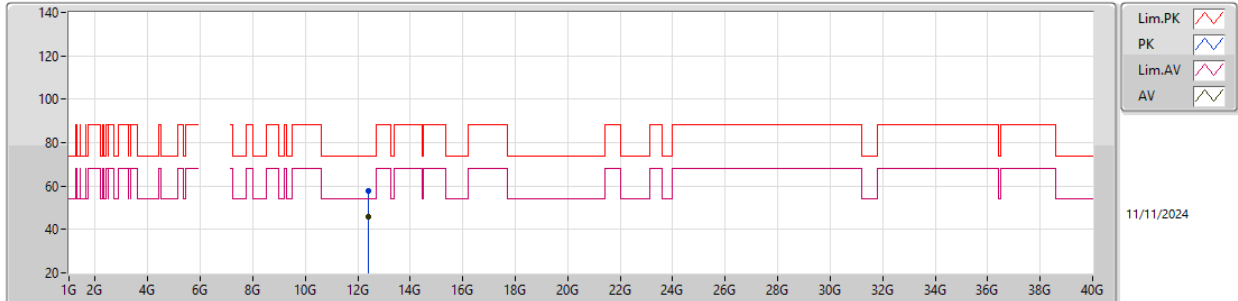


EUT_Z_2TX
Setting Z6
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.8782G	60.70	88.20	-27.50	53.45	3	Horizontal	88	2.61	-	34.41	8.04	35.20			
RMS	5.9118G	49.76	68.20	-18.44	42.36	3	Horizontal	88	2.61	-	34.52	8.08	35.20			
PK	6.1974G	118.82	Inf	-Inf	110.56	3	Horizontal	88	2.61	-	34.99	8.47	35.20			
RMS	6.1966G	107.92	Inf	-Inf	99.67	3	Horizontal	88	2.61	-	34.99	8.46	35.20			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

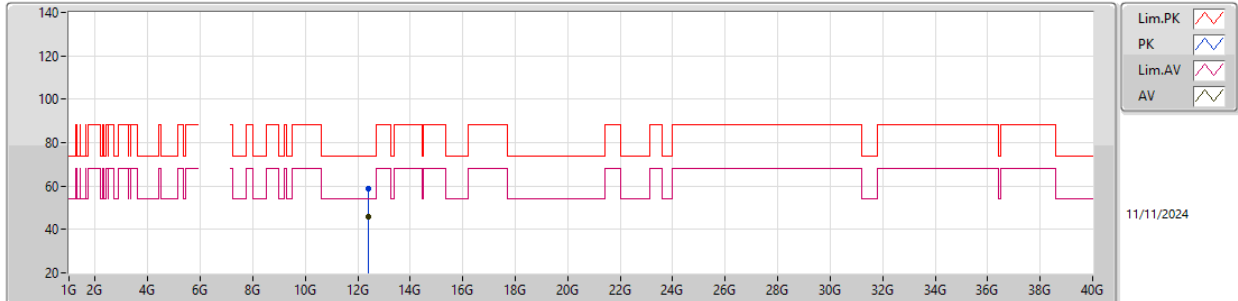
6195MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.39588G	57.53	74.00	-16.47	41.19	3	Vertical	276	1.94	-	38.61	11.80	34.07			
AV	12.3951G	45.73	54.00	-8.27	29.39	3	Vertical	276	1.94	-	38.61	11.80	34.07			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

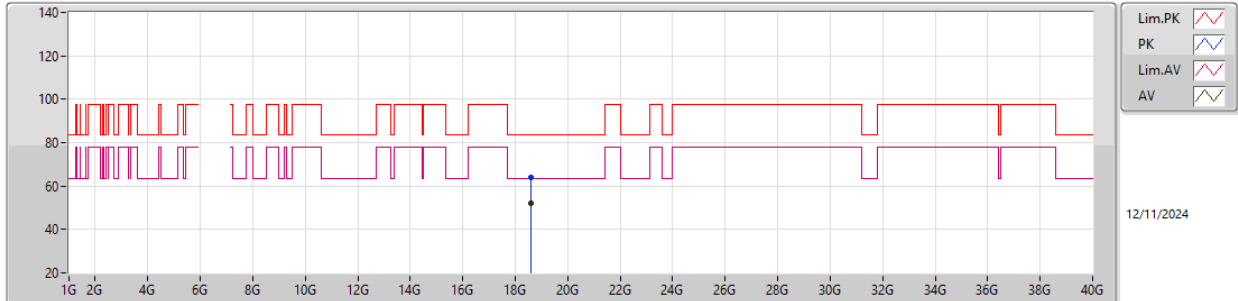
6195MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.39327G	58.64	74.00	-15.36	42.30	3	Horizontal	147	2.17	-	38.61	11.80	34.07			
AV	12.39759G	45.77	54.00	-8.23	29.43	3	Horizontal	147	2.17	-	38.60	11.80	34.06			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

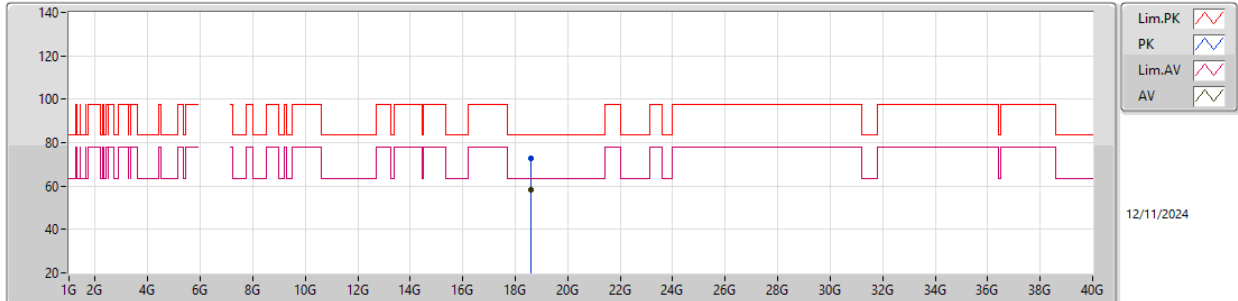
6195MHz_TX

EUT X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.59127G	64.03	74.00	-29.41	41.14	1	Vertical	163	1.52	-	37.80	15.27	49.62			
AV	18.59415G	52.17	54.00	-21.68	28.87	1	Vertical	163	1.52	-	37.80	15.27	49.62			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

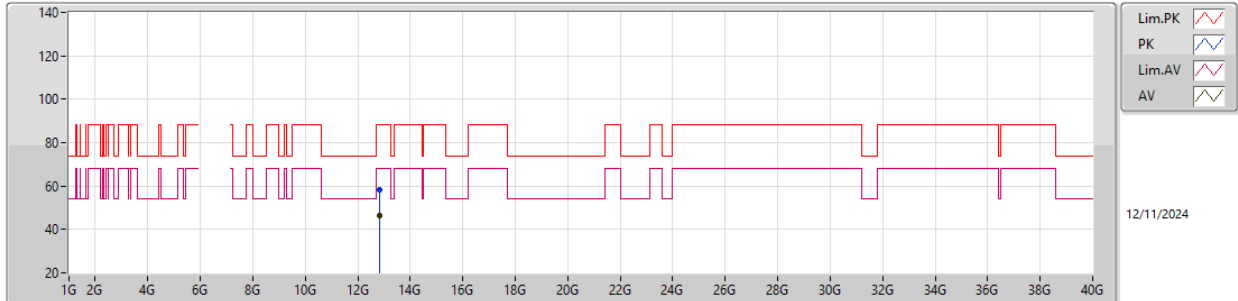
6195MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.59106G	72.55	83.54	-10.99	69.10	1	Horizontal	184	2.01	-	37.80	15.27	49.62			
AV	18.59772G	58.41	63.54	-5.13	54.95	1	Horizontal	184	2.01	-	37.80	15.27	49.61			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

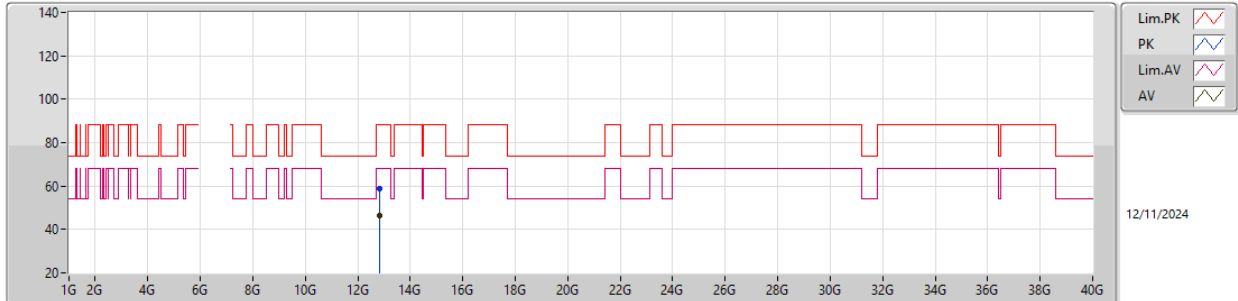
6415MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.83594G	58.28	88.20	-29.92	41.21	3	Vertical	293	1.71	-	39.14	11.77	33.84			
RMS	12.83699G	46.33	68.20	-21.87	29.25	3	Vertical	293	1.71	-	39.15	11.77	33.84			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

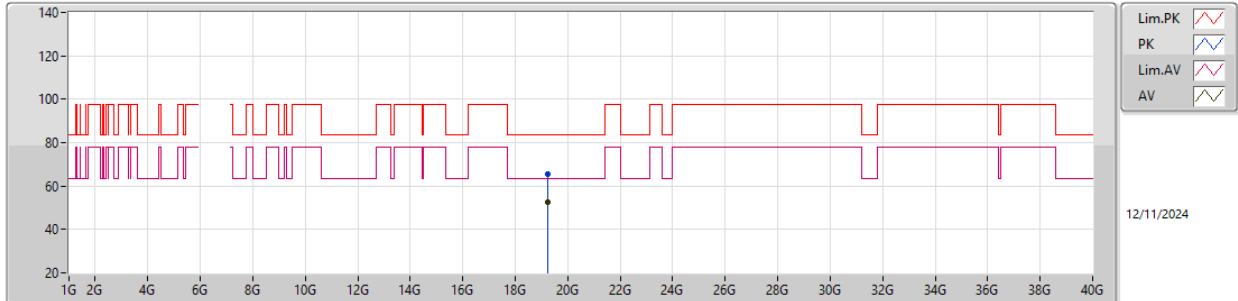
6415MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.82898G	58.76	88.20	-29.44	41.71	3	Horizontal	282	2.16	-	39.12	11.77	33.84			
RMS	12.82196G	46.36	68.20	-21.84	29.34	3	Horizontal	282	2.16	-	39.09	11.77	33.84			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

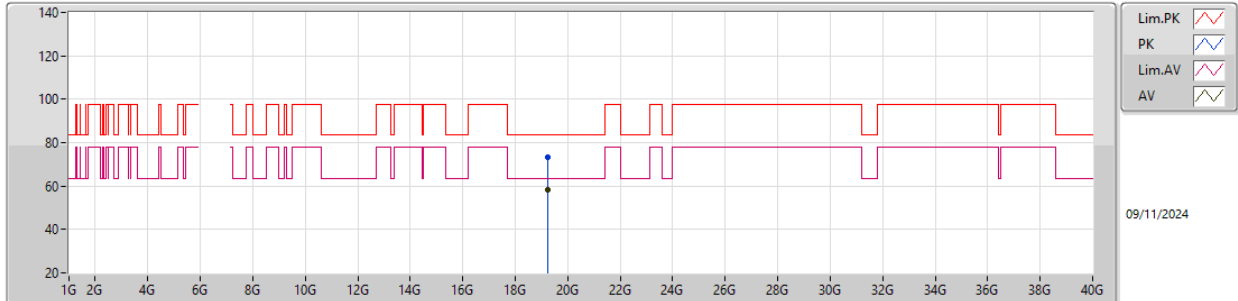
6415MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.23606G	65.31	83.54	-18.23	61.63	1	Vertical	328	1.44	-	37.94	15.24	49.50			
AV	19.24488G	52.47	63.54	-11.07	48.76	1	Vertical	328	1.44	-	37.98	15.24	49.51			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

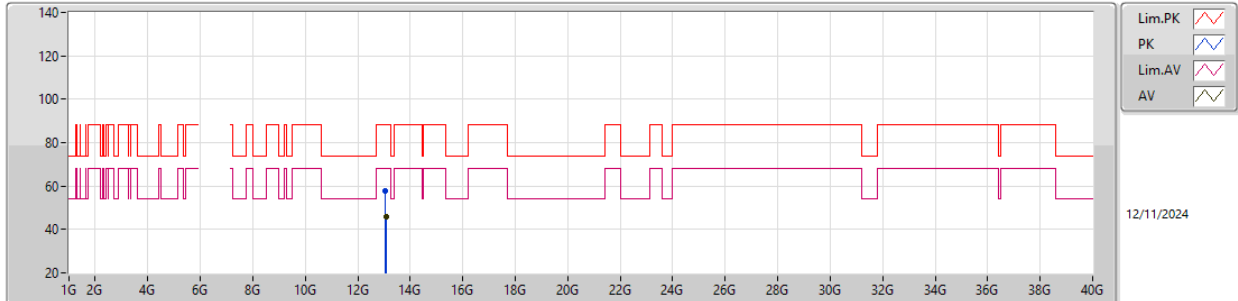
6415MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.25043G	73.09	83.54	-10.45	69.36	1	Horizontal	342	1.69	-	38.00	15.24	49.51			
AV	19.24281G	58.52	63.54	-5.02	54.82	1	Horizontal	342	1.69	-	37.97	15.24	49.51			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

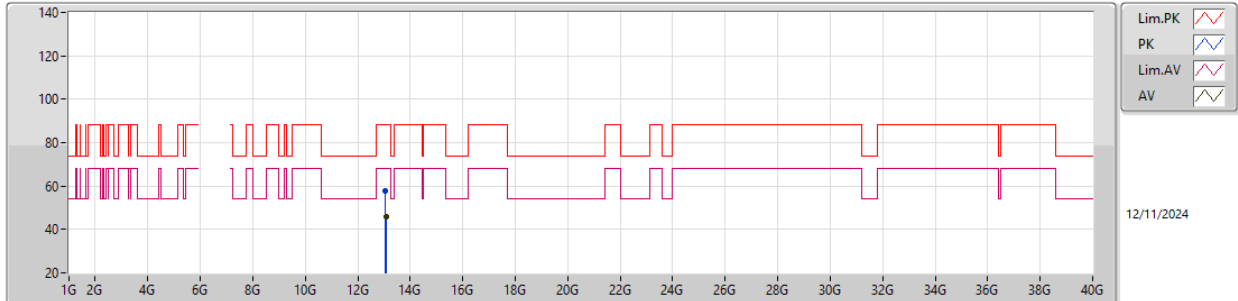
6535MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.06496G	57.86	88.20	-30.34	40.32	3	Vertical	325	1.08	-	39.46	11.75	33.67			
RMS	13.07975G	45.99	68.20	-22.21	28.36	3	Vertical	325	1.08	-	39.52	11.75	33.64			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

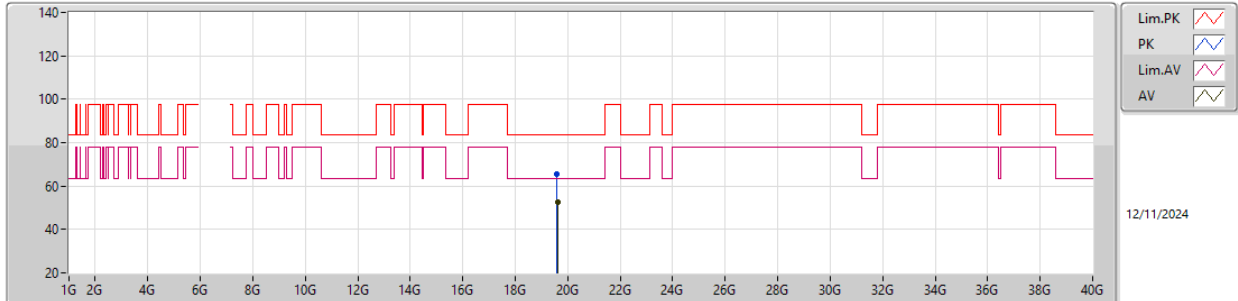
6535MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.05752G	57.90	88.20	-30.30	40.41	3	Horizontal	31	2.62	-	39.43	11.75	33.69			
RMS	13.07546G	46.09	68.20	-22.11	28.49	3	Horizontal	31	2.62	-	39.50	11.75	33.65			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

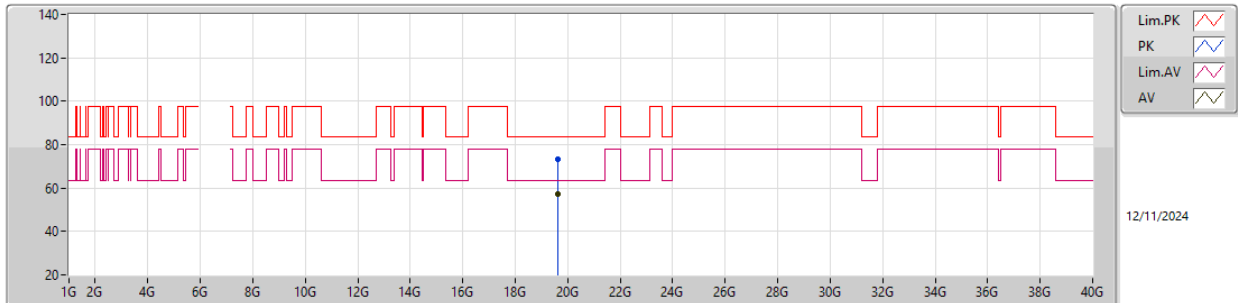
6535MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.59843G	65.43	83.54	-18.11	62.11	1	Vertical	108	1.55	-	37.70	15.22	49.60			
AV	19.60482G	52.37	63.54	-11.17	49.04	1	Vertical	108	1.55	-	37.70	15.22	49.59			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

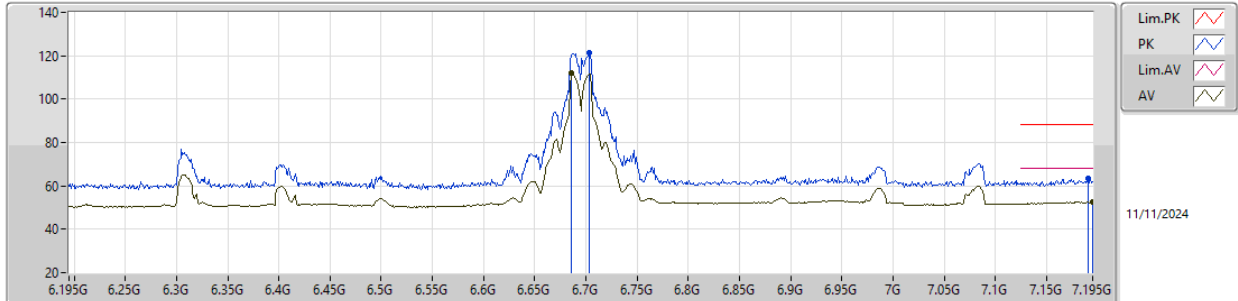
6535MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.61847G	73.04	83.54	-10.50	69.70	1	Horizontal	310	1.38	-	37.70	15.22	49.58			
AV	19.60395G	57.43	63.54	-6.11	54.10	1	Horizontal	310	1.38	-	37.70	15.22	49.59			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

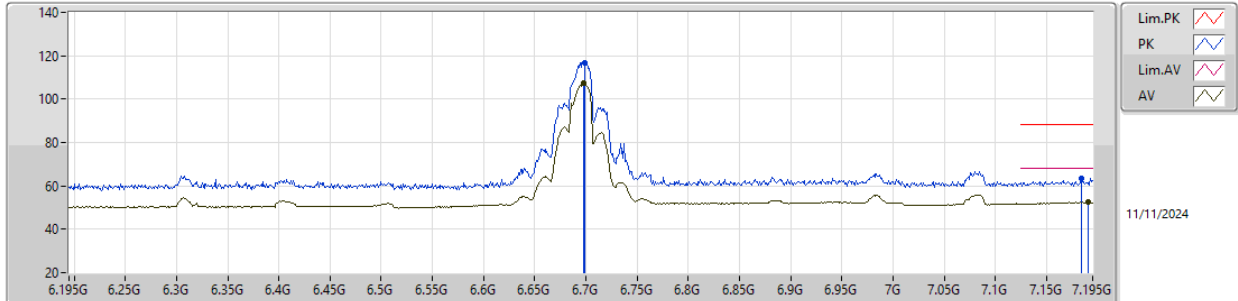
6695MHz_TX

EUT_Z_2TX
Setting Z6
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	6.703G	121.55	Inf	-Inf	112.45	3	Vertical	51	2.45	-	35.31	8.97	35.18			
RMS	6.686G	112.18	Inf	-Inf	103.14	3	Vertical	51	2.45	-	35.27	8.96	35.19			
PK	7.191G	63.31	88.20	-24.89	53.78	3	Vertical	51	2.45	-	36.15	8.53	35.15			
RMS	7.195G	52.62	68.20	-15.58	43.06	3	Vertical	51	2.45	-	36.17	8.54	35.15			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

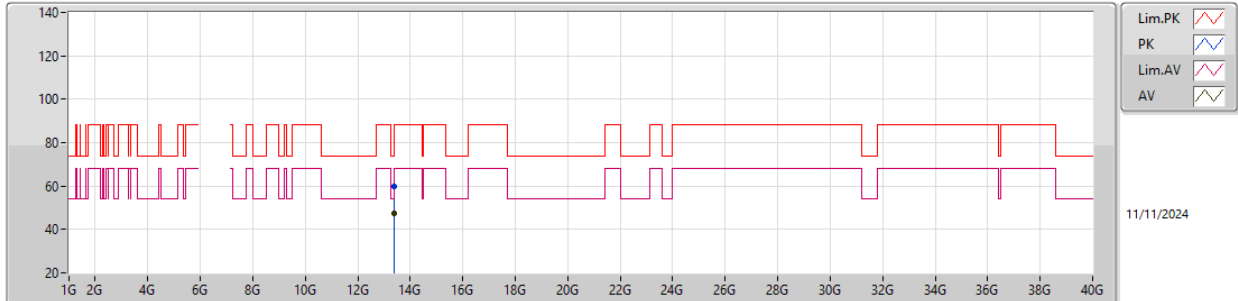
6695MHz_TX

EUT_Z_2TX
Setting 26
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	6.699G	116.79	Inf	-Inf	107.71	3	Horizontal	278	2.25	-	35.30	8.96	35.18			
RMS	6.698G	107.63	Inf	-Inf	98.55	3	Horizontal	278	2.25	-	35.30	8.96	35.18			
PK	7.184G	63.45	88.20	-24.75	53.96	3	Horizontal	278	2.25	-	36.10	8.53	35.14			
RMS	7.191G	52.50	68.20	-15.70	42.97	3	Horizontal	278	2.25	-	36.15	8.53	35.15			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

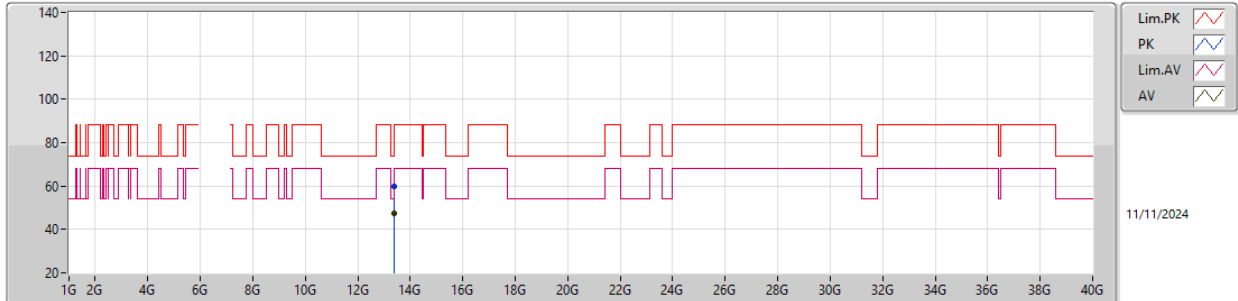
6695MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.38811G	59.85	74.00	-14.15	40.94	3	Vertical	119	1.88	-	40.08	11.73	32.90			
AV	13.39006G	47.43	54.00	-6.57	28.51	3	Vertical	119	1.88	-	40.08	11.73	32.89			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

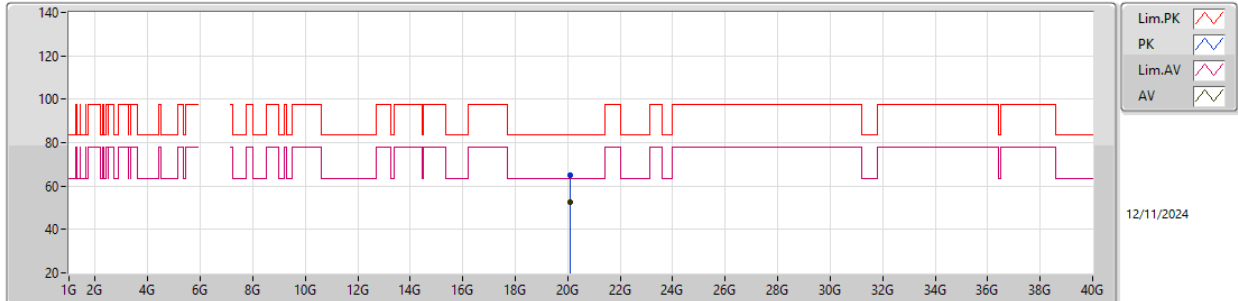
6695MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.39828G	59.83	74.00	-14.17	40.87	3	Horizontal	167	1.78	-	40.10	11.73	32.87			
AV	13.37578G	47.47	54.00	-6.53	28.62	3	Horizontal	167	1.78	-	40.05	11.73	32.93			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

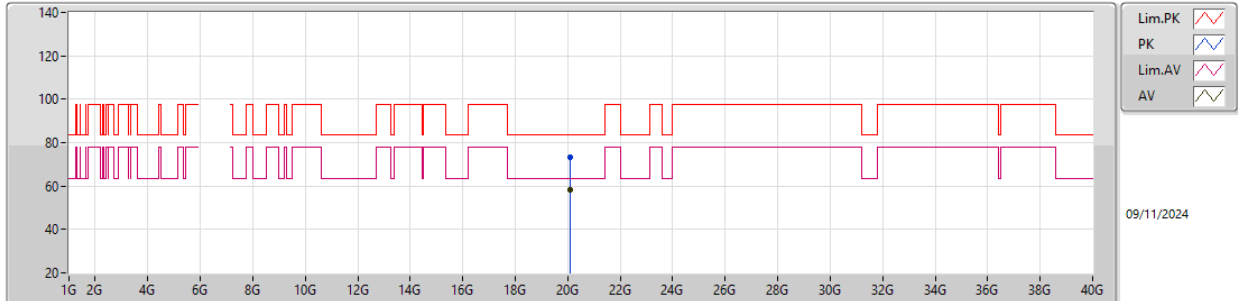
6695MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.09922G	65.21	83.54	-18.33	61.37	1	Vertical	106	1.98	-	37.80	15.28	49.24			
AV	20.08155G	52.34	63.54	-11.20	48.52	1	Vertical	106	1.98	-	37.80	15.27	49.25			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

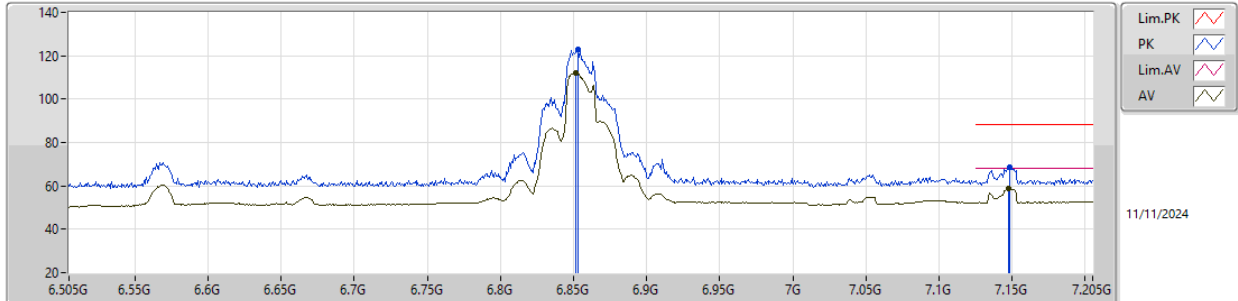
6695MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.07774G	73.06	83.54	-10.48	69.25	1	Horizontal	138	1.67	-	37.80	15.26	49.25			
AV	20.08242G	58.41	63.54	-5.13	54.59	1	Horizontal	138	1.67	-	37.80	15.27	49.25			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

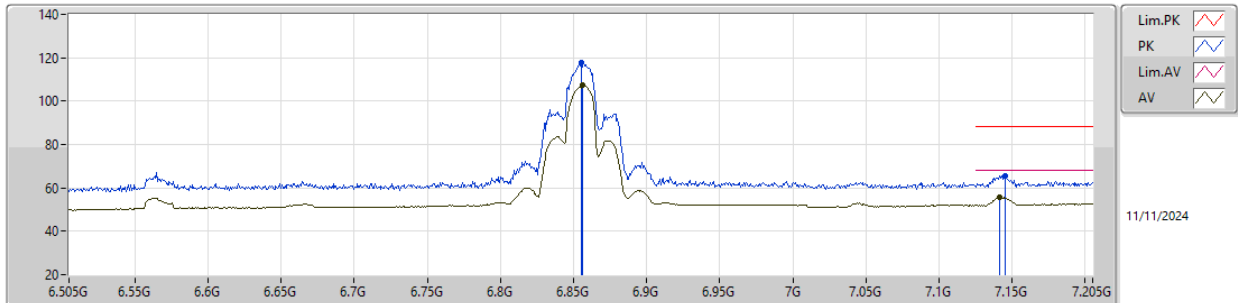
6855MHz_TX

EUT_Z_2TX
Setting Z6
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	6.8529G	123.10	Inf	-Inf	113.81	3	Vertical	98	2.62	-	35.60	8.85	35.16			
RMS	6.8515G	112.24	Inf	-Inf	102.95	3	Vertical	98	2.62	-	35.60	8.85	35.16			
PK	7.1483G	68.44	88.20	-19.76	59.19	3	Vertical	98	2.62	-	35.89	8.50	35.14			
RMS	7.1476G	58.65	68.20	-9.55	49.40	3	Vertical	98	2.62	-	35.89	8.50	35.14			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

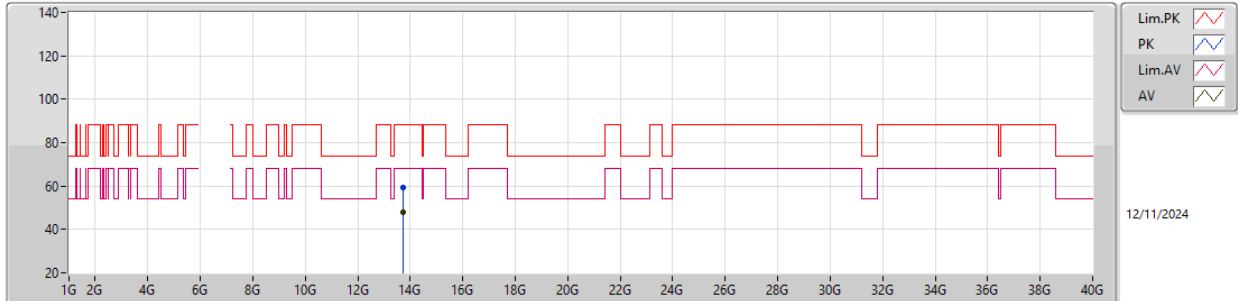
6855MHz_TX

EUT_Z_2TX
Setting Z6
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	6.8557G	117.91	Inf	-Inf	108.63	3	Horizontal	282	2.46	-	35.60	8.84	35.16			
RMS	6.8564G	107.24	Inf	-Inf	97.96	3	Horizontal	282	2.46	-	35.60	8.84	35.16			
PK	7.1455G	65.62	88.20	-22.58	56.39	3	Horizontal	282	2.46	-	35.88	8.49	35.14			
RMS	7.1413G	55.71	68.20	-12.49	46.49	3	Horizontal	282	2.46	-	35.87	8.49	35.14			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

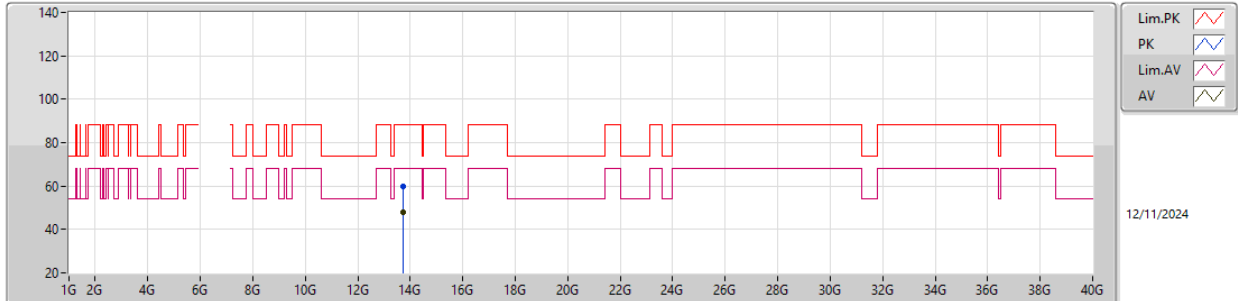
6855MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.71597G	59.33	88.20	-28.87	40.11	3	Vertical	90	1.58	-	40.46	11.70	32.94			
RMS	13.71045G	47.79	68.20	-20.41	28.58	3	Vertical	90	1.58	-	40.44	11.70	32.93			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

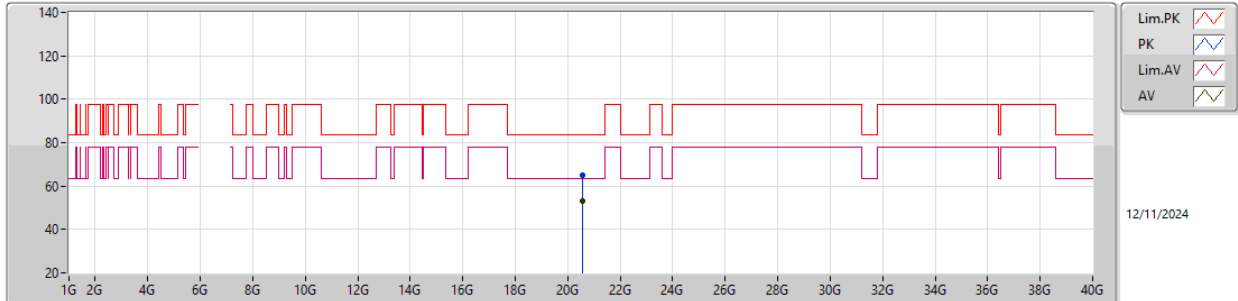
6855MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.71222G	60.05	88.20	-28.15	40.83	3	Horizontal	198	2.45	-	40.45	11.70	32.93			
RMS	13.71294G	47.93	68.20	-20.27	28.71	3	Horizontal	198	2.45	-	40.45	11.70	32.93			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

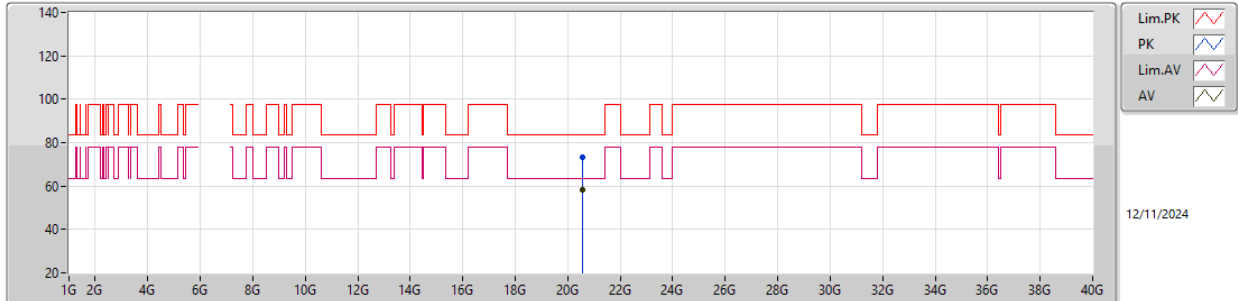
6855MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.5653G	65.21	83.54	-18.33	60.77	1	Vertical	141	2.00	-	37.90	15.65	49.11			
AV	20.57787G	53.14	63.54	-10.40	48.68	1	Vertical	141	2.00	-	37.90	15.66	49.10			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

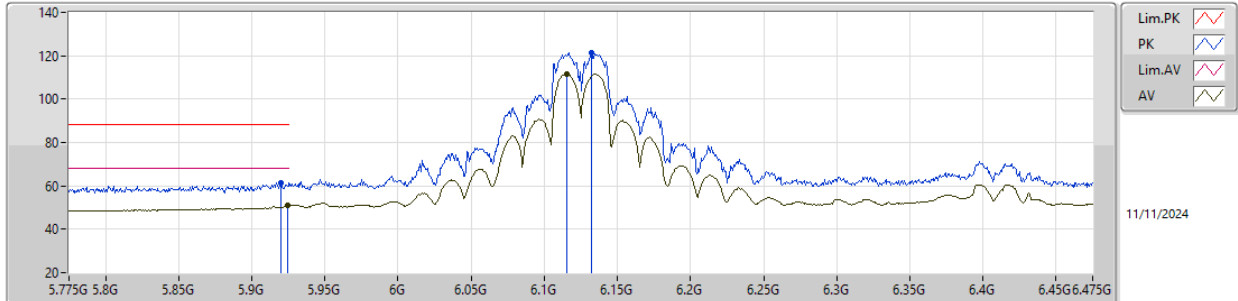
6855MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.55261G	73.05	83.54	-10.49	68.62	1	Horizontal	46	2.04	-	37.90	15.64	49.11			
AV	20.55999G	58.46	63.54	-5.08	54.02	1	Horizontal	46	2.04	-	37.90	15.65	49.11			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

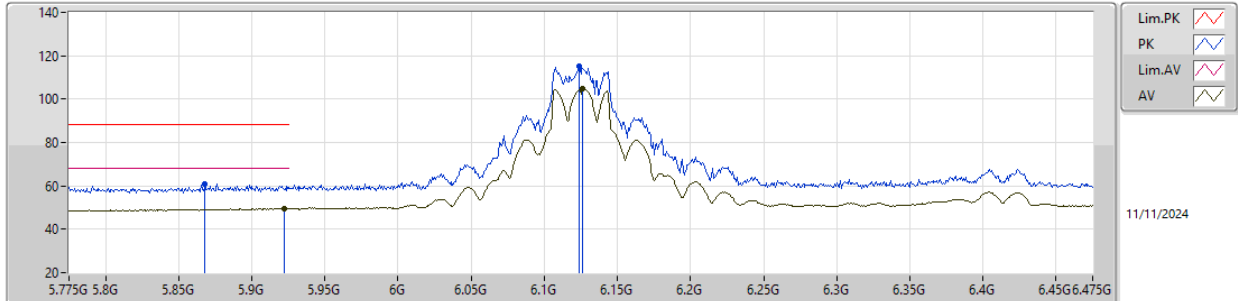
6125MHz_TX

EUT_Z_2TX
Setting 26
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9199G	61.26	88.20	-26.94	53.83	3	Vertical	357	2.57	-	34.54	8.09	35.20			
RMS	5.9248G	50.89	68.20	-17.31	43.45	3	Vertical	357	2.57	-	34.55	8.09	35.20			
PK	6.132G	121.59	Inf	-Inf	113.52	3	Vertical	357	2.57	-	34.90	8.37	35.20			
RMS	6.1152G	111.75	Inf	-Inf	103.71	3	Vertical	357	2.57	-	34.90	8.34	35.20			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

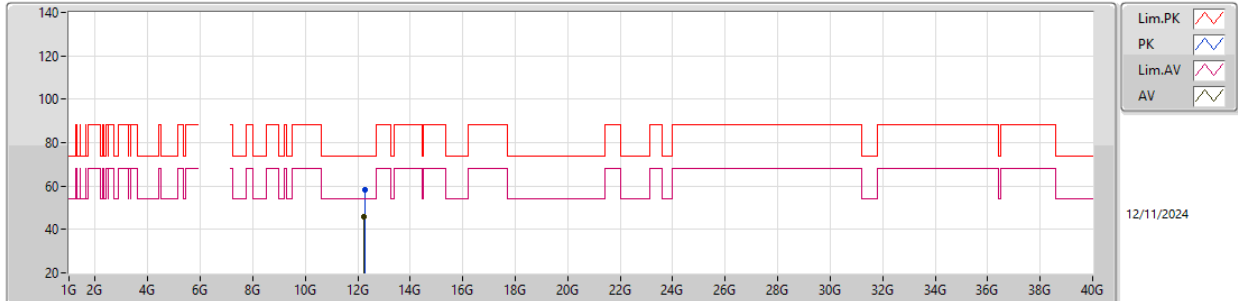
6125MHz_TX

EUT_Z_2TX
Setting 26
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.8681G	60.71	88.20	-27.49	53.51	3	Horizontal	89	2.58	-	34.37	8.03	35.20			
RMS	5.922G	49.64	68.20	-18.56	42.21	3	Horizontal	89	2.58	-	34.54	8.09	35.20			
PK	6.1236G	115.06	Inf	-Inf	107.00	3	Horizontal	89	2.58	-	34.90	8.36	35.20			
RMS	6.1264G	104.78	Inf	-Inf	96.72	3	Horizontal	89	2.58	-	34.90	8.36	35.20			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

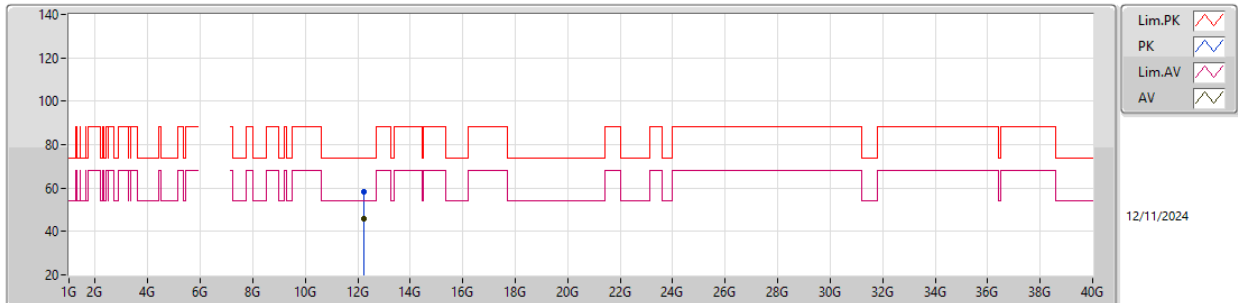
6125MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.25591G	58.39	74.00	-15.61	42.12	3	Vertical	6	2.81	-	38.79	11.81	34.33			
AV	12.24691G	46.10	54.00	-7.90	29.85	3	Vertical	6	2.81	-	38.79	11.81	34.35			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

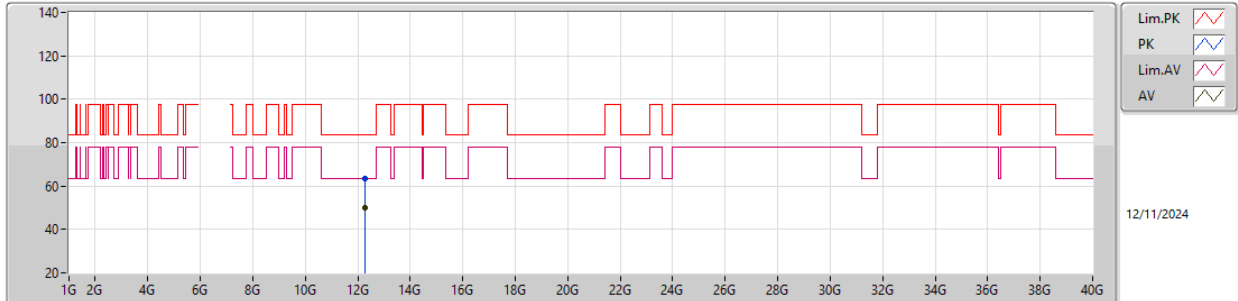
6125MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.23869G	58.20	74.00	-15.80	41.97	3	Horizontal	40	1.72	-	38.78	11.81	34.36			
AV	12.2431G	46.10	54.00	-7.90	29.85	3	Horizontal	40	1.72	-	38.79	11.81	34.35			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

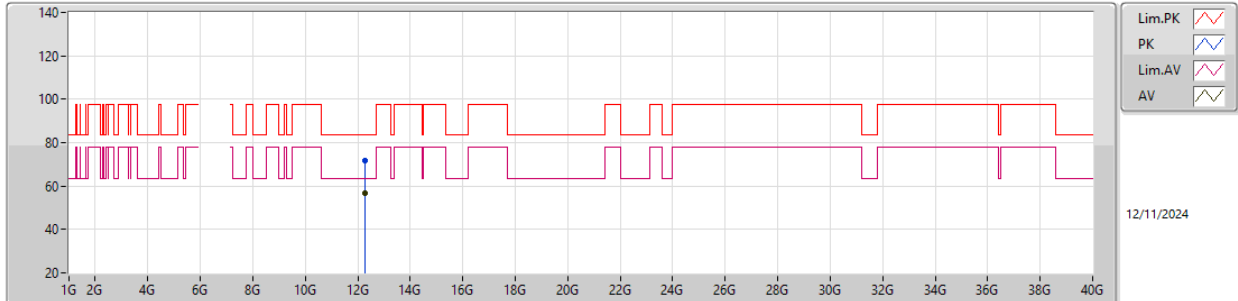
6125MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.25879G	63.59	83.54	-19.95	59.42	1	Vertical	193	2.07	-	25.68	12.16	33.67			
AV	12.262G	50.21	63.54	-13.33	46.05	1	Vertical	193	2.07	-	25.68	12.16	33.68			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

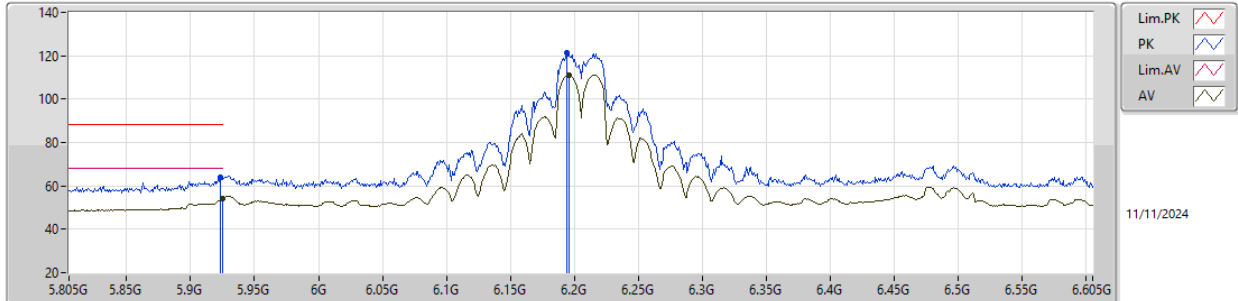
6125MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.26383G	71.92	83.54	-11.62	67.75	1	Horizontal	107	1.78	-	25.69	12.16	33.68			
AV	12.26026G	56.49	63.54	-7.05	52.32	1	Horizontal	107	1.78	-	25.68	12.16	33.67			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

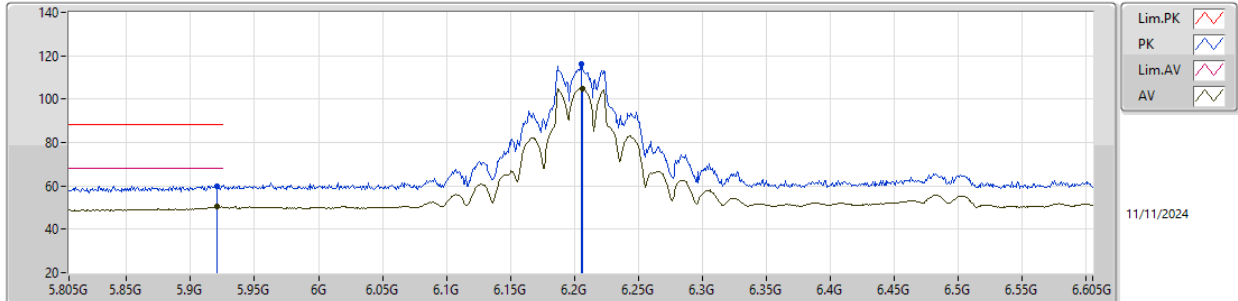
6205MHz_TX

EUT_Z_2TX
Setting 26
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9234G	64.18	88.20	-24.02	56.74	3	Vertical	357	2.43	-	34.55	8.09	35.20			
RMS	5.925G	54.22	68.20	-13.98	46.78	3	Vertical	357	2.43	-	34.55	8.09	35.20			
PK	6.1938G	121.52	Inf	-Inf	113.27	3	Vertical	357	2.43	-	34.99	8.46	35.20			
RMS	6.1962G	111.15	Inf	-Inf	102.90	3	Vertical	357	2.43	-	34.99	8.46	35.20			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

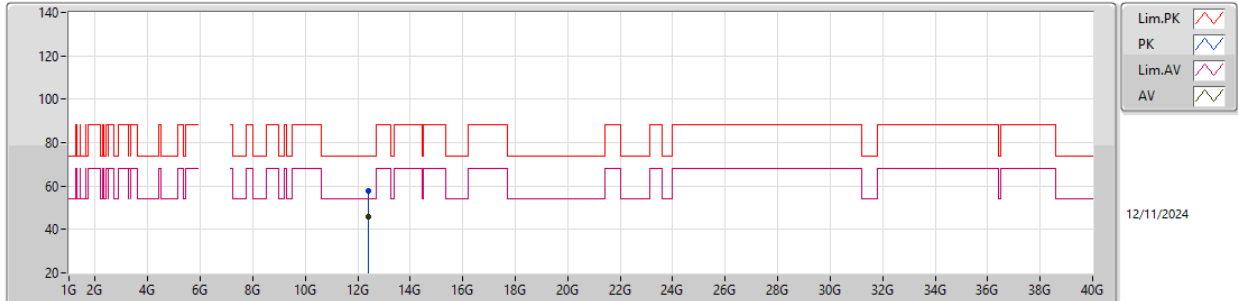
6205MHz_TX

EUT_Z_2TX
Setting Z6
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.921G	60.06	88.20	-28.14	52.63	3	Horizontal	89	2.67	-	34.54	8.09	35.20			
RMS	5.921G	50.49	68.20	-17.71	43.06	3	Horizontal	89	2.67	-	34.54	8.09	35.20			
PK	6.2058G	116.27	Inf	-Inf	108.00	3	Horizontal	89	2.67	-	34.99	8.48	35.20			
RMS	6.2066G	104.93	Inf	-Inf	96.66	3	Horizontal	89	2.67	-	34.99	8.48	35.20			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6205MHz_TX

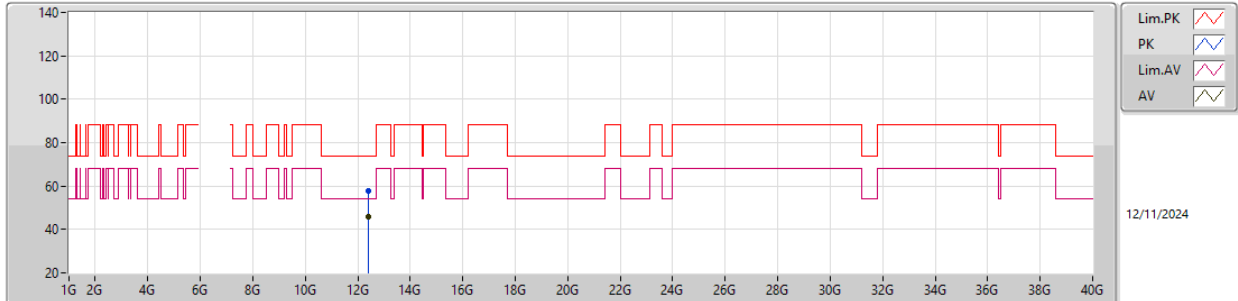


EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.41807G	57.54	74.00	-16.46	41.16	3	Vertical	230	2.08	-	38.60	11.80	34.02			
AV	12.39695G	45.80	54.00	-8.20	29.45	3	Vertical	230	2.08	-	38.61	11.80	34.06			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

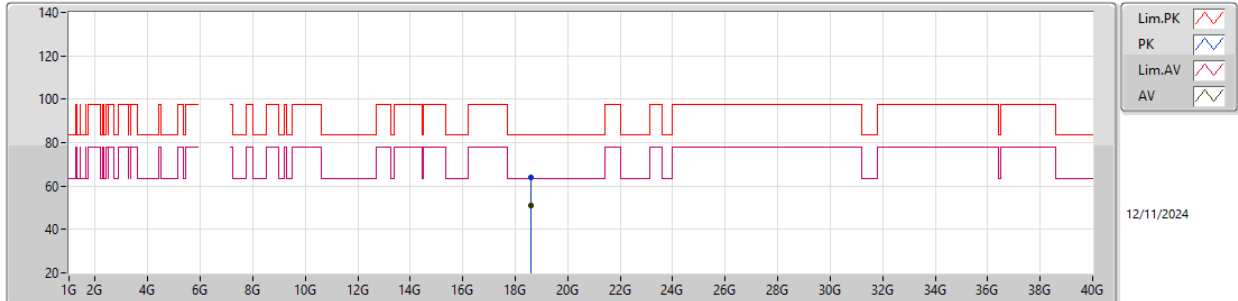
6205MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.42209G	57.75	74.00	-16.25	41.37	3	Horizontal	18	2.16	-	38.60	11.80	34.02			
AV	12.39959G	45.83	54.00	-8.17	29.49	3	Horizontal	18	2.16	-	38.60	11.80	34.06			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

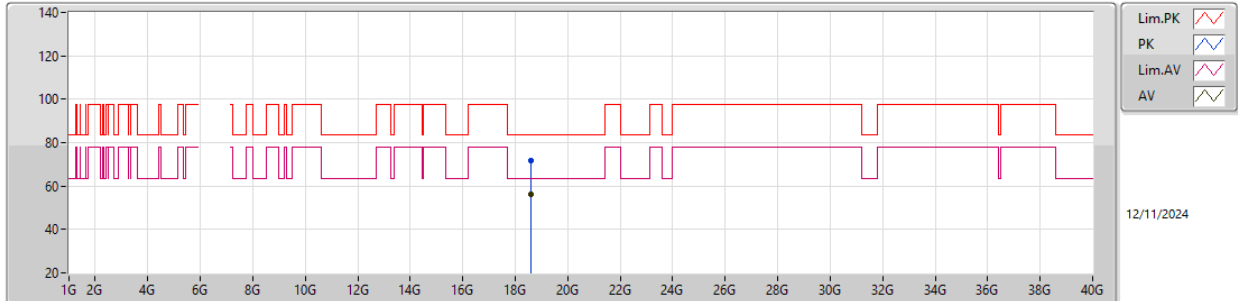
6205MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.61173G	63.75	83.54	-19.79	60.26	1	Vertical	228	1.27	-	37.82	15.27	49.60			
AV	18.61371G	50.83	63.54	-12.71	47.33	1	Vertical	228	1.27	-	37.83	15.27	49.60			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

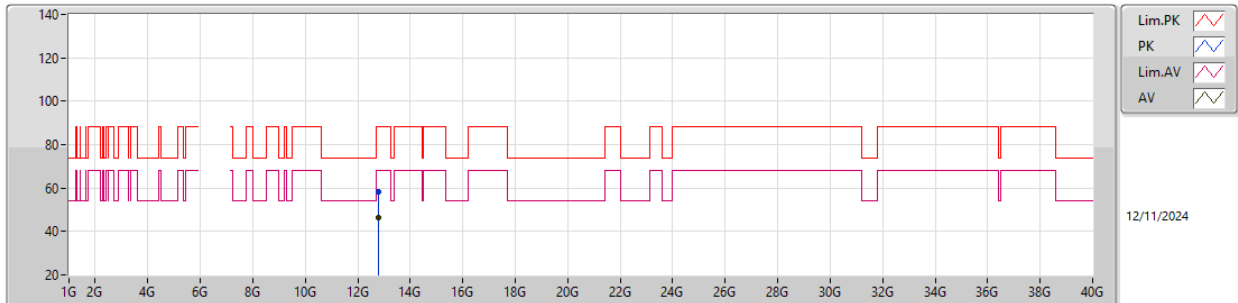
6205MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.61131G	71.82	83.54	-11.72	68.33	1	Horizontal	172	2.32	-	37.82	15.27	49.60			
AV	18.61467G	56.14	63.54	-7.40	52.64	1	Horizontal	172	2.32	-	37.83	15.27	49.60			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

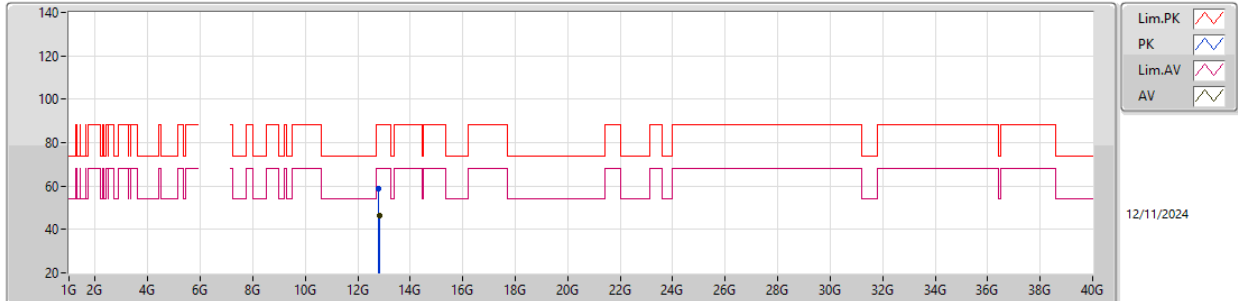
6405MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.81018G	58.41	88.20	-29.79	41.45	3	Vertical	294	1.72	-	39.04	11.77	33.85			
RMS	12.81039G	46.35	68.20	-21.85	29.39	3	Vertical	294	1.72	-	39.04	11.77	33.85			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

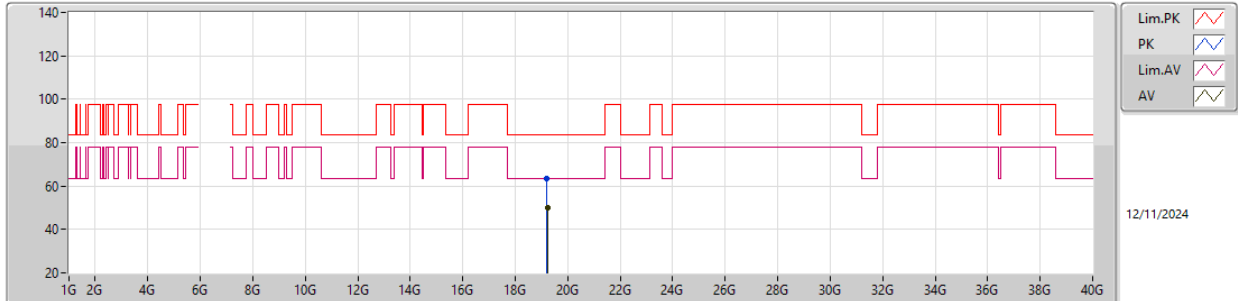
6405MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.79875G	58.68	88.20	-29.52	41.76	3	Horizontal	172	1.86	-	39.00	11.77	33.85			
RMS	12.813G	46.31	68.20	-21.89	29.33	3	Horizontal	172	1.86	-	39.05	11.77	33.84			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

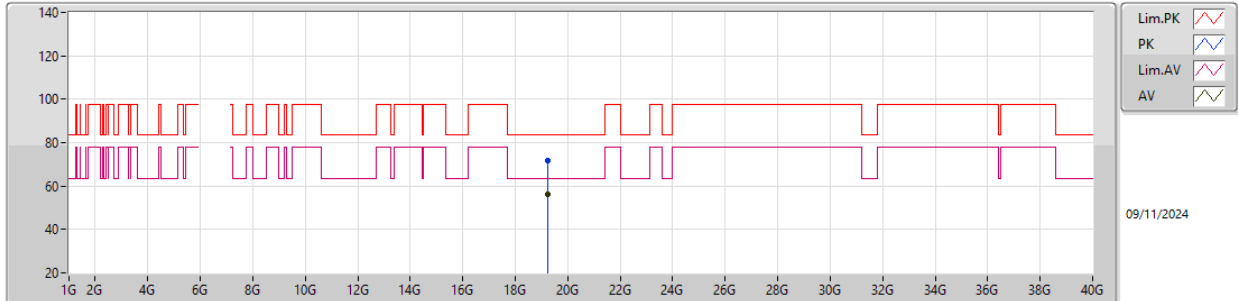
6405MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.20834G	63.47	83.54	-20.07	59.88	1	Vertical	278	2.91	-	37.83	15.24	49.48			
AV	19.22691G	50.14	63.54	-13.40	46.48	1	Vertical	278	2.91	-	37.91	15.24	49.49			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

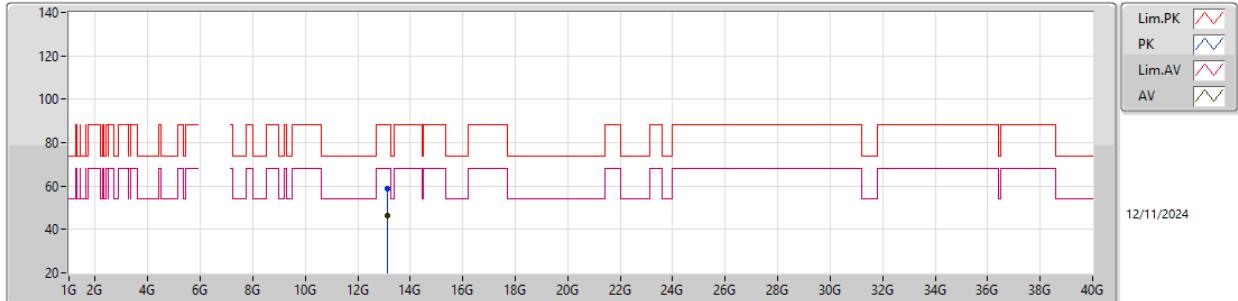
6405MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.21992G	71.58	83.54	-11.96	67.95	1	Horizontal	287	1.35	-	37.88	15.24	49.49			
AV	19.22205G	56.41	63.54	-7.13	52.77	1	Horizontal	287	1.35	-	37.89	15.24	49.49			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

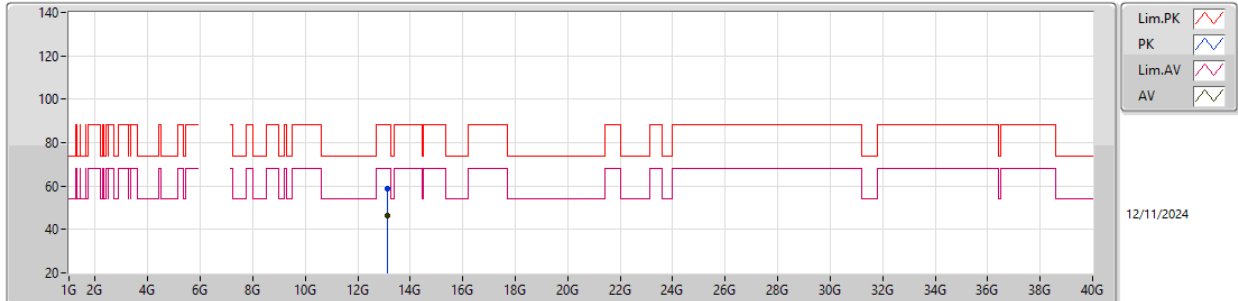
6565MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.13726G	58.83	88.20	-29.37	40.99	3	Vertical	74	2.30	-	39.60	11.74	33.50			
RMS	13.14032G	46.30	68.20	-21.90	28.45	3	Vertical	74	2.30	-	39.60	11.74	33.49			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

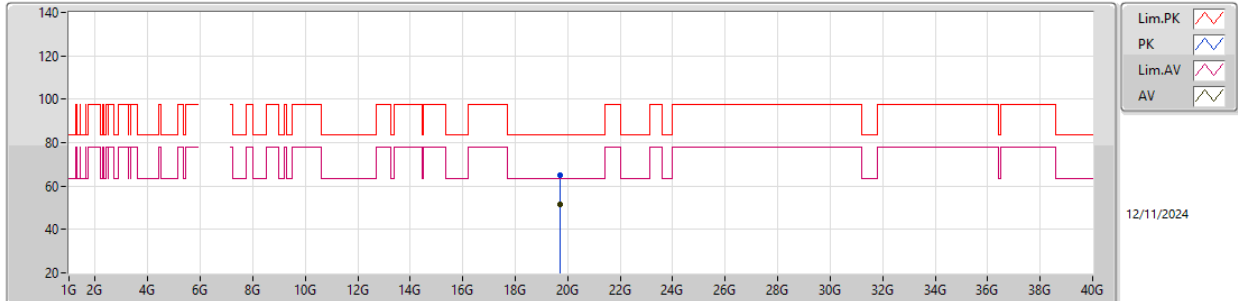
6565MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.12337G	58.95	88.20	-29.25	41.13	3	Horizontal	91	2.27	-	39.60	11.75	33.53			
RMS	13.1387G	46.27	68.20	-21.93	28.43	3	Horizontal	91	2.27	-	39.60	11.74	33.50			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

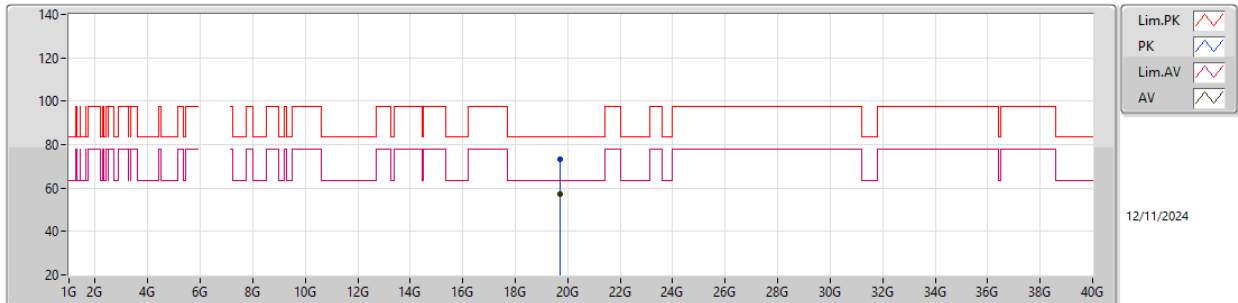
6565MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.70001G	65.17	83.54	-18.37	61.78	1	Vertical	318	2.75	-	37.70	15.21	49.52			
AV	19.69305G	51.49	63.54	-12.05	48.09	1	Vertical	318	2.75	-	37.70	15.22	49.52			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

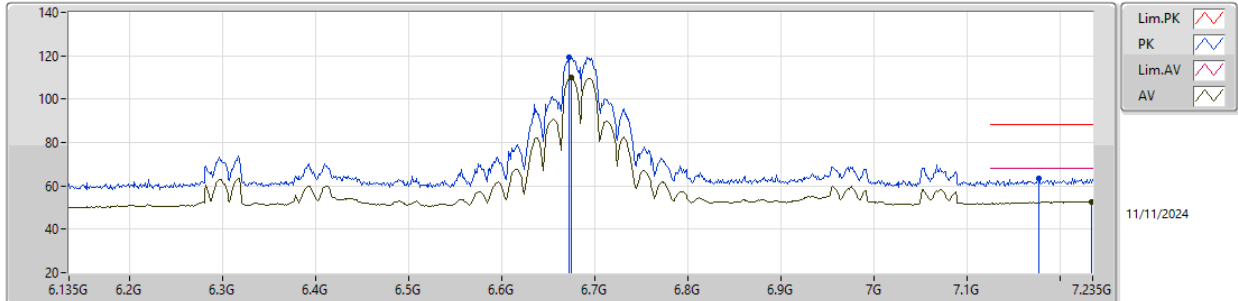
6565MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.70439G	73.15	83.54	-10.39	69.75	1	Horizontal	218	1.47	-	37.70	15.21	49.51			
AV	19.70844G	57.49	63.54	-6.05	54.09	1	Horizontal	218	1.47	-	37.70	15.21	49.51			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

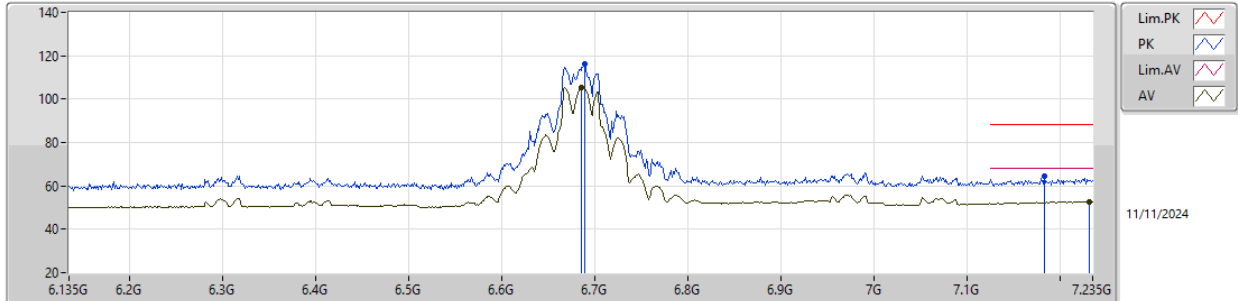
6685MHz_TX

EUT_Z_2TX
Setting Z6
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	6.6729G	119.44	Inf	-Inf	110.43	3	Vertical	51	2.22	-	35.25	8.95	35.19			
RMS	6.6751G	110.15	Inf	-Inf	101.14	3	Vertical	51	2.22	-	35.25	8.95	35.19			
PK	7.1767G	63.54	88.20	-24.66	54.10	3	Vertical	51	2.22	-	36.06	8.52	35.14			
RMS	7.2339G	52.84	68.20	-15.36	43.03	3	Vertical	51	2.22	-	36.40	8.56	35.15			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

6685MHz_TX

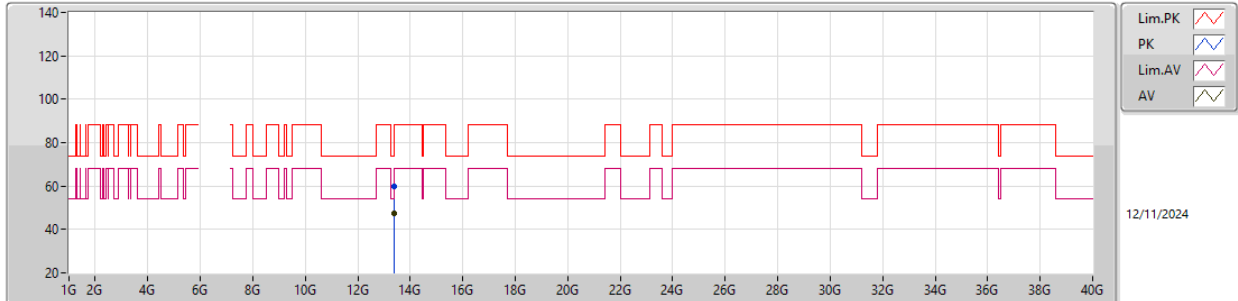


EUT_Z_2TX
Setting Z6
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	6.6894G	116.13	Inf	-Inf	107.08	3	Horizontal	277	2.39	-	35.28	8.96	35.19			
RMS	6.6861G	105.60	Inf	-Inf	96.56	3	Horizontal	277	2.39	-	35.27	8.96	35.19			
PK	7.1833G	64.36	88.20	-23.84	54.87	3	Horizontal	277	2.39	-	36.10	8.53	35.14			
RMS	7.2317G	52.83	68.20	-15.37	43.03	3	Horizontal	277	2.39	-	36.39	8.56	35.15			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

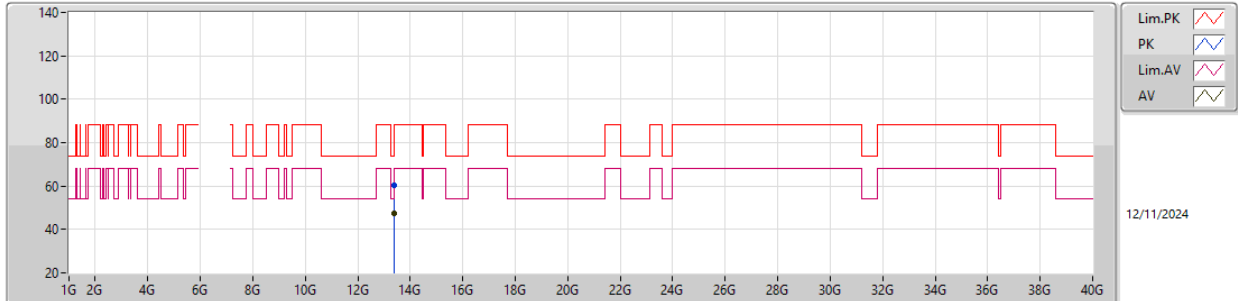
6685MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.36697G	59.78	74.00	-14.22	40.97	3	Vertical	138	2.48	-	40.03	11.73	32.95			
AV	13.37468G	47.51	54.00	-6.49	28.66	3	Vertical	138	2.48	-	40.05	11.73	32.93			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

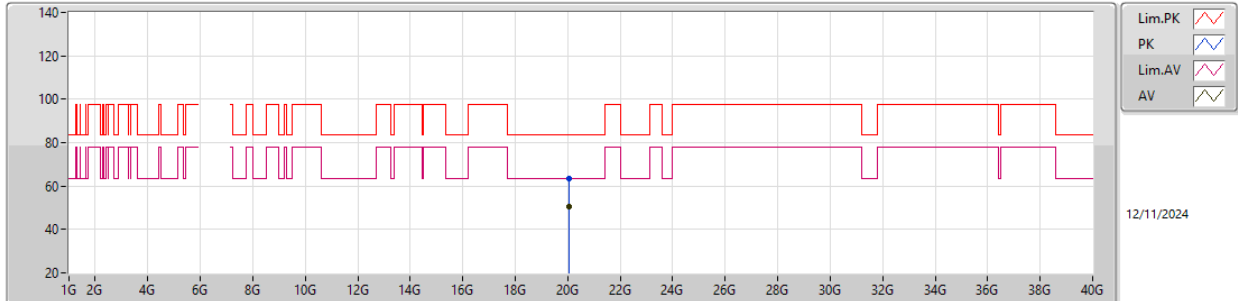
6685MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.37315G	60.21	74.00	-13.79	41.36	3	Horizontal	184	2.84	-	40.05	11.73	32.93			
AV	13.37768G	47.39	54.00	-6.61	28.52	3	Horizontal	184	2.84	-	40.06	11.73	32.92			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

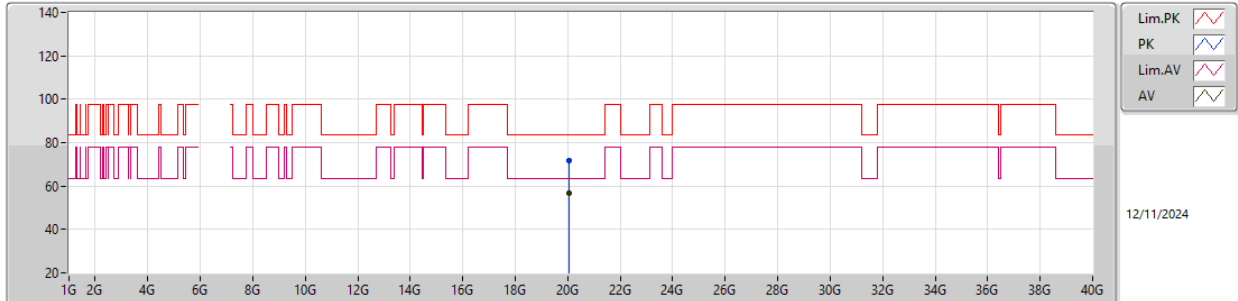
6685MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.06268G	63.21	83.54	-20.33	59.41	1	Vertical	184	1.84	-	37.80	15.25	49.25			
AV	20.04876G	50.47	63.54	-13.07	46.69	1	Vertical	184	1.84	-	37.80	15.24	49.26			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

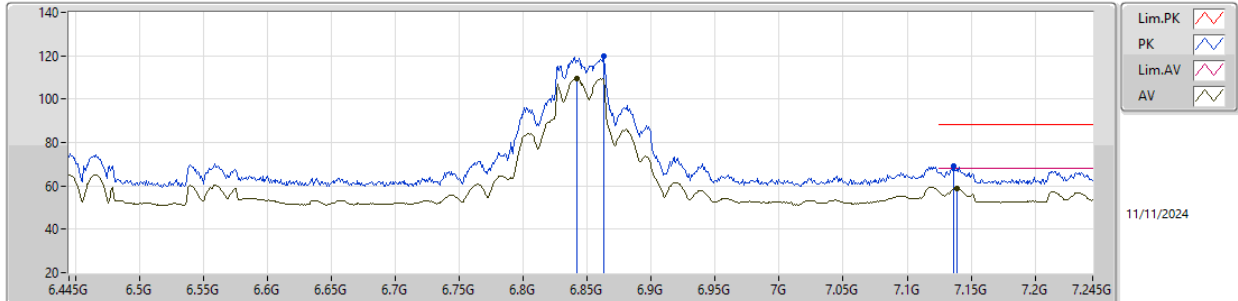
6685MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.04207G	71.52	83.54	-12.02	67.77	1	Horizontal	318	1.57	-	37.78	15.23	49.26			
AV	20.04414G	56.47	63.54	-7.07	52.70	1	Horizontal	318	1.57	-	37.79	15.24	49.26			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

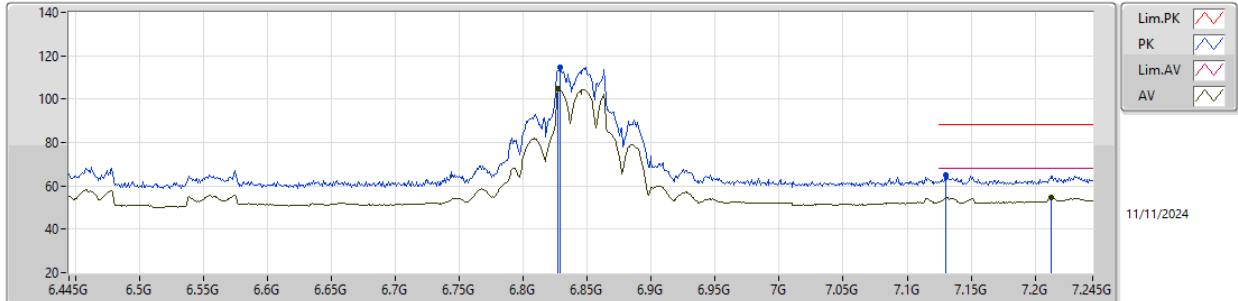
6845MHz_TX

EUT_Z_2TX
Setting Z6
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	6.8626G	120.03	Inf	-Inf	110.76	3	Vertical	97	2.61	-	35.60	8.82	35.15			
RMS	6.8418G	109.51	Inf	-Inf	100.19	3	Vertical	97	2.61	-	35.60	8.88	35.16			
PK	7.1362G	68.91	88.20	-19.29	59.72	3	Vertical	97	2.61	-	35.84	8.49	35.14			
RMS	7.1386G	58.92	68.20	-9.28	49.72	3	Vertical	97	2.61	-	35.85	8.49	35.14			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

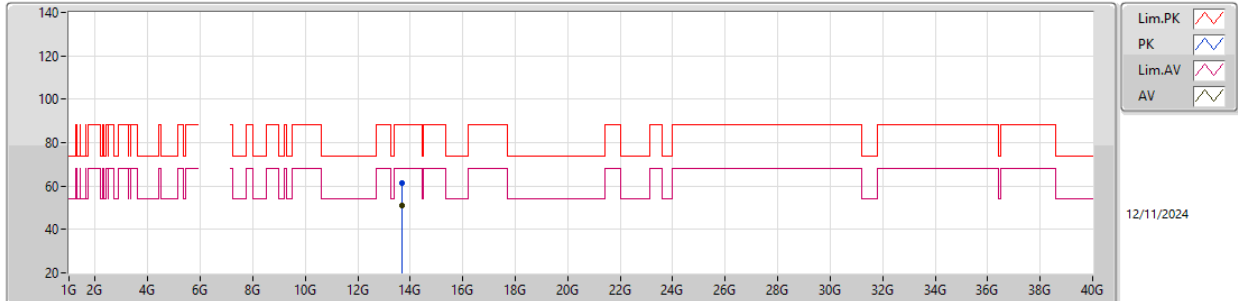
6845MHz_TX

EUT_Z_2TX
Setting Z6
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	6.829G	114.63	Inf	-Inf	105.26	3	Horizontal	279	2.46	-	35.60	8.93	35.16			
RMS	6.8274G	104.81	Inf	-Inf	95.44	3	Horizontal	279	2.46	-	35.60	8.93	35.16			
PK	7.1298G	64.88	88.20	-23.32	55.72	3	Horizontal	279	2.46	-	35.82	8.48	35.14			
RMS	7.213G	54.56	68.20	-13.64	44.88	3	Horizontal	279	2.46	-	36.28	8.55	35.15			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

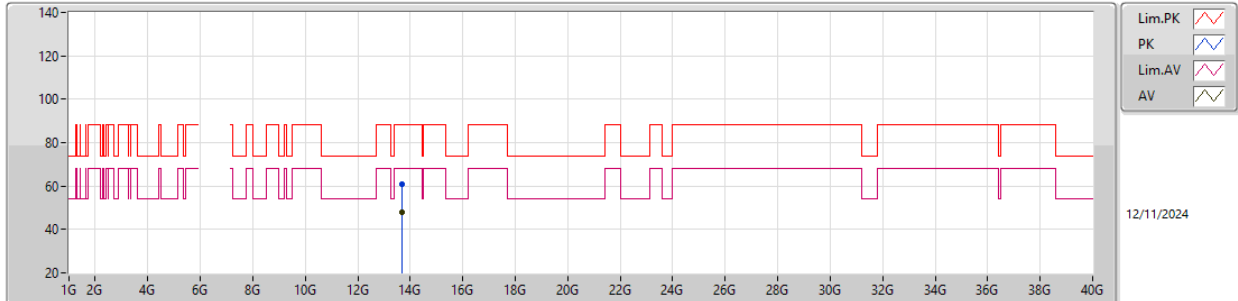
6845MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.68907G	61.13	88.20	-27.07	41.93	3	Vertical	196	2.85	-	40.40	11.70	32.90			
RMS	13.69003G	50.85	68.20	-17.35	31.65	3	Vertical	196	2.85	-	40.40	11.70	32.90			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

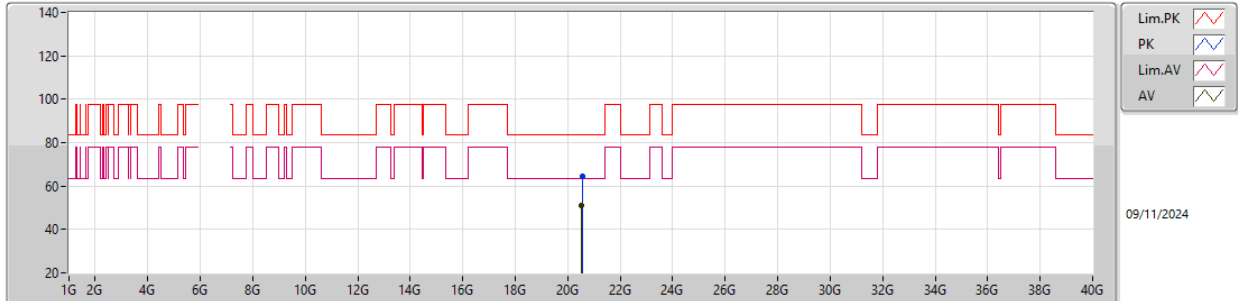
6845MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.6756G	60.98	88.20	-27.22	41.76	3	Horizontal	360	3.00	-	40.40	11.70	32.88			
RMS	13.68586G	47.84	68.20	-20.36	28.63	3	Horizontal	360	3.00	-	40.40	11.70	32.89			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

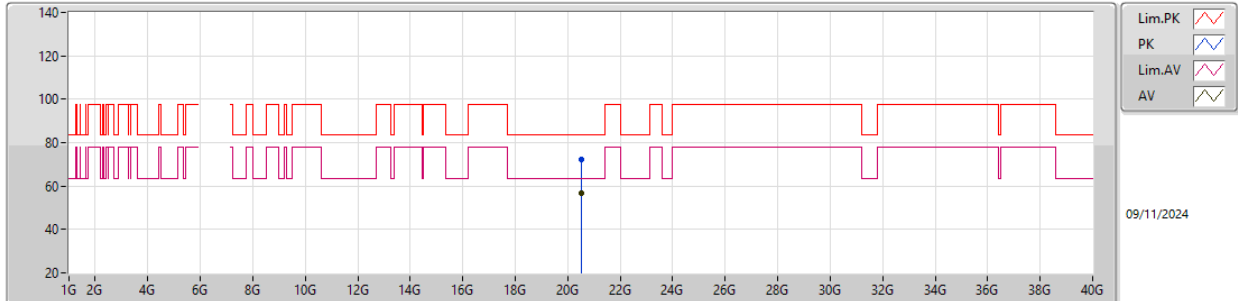
6845MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.5461G	64.25	83.54	-19.29	59.83	1	Vertical	289	1.57	-	37.90	15.64	49.12			
AV	20.53017G	51.24	63.54	-12.30	46.84	1	Vertical	289	1.57	-	37.90	15.62	49.12			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

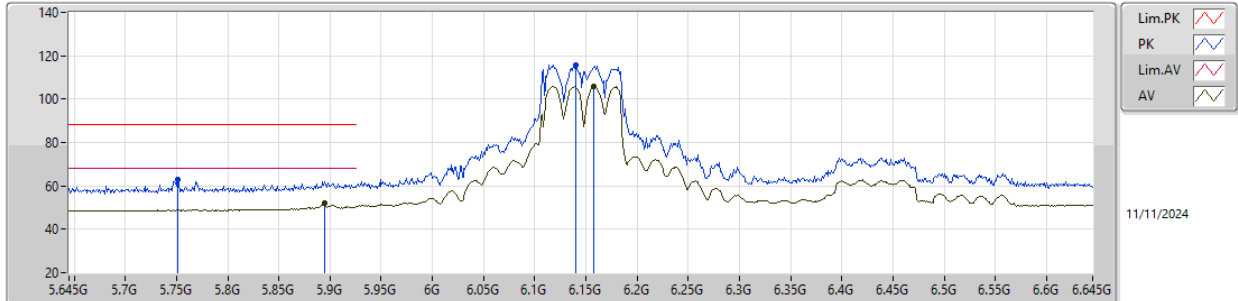
6845MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.52987G	72.15	83.54	-11.39	67.75	1	Horizontal	127	1.88	-	37.90	15.62	49.12			
AV	20.53374G	56.49	63.54	-7.05	52.08	1	Horizontal	127	1.88	-	37.90	15.63	49.12			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6145MHz_TX

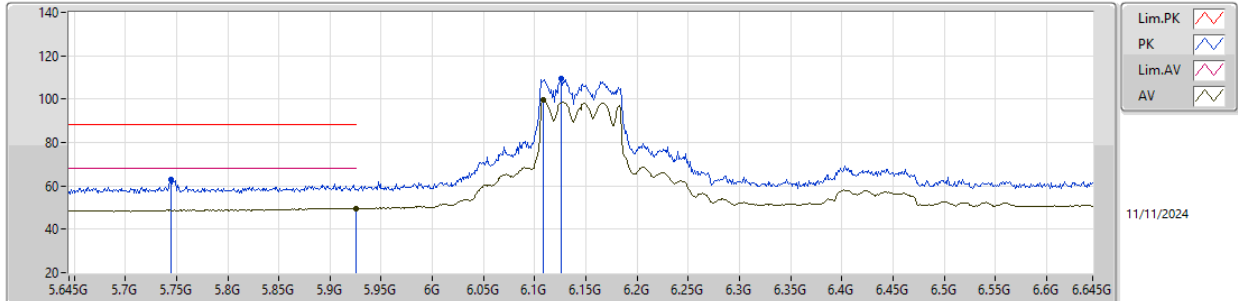


EUT_Z_2TX
Setting 23.5
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.751G	62.91	88.20	-25.29	56.05	3	Vertical	354	2.68	-	34.20	7.87	35.21			
RMS	5.895G	52.03	68.20	-16.17	44.69	3	Vertical	354	2.68	-	34.48	8.06	35.20			
PK	6.14G	115.82	Inf	-Inf	107.74	3	Vertical	354	2.68	-	34.90	8.38	35.20			
RMS	6.158G	105.76	Inf	-Inf	97.63	3	Vertical	354	2.68	-	34.92	8.41	35.20			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

6145MHz_TX

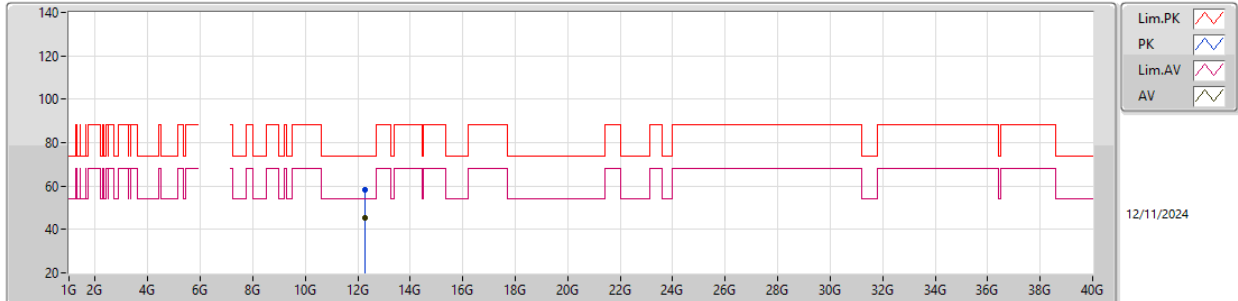


EUT_Z_2TX
Setting 23.5
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.745G	62.70	88.20	-25.50	55.87	3	Horizontal	90	2.94	-	34.19	7.86	35.22			
RMS	5.925G	49.70	68.20	-18.50	42.26	3	Horizontal	90	2.94	-	34.55	8.09	35.20			
PK	6.126G	109.47	Inf	-Inf	101.41	3	Horizontal	90	2.94	-	34.90	8.36	35.20			
RMS	6.108G	99.71	Inf	-Inf	91.68	3	Horizontal	90	2.94	-	34.90	8.33	35.20			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

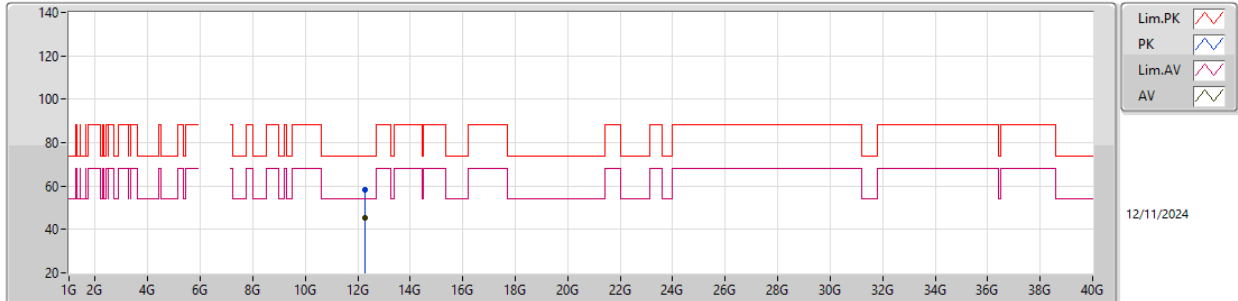
6145MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.27635G	58.28	74.00	-15.72	42.01	3	Vertical	360	1.80	-	38.75	11.81	34.29			
AV	12.27521G	45.41	54.00	-8.59	29.14	3	Vertical	360	1.80	-	38.75	11.81	34.29			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

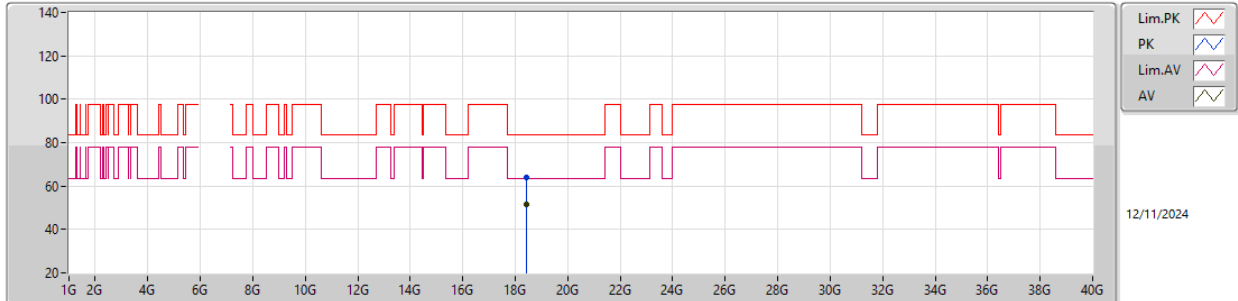
6145MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.29048G	58.14	74.00	-15.86	41.87	3	Horizontal	360	1.80	-	38.72	11.81	34.26			
AV	12.2762G	45.60	54.00	-8.40	29.33	3	Horizontal	360	1.80	-	38.75	11.81	34.29			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

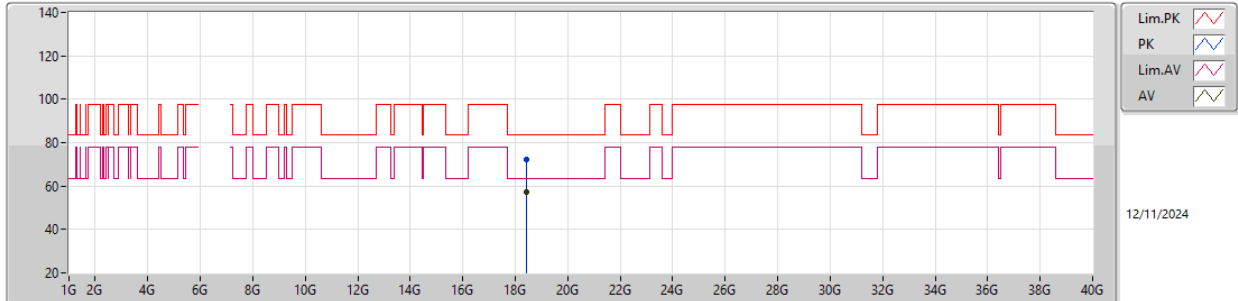
6145MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.42144G	64.11	83.54	-19.43	60.77	1	Vertical	78	1.91	-	37.70	15.28	49.64			
AV	18.43365G	51.30	63.54	-12.24	47.97	1	Vertical	78	1.91	-	37.70	15.28	49.65			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

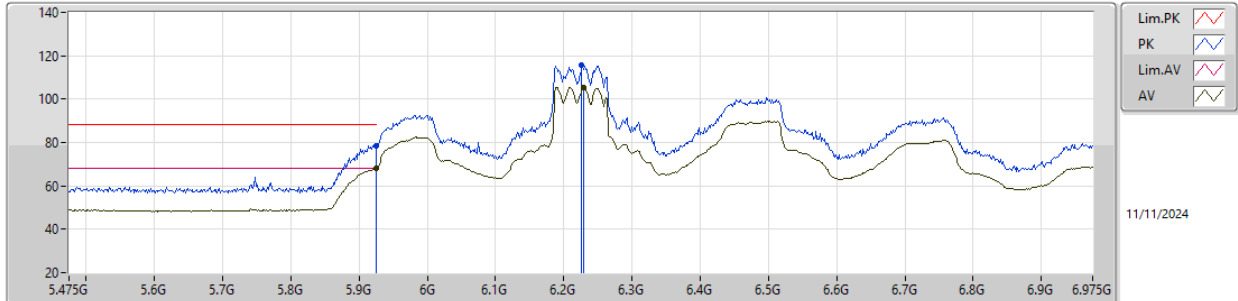
6145MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.441G	72.11	83.54	-11.43	68.78	1	Horizontal	305	1.37	-	37.70	15.28	49.65			
AV	18.43263G	57.10	63.54	-6.44	53.77	1	Horizontal	305	1.37	-	37.70	15.28	49.65			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

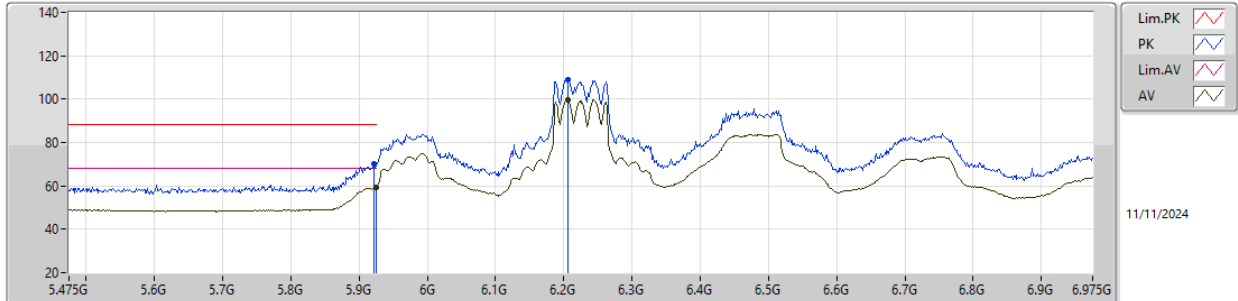
6225MHz_TX

EUT_Z_2TX
Setting 24
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	78.58	88.20	-9.62	71.14	3	Vertical	103	2.48	-	34.55	8.09	35.20			
RMS	5.925G	68.07	68.20	-0.13	60.63	3	Vertical	103	2.48	-	34.55	8.09	35.20			
PK	6.2265G	115.67	Inf	-Inf	107.41	3	Vertical	103	2.48	-	34.95	8.51	35.20			
RMS	6.2295G	105.47	Inf	-Inf	97.22	3	Vertical	103	2.48	-	34.94	8.51	35.20			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

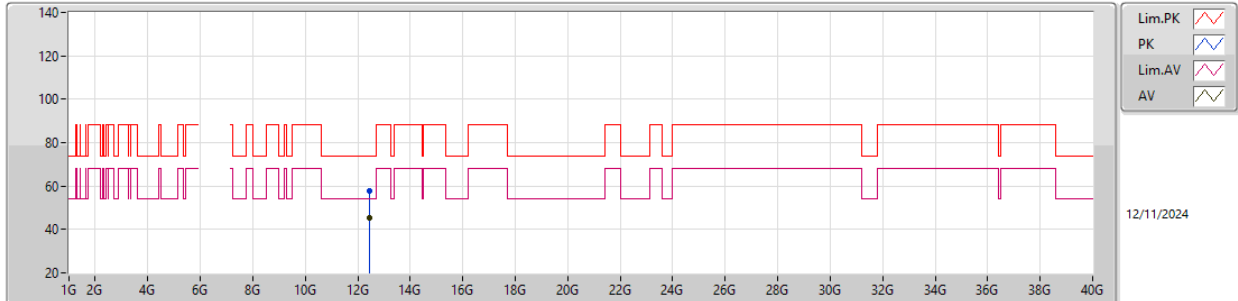
6225MHz_TX

EUT_Z_2TX
Setting 24
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.922G	69.97	88.20	-18.23	62.54	3	Horizontal	87	2.52	-	34.54	8.09	35.20			
RMS	5.925G	59.54	68.20	-8.66	52.10	3	Horizontal	87	2.52	-	34.55	8.09	35.20			
PK	6.2055G	109.14	Inf	-Inf	100.87	3	Horizontal	87	2.52	-	34.99	8.48	35.20			
RMS	6.2055G	99.80	Inf	-Inf	91.53	3	Horizontal	87	2.52	-	34.99	8.48	35.20			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

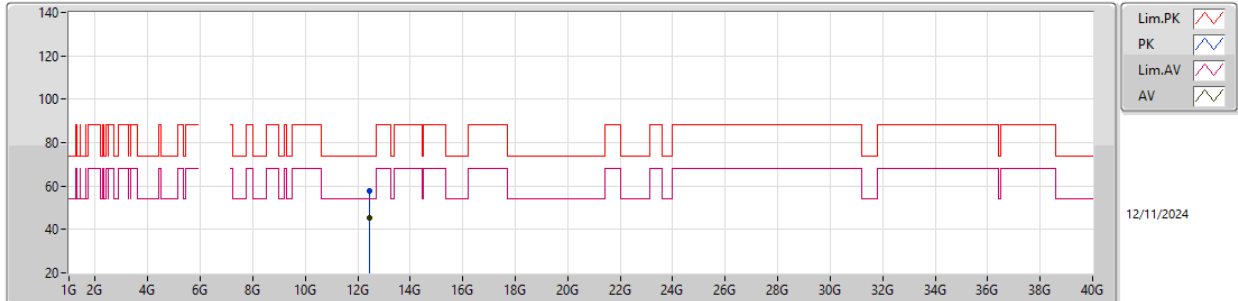
6225MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.44979G	57.71	74.00	-16.29	41.27	3	Vertical	240	1.51	-	38.60	11.80	33.96			
AV	12.46023G	45.28	54.00	-8.72	28.80	3	Vertical	240	1.51	-	38.62	11.80	33.94			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

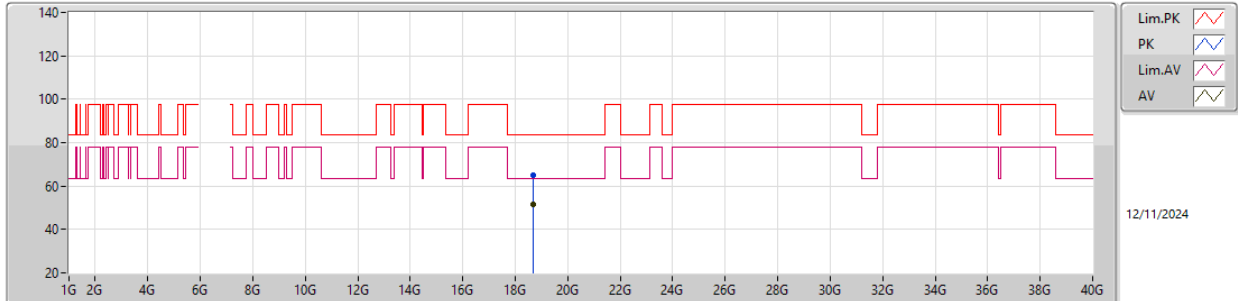
6225MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.45996G	57.92	74.00	-16.08	41.45	3	Horizontal	315	1.17	-	38.62	11.80	33.95			
AV	12.46137G	45.33	54.00	-8.67	28.85	3	Horizontal	315	1.17	-	38.62	11.80	33.94			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

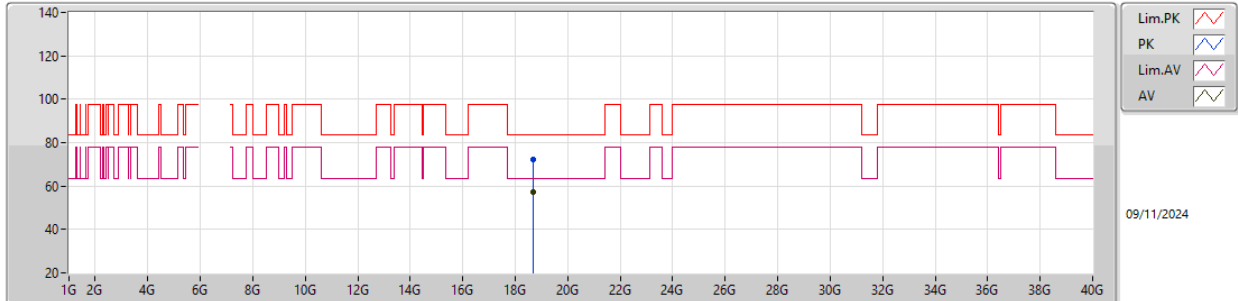
6225MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.67392G	64.82	83.54	-18.72	61.21	1	Vertical	200	1.49	-	37.90	15.27	49.56			
AV	18.6747G	51.49	63.54	-12.05	47.88	1	Vertical	200	1.49	-	37.90	15.27	49.56			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

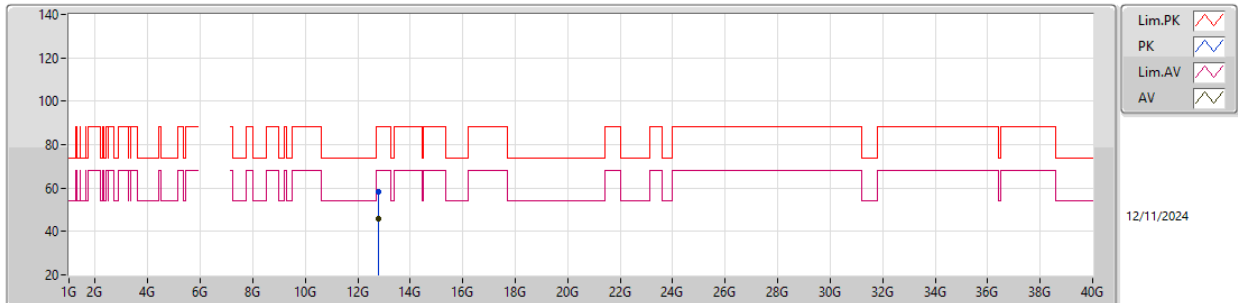
6225MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.68823G	72.00	83.54	-11.54	68.38	1	Horizontal	239	1.90	-	37.90	15.27	49.55			
AV	18.67422G	57.13	63.54	-6.41	53.52	1	Horizontal	239	1.90	-	37.90	15.27	49.56			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

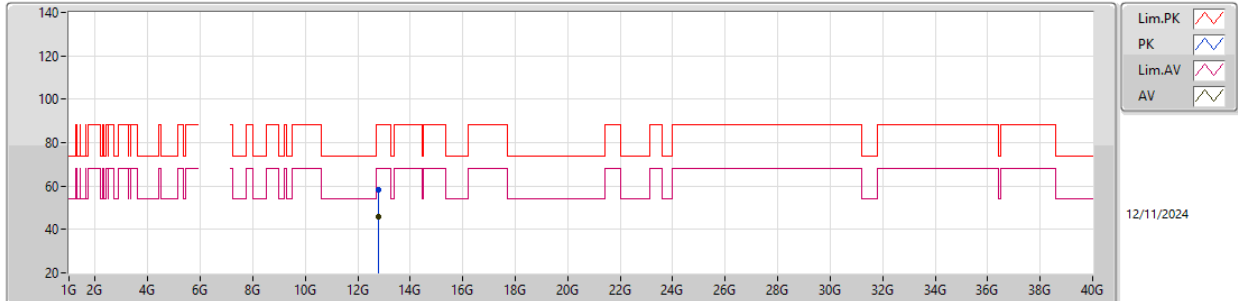
6385MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.7847G	58.28	88.20	-29.92	41.42	3	Vertical	123	1.80	-	38.94	11.77	33.85			
RMS	12.77264G	45.81	68.20	-22.39	29.00	3	Vertical	123	1.80	-	38.89	11.77	33.85			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

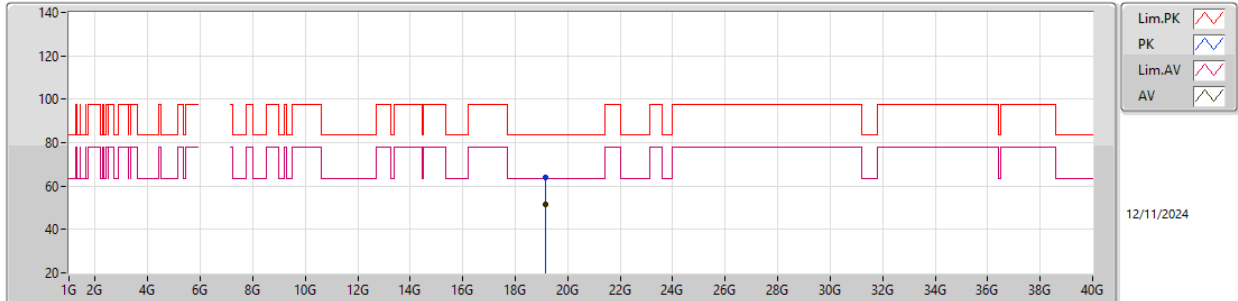
6385MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.77042G	58.50	88.20	-29.70	41.70	3	Horizontal	243	1.80	-	38.88	11.77	33.85			
RMS	12.77762G	45.61	68.20	-22.59	28.78	3	Horizontal	243	1.80	-	38.91	11.77	33.85			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

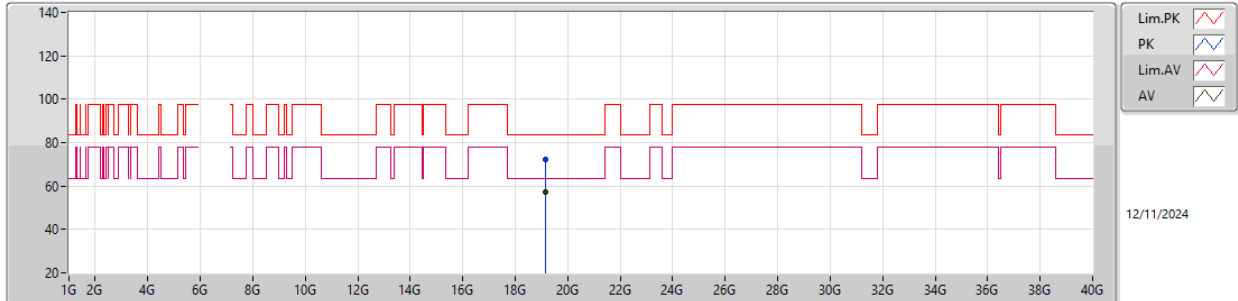
6385MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.15236G	64.22	83.54	-19.32	60.43	1	Vertical	14	1.73	-	37.99	15.24	49.44			
AV	19.15335G	51.47	63.54	-12.07	47.68	1	Vertical	14	1.73	-	37.99	15.24	49.44			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

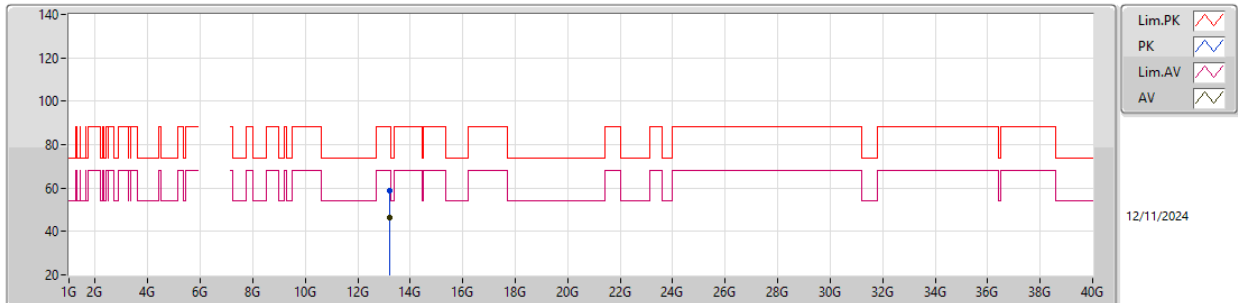
6385MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.15503G	72.14	83.54	-11.40	68.37	1	Horizontal	260	1.66	-	37.98	15.24	49.45			
AV	19.14885G	57.20	63.54	-6.34	53.40	1	Horizontal	260	1.66	-	38.00	15.24	49.44			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

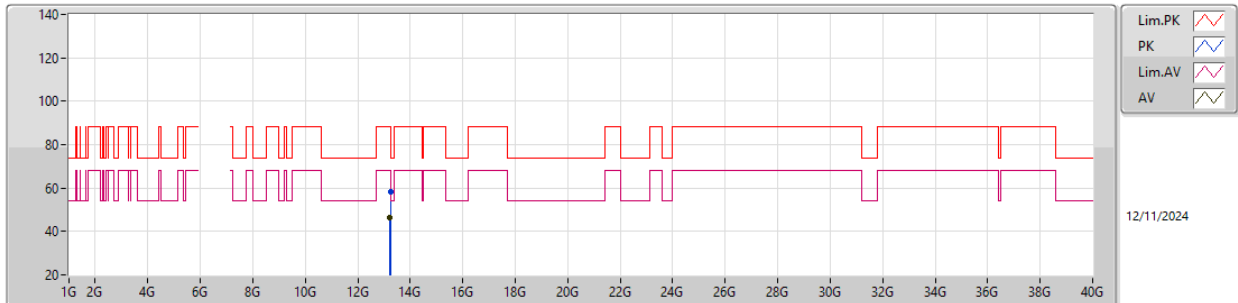
6625MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.2374G	58.71	88.20	-29.49	40.38	3	Vertical	330	1.43	-	39.85	11.74	33.26			
RMS	13.23551G	46.37	68.20	-21.83	28.05	3	Vertical	330	1.43	-	39.84	11.74	33.26			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

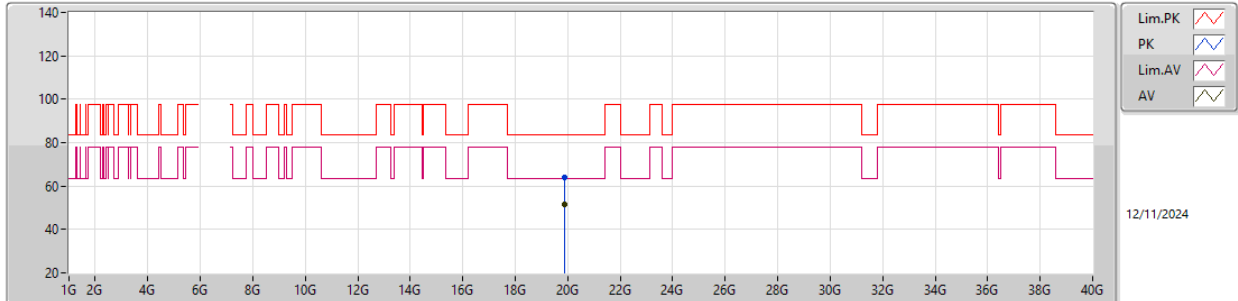
6625MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.2467G	58.33	88.20	-29.87	39.94	3	Horizontal	242	2.13	-	39.89	11.74	33.24			
RMS	13.23659G	46.37	68.20	-21.83	28.04	3	Horizontal	242	2.13	-	39.85	11.74	33.26			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

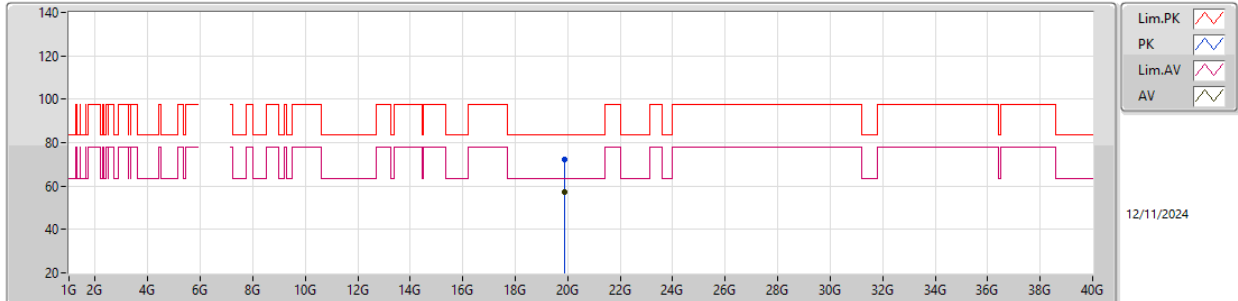
6625MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.88784G	64.15	83.54	-19.39	60.60	1	Vertical	297	1.60	-	37.70	15.21	49.36			
AV	19.87395G	51.78	63.54	-11.76	48.24	1	Vertical	297	1.60	-	37.70	15.21	49.37			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

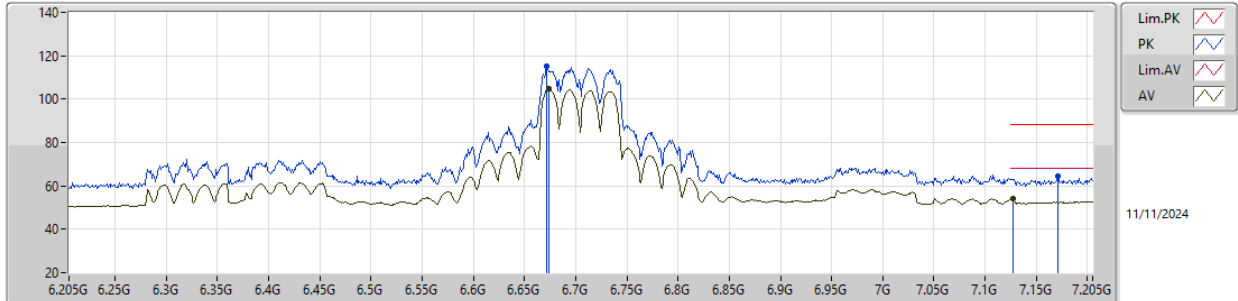
6625MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.87617G	72.19	83.54	-11.35	68.65	1	Horizontal	44	1.39	-	37.70	15.21	49.37			
AV	19.86939G	57.46	63.54	-6.08	53.93	1	Horizontal	44	1.39	-	37.70	15.21	49.38			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

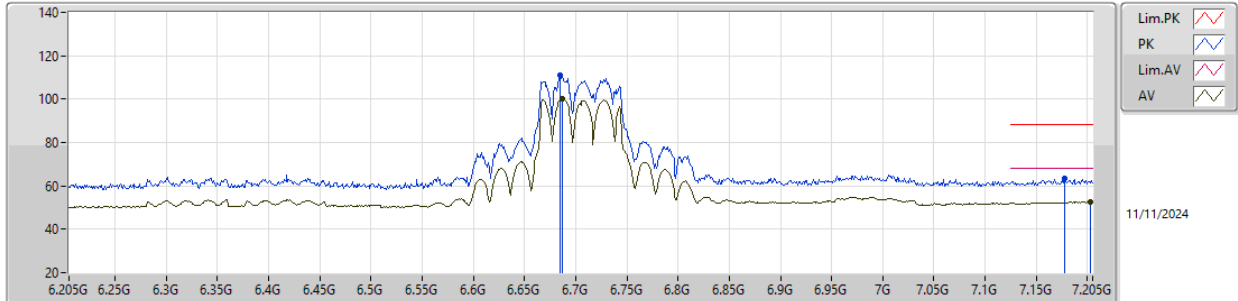
6705MHz_TX

EUT_Z_2TX
Setting 23
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	6.672G	115.30	Inf	-Inf	106.30	3	Vertical	52	2.23	-	35.24	8.95	35.19			
RMS	6.674G	104.72	Inf	-Inf	95.71	3	Vertical	52	2.23	-	35.25	8.95	35.19			
PK	7.171G	64.28	88.20	-23.92	54.87	3	Vertical	52	2.23	-	36.03	8.52	35.14			
RMS	7.127G	53.92	68.20	-14.28	44.77	3	Vertical	52	2.23	-	35.81	8.48	35.14			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

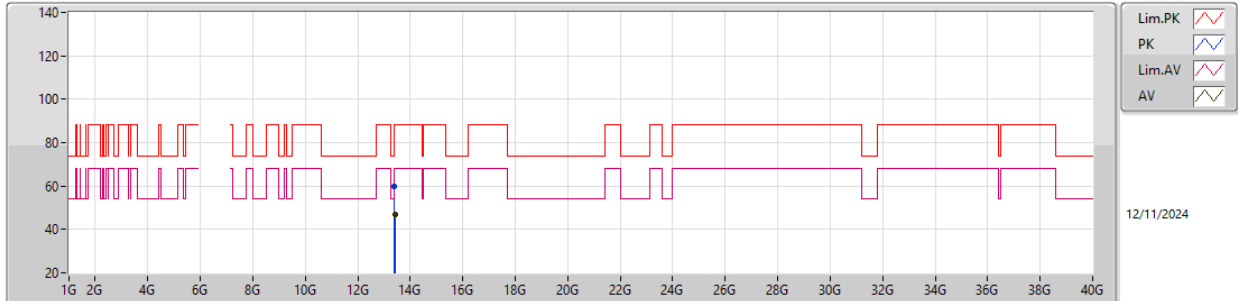
6705MHz_TX

EUT_Z_2TX
Setting 23
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	6.685G	110.80	Inf	-Inf	101.76	3	Horizontal	276	2.39	-	35.27	8.96	35.19			
RMS	6.687G	100.22	Inf	-Inf	91.18	3	Horizontal	276	2.39	-	35.27	8.96	35.19			
PK	7.178G	63.52	88.20	-24.68	54.07	3	Horizontal	276	2.39	-	36.07	8.52	35.14			
RMS	7.203G	52.66	68.20	-15.54	43.05	3	Horizontal	276	2.39	-	36.22	8.54	35.15			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

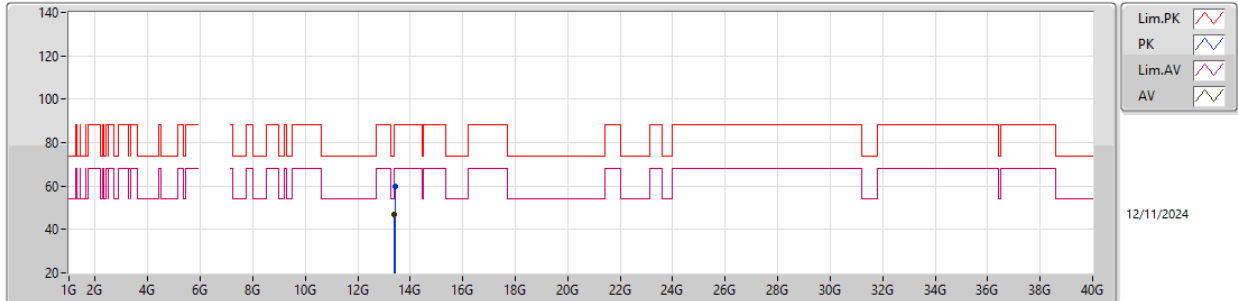
6705MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.4073G	59.72	88.20	-28.48	40.74	3	Vertical	191	1.50	-	40.11	11.72	32.85			
RMS	13.41726G	47.11	68.20	-21.09	28.09	3	Vertical	191	1.50	-	40.13	11.72	32.83			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

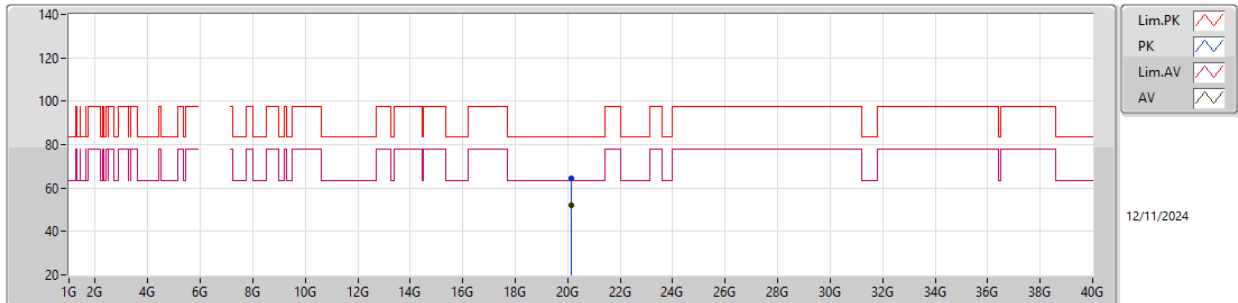
6705MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.41624G	59.74	88.20	-28.46	40.72	3	Horizontal	88	2.81	-	40.13	11.72	32.83			
RMS	13.40836G	47.13	68.20	-21.07	28.14	3	Horizontal	88	2.81	-	40.12	11.72	32.85			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

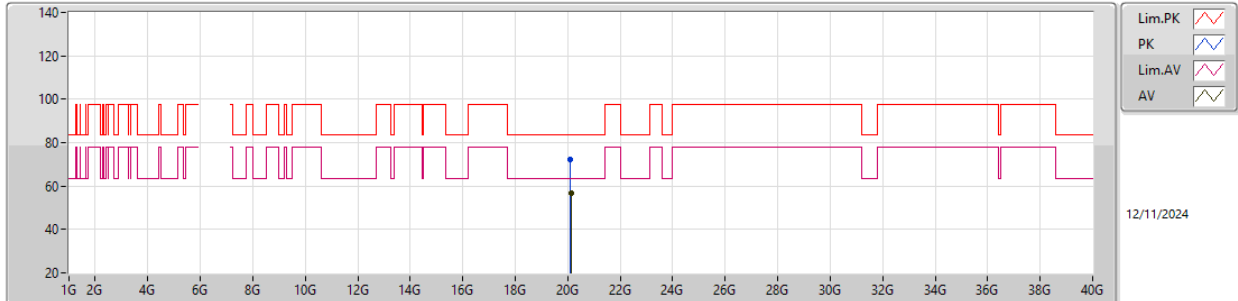
6705MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.12223G	64.33	83.54	-19.21	60.47	1	Vertical	135	1.72	-	37.80	15.30	49.24			
AV	20.12754G	51.89	63.54	-11.65	48.03	1	Vertical	135	1.72	-	37.80	15.30	49.24			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

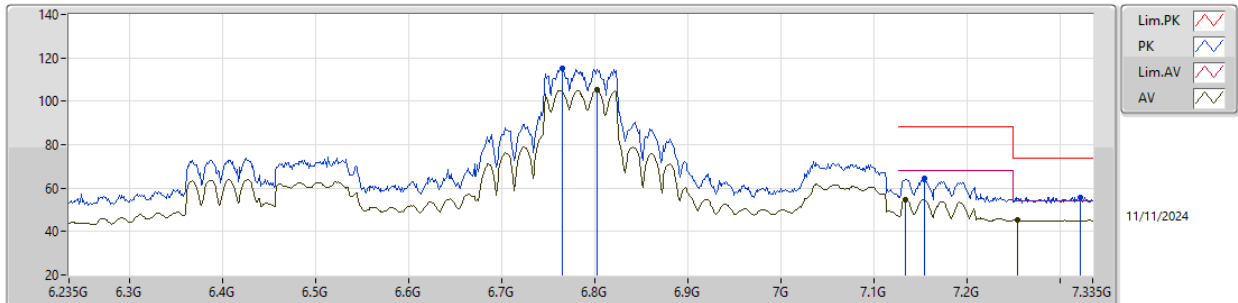
6705MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.11017G	72.19	83.54	-11.35	68.34	1	Horizontal	189	2.19	-	37.80	15.29	49.24			
AV	20.12874G	56.62	63.54	-6.92	52.76	1	Horizontal	189	2.19	-	37.80	15.30	49.24			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

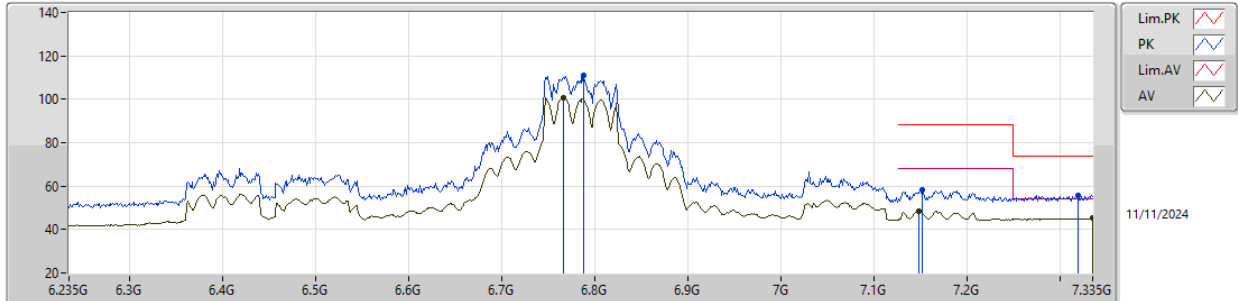
6785MHz_TX

EUT_Z_2TX
Setting 23.5
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	6.7652G	115.14	Inf	-Inf	105.85	3	Vertical	98	2.56	-	35.46	9.00	35.17			
RMS	6.8026G	105.15	Inf	-Inf	95.71	3	Vertical	98	2.56	-	35.60	9.01	35.17			
PK	7.1546G	64.32	88.20	-23.88	55.03	3	Vertical	98	2.56	-	35.93	8.50	35.14			
RMS	7.1337G	54.89	68.20	-13.31	45.72	3	Vertical	98	2.56	-	35.83	8.48	35.14			
PK	7.3218G	55.94	74.00	-18.06	45.69	3	Vertical	98	2.56	-	36.79	8.62	35.16			
AV	7.2547G	45.20	54.00	-8.80	35.25	3	Vertical	98	2.56	-	36.52	8.58	35.15			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

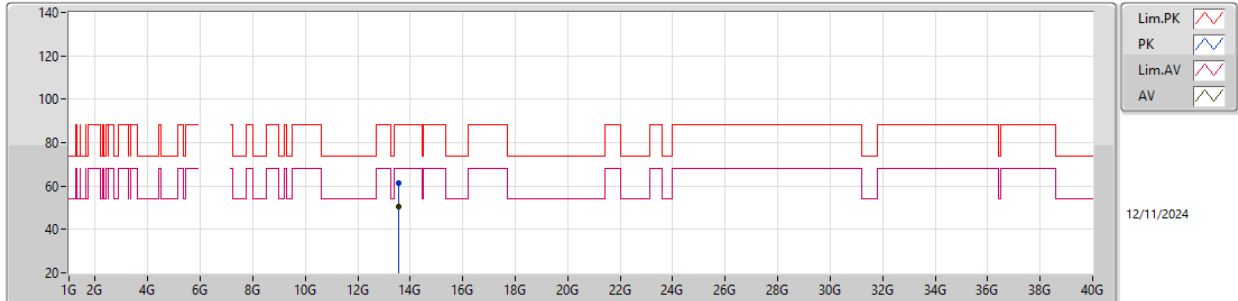
6785MHz_TX

EUT_Z_2TX
Setting 23.5
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	6.7883G	111.25	Inf	-Inf	101.86	3	Horizontal	277	2.56	-	35.55	9.01	35.17			
RMS	6.7663G	100.68	Inf	-Inf	91.38	3	Horizontal	277	2.56	-	35.47	9.00	35.17			
PK	7.1524G	58.26	88.20	-29.94	48.99	3	Horizontal	277	2.56	-	35.91	8.50	35.14			
RMS	7.148G	48.53	68.20	-19.67	39.28	3	Horizontal	277	2.56	-	35.89	8.50	35.14			
PK	7.3196G	55.82	74.00	-18.18	45.58	3	Horizontal	277	2.56	-	36.78	8.62	35.16			
AV	7.335G	45.24	54.00	-8.76	34.93	3	Horizontal	277	2.56	-	36.84	8.63	35.16			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

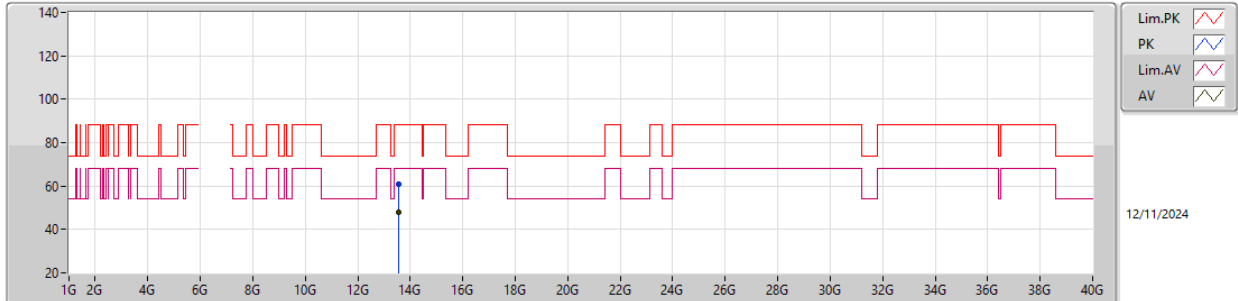
6785MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.56997G	61.46	88.20	-26.74	42.08	3	Vertical	199	2.83	-	40.40	11.71	32.73			
RMS	13.57G	50.76	68.20	-17.44	31.38	3	Vertical	199	2.83	-	40.40	11.71	32.73			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

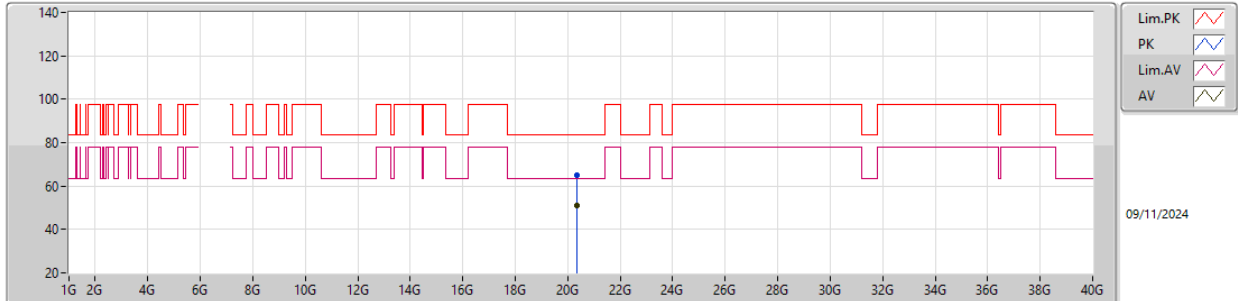
6785MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.5778G	60.61	88.20	-27.59	41.24	3	Horizontal	190	1.80	-	40.40	11.71	32.74			
RMS	13.55638G	47.87	68.20	-20.33	28.47	3	Horizontal	190	1.80	-	40.40	11.71	32.71			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

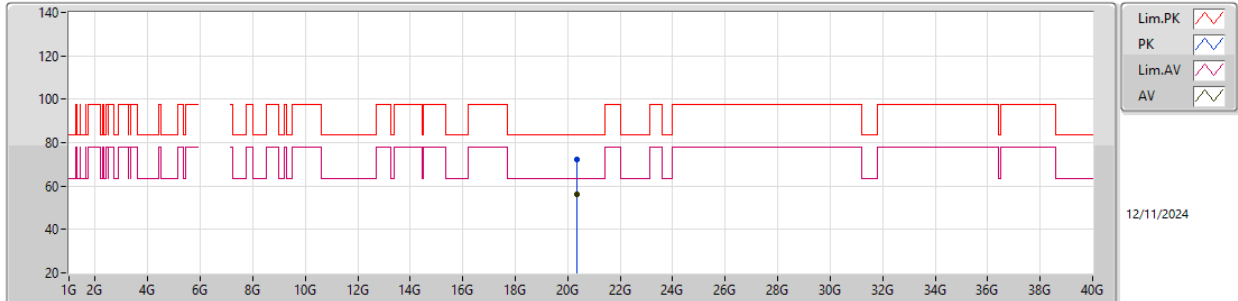
6785MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.3436G	64.82	83.54	-18.72	60.64	1	Vertical	210	1.71	-	37.89	15.47	49.18			
AV	20.35341G	51.22	63.54	-12.32	47.03	1	Vertical	210	1.71	-	37.89	15.48	49.18			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

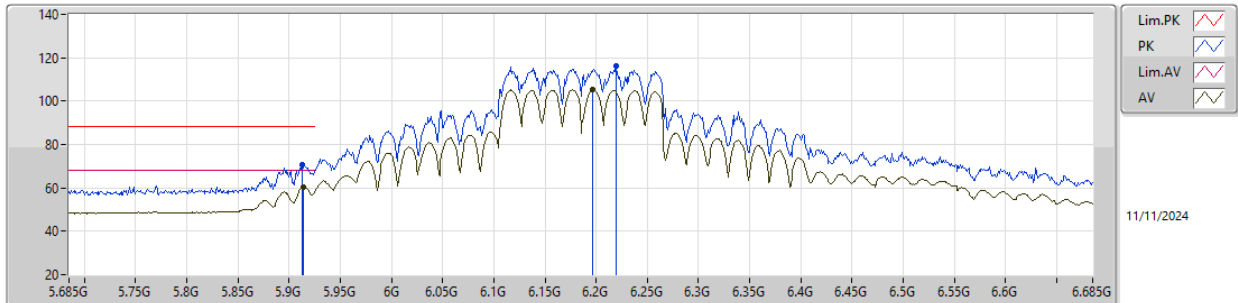
6785MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.36304G	72.19	83.54	-11.35	68.01	1	Horizontal	112	1.82	-	37.87	15.49	49.18			
AV	20.36745G	56.13	63.54	-7.41	51.94	1	Horizontal	112	1.82	-	37.87	15.49	49.17			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

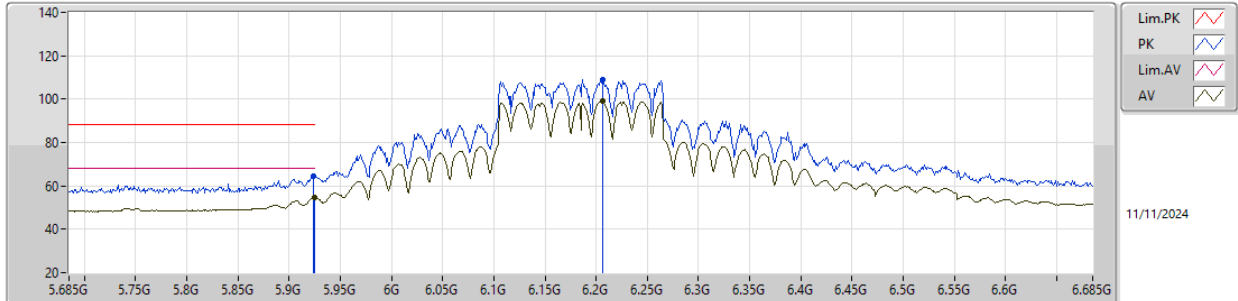
6185MHz_TX

EUT Z_2TX
Setting Z6
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.913G	70.63	88.20	-17.57	63.22	3	Vertical	355	2.46	-	34.53	8.08	35.20			
RMS	5.914G	60.35	68.20	-7.85	52.94	3	Vertical	355	2.46	-	34.53	8.08	35.20			
PK	6.219G	116.44	Inf	-Inf	108.18	3	Vertical	355	2.46	-	34.96	8.50	35.20			
RMS	6.197G	105.42	Inf	-Inf	97.16	3	Vertical	355	2.46	-	34.99	8.47	35.20			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

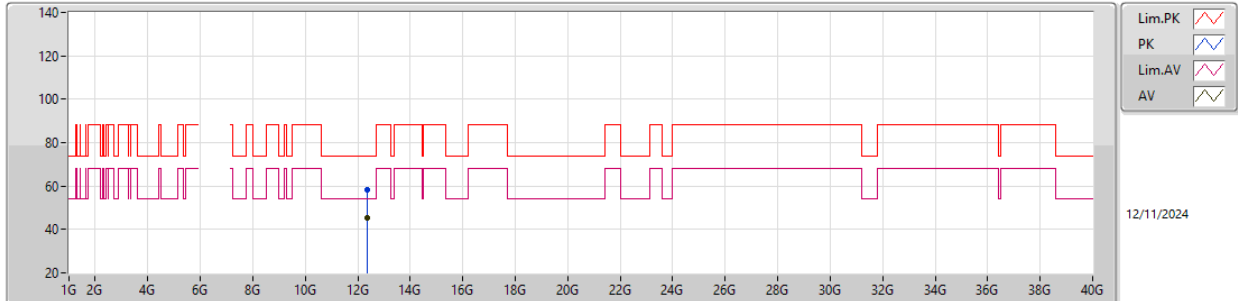
6185MHz_TX

EUT_Z_2TX
Setting Z6
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.924G	64.32	88.20	-23.88	56.88	3	Horizontal	89	2.66	-	34.55	8.09	35.20			
RMS	5.925G	54.75	68.20	-13.45	47.31	3	Horizontal	89	2.66	-	34.55	8.09	35.20			
PK	6.206G	108.99	Inf	-Inf	100.72	3	Horizontal	89	2.66	-	34.99	8.48	35.20			
RMS	6.206G	99.11	Inf	-Inf	90.84	3	Horizontal	89	2.66	-	34.99	8.48	35.20			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

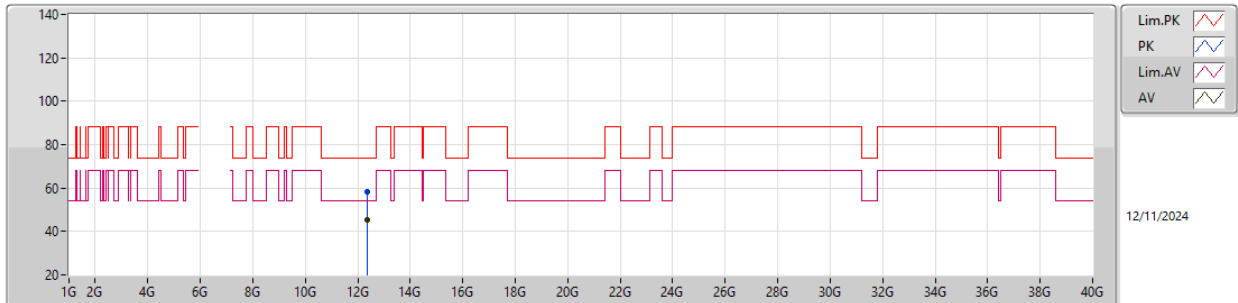
6185MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.36826G	58.19	74.00	-15.81	41.85	3	Vertical	347	1.13	-	38.66	11.80	34.12			
AV	12.37093G	45.38	54.00	-8.62	29.03	3	Vertical	347	1.13	-	38.66	11.80	34.11			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

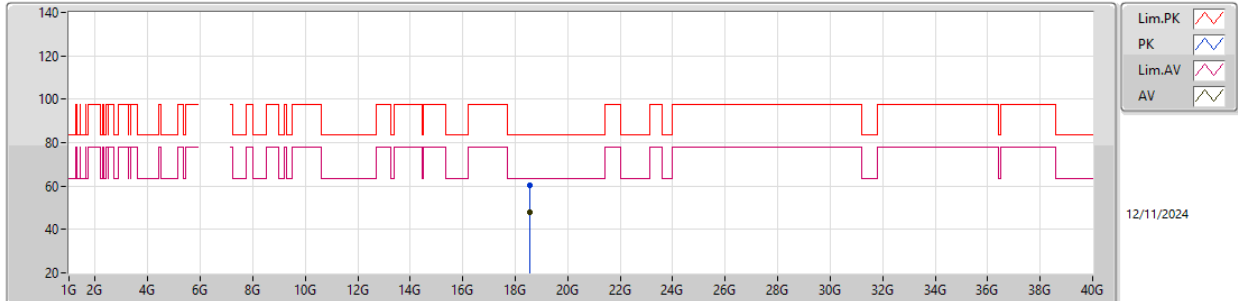
6185MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.36679G	58.03	74.00	-15.97	41.68	3	Horizontal	339	2.30	-	38.67	11.80	34.12			
AV	12.37066G	45.53	54.00	-8.47	29.18	3	Horizontal	339	2.30	-	38.66	11.80	34.11			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

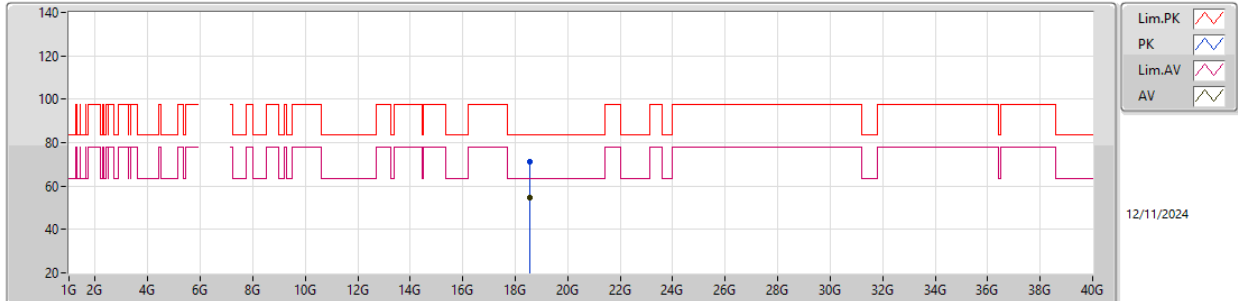
6185MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.54978G	60.14	83.54	-23.40	56.72	1	Vertical	284	1.57	-	37.80	15.27	49.65			
AV	18.56976G	48.09	63.54	-15.45	44.65	1	Vertical	284	1.57	-	37.80	15.27	49.63			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

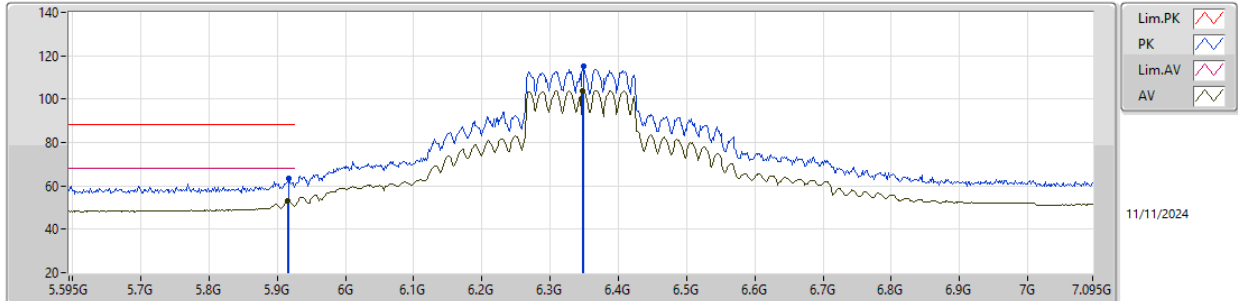
6185MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.55755G	71.09	83.54	-12.45	67.66	1	Horizontal	143	1.31	-	37.80	15.27	49.64			
AV	18.56997G	54.44	63.54	-9.10	51.00	1	Horizontal	143	1.31	-	37.80	15.27	49.63			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6345MHz_TX

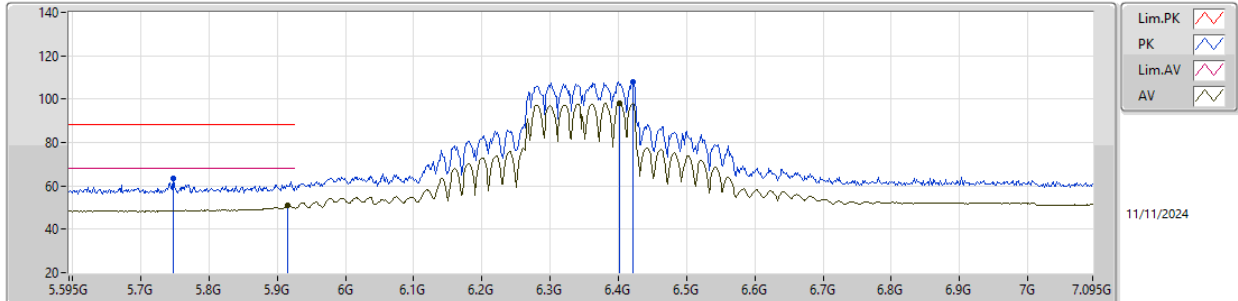


EUT_Z_2TX
Setting 26
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9175G	63.66	88.20	-24.54	56.24	3	Vertical	98	2.57	-	34.54	8.08	35.20			
RMS	5.916G	53.16	68.20	-15.04	45.75	3	Vertical	98	2.57	-	34.53	8.08	35.20			
PK	6.3495G	114.96	Inf	-Inf	106.78	3	Vertical	98	2.57	-	34.70	8.69	35.21			
RMS	6.348G	103.85	Inf	-Inf	95.67	3	Vertical	98	2.57	-	34.70	8.69	35.21			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

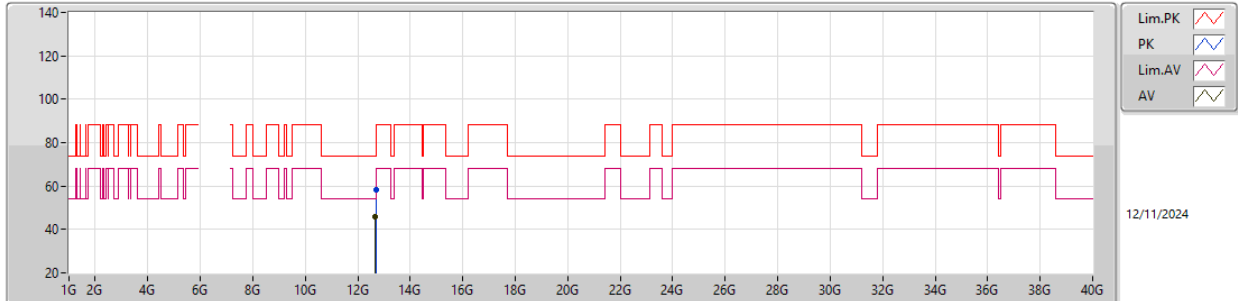
6345MHz_TX

EUT_Z_2TX
Setting Z6
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.748G	63.34	88.20	-24.86	56.49	3	Horizontal	321	2.57	-	34.20	7.87	35.22			
RMS	5.916G	50.95	68.20	-17.25	43.54	3	Horizontal	321	2.57	-	34.53	8.08	35.20			
PK	6.4215G	108.07	Inf	-Inf	99.84	3	Horizontal	321	2.57	-	34.66	8.79	35.22			
RMS	6.402G	98.28	Inf	-Inf	90.02	3	Horizontal	321	2.57	-	34.70	8.77	35.21			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

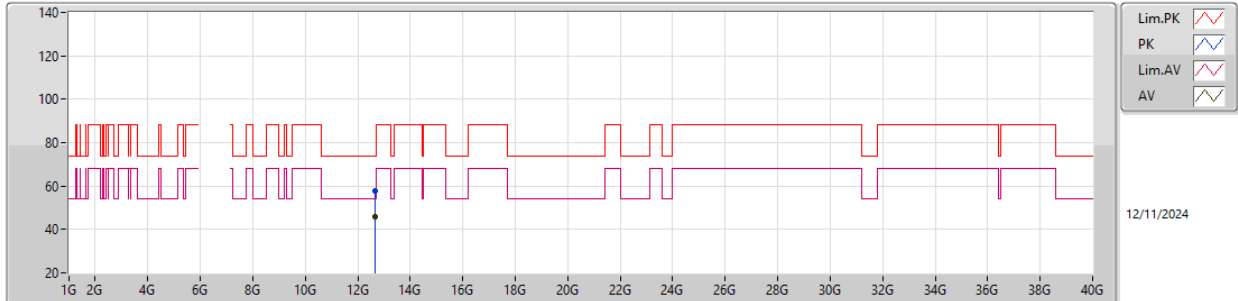
6345MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.69054G	58.14	74.00	-15.86	41.33	3	Vertical	254	2.72	-	38.88	11.78	33.85			
AV	12.675G	45.74	54.00	-8.26	28.97	3	Vertical	254	2.72	-	38.85	11.78	33.86			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

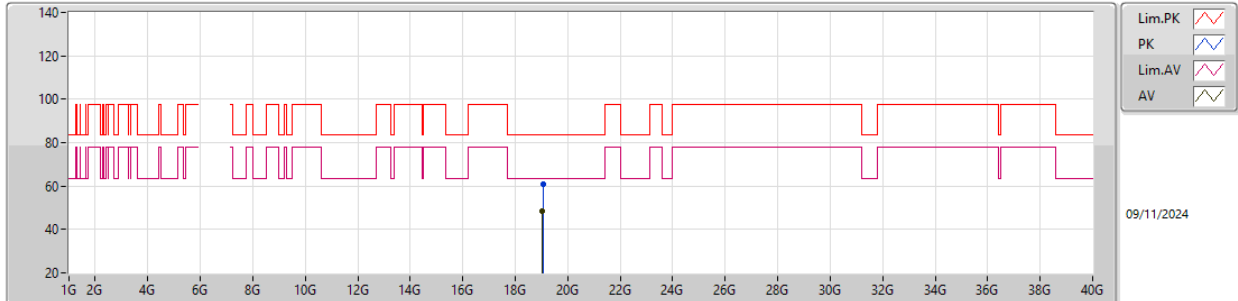
6345MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.67935G	57.85	74.00	-16.15	41.07	3	Horizontal	57	1.34	-	38.86	11.78	33.86			
AV	12.67506G	45.77	54.00	-8.23	29.00	3	Horizontal	57	1.34	-	38.85	11.78	33.86			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

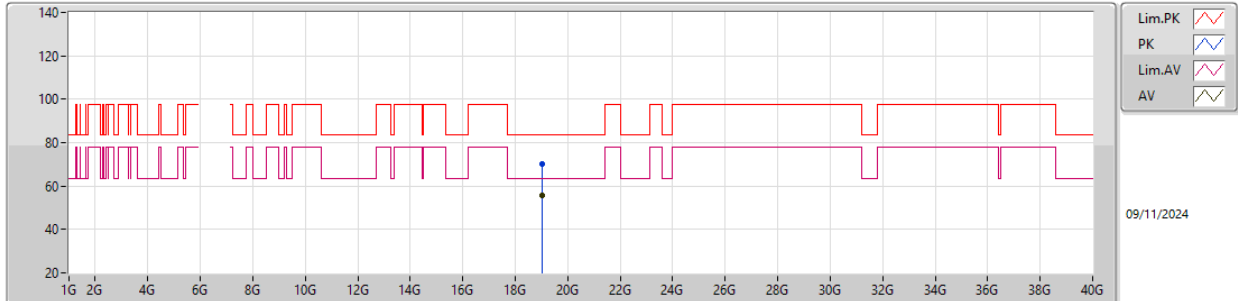
6345MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.04856G	60.79	83.54	-22.75	57.01	1	Vertical	125	1.43	-	37.90	15.25	49.37			
AV	19.03287G	48.55	63.54	-14.99	44.73	1	Vertical	125	1.43	-	37.93	15.25	49.36			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

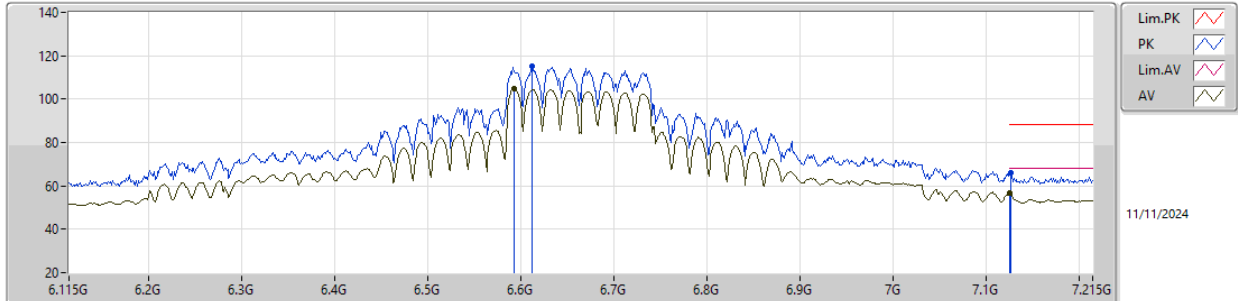
6345MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.0383G	70.25	83.54	-13.29	66.45	1	Horizontal	8	1.49	-	37.92	15.25	49.37			
AV	19.02903G	55.49	63.54	-8.05	51.66	1	Horizontal	8	1.49	-	37.94	15.25	49.36			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

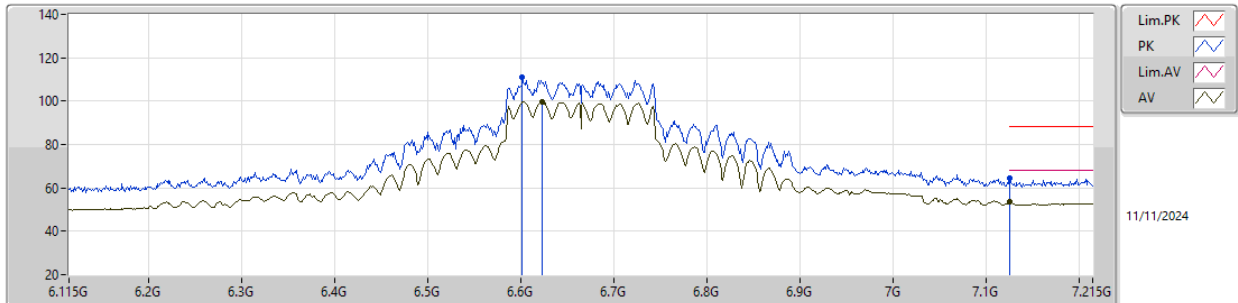
6665MHz_TX

EUT_Z_2TX
Setting Z6
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	6.6122G	115.06	Inf	-Inf	106.29	3	Vertical	53	2.15	-	35.05	8.92	35.20			
RMS	6.5935G	104.67	Inf	-Inf	95.99	3	Vertical	53	2.15	-	34.97	8.91	35.20			
PK	7.127G	66.15	88.20	-22.05	57.00	3	Vertical	53	2.15	-	35.81	8.48	35.14			
RMS	7.1259G	56.59	68.20	-11.61	47.45	3	Vertical	53	2.15	-	35.80	8.48	35.14			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

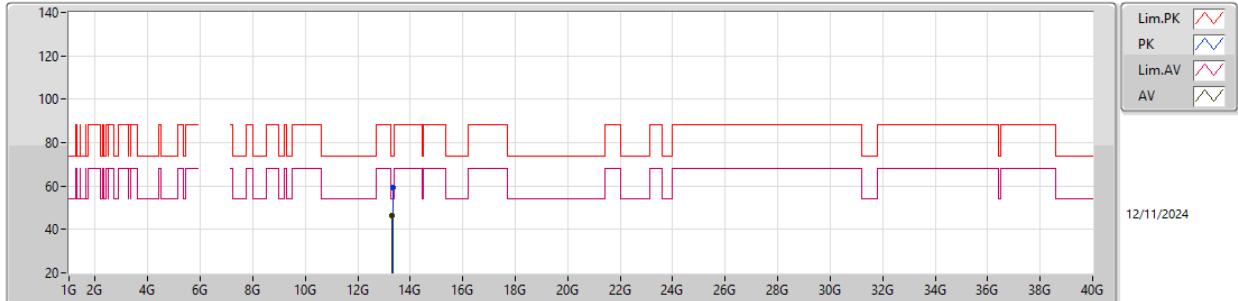
6665MHz_TX

EUT_Z_2TX
Setting Z6
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	6.6023G	110.85	Inf	-Inf	102.13	3	Horizontal	278	2.53	-	35.01	8.91	35.20			
RMS	6.6232G	99.73	Inf	-Inf	90.92	3	Horizontal	278	2.53	-	35.09	8.92	35.20			
PK	7.1259G	64.58	88.20	-23.62	55.44	3	Horizontal	278	2.53	-	35.80	8.48	35.14			
RMS	7.1259G	53.64	68.20	-14.56	44.50	3	Horizontal	278	2.53	-	35.80	8.48	35.14			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

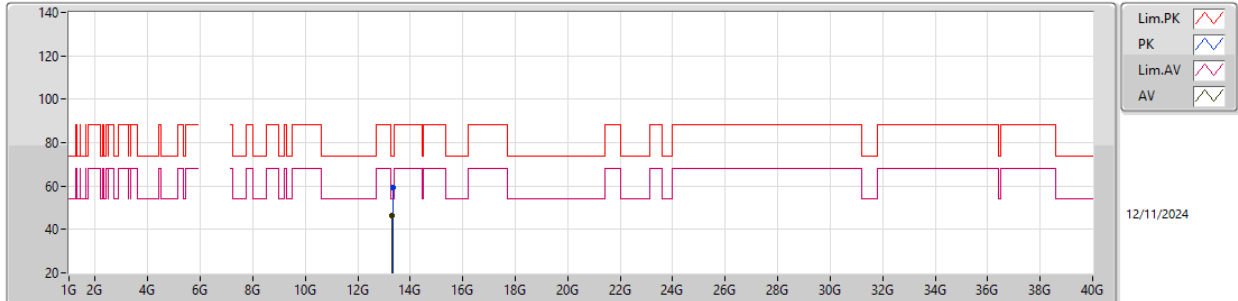
6665MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.34143G	59.50	74.00	-14.50	40.78	3	Vertical	180	1.80	-	40.00	11.73	33.01			
AV	13.315G	46.59	54.00	-7.41	27.93	3	Vertical	180	1.80	-	40.00	11.73	33.07			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

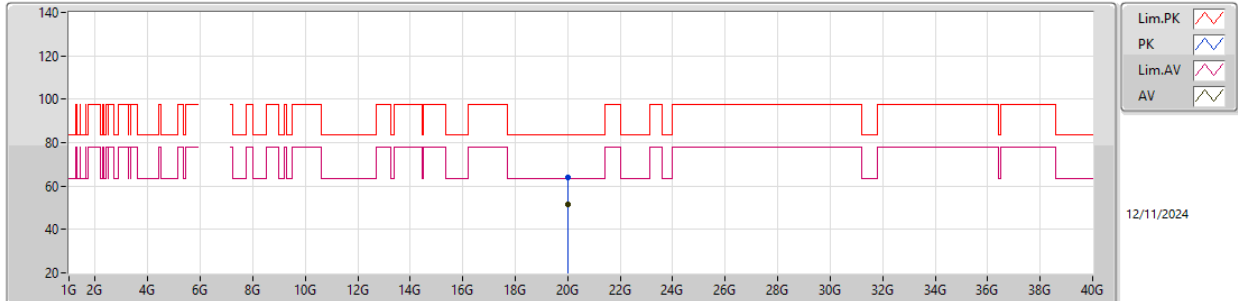
6665MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.33828G	59.44	74.00	-14.56	40.73	3	Horizontal	132	1.80	-	40.00	11.73	33.02			
AV	13.31545G	46.60	54.00	-7.40	27.94	3	Horizontal	132	1.80	-	40.00	11.73	33.07			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

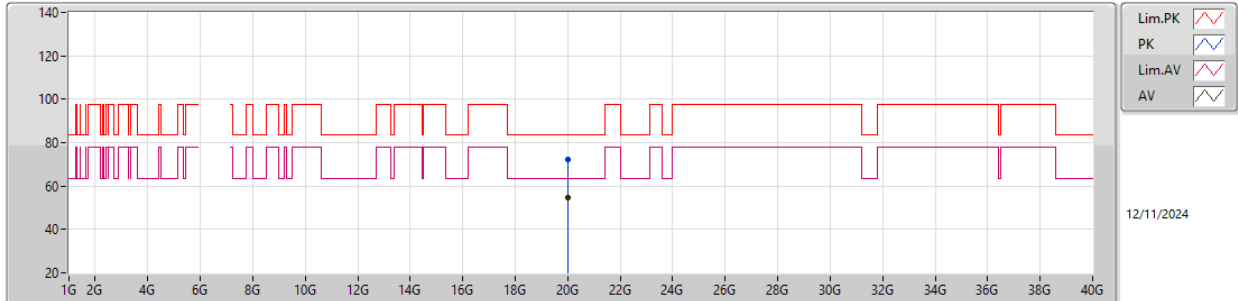
6665MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.0016G	64.21	83.54	-19.33	60.58	1	Vertical	347	1.58	-	37.70	15.20	49.27			
AV	19.99113G	51.46	63.54	-12.08	47.82	1	Vertical	347	1.58	-	37.72	15.20	49.28			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

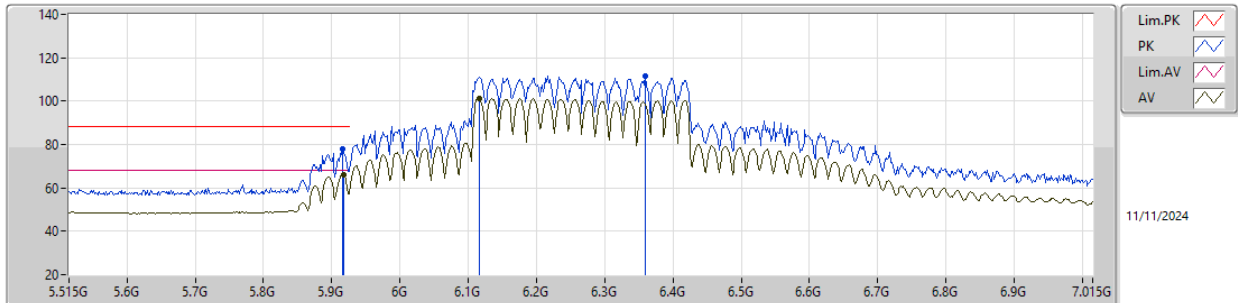
6665MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.98981G	72.15	83.54	-11.39	68.51	1	Horizontal	196	1.80	-	37.72	15.20	49.28			
AV	19.98933G	54.64	63.54	-8.90	51.00	1	Horizontal	196	1.80	-	37.72	15.20	49.28			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

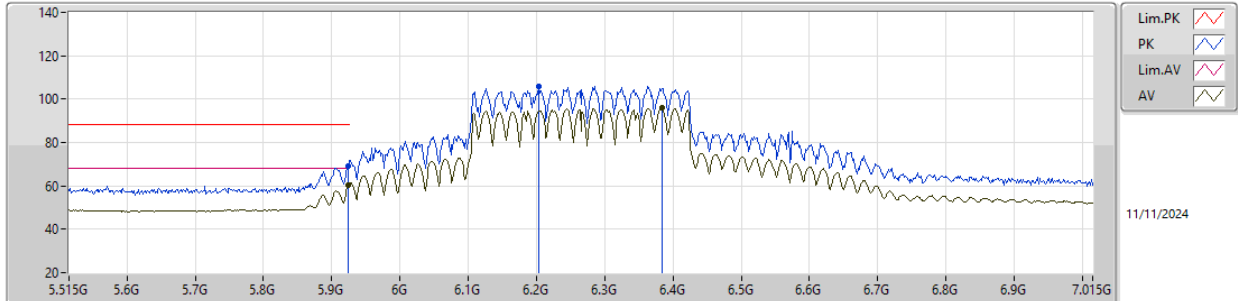


EUT_Z_2TX
Setting 26
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9155G	77.92	88.20	-10.28	70.51	3	Vertical	356	2.54	-	34.53	8.08	35.20			
RMS	5.917G	66.20	68.20	-2.00	58.79	3	Vertical	356	2.54	-	34.53	8.08	35.20			
PK	6.3595G	111.80	Inf	-Inf	103.60	3	Vertical	356	2.54	-	34.70	8.71	35.21			
RMS	6.1165G	101.35	Inf	-Inf	93.31	3	Vertical	356	2.54	-	34.90	8.34	35.20			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

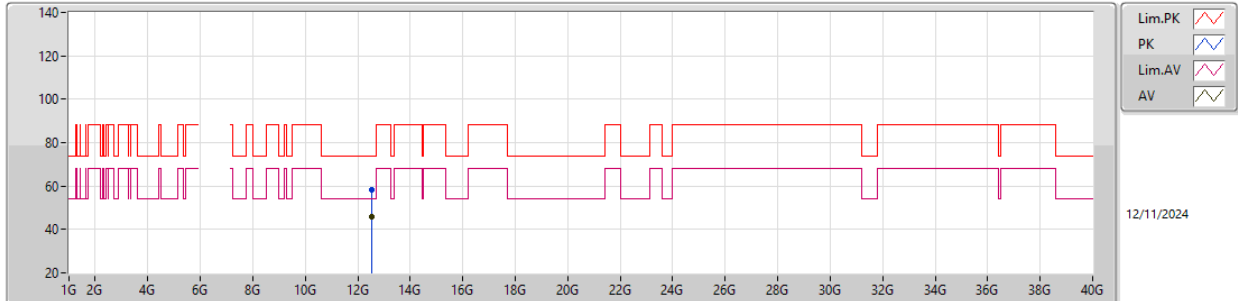


EUT_Z_2TX
Setting Z6
03-V-E-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9245G	69.09	88.20	-19.11	61.65	3	Horizontal	88	2.59	-	34.55	8.09	35.20			
RMS	5.9245G	60.58	68.20	-7.62	53.14	3	Horizontal	88	2.59	-	34.55	8.09	35.20			
PK	6.2035G	106.08	Inf	-Inf	97.81	3	Horizontal	88	2.59	-	34.99	8.48	35.20			
RMS	6.3835G	95.82	Inf	-Inf	87.58	3	Horizontal	88	2.59	-	34.70	8.75	35.21			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

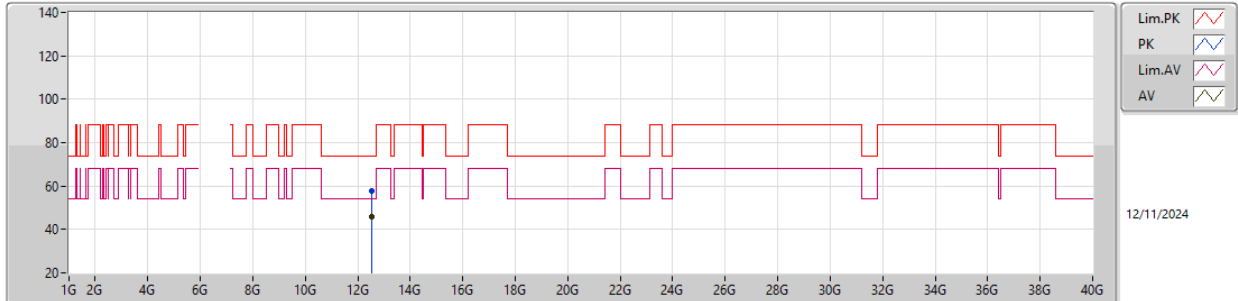
6265MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.53129G	58.15	74.00	-15.85	41.53	3	Vertical	152	1.80	-	38.70	11.79	33.87			
AV	12.53651G	45.67	54.00	-8.33	29.05	3	Vertical	152	1.80	-	38.70	11.79	33.87			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

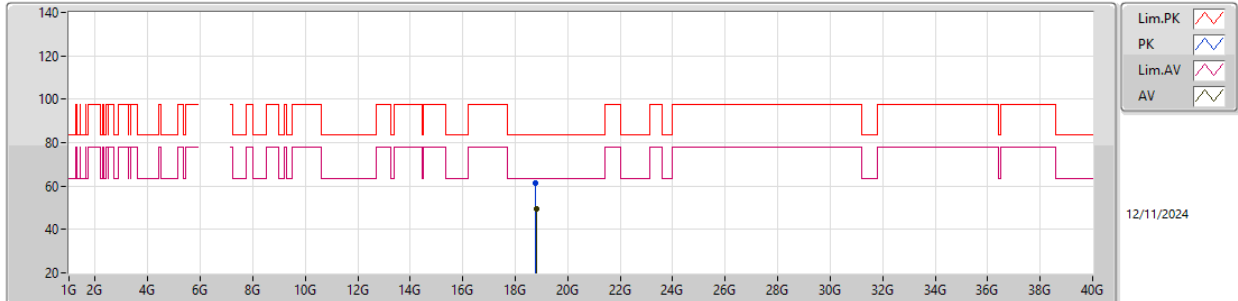
6265MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.52355G	57.88	74.00	-16.12	41.26	3	Horizontal	252	2.14	-	38.70	11.79	33.87			
AV	12.53543G	45.62	54.00	-8.38	29.00	3	Horizontal	252	2.14	-	38.70	11.79	33.87			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

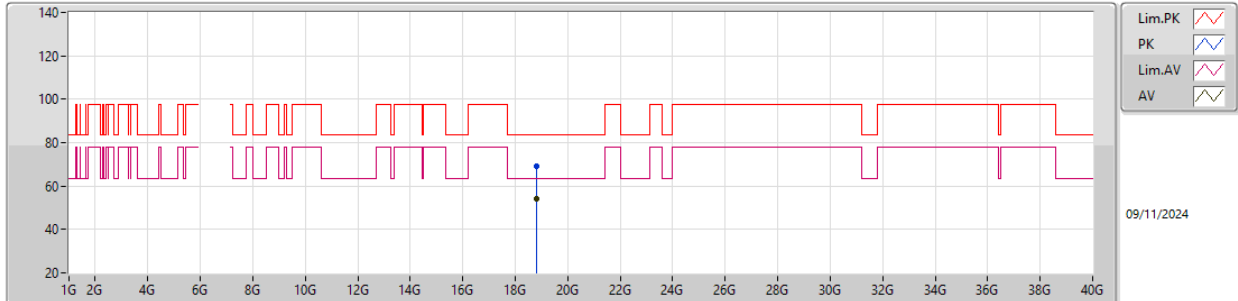
6265MHz_TX

EUT_X_2TX
Setting 26
03-V-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.78111G	61.56	83.54	-21.98	57.89	1	Vertical	293	1.76	-	37.90	15.26	49.49			
AV	18.80985G	49.33	63.54	-14.21	45.62	1	Vertical	293	1.76	-	37.92	15.26	49.47			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

6265MHz_TX

EUT_X_2TX
Setting 26
03-V-R-7

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.79407G	69.23	83.54	-14.31	65.55	1	Horizontal	41	1.58	-	37.90	15.26	49.48			
AV	18.79476G	54.21	63.54	-9.33	50.53	1	Horizontal	41	1.58	-	37.90	15.26	49.48			

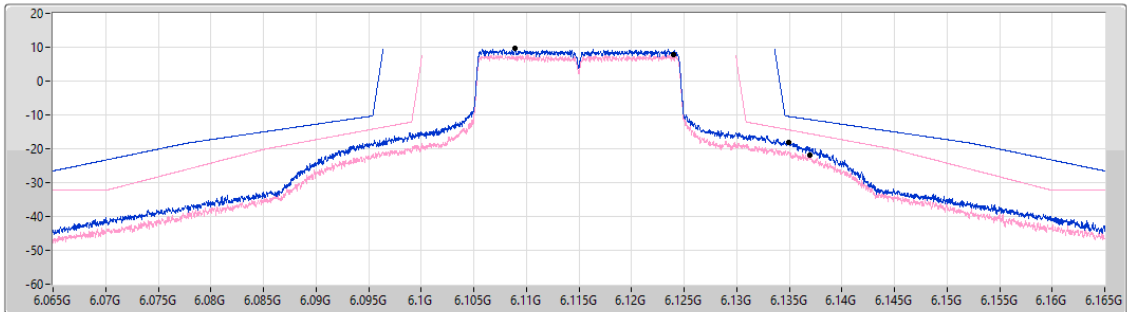
5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6115MHz_TX

19/02/2025

CF (Hz)
6.115G
Span (Hz)
100M
RBW (Hz)
300k
VBW (Hz)
1M
Sweep Time (s)
4.01m
Detector Type
RMS



Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.108952G	9.71	6.1349G	-17.98	-10.43	-7.55	1
6.123973G	7.92	6.13695G	-21.87	-15.56	-6.31	2

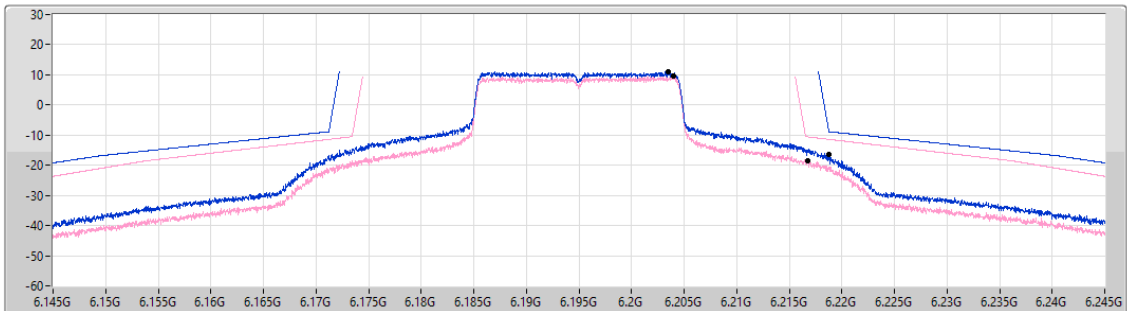
5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6195MHz_TX

19/02/2025

CF (Hz)
6.195G
Span (Hz)
100M
RBW (Hz)
500k
VBW (Hz)
2M
Sweep Time (s)
4.01m
Detector Type
RMS



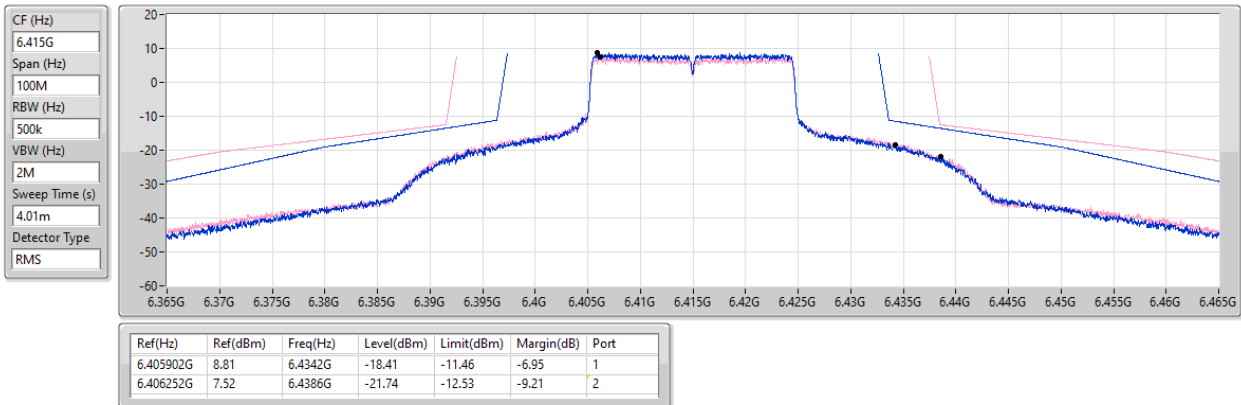
Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.203498G	11.14	6.2188G	-16.38	-8.87	-7.51	1
6.203998G	9.49	6.216775G	-18.41	-10.59	-7.82	2

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6415MHz_TX

19/02/2025

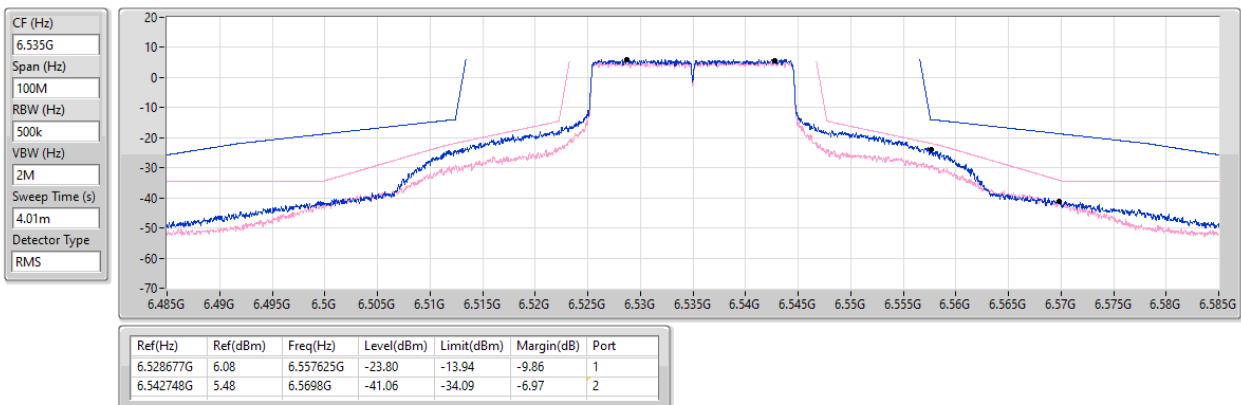


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6535MHz_TX

19/02/2025

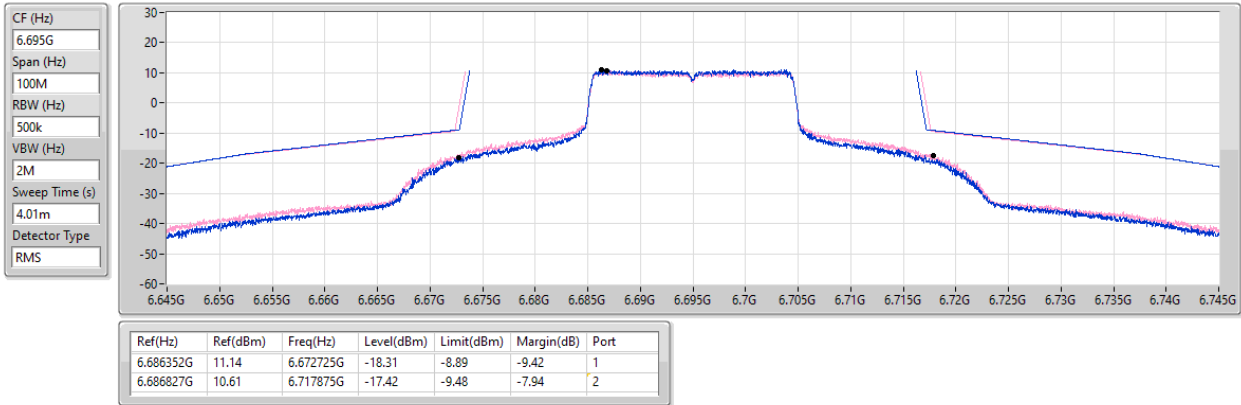


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6695MHz_TX

19/02/2025

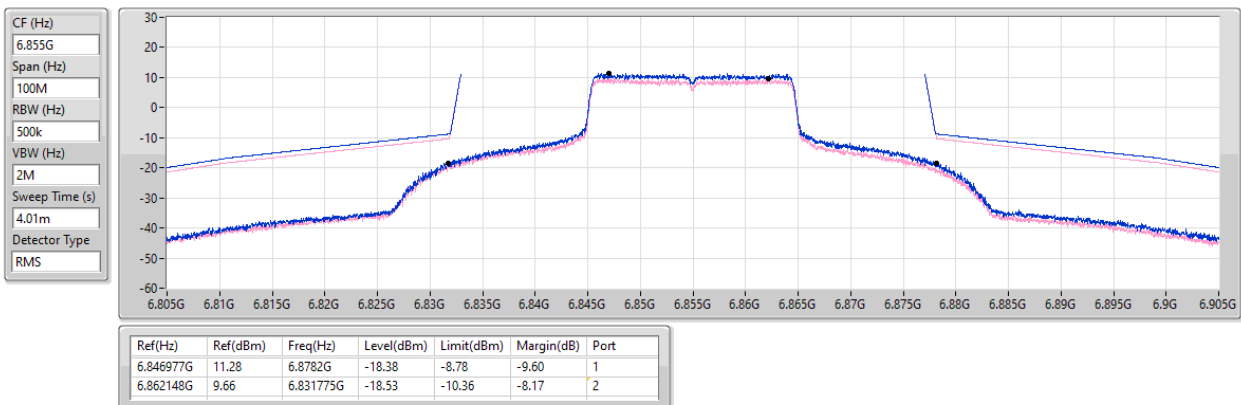


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6855MHz_TX

19/02/2025

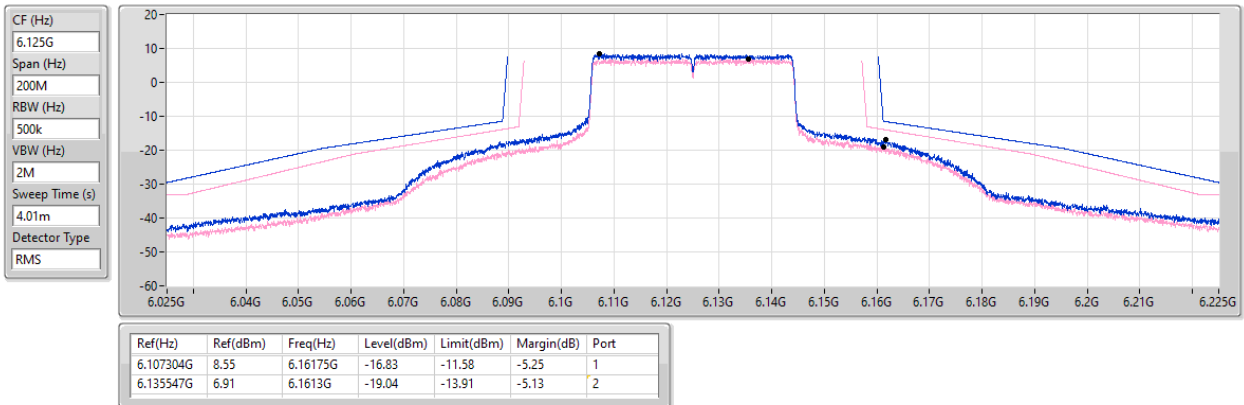


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6125MHz_TX

19/02/2025

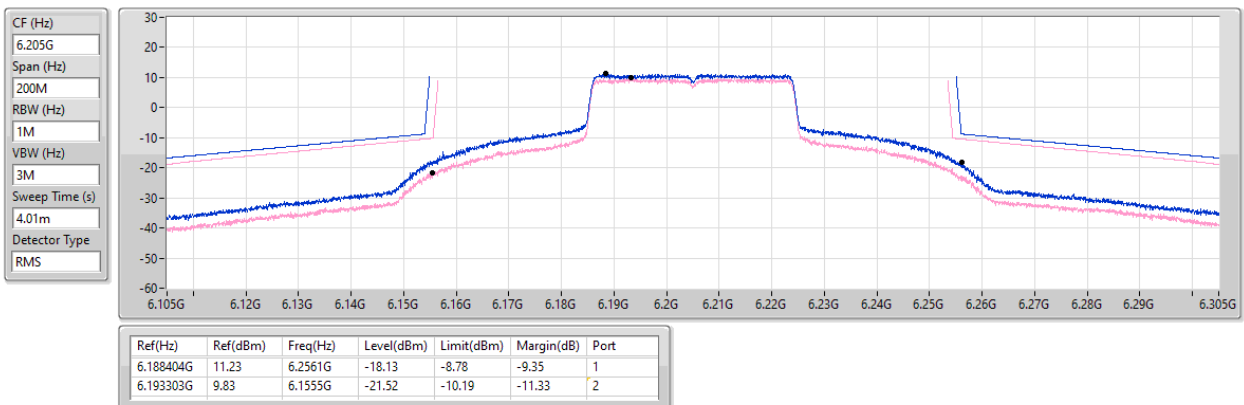


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6205MHz_TX

19/02/2025

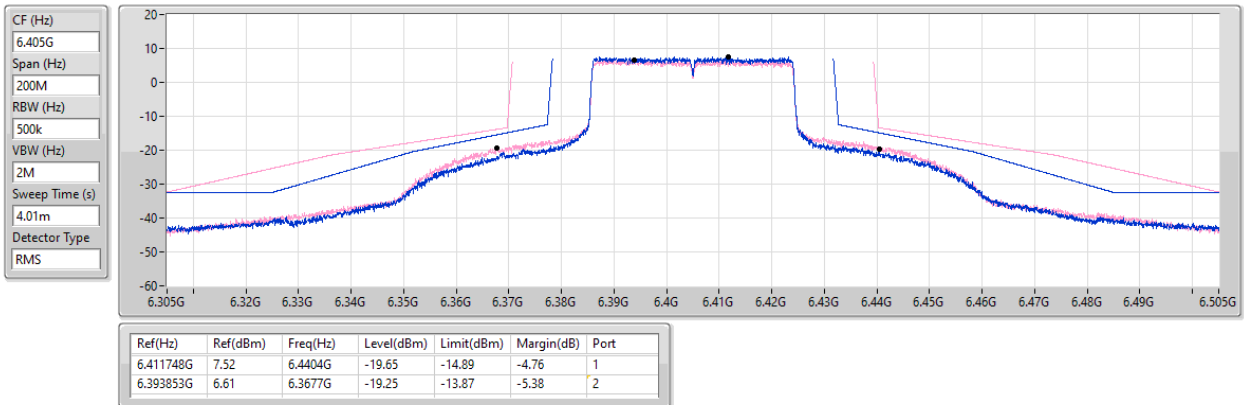


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6405MHz_TX

19/02/2025

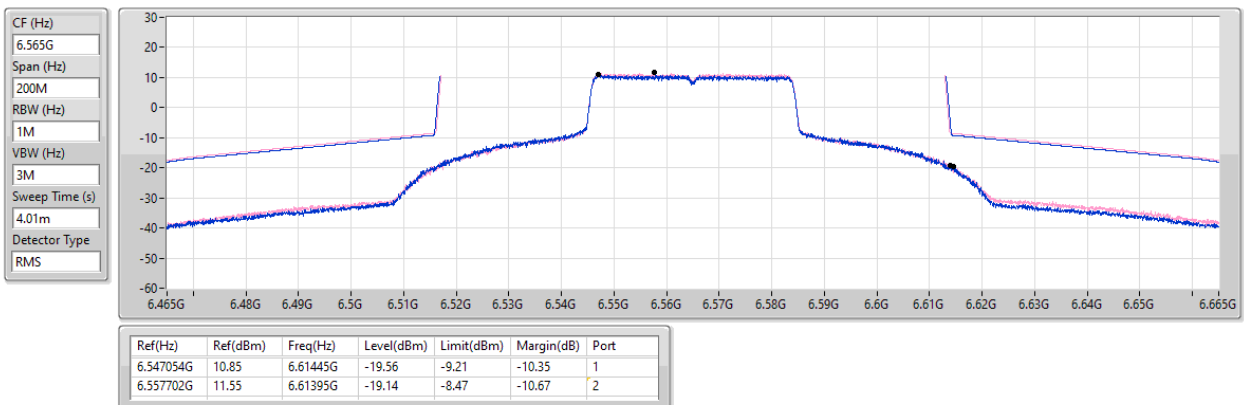


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6565MHz_TX

19/02/2025

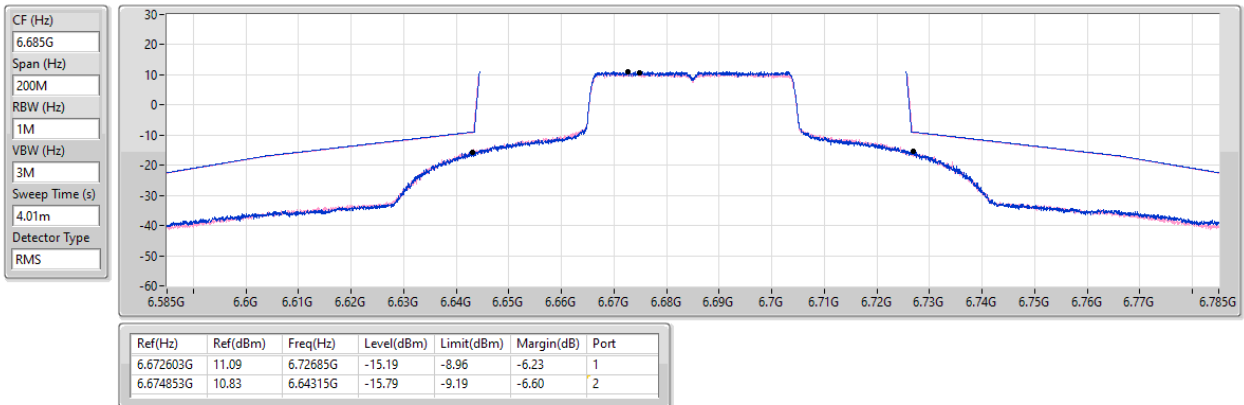


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6685MHz_TX

19/02/2025

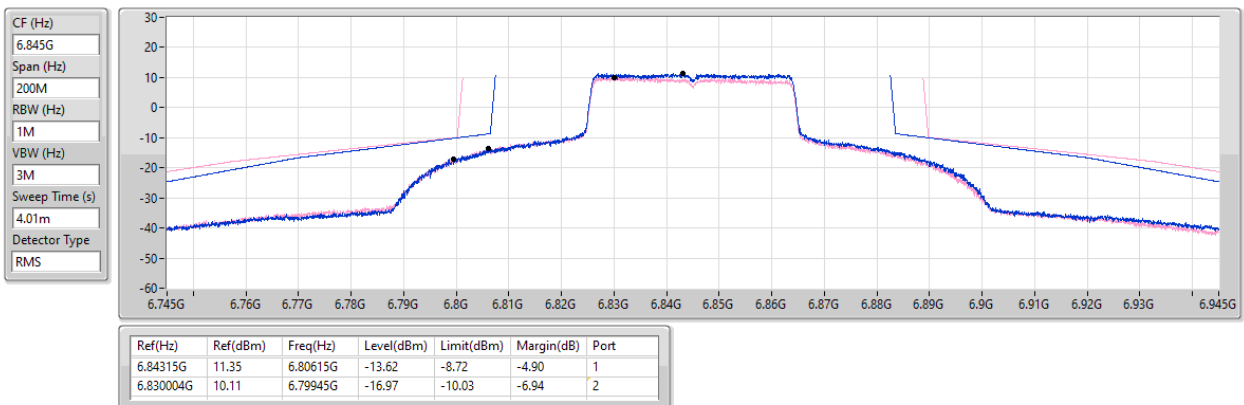


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6845MHz_TX

19/02/2025

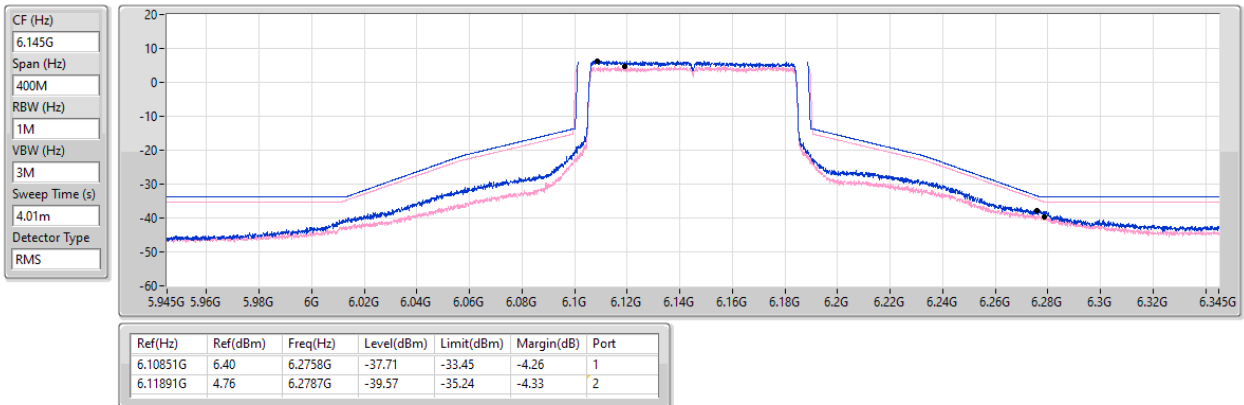


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6145MHz_TX

19/02/2025

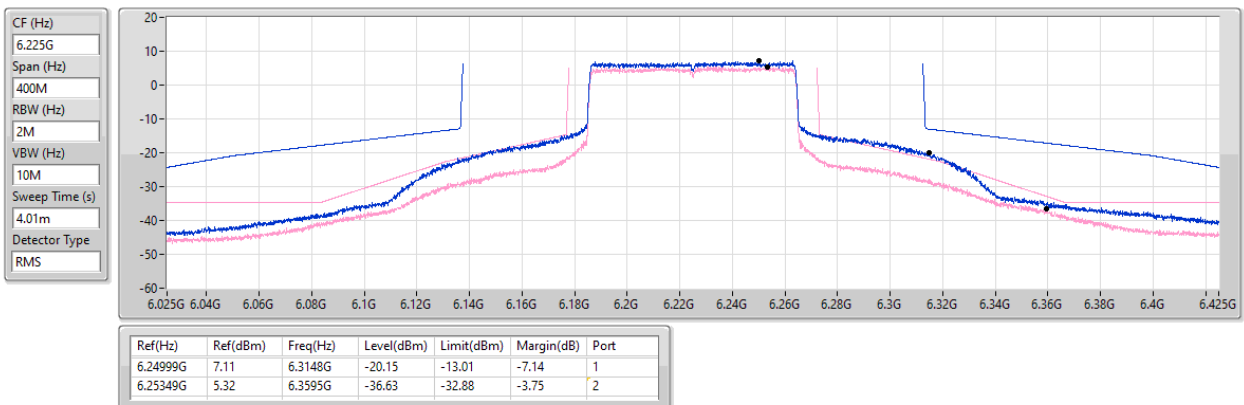


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6225MHz_TX

19/02/2025

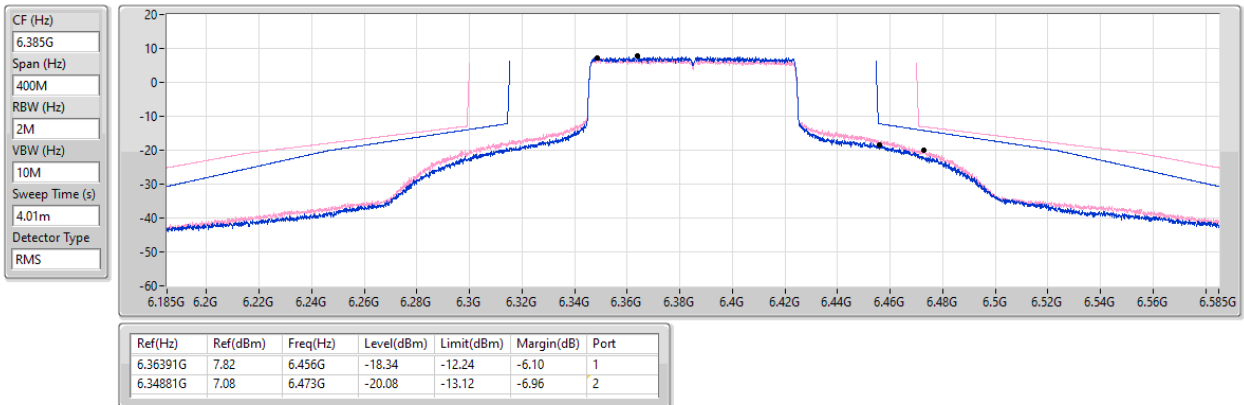


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6385MHz_TX

19/02/2025

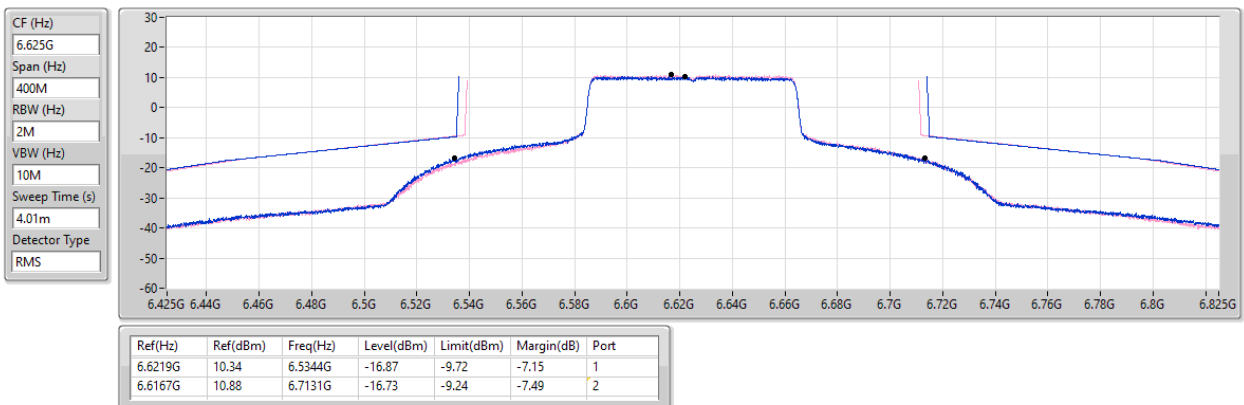


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6625MHz_TX

19/02/2025



6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6705MHz_TX

19/02/2025

CF (Hz)
6.705G

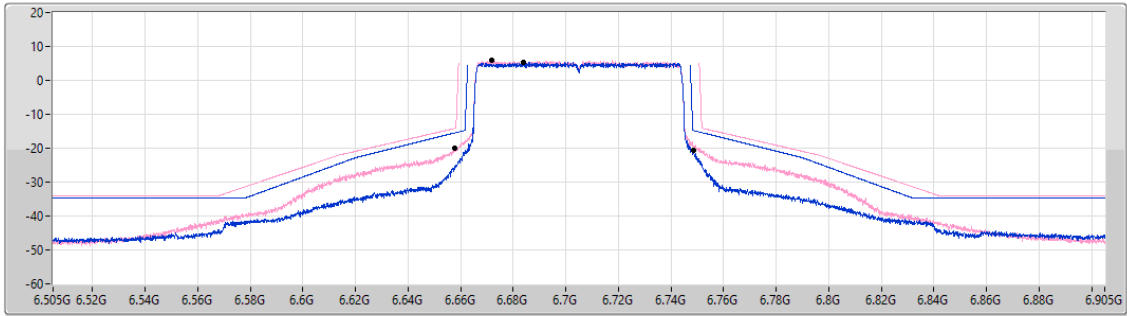
Span (Hz)
400M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
4.01m

Detector Type
RMS



Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.68371G	5.26	6.7487G	-20.64	-14.81	-5.83	1
6.67181G	5.91	6.6576G	-20.01	-14.20	-5.81	2

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6785MHz_TX

19/02/2025

CF (Hz)
6.785G

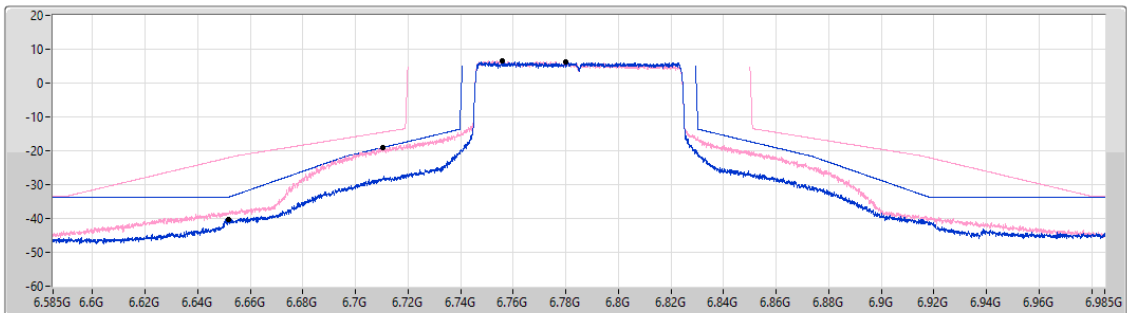
Span (Hz)
400M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
4.01m

Detector Type
RMS



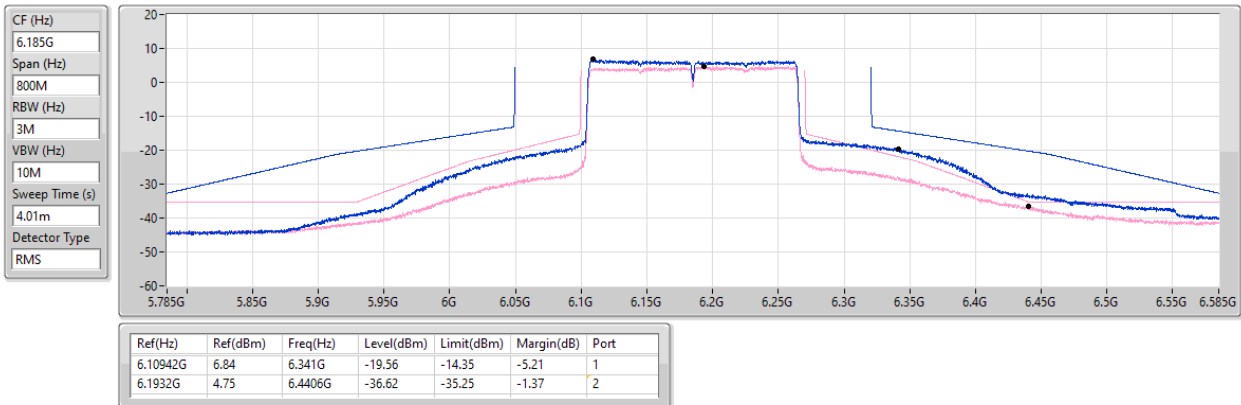
Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.78G	6.35	6.6518G	-40.22	-33.65	-6.57	1
6.75571G	6.54	6.7105G	-19.13	-14.52	-4.61	2

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6185MHz_TX

19/02/2025

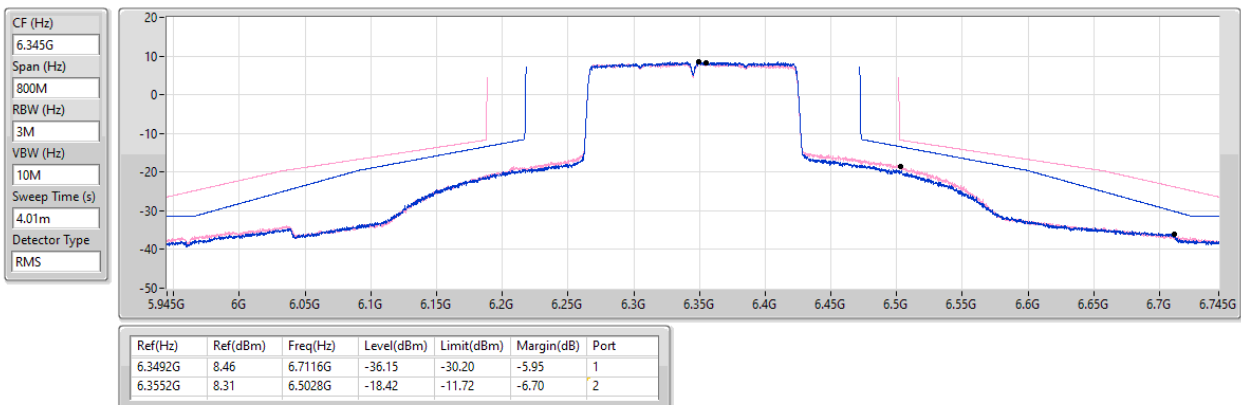


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6345MHz_TX

19/02/2025

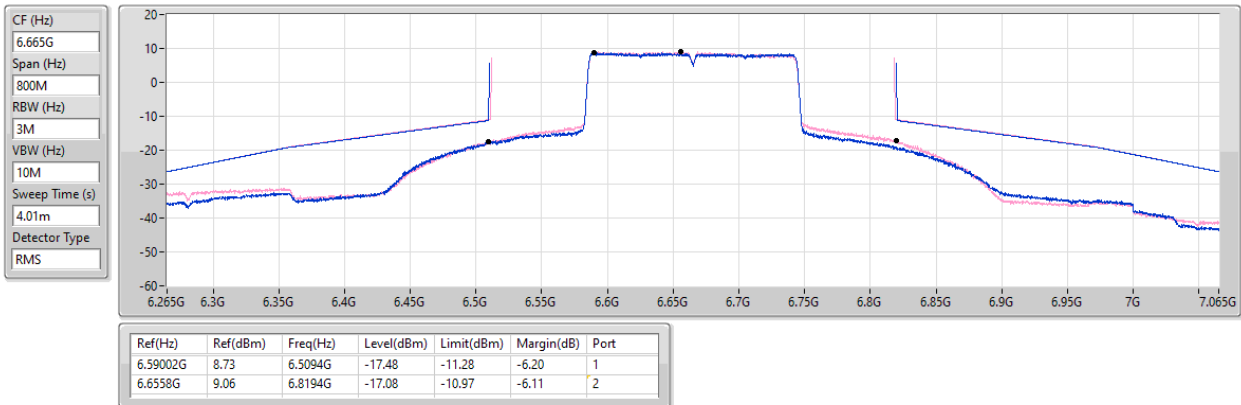


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6665MHz_TX

19/02/2025



5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

MASK

6265MHz Straddle 5.925-6.425GHz_TX

19/02/2025

