

FCC Radio Test Report

FCC ID: 2BCGWGXE75

Report No. : BTL-FCCP-2-2402G042
Equipment : AXE5400 Tri-Band Wi-Fi 6E Gaming Router
Model Name : Archer GXE75
Brand Name : tp-link
Applicant : TP-LINK CORPORATION PTE. LTD.
Address : 7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987

Radio Function : RLAN 5 GHz (U-NII 1, U-NII 2A, U-NII 2C, U-NII 3)

FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart E (15.407)
Measurement Procedure(s) : ANSI C63.10-2013

Date of Receipt : 2024/2/21
Date of Test : 2024/5/7 ~ 2024/7/4
Issued Date : 2024/7/23

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : 
Eddie Lee, Engineer

Approved by : 
Jerry Chuang, Supervisor

**BTL Inc.**

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the Customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

REVISION HISTORY	5
1 SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
1.4 DUTY CYCLE	8
2 GENERAL INFORMATION	10
2.1 DESCRIPTION OF EUT	10
2.2 TEST MODES	15
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	17
2.4 SUPPORT UNITS	18
3 AC POWER LINE CONDUCTED EMISSIONS TEST	19
3.1 LIMIT	19
3.2 TEST PROCEDURE	19
3.3 DEVIATION FROM TEST STANDARD	19
3.4 TEST SETUP	20
3.5 TEST RESULT	20
4 RADIATED EMISSIONS TEST	21
4.1 LIMIT	21
4.2 TEST PROCEDURE	22
4.3 DEVIATION FROM TEST STANDARD	22
4.4 TEST SETUP	23
4.5 EUT OPERATING CONDITIONS	24
4.6 TEST RESULT – 9 KHZ TO 30 MHZ	24
4.7 TEST RESULT – 30 MHZ TO 1 GHZ	24
4.8 TEST RESULT – ABOVE 1 GHZ	24
5 BANDWIDTH TEST	25
5.1 LIMIT	25
5.2 TEST PROCEDURE	25
5.3 DEVIATION FROM TEST STANDARD	25
5.4 TEST SETUP	25
5.5 EUT OPERATING CONDITIONS	25
5.6 TEST RESULT	25
6 OUTPUT POWER TEST	26
6.1 LIMIT	26
6.2 TEST PROCEDURE	26
6.3 DEVIATION FROM TEST STANDARD	26
6.4 TEST SETUP	26
6.5 EUT OPERATING CONDITIONS	26
6.6 TEST RESULT	26
7 POWER SPECTRAL DENSITY	27
7.1 LIMIT	27
7.2 TEST PROCEDURE	27
7.3 DEVIATION FROM TEST STANDARD	27
7.4 TEST SETUP	27
7.5 EUT OPERATING CONDITIONS	27
7.6 TEST RESULT	27

8	LIST OF MEASURING EQUIPMENTS	28
9	EUT TEST PHOTO	30
10	EUT PHOTOS	30
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	31
APPENDIX B	RADIATED EMISSIONS - 9 KHZ TO 30 MHZ	36
APPENDIX C	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	41
APPENDIX D	RADIATED EMISSIONS - ABOVE 1 GHZ	44
APPENDIX E	BANDWIDTH	251
APPENDIX F	CONDUCTED OUTPUT POWER	303
APPENDIX G	POWER SPECTRAL DENSITY	335

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2402G042	R00	Original Report.	2024/7/23	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.205 15.209 15.407(b)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	Pass	-----
15.407(a)	Bandwidth	APPENDIX E	Pass	-----
15.407(a)	Output Power	APPENDIX F	Pass	-----
15.407(a)	Power Spectral Density	APPENDIX G	Pass	-----
15.203	Antenna Requirement	-----	Pass	-----
15.407(c)	Automatically Discontinue Transmission	-----	Pass	NOTE (3)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

☐ C05 ☐ CB08 ☐ CB11 ☐ SR10 ☒ SR11

No. 68-2, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

☐ CB12 ☒ SR05

No. 72, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

☐ C06 ☒ CB21 ☐ CB22

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
SR05	CISPR	150 kHz ~ 30MHz	3.44

B. Radiated emissions test :

Test Site	Measurement Frequency Range	U,(dB)
CB21	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

C. Conducted test :

Test Item	U,(dB)
Occupied Bandwidth	0.5332
Output power	0.3669
Power Spectral Density	0.6590
Conducted Spurious emissions	0.5416
Conducted Band edges	0.5335
Frequency Stability	0.5333

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS


Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	25 °C, 49 %	AC 120V	Easton Tsai
Radiated emissions below 1 GHz	Refer to data	AC 120V	Sean Huang
Radiated emissions above 1 GHz	Refer to data	AC 120V	Sean Huang
Bandwidth	24 °C, 56 %	AC 120V	Easton Tsai
Output Power	24 °C, 56 %	AC 120V	Easton Tsai
Power Spectral Density	24 °C, 56 %	AC 120V	Easton Tsai

1.4 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.


Remark	Delta 1			Delta 2	On Time/Period	10 log(1/Duty Cycle)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)	Duty Cycle (%)	Duty Factor (dB)
IEEE 802.11a	0.128	1	0.128	0.236	54.24%	2.66
IEEE 802.11ac (VHT20)	0.152	1	0.152	0.182	83.52%	0.78
IEEE 802.11ac (VHT40)	0.928	1	0.928	0.992	93.55%	0.29
IEEE 802.11ac (VHT80)	0.428	1	0.428	0.492	86.99%	0.61
IEEE 802.11ac (VHT160)	0.253	1	0.253	0.283	89.40%	0.49
IEEE 802.11ax (HE20)	1.495	1	1.495	1.525	98.03%	0.09
IEEE 802.11ax (HE40)	0.770	1	0.770	0.818	94.13%	0.26
IEEE 802.11ax (HE80)	0.394	1	0.394	0.444	88.74%	0.52
IEEE 802.11ax (HE160)	0.237	1	0.237	0.266	89.10%	0.50

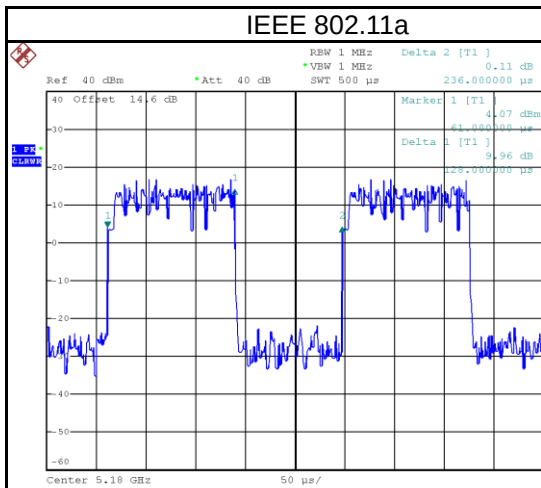


Date: 8.MAY.2024 21:46:21

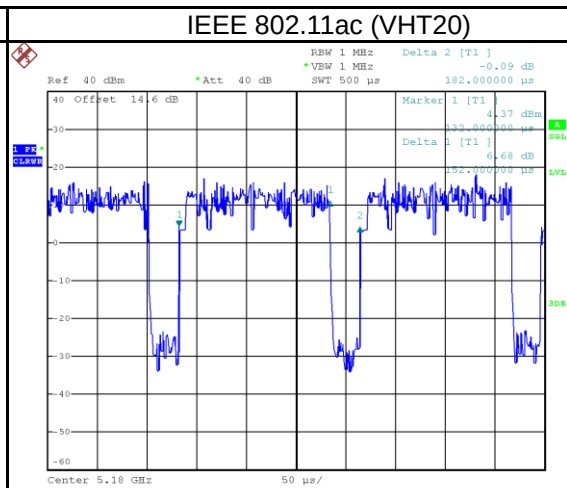


Date: 8.MAY.2024 21:47:32

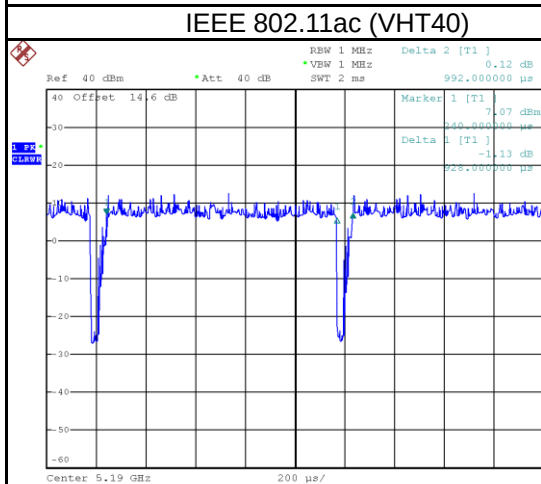

Date: 8.MAY.2024 21:53:31

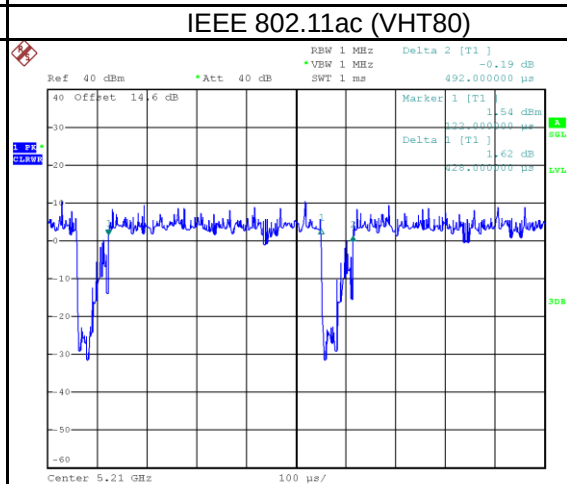

Date: 8.MAY.2024 21:55:01

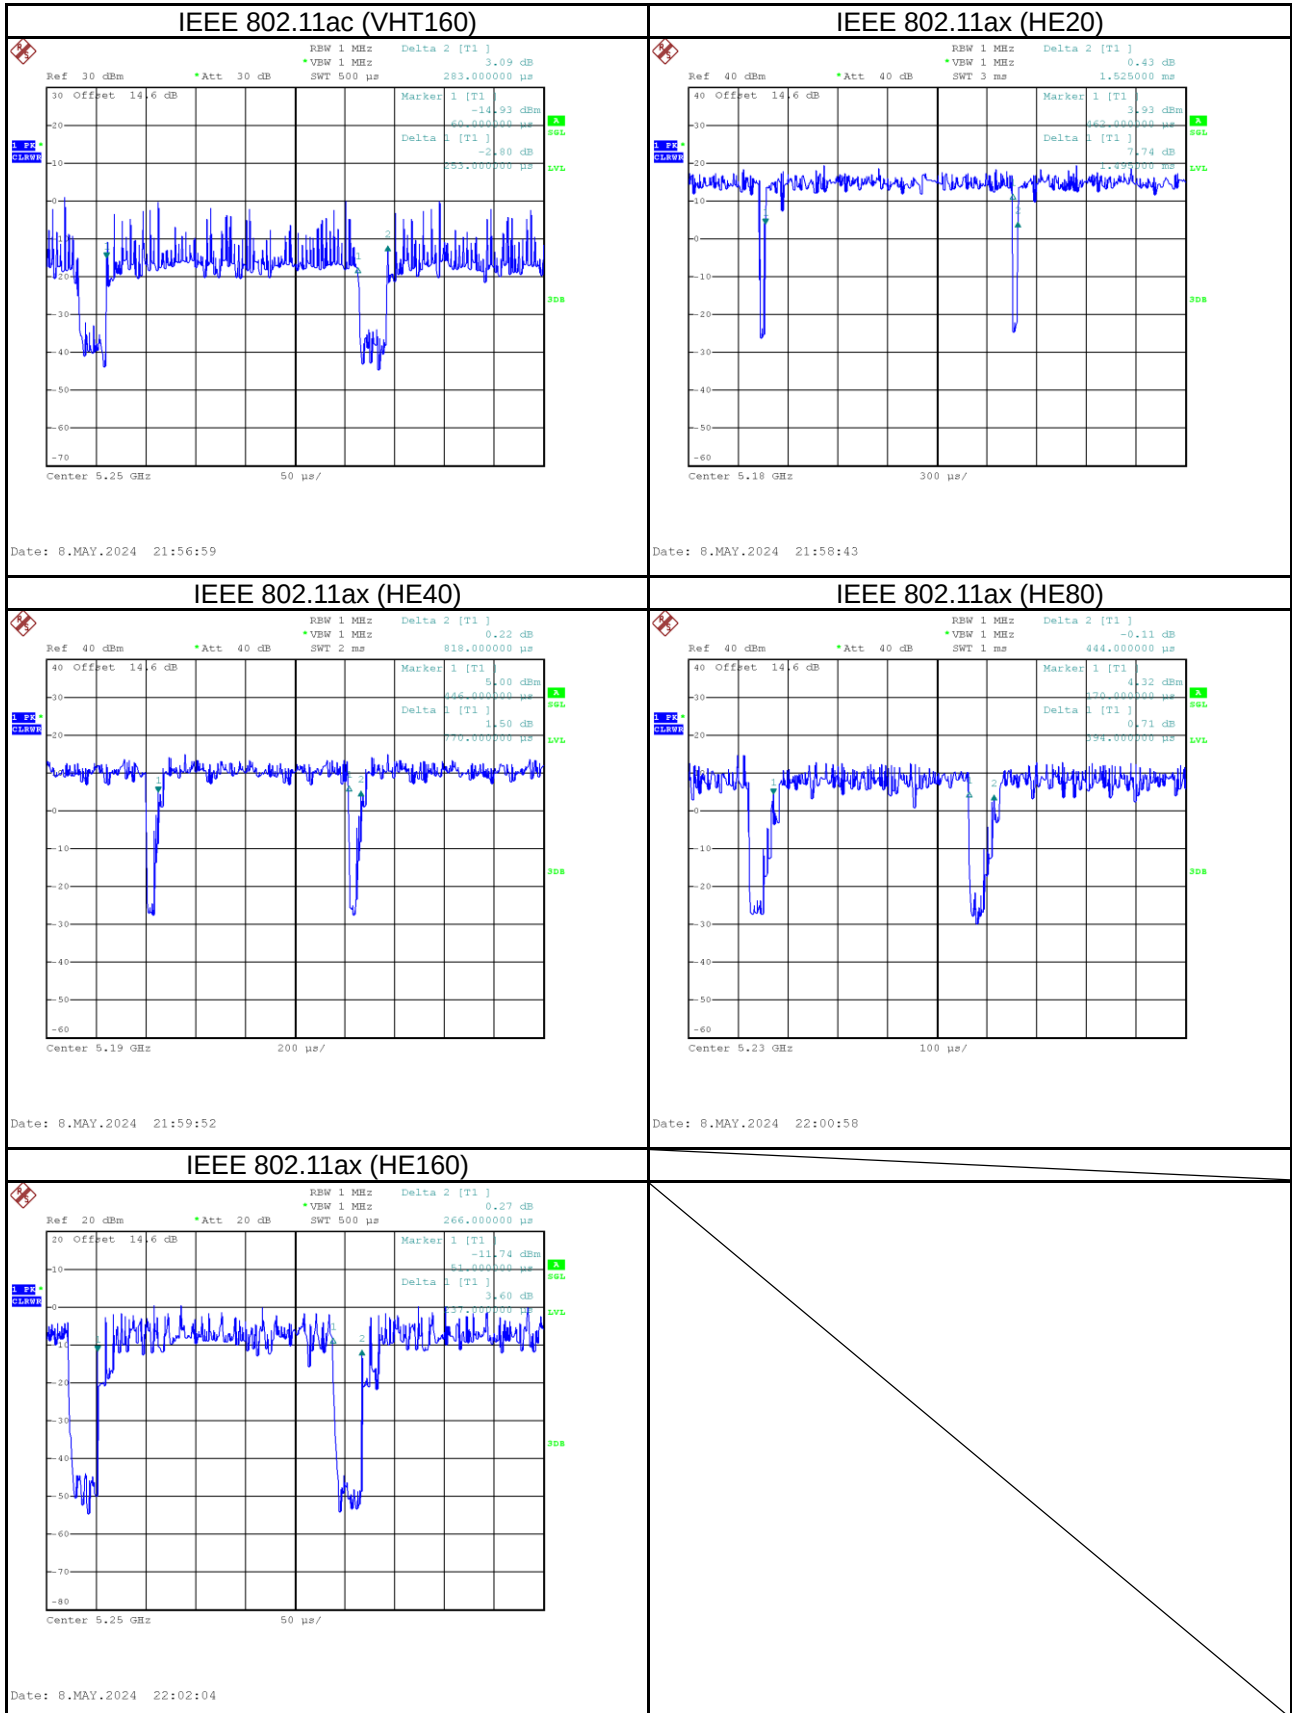

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	AXE5400 Tri-Band Wi-Fi 6E Gaming Router
Model Name	Archer GXE75
Brand Name	tp-link
Model Difference	N/A
Power Source	DC voltage supplied from AC Adapter.
Power Rating	I/P: 100-240V~, 50/60Hz, 0.8A O/P: 12.0V --- 2.5A
Products Covered	1 * Adapter: MASS POWER / NBS30D120250VU 1 * LAN Cable
Operation Band	UNII-1: 5150 MHz to 5250 MHz UNII-2A: 5250 MHz to 5350 MHz UNII-2C: 5470 MHz to 5725 MHz UNII-3: 5725 MHz to 5850 MHz
Operation Frequency	UNII-1: 5180 MHz to 5250 MHz UNII-2A: 5250 MHz to 5320 MHz UNII-2C: 5500 MHz to 5720 MHz UNII-3: 5745 MHz to 5825 MHz
Modulation Technology	OFDM, OFDMA
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6 Mbps 802.11n: Up to 300 Mbps 802.11ac: Up to 866.7 Mbps 802.11ax: Up to 2402 Mbps
Output Power Max. for UNII-1 - Non-Beamforming mode	IEEE 802.11a: 26.91 dBm (0.4906 W) IEEE 802.11ac (VHT20): 27.64 dBm (0.5808 W) IEEE 802.11ac (VHT40): 24.72 dBm (0.2967 W) IEEE 802.11ac (VHT80): 19.90 dBm (0.0978 W) IEEE 802.11ac (VHT160): 20.98 dBm (0.1252 W) IEEE 802.11ax (HE20): 27.22 dBm (0.5277 W) IEEE 802.11ax (HE40): 25.59 dBm (0.3619 W) IEEE 802.11ax (HE80): 19.84 dBm (0.0963 W) IEEE 802.11ax (HE160): 22.24 dBm (0.1675 W)
Output Power Max. for UNII-2A - Non-Beamforming mode	IEEE 802.11a: 22.61 dBm (0.1822 W) IEEE 802.11ac (VHT20): 23.81 dBm (0.2402 W) IEEE 802.11ac (VHT40): 23.98 dBm (0.2502 W) IEEE 802.11ac (VHT80): 20.21 dBm (0.1049 W) IEEE 802.11ax (HE20): 23.22 dBm (0.2097 W) IEEE 802.11ax (HE40): 23.90 dBm (0.2453 W) IEEE 802.11ax (HE80): 20.26 dBm (0.1062 W)
Output Power Max. for UNII-2C - Non-Beamforming mode	IEEE 802.11a: 22.96 dBm (0.1975 W) IEEE 802.11ac (VHT20): 23.38 dBm (0.2177 W) IEEE 802.11ac (VHT40): 23.08 dBm (0.2031 W) IEEE 802.11ac (VHT80): 22.98 dBm (0.1988 W) IEEE 802.11ac (VHT160): 18.45 dBm (0.0700 W) IEEE 802.11ax (HE20): 23.30 dBm (0.2138 W) IEEE 802.11ax (HE40): 23.23 dBm (0.2102 W) IEEE 802.11ax (HE80): 23.02 dBm (0.2002 W) IEEE 802.11ax (HE160): 20.03 dBm (0.1007 W)
Output Power Max. for UNII-3 - Non-Beamforming mode	IEEE 802.11a: 27.31 dBm (0.5387 W) IEEE 802.11ac (VHT20): 27.54 dBm (0.5673 W) IEEE 802.11ac (VHT40): 27.52 dBm (0.5654 W) IEEE 802.11ac (VHT80): 27.51 dBm (0.5634 W) IEEE 802.11ax (HE20): 27.44 dBm (0.5548 W) IEEE 802.11ax (HE40): 27.40 dBm (0.5492 W) IEEE 802.11ax (HE80): 27.32 dBm (0.5390 W)

Maximum Output Power for Straddle Channel - Non-Beamforming mode	IEEE 802.11a: 17.72 dBm (0.0592 W) IEEE 802.11ac (VHT20): 19.56 dBm (0.0904 W) IEEE 802.11ac (VHT40): 22.94 dBm (0.1968 W) IEEE 802.11ac (VHT80): 22.81 dBm (0.1910 W) IEEE 802.11ac (VHT160): 18.83 dBm (0.0764 W) IEEE 802.11ax (HE20): 19.52 dBm (0.0895 W) IEEE 802.11ax (HE40): 22.95 dBm (0.1970 W) IEEE 802.11ax (HE80): 22.71 dBm (0.1867 W) IEEE 802.11ax (HE160): 20.18 dBm (0.1042 W)
Output Power Max. for UNII-1 - Beamforming mode	IEEE 802.11ac (VHT20): 27.11 dBm (0.5144 W) IEEE 802.11ac (VHT40): 24.50 dBm (0.2816 W) IEEE 802.11ac (VHT80): 19.70 dBm (0.0934 W) IEEE 802.11ac (VHT160): 20.70 dBm (0.1176 W) IEEE 802.11ax (HE20): 26.72 dBm (0.4696 W) IEEE 802.11ax (HE40): 25.30 dBm (0.3388 W) IEEE 802.11ax (HE80): 19.69 dBm (0.0930 W) IEEE 802.11ax (HE160): 21.84 dBm (0.1529 W)
Output Power Max. for UNII-2A - Beamforming mode	IEEE 802.11ac (VHT20): 23.41 dBm (0.2194 W) IEEE 802.11ac (VHT40): 23.82 dBm (0.2412 W) IEEE 802.11ac (VHT80): 20.09 dBm (0.1021 W) IEEE 802.11ax (HE20): 22.88 dBm (0.1941 W) IEEE 802.11ax (HE40): 23.74 dBm (0.2366 W) IEEE 802.11ax (HE80): 19.96 dBm (0.0990 W)
Output Power Max. for UNII-2C - Beamforming mode	IEEE 802.11ac (VHT20): 22.99 dBm (0.1991 W) IEEE 802.11ac (VHT40): 22.93 dBm (0.1963 W) IEEE 802.11ac (VHT80): 22.87 dBm (0.1934 W) IEEE 802.11ac (VHT160): 18.27 dBm (0.0671 W) IEEE 802.11ax (HE20): 23.07 dBm (0.2028 W) IEEE 802.11ax (HE40): 22.87 dBm (0.1936 W) IEEE 802.11ax (HE80): 22.79 dBm (0.1900 W) IEEE 802.11ax (HE160): 19.92 dBm (0.0983 W)
Output Power Max. for UNII-3 - Beamforming mode	IEEE 802.11ac (VHT20): 26.83 dBm (0.4820 W) IEEE 802.11ac (VHT40): 27.03 dBm (0.5047 W) IEEE 802.11ac (VHT80): 26.84 dBm (0.4825 W) IEEE 802.11ax (HE20): 27.01 dBm (0.5018 W) IEEE 802.11ax (HE40): 26.88 dBm (0.4878 W) IEEE 802.11ax (HE80): 26.72 dBm (0.4703 W)
Maximum Output Power for Straddle Channel - Beamforming mode	IEEE 802.11ac (VHT20): 19.14 dBm (0.0820 W) IEEE 802.11ac (VHT40): 22.47 dBm (0.1766 W) IEEE 802.11ac (VHT80): 22.37 dBm (0.1724 W) IEEE 802.11ac (VHT160): 18.42 dBm (0.0695 W) IEEE 802.11ax (HE20): 19.04 dBm (0.0801 W) IEEE 802.11ax (HE40): 22.63 dBm (0.1832 W) IEEE 802.11ax (HE80): 22.32 dBm (0.1706 W) IEEE 802.11ax (HE160): 19.64 dBm (0.0919 W)
Operating Software	accessMTool V3.2.1.3
Test Model	Archer GXE75
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

- (1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Channel List:

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630		
116	5580	134	5670		
120	5600	142	5710		
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				
144	5720				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

802.11ac (VHT160) 802.11ax (HE160)	
Channel	Frequency (MHz)
50	5250
114	5570

(3) Table for Filed Antenna:

Ant	Manufacturer	Product Model	Antenna Type	Connector	Frequency (MHz)	Gain (dBi)
3	TP-LINK CORPORATION PTE. LTD.	Archer GXE75	Dipole	I-PEX	5150~5250	2.82
					5250~5350	2.82
					5470~5725	2.94
					5725~5850	3.06
4	TP-LINK CORPORATION PTE. LTD.	Archer GXE75	Dipole	I-PEX	5150~5250	2.84
					5250~5350	2.84
					5470~5725	2.88
					5725~5850	3.04

NOTE:

- Antenna gain higher is used for testing.
- The EUT incorporates a CDD function. Physically, the EUT provides two completed transmitters and receivers (2T2R).
- For Power Spectral Density:

$$\text{Directional Gain} = 10 \log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / N_{\text{ANT}}] = 6.06 \text{ dBi.} > 6 \text{ dBi.}$$

To UNII-1,
The reduced power spectral density limits = 17 - (6.06 - 6) = 16.94
To UNII-2A, UNII-2C,
The reduced power spectral density limits = 11 - (6.06 - 6) = 10.94
To UNII-3,
The reduced power spectral density limits = 30 - (6.06 - 6) = 29.94
- For Output Power:
For $N_{\text{ANT}} = 2 < 5$,
Direction gain = $G_{\text{ANT}} + 0 = 3.06 + 0 = 3.06 \text{ dBi.}$
The Direction gain is less than 6 dBi, so output power limits will not be reduced.
- For Beamforming mode:
Beamforming gain is 3. Then the Directional gain = $3 + 3.06 = 6.06 > 6 \text{ dBi.}$
To UNII-1,
The reduced output power limits = 30 - (6.06 - 6) = 29.94
To UNII-2A, UNII-2C,
The reduced output power limits = 24 - (6.06 - 6) = 23.94
To UNII-3,
The reduced output power limits = 30 - (6.06 - 6) = 29.94

(4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

(5) Operating Mode and Antenna Configuration

TX Mode	Operating Mode	2TX
	IEEE 802.11a	V (Ant 3+Ant 4)
	IEEE 802.11ac (VHT20)	V (Ant 3+Ant 4)
	IEEE 802.11ac (VHT40)	V (Ant 3+Ant 4)
	IEEE 802.11ac (VHT80)	V (Ant 3+Ant 4)
	IEEE 802.11ac (VHT160)	V (Ant 3+Ant 4)
	IEEE 802.11ax (HE20)	V (Ant 3+Ant 4)
	IEEE 802.11ax (HE40)	V (Ant 3+Ant 4)
	IEEE 802.11ax (HE80)	V (Ant 3+Ant 4)
	IEEE 802.11ax (HE160)	V (Ant 3+Ant 4)

2.2 TEST MODES


Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	TX Mode_ IEEE 802.11ac (VHT20)	149	-
Transmitter Radiated Emissions (above 1GHz)	TX Mode_ IEEE 802.11a	36/48, 52/64 100/140, 149/165	Bandedge
	TX Mode_ IEEE 802.11ac (VHT20) TX Mode_ IEEE 802.11ax (HE20)		
	TX Mode_ IEEE 802.11ac (VHT40) TX Mode_ IEEE 802.11ax (HE40)	38/46, 54/62 102/134, 151/159	
	TX Mode_ IEEE 802.11ac (VHT80) TX Mode_ IEEE 802.11ax (HE80)	42, 58 106/122, 155	
	TX Mode_ IEEE 802.11ac (VHT160) TX Mode_ IEEE 802.11ax (HE160)	50, 114	
	TX Mode_ IEEE 802.11a	36/40/48 52/60/64	Harmonic
	TX Mode_ IEEE 802.11ac (VHT20) TX Mode_ IEEE 802.11ax (HE20)	100/116/140/144 149/157/165	
	TX Mode_ IEEE 802.11ac (VHT40) TX Mode_ IEEE 802.11ax (HE40)	38/46, 54/62 102/110/134/142 151/159	
	TX Mode_ IEEE 802.11ac (VHT80) TX Mode_ IEEE 802.11ax (HE80)	42, 58 106/122/138 155	
	TX Mode_ IEEE 802.11ac (VHT160) TX Mode_ IEEE 802.11ax (HE160)	50 114	
Transmitter Radiated Emissions (above 18GHz)	TX Mode_ IEEE 802.11ac (VHT20)	149	-
Bandwidth & Power Spectral Density & Output Power	TX Mode_ IEEE 802.11a	36/40/48 52/60/64	-
	TX Mode_ IEEE 802.11ac (VHT20) TX Mode_ IEEE 802.11ax (HE20)	100/116/140/144 149/157/165	
	TX Mode_ IEEE 802.11ac (VHT40) TX Mode_ IEEE 802.11ax (HE40)	38/46, 54/62 102/110/134/142 151/159	
	TX Mode_ IEEE 802.11ac (VHT80) TX Mode_ IEEE 802.11ax (HE80)	42, 58 106/122/138 155	
	TX Mode_ IEEE 802.11ac (VHT160) TX Mode_ IEEE 802.11ax (HE160)	50 114	
Output Power	TX Mode_ IEEE 802.11ac (VHT20) TX Mode_ IEEE 802.11ax (HE20)	36/40/48 52/60/64 100/116/140/144 149/157/165	Beamforming mode
	TX Mode_ IEEE 802.11ac (VHT40) TX Mode_ IEEE 802.11ax (HE40)	38/46, 54/62 102/110/134/142 151/159	
	TX Mode_ IEEE 802.11ac (VHT80) TX Mode_ IEEE 802.11ax (HE80)	42, 58 106/122/138 155	
	TX Mode_ IEEE 802.11ac (VHT160) TX Mode_ IEEE 802.11ax (HE160)	50 114	

NOTE:


- (1) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.
- (2) All X, Y and Z axes are evaluated, but only the worst case (X axis) is recorded.
- (3) IEEE 802.11ac (VHT20) & IEEE 802.11ac (VHT40) mode is worse than IEEE 802.11n (HT20) & IEEE 802.11n (HT40) mode, so we select IEEE 802.11ac (VHT20) & IEEE 802.11ac (VHT40) mode for the test.
- (4) For IEEE 802.11ax modes, refer to TCB Workshop presentations on October 3, 2018, after evaluated, all testing are performed under fully loaded conditions (Full RU). In the test data, only the partially loaded conditions data are marked with tones.

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

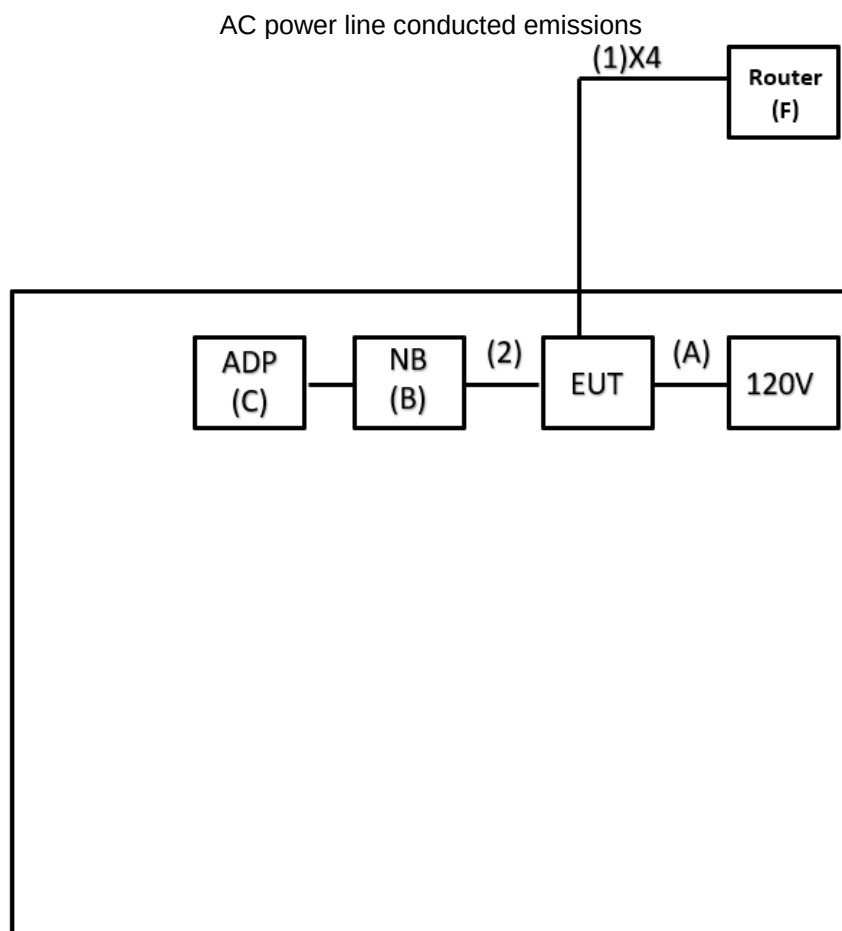

Radiated Emissions

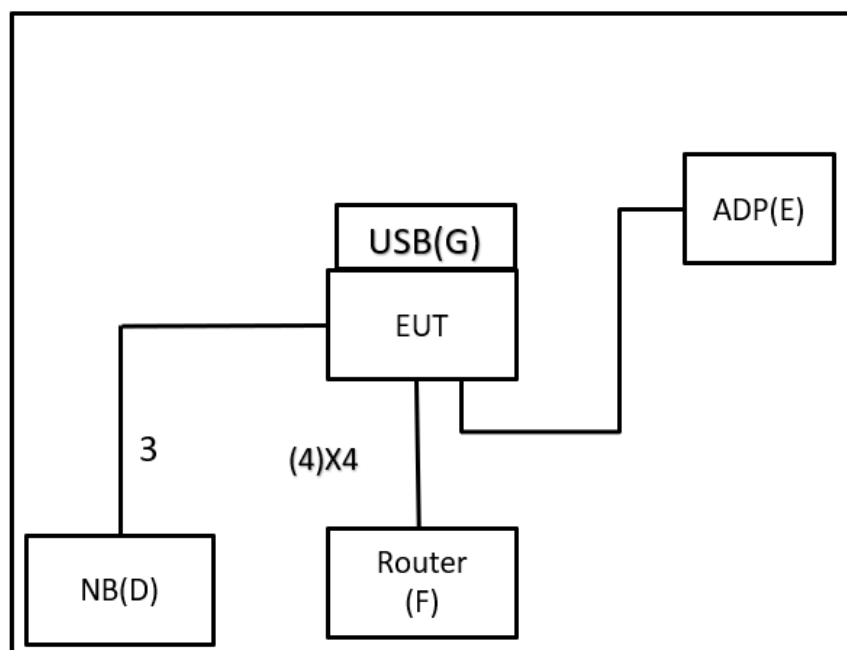

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	ADP	MASS POWER	NBS30D120250VU	N/A	Supplied by test requester
B	NB	HP	N/A	N/A	Furnished by test lab.
C	ADP	HP	N/A	N/A	Furnished by test lab.
D	NB	HP	TPN-I119	N/A	Furnished by test lab.
E	ADP	MASS POWER	NBS30D120250VU	N/A	Supplied by test requester
F	Router	Tp-Link	Archer C64	N/A	Furnished by test lab.
G	USB	ADATA	UV150	N/A	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	No	No	5m	LAN CABLE	Furnished by test lab.
2	No	No	1.2m	LAN CABLE	Furnished by test lab.
3	No	No	1.2m	LAN CABLE	Supplied by test requester
4	No	No	1m	LAN CABLE	Furnished by test lab.

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level (dBμV)		Correct Factor (dB)		Measurement Value (dBμV)
38.22	+	3.45	=	41.67

Measurement Value (dBμV)		Limit Value (dBμV)		Margin Level (dB)
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

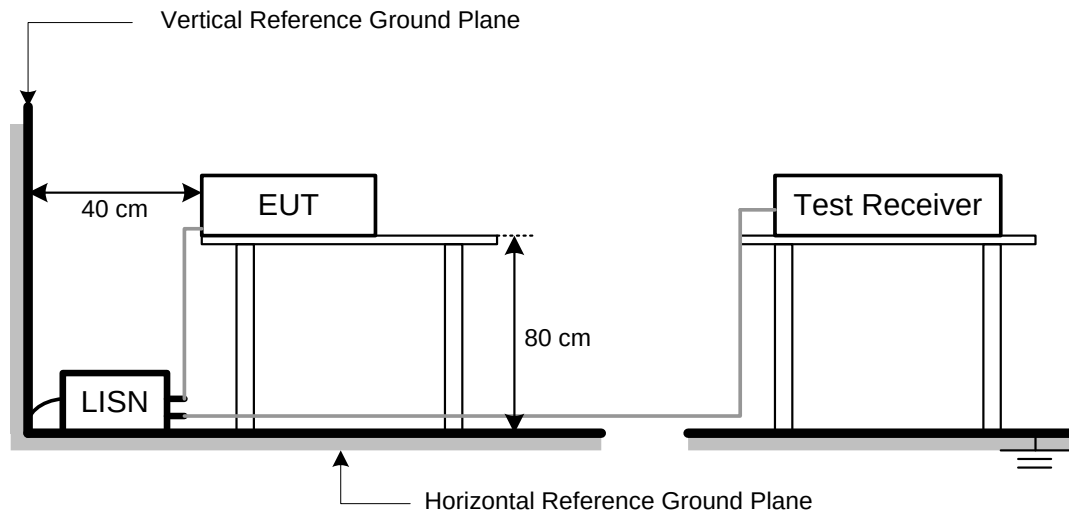

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 (NOTE 2)	68.3
	10 (NOTE 2)	105.3
	15.6 (NOTE 2)	110.9
	27 (NOTE 2)	122.3

NOTE:

- (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBμV)		Correct Factor (dB/m)		Measurement Value (dBμV/m)
36.23	+	-11.97	=	24.26

Measurement Value (dBμV/m)		Limit Value (dBμV/m)		Margin Level (dB)
24.26	-	40	=	-15.74

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2 TEST PROCEDURE


- The measuring distance of 1 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 30MHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

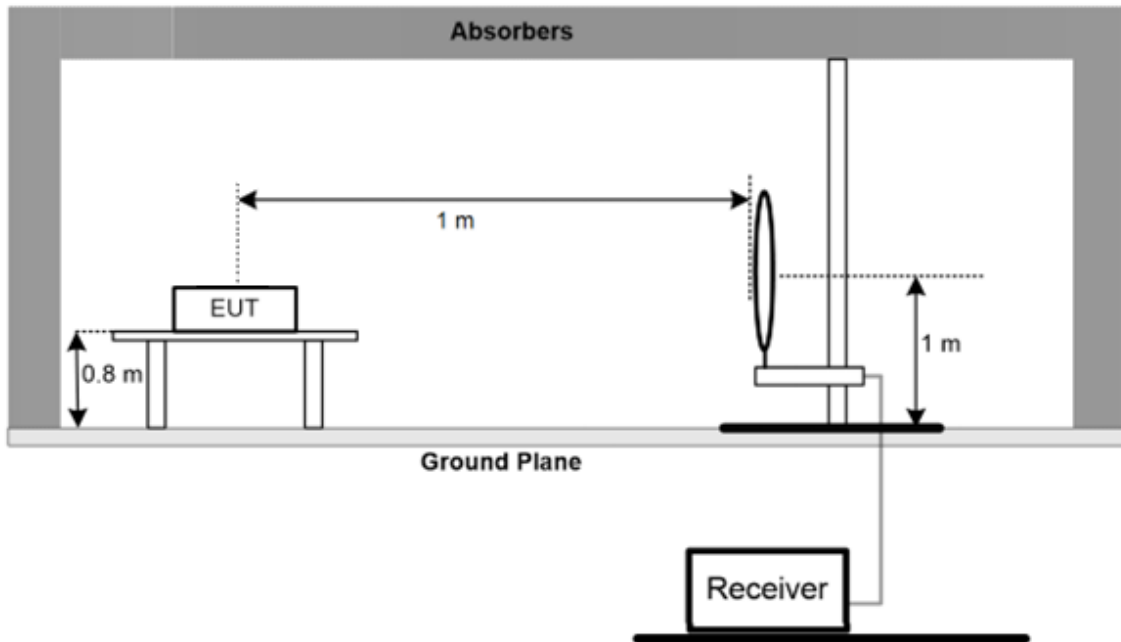

30 MHz to 1 GHz

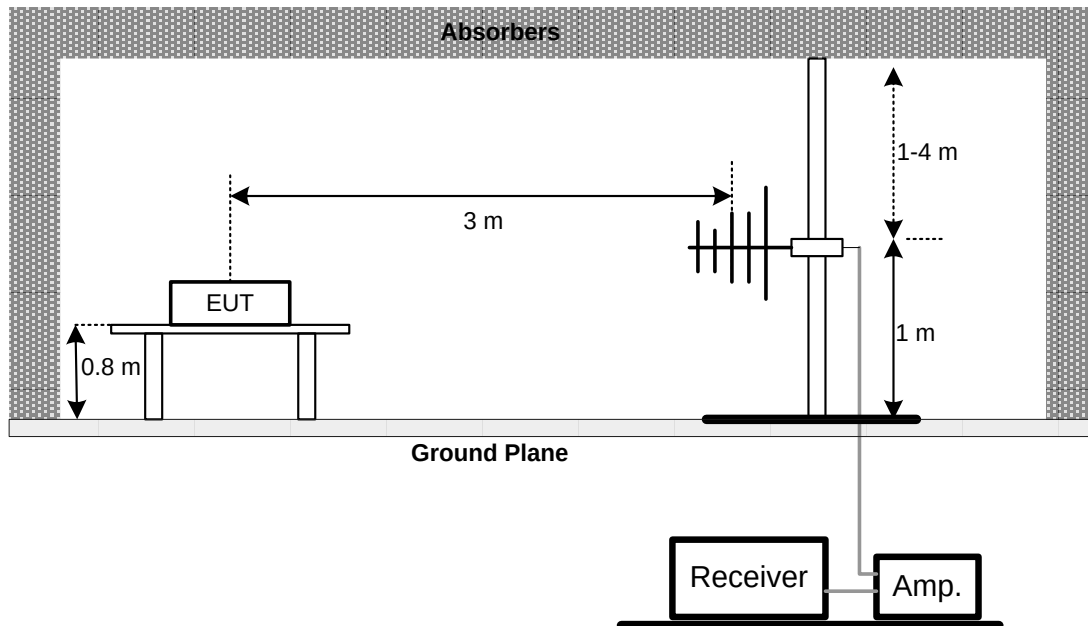

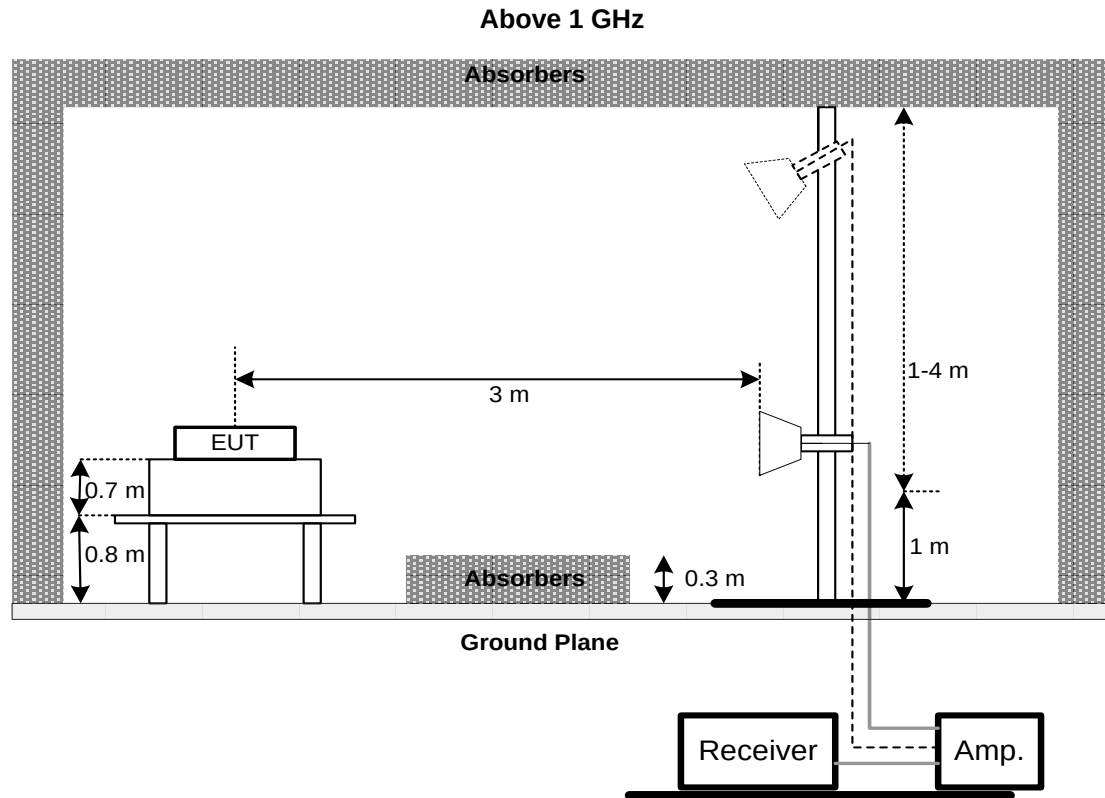

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT – 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

4.7 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX C.

4.8 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX D.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 BANDWIDTH TEST

5.1 LIMIT

Section	Test Item	Frequency Range (MHz)
15.407(a)	26 dB Bandwidth	5150-5250
		5250-5350
		5470-5725
	Minimum 500 kHz 6 dB Bandwidth	5725-5850

5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 26 dB Bandwidth
RBW	300 kHz(Bandwidth 20 MHz) 1 MHz(Bandwidth 40 MHz and 80 MHz)
VBW	1 MHz(Bandwidth 20 MHz) 3 MHz(Bandwidth 40 MHz and 80 MHz)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT

Please refer to the APPENDIX E.

6 OUTPUT POWER TEST

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Maximum Output Power	Fixed:1 Watt (30 dBm) Mobile and portable: 250 mW (24 dBm)	5150-5250
		250 mW (24 dBm)	5250-5350
			5470-5725
		1 Watt (30dBm)	5725-5850

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW(21 dBm).


6.2 TEST PROCEDURE

- The EUT was directly connected to the Peak Power Analyzer and antenna output port as show in the block diagram below.
- The maximum peak conducted output power was performed in accordance with method of clause E. 3. a) FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
 - Method PM (Measurement using an RF average power meter):
 - Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied
The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
 - If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.
 - Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25%).

6.3 DEVIATION FROM TEST STANDARD

No deviation.

6.4 TEST SETUP

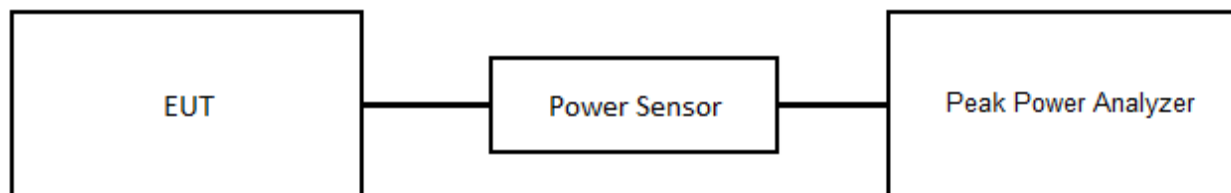

6.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULT

Please refer to the APPENDIX F.

7 POWER SPECTRAL DENSITY

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Power Spectral Density	Other than Mobile and portable: 17 dBm/MHz	5150-5250
		Mobile and portable: 11 dBm/MHz	
		11 dBm/MHz	5250-5350
		30 dBm/500 kHz	5470-5725
			5725-5850

7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz
VBW	≥ 3 MHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM TEST STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULT

Please refer to the APPENDIX G.

8 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	TWO-LINE V-NETWORK	R&S	ENV216	101497	2023/5/18	2024/5/17
2	Test Cable	EMCI	EMC400-BM-BM-5000	170501	2023/8/1	2024/7/31
3	EMI Test Receiver	R&S	ESR3	102950	2024/4/12	2025/4/11
4	Measurement Software	EZ	EZ EMC (Version NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC330N	980850	2023/9/6	2024/9/5
2	Preamplifier	EMCI	EMC118A45SE	980819	2024/3/6	2025/3/5
3	Pre-Amplifier	EMCI	EMC184045SE	980907	2023/9/21	2024/9/20
4	Preamplifier	EMCI	EMC001340	980579	2023/9/6	2024/9/5
5	Test Cable	EMCI	EMC104-SM-1000	180809	2024/3/8	2025/3/7
6	Test Cable	EMCI	EMC104-SM-SM-3000	220322	2024/3/8	2025/3/7
7	Test Cable	EMCI	EMC104-SM-SM-7000	220324	2024/3/8	2025/3/7
8	EXA Signal Analyzer	keysight	N9020B	MY57120120	2024/2/23	2025/2/22
9	Loop Ant	Electro-Metrics	EMCI-LPA600	291	2023/9/12	2024/9/11
10	Horn Antenna	RFSPIN	DRH18-E	211202A18EN	2024/5/9	2025/5/8
11	Horn Ant	Schwarzbeck	BBHA 9170	1136	2023/6/28	2024/6/27
12	TRILOG Broadband Antenna	Schwarzbeck	VULB9168	1371	2023/8/8	2024/8/7
13	6dB Attenuator	EMCI	EMCI-N-6-06	AT-N0625	2023/8/8	2024/8/7
14	Test Cable	EMCI	EMC101G-KM-KM-3000	220329	2024/3/13	2025/3/12
15	Test Cable	EMCI	EMC102-KM-KM-1000	220327	2024/3/13	2025/3/12
16	Horn Antenna	RFSPIN	DRH18-E	211202A18EN	2024/5/9	2025/5/8
17	Measurement Software	EZ	EZ EMC (Version NB-03A1-01)	N/A	N/A	N/A

Bandwidth						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 40	101139	2024/3/8	2025/3/7

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Peak Power Analyzer	Keysight	8990B	MY51000517	2024/3/12	2025/3/11
2	Power Sensor	Keysight	N1923A	MY58310005	2024/3/12	2025/3/11

Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 40	101139	2024/3/8	2025/3/7

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

9 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2402G042-FCCP-1 (APPENDIX-TEST PHOTOS).

10 EUT PHOTOS

Please refer to document Appendix No.: EP-2402G042-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2024/5/7
Test Frequency	-	Phase	Line

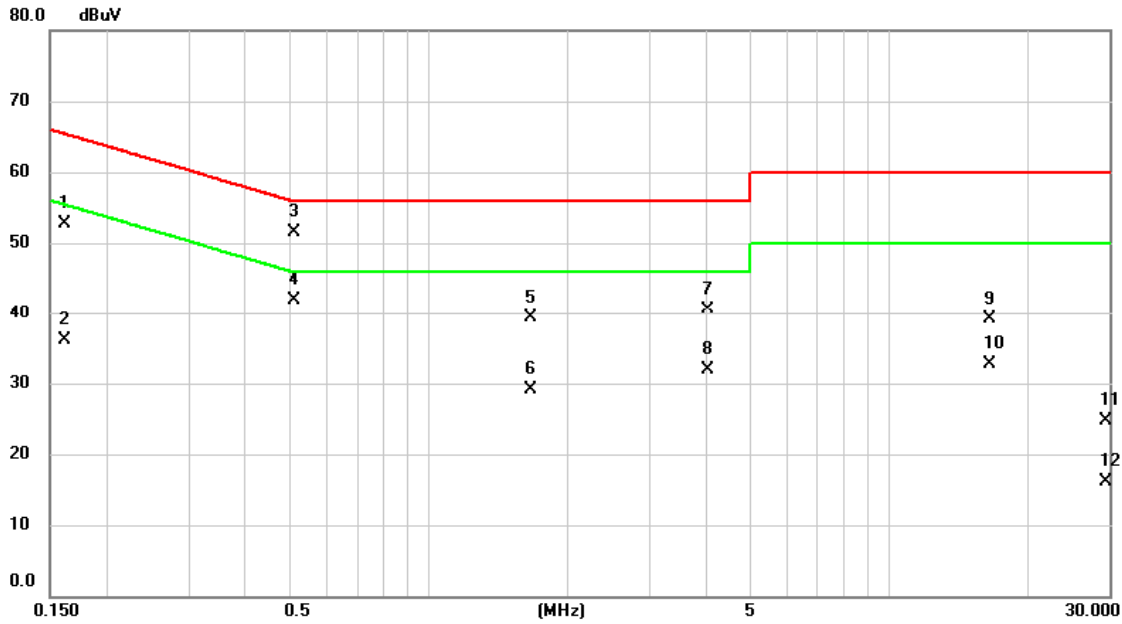


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1612	42.95	9.80	52.75	65.40	-12.65	QP	
2		0.1612	26.27	9.80	36.07	55.40	-19.33	AVG	
3		0.5122	41.77	9.76	51.53	56.00	-4.47	QP	
4	*	0.5122	32.07	9.76	41.83	46.00	-4.17	AVG	
5		1.6642	29.56	9.77	39.33	56.00	-16.67	QP	
6		1.6642	19.34	9.77	29.11	46.00	-16.89	AVG	
7		4.0245	30.74	9.79	40.53	56.00	-15.47	QP	
8		4.0245	22.17	9.79	31.96	46.00	-14.04	AVG	
9		16.5006	28.95	10.07	39.02	60.00	-20.98	QP	
10		16.5006	22.56	10.07	32.63	50.00	-17.37	AVG	
11		29.4000	14.65	9.98	24.63	60.00	-35.37	QP	
12		29.4000	6.15	9.98	16.13	50.00	-33.87	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2024/5/7
Test Frequency	-	Phase	Neutral

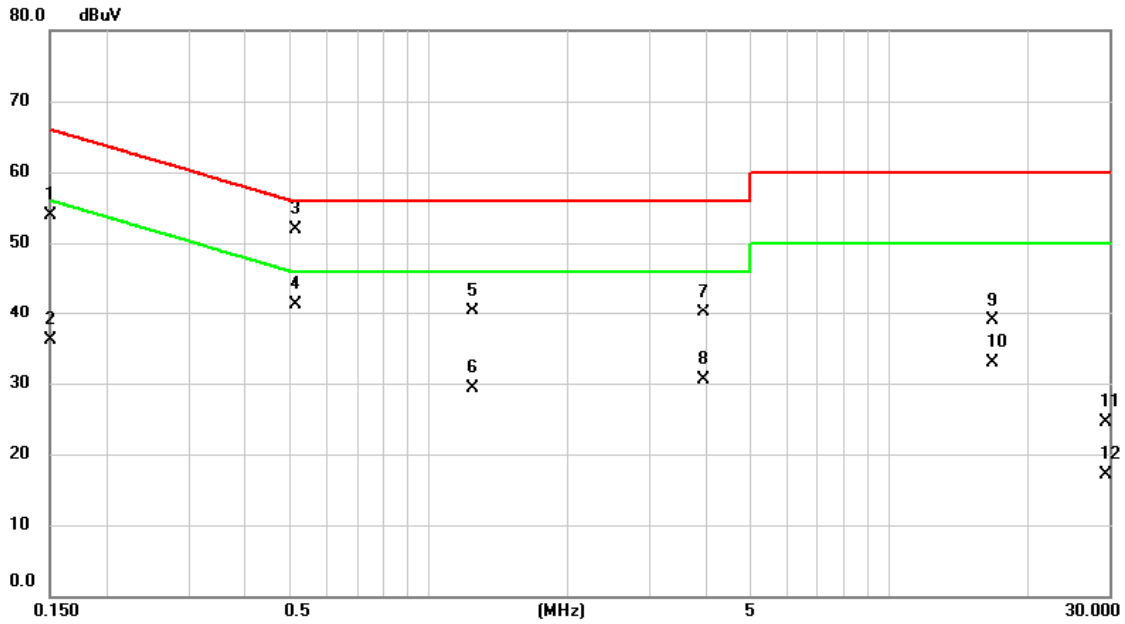


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	44.12	9.76	53.88	66.00	-12.12	QP	
2		0.1500	26.40	9.76	36.16	56.00	-19.84	AVG	
3	*	0.5144	42.21	9.75	51.96	56.00	-4.04	QP	
4		0.5144	31.61	9.75	41.36	46.00	-4.64	AVG	
5		1.2480	30.55	9.77	40.32	56.00	-15.68	QP	
6		1.2480	19.63	9.77	29.40	46.00	-16.60	AVG	
7		3.9458	30.26	9.76	40.02	56.00	-15.98	QP	
8		3.9458	20.80	9.76	30.56	46.00	-15.44	AVG	
9		16.7685	28.80	10.18	38.98	60.00	-21.02	QP	
10		16.7685	22.64	10.18	32.82	50.00	-17.18	AVG	
11		29.4833	14.18	10.26	24.44	60.00	-35.56	QP	
12		29.4833	6.79	10.26	17.05	50.00	-32.95	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2024/5/7
Test Frequency	-	Phase	Line

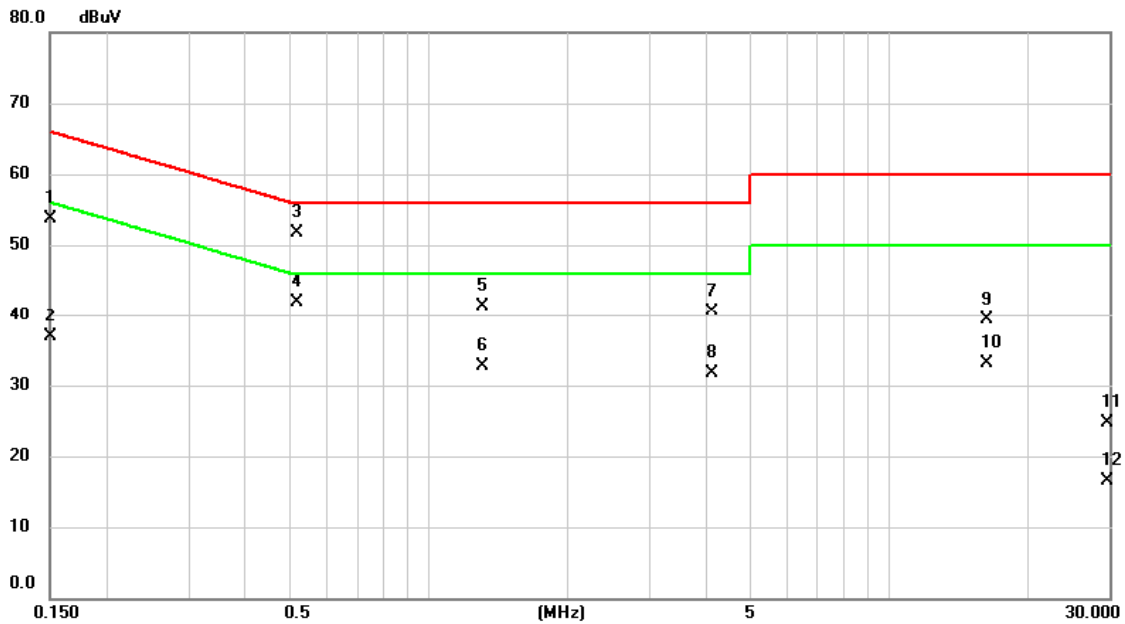


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1508	43.90	9.80	53.70	65.96	-12.26	QP	
2		0.1508	27.11	9.80	36.91	55.96	-19.05	AVG	
3		0.5167	41.95	9.76	51.71	56.00	-4.29	QP	
4	*	0.5167	32.23	9.76	41.99	46.00	-4.01	AVG	
5		1.3110	31.59	9.78	41.37	56.00	-14.63	QP	
6		1.3110	22.96	9.78	32.74	46.00	-13.26	AVG	
7		4.1100	30.72	9.79	40.51	56.00	-15.49	QP	
8		4.1100	21.86	9.79	31.65	46.00	-14.35	AVG	
9		16.2285	29.27	10.05	39.32	60.00	-20.68	QP	
10		16.2285	23.07	10.05	33.12	50.00	-16.88	AVG	
11		29.5913	14.69	9.97	24.66	60.00	-35.34	QP	
12		29.5913	6.60	9.97	16.57	50.00	-33.43	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2024/5/7
Test Frequency	-	Phase	Neutral

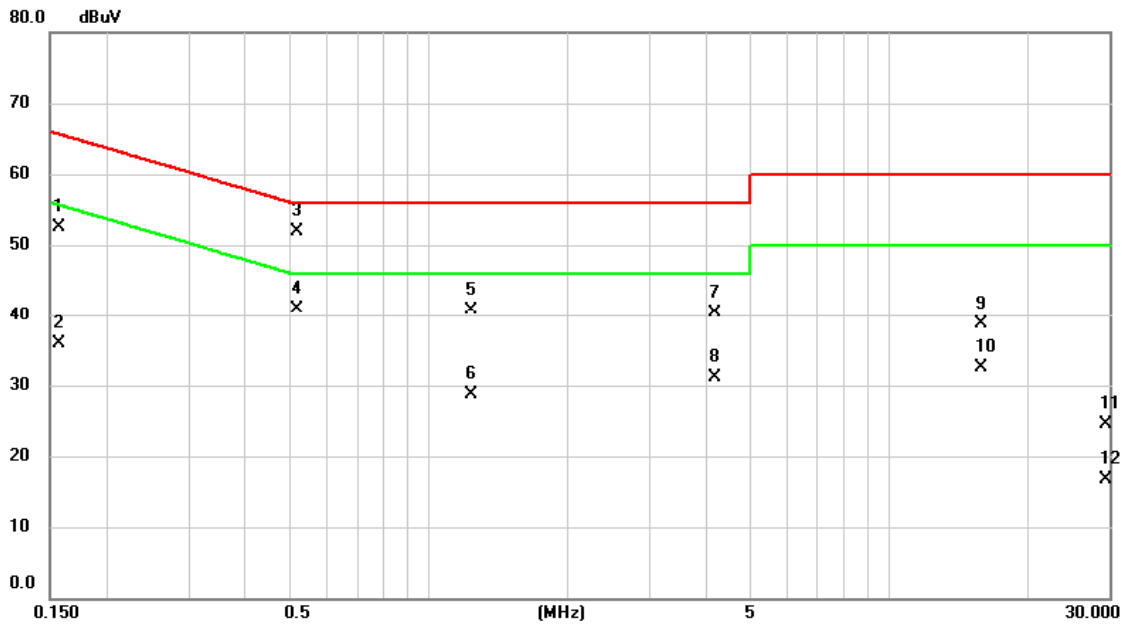

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1568	42.69	9.77	52.46	65.63	-13.17	QP	
2		0.1568	26.13	9.77	35.90	55.63	-19.73	AVG	
3	*	0.5190	42.21	9.75	51.96	56.00	-4.04	QP	
4		0.5190	31.24	9.75	40.99	46.00	-5.01	AVG	
5		1.2323	30.95	9.77	40.72	56.00	-15.28	QP	
6		1.2323	18.86	9.77	28.63	46.00	-17.37	AVG	
7		4.1640	30.50	9.77	40.27	56.00	-15.73	QP	
8		4.1640	21.30	9.77	31.07	46.00	-14.93	AVG	
9		15.7898	28.67	10.13	38.80	60.00	-21.20	QP	
10		15.7898	22.39	10.13	32.52	50.00	-17.48	AVG	
11		29.5080	14.31	10.26	24.57	60.00	-35.43	QP	
12		29.5080	6.50	10.26	16.76	50.00	-33.24	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/14
Test Frequency	5745MHz	Polarization	Vertical
Temp	23°C	Hum.	66%

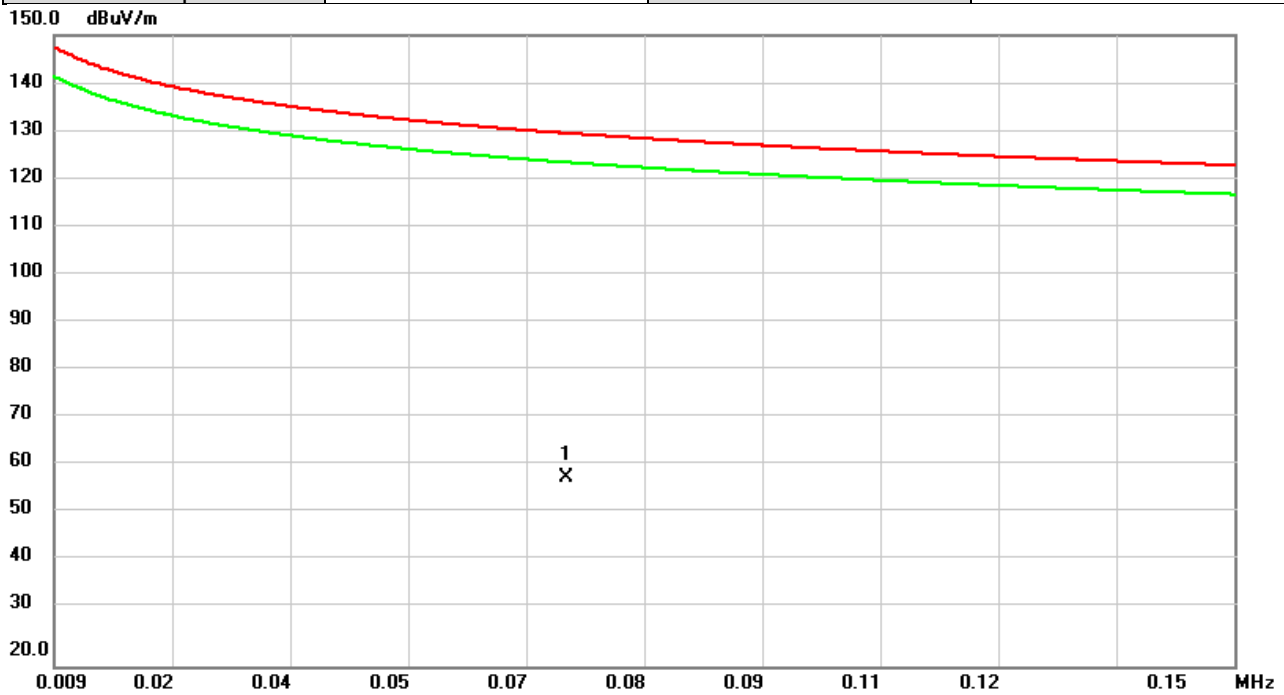


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0701	38.01	20.67	58.68	129.77	-71.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/14
Test Frequency	5745MHz	Polarization	Vertical
Temp	23°C	Hum.	66%

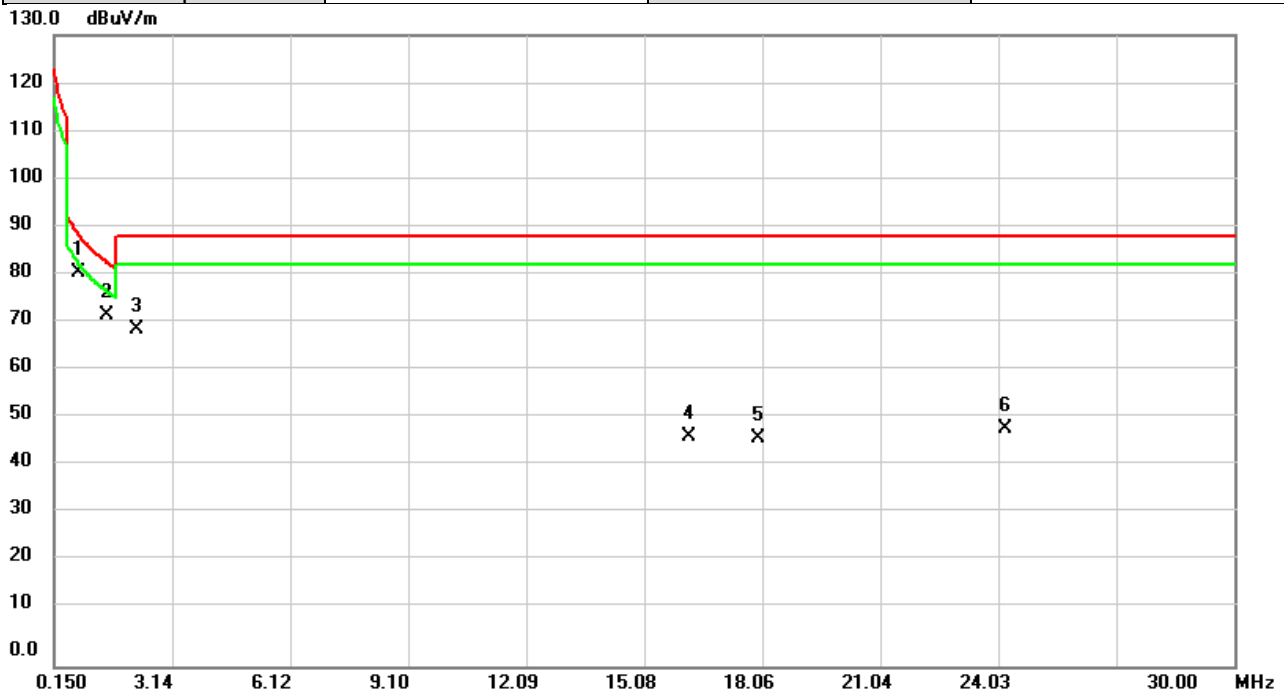


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.7470	78.12	3.10	81.22	89.21	-7.99	QP	
2		1.4932	72.62	-0.42	72.20	83.19	-10.99	QP	
3		2.2395	71.54	-2.22	69.32	88.62	-19.30	QP	
4		16.2092	51.11	-3.75	47.36	88.62	-41.26	QP	
5		17.9704	50.82	-3.91	46.91	88.62	-41.71	QP	
6		24.2090	51.10	-2.09	49.01	88.62	-39.61	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/14
Test Frequency	5745MHz	Polarization	Horizontal
Temp	23°C	Hum.	66%

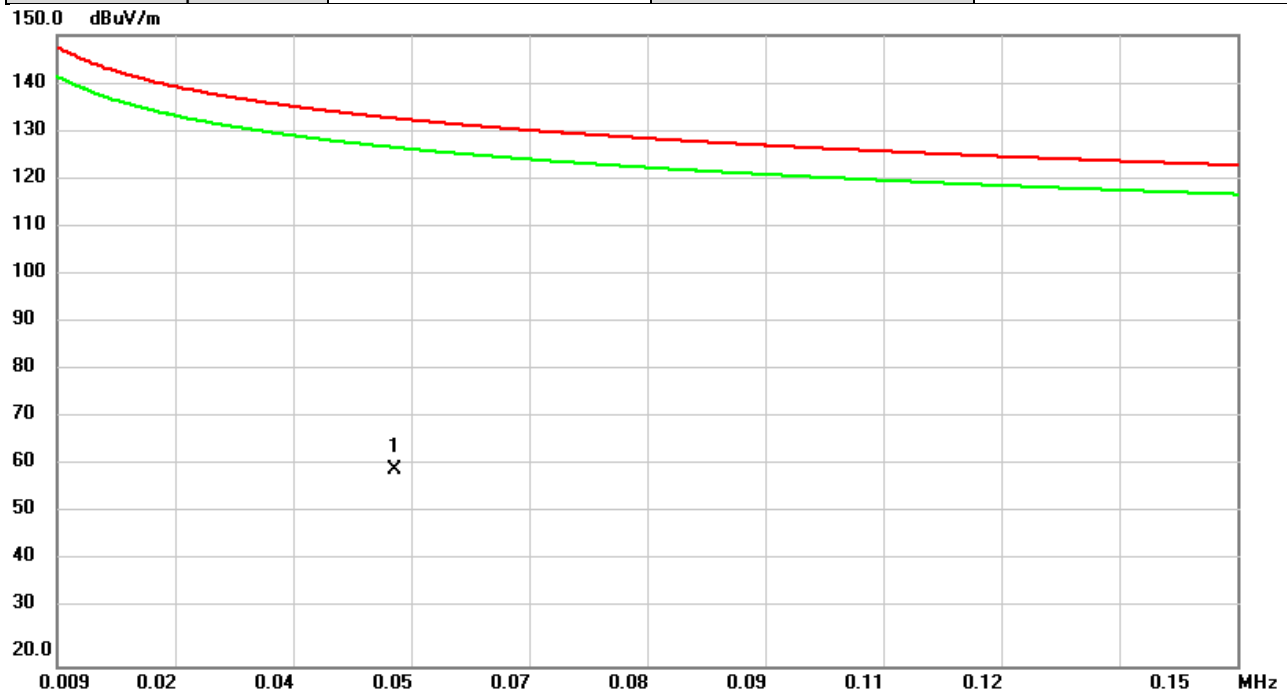


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0494	36.98	23.52	60.50	132.81	-72.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/14
Test Frequency	5745MHz	Polarization	Horizontal
Temp	23°C	Hum.	66%

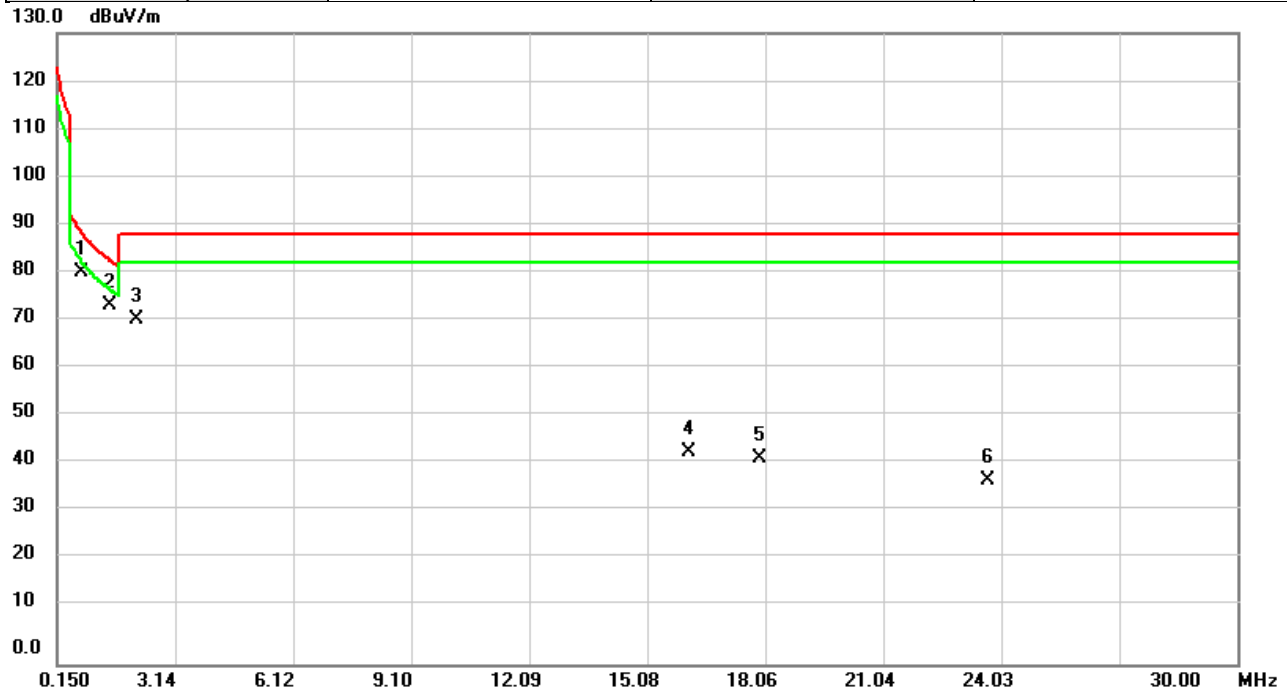


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.7470	77.74	3.10	80.84	89.21	-8.37	QP	
2		1.4932	74.49	-0.42	74.07	83.19	-9.12	QP	
3		2.1500	73.07	-2.04	71.03	88.62	-17.59	QP	
4		16.1494	47.36	-3.74	43.62	88.62	-45.00	QP	
5		17.9107	46.16	-3.90	42.26	88.62	-46.36	QP	
6		23.6718	40.19	-2.35	37.84	88.62	-50.78	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024-5-13
Test Frequency	5745MHz	Polarization	Horizontal
Temp	23°C	Hum.	66%

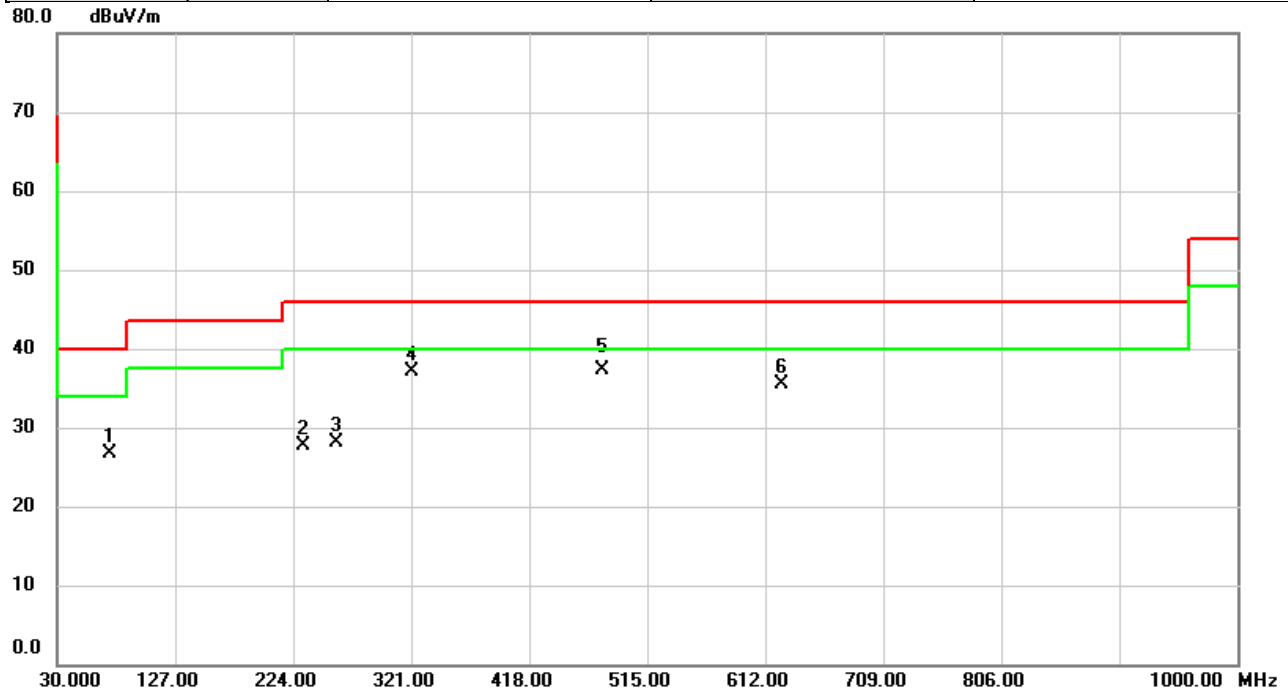


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		73.1326	42.71	-15.97	26.74	40.00	-13.26	peak	
2		231.7600	43.49	-15.78	27.71	46.00	-18.29	peak	
3		260.0193	41.85	-13.74	28.11	46.00	-17.89	peak	
4		321.1293	48.93	-11.85	37.08	46.00	-8.92	peak	
5	*	478.7866	45.15	-7.77	37.38	46.00	-8.62	QP	
6		624.9980	40.37	-4.78	35.59	46.00	-10.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024-5-13
Test Frequency	5745MHz	Polarization	Vertical
Temp	23°C	Hum.	66%

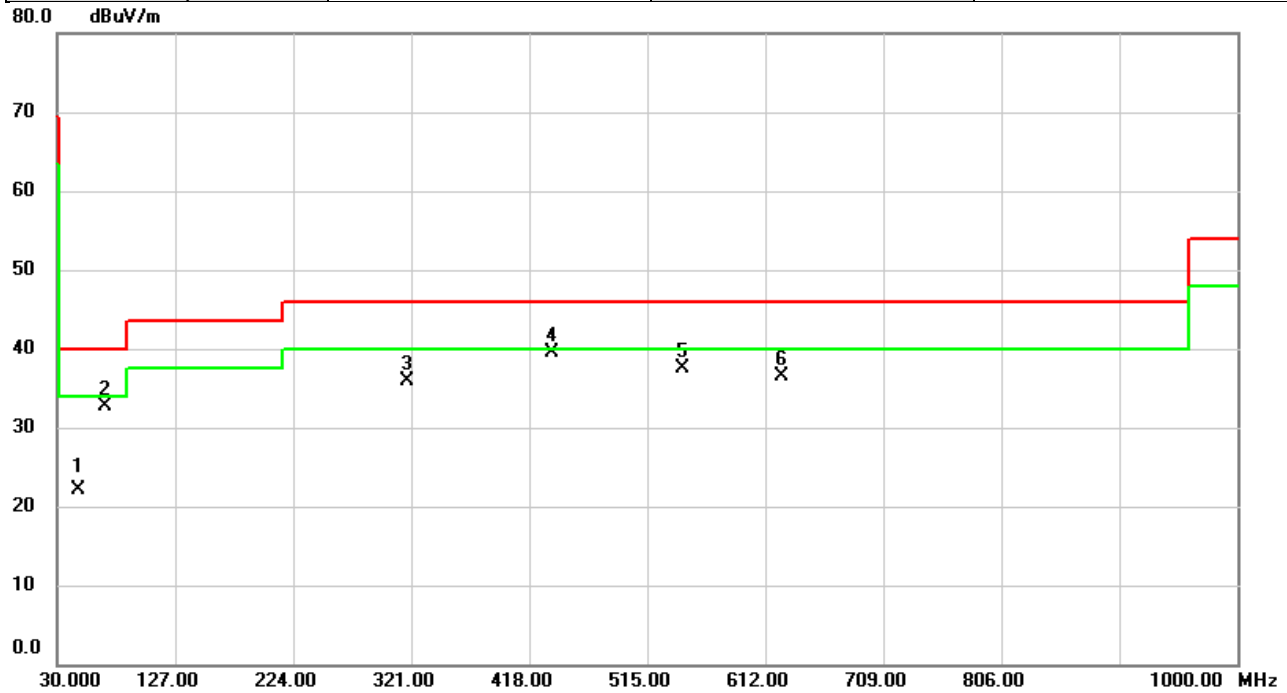


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		47.5570	34.63	-12.61	22.02	40.00	-17.98	QP	
2		69.4790	47.88	-15.25	32.63	40.00	-7.37	peak	
3		317.6373	47.91	-11.92	35.99	46.00	-10.01	peak	
4	*	436.1390	48.23	-8.64	39.59	46.00	-6.41	peak	
5		544.5850	44.20	-6.75	37.45	46.00	-8.55	peak	
6		624.9980	41.36	-4.78	36.58	46.00	-9.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	IEEE 802.11a	Test Date	2024/5/22
Test Frequency	5180MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

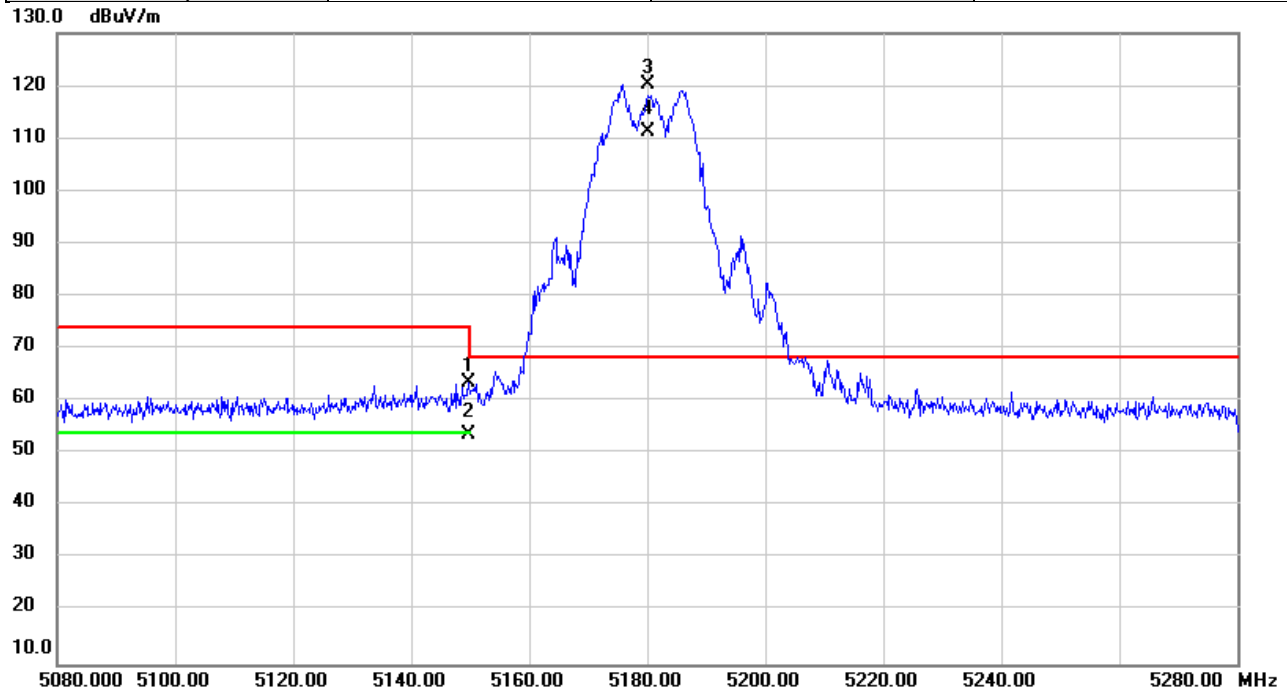


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5149.680	62.09	1.37	63.46	74.00	-10.54	peak	
2		5149.680	52.19	1.37	53.56	54.00	-0.44	AVG	
3	*	5180.000	118.74	1.39	120.13	68.20	51.93	peak	No Limit
4	X	5180.000	109.83	1.39	111.22	68.20	43.02	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/22
Test Frequency	5240MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

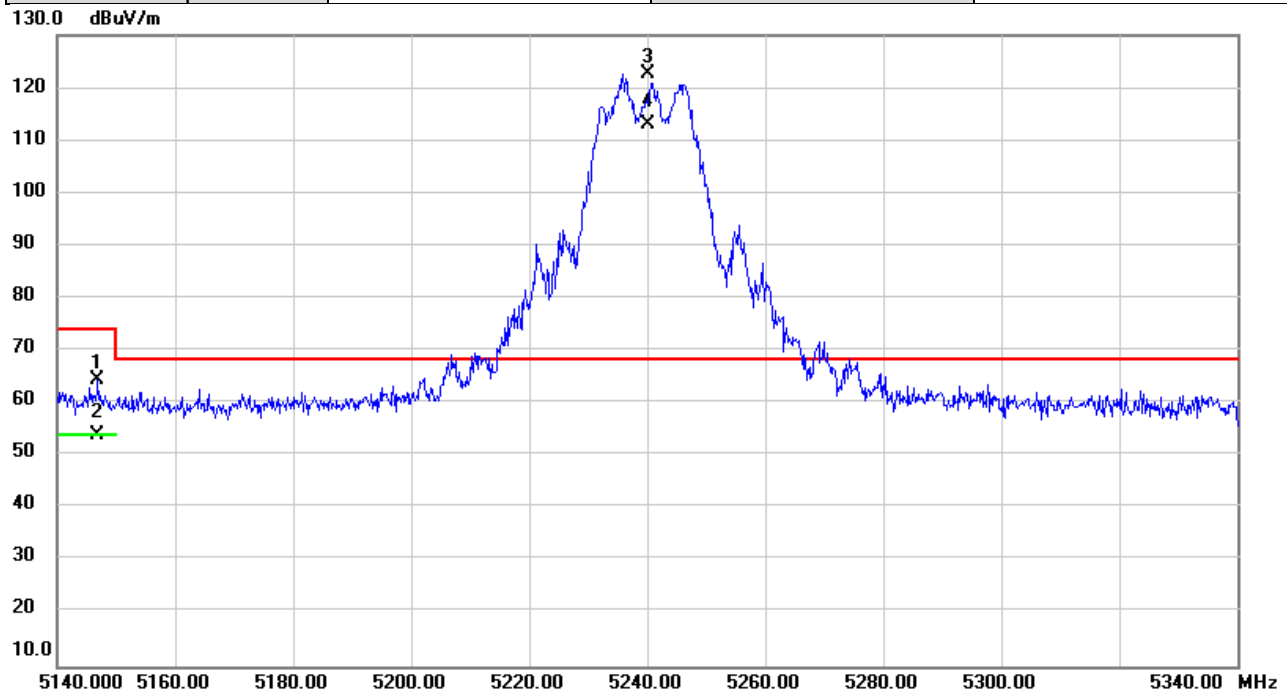


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5146.833	62.95	1.37	64.32	74.00	-9.68	peak	
2		5146.833	52.52	1.37	53.89	54.00	-0.11	AVG	
3	*	5240.000	121.23	1.43	122.66	68.20	54.46	peak	No Limit
4	X	5240.000	111.67	1.43	113.10	68.20	44.90	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/22
Test Frequency	5260MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

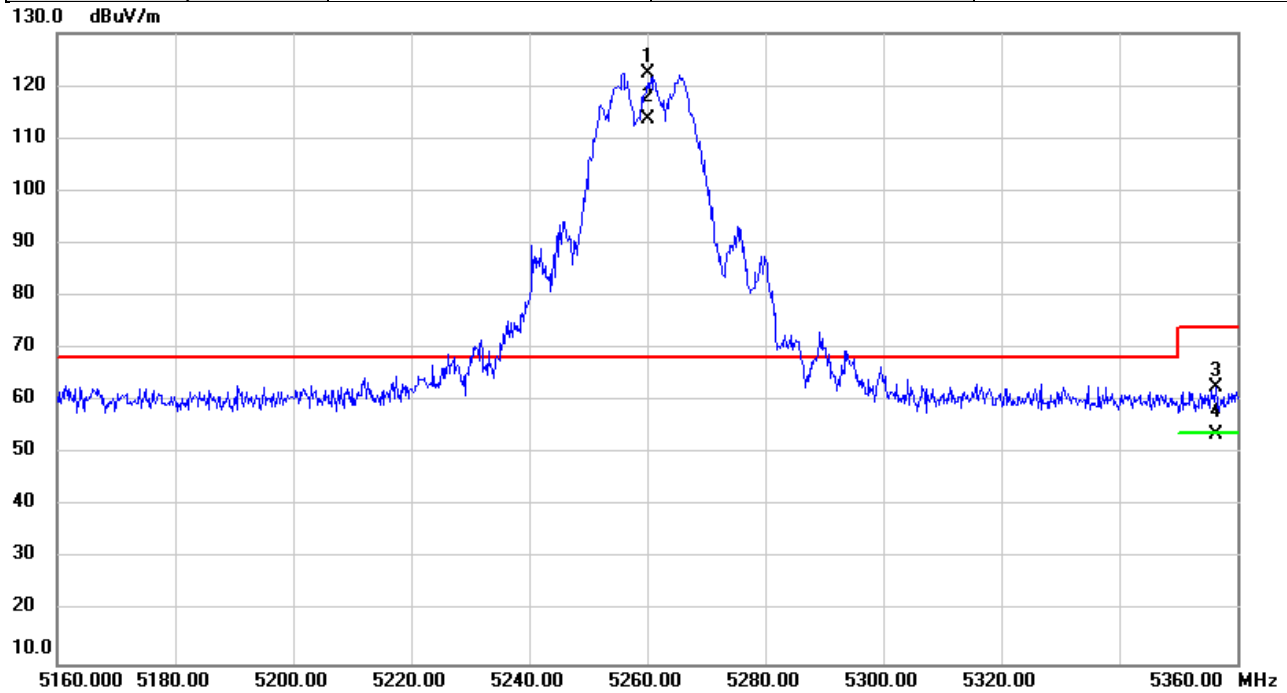


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5260.000	120.91	1.44	122.35	68.20	54.15	peak	No Limit
2	X	5260.000	112.24	1.44	113.68	68.20	45.48	AVG	No Limit
3		5356.400	61.26	1.50	62.76	74.00	-11.24	peak	
4		5356.400	52.09	1.50	53.59	54.00	-0.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/22
Test Frequency	5320MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

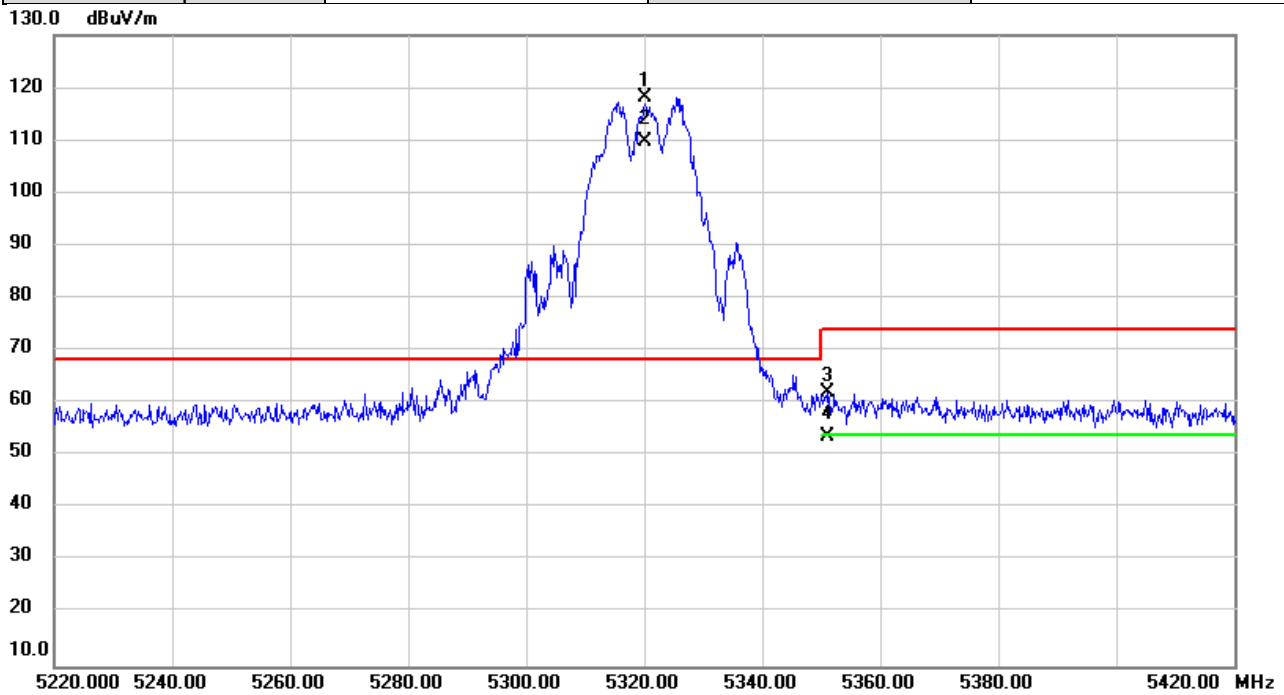


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5320.000	116.55	1.48	118.03	68.20	49.83	peak	No Limit
2	X	5320.000	108.13	1.48	109.61	68.20	41.41	AVG	No Limit
3		5350.973	60.46	1.50	61.96	74.00	-12.04	peak	
4		5350.973	52.07	1.50	53.57	54.00	-0.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/22
Test Frequency	5500MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

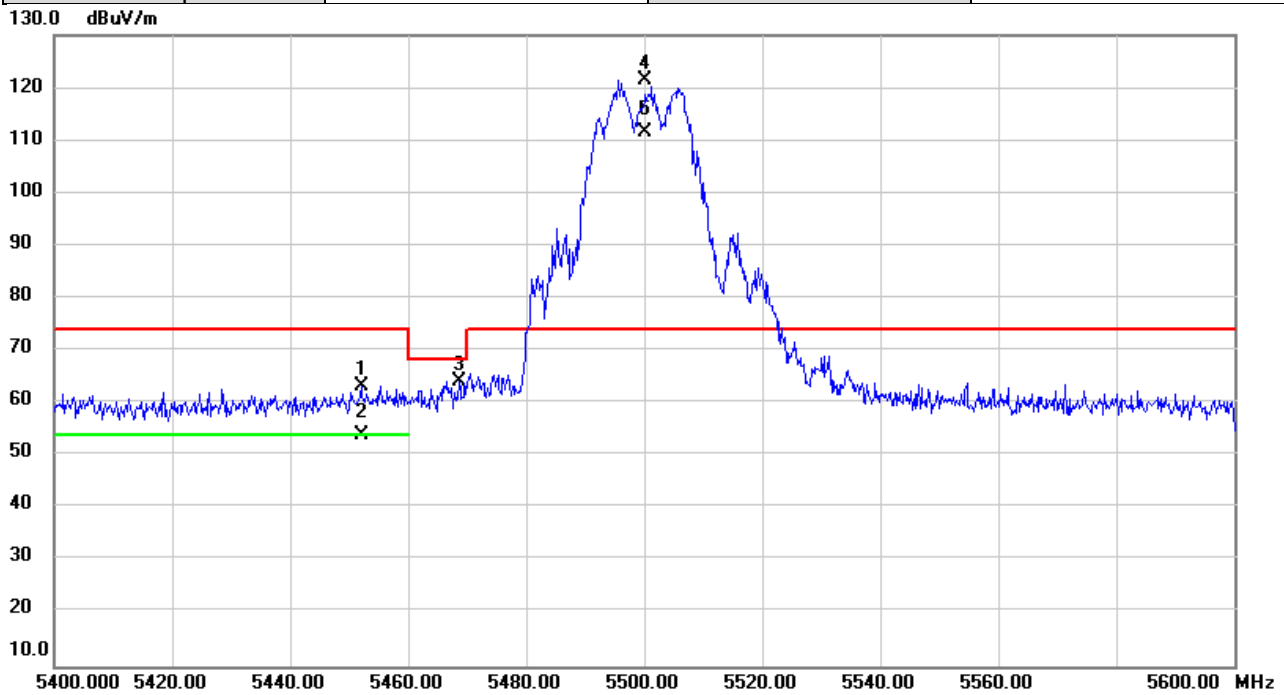


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5452.173	61.82	1.55	63.37	74.00	-10.63	peak	
2		5452.173	52.33	1.55	53.88	54.00	-0.12	AVG	
3		5468.673	62.71	1.56	64.27	68.20	-3.93	peak	
4	*	5500.000	119.75	1.58	121.33	74.00	47.33	peak	No Limit
5	X	5500.000	109.89	1.58	111.47	74.00	37.47	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/14
Test Frequency	5700MHz	Polarization	Vertical
Temp	21°C	Hum.	66%

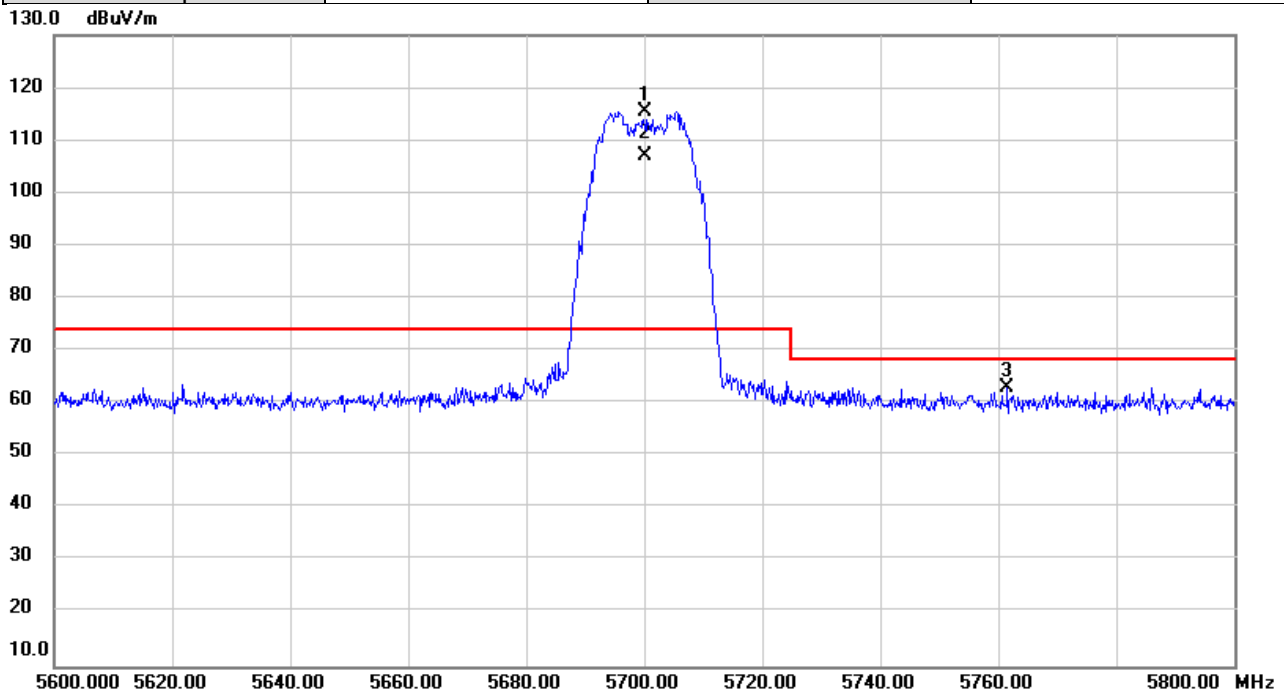


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5700.000	113.31	2.24	115.55	74.00	41.55	peak	No Limit
2	X	5700.000	104.73	2.24	106.97	74.00	32.97	AVG	No Limit
3		5761.480	60.45	2.44	62.89	68.20	-5.31	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/7/4
Test Frequency	5745MHz	Polarization	Vertical
Temp	26°C	Hum.	63%

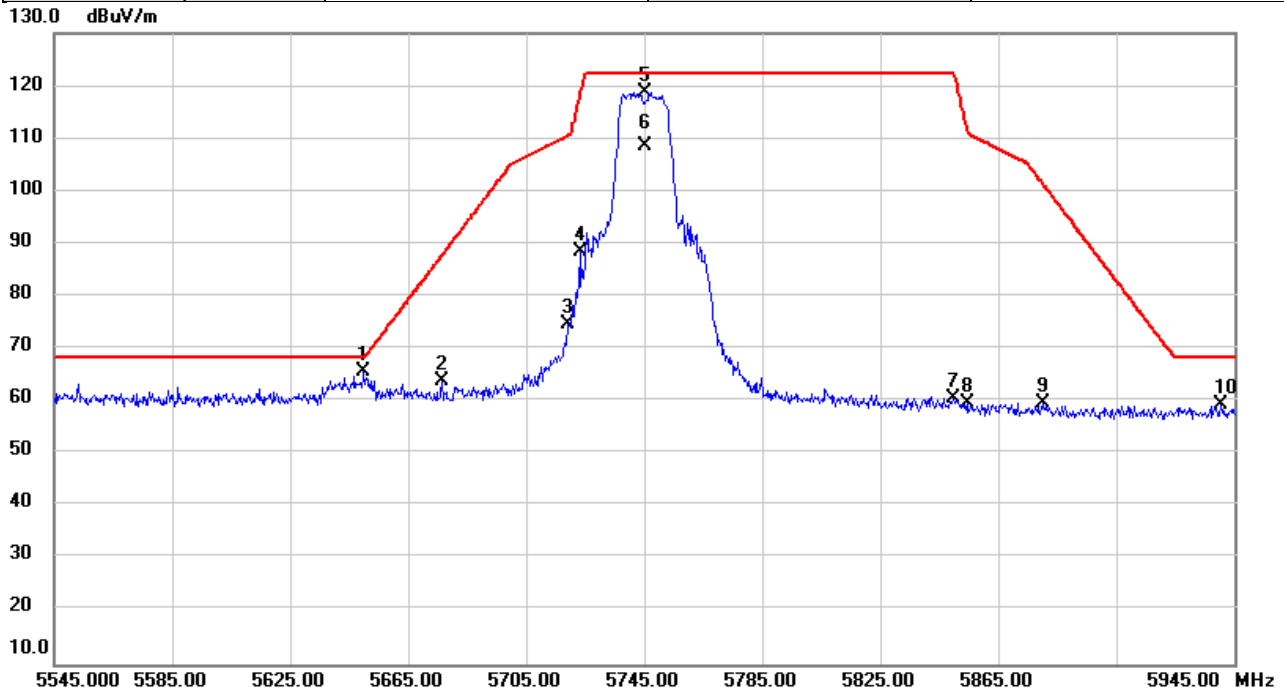


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5649.813	63.45	2.08	65.53	68.20	-2.67	peak	
2		5676.360	61.82	2.16	63.98	87.75	-23.77	peak	
3		5719.387	72.21	2.30	74.51	110.63	-36.12	peak	
4		5723.293	86.09	2.31	88.40	118.31	-29.91	peak	
5		5745.000	116.38	2.38	118.76	122.20	-3.44	peak	No Limit
6		5745.000	106.19	2.38	108.57	122.20	-13.63	AVG	No Limit
7		5850.000	57.93	2.72	60.65	122.20	-61.55	peak	
8		5854.360	56.89	2.74	59.63	112.26	-52.63	peak	
9		5880.240	56.81	2.84	59.65	101.31	-41.66	peak	
10		5940.253	56.20	3.03	59.23	68.20	-8.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/7/4
Test Frequency	5825MHz	Polarization	Vertical
Temp	26°C	Hum.	63%

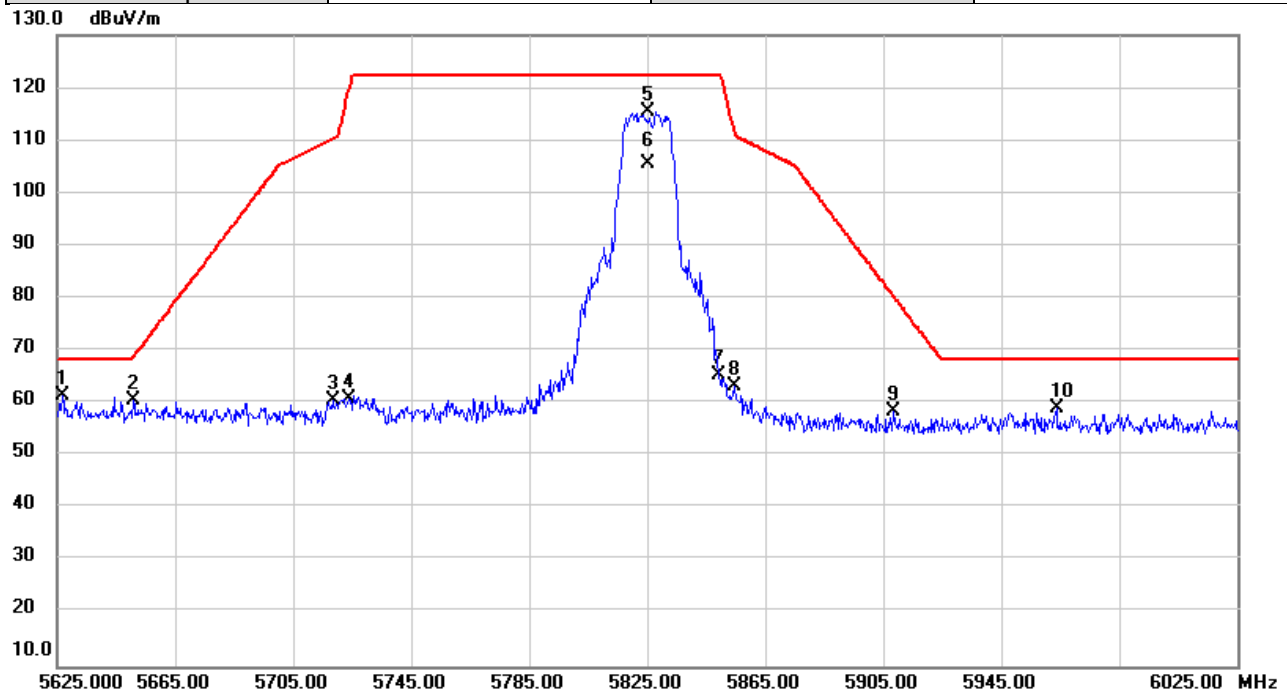


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5626.853	59.55	2.00	61.55	68.20	-6.65	peak	
2		5650.853	58.60	2.08	60.68	68.83	-8.15	peak	
3		5718.533	58.35	2.30	60.65	110.39	-49.74	peak	
4		5723.933	58.48	2.31	60.79	119.77	-58.98	peak	
5	*	5825.000	112.93	2.65	115.58	122.20	-6.62	peak	No Limit
6		5825.000	103.04	2.65	105.69	122.20	-16.51	AVG	No Limit
7		5849.107	62.54	2.72	65.26	122.20	-56.94	peak	
8		5854.600	60.42	2.74	63.16	111.71	-48.55	peak	
9		5908.600	55.48	2.92	58.40	80.30	-21.90	peak	
10		5963.720	55.89	3.10	58.99	68.20	-9.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/22
Test Frequency	5180MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

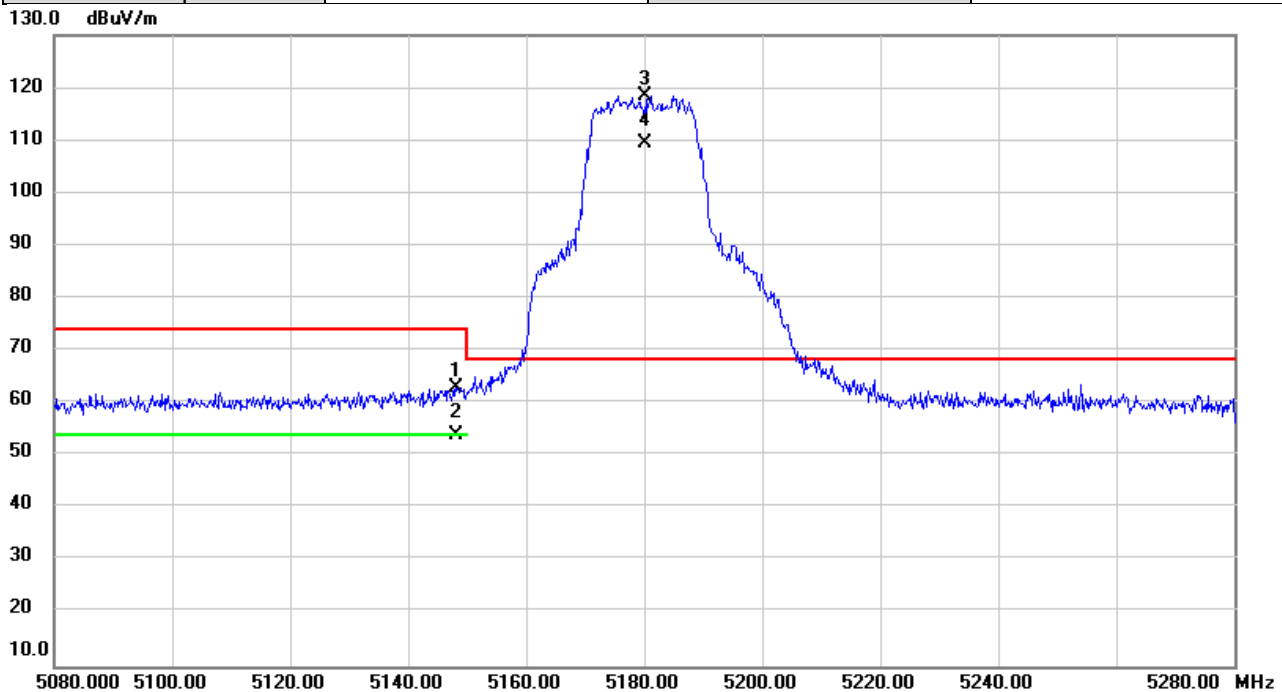


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5148.200	61.52	1.37	62.89	74.00	-11.11	peak	
2		5148.200	52.47	1.37	53.84	54.00	-0.16	AVG	
3	*	5180.000	117.20	1.39	118.59	68.20	50.39	peak	No Limit
4	X	5180.000	107.95	1.39	109.34	68.20	41.14	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/22
Test Frequency	5240MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

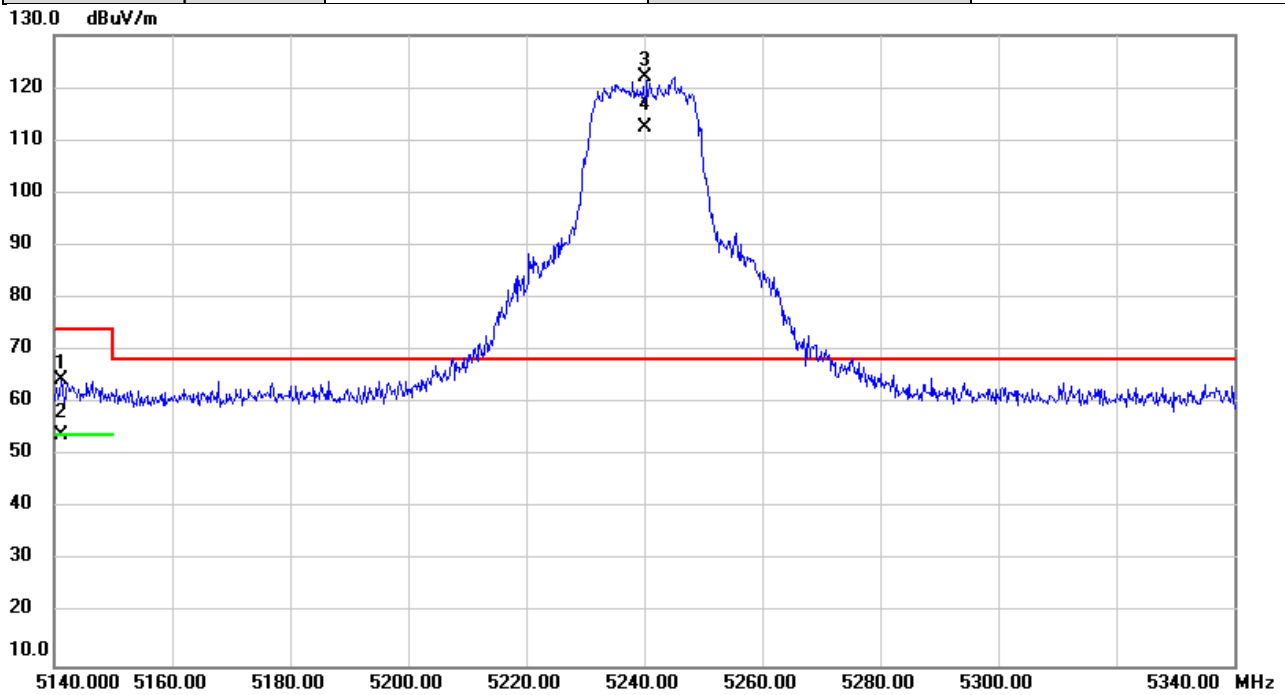


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5141.120	63.02	1.37	64.39	74.00	-9.61	peak	
2		5141.120	52.51	1.37	53.88	54.00	-0.12	AVG	
3	*	5240.000	120.56	1.43	121.99	68.20	53.79	peak	No Limit
4	X	5240.000	110.94	1.43	112.37	68.20	44.17	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/22
Test Frequency	5260MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

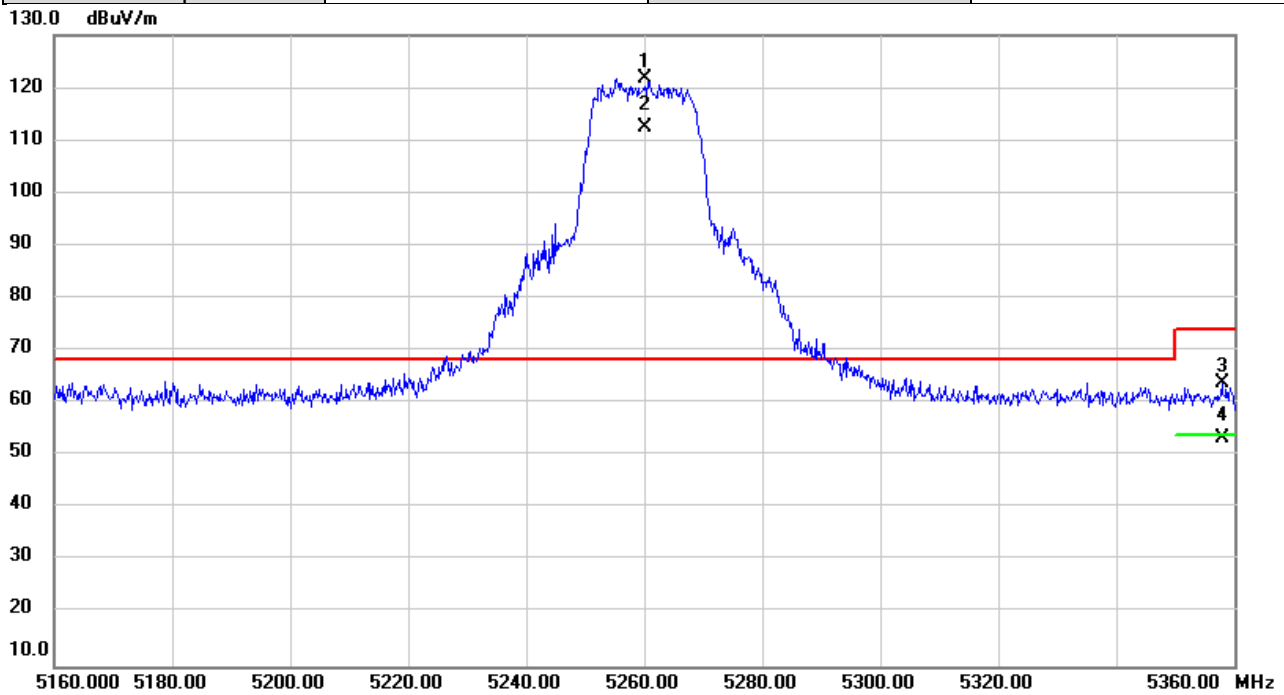


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5260.000	120.28	1.44	121.72	68.20	53.52	peak	No Limit
2	X	5260.000	110.91	1.44	112.35	68.20	44.15	AVG	No Limit
3		5357.973	62.48	1.50	63.98	74.00	-10.02	peak	
4		5357.973	51.98	1.50	53.48	54.00	-0.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/22
Test Frequency	5320MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

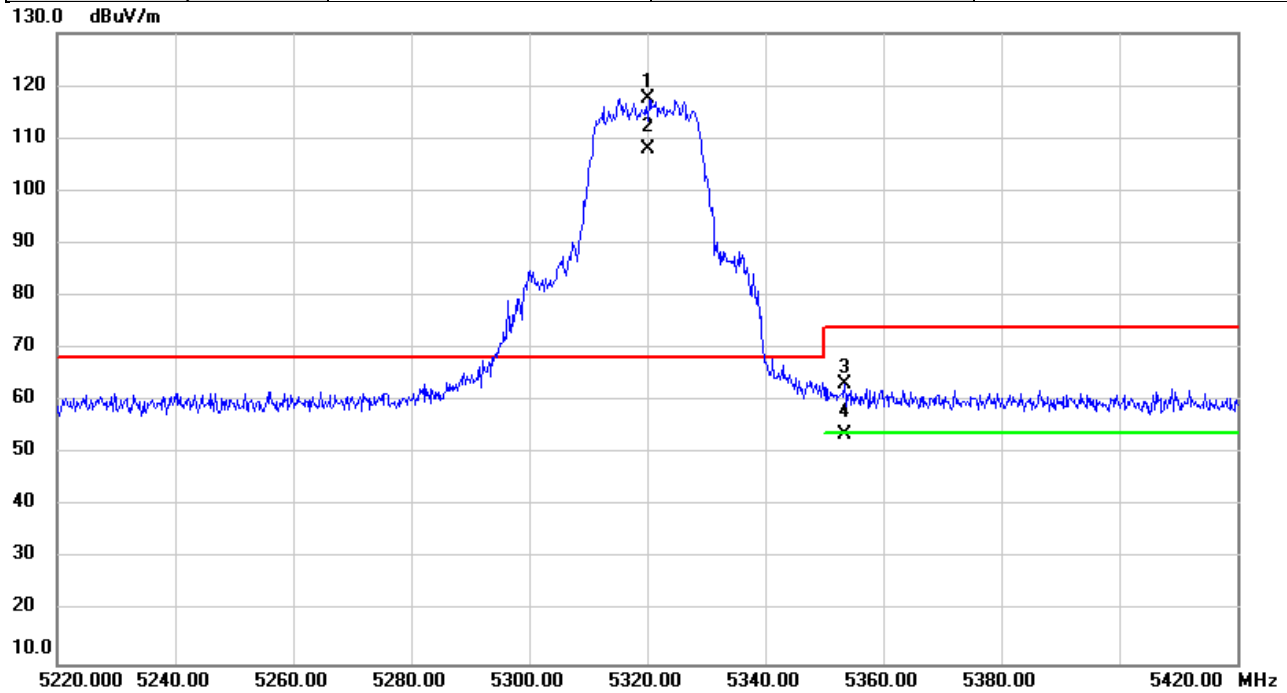


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5320.000	116.03	1.48	117.51	68.20	49.31	peak	No Limit
2	X	5320.000	106.58	1.48	108.06	68.20	39.86	AVG	No Limit
3		5353.453	61.63	1.50	63.13	74.00	-10.87	peak	
4		5353.453	52.01	1.50	53.51	54.00	-0.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/22
Test Frequency	5500MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

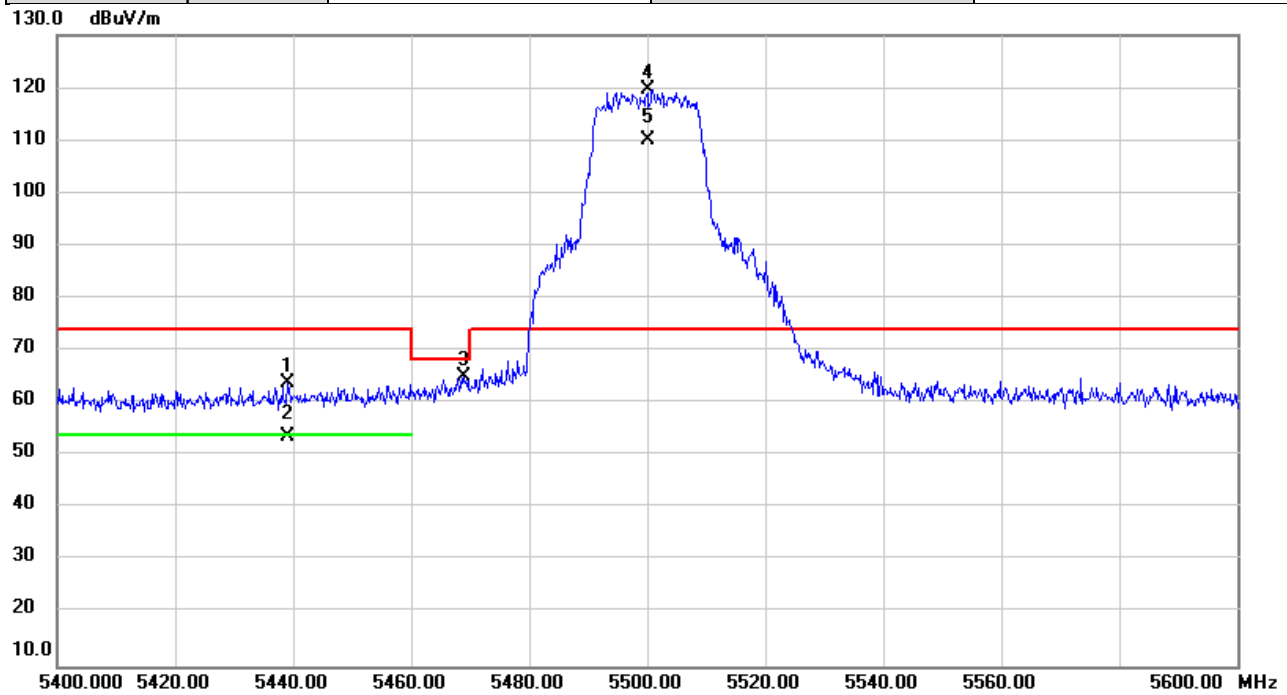


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5439.200	62.19	1.54	63.73	74.00	-10.27	peak	
2		5439.200	52.18	1.54	53.72	54.00	-0.28	AVG	
3		5468.980	63.44	1.56	65.00	68.20	-3.20	peak	
4	*	5500.000	117.93	1.58	119.51	74.00	45.51	peak	No Limit
5	X	5500.000	108.34	1.58	109.92	74.00	35.92	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/22
Test Frequency	5700MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

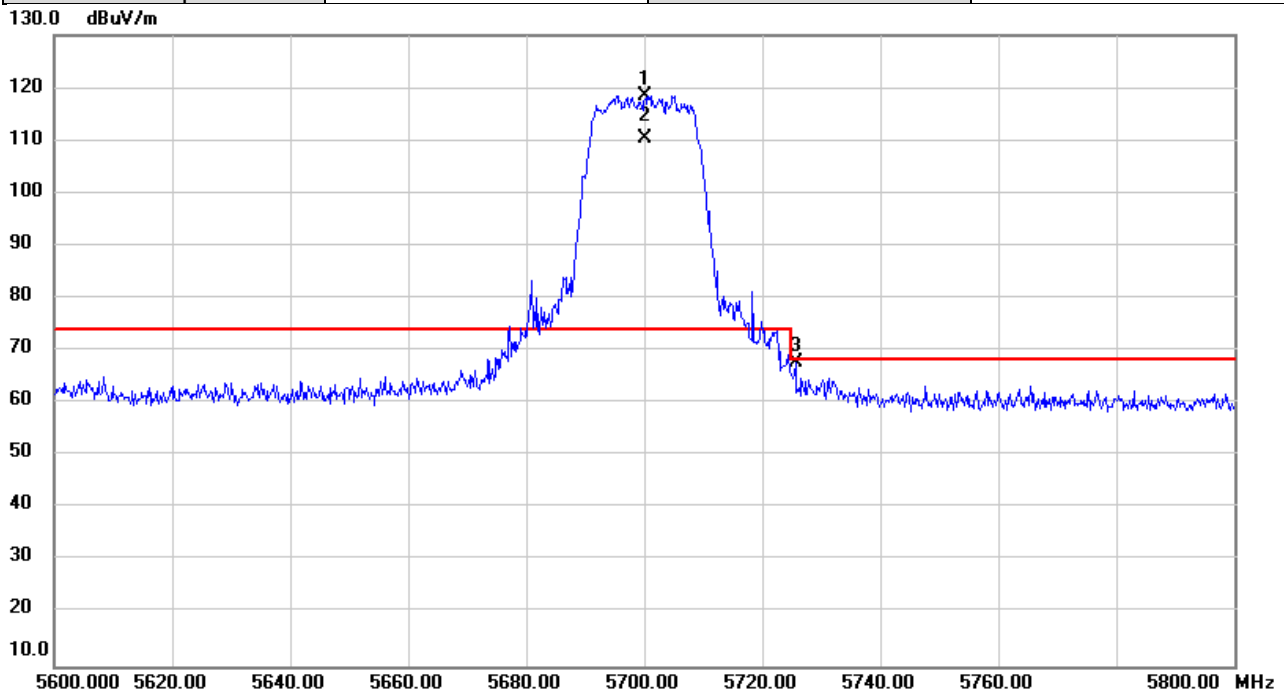


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5700.000	116.36	2.24	118.60	74.00	44.60	peak	No Limit
2	X	5700.000	108.13	2.24	110.37	74.00	36.37	AVG	No Limit
3		5725.707	65.34	2.32	67.66	68.20	-0.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/7/4
Test Frequency	5745MHz	Polarization	Vertical
Temp	26°C	Hum.	63%

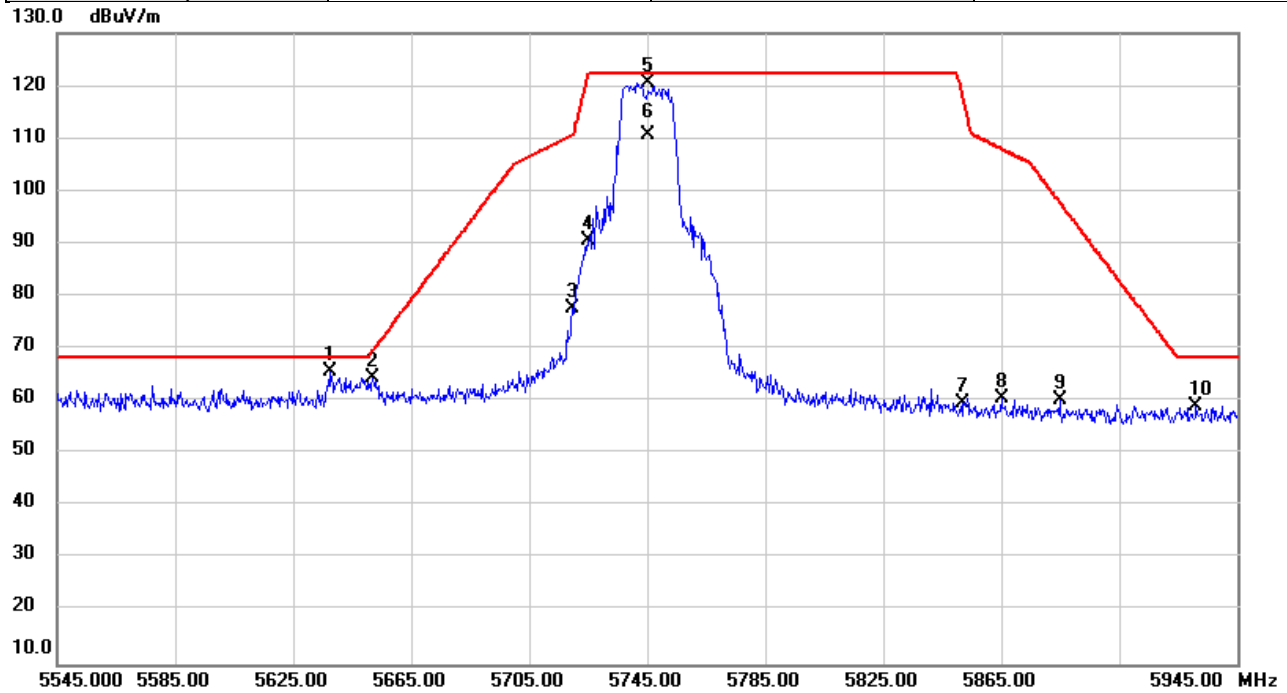


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5637.347	63.54	2.03	65.57	68.20	-2.63	peak	
2		5652.067	62.30	2.08	64.38	69.74	-5.36	peak	
3		5719.507	75.49	2.30	77.79	110.66	-32.87	peak	
4		5724.947	88.32	2.31	90.63	122.08	-31.45	peak	
5	*	5745.000	118.13	2.38	120.51	122.20	-1.69	peak	No Limit
6		5745.000	108.39	2.38	110.77	122.20	-11.43	AVG	No Limit
7		5851.880	57.04	2.73	59.77	117.91	-58.14	peak	
8		5865.133	57.66	2.77	60.43	107.96	-47.53	peak	
9		5884.867	57.37	2.85	60.22	97.87	-37.65	peak	
10		5931.080	55.98	3.00	58.98	68.20	-9.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/7/4
Test Frequency	5825MHz	Polarization	Vertical
Temp	26°C	Hum.	63%

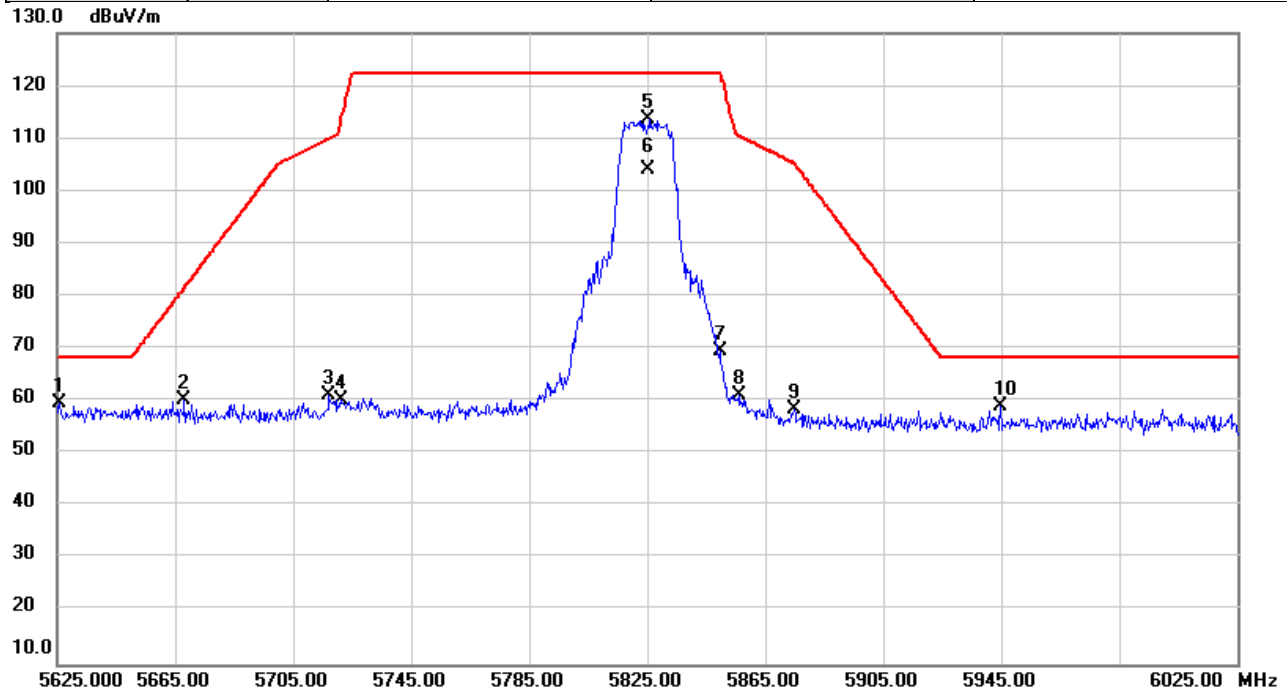


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5626.013	57.75	2.00	59.75	68.20	-8.45	peak	
2		5667.853	58.10	2.13	60.23	81.45	-21.22	peak	
3		5717.187	58.89	2.30	61.19	110.01	-48.82	peak	
4		5721.173	57.89	2.31	60.20	113.48	-53.28	peak	
5		5825.000	110.93	2.65	113.58	122.20	-8.62	peak	No Limit
6		5825.000	101.35	2.65	104.00	122.20	-18.20	AVG	No Limit
7		5849.653	66.76	2.72	69.48	122.20	-52.72	peak	
8		5856.107	58.30	2.74	61.04	110.49	-49.45	peak	
9		5874.613	55.58	2.80	58.38	105.31	-46.93	peak	
10		5944.680	55.96	3.04	59.00	68.20	-9.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/22
Test Frequency	5190MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

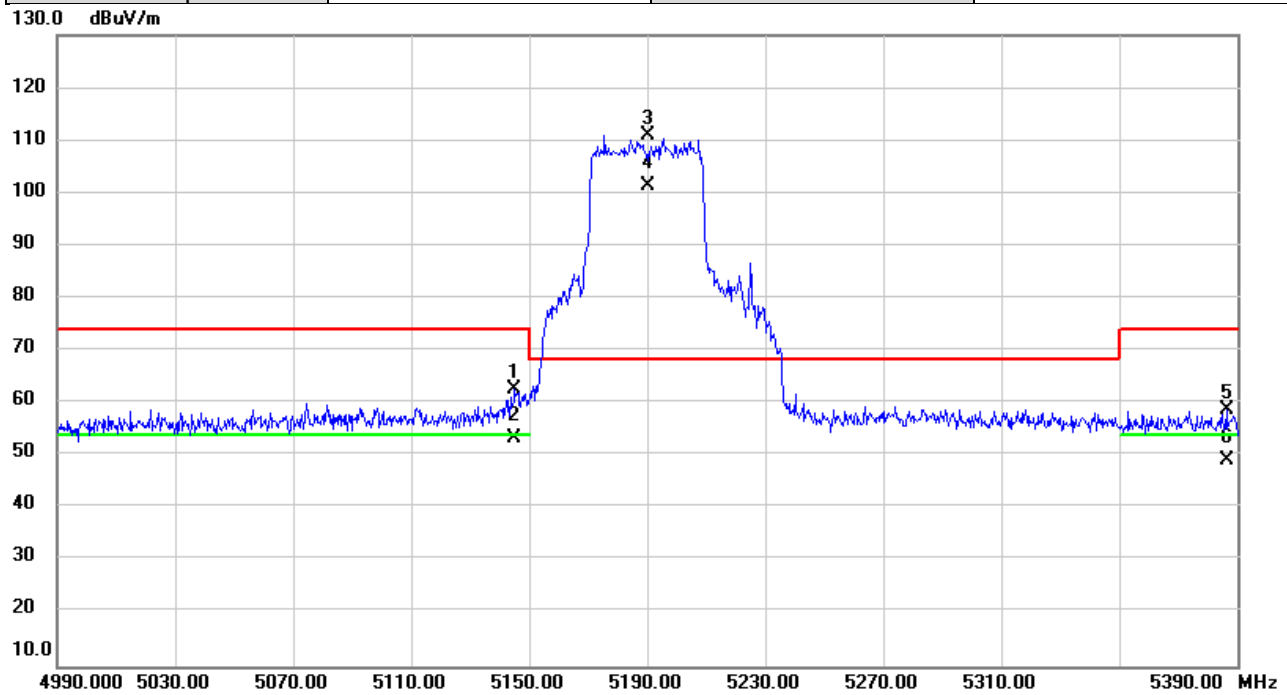


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5145.080	61.16	1.37	62.53	74.00	-11.47	peak	
2		5145.080	52.10	1.37	53.47	54.00	-0.53	AVG	
3	*	5190.000	109.51	1.40	110.91	68.20	42.71	peak	No Limit
4	X	5190.000	99.96	1.40	101.36	68.20	33.16	AVG	No Limit
5		5386.320	57.39	1.51	58.90	74.00	-15.10	peak	
6		5386.320	47.57	1.51	49.08	54.00	-4.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/22
Test Frequency	5230MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

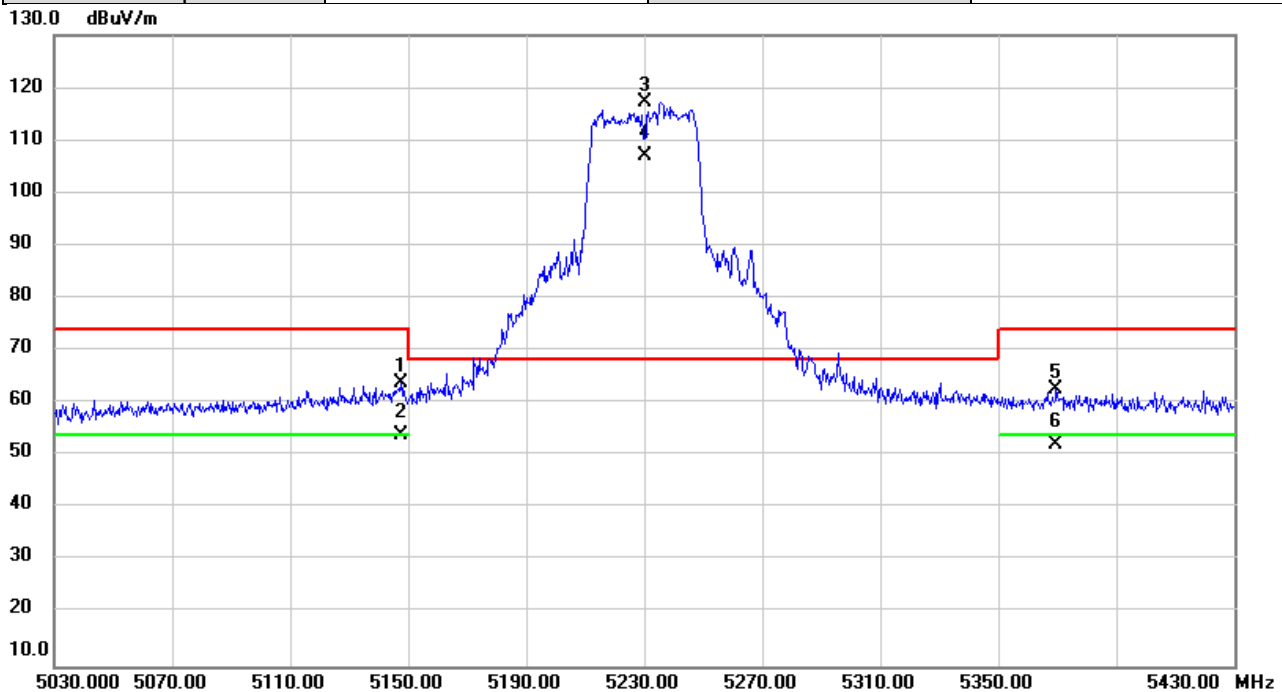


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5147.507	62.36	1.37	63.73	74.00	-10.27	peak	
2		5147.507	52.50	1.37	53.87	54.00	-0.13	AVG	
3	*	5230.000	115.80	1.42	117.22	68.20	49.02	peak	No Limit
4	X	5230.000	105.72	1.42	107.14	68.20	38.94	AVG	No Limit
5		5369.720	61.17	1.51	62.68	74.00	-11.32	peak	
6		5369.720	50.69	1.51	52.20	54.00	-1.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/22
Test Frequency	5270MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

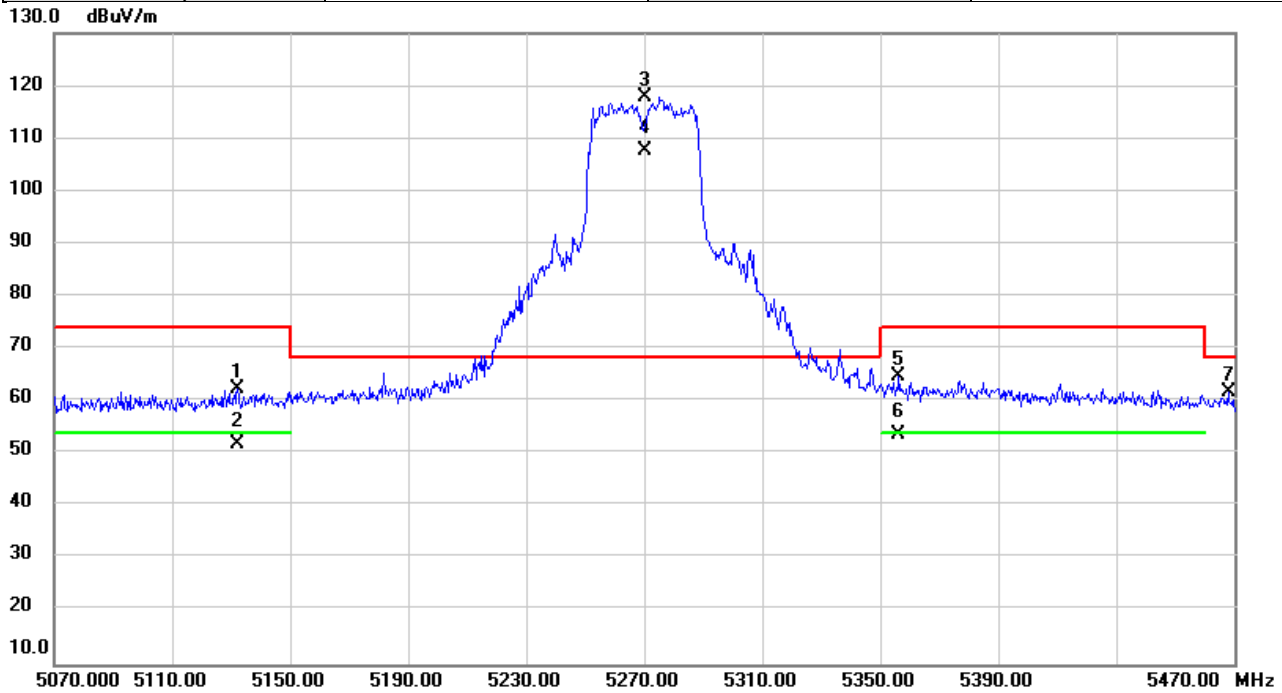


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5132.040	60.89	1.36	62.25	74.00	-11.75	peak	
2		5132.040	50.44	1.36	51.80	54.00	-2.20	AVG	
3	*	5270.000	116.50	1.45	117.95	68.20	49.75	peak	No Limit
4	X	5270.000	106.19	1.45	107.64	68.20	39.44	AVG	No Limit
5		5356.253	63.36	1.50	64.86	74.00	-9.14	peak	
6		5356.253	52.18	1.50	53.68	54.00	-0.32	AVG	
7		5468.320	60.28	1.56	61.84	68.20	-6.36	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/22
Test Frequency	5310MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

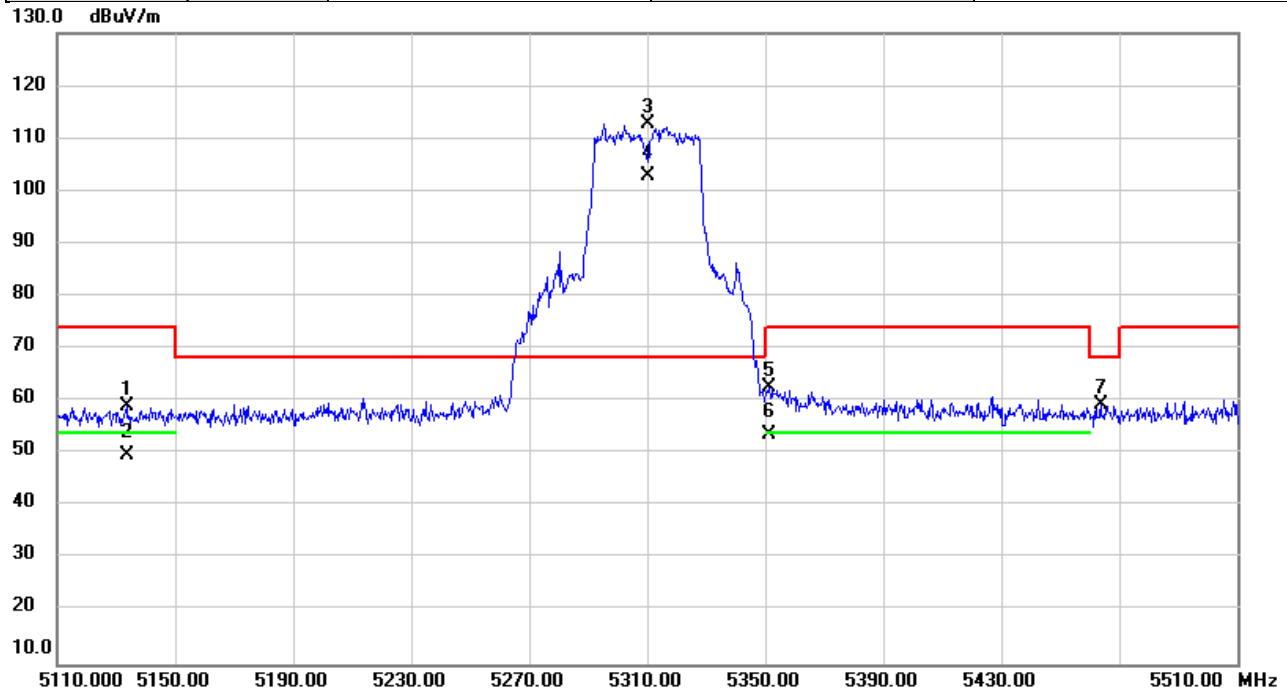


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5133.493	57.55	1.36	58.91	74.00	-15.09	peak	
2		5133.493	48.36	1.36	49.72	54.00	-4.28	AVG	
3	*	5310.000	111.25	1.47	112.72	68.20	44.52	peak	No Limit
4	X	5310.000	101.34	1.47	102.81	68.20	34.61	AVG	No Limit
5		5351.200	61.01	1.50	62.51	74.00	-11.49	peak	
6		5351.200	52.26	1.50	53.76	54.00	-0.24	AVG	
7		5463.853	57.82	1.56	59.38	68.20	-8.82	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/22
Test Frequency	5510MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

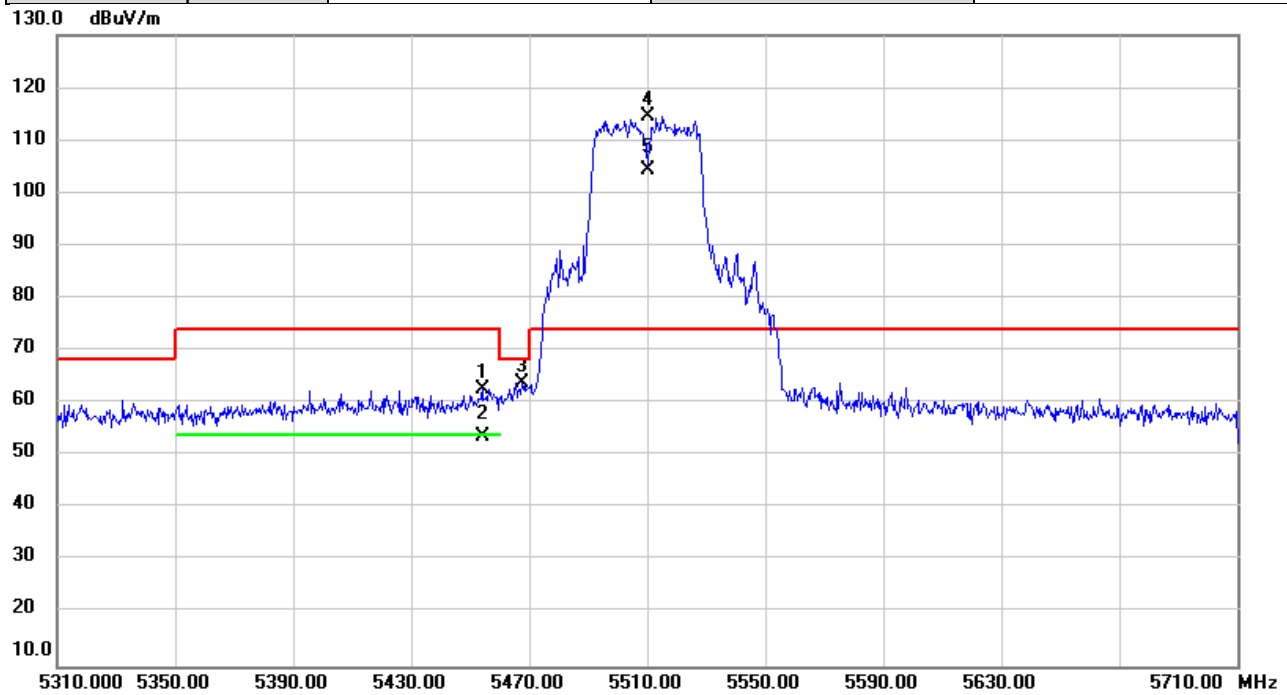


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5454.120	61.12	1.55	62.67	74.00	-11.33	peak	
2		5454.120	51.98	1.55	53.53	54.00	-0.47	AVG	
3		5467.520	62.35	1.56	63.91	68.20	-4.29	peak	
4	*	5510.000	112.92	1.61	114.53	74.00	40.53	peak	No Limit
5	X	5510.000	102.76	1.61	104.37	74.00	30.37	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/22
Test Frequency	5670MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

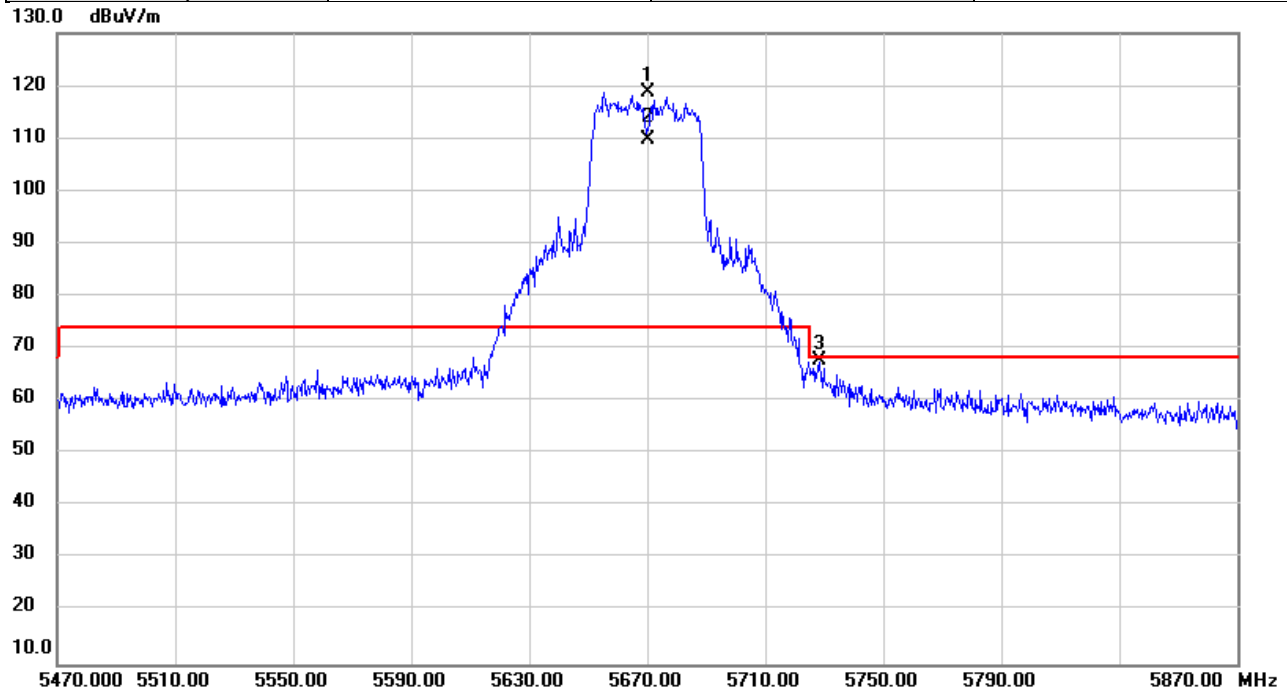


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5670.000	116.75	2.14	118.89	74.00	44.89	peak	No Limit
2	X	5670.000	107.69	2.14	109.83	74.00	35.83	AVG	No Limit
3		5728.267	65.52	2.33	67.85	68.20	-0.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/7/3
Test Frequency	5755MHz	Polarization	Vertical
Temp	27°C	Hum.	53%

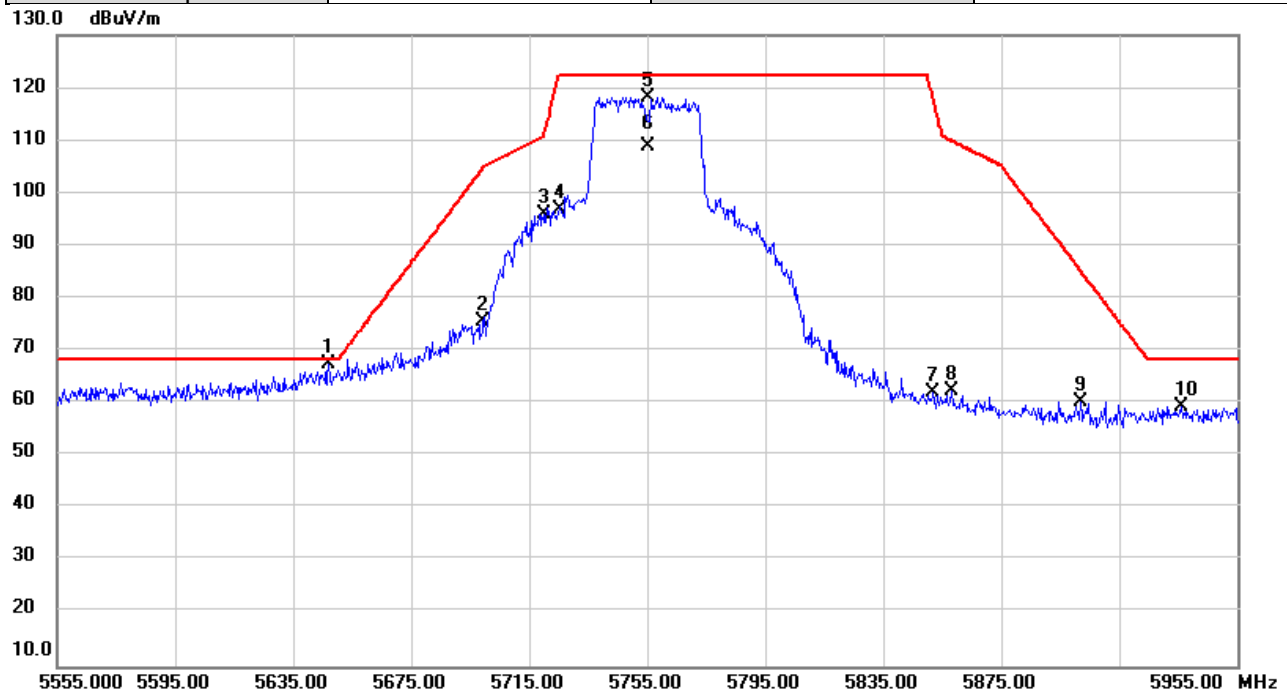


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5647.093	65.49	2.06	67.55	68.20	-0.65	peak	
2		5699.493	73.45	2.24	75.69	104.83	-29.14	peak	
3		5720.293	93.69	2.30	95.99	111.47	-15.48	peak	
4		5725.347	94.45	2.32	96.77	122.20	-25.43	peak	
5		5755.000	115.83	2.42	118.25	122.20	-3.95	peak	No Limit
6		5755.000	106.44	2.42	108.86	122.20	-13.34	AVG	No Limit
7		5851.827	59.29	2.73	62.02	118.03	-56.01	peak	
8		5858.213	59.47	2.75	62.22	109.90	-47.68	peak	
9		5901.907	57.40	2.90	60.30	85.25	-24.95	peak	
10		5936.227	56.35	3.01	59.36	68.20	-8.84	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/7/4
Test Frequency	5795MHz	Polarization	Vertical
Temp	26°C	Hum.	63%

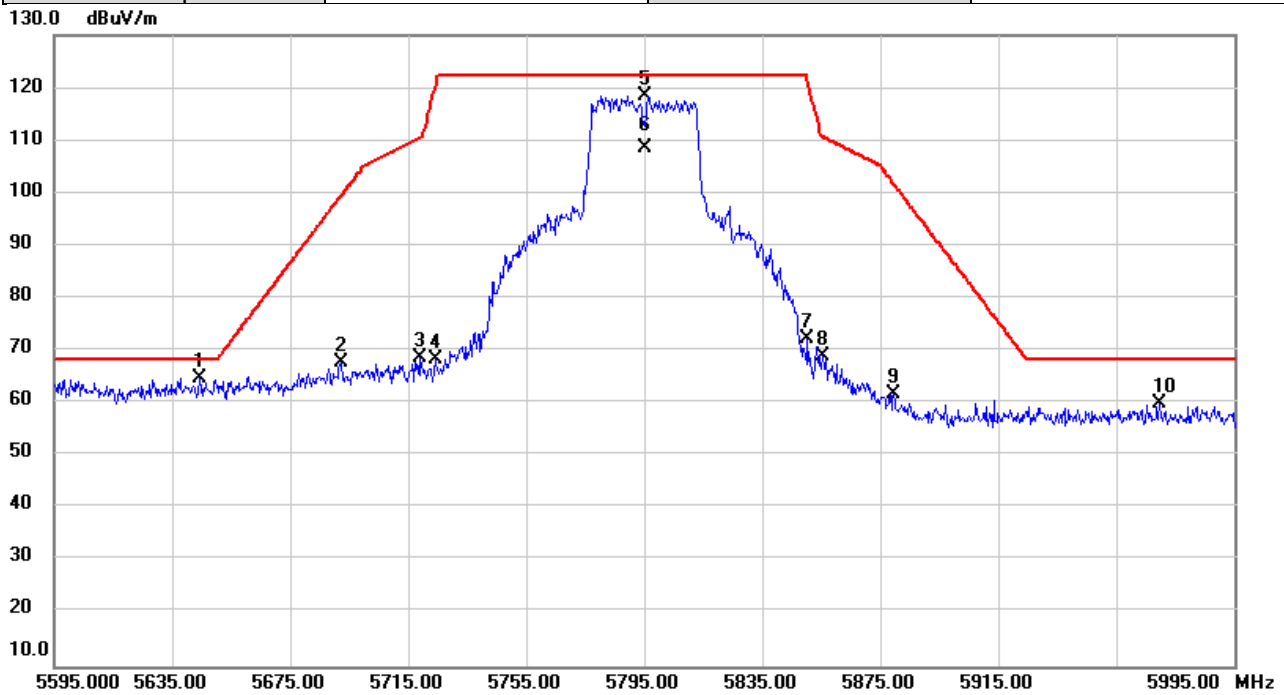


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5644.187	62.83	2.06	64.89	68.20	-3.31	peak	
2		5692.187	65.62	2.21	67.83	99.44	-31.61	peak	
3		5718.813	66.46	2.30	68.76	110.47	-41.71	peak	
4		5724.147	65.92	2.31	68.23	120.26	-52.03	peak	
5		5795.000	115.86	2.55	118.41	122.20	-3.79	peak	No Limit
6		5795.000	106.12	2.55	108.67	122.20	-13.53	AVG	No Limit
7		5850.373	69.56	2.72	72.28	121.35	-49.07	peak	
8		5855.587	66.19	2.74	68.93	110.64	-41.71	peak	
9		5879.707	59.01	2.83	61.84	101.70	-39.86	peak	
10		5969.787	56.76	3.12	59.88	68.20	-8.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/22
Test Frequency	5210MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

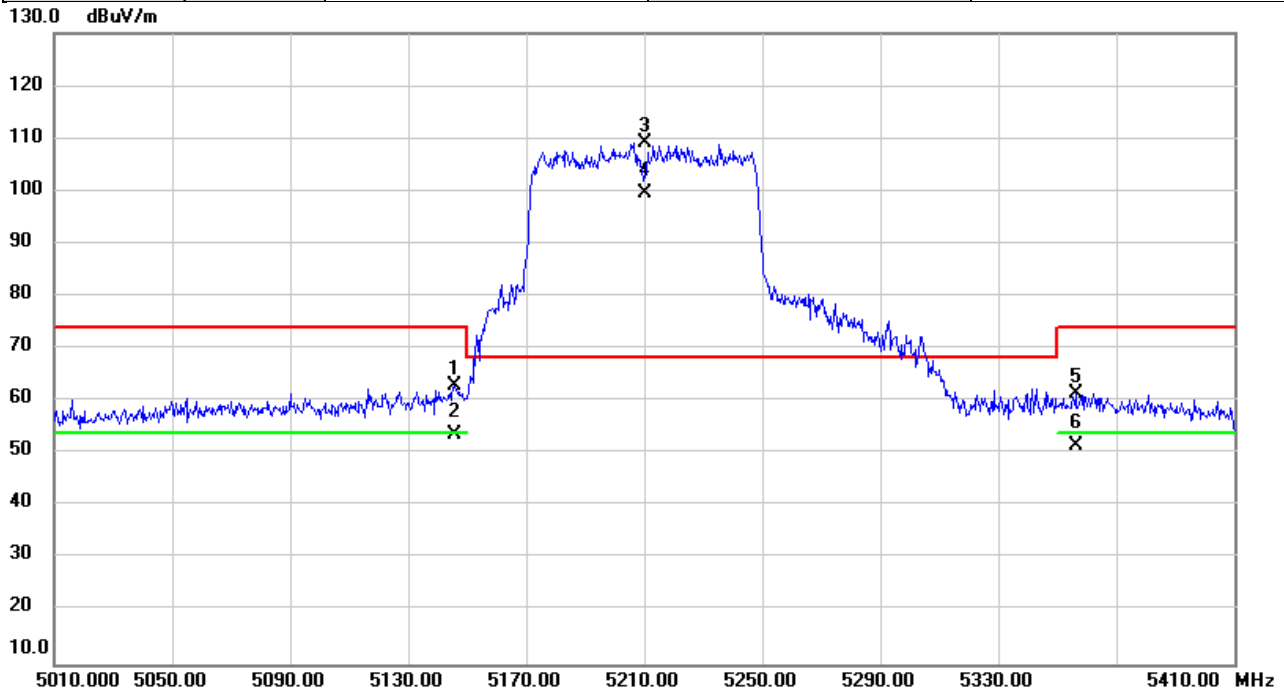


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5145.813	61.46	1.37	62.83	74.00	-11.17	peak	
2		5145.813	52.37	1.37	53.74	54.00	-0.26	AVG	
3	*	5210.000	107.64	1.41	109.05	68.20	40.85	peak	No Limit
4	X	5210.000	98.15	1.41	99.56	68.20	31.36	AVG	No Limit
5		5356.320	60.09	1.50	61.59	74.00	-12.41	peak	
6		5356.320	50.16	1.50	51.66	54.00	-2.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/22
Test Frequency	5290MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

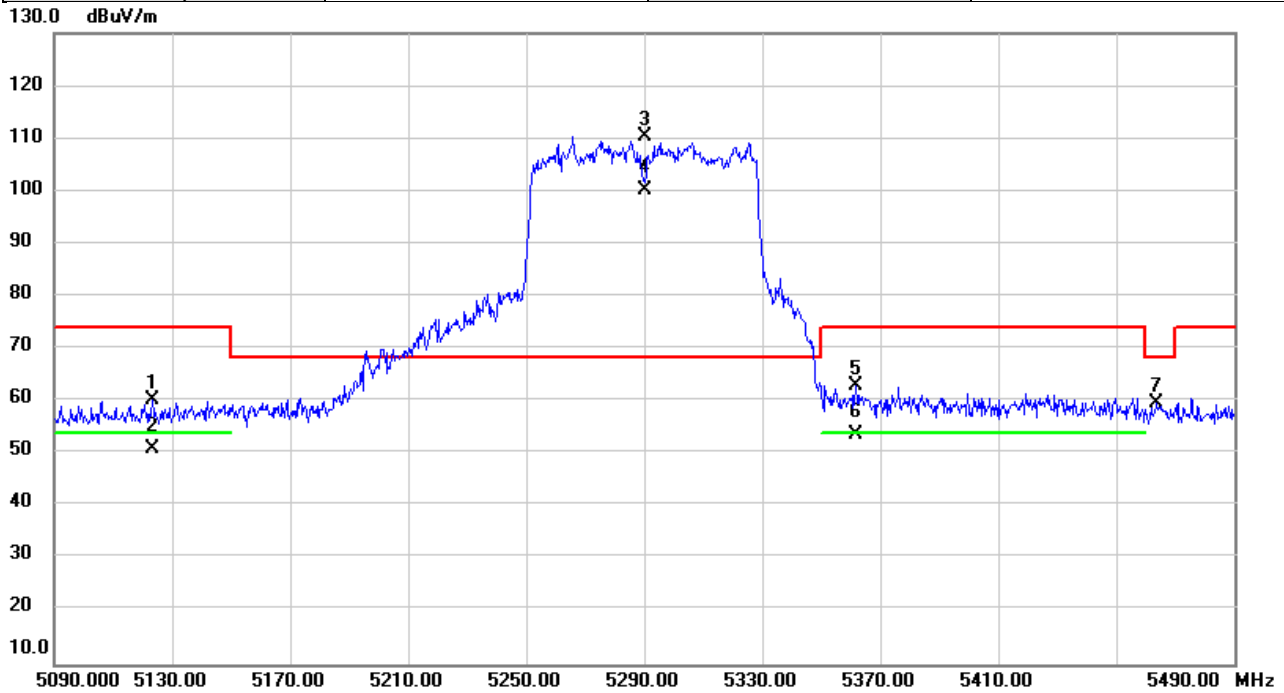


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5123.413	58.79	1.37	60.16	74.00	-13.84	peak	
2		5123.413	49.66	1.37	51.03	54.00	-2.97	AVG	
3	*	5290.000	108.85	1.46	110.31	68.20	42.11	peak	No Limit
4	X	5290.000	98.72	1.46	100.18	68.20	31.98	AVG	No Limit
5		5361.680	61.58	1.50	63.08	74.00	-10.92	peak	
6		5361.680	52.14	1.50	53.64	54.00	-0.36	AVG	
7		5463.613	58.17	1.56	59.73	68.20	-8.47	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/22
Test Frequency	5530MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

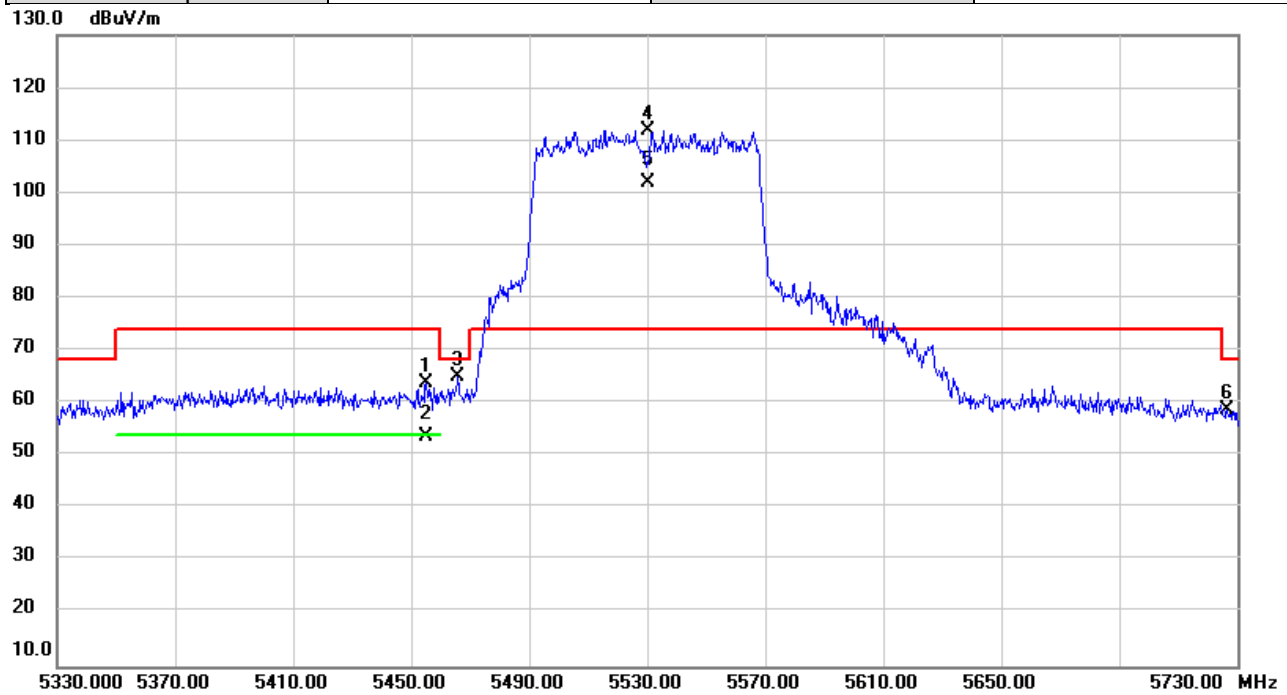


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5454.827	62.33	1.55	63.88	74.00	-10.12	peak	
2		5454.827	52.14	1.55	53.69	54.00	-0.31	AVG	
3		5465.760	63.44	1.56	65.00	68.20	-3.20	peak	
4	*	5530.000	110.30	1.68	111.98	74.00	37.98	peak	No Limit
5	X	5530.000	100.34	1.68	102.02	74.00	28.02	AVG	No Limit
6		5726.533	56.46	2.33	58.79	68.20	-9.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/22
Test Frequency	5610MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

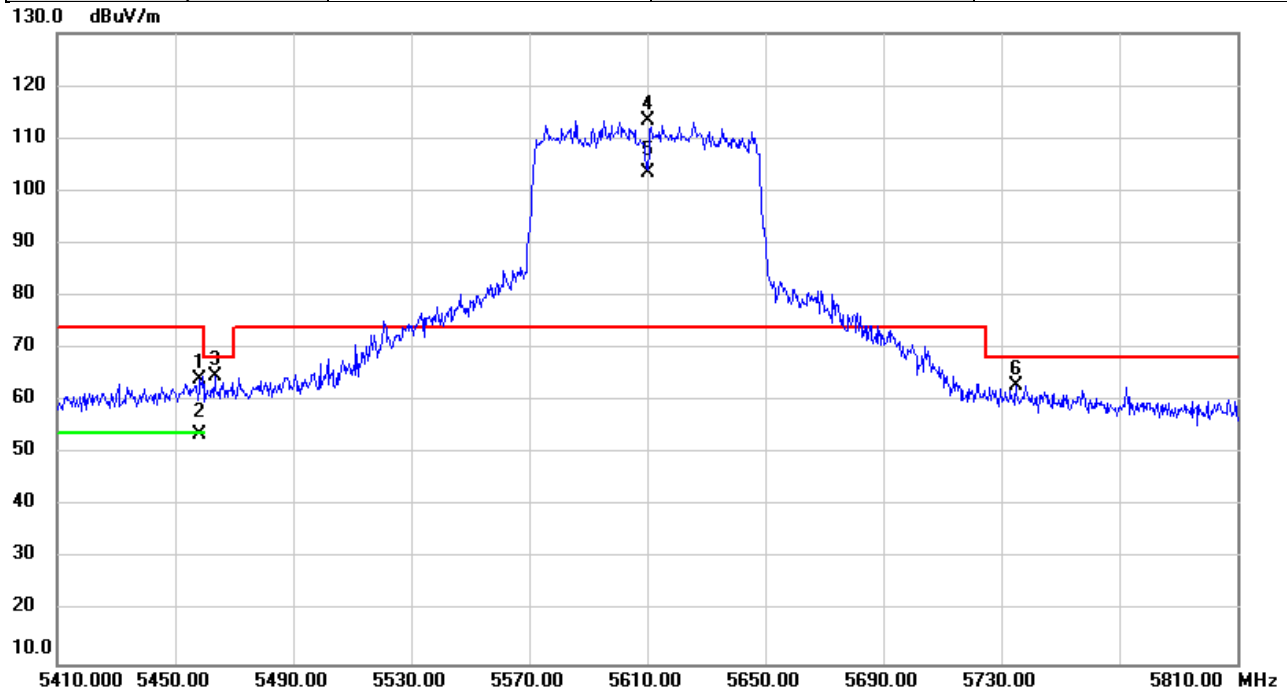


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5458.440	62.59	1.55	64.14	74.00	-9.86	peak	
2		5458.440	52.24	1.55	53.79	54.00	-0.21	AVG	
3		5463.400	63.12	1.56	64.68	68.20	-3.52	peak	
4	*	5610.000	111.54	1.93	113.47	74.00	39.47	peak	No Limit
5	X	5610.000	101.54	1.93	103.47	74.00	29.47	AVG	No Limit
6		5734.867	60.73	2.35	63.08	68.20	-5.12	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024-7-3
Test Frequency	5775MHz	Polarization	Vertical
Temp	24°C	Hum.	59%

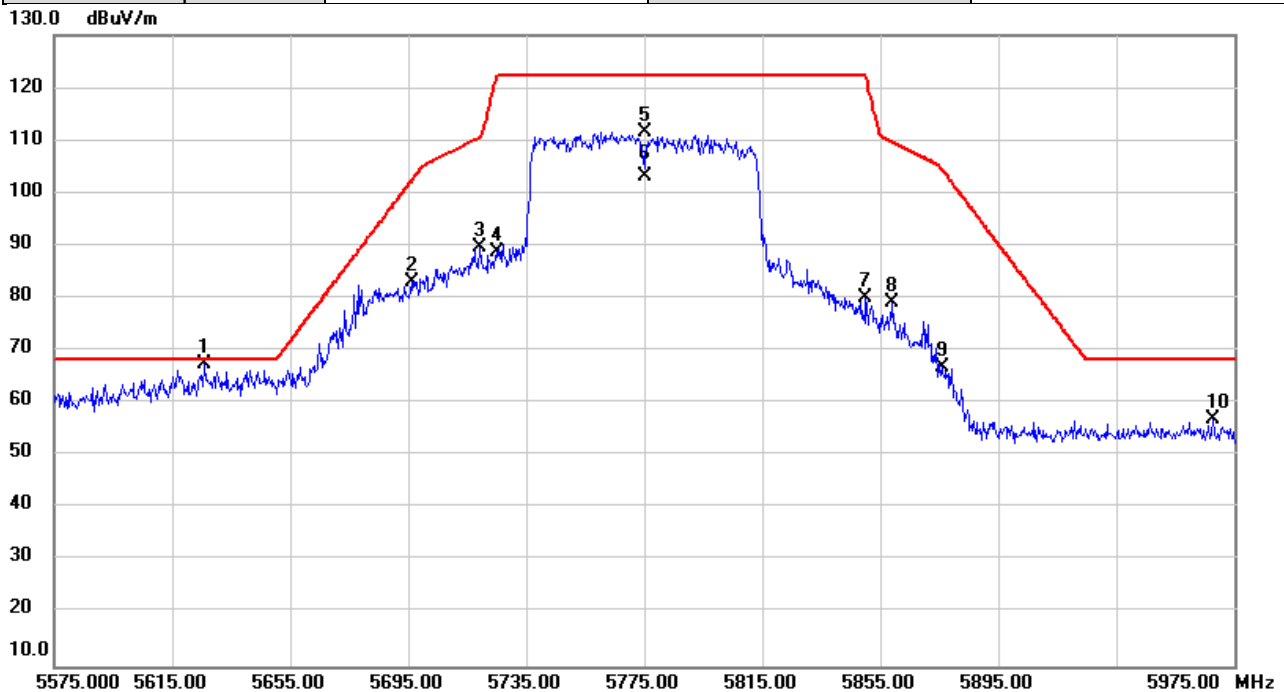


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5625.813	67.53	-0.15	67.38	68.20	-0.82	peak	
2		5696.107	83.06	0.07	83.13	102.33	-19.20	peak	
3		5719.067	89.58	0.15	89.73	110.54	-20.81	peak	
4		5724.960	88.46	0.16	88.62	122.11	-33.49	peak	
5		5775.000	111.34	0.34	111.68	122.20	-10.52	peak	No Limit
6		5775.000	102.69	0.34	103.03	122.20	-19.17	AVG	No Limit
7		5849.880	79.43	0.57	80.00	122.20	-42.20	peak	
8		5859.040	78.47	0.60	79.07	109.67	-30.60	peak	
9		5876.093	66.09	0.67	66.76	104.39	-37.63	peak	
10		5967.933	55.94	0.97	56.91	68.20	-11.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2024/5/22
Test Frequency	5250MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

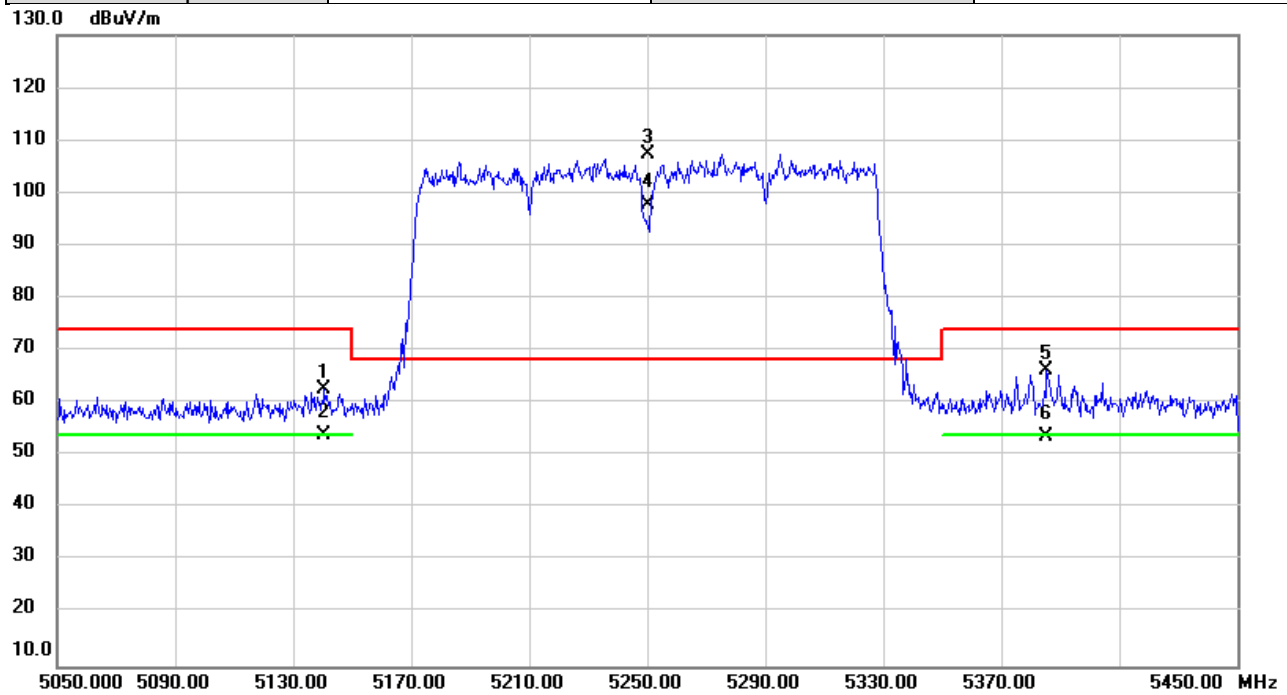


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5140.507	61.18	1.37	62.55	74.00	-11.45	peak	
2		5140.507	52.49	1.37	53.86	54.00	-0.14	AVG	
3	*	5250.000	105.91	1.44	107.35	68.20	39.15	peak	No Limit
4	X	5250.000	96.23	1.44	97.67	68.20	29.47	AVG	No Limit
5		5385.413	64.88	1.51	66.39	74.00	-7.61	peak	
6		5385.413	52.05	1.51	53.56	54.00	-0.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2024/5/22
Test Frequency	5570MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

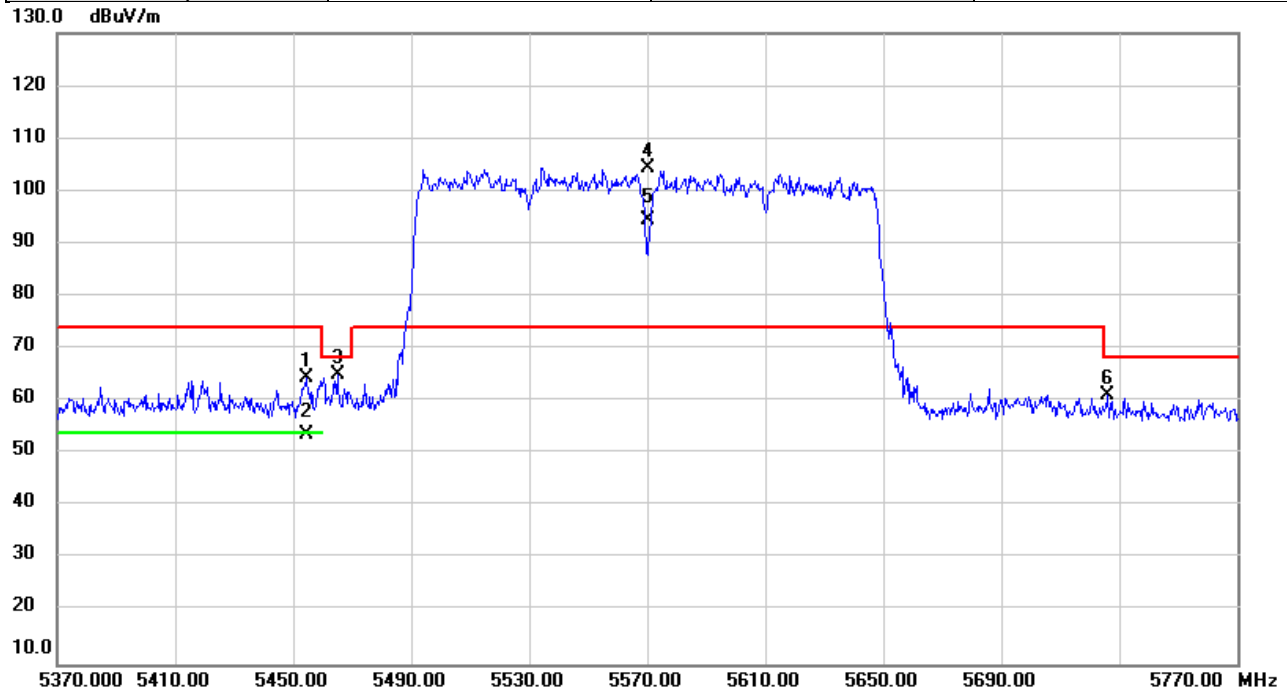


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5454.480	62.88	1.55	64.43	74.00	-9.57	peak	
2		5454.480	52.10	1.55	53.65	54.00	-0.35	AVG	
3		5464.987	63.47	1.56	65.03	68.20	-3.17	peak	
4	*	5570.000	102.48	1.80	104.28	74.00	30.28	peak	No Limit
5	X	5570.000	92.65	1.80	94.45	74.00	20.45	AVG	No Limit
6		5726.027	58.84	2.33	61.17	68.20	-7.03	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/22
Test Frequency	5180MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

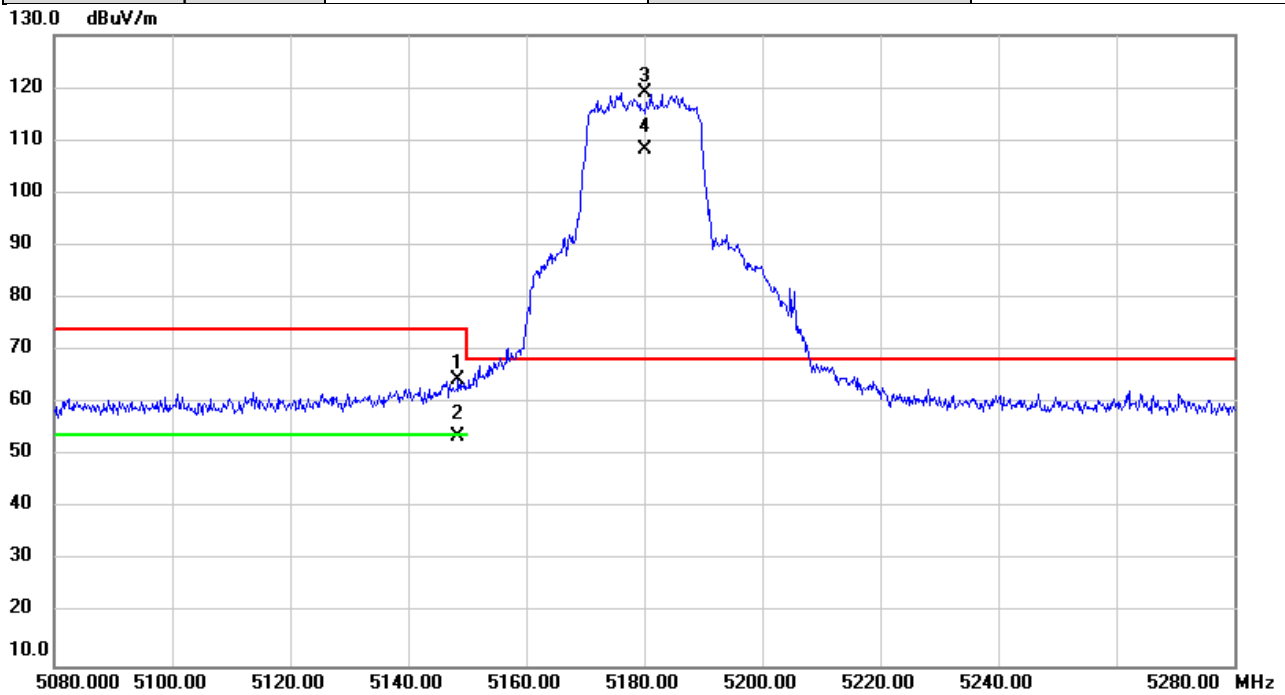


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5148.427	63.12	1.37	64.49	74.00	-9.51	peak	
2		5148.427	52.14	1.37	53.51	54.00	-0.49	AVG	
3	*	5180.000	117.69	1.39	119.08	68.20	50.88	peak	No Limit
4	X	5180.000	106.73	1.39	108.12	68.20	39.92	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/22
Test Frequency	5240MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

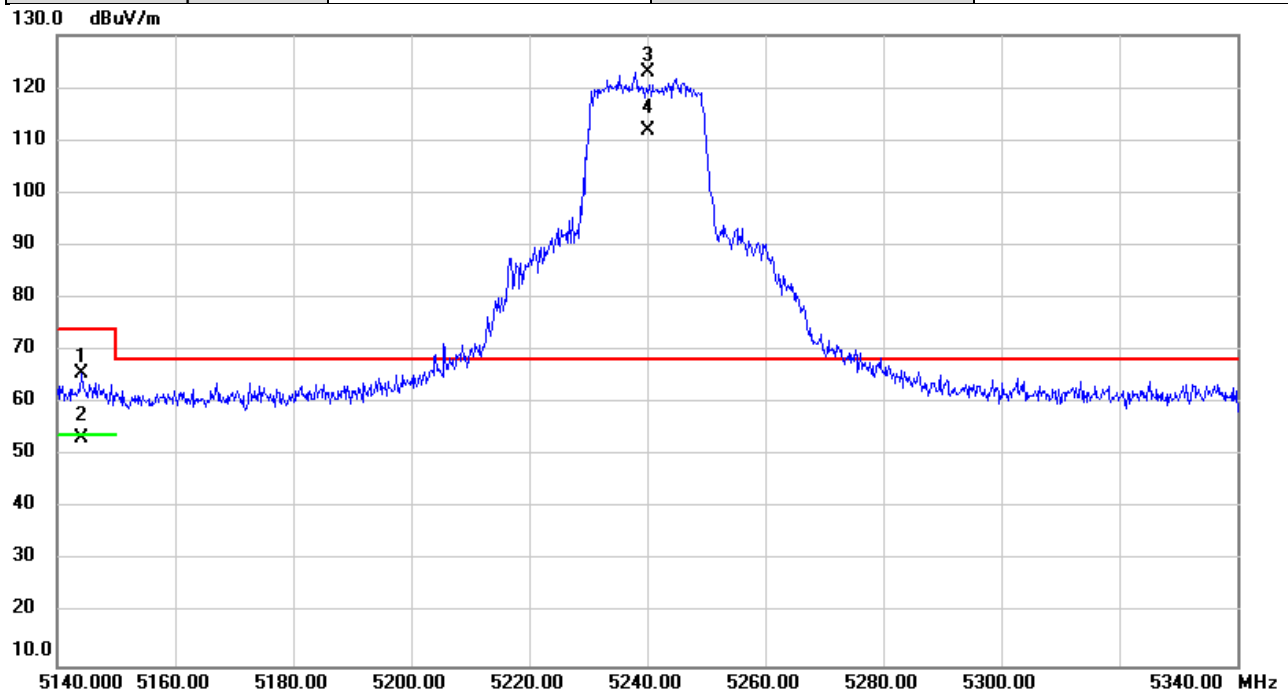


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5144.147	64.18	1.37	65.55	74.00	-8.45	peak	
2		5144.147	52.08	1.37	53.45	54.00	-0.55	AVG	
3	*	5240.000	121.62	1.43	123.05	68.20	54.85	peak	No Limit
4	X	5240.000	110.41	1.43	111.84	68.20	43.64	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/5/14
Test Frequency	5260MHz	Polarization	Vertical
Temp	21°C	Hum.	66%

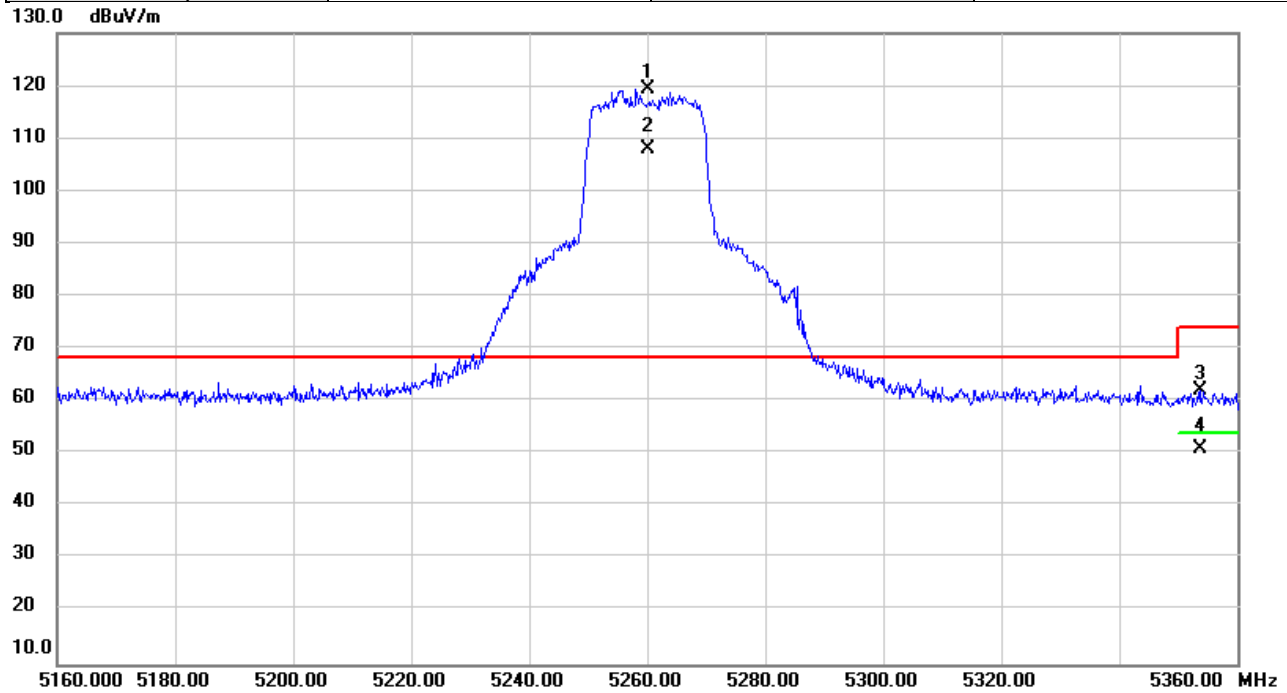


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5260.000	117.86	1.44	119.30	68.20	51.10	peak	No Limit
2	X	5260.000	106.50	1.44	107.94	68.20	39.74	AVG	No Limit
3		5353.653	60.45	1.50	61.95	74.00	-12.05	peak	
4		5353.653	49.35	1.50	50.85	54.00	-3.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/22
Test Frequency	5320MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

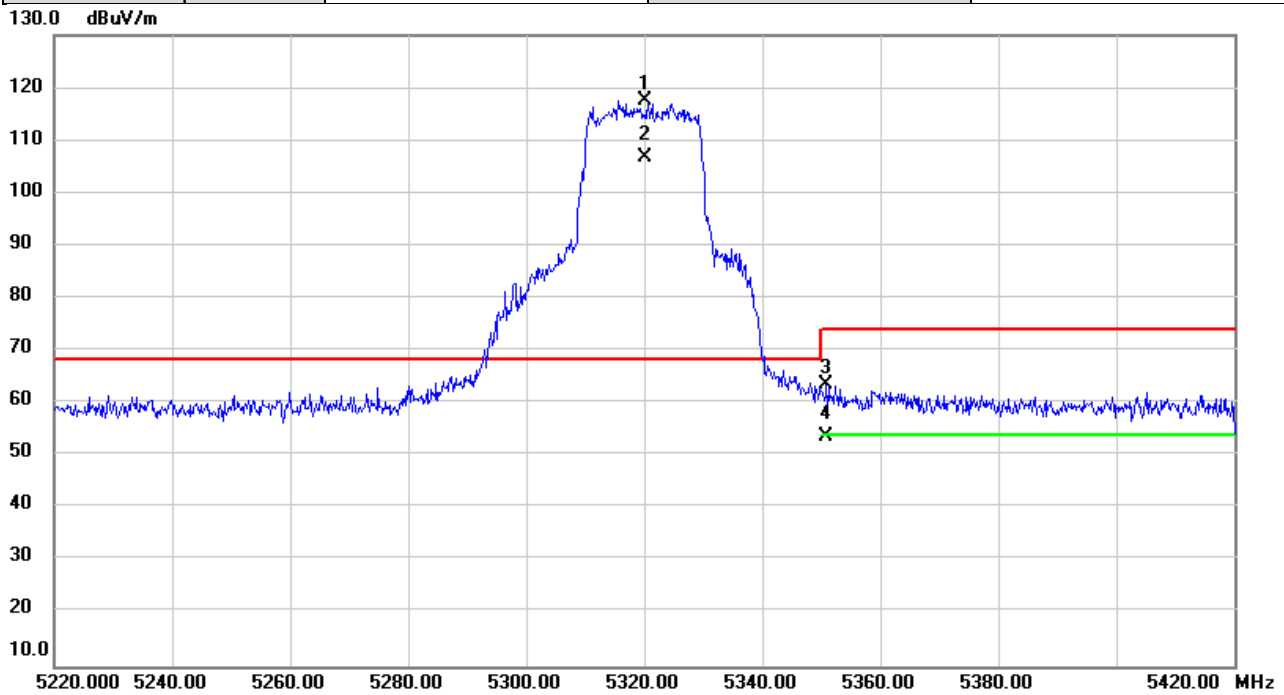


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5320.000	115.96	1.48	117.44	68.20	49.24	peak	No Limit
2	X	5320.000	105.33	1.48	106.81	68.20	38.61	AVG	No Limit
3		5350.933	62.03	1.50	63.53	74.00	-10.47	peak	
4		5350.933	52.09	1.50	53.59	54.00	-0.41	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/22
Test Frequency	5500MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

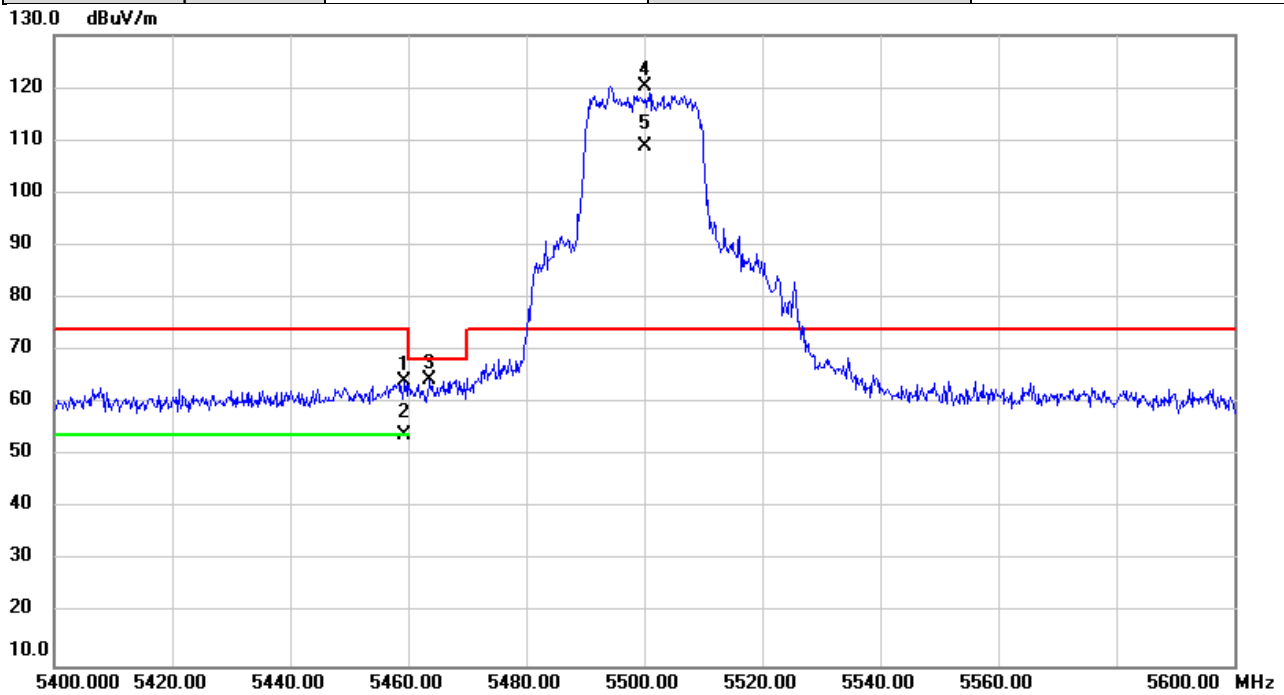


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5459.407	62.55	1.55	64.10	74.00	-9.90	peak	
2		5459.407	52.34	1.55	53.89	54.00	-0.11	AVG	
3		5463.627	62.92	1.56	64.48	68.20	-3.72	peak	
4	*	5500.000	118.56	1.58	120.14	74.00	46.14	peak	No Limit
5	X	5500.000	107.19	1.58	108.77	74.00	34.77	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/5/14
Test Frequency	5700MHz	Polarization	Vertical
Temp	21°C	Hum.	66%

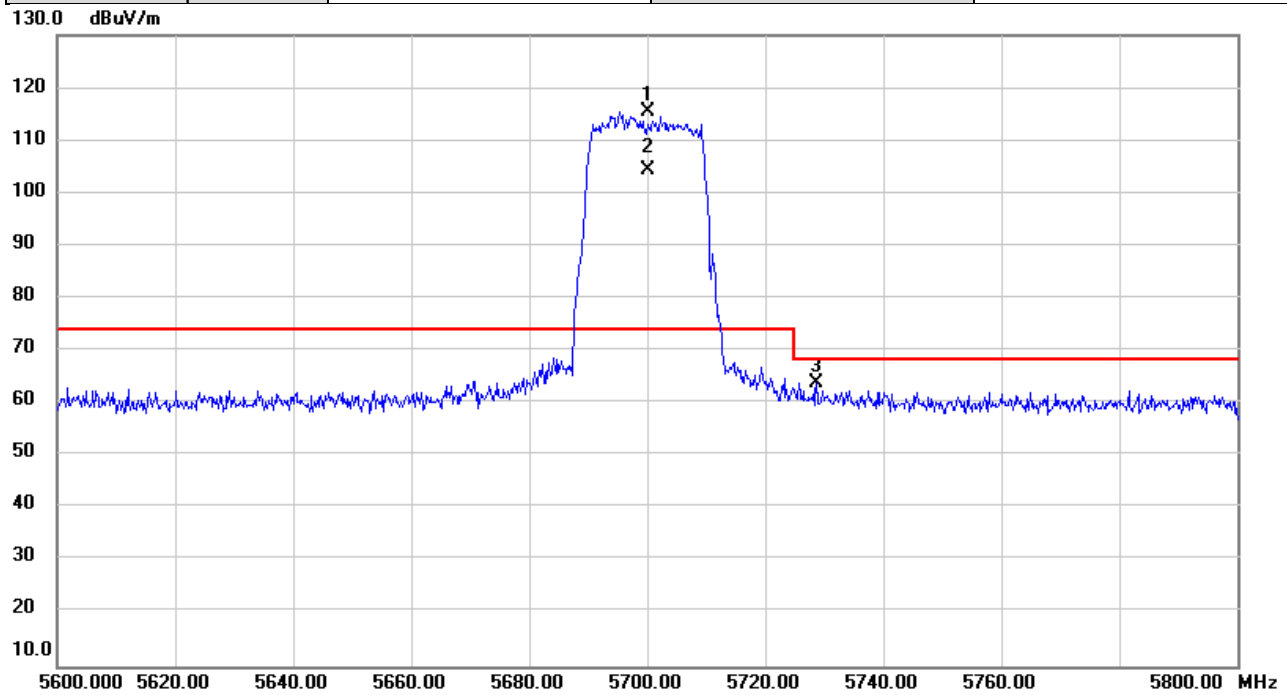


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5700.000	113.10	2.24	115.34	74.00	41.34	peak	No Limit
2	X	5700.000	102.17	2.24	104.41	74.00	30.41	AVG	No Limit
3		5728.700	61.46	2.33	63.79	68.20	-4.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/7/4
Test Frequency	5745MHz	Polarization	Vertical
Temp	26°C	Hum.	63%

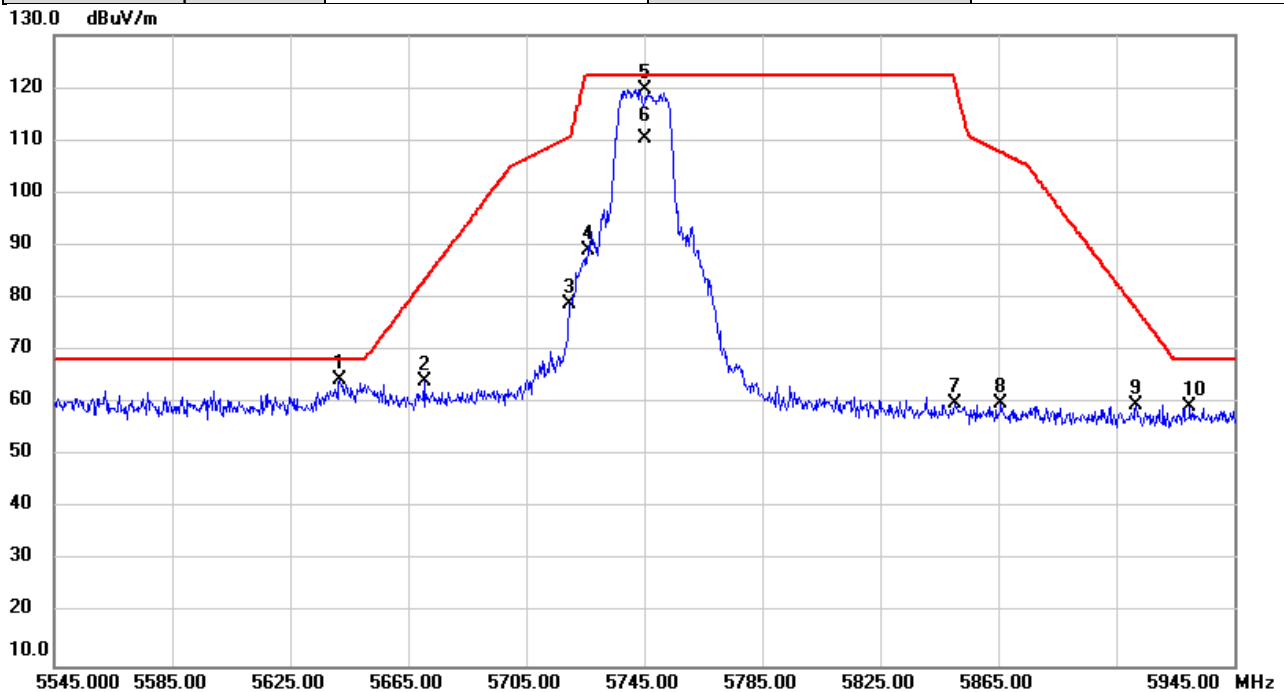


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5642.053	62.31	2.05	64.36	68.20	-3.84	peak	
2		5670.453	62.05	2.14	64.19	83.37	-19.18	peak	
3		5719.787	76.46	2.30	78.76	110.74	-31.98	peak	
4		5726.187	86.66	2.33	88.99	122.20	-33.21	peak	
5	*	5745.000	117.32	2.38	119.70	122.20	-2.50	peak	No Limit
6		5745.000	107.94	2.38	110.32	122.20	-11.88	AVG	No Limit
7		5850.413	57.34	2.72	60.06	121.26	-61.20	peak	
8		5866.053	57.26	2.78	60.04	107.70	-47.66	peak	
9		5911.480	56.61	2.94	59.55	78.17	-18.62	peak	
10		5929.960	56.29	3.00	59.29	68.20	-8.91	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/7/4
Test Frequency	5825MHz	Polarization	Vertical
Temp	26°C	Hum.	63%

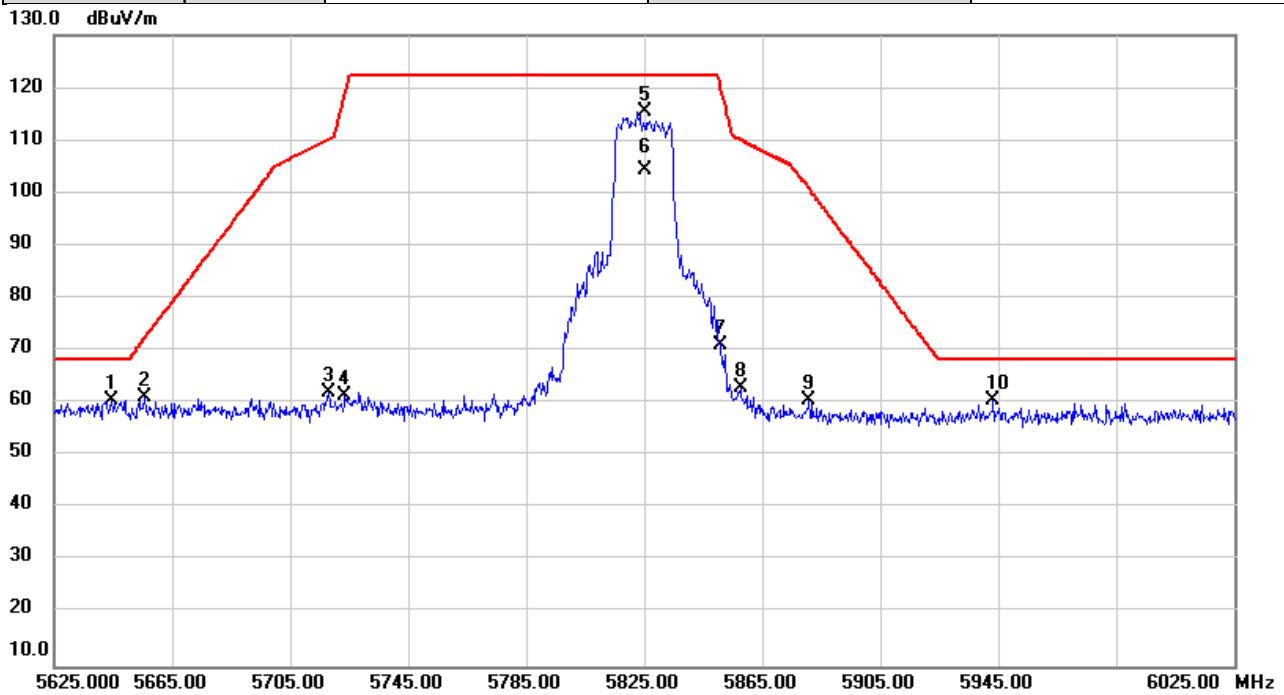


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5644.507	58.62	2.06	60.68	68.20	-7.52	peak	
2		5655.707	59.12	2.09	61.21	72.44	-11.23	peak	
3		5718.053	59.85	2.30	62.15	110.26	-48.11	peak	
4		5723.467	59.21	2.31	61.52	118.71	-57.19	peak	
5	*	5825.000	112.83	2.65	115.48	122.20	-6.72	peak	No Limit
6		5825.000	101.68	2.65	104.33	122.20	-17.87	AVG	No Limit
7		5850.733	68.40	2.72	71.12	120.53	-49.41	peak	
8		5857.747	60.17	2.75	62.92	110.03	-47.11	peak	
9		5880.627	57.57	2.84	60.41	101.02	-40.61	peak	
10		5943.040	57.54	3.03	60.57	68.20	-7.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/22
Test Frequency	5190MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

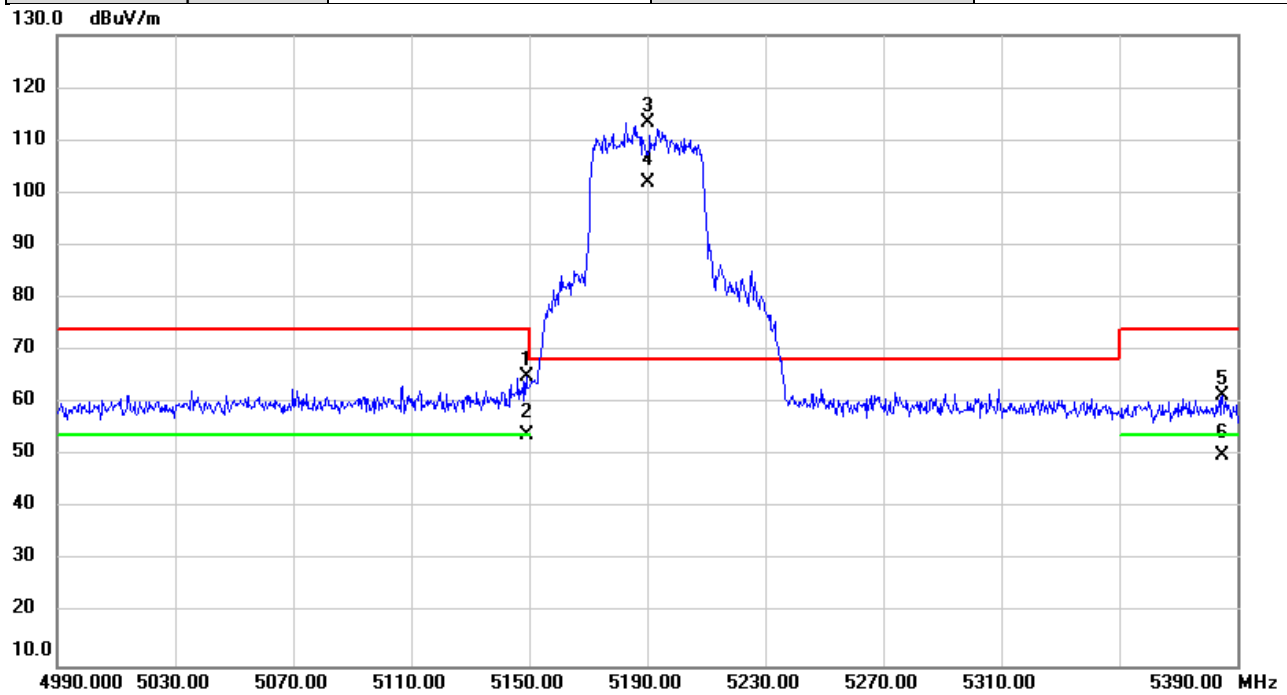


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5149.107	63.71	1.37	65.08	74.00	-8.92	peak	
2		5149.107	52.49	1.37	53.86	54.00	-0.14	AVG	
3	*	5190.000	111.81	1.40	113.21	68.20	45.01	peak	No Limit
4	X	5190.000	100.43	1.40	101.83	68.20	33.63	AVG	No Limit
5		5384.893	60.08	1.51	61.59	74.00	-12.41	peak	
6		5384.893	48.46	1.51	49.97	54.00	-4.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/22
Test Frequency	5230MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

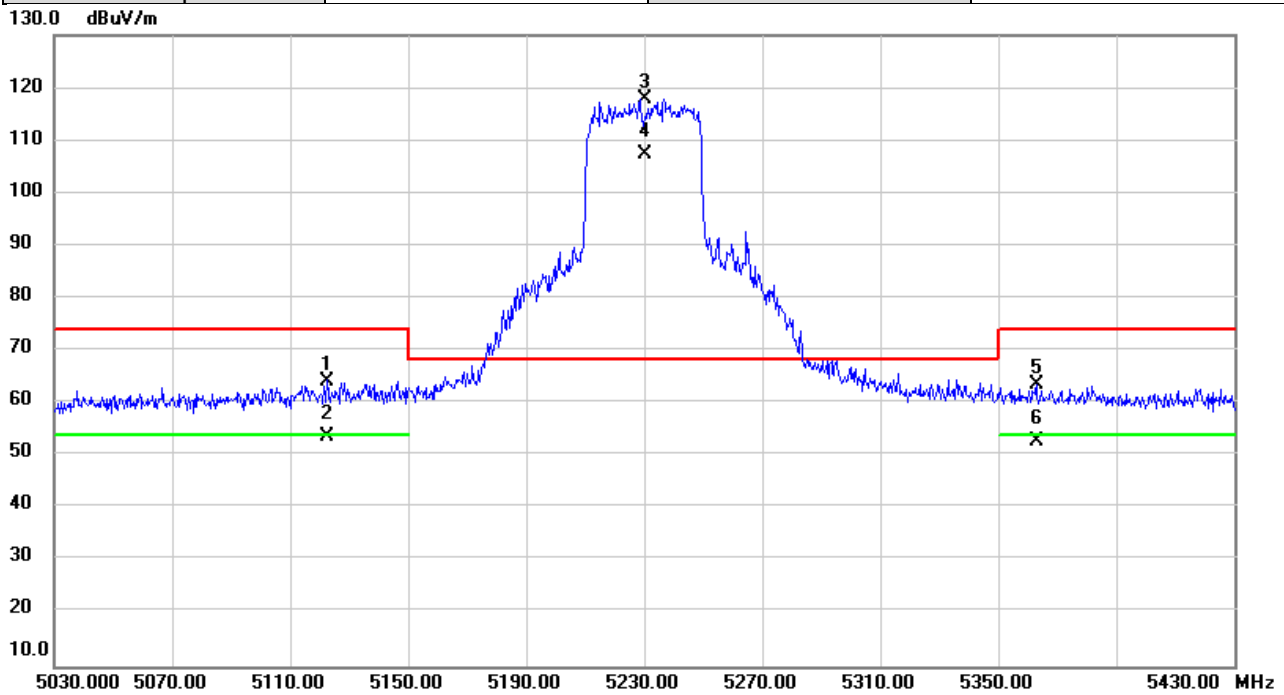


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5122.547	62.93	1.37	64.30	74.00	-9.70	peak	
2		5122.547	52.27	1.37	53.64	54.00	-0.36	AVG	
3	*	5230.000	116.35	1.42	117.77	68.20	49.57	peak	No Limit
4	X	5230.000	106.05	1.42	107.47	68.20	39.27	AVG	No Limit
5		5362.827	61.91	1.50	63.41	74.00	-10.59	peak	
6		5362.827	51.33	1.50	52.83	54.00	-1.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/22
Test Frequency	5270MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

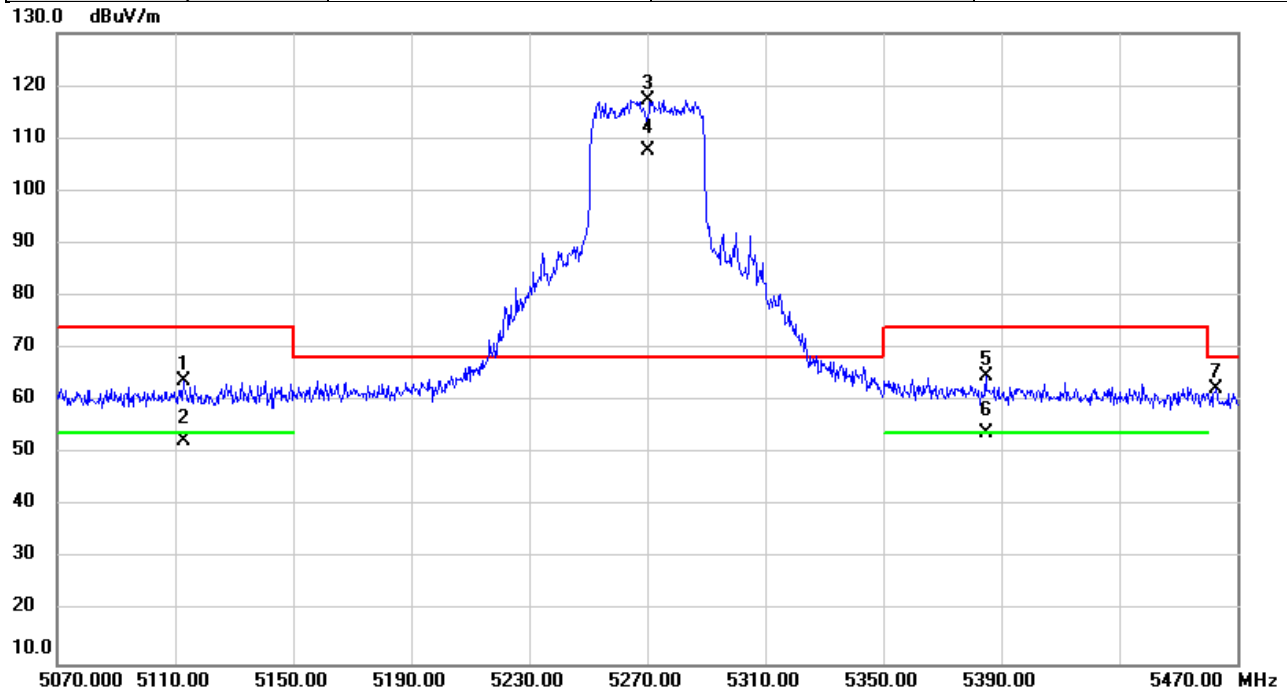


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5113.160	62.47	1.36	63.83	74.00	-10.17	peak	
2		5113.160	51.19	1.36	52.55	54.00	-1.45	AVG	
3	*	5270.000	115.87	1.45	117.32	68.20	49.12	peak	No Limit
4	X	5270.000	106.17	1.45	107.62	68.20	39.42	AVG	No Limit
5		5385.120	63.31	1.51	64.82	74.00	-9.18	peak	
6		5385.120	52.37	1.51	53.88	54.00	-0.12	AVG	
7		5462.813	60.71	1.56	62.27	68.20	-5.93	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/22
Test Frequency	5310MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

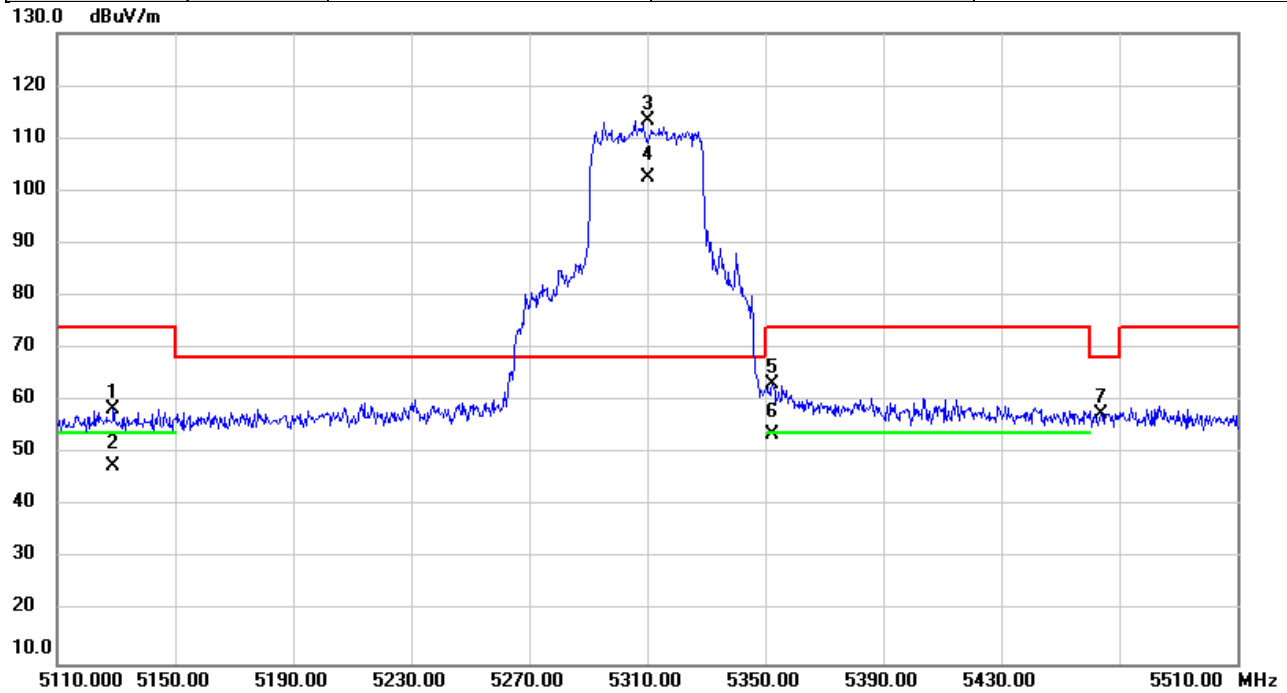


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5129.160	57.18	1.36	58.54	74.00	-15.46	peak	
2		5129.160	46.25	1.36	47.61	54.00	-6.39	AVG	
3	*	5310.000	111.92	1.47	113.39	68.20	45.19	peak	No Limit
4	X	5310.000	101.00	1.47	102.47	68.20	34.27	AVG	No Limit
5		5352.627	61.63	1.50	63.13	74.00	-10.87	peak	
6		5352.627	52.20	1.50	53.70	54.00	-0.30	AVG	
7		5463.773	56.12	1.56	57.68	68.20	-10.52	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/22
Test Frequency	5510MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

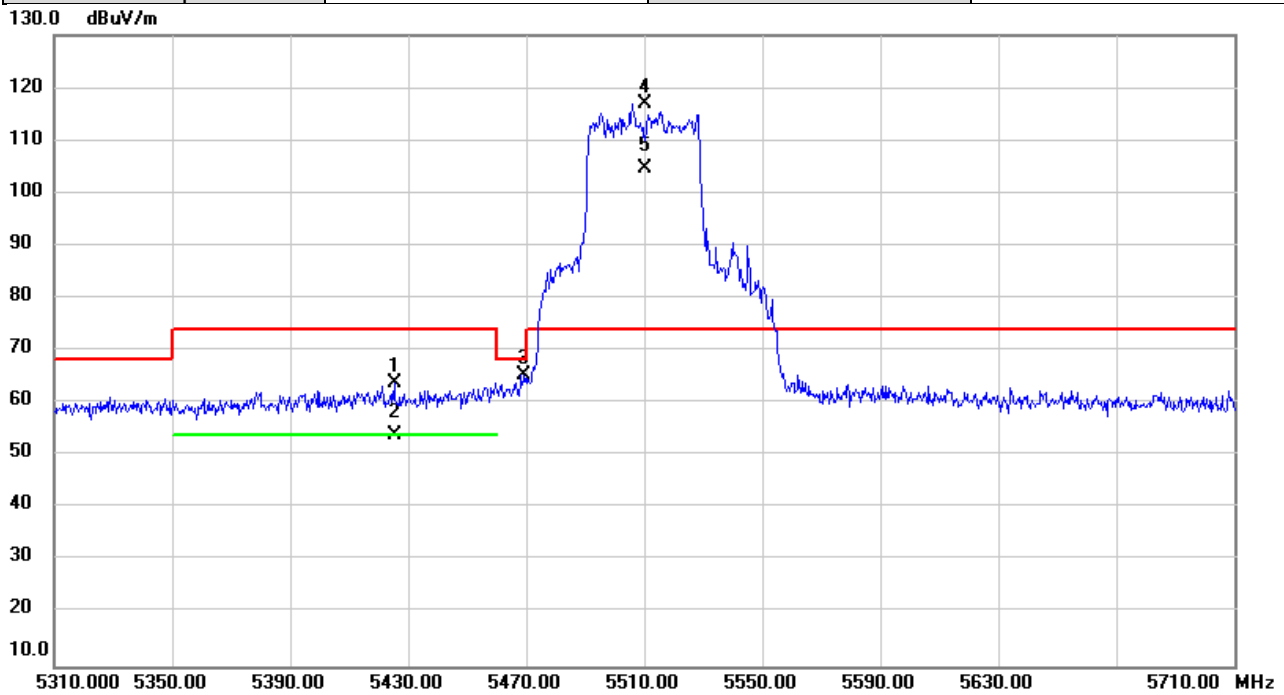


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5425.533	62.41	1.53	63.94	74.00	-10.06	peak	
2		5425.553	52.35	1.53	53.88	54.00	-0.12	AVG	
3		5469.280	63.68	1.56	65.24	68.20	-2.96	peak	
4	*	5510.000	115.29	1.61	116.90	74.00	42.90	peak	No Limit
5	X	5510.000	103.00	1.61	104.61	74.00	30.61	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/22
Test Frequency	5670MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

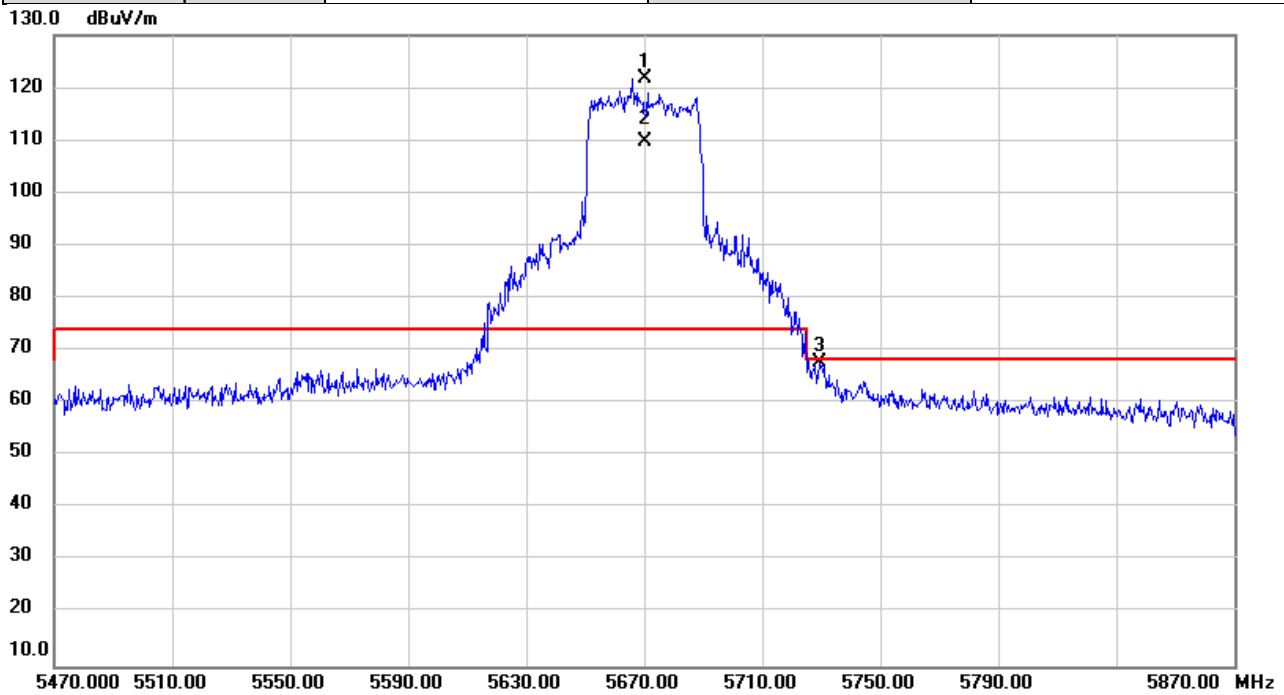


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5670.000	119.47	2.14	121.61	74.00	47.61	peak	No Limit
2	X	5670.000	107.59	2.14	109.73	74.00	35.73	AVG	No Limit
3		5729.587	65.27	2.34	67.61	68.20	-0.59	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/7/3
Test Frequency	5755MHz	Polarization	Vertical
Temp	27°C	Hum.	53%

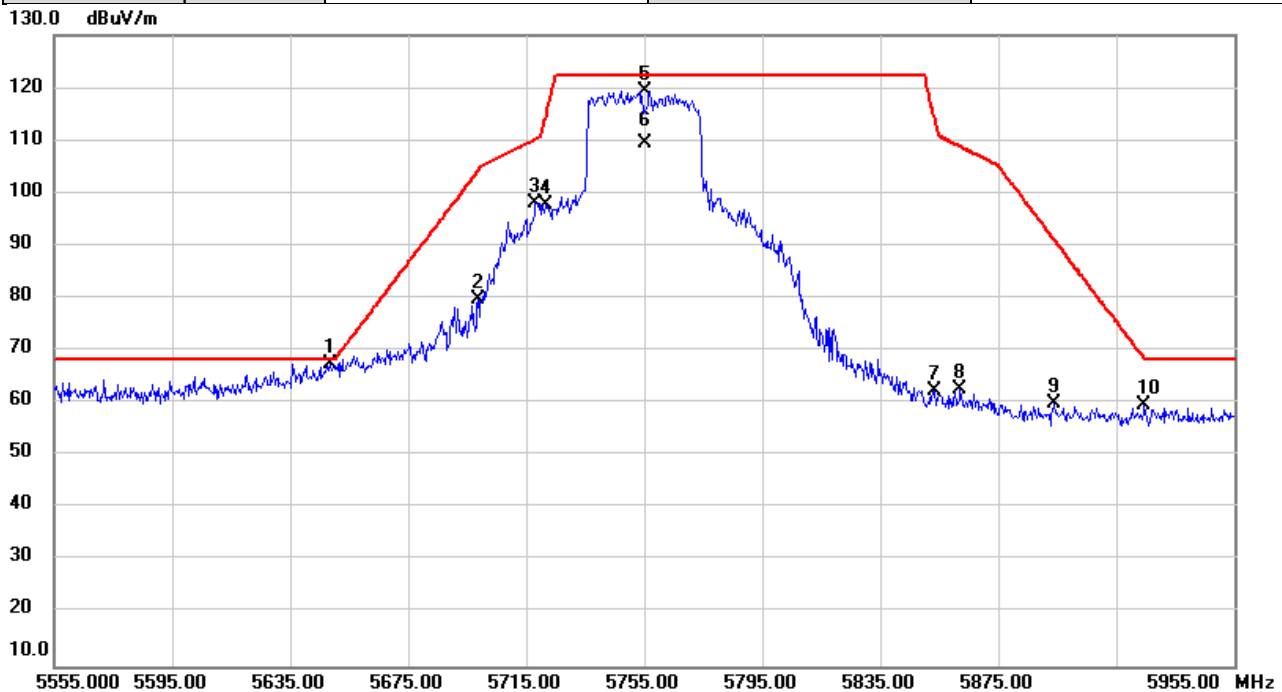


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5648.587	65.42	2.07	67.49	68.20	-0.71	peak	
2		5698.907	77.45	2.24	79.69	104.39	-24.70	peak	
3		5717.920	95.80	2.30	98.10	110.22	-12.12	peak	
4		5721.453	95.47	2.31	97.78	114.11	-16.33	peak	
5		5755.000	117.06	2.42	119.48	122.20	-2.72	peak	No Limit
6		5755.000	107.15	2.42	109.57	122.20	-12.63	AVG	No Limit
7		5853.413	59.74	2.74	62.48	114.42	-51.94	peak	
8		5862.067	59.99	2.77	62.76	108.82	-46.06	peak	
9		5893.813	56.99	2.88	59.87	91.24	-31.37	peak	
10		5924.547	56.67	2.97	59.64	68.53	-8.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/7/3
Test Frequency	5795MHz	Polarization	Vertical
Temp	27°C	Hum.	53%

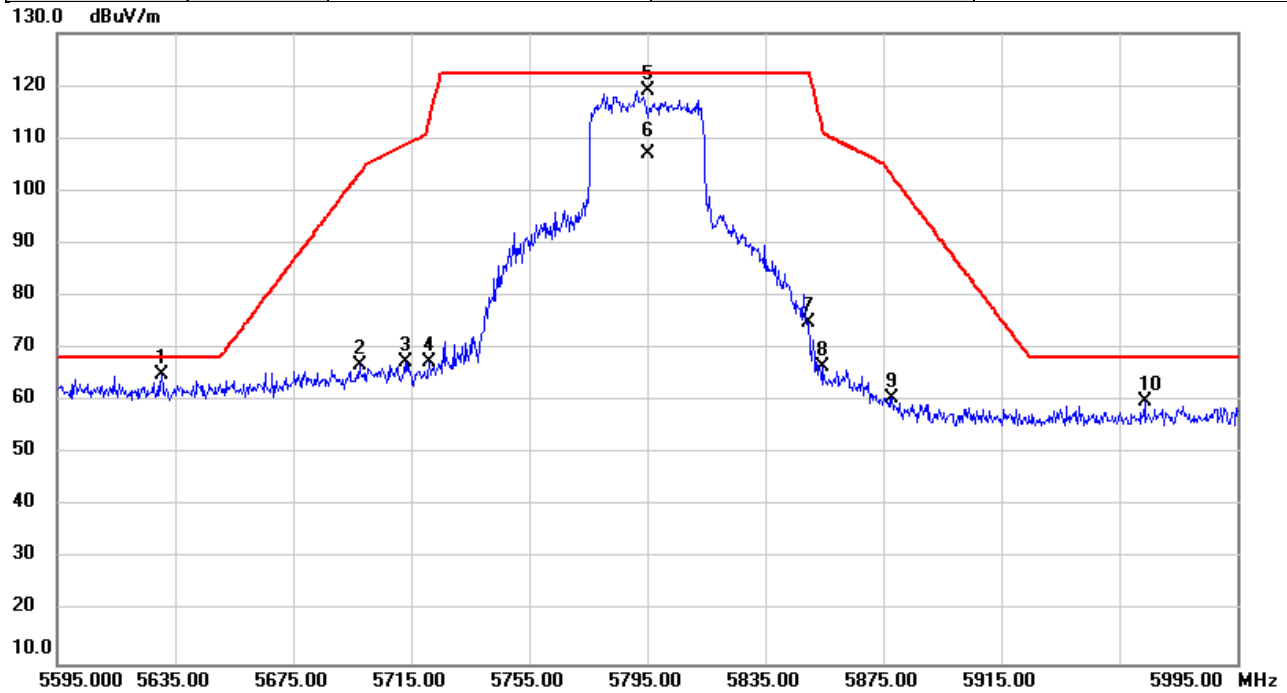


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5630.267	63.07	2.02	65.09	68.20	-3.11	peak	
2		5697.760	64.48	2.24	66.72	103.55	-36.83	peak	
3		5712.960	65.23	2.28	67.51	108.83	-41.32	peak	
4		5721.240	65.00	2.31	67.31	113.63	-46.32	peak	
5		5795.000	116.40	2.55	118.95	122.20	-3.25	peak	No Limit
6		5795.000	104.63	2.55	107.18	122.20	-15.02	AVG	No Limit
7		5849.667	72.25	2.72	74.97	122.20	-47.23	peak	
8		5854.640	63.76	2.74	66.50	111.62	-45.12	peak	
9		5877.880	57.80	2.82	60.62	103.06	-42.44	peak	
10		5963.600	56.88	3.10	59.98	68.20	-8.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/22
Test Frequency	5210MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

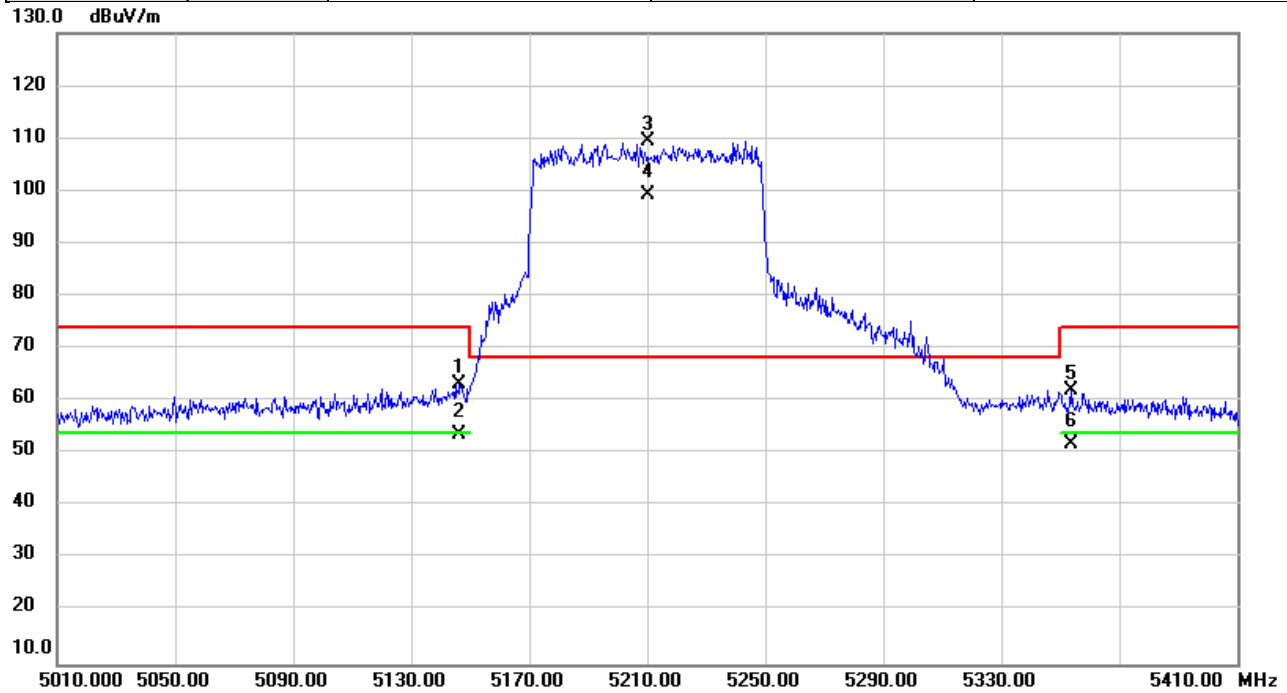


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5146.493	62.02	1.37	63.39	74.00	-10.61	peak	
2		5146.493	52.39	1.37	53.76	54.00	-0.24	AVG	
3	*	5210.000	108.18	1.41	109.59	68.20	41.39	peak	No Limit
4	X	5210.000	97.79	1.41	99.20	68.20	31.00	AVG	No Limit
5		5353.533	60.60	1.50	62.10	74.00	-11.90	peak	
6		5353.533	50.29	1.50	51.79	54.00	-2.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/22
Test Frequency	5290MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

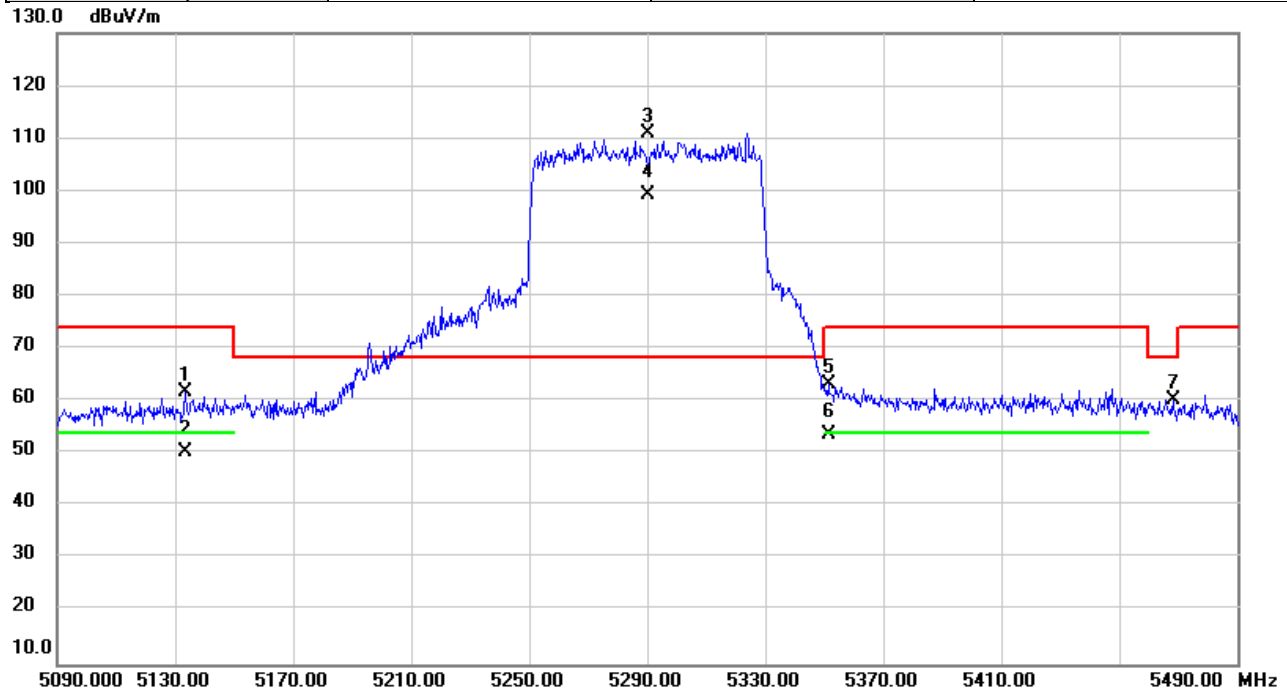


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5133.320	60.27	1.36	61.63	74.00	-12.37	peak	
2		5133.320	48.90	1.36	50.26	54.00	-3.74	AVG	
3	*	5290.000	109.39	1.46	110.85	68.20	42.65	peak	No Limit
4	X	5290.000	97.86	1.46	99.32	68.20	31.12	AVG	No Limit
5		5351.547	61.72	1.50	63.22	74.00	-10.78	peak	
6		5351.547	52.10	1.50	53.60	54.00	-0.40	AVG	
7		5468.200	58.65	1.56	60.21	68.20	-7.99	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/22
Test Frequency	5530MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

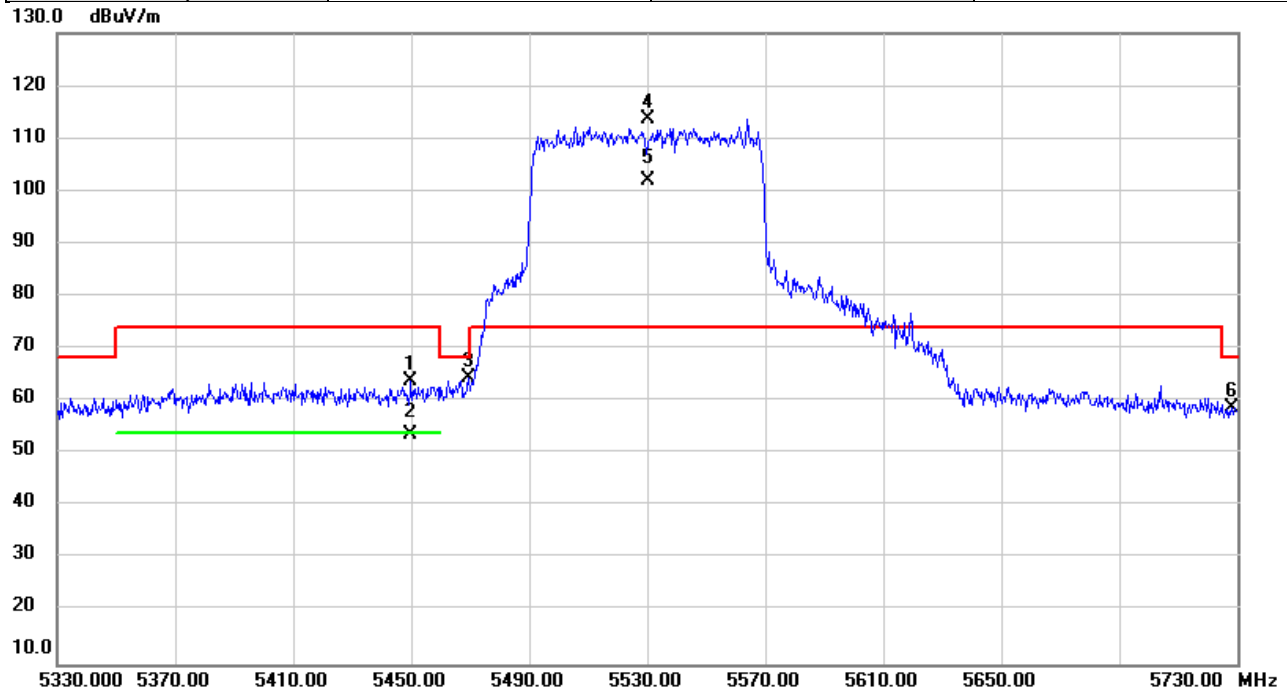


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5449.627	62.20	1.55	63.75	74.00	-10.25	peak	
2		5449.627	52.10	1.55	53.65	54.00	-0.35	AVG	
3		5469.253	62.97	1.56	64.53	68.20	-3.67	peak	
4	*	5530.000	112.09	1.68	113.77	74.00	39.77	peak	No Limit
5	X	5530.000	100.15	1.68	101.83	74.00	27.83	AVG	No Limit
6		5728.000	56.39	2.33	58.72	68.20	-9.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/22
Test Frequency	5610MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

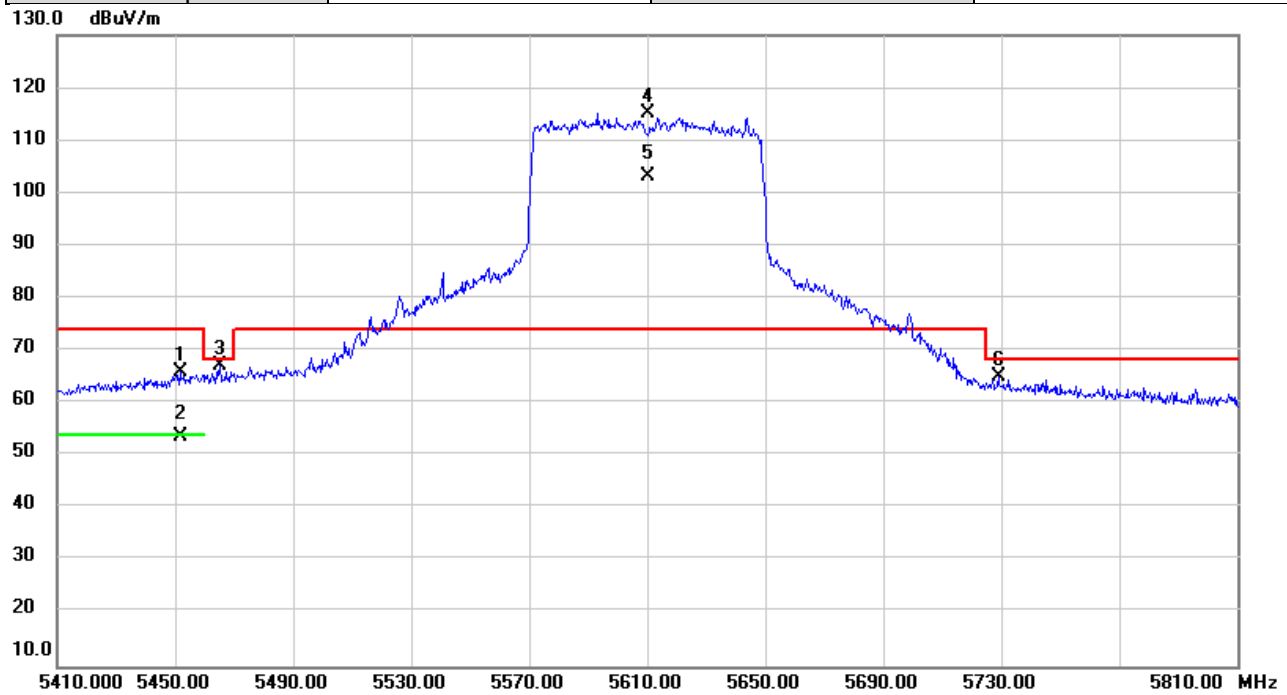


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5451.800	64.28	1.55	65.83	74.00	-8.17	peak	
2		5451.800	52.25	1.55	53.80	54.00	-0.20	AVG	
3		5465.213	65.65	1.56	67.21	68.20	-0.99	peak	
4	*	5610.000	113.18	1.93	115.11	74.00	41.11	peak	No Limit
5	X	5610.000	101.13	1.93	103.06	74.00	29.06	AVG	No Limit
6		5729.133	62.86	2.33	65.19	68.20	-3.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024-7-3
Test Frequency	5775MHz	Polarization	Vertical
Temp	24°C	Hum.	59%

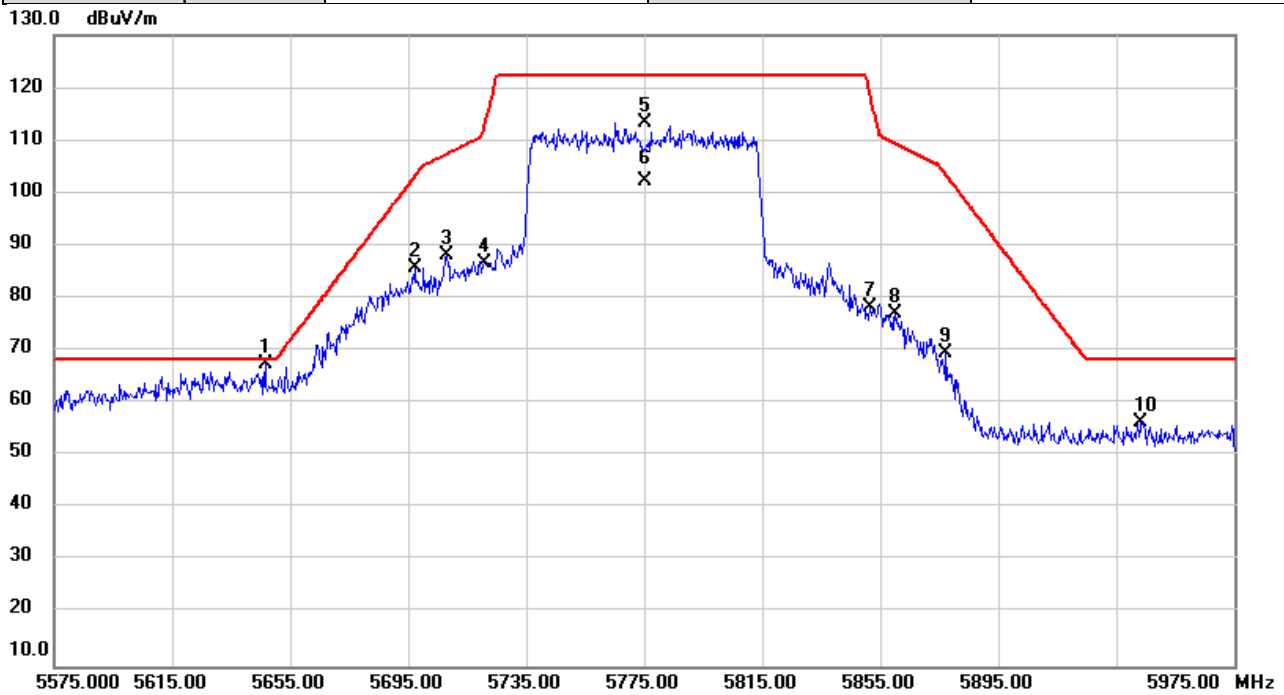


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5646.507	67.62	-0.09	67.53	68.20	-0.67	peak	
2		5697.320	85.70	0.08	85.78	103.23	-17.45	peak	
3		5707.800	88.02	0.12	88.14	107.39	-19.25	peak	
4		5721.013	86.61	0.16	86.77	113.11	-26.34	peak	
5		5775.000	112.88	0.34	113.22	122.20	-8.98	peak	No Limit
6		5775.000	102.04	0.34	102.38	122.20	-19.82	AVG	No Limit
7		5851.547	77.54	0.58	78.12	118.67	-40.55	peak	
8		5859.947	76.44	0.60	77.04	109.41	-32.37	peak	
9		5877.187	68.85	0.67	69.52	103.58	-34.06	peak	
10		5943.427	55.58	0.89	56.47	68.20	-11.73	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/22
Test Frequency	5250MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

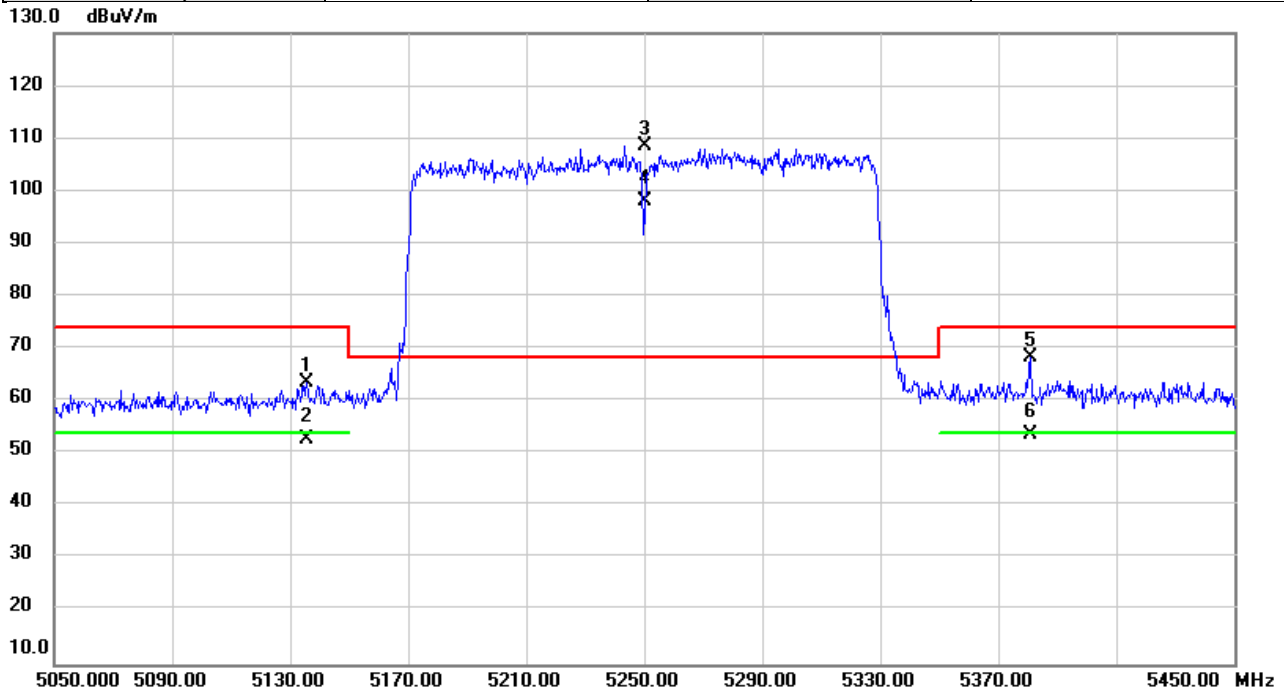


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5135.827	62.06	1.36	63.42	74.00	-10.58	peak	
2		5135.827	51.53	1.36	52.89	54.00	-1.11	AVG	
3	*	5250.000	107.16	1.44	108.60	68.20	40.40	peak	No Limit
4	X	5250.000	96.53	1.44	97.97	68.20	29.77	AVG	No Limit
5		5381.173	66.78	1.51	68.29	74.00	-5.71	peak	
6		5381.173	52.09	1.51	53.60	54.00	-0.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/22
Test Frequency	5570MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

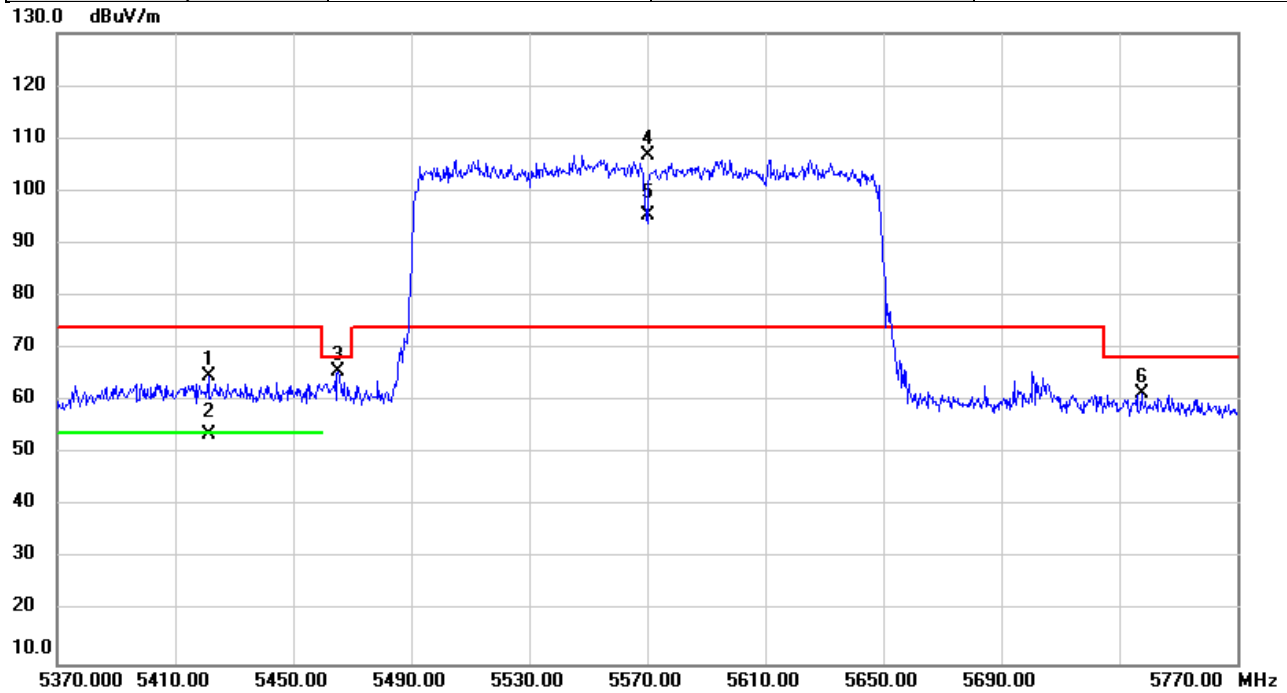


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5421.253	63.14	1.53	64.67	74.00	-9.33	peak	
2		5421.253	52.24	1.53	53.77	54.00	-0.23	AVG	
3		5465.453	63.99	1.56	65.55	68.20	-2.65	peak	
4	*	5570.000	105.04	1.80	106.84	74.00	32.84	peak	No Limit
5	X	5570.000	93.52	1.80	95.32	74.00	21.32	AVG	No Limit
6		5737.480	59.23	2.36	61.59	68.20	-6.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5180MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

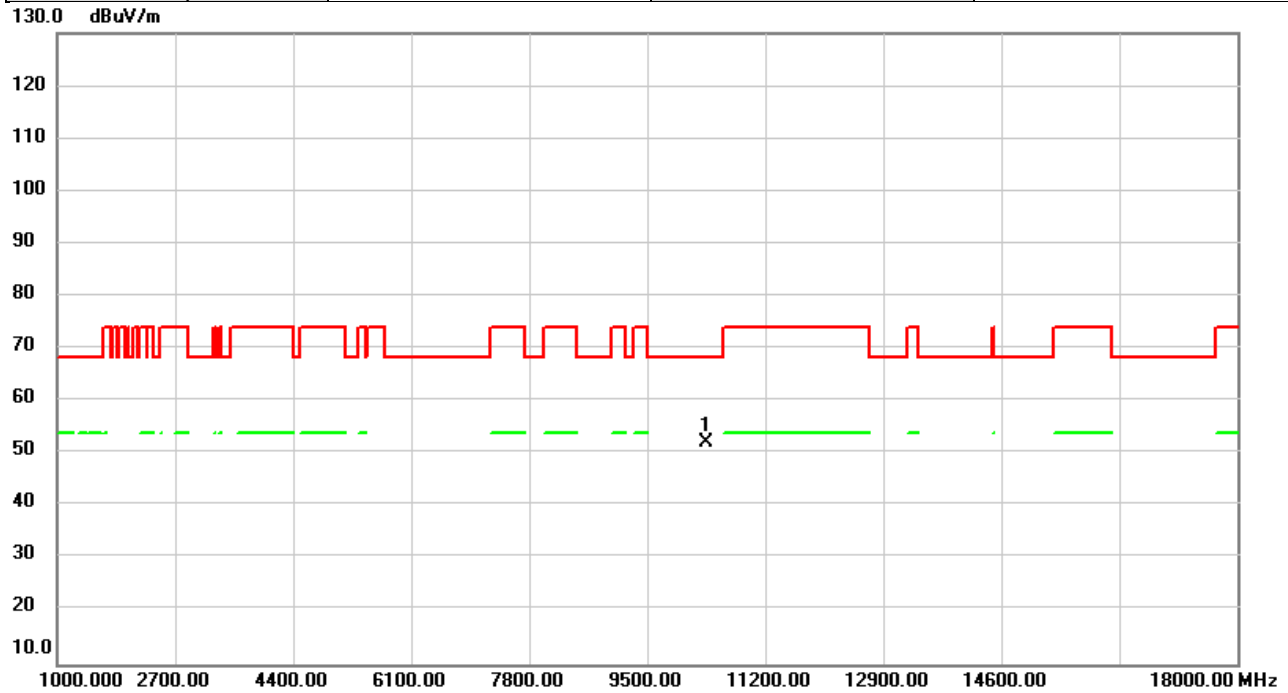


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	45.33	6.76	52.09	68.20	-16.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5180MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

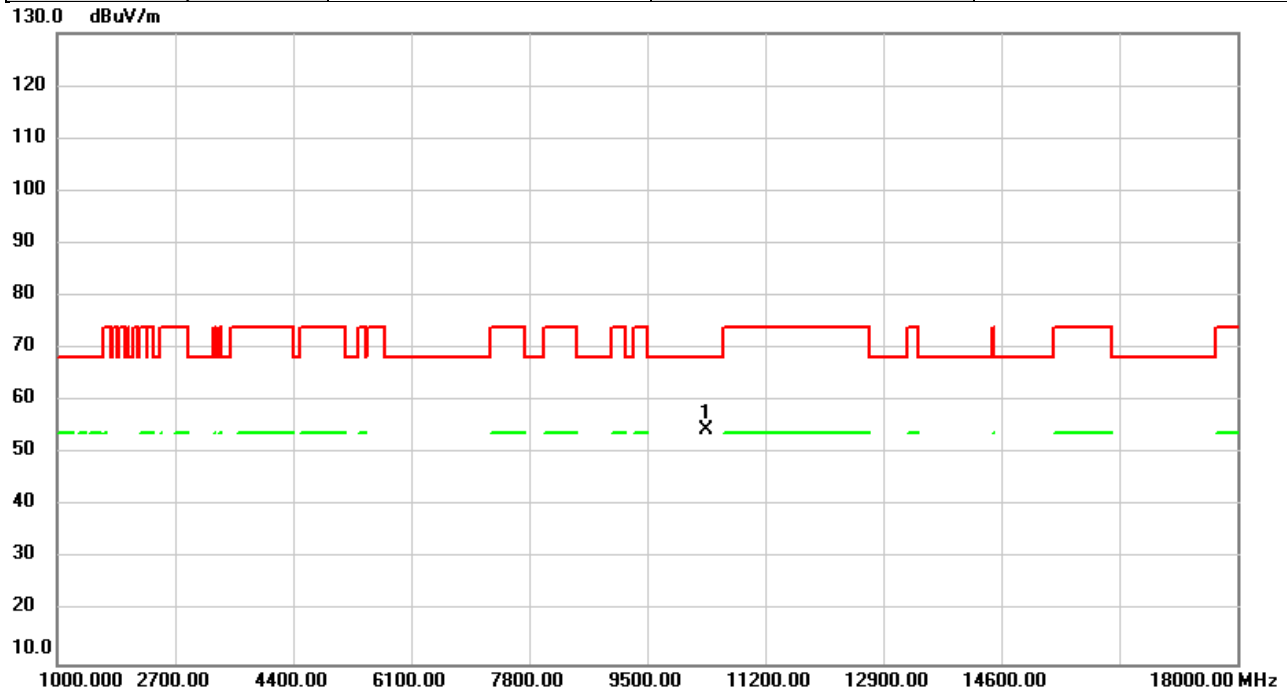


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	47.72	6.76	54.48	68.20	-13.72	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5200MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

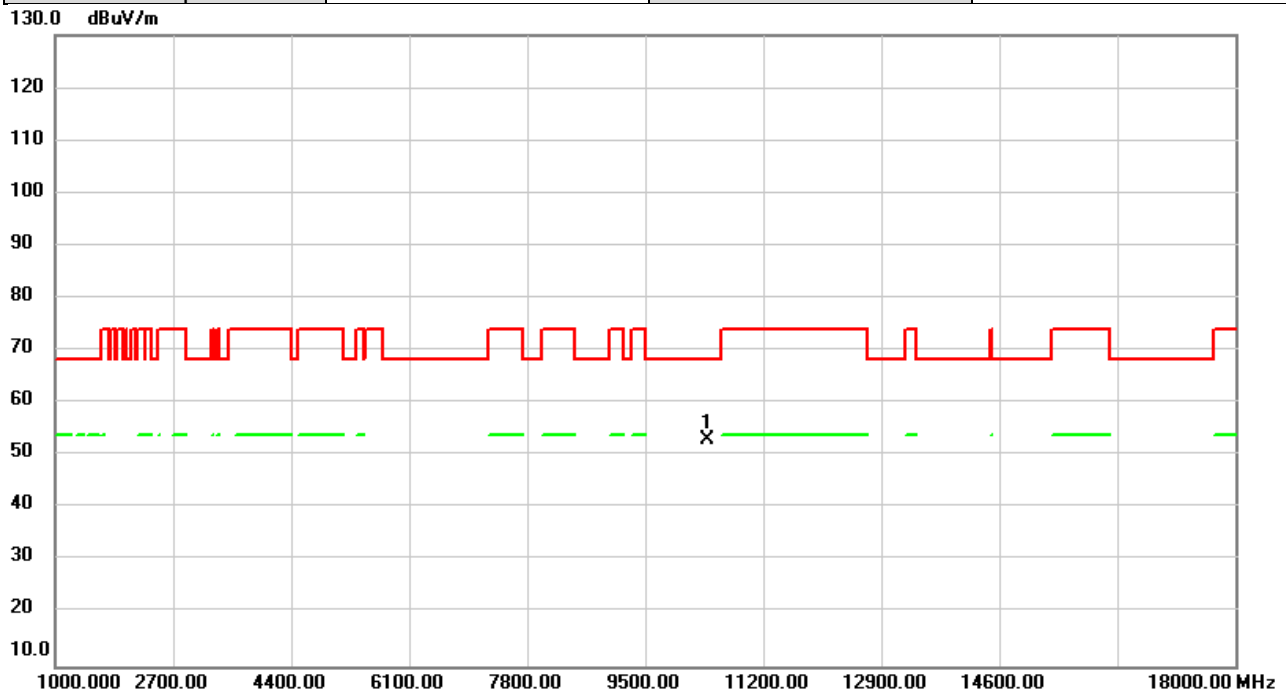


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	46.30	6.78	53.08	68.20	-15.12	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5200MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

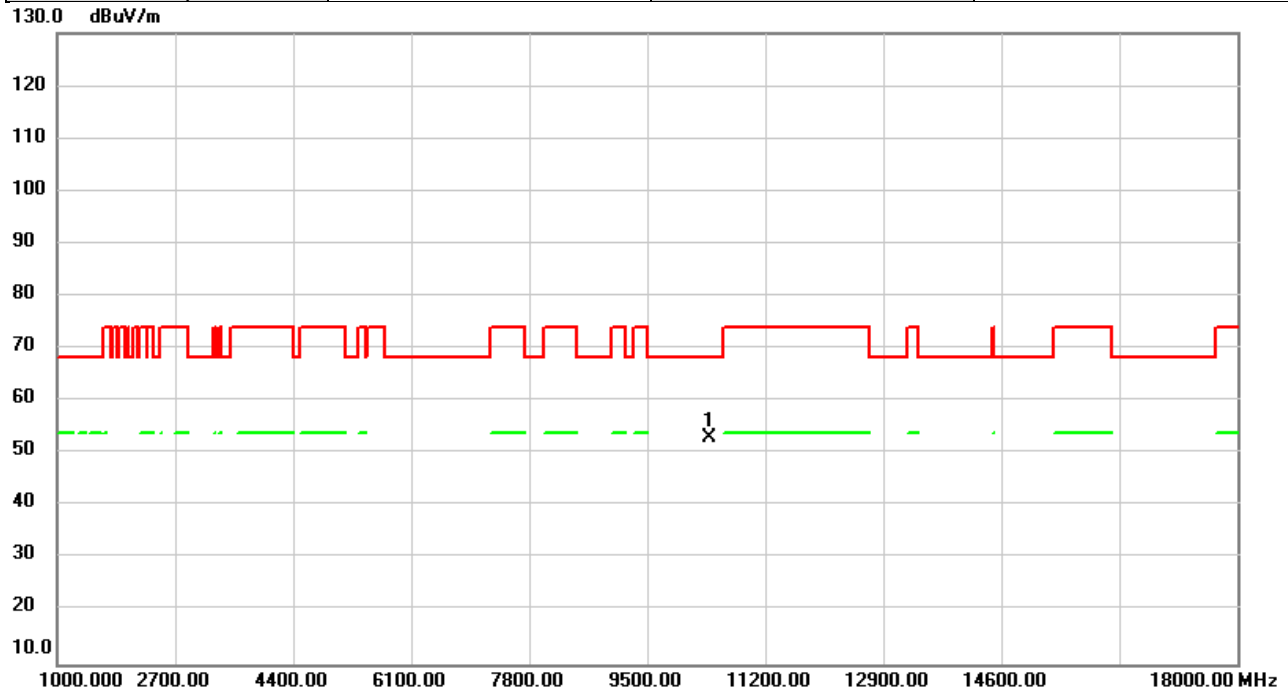


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	46.39	6.78	53.17	68.20	-15.03	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5240MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

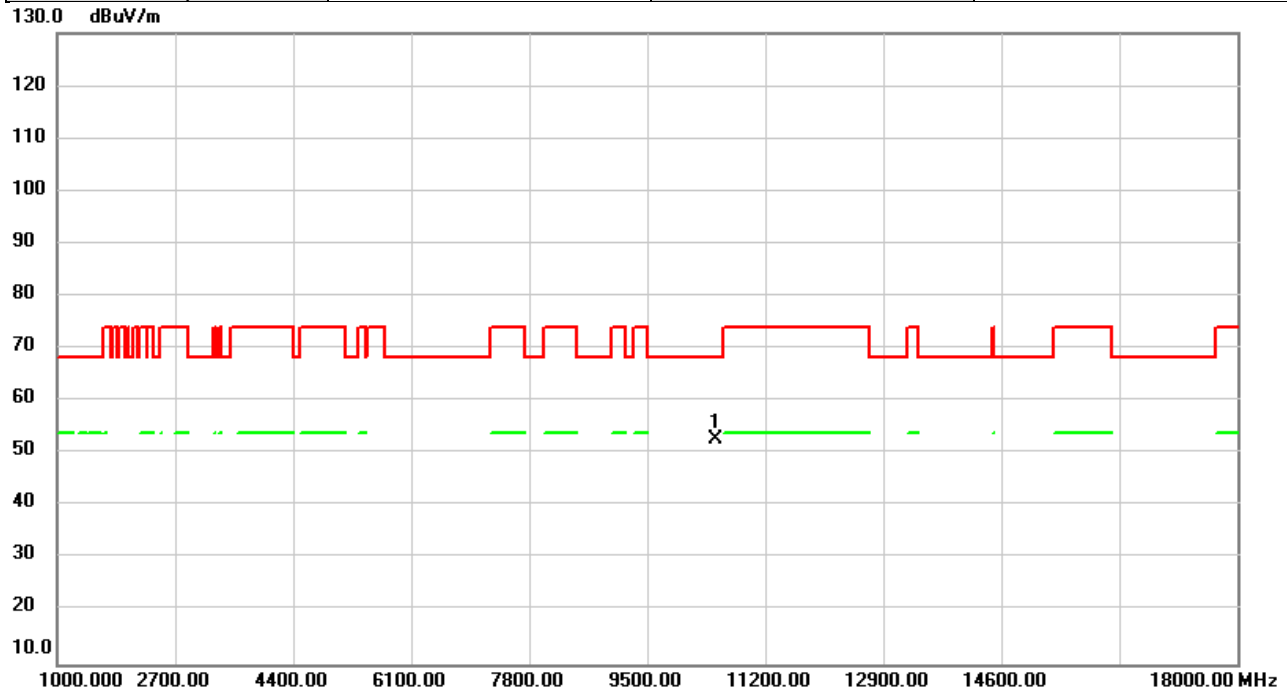


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	46.06	6.81	52.87	68.20	-15.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5240MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

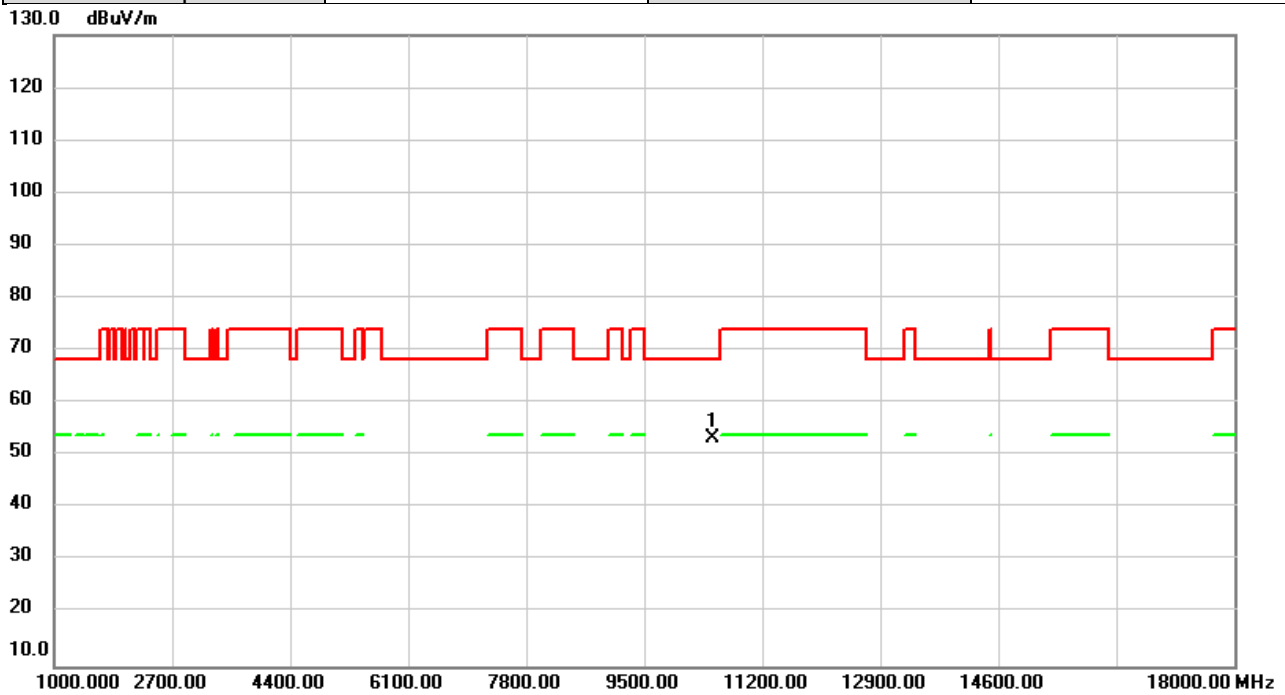


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	46.52	6.81	53.33	68.20	-14.87	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5260MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

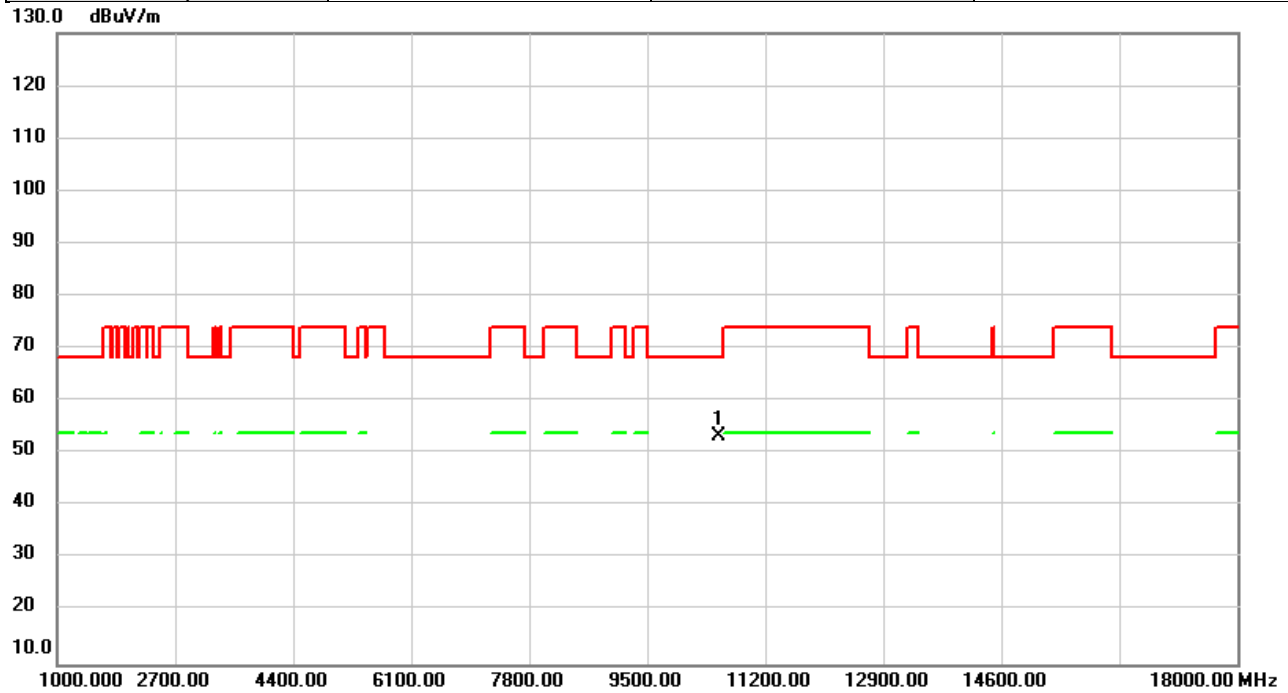


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	46.67	6.82	53.49	68.20	-14.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5260MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

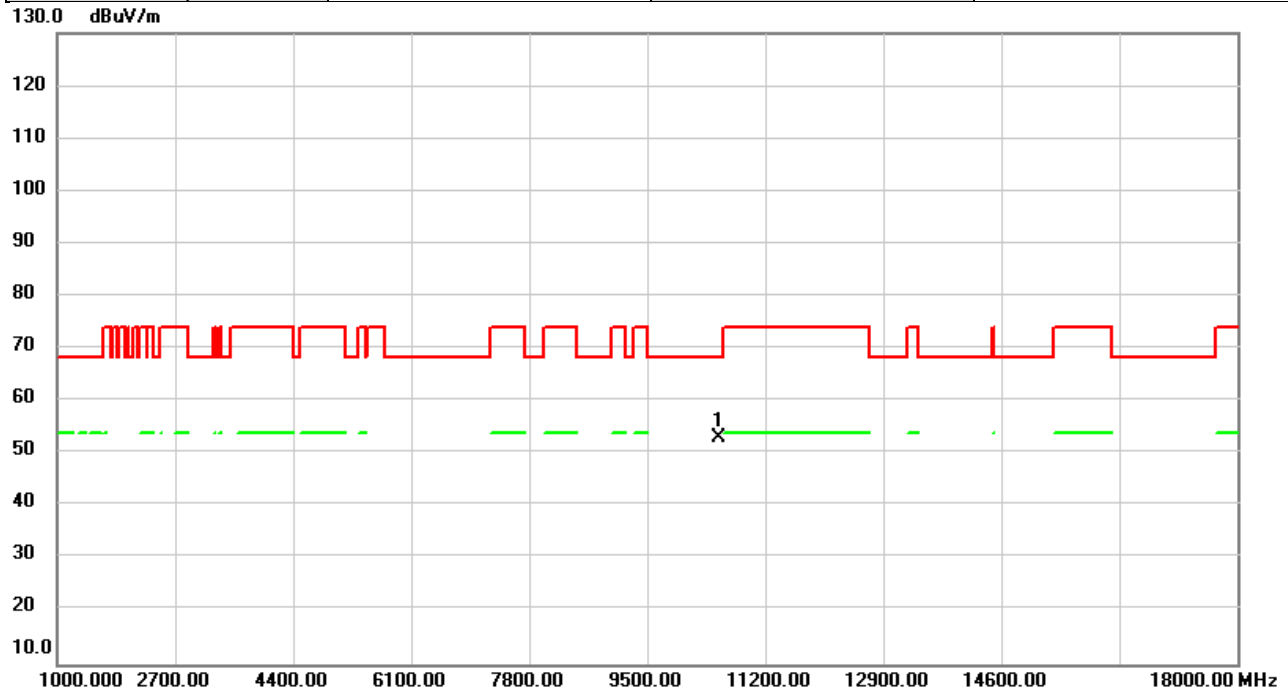


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	46.32	6.82	53.14	68.20	-15.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5300MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

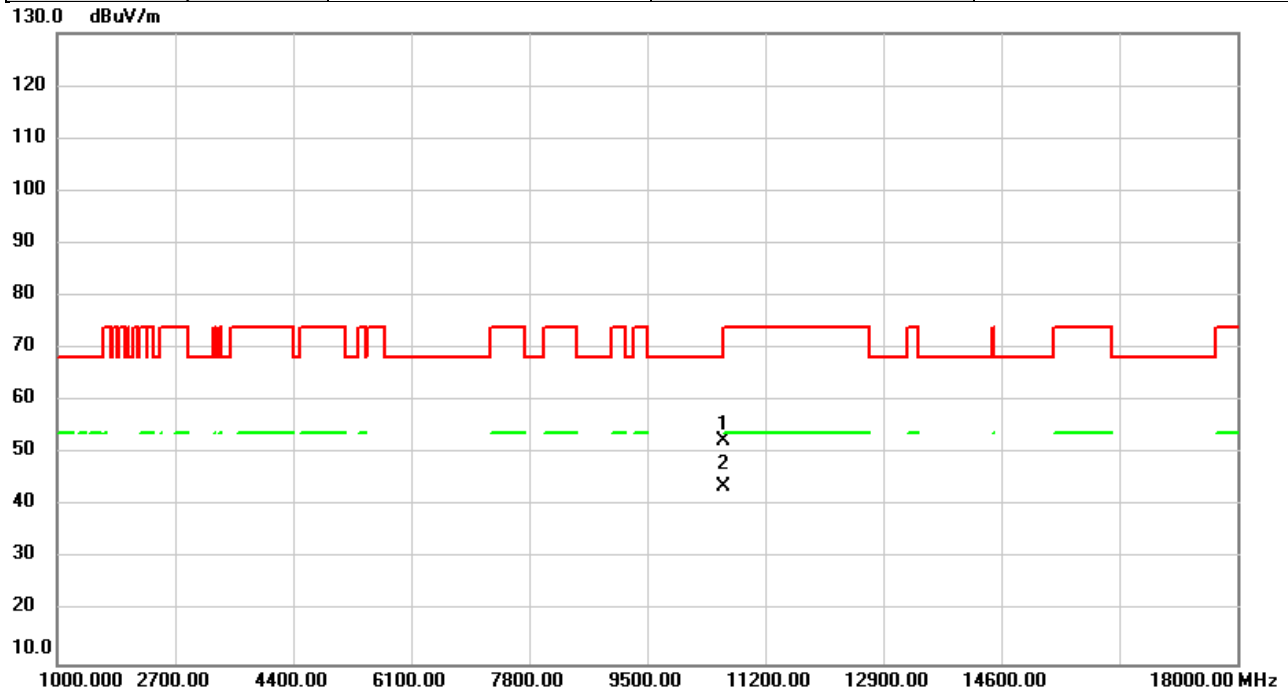


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.00	45.71	6.87	52.58	68.20	-15.62	peak	
2	*	10600.00	36.82	6.87	43.69	54.00	-10.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5300MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

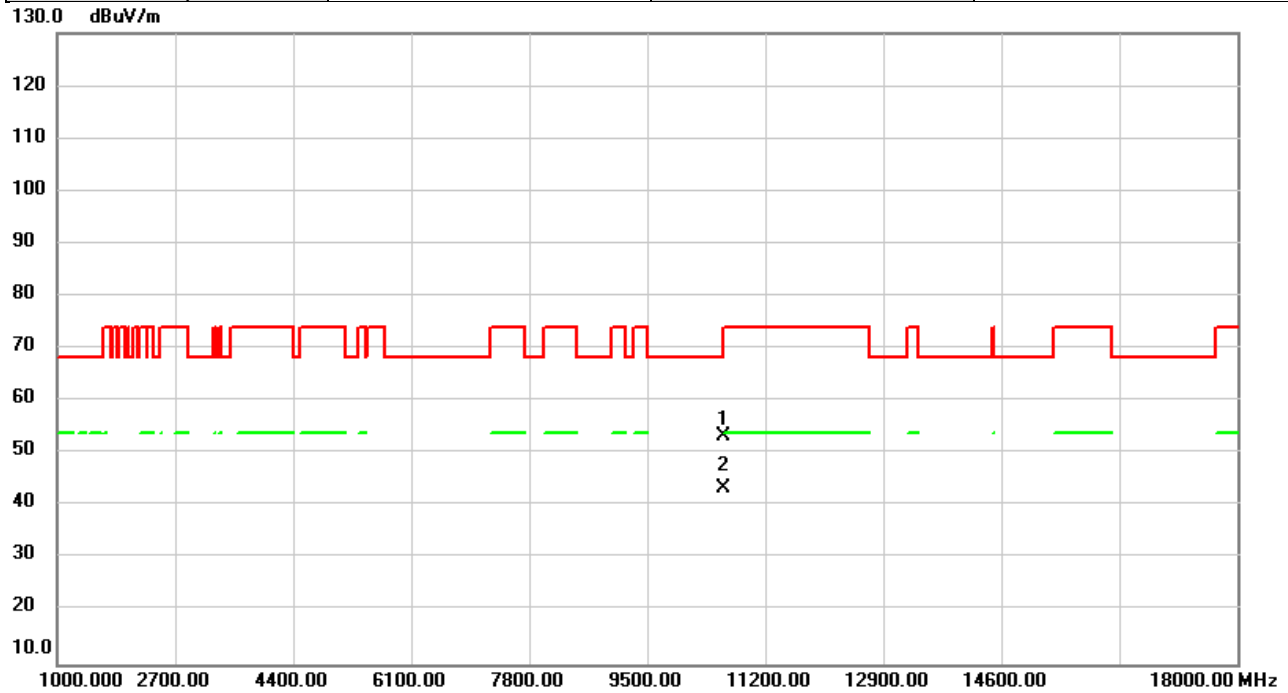


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.00	46.44	6.87	53.31	68.20	-14.89	peak	
2	*	10600.00	36.72	6.87	43.59	54.00	-10.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5320MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

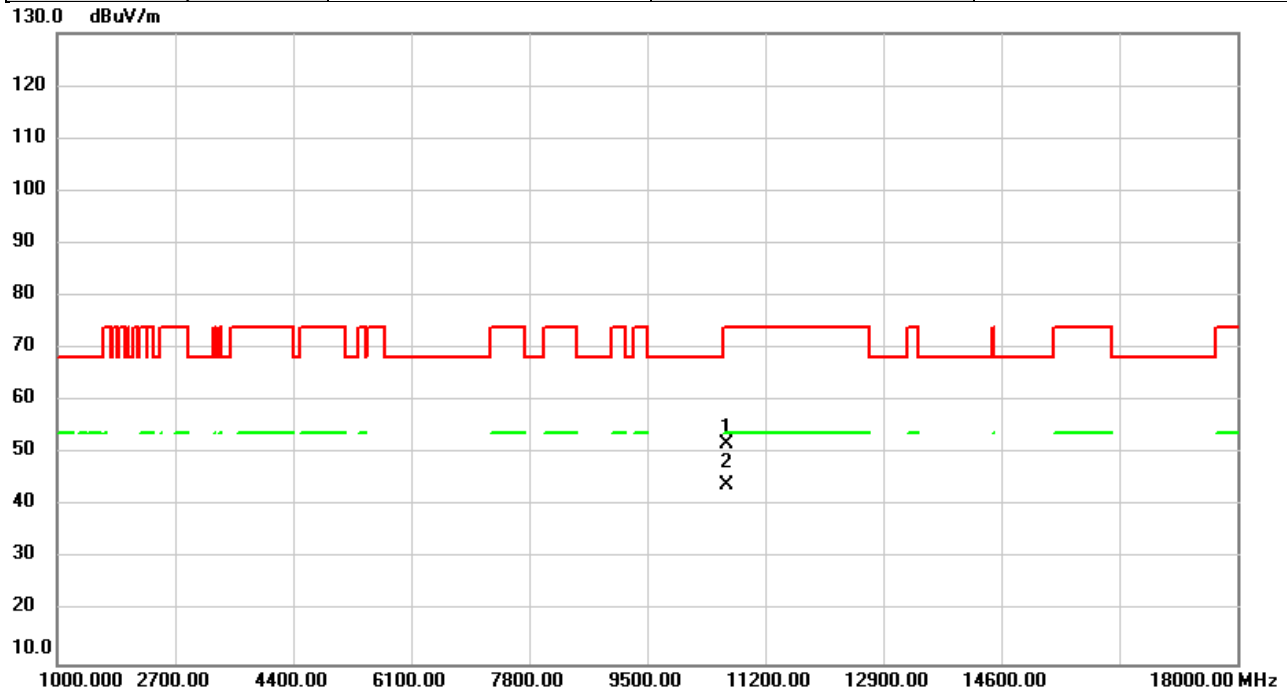


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	45.07	6.89	51.96	74.00	-22.04	peak	
2	*	10640.00	37.09	6.89	43.98	54.00	-10.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5320MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

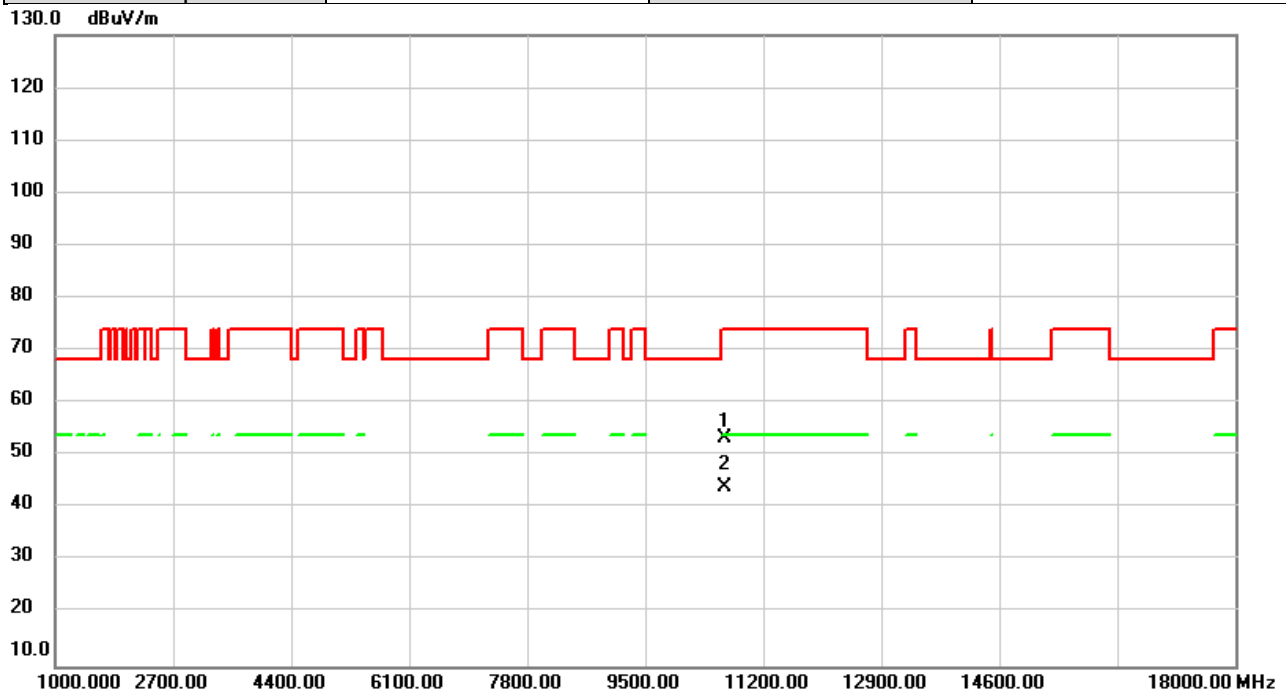


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	46.31	6.89	53.20	74.00	-20.80	peak	
2	*	10640.00	37.15	6.89	44.04	54.00	-9.96	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5500MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

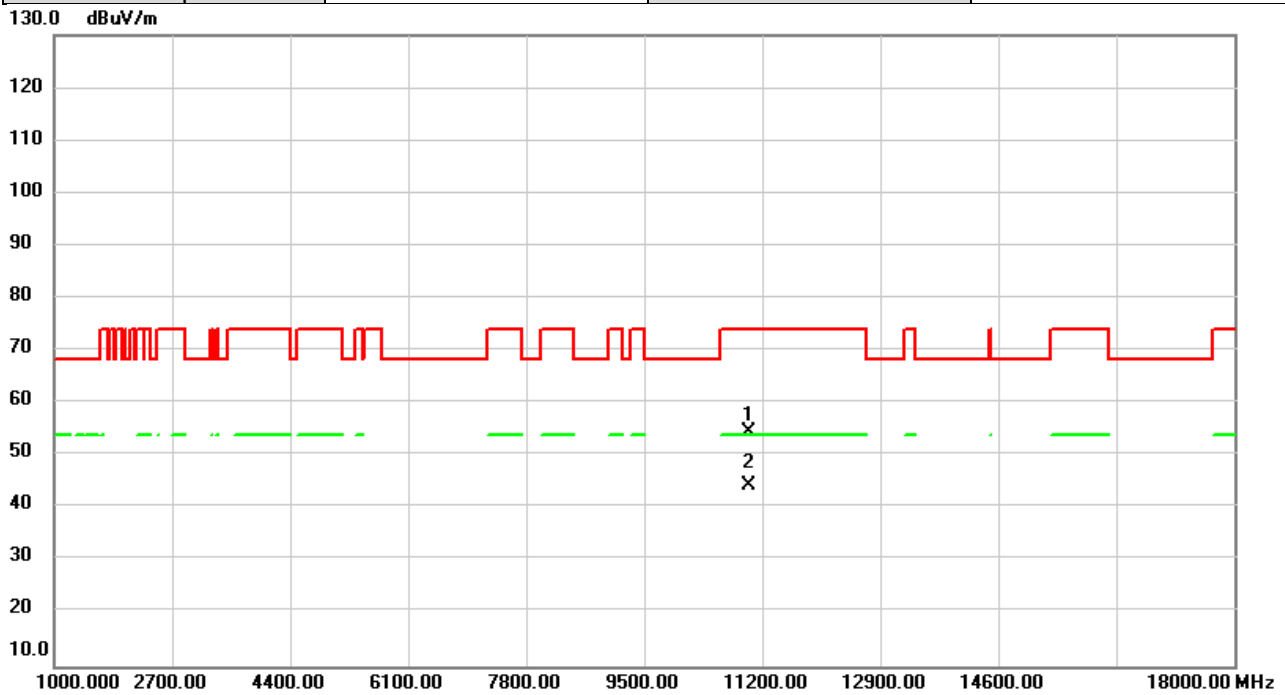


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	47.43	7.09	54.52	74.00	-19.48	peak	
2	*	11000.00	37.32	7.09	44.41	54.00	-9.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5500MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

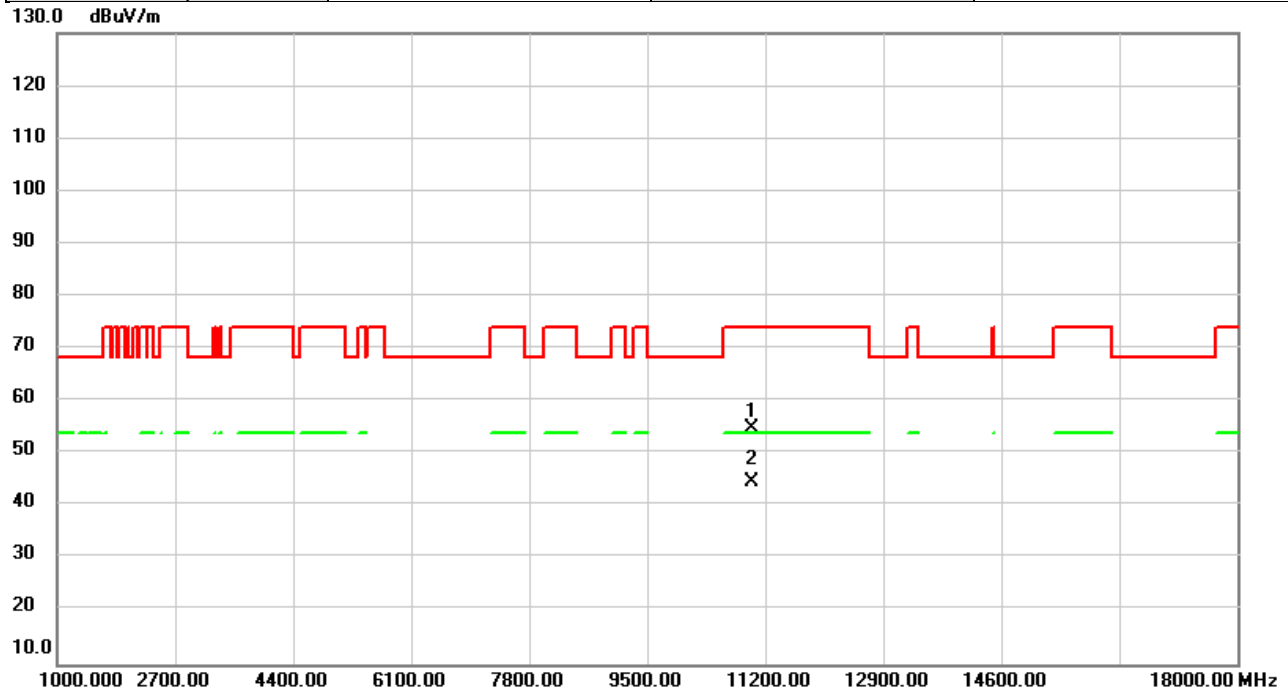


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	47.72	7.09	54.81	74.00	-19.19	peak	
2	*	11000.00	37.64	7.09	44.73	54.00	-9.27	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5580MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

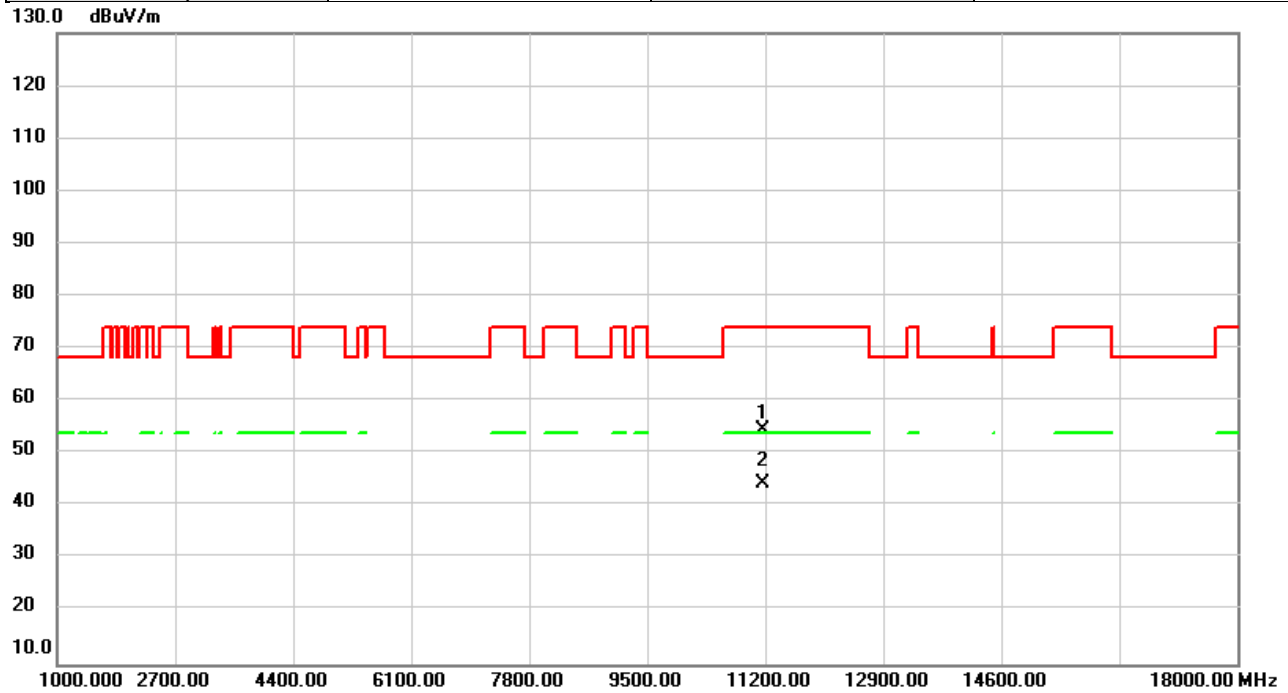


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.00	47.18	7.25	54.43	74.00	-19.57	peak	
2	*	11160.00	37.24	7.25	44.49	54.00	-9.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5580MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

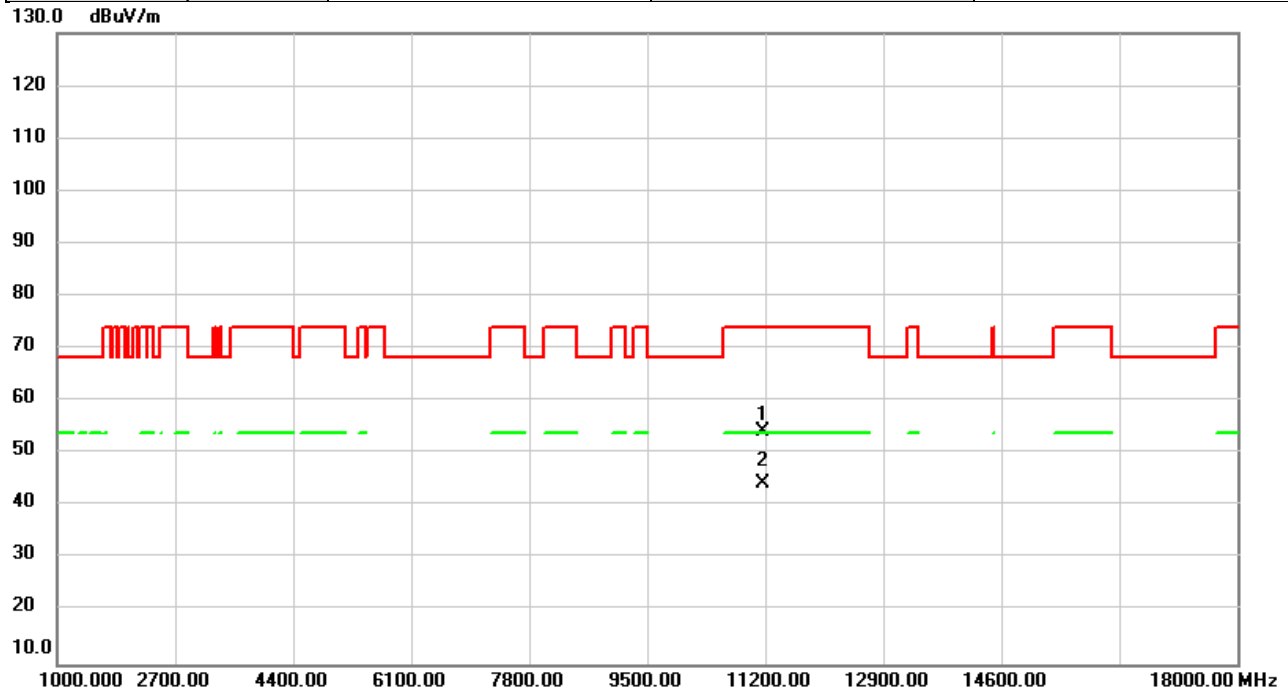


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.00	46.93	7.25	54.18	74.00	-19.82	peak	
2	*	11160.00	37.22	7.25	44.47	54.00	-9.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5700MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

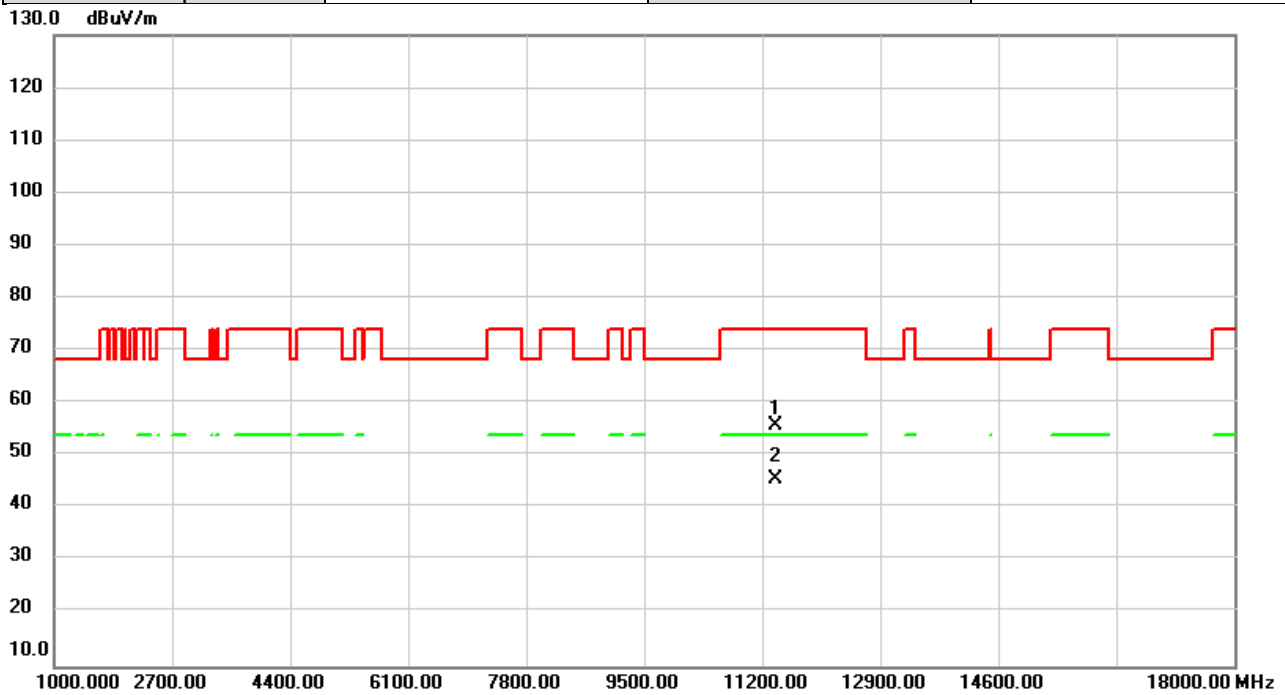


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	48.38	7.48	55.86	74.00	-18.14	peak	
2	*	11400.00	38.09	7.48	45.57	54.00	-8.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5700MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

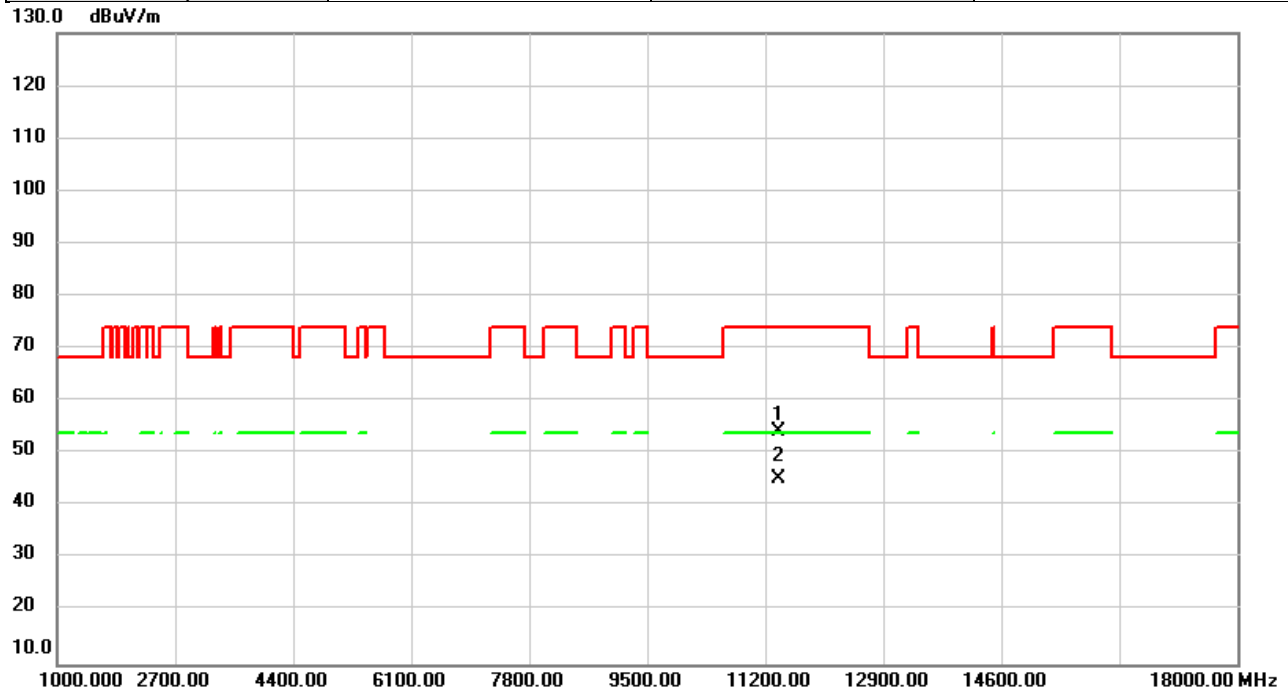


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	46.65	7.48	54.13	74.00	-19.87	peak	
2	*	11400.00	37.64	7.48	45.12	54.00	-8.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5720MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

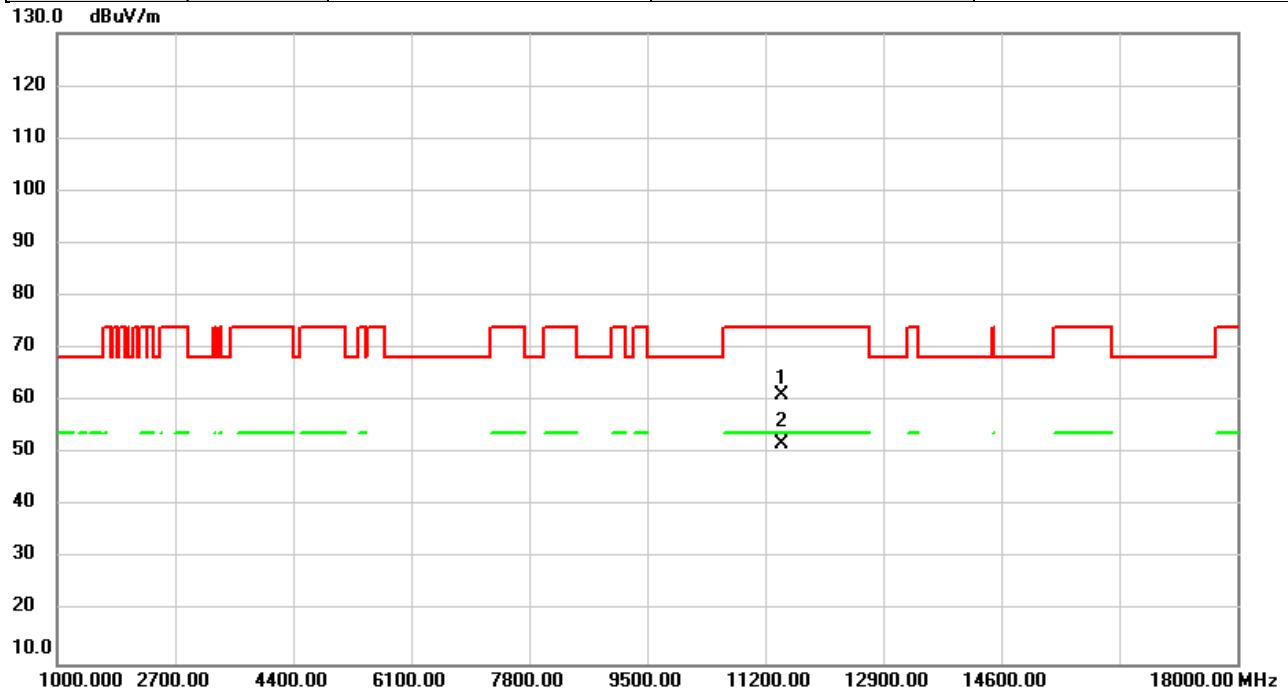


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11440.00	53.79	7.51	61.30	74.00	-12.70	peak	
2	*	11440.00	44.33	7.51	51.84	54.00	-2.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/5/15
Test Frequency	5720MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

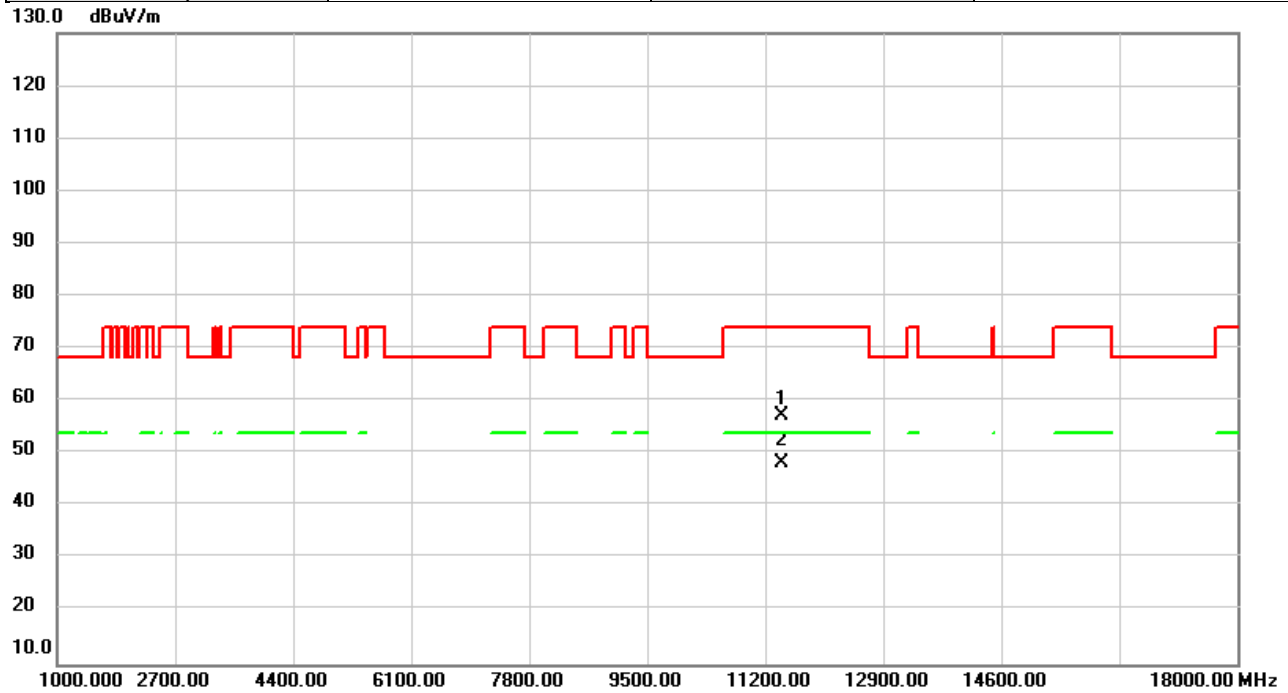


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11440.00	49.87	7.51	57.38	74.00	-16.62	peak	
2	*	11440.00	40.64	7.51	48.15	54.00	-5.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/6/17
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	66%

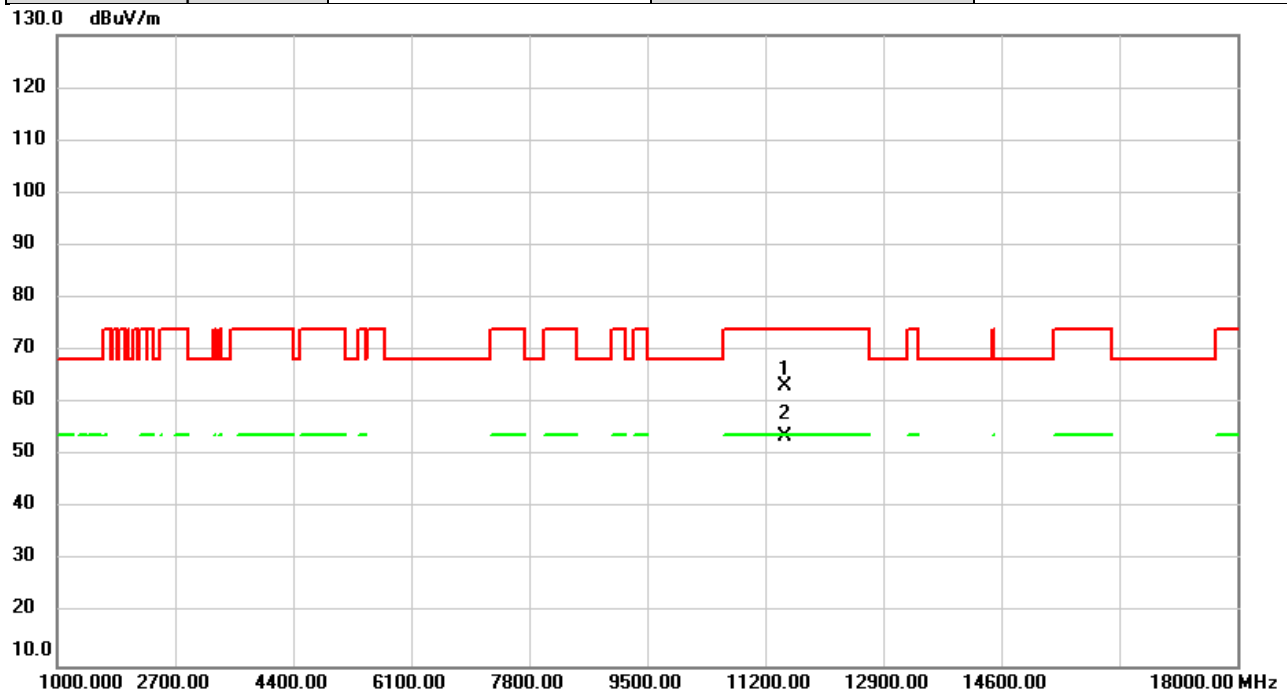


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	55.70	7.57	63.27	74.00	-10.73	peak	
7	2								

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/6/21
Test Frequency	5745MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

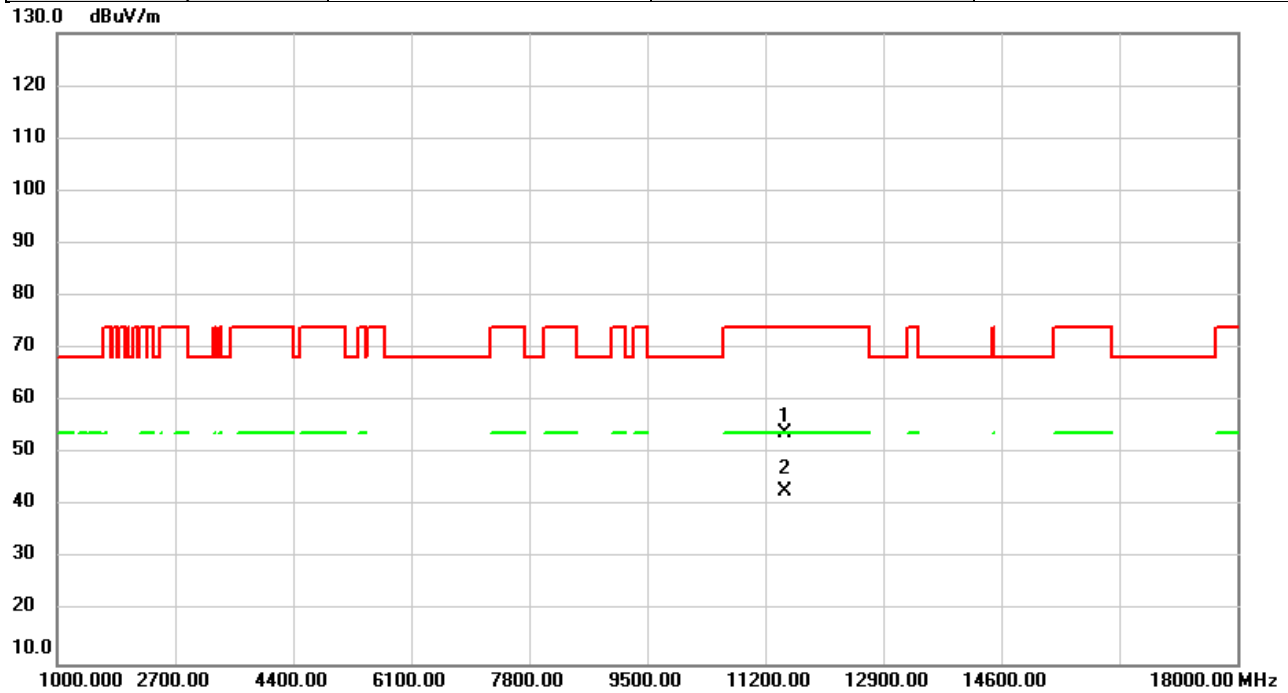


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	46.25	7.56	53.81	74.00	-20.19	peak	
2	*	11490.00	35.26	7.56	42.82	54.00	-11.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/6/17
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	66%

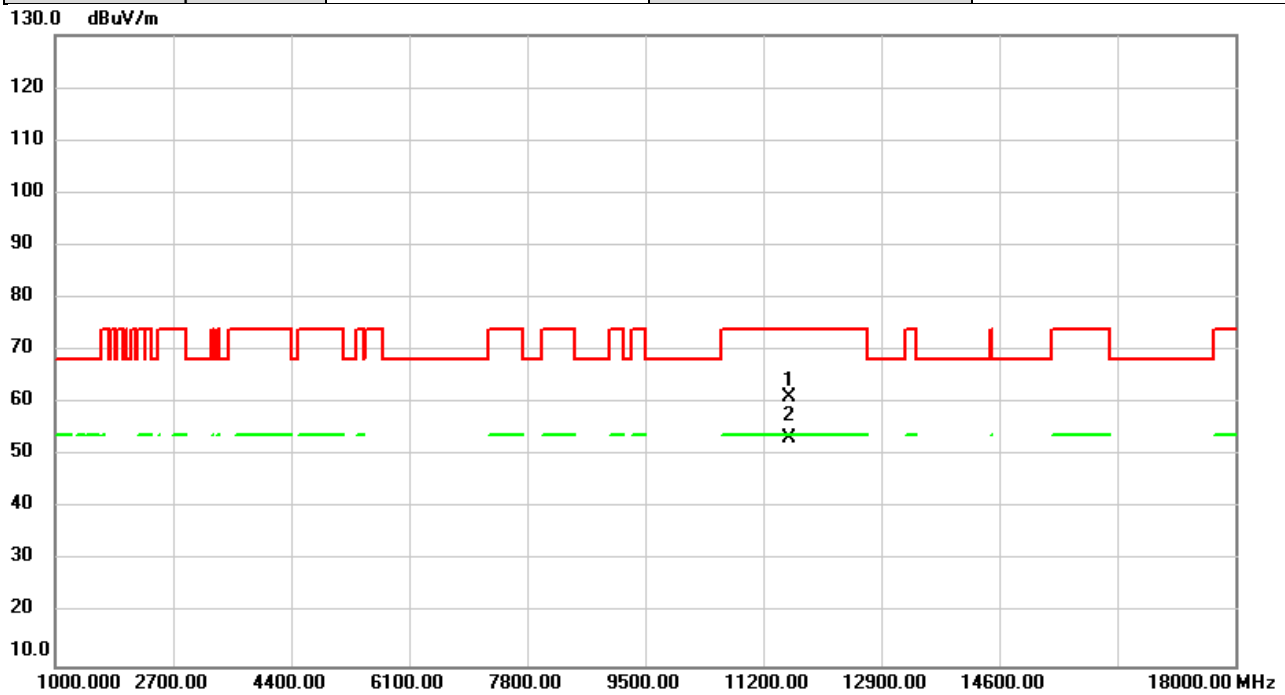


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	53.45	7.59	61.04	74.00	-12.96	peak	
2	*	11570.00	45.90	7.59	53.49	54.00	-0.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/6/21
Test Frequency	5785MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

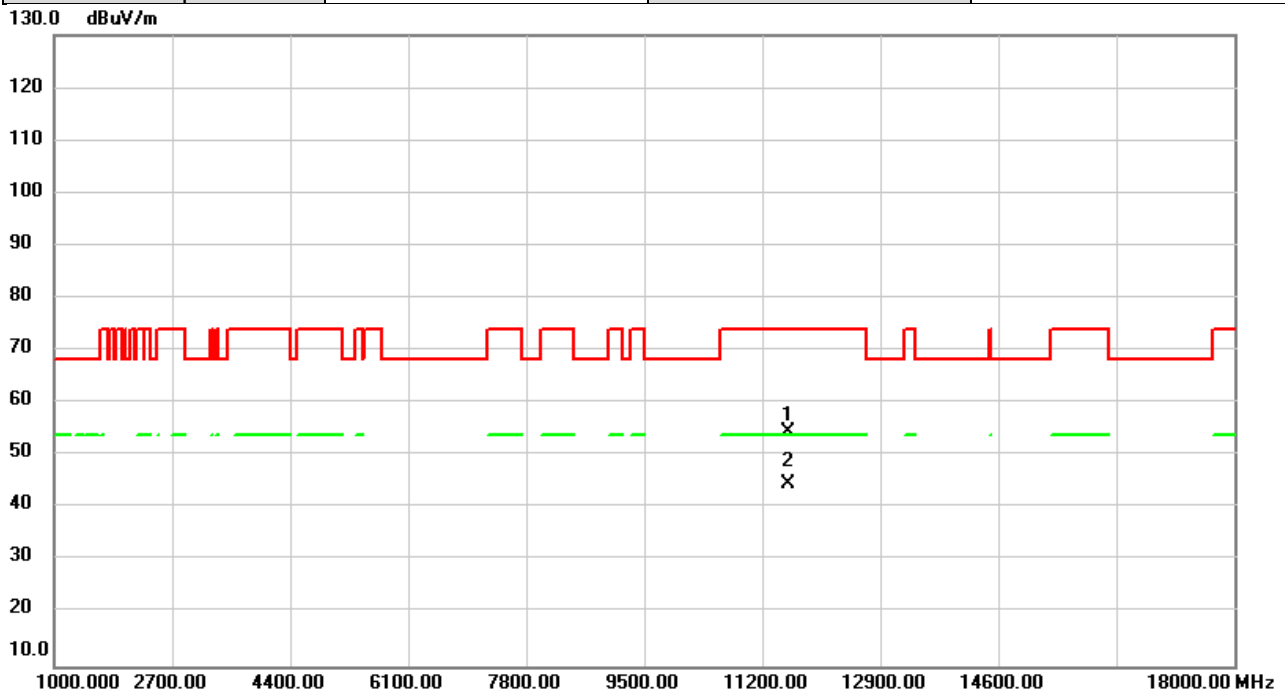


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	46.91	7.59	54.50	74.00	-19.50	peak	
2	*	11570.00	37.21	7.59	44.80	54.00	-9.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/6/17
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	66%

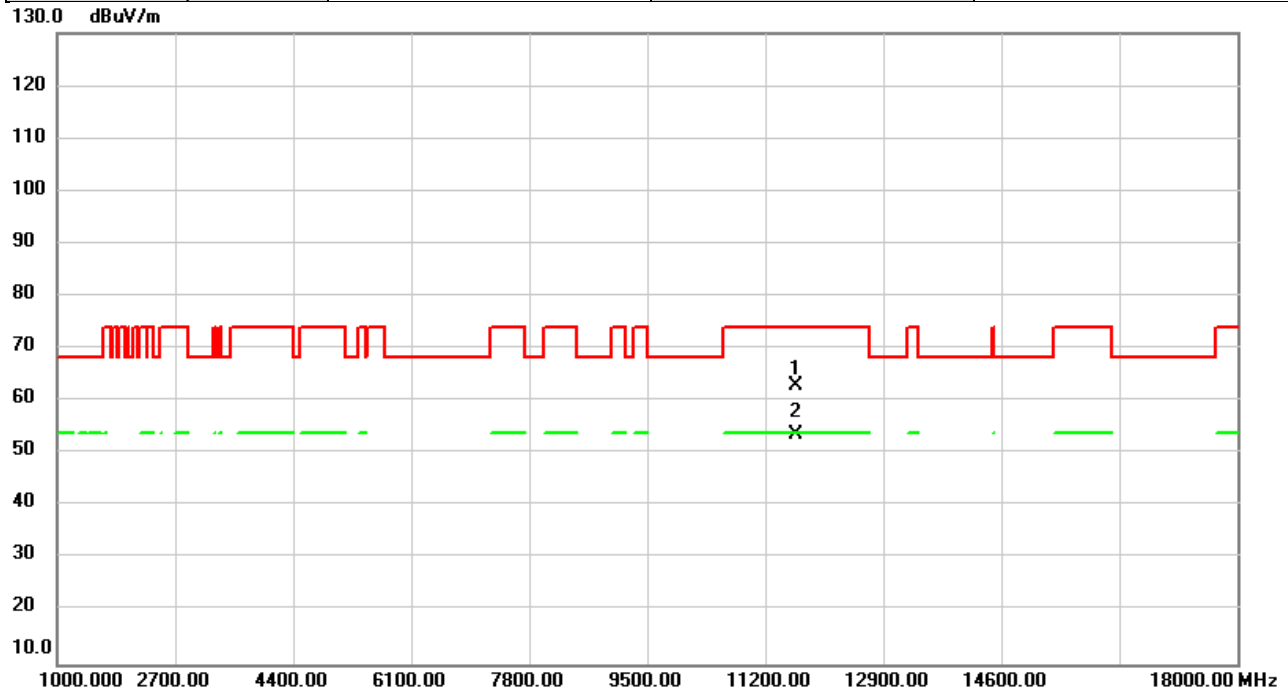


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	55.30	7.62	62.92	74.00	-11.08	peak	
2	*	11650.00	46.15	7.62	53.77	54.00	-0.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/6/21
Test Frequency	5825MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

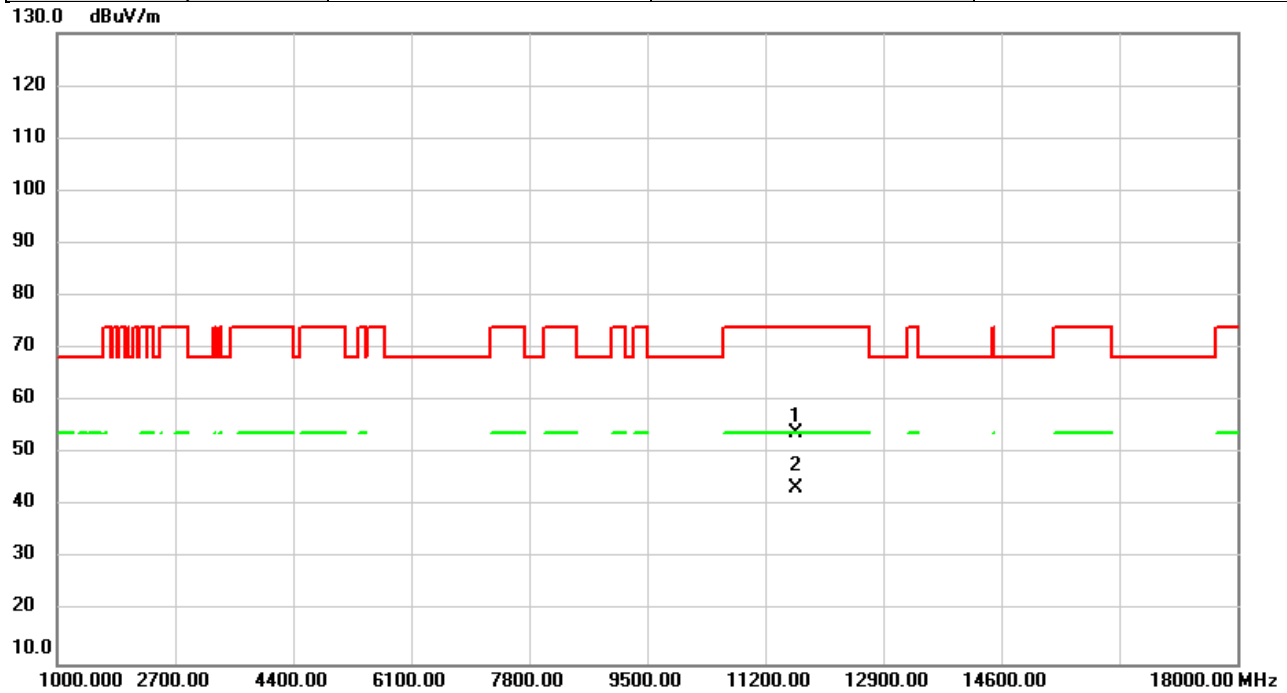


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	46.24	7.62	53.86	74.00	-20.14	peak	
2	*	11650.00	35.87	7.62	43.49	54.00	-10.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5180MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

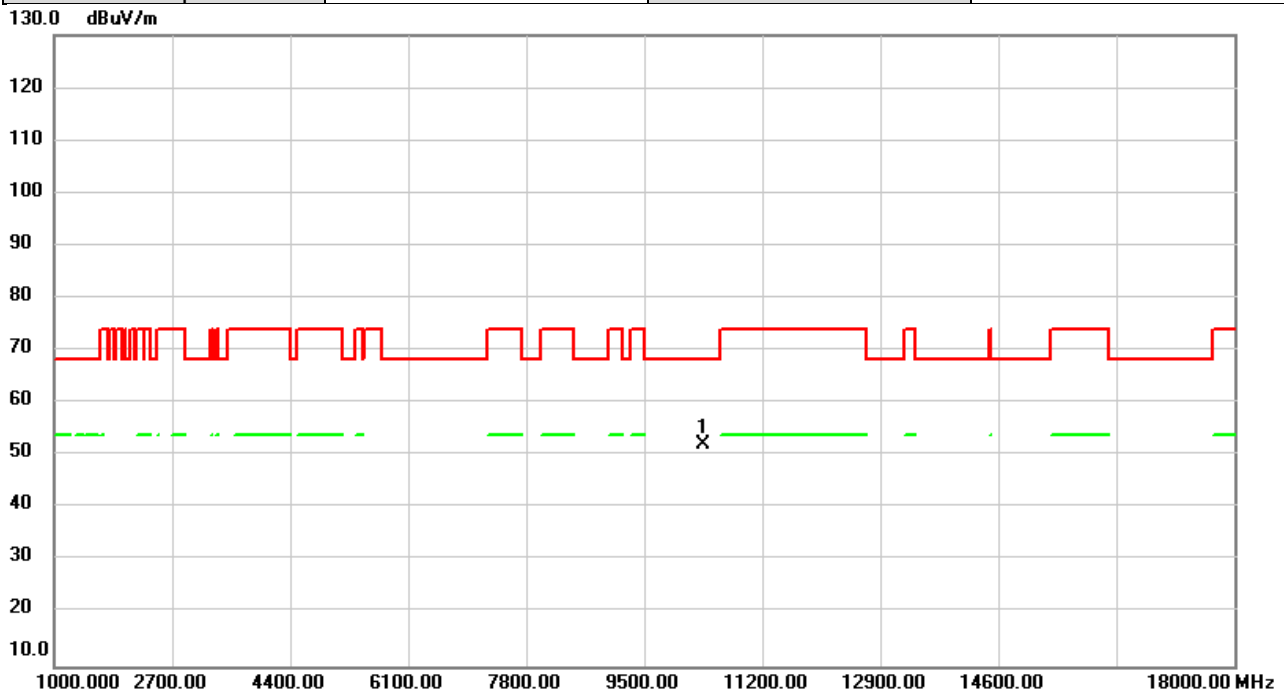


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	45.54	6.76	52.30	68.20	-15.90	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5180MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

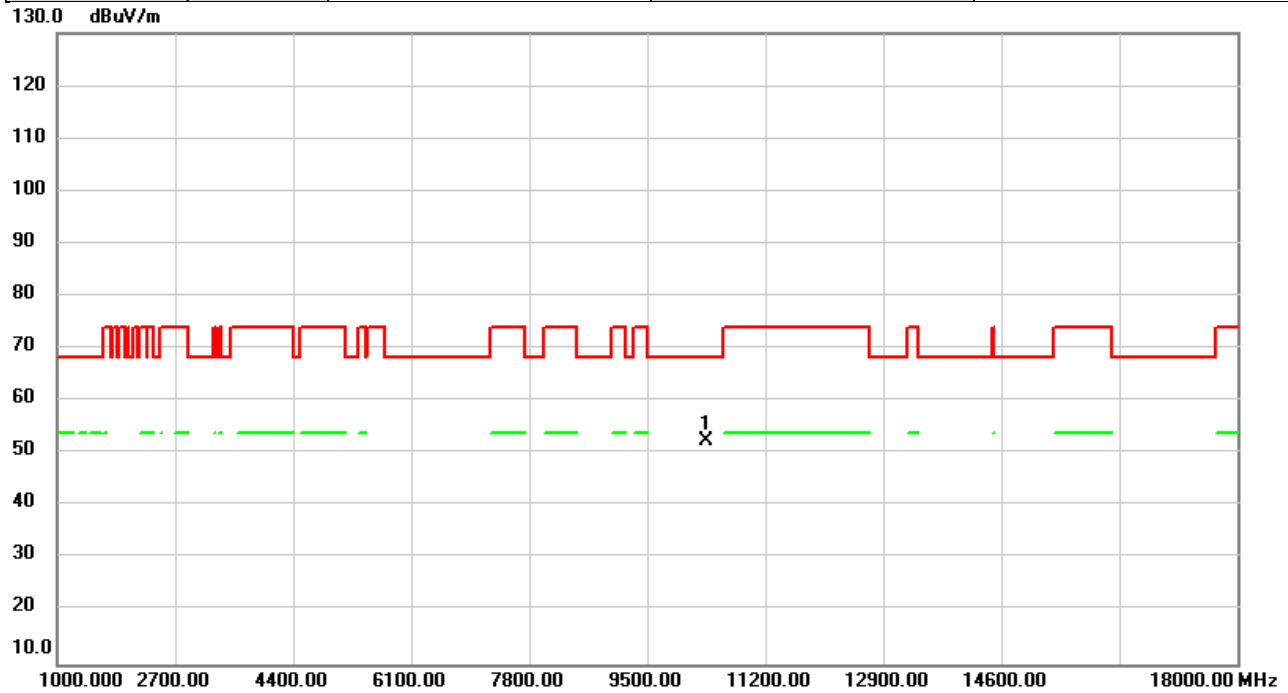


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	45.77	6.76	52.53	68.20	-15.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5200MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

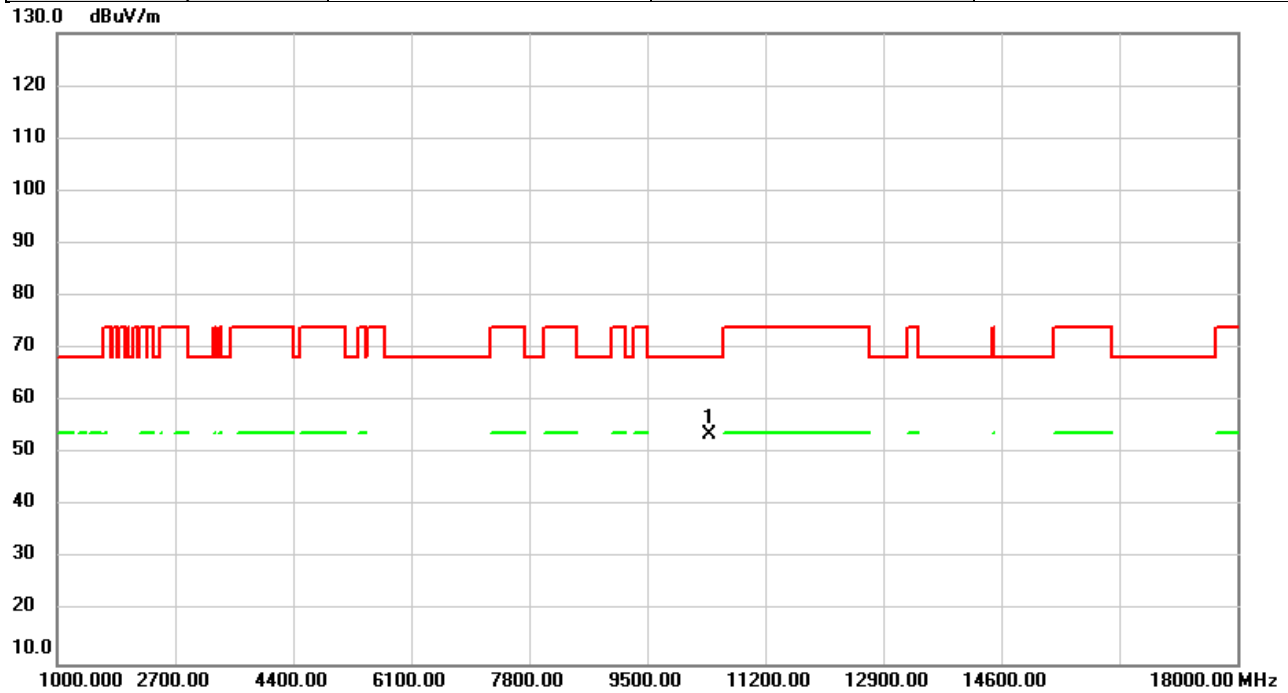


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	46.98	6.78	53.76	68.20	-14.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5200MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

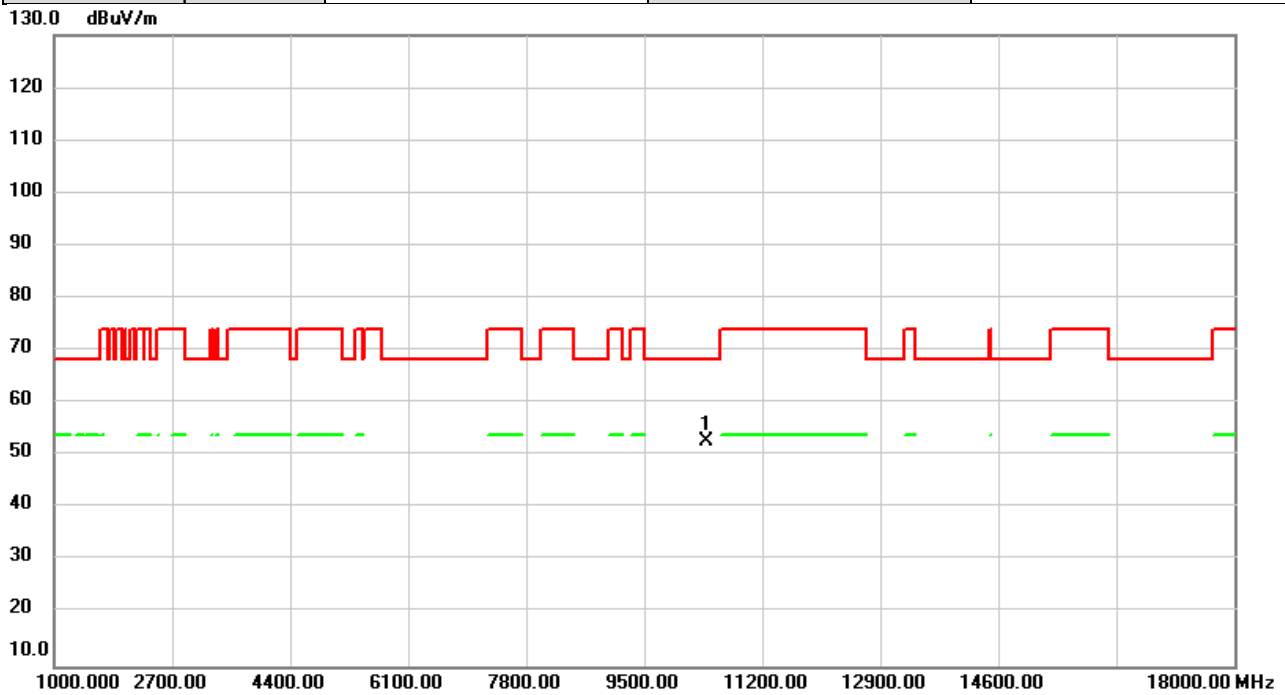


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	45.93	6.78	52.71	68.20	-15.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5240MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

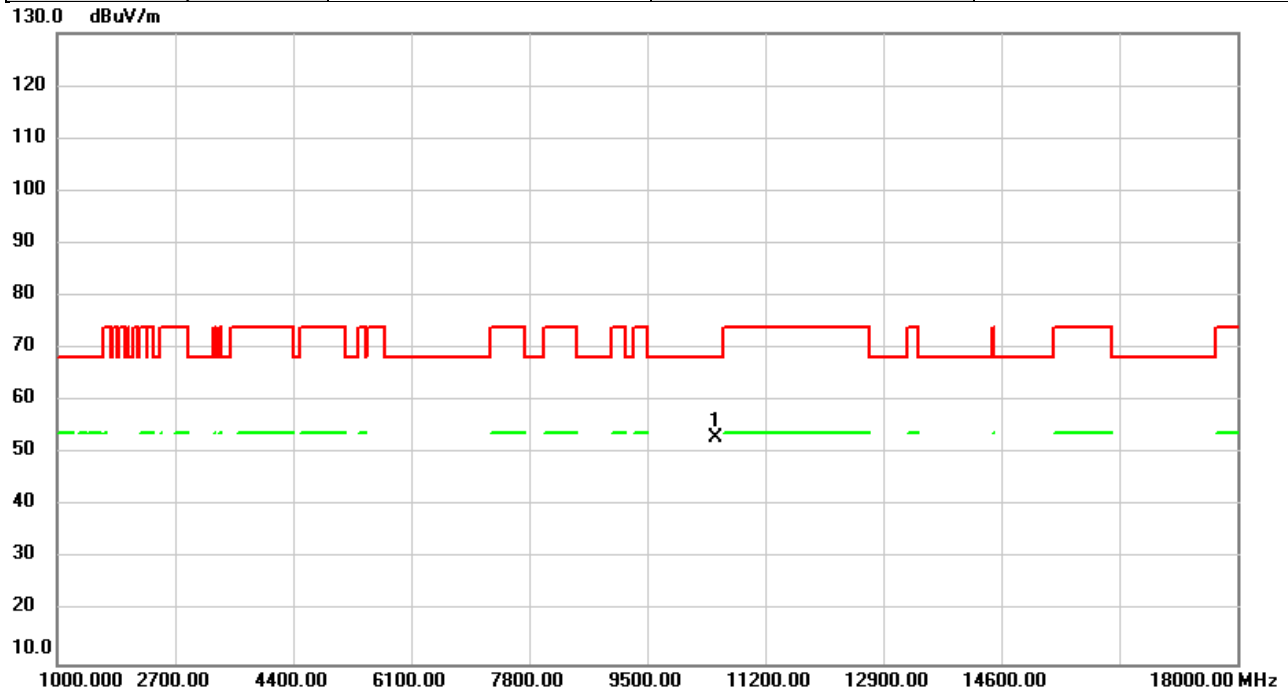


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	46.18	6.81	52.99	68.20	-15.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5240MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

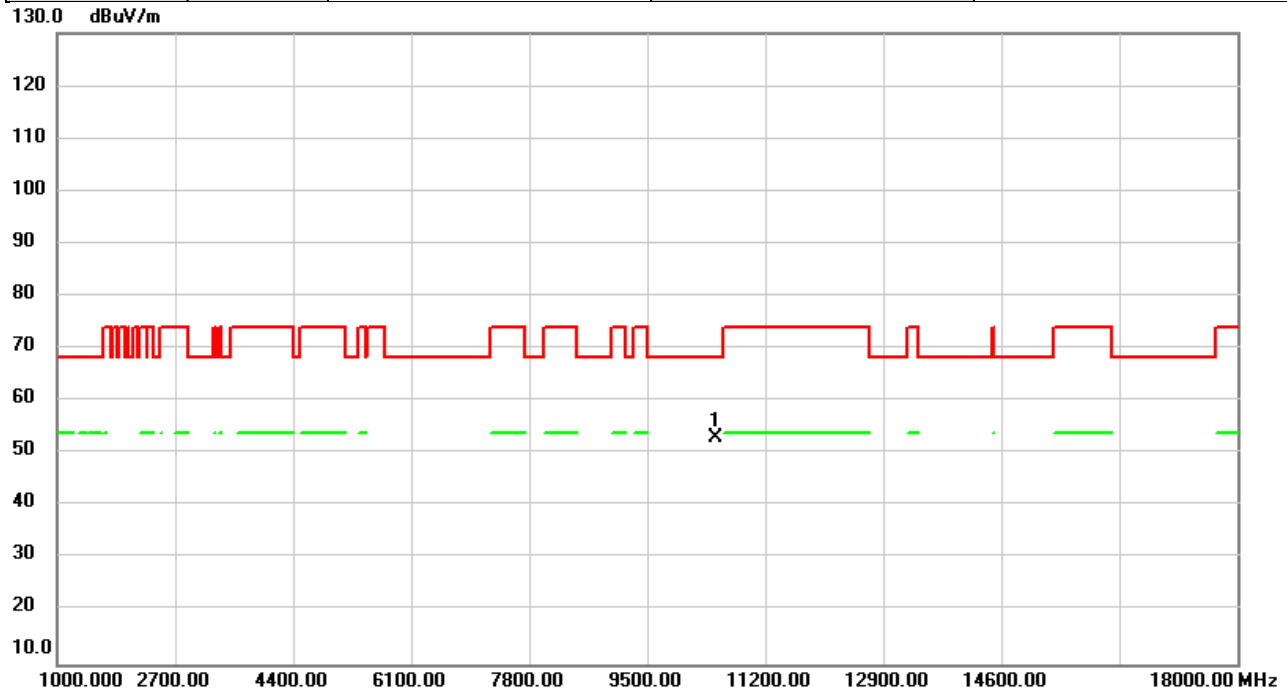


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	46.26	6.81	53.07	68.20	-15.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5260MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

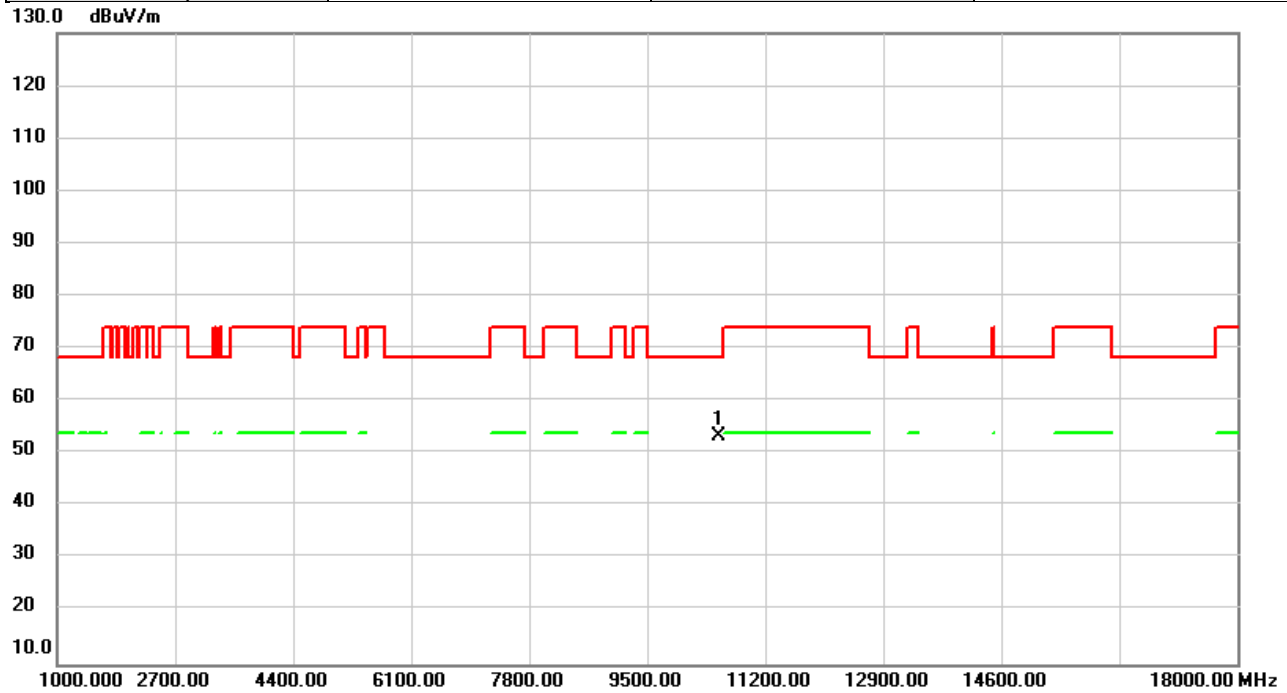


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	46.39	6.82	53.21	68.20	-14.99	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5260MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

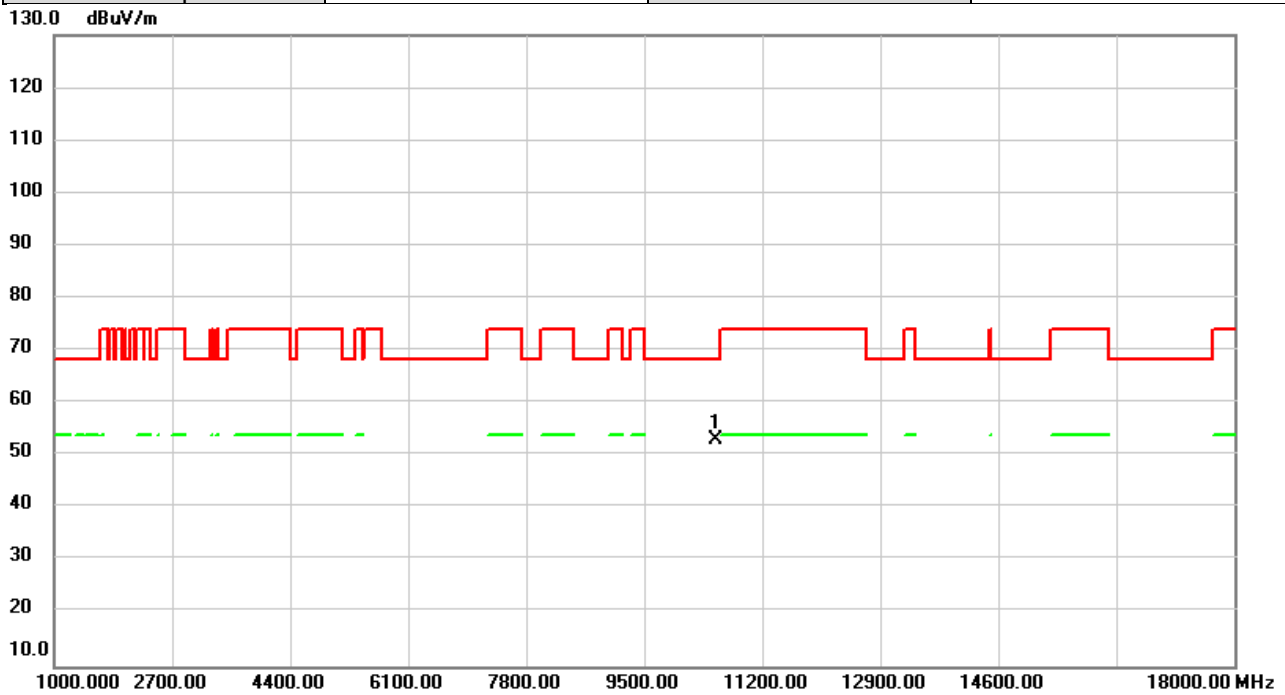


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	46.35	6.82	53.17	68.20	-15.03	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5300MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

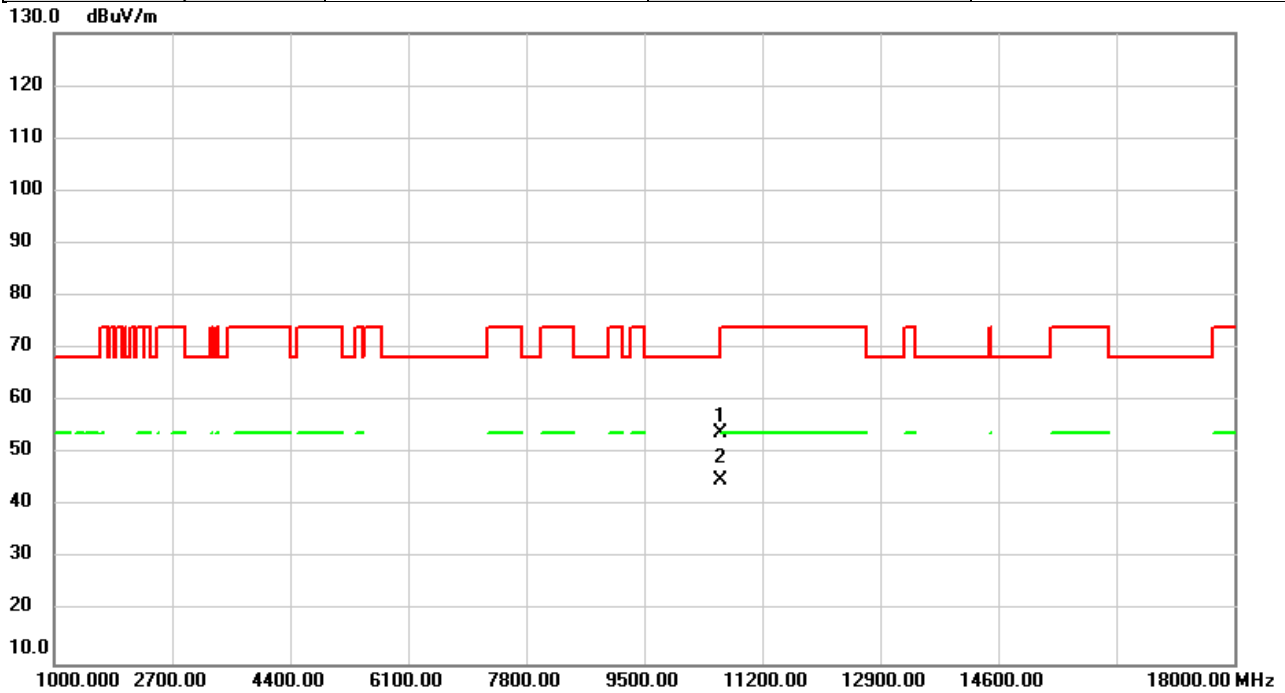


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.00	47.22	6.87	54.09	68.20	-14.11	peak	
2	*	10600.00	38.16	6.87	45.03	54.00	-8.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5300MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

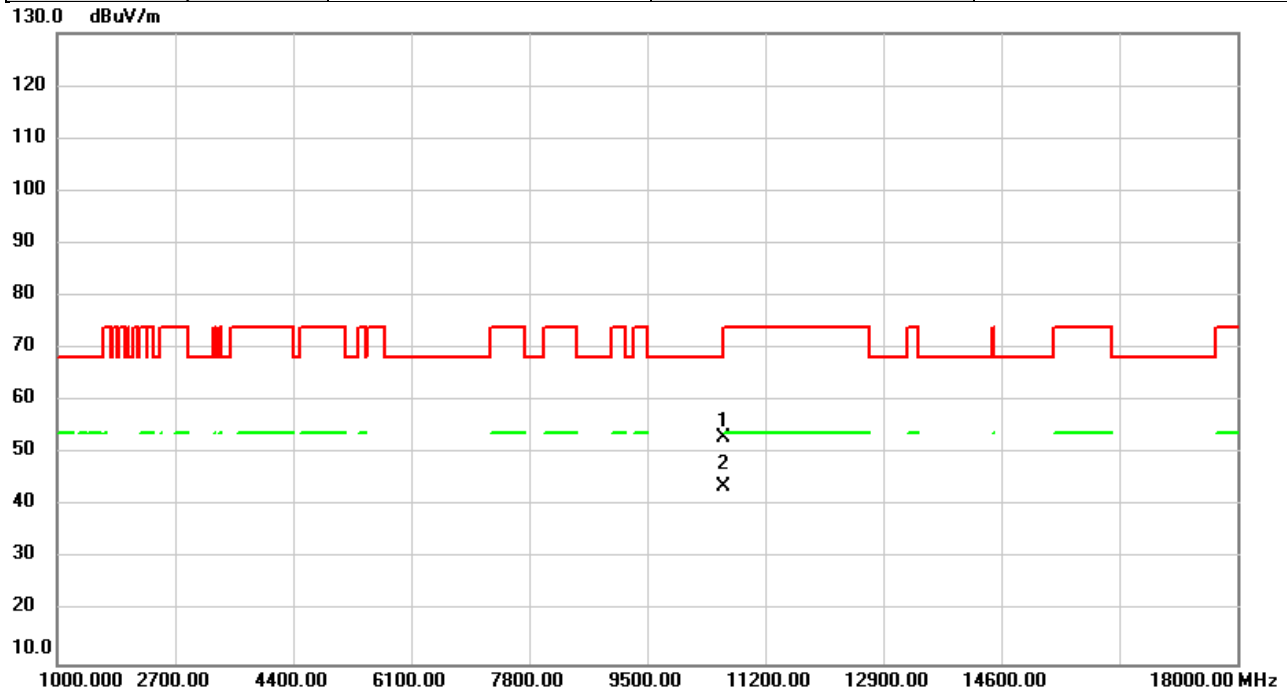


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.00	46.17	6.87	53.04	68.20	-15.16	peak	
2	*	10600.00	37.01	6.87	43.88	54.00	-10.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5320MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

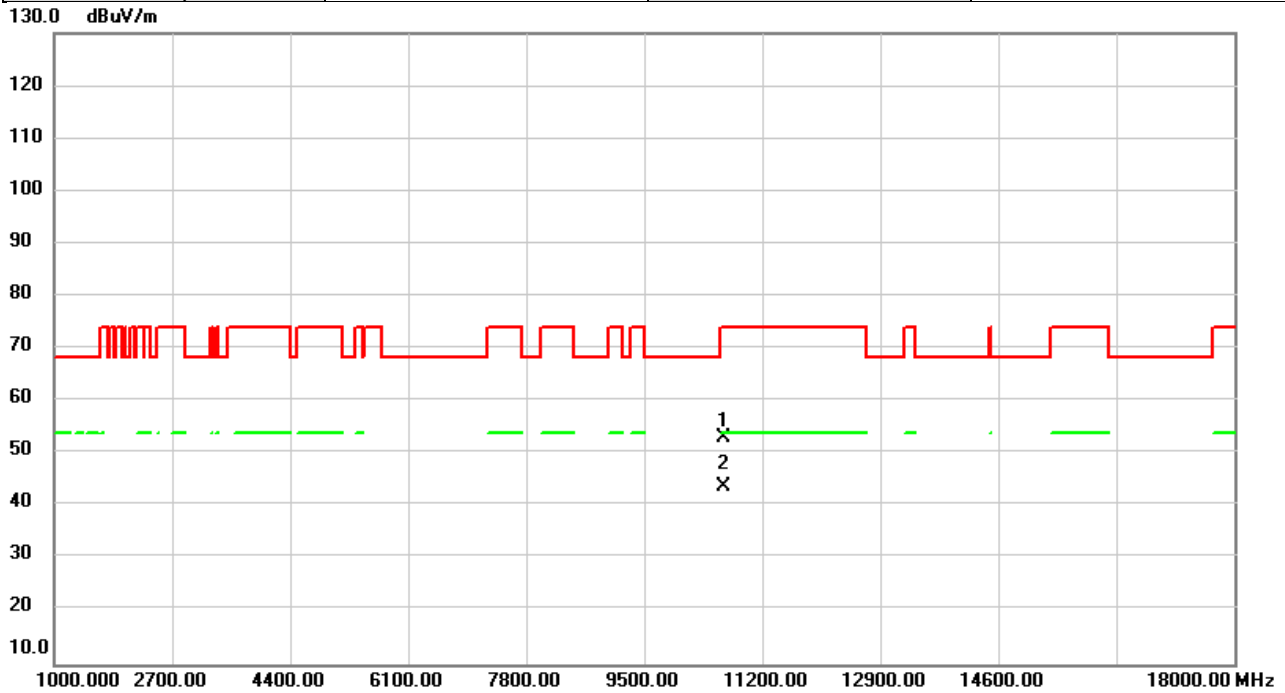


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	46.07	6.89	52.96	74.00	-21.04	peak	
2	*	10640.00	36.99	6.89	43.88	54.00	-10.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5320MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

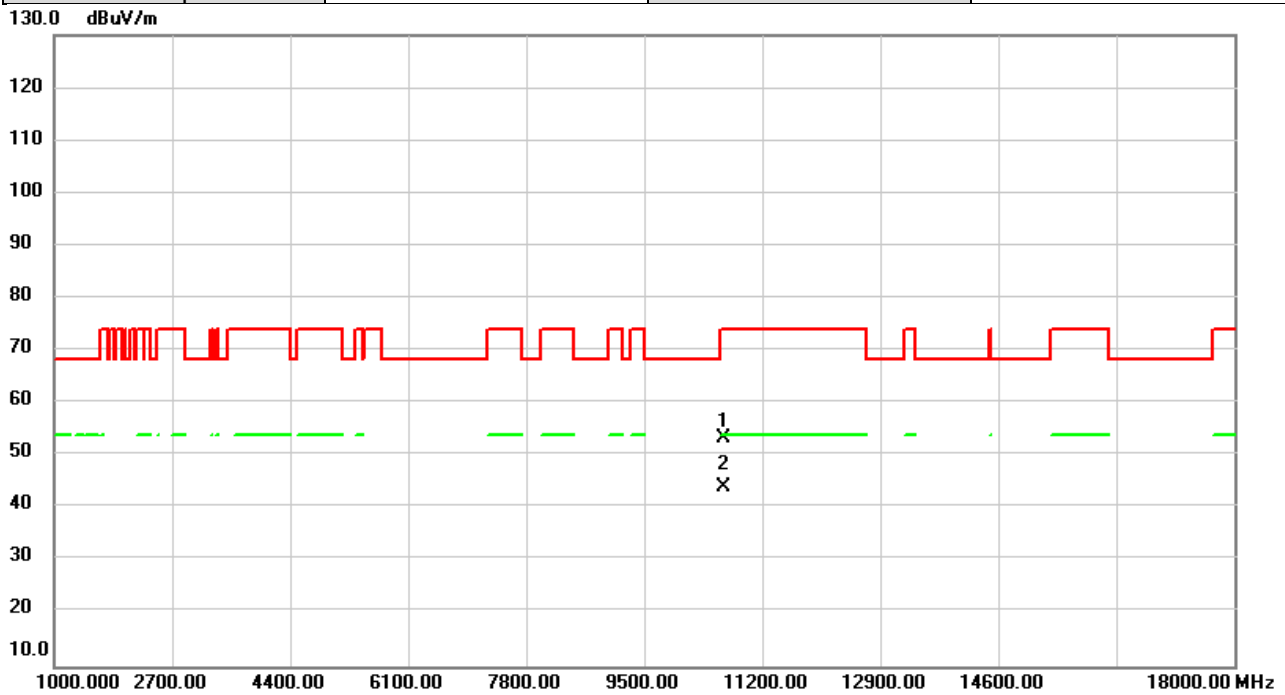


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	46.43	6.89	53.32	74.00	-20.68	peak	
2	*	10640.00	37.30	6.89	44.19	54.00	-9.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5500MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

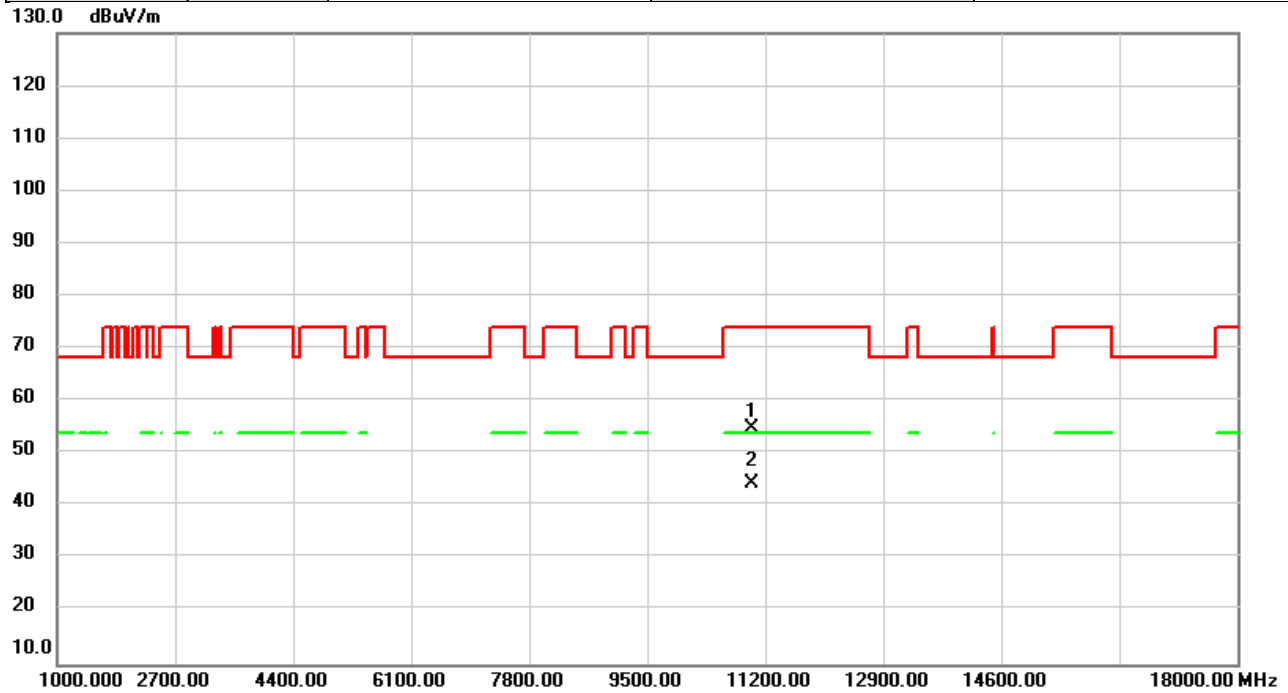


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	47.67	7.09	54.76	74.00	-19.24	peak	
2	*	11000.00	37.30	7.09	44.39	54.00	-9.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5500MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

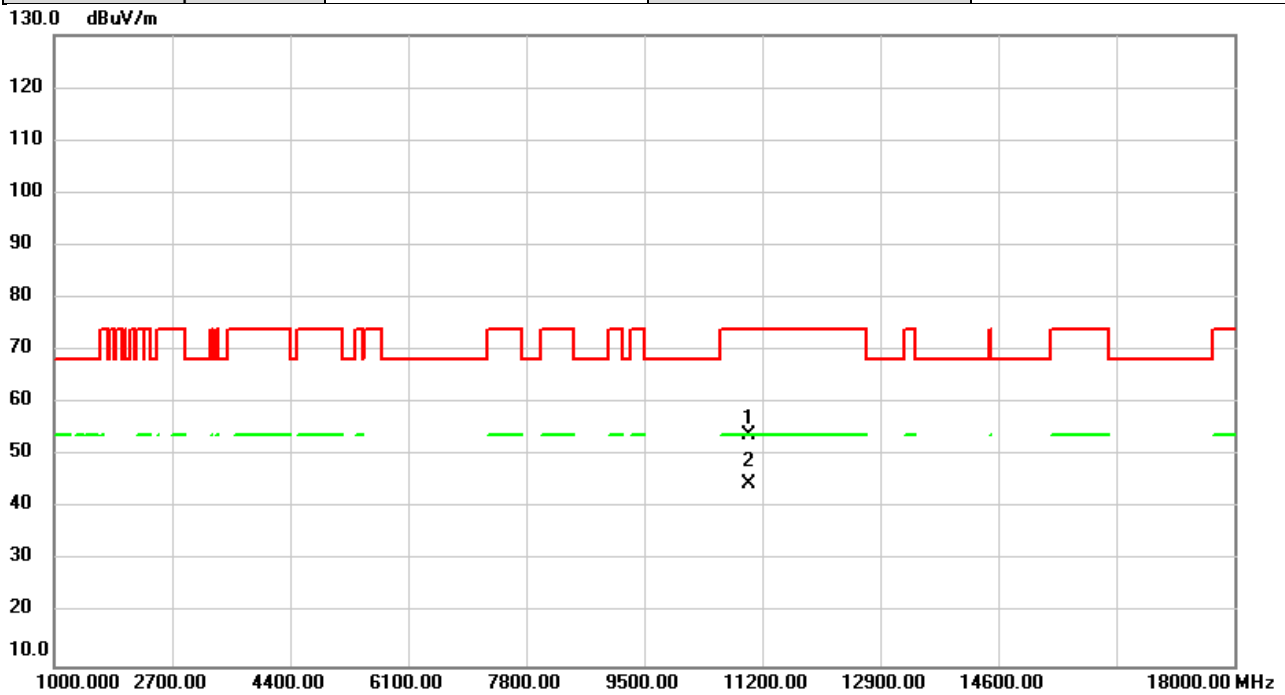


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	46.76	7.09	53.85	74.00	-20.15	peak	
2	*	11000.00	37.56	7.09	44.65	54.00	-9.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5580MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

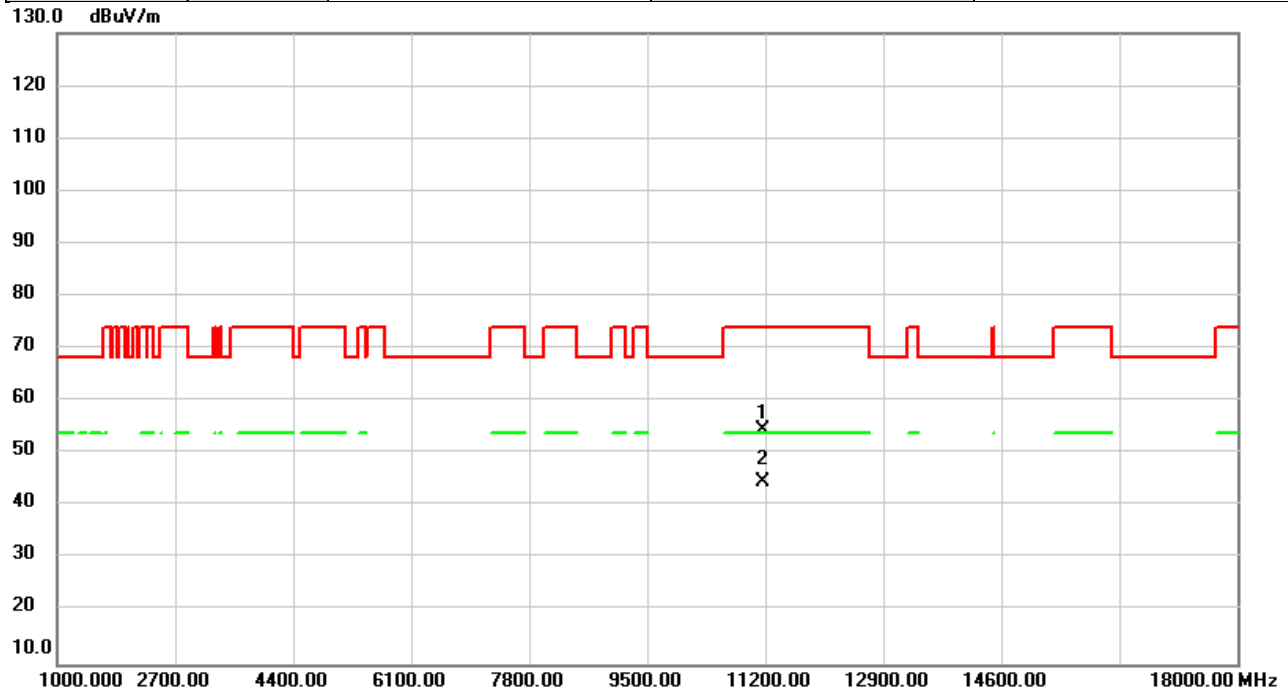


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.00	47.44	7.25	54.69	74.00	-19.31	peak	
2	*	11160.00	37.29	7.25	44.54	54.00	-9.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5580MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

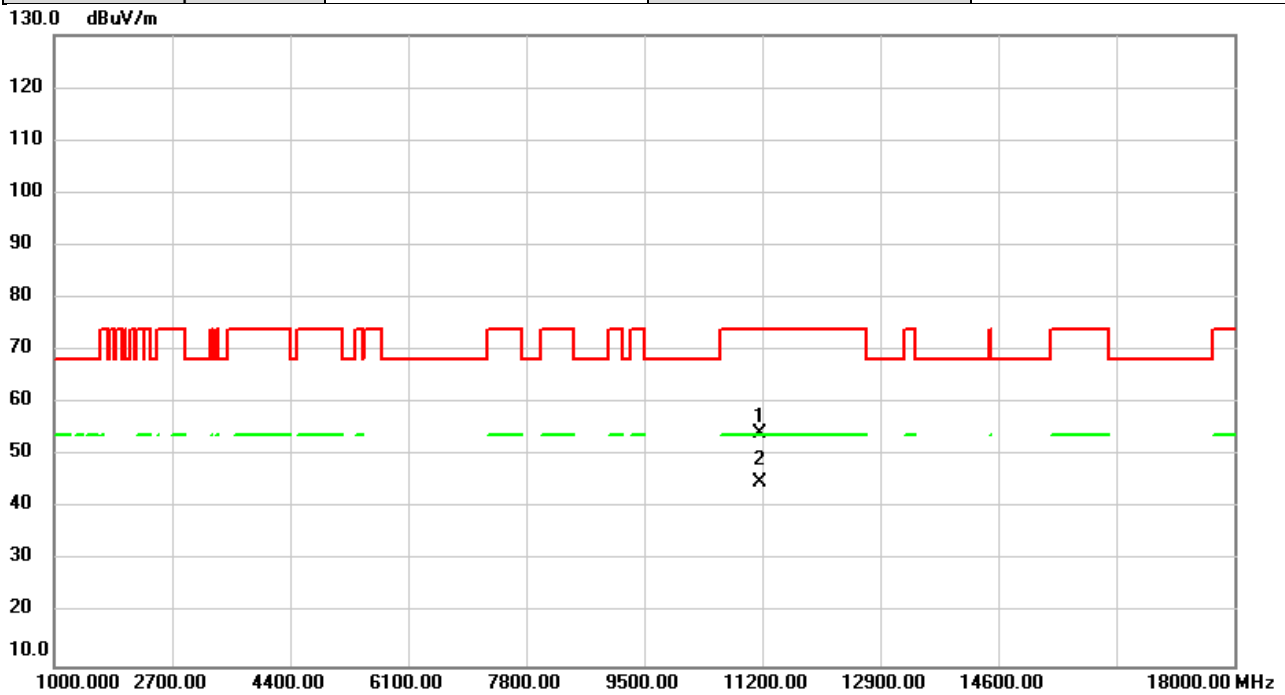


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.00	46.91	7.25	54.16	74.00	-19.84	peak	
2	*	11160.00	37.63	7.25	44.88	54.00	-9.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5700MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

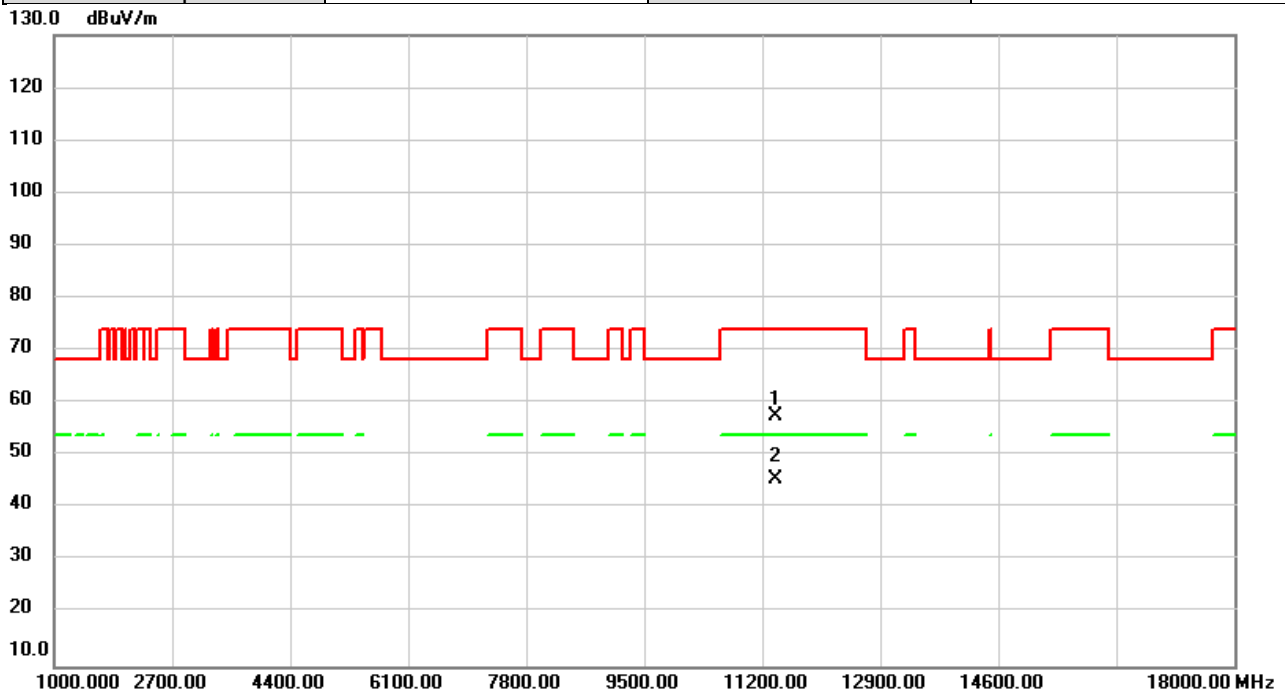


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	49.97	7.48	57.45	74.00	-16.55	peak	
2	*	11400.00	38.11	7.48	45.59	54.00	-8.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5700MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

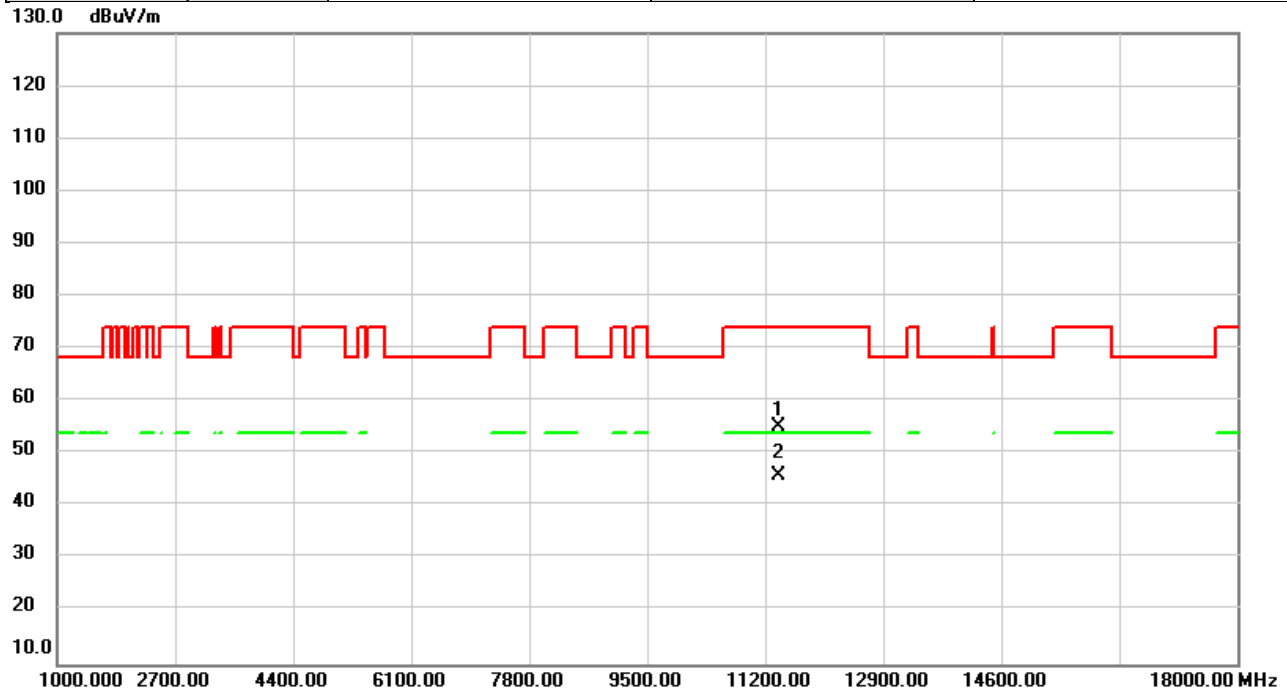


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	47.61	7.48	55.09	74.00	-18.91	peak	
2	*	11400.00	38.24	7.48	45.72	54.00	-8.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5720MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

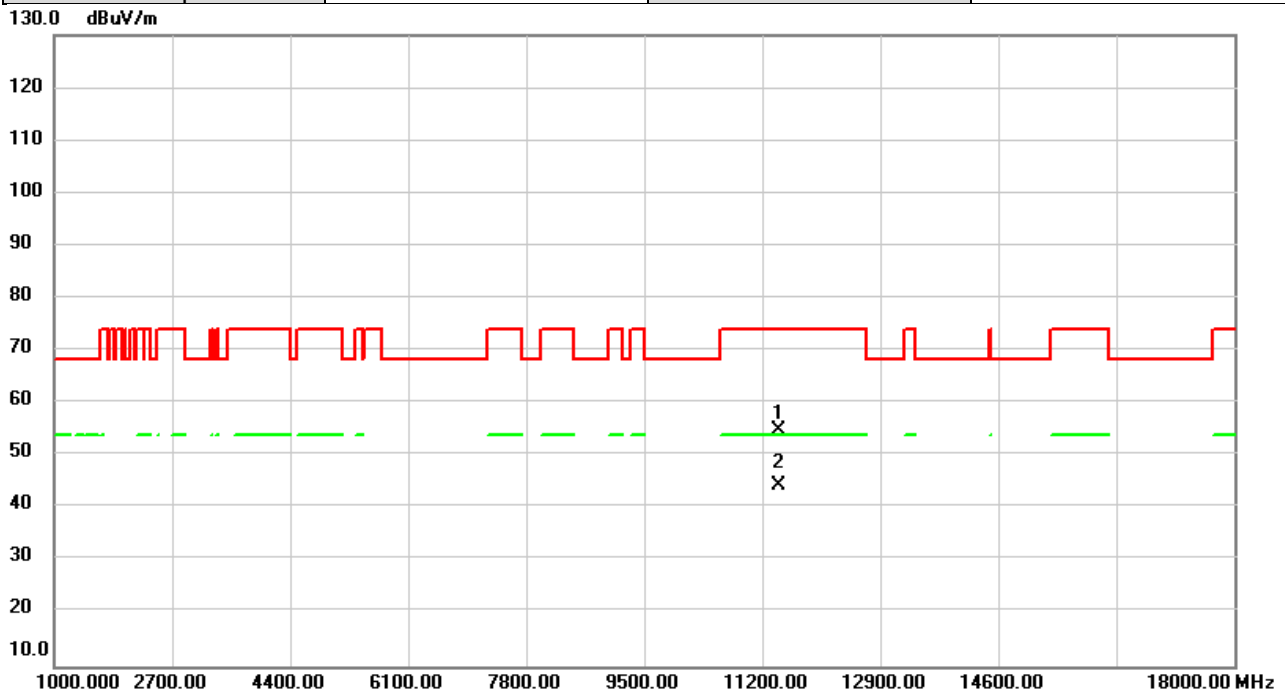


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11440.00	47.42	7.51	54.93	74.00	-19.07	peak	
2	*	11440.00	36.88	7.51	44.39	54.00	-9.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/15
Test Frequency	5720MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

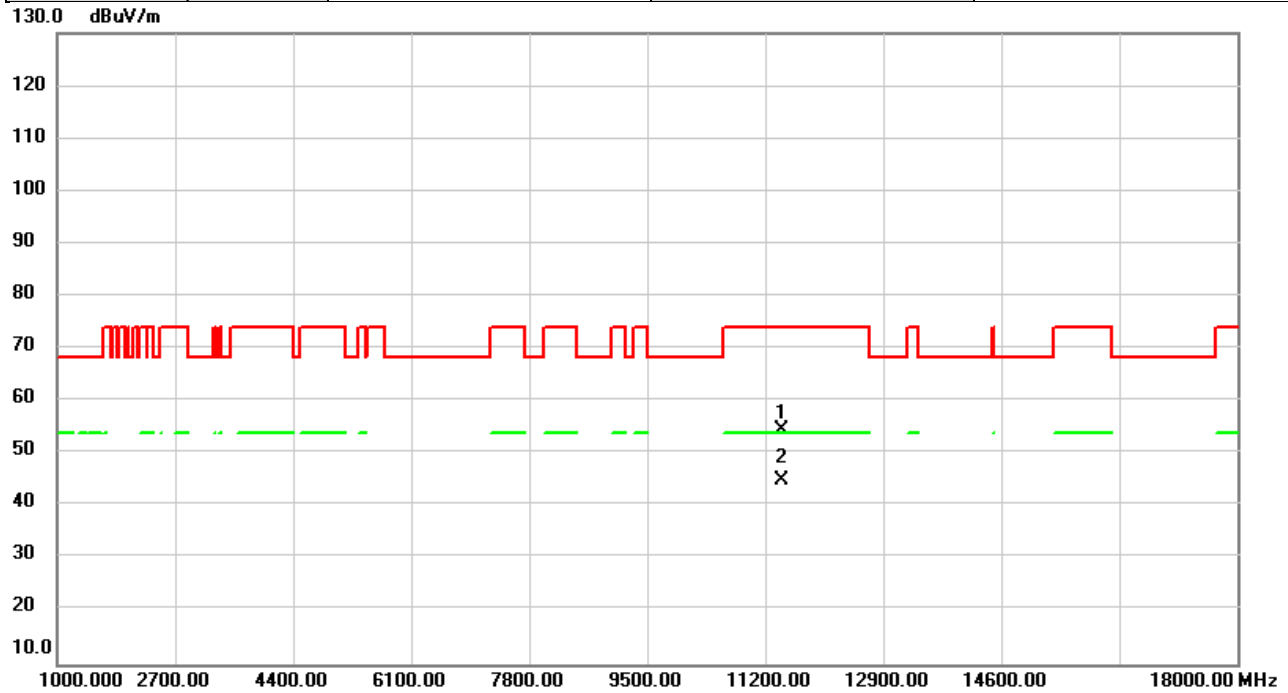


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11440.00	47.01	7.51	54.52	74.00	-19.48	peak	
2	*	11440.00	37.54	7.51	45.05	54.00	-8.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/6/21
Test Frequency	5745MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

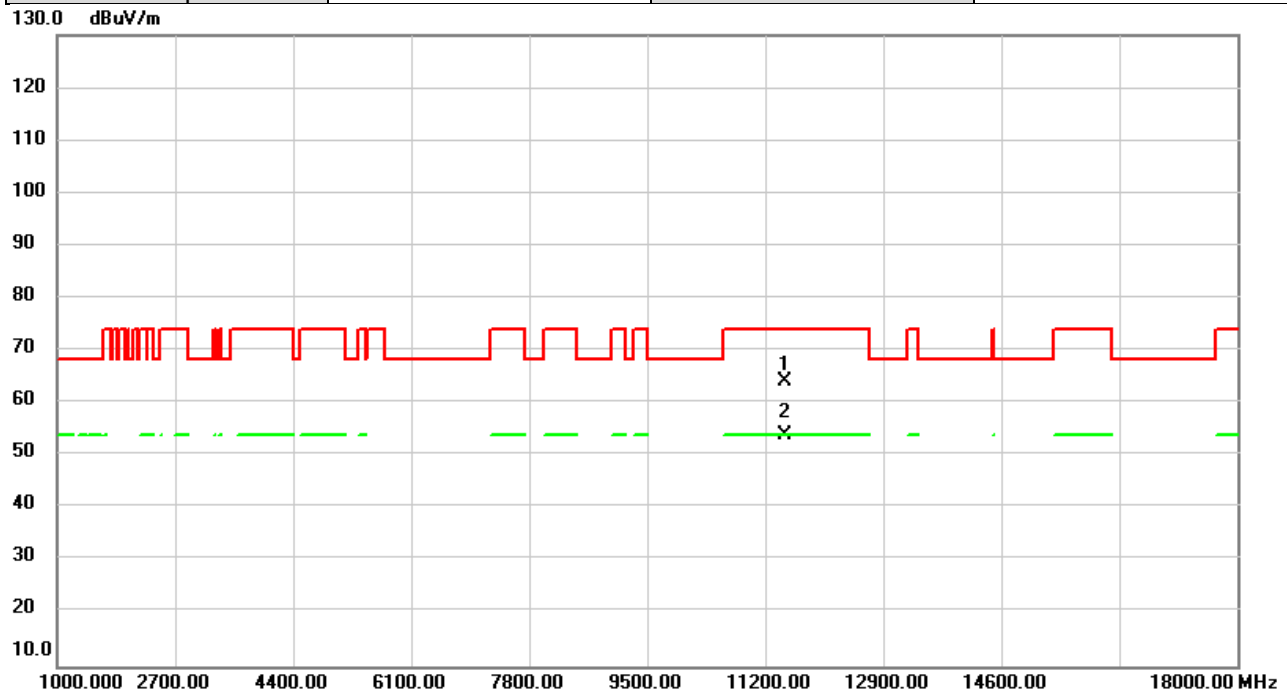


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	56.62	7.56	64.18	74.00	-9.82	peak	
2	*	11490.00	46.32	7.56	53.88	54.00	-0.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/6/21
Test Frequency	5745MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

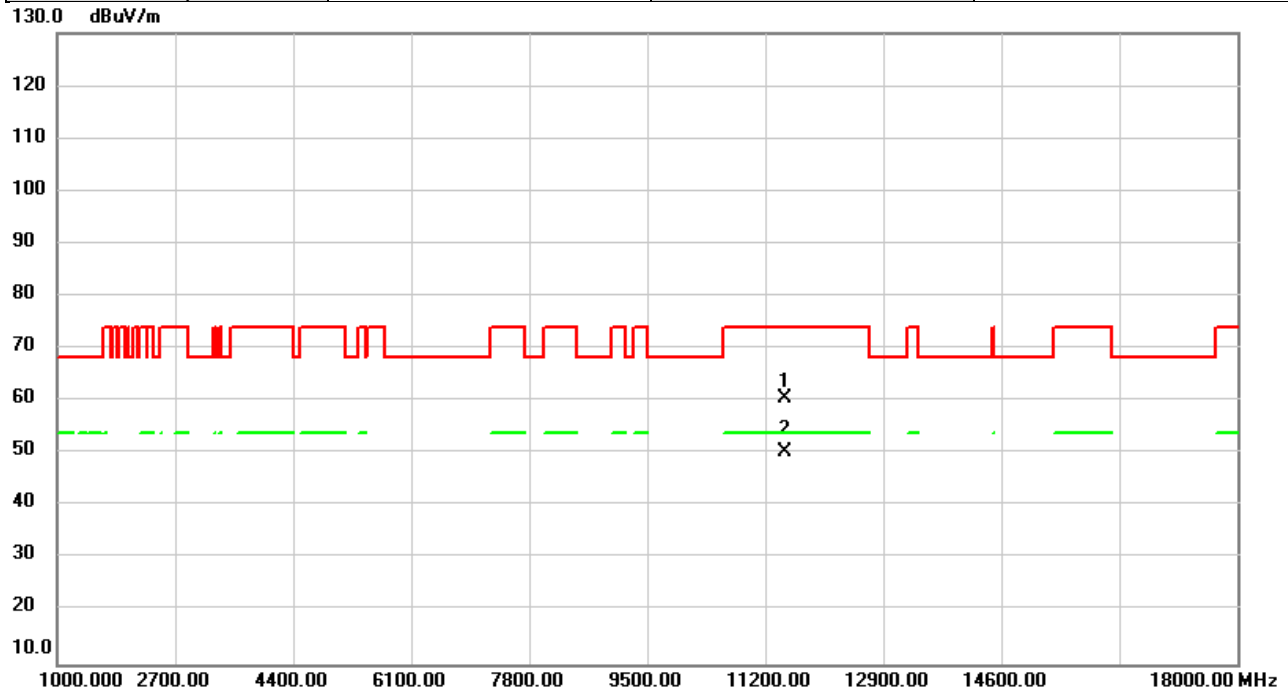


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	52.92	7.56	60.48	74.00	-13.52	peak	
2	*	11490.00	42.76	7.56	50.32	54.00	-3.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/6/21
Test Frequency	5785MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

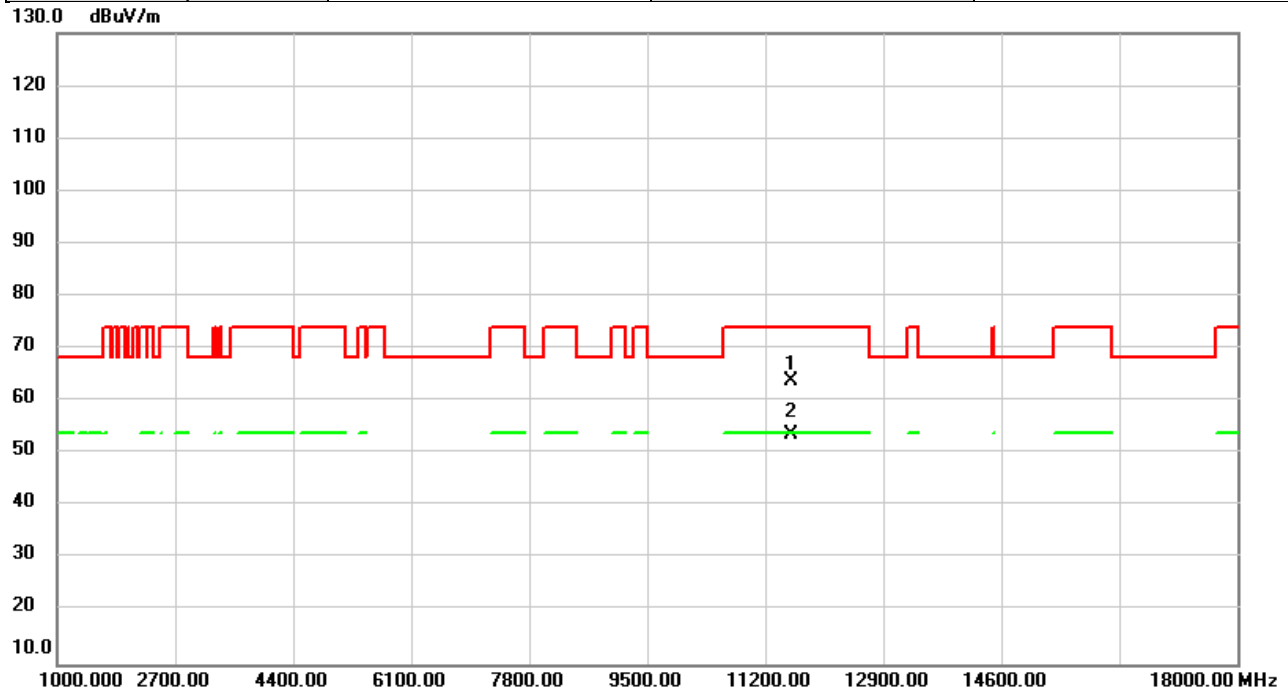


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	56.21	7.59	63.80	74.00	-10.20	peak	
2	*	11570.00	46.03	7.59	53.62	54.00	-0.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/6/21
Test Frequency	5785MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

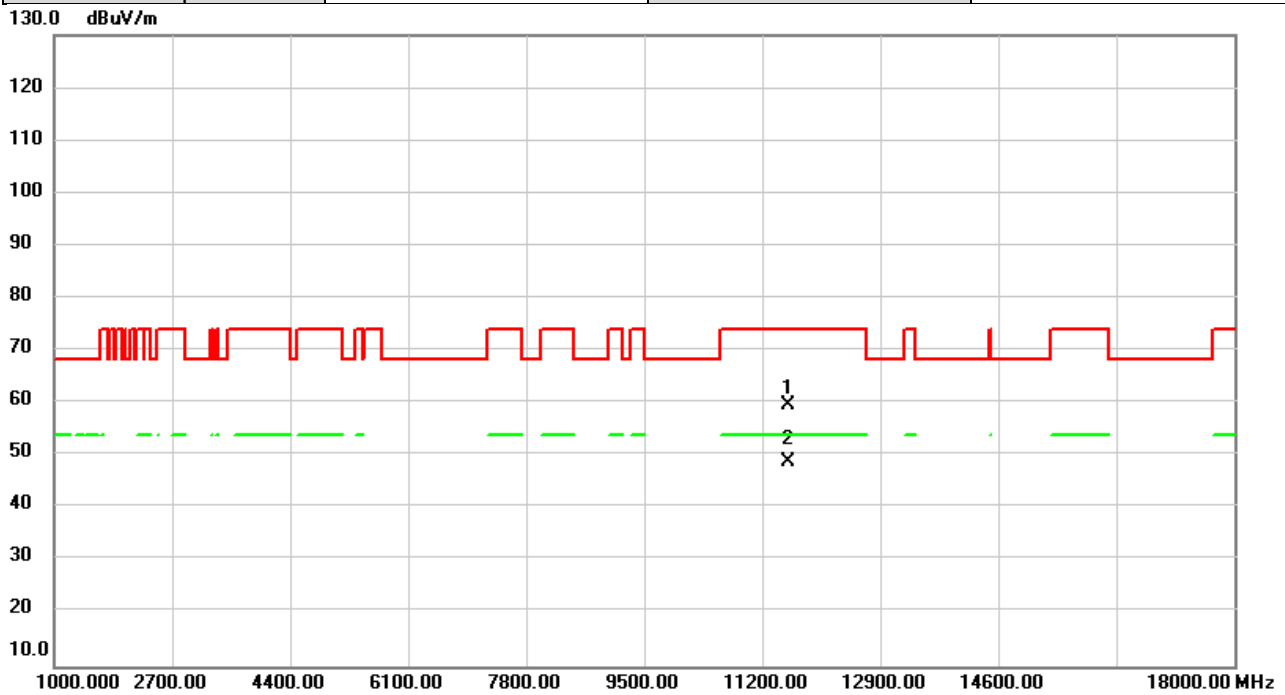


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	52.00	7.59	59.59	74.00	-14.41	peak	
2	*	11570.00	41.15	7.59	48.74	54.00	-5.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/6/21
Test Frequency	5825MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

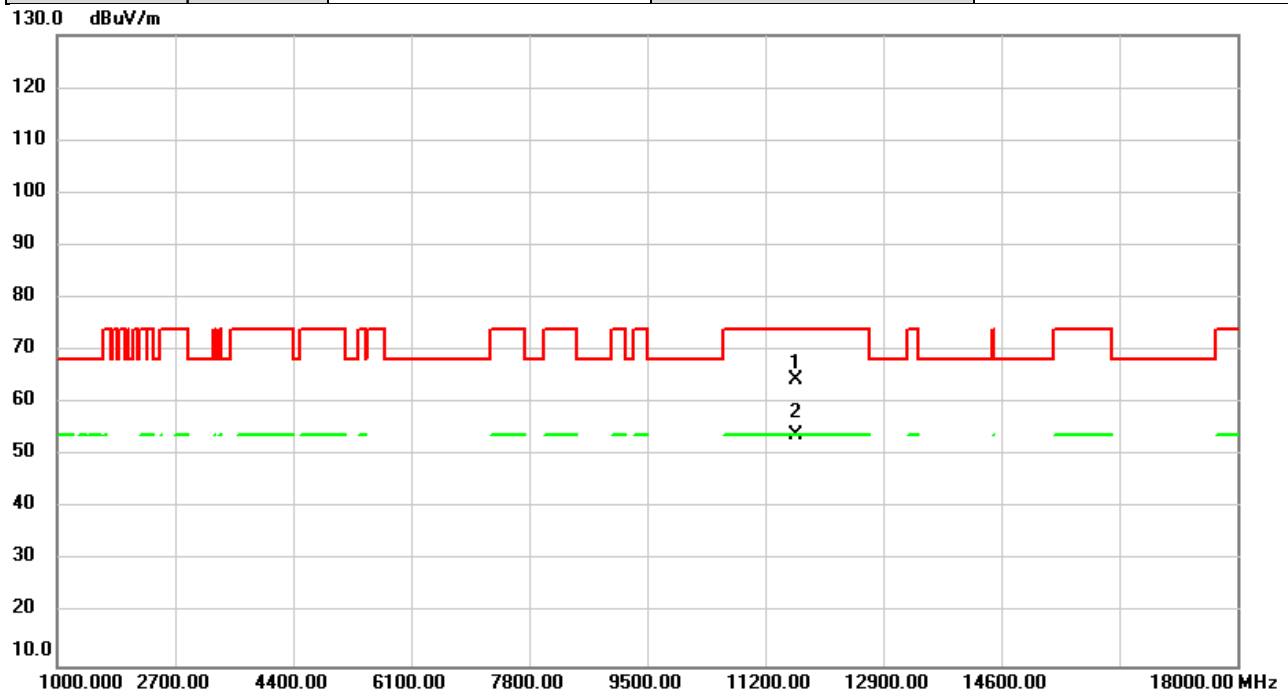


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	56.79	7.62	64.41	74.00	-9.59	peak	
2	*	11650.00	46.32	7.62	53.94	54.00	-0.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/6/21
Test Frequency	5825MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

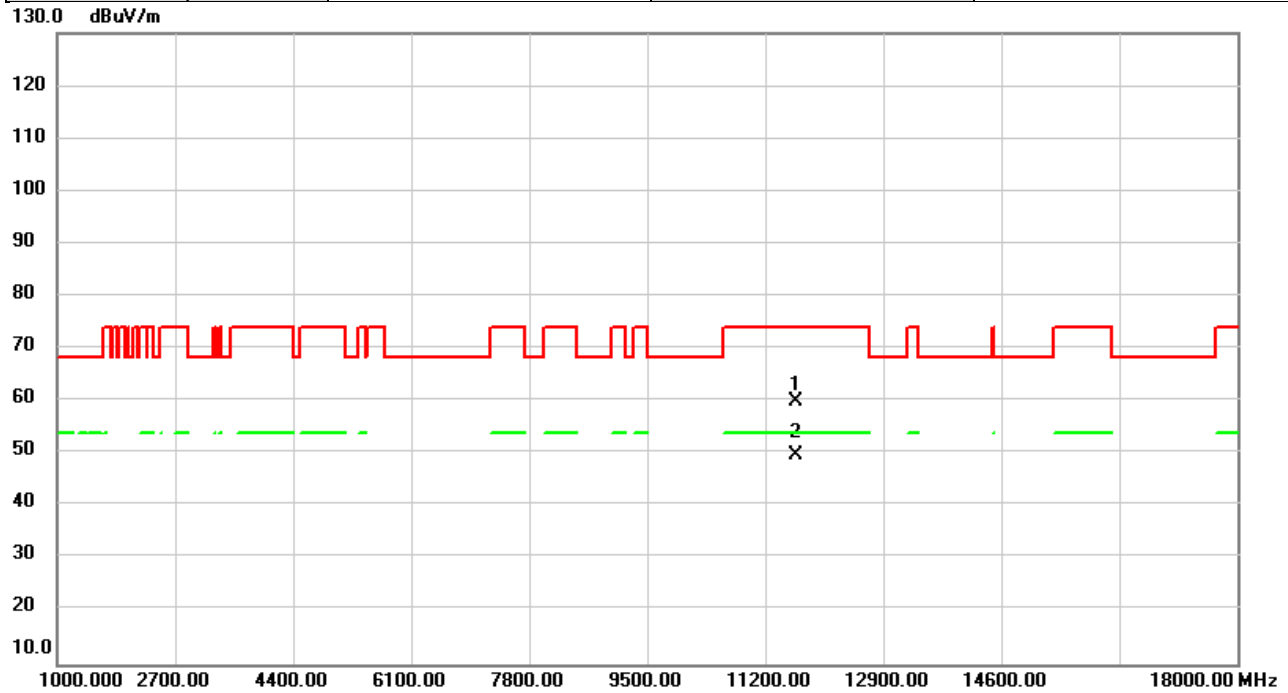


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	52.32	7.62	59.94	74.00	-14.06	peak	
2	*	11650.00	42.15	7.62	49.77	54.00	-4.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/15
Test Frequency	5190MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

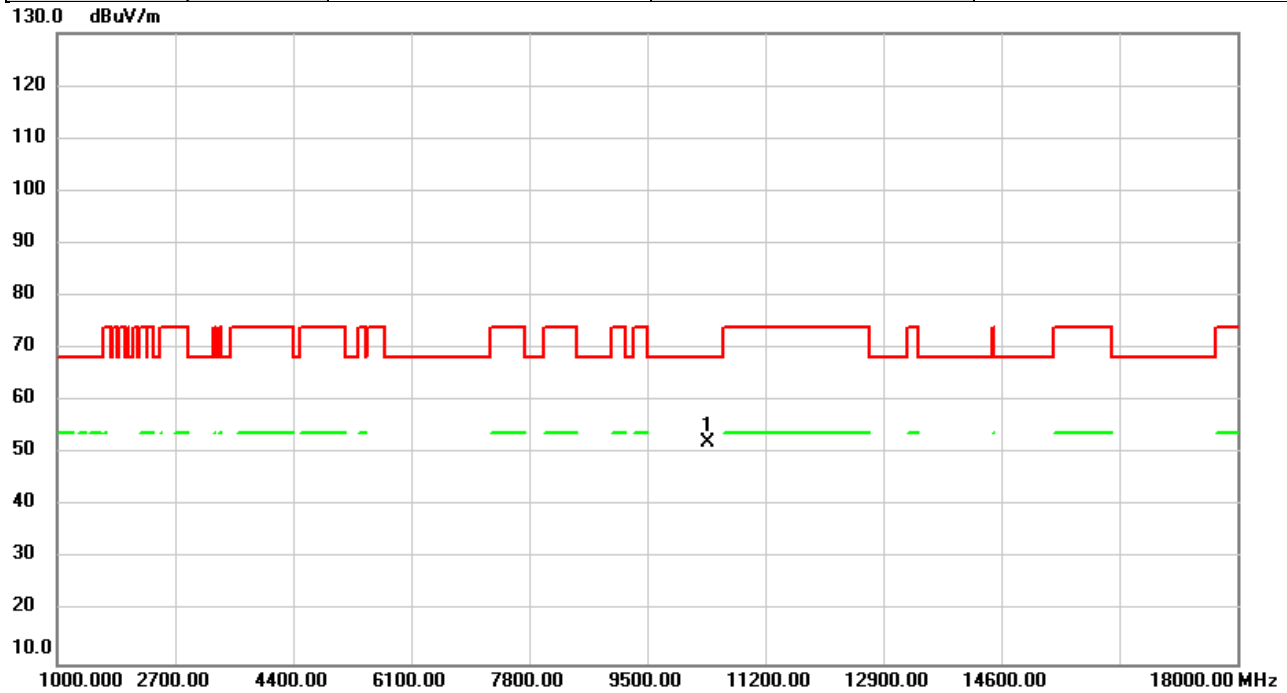


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	45.39	6.78	52.17	68.20	-16.03	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/15
Test Frequency	5190MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

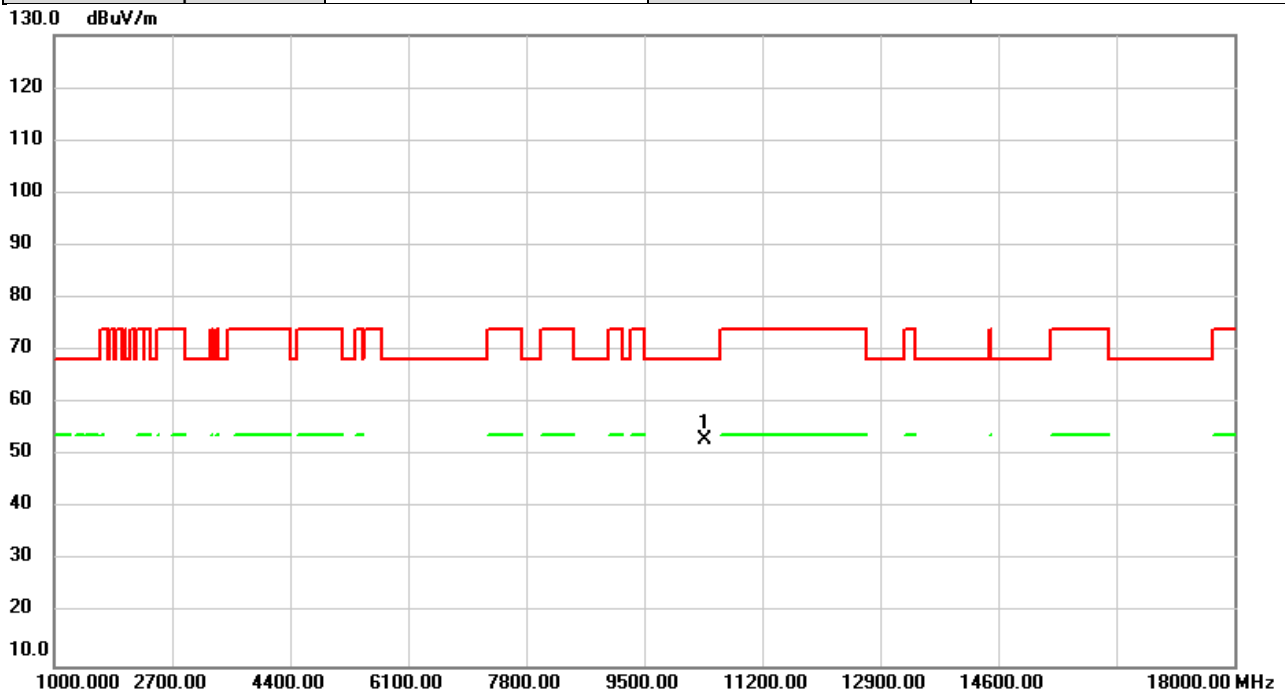


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	46.33	6.78	53.11	68.20	-15.09	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/15
Test Frequency	5230MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

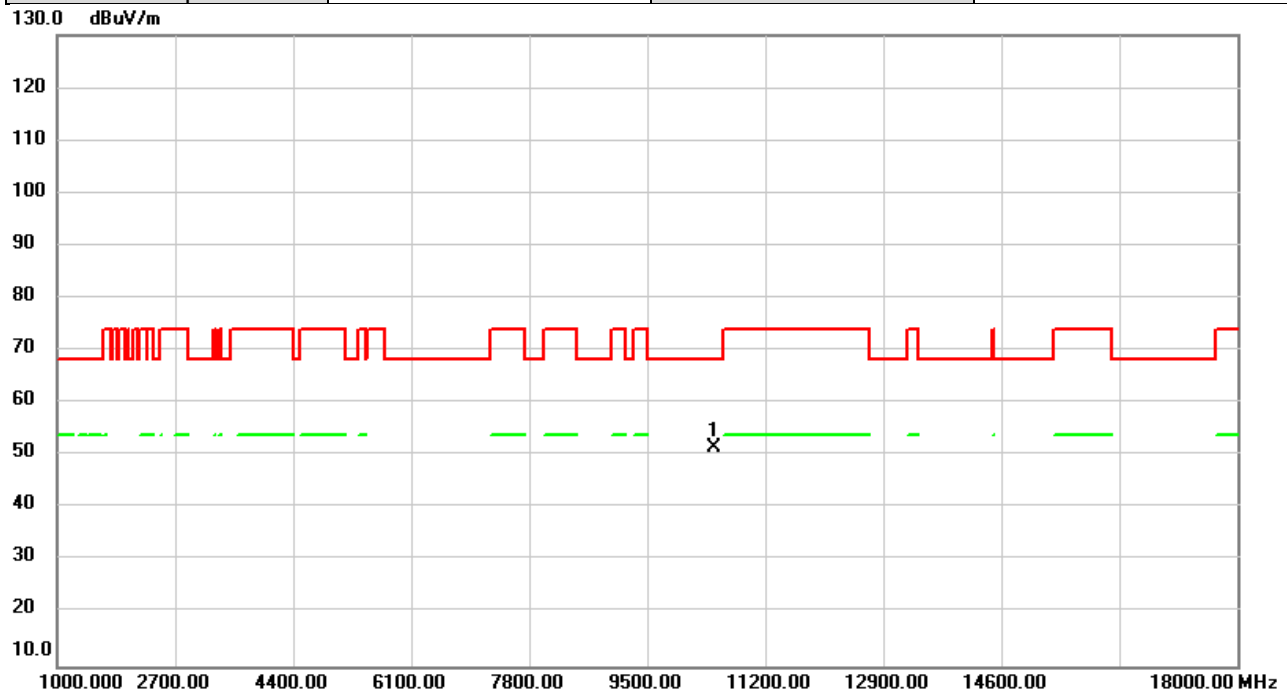


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	44.73	6.80	51.53	68.20	-16.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/15
Test Frequency	5230MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

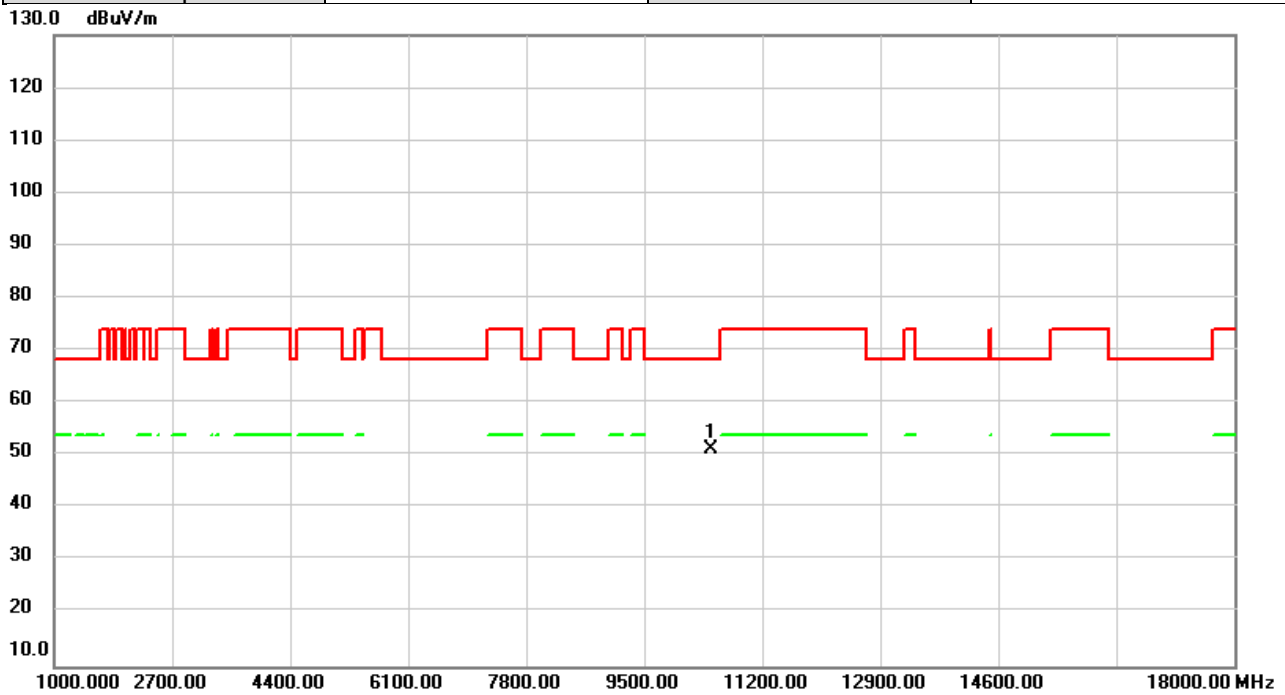


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	44.34	6.80	51.14	68.20	-17.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/15
Test Frequency	5270MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

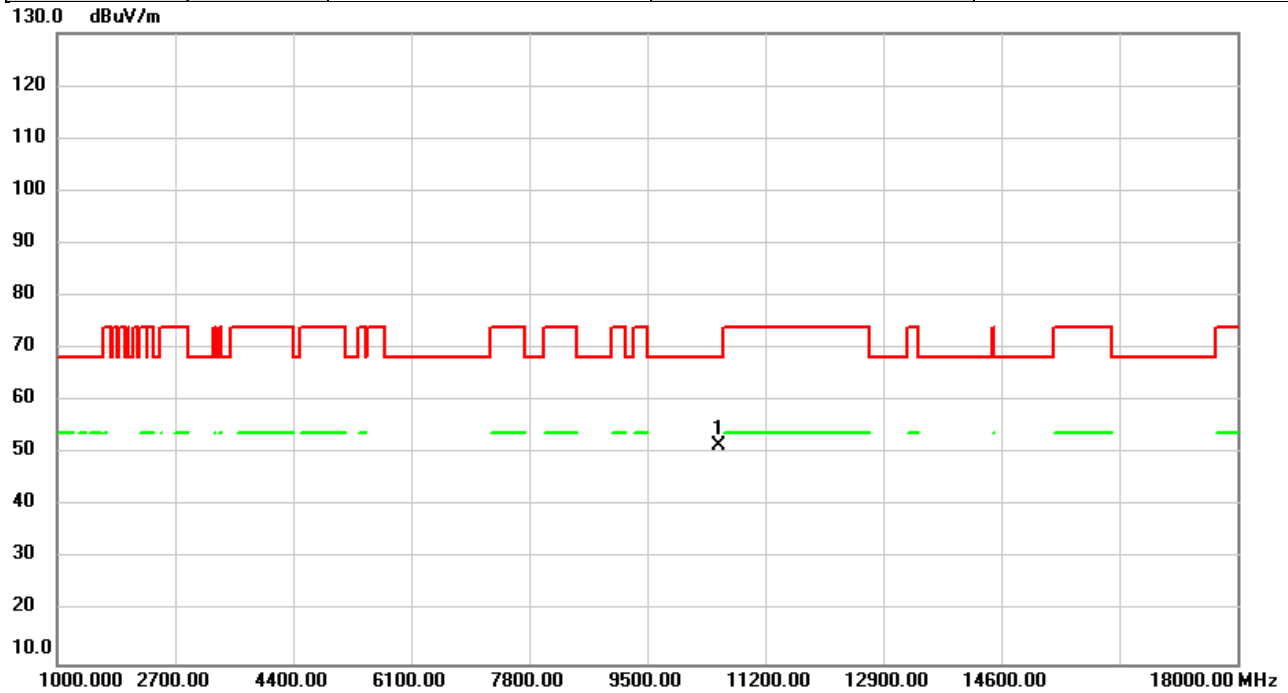


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	44.83	6.83	51.66	68.20	-16.54	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/15
Test Frequency	5270MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

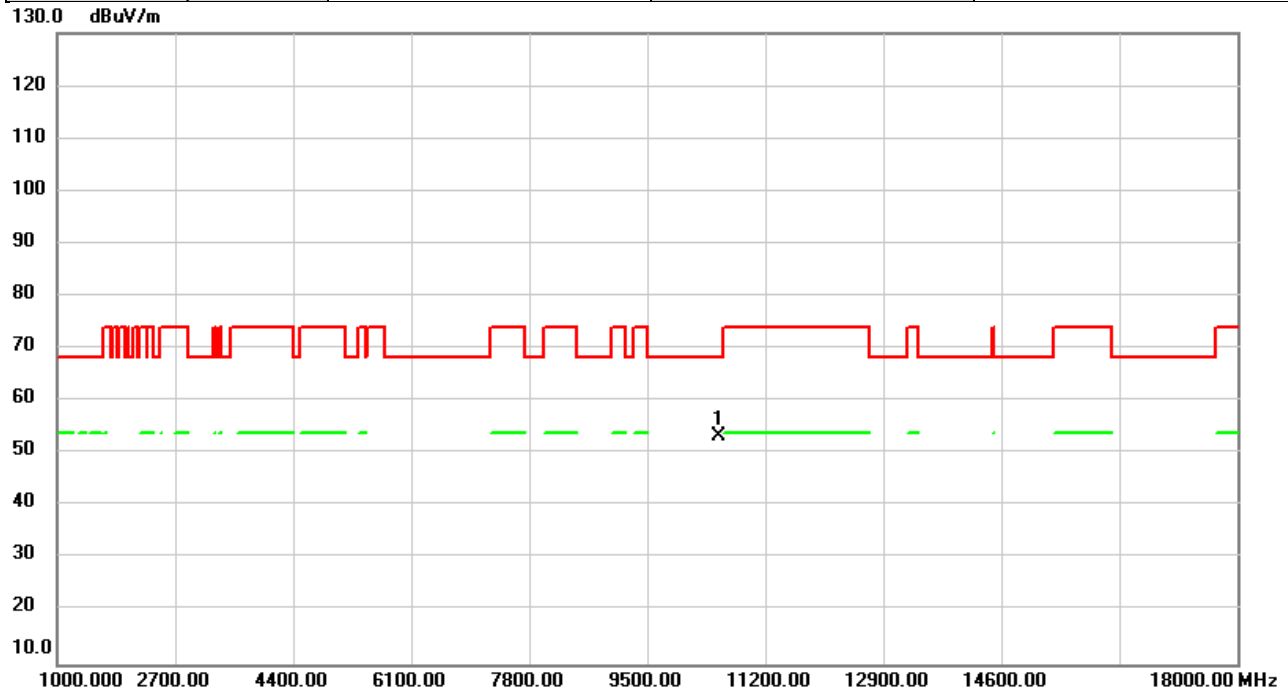


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	46.37	6.83	53.20	68.20	-15.00	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/15
Test Frequency	5310MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

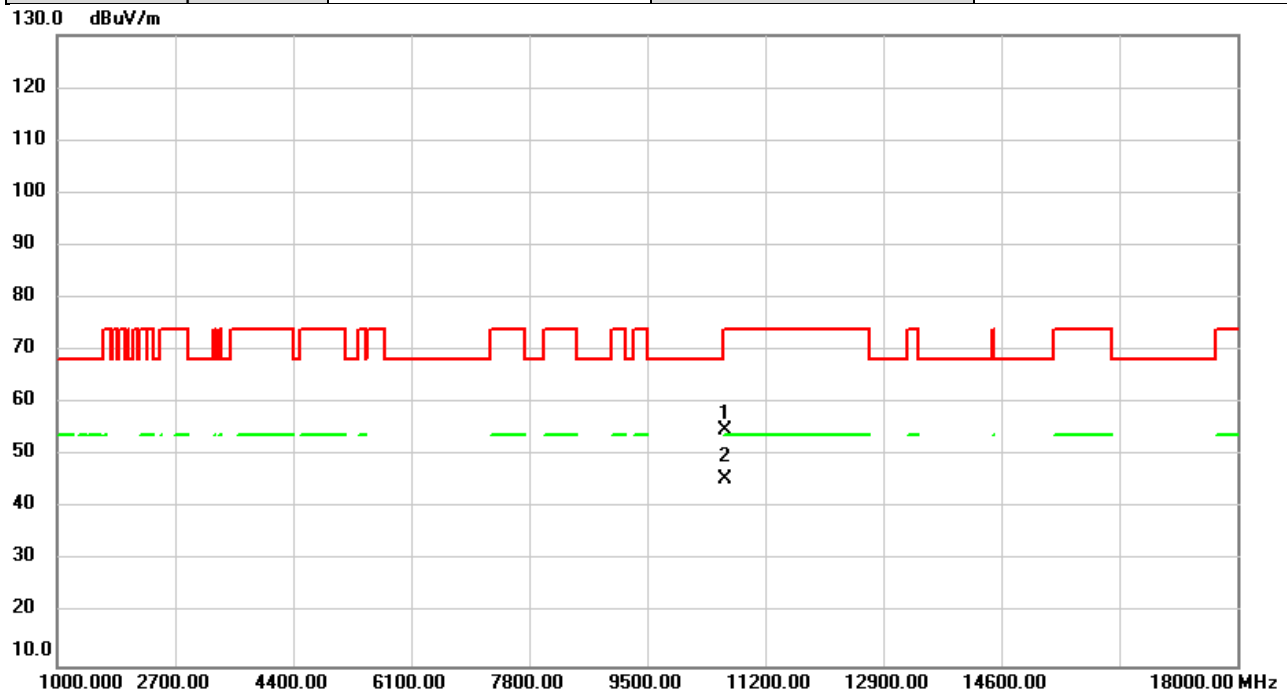


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10620.00	47.96	6.88	54.84	74.00	-19.16	peak	
2	*	10620.00	38.63	6.88	45.51	54.00	-8.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/15
Test Frequency	5310MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

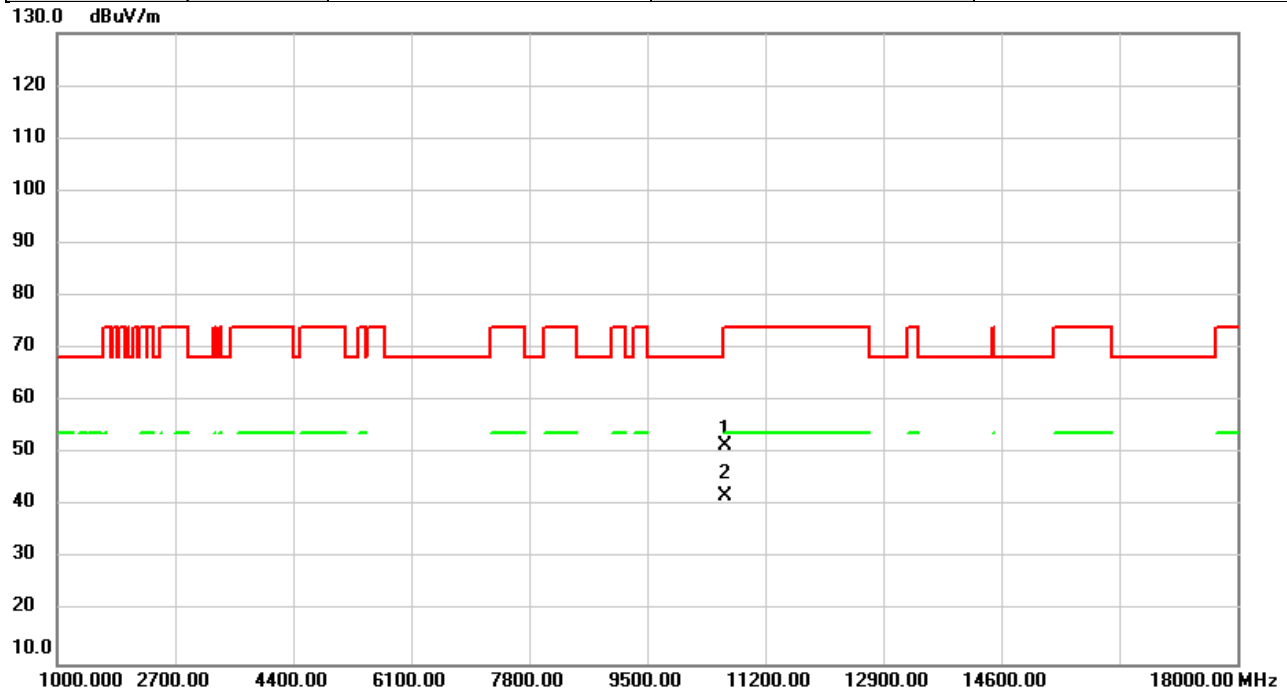


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10620.00	44.55	6.88	51.43	74.00	-22.57	peak	
2	*	10620.00	35.19	6.88	42.07	54.00	-11.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/15
Test Frequency	5510MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

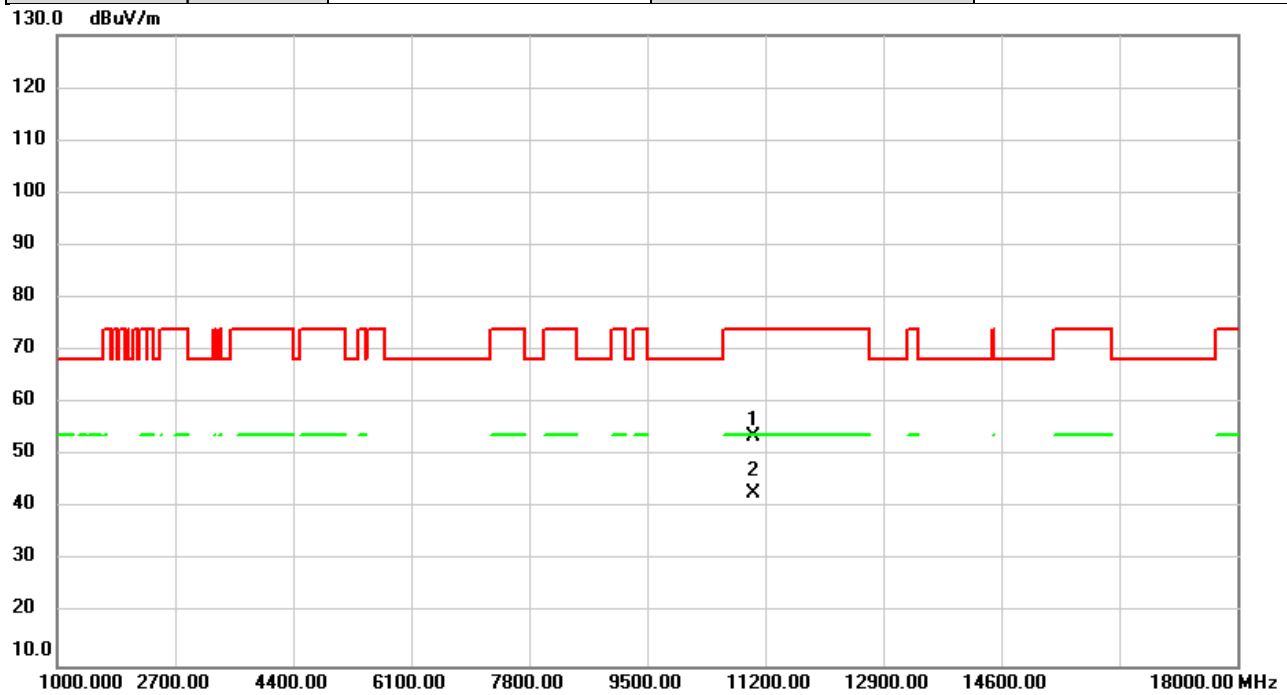


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11020.00	46.42	7.10	53.52	74.00	-20.48	peak	
2	*	11020.00	35.63	7.10	42.73	54.00	-11.27	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/15
Test Frequency	5510MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

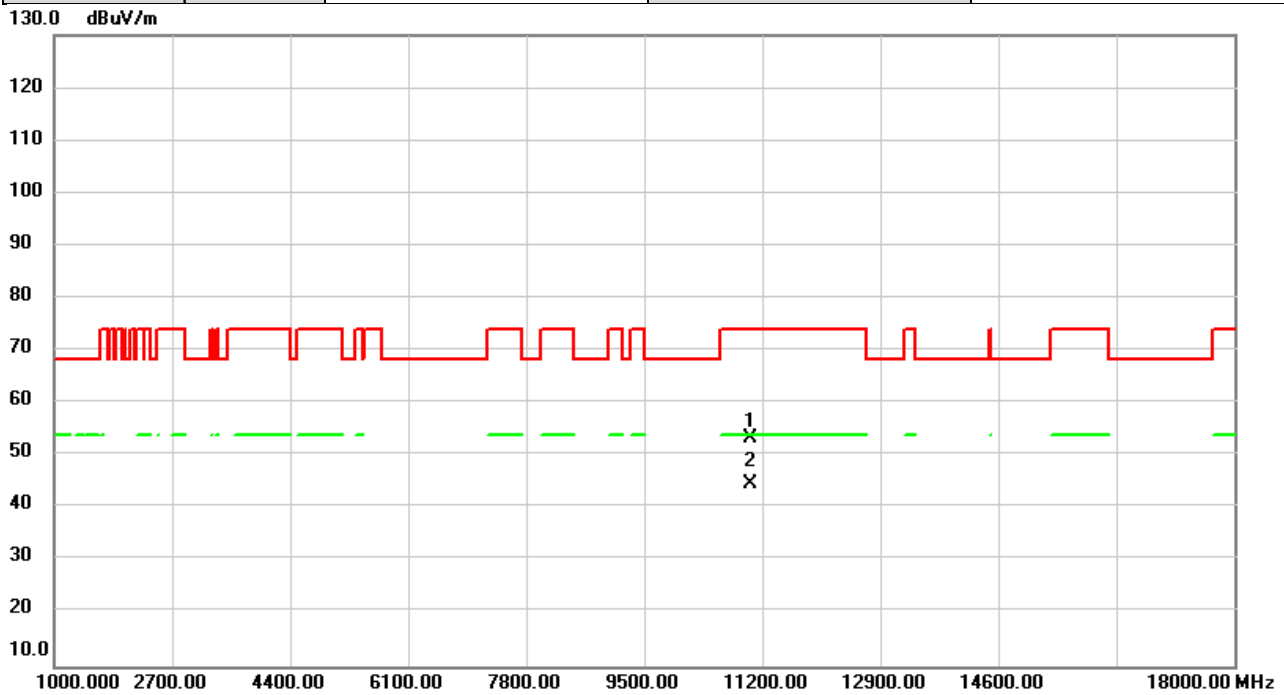


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11020.00	46.38	7.10	53.48	74.00	-20.52	peak	
2	*	11020.00	37.41	7.10	44.51	54.00	-9.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/15
Test Frequency	5550MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

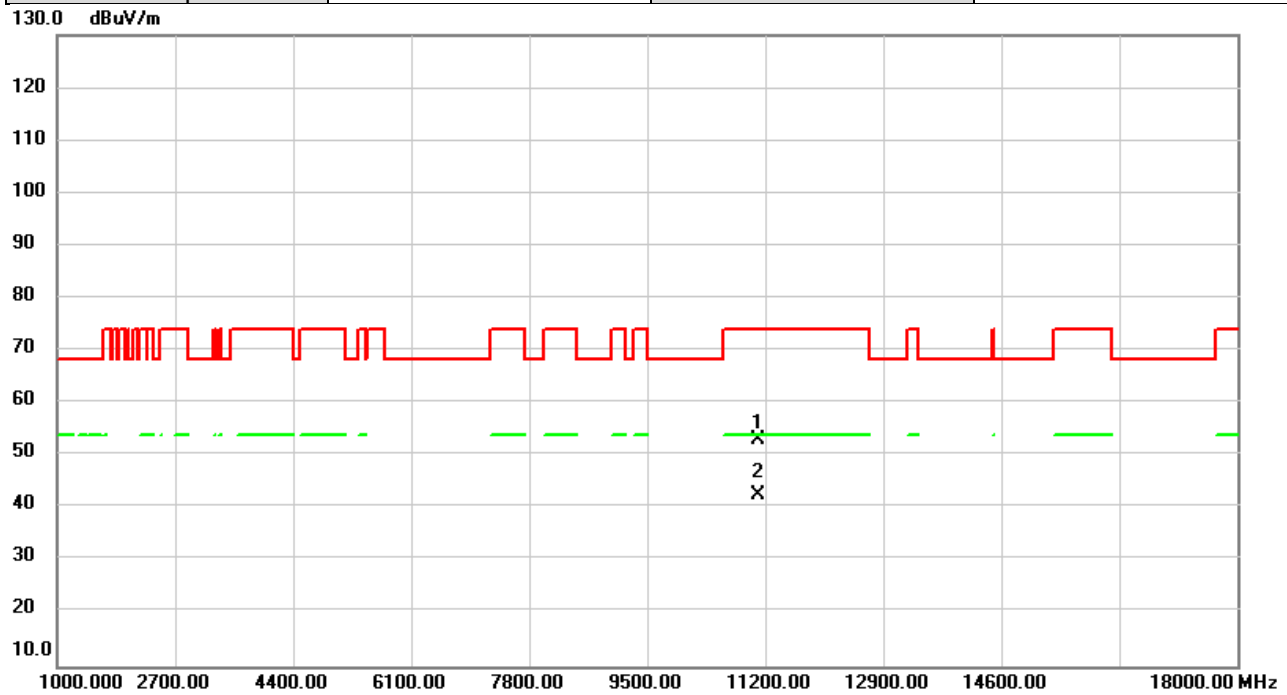


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11100.00	45.88	7.18	53.06	74.00	-20.94	peak	
2	*	11100.00	35.46	7.18	42.64	54.00	-11.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/15
Test Frequency	5550MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

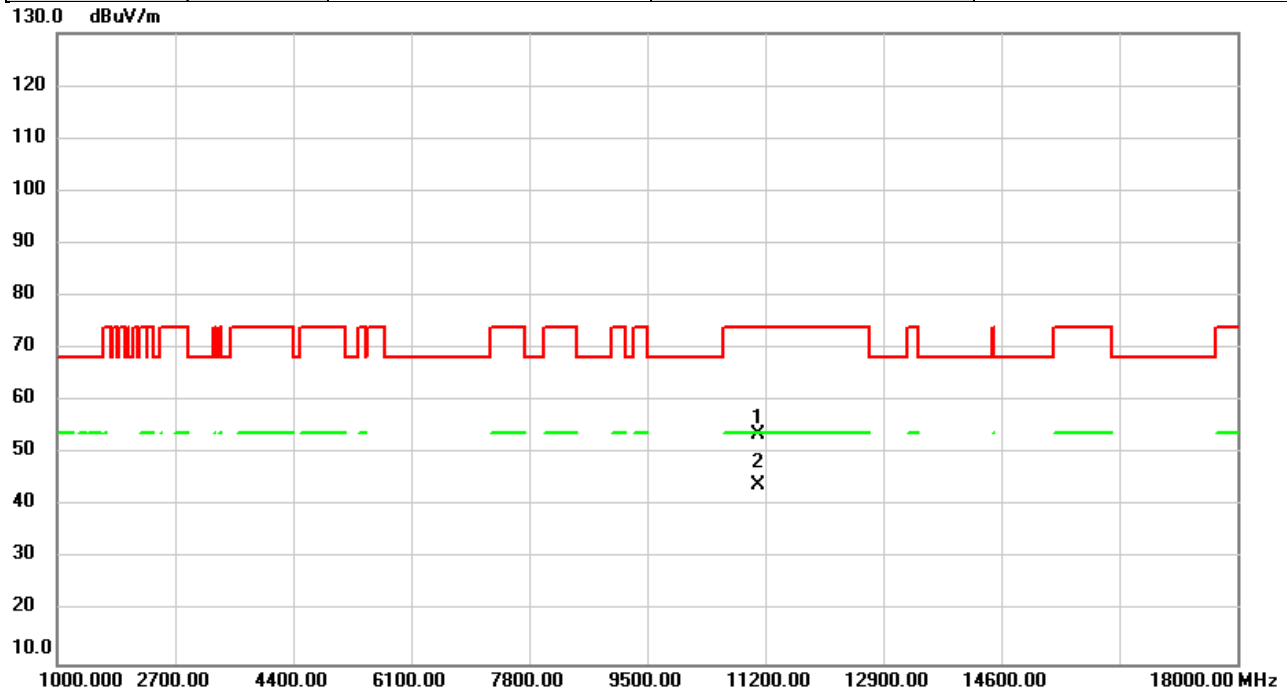


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11100.00	46.50	7.18	53.68	74.00	-20.32	peak	
2	*	11100.00	36.78	7.18	43.96	54.00	-10.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/15
Test Frequency	5670MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

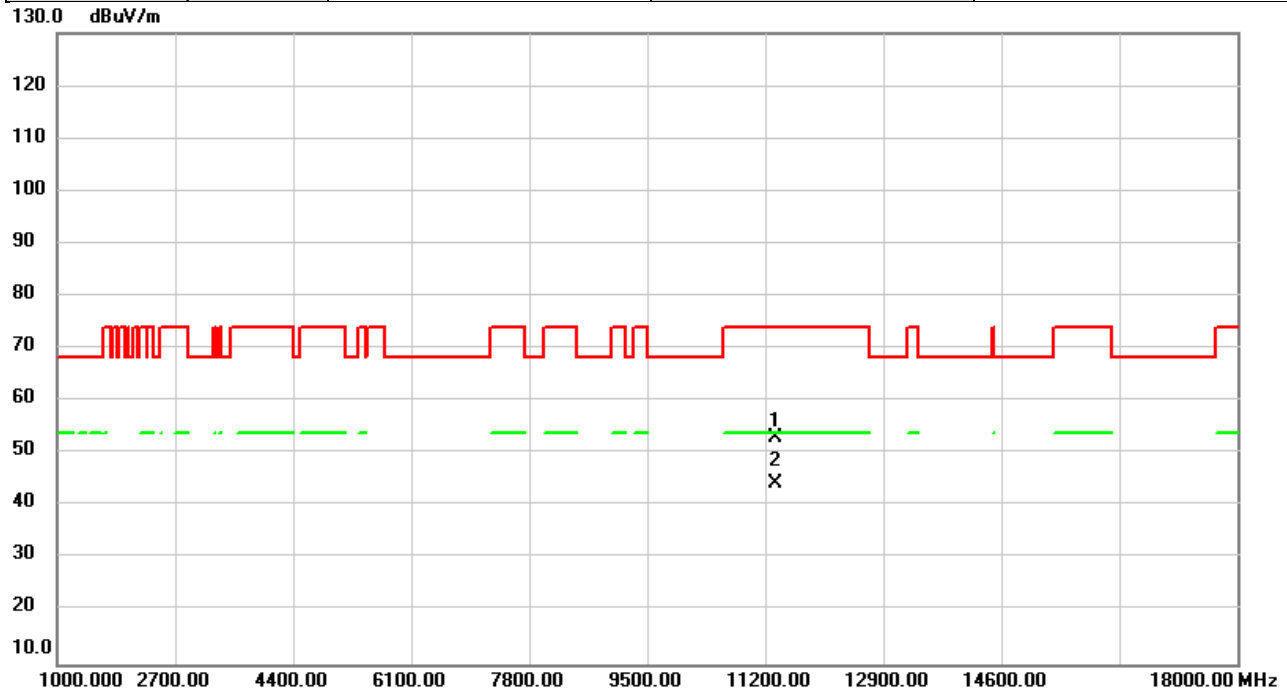


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11340.00	45.70	7.41	53.11	74.00	-20.89	peak	
2	*	11340.00	36.81	7.41	44.22	54.00	-9.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/15
Test Frequency	5670MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

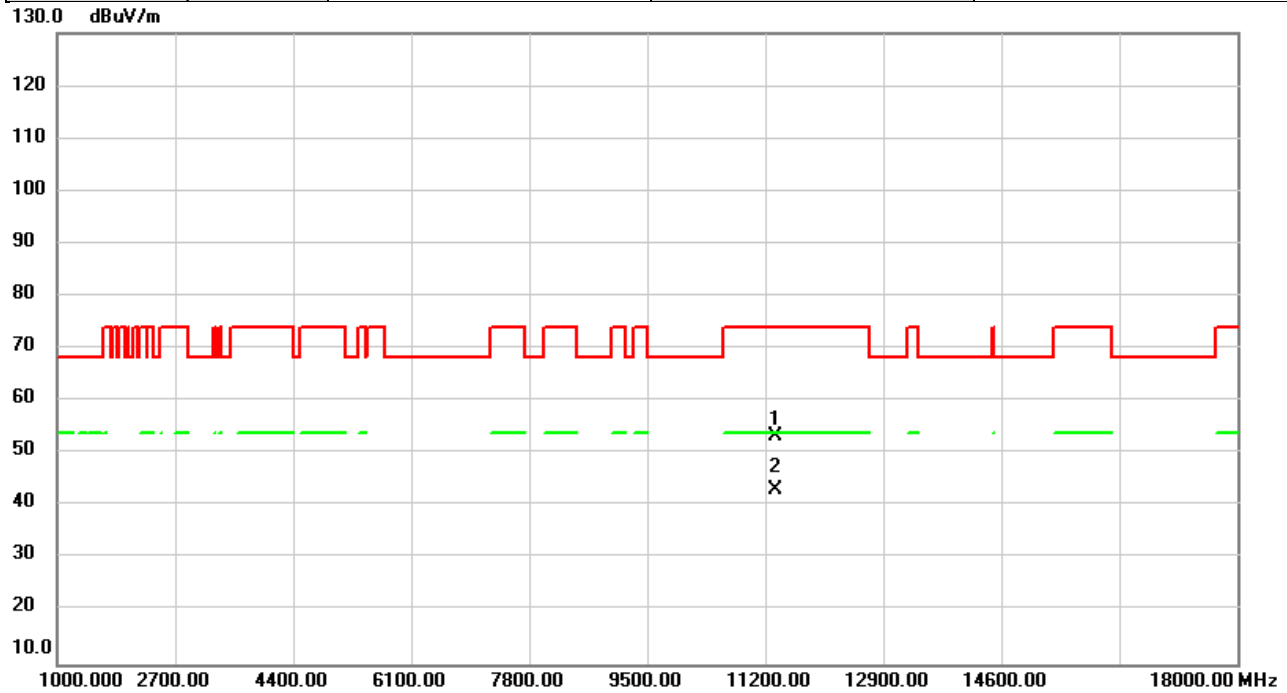


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11340.00	46.05	7.41	53.46	74.00	-20.54	peak	
2	*	11340.00	35.71	7.41	43.12	54.00	-10.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/15
Test Frequency	5710MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

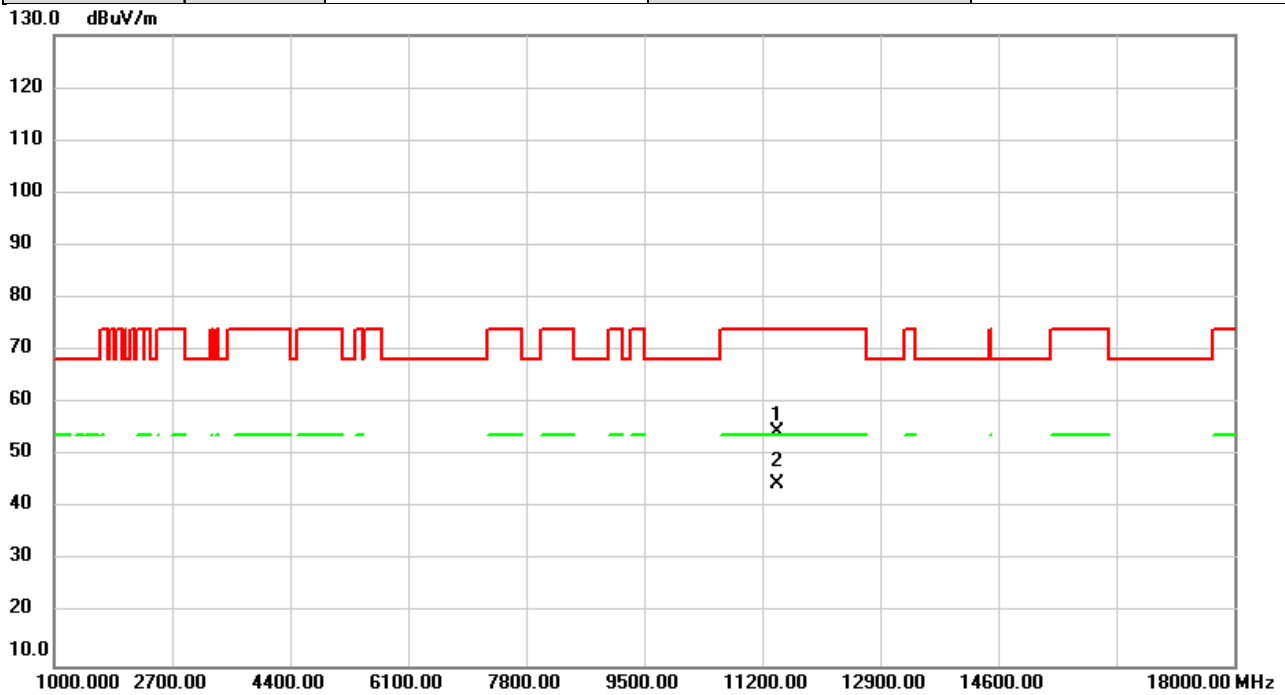


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11420.00	46.96	7.49	54.45	74.00	-19.55	peak	
2	*	11420.00	37.27	7.49	44.76	54.00	-9.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/5/15
Test Frequency	5710MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

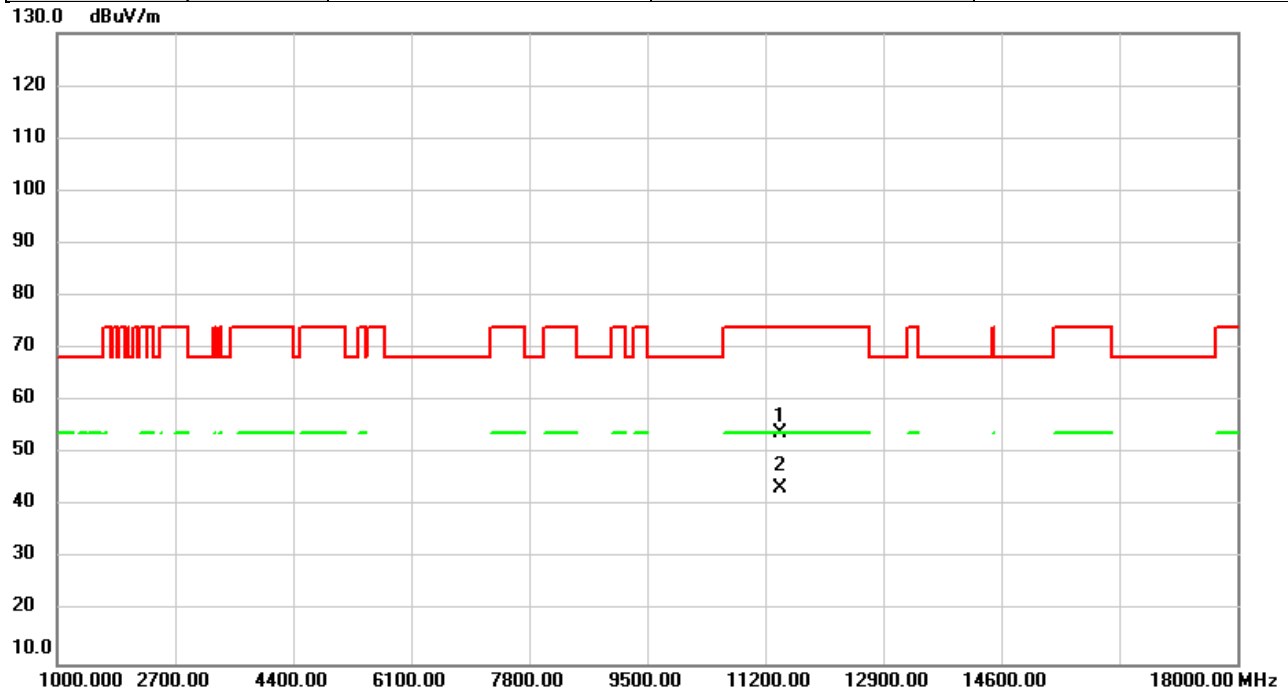


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11420.00	46.33	7.49	53.82	74.00	-20.18	peak	
2	*	11420.00	35.91	7.49	43.40	54.00	-10.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/6/21
Test Frequency	5755MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

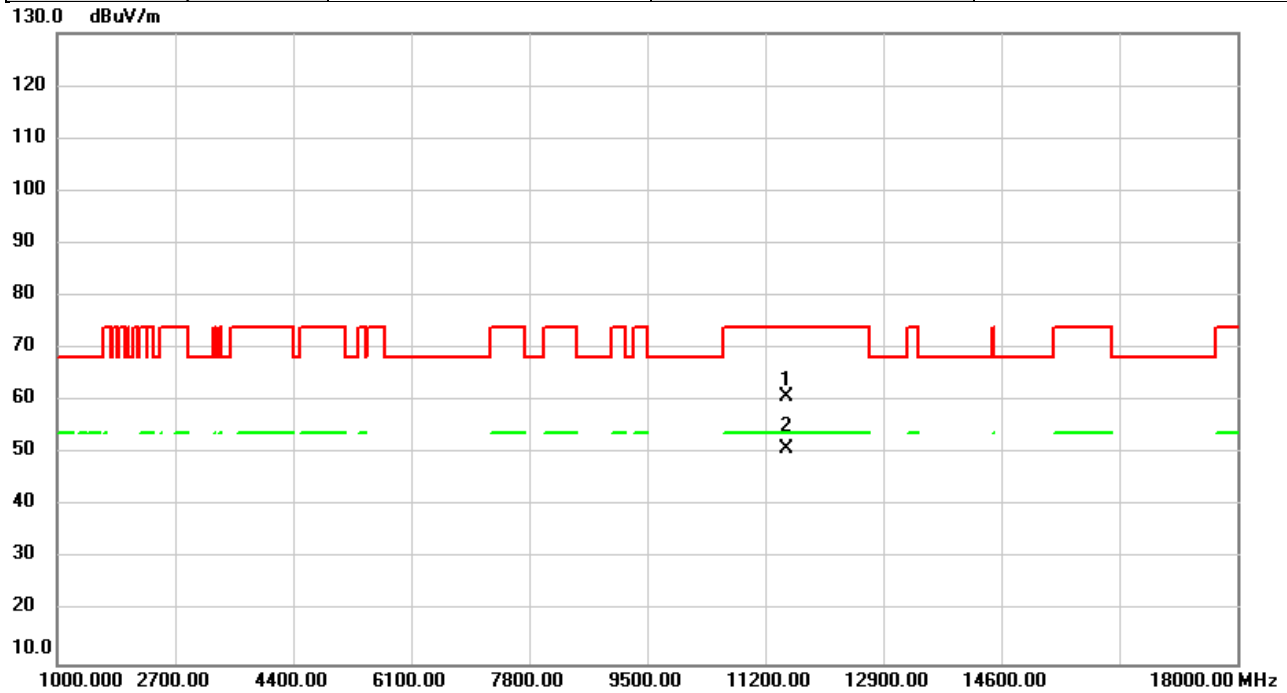


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	53.32	7.57	60.89	74.00	-13.11	peak	
2	*	11510.00	43.29	7.57	50.86	54.00	-3.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/6/21
Test Frequency	5755MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

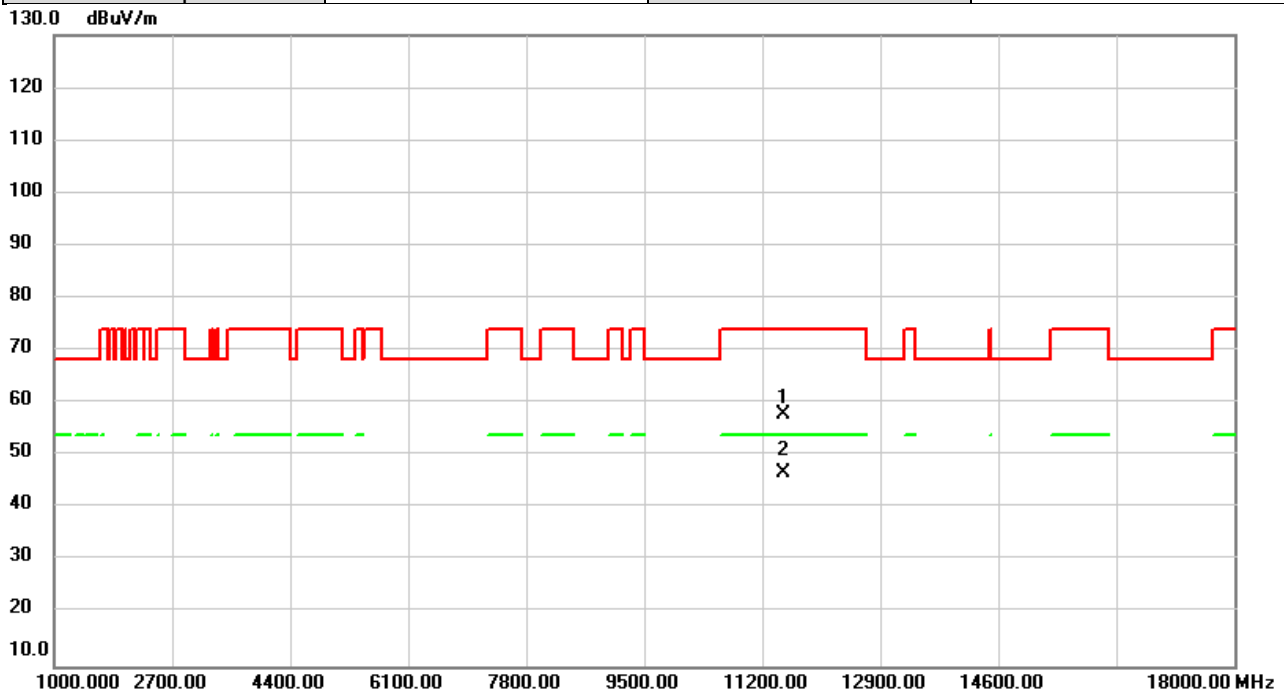


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	50.24	7.57	57.81	74.00	-16.19	peak	
2	*	11510.00	39.30	7.57	46.87	54.00	-7.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/6/21
Test Frequency	5795MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

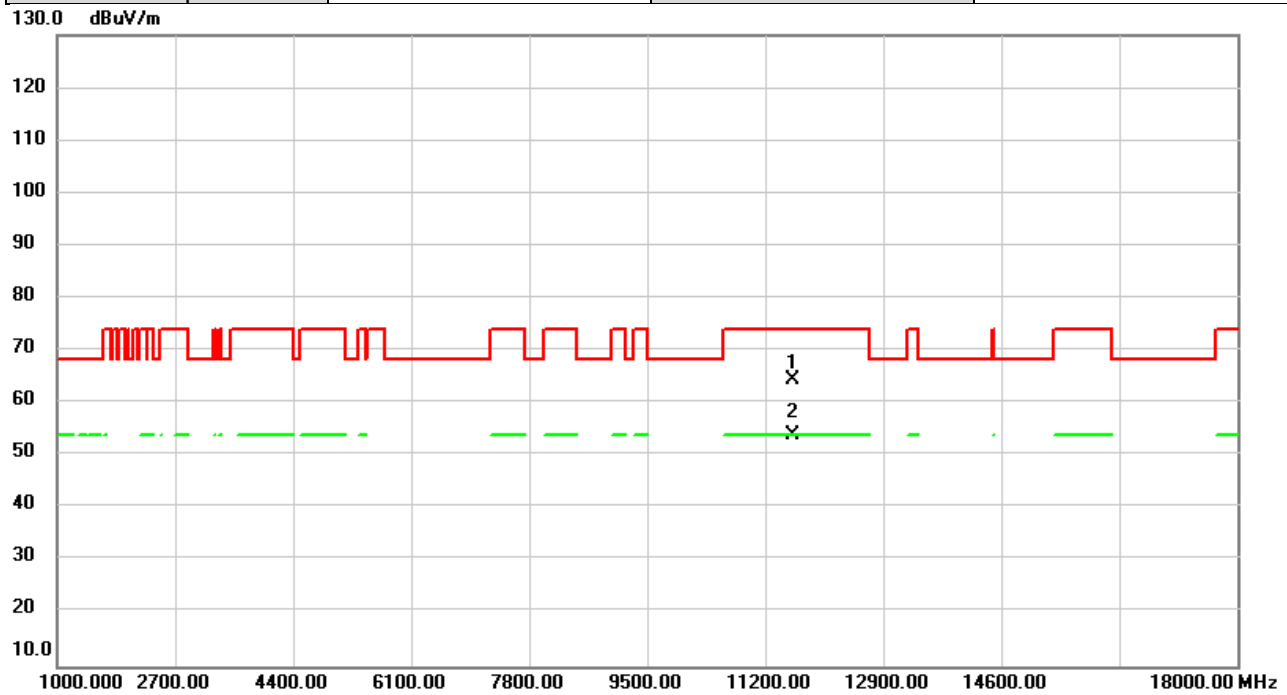


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.00	56.76	7.61	64.37	74.00	-9.63	peak	
2	*	11590.00	46.35	7.61	53.96	54.00	-0.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/6/21
Test Frequency	5795MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

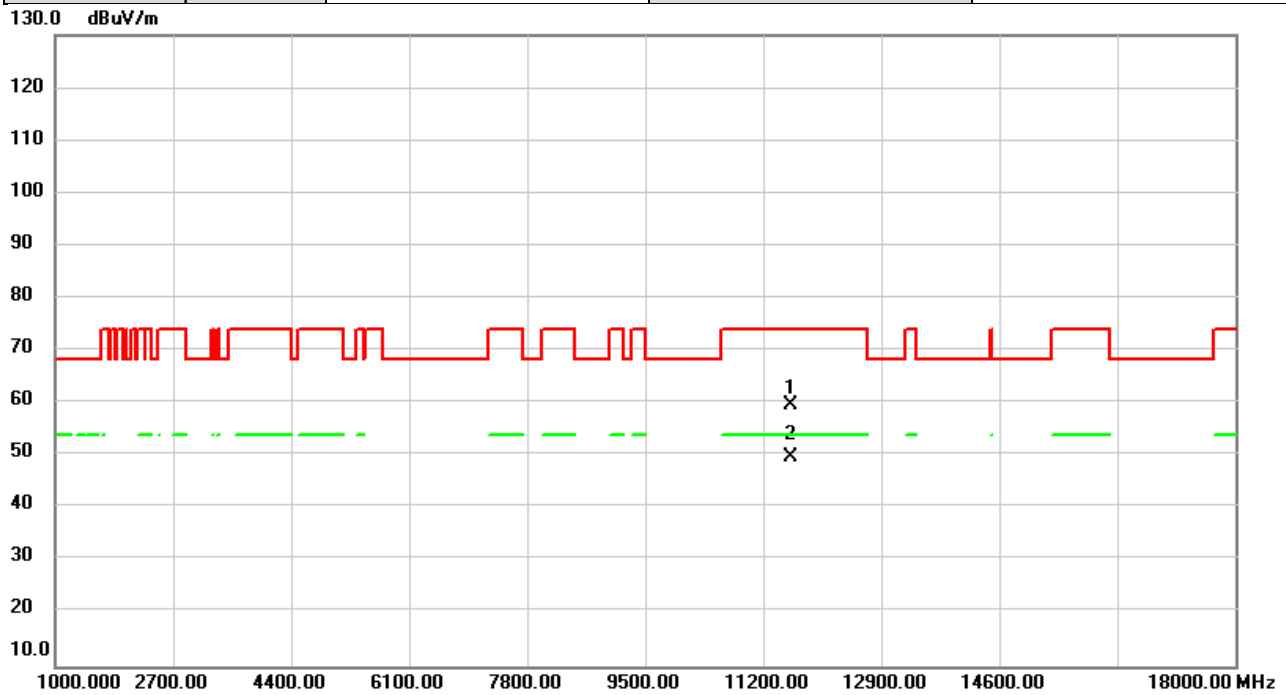


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.00	52.08	7.61	59.69	74.00	-14.31	peak	
2	*	11590.00	42.15	7.61	49.76	54.00	-4.24	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/15
Test Frequency	5210MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

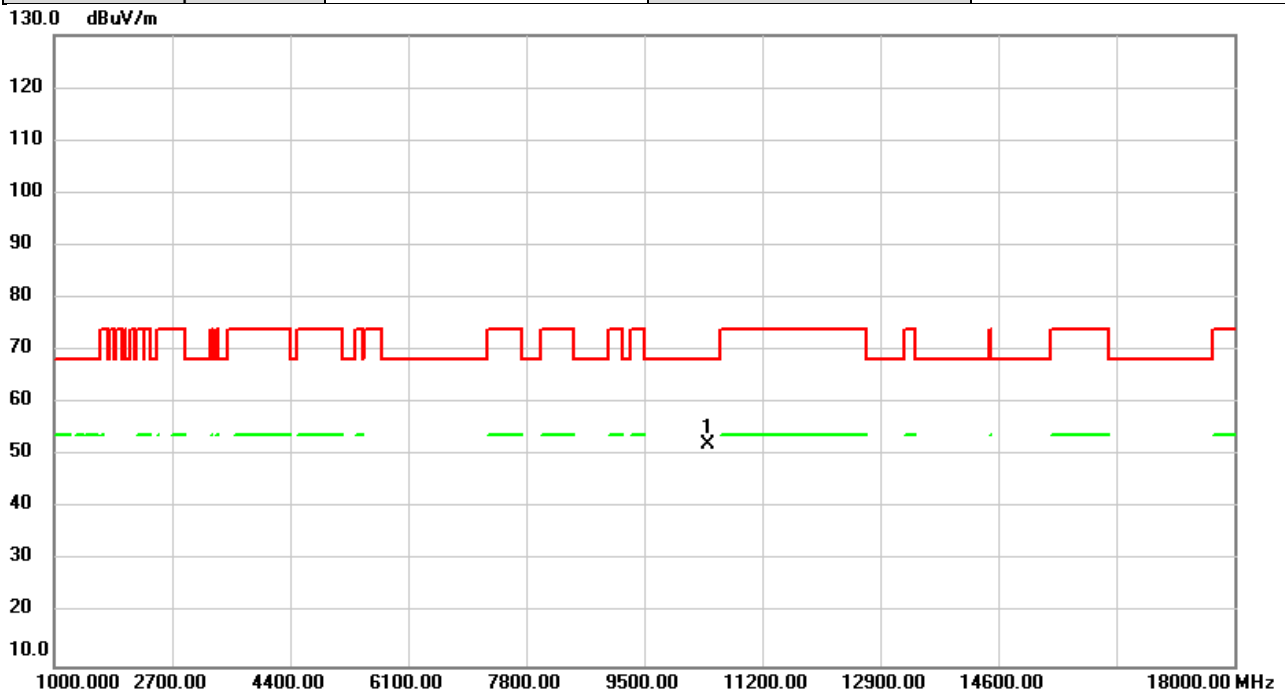


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	45.42	6.78	52.20	68.20	-16.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/15
Test Frequency	5210MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

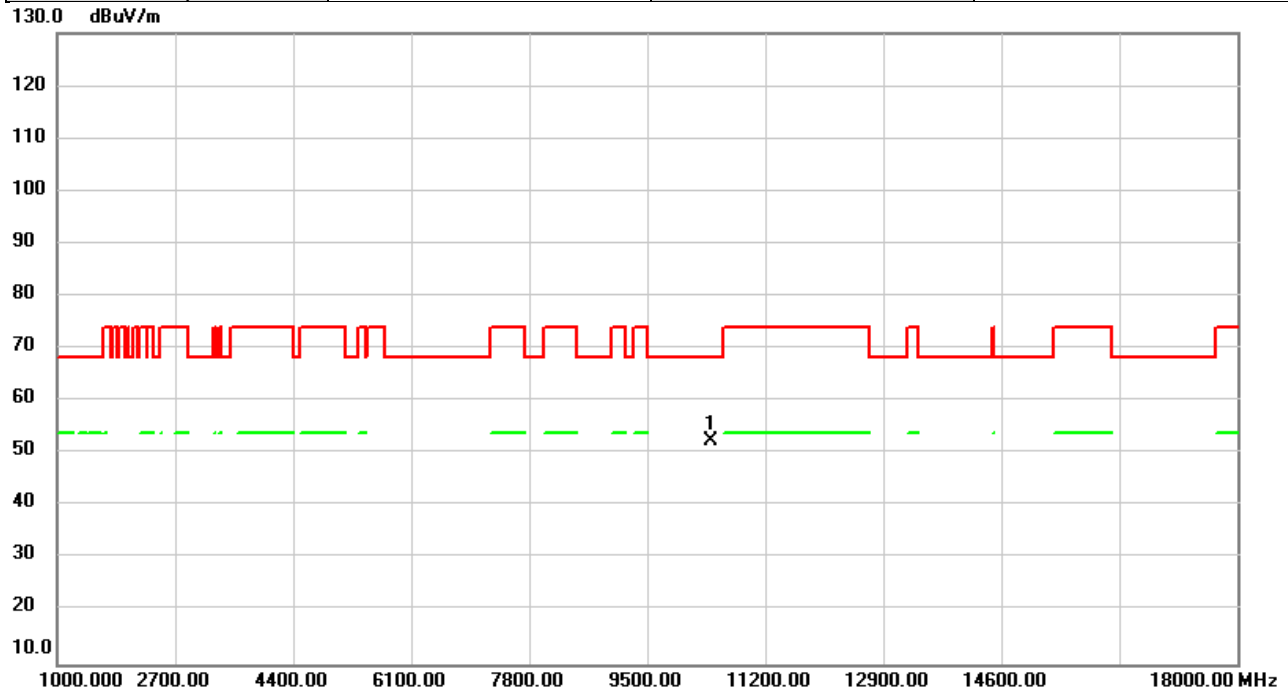


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	45.57	6.78	52.35	68.20	-15.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/15
Test Frequency	5290MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

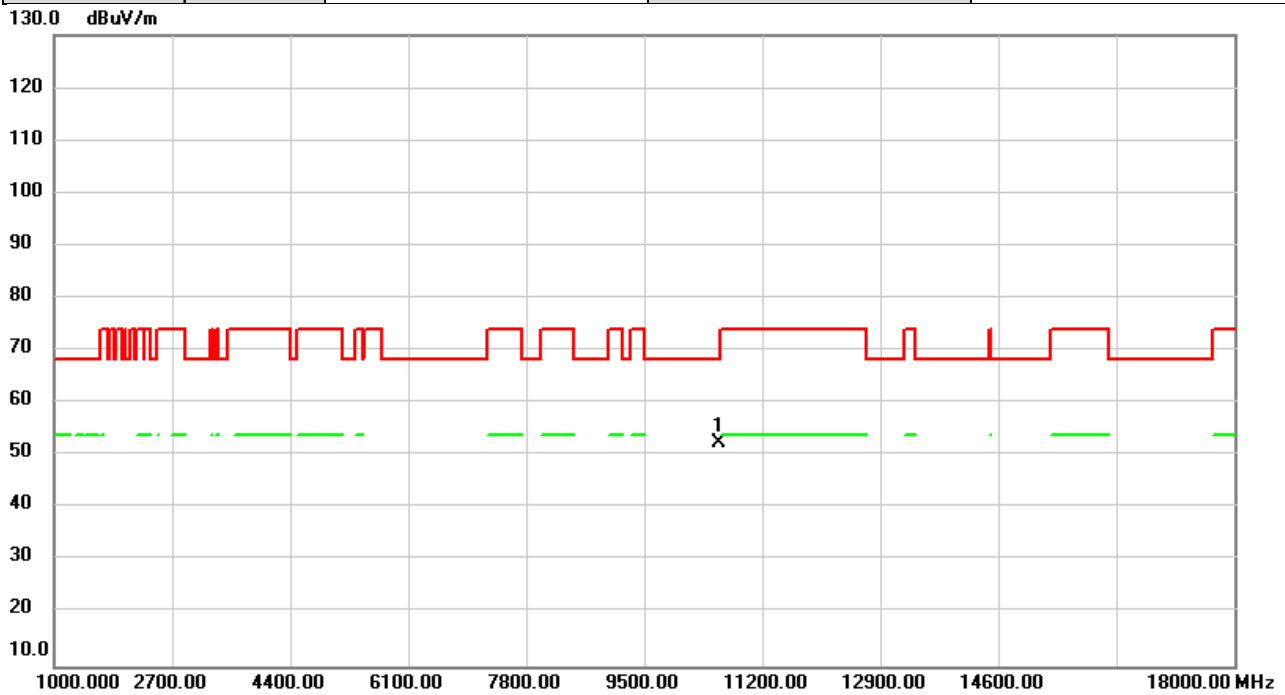


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	45.52	6.85	52.37	68.20	-15.83	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/15
Test Frequency	5290MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

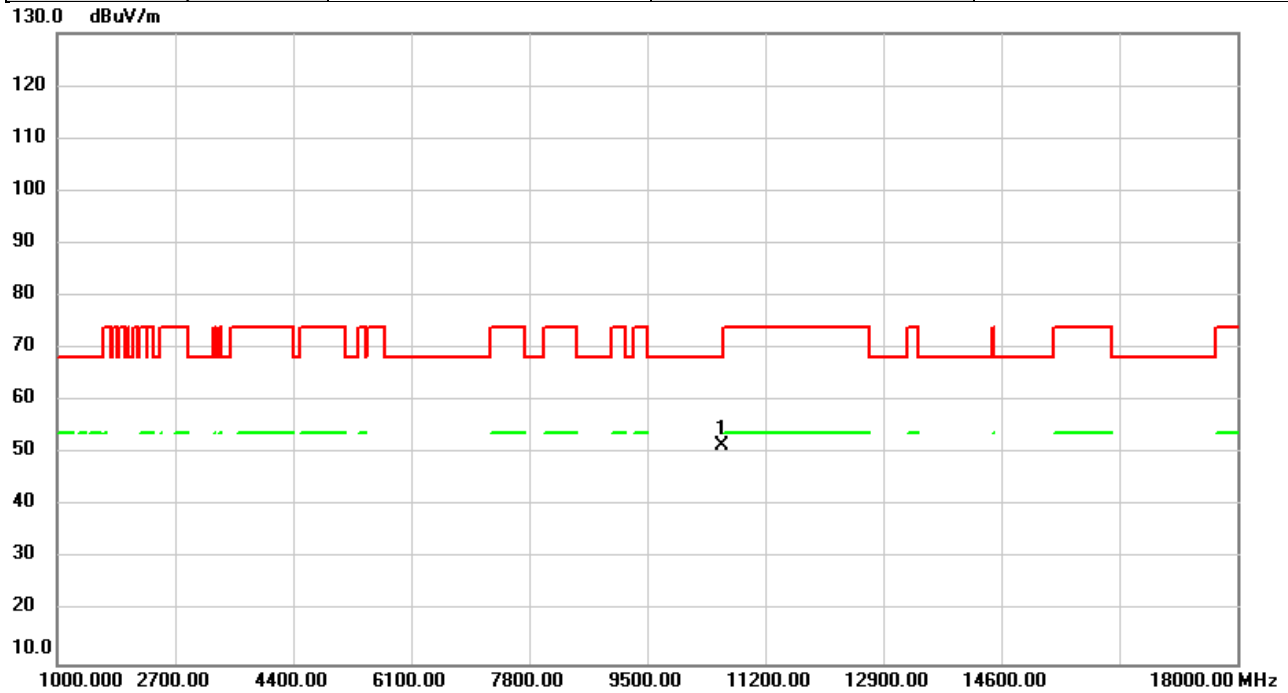


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	44.72	6.85	51.57	68.20	-16.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/15
Test Frequency	5530MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

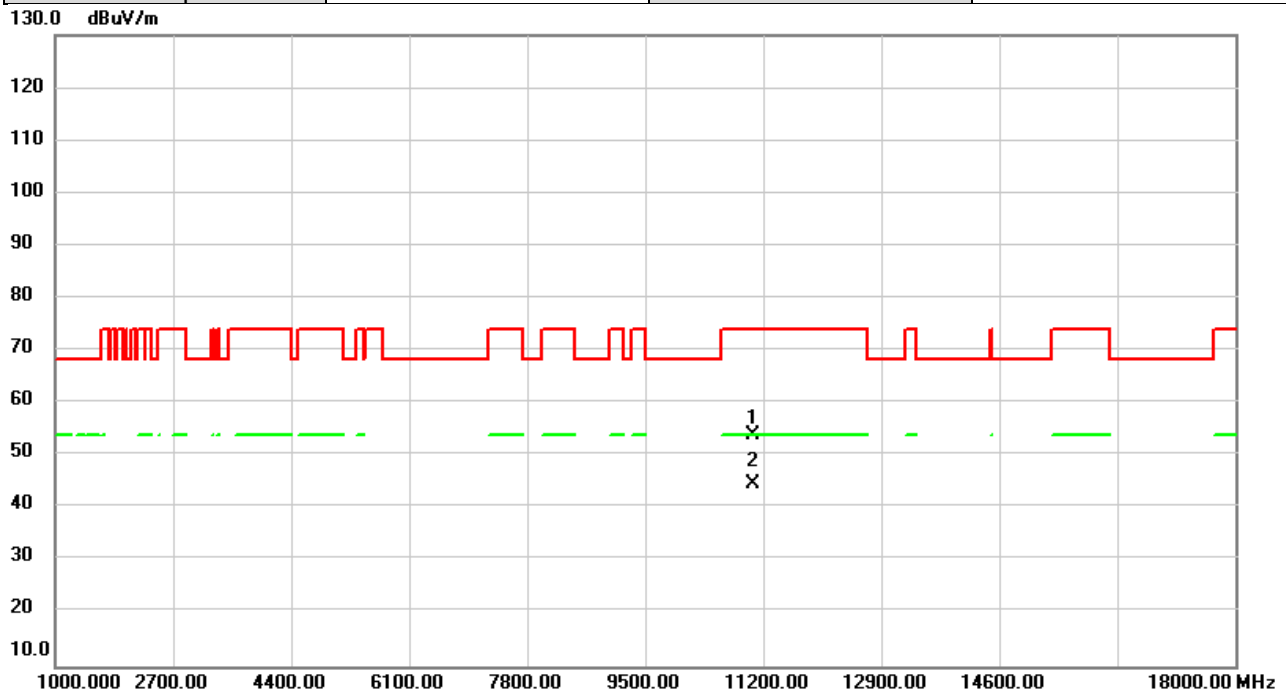


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	46.90	7.15	54.05	74.00	-19.95	peak	
2	*	11060.00	37.50	7.15	44.65	54.00	-9.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/15
Test Frequency	5530MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

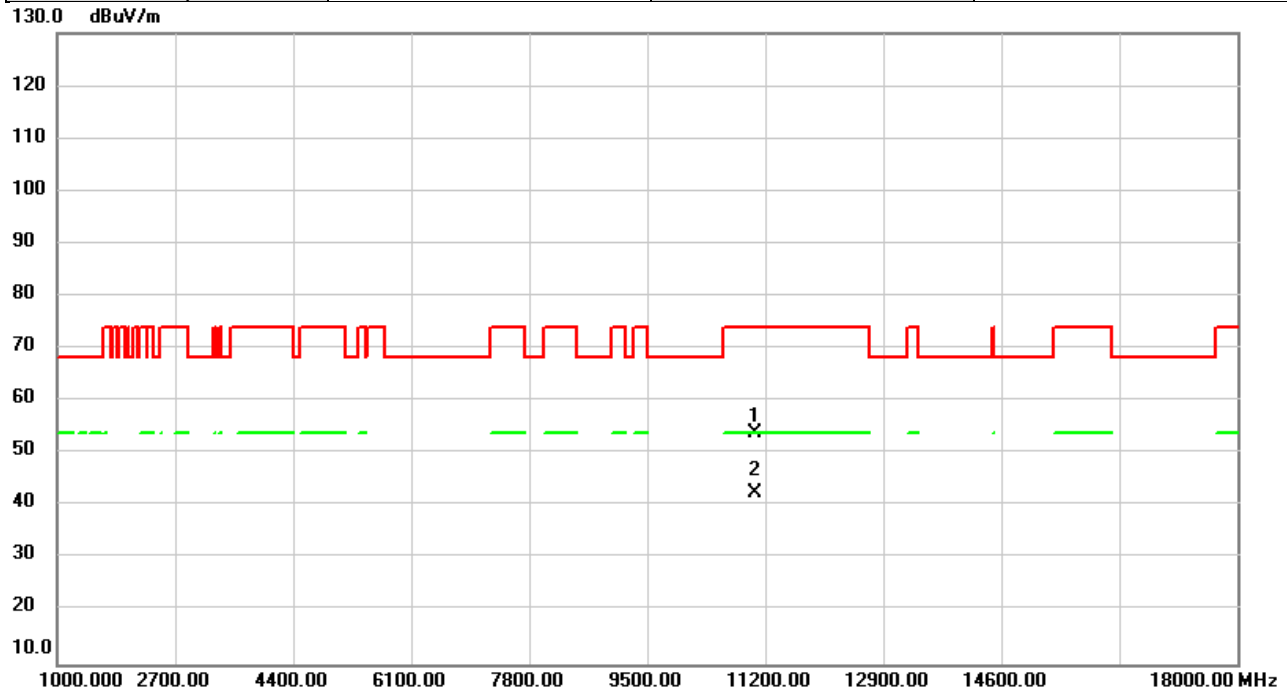


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	46.69	7.15	53.84	74.00	-20.16	peak	
2	*	11060.00	35.45	7.15	42.60	54.00	-11.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/15
Test Frequency	5610MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

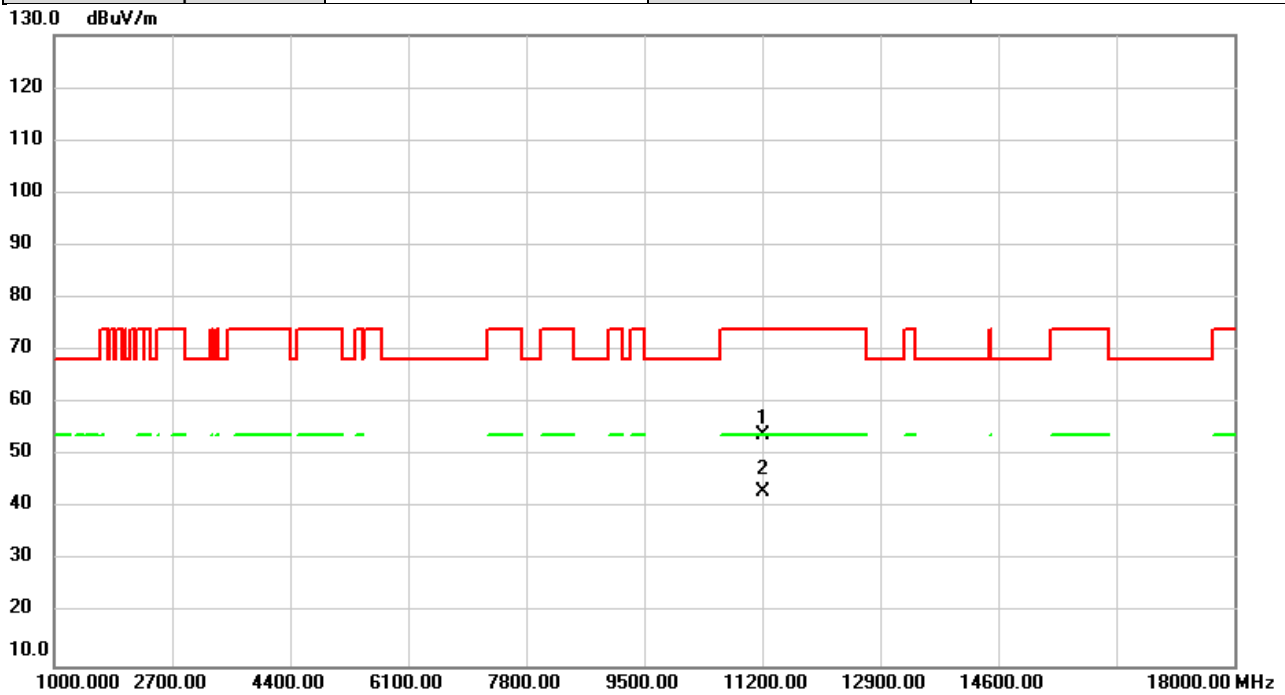


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	46.59	7.30	53.89	74.00	-20.11	peak	
2	*	11220.00	35.99	7.30	43.29	54.00	-10.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/15
Test Frequency	5610MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

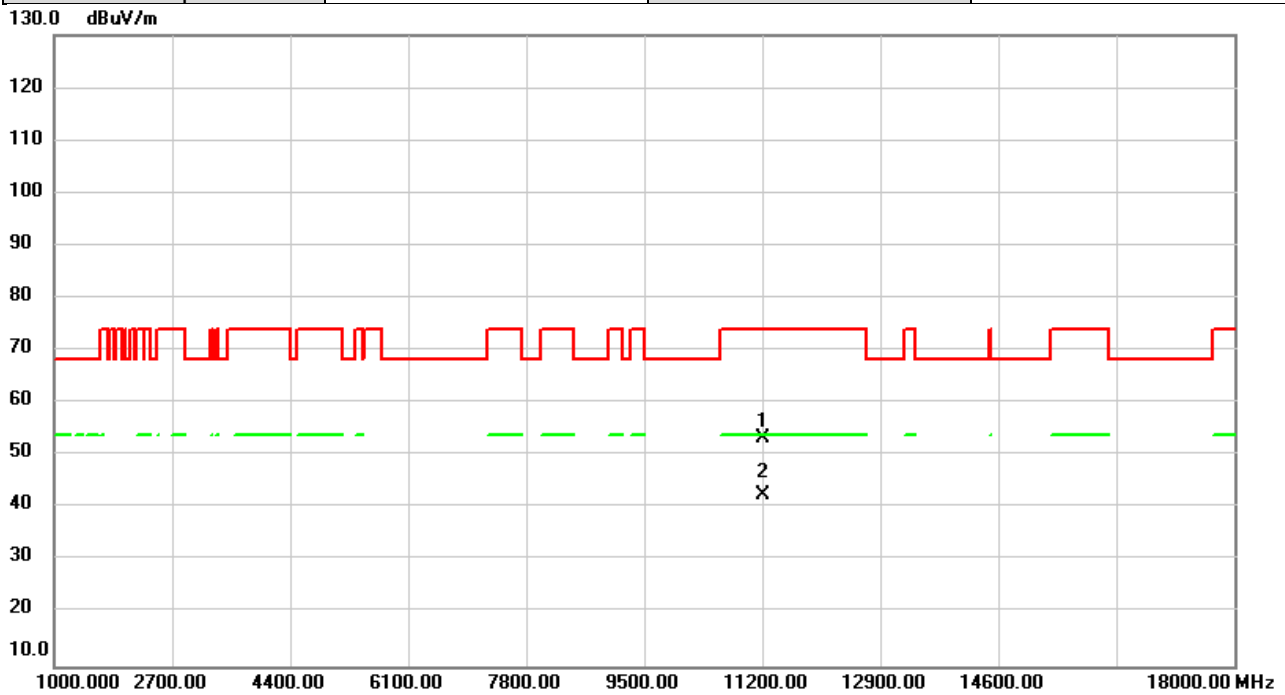


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	45.90	7.30	53.20	74.00	-20.80	peak	
2	*	11220.00	35.28	7.30	42.58	54.00	-11.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/23
Test Frequency	5690MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

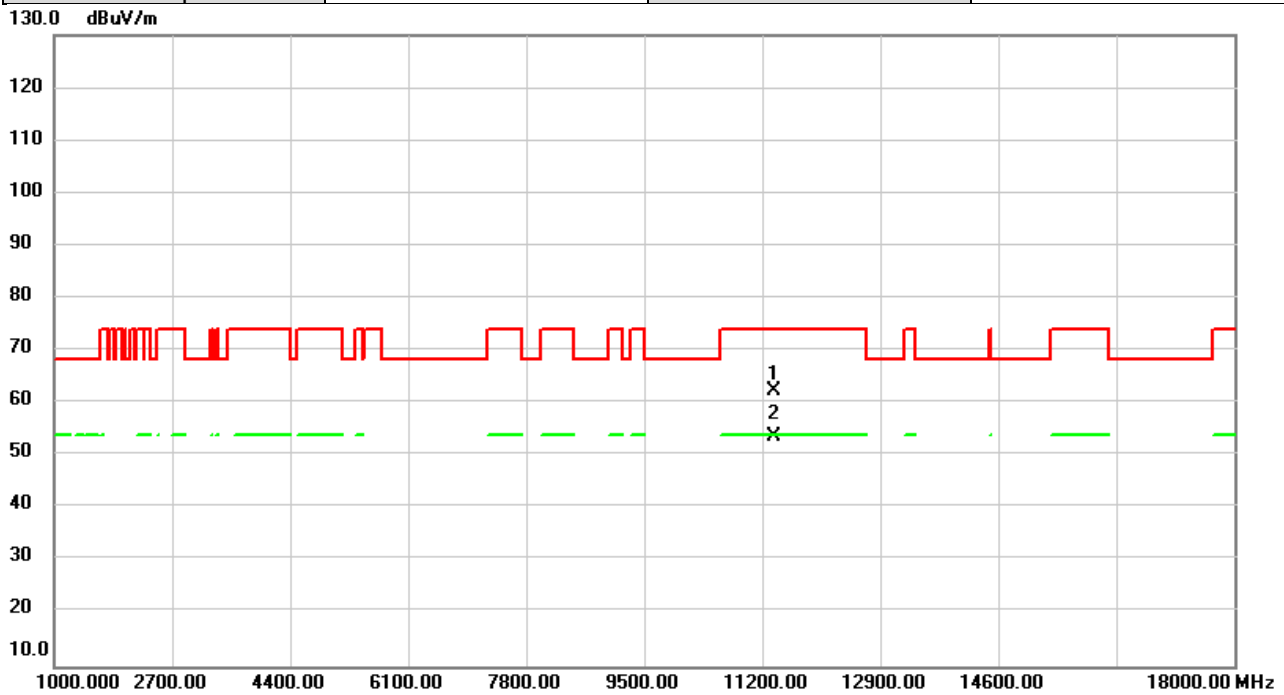


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11380.00	54.87	7.45	62.32	74.00	-11.68	peak	
2	*	11380.00	46.24	7.45	53.69	54.00	-0.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/5/23
Test Frequency	5690MHz	Polarization	Horizontal
Temp	20°C	Hum.	60%

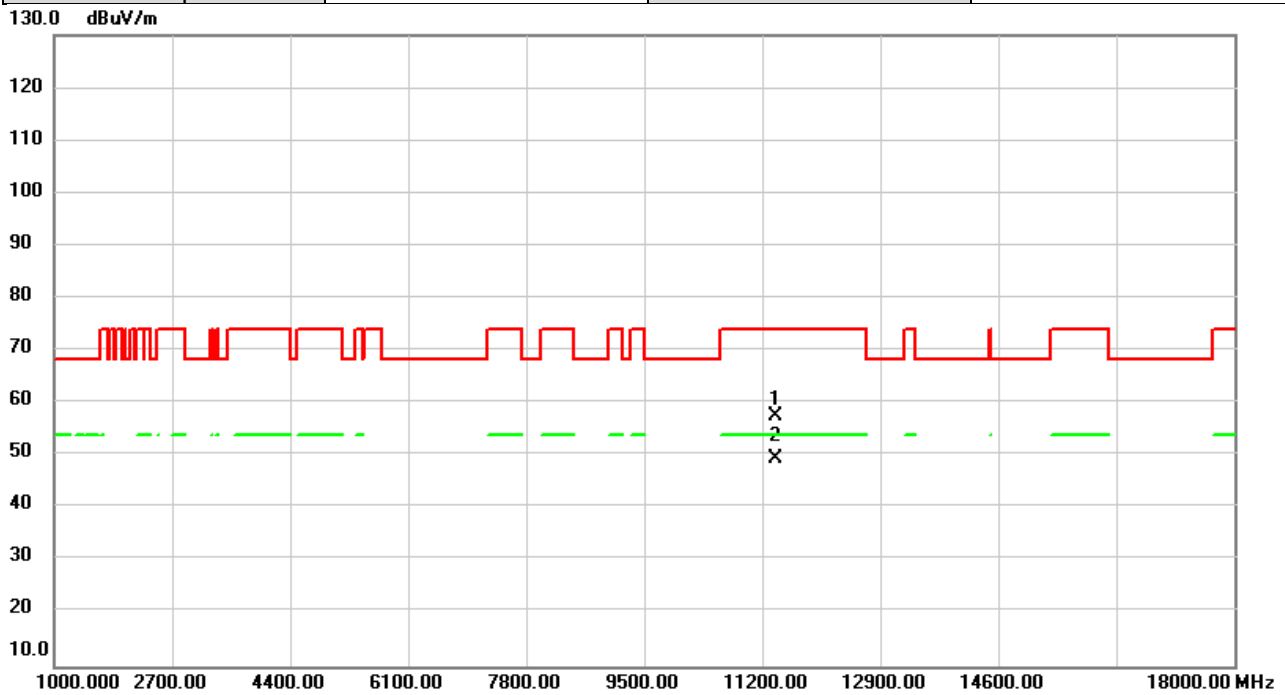


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11390.00	50.23	7.46	57.69	74.00	-16.31	peak	
2	*	11390.00	42.07	7.46	49.53	54.00	-4.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/6/21
Test Frequency	5775MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

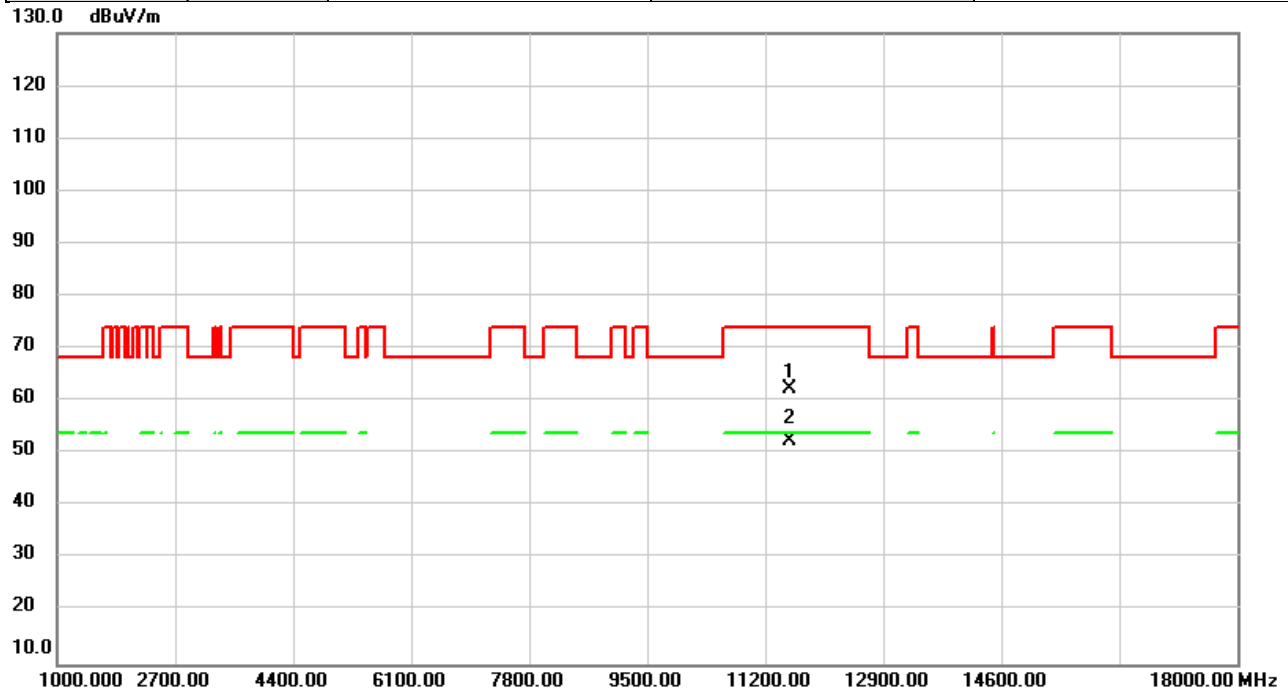


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11550.00	54.72	7.58	62.30	74.00	-11.70	peak	
2	*	11550.00	44.98	7.58	52.56	54.00	-1.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/6/21
Test Frequency	5775MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

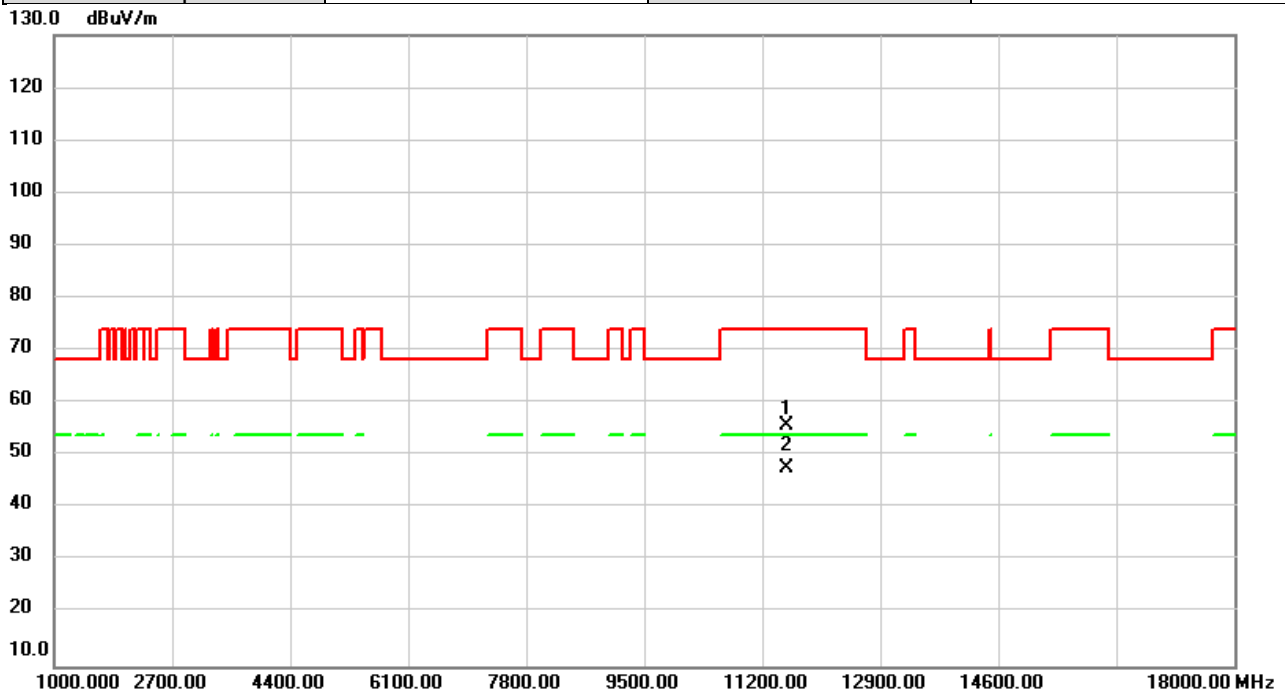


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11550.00	48.11	7.58	55.69	74.00	-18.31	peak	
2	*	11550.00	40.13	7.58	47.71	54.00	-6.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2024/5/15
Test Frequency	5250MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

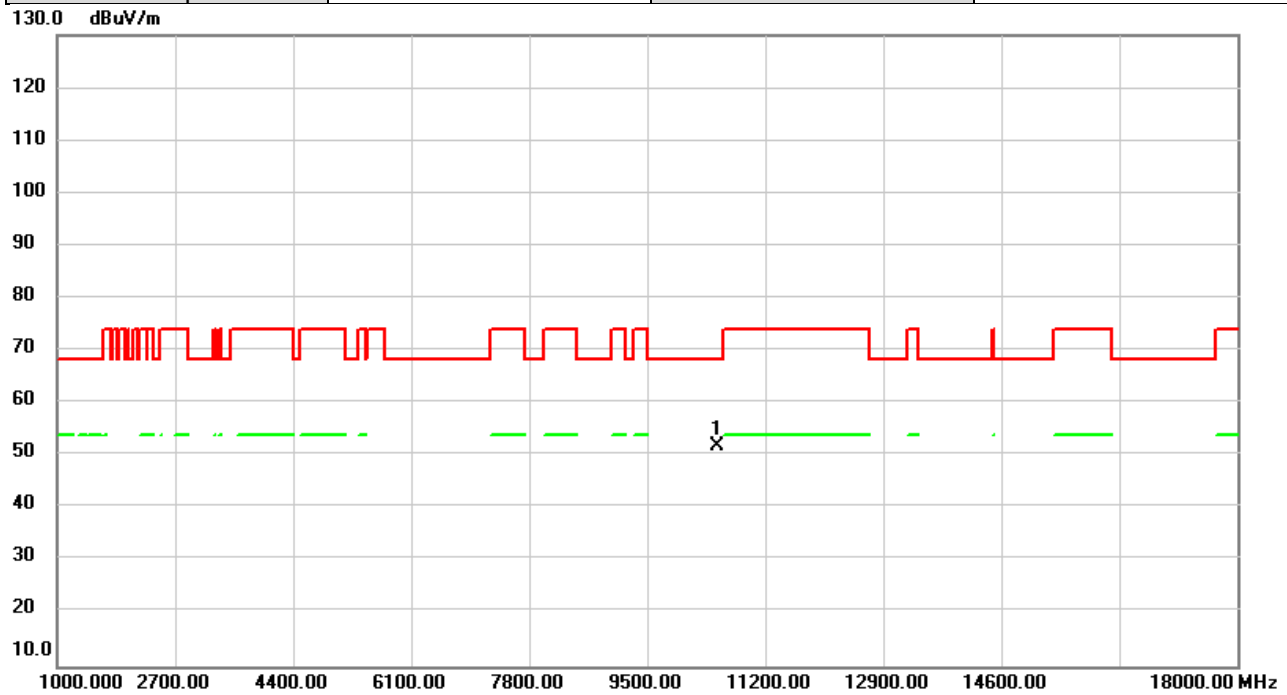


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.00	45.18	6.81	51.99	68.20	-16.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2024/5/15
Test Frequency	5250MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

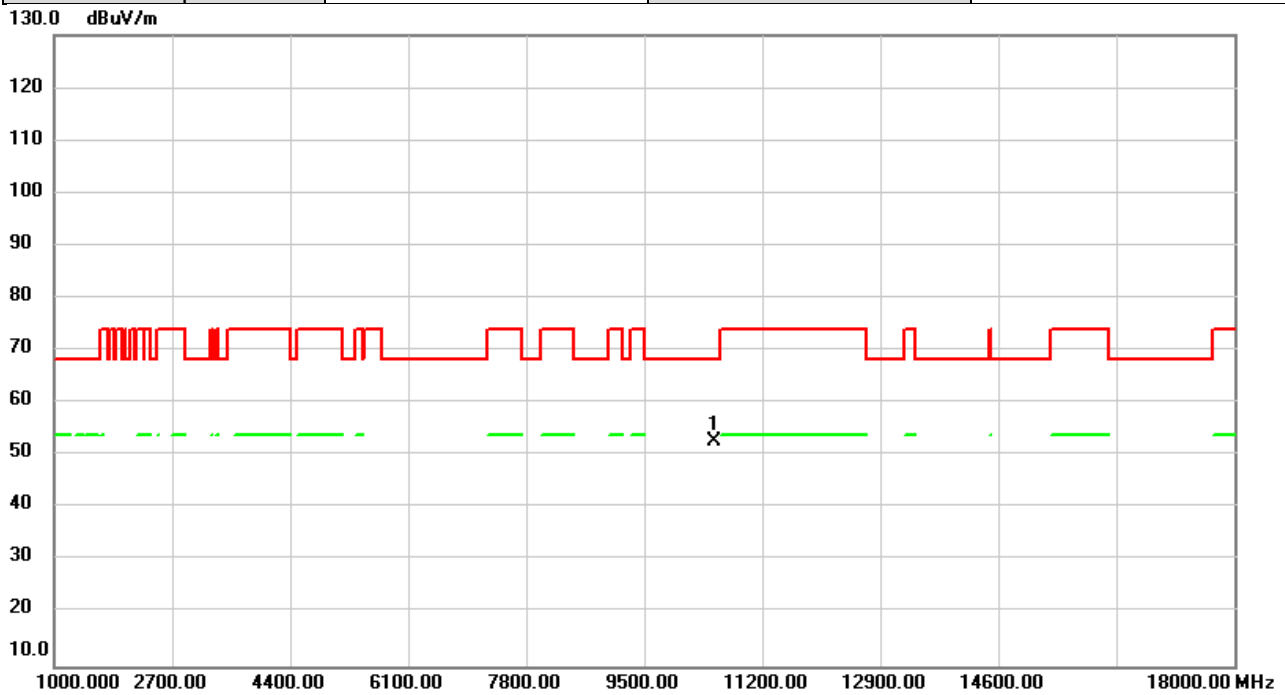


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.00	45.93	6.81	52.74	68.20	-15.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2024/5/15
Test Frequency	5570MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

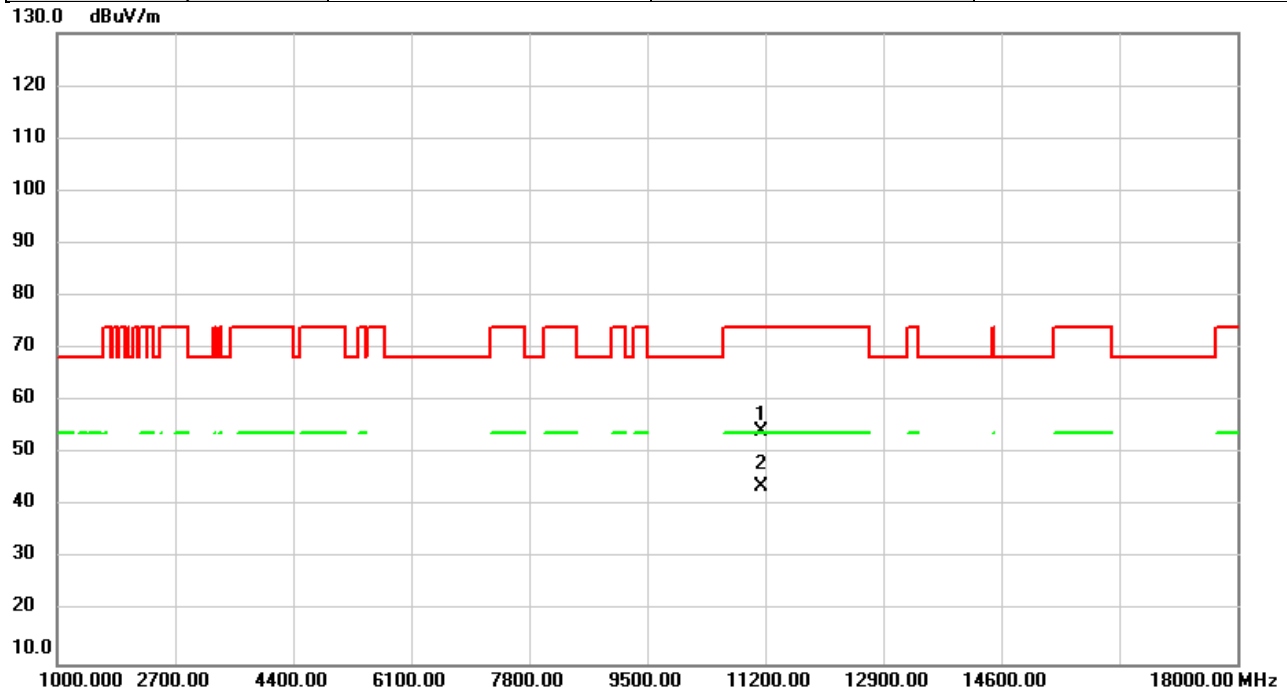


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11140.00	47.07	7.22	54.29	74.00	-19.71	peak	
2	*	11140.00	36.52	7.22	43.74	54.00	-10.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2024/5/15
Test Frequency	5570MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

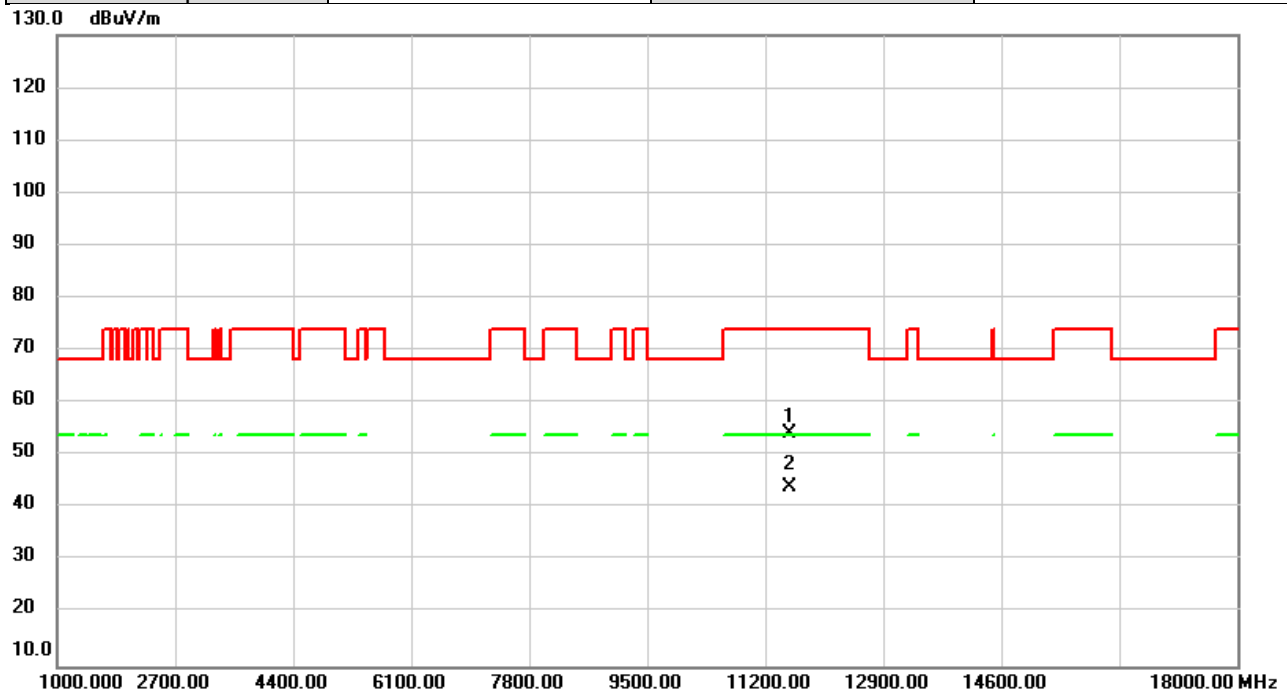


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11550.00	46.62	7.58	54.20	74.00	-19.80	peak	
2	*	11550.00	36.52	7.58	44.10	54.00	-9.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5180MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

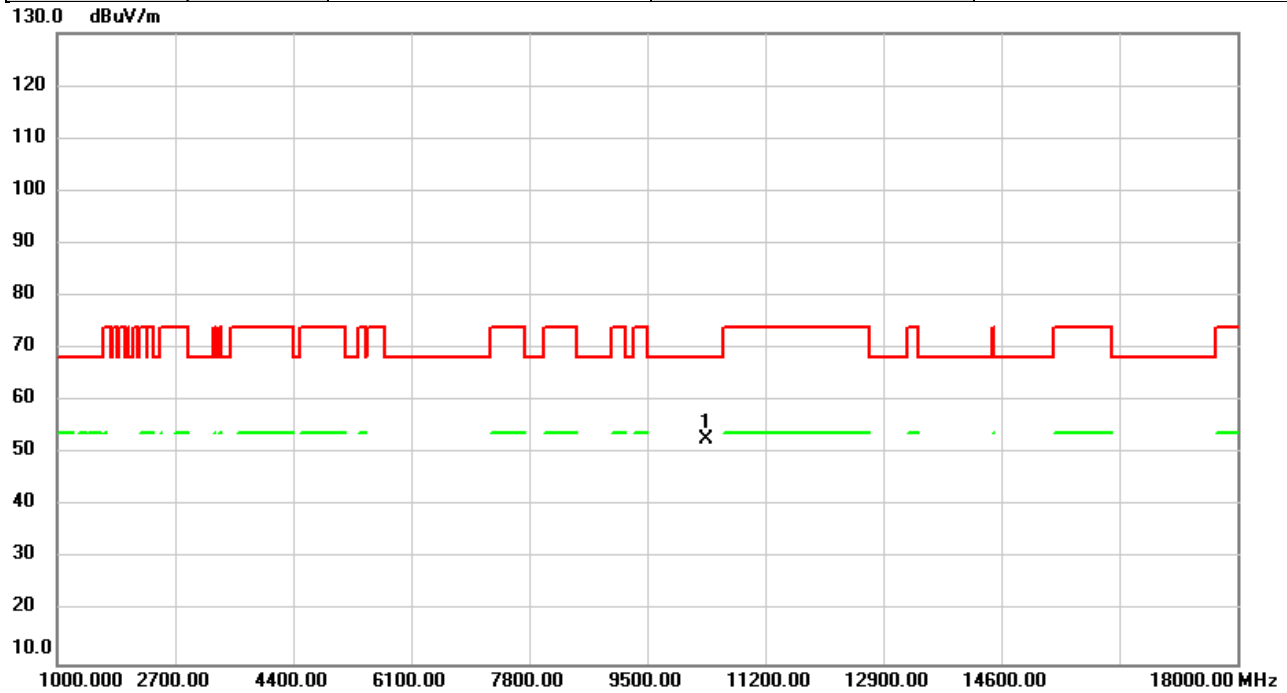


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	46.00	6.76	52.76	68.20	-15.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5180MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

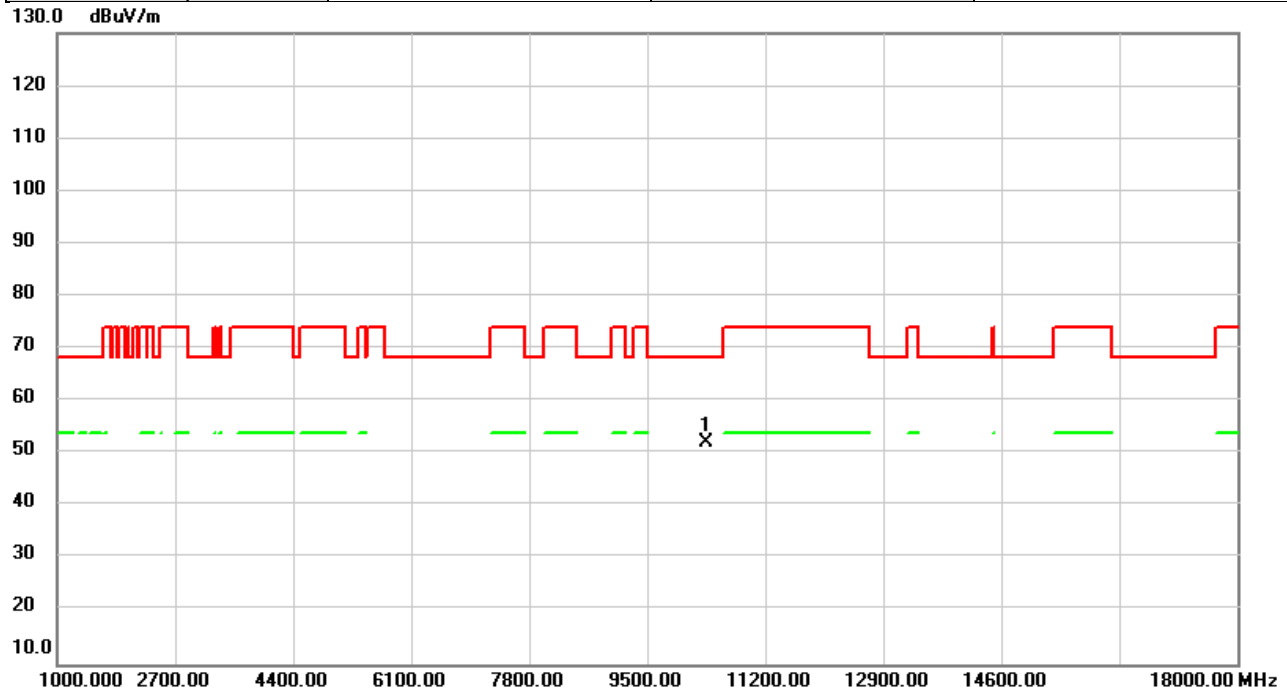


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	45.35	6.76	52.11	68.20	-16.09	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5200MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

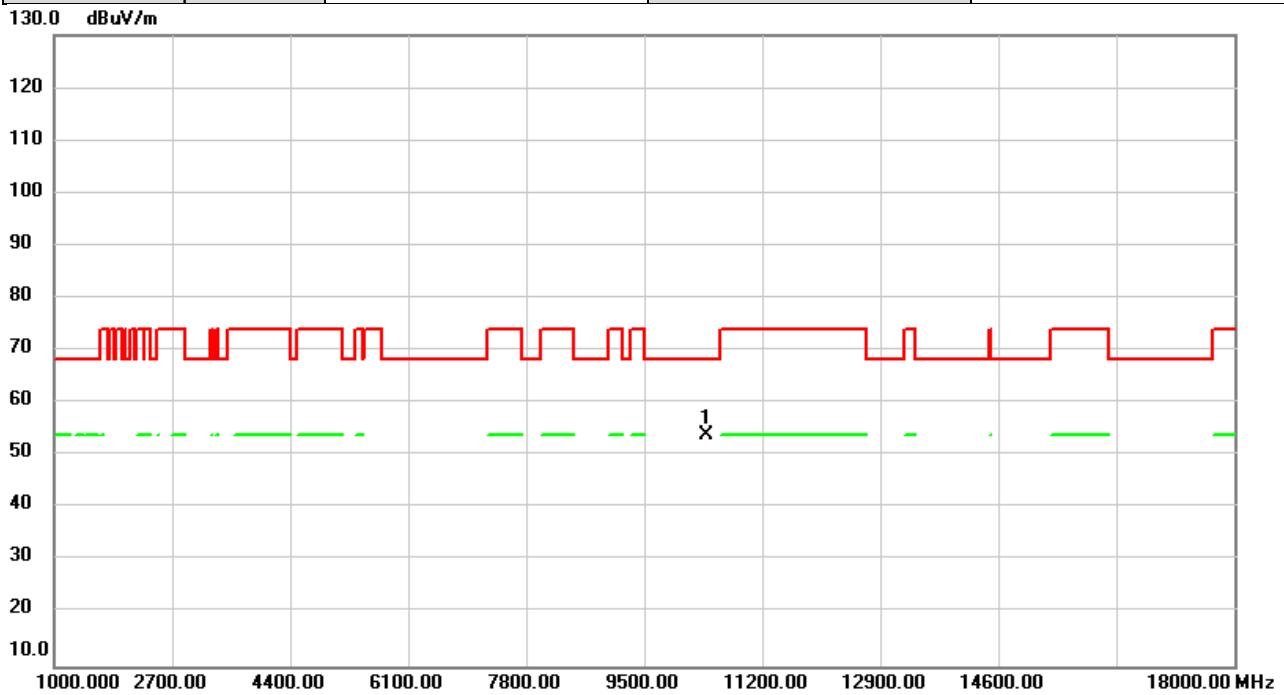


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	47.09	6.78	53.87	68.20	-14.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5200MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

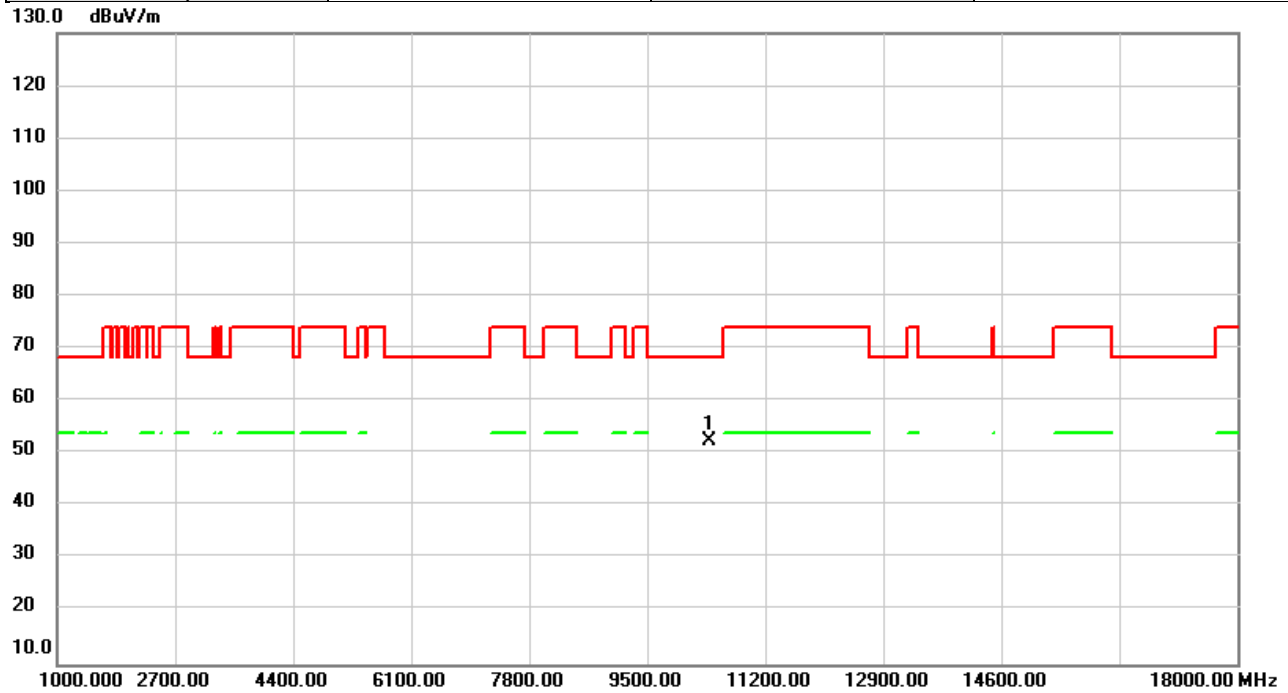


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	45.68	6.78	52.46	68.20	-15.74	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5240MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

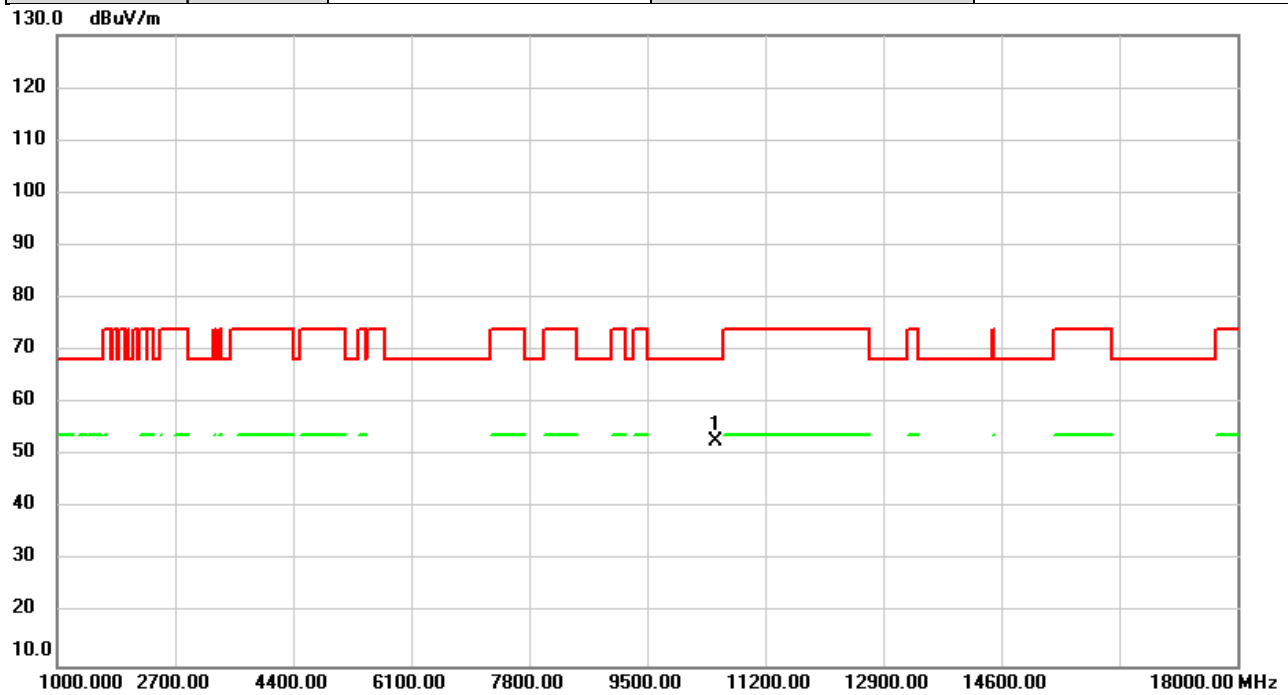


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	46.03	6.81	52.84	68.20	-15.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5240MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

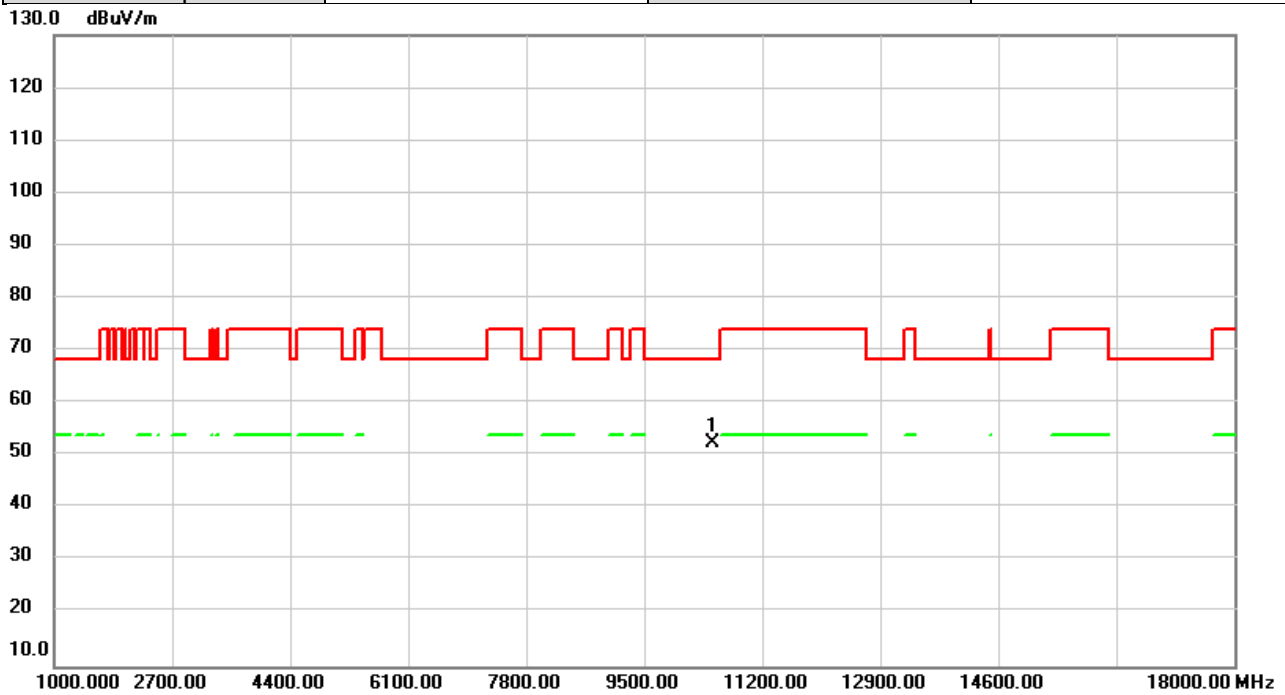


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	45.50	6.81	52.31	68.20	-15.89	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5260MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

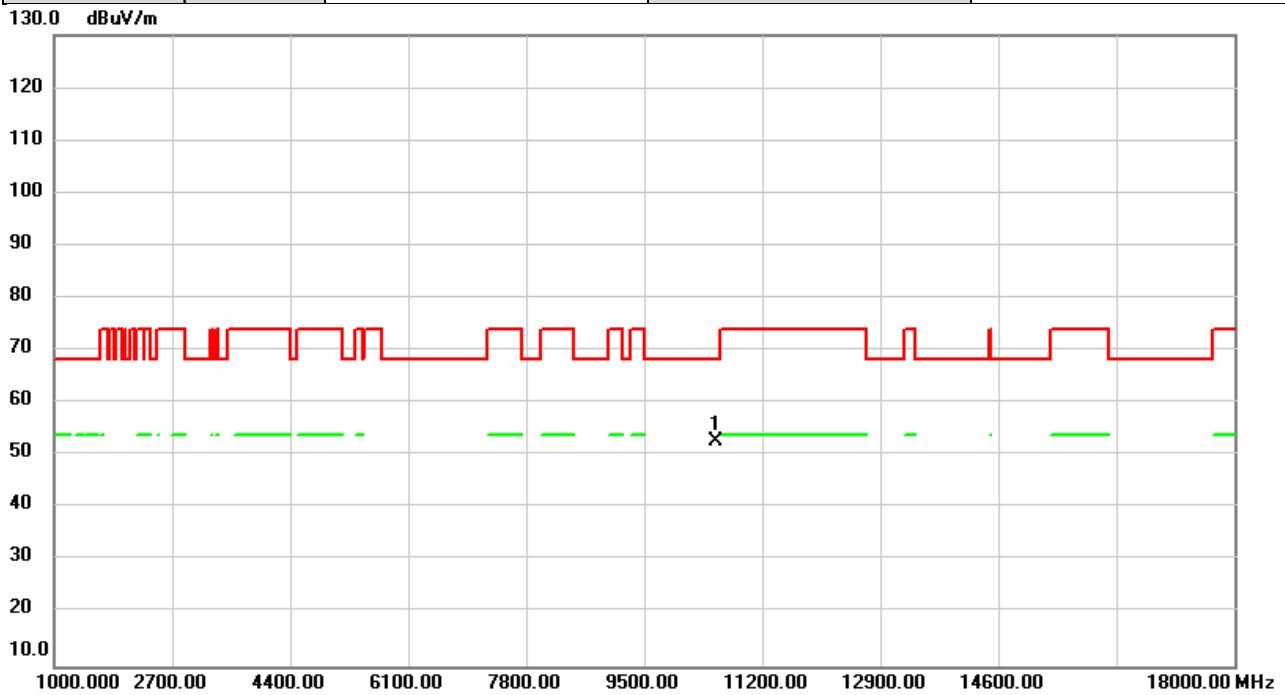


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	46.03	6.82	52.85	68.20	-15.35	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5260MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

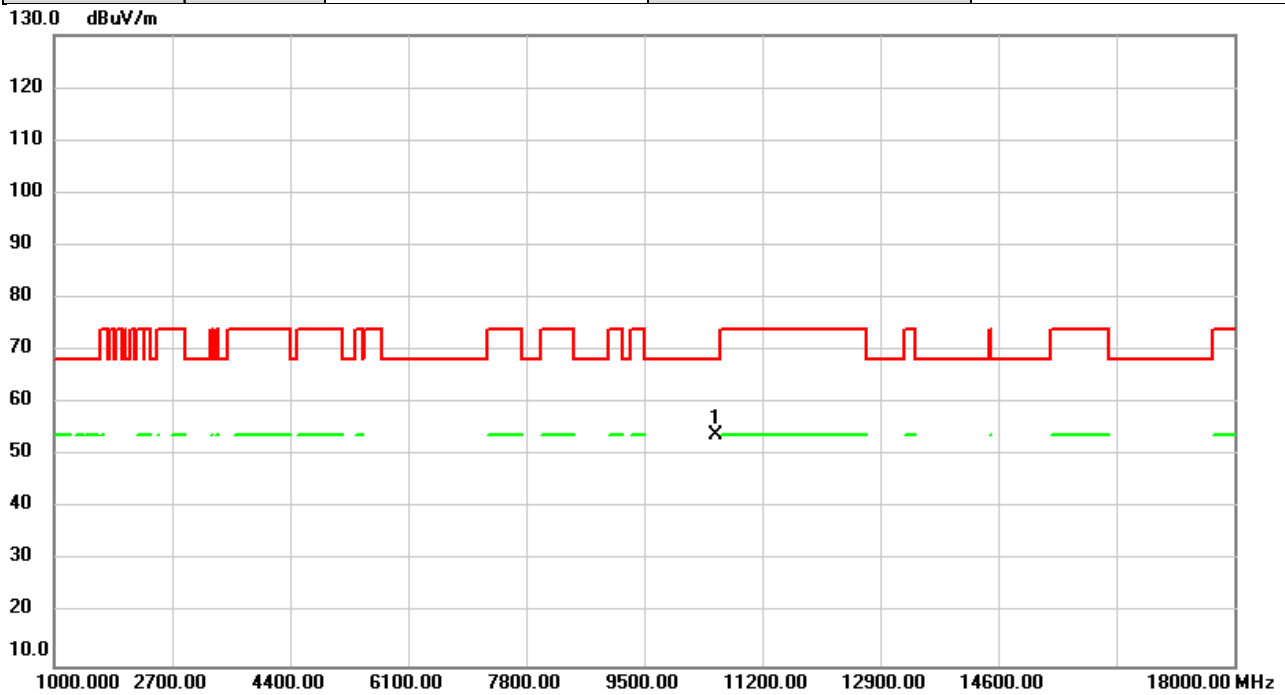


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	47.16	6.82	53.98	68.20	-14.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5300MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

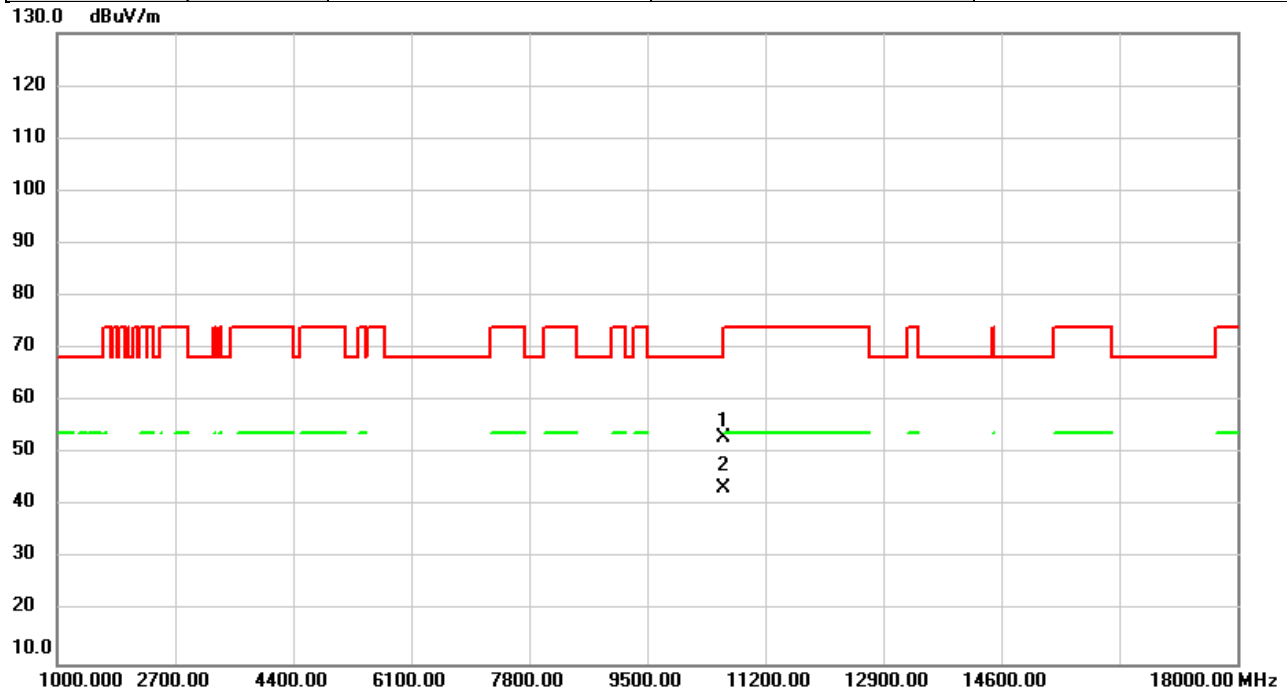


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.00	46.26	6.87	53.13	68.20	-15.07	peak	
2	*	10600.00	36.53	6.87	43.40	54.00	-10.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5300MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

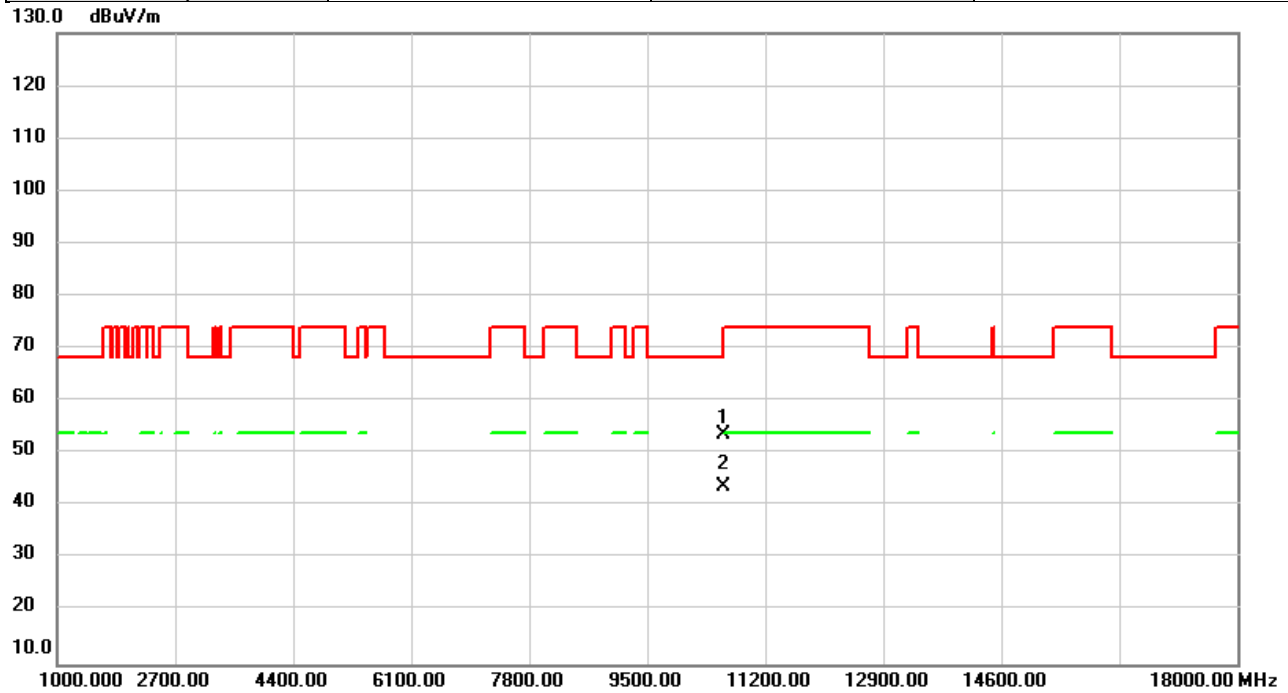


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.00	46.86	6.87	53.73	68.20	-14.47	peak	
2	*	10600.00	36.73	6.87	43.60	54.00	-10.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5320MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

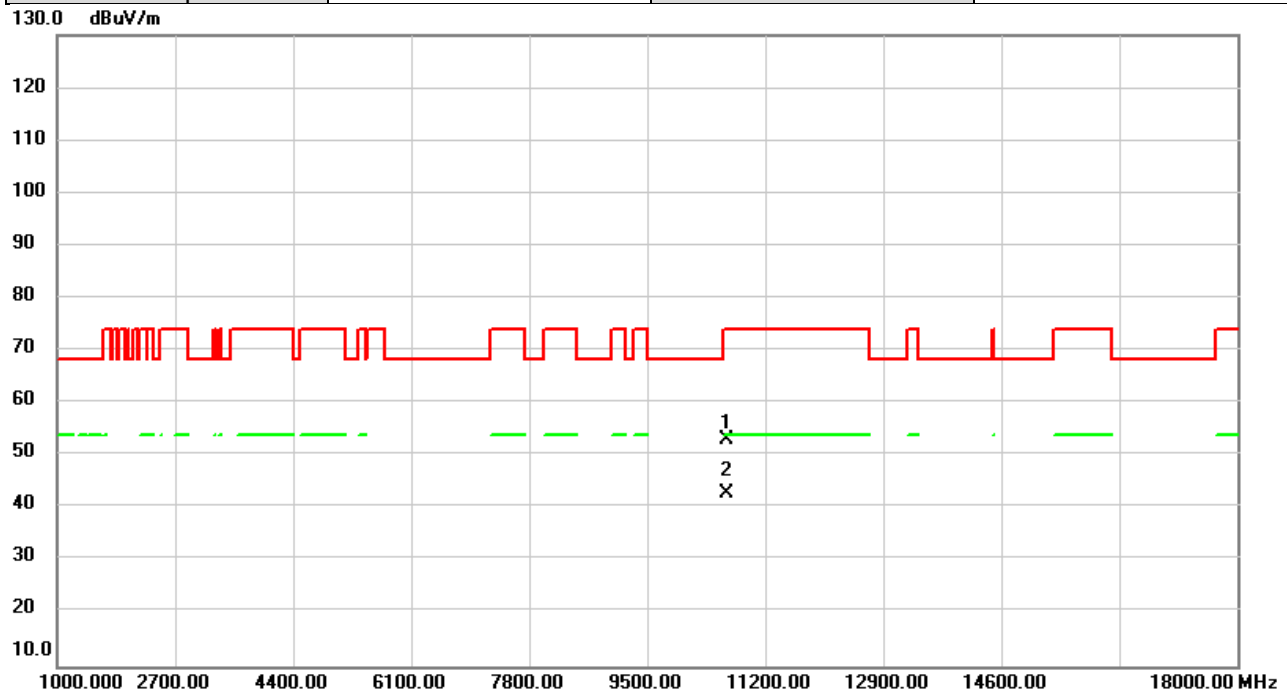


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	46.30	6.89	53.19	74.00	-20.81	peak	
2	*	10640.00	36.02	6.89	42.91	54.00	-11.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5320MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

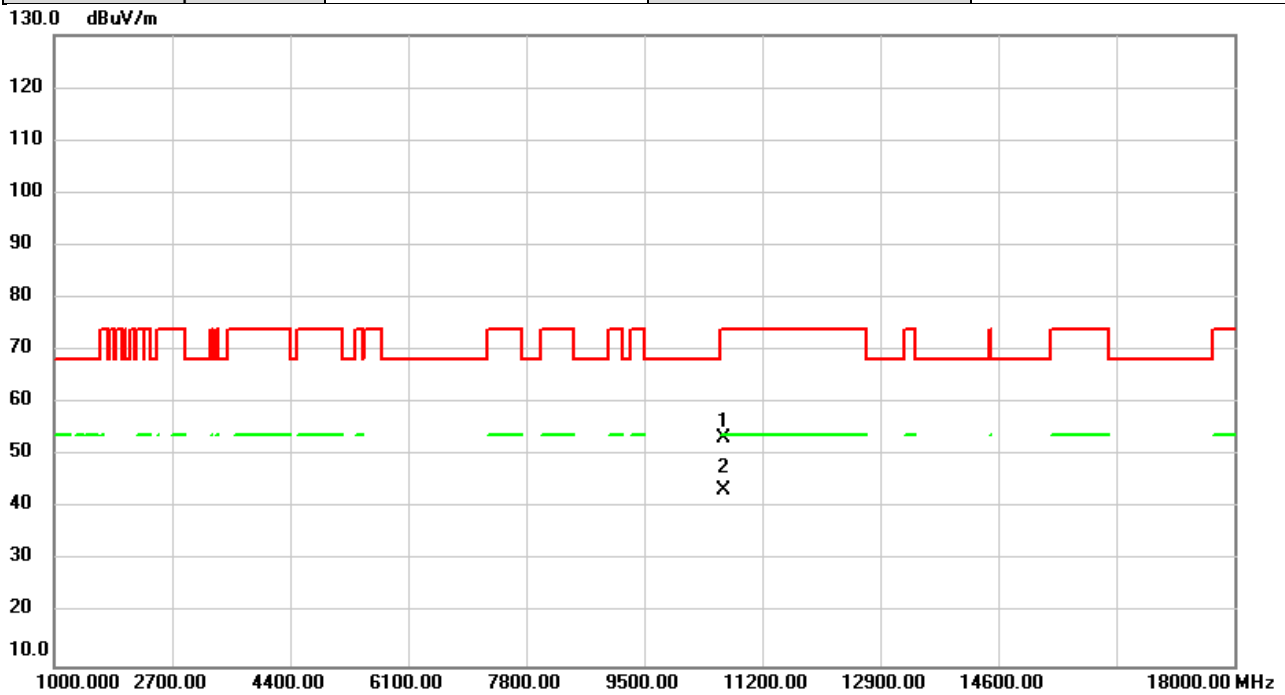


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	46.31	6.89	53.20	74.00	-20.80	peak	
2	*	10640.00	36.52	6.89	43.41	54.00	-10.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5500MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

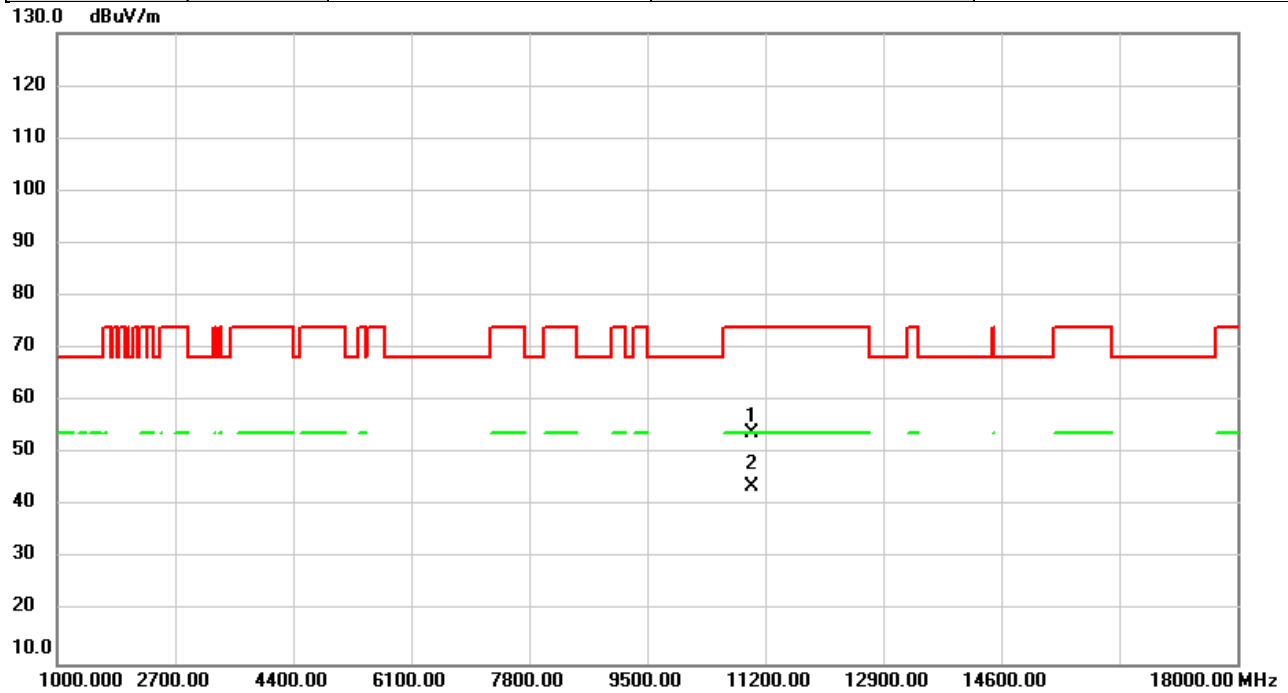


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	46.88	7.09	53.97	74.00	-20.03	peak	
2	*	11000.00	36.65	7.09	43.74	54.00	-10.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5500MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

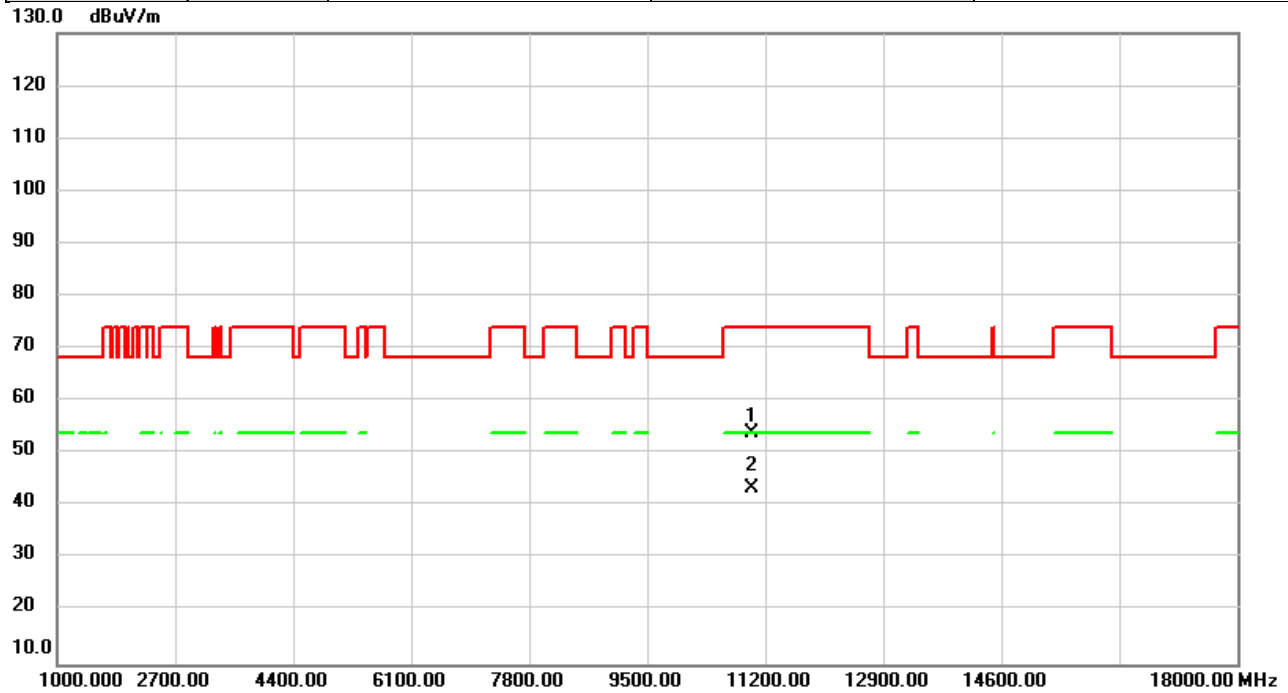


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	46.88	7.09	53.97	74.00	-20.03	peak	
2	*	11000.00	36.45	7.09	43.54	54.00	-10.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5580MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

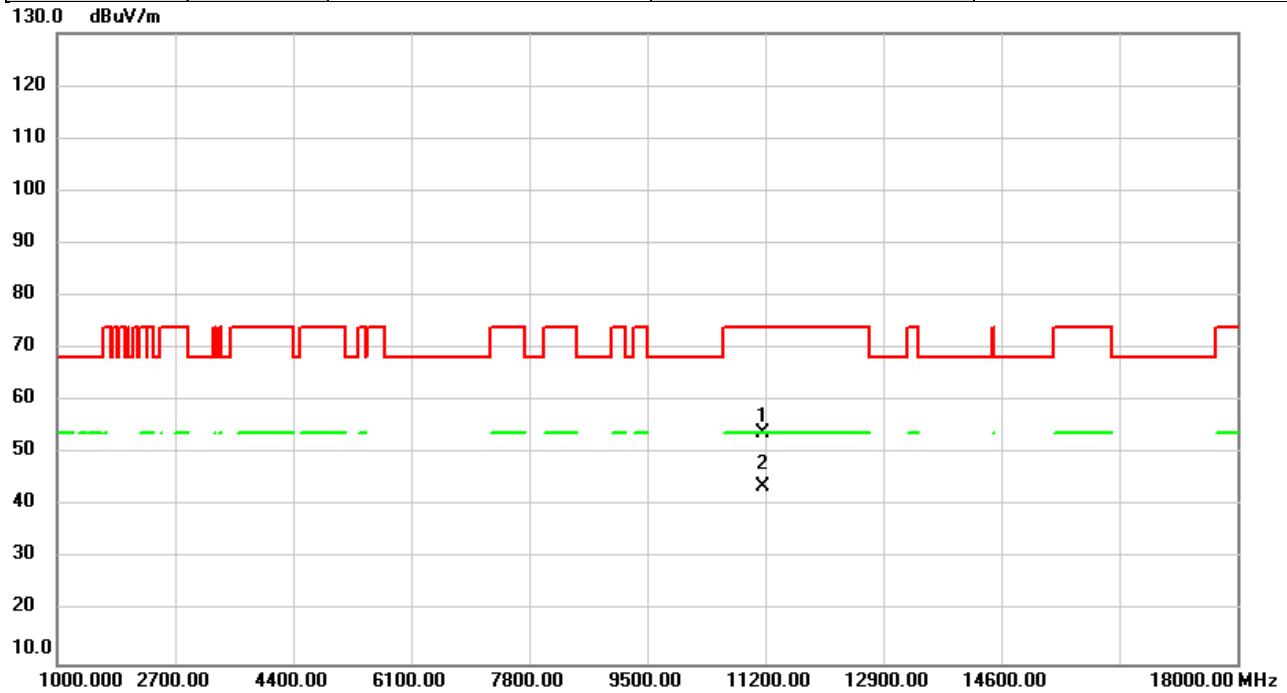


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.00	46.73	7.25	53.98	74.00	-20.02	peak	
2	*	11160.00	36.40	7.25	43.65	54.00	-10.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5580MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

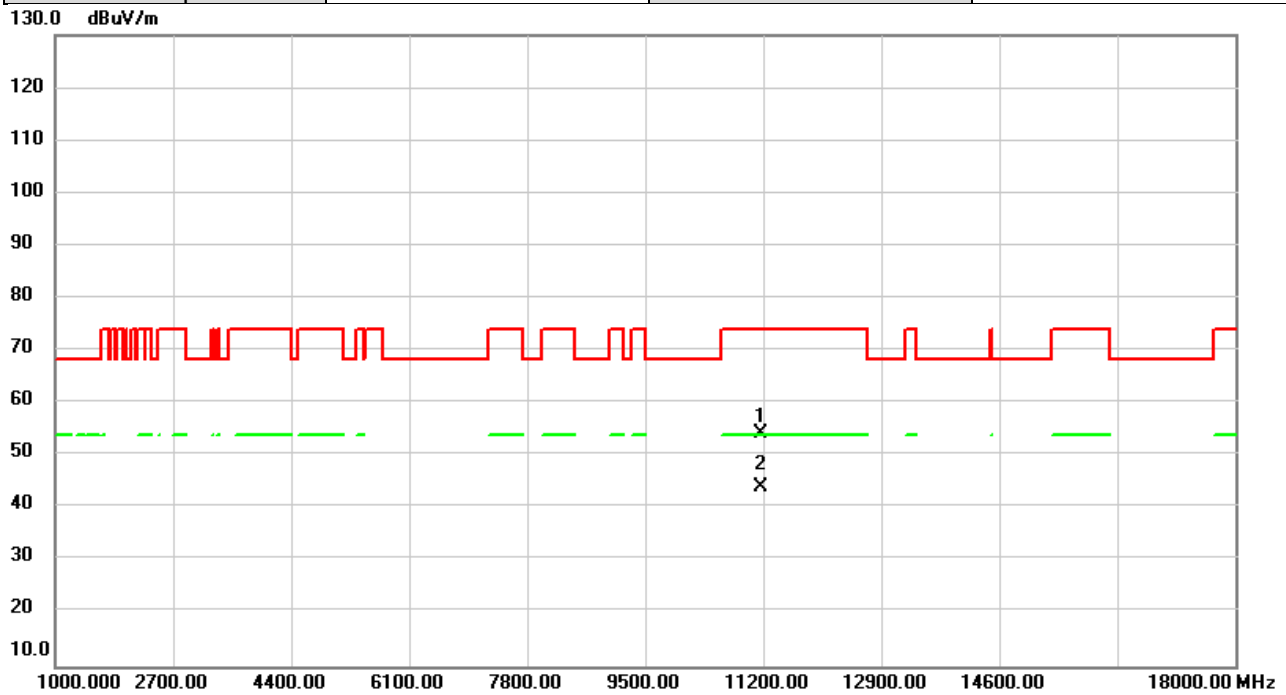


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.00	46.98	7.25	54.23	74.00	-19.77	peak	
2	*	11160.00	36.78	7.25	44.03	54.00	-9.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5700MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

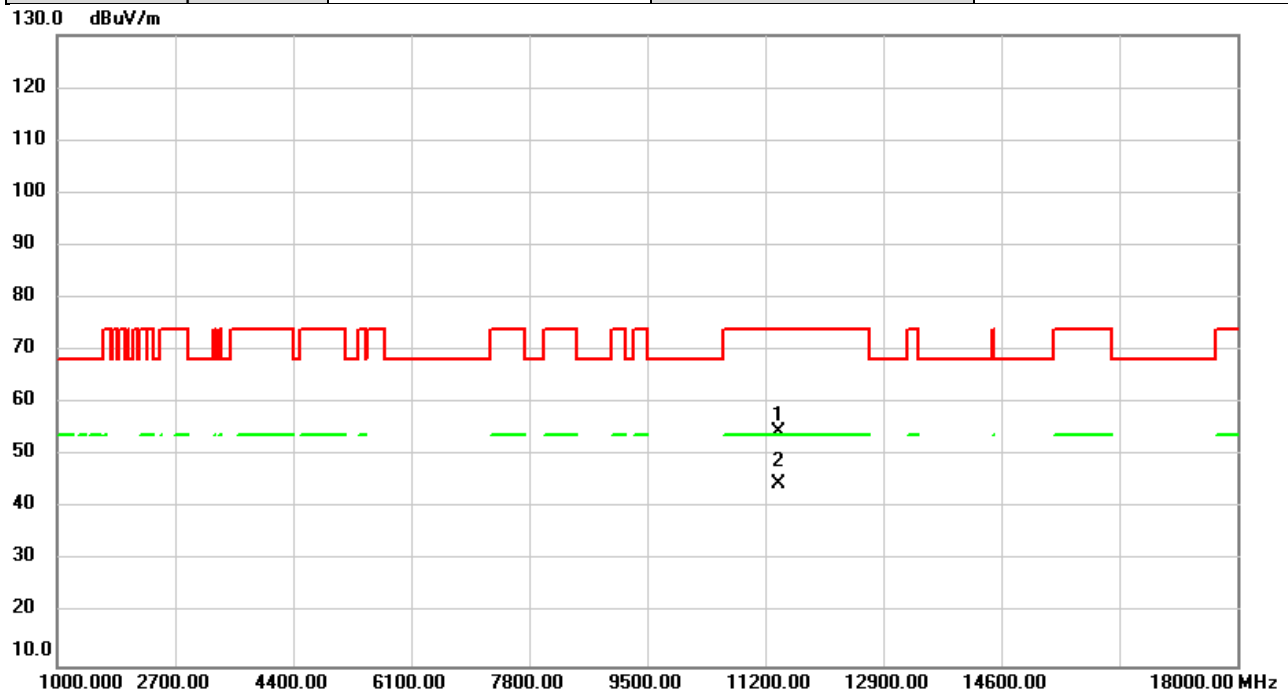


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	47.17	7.48	54.65	74.00	-19.35	peak	
2	*	11400.00	37.05	7.48	44.53	54.00	-9.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5700MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

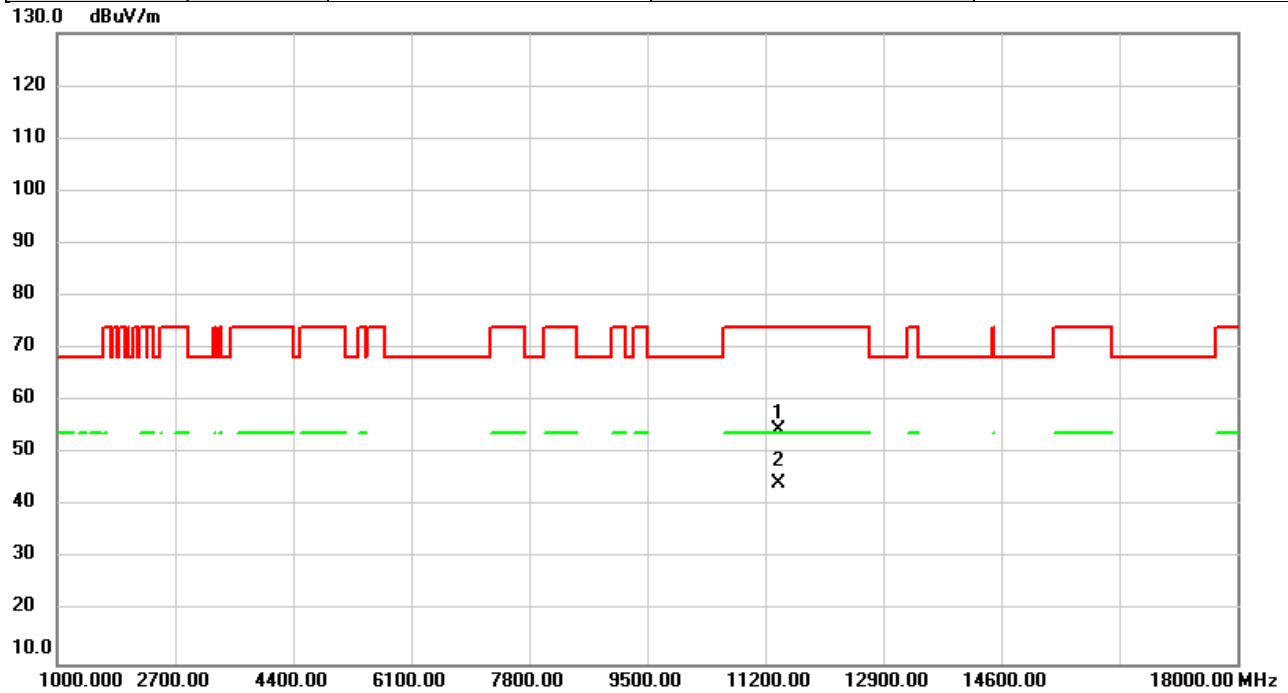


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	47.12	7.48	54.60	74.00	-19.40	peak	
2	*	11400.00	36.97	7.48	44.45	54.00	-9.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5720MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

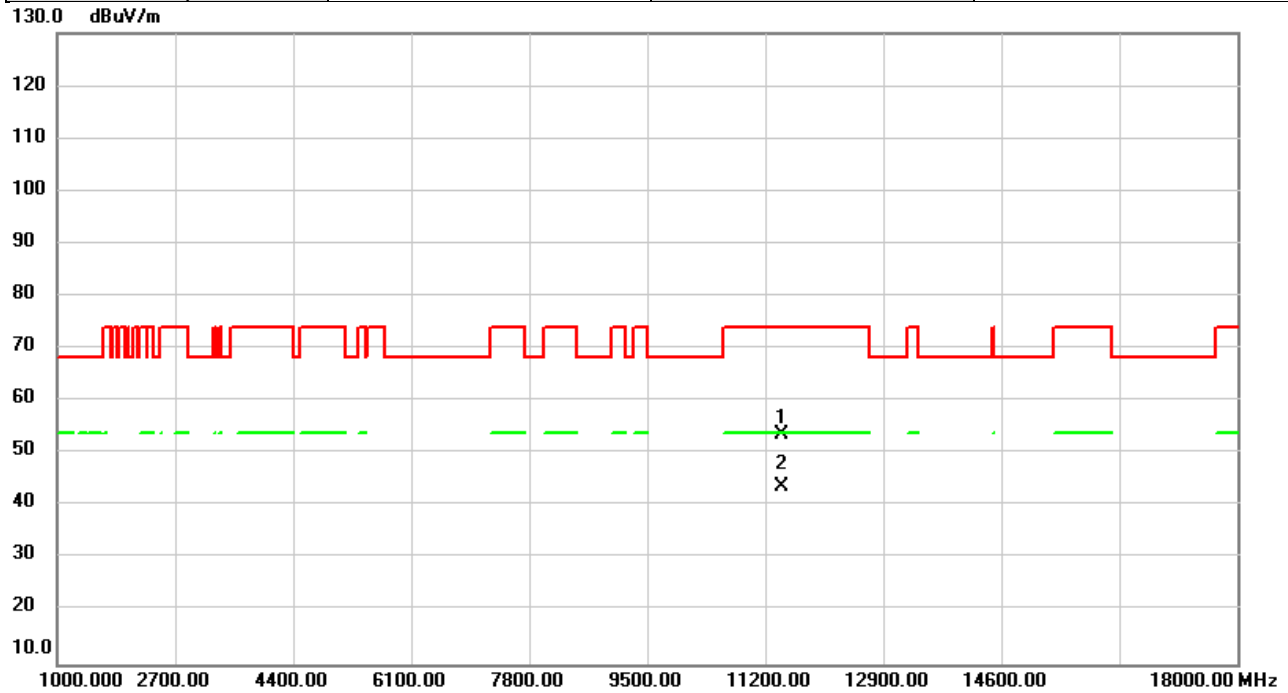


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11440.00	46.24	7.51	53.75	74.00	-20.25	peak	
2	*	11440.00	36.14	7.51	43.65	54.00	-10.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/5/15
Test Frequency	5720MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

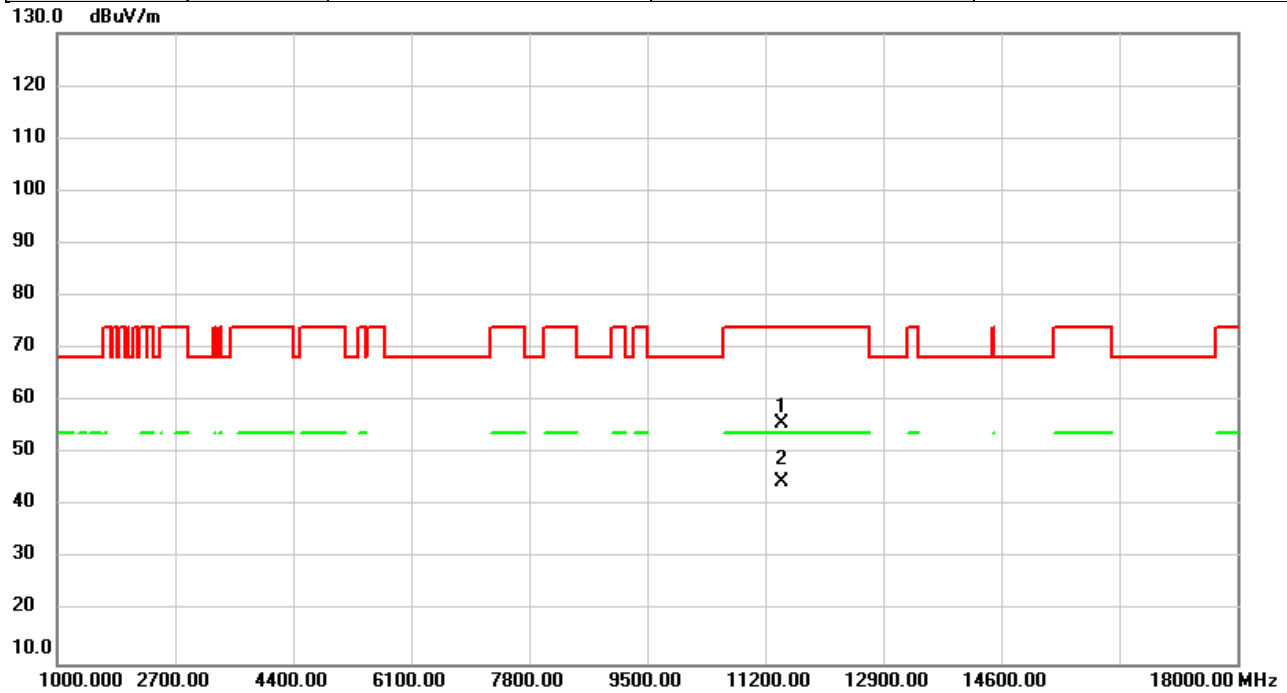


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11440.00	48.29	7.51	55.80	74.00	-18.20	peak	
2	*	11440.00	37.13	7.51	44.64	54.00	-9.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/6/21
Test Frequency	5745MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

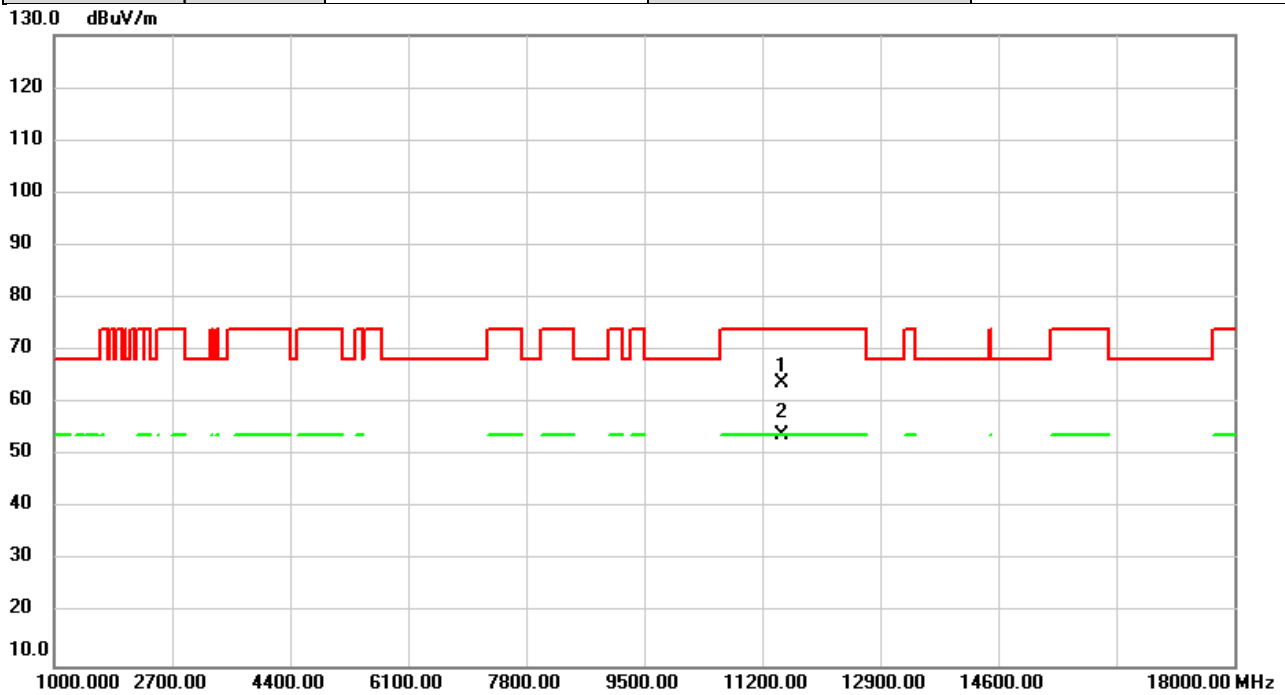


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	56.40	7.56	63.96	74.00	-10.04	peak	
2	*	11490.00	46.31	7.56	53.87	54.00	-0.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/6/21
Test Frequency	5745MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

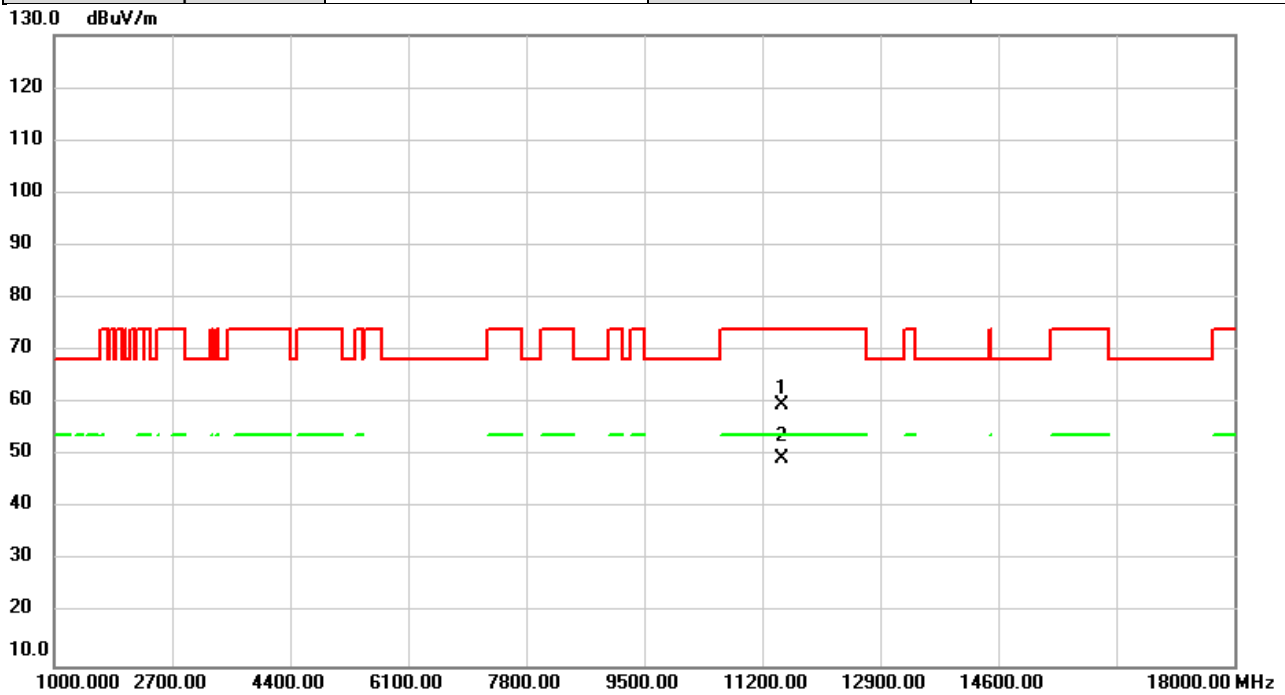


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	52.08	7.56	59.64	74.00	-14.36	peak	
2	*	11490.00	41.82	7.56	49.38	54.00	-4.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/6/21
Test Frequency	5785MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

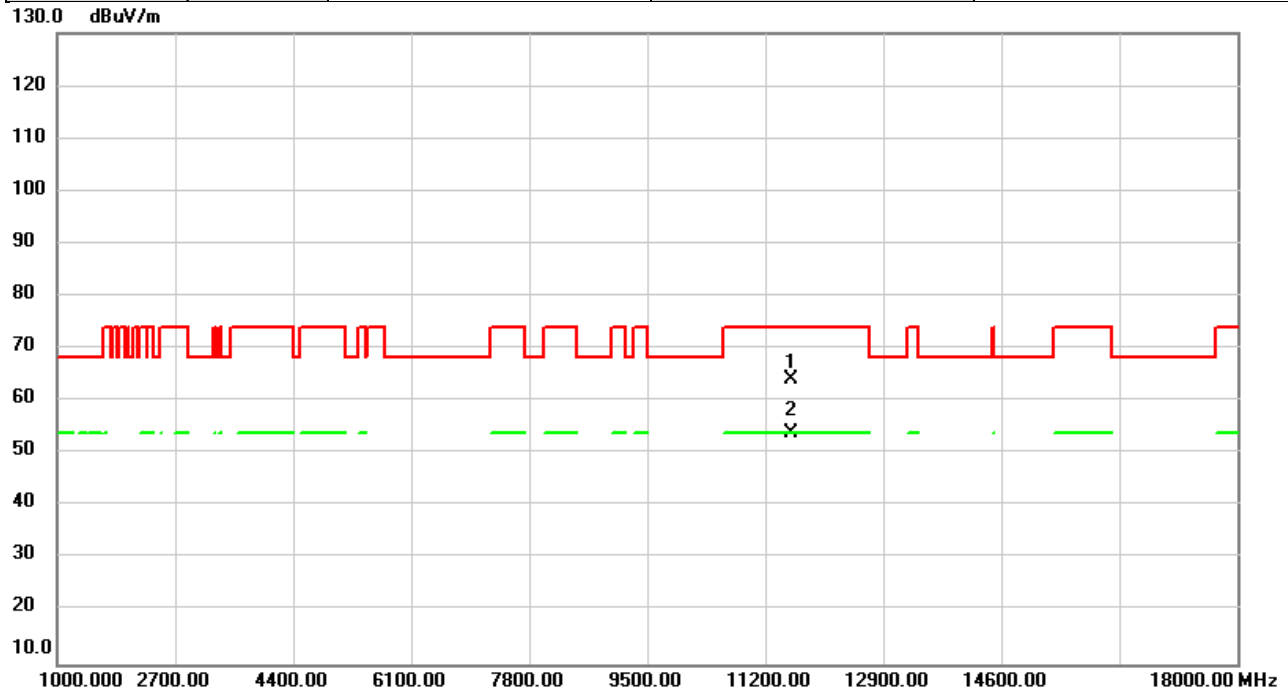


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	56.45	7.59	64.04	74.00	-9.96	peak	
2	*	11570.00	46.27	7.59	53.86	54.00	-0.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/6/21
Test Frequency	5785MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

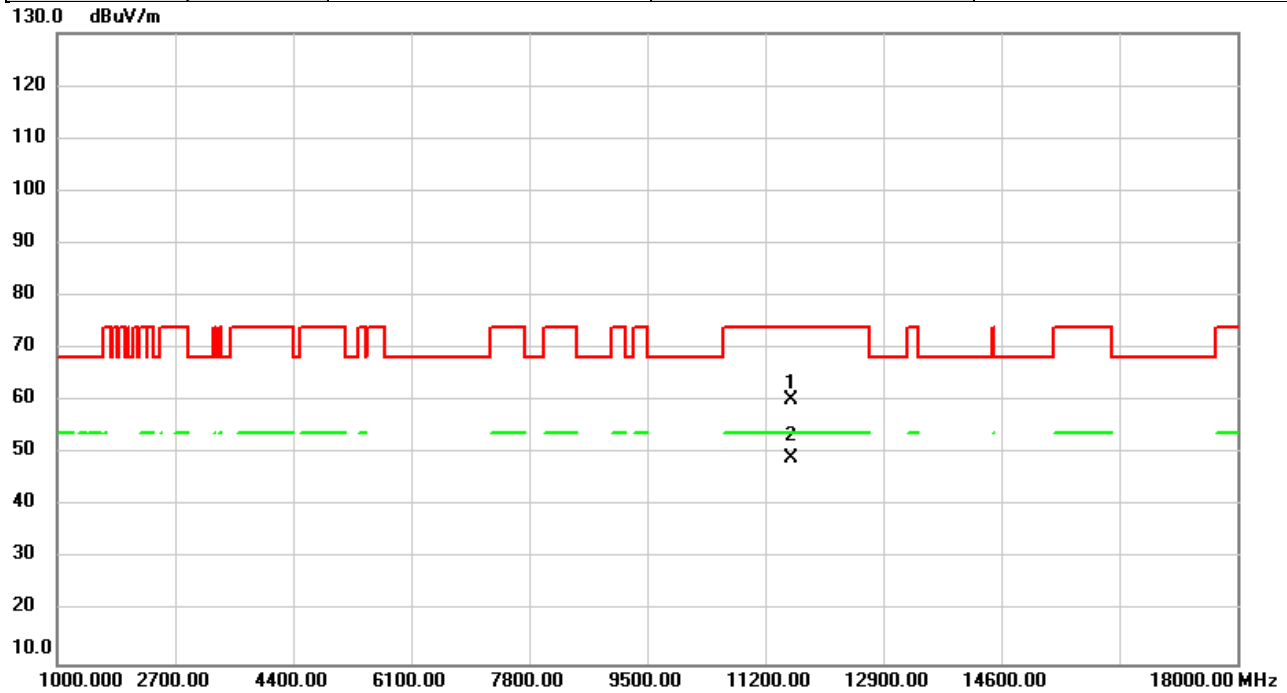


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	52.53	7.59	60.12	74.00	-13.88	peak	
2	*	11570.00	41.52	7.59	49.11	54.00	-4.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/6/21
Test Frequency	5825MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

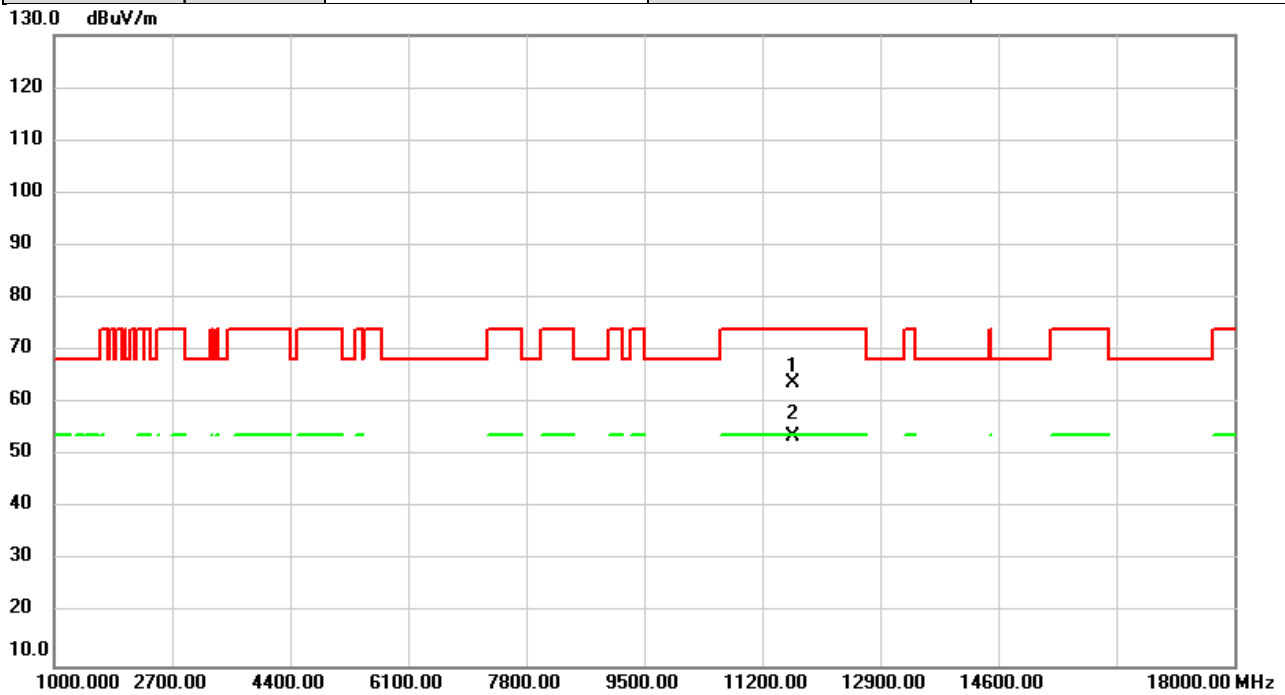


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	56.10	7.62	63.72	74.00	-10.28	peak	
2	*	11650.00	46.13	7.62	53.75	54.00	-0.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/6/21
Test Frequency	5825MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

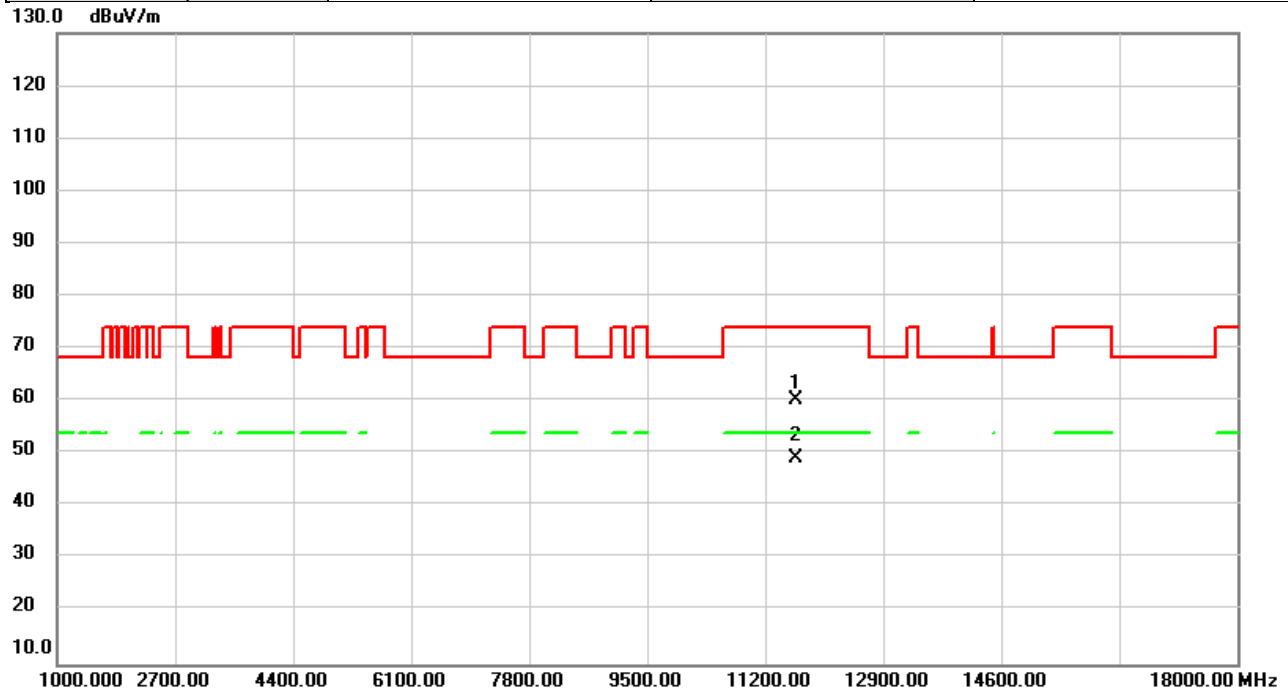


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	52.70	7.62	60.32	74.00	-13.68	peak	
2	*	11650.00	41.63	7.62	49.25	54.00	-4.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/15
Test Frequency	5190MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

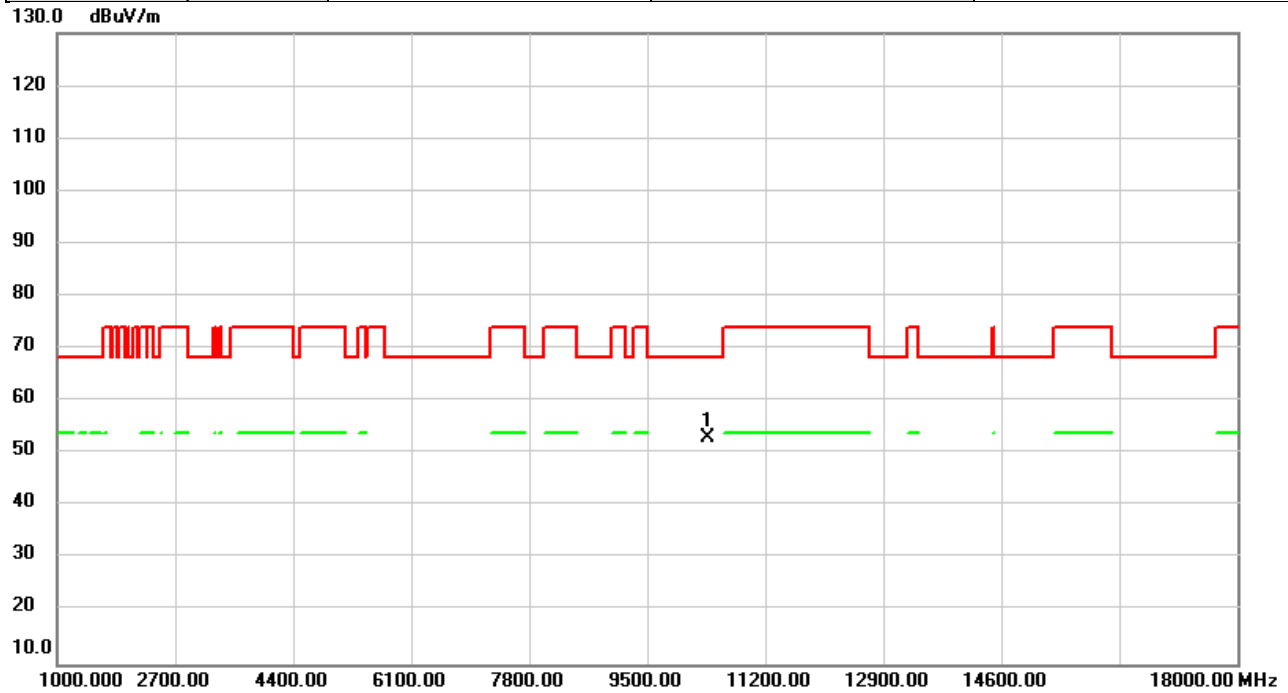


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	46.39	6.78	53.17	68.20	-15.03	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/15
Test Frequency	5190MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

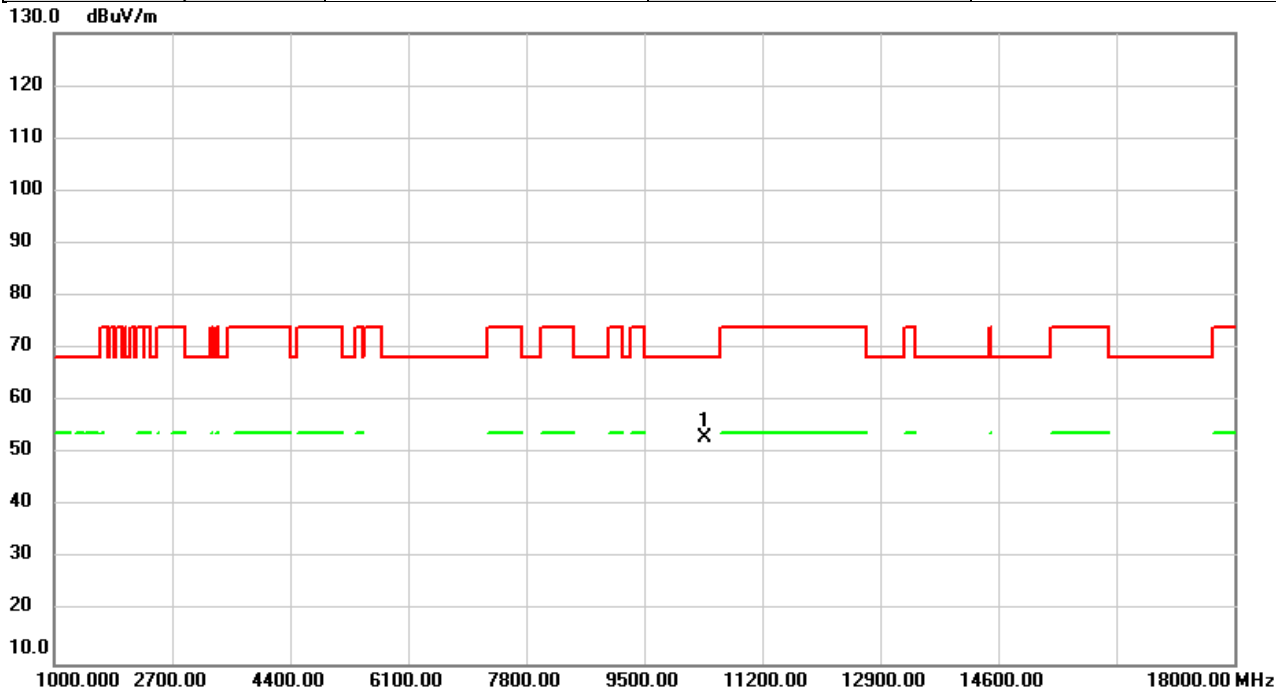

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	46.25	6.78	53.03	68.20	-15.17	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/15
Test Frequency	5230MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

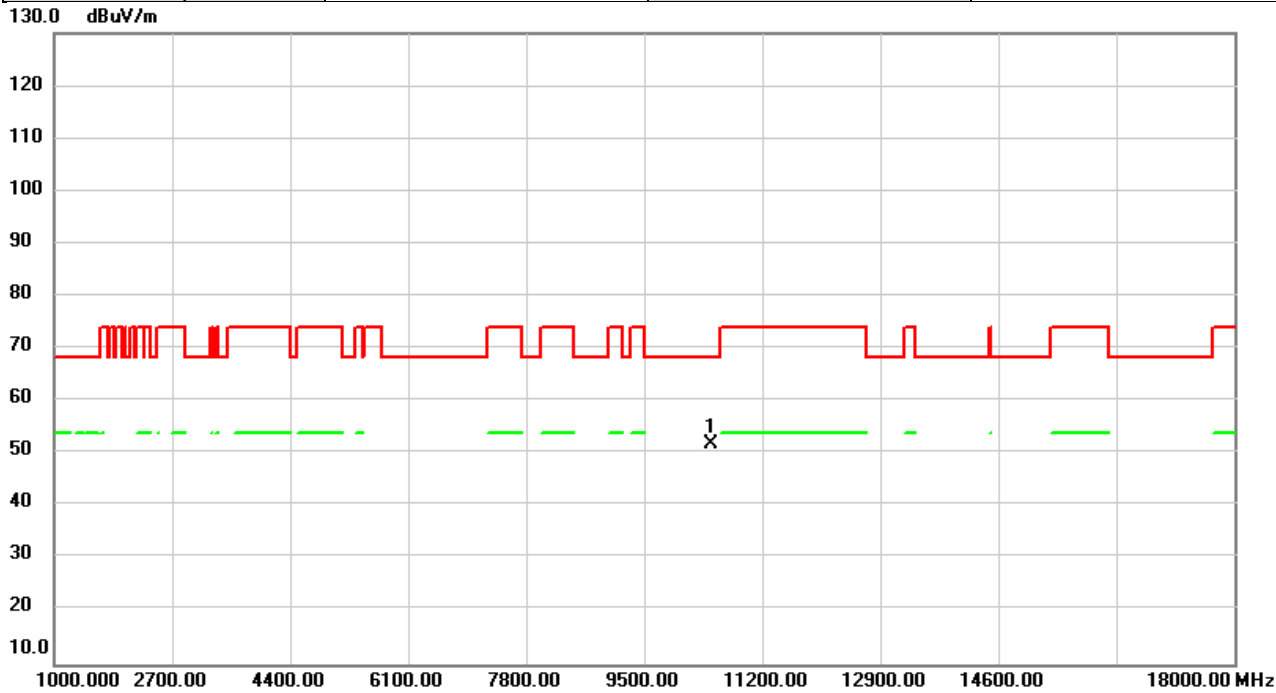


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	45.12	6.80	51.92	68.20	-16.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/15
Test Frequency	5230MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

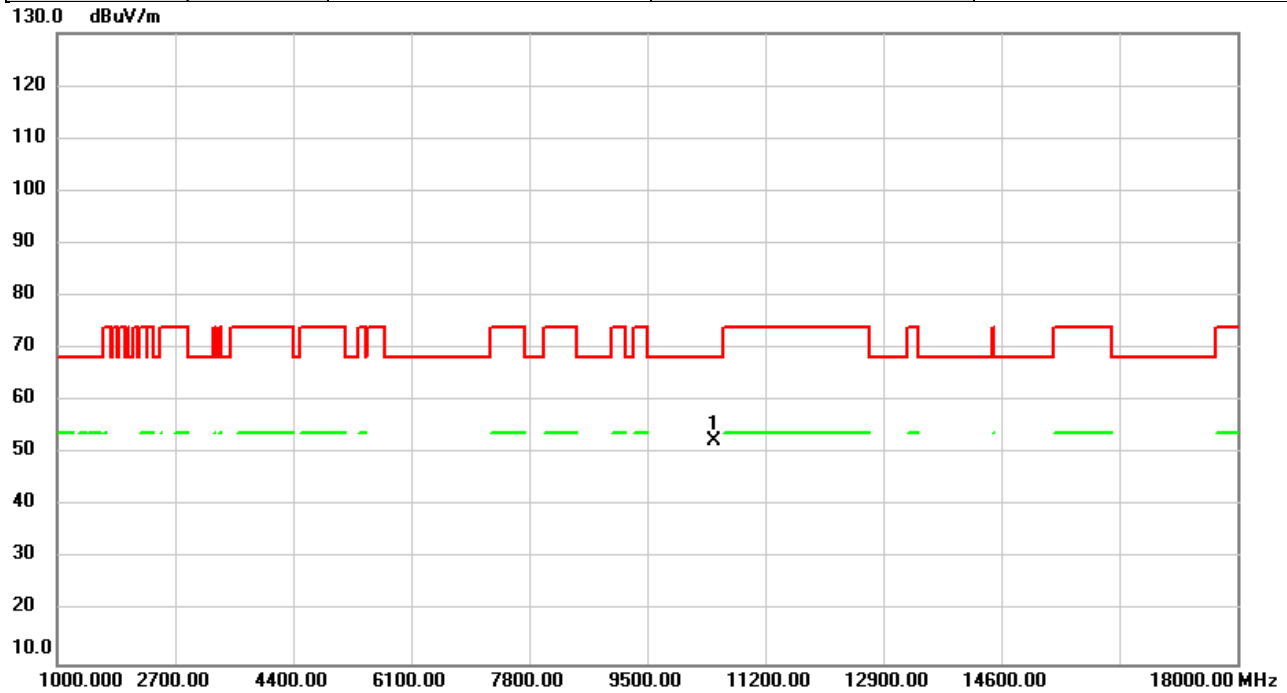


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	45.60	6.80	52.40	68.20	-15.80	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/15
Test Frequency	5270MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

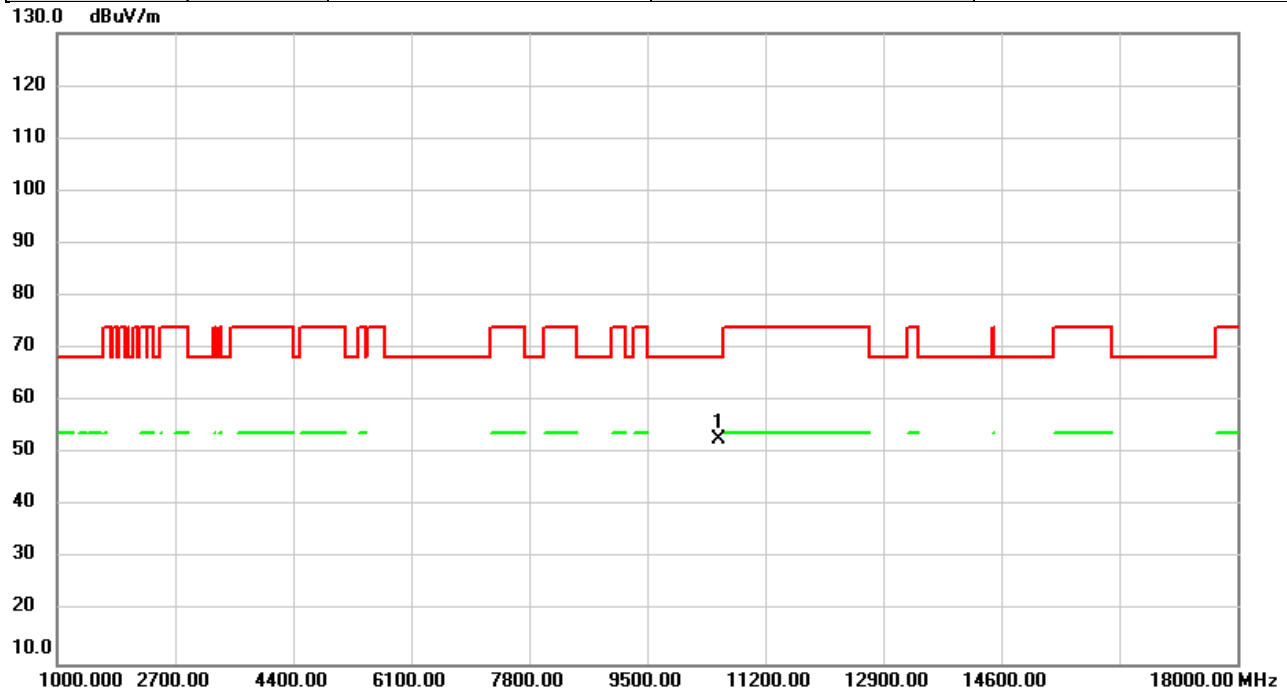


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	45.87	6.83	52.70	68.20	-15.50	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/15
Test Frequency	5270MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

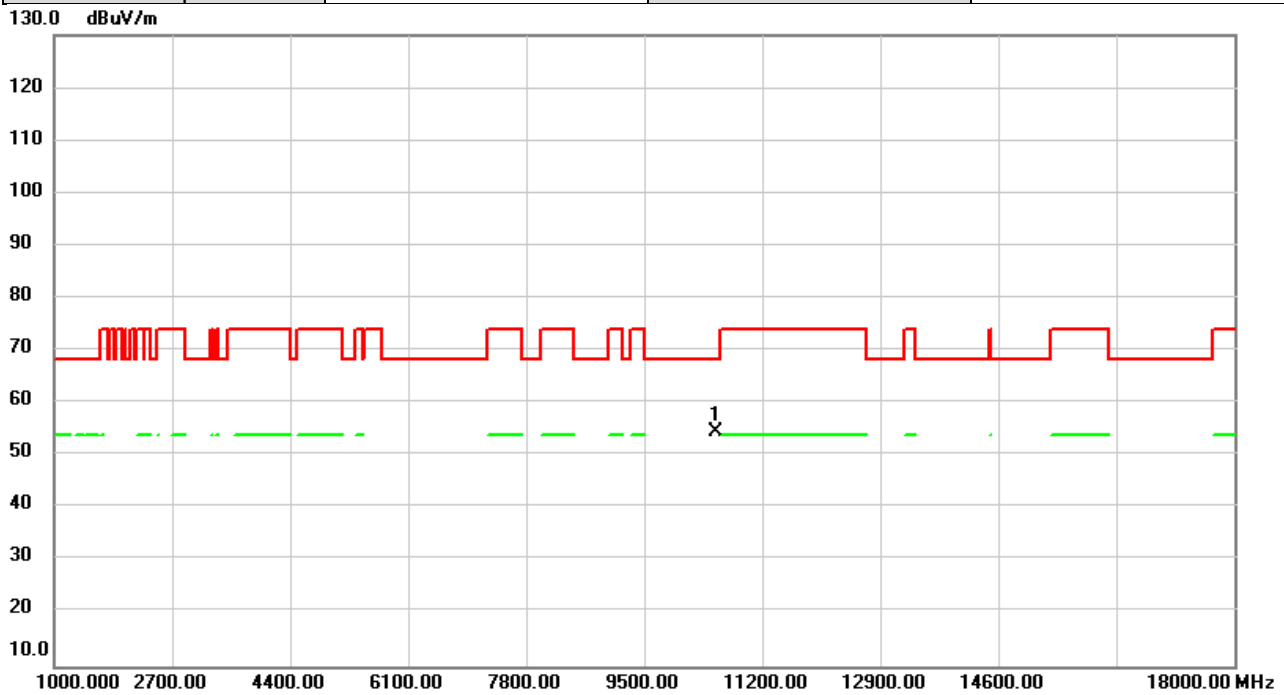


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	47.69	6.83	54.52	68.20	-13.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/15
Test Frequency	5310MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

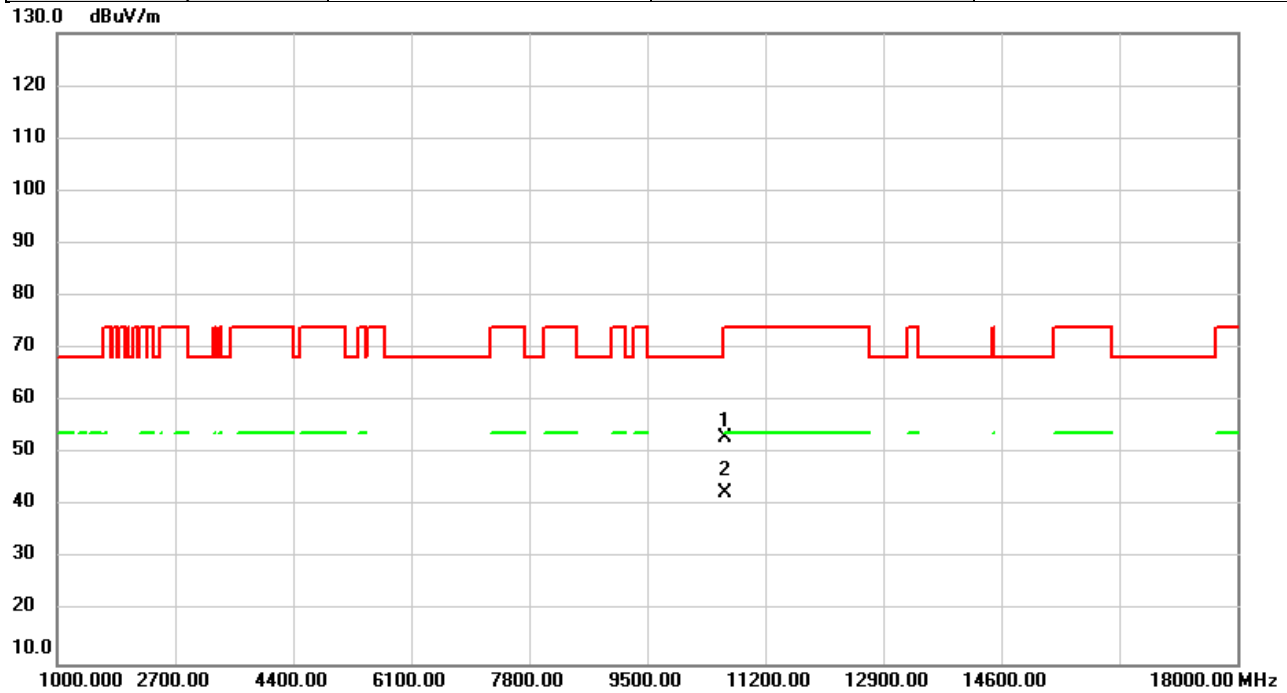


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10620.00	46.18	6.88	53.06	74.00	-20.94	peak	
2	*	10620.00	35.63	6.88	42.51	54.00	-11.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/15
Test Frequency	5310MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

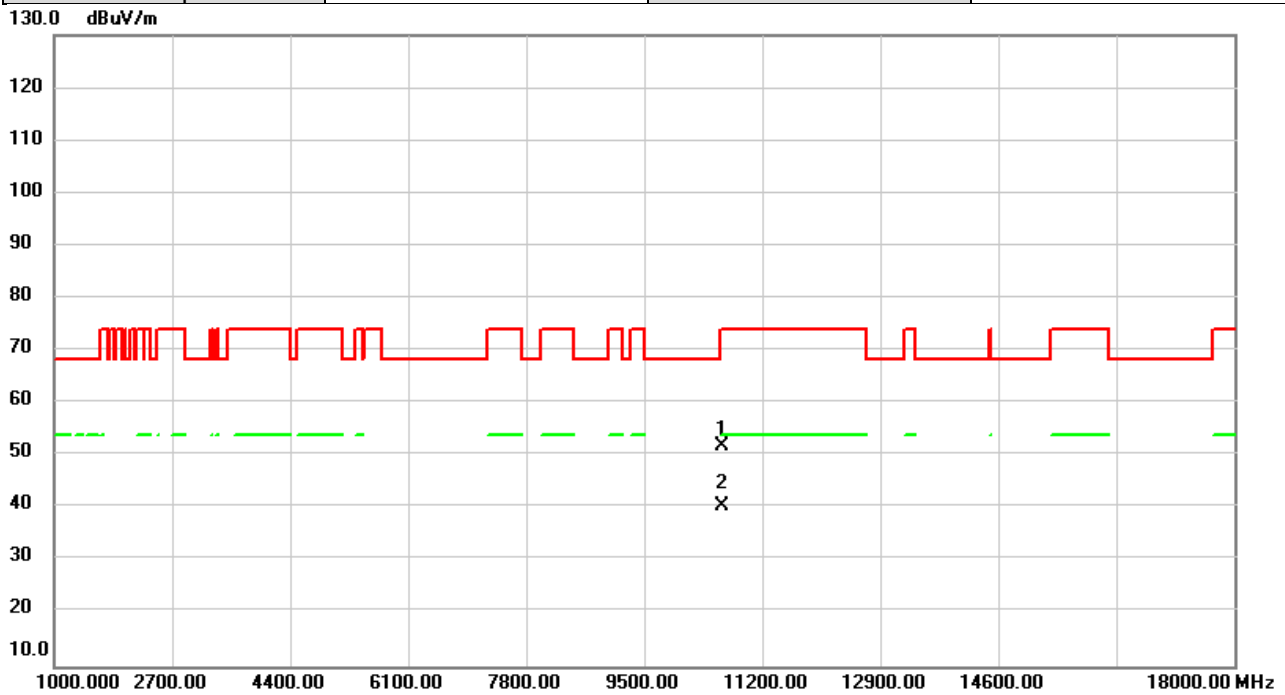


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10620.00	44.95	6.88	51.83	74.00	-22.17	peak	
2	*	10620.00	33.50	6.88	40.38	54.00	-13.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/15
Test Frequency	5510MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

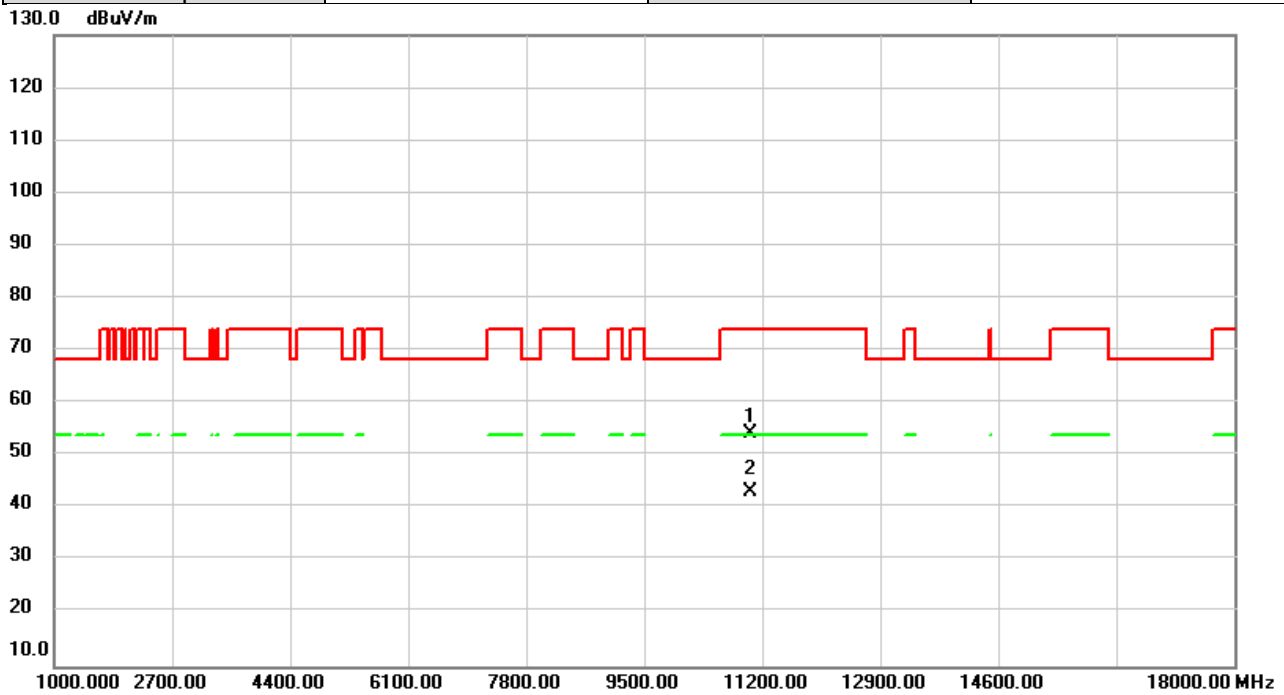


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11020.00	47.19	7.10	54.29	74.00	-19.71	peak	
2	*	11020.00	36.17	7.10	43.27	54.00	-10.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/15
Test Frequency	5510MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

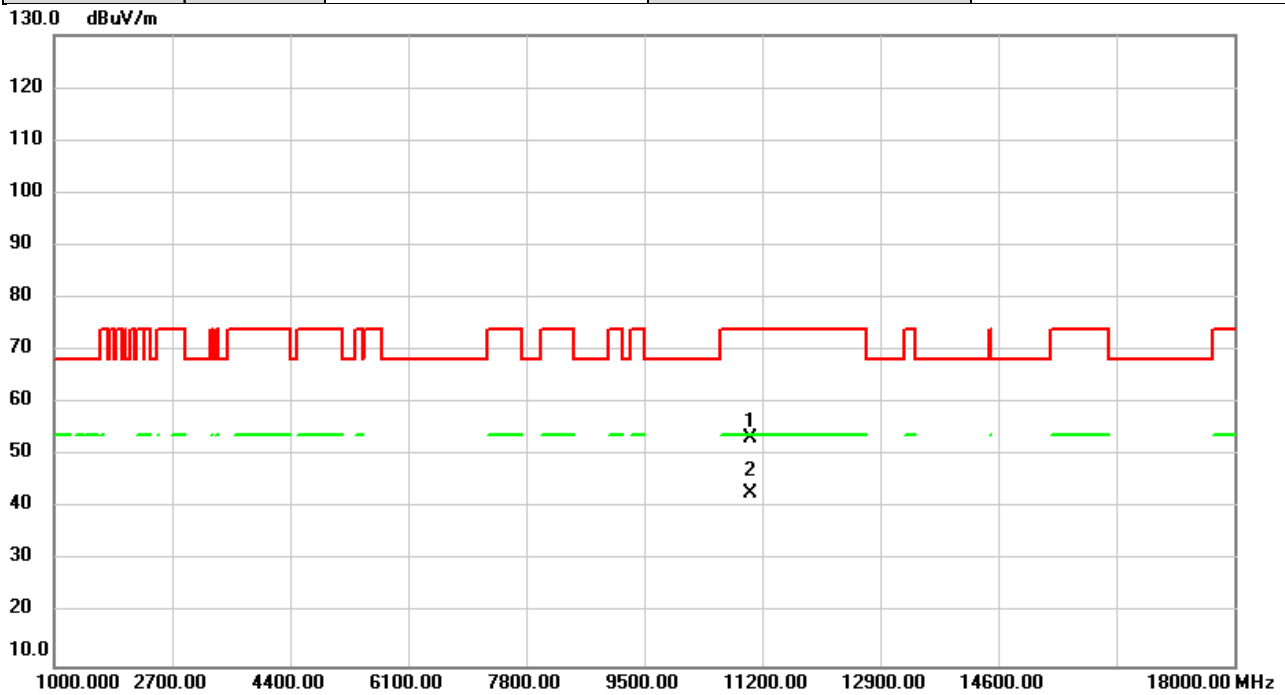


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11020.00	46.28	7.10	53.38	74.00	-20.62	peak	
2	*	11020.00	35.85	7.10	42.95	54.00	-11.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/23
Test Frequency	5550MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

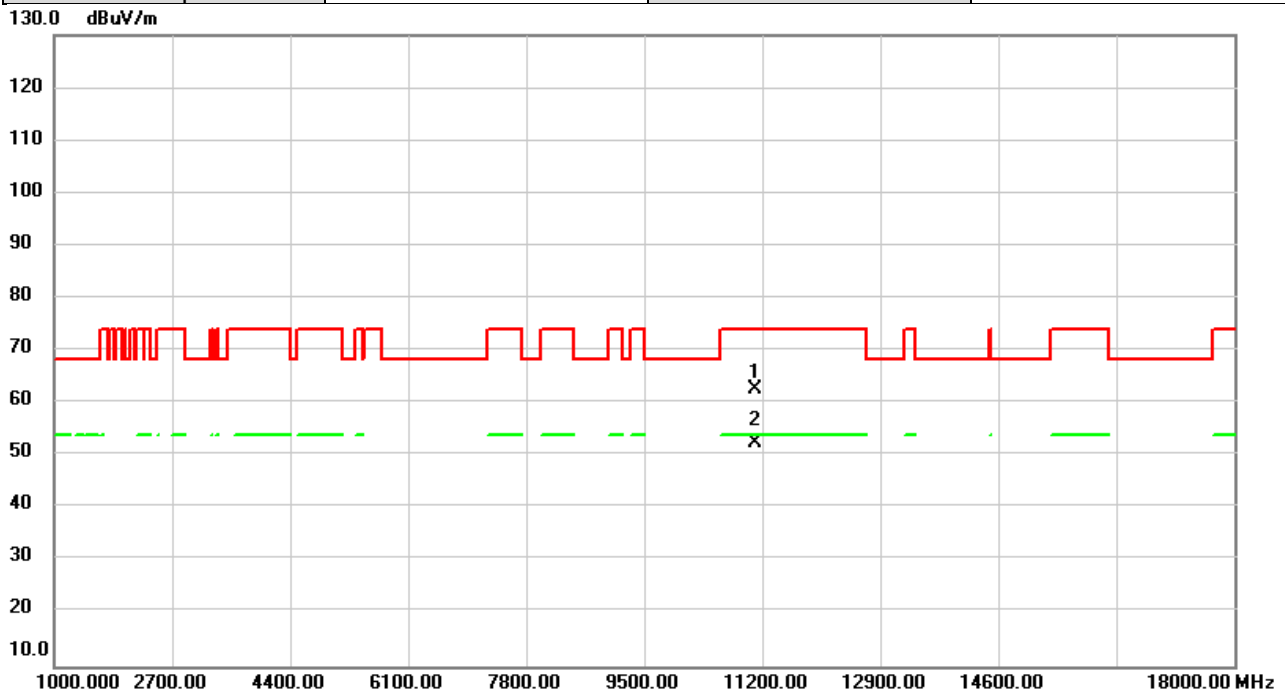


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11100.00	55.45	7.18	62.63	74.00	-11.37	peak	
2	*	11100.00	45.28	7.18	52.46	54.00	-1.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/23
Test Frequency	5550MHz	Polarization	Horizontal
Temp	20°C	Hum.	60%

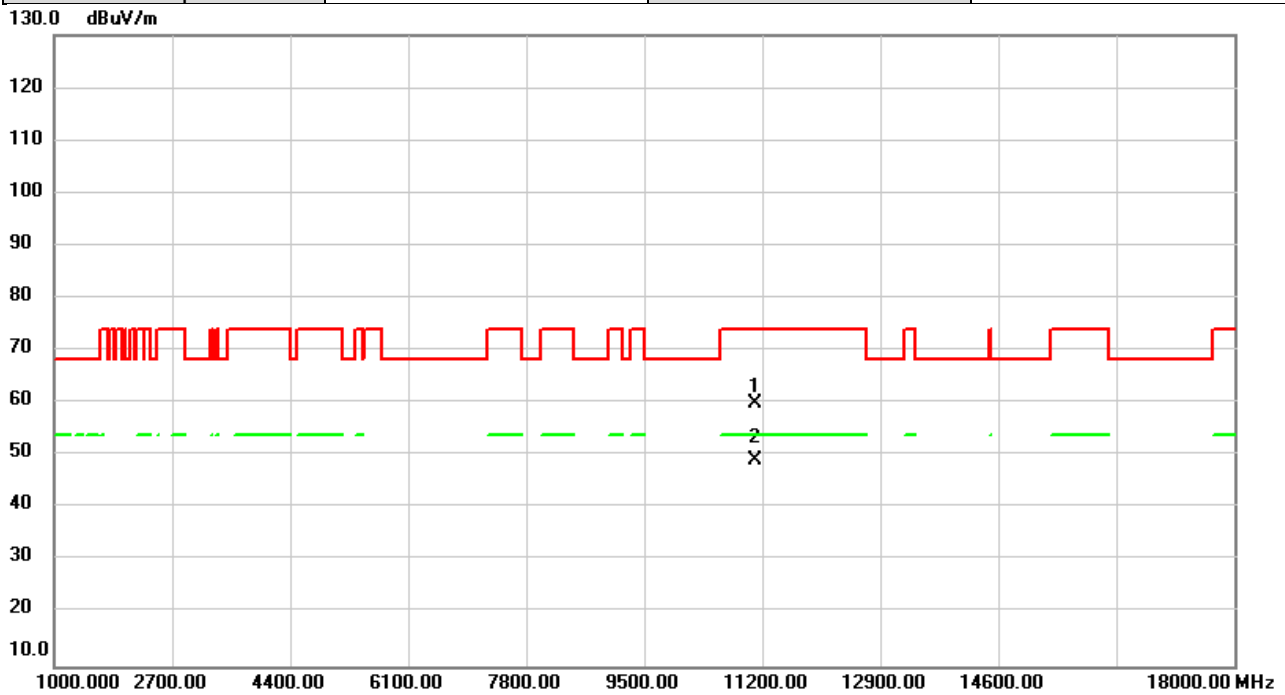


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11100.00	52.84	7.18	60.02	74.00	-13.98	peak	
2	*	11100.00	42.08	7.18	49.26	54.00	-4.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/23
Test Frequency	5670MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

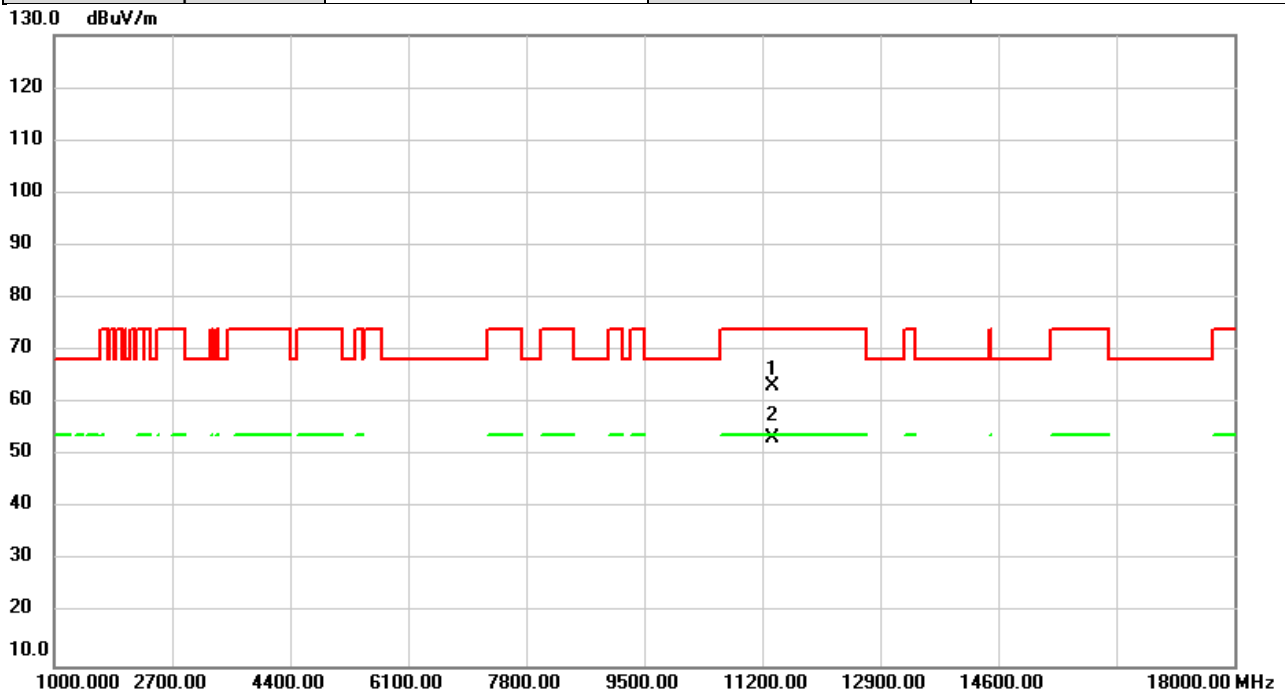


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11340.00	55.80	7.41	63.21	74.00	-10.79	peak	
2	*	11340.00	45.88	7.41	53.29	54.00	-0.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/23
Test Frequency	5670MHz	Polarization	Horizontal
Temp	20°C	Hum.	60%

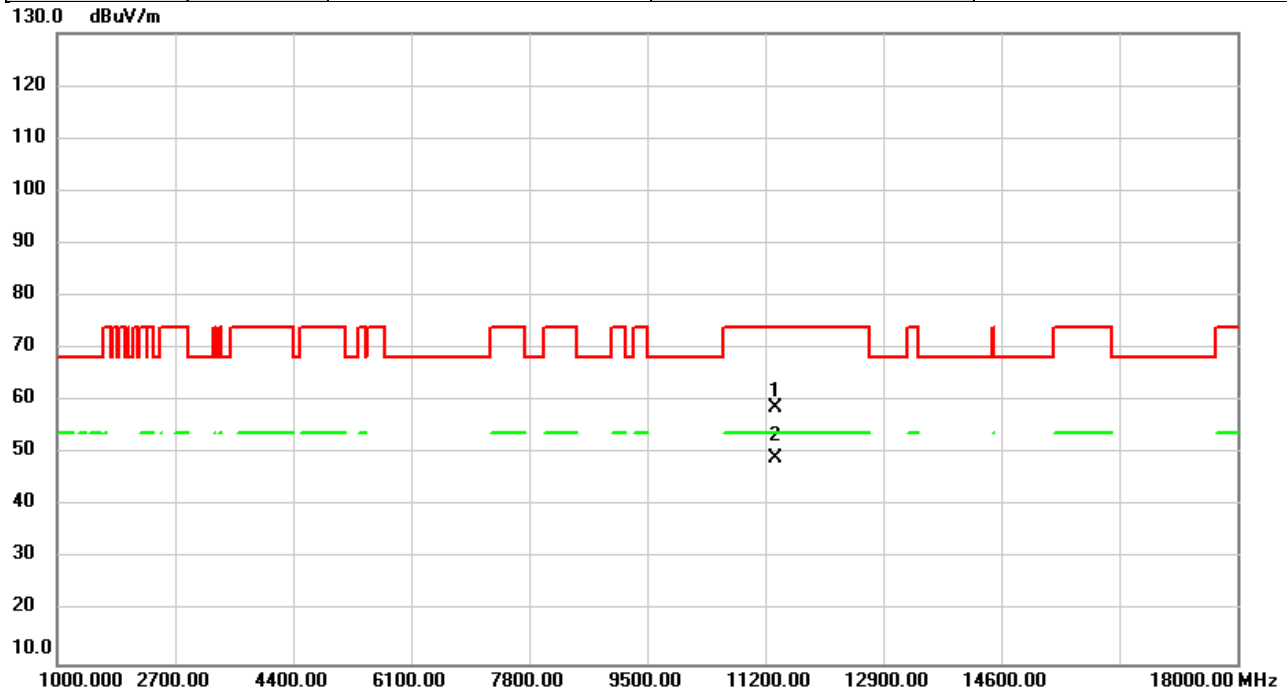


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11340.00	51.49	7.41	58.90	74.00	-15.10	peak	
2	*	11340.00	41.67	7.41	49.08	54.00	-4.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/15
Test Frequency	5710MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

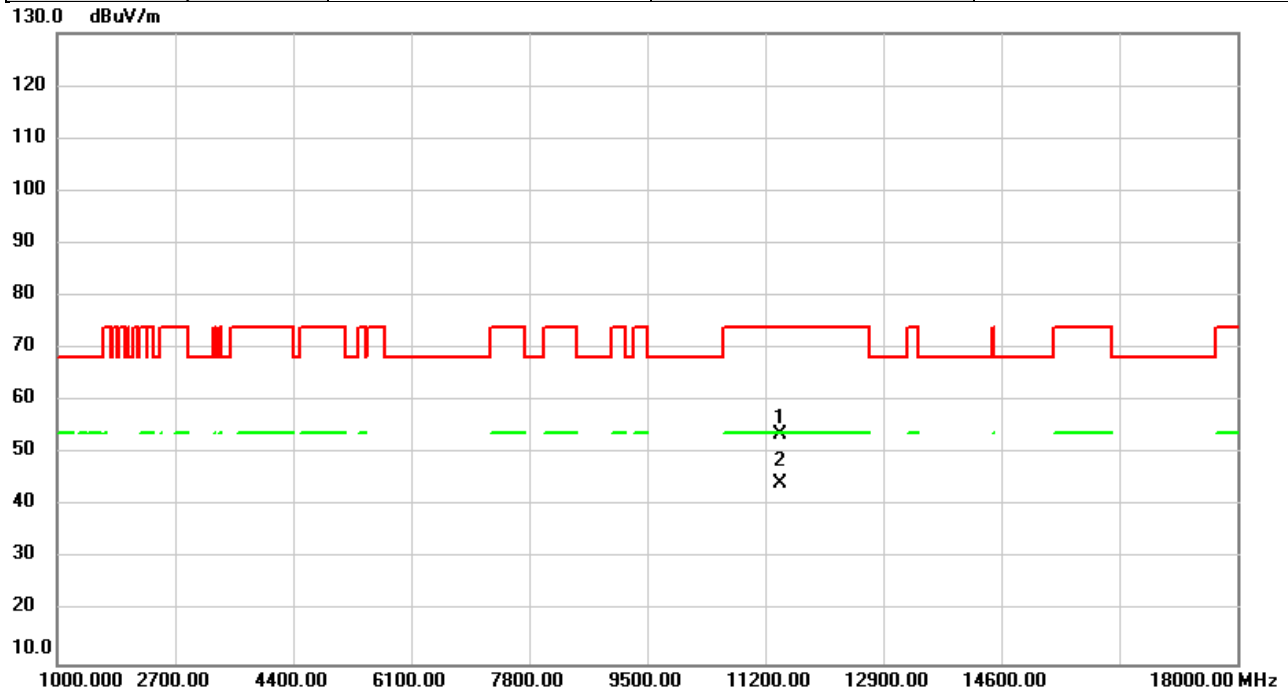


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11420.00	46.14	7.49	53.63	74.00	-20.37	peak	
2	*	11420.00	37.01	7.49	44.50	54.00	-9.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/5/15
Test Frequency	5710MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

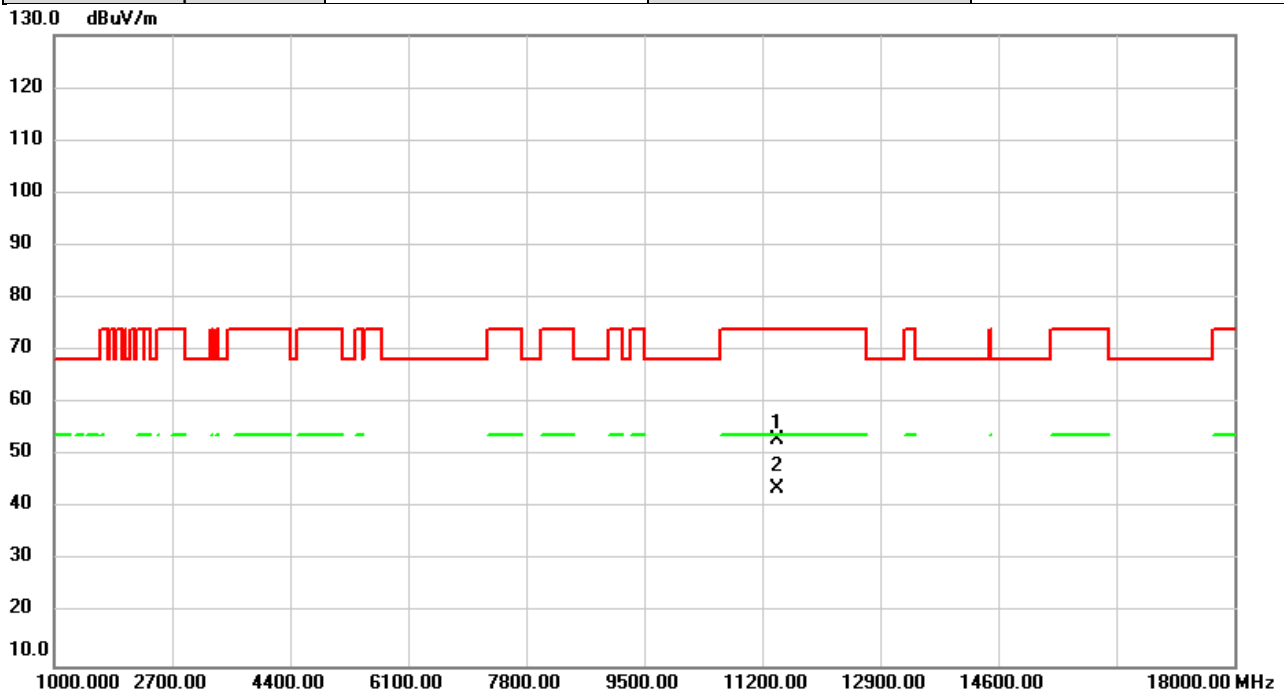


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11420.00	45.57	7.49	53.06	74.00	-20.94	peak	
2	*	11420.00	36.17	7.49	43.66	54.00	-10.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/6/21
Test Frequency	5755MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

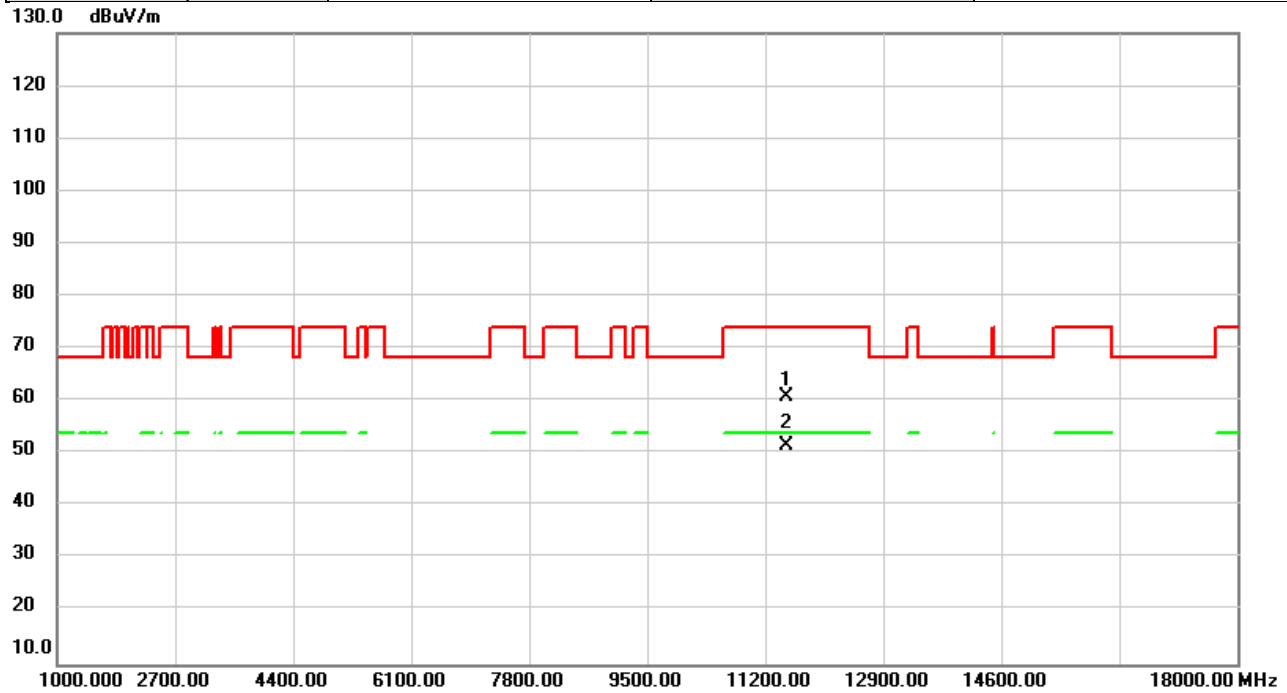


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	53.18	7.57	60.75	74.00	-13.25	peak	
2	*	11510.00	43.92	7.57	51.49	54.00	-2.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/6/21
Test Frequency	5755MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

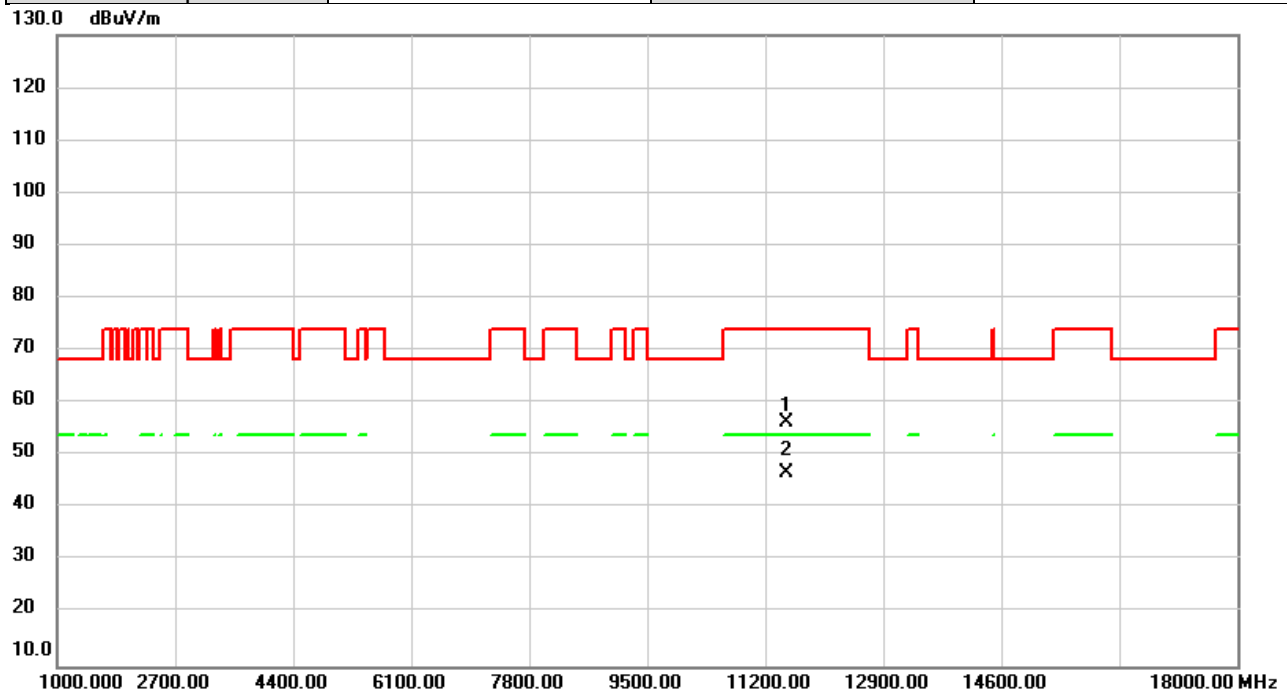


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	48.66	7.57	56.23	74.00	-17.77	peak	
2	*	11510.00	39.17	7.57	46.74	54.00	-7.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/6/21
Test Frequency	5795MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

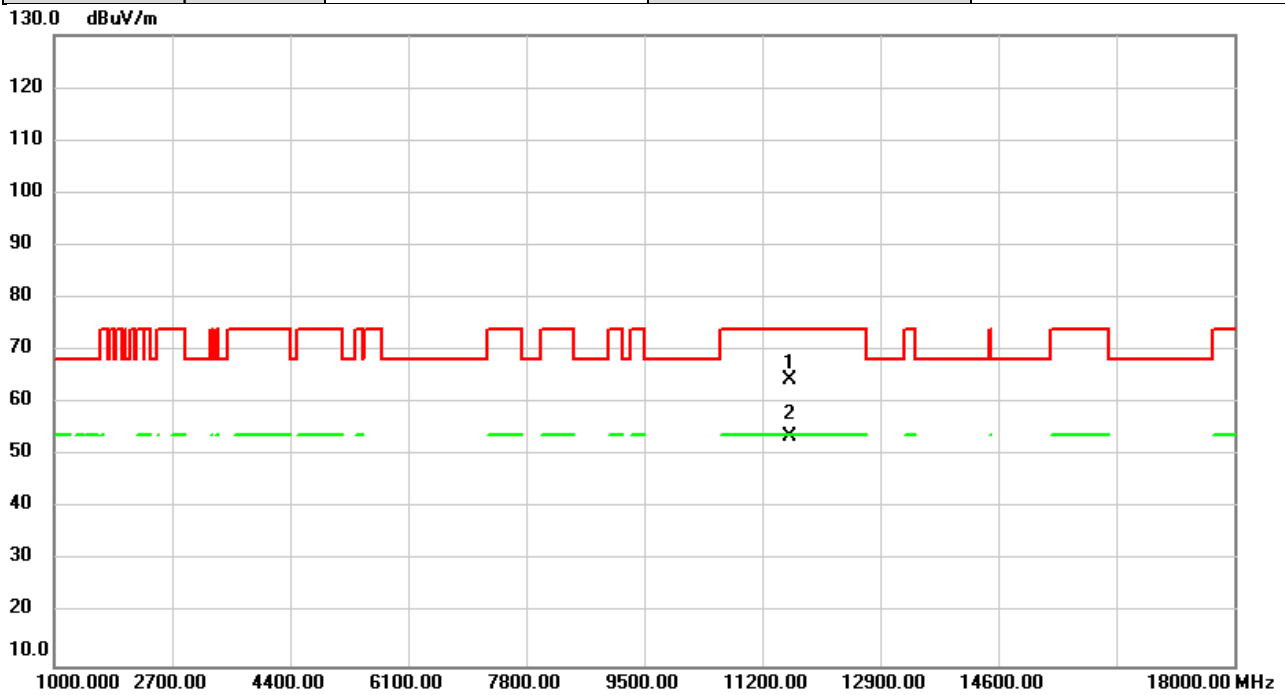


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.00	56.73	7.61	64.34	74.00	-9.66	peak	
2	*	11590.00	46.19	7.61	53.80	54.00	-0.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/6/21
Test Frequency	5795MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

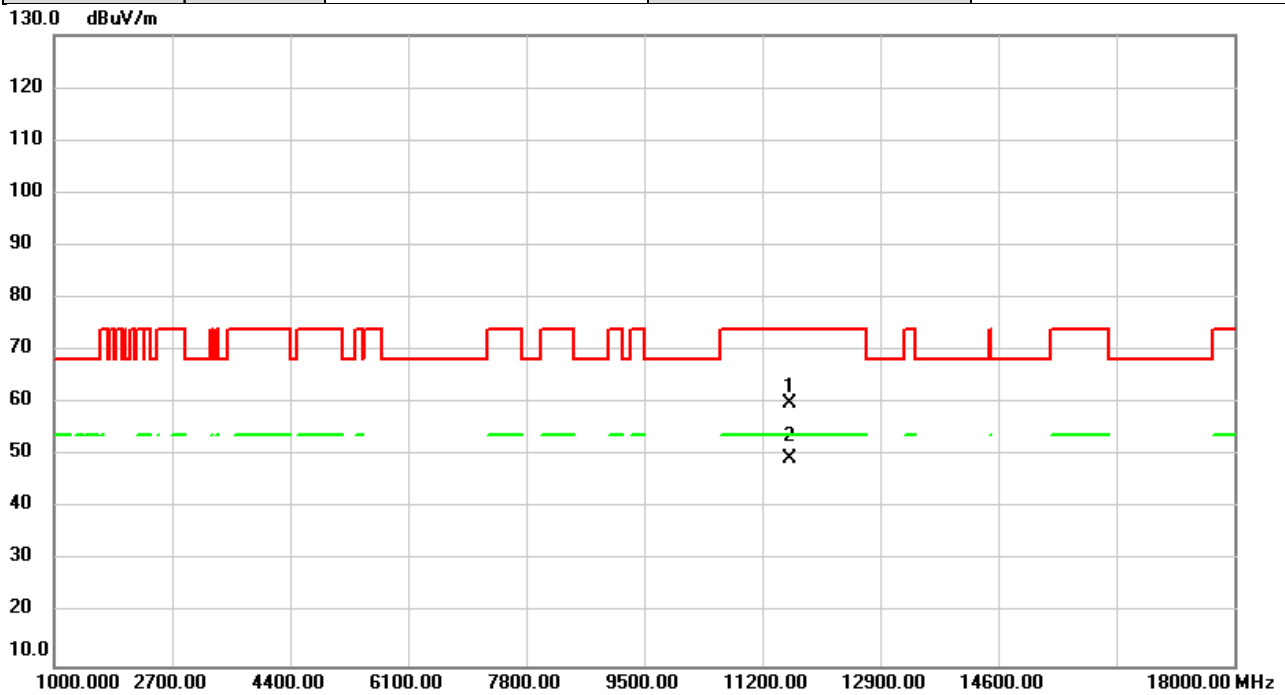


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.00	52.33	7.61	59.94	74.00	-14.06	peak	
2	*	11590.00	41.88	7.61	49.49	54.00	-4.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/15
Test Frequency	5210MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

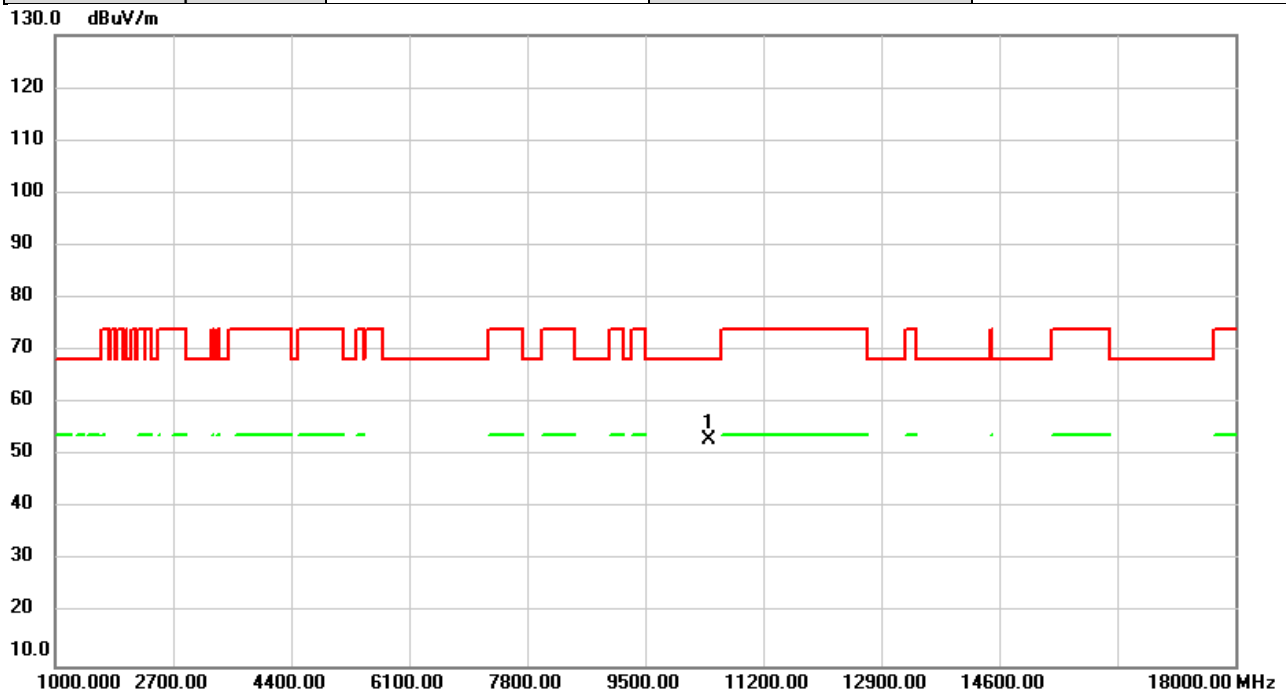


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	46.30	6.78	53.08	68.20	-15.12	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/15
Test Frequency	5210MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

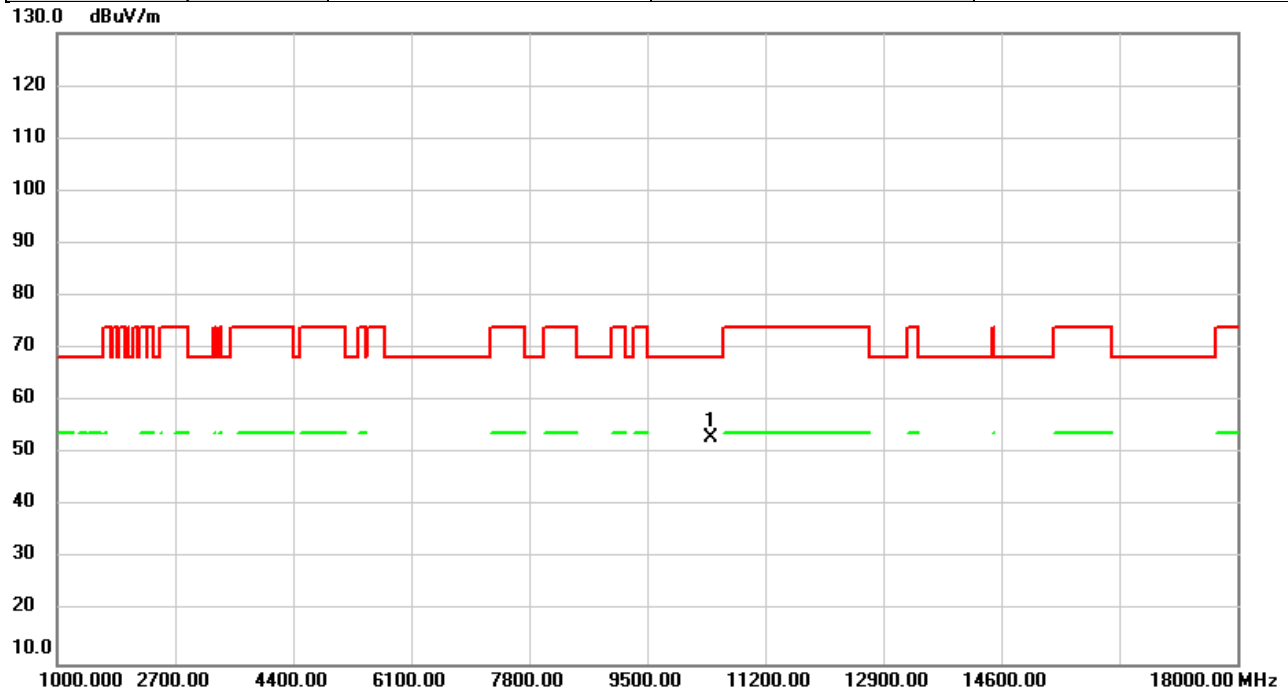


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	46.38	6.78	53.16	68.20	-15.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/15
Test Frequency	5290MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

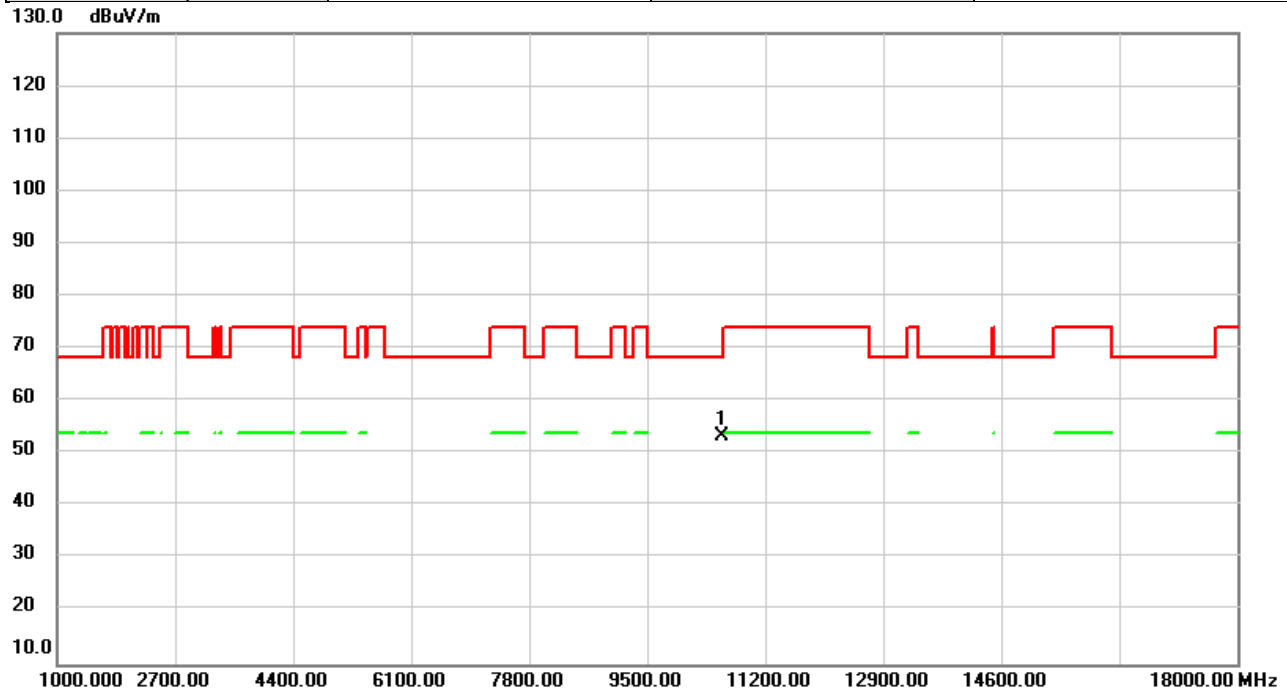


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	46.39	6.85	53.24	68.20	-14.96	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/15
Test Frequency	5290MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

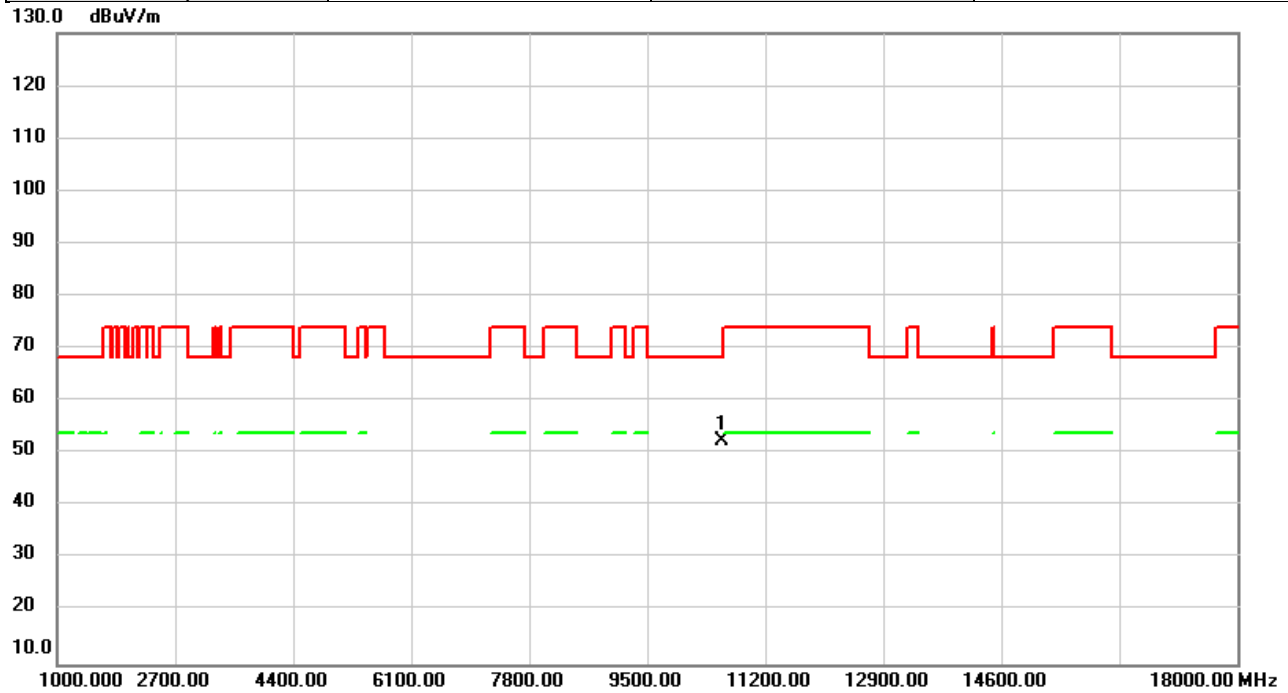


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	45.70	6.85	52.55	68.20	-15.65	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/15
Test Frequency	5530MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

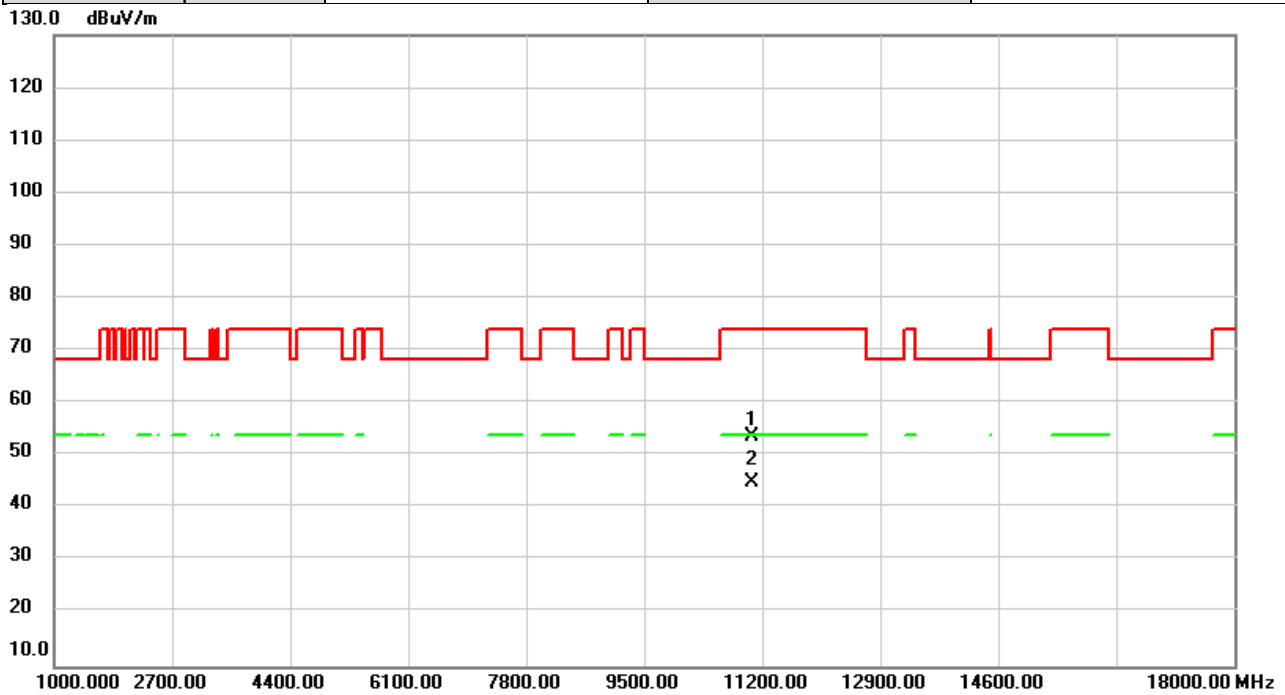


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	46.43	7.15	53.58	74.00	-20.42	peak	
2	*	11060.00	37.74	7.15	44.89	54.00	-9.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/15
Test Frequency	5530MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

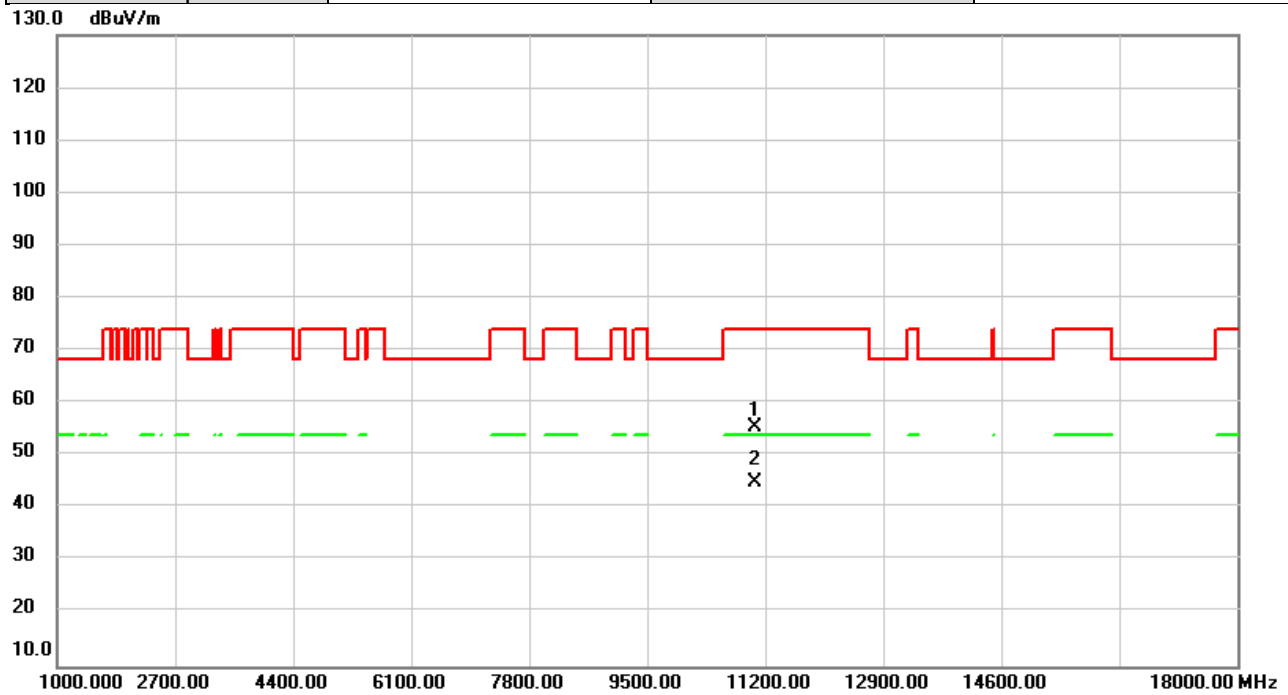


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	48.18	7.15	55.33	74.00	-18.67	peak	
2	*	11060.00	37.92	7.15	45.07	54.00	-8.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/15
Test Frequency	5610MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

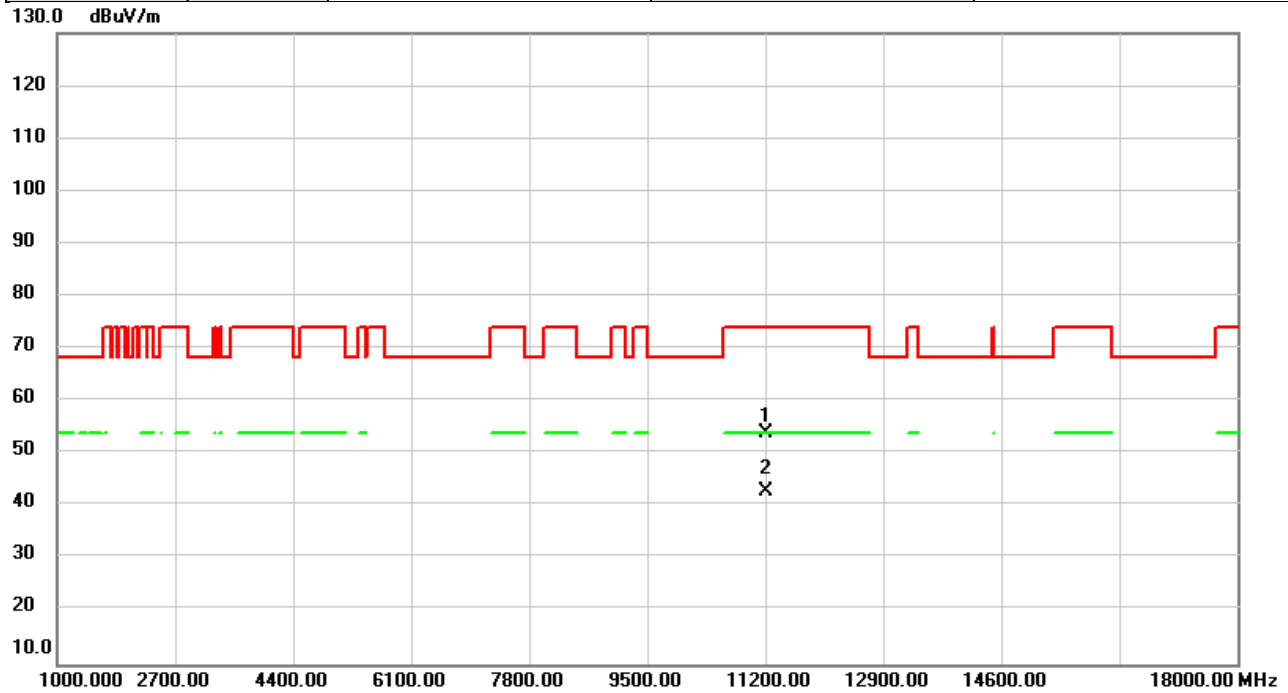


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	46.55	7.30	53.85	74.00	-20.15	peak	
2	*	11220.00	35.59	7.30	42.89	54.00	-11.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/15
Test Frequency	5610MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

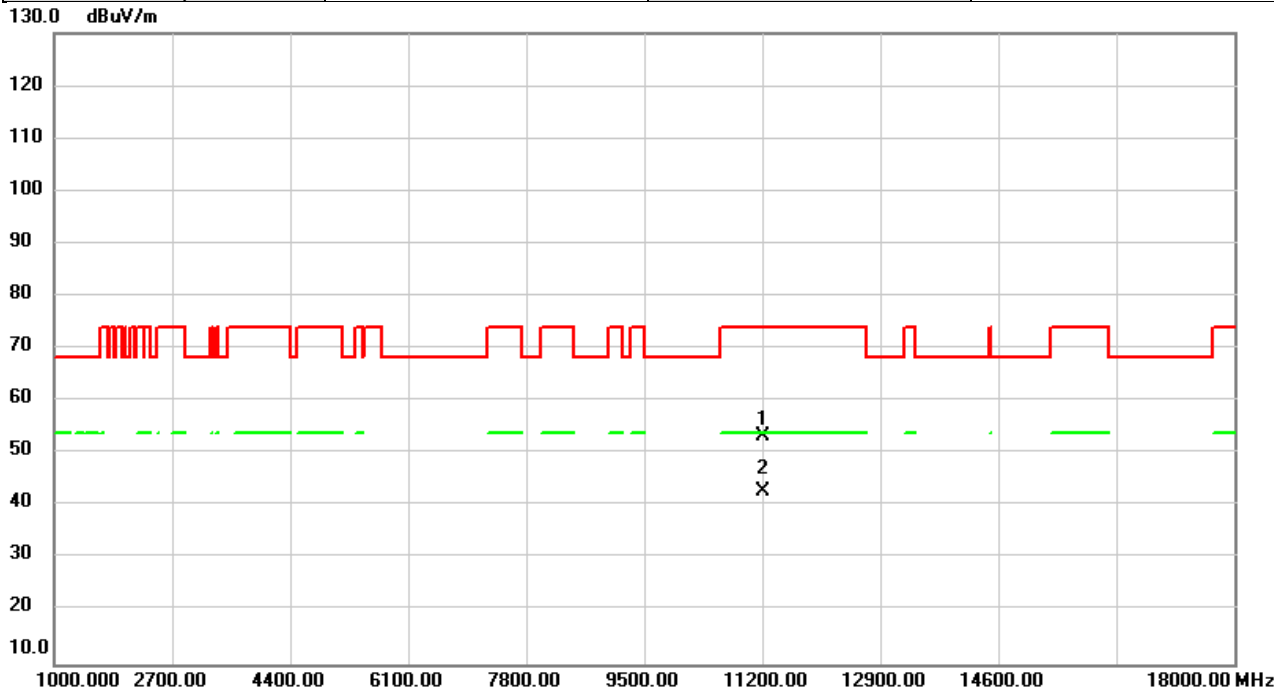

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	46.01	7.30	53.31	74.00	-20.69	peak	
2	*	11220.00	35.63	7.30	42.93	54.00	-11.07	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/23
Test Frequency	5690MHz	Polarization	Vertical
Temp	20°C	Hum.	60%

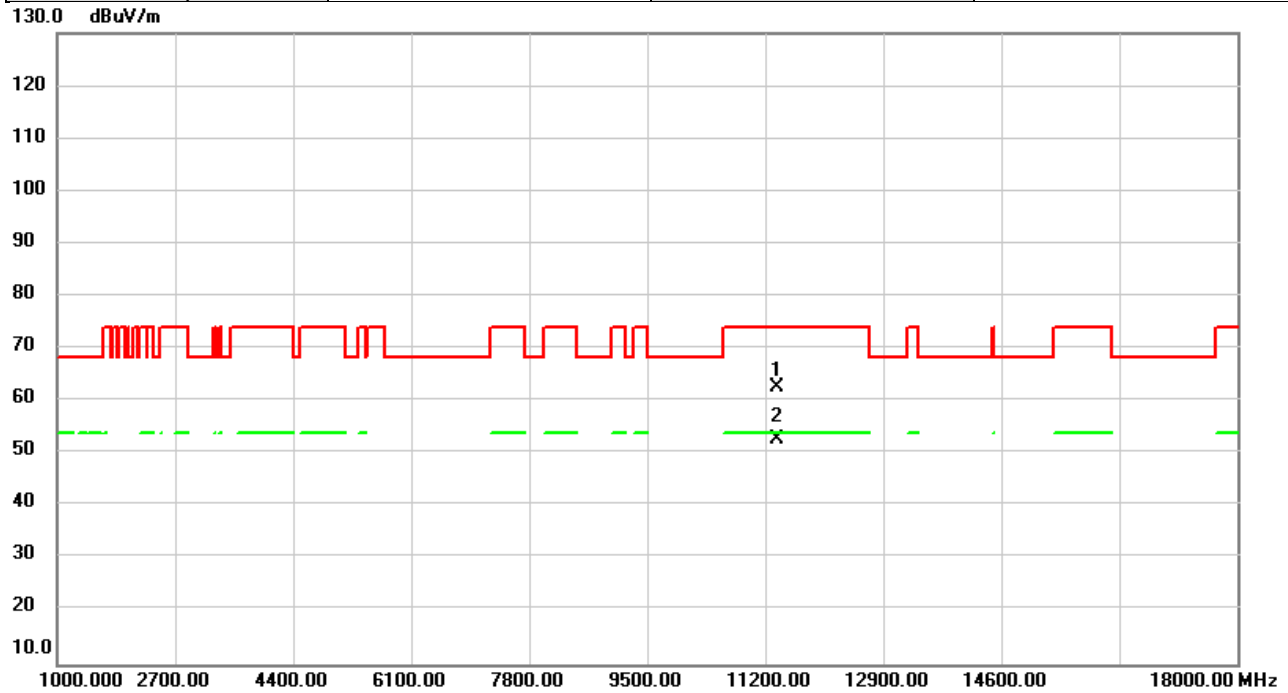


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11380.00	55.24	7.45	62.69	74.00	-11.31	peak	
2	*	11380.00	45.41	7.45	52.86	54.00	-1.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/5/23
Test Frequency	5690MHz	Polarization	Horizontal
Temp	20°C	Hum.	60%

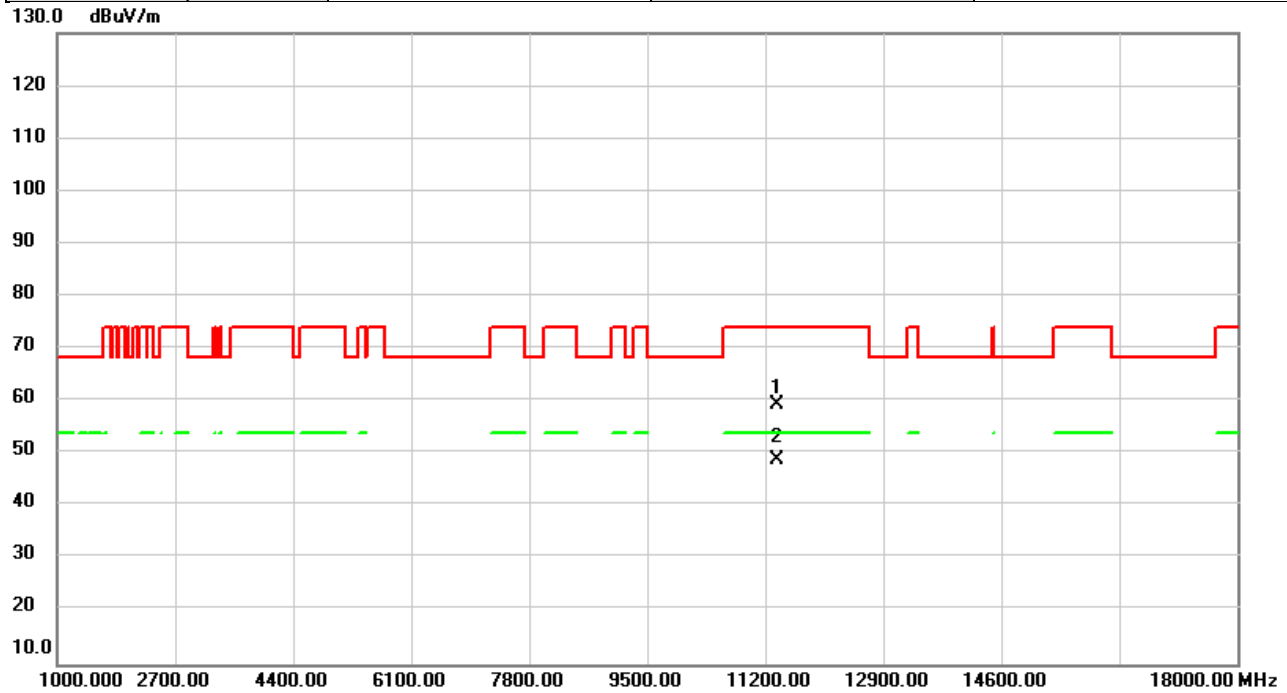


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11380.00	51.98	7.45	59.43	74.00	-14.57	peak	
2	*	11380.00	41.30	7.45	48.75	54.00	-5.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/6/21
Test Frequency	5775MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

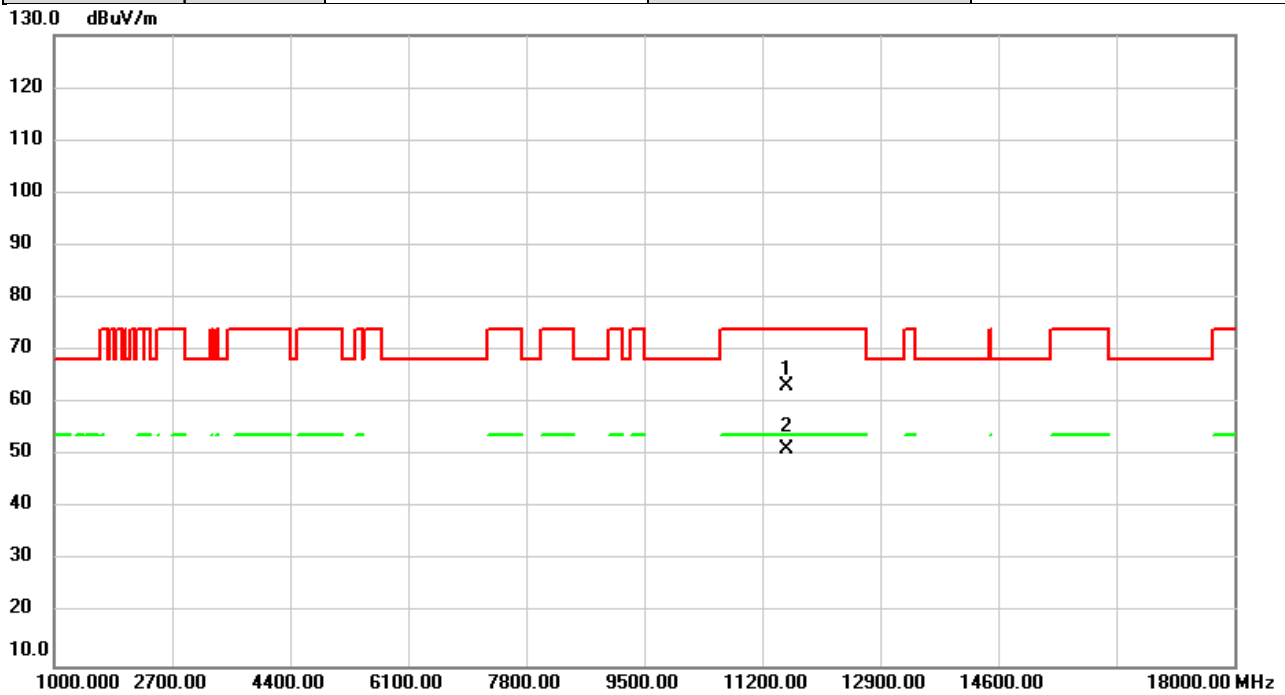


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11550.00	55.53	7.58	63.11	74.00	-10.89	peak	
2	*	11550.00	43.79	7.58	51.37	54.00	-2.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/6/21
Test Frequency	5775MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

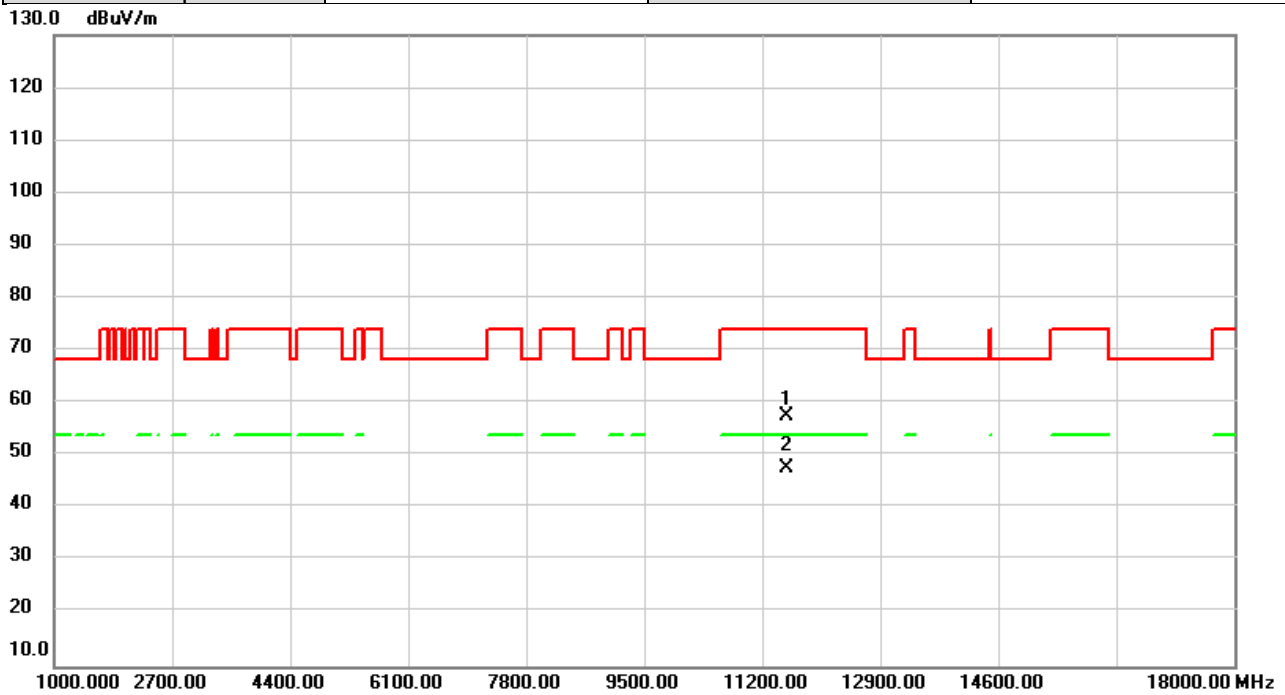


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11550.00	49.95	7.58	57.53	74.00	-16.47	peak	
2	*	11550.00	39.97	7.58	47.55	54.00	-6.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/15
Test Frequency	5250MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

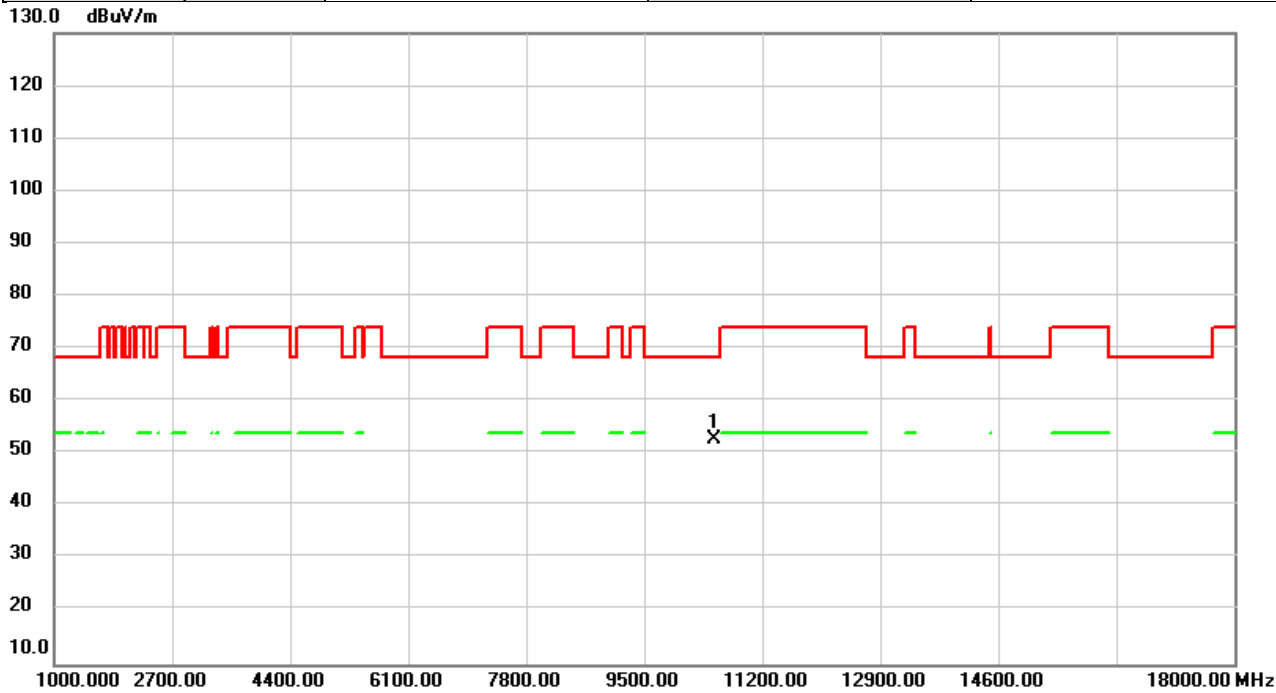

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.00	46.05	6.81	52.86	68.20	-15.34	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/15
Test Frequency	5250MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

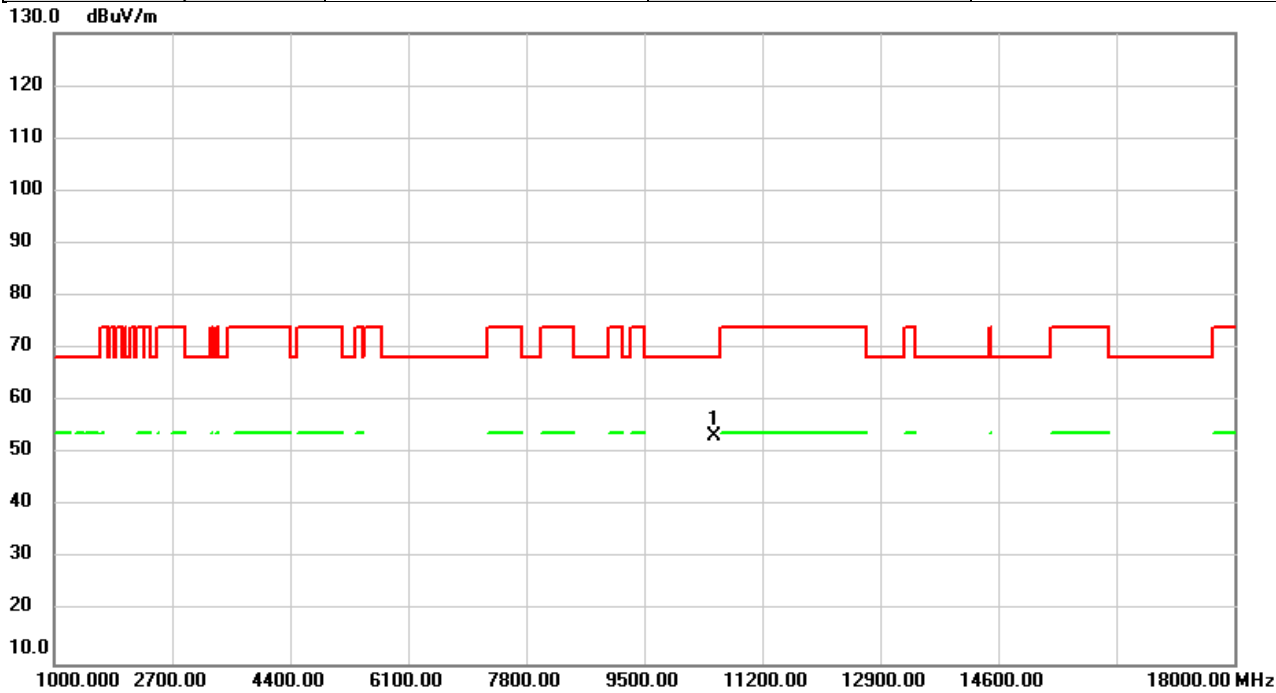


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.00	46.56	6.81	53.37	68.20	-14.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/15
Test Frequency	5570MHz	Polarization	Vertical
Temp	20°C	Hum.	67%

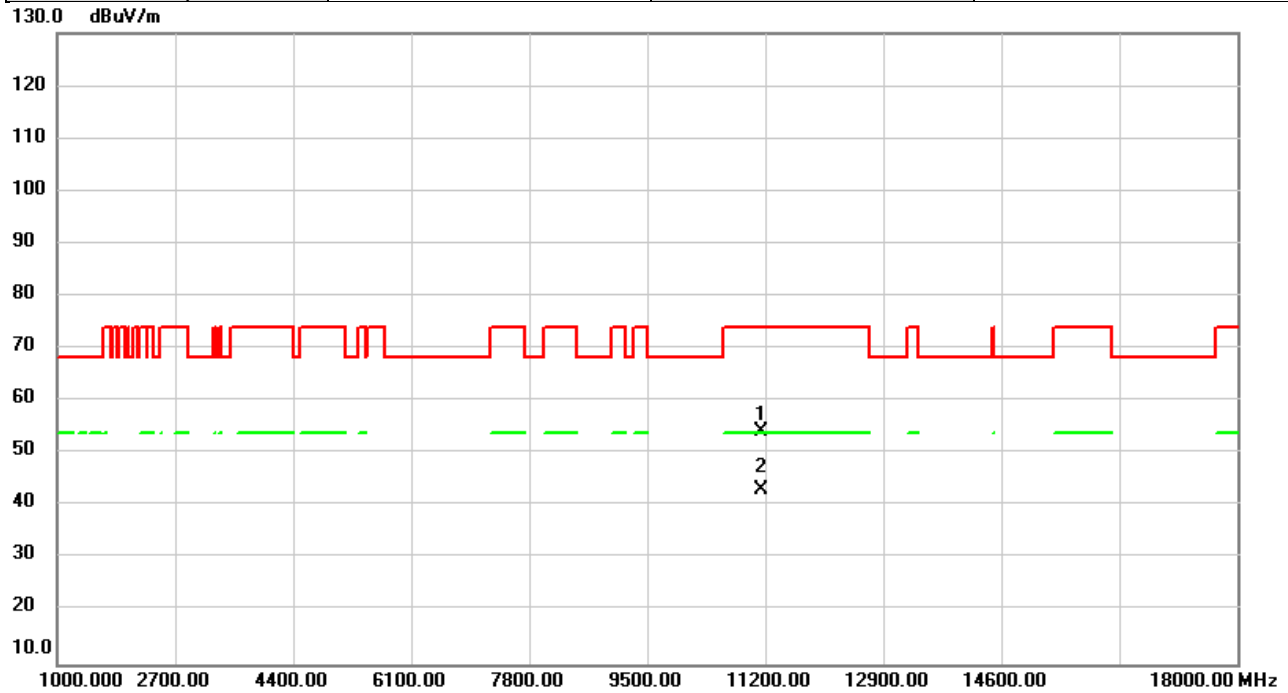


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11140.00	47.00	7.22	54.22	74.00	-19.78	peak	
2	*	11140.00	36.05	7.22	43.27	54.00	-10.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/5/15
Test Frequency	5570MHz	Polarization	Horizontal
Temp	20°C	Hum.	67%

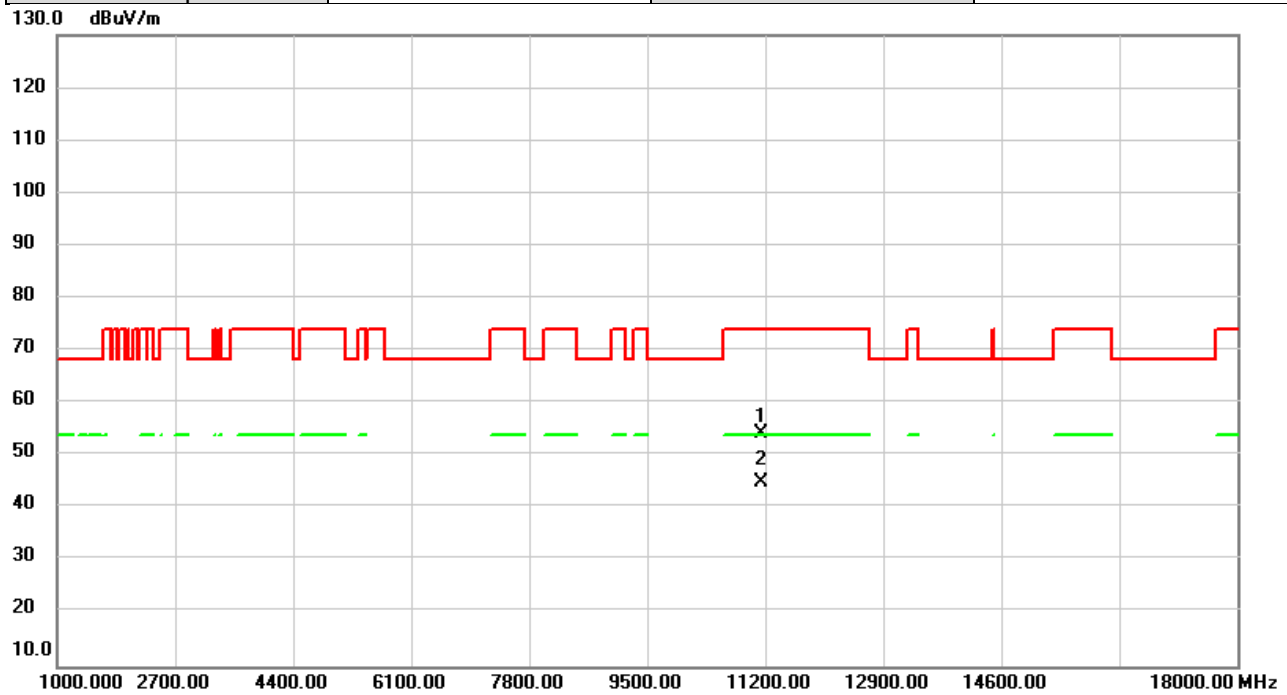


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11140.00	46.91	7.22	54.13	74.00	-19.87	peak	
2	*	11140.00	37.85	7.22	45.07	54.00	-8.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/17
Test Frequency	5745MHz	Polarization	Vertical
Temp	20°C	Hum.	61%

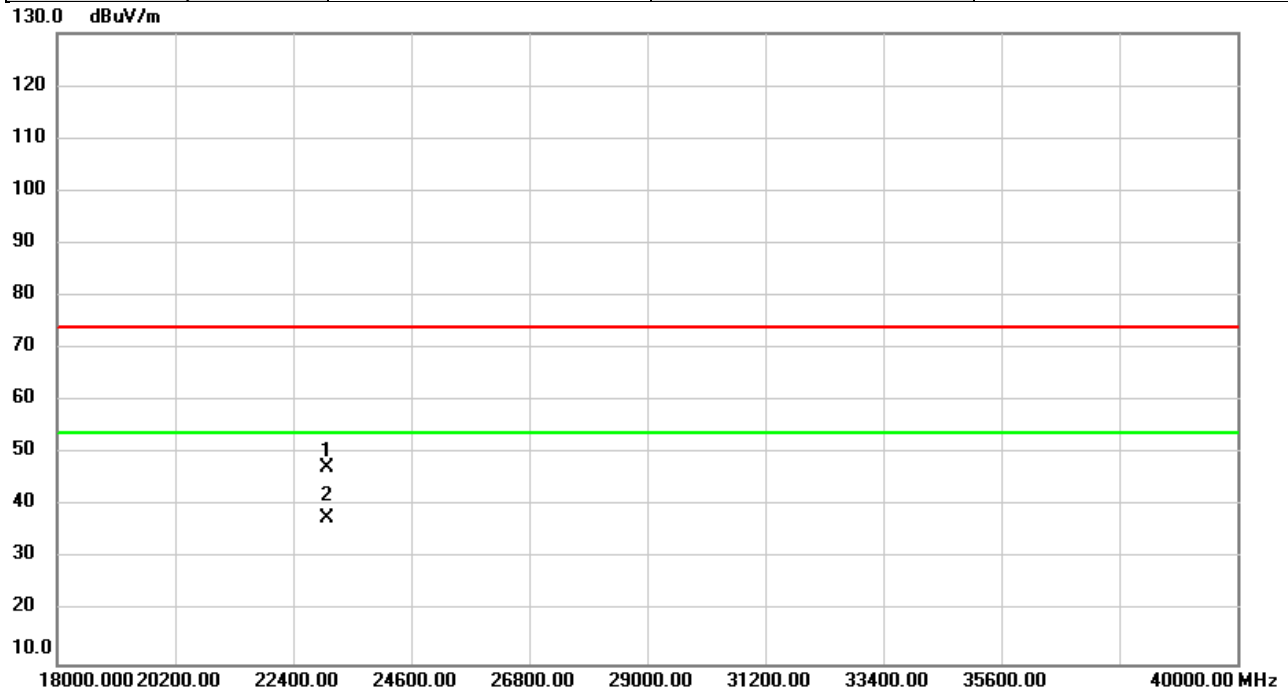


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		23020.00	50.03	-2.69	47.34	74.00	-26.66	peak	
2	*	23020.00	40.37	-2.69	37.68	54.00	-16.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/5/17
Test Frequency	5745MHz	Polarization	Horizontal
Temp	20°C	Hum.	61%

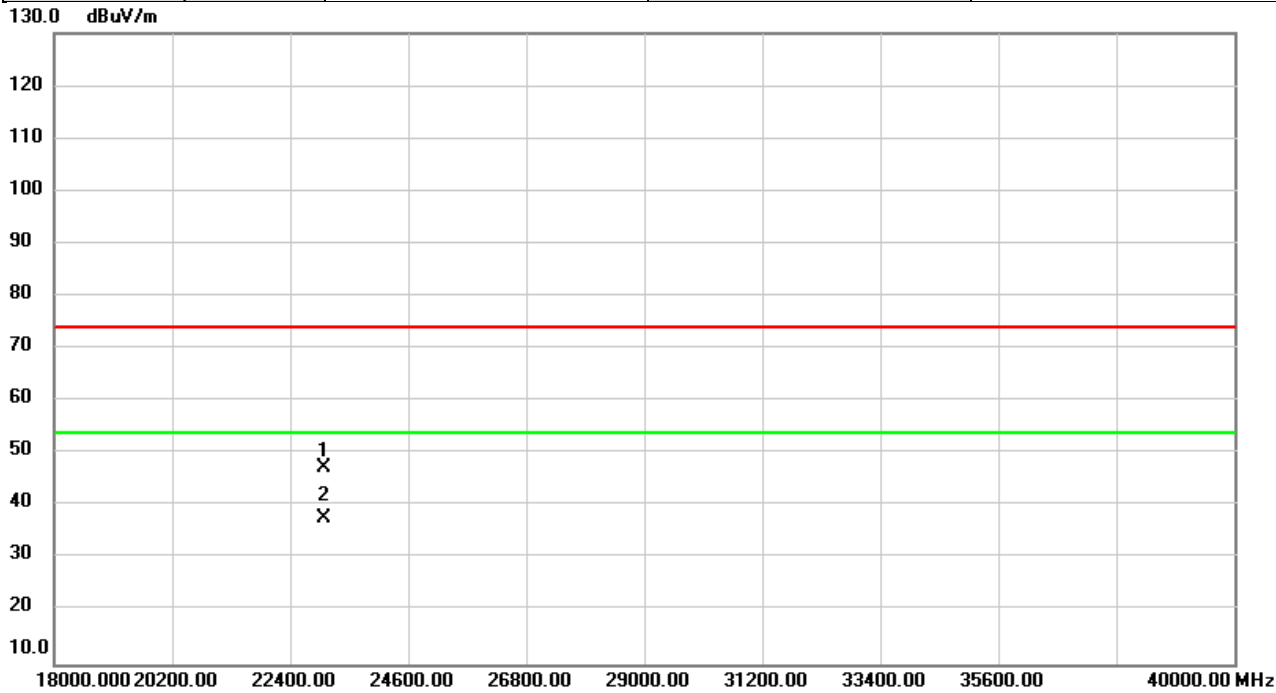



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		23020.00	49.99	-2.69	47.30	74.00	-26.70	peak	
2	*	23020.00	40.59	-2.69	37.90	54.00	-16.10	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.


APPENDIX E BANDWIDTH

Test Mode	IEEE 802.11a_Ant 3
-----------	--------------------


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5180	27.65	17.70	No limit
5200	35.55	18.20	No limit
5240	31.40	18.40	No limit

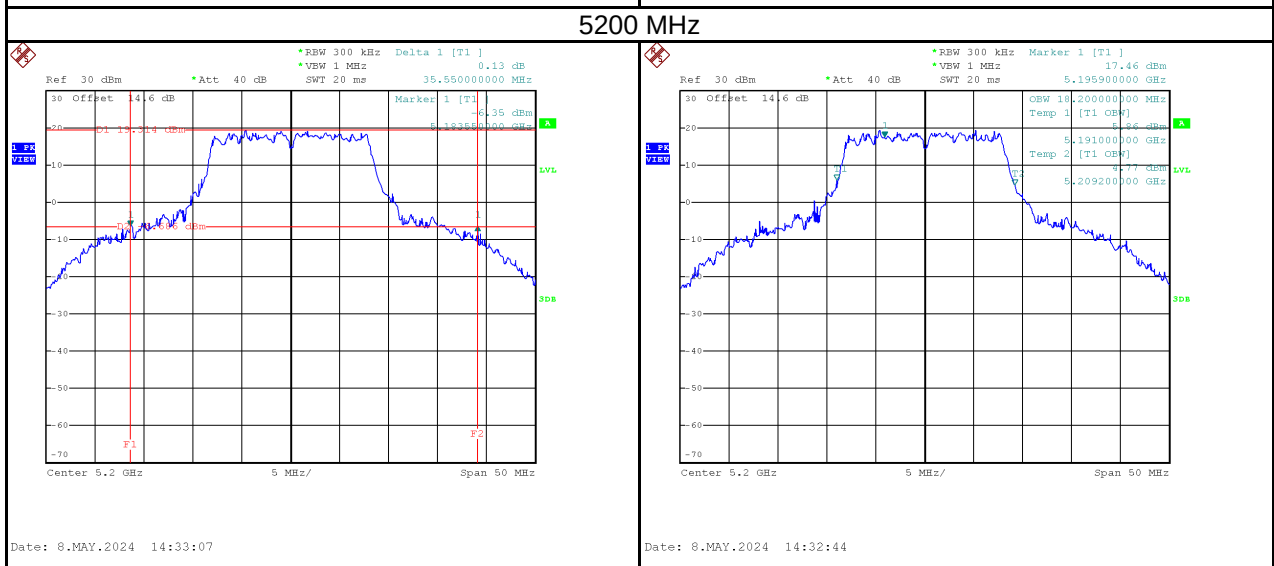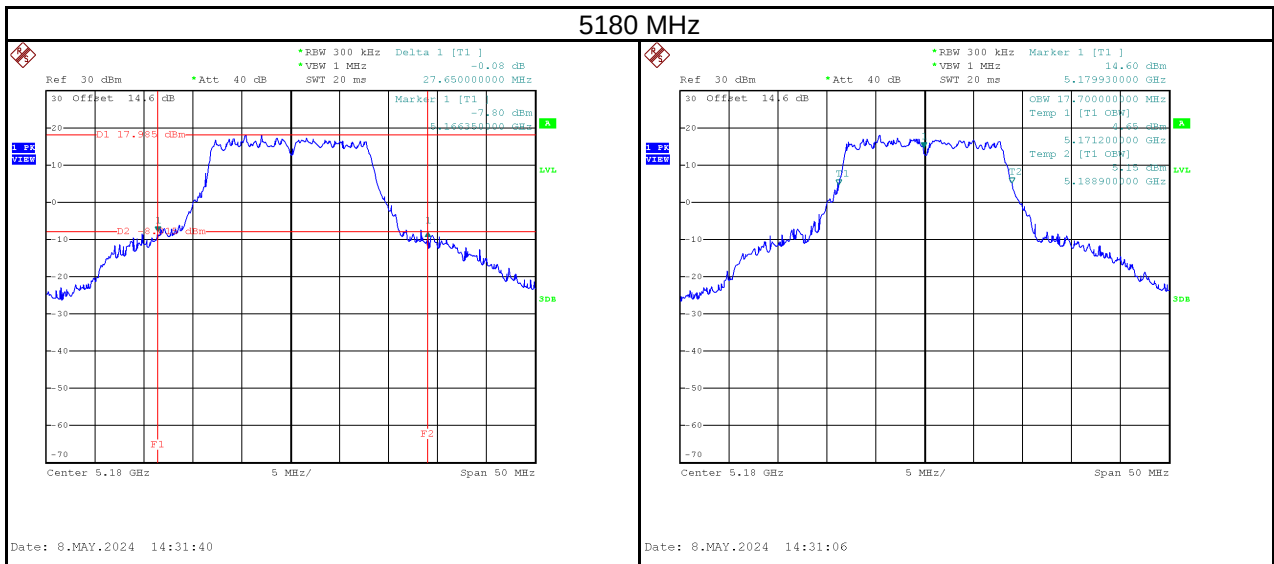

5240 MHz


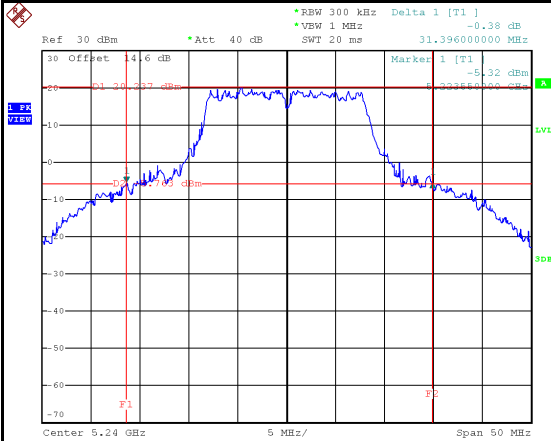


Date: 8.MAY.2024 14:34:29

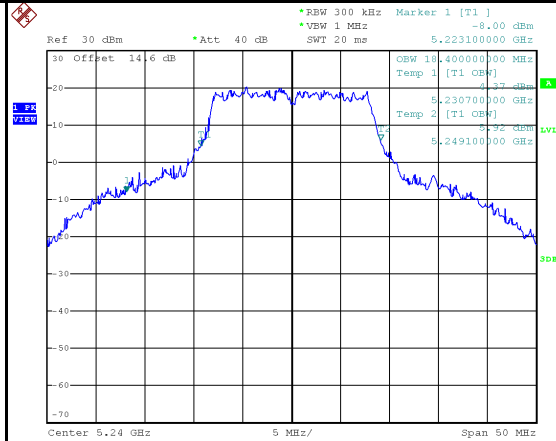


Date: 8.MAY.2024 14:33:58


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5260	21.85	17.30	No limit
5300	21.90	17.40	No limit
5320	21.90	17.40	No limit

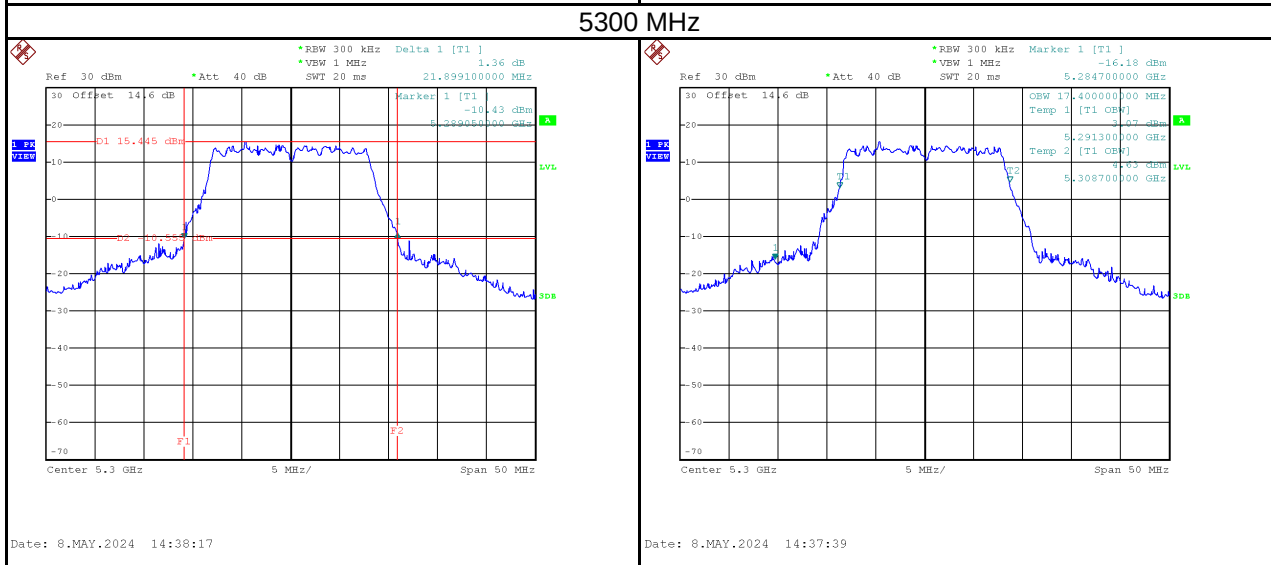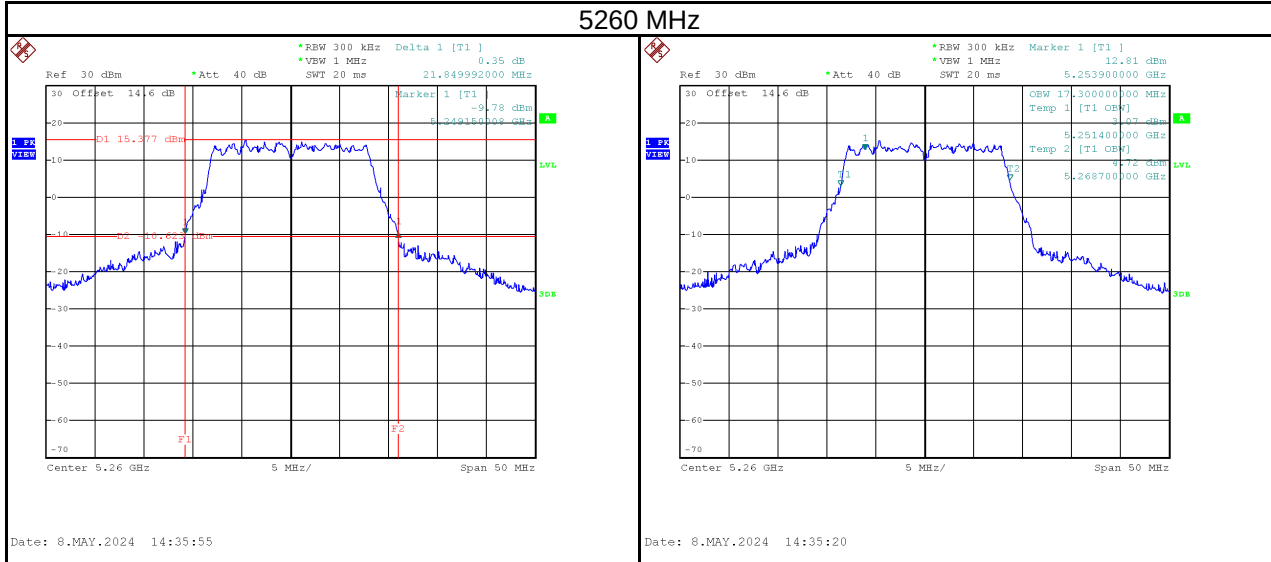

5320 MHz

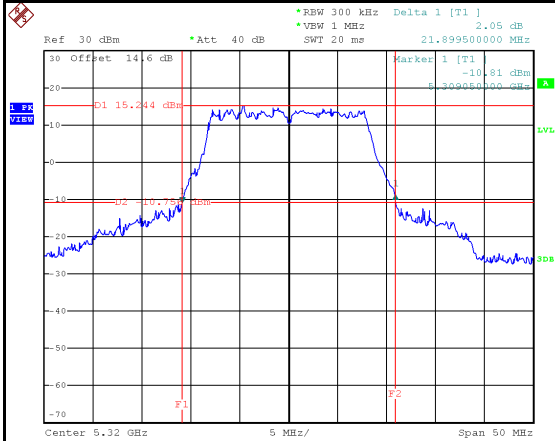


Date: 8.MAY.2024 14:43:17

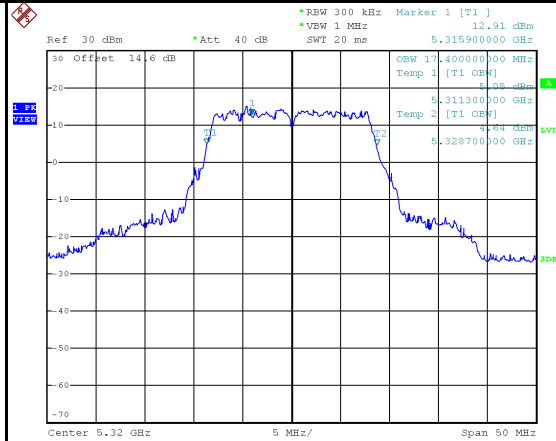


Date: 8.MAY.2024 14:42:42

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5500	24.25	17.30	No limit
5580	21.85	17.40	No limit
5700	21.49	17.30	No limit

5500 MHz

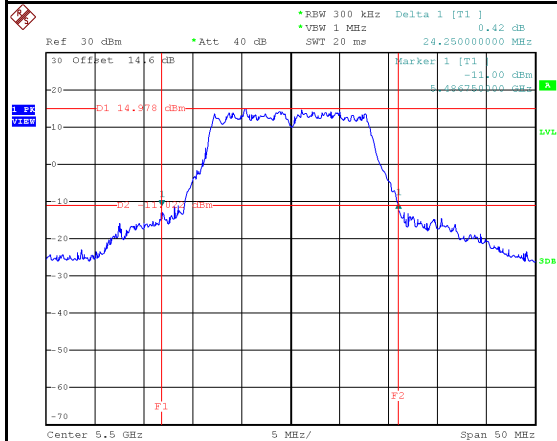


Date: 8.MAY.2024 14:44:33

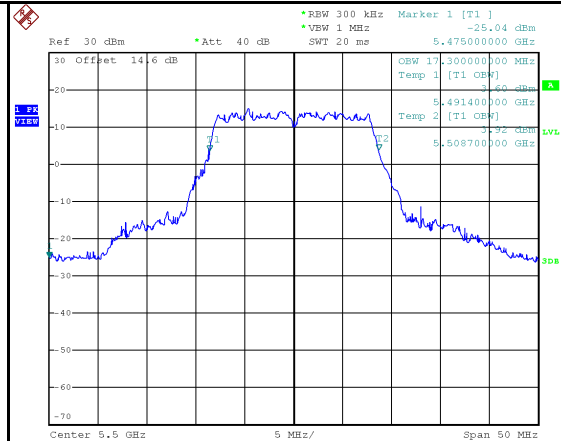


Date: 8.MAY.2024 14:44:01

5580 MHz

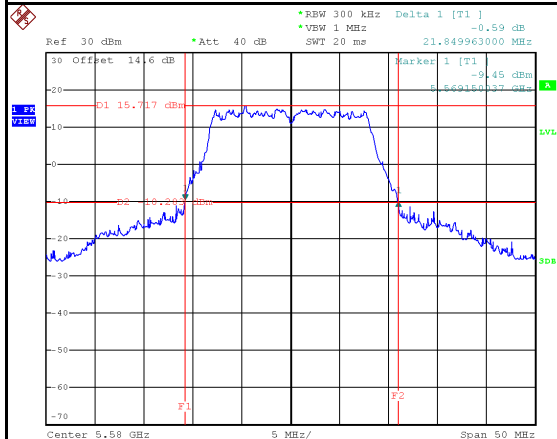


Date: 8.MAY.2024 14:46:03

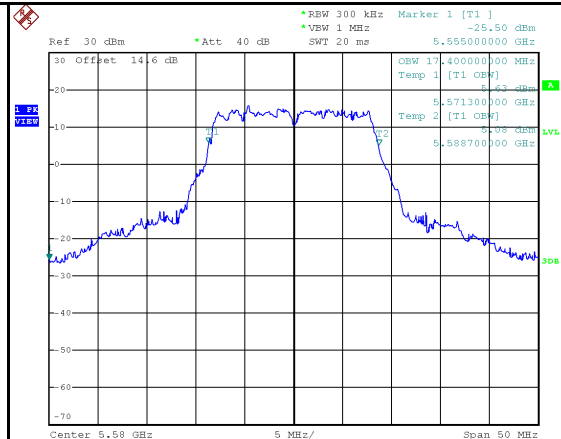


Date: 8.MAY.2024 14:45:26

5700 MHz

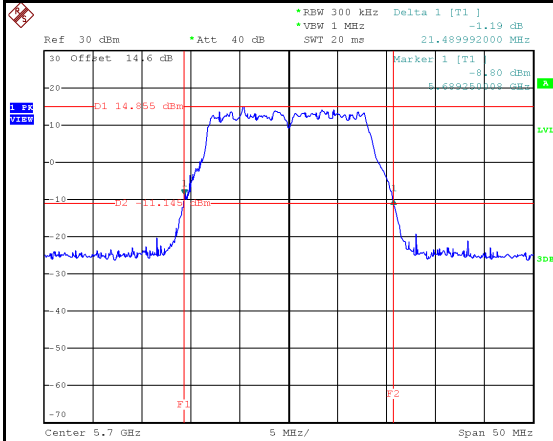


Date: 8.MAY.2024 14:47:40

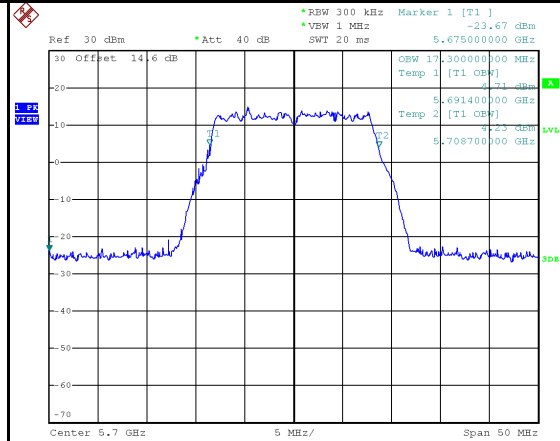


Date: 8.MAY.2024 14:47:05

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5745	16.39	18.00	500	Pass
5785	16.00	17.80	500	Pass
5825	16.50	17.50	500	Pass

5745 MHz

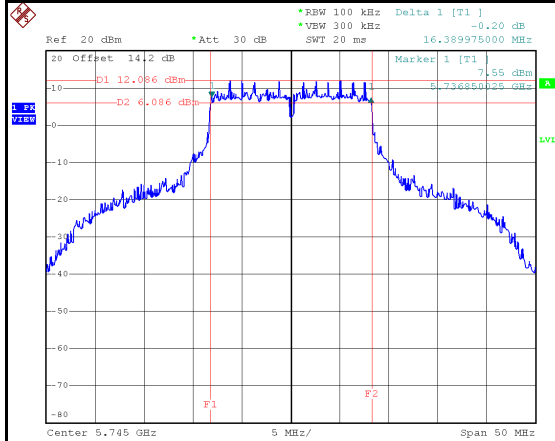


Date: 3.JUL.2024 14:33:28

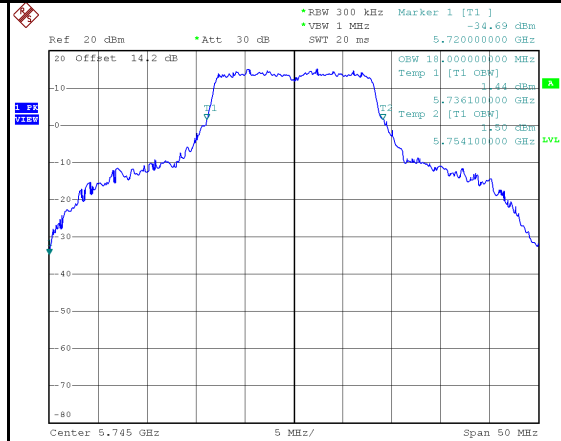


Date: 3.JUL.2024 14:32:40

5785 MHz

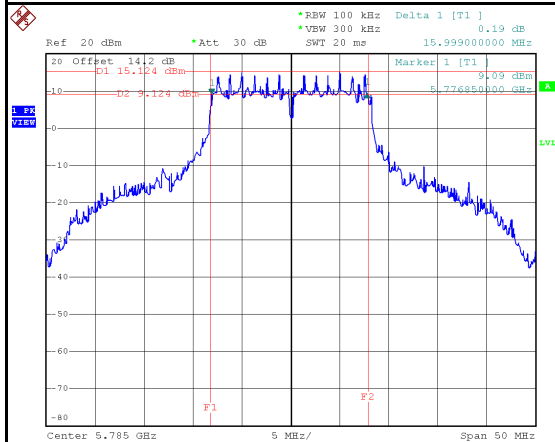


Date: 1.JUL.2024 15:15:15

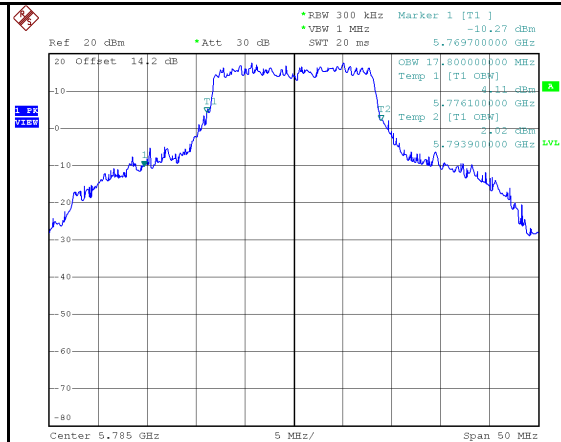


Date: 1.JUL.2024 15:14:26

5825 MHz

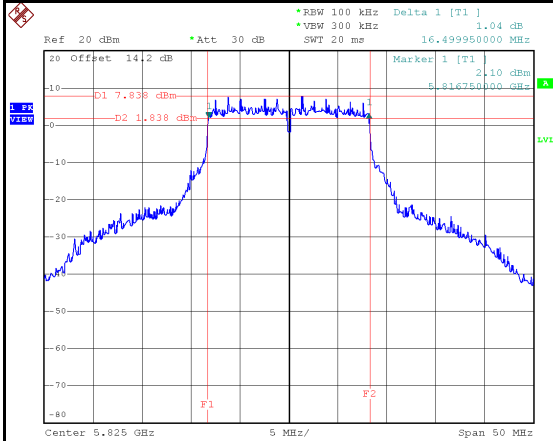



Date: 3.JUL.2024 14:35:56

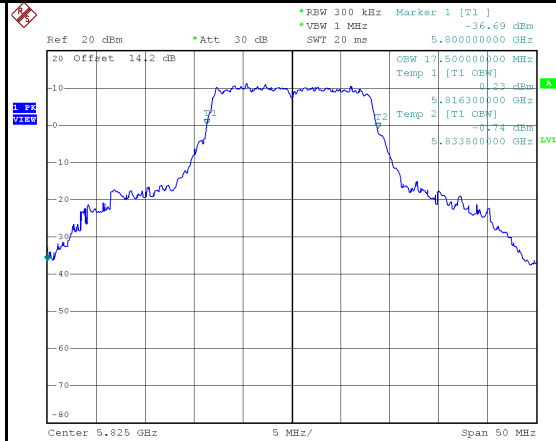


Date: 3.JUL.2024 14:35:14

Test Mode	IEEE 802.11ac (VHT20)_Ant 3
-----------	-----------------------------


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5180	29.95	18.60	No limit
5200	36.19	19.30	No limit
5240	34.49	19.10	No limit

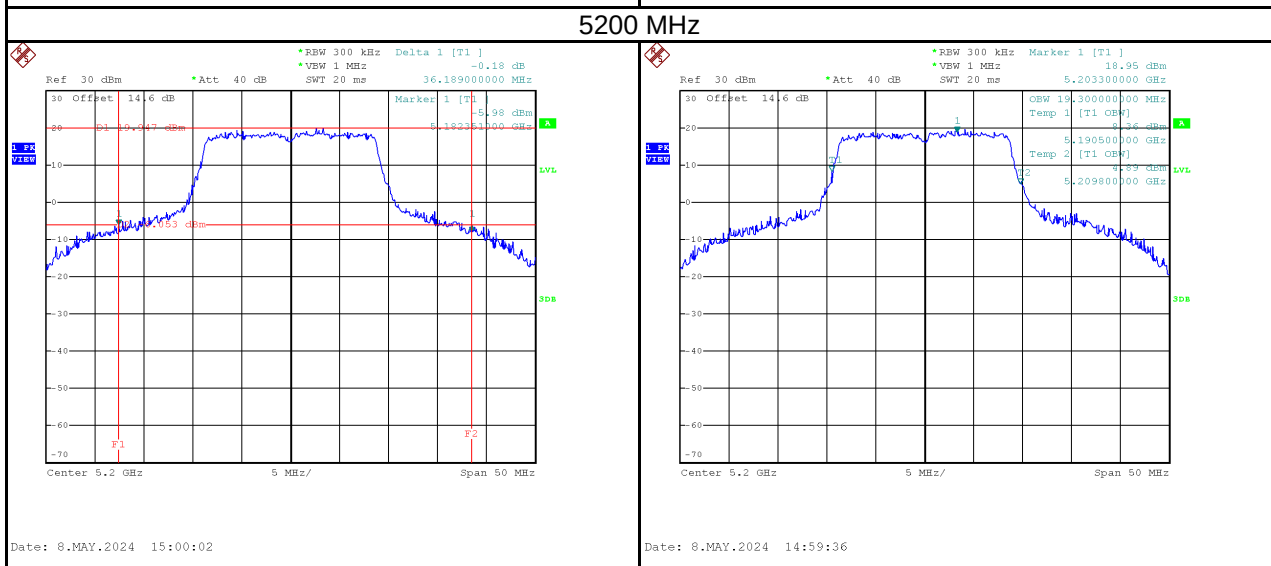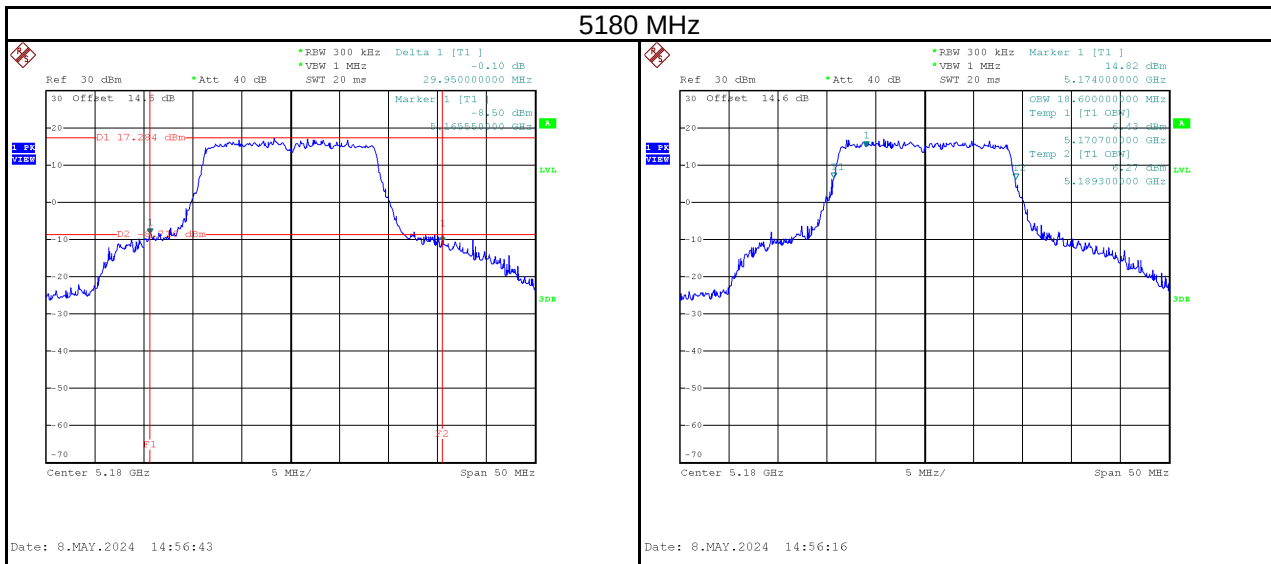

5240 MHz

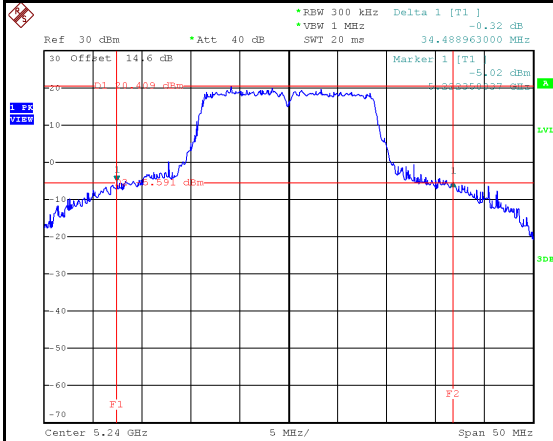


Date: 8.MAY.2024 15:01:55

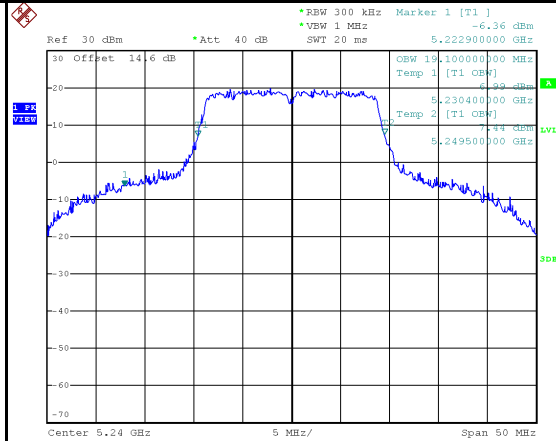


Date: 8.MAY.2024 15:01:18

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5260	25.19	18.50	No limit
5300	23.79	18.40	No limit
5320	25.90	18.60	No limit

5260 MHz

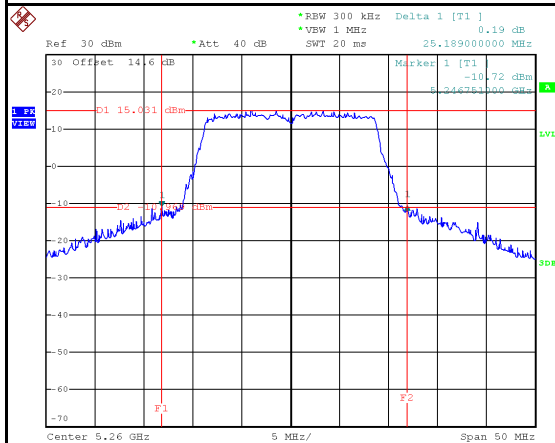


Date: 8.MAY.2024 15:04:31

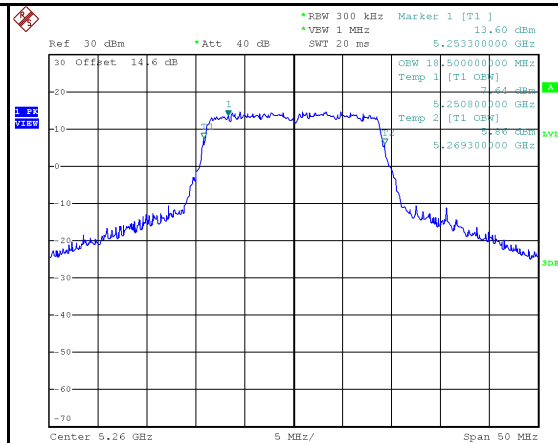


Date: 8.MAY.2024 15:03:56

5300 MHz

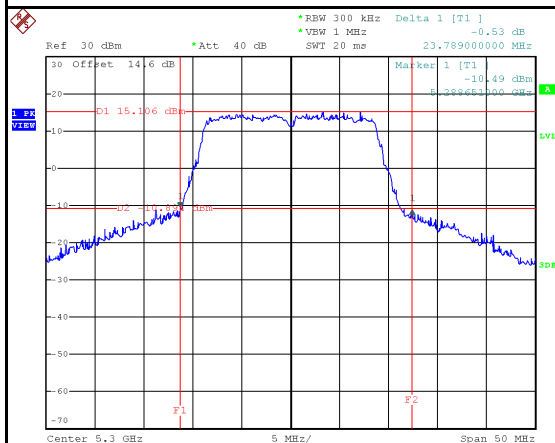


Date: 8.MAY.2024 15:05:56

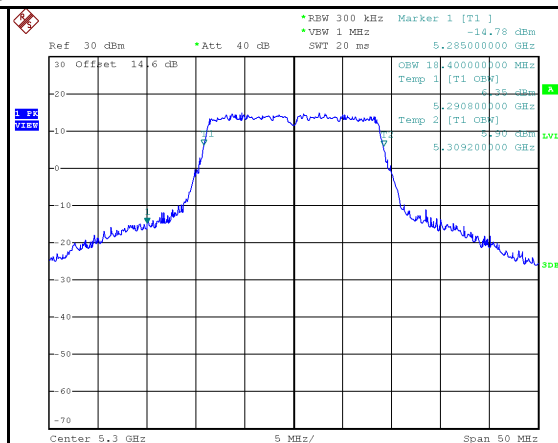


Date: 8.MAY.2024 15:05:22

5320 MHz

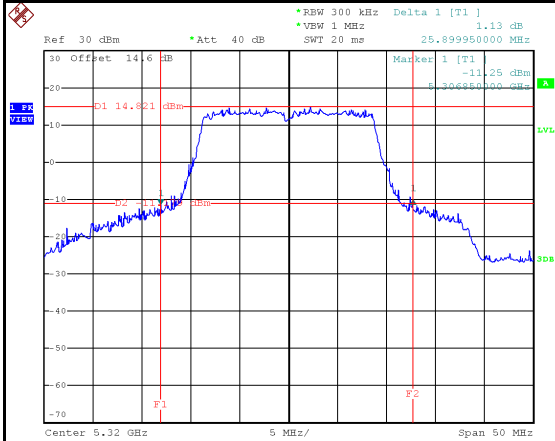


Date: 8.MAY.2024 15:07:14

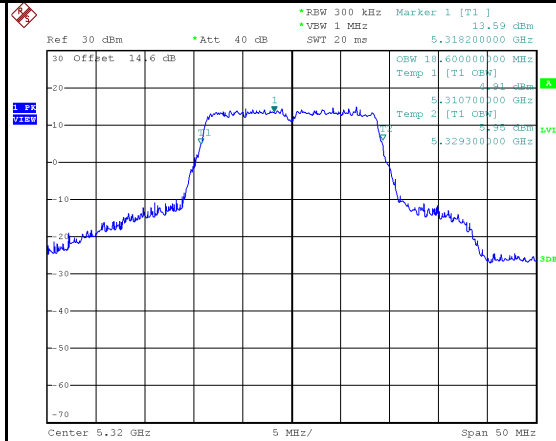


Date: 8.MAY.2024 15:06:43

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5500	29.85	18.60	No limit
5580	23.85	18.50	No limit
5700	21.85	18.40	No limit

5500 MHz

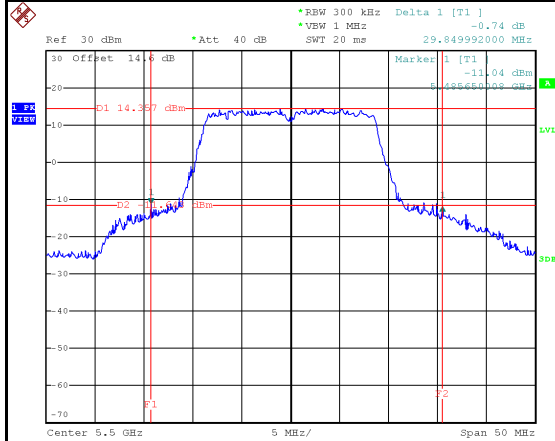


Date: 8.MAY.2024 15:08:47

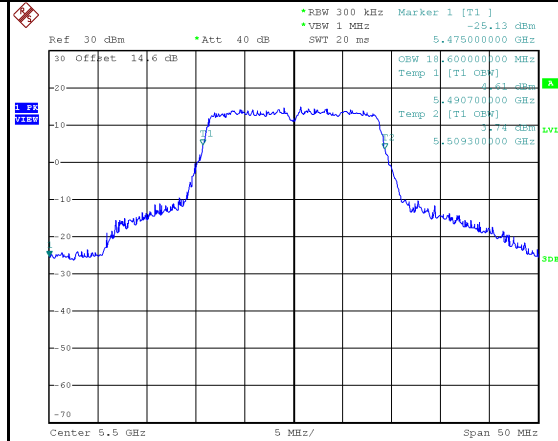


Date: 8.MAY.2024 15:08:21

5580 MHz

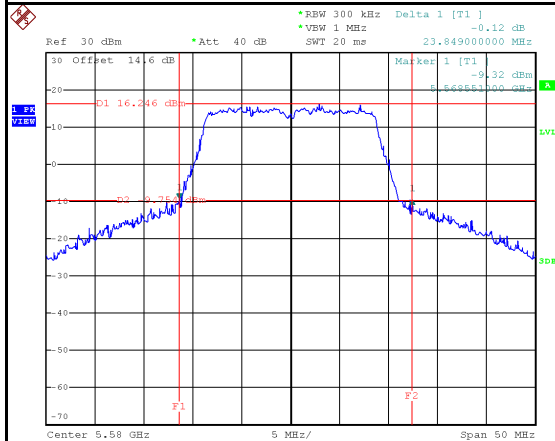


Date: 8.MAY.2024 15:10:19

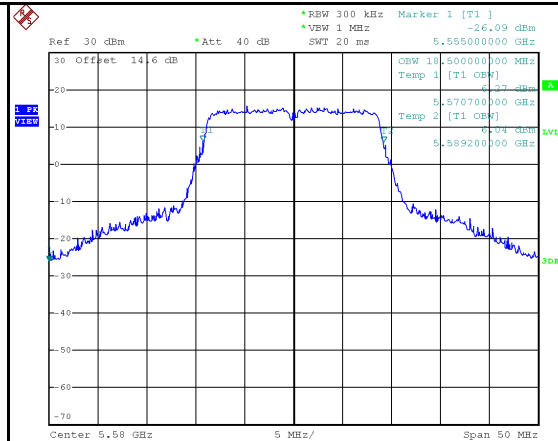


Date: 8.MAY.2024 15:09:43

5700 MHz

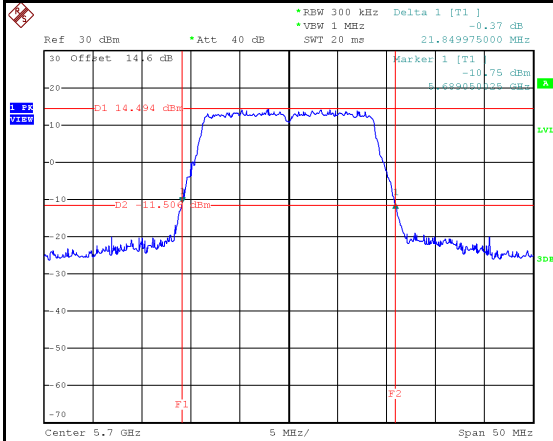


Date: 8.MAY.2024 15:13:00

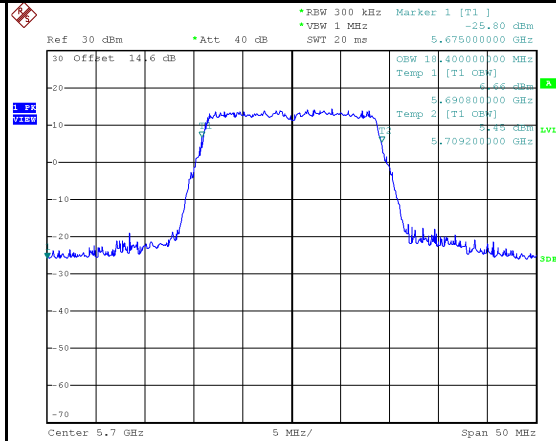


Date: 8.MAY.2024 15:12:25

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5745	17.65	19.00	500	Pass
5785	17.60	19.00	500	Pass
5825	17.70	18.50	500	Pass

5745 MHz

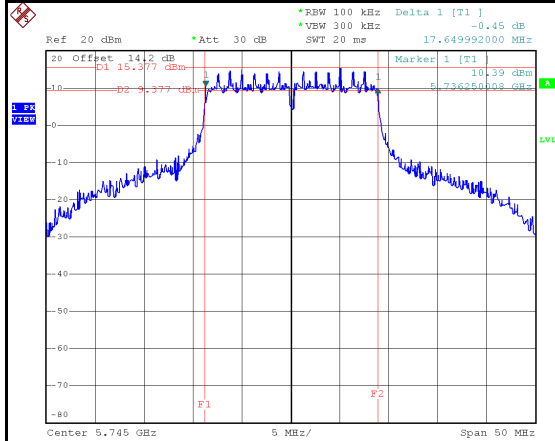


Date: 1.JUL.2024 15:24:01

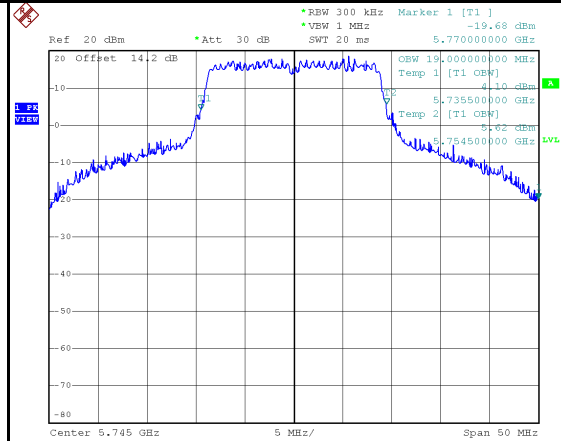


Date: 1.JUL.2024 15:23:18

5785 MHz

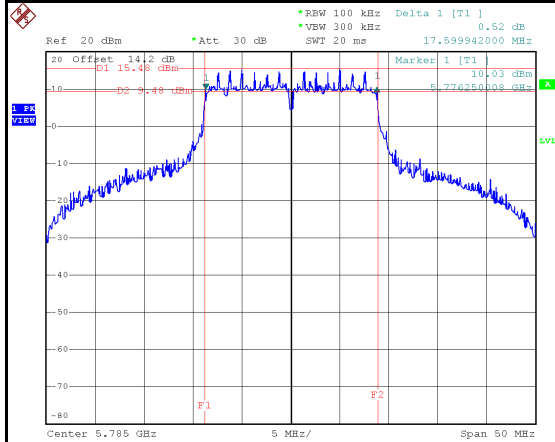


Date: 1.JUL.2024 15:25:52

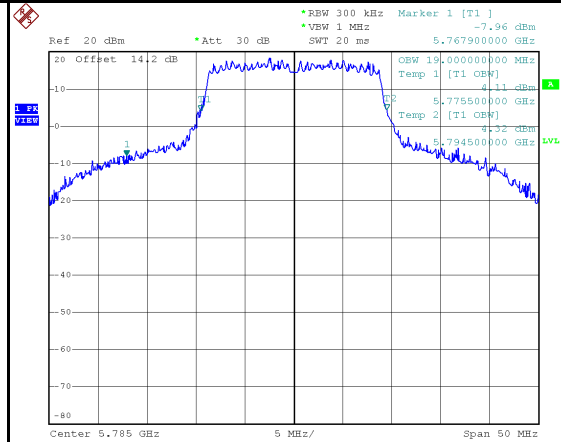


Date: 1.JUL.2024 15:25:06

5825 MHz

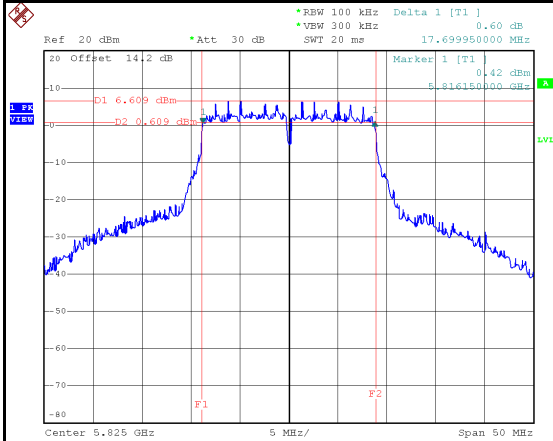



Date: 3.JUL.2024 14:47:42

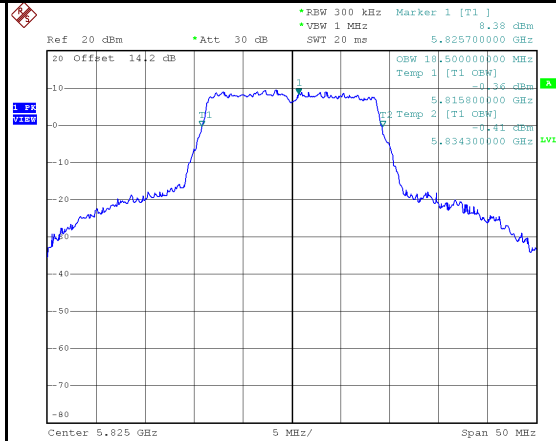

Date: 3.JUL.2024 14:46:57


Test Mode	IEEE 802.11ac (VHT40)_Ant 3
-----------	-----------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5190	57.21	37.20	No limit
5230	72.39	37.60	No limit

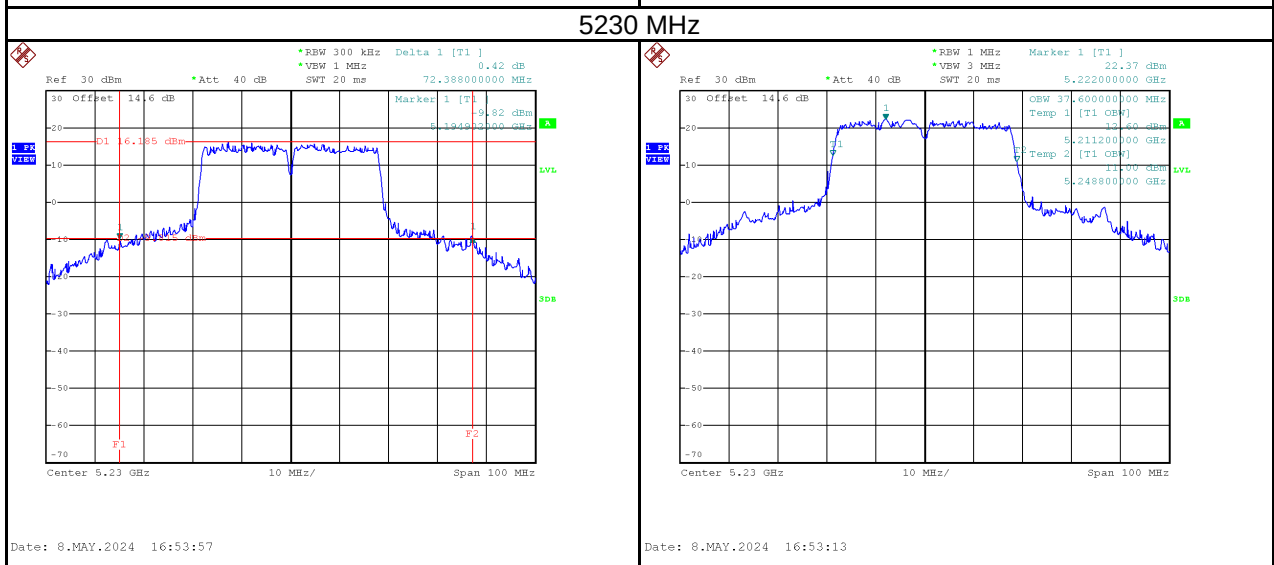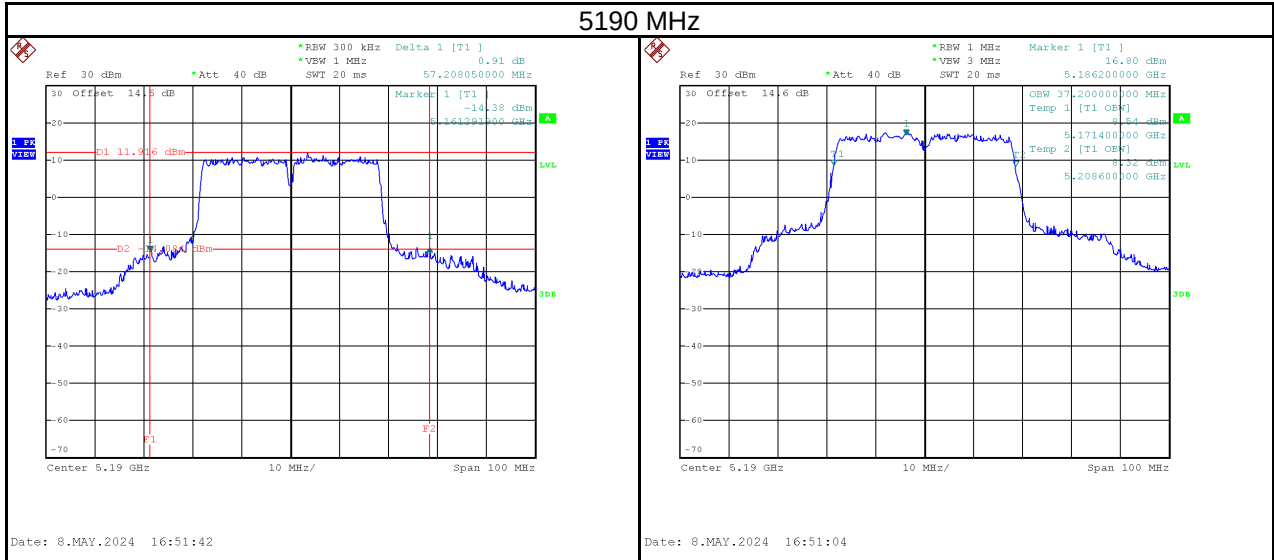


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5270	45.20	37.00	No limit
5310	58.20	37.20	No limit

5270 MHz

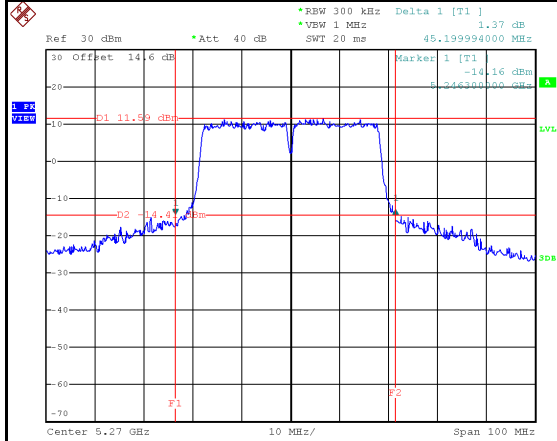


Date: 8.MAY.2024 16:56:41

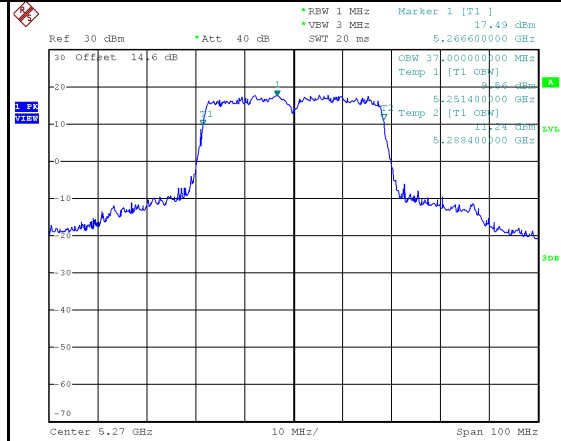


Date: 8.MAY.2024 16:55:08

5310 MHz

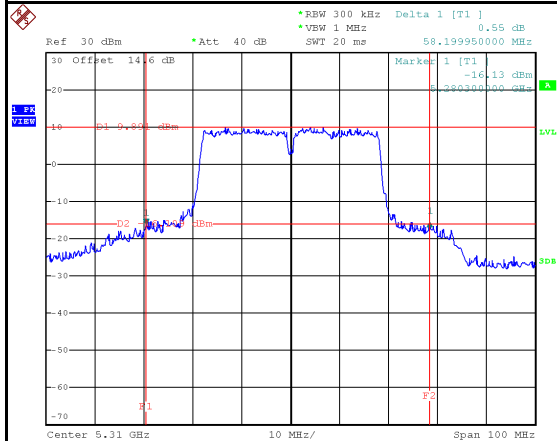


Date: 8.MAY.2024 16:58:44

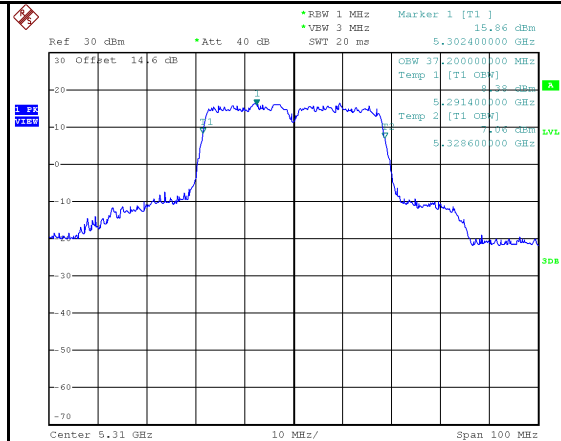


Date: 8.MAY.2024 16:57:58

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5510	56.90	37.00	No limit
5550	42.60	37.00	No limit
5670	50.20	37.00	No limit

5510 MHz

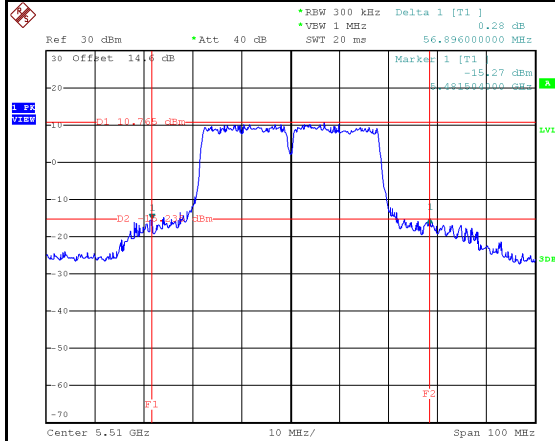


Date: 8.MAY.2024 17:00:19

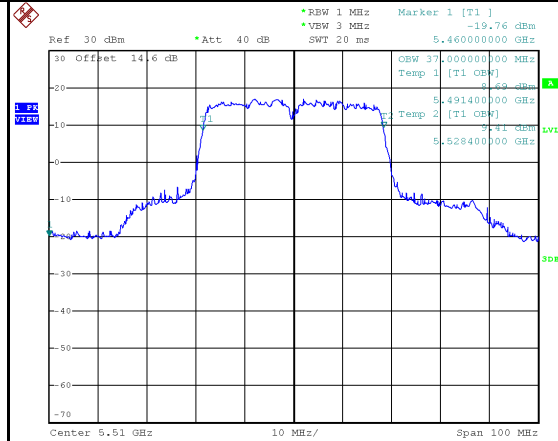


Date: 8.MAY.2024 16:59:39


5550 MHz

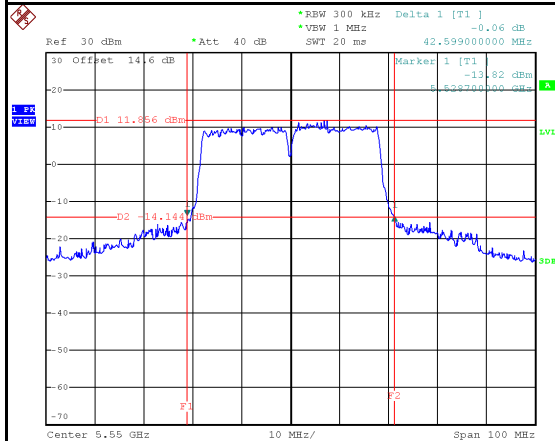

Date: 8.MAY.2024 17:02:31

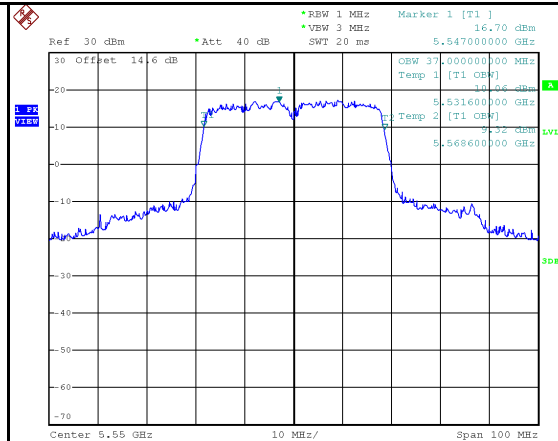


Date: 8.MAY.2024 17:01:43

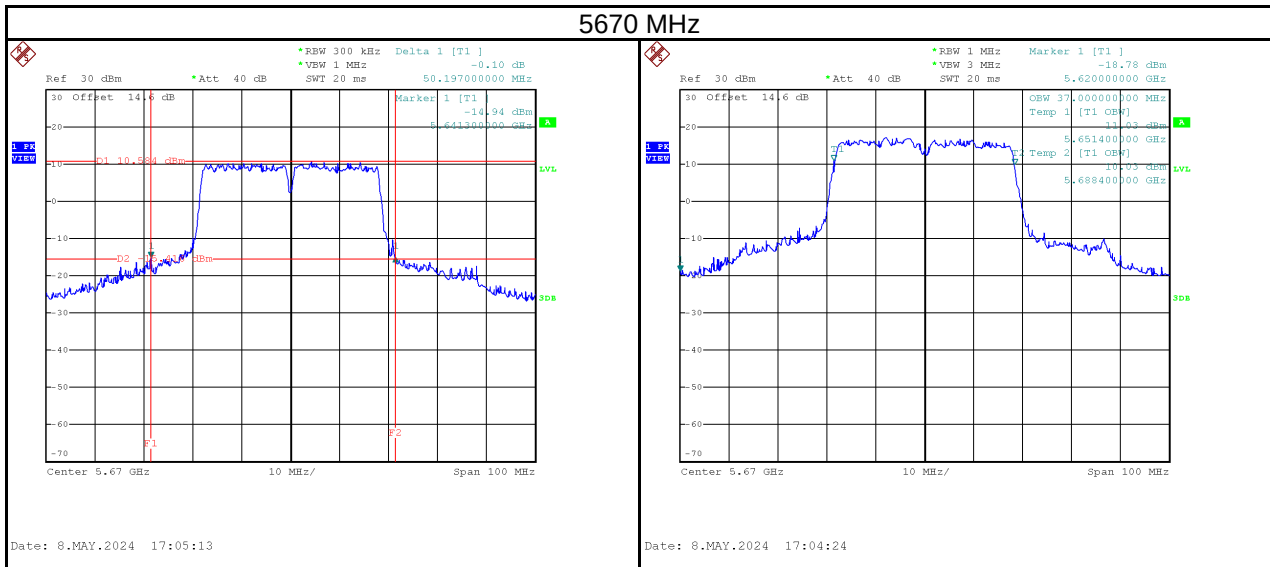


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5755	36.50	38.00	500	Pass
5795	36.30	38.80	500	Pass

5755 MHz

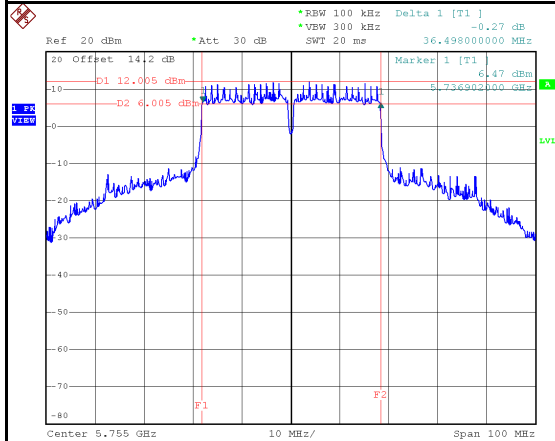


Date: 1.JUL.2024 15:36:07

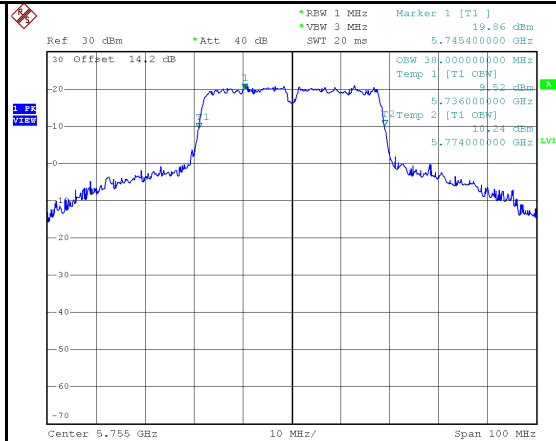


Date: 1.JUL.2024 17:15:03

5795 MHz

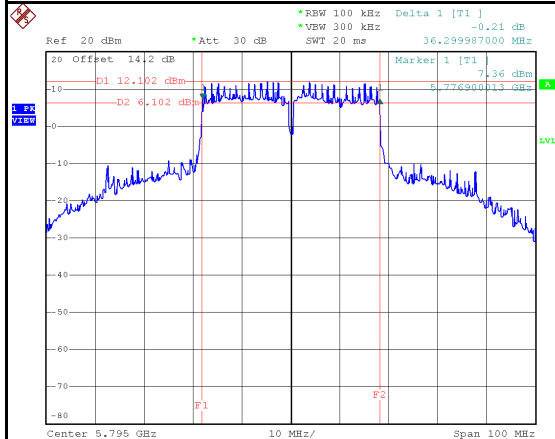


Date: 1.JUL.2024 15:38:32

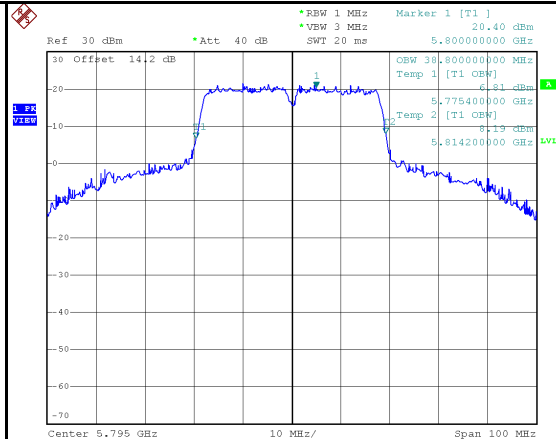


Date: 1.JUL.2024 17:13:14

Test Mode	IEEE 802.11ac (VHT80)_Ant 3
-----------	-----------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5210	102.00	76.40	No limit

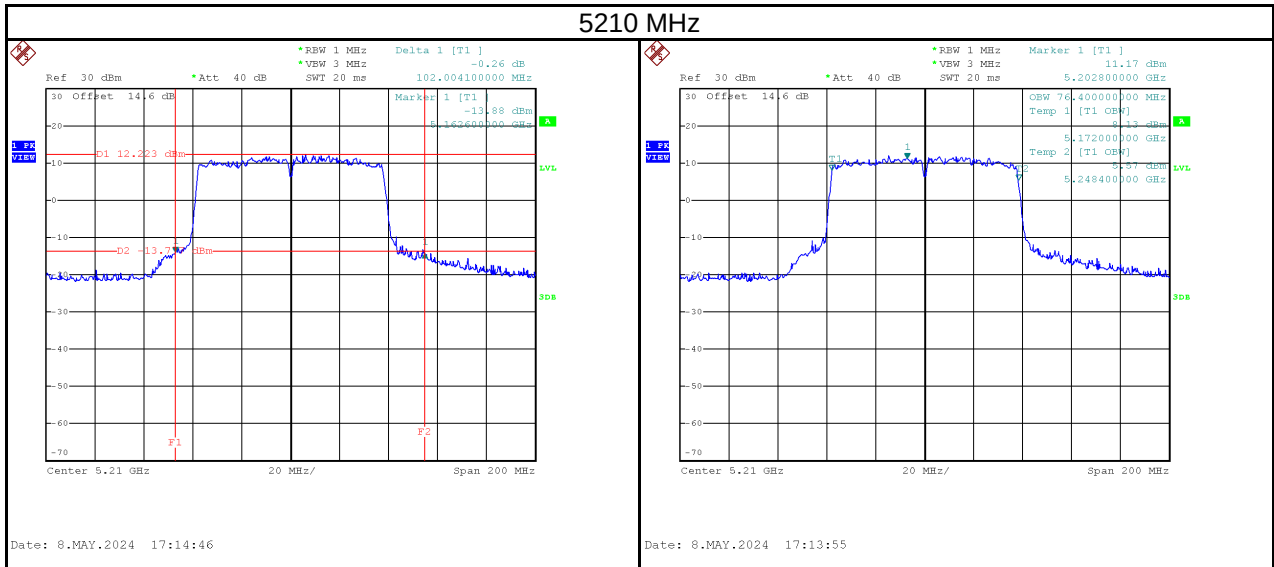


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5290	101.80	76.80	No limit

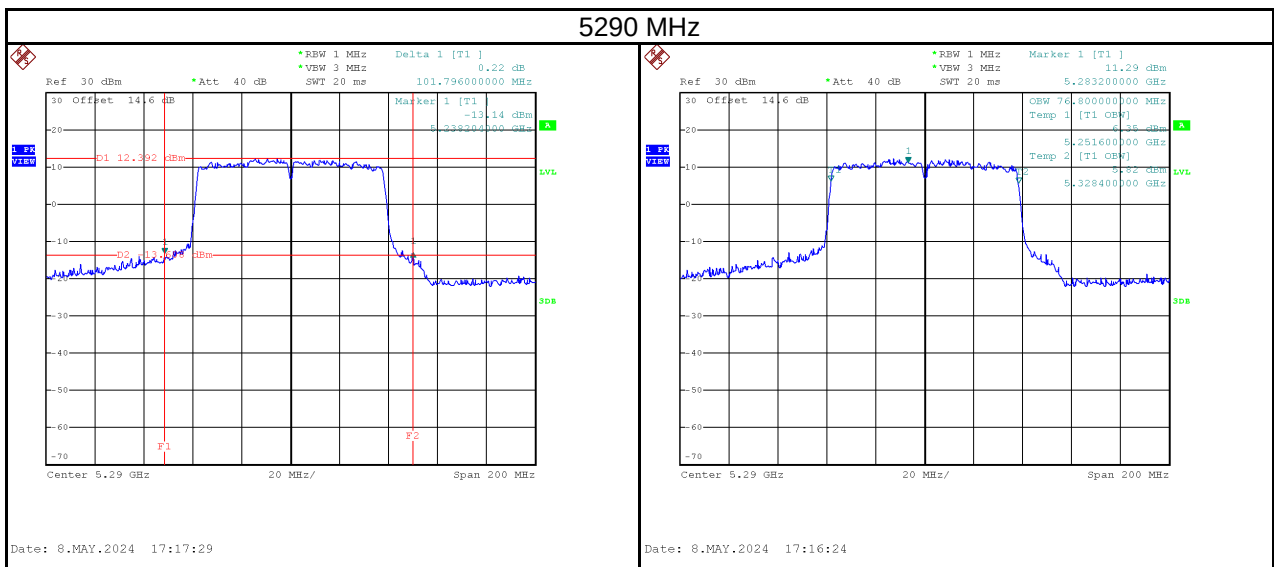


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5530	99.59	76.80	No limit
5610	89.19	76.40	No limit

5530 MHz

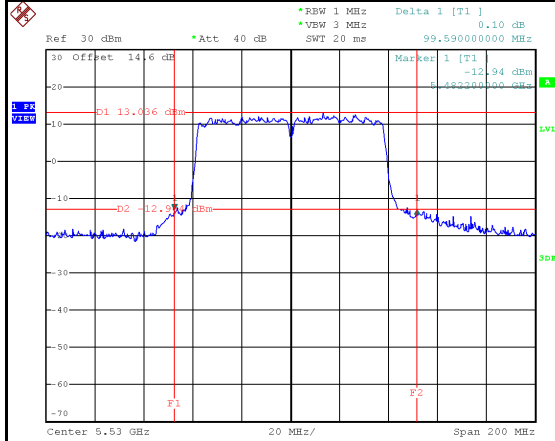


Date: 8.MAY.2024 17:19:58

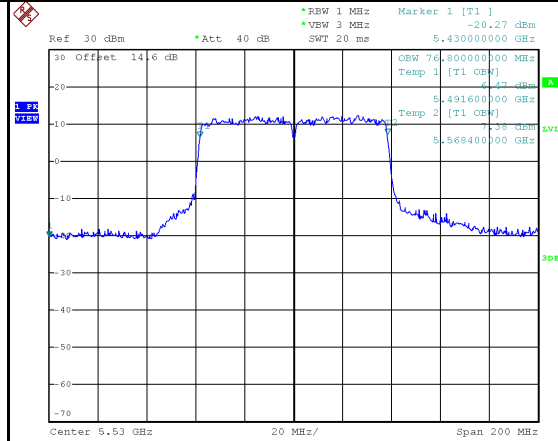


Date: 8.MAY.2024 17:18:57

5610 MHz

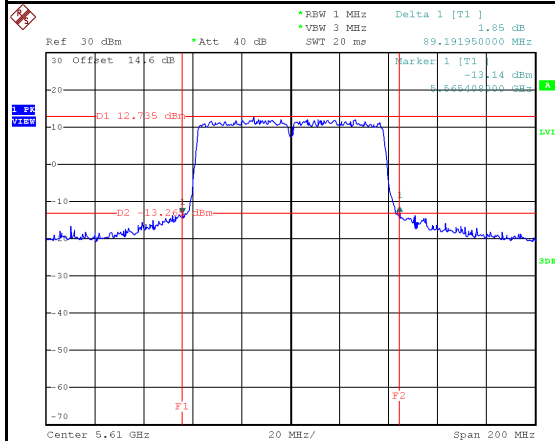


Date: 8.MAY.2024 17:23:57

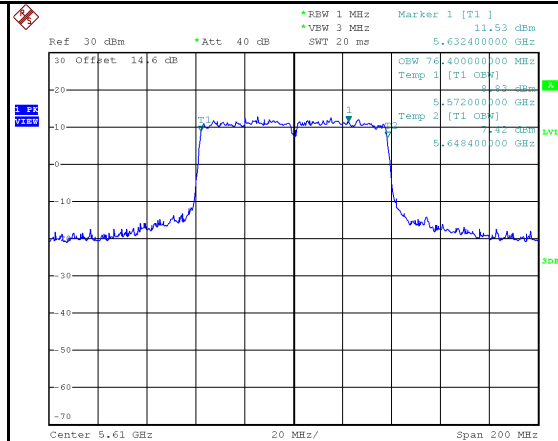


Date: 8.MAY.2024 17:22:12

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5775	75.80	76.80	500	Pass

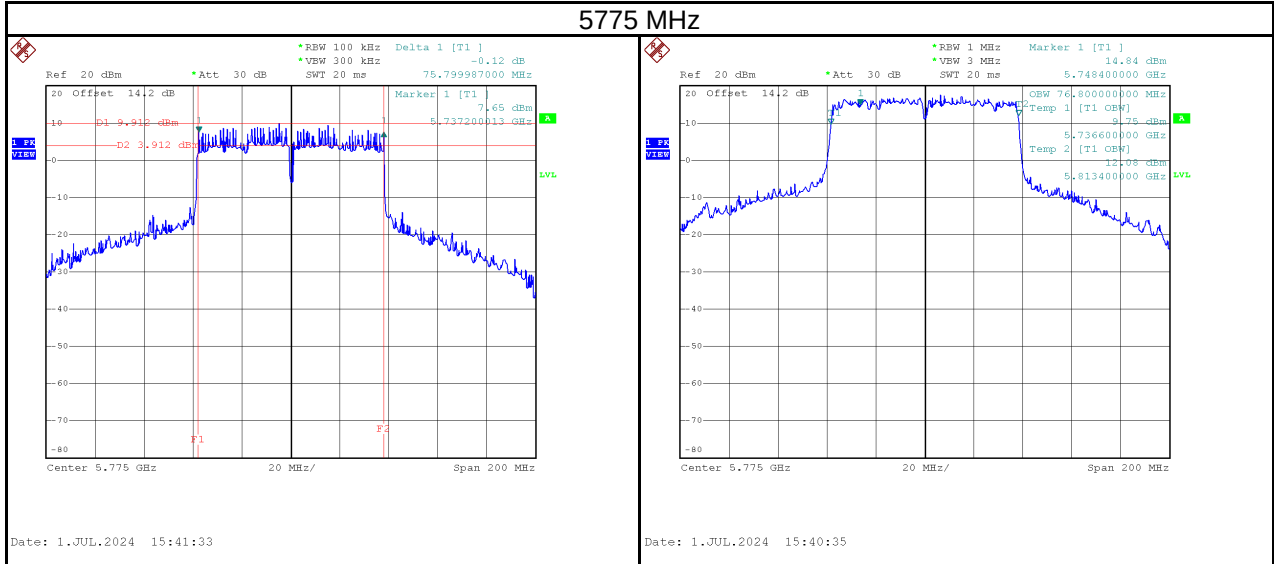


Test Mode	IEEE 802.11ac (VHT160)_Ant 3
-----------	------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5250	165.20	156.80	No limit


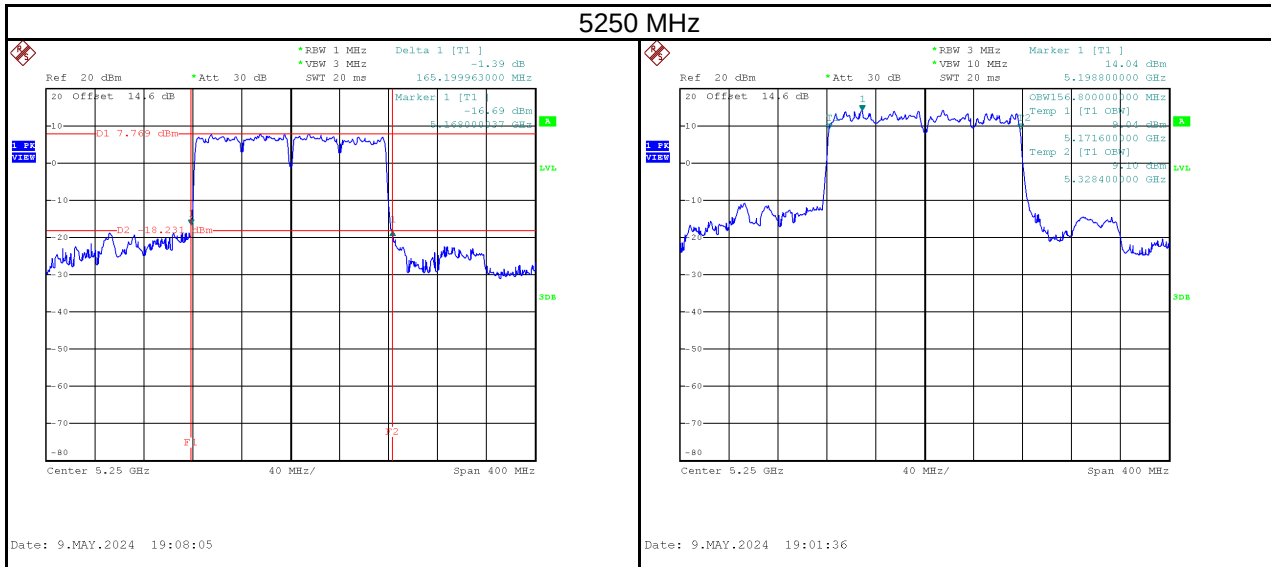


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5570	164.00	156.00	No limit

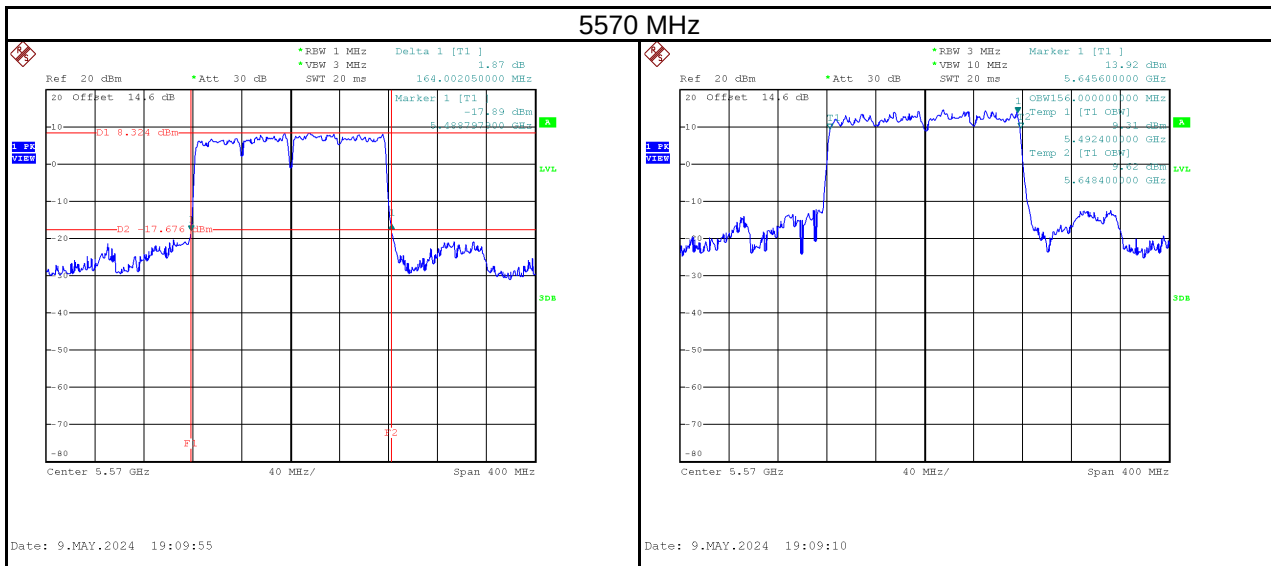


Test Mode	IEEE 802.11ax (HE20)_Ant 3
-----------	----------------------------


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5180	24.80	19.40	No limit
5200	39.69	19.80	No limit
5240	33.79	19.50	No limit

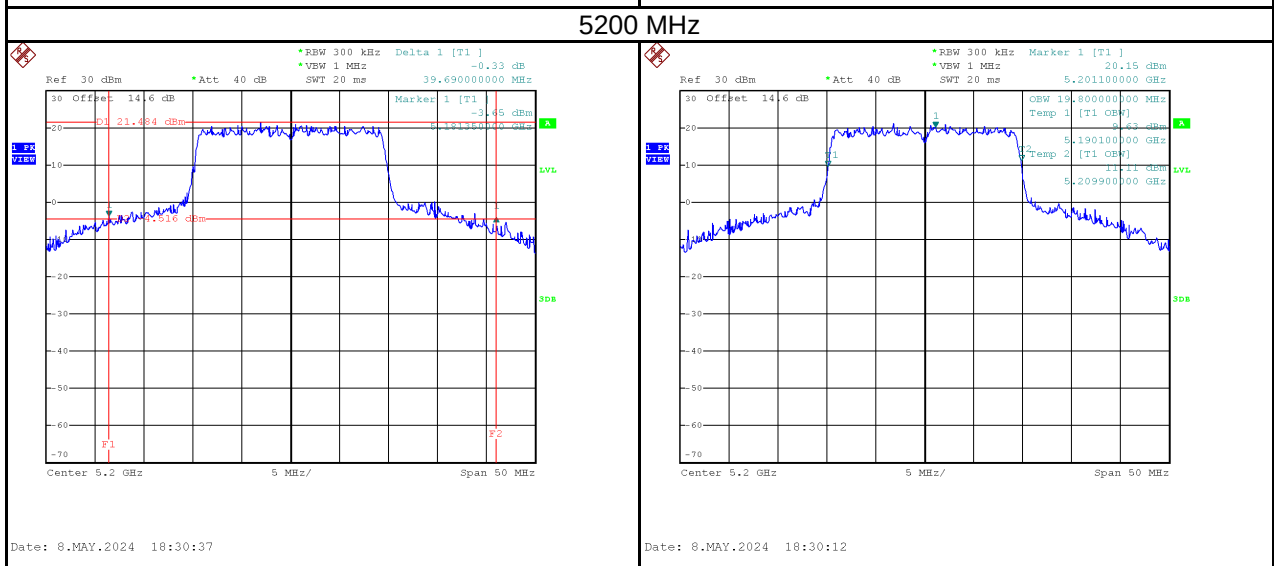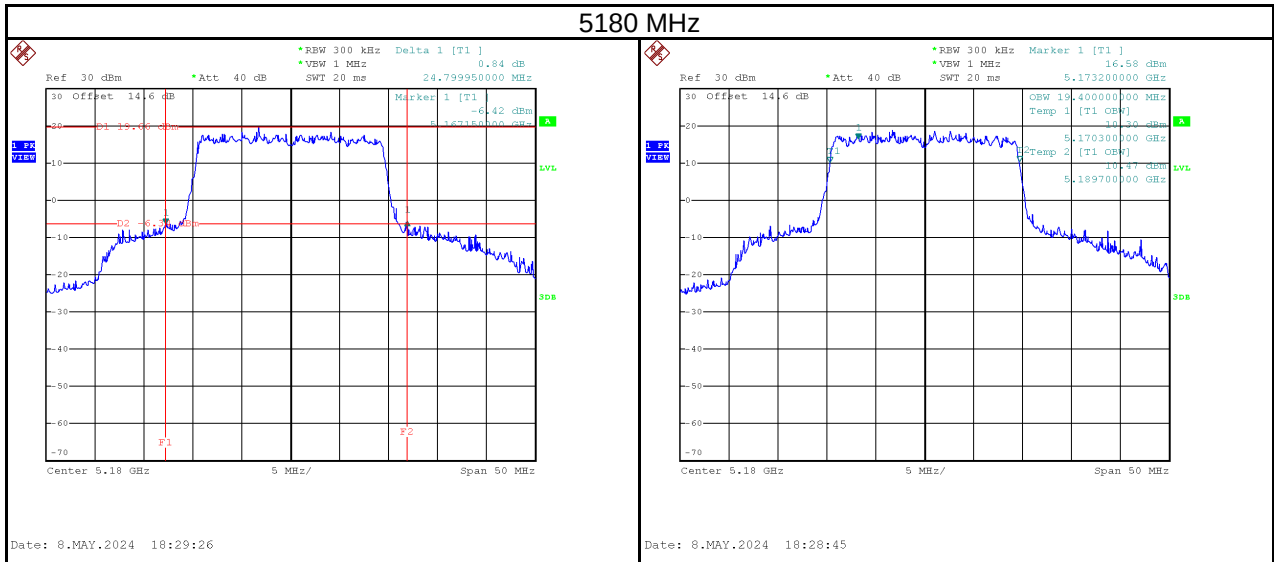

5240 MHz


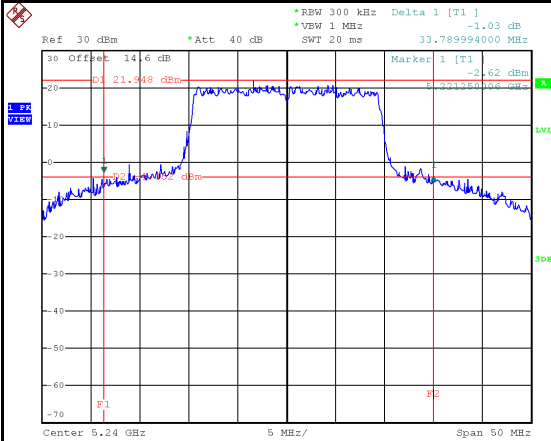


Date: 8.MAY.2024 18:32:08

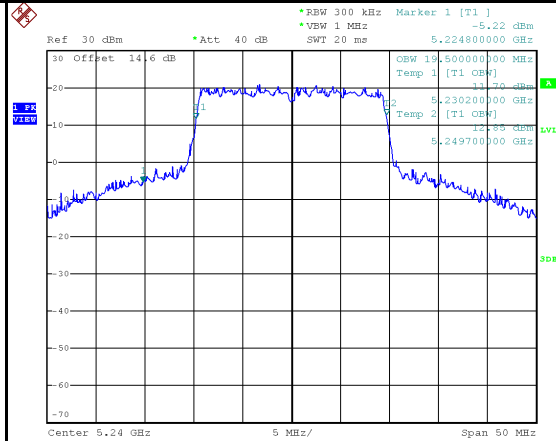


Date: 8.MAY.2024 18:31:31


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5260	22.99	19.40	No limit
5300	23.40	19.30	No limit
5320	22.95	19.40	No limit

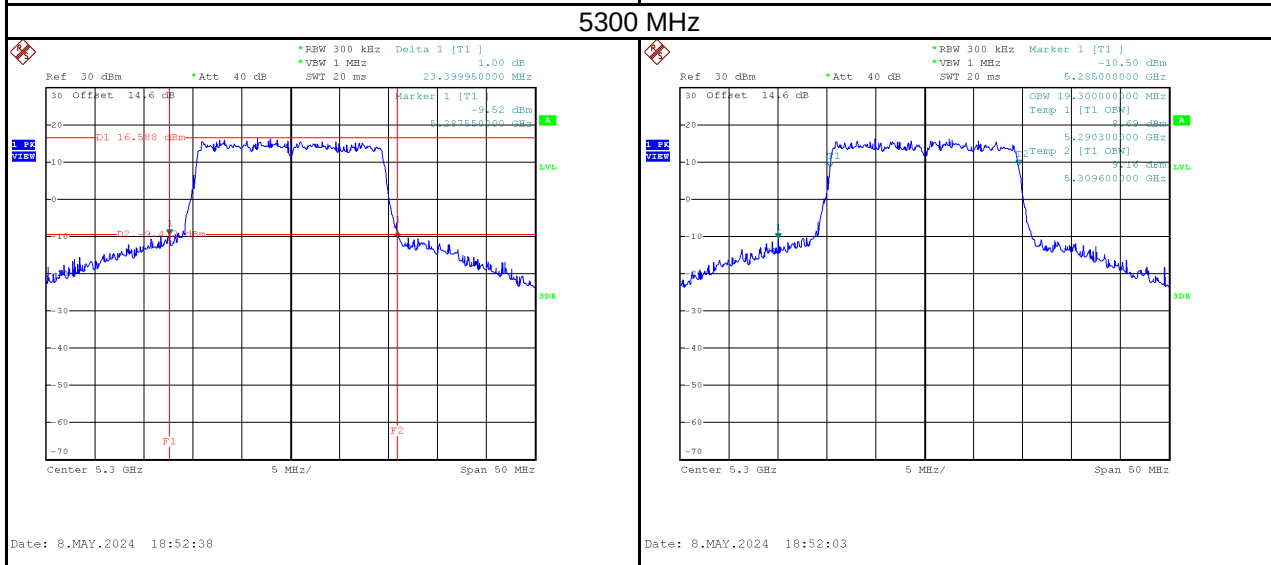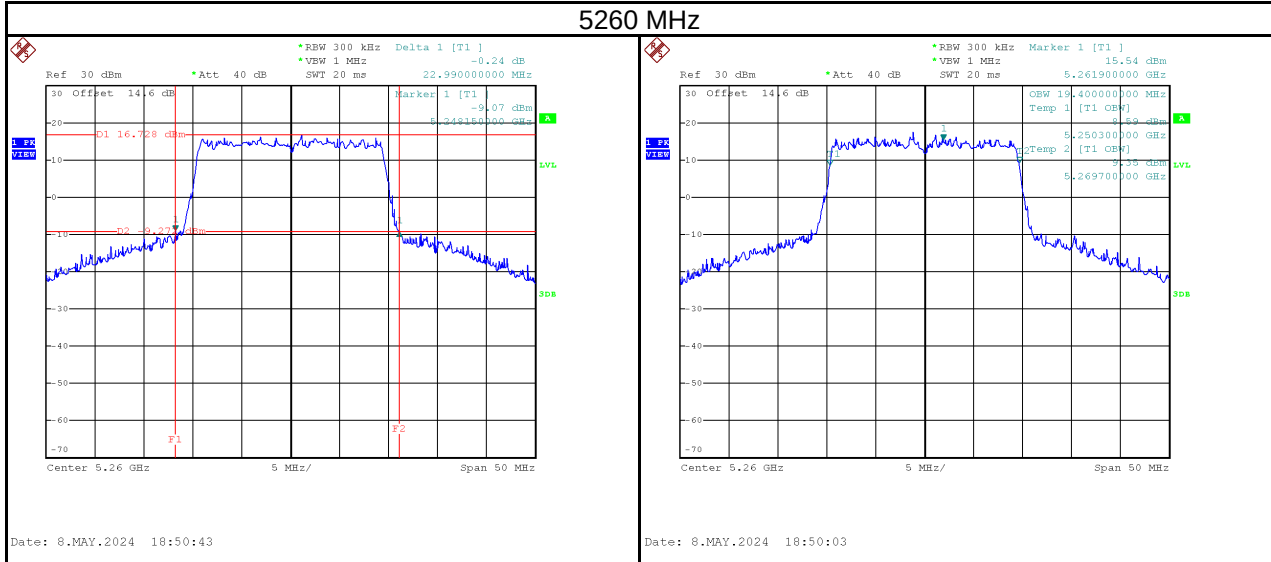

5320 MHz


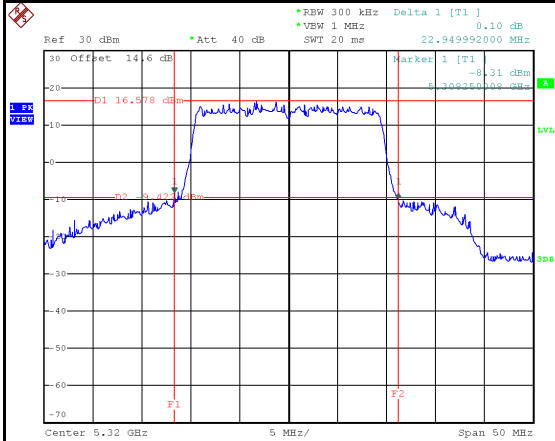


Date: 8.MAY.2024 18:59:56

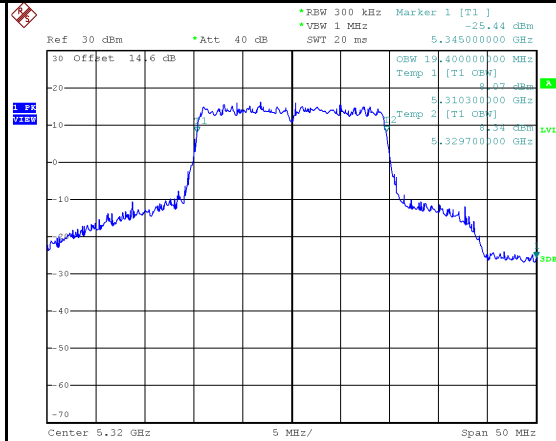


Date: 8.MAY.2024 18:59:24


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5500	26.20	19.30	No limit
5580	27.05	19.30	No limit
5700	21.65	19.20	No limit

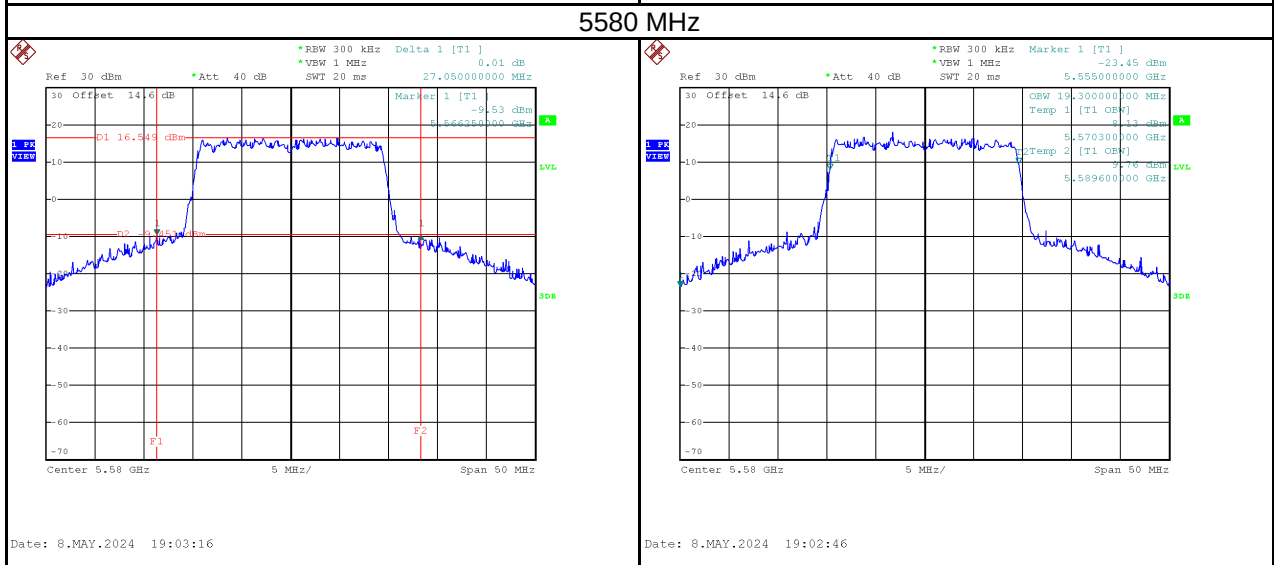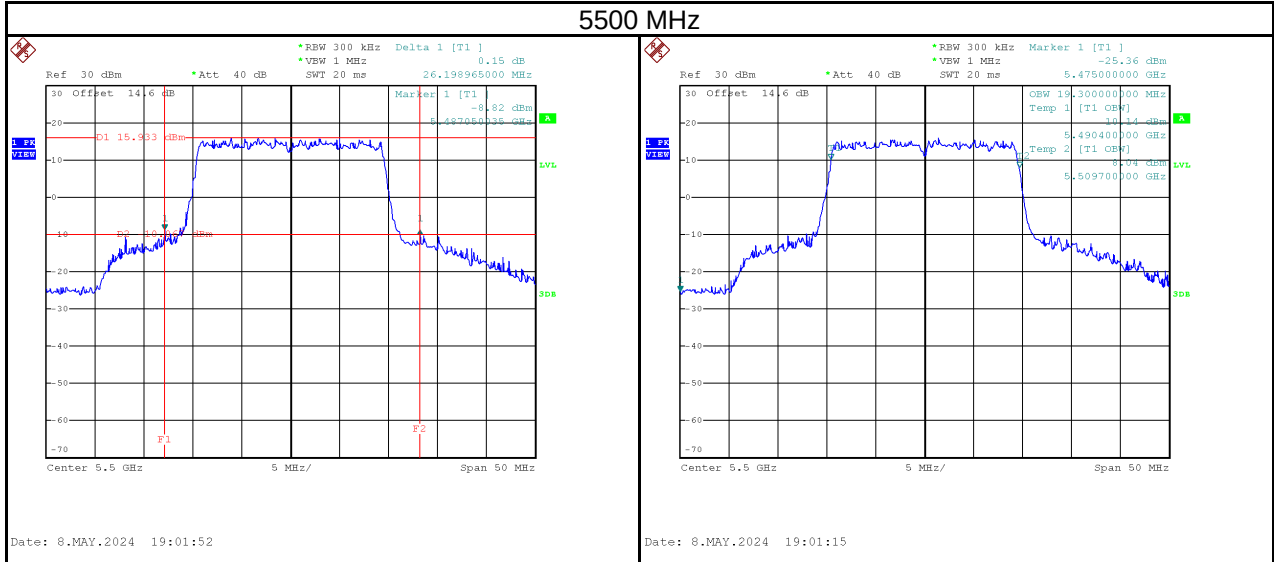

5700 MHz

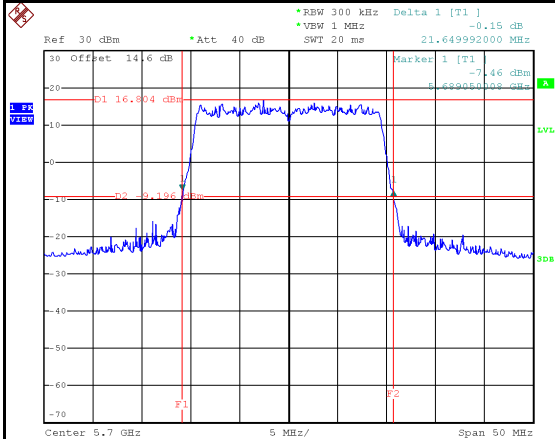


Date: 8.MAY.2024 19:04:36

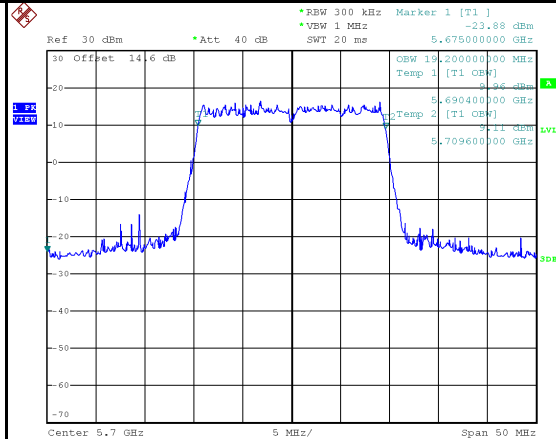


Date: 8.MAY.2024 19:04:02

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5745	18.35	19.50	500	Pass
5785	18.85	19.70	500	Pass
5825	18.99	19.20	500	Pass

5745 MHz

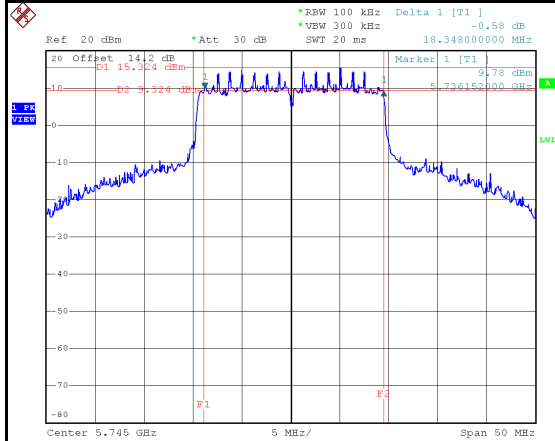


Date: 1.JUL.2024 15:48:01

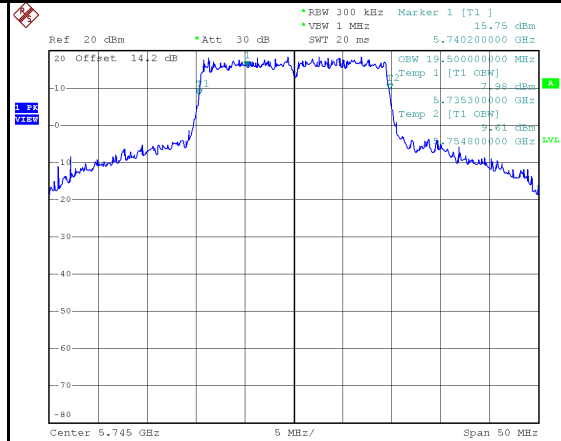


Date: 1.JUL.2024 15:47:15

5785 MHz

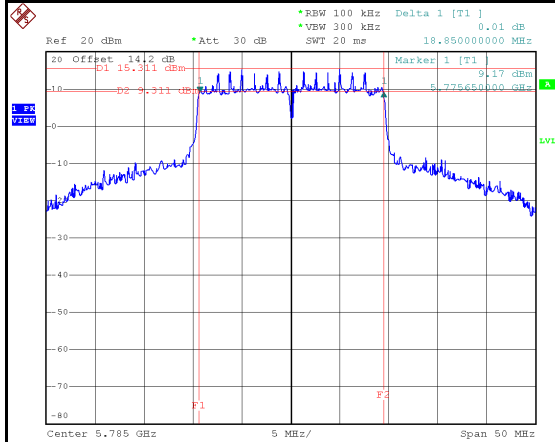


Date: 1.JUL.2024 15:51:14

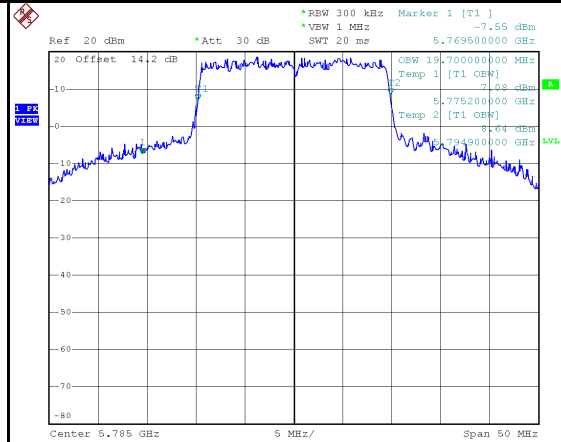


Date: 1.JUL.2024 15:50:30

5825 MHz

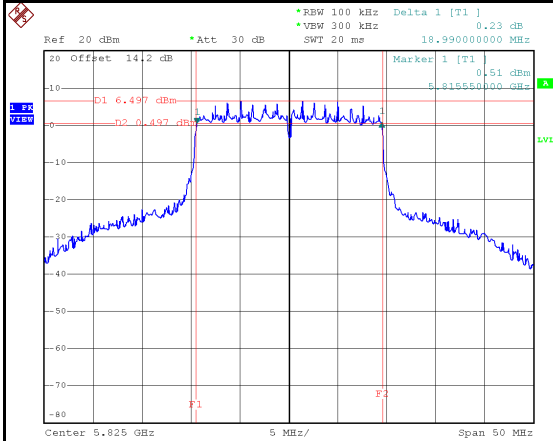



Date: 3.JUL.2024 14:53:11

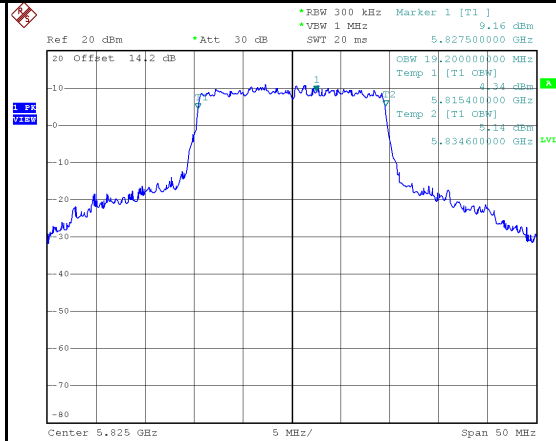

Date: 3.JUL.2024 14:52:27


Test Mode	IEEE 802.11ax (HE40)_Ant 3
-----------	----------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5190	50.80	38.40	No limit
5230	61.01	38.40	No limit

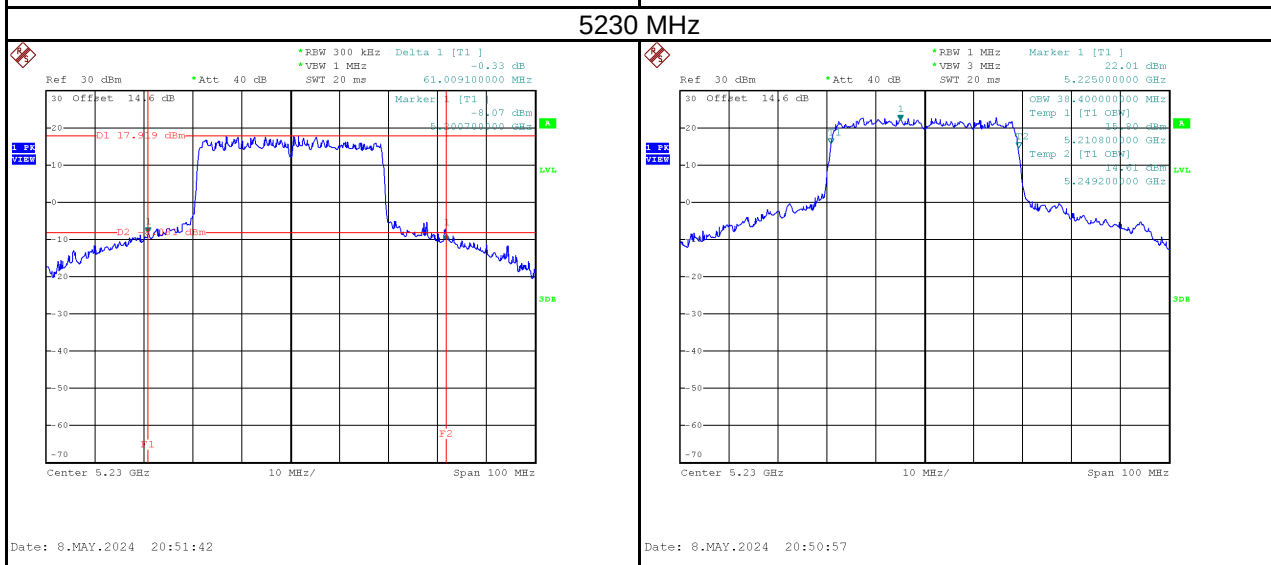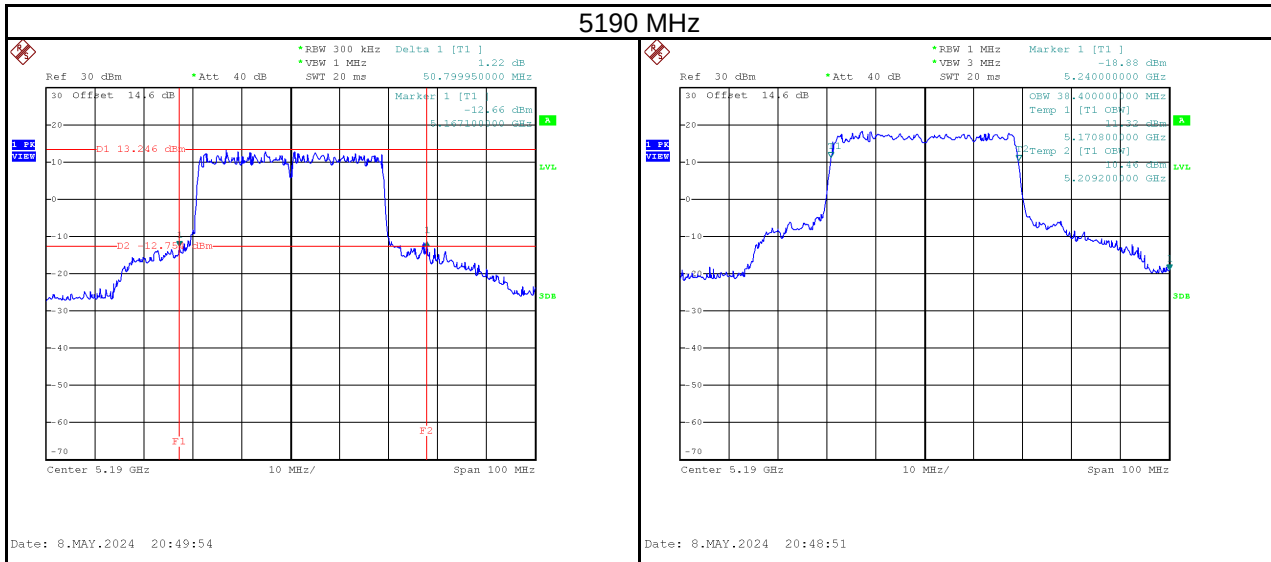


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5270	49.20	38.20	No limit
5310	50.50	38.20	No limit

5270 MHz

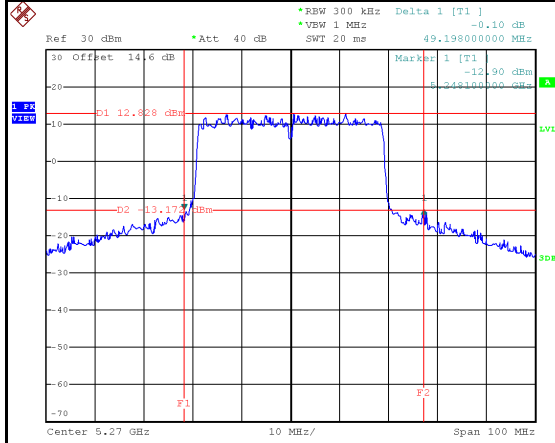


Date: 8.MAY.2024 20:53:31

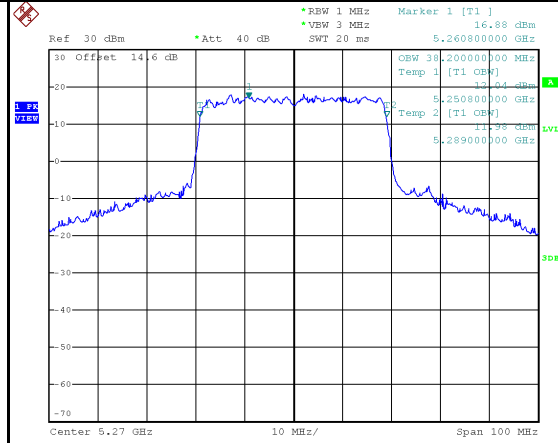


Date: 8.MAY.2024 20:52:45

5310 MHz

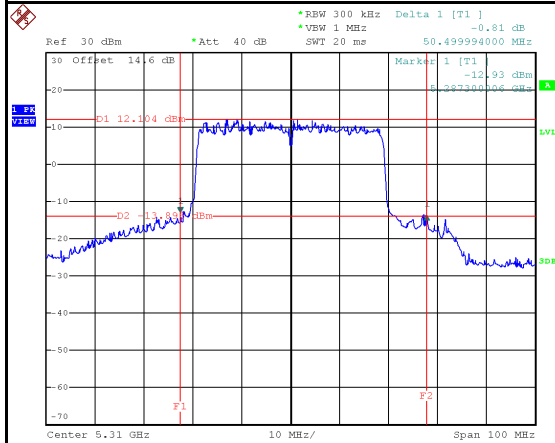


Date: 8.MAY.2024 20:56:03

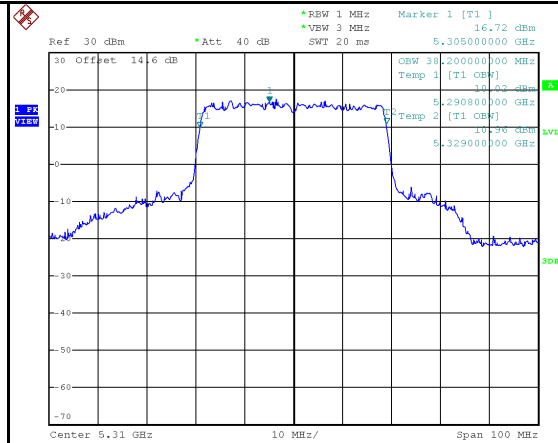


Date: 8.MAY.2024 20:54:54

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5510	43.40	38.00	No limit
5550	49.00	38.20	No limit
5670	49.70	38.40	No limit

5510 MHz

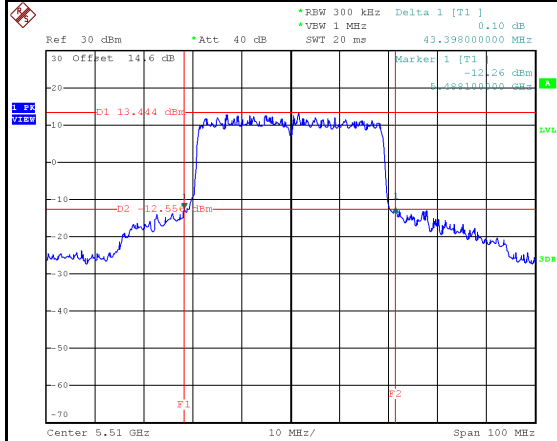


Date: 8.MAY.2024 20:58:40

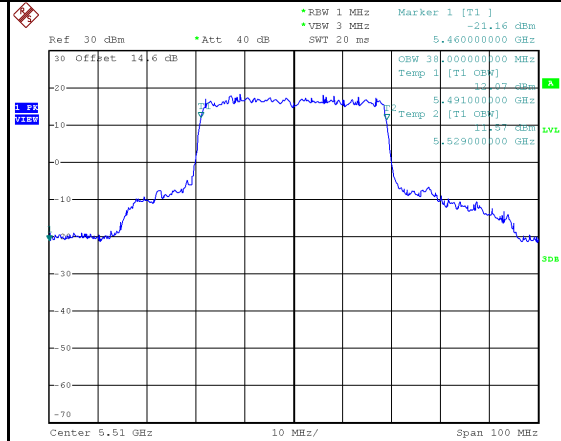


Date: 8.MAY.2024 20:57:04

5550 MHz

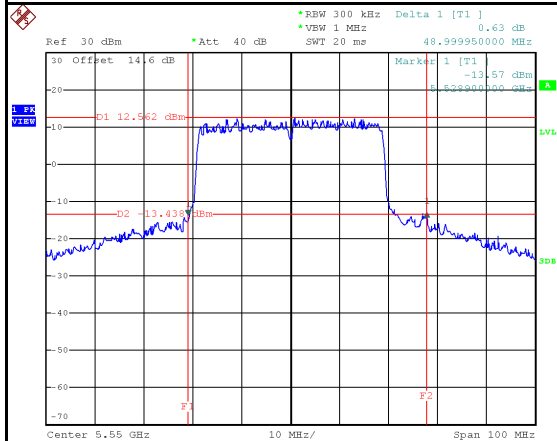


Date: 8.MAY.2024 21:01:21

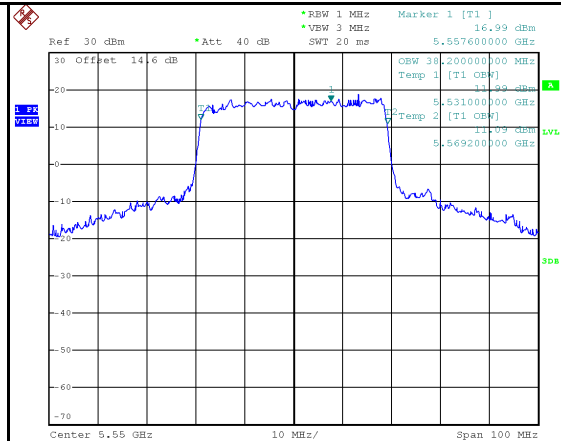


Date: 8.MAY.2024 21:00:33

5670 MHz

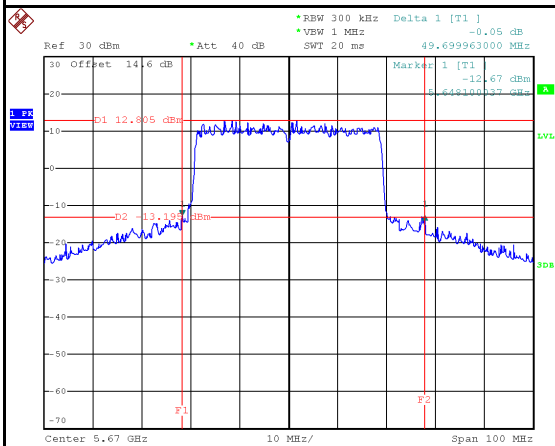

Date: 8.MAY.2024 21:03:16

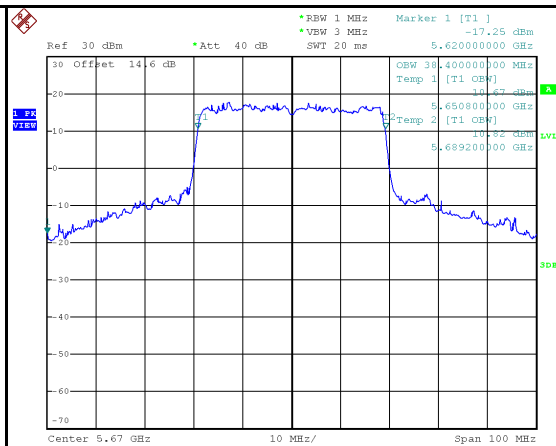

Date: 8.MAY.2024 21:02:18

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5755	37.39	38.80	500	Pass
5795	37.10	39.00	500	Pass

