



*FCC PART 15, SUBPART B and C; and FCC SECTION 15.247
 TEST REPORT*

for

PATCH-TEA

Model: TEA-21

Prepared for

TRANSTIMULATION RESEARCH INC.
 892 NORTH FAIR OAKS AVENUE
 PASADENA, CALIFORNIA 91103

Prepared by: *James Ross*

JAMES ROSS

Approved by: *Kyle Fujimoto*

KYLE FUJIMOTO

COMPATIBLE ELECTRONICS INC.
 114 OLINDA DRIVE
 BREA, CALIFORNIA 92823
 (714) 579-0500

DATE: SEPTEMBER 14, 2023

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	20	2	2	2	13	62	101

This report shall not be reproduced except in full, without the written
 approval of Compatible Electronics.



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

Newbury Park Division
 1050 Lawrence Drive
 Newbury Park, CA 91320
 (805) 480-4044



TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	5
1. PURPOSE	6
1.1 DECISION RULE & RISK	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
3. APPLICABLE DOCUMENTS	8
4. DESCRIPTION OF TEST CONFIGURATION	9
4.1.1 Cable Construction and Termination	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1 EUT and Accessory List	10
5.2 Emissions Test Equipment	11
6. TEST SITE DESCRIPTION	12
6.1 Test Facility Description	12
6.2 EUT Mounting, Bonding and Grounding	12
6.3 Measurement Uncertainty	12
7. CHARACTERISTICS OF THE TRANSMITTER	13
7.1 Channel Number and Frequencies	13
7.2 Antenna	13
8. TEST PROCEDURES	14
8.1 RF Emissions	14
8.1.1 Conducted Emissions Test	14
8.1.2 Radiated Emissions Test	15
8.1.3 RF Emissions Test Results	16
8.1.4 Sample Calculations	17
8.2 DTS Bandwidth	18
8.3 Maximum Peak Conducted Output Power	18
8.4 Emissions in Non-restricted Frequency Bands	19
8.5 RF Band Edges	19
8.6 Spectral Density Test	20
8.7 Variation of the Input Power	20
9. CONCLUSIONS	20



LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Models Covered Under This Report
D	Diagrams and Charts <ul style="list-style-type: none"> • Test Setup Diagrams • Antenna and Effective Gain Factors
E	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Conducted Emissions Test Setup
2	Layout of the Semi-Anechoic Test Chamber

LIST OF TABLES

TABLE	TITLE
1	Radiated Emission Results



GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used by the client to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the U.S. Government.

Device Tested: Patch-TEA
 Model: TEA-21
 S/N: Unit 1

Product Description: The equipment under test is a Transcutaneous Electrical Applicator with BLE connectivity and is used as an electrical nerve stimulator. It contained an internal, rechargeable battery. Highest frequency generated: 2.4 GHz. Dimensions (LxWxH): 50 mm. x 28 mm x 11 mm. Weight: 12 g.

Modifications: The EUT was not modified in order to meet the specifications.

Customer: Transtimulation Research Inc.
 892 North Fair Oaks Avenue
 Pasadena, California 91103

Test Dates: August 3 and 4, 2023

Test Specification covered by accreditation:



Test Specifications: Emissions requirements
 CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.247

Test Procedures: ANSI C63.4 and ANSI C63.10

Test Deviations: The test procedure was not deviated from during the testing.

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz	This test was not performed because the EUT is an internal battery powered device only and does not connect to the public AC mains while transmitting.
2	Radiated RF Emissions, 9 kHz – 25000 MHz	Complies with the Class B limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15 Subpart C, 15.205, 15.209 and 15.247 (d) See section 6.3 for Measurement Uncertainty
3	DTS Bandwidth	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247 (a)(2)
4	Peak Output Power	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (b)(3)
5	RF Band Edges	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (d)
6	Spectral Density	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (e)



1. PURPOSE

This document is a qualification test report based on the emissions tests performed on the Patch-TEA, Model: TEA-21 (EUT). The emissions measurements were performed according to the measurement procedure described in ANSI C 63.4 and ANSI C 63.10. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the Class B specification limits defined by CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.247.

1.1 DECISION RULE & RISK

If a measured value exceeds a specification limit it implies non-compliance. If the value is below a specification limit it implies compliance. Measurement uncertainty of the laboratory is reported with all measurement results but generally not taken into consideration unless a standard, rule or law requires it to be considered.

Qualification test reports are only produced for products that are in compliance with the test requirements, therefore results are always in conformity. Otherwise, an engineering report or just the data is provided to the customer.

When performing a measurement and making a statement of conformity, in or out-of-specification to manufacturer's specifications or Pass/Fail against a requirement, there are two possible outcomes:

- The result is reported as conforming with the specification
- The result is reported as not conforming with the specification

The decision rule is defined below.

When the test result is found to be below the limit but within our measurement uncertainty of the limit, it is our policy that the final acceptance decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be exactly on the specification, it is our policy, in the case of unwanted emissions measurements to consider the result non-compliant; however, the final decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be over the specification limit under any condition, it is our policy to consider the result non-compliant.

In terms of uncertainty of measurement, the laboratory is a calibrated and tightly controlled environment and generally exceptionally stable, the measurement uncertainties are evaluated without the consideration of the test sample. When it comes to the test sample however, as most testing is performed on a single sample rather than a sample population, and that sample is often a pre-production representation of the final product that test sample represents a significantly higher source of measurement uncertainty. We advise our customers of this and that when in doubt (small test to limit margins), they may wish to perform statistical sampling on a population to gain a higher confidence in the results. All lab reported results are that of a single sample in any event.

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The emissions tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Transtimulation Research Inc.

Victor Pikov VP of Product Development

Compatible Electronics Inc.

Kyle Fujimoto	Sr. Test Engineer
James Ross	Sr. Test Engineer

2.4 Date Test Sample was Received

The test sample was received prior to initial date of testing. Received as defined in product description.

2.5 Disposition of the Test Sample

The test sample has not been returned to Transtimulation Research Inc. as of the date of this test report.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
ITE	Information Technology Equipment
DoC	Declaration of Conformity
FCC	Federal Communications Commission
ID	Identification
N/A	Not Applicable
Tx	Transmit
Rx	Receive
Inc.	Incorporated
RF	Radio Frequency
GND	Ground
BLE	Bluetooth Low Energy
VP	Vice President
TEA	Transcutaneous Electrical Applicator



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this emissions Test Report.

SPEC	TITLE
FCC Title 47, Part 15 Subpart C	FCC Rules – Radio frequency devices (including digital devices) – Intentional Radiators
FCC Title 47, Part 15 Subpart B	FCC Rules – Radio frequency devices (including digital devices) – Unintentional Radiators
558074 D01 DTS Meas Guidance v05r02	Guidance for Performing Compliance Measurements on Digital Transmissions Systems (DTS) Operating Under Section 15.247
EN 50147-2: 1997	Anechoic chambers. Alternative test site suitability with respect to site attenuation
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10: 2013	American National Standard for Testing Unlicensed Wireless Devices



4. DESCRIPTION OF TEST CONFIGURATION

The Patch-TEA, Model: TEA-21 (EUT) was tested as a stand-alone device and was powered by an internal battery.

The EUT was continuously transmitting at 2402 MHz during spurious emissions testing (worst case).

The EUT was tested for emissions while in the X, Y, and Z axis. The X orientation is when the EUT is parallel to the ground mounted horizontally. The Y orientation is when the EUT is perpendicular to the ground mounted vertically. The Z orientation is when the EUT is perpendicular to the ground mounted horizontally.

The firmware inside the EUT allowed it to continuously transmit at the low, middle, and high during the intentional radiator tests.

The firmware is stored on the company's servers.

The radiated data was taken in the continuously exercising mode of operation. All initial investigations were performed with the EMI Receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the photographs in Appendix D.

4.1.1 Cable Construction and Termination

The EUT contained no externally connected cables.

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

5.1 EUT and Accessory List

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID
PATCH-TEA (EUT)	TRANSTIMULATION RESEARCH INC.	TEA-21	UNIT 1	2BCH2-TEA21
FIRMWARE*	TRANSTIMULATION RESEARCH INC.	FW E MODE: BT	N/A	N/A

*Only used to program the EUT to continuously transmit at the low, middle, and high channels (not used during testing)



5.2 Emissions Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
RF RADIATED EMISSIONS TEST EQUIPMENT					
TDK TestLab	TDK RF Solutions, Inc.	9.22	700145	N/A	N/A
EMI Receiver, 3 Hz – 44 GHz	Keysight Technologies, Inc.	N9038A	MY59050117	July 14, 2023	July 14, 2024
Loop Antenna	Com-Power	AL-130R	121090	February 10, 2022	February 10, 2024
CombiLog Antenna	Com-Power	AC-220	61093	December 14, 2021	December 14, 2023
Horn Antenna	Com-Power	AH-118	10050113	December 16, 2021	December 16, 2023
Horn Antenna	Com-Power	AH-826	0071957	NCR	NCR
Preamplifier	Com-Power	PA-118	181653	March 7, 2022	March 7, 2024
Preamplifier	Com-Power	PA-840	711013	April 8, 2022	April 8, 2024
System Controller	Sunol Sciences Corporation	SC110V	112213-1	N/A	N/A
Turntable	Sunol Sciences Corporation	2011VS	N/A	N/A	N/A
Antenna-Mast	Sunol Sciences Corporation	TWR95-4	112213-3	N/A	N/A
Computer	Hewlett Packard	p6716f	MXX1030PX0	N/A	N/A



6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 of this report for emissions test location.

6.2 EUT Mounting, Bonding and Grounding

For frequencies 1 GHz and below: The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 0.8 meters above the ground plane.

For frequencies above 1 GHz: The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 1.5 meters above the ground plane.

The EUT was not grounded.

6.3 Measurement Uncertainty

“Compatible Electronics” U_{lab} value is less than U_{cisp} , thus based on this – compliance is deemed to occur if no measured disturbance exceeds the disturbance limit.

The uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level, using a coverage factor of $k=2$

$$u_c(y) = \sqrt{\sum_i c_i^2 u^2(x_i)}$$

Measurement		U_{cisp}	$U_{lab} = 2u_c(y)$
Conducted disturbance (mains port)	(150 kHz – 30 MHz)	3.4 dB	2.72 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(30 MHz – 1,000 MHz)	6.3 dB	3.32 dB (Vertical) 3.30 dB (Horizontal)
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(1 GHz – 6 GHz)	5.2 dB	4.06 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(6 GHz – 18 GHz)	5.5 dB	4.06 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(18 GHz – 26 GHz)	N/A	4.43 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(26.5 GHz – 40 GHz)	N/A	4.57 dB



7. CHARACTERISTICS OF THE TRANSMITTER

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

7.1 Channel Number and Frequencies

The EUT uses a total of 40 channels.

The low channel is 2402 MHz

The middle channel is 2442 MHz

The high channel is 2480 MHz

7.2 Antenna

The EUT utilized the following antenna:

2.4 GHz Mini Antenna, Surface Mount, Johansson 2450AT18A100

Peak Gain: 0.5 dBi and Average Gain: -0.5 dBi

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions

8.1.1 Conducted Emissions Test

The EMI Receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. A 10 dB attenuator used for the protection of the EMI Receiver input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the EMI Receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63:4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by computer software.

Test Results:

This test was not performed because the EUT is an internal battery powered device only and does not connect to the public AC mains.

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



8.1.2 Radiated Emissions Test

The EMI Receiver was used as the measuring meter. Above 1000 MHz, preamplifiers were used to increase the sensitivity of the instrument. The EMI Receiver was initially used with the Analyzer mode feature activated. In this mode, the EMI receiver can then record the actual frequency to be measured. This final reading is then taken accurately in the EMI Receiver mode, which takes into account the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit. The effective measurement bandwidth used for the radiated emissions test was according to the frequency measured.

The frequencies below 1 GHz were quasi-peaked using the quasi-peak detector of the EMI Receiver.

The frequencies above 1 GHz were averaged using the RMS average function of the EMI Receiver.

The EMI test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4 and ANSI C63.10. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results.

The EUT was tested at a 3-meter test distance. The six highest emissions are listed in Table 1.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
9 kHz to 150 kHz	200 Hz	Loop Antenna
150 kHz to 30 MHz	9 kHz	Loop Antenna
30 MHz to 1 GHz	120 kHz	CombiLog Antenna
1 GHz to 25 GHz	1 MHz	Horn Antenna

Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; the limits of CFR Title 47, Part 15, Subpart C, sections 15.205, 15.209 and 15.247 for radiated emissions.



8.1.3 RF Emissions Test Results

Table 1 RADIATED EMISSION RESULTS

Patch-TEA

Model: TEA-21

Frequency (MHz)	EMI Reading (dB μ V/m)	Specification Limit (dB μ V/m)	Delta (EMI Reading – Spec. Limit) (dB)
7440 (V) (High Channel) (Z-Axis)	46.76	53.97	-7.21
7440 (H) (High Channel) (X-Axis)	46.10	53.97	-7.87
7326 (H) (Middle Channel) (X-Axis)	45.69	53.97	-8.28
4960 (V) (High Channel) (Z-Axis)	44.14	53.97	-9.83
7326 (H) (Middle Channel) (Z-Axis)	43.97	53.97	-10.00
7326 (H) (Middle Channel) (Y-Axis)	43.89	53.97	-10.08

Notes: * The complete emissions data is given in Appendix E of this report.

(V) Vertical

(H) Horizontal

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



8.1.4 Sample Calculations

A correction factor for the antenna, cable and a distance factor (if any) must be applied to the meter reading before a true field strength reading can be obtained. This Corrected Meter Reading is then compared to the specification limit in order to determine compliance with the limits.

Conversion to logarithmic terms: Specification limit ($\mu\text{V/m}$) $\log x 20$ = Specification Limit in dB $\mu\text{V/m}$

To correct for distance when measuring at a distance other than the specification

For measurements below 30 MHz: (Specification distance / test distance) $\log x 40$ = distance factor

For measurements above 30 MHz: (Specification distance / test distance) $\log x 20$ = distance factor

Note: When using an Active Antenna, the Antenna factor shall be subtracted due to the combination of the internal amplification and antenna loss.

Corrected Meter Reading = meter reading + F - A + C

where: F = antenna factor

A = amplifier gain

C = cable loss

The correction factors for the antenna and the amplifier gain are attached in Appendix D of this report. The data sheets are attached in Appendix E.

The distance factor D is 0 when the test is performed at the required specification distance.

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



8.2 DTS Bandwidth

The DTS Bandwidth was measured using the EMI Receiver. The following steps were performed for measuring the DTS Bandwidth.

1. Set RBW = 100 kHz
2. Set the video bandwidth (VBW) to equal or greater than 3 times the RBW
3. Detector = Peak
4. Trace Mode = Max Hold
5. Sweep = Auto Couple
6. Allow the trace to stabilize
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (a)(2).

8.3 Maximum Peak Conducted Output Power

The Maximum Peak Conducted Output Power was measured using the EMI Receiver. The Maximum Peak Conducted Output Power was measured using the procedure described in section 11.9.1.1 of ANSI C63.10. The Maximum Peak Conducted Output Power was then taken. The following steps were performed for measuring the Maximum Peak Conducted Output Power.

1. Set the RBW \geq DTS bandwidth
2. Set VBW \geq [3 x RBW]
3. Set span \geq [3 x RBW]
4. Sweep time = auto couple
5. Detector = peak
6. Trace mode = max hold
7. Allow trace to fully stabilize
8. Use peak marker function to determine the peak amplitude level

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (b)(3)

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

**8.4****Emissions in Non-restricted Frequency Bands**

The emissions in the non-restricted frequency bands measurements were performed using the EMI receiver directly connected to the EUT. The reference level was established by setting the instrument center frequency to the DTS channel center frequency. The span was set to ≥ 1.5 times the DTS bandwidth. The RBW was set to 100 kHz and the VBW was set to 300 kHz. A peak detector was used with sweep set to auto. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the reference level. For emission level measurement, the center frequency and span were set to encompass the frequency range to be measured. The RBW was set to 100 kHz and the VBW was set to 300 kHz. A peak detector was used with a sweep time set to auto. The number of measurement points were greater than the span/RBW. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the maximum amplitude level. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (d).

8.5**RF Band Edges**

The RF band edges were taken at 2390 MHz when the EUT was on the low channel and 2483.5 MHz when the EUT was on the high channel using the EMI Receiver. A preamplifier was used to boost the signal level, with the plots being taken at a 3 meter test distance. The radiated emissions test procedure as describe in section 8.1.2 of this test report was used to maximize the emission.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (d). The RF power at the restricted bands closest to the band edges at 2390 MHz and 2483.5 MHz also meet the limits of section 15.209. Please see the data sheets located in Appendix E.



8.6 Spectral Density Test

The spectrum density output was measured using the EMI Receiver. The spectral density output was measured using a direct connection from the RF out on the EUT into the input of the EMI Receiver. The following steps were performed for measuring the spectral density.

1. Set analyzer center frequency to DTS channel center frequency
2. Set the span to 1.5 times the DTS BW.
3. Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
4. Set the VBW $\geq [3 \times \text{RBW}]$
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow the trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (e).

8.7 Variation of the Input Power

The variation of the input power test was performed using the EMI Receiver. The EUT input power was varied between 85 % and 115 % of the nominal rated supply voltage. The carrier frequency was monitored for any change in amplitude.

Test Results:

This test was not performed because the EUT is an internal battery powered device only and does not connect to the public AC mains.

9. CONCLUSIONS

The Patch-TEA, Model: TEA-21 (EUT), as tested, meets all of the specification limits defined in CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.247.



**COMPATIBLE
ELECTRONICS**

APPENDIX A

LABORATORY ACCREDITATIONS AND RECOGNITIONS

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

For the most up-to-date version of our scopes and certificates please visit

<http://celectronics.com/quality/scope/>

Quote from ISO-ILAC-IAF Communiqué on the Management Systems Requirements of ISO/IEC 17025, General Requirements for the competence of testing and calibration laboratories:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025 are written in language relevant to laboratory operations and operate generally in accordance with the principles of ISO 9001"

ISED Test Site Registration Number: 2154A

Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

Newbury Park Division
 1050 Lawrence Drive
 Newbury Park, CA 91320
 (805) 480-4044



APPENDIX B

MODIFICATIONS TO THE EUT

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC Subpart B and FCC 15.247 specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT during the testing.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



**COMPATIBLE
ELECTRONICS**

APPENDIX C

MODELS COVERED UNDER THIS REPORT

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Patch-TEA
Model: TEA-21
S/N: Unit 1

There are no additional models covered under this report.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



APPENDIX D

DIAGRAMS AND CHARTS

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

FIGURE 1: CONDUCTED EMISSIONS TEST SETUP


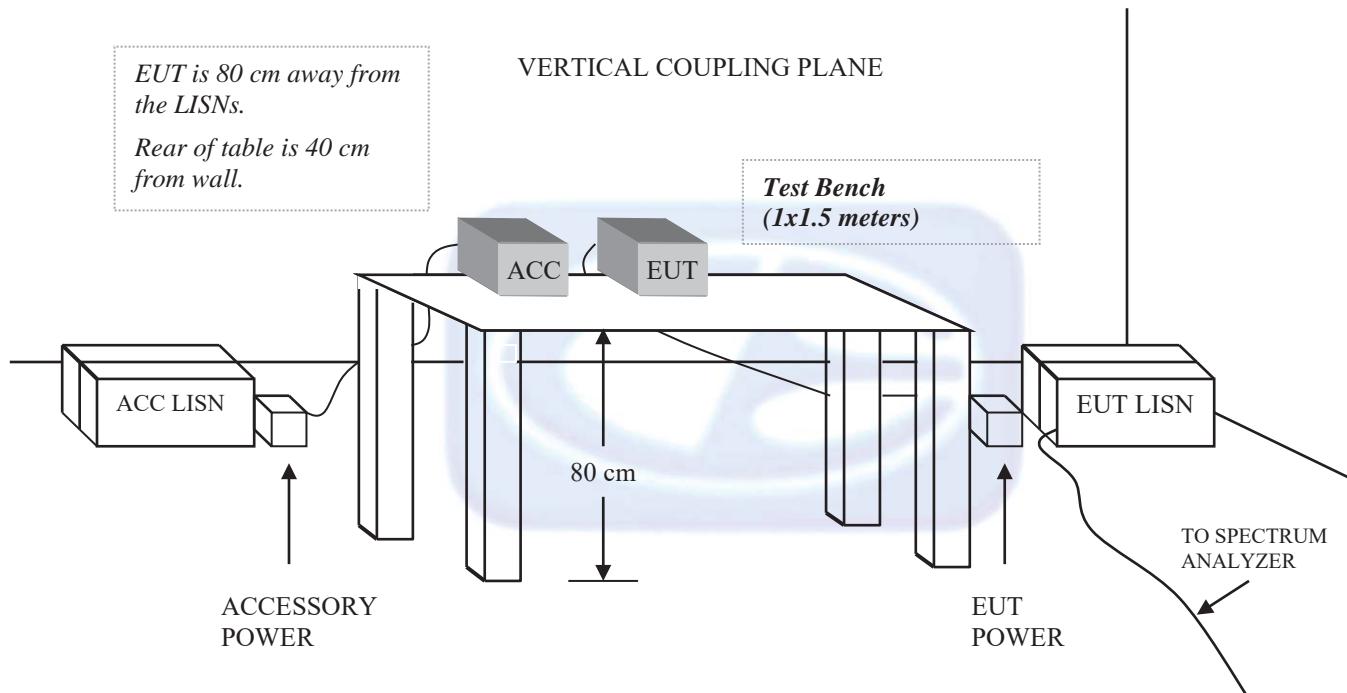




FIGURE 2: LAYOUT OF THE SEMI-ANECHOIC TEST CHAMBER

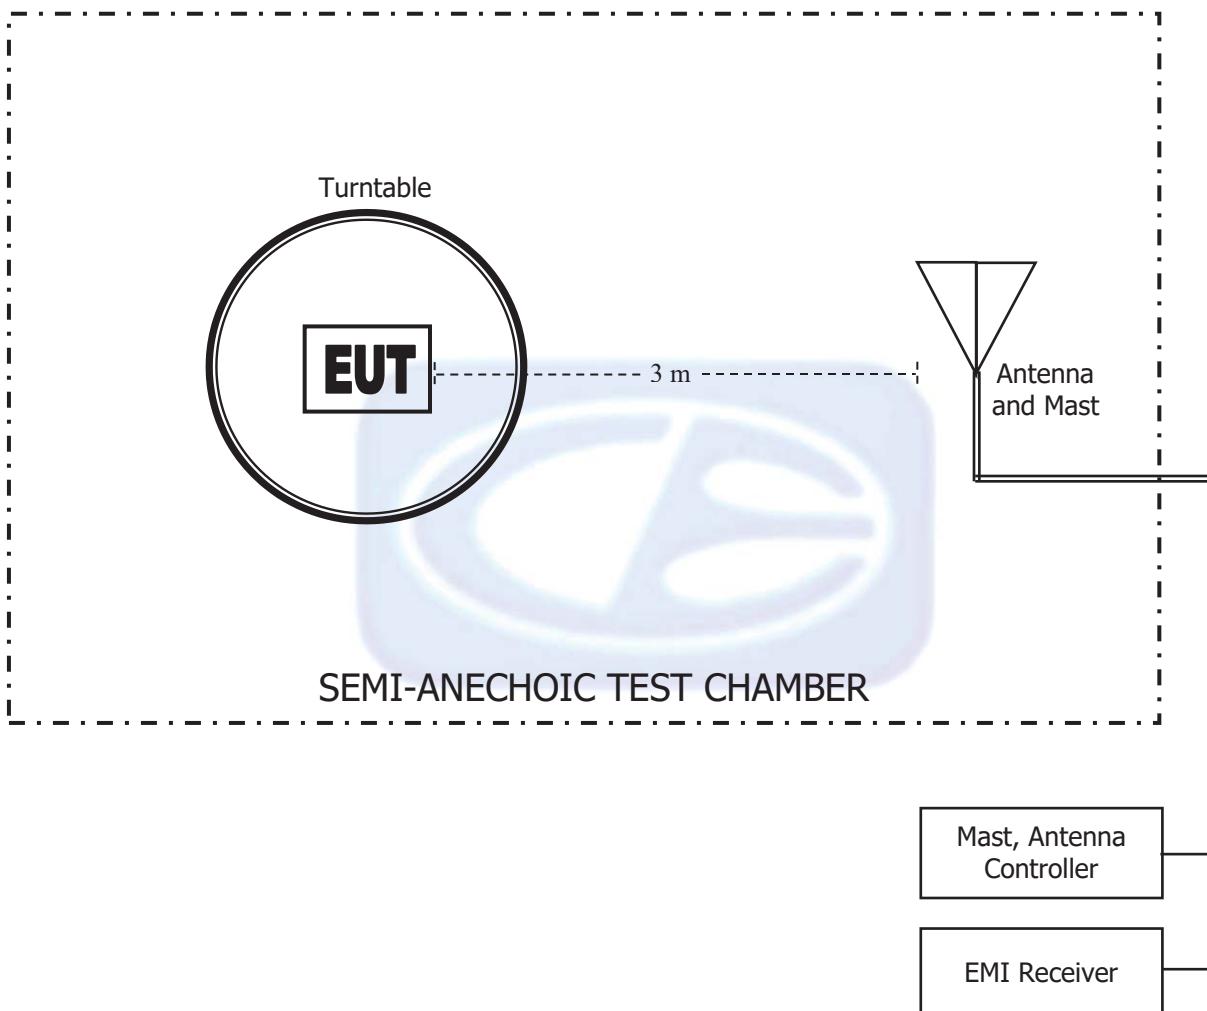

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



COM-POWER AL-130R

LOOP ANTENNA

S/N: 121090

CALIBRATION DATE: FEBRUARY 10, 2022

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	15.6	-35.8
0.01	15.8	-35.6
0.02	14.8	-36.6
0.03	15.6	-35.9
0.04	15.0	-36.5
0.05	14.4	-37.1
0.06	14.6	-36.9
0.07	14.3	-37.2
0.08	14.3	-37.2
0.09	14.4	-37.0
0.10	14.1	-37.4
0.20	14.1	-37.4
0.30	14.0	-37.5
0.40	13.9	-37.6
0.50	14.1	-37.3
0.60	14.1	-37.3
0.70	14.2	-37.3
0.80	14.2	-37.3
0.90	14.2	-37.2
1.00	14.4	-37.0
2.00	14.6	-36.9
3.00	14.6	-36.8
4.00	14.9	-36.6
5.00	14.9	-36.7
6.00	14.8	-36.7
7.00	14.6	-36.8
8.00	14.5	-37.0
9.00	14.3	-37.2
10.00	14.5	-37.0
11.00	14.6	-36.9
12.00	14.7	-36.7
13.00	14.9	-36.6
14.00	15.0	-36.5
15.00	14.9	-36.6
16.00	14.9	-36.6
17.00	14.6	-36.8
18.00	14.4	-37.1
19.00	14.5	-37.0
20.00	14.5	-37.0
21.00	14.2	-37.3
22.00	13.9	-37.5
23.00	13.9	-37.5
24.00	13.8	-37.7
25.00	13.4	-38.0
26.00	13.2	-38.2
27.00	13.2	-38.3
28.00	12.7	-38.7
29.00	12.7	-38.8
30.00	12.4	-39.0

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



COM-POWER AC-220

COMBILOG ANTENNA

S/N: 61093

CALIBRATION DATE: DECEMBER 14, 2021

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	22.50	200	16.00
35	21.40	250	17.40
40	21.00	300	19.70
45	20.60	350	20.00
50	19.70	400	22.20
60	16.10	450	22.40
70	12.80	500	23.10
80	12.50	550	23.40
90	14.20	600	24.90
100	15.40	650	25.30
120	16.50	700	25.40
125	16.80	750	26.40
140	15.90	800	26.70
150	16.60	850	27.10
160	18.50	900	27.90
175	15.90	950	28.00
180	15.50	1000	28.00



COM POWER AH-118

HORN ANTENNA

S/N: 10050113

CALIBRATION DATE: DECEMBER 16, 2021

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	23.86	10.0	38.91
1.5	25.67	10.5	39.94
2.0	28.25	11.0	39.10
2.5	29.17	11.5	39.70
3.0	29.78	12.0	40.29
3.5	30.88	12.5	41.93
4.0	31.21	13.0	41.34
4.5	32.96	13.5	40.57
5.0	33.30	14.0	40.23
5.5	34.24	14.5	42.25
6.0	34.57	15.0	43.63
6.5	35.61	15.5	39.96
7.0	36.60	16.0	40.38
7.5	37.49	16.5	40.56
8.0	37.44	17.0	40.93
8.5	37.98	17.5	42.27
9.0	38.01	18.0	43.77
9.5	38.53		



COM-POWER AH-826

HORN ANTENNA

S/N: 71957

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
18.0	33.5	22.5	35.5
18.5	33.5	23.0	35.9
19.0	34.0	23.5	35.7
19.5	34.0	24.0	35.6
20.0	34.3	24.5	36.0
20.5	34.9	25.0	36.2
21.0	34.7	25.5	36.1
21.5	35.0	26.0	36.2
22.0	35.0	26.5	35.7



COM-POWER PA-118

PREAMPLIFIER

S/N: 181653

CALIBRATION DATE: MARCH 7, 2022

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	40.02	6.0	38.84
1.1	39.72	6.5	39.20
1.2	39.93	7.0	39.46
1.3	39.98	7.5	39.67
1.4	39.99	8.0	39.28
1.5	40.20	8.5	38.63
1.6	40.05	9.0	38.96
1.7	40.15	9.5	39.33
1.8	40.20	10.0	39.58
1.9	40.33	11.0	38.25
2.0	40.33	12.0	40.03
2.5	40.60	13.0	40.55
3.0	40.76	14.0	40.36
3.5	40.87	15.0	39.34
4.0	40.39	16.0	37.34
4.5	39.55	17.0	42.14
5.0	40.34	18.0	42.54
5.5	39.45		

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




COM-POWER PA-840

MICROWAVE PREAMPLIFIER

S/N: 711013

CALIBRATION DATE: APRIL 8, 2022

FREQUENCY (GHz)	FACTOR (dB)
18.0	24.85
19.0	24.25
20.0	22.69
21.0	22.17
22.0	22.78
23.0	23.23
24.0	23.72
25.0	24.13
26.0	24.28
26.5	25.06

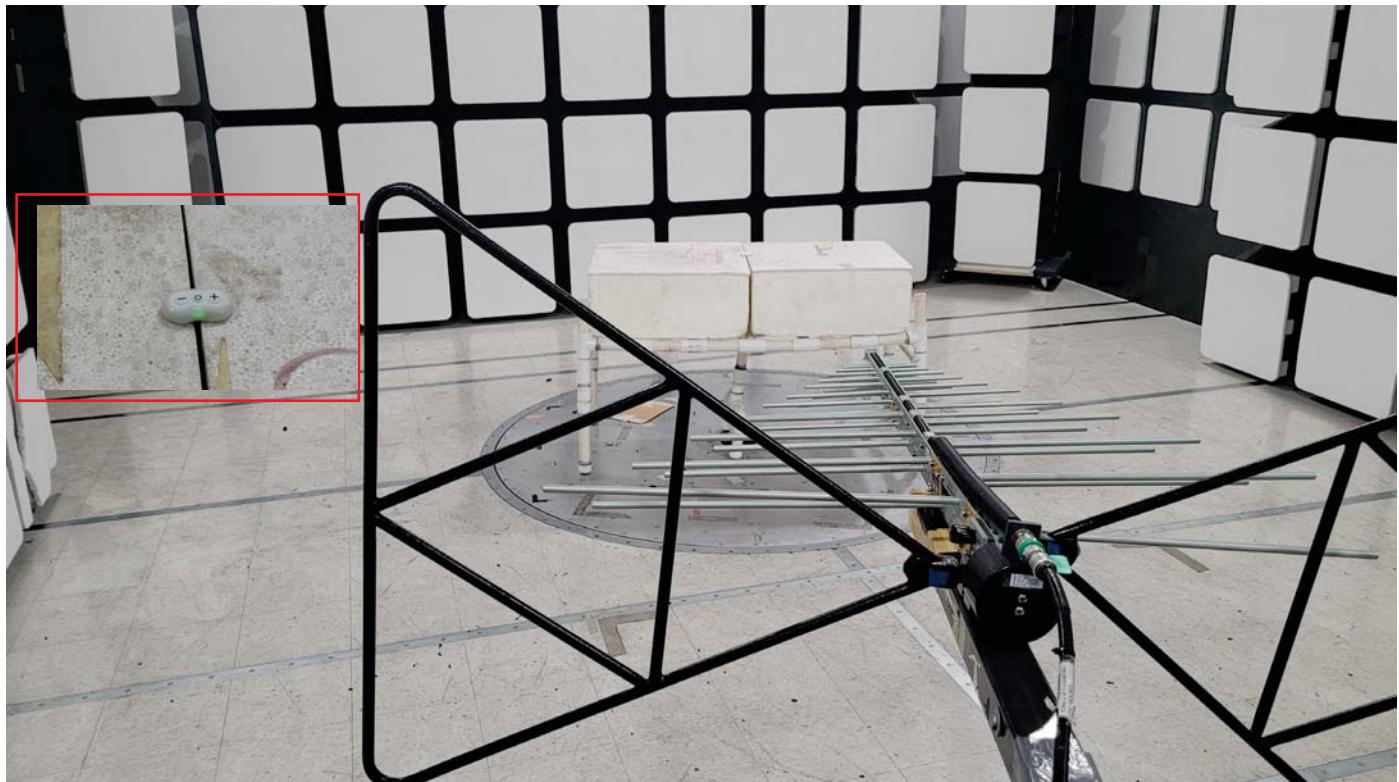**FRONT VIEW**

TRANSTIMULATION RESEARCH INC.

PATCH-TEA

MODEL: TEA-21


FCC SUBPART B AND C – RADIATED EMISSIONS – BELOW 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**


Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

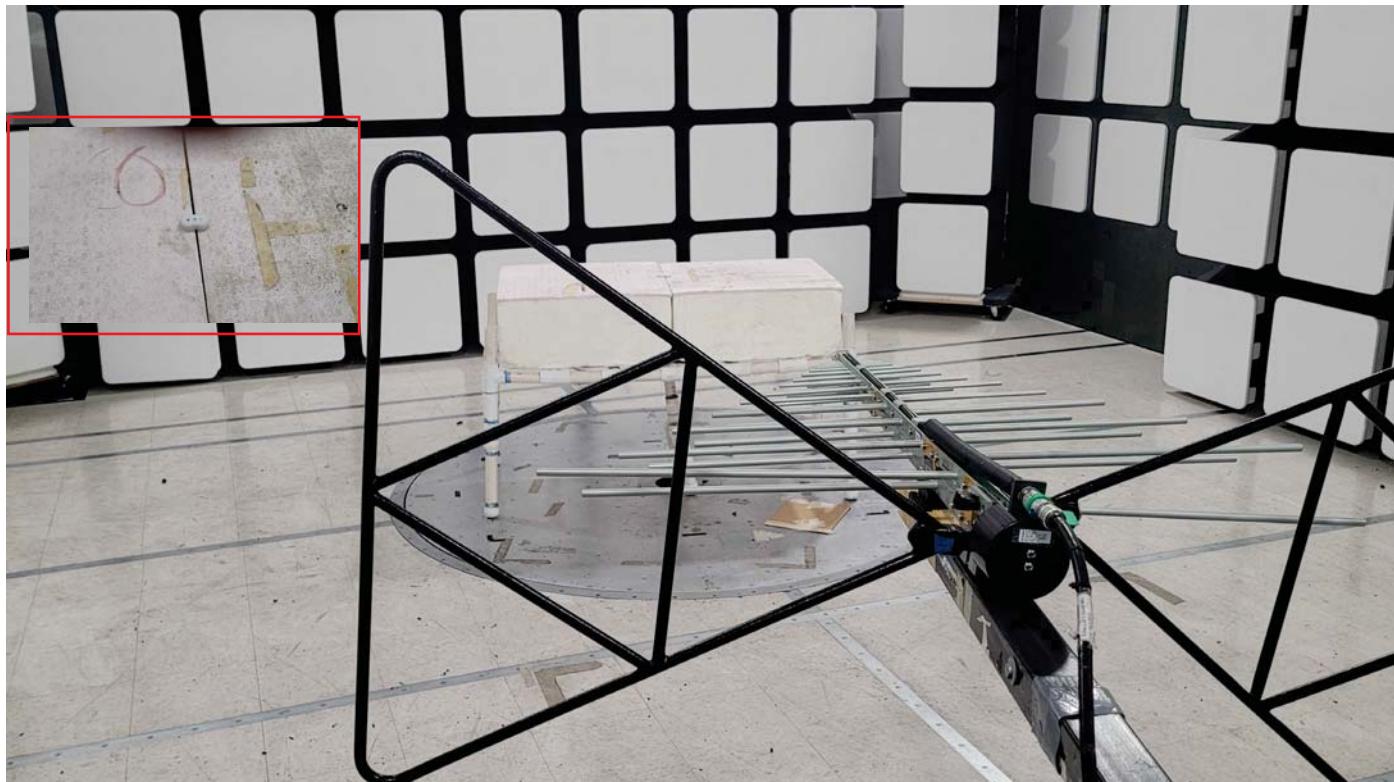**REAR VIEW****TRANSTIMULATION RESEARCH INC.****PATCH-TEA****MODEL: TEA-21****FCC SUBPART B AND C – RADIATED EMISSIONS – BELOW 1 GHz****PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500**Lake Forest Division**
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400**Newbury Park Division**
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

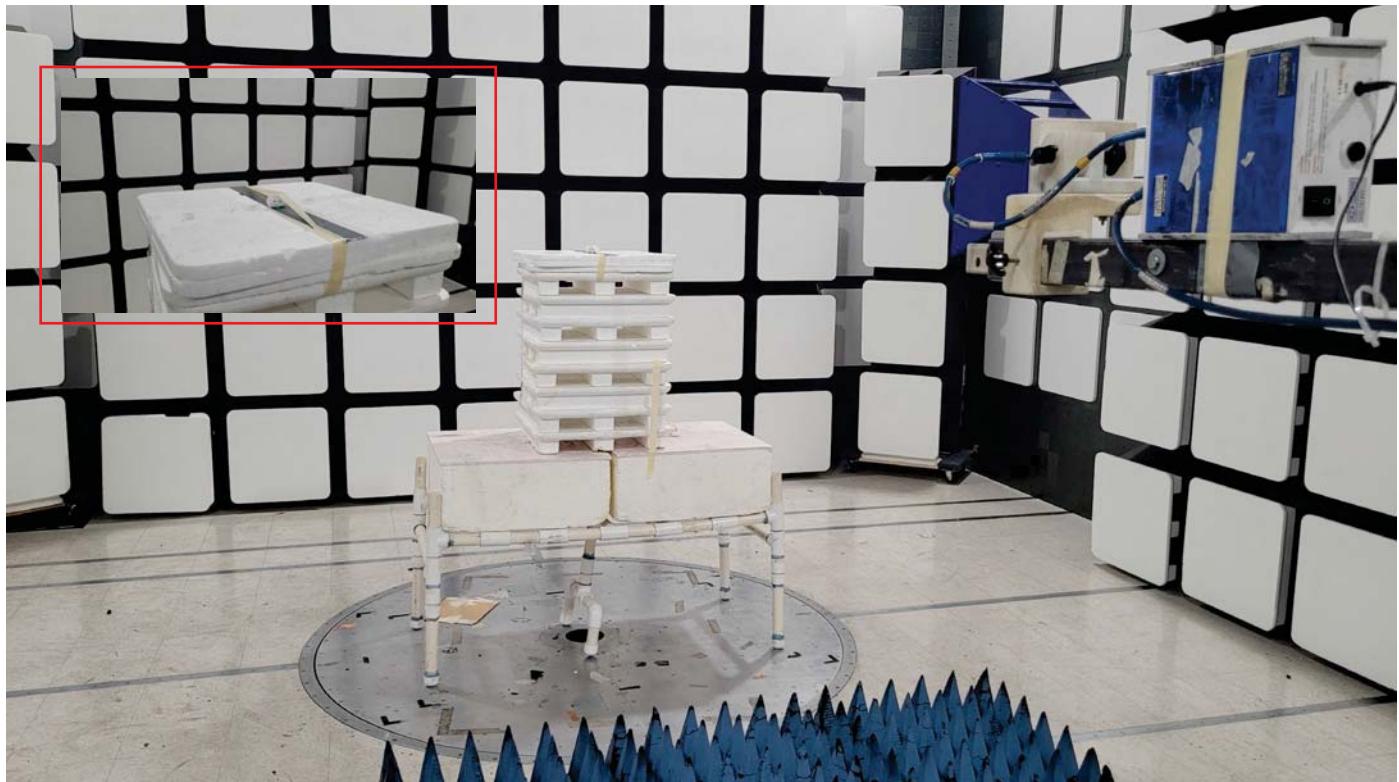**FRONT VIEW**

TRANSTIMULATION RESEARCH INC.

PATCH-TEA

MODEL: TEA-21


FCC SUBPART B AND C – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

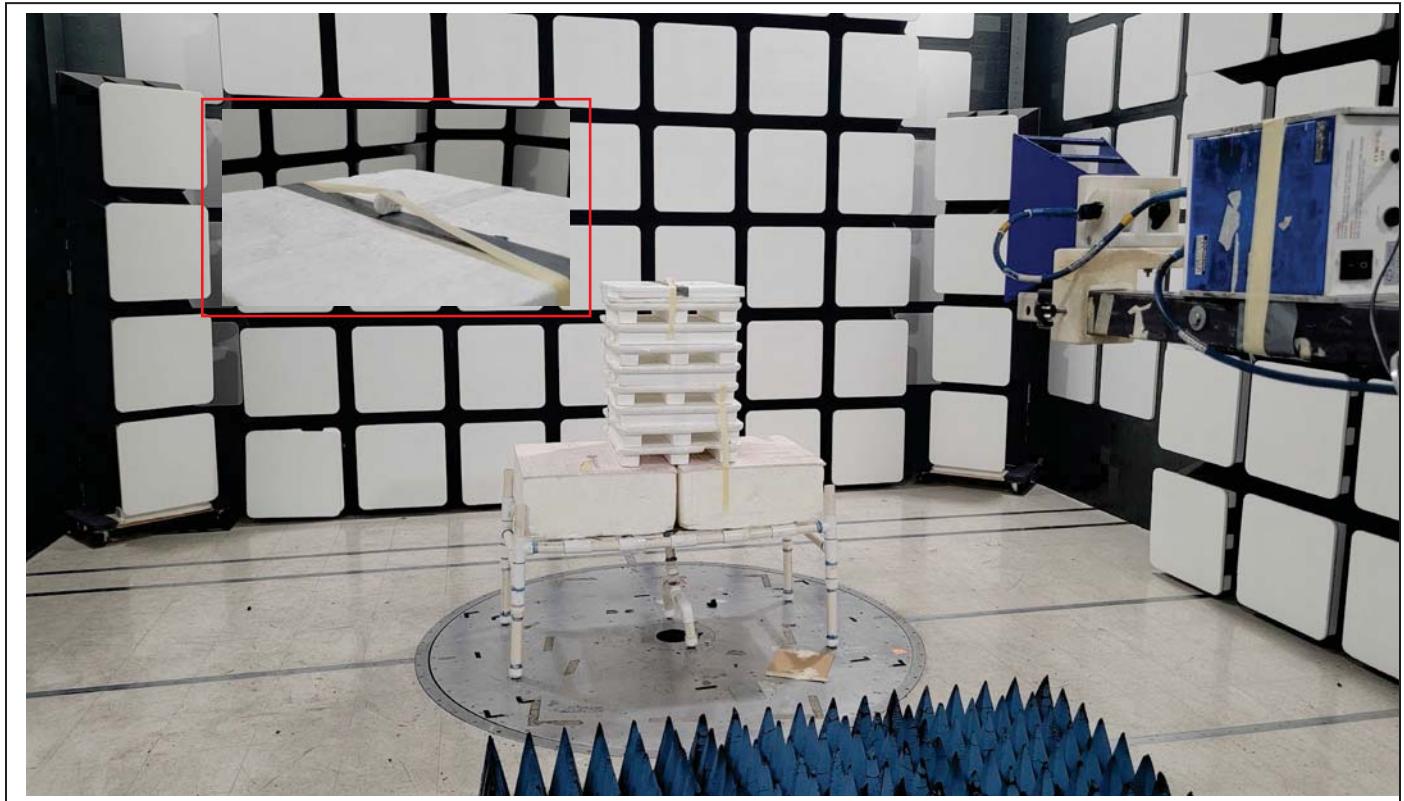

REAR VIEW

TRANSTIMULATION RESEARCH INC.

PATCH-TEA

MODEL: TEA-21

FCC SUBPART B AND C – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



**COMPATIBLE
ELECTRONICS**

APPENDIX E

DATA SHEETS

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



**COMPATIBLE
ELECTRONICS**

***SPURIOUS EMISSIONS – 30 MHz TO 1000 MHz
DATA SHEETS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400


Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



Title: Pre-Scan - FCC Class B
 File: 1 - Pre-Scan - X-Axis - 2402 MHz - 08-04-2023.set
 Operator: Kyle Fujimoto
 EUT Type: Patch-TEA
 EUT Condition: The EUT is continuously transmitting at 2402 MHz
 Company: Transtimulation Research Inc.
 Model: TEA-21
 S/N: Unit 1
 X-Axis (Worst Case)

8/4/2023 2:41:55 PM
 Sequence: Preliminary Scan

FCC Class B

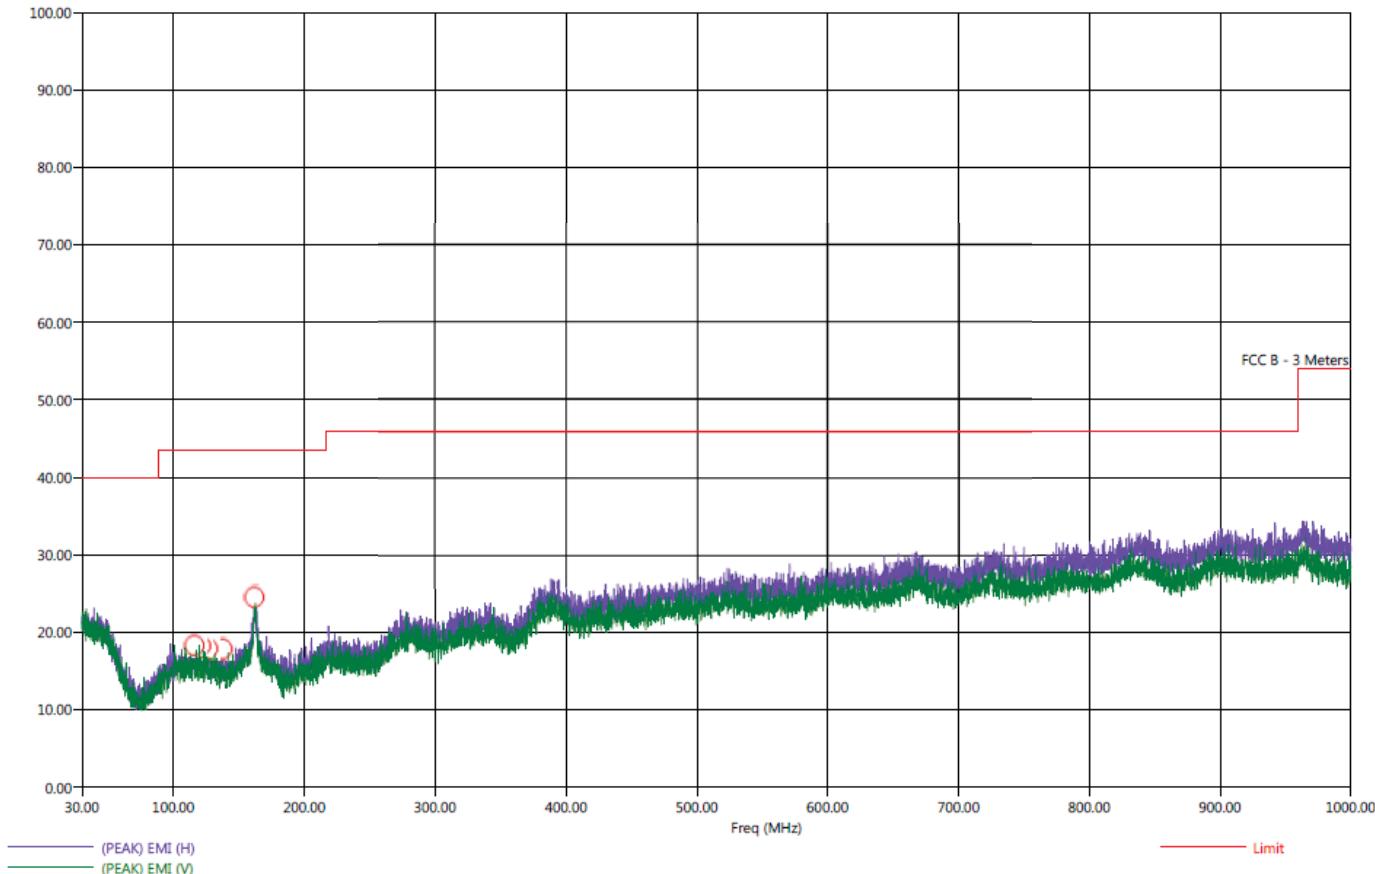Electric Field Strength (dB μ V/m)

Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

Newbury Park Division
 1050 Lawrence Drive
 Newbury Park, CA 91320
 (805) 480-4044



Title: Radiated Final - FCC Class B
 File: 1 - Final Scan - X-Axis - 2402 MHz - 08-04-2023.set
 Operator: Kyle Fujimoto
 EUT Type: Patch-TEA
 EUT Condition: The EUT is continuously transmitting at 2402 MHz
 Company: Transtimulation Research Inc.
 Model: TEA-21
 S/N: Unit 1
 X-Axis (Worst Case)

8/4/2023 2:50:52 PM
Sequence: Final Measurements

FCC Class B

Freq (MHz)	Pol	(PEAK) EMI (dB μ V/m)	(QP) EMI (dB μ V/m)	Limit (dB μ V/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Transducer (dB)	Cable (dB)	Ttbl Agl (deg)	Twr Ht (cm)
116.10	H	18.56	13.23	43.50	-24.94	-30.27	16.29	0.77	111.50	223.14
121.10	H	19.03	14.56	43.50	-24.47	-29.04	16.57	0.80	37.50	399.74
126.60	H	19.36	14.87	43.50	-24.14	-28.63	16.70	0.82	137.25	175.26
137.60	H	18.98	14.56	43.50	-24.52	-28.94	16.04	0.86	222.00	159.02
162.00	H	25.02	24.01	43.50	-18.48	-19.49	18.15	0.93	189.25	159.38
162.90	H	24.99	23.96	43.50	-18.51	-19.54	18.00	0.94	210.75	382.67



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

Newbury Park Division
 1050 Lawrence Drive
 Newbury Park, CA 91320
 (805) 480-4044



**COMPATIBLE
ELECTRONICS**

**TRANSMIT HARMONICS
DATA SHEETS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

**FCC 15.247**

Transtimulation Research, Inc.

Patch-TEA

Model: TEA-21

Date: 08/04/2023

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Low Channel**Transmit Mode - X-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4804.00	43.81	V	73.97	-30.16	Peak	370.25	100.00	
4804.00	25.56	V	53.97	-28.41	Avg	370.25	100.00	
7206.00								Not in Restricted Band
7206.00								Done Via Conducted
9608.00								Not in Restricted Band
9608.00								Done Via Conducted
12010.00	54.38	V	73.97	-19.59	Peak	62.75	123.80	
12010.00	31.92	V	53.97	-22.05	Avg	62.75	123.80	
14412.00								No Emission
14412.00								Detected
16814.00								No Emission
16814.00								Detected
19216.00								No Emission
19216.00								Detected
21618.00								No Emission
21618.00								Detected
24020.00								No Emission
24020.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

**FCC 15.247**

Transtimulation Research Inc.

Patch-TEA

Model: TEA-21

Date: 08/04/2023

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Low Channel**Transmit Mode - Y-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4804.00	47.15	V	73.97	-26.82	Peak	234.25	147.44	
4804.00	35.45	V	53.97	-18.52	Avg	234.25	147.44	
7206.00								Not in Restricted Band
7206.00								Done Via Conducted
9608.00								Not in Restricted Band
9608.00								Done Via Conducted
12010.00	53.60	V	73.97	-20.37	Peak	7.75	118.25	
12010.00	31.56	V	53.97	-22.41	Avg	7.75	118.25	
14412.00								No Emission
14412.00								Detected
16814.00								No Emission
16814.00								Detected
19216.00								No Emission
19216.00								Detected
21618.00								No Emission
21618.00								Detected
24020.00								No Emission
24020.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



FCC 15.247

Transtimulation Research Inc.

Patch-TEA

Model: TEA-21

Date: 08/04/2023

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Low Channel

Transmit Mode - Z-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4804.00	45.31	V	73.97	-28.66	Peak	295.50	154.85	
4804.00	33.81	V	53.97	-20.16	Avg	295.50	154.85	
7206.00								Not in Restricted Band
7206.00								Done Via Conducted
9608.00								Not in Restricted Band
9608.00								Done Via Conducted
12010.00	51.35	V	73.97	-22.62	Peak	50.75	113.17	
12010.00	31.91	V	53.97	-22.07	Avg	50.75	113.17	
14412.00								No Emission Detected
14412.00								
16814.00								No Emission Detected
16814.00								
19216.00								No Emission Detected
19216.00								
21618.00								No Emission Detected
21618.00								
24020.00								No Emission Detected
24020.00								

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

**FCC 15.247**

Transtimulation Research Inc.

Patch-TEA

Model: TEA-21

Date: 08/04/2023

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Low Channel**Transmit Mode - X-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4804.00	46.16	H	73.97	-27.81	Peak	229.25	114.07	
4804.00	33.68	H	53.97	-20.29	Avg	229.25	114.07	
7206.00								Not in Restricted Band
7206.00								Done Via Conducted
9608.00								Not in Restricted Band
9608.00								Done Via Conducted
12010.00	53.65	H	73.97	-20.32	Peak	350.00	111.50	
12010.00	36.37	H	53.97	-17.60	Avg	350.00	111.50	
14412.00								No Emission
14412.00								Detected
16814.00								No Emission
16814.00								Detected
19216.00								No Emission
19216.00								Detected
21618.00								No Emission
21618.00								Detected
24020.00								No Emission
24020.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

**FCC 15.247**

Transtimulation Research Inc.
 Patch-TEA
 Model: TEA-21

Date: 08/04/2023
 Lab: D
 Tested By: Kyle Fujimoto

Harmonics - Low Channel
Transmit Mode - Y-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4804.00	41.00	H	73.97	-32.97	Peak	349.25	135.92	
4804.00	27.13	H	53.97	-26.84	Avg	349.25	135.92	
7206.00								Not in Restricted Band
7206.00								Done Via Conducted
9608.00								Not in Restricted Band
9608.00								Done Via Conducted
12010.00	54.49	H	73.97	-19.48	Peak	222.00	114.73	
12010.00	34.99	H	53.97	-18.98	Avg	222.00	114.73	
14412.00								No Emission
14412.00								Detected
16814.00								No Emission
16814.00								Detected
19216.00								No Emission
19216.00								Detected
21618.00								No Emission
21618.00								Detected
24020.00								No Emission
24020.00								Detected

**FCC 15.247**

Transtimulation Research Inc.
 Patch-TEA
 Model: TEA-21

Date: 08/04/2023
 Lab: D
 Tested By: Kyle Fujimoto

Harmonics - Low Channel
Transmit Mode - Z-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4804.00	45.90	H	73.97	-28.08	Peak	0.00	144.22	
4804.00	33.21	H	53.97	-20.76	Avg	0.00	144.22	
7206.00								Not in Restricted Band
7206.00								Done Via Conducted
9608.00								Not in Restricted Band
9608.00								Done Via Conducted
12010.00	53.77	H	73.97	-20.20	Peak	42.50	144.22	
12010.00	33.35	H	53.97	-20.62	Avg	42.50	144.22	
14412.00								No Emission
14412.00								Detected
16814.00								No Emission
16814.00								Detected
19216.00								No Emission
19216.00								Detected
21618.00								No Emission
21618.00								Detected
24020.00								No Emission
24020.00								Detected



FCC 15.247

Transtimulation Research Inc.
 Patch-TEA
 Model: TEA-21

Date: 08/04/2023
 Lab: D
 Tested By: Kyle Fujimoto

Harmonics - Middle Channel
Transmit Mode - X-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4884.00	43.82	V	73.97	-30.15	Peak	194.00	141.59	
4884.00	31.48	V	53.97	-22.49	Avg	194.00	141.59	
7326.00	52.13	V	73.97	-21.84	Peak	37.25	180.94	
7326.00	40.29	V	53.97	-13.68	Avg	37.25	180.94	
9768.00								Not in Restricted Band
9768.00								Done Via Conducted
12210.00	55.29	V	73.97	-18.68	Peak	350.00	132.76	
12210.00	31.17	V	53.97	-22.80	Avg	350.00	132.76	
14652.00								No Emission
14652.00								Detected
17094.00								No Emission
17094.00								Detected
19536.00								No Emission
19536.00								Detected
21978.00								No Emission
21978.00								Detected
24420.00								No Emission
24420.00								Detected

Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

Newbury Park Division
 1050 Lawrence Drive
 Newbury Park, CA 91320
 (805) 480-4044

**FCC 15.247**

Transtimulation Research Inc.

Patch-TEA

Model: TEA-21

Date: 08/04/2023

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Middle Channel**Transmit Mode - Y-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4884.00	47.20	V	73.97	-26.77	Peak	176.50	100.05	
4884.00	40.39	V	53.97	-13.58	Avg	176.50	100.05	
7326.00	52.47	V	73.97	-21.50	Peak	177.25	149.11	
7326.00	43.81	V	53.97	-10.16	Avg	177.25	149.11	
9768.00								Not in Restricted Band
9768.00								Done Via Conducted
12210.00	48.82	V	73.97	-25.16	Peak	28.00	126.43	
12210.00	36.34	V	53.97	-17.63	Avg	28.00	126.43	
14652.00								No Emission
14652.00								Detected
17094.00								No Emission
17094.00								Detected
19536.00								No Emission
19536.00								Detected
21978.00								No Emission
21978.00								Detected
24420.00								No Emission
24420.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

**FCC 15.247**

Transtimulation Research Inc.

Patch-TEA

Model: TEA-21

Date: 08/04/2023

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Middle Channel**Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4884.00	42.91	V	73.97	-31.06	Peak	278.25	139.80	
4884.00	33.99	V	53.97	-19.98	Avg	278.25	139.80	
7326.00	51.35	V	73.97	-22.62	Peak	115.00	123.20	
7326.00	42.99	V	53.97	-10.98	Avg	115.00	123.20	
9768.00								Not in Restricted Band
9768.00								Done Via Conducted
12210.00	48.12	V	73.97	-25.85	Peak	159.50	117.89	
12210.00	33.53	V	53.97	-20.44	Avg	159.50	117.89	
14652.00								No Emission
14652.00								Detected
17094.00								No Emission
17094.00								Detected
19536.00								No Emission
19536.00								Detected
21978.00								No Emission
21978.00								Detected
24420.00								No Emission
24420.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

**FCC 15.247**

Transtimulation Research Inc.
 Patch-TEA
 Model: TEA-21

Date: 08/04/2023
 Lab: D
 Tested By: Kyle Fujimoto

Harmonics - Middle Channel
Transmit Mode - X-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4884.00	49.72	H	73.97	-24.25	Peak	220.50	116.22	
4884.00	38.27	H	53.97	-15.70	Avg	220.50	116.22	
7326.00	53.52	H	73.97	-20.45	Peak	86.00	113.59	
7326.00	45.69	H	53.97	-8.28	Avg	86.00	113.59	
9768.00								Not in Restricted Band
9768.00								Done Via Conducted
12210.00	49.03	H	73.97	-24.94	Peak	117.50	105.59	
12210.00	34.82	H	53.97	-19.15	Avg	117.50	105.59	
14652.00								No Emission
14652.00								Detected
17094.00								No Emission
17094.00								Detected
19536.00								No Emission
19536.00								Detected
21978.00								No Emission
21978.00								Detected
24420.00								No Emission
24420.00								Detected

Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

Newbury Park Division
 1050 Lawrence Drive
 Newbury Park, CA 91320
 (805) 480-4044

**FCC 15.247**

Transtimulation Research Inc.

Patch-TEA

Model: TEA-21

Date: 08/04/2023

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Middle Channel**Transmit Mode - Y-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4884.00	46.74	H	73.97	-27.23	Peak	184.50	109.29	
4884.00	37.19	H	53.97	-16.78	Avg	184.50	109.29	
7326.00	52.29	H	73.97	-21.68	Peak	192.00	126.25	
7326.00	43.89	H	53.97	-10.08	Avg	192.00	126.25	
9768.00								Not in Restricted Band
9768.00								Done Via Conducted
12210.00	48.25	H	73.97	-25.72	Peak	358.00	114.37	
12210.00	34.32	H	53.97	-19.65	Avg	358.00	114.37	
14652.00								No Emission
14652.00								Detected
17094.00								No Emission
17094.00								Detected
19536.00								No Emission
19536.00								Detected
21978.00								No Emission
21978.00								Detected
24420.00								No Emission
24420.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

**FCC 15.247**

Transtimulation Research Inc.
Patch-TEA
Model: TEA-21

Date: 08/04/2023
Lab: D
Tested By: Kyle Fujimoto

Harmonics - Middle Channel
Transmit Mode - Z-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4884.00	43.96	H	73.97	-30.01	Peak	110.00	125.47	
4884.00	33.04	H	53.97	-20.93	Avg	110.00	125.47	
7326.00	51.65	H	73.97	-22.32	Peak	116.00	169.95	
7326.00	43.97	H	53.97	-10.00	Avg	116.00	169.95	
9768.00								Not in Restricted Band
9768.00								Done Via Conducted
12210.00	48.36	H	73.97	-25.61	Peak	10.00	170.01	
12210.00	34.04	H	53.97	-19.93	Avg	10.00	170.01	
14652.00								No Emission
14652.00								Detected
17094.00								No Emission
17094.00								Detected
19536.00								No Emission
19536.00								Detected
21978.00								No Emission
21978.00								Detected
24420.00								No Emission
24420.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

**FCC 15.247**

Transtimulation Research Inc.

Patch-TEA

Model: TEA-21

Date: 08/04/2023

Lab: D

Tested By: Kyle Fujimoto

Harmonics - High Channel**Transmit Mode - X-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4960.00	40.49	V	73.97	-33.48	Peak	186.50	145.41	
4960.00	23.26	V	53.97	-30.71	Avg	186.50	145.41	
7440.00	49.91	V	73.97	-24.06	Peak	36.25	123.86	
7440.00	35.81	V	53.97	-18.16	Avg	36.25	123.86	
9920.00								No in Restricted Band
9920.00								Done Via Conducted
12400.00	43.90	V	73.97	-30.07	Peak	250.50	115.32	
12400.00	34.89	V	53.97	-19.08	Avg	250.50	115.32	
14880.00								No Emission
14880.00								Detected
17360.00								No Emission
17360.00								Detected
19840.00								No Emission
19840.00								Detected
22320.00								No Emission
22320.00								Detected
24800.00								No Emission
24800.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

**FCC 15.247**

Transtimulation Research Inc.

Patch-TEA

Model: TEA-21

Date: 08/04/2023

Lab: D

Tested By: Kyle Fujimoto

Harmonics - High Channel**Transmit Mode - Y-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4960.00	46.75	V	73.97	-27.22	Peak	128.75	138.85	
4960.00	35.67	V	53.97	-18.30	Avg	128.75	138.85	
7440.00	51.85	V	73.97	-22.12	Peak	90.00	130.91	
7440.00	42.37	V	53.97	-11.60	Avg	90.00	130.91	
9920.00								No in Restricted Band
9920.00								Done Via Conducted
12400.00	49.18	V	73.97	-24.79	Peak	10.00	138.85	
12400.00	35.33	V	53.97	-18.64	Avg	10.00	138.85	
14880.00								No Emission
14880.00								Detected
17360.00								No Emission
17360.00								Detected
19840.00								No Emission
19840.00								Detected
22320.00								No Emission
22320.00								Detected
24800.00								No Emission
24800.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

**FCC 15.247**

Transtimulation Research Inc.

Patch-TEA

Model: TEA-21

Date: 08/04/2023

Lab: D

Tested By: Kyle Fujimoto

Harmonics - High Channel**Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4960.00	50.36	V	73.97	-23.61	Peak	52.75	112.40	
4960.00	44.14	V	53.97	-9.83	Avg	52.75	112.40	
7440.00	54.31	V	73.97	-19.66	Peak	60.75	140.04	
7440.00	46.76	V	53.97	-7.21	Avg	60.75	140.04	
9920.00								No in Restricted Band
9920.00								Done Via Conducted
12400.00	46.61	V	73.97	-27.36	Peak	88.25	123.68	
12400.00	34.73	V	53.97	-19.24	Avg	88.20	123.68	
14880.00								No Emission
14880.00								Detected
17360.00								No Emission
17360.00								Detected
19840.00								No Emission
19840.00								Detected
22320.00								No Emission
22320.00								Detected
24800.00								No Emission
24800.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

**FCC 15.247**

Transtimulation Research Inc.

Patch-TEA

Model: TEA-21

Date: 08/04/2023

Lab: D

Tested By: Kyle Fujimoto

Harmonics - High Channel**Transmit Mode - X-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4960.00	50.82	H	73.97	-23.15	Peak	259.25	100.00	
4960.00	42.08	H	53.97	-11.89	Avg	259.25	100.00	
7440.00	54.29	H	73.97	-19.68	Peak	100.50	122.79	
7440.00	46.10	H	53.97	-7.87	Avg	100.50	122.79	
9920.00								No in Restricted Band
9920.00								Done Via Conducted
12400.00	49.76	H	73.97	-24.21	Peak	350.00	135.98	
12400.00	35.29	H	53.97	-18.68	Avg	350.00	135.98	
14880.00								No Emission
14880.00								Detected
17360.00								No Emission
17360.00								Detected
19840.00								No Emission
19840.00								Detected
22320.00								No Emission
22320.00								Detected
24800.00								No Emission
24800.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

**FCC 15.247**

Transtimulation Research Inc.
 Patch-TEA
 Model: TEA-21

Date: 08/04/2023
 Lab: D
 Tested By: Kyle Fujimoto

Harmonics - High Channel
Transmit Mode - Y-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4960.00	45.96	H	73.97	-28.01	Peak	159.00	174.79	
4960.00	38.79	H	53.97	-15.18	Avg	159.00	174.79	
7440.00	51.22	H	73.97	-22.75	Peak	187.00	113.89	
7440.00	42.82	H	53.97	-11.15	Avg	187.00	113.89	
9920.00								Not in Restricted Band
9920.00								Done Via Conducted
12400.00	50.34	H	73.97	-23.63	Peak	84.50	118.67	
12400.00	39.61	H	53.97	-14.36	Avg	84.50	118.67	
14880.00								No Emission
14880.00								Detected
17360.00								No Emission
17360.00								Detected
19840.00								No Emission
19840.00								Detected
22320.00								No Emission
22320.00								Detected
24800.00								No Emission
24800.00								Detected

Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

Newbury Park Division
 1050 Lawrence Drive
 Newbury Park, CA 91320
 (805) 480-4044

**FCC 15.247**

Transtimulation Research Inc.

Patch-TEA

Model: TEA-21

Date: 08/04/2023

Lab: D

Tested By: Kyle Fujimoto

Harmonics - High Channel**Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4960.00	43.37	H	73.97	-30.60	Peak	253.00	100.00	
4960.00	35.69	H	53.97	-18.28	Avg	253.00	100.00	
7440.00	48.12	H	73.97	-25.85	Peak	36.50	111.14	
7440.00	38.75	H	53.97	-15.22	Avg	36.50	111.14	
9920.00								No in Restricted Band
9920.00								Done Via Conducted
12400.00	48.91	H	73.97	-24.86	Peak	10.00	111.14	
12400.00	34.26	H	53.97	-17.12	Avg	10.00	111.14	
14880.00								No Emission
14880.00								Detected
17360.00								No Emission
17360.00								Detected
19840.00								No Emission
19840.00								Detected
22320.00								No Emission
22320.00								Detected
24800.00								No Emission
24800.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



COMPATIBLE ELECTRONICS

FCC 15.247

Transtimulation Research Inc.
Patch-TEA
Model: TEA-21


Date: 08/04/2023
Lab: D
Tested By: Kyle Fujimoto

Non Harmonic Emissions from the Tx and Digital Portion - 9 kHz to 30 MHz

Non Harmonic Emissions from the Tx and Digital Portion - 1 GHz to 25 GHz



**COMPATIBLE
ELECTRONICS**

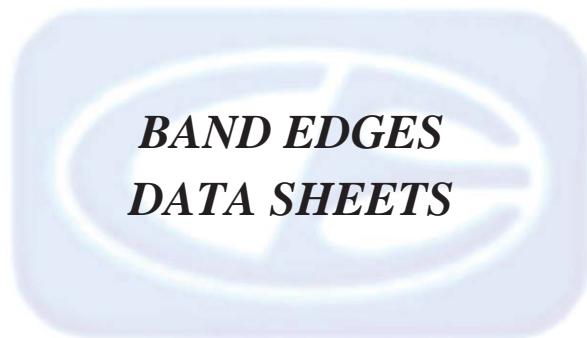

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



COMPATIBLE ELECTRONICS

FCC 15.247

Transtimulation Research Inc.
Patch-TEA
Model: TEA-21

Date: 08/04/2023

Lab: D

Tested By: Kyle Fujimoto

Band Edges



COMPATIBLE ELECTRONICS

FCC 15.247


Transtimulation Research Inc.
Patch-TEA
Model: TEA-21

Date: 08/04/2023

Lab: D

Tested By: Kyle Fujimoto

Band Edges

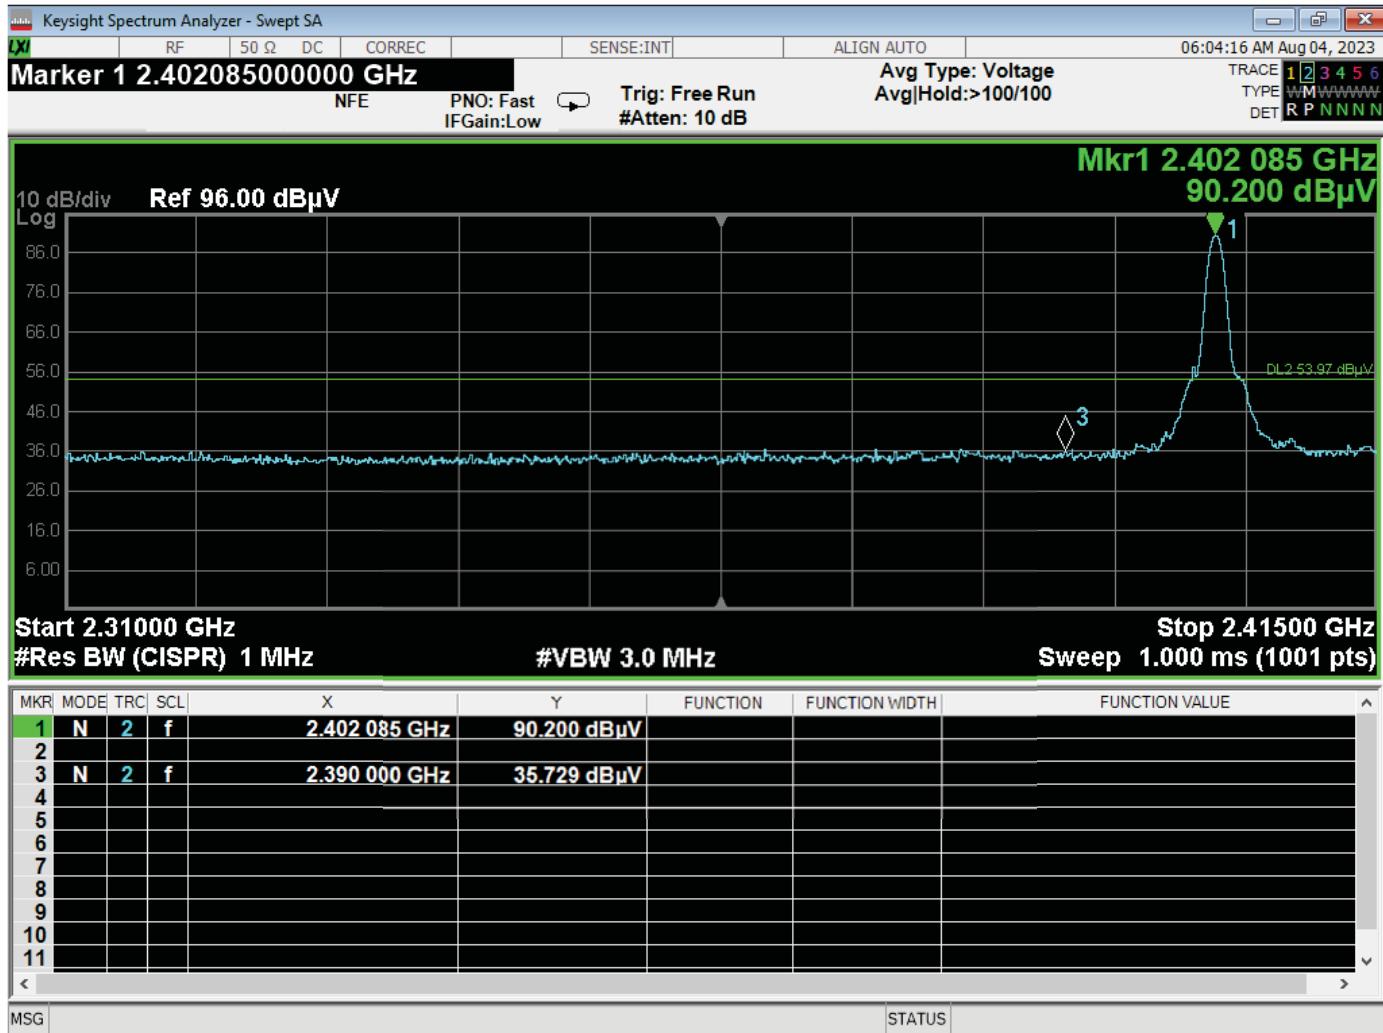


Band Edge - Low Channel - Horizontal - Z-Axis

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

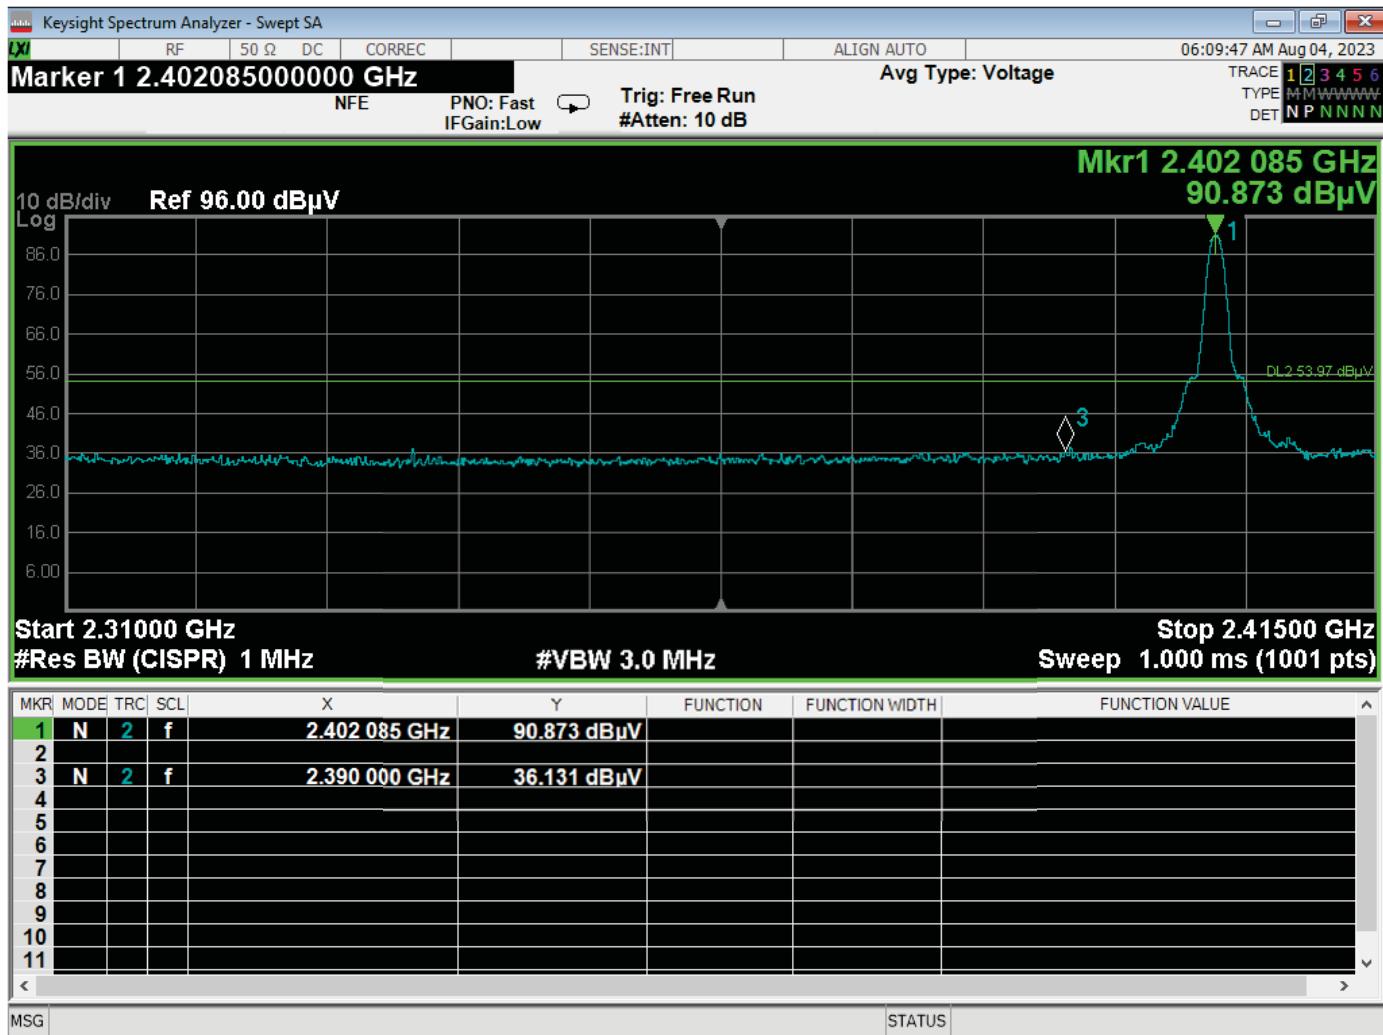


Band Edge - Low Channel - Vertical - Y-Axis

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

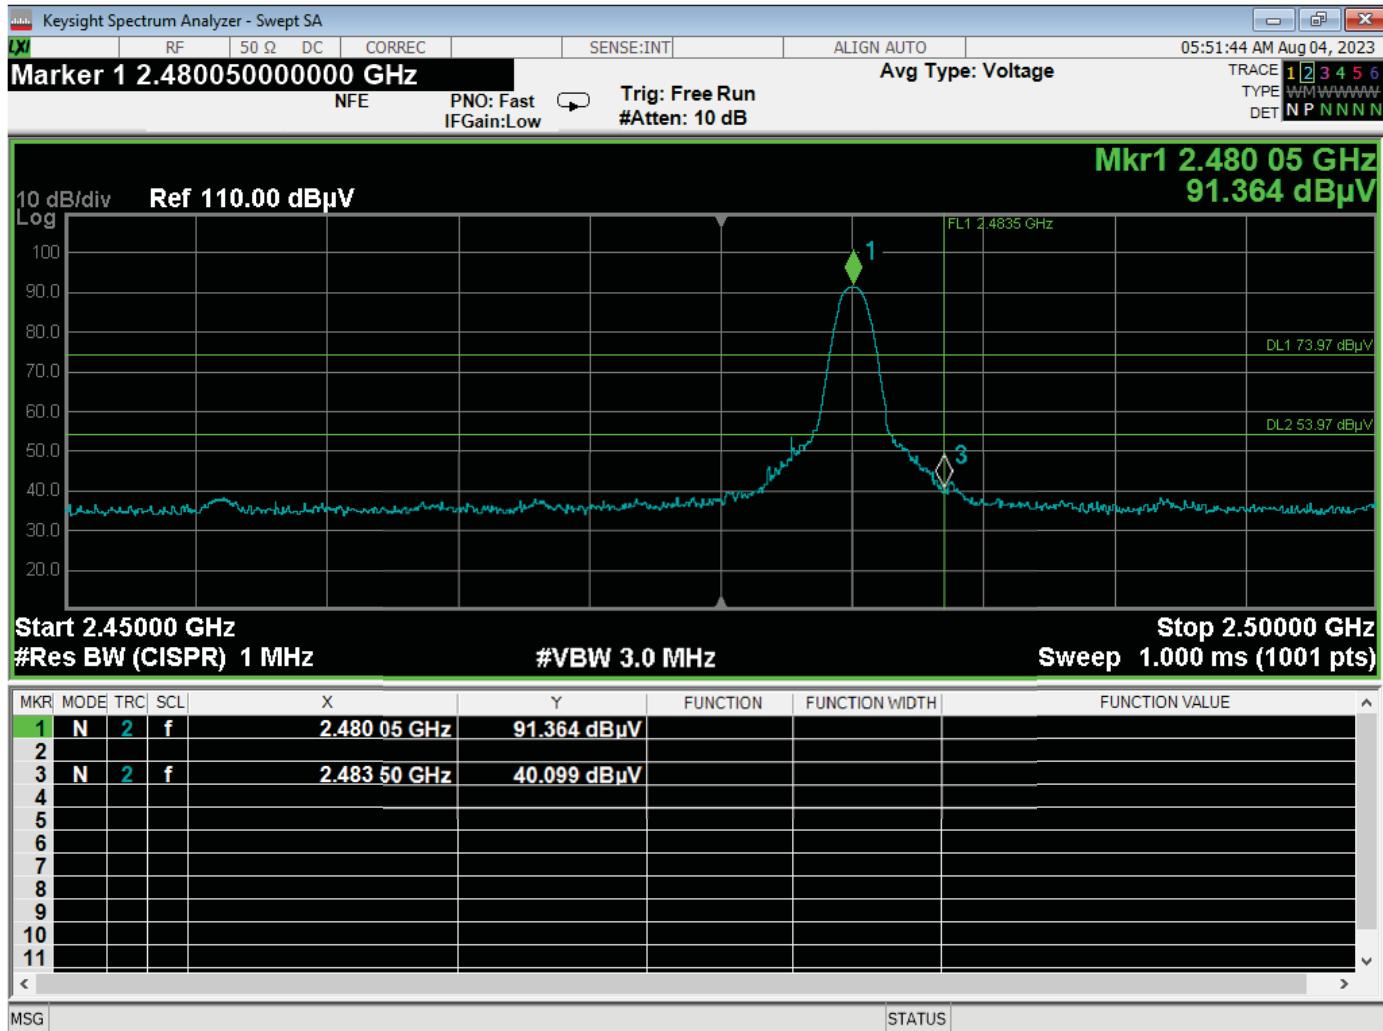


Band Edge - High Channel - Horizontal - Z-Axis

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

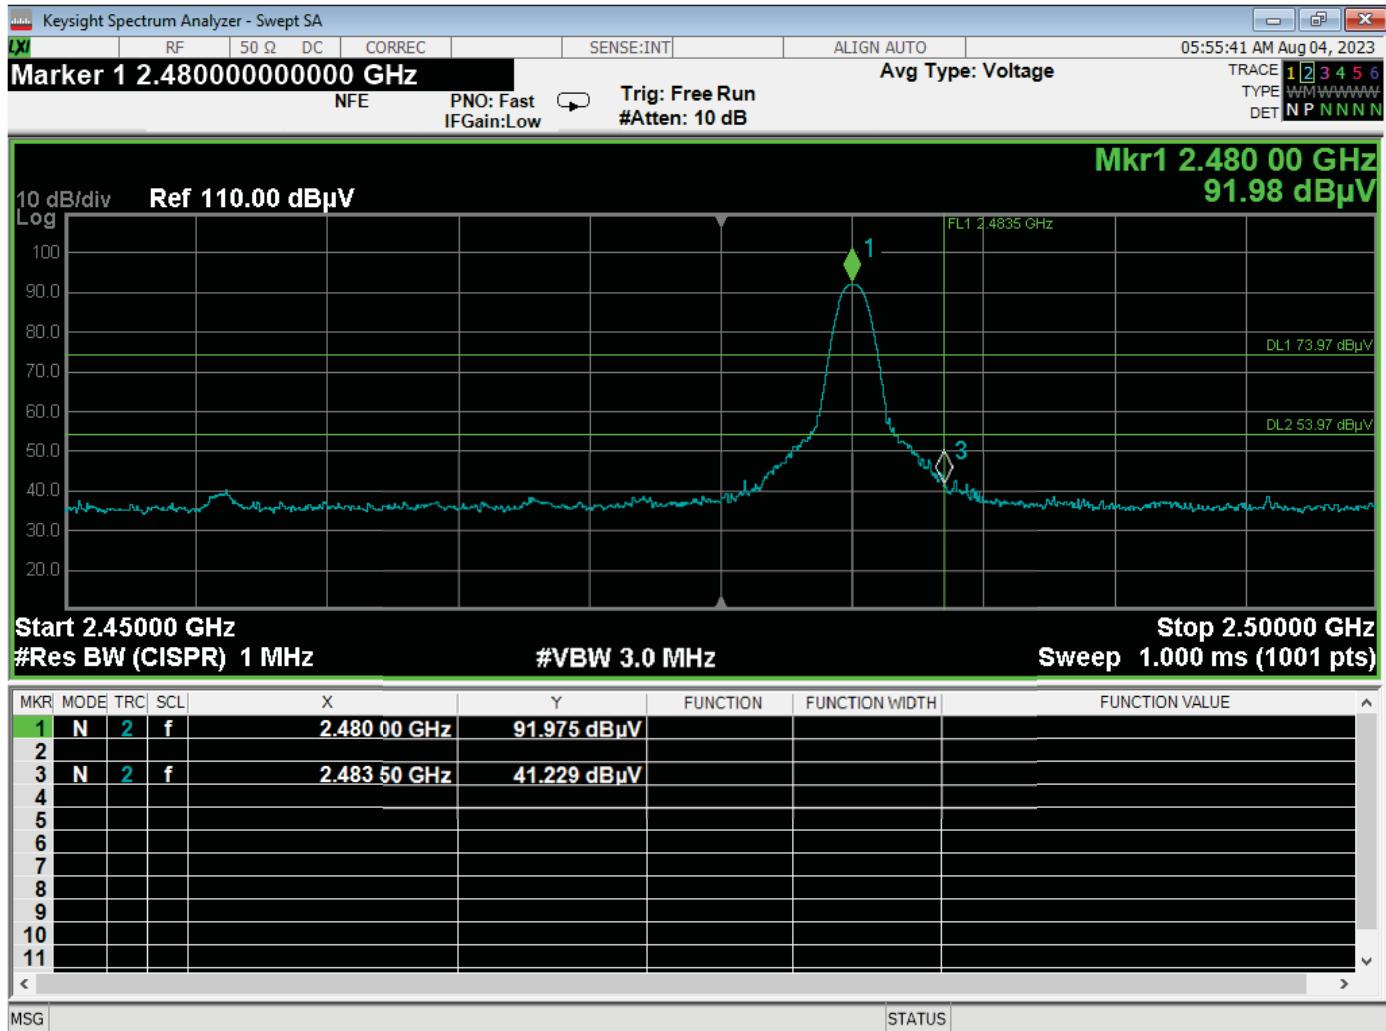

Band Edge - High Channel - Vertical - Y-Axis

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



COMPATIBLE ELECTRONICS


FCC Part 15 Subpart B and C; and FCC Section 15.247 Test Report
Patch-TEA
Model: TEA-21

***BAND EDGES
CONDUCTED
2402 MHz at 2400 MHz
DATA SHEETS***

**Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500**

**Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400**

**Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044**

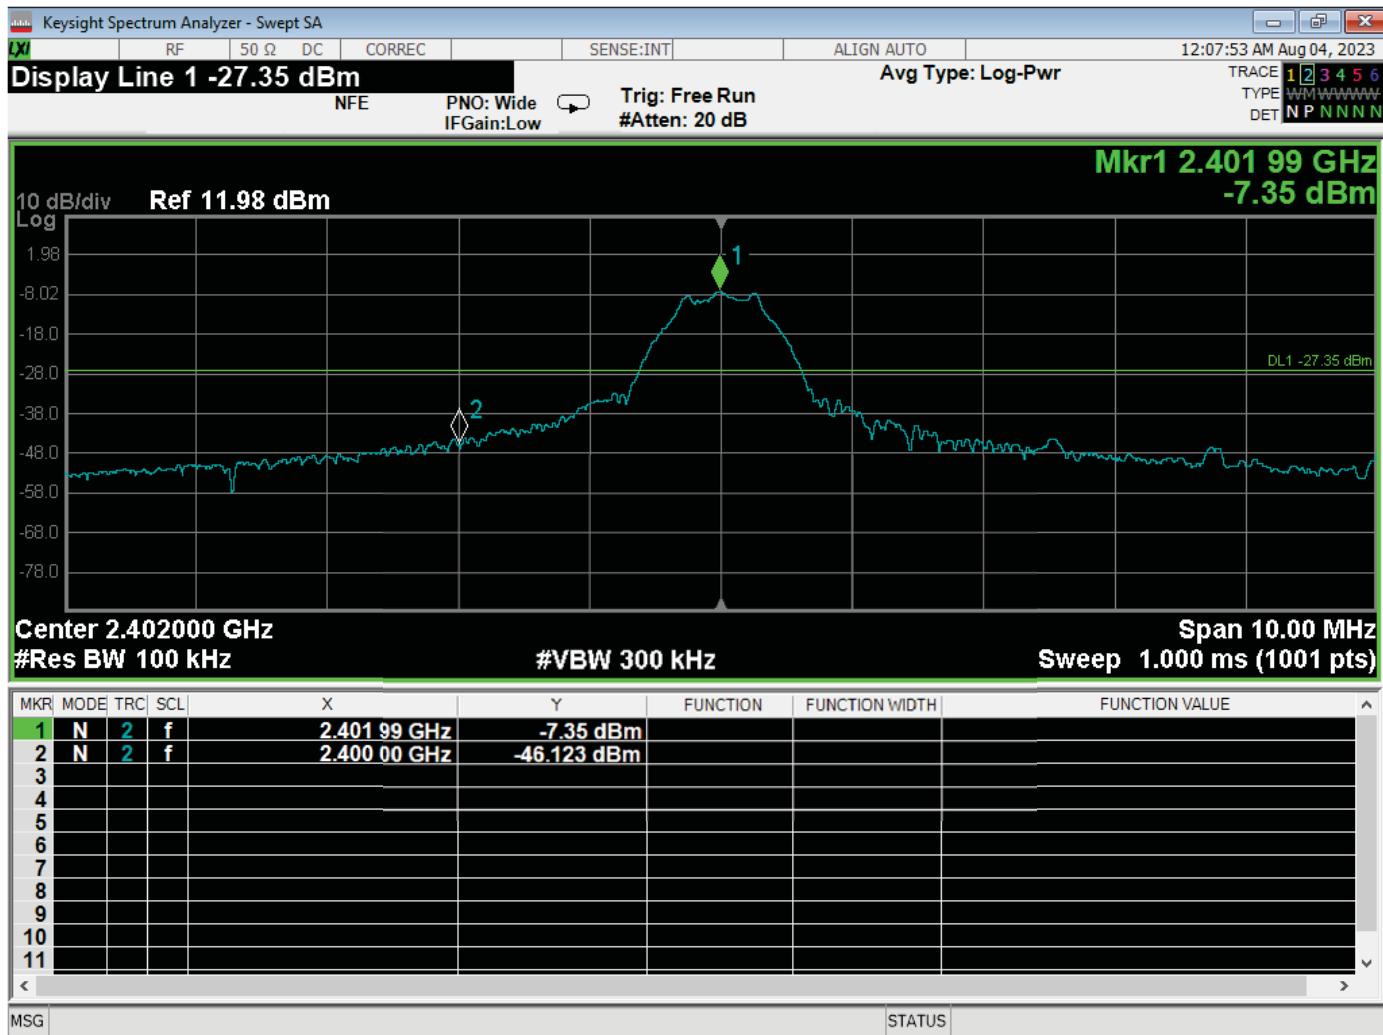

Band Edge at 2400 MHz - Low Channel - Via Conducted

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

***DTS BANDWIDTH
DATA SHEETS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

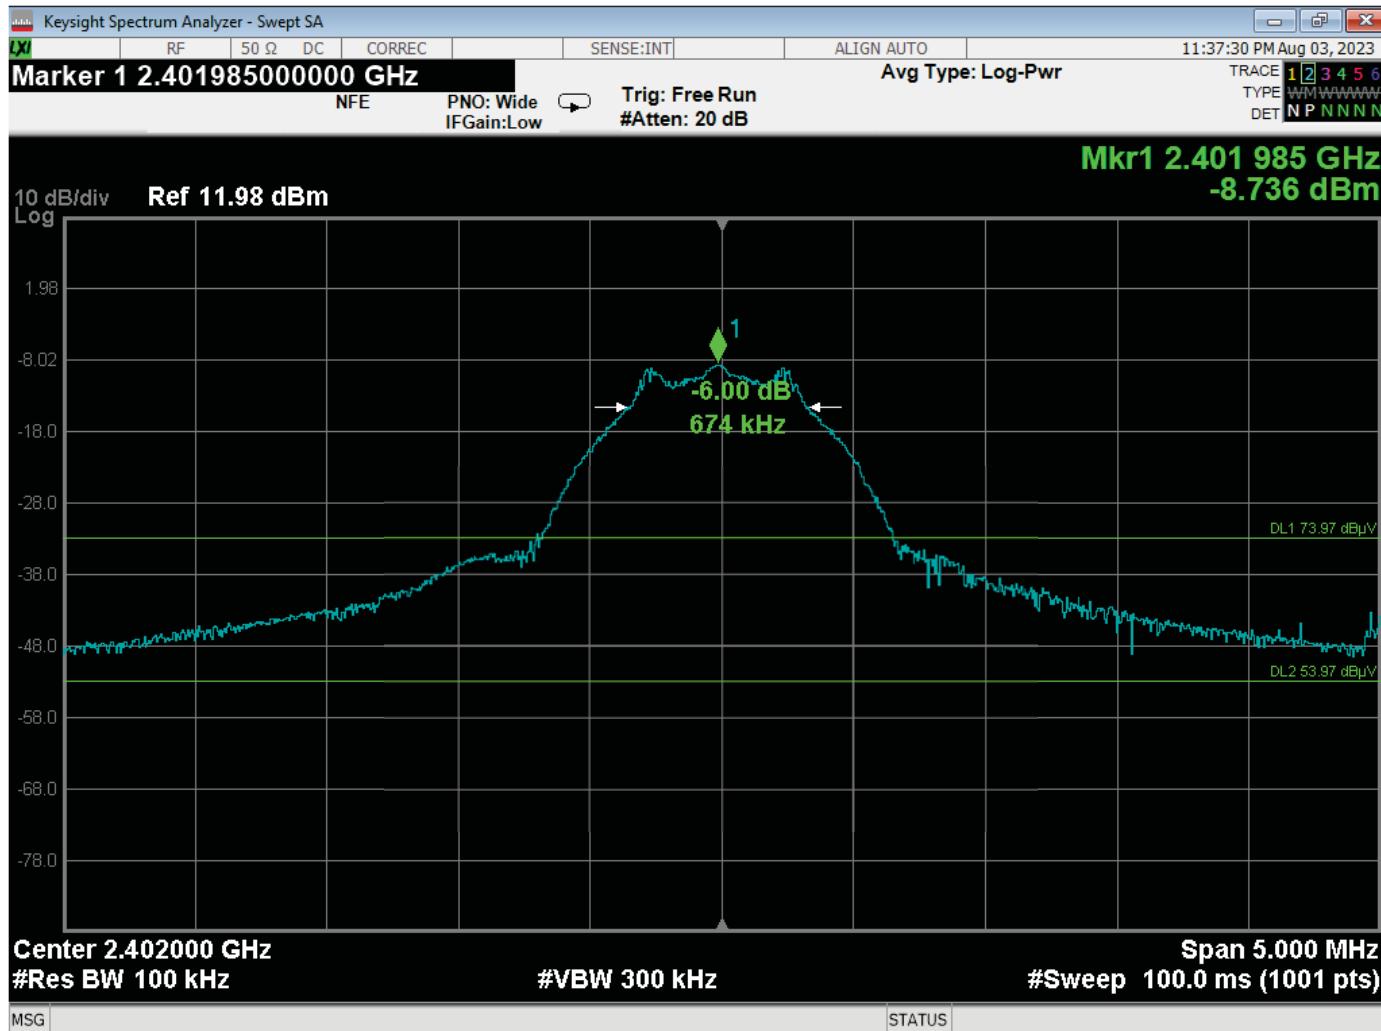


Bandwidth 6 dB – Low Channel

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

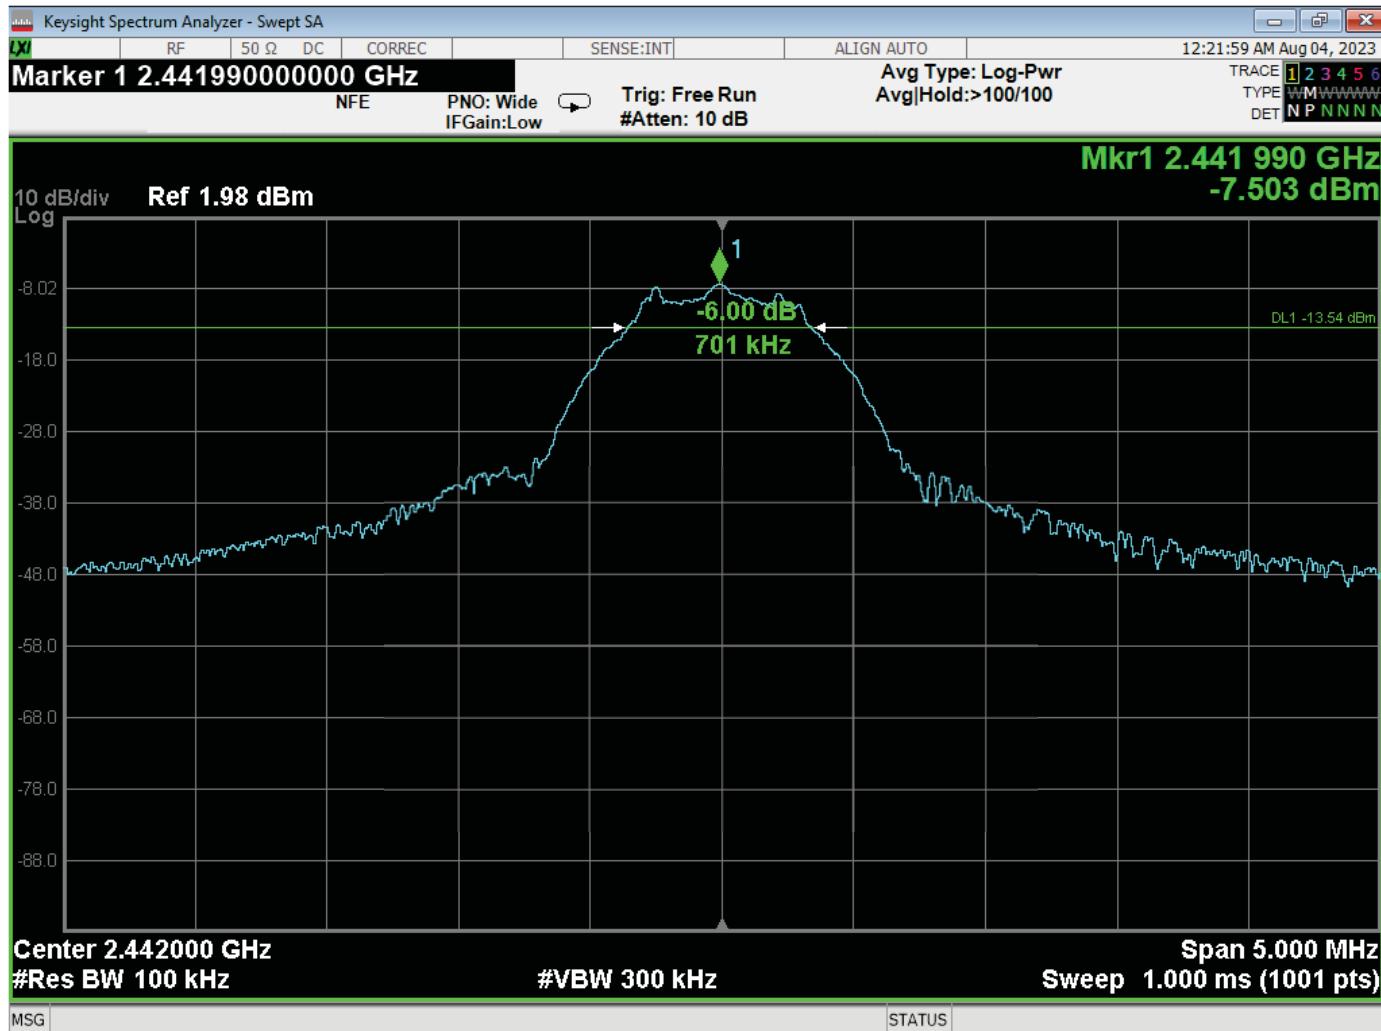


Bandwidth 6 dB – Middle Channel

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

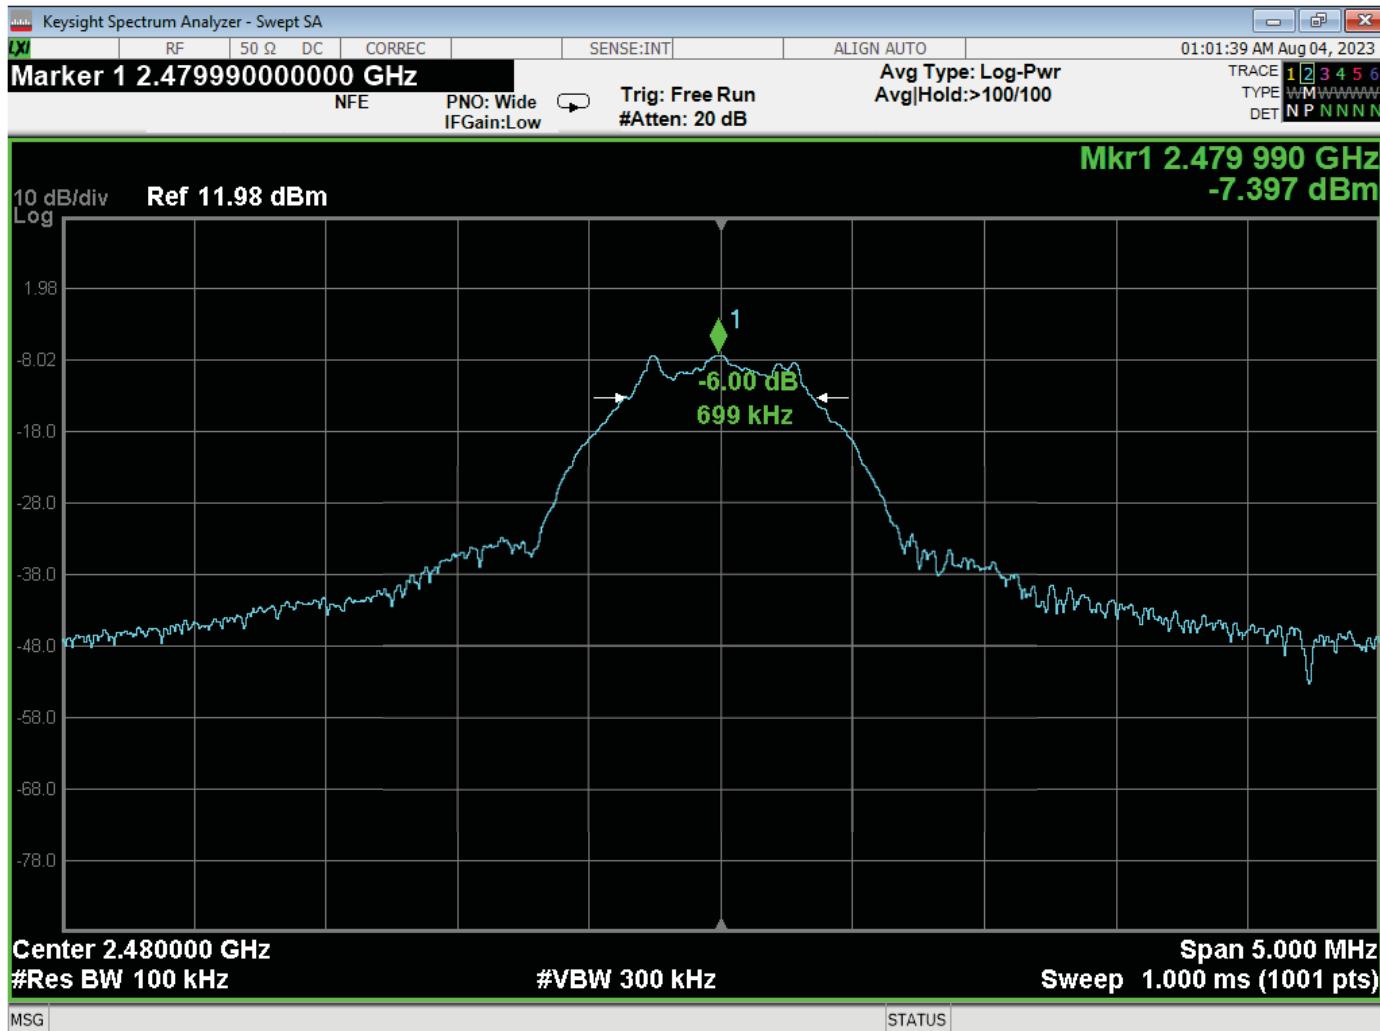

Bandwidth 6 dB – High Channel


Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

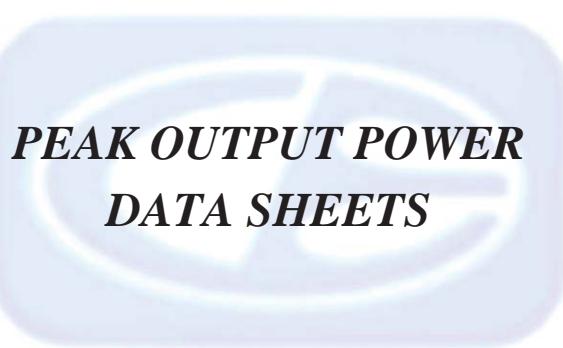

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

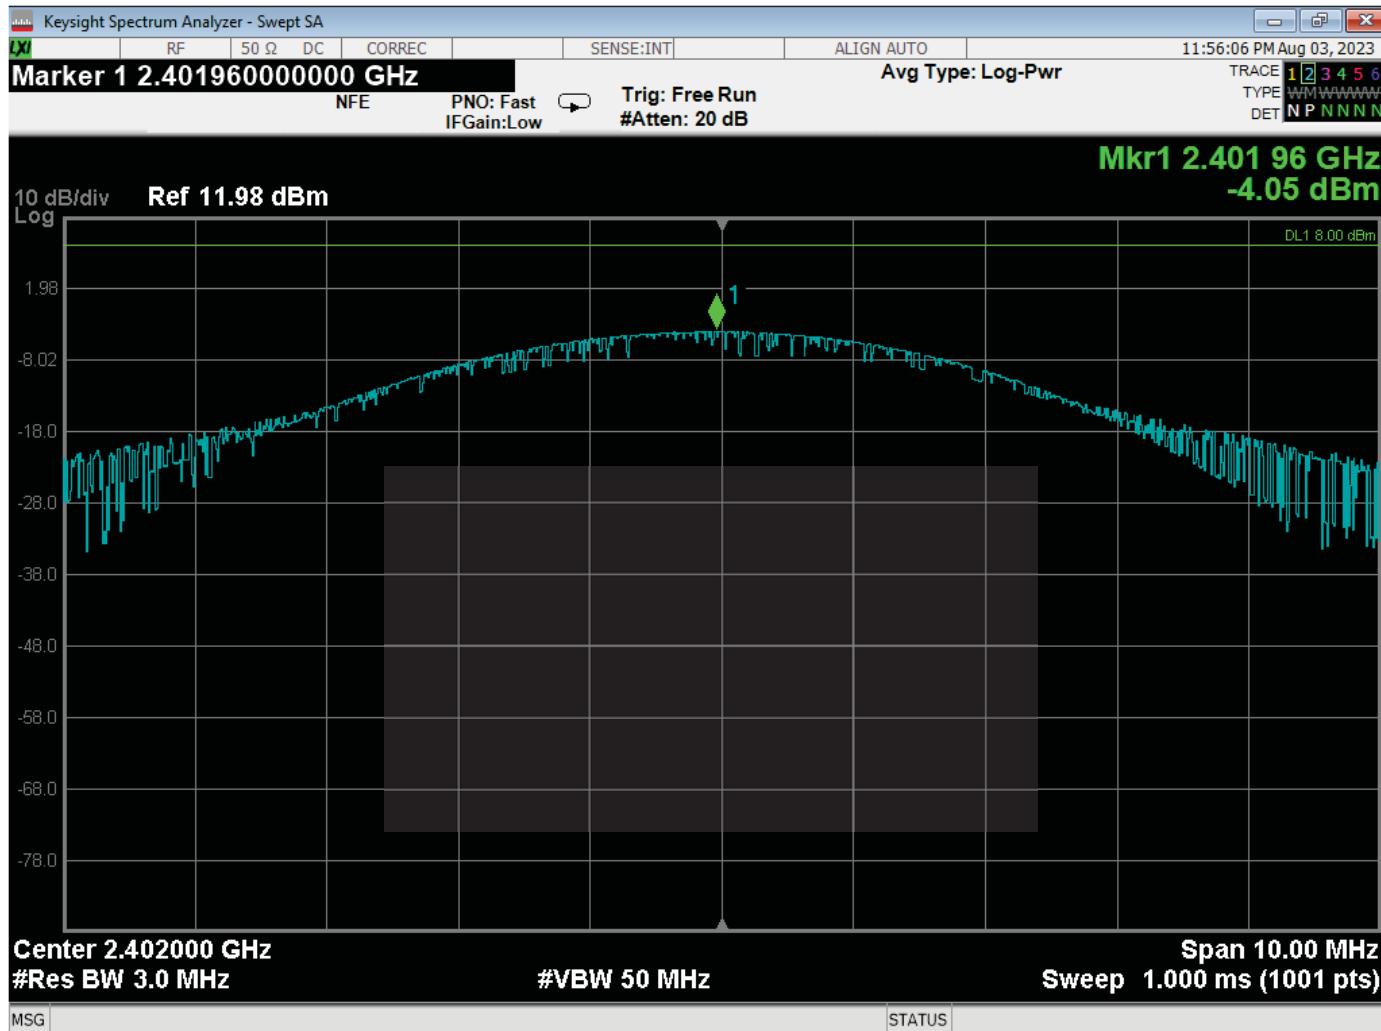


Peak Power Output – Low Channel

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

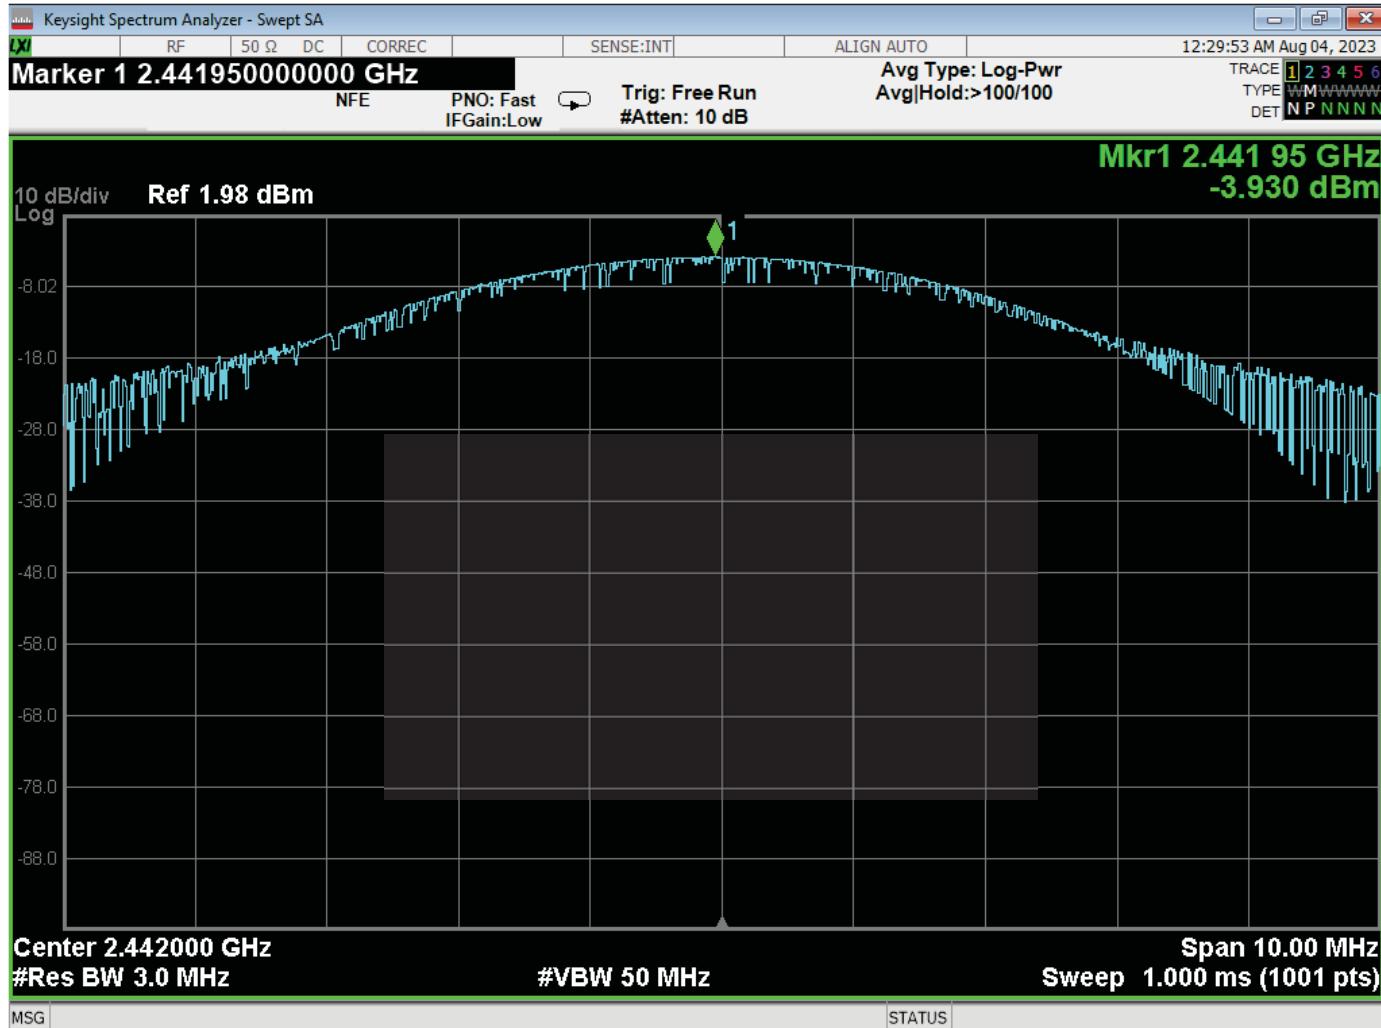


Peak Power Output – Middle Channel

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

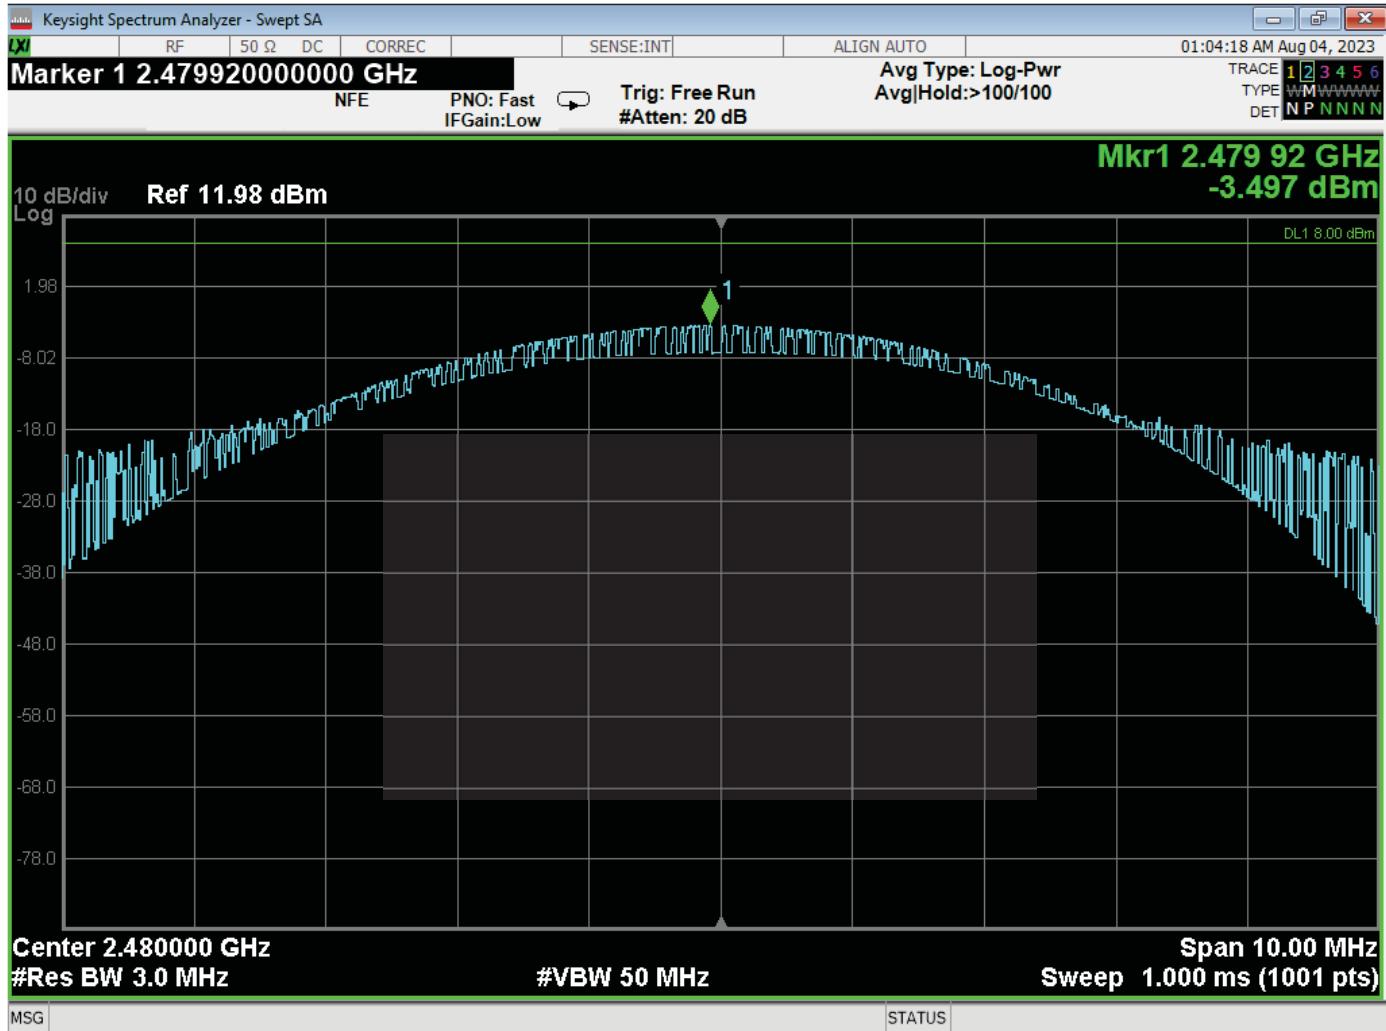

Peak Power Output – High Channel

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

***SPECTRAL DENSITY OUTPUT
DATA SHEETS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

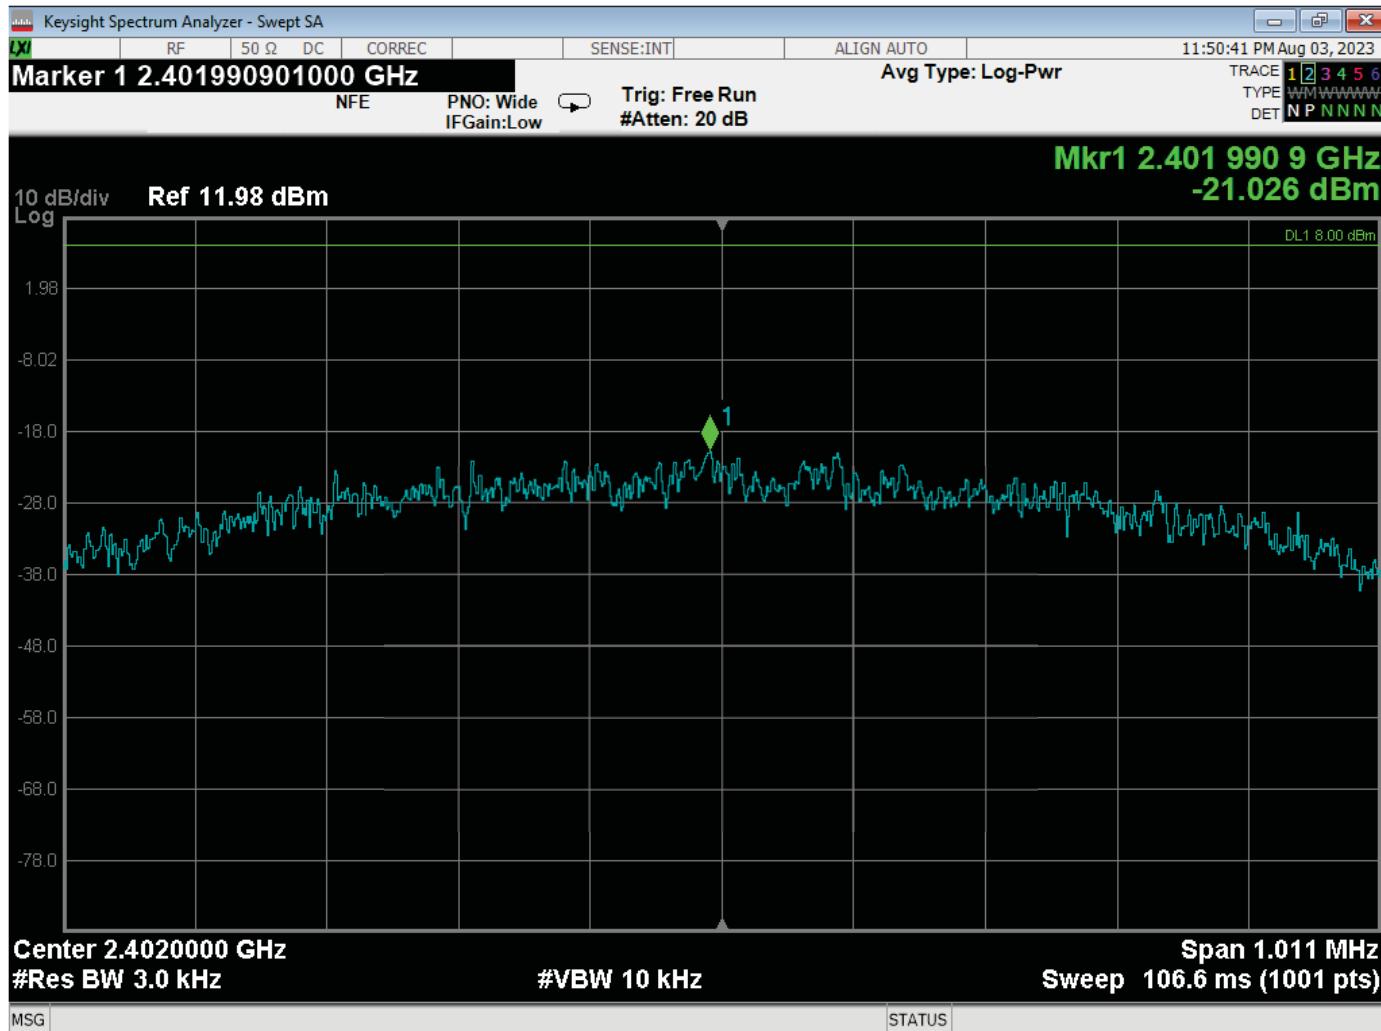

Special Density Output – Low Channel

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




Special Density Output – Middle Channel

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

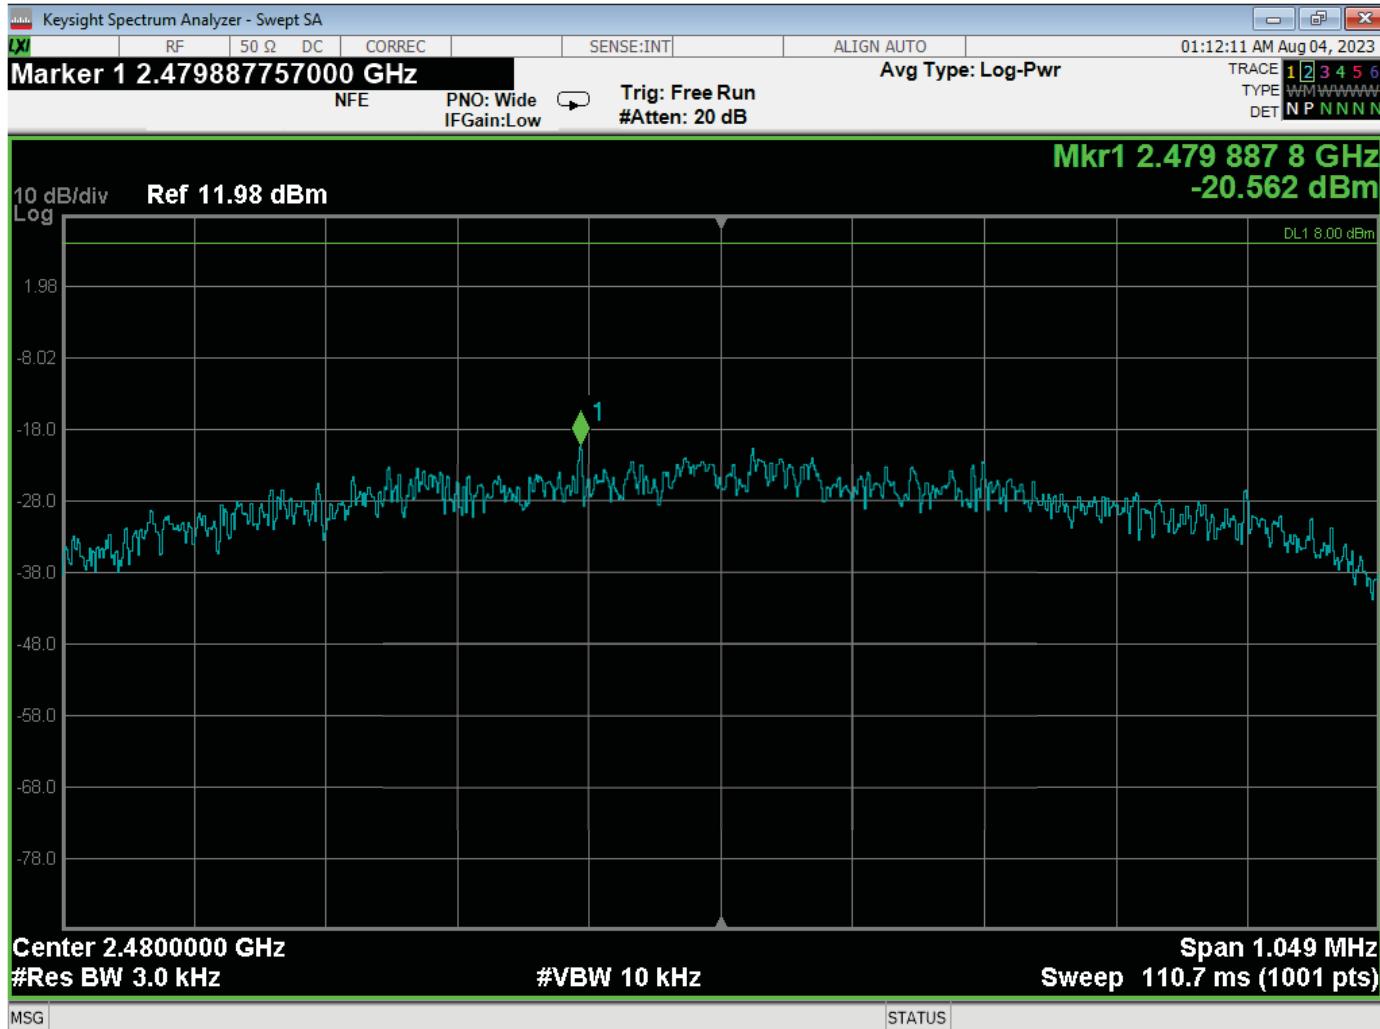

Special Density Output – High Channel

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

***RF ANTENNA CONDUCTED
DATA SHEETS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

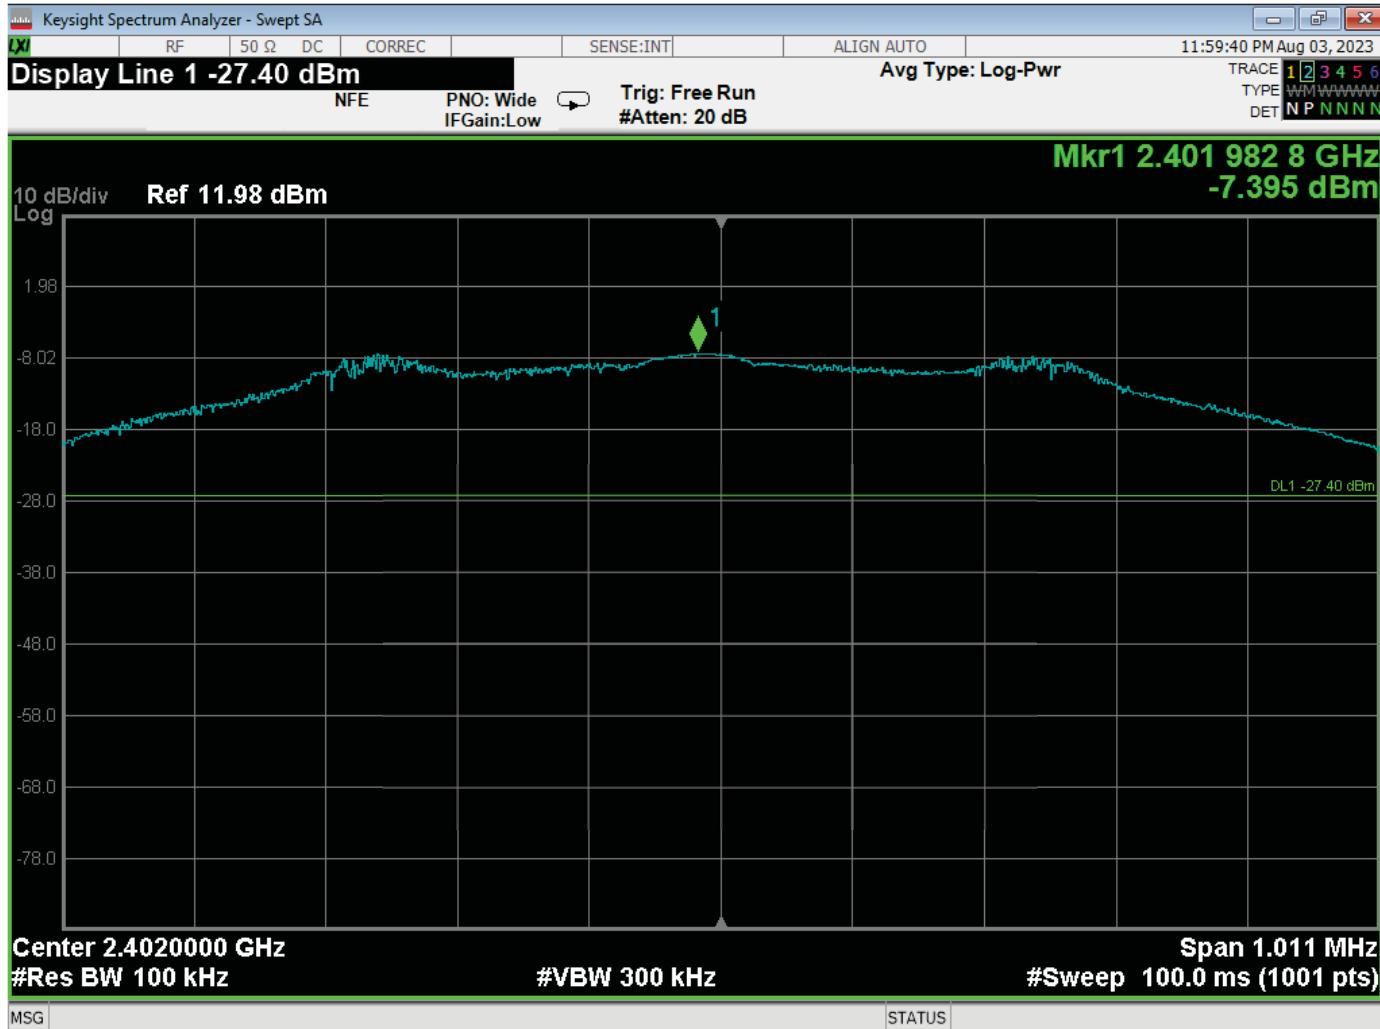


RF Antenna Conducted Test – Low Channel – Reference Level

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

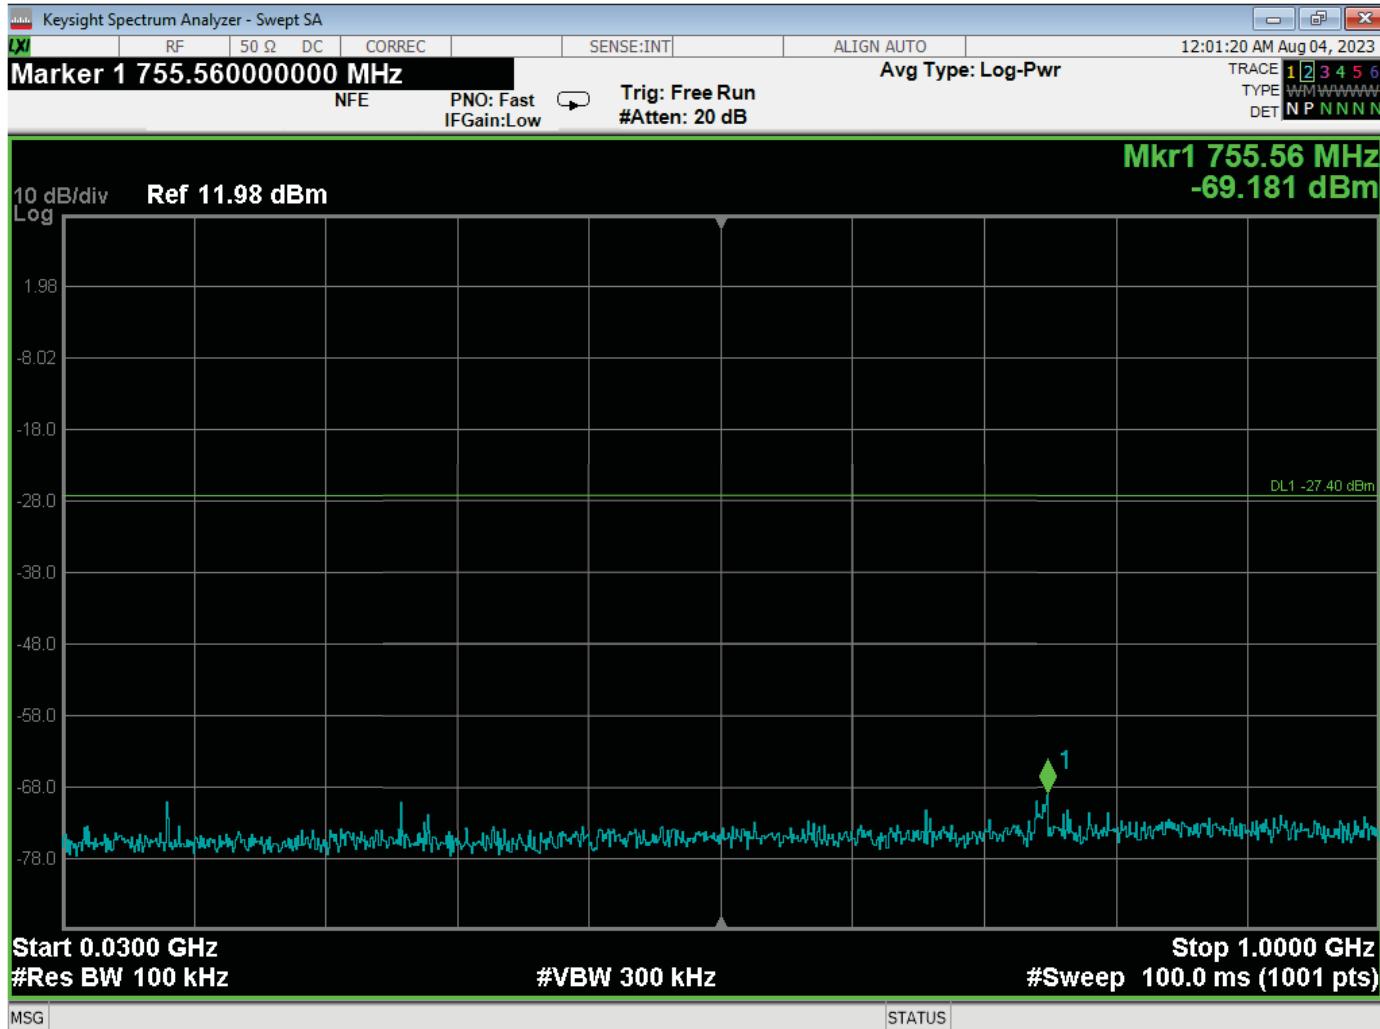


RF Antenna Conducted Test – Low Channel – 30 MHz to 1 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

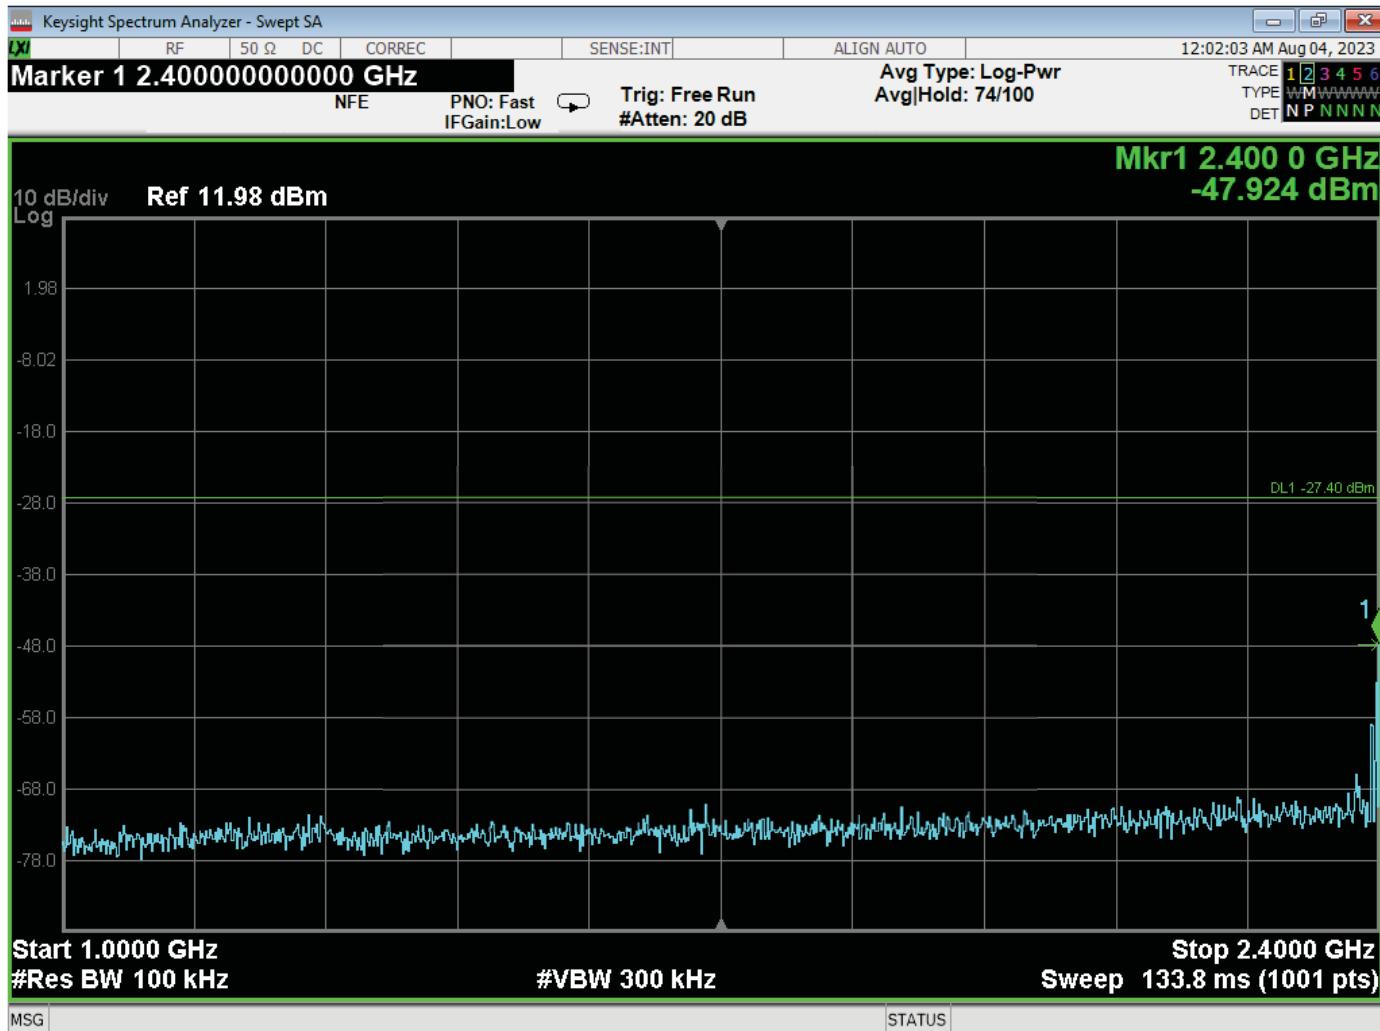


RF Antenna Conducted Test – Low Channel – 1 GHz to 2.4 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

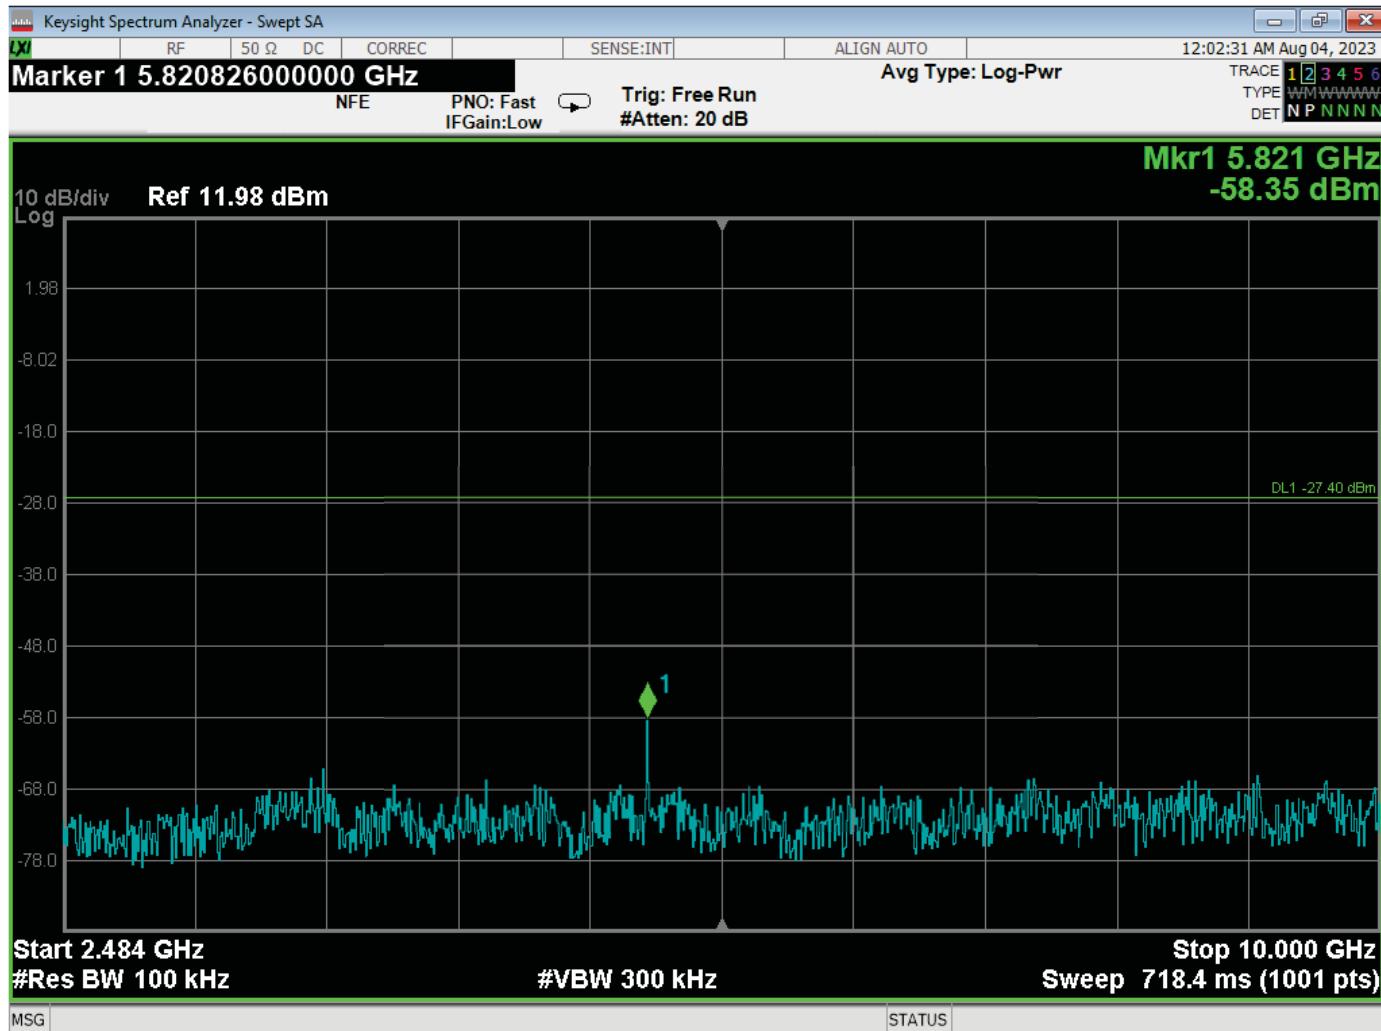


RF Antenna Conducted Test – Low Channel – 2483.5 MHz to 10 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

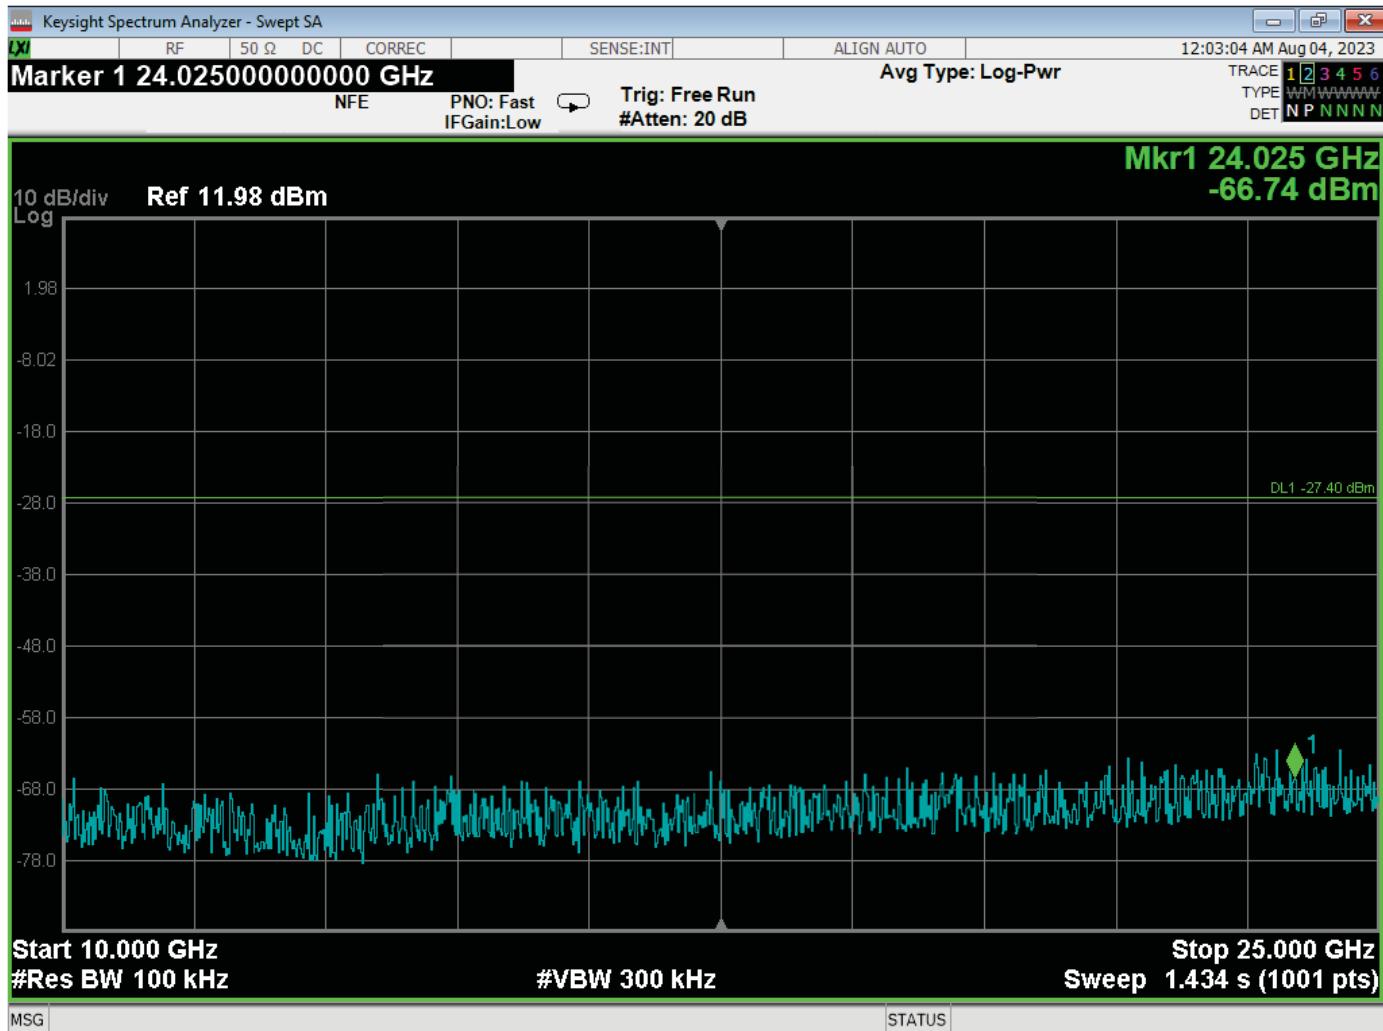


RF Antenna Conducted Test – Low Channel – 10 GHz to 25 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

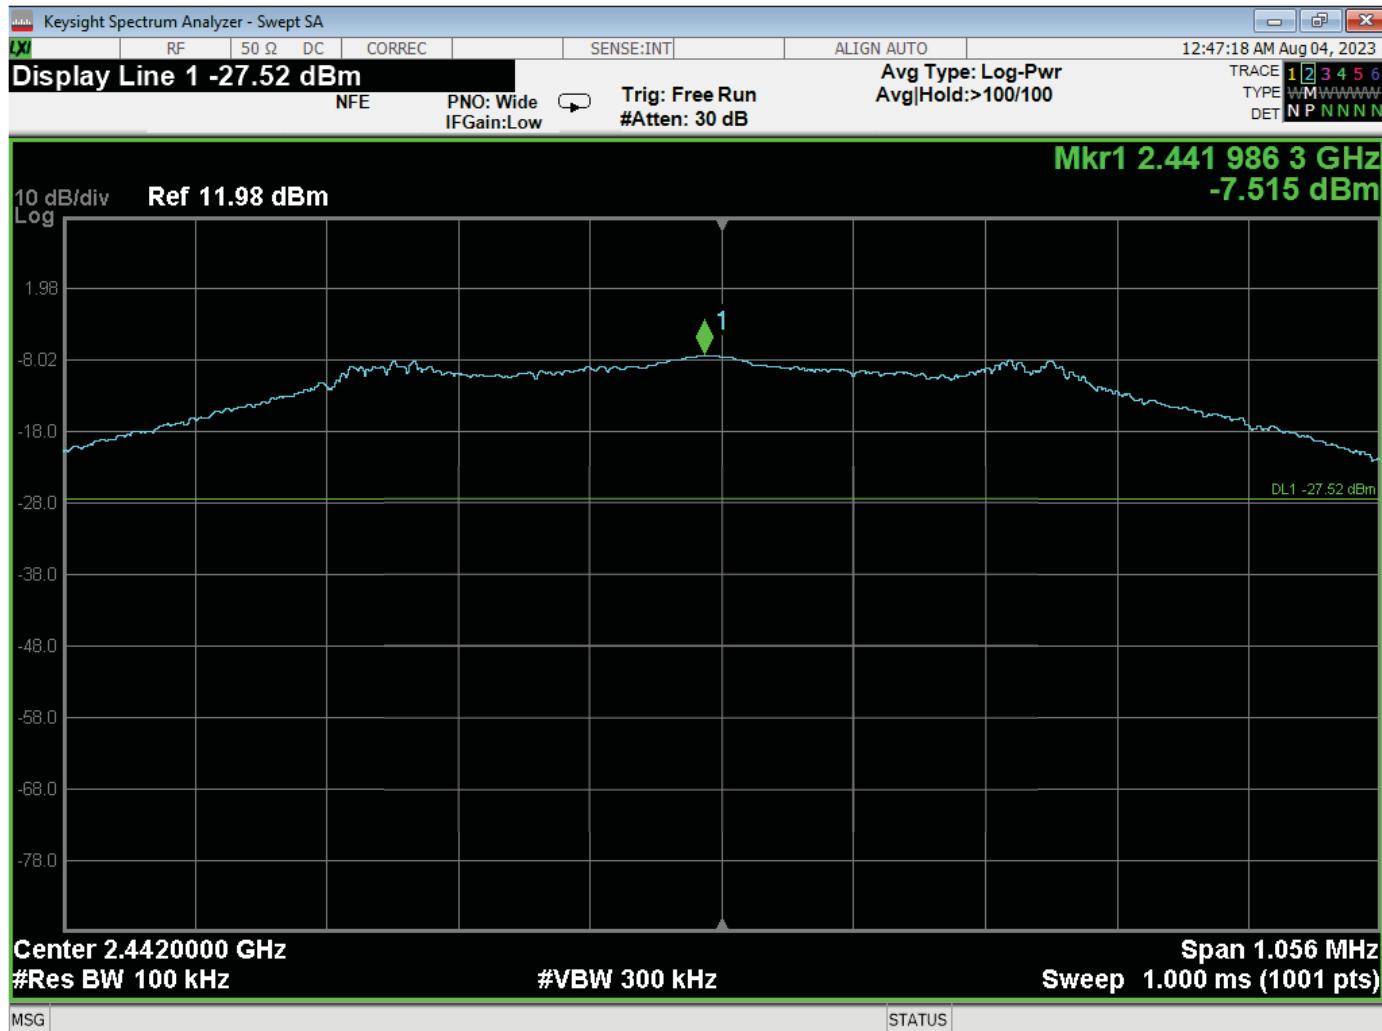


RF Antenna Conducted Test – Mid Channel – Reference Level

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

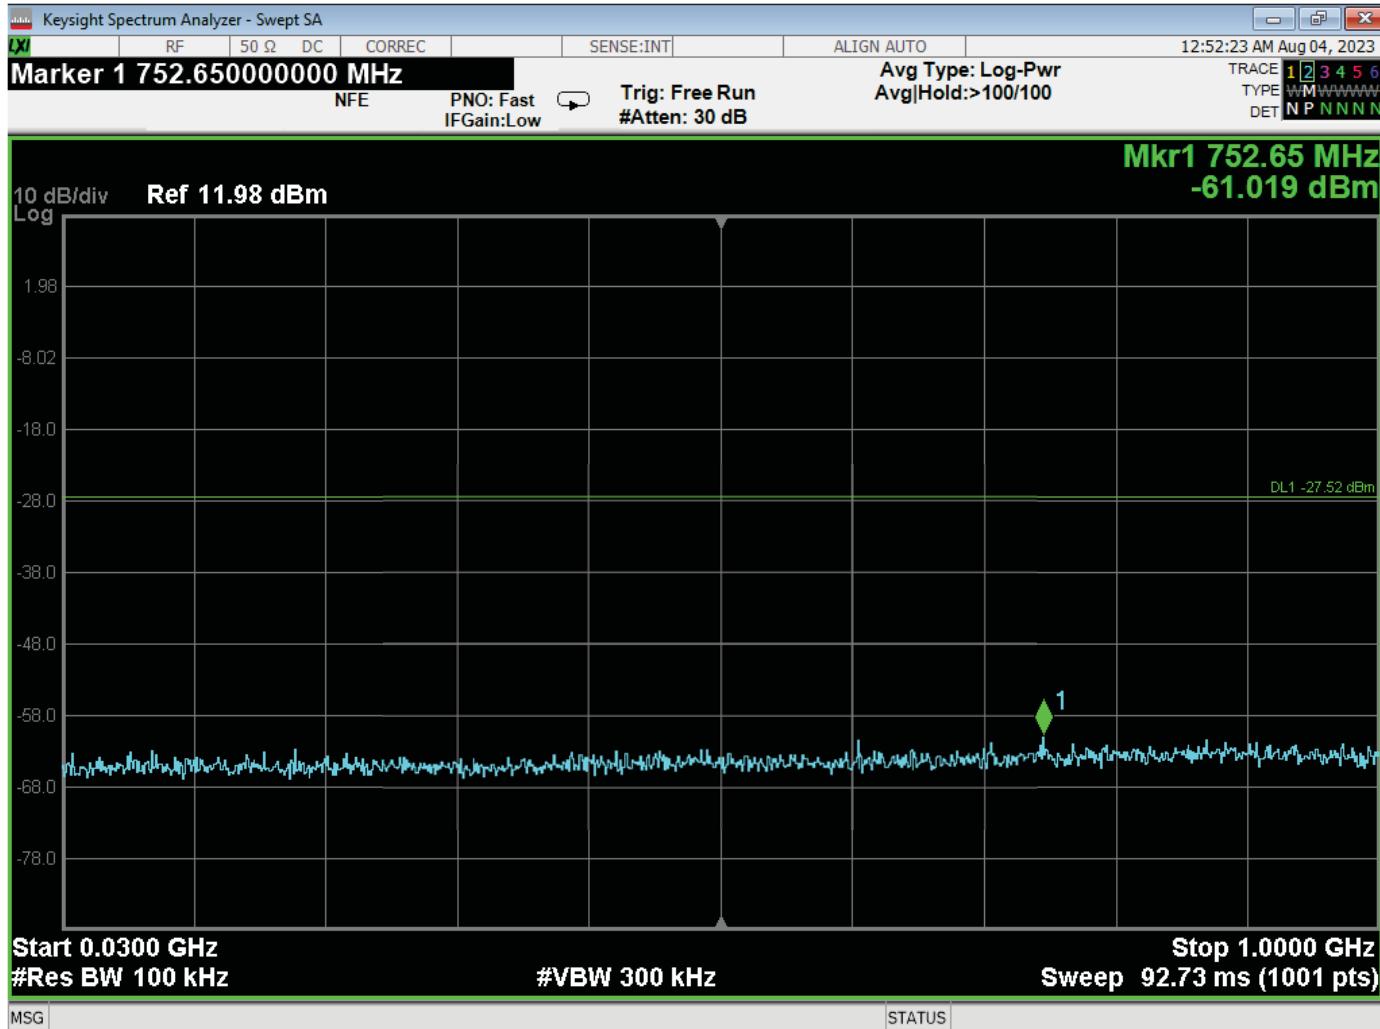


RF Antenna Conducted Test – Mid Channel – 30 MHz to 1 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

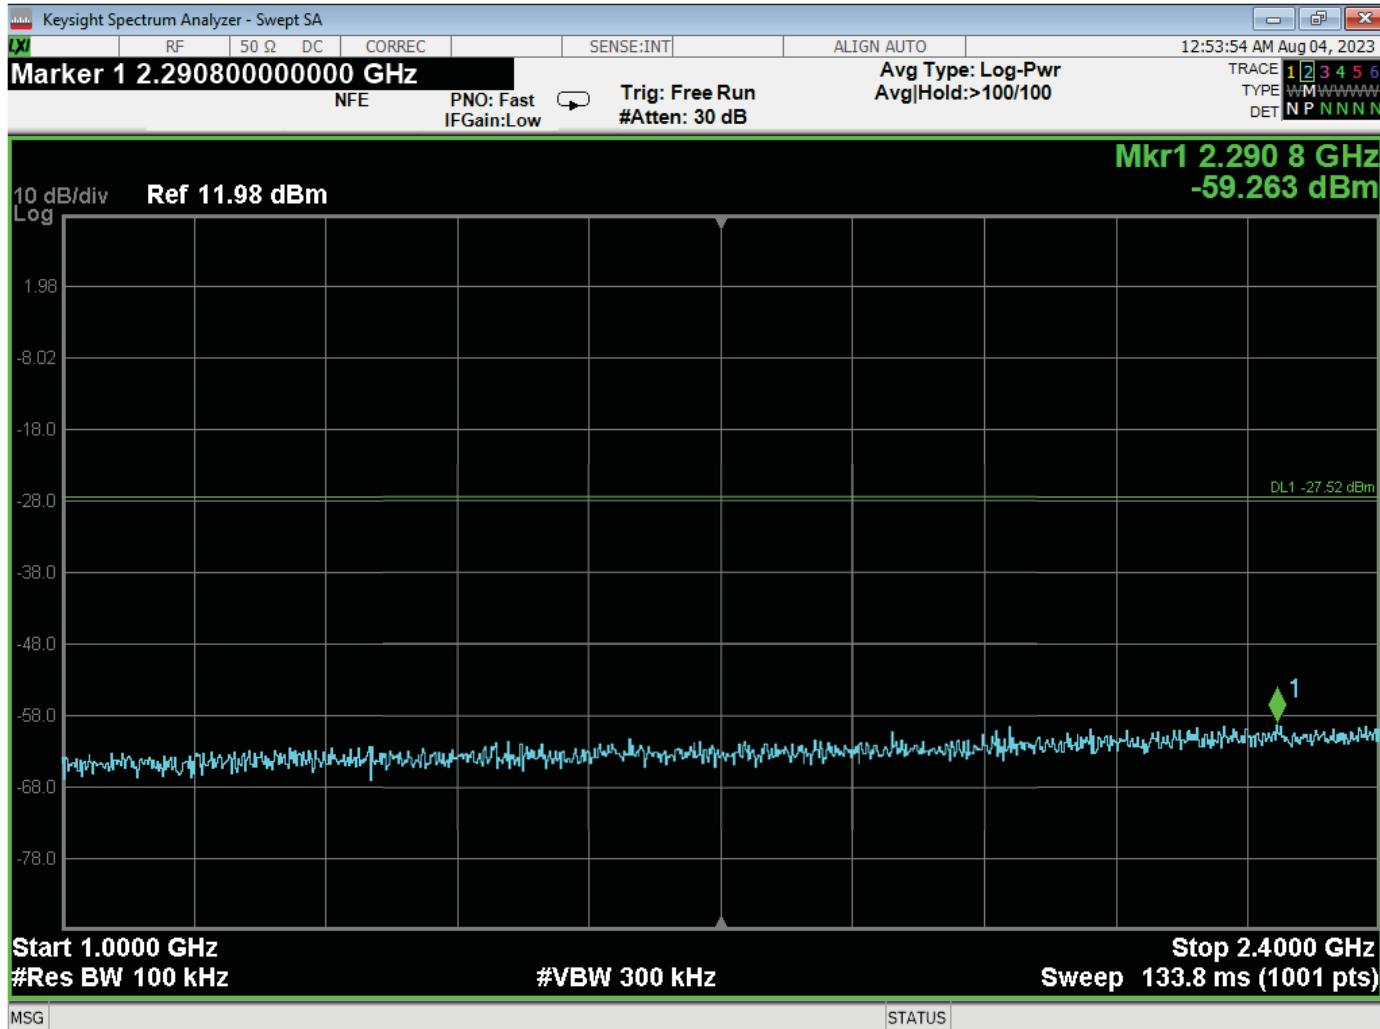


RF Antenna Conducted Test – Mid Channel – 1 GHz to 2.4 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

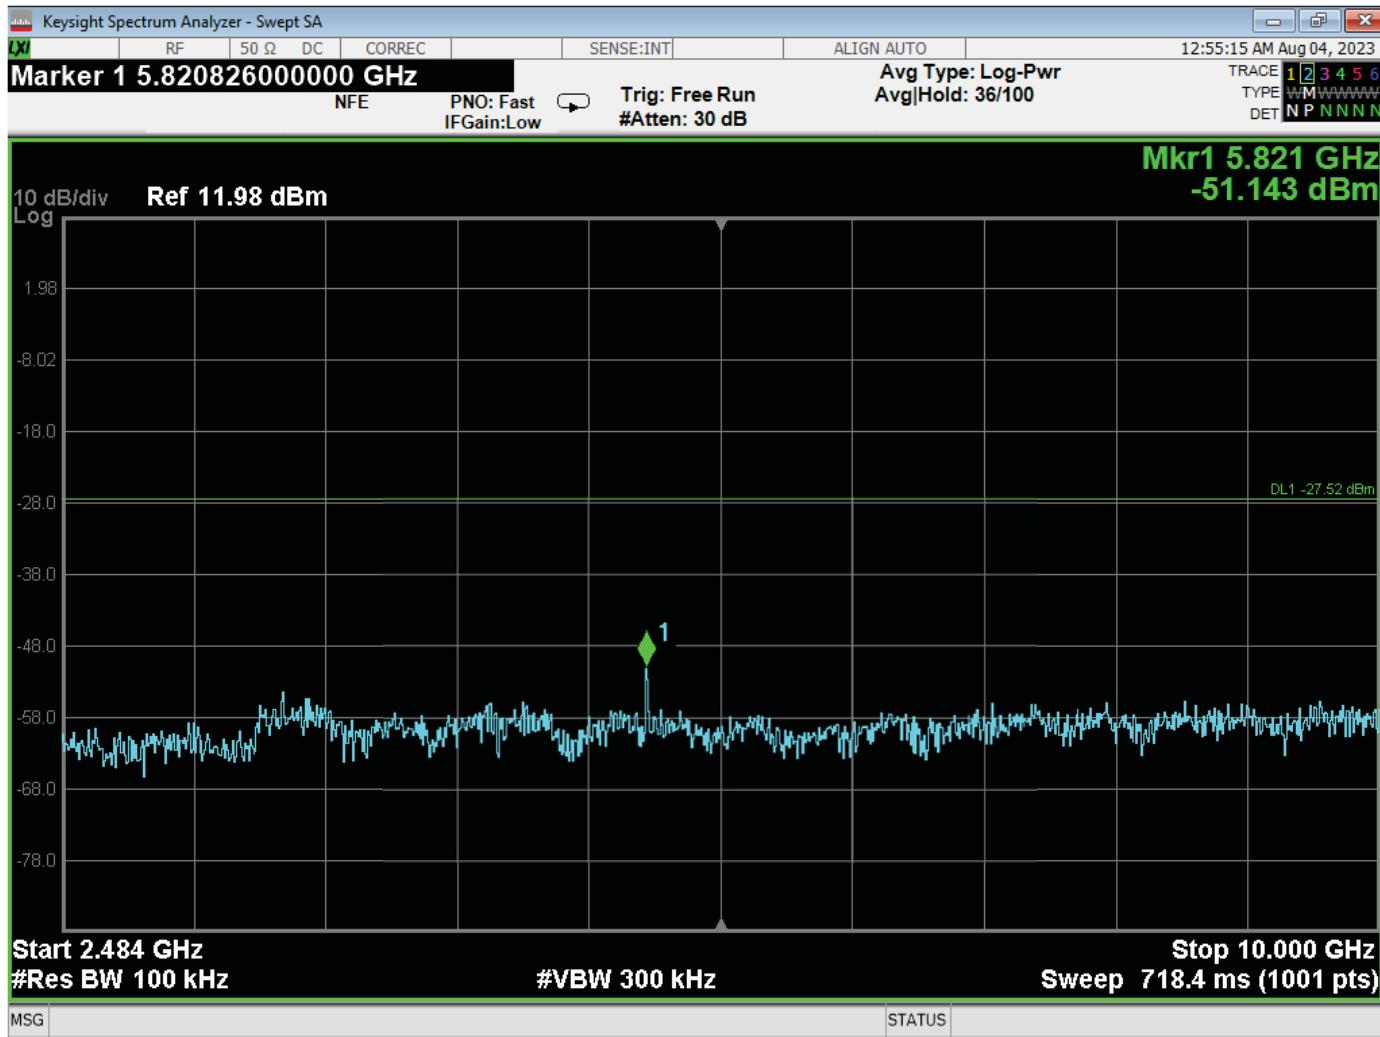


RF Antenna Conducted Test – Mid Channel – 2483.5 MHz to 10 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

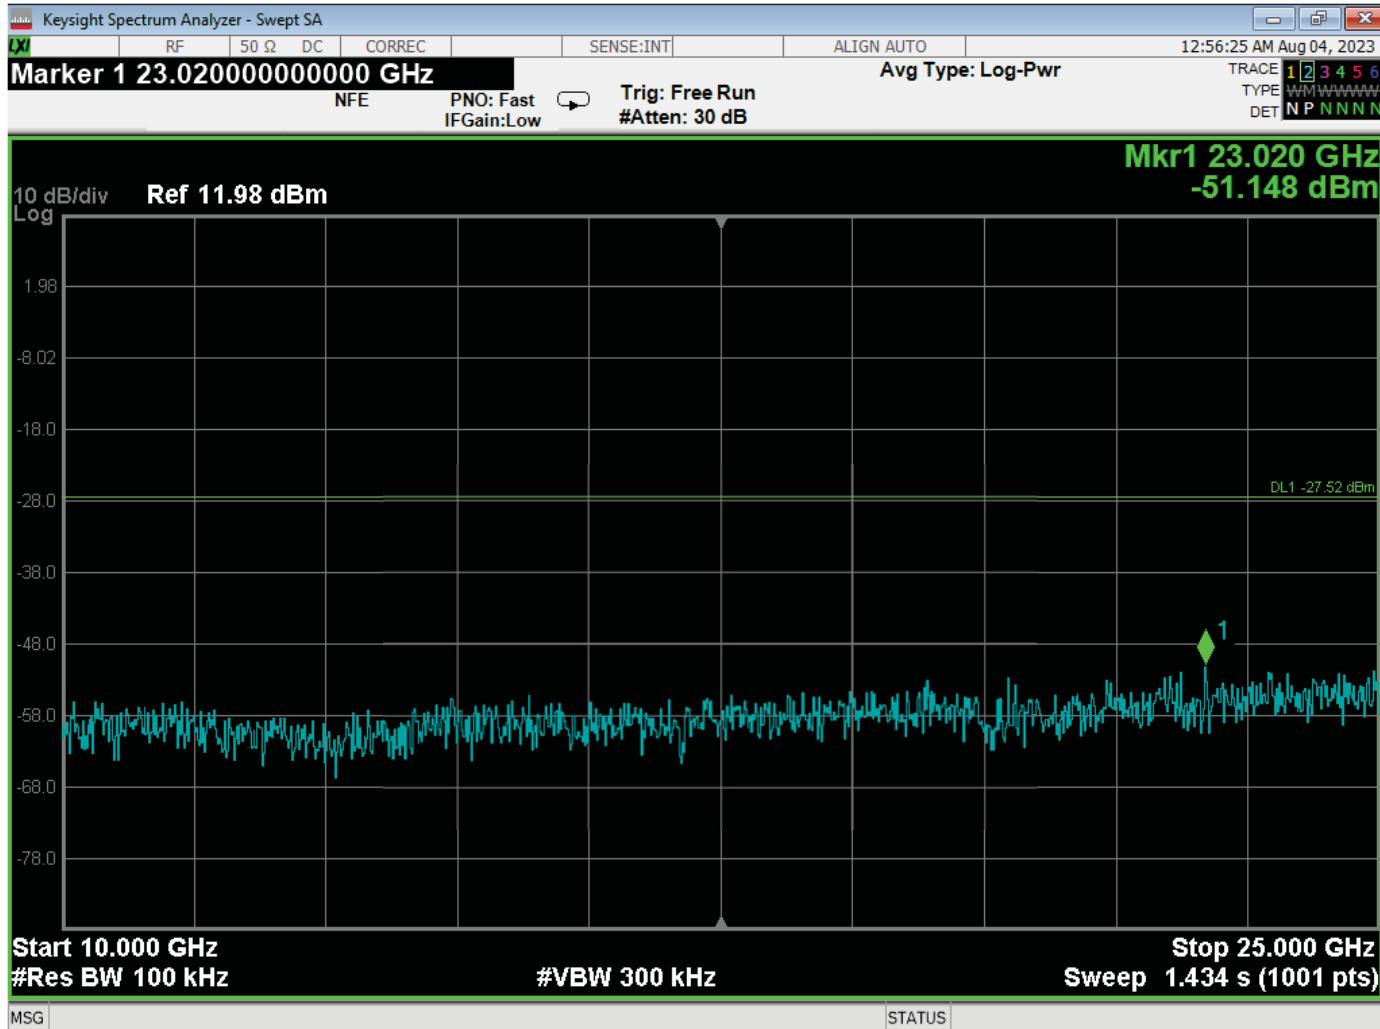


RF Antenna Conducted Test – Mid Channel – 10 GHz to 25 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

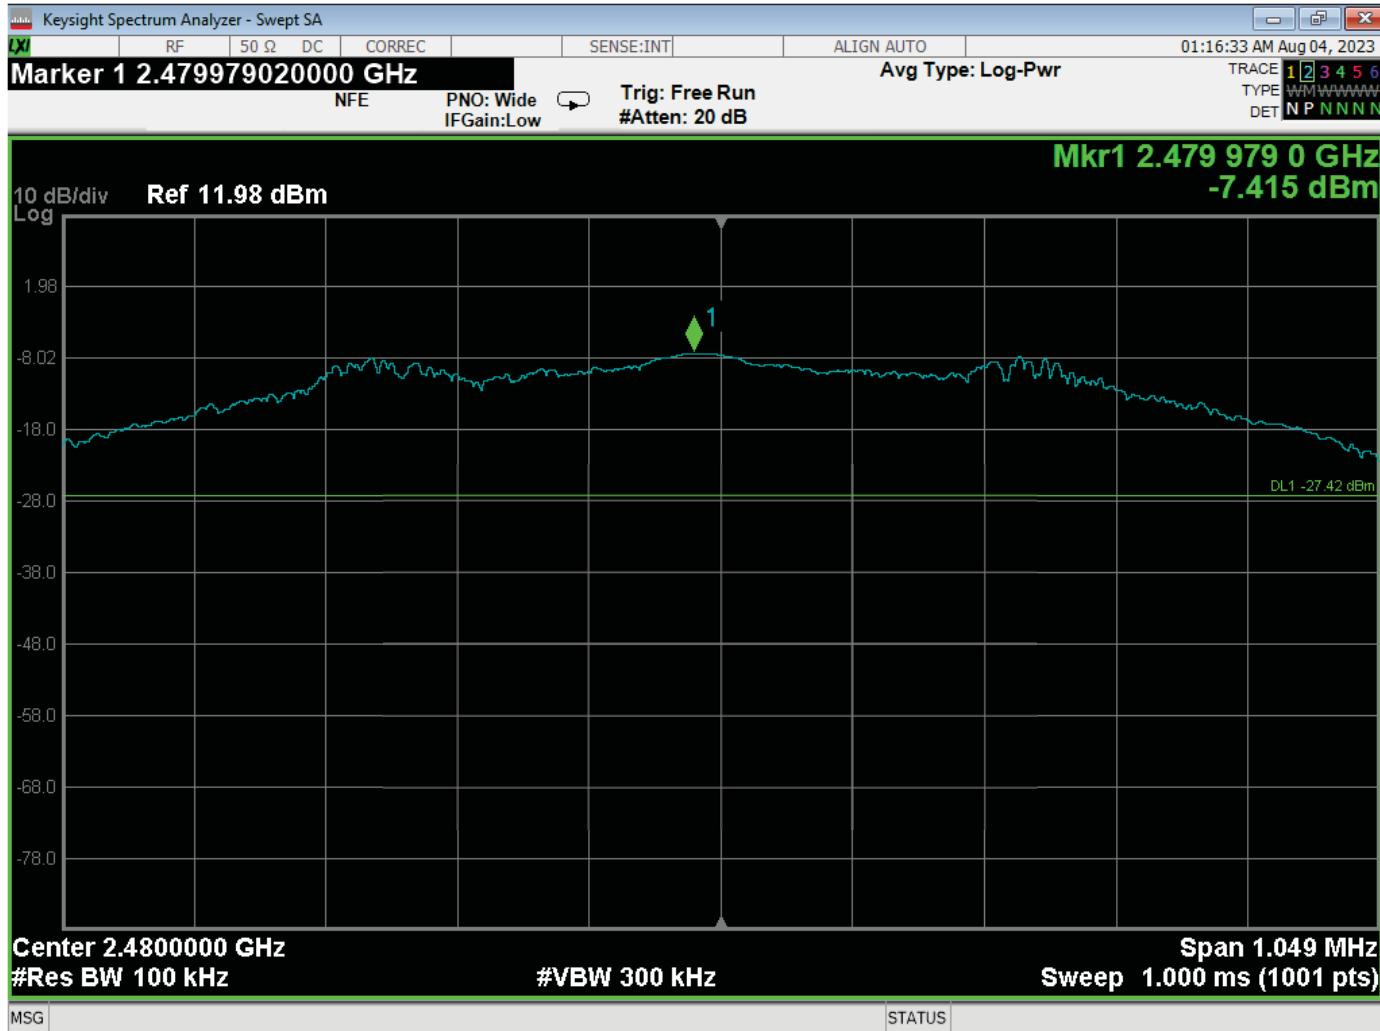


RF Antenna Conducted Test – High Channel – Reference Level

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

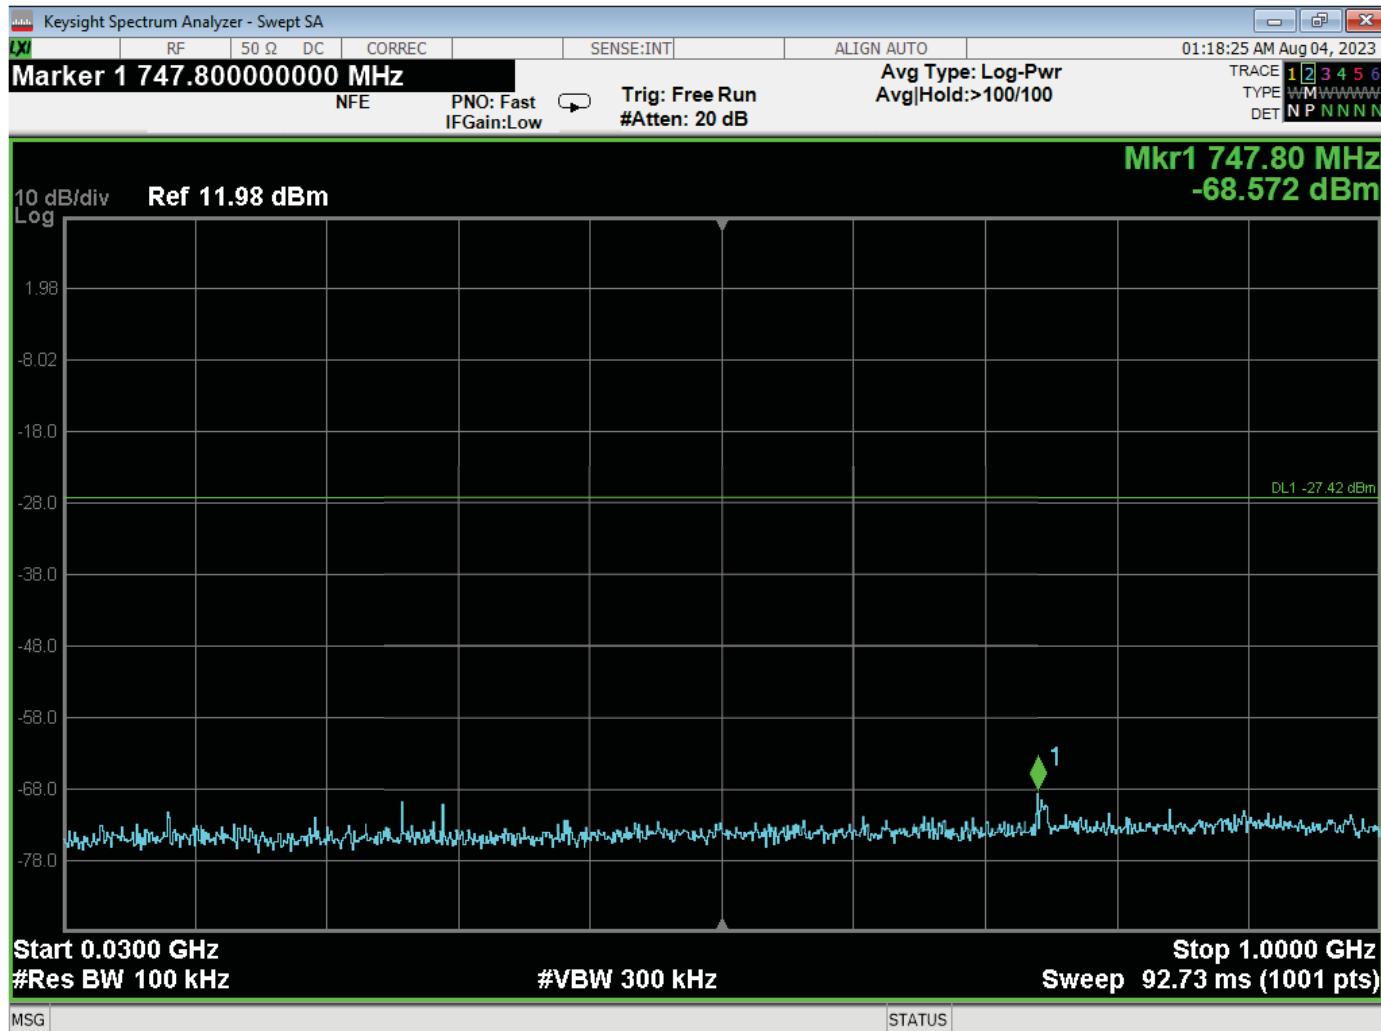


RF Antenna Conducted Test – High Channel – 30 MHz to 1 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

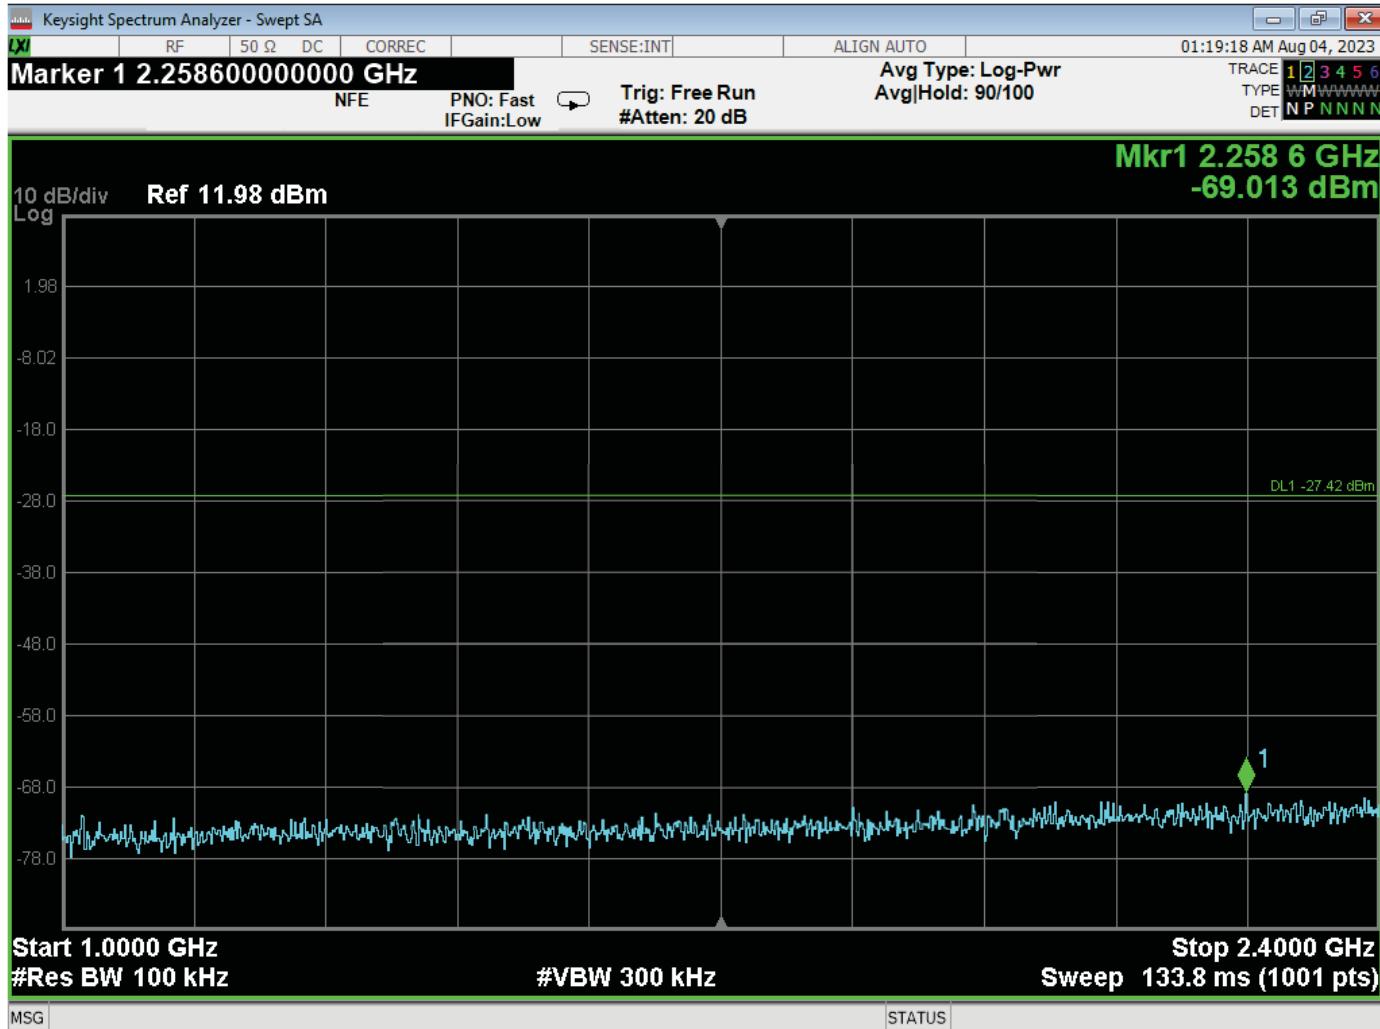


RF Antenna Conducted Test – High Channel – 1 GHz to 2.4 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

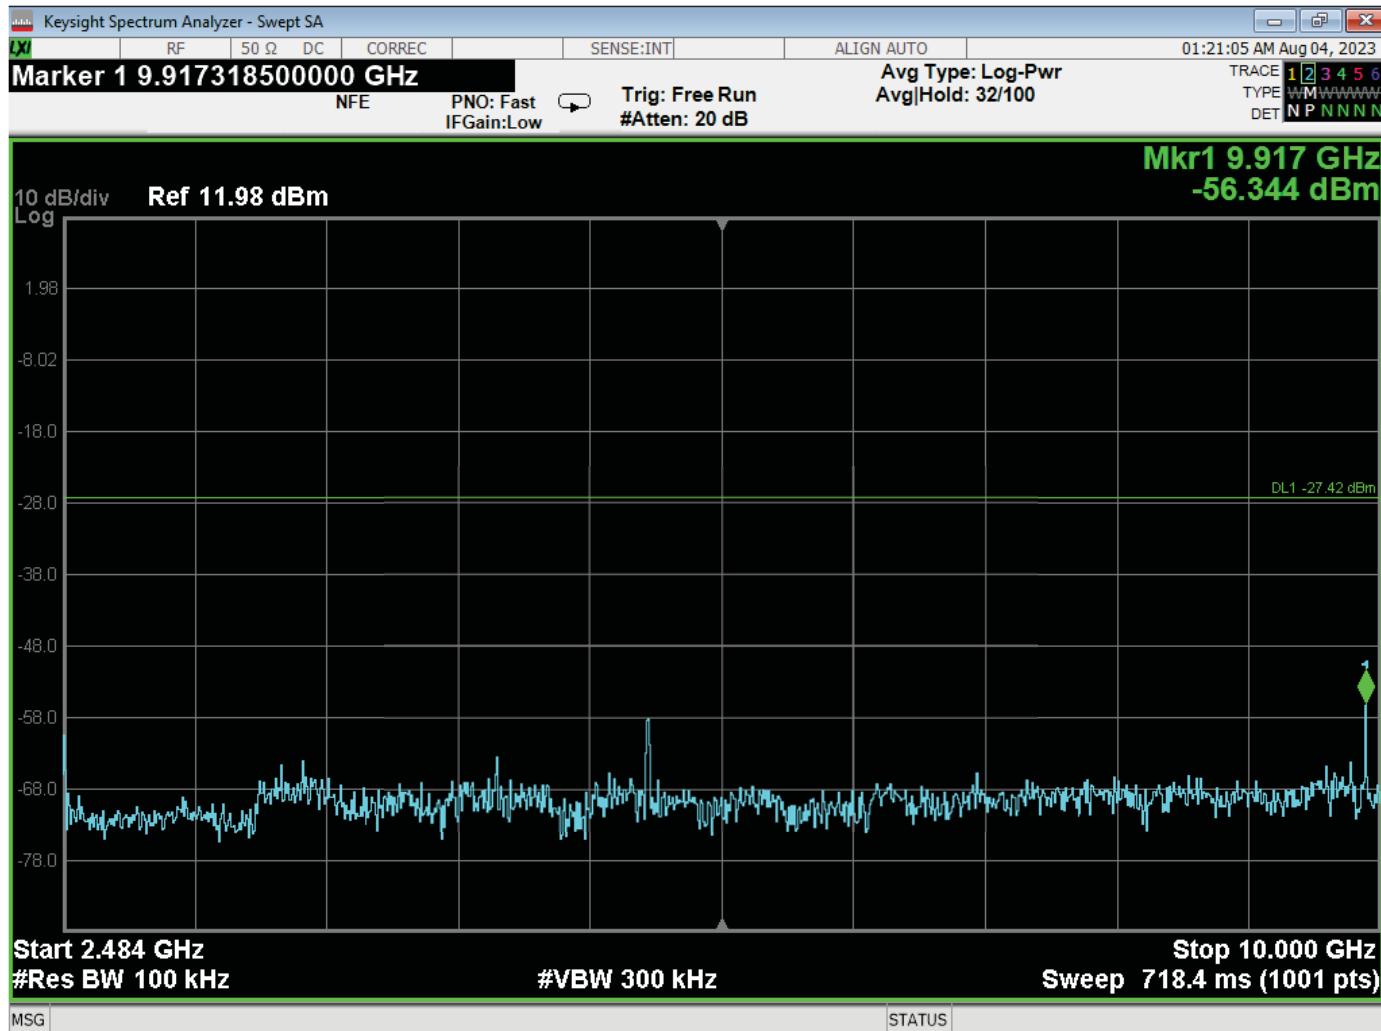


RF Antenna Conducted Test – High Channel – 2483.5 MHz to 10 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

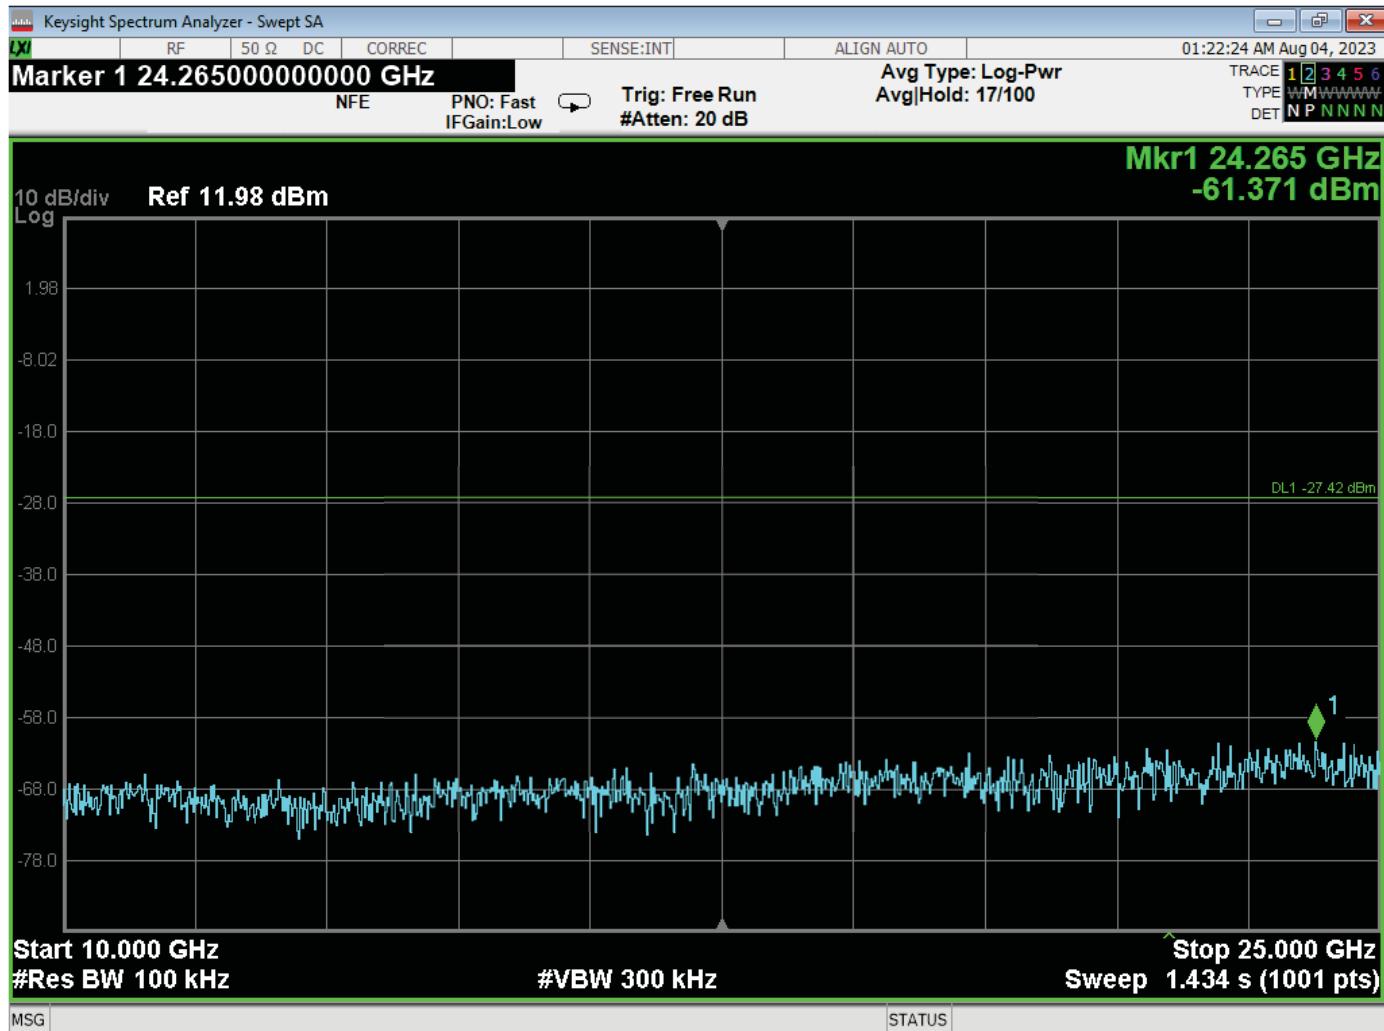

RF Antenna Conducted Test – High Channel – 10 GHz to 25 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



TRANSTIMULATION RESEARCH INC.

PATCH-TEA

MODEL: TEA-21

EMISSIONS IN NON-RESTRICTED BANDS

FREQUENCY (MHz)	LEVEL (dBm)	Limit* (dBm)	Margin (dB)
2400.00	-47.924	-27.40	-20.524
5821.00	-51.143	-27.52	-23.623
9917.00	-56.344	-27.42	-28.924

Note: The three highest non-restricted emissions are reported.

*The Limit is based on 20 dB below the highest reference level obtained on the previous pages.