## ANT-LTE-VDP-2000-SMA V ACTIVE

TE Internal #: L9000176-01

Module Antenna, Wide Band, LTE / Cellular, Remote Mount, Adhesive, SMA, Omnidirectional, Single Port, Gain 3 < 6 dBi

View on TE.com >



#### Antennas



Wireless Application: Cat-M/NB-IoT, Cellular, LTE

Mounting Location: Remote
Mounting Type: Adhesive
Antenna Termination: SMA
Antenna Type: Module

#### **Features**

### Product Type Features

Antenna Termination	SMA
Configuration Features	
Antenna Style	Whip
Mounting Location	Remote
Antenna Type	Module
Band Type	Wide Band
Port Configuration	Single Port
Electrical Characteristics	
VSWR (Max)	<1.7:1
Impedance	50 Ω

### Signal Characteristics

Gain (Max)	4.5 dB
Frequency Band	698 – 960 MHz
Nominal Frequency Range	617 – 6000
Peak Gain	3 < 6 dBi

#### **Body Features**

Product Weight	49 g[1.72839 oz]
----------------	------------------

### Mechanical Attachment



Polarization	Linear
Mounting Type	Adhesive
Dimensions	
Cable Length	2 m[6.56 ft]
Product Width	22 mm[.87 in]
Product Length	115 mm[4.53 in]
Product Height	6.3 mm[.25 in]
Operation/Application	
Directionality	Omnidirectional
Industry Standards	
Wireless Application	Cat-M/NB-IoT, Cellular, LTE
Primary Application	Cellular, LTE

### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An



Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

## Compatible Parts





SMA Jack 50 Ohm PCB Through Hole







TE Part # L000795-15 Antenna LTE VDP Adh Bk 1.5M FAKRA-C Plug

# Customers Also Bought
















TE Part #M3031-000005-10KPG
PRESS XDCR M3031-000005-10KPG



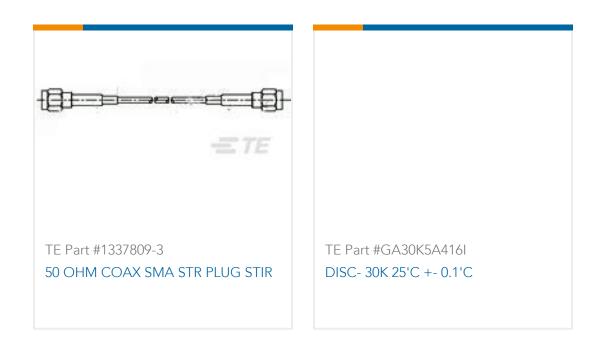

#### **Documents**

### **Product Drawings**

Antenna Vert 1/2 Wave Dipole LTE 2M SMA

English

### Datasheets & Catalog Pages

VHETH Antenna Series Ground Plane Optimization

English

Sub-6 Cellular LTE-5G NR Frequency Band Guide

English

Considerations for Operation within the 260-470MHz Band

English

**Understanding Antenna Specifications and Operation** 

English

Antennas Design, Application and Performance

English

Antenna Color Codes

English

The FCC Road Part 15 From Concept to Approval

English

RF 101 Information for the RF Challenged

English

Remote Adhesive-Mount Cellular Antenna

English

Virtual Antenna

English

Microsplatch Ground Plane Optimization

English