



TEST REPORT

Product Name: Amplifier
FCC ID: 2BCJV-A50
Trademark: Arylic
Model Number: A50+
Prepared For: Rakoit Technology (SZ) Co., Ltd.
Address: FI.13th, Bldg.2B, Baiwang R&D Building, Baimang Community, Xili Street, Nanshan, Shenzhen, China
Manufacturer: Rakoit Technology (SZ) Co., Ltd.
Address: FI.13th, Bldg.2B, Baiwang R&D Building, Baimang Community, Xili Street, Nanshan, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Dec. 24, 2024
Sample tested Date: Dec. 24, 2024 to Jan. 13, 2025
Issue Date: Jan. 13, 2025
Report No.: CTB24122403503RF03
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	6
4.3 Support Equipment	6
4.4 Channel List	6
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	39
8.1 Block Diagram Of Test Setup	39
8.2 Limit	39
8.3 Test procedure	39
8.4 Test Result	40
9. CONDUCTED OUTPUT POWER	48
9.1 Block Diagram Of Test Setup	48
9.2 Limit	48
9.3 Test procedure	48
9.4 Test Result	48
10. 6DB OCCUPIED BANDWIDTH	49
10.1 Block Diagram Of Test Setup	49
10.2 Limit	49
10.3 Test procedure	49
10.4 Test Result	50
11. POWER SPECTRAL DENSITY	55
11.1 Block Diagram Of Test Setup	55
11.2 Limit	55
11.3 Test procedure	55
11.4 Test Result	56
12. ANTENNA REQUIREMENT	61
13. EUT TEST SETUP PHOTOGRAPHS	62

(NOTE: N/A MEANS NOT APPLICABLE)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB24122403503RF03	Jan. 13, 2025	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D05v02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m camber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m camber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	A50+
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 23.465dBm
Type of Modulation:	WiFi (2.4G): DSSS, OFDM
Antenna installation:	WiFi (2.4G): Glue stick antenna
Antenna Gain:	WiFi (2.4G): 3.49dBi
Ratings:	ADAPTER: INPUT: AC 100-240V 50/60Hz~2A Max OUTPUT: 24V --- 4.16A 99.84W

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC/DC Adapter	/	BX-2404160	/	EUT

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	/	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: Duty cycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11n20	65M
802.11n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	24V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28


Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/10/25
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

Radiated emission(No.2 Chamber)						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2026/11/14
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2026/7/07
3	Broadband Antenna	Schwarzbeck	VULB 9168	1471	/	2025/7/06
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Preamplifier	Schwarzbeck	BBV 9743 B	00500	/	2025/5/23
6	EMI TEST RECEIVER	R&S	ESCI7	100861	/	2025/10/25
7	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
8	EMI test software	Farad	EZ-EMC	/	Ver. FARAD-3A1+	/
9	Coaxial cable	Rosenberg	8m	/	/	2025/10/25
10	Coaxial cable	Times	2m	/	/	2025/10/25
11	Coaxial cable	Times	2m	/	/	2025/10/25
12	Coaxial cable	Times	1m	/	/	2025/10/25

13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

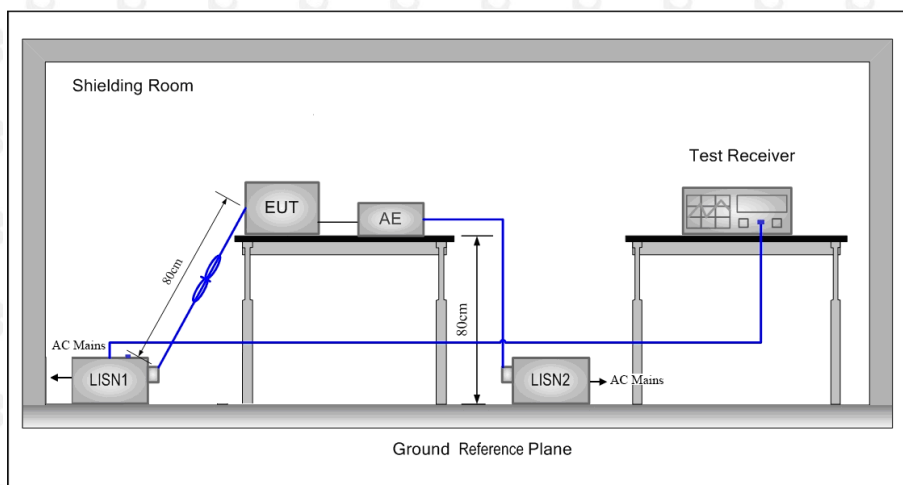

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.


- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.

6.4 Test Result

Test Specification: Line

AC 120V 60Hz

the worst: 802.11b (low channel)

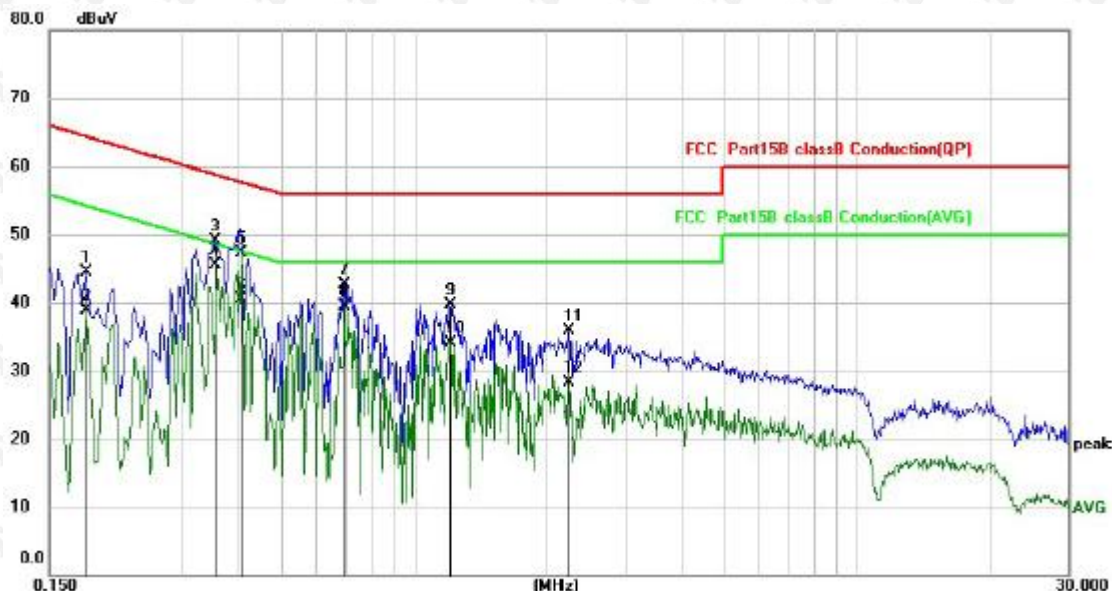


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1819	33.80	10.78	44.58	64.40	-19.82	QP
2		0.1819	28.22	10.78	39.00	54.40	-15.40	AVG
3		0.3540	38.48	10.60	49.08	58.87	-9.79	QP
4	*	0.3540	34.86	10.60	45.46	48.87	-3.41	AVG
5		0.4060	36.79	10.57	47.36	57.73	-10.37	QP
6		0.4060	29.97	10.57	40.54	47.73	-7.19	AVG
7		0.6940	31.93	10.71	42.64	56.00	-13.36	QP
8		0.6940	28.74	10.71	39.45	46.00	-6.55	AVG
9		1.2059	28.66	11.08	39.74	56.00	-16.26	QP
10		1.2059	23.03	11.08	34.11	46.00	-11.89	AVG
11		2.2340	24.28	11.63	35.91	56.00	-20.09	QP
12		2.2340	16.68	11.63	28.31	46.00	-17.69	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz
the worst: 802.11b (low channel)

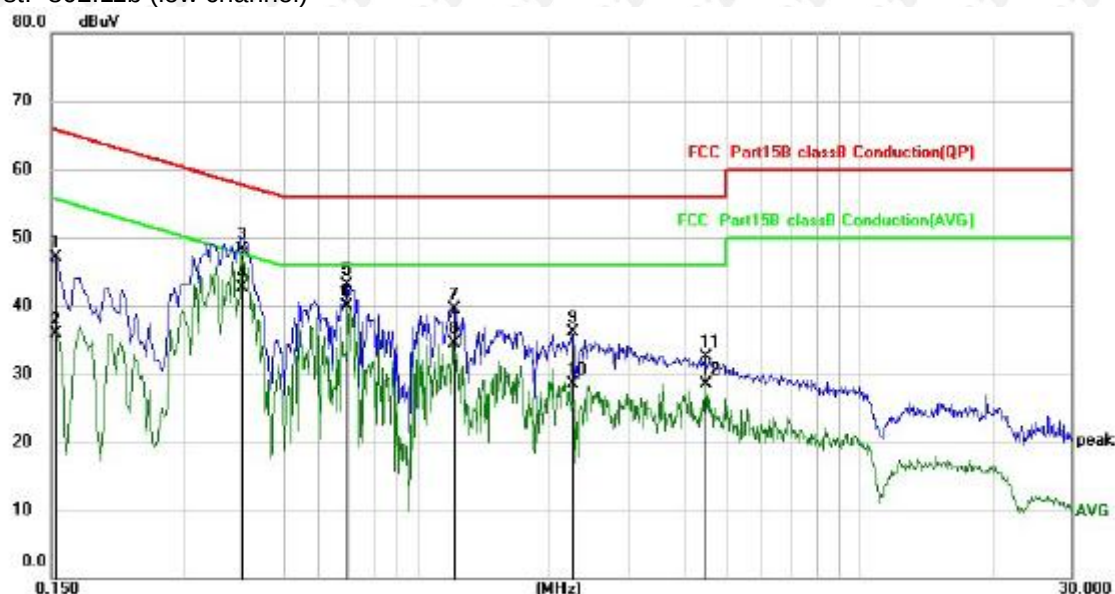

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1539	36.20	10.88	47.08	65.79	-18.71	QP
2		0.1539	25.10	10.88	35.98	55.79	-19.81	AVG
3		0.4020	37.74	10.57	48.31	57.81	-9.50	QP
4	*	0.4020	32.09	10.57	42.66	47.81	-5.15	AVG
5		0.6940	32.32	10.71	43.03	56.00	-12.97	QP
6		0.6940	29.20	10.71	39.91	46.00	-6.09	AVG
7		1.2100	28.50	11.08	39.58	56.00	-16.42	QP
8		1.2100	23.48	11.08	34.56	46.00	-11.44	AVG
9		2.2380	24.51	11.63	36.14	56.00	-19.86	QP
10		2.2380	16.82	11.63	28.45	46.00	-17.55	AVG
11		4.4980	20.28	12.13	32.41	56.00	-23.59	QP
12		4.4980	16.46	12.13	28.59	46.00	-17.41	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

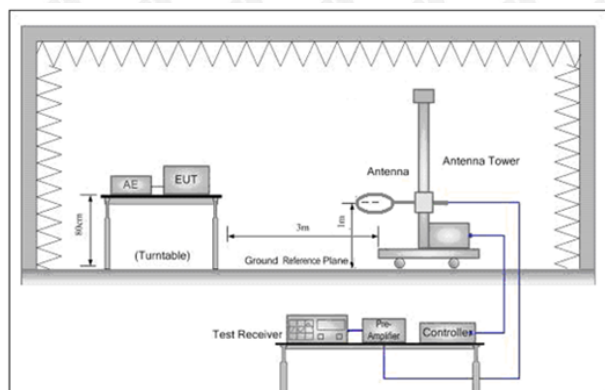


Figure 1. Below 30MHz

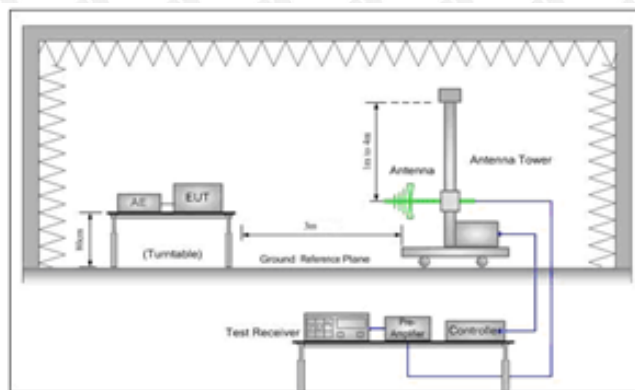


Figure 2. 30MHz to 1GHz

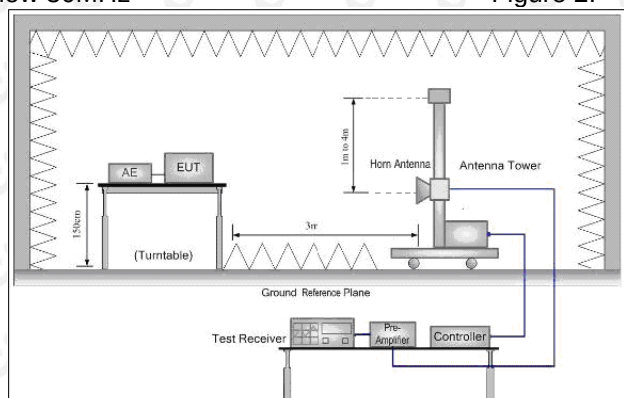


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i. Repeat above procedures until all frequencies measured was complete.


Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:


Antenna polarity: H

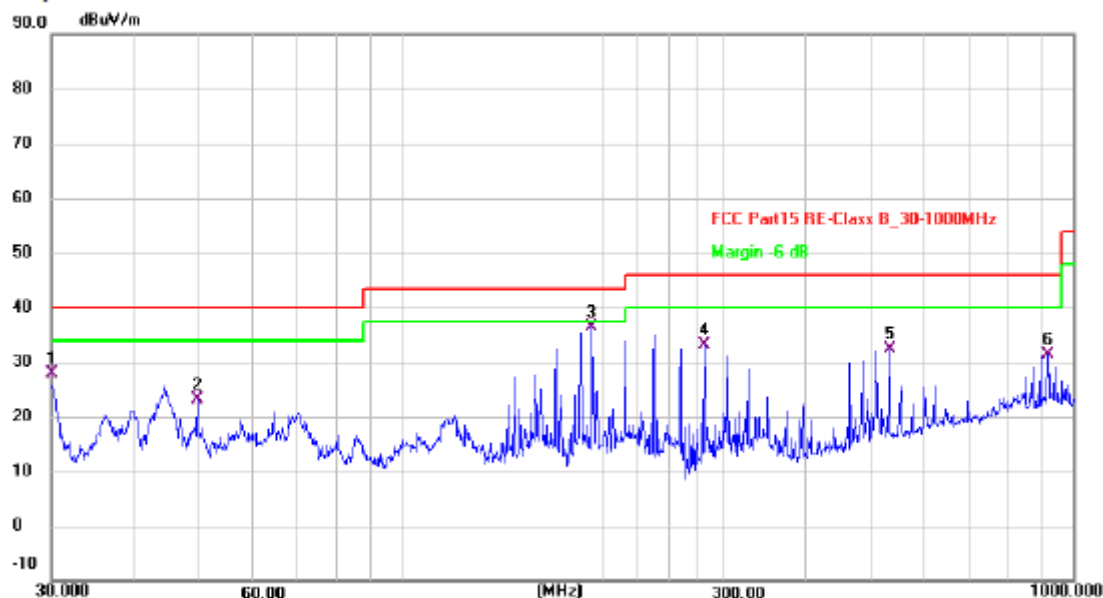

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.0000	40.69	-12.93	27.76	40.00	-12.24	QP
2	49.5328	37.70	-14.49	23.21	40.00	-16.79	QP
3 *	191.7450	53.28	-16.98	36.30	43.50	-7.20	QP
4	281.9945	47.96	-14.72	33.24	46.00	-12.76	QP
5	531.9633	40.77	-8.38	32.39	46.00	-13.61	QP
6	916.0684	31.71	-0.37	31.34	46.00	-14.66	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

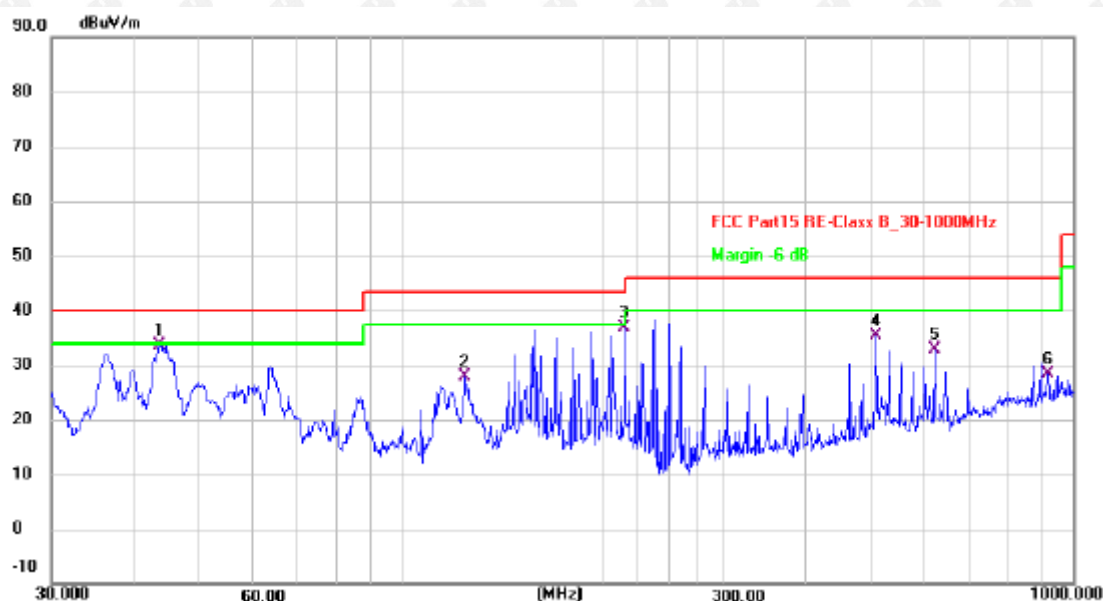

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	43.5056	47.03	-13.30	33.73	40.00	-6.27	QP
2	124.1330	43.48	-15.58	27.90	43.50	-15.60	QP
3	214.5141	53.77	-16.86	36.91	43.50	-6.59	QP
4	508.2581	44.46	-9.04	35.42	46.00	-10.58	QP
5	622.8900	39.20	-6.23	32.97	46.00	-13.03	QP
6	916.0684	28.63	-0.37	28.26	46.00	-17.74	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.42	-3.64	60.78	74	-13.22	peak
4824	49.50	-3.64	45.86	54	-8.14	AVG
7236	56.86	-0.95	55.91	74	-18.09	peak
7236	44.81	-0.95	43.86	54	-10.14	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.88	-3.64	63.24	74	-10.76	peak
4824	49.63	-3.64	45.99	54	-8.01	AVG
7236	56.63	-0.95	55.68	74	-18.32	peak
7236	43.69	-0.95	42.74	54	-11.26	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	66.38	-3.51	62.87	74	-11.13	peak
4874	49.33	-3.51	45.82	54	-8.18	AVG
7311	57.98	-0.82	57.16	74	-16.84	peak
7311	45.06	-0.82	44.24	54	-9.76	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.68	-3.51	61.17	74	-12.83	peak
4874	48.27	-3.51	44.76	54	-9.24	AVG
7311	59.34	-0.82	58.52	74	-15.48	peak
7311	43.45	-0.82	42.63	54	-11.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.18	-3.43	60.75	74	-13.25	peak
4924	47.21	-3.43	43.78	54	-10.22	AVG
7386	57.83	-0.75	57.08	74	-16.92	peak
7386	43.21	-0.75	42.46	54	-11.54	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.04	-3.43	59.61	74	-14.39	peak
4924	46.15	-3.43	42.72	54	-11.28	AVG
7386	59.06	-0.75	58.31	74	-15.69	peak
7386	43.90	-0.75	43.15	54	-10.85	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.82	-3.64	60.18	74	-13.82	peak
4824	49.68	-3.64	46.04	54	-7.96	AVG
7236	57.12	-0.95	56.17	74	-17.83	peak
7236	46.80	-0.95	45.85	54	-8.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.65	-3.64	60.01	74	-13.99	peak
4824	49.06	-3.64	45.42	54	-8.58	AVG
7236	59.71	-0.95	58.76	74	-15.24	peak
7236	44.40	-0.95	43.45	54	-10.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.80	-3.51	60.29	74	-13.71	peak
4874	46.98	-3.51	43.47	54	-10.53	AVG
7311	59.12	-0.82	58.30	74	-15.70	peak
7311	43.76	-0.82	42.94	54	-11.06	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.20	-3.51	60.69	74	-13.31	peak
4874	46.98	-3.51	43.47	54	-10.53	AVG
7311	57.25	-0.82	56.43	74	-17.57	peak
7311	41.26	-0.82	40.44	54	-13.56	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.79	-3.43	60.36	74	-13.64	peak
4924	47.29	-3.43	43.86	54	-10.14	AVG
7386	57.73	-0.75	56.98	74	-17.02	peak
7386	41.97	-0.75	41.22	54	-12.78	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.07	-3.43	58.64	74	-15.36	peak
4924	47.98	-3.43	44.55	54	-9.45	AVG
7386	57.32	-0.75	56.57	74	-17.43	peak
7386	41.24	-0.75	40.49	54	-13.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz。

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.47	-3.64	60.83	74	-13.17	peak
4824	47.81	-3.64	44.17	54	-9.83	AVG
7236	58.94	-0.95	57.99	74	-16.01	peak
7236	44.43	-0.95	43.48	54	-10.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.91	-3.64	60.27	74	-13.73	peak
4824	50.62	-3.64	46.98	54	-7.02	AVG
7236	60.25	-0.95	59.30	74	-14.70	peak
7236	42.22	-0.95	41.27	54	-12.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.86	-3.51	60.35	74.00	-13.65	peak
4874.00	48.17	-3.51	44.66	54.00	-9.34	AVG
7311.00	59.79	-0.82	58.97	74.00	-15.03	peak
7311.00	43.40	-0.82	42.58	54.00	-11.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.43	-3.51	58.92	74.00	-15.08	peak
4874.00	47.61	-3.51	44.10	54.00	-9.90	AVG
7311.00	57.94	-0.82	57.12	74.00	-16.88	peak
7311.00	42.31	-0.82	41.49	54.00	-12.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.36	-3.43	59.93	74	-14.07	peak
4924	46.69	-3.43	43.26	54	-10.74	AVG
7386	58.34	-0.75	57.59	74	-16.41	peak
7386	42.33	-0.75	41.58	54	-12.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.62	-3.43	62.19	74	-11.81	peak
4924	46.46	-3.43	43.03	54	-10.97	AVG
7386	57.27	-0.75	56.52	74	-17.48	peak
7386	43.37	-0.75	42.62	54	-11.38	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.82	-3.63	62.19	74	-11.81	peak
4844	47.06	-3.63	43.43	54	-10.57	AVG
7266	59.32	-0.94	58.38	74	-15.62	peak
7266	44.35	-0.94	43.41	54	-10.59	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.65	-3.63	62.02	74	-11.98	peak
4844	49.10	-3.63	45.47	54	-8.53	AVG
7266	59.55	-0.94	58.61	74	-15.39	peak
7266	45.69	-0.94	44.75	54	-9.25	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.49	-3.51	60.98	74	-13.02	peak
4874	48.90	-3.51	45.39	54	-8.61	AVG
7311	58.29	-0.82	57.47	74	-16.53	peak
7311	45.83	-0.82	45.01	54	-8.99	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.29	-3.51	58.78	74	-15.22	peak
4874	46.51	-3.51	43.00	54	-11.00	AVG
7311	56.67	-0.82	55.85	74	-18.15	peak
7311	43.33	-0.82	42.51	54	-11.49	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	63.65	-3.43	60.22	74	-13.78	peak
4904	49.30	-3.43	45.87	54	-8.13	AVG
7356	56.49	-0.75	55.74	74	-18.26	peak
7356	42.35	-0.75	41.60	54	-12.40	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.31	-3.43	60.88	74	-13.12	peak
4904	47.13	-3.43	43.70	54	-10.30	AVG
7356	58.00	-0.75	57.25	74	-16.75	peak
7356	43.40	-0.75	42.65	54	-11.35	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.74	-5.81	51.93	74	-22.07	
2390	/	-5.81	/	54	/	AVG
2399	65.02	-5.84	59.18	74	-14.82	peak
2399	48.24	-5.84	42.40	54	-11.60	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	56.45	-5.81	50.64	74	-23.36	
2390	/	-5.81	/	54	/	AVG
2399	62.66	-5.84	56.82	74	-17.18	peak
2399	46.78	-5.84	40.94	54	-13.06	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.97	-5.65	50.32	74	-23.68	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.48	-5.65	49.83	74	-24.17	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.64	-5.81	53.83	74	-20.17	peak
2390	/	-5.81	/	54	/	AVG
2399	63.10	-5.84	57.26	74	-16.74	peak
2399	47.56	-5.84	41.72	54	-12.28	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.02	-5.81	50.21	74	-23.79	peak
2390	/	-5.81	/	54	/	AVG
2399	61.52	-5.84	55.68	74	-18.32	peak
2399	46.36	-5.84	40.52	54	-13.48	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.92	-5.65	52.27	74	-21.73	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.03	-5.65	52.38	74	-21.62	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.38	-5.81	51.57	74	-22.43	peak
2390	/	-5.81	/	54	/	AVG
2399	62.72	-5.84	56.88	74	-17.12	peak
2399	48.65	-5.84	42.81	54	-11.19	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.63	-5.81	51.82	74	-22.18	peak
2390	/	-5.81	/	54	/	AVG
2399	59.85	-5.84	54.01	74	-19.99	peak
2399	47.54	-5.84	41.70	54	-12.30	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.47	-5.65	51.82	74	-22.18	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.25	-5.65	50.60	74	-23.40	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.88	-5.81	53.07	74	-20.93	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.94	-5.81	52.13	74	-21.87	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.88	-5.65	52.23	74	-21.77	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						


Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.32	-5.65	50.67	74	-23.33	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

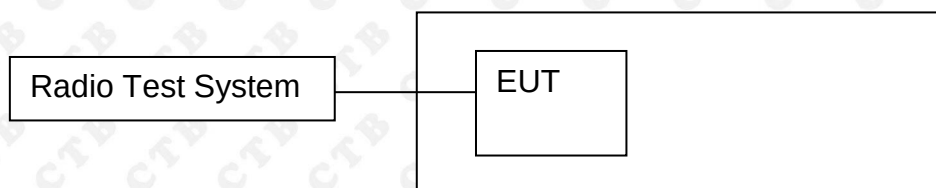


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100KHz, VBW = 300KHz, Sweep = auto
 - Detector function = peak, Trace = max hold

8.4 Test Result

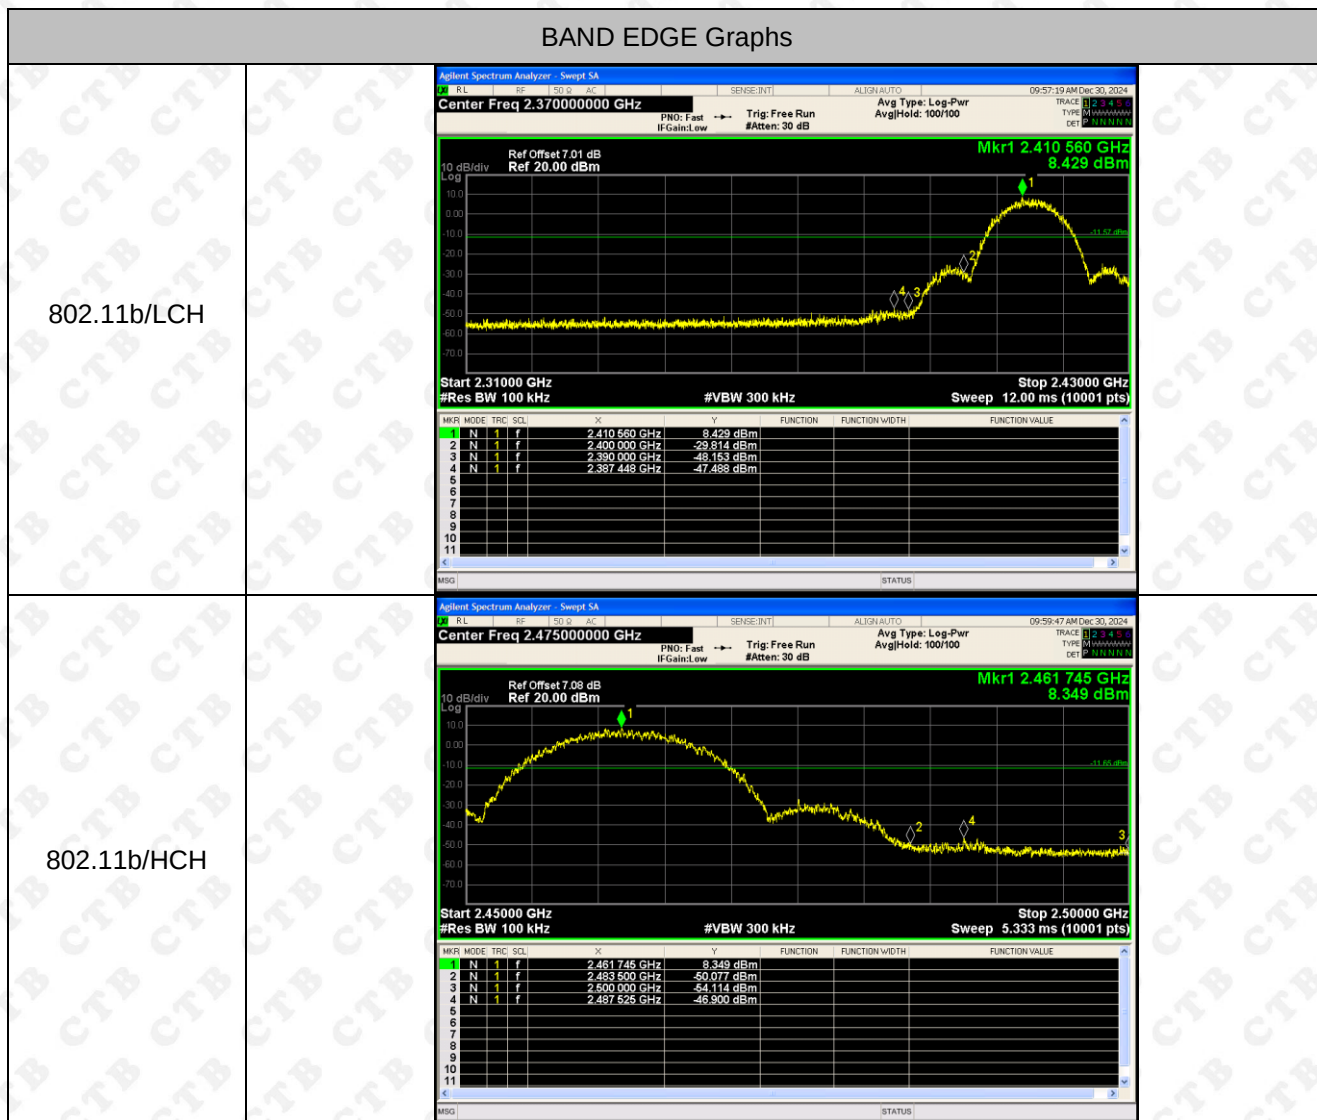



BAND EDGE Graphs


802.11g/LCH

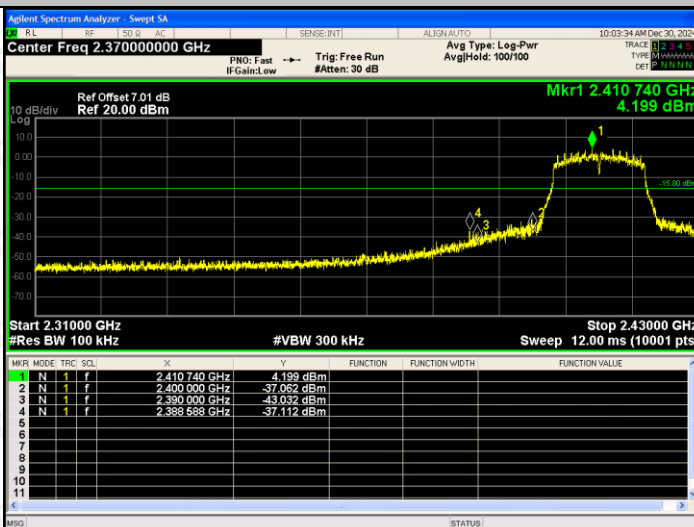

802.11g/HCH

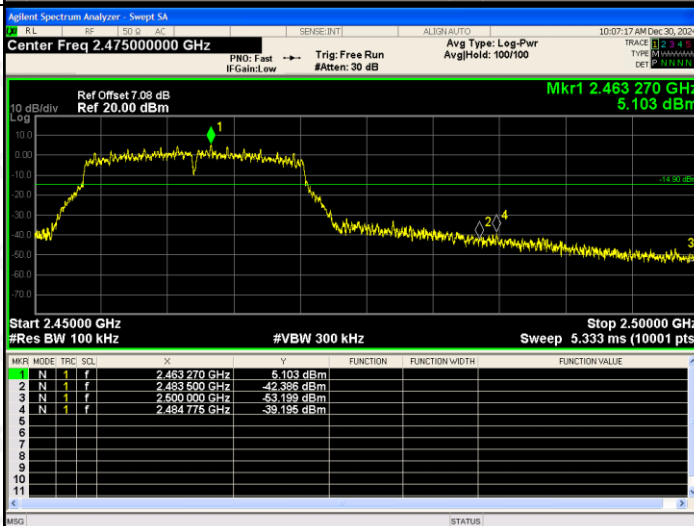


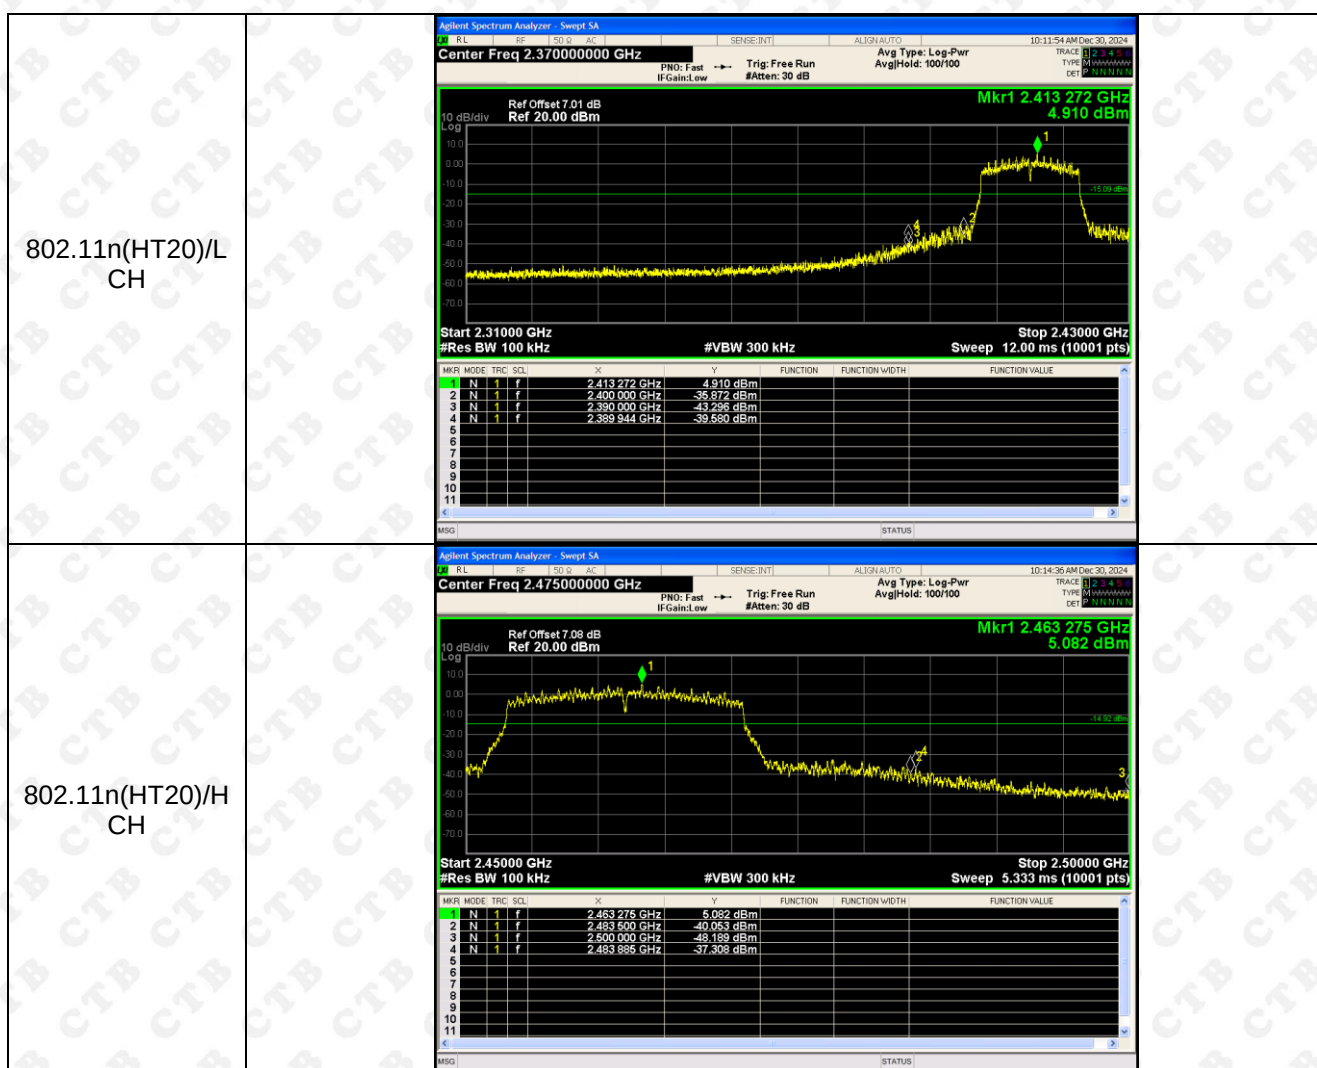

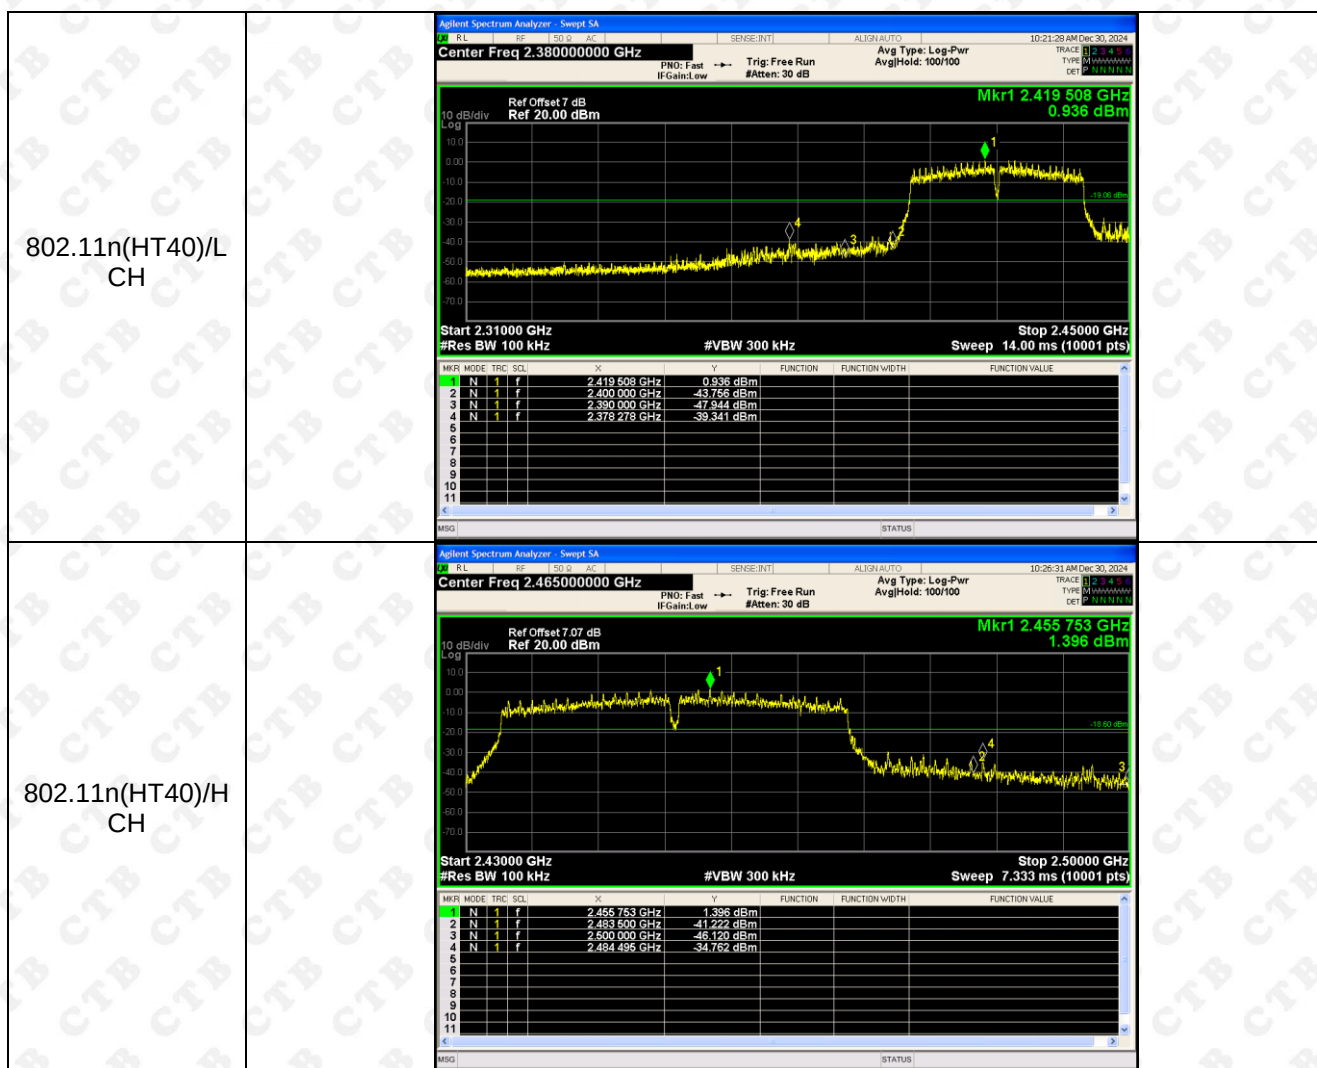


RF Conducted Spurious Emissions Graphs


802.11b/LCH

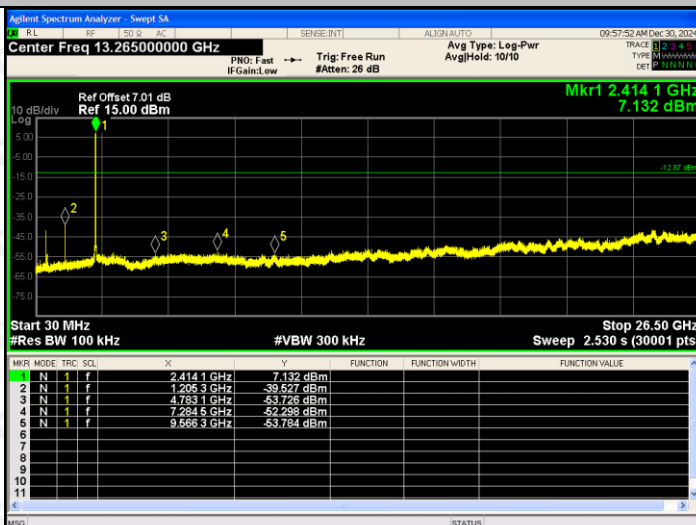

802.11b/MCH

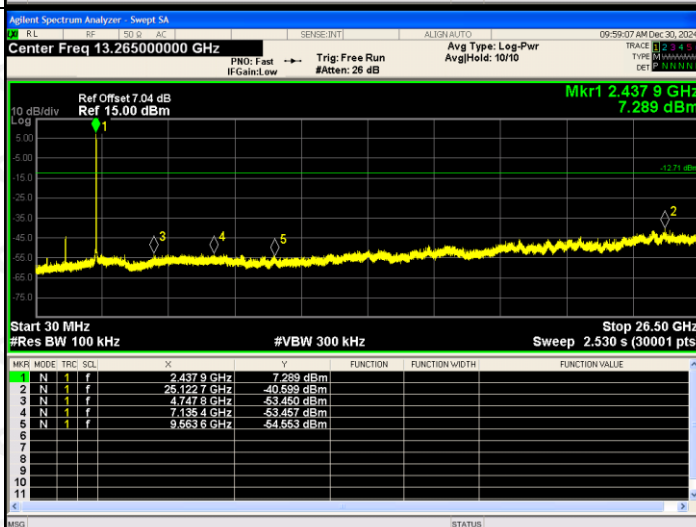


802.11b/HCH

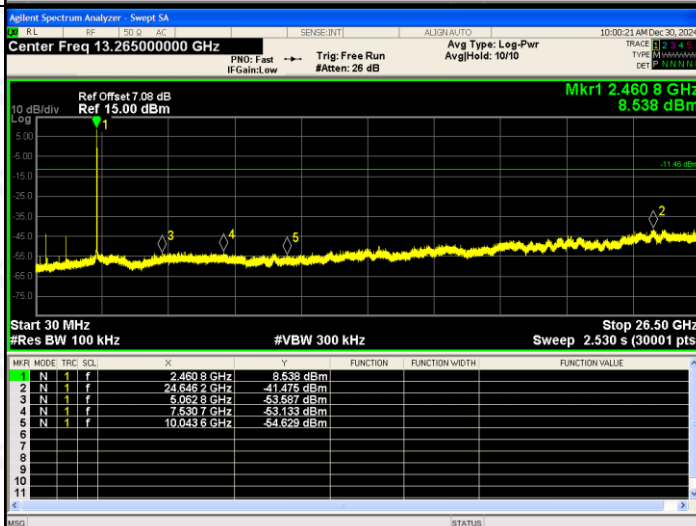


RF Conducted Spurious Emissions Graphs


802.11g/LCH

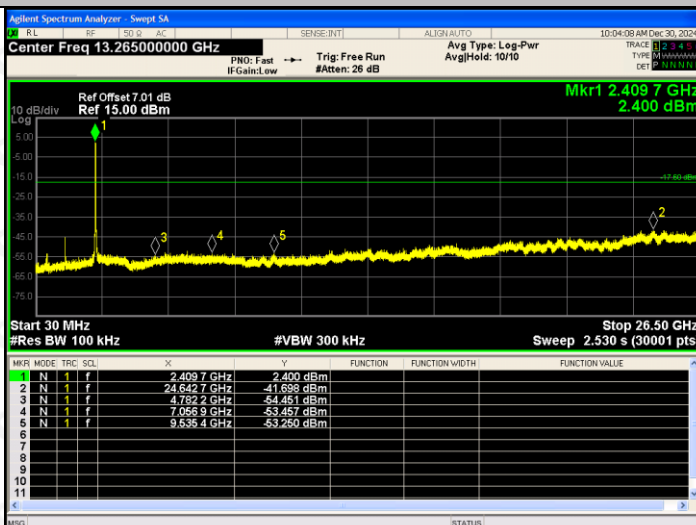

802.11g/MCH

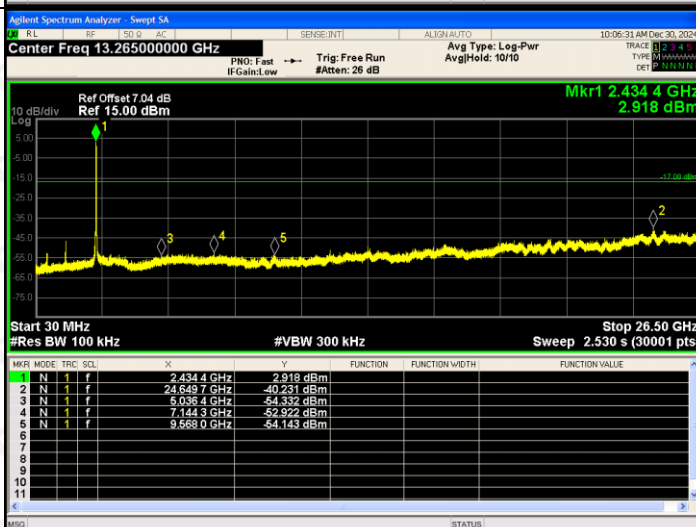


802.11g/HCH

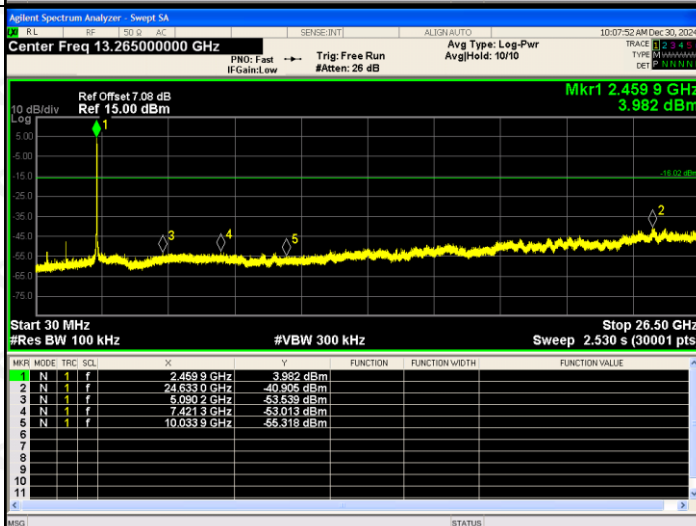


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

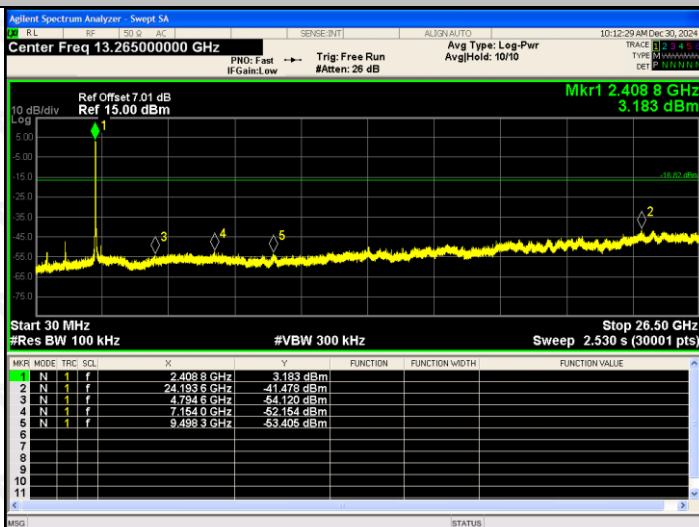

802.11 n(HT20)/MCH

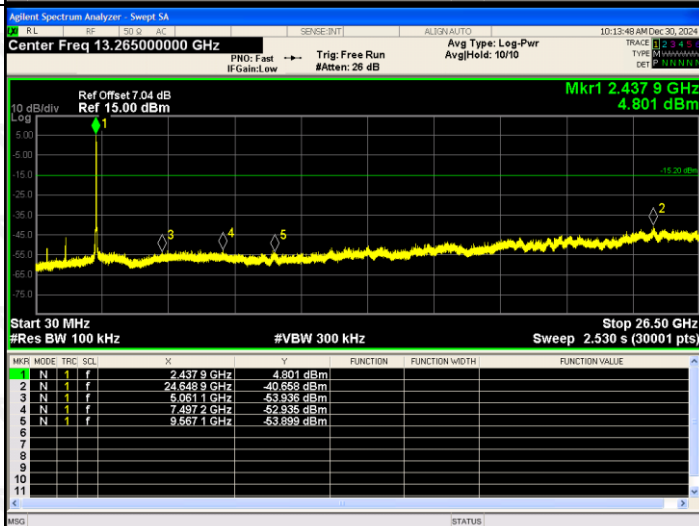

802.11 n(HT20)/HCH

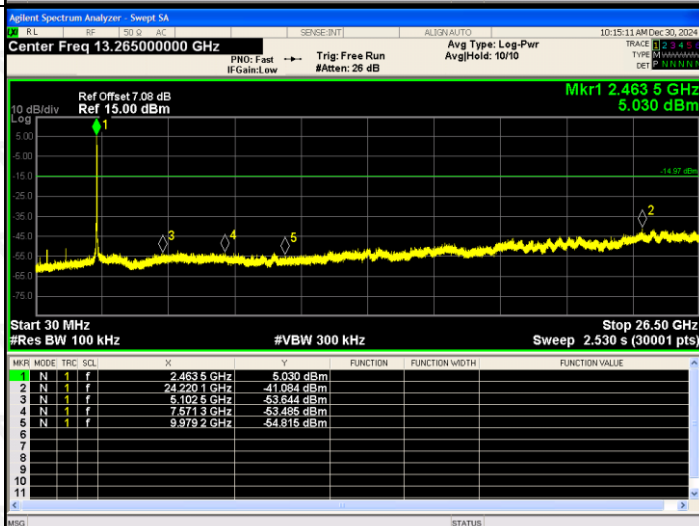

802.11n(HT40)/LCH	Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 10:22:08 AM Dec 30, 2024 TRACE 1: 2.4247 GHz TYPE: M DET: P 10 dB/div Log Ref Offset 7 dB Ref 15.00 dBm Mkr1 2.4247 GHz 0.523 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4247 GHz</td><td>0.523 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.643 GHz</td><td>-40.456 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.764 GHz</td><td>-24.562 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.420 GHz</td><td>-52.776 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.571 GHz</td><td>-54.132 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSG STATUS <tr><td>802.11 n(HT40)/MCH</td><td> Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 10:23:25 AM Dec 30, 2024 TRACE 1: 2.4335 GHz TYPE: M DET: P 10 dB/div Log Ref Offset 7.04 dB Ref 15.00 dBm Mkr1 2.4335 GHz -0.309 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4335 GHz</td><td>-0.309 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.633 GHz</td><td>-41.177 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.933 GHz</td><td>-24.749 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.287 GHz</td><td>-53.366 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.569 GHz</td><td>-53.333 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSG STATUS <tr><td>802.11 n(HT40)/HCH</td><td> Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 10:27:08 AM Dec 30, 2024 TRACE 1: 2.4547 GHz TYPE: M DET: P 10 dB/div Log Ref Offset 7.07 dB Ref 15.00 dBm Mkr1 2.4547 GHz 1.519 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4547 GHz</td><td>1.519 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.537 GHz</td><td>-40.704 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.098 GHz</td><td>-53.914 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.203 GHz</td><td>-52.721 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.628 GHz</td><td>-52.921 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSG STATUS </td></tr></td></tr>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4247 GHz	0.523 dBm				2	N	1	f	24.643 GHz	-40.456 dBm				3	N	1	f	4.764 GHz	-24.562 dBm				4	N	1	f	7.420 GHz	-52.776 dBm				5	N	1	f	9.571 GHz	-54.132 dBm				6									7									8									9									10									11									802.11 n(HT40)/MCH	Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 10:23:25 AM Dec 30, 2024 TRACE 1: 2.4335 GHz TYPE: M DET: P 10 dB/div Log Ref Offset 7.04 dB Ref 15.00 dBm Mkr1 2.4335 GHz -0.309 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4335 GHz</td><td>-0.309 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.633 GHz</td><td>-41.177 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.933 GHz</td><td>-24.749 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.287 GHz</td><td>-53.366 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.569 GHz</td><td>-53.333 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSG STATUS <tr><td>802.11 n(HT40)/HCH</td><td> Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 10:27:08 AM Dec 30, 2024 TRACE 1: 2.4547 GHz TYPE: M DET: P 10 dB/div Log Ref Offset 7.07 dB Ref 15.00 dBm Mkr1 2.4547 GHz 1.519 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4547 GHz</td><td>1.519 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.537 GHz</td><td>-40.704 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.098 GHz</td><td>-53.914 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.203 GHz</td><td>-52.721 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.628 GHz</td><td>-52.921 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSG STATUS </td></tr>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4335 GHz	-0.309 dBm				2	N	1	f	24.633 GHz	-41.177 dBm				3	N	1	f	4.933 GHz	-24.749 dBm				4	N	1	f	7.287 GHz	-53.366 dBm				5	N	1	f	9.569 GHz	-53.333 dBm				6									7									8									9									10									11									802.11 n(HT40)/HCH	Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 10:27:08 AM Dec 30, 2024 TRACE 1: 2.4547 GHz TYPE: M DET: P 10 dB/div Log Ref Offset 7.07 dB Ref 15.00 dBm Mkr1 2.4547 GHz 1.519 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4547 GHz</td><td>1.519 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.537 GHz</td><td>-40.704 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.098 GHz</td><td>-53.914 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.203 GHz</td><td>-52.721 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.628 GHz</td><td>-52.921 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSG STATUS	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4547 GHz	1.519 dBm				2	N	1	f	24.537 GHz	-40.704 dBm				3	N	1	f	5.098 GHz	-53.914 dBm				4	N	1	f	7.203 GHz	-52.721 dBm				5	N	1	f	9.628 GHz	-52.921 dBm				6									7									8									9									10									11								
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																																																																																																																																																																																																																																																	
1	N	1	f	2.4247 GHz	0.523 dBm																																																																																																																																																																																																																																																																																																																																				
2	N	1	f	24.643 GHz	-40.456 dBm																																																																																																																																																																																																																																																																																																																																				
3	N	1	f	4.764 GHz	-24.562 dBm																																																																																																																																																																																																																																																																																																																																				
4	N	1	f	7.420 GHz	-52.776 dBm																																																																																																																																																																																																																																																																																																																																				
5	N	1	f	9.571 GHz	-54.132 dBm																																																																																																																																																																																																																																																																																																																																				
6																																																																																																																																																																																																																																																																																																																																									
7																																																																																																																																																																																																																																																																																																																																									
8																																																																																																																																																																																																																																																																																																																																									
9																																																																																																																																																																																																																																																																																																																																									
10																																																																																																																																																																																																																																																																																																																																									
11																																																																																																																																																																																																																																																																																																																																									
802.11 n(HT40)/MCH	Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 10:23:25 AM Dec 30, 2024 TRACE 1: 2.4335 GHz TYPE: M DET: P 10 dB/div Log Ref Offset 7.04 dB Ref 15.00 dBm Mkr1 2.4335 GHz -0.309 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4335 GHz</td><td>-0.309 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.633 GHz</td><td>-41.177 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.933 GHz</td><td>-24.749 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.287 GHz</td><td>-53.366 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.569 GHz</td><td>-53.333 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSG STATUS <tr><td>802.11 n(HT40)/HCH</td><td> Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 10:27:08 AM Dec 30, 2024 TRACE 1: 2.4547 GHz TYPE: M DET: P 10 dB/div Log Ref Offset 7.07 dB Ref 15.00 dBm Mkr1 2.4547 GHz 1.519 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4547 GHz</td><td>1.519 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.537 GHz</td><td>-40.704 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.098 GHz</td><td>-53.914 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.203 GHz</td><td>-52.721 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.628 GHz</td><td>-52.921 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSG STATUS </td></tr>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4335 GHz	-0.309 dBm				2	N	1	f	24.633 GHz	-41.177 dBm				3	N	1	f	4.933 GHz	-24.749 dBm				4	N	1	f	7.287 GHz	-53.366 dBm				5	N	1	f	9.569 GHz	-53.333 dBm				6									7									8									9									10									11									802.11 n(HT40)/HCH	Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 10:27:08 AM Dec 30, 2024 TRACE 1: 2.4547 GHz TYPE: M DET: P 10 dB/div Log Ref Offset 7.07 dB Ref 15.00 dBm Mkr1 2.4547 GHz 1.519 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4547 GHz</td><td>1.519 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.537 GHz</td><td>-40.704 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.098 GHz</td><td>-53.914 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.203 GHz</td><td>-52.721 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.628 GHz</td><td>-52.921 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSG STATUS	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4547 GHz	1.519 dBm				2	N	1	f	24.537 GHz	-40.704 dBm				3	N	1	f	5.098 GHz	-53.914 dBm				4	N	1	f	7.203 GHz	-52.721 dBm				5	N	1	f	9.628 GHz	-52.921 dBm				6									7									8									9									10									11																																																																																																																						
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																																																																																																																																																																																																																																																	
1	N	1	f	2.4335 GHz	-0.309 dBm																																																																																																																																																																																																																																																																																																																																				
2	N	1	f	24.633 GHz	-41.177 dBm																																																																																																																																																																																																																																																																																																																																				
3	N	1	f	4.933 GHz	-24.749 dBm																																																																																																																																																																																																																																																																																																																																				
4	N	1	f	7.287 GHz	-53.366 dBm																																																																																																																																																																																																																																																																																																																																				
5	N	1	f	9.569 GHz	-53.333 dBm																																																																																																																																																																																																																																																																																																																																				
6																																																																																																																																																																																																																																																																																																																																									
7																																																																																																																																																																																																																																																																																																																																									
8																																																																																																																																																																																																																																																																																																																																									
9																																																																																																																																																																																																																																																																																																																																									
10																																																																																																																																																																																																																																																																																																																																									
11																																																																																																																																																																																																																																																																																																																																									
802.11 n(HT40)/HCH	Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz PN0: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 10:27:08 AM Dec 30, 2024 TRACE 1: 2.4547 GHz TYPE: M DET: P 10 dB/div Log Ref Offset 7.07 dB Ref 15.00 dBm Mkr1 2.4547 GHz 1.519 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4547 GHz</td><td>1.519 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.537 GHz</td><td>-40.704 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.098 GHz</td><td>-53.914 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.203 GHz</td><td>-52.721 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.628 GHz</td><td>-52.921 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSG STATUS	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4547 GHz	1.519 dBm				2	N	1	f	24.537 GHz	-40.704 dBm				3	N	1	f	5.098 GHz	-53.914 dBm				4	N	1	f	7.203 GHz	-52.721 dBm				5	N	1	f	9.628 GHz	-52.921 dBm				6									7									8									9									10									11																																																																																																																																																																																																																																				
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																																																																																																																																																																																																																																																	
1	N	1	f	2.4547 GHz	1.519 dBm																																																																																																																																																																																																																																																																																																																																				
2	N	1	f	24.537 GHz	-40.704 dBm																																																																																																																																																																																																																																																																																																																																				
3	N	1	f	5.098 GHz	-53.914 dBm																																																																																																																																																																																																																																																																																																																																				
4	N	1	f	7.203 GHz	-52.721 dBm																																																																																																																																																																																																																																																																																																																																				
5	N	1	f	9.628 GHz	-52.921 dBm																																																																																																																																																																																																																																																																																																																																				
6																																																																																																																																																																																																																																																																																																																																									
7																																																																																																																																																																																																																																																																																																																																									
8																																																																																																																																																																																																																																																																																																																																									
9																																																																																																																																																																																																																																																																																																																																									
10																																																																																																																																																																																																																																																																																																																																									
11																																																																																																																																																																																																																																																																																																																																									

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
802.11b	LCH	23.289	30	PASS
	MCH	23.122	30	PASS
	HCH	23.465	30	PASS
802.11g	LCH	22.041	30	PASS
	MCH	21.834	30	PASS
	HCH	22.356	30	PASS
802.11n(HT20)	LCH	21.983	30	PASS
	MCH	21.597	30	PASS
	HCH	22.295	30	PASS
802.11n(HT40)	LCH	20.512	30	PASS
	MCH	20.423	30	PASS
	HCH	20.760	30	PASS

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

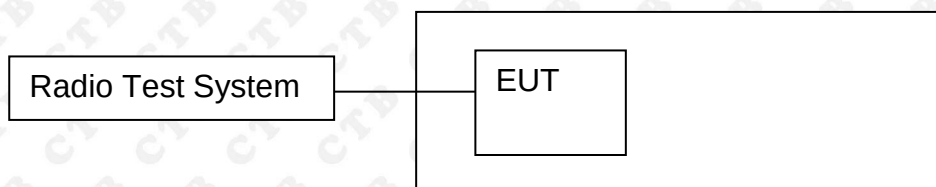

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	7.731	500	PASS
	MCH	7.695	500	PASS
	HCH	7.899	500	PASS
802.11g	LCH	15.121	500	PASS
	MCH	15.719	500	PASS
	HCH	15.125	500	PASS
802.11n(HT20)	LCH	16.018	500	PASS
	MCH	16.240	500	PASS
	HCH	15.125	500	PASS
802.11n(HT40)	LCH	35.149	500	PASS
	MCH	35.130	500	PASS
	HCH	35.093	500	PASS


Test Graph:




802.11g/LCH



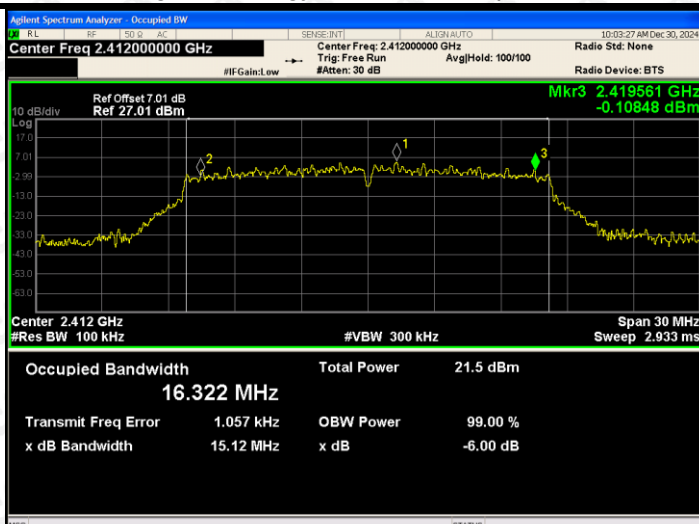





802.11g/MCH

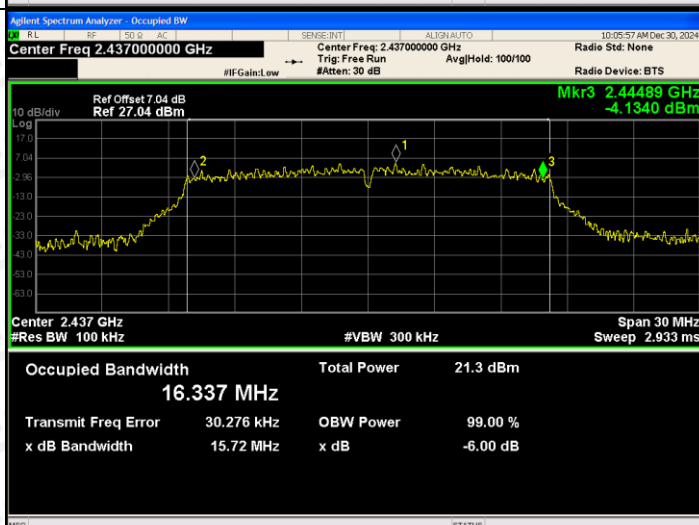

802.11g/HCH

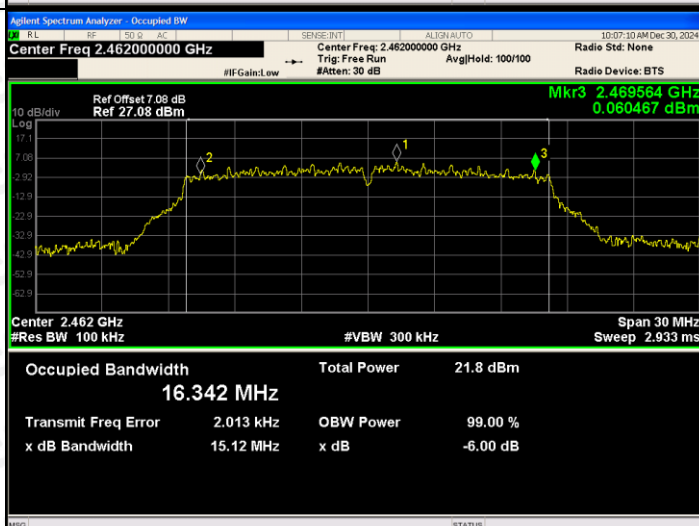


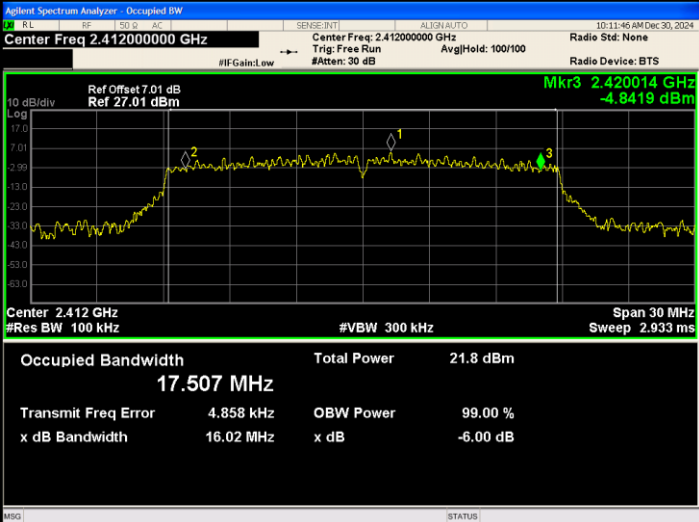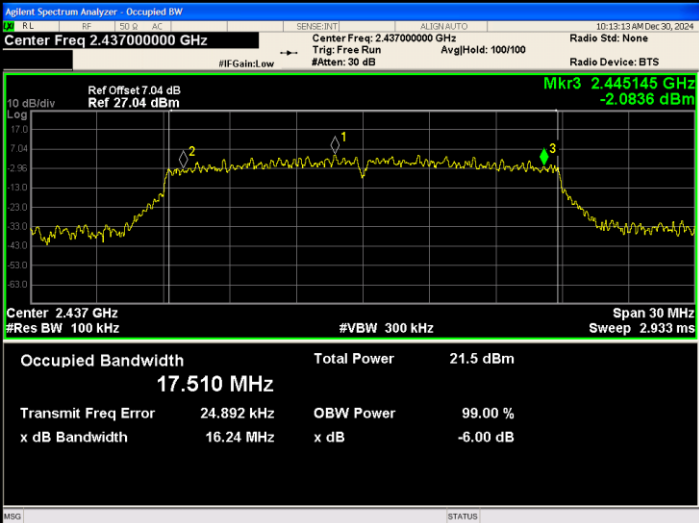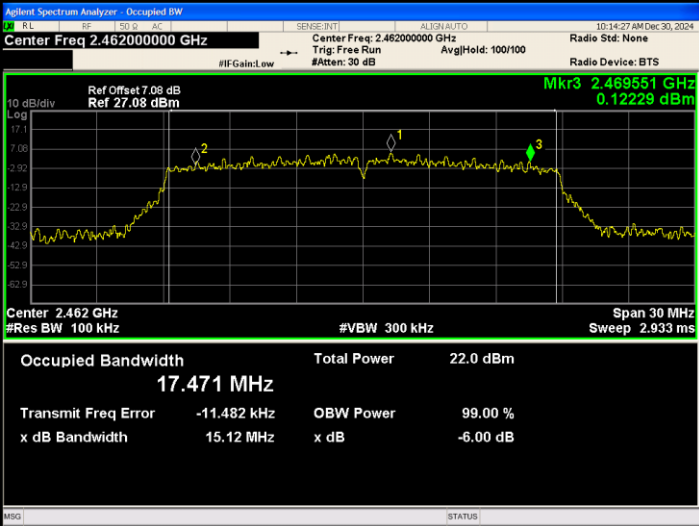802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.420014 GHz -4.8419 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.507 MHz Total Power 21.8 dBm Transmit Freq Error 4.858 kHz OBW Power 99.00 % x dB Bandwidth 16.02 MHz x dB -6.00 dB Radio Device: BTS
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.445145 GHz -2.0836 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.510 MHz Total Power 21.5 dBm Transmit Freq Error 24.892 kHz OBW Power 99.00 % x dB Bandwidth 16.24 MHz x dB -6.00 dB Radio Device: BTS
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 7.08 dB Ref 27.08 dBm Mkr3 2.469551 GHz 0.12229 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.471 MHz Total Power 22.0 dBm Transmit Freq Error -11.482 kHz OBW Power 99.00 % x dB Bandwidth 15.12 MHz x dB -6.00 dB Radio Device: BTS

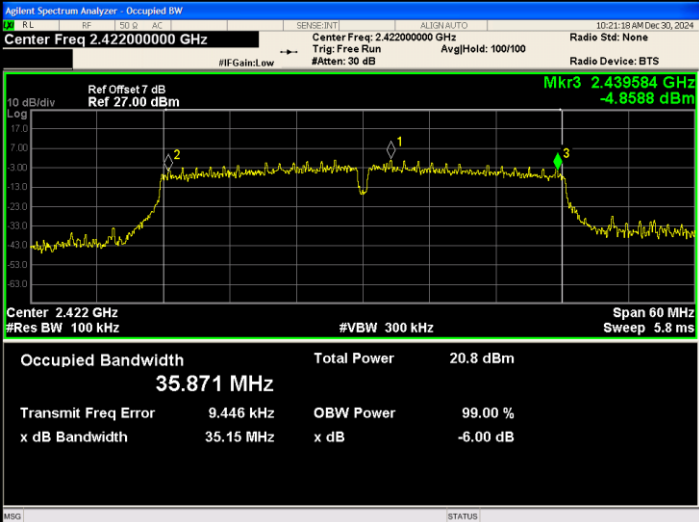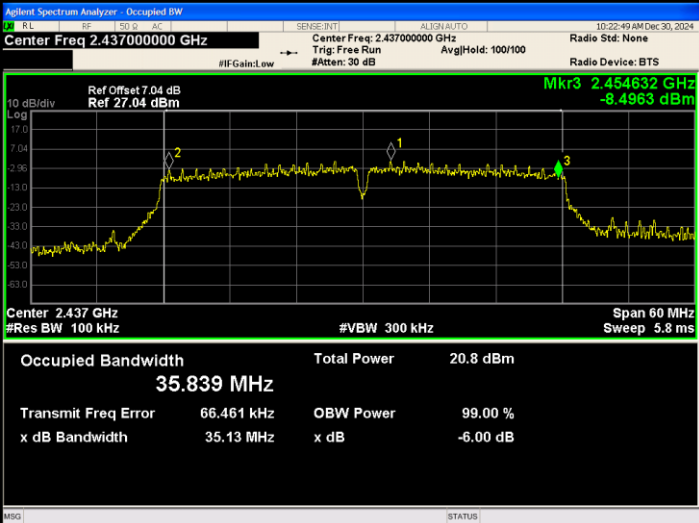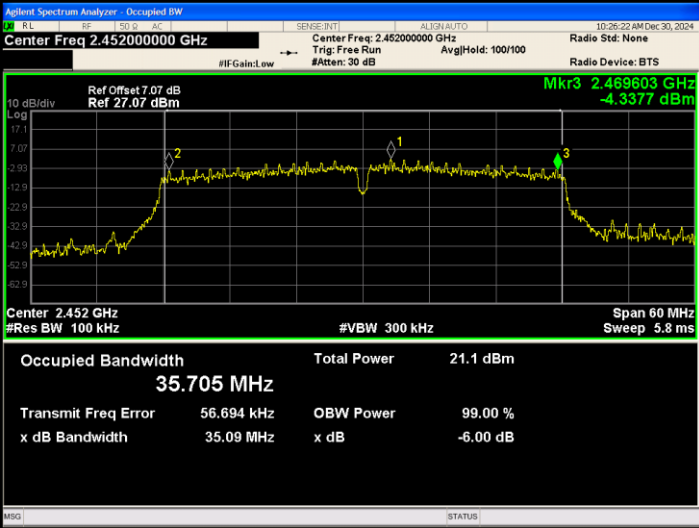802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.422000000 GHz Ref Offset 7 dB Ref 27.00 dBm Mkr3 2.439584 GHz -4.8588 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.871 MHz Total Power 20.8 dBm Transmit Freq Error 9.446 kHz OBW Power 99.00 % x dB Bandwidth 35.15 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.454632 GHz -8.4963 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.839 MHz Total Power 20.8 dBm Transmit Freq Error 66.461 kHz OBW Power 99.00 % x dB Bandwidth 35.13 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Ref Offset 7.07 dB Ref 27.07 dBm Mkr3 2.469603 GHz -4.3377 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.705 MHz Total Power 21.1 dBm Transmit Freq Error 56.694 kHz OBW Power 99.00 % x dB Bandwidth 35.09 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

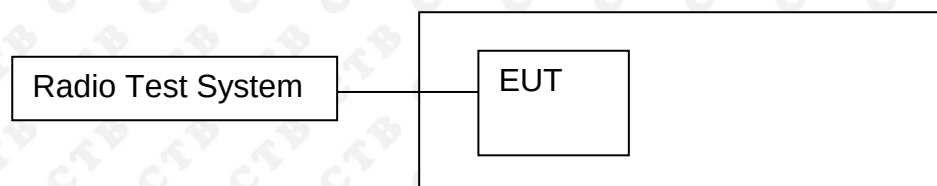

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


11.3 Test procedure


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.




11.4 Test Result




Mode	Channel.	Power Spectral Density [dBm /3KHz]	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	1.289	8	PASS
	MCH	-2.170	8	PASS
	HCH	0.548	8	PASS
802.11g	LCH	-9.836	8	PASS
	MCH	-11.422	8	PASS
	HCH	-10.988	8	PASS
802.11n(H T20)	LCH	-9.992	8	PASS
	MCH	-10.669	8	PASS
	HCH	-10.262	8	PASS
802.11n(H T40)	LCH	-14.337	8	PASS
	MCH	-13.858	8	PASS
	HCH	-13.293	8	PASS

Test Graph

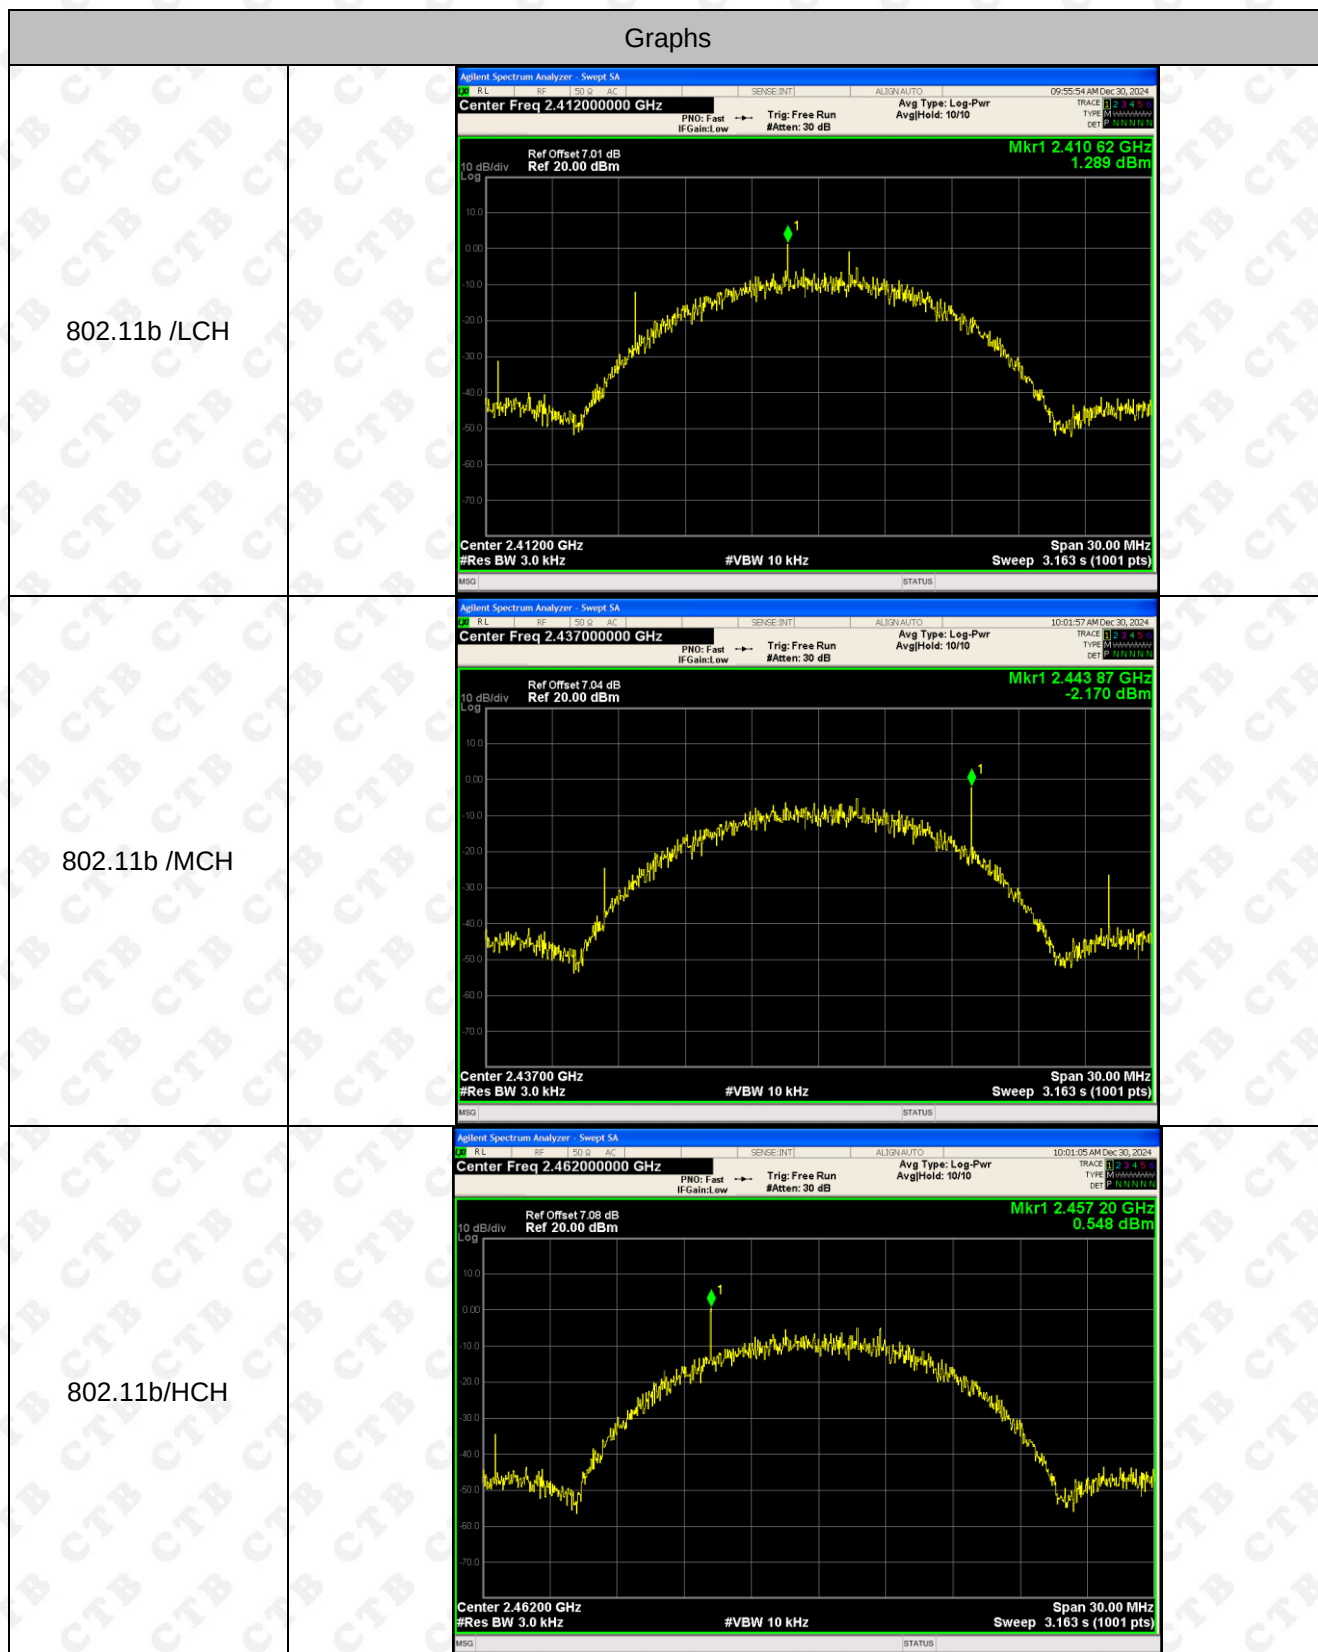

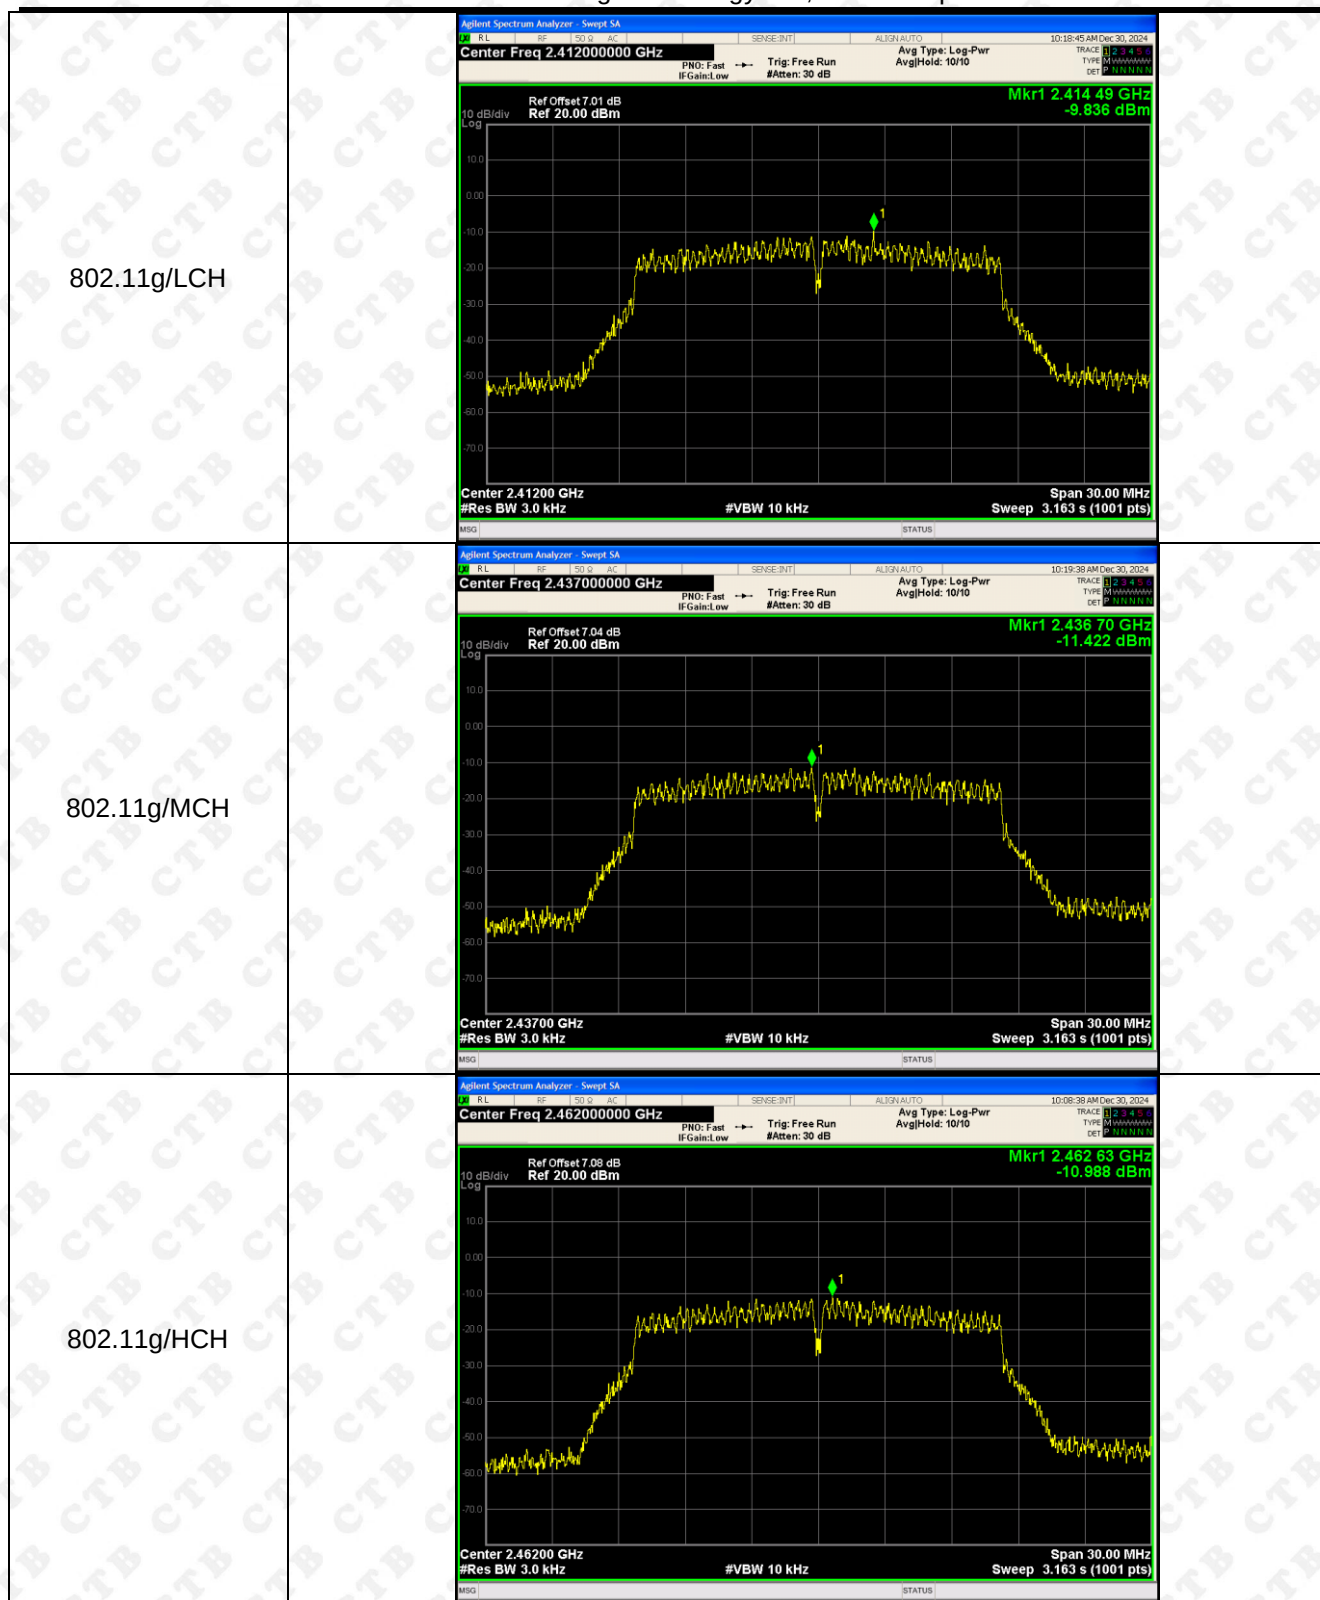

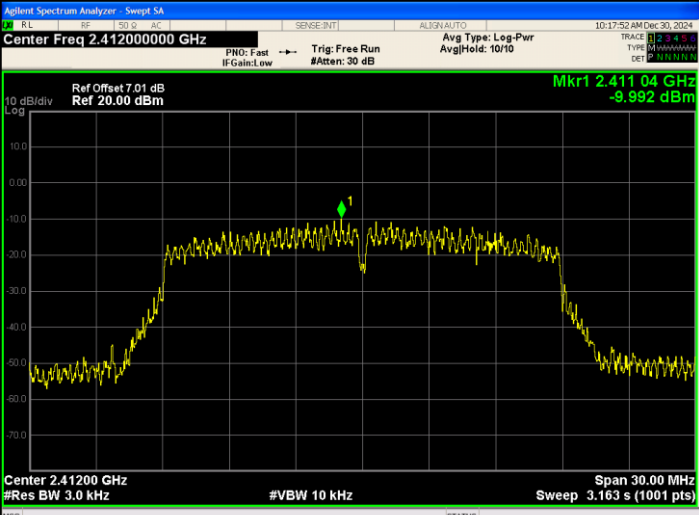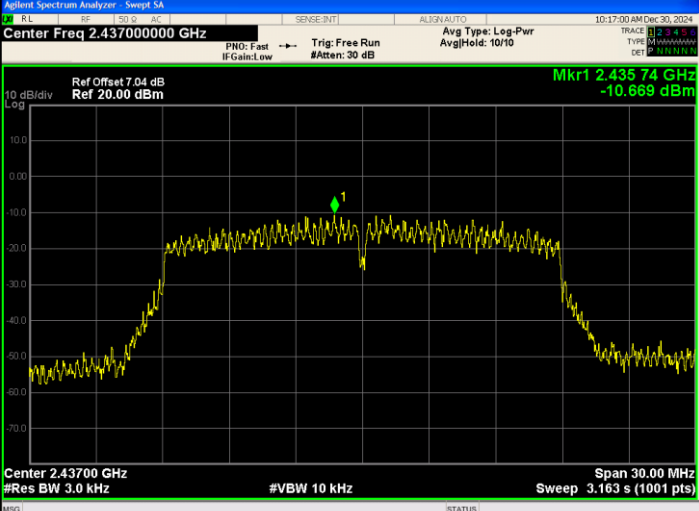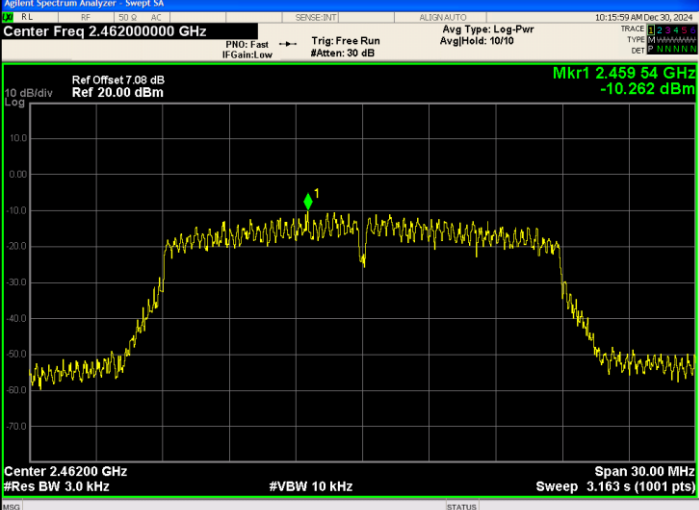802.11n(HT20)/LCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.411 04 GHz -9.992 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.435 74 GHz -10.669 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 7.08 dB Ref 20.00 dBm Mkr1 2.459 54 GHz -10.262 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

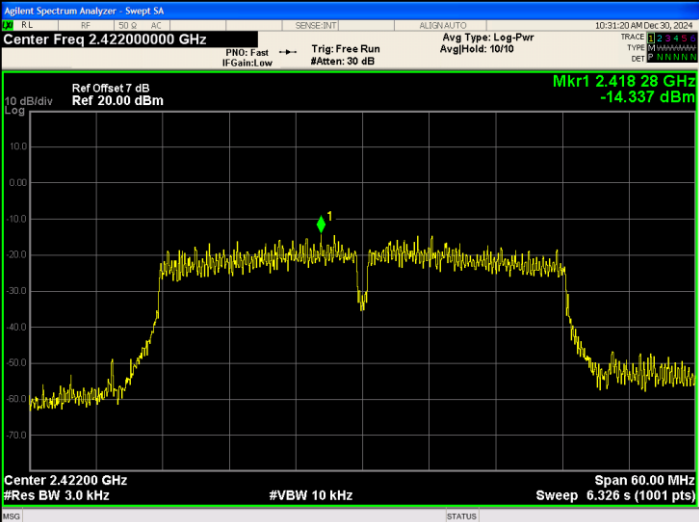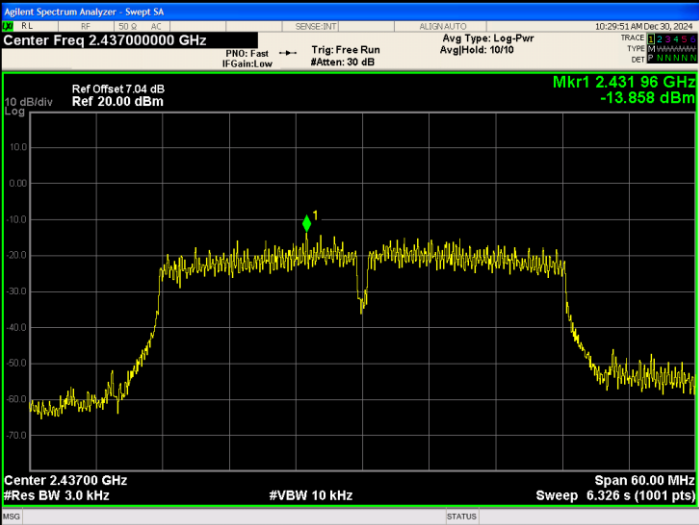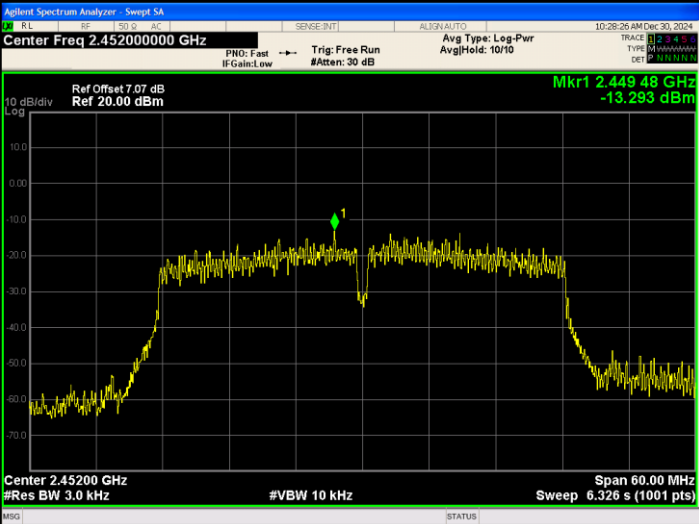802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.422000000 GHz Ref Offset 7.0 dB Ref 20.00 dBm Mkr1 2.41828 GHz -14.337 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.437000000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.43196 GHz -13.858 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.452000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.44948 GHz -13.293 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is Glue stick antenna and no consideration of replacement. The best case gain of the antenna is 3.49dBi.

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

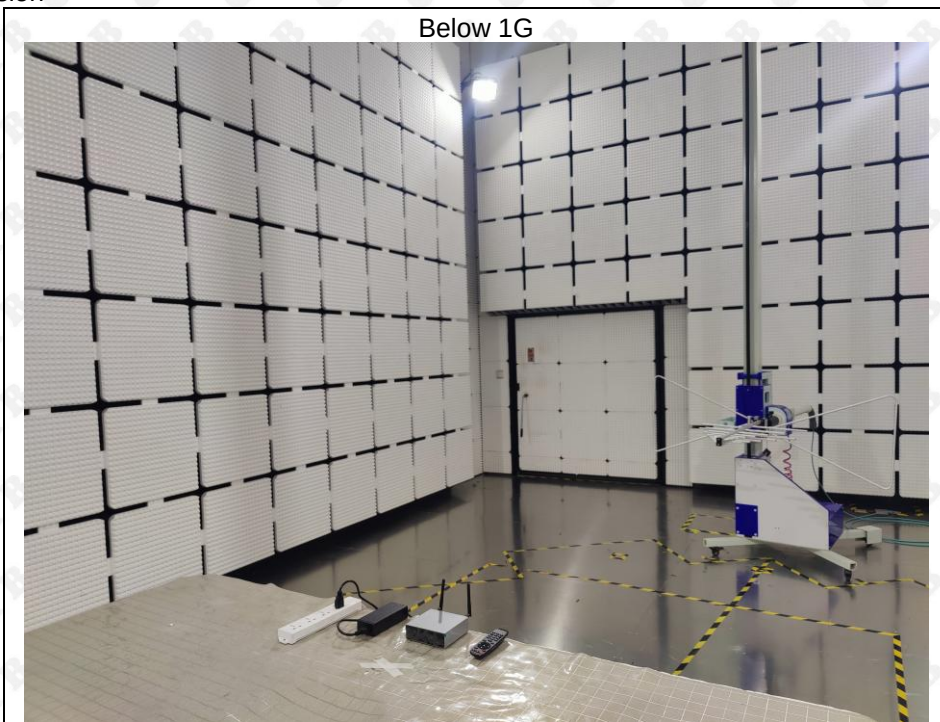

Above 1G



Conducted Emission



※※※※※ END OF REPORT ※※※※※