Huizhou Qitai Electronic Technology Co., LTD



SPECIFICATIONS SHEET

规格图面

E SE	CUSTOMER :	金天下	
	客户 DESCRIPTION:	(根)以	
	品名描述	Miller Tribate	
	CUSTOMER P/N :	THE THE PARTY OF T	
1	客户品名 PART NUMBER:	(1) (1) (1) (1) (1) (1) (1) (1) (1) (1)	
	制造商料号		X
	DATE OF APPLICATION: 提出日期	2025-8-7	
	A WHITE TO		A. T. X. Y.
CLA	ASSIFICATION OF SPEC. PRESENTA	ATION. (Tick the relevant box "√") 規格图面:	提出区分
	New application 新规格	THE IZ	
7	√ New part is added to accepted spe	ecification 新产品规格追加记录	

既存规格图面变更

ACCEPTANCE STAMP(客户受领印

☐ Revision of accepted specification



ADDRESS: 181 Floor, No. 181, Mingyue 2nd Road, Shiwan Town, Boluo County, Huizhou city

TELPHONE: 0752-6668681

E-MAIL: 839689578@qq.com

Huizhou Qitai Electronic Technology Co., LTD

<u>کالہ '</u>				XXX.
A THE VALUE OF THE PARTY OF THE	CUSTO	MER P/N :		4=137
History For Revised Specification	客户品名			1K'
X / X / X /		IUMBER: 商料号	1	2 ,
X	即是	何件与	, #F	4
Item DESCRIPTION (Content Or Reason For Changed) 项次 变 更 内 容	Rev. 版本	Cust Rev. 客户版本	Date 日期	Revisor 修订者
1 Initial Release (初版发行)	TANK T		10774	冯欣
(13/10×13)	A0		2025-8-7	冯庆
		1120		175
		SE		Will In
		X(0)		75
W. W.	. 5	= 137		
XXXXXX	X			
4 4 X X X X X X X X X X X X X X X X X X	KIZ		ARIV.	
	17.75			
ALE DE LA COLLEGE DE LA COLLEG	HA IC		XY	
		1 KX		
-XX		. 20,7		
1 th		- The second sec		SR
				XIV.
THE STATE OF THE S	10		4	XX7
MINE XX	Y	(3)		
AFX X			KIZ (R)	
* **			775	
AL THE STATE OF TH			11/1/2	1
	10	195	[1]	13
WHILE STATE				. 25,7
				XX
		212		CH FEI
	X			
ALL WILLIAM STATES	XX.		×.	1
	λ <u>-</u> χ ₃ ′			
	W. S			
	- X	1	2.1/	2
		X (A)		
		4=X34		
XXXV		1		
A			4	RV
N. S.	. 0	335	.10	60
THE WAY TO THE TANK T	~ 1/1/1 N		-1X4-X	
	11/3		VKX,	
APPROVED BY CHECKED BY PREPARE	ED BY	DATE	(1)	PAGE
		. 47	T	
		日期		页 码
混子奇 冯 [[] [] [] [] [] [] [] [] []	次	2025 2		of 2
THE STATE OF THE S	'' \	2025-8-7	1	of 3
		^		

Huizhou Qitai Electronic Technology Co., LTD


Specification 规格内容

CUSTOMER P/N: 客户品名

PART NUMBER: 制造商料号

1. DIMENSIONS (外形尺寸): (Unit: mm)

单位(Unit):毫米(mm)

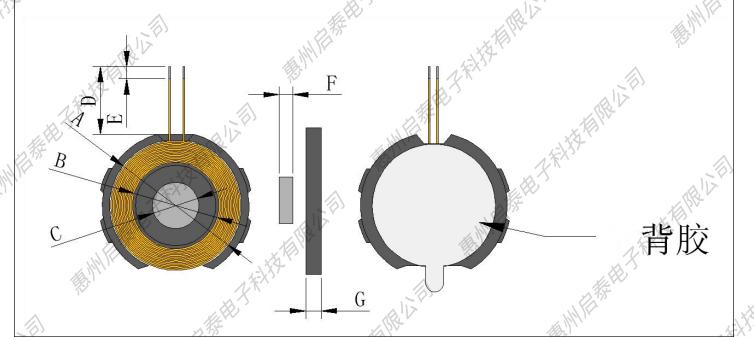

		· · · · · · · · · · · · · · · · · · ·					
A	В	C	D	E	F	G	
X-X,,		\wedge		1/2		A V	
21Max	14.5 ± 0.5	7.5 ± 0.5	5±1	2±1	2.2±0.1	2.8MAX	18
⊘ , ′		>	1/./	(<u>)</u>	. X, ¹		l i

- 背胶为白色背胶, φ18.0。
- 2. 磁铁规格: Φ7.5*2.2, 磁场 3400GS±150。
- 3. 软磁出线处开线槽。

APPROVED BY	CHECKED BY	PREPARED BY	DATE	PAGE
承 认	审查	制作	日期	页 码
尾子奇	独挺大	冯欣	2025-8-7	2 of 3

Huizhou Qitai Electronic Technology Co., LTD

Specification 规格内容 CUSTOMER P/N: 客户品名

PART NUMBER:制造商料号

2. WINDING DETAILS(绕线详细说明) Coil1

圈数 Turns	线径 Wire Dia	绕线方式疏/密 Wdg. Type Spred/Close	绕线方向 Wdg.Direction	相交 是/否 Intersect Yes/Not
13TS	0. 08*24P热风绞线 (Hot Air stranded Wire)	密绕(Close)	逆绕	是 (Yes)

3. 电气特性 (ELECTRICAL CHARACTERISTICS):

温度 TEMPERATURE:25±10℃,湿度 RELATIVE HUMIDITY:65±10%

序号	项目	端子	标准	测试条件	测试仪器
NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
	1	**	Coil 1	15 m	THE STATE OF THE S
1.	IND	S-F	8.2uh±0.3	100kHz/V	UC2906A
2.	A CONTRACTOR	S–F	20Min	100kHz/V	UC2906A
3.	DCR	S-F	125Max	100kHz/V	UC2906A

27.3		(A)		1. EX.31
APPROVED BY	CHECKED BY	PREPARED BY	DATE	PAGE
承 认	审 查	制作	日期	页 码
尾子 奇	· 推进,	冯欣	2025-8-7	3 of 3