



**中认信通**

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



## TEST REPORT

**Applicant:** Core Health & Fitness, LLC

**Address:** 4400 NE 77th Avenue, Suite 300 Vancouver, WA 98662 USA

**FCC ID:** 2BCKC-7000541

**IC:** 31120-7000541

**HVIN:** 0616K\_BB\_V1

**Product Name:** VIRTUAL BIKE CONSOLE

**Standard(s):** 47 CFR Part 15, Subpart E(15.407)

RSS-247 Issue 2, February 2017

RSS-Gen, Issue 5, February 2021 Amendment 2

ANSI C63.10-2013

KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number:** CR230744293-00D

**Date Of Issue:** 2023/9/1

**Reviewed By:** Calvin Chen

**Title:** RF Engineer

**Approved By:** Sun Zhong

**Title:** Manager

**Test Laboratory:** China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,  
Guangdong, China

Tel: +86-769-82016888

## Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

## Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## CONTENTS

|                                                              |    |
|--------------------------------------------------------------|----|
| TEST FACILITY .....                                          | 2  |
| DECLARATIONS.....                                            | 2  |
| DOCUMENT REVISION HISTORY .....                              | 5  |
| 1. GENERAL INFORMATION.....                                  | 6  |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) ..... | 6  |
| 1.2 DESCRIPTION OF TEST CONFIGURATION.....                   | 8  |
| 1.2.1 EUT Operation Condition:.....                          | 8  |
| 1.2.2 Support Equipment List and Details .....               | 8  |
| 1.2.3 Support Cable List and Details .....                   | 9  |
| 1.2.4 Block Diagram of Test Setup.....                       | 10 |
| 1.3 MEASUREMENT UNCERTAINTY .....                            | 11 |
| 2. SUMMARY OF TEST RESULTS .....                             | 12 |
| 3. REQUIREMENTS AND TEST PROCEDURES .....                    | 13 |
| 3.1 AC LINE CONDUCTED EMISSIONS.....                         | 13 |
| 3.1.1 Applicable Standard.....                               | 13 |
| 3.1.2 EUT Setup.....                                         | 14 |
| 3.1.3 EMI Test Receiver Setup .....                          | 15 |
| 3.1.4 Test Procedure .....                                   | 15 |
| 3.1.5 Corrected Amplitude & Margin Calculation.....          | 15 |
| 3.2 RADIATION SPURIOUS EMISSIONS .....                       | 16 |
| 3.2.1 Applicable Standard.....                               | 16 |
| 3.2.2 EUT Setup.....                                         | 17 |
| 3.2.3 EMI Test Receiver & Spectrum Analyzer Setup .....      | 18 |
| 3.2.4 Test Procedure .....                                   | 19 |
| 3.2.5 Corrected Amplitude & Margin Calculation.....          | 19 |
| 3.3 26dB ATTENUATED BELOW THE CHANNEL POWER: .....           | 20 |
| 3.3.1 Applicable Standard.....                               | 20 |
| 3.3.2 EUT Setup.....                                         | 20 |
| 3.3.3 Test Procedure .....                                   | 20 |
| 3.4 EMISSION BANDWIDTH: .....                                | 21 |
| 3.4.1 Applicable Standard.....                               | 21 |
| 3.4.2 EUT Setup.....                                         | 21 |
| 3.4.3 Test Procedure .....                                   | 21 |
| 3.5 MAXIMUM CONDUCTED OUTPUT POWER: .....                    | 23 |
| 3.5.1 Applicable Standard.....                               | 23 |
| 3.5.2 EUT Setup.....                                         | 24 |
| 3.5.3 Test Procedure .....                                   | 24 |
| 3.6 MAXIMUM POWER SPECTRAL DENSITY: .....                    | 25 |
| 3.6.1 Applicable Standard.....                               | 25 |
| 3.6.2 EUT Setup.....                                         | 26 |
| 3.6.3 Test Procedure .....                                   | 26 |

|                                                                      |           |
|----------------------------------------------------------------------|-----------|
| <b>3.7 DUTY CYCLE:</b>                                               | <b>27</b> |
| 3.7.1 EUT Setup                                                      | 27        |
| 3.7.2 Test Procedure                                                 | 27        |
| <b>3.8 ANTENNA REQUIREMENT</b>                                       | <b>28</b> |
| 3.8.1 Applicable Standard                                            | 28        |
| 3.8.2 Judgment                                                       | 28        |
| <b>3.9 ADDITIONAL REQUIREMENT</b>                                    | <b>29</b> |
| 3.9.1 Applicable Standard                                            | 29        |
| 3.9.2 Judgment                                                       | 30        |
| <b>4. Test DATA AND RESULTS</b>                                      | <b>31</b> |
| 4.1 AC LINE CONDUCTED EMISSIONS                                      | 31        |
| 4.2 RADIATION SPURIOUS EMISSIONS                                     | 34        |
| 4.3 26dB ATTENUATED BELOW THE CHANNEL POWER:                         | 46        |
| 4.4 EMISSION BANDWIDTH:                                              | 49        |
| 4.5 MAXIMUM CONDUCTED OUTPUT POWER:                                  | 63        |
| 4.6 MAXIMUM POWER SPECTRAL DENSITY:                                  | 65        |
| 4.6 DUTY CYCLE:                                                      | 73        |
| <b>5. RF EXPOSURE EVALUATION</b>                                     | <b>75</b> |
| 5.1 MAXIMUM PERMISSIBLE EXPOSURE (MPE)                               | 75        |
| 5.1.1 APPLICABLE STANDARD                                            | 75        |
| 5.1.2 MEASUREMENT RESULT                                             | 76        |
| 5.2 EXEMPTION LIMITS FOR ROUTINE EVALUATION – RF EXPOSURE EVALUATION | 77        |
| 5.2.1 APPLICABLE STANDARD                                            | 77        |
| 5.2.2 CALCULATED DATA:                                               | 77        |
| <b>6. EUT PHOTOGRAPHS</b>                                            | <b>78</b> |
| <b>7. TEST SETUP PHOTOGRAPHS</b>                                     | <b>79</b> |

## DOCUMENT REVISION HISTORY

| Revision Number | Report Number   | Description of Revision | Date of Revision |
|-----------------|-----------------|-------------------------|------------------|
| 1.0             | CR230744293-00D | Original Report         | 2023/9/1         |

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

|                                                  |                                                                                                                                                                                                                          |
|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EUT Name:</b>                                 | VIRTUAL BIKE CONSOLE                                                                                                                                                                                                     |
| <b>Trade Name:</b>                               | VIRTUAL BIKE CONSOLE                                                                                                                                                                                                     |
| <b>EUT Model:</b>                                | 7000541                                                                                                                                                                                                                  |
| <b>Operation Frequency:</b>                      | 5180-5240 MHz (802.11a/n ht20/ac vht20)<br>5190-5230 MHz(802.11n ht40/ac vht40)<br>5210MHz(802.11ac vht80)<br>5745-5825 MHz (802.11a/n ht20/ac vht20)<br>5755-5795 MHz(802.11n ht40/ac vht40)<br>5775MHz(802.11ac vht80) |
| <b>Maximum Average Output Power (Conducted):</b> | 12.72 dBm (5150-5250 MHz)<br>13.85 dBm (5725-5850 MHz)                                                                                                                                                                   |
| <b>Modulation Type:</b>                          | OFDM-BPSK, QPSK, 16QAM, 64QAM,256QAM                                                                                                                                                                                     |
| <b>Rated Input Voltage:</b>                      | DC 12V                                                                                                                                                                                                                   |
| <b>Serial Number:</b>                            | RF Conducted Test: 29F9-2<br>Conducted & Radiated Emissions: 29F9-1                                                                                                                                                      |
| <b>EUT Received Date:</b>                        | 2023/7/22                                                                                                                                                                                                                |
| <b>EUT Received Status:</b>                      | Good                                                                                                                                                                                                                     |

#### 1.1.2 Operation Frequency Detail: For 802.11a/n ht20/ac vht20:

| 5150-5250MHz Band                                                                     |                 | 5725-5850MHz Band |                 |
|---------------------------------------------------------------------------------------|-----------------|-------------------|-----------------|
| Channel                                                                               | Frequency (MHz) | Channel           | Frequency (MHz) |
| 36                                                                                    | 5180            | 149               | 5745            |
| 40                                                                                    | 5200            | 153               | 5765            |
| 44                                                                                    | 5220            | 157               | 5785            |
| 48                                                                                    | 5240            | 161               | 5805            |
| /                                                                                     | /               | 165               | 5825            |
| Per section 15.31(m)/RSS-Gen, the below frequencies were performed the test as below: |                 |                   |                 |
| 36                                                                                    | 5180            | 149               | 5745            |
| 40                                                                                    | 5200            | 157               | 5785            |
| 48                                                                                    | 5240            | 165               | 5825            |

#### For 802.11n ht40/ac vht40:

| 5150-5250MHz Band                                                                     |                 | 5725-5850MHz Band |                 |
|---------------------------------------------------------------------------------------|-----------------|-------------------|-----------------|
| Channel                                                                               | Frequency (MHz) | Channel           | Frequency (MHz) |
| 38                                                                                    | 5190            | 151               | 5755            |
| 46                                                                                    | 5230            | 159               | 5795            |
| Per section 15.31(m)/RSS-Gen, the below frequencies were performed the test as below: |                 |                   |                 |
| 38                                                                                    | 5190            | 151               | 5755            |
| 46                                                                                    | 5230            | 159               | 5795            |

**For 802.11ac vht80:**

| 5150-5250MHz Band                                                                     |                 | 5725-5850MHz Band |                 |
|---------------------------------------------------------------------------------------|-----------------|-------------------|-----------------|
| Channel                                                                               | Frequency (MHz) | Channel           | Frequency (MHz) |
| 42                                                                                    | 5210            | 155               | 5775            |
| Per section 15.31(m)/RSS-Gen, the below frequencies were performed the test as below: |                 |                   |                 |
| 42                                                                                    | 5210            | 155               | 5775            |

**1.1.3 Antenna Information Detail▲:**

| Antenna Type | input impedance (Ohm) | Frequency Range | Antenna Gain |
|--------------|-----------------------|-----------------|--------------|
| FPC          | 50                    | 5150~5250MHz    | 0.87 dBi     |
|              |                       | 5725~5850MHz    | 1.82 dBi     |

The Method of §15.203 Compliance:

- ☒ Antenna must be permanently attached to the unit.  
☐ Antenna must use a unique type of connector to attach to the EUT.  
☐ Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

**1.1.4 Accessory Information:**

| Accessory Description | Manufacturer | Model | Parameters |
|-----------------------|--------------|-------|------------|
| /                     | /            | /     | /          |

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

|                                                                                                                                                                                                  |               |                      |                                                                                                    |                     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------|----------------------------------------------------------------------------------------------------|---------------------|
| EUT Operation Mode:                                                                                                                                                                              |               |                      | The system was configured for testing in Engineering Mode, which was provided by the manufacturer. |                     |
| Equipment Modifications:                                                                                                                                                                         |               |                      | No                                                                                                 |                     |
| EUT Exercise Software:                                                                                                                                                                           |               |                      | Engineer mode                                                                                      |                     |
| The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲ :                                                                  |               |                      |                                                                                                    |                     |
| 5150-5250 MHz Band:                                                                                                                                                                              |               |                      |                                                                                                    |                     |
| Test Modes                                                                                                                                                                                       | Test Channels | Test Frequency (MHz) | Data rate                                                                                          | Power Level Setting |
| 802.11a                                                                                                                                                                                          | Lowest        | 5180                 | 6Mbps                                                                                              | 17                  |
|                                                                                                                                                                                                  | Middle        | 5200                 | 6Mbps                                                                                              | 17                  |
|                                                                                                                                                                                                  | Highest       | 5240                 | 6Mbps                                                                                              | 17                  |
| 802.11n ht20                                                                                                                                                                                     | Lowest        | 5180                 | MCS0                                                                                               | 17                  |
|                                                                                                                                                                                                  | Middle        | 5200                 | MCS0                                                                                               | 17                  |
|                                                                                                                                                                                                  | Highest       | 5240                 | MCS0                                                                                               | 17                  |
| 802.11n ht40                                                                                                                                                                                     | Lowest        | 5190                 | MCS0                                                                                               | 17                  |
|                                                                                                                                                                                                  | Highest       | 5230                 | MCS0                                                                                               | 17                  |
| 802.11ac vht80                                                                                                                                                                                   | Middle        | 5210                 | MCS0                                                                                               | 17                  |
| 5725-5850 MHz Band:                                                                                                                                                                              |               |                      |                                                                                                    |                     |
| Test Modes                                                                                                                                                                                       | Test Channels | Test Frequency (MHz) | Data rate                                                                                          | Power Level Setting |
| 802.11a                                                                                                                                                                                          | Lowest        | 5745                 | 6Mbps                                                                                              | 17                  |
|                                                                                                                                                                                                  | Middle        | 5785                 | 6Mbps                                                                                              | 17                  |
|                                                                                                                                                                                                  | Highest       | 5825                 | 6Mbps                                                                                              | 17                  |
| 802.11n ht20                                                                                                                                                                                     | Lowest        | 5745                 | MCS0                                                                                               | 17                  |
|                                                                                                                                                                                                  | Middle        | 5785                 | MCS0                                                                                               | 17                  |
|                                                                                                                                                                                                  | Highest       | 5825                 | MCS0                                                                                               | 17                  |
| 802.11n ht40                                                                                                                                                                                     | Lowest        | 5755                 | MCS0                                                                                               | 17                  |
|                                                                                                                                                                                                  | Highest       | 5795                 | MCS0                                                                                               | 17                  |
| 802.11ac vht80                                                                                                                                                                                   | Middle        | 5775                 | MCS0                                                                                               | 17                  |
| Note:                                                                                                                                                                                            |               |                      |                                                                                                    |                     |
| The system support 802.11a/n ht20/n ht40/ac vht20/ac vht40/ac vht80, the vht20/vht40 were reduced since the identical parameters with 802.11n ht20 and ht40.                                     |               |                      |                                                                                                    |                     |
| The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations. |               |                      |                                                                                                    |                     |

### 1.2.2 Support Equipment List and Details

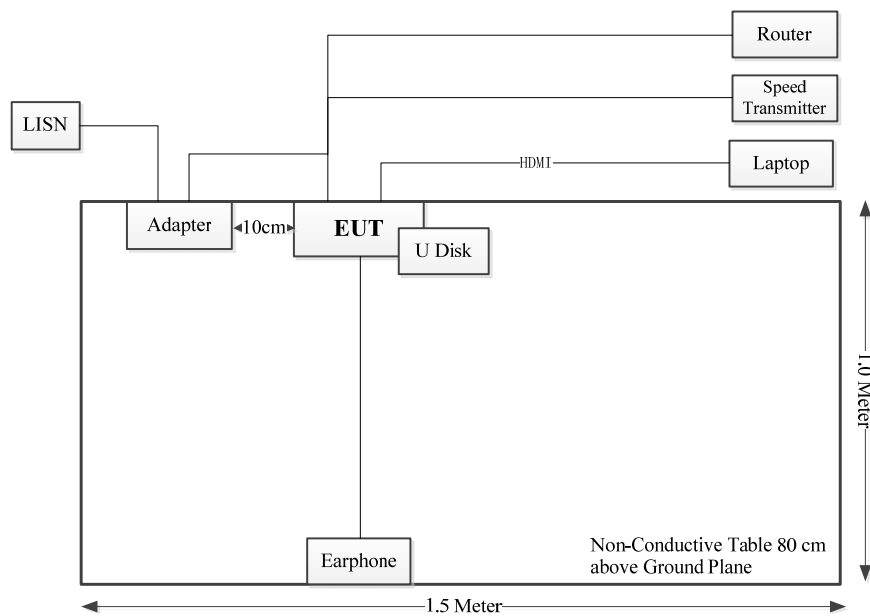
| Manufacturer | Description       | Model         | Serial Number    |
|--------------|-------------------|---------------|------------------|
| IPEVO        | Earphone          | Phonenix 5.0s | EP221126001      |
| Lenovo       | Laptop            | T460S         | 60PDTEK8         |
| TOTO LINK    | Router            | X5000R        | X5000RK9T0560    |
| Kingston     | USB Disk          | DTI/2GB       | CH 031308        |
| Unknown      | speed transmitter | Unknown       | Unknown          |
| Fuyuang      | Adapter           | FY1205000     | 2022010907509119 |

**1.2.3 Support Cable List and Details**

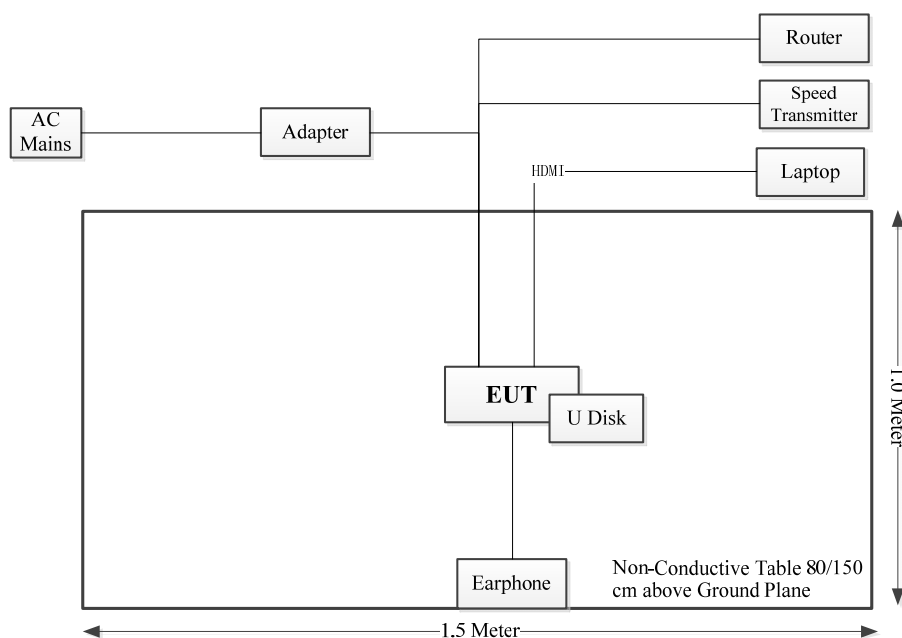
| <b>Cable Description</b> | <b>Shielding Type</b> | <b>Ferrite Core</b> | <b>Length (m)</b> | <b>From Port</b> | <b>To</b>         |
|--------------------------|-----------------------|---------------------|-------------------|------------------|-------------------|
| Power Cable              | No                    | No                  | 1.2               | Adapter          | LISN/AC Mains     |
| Power Cable              | No                    | No                  | 1.2               | Adapter          | EUT               |
| Earphone Cable           | No                    | No                  | 1.2               | EUT              | Earphone          |
| HDMI Cable               | No                    | No                  | 10                | EUT              | Laptop            |
| RJ 45 Cable              | No                    | No                  | 10                | EUT              | Router            |
| Cable                    | No                    | No                  | 10                | EUT              | Speed Transmitter |

### 1.2.4 Block Diagram of Test Setup

AC line conducted emissions:



Radiated Spurious Emissions:



### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

| Parameter                         | Measurement Uncertainty                                                                                           |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Occupied Channel Bandwidth        | ±5 %                                                                                                              |
| RF output power, conducted        | ±0.61dB                                                                                                           |
| Power Spectral Density, conducted | ±0.61 dB                                                                                                          |
| Unwanted Emissions, radiated      | 30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB,<br>6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB |
| Unwanted Emissions, conducted     | ±1.26 dB                                                                                                          |
| Temperature                       | ±1℃                                                                                                               |
| Humidity                          | ±5%                                                                                                               |
| DC and low frequency voltages     | ±0.4%                                                                                                             |
| Duty Cycle                        | 1%                                                                                                                |
| AC Power Lines Conducted Emission | 2.8 dB (150 kHz to 30 MHz)                                                                                        |

## 2. SUMMARY OF TEST RESULTS

| Standard(s) Section                                           | Test Items                              | Result    |
|---------------------------------------------------------------|-----------------------------------------|-----------|
| §15.207(a)<br>RSS-Gen Clause 8.8                              | AC line conducted emissions             | Compliant |
| FCC§15.205& §15.209<br>&§15.407(b)<br>RSS-247 Clause 6.2      | Undesirable Emission& Restricted Bands  | Compliant |
| RSS-247 Clause 6.2.1.2                                        | 26dB attenuated below the channel power | Compliant |
| FCC§15.407(a) (e)<br>RSS-247 Clause 6.2<br>RSS-Gen Clause 6.7 | Emission Bandwidth                      | Compliant |
| FCC§15.407(a)<br>RSS-247 Clause 6.2                           | Maximum Conducted Output Power          | Compliant |
| FCC§15.407 (a)<br>RSS-247 Clause 6.2                          | Power Spectral Density                  | Compliant |
| §15.203<br>RSS-GEN Clause 6.8                                 | Antenna Requirement                     | Compliant |
| RSS-247 Clause 6.4                                            | Additional requirements                 | Compliant |
| FCC §1.1310, §2.1091<br>RSS-102 Clause 2.5.2                  | RF Exposure                             | Compliant |

### 3. REQUIREMENTS AND TEST PROCEDURES

#### 3.1 AC Line Conducted Emissions

##### 3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency of emission (MHz) | Conducted limit (dB $\mu$ V) |           |
|-----------------------------|------------------------------|-----------|
|                             | Quasi-peak                   | Average   |
| 0.15-0.5                    | 66 to 56*                    | 56 to 46* |
| 0.5-5                       | 56                           | 46        |
| 5-30                        | 60                           | 50        |

\*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

#### RSS-Gen Clause 8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50  $\mu$ H / 50  $\Omega$  line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the

boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

**Table 4 – AC power-line conducted emissions limits**

| Frequency<br>(MHz) | Conducted limit (dB $\mu$ V) |                       |
|--------------------|------------------------------|-----------------------|
|                    | Quasi-peak                   | Average               |
| 0.15 - 0.5         | 66 to 56 <sup>1</sup>        | 56 to 46 <sup>1</sup> |
| 0.5 – 5            | 56                           | 46                    |
| 5 – 30             | 60                           | 50                    |

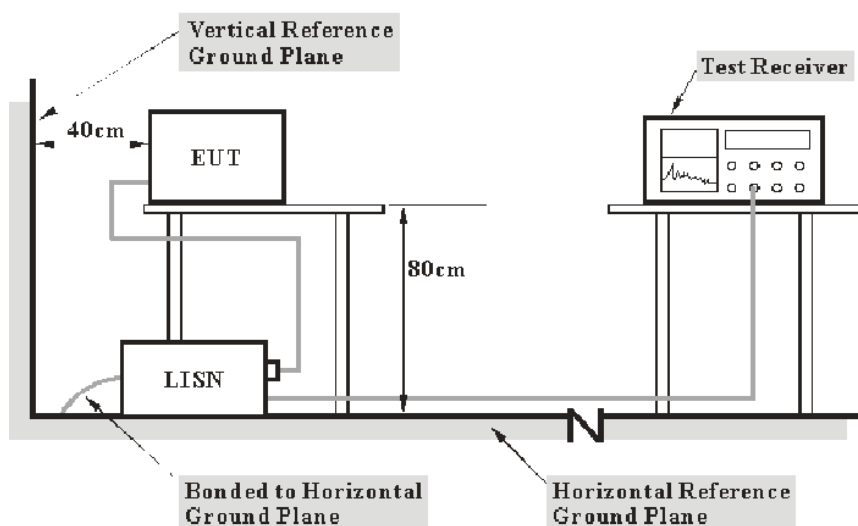
**Note 1:** The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

(a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.

(b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

### 3.1.2 EUT Setup



Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207,RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

### 3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### 3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

### 3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

## 3.2 Radiation Spurious Emissions

### 3.2.1 Applicable Standard

FCC §15.407 (b);

*Undesirable emission limits.* Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(4) For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of - 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.

(10) The provisions of § 15.205 apply to intentional radiators operating under this section.

(11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

(c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

RSS-247 Clause 6.2

Frequency band 5150-5250 MHz

#### 6.2.1.2 Unwanted emission limits

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

## Frequency band 5725-5850 MHz

### 6.2.4.2 Unwanted emission limits

Devices operating in the band 5725-5850 MHz with antenna gain greater than 10 dBi can have unwanted emissions that comply with either the limits in this section or in section 5.5 until six (6) months after the publication date of this standard for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2018.

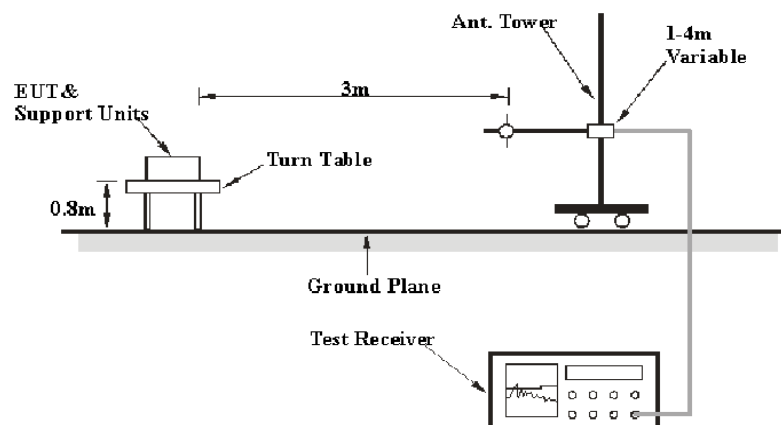
Devices operating in the band 5725-5850 MHz with antenna gain of 10 dBi or less can have unwanted emissions that comply with either the limits in this section or in section 5.5 until April 1, 2018 for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2020.

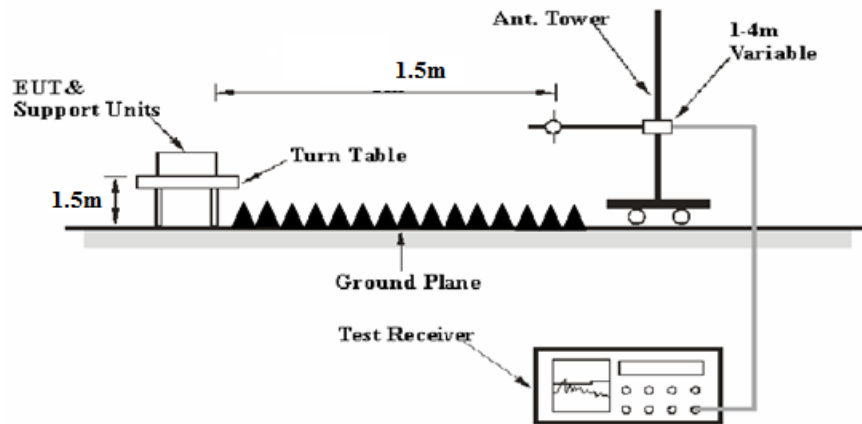
Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

- a) 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- b) 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- c) 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- d) -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

### 3.2.2 EUT Setup

#### Below 1GHz:



**1-40 GHz:**

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407, RSS-247, RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

**3.2.3 EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

| Detector | RBW     | Video B/W | IF B/W |
|----------|---------|-----------|--------|
| QP       | 120 kHz | 300 kHz   | 120kHz |

1GHz- 40GHz:

| Measurement | Duty cycle | RBW  | Video B/W  |
|-------------|------------|------|------------|
| PK          | Any        | 1MHz | 3 MHz      |
| AV          | >98%       | 1MHz | 10 Hz      |
|             | <98%       | 1MHz | $\geq 1/T$ |

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

### 3.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as:  $E [dB\mu V/m] = EIRP[dBm] + 95.2$ , for  $d = 3$  meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m

Distance extrapolation Factor  $= 20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$  dB = 6.02 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

### 3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Factor = Antenna Factor + Cable Loss - Amplifier Gain

For 30MHz-1GHz:

Result = Reading + Factor

For 1GHz-40GHz

Result = Reading + Factor - Distance extrapolation Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

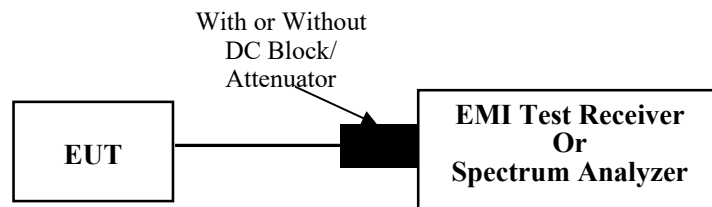
### 3.3 26dB Attenuated Below The Channel Power:

#### 3.3.1 Applicable Standard

RSS-247 Clause 6.2.1.2

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

#### 3.3.2 EUT Setup



#### 3.3.3 Test Procedure

- Set RBW = 1%~5% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = RMS.
- Trace mode = max hold
- Measure the emission attenuated below the channel power

### 3.4 Emission Bandwidth:

#### 3.4.1 Applicable Standard

FCC §15.407 (a),(h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

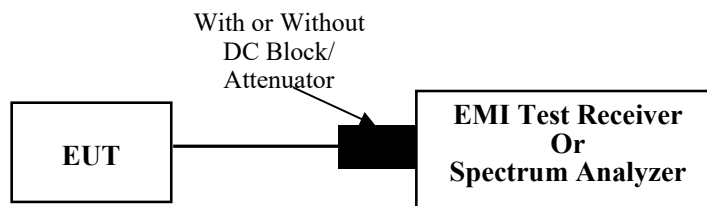
RSS-247 Clause 6.2.1.2

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

RSS-247 Clause 6.2.4.1

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### 3.4.2 EUT Setup



#### 3.4.3 Test Procedure

##### 26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

**99% Occupied Bandwidth:**

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (OBW/RBW)]$  below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

**6 dB emission bandwidth:**

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

### 3.5 Maximum Conducted Output Power:

#### 3.5.1 Applicable Standard

FCC §15.407(a)(1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a)(2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a)(3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

RSS-247 Clause 6.2.1.1

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10} B$ , dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

RSS-247 Clause 6.2.2.1

Devices, other than devices installed in vehicles, shall comply with the following:

a) The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

b) The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

#### RSS-247 Clause 6.2.3.1

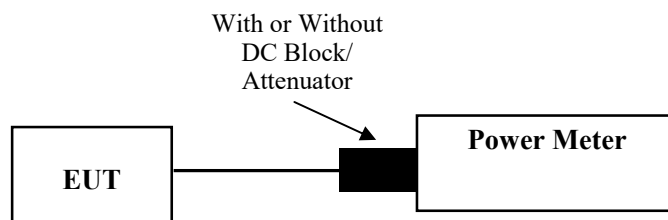
The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

#### RSS-247 Clause 6.2.4.1

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

### 3.5.2 EUT Setup



### 3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 12.3.3.2

Method PM-G is measurement using a gated RF average power meter.

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

### 3.6 Maximum Power Spectral Density:

#### 3.6.1 Applicable Standard

FCC §15.407(a)(1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a)(2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where  $B$  is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a)(3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

RSS-247 Clause 6.2.1.1

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10} B$ , dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less.  $B$  is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

RSS-247 Clause 6.2.2.1

Devices, other than devices installed in vehicles, shall comply with the following:

a) The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

b) The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

#### RSS-247 Clause 6.2.3.1

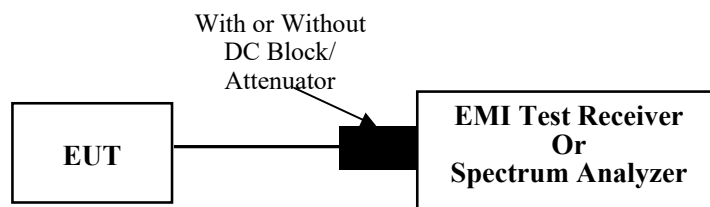
The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

#### RSS-247 Clause 6.2.4.1

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

### 3.6.2 EUT Setup



### 3.6.3 Test Procedure

According to ANSI C63.10-2013 Section 12.3.2

#### **Duty cycle $\geq 98\%$**

Method SA-1 was used.

#### **Duty cycle $< 98\%$ , duty cycle variations are less than $\pm 2\%$**

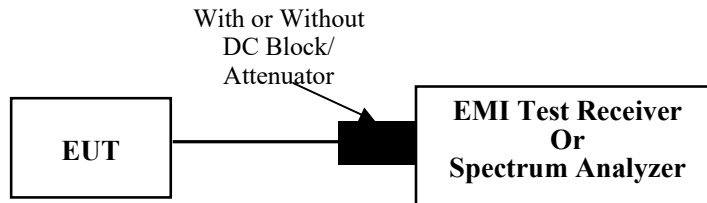
Method SA-2 was used.

#### **Duty cycle $< 98\%$ , duty cycle variations exceed $\pm 2\%$**

Method SA-3 was used.

### 3.7 Duty Cycle:

#### 3.7.1 EUT Setup



#### 3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value.
- 3) Set  $VBW \geq RBW$ . Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)

### 3.8 Antenna Requirement

#### 3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

RSS-GEN Clause 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISCED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

#### 3.8.2 Judgment

**Result: Compliant.** Please refer to the Antenna Information detail in Section 1.

### 3.9 Additional requirement

#### 3.9.1 Applicable Standard

According to RSS-247 Clause 6.4 Additional requirement

The following requirements shall apply:

- a) The device shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure. A description on how this is done shall accompany the application for equipment certification. Note that this is not intended to prohibit transmission of control or signalling information or the use of repetitive codes where required by the technology.
- b) All LE-LAN devices must contain security features to protect against modification of software by unauthorized parties.

Manufacturers must implement security features in any digitally modulated devices capable of operating in any of the frequency ranges within the 5 GHz band, so that third parties are not able to reprogram the device to operate outside the parameters for which the device was certified. The software must prevent the user from operating the transmitter with operating frequencies, output power, modulation types or other radio frequency parameters outside those that were approved for the device. Manufacturers may use various means, including the use of a private network that allows only authenticated users to download software, electronic signatures in software or coding in hardware that is decoded by software to verify that new software can be legally loaded into a device to meet these requirements and must describe the methods in their application for equipment certification.

Manufacturers must take steps to ensure that DFS functionality cannot be disabled by the operator of the LE-LAN device.

- c) The user manual for LE-LAN devices shall contain instructions related to the restrictions mentioned in the above sections, namely that:
  - i. the device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;<sup>4</sup>
  - ii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
  - iii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits as appropriate; and
  - iv. where applicable, antenna type(s), antenna models(s), and worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in section 6.2.2.3 shall be clearly indicated.

### 3.9.2 Judgment

RSS-247 Clause 6.4 a):

The device shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure. Please refer to the declaration

RSS-247 Clause 6.4 b):

The devices must contain security features to protect against modification of software by unauthorized parties. Please refer to the declaration

RSS-247 Clause 6.4 c):

i). The device operates on 5150-5250MHz is only for indoor use.

ii). The device not operates on 5250-5350MHz/5470-5725MHz.

iii). The antenna is not detachable, and all the EIPR compliance with RSS-247 requirement. Please refer to the conducted output power test result.

iv). Not Applicable.

## 4. Test DATA AND RESULTS

### 4.1 AC Line Conducted Emissions

|                |             |              |                                                      |
|----------------|-------------|--------------|------------------------------------------------------|
| Serial Number: | 29F9-1      | Test Date:   | 2023/8/26                                            |
| Test Site:     | CE          | Test Mode:   | Transmitting<br>(802.11n40 model 5755MHz was tested) |
| Tester:        | David Huang | Test Result: | Pass                                                 |

#### Environmental Conditions:

|                      |      |                              |    |                        |       |
|----------------------|------|------------------------------|----|------------------------|-------|
| Temperature:<br>(°C) | 24.8 | Relative<br>Humidity:<br>(%) | 57 | ATM Pressure:<br>(kPa) | 100.1 |
|----------------------|------|------------------------------|----|------------------------|-------|

#### Test Equipment List and Details:

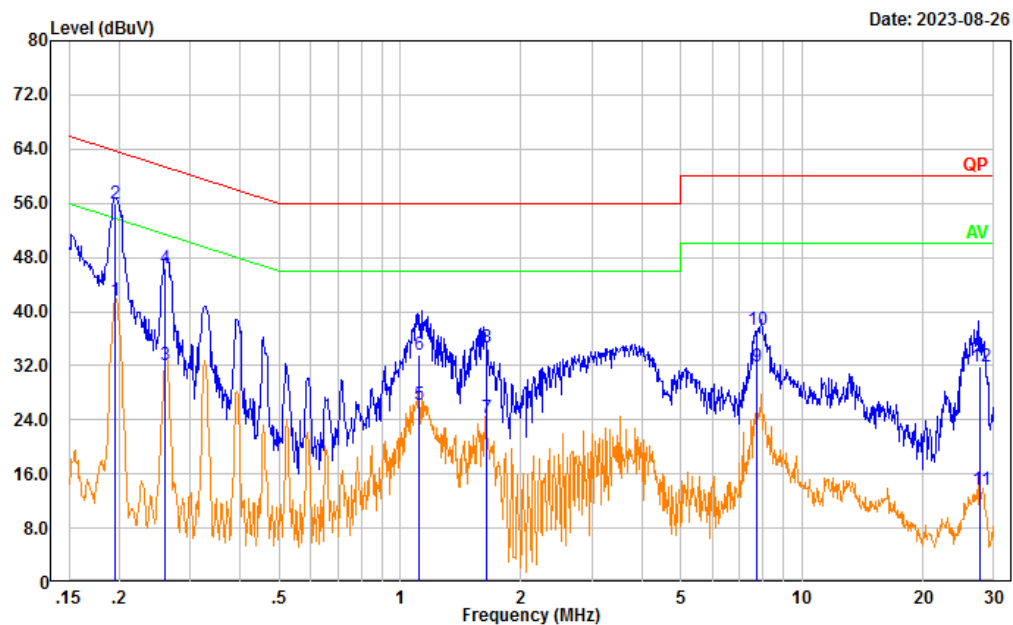
| Manufacturer | Description       | Model   | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|---------|---------------|------------------|----------------------|
| R&S          | LISN              | ENV216  | 101134        | 2023/3/31        | 2024/3/30            |
| R&S          | EMI Test Receiver | ESR3    | 102726        | 2023/3/31        | 2024/3/30            |
| MICRO-COAX   | Coaxial Cable     | UTIFLEX | C-0200-01     | 2023/8/6         | 2024/8/5             |
| Audix        | Test Software     | E3      | 190306 (V9)   | N/A              | N/A                  |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:

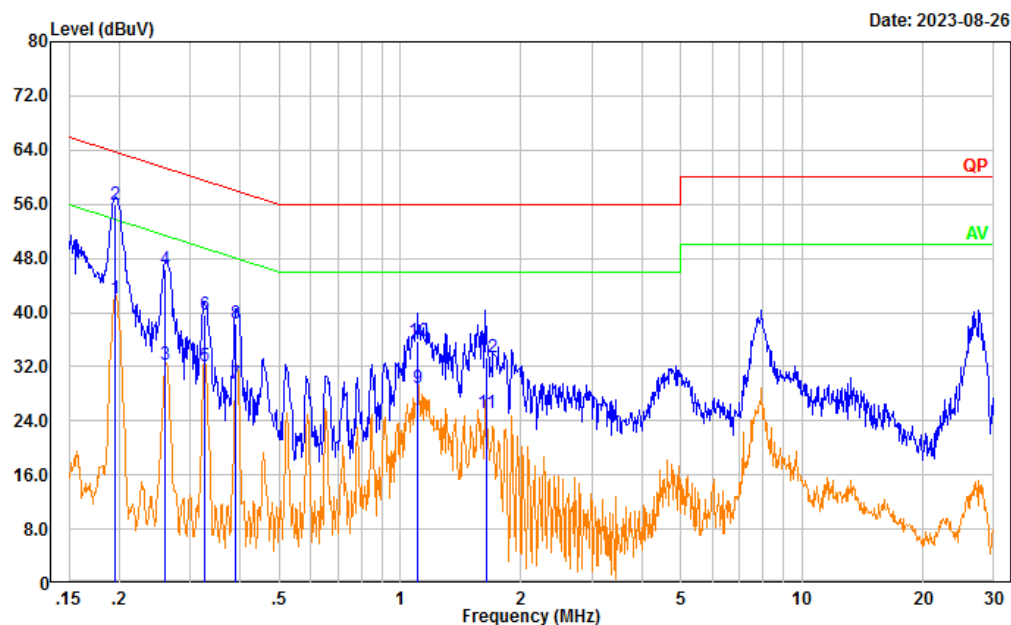
Note: Testing with Low, middle, high channel per FCC part 15.31(m)/ RSS-Gen with each operation mode (802.11a/n ht20/n ht40 /ac vht80), the worst case mode as below:

Test Mode: Transmitting  
Port: Line  
Note:



| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB) | Result<br>(dBμV) | Limit<br>(dBμV) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|----------------|------------------|-----------------|----------------|----------|
| 1   | 0.196              | 31.95             | 9.61           | 41.56            | 53.78           | 12.22          | Average  |
| 2   | 0.196              | 46.29             | 9.61           | 55.90            | 63.78           | 7.88           | QP       |
| 3   | 0.260              | 22.51             | 9.61           | 32.12            | 51.43           | 19.31          | Average  |
| 4   | 0.260              | 36.80             | 9.61           | 46.41            | 61.43           | 15.02          | QP       |
| 5   | 1.111              | 16.55             | 9.62           | 26.17            | 46.00           | 19.83          | Average  |
| 6   | 1.111              | 24.09             | 9.62           | 33.71            | 56.00           | 22.29          | QP       |
| 7   | 1.638              | 14.74             | 9.63           | 24.37            | 46.00           | 21.63          | Average  |
| 8   | 1.638              | 25.02             | 9.63           | 34.65            | 56.00           | 21.35          | QP       |
| 9   | 7.742              | 22.28             | 9.67           | 31.95            | 50.00           | 18.05          | Average  |
| 10  | 7.742              | 27.62             | 9.67           | 37.29            | 60.00           | 22.71          | QP       |
| 11  | 27.827             | 3.93              | 9.83           | 13.76            | 50.00           | 36.24          | Average  |
| 12  | 27.827             | 22.05             | 9.83           | 31.88            | 60.00           | 28.12          | QP       |

Test Mode: Transmitting  
Port: neutral  
Note:



| No.   | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB) | Result<br>(dBμV) | Limit<br>(dBμV) | Margin<br>(dB) | Detector |
|-------|--------------------|-------------------|----------------|------------------|-----------------|----------------|----------|
| <hr/> |                    |                   |                |                  |                 |                |          |
| 1     | 0.196              | 32.48             | 9.61           | 42.09            | 53.79           | 11.70          | Average  |
| 2     | 0.196              | 46.37             | 9.61           | 55.98            | 63.79           | 7.81           | QP       |
| 3     | 0.261              | 22.77             | 9.61           | 32.38            | 51.40           | 19.02          | Average  |
| 4     | 0.261              | 36.87             | 9.61           | 46.48            | 61.40           | 14.92          | QP       |
| 5     | 0.326              | 22.54             | 9.61           | 32.15            | 49.55           | 17.40          | Average  |
| 6     | 0.326              | 30.11             | 9.61           | 39.72            | 59.55           | 19.83          | QP       |
| 7     | 0.390              | 19.77             | 9.61           | 29.38            | 48.07           | 18.69          | Average  |
| 8     | 0.390              | 28.68             | 9.61           | 38.29            | 58.07           | 19.78          | QP       |
| 9     | 1.108              | 19.19             | 9.62           | 28.81            | 46.00           | 17.19          | Average  |
| 10    | 1.108              | 26.12             | 9.62           | 35.74            | 56.00           | 20.26          | QP       |
| 11    | 1.638              | 15.50             | 9.63           | 25.13            | 46.00           | 20.87          | Average  |
| 12    | 1.638              | 23.75             | 9.63           | 33.38            | 56.00           | 22.62          | QP       |

## 4.2 Radiation Spurious Emissions

|                |                   |              |                     |
|----------------|-------------------|--------------|---------------------|
| Serial Number: | 29F9-1            | Test Date:   | 2023/8/26~2023/8/31 |
| Test Site:     | 966-2,966-1       | Test Mode:   | Transmitting        |
| Tester:        | Vic Du, coco Tian | Test Result: | Pass                |

### Environmental Conditions:

|                      |           |                              |       |                        |           |
|----------------------|-----------|------------------------------|-------|------------------------|-----------|
| Temperature:<br>(°C) | 25.1~26.1 | Relative<br>Humidity:<br>(%) | 51~66 | ATM Pressure:<br>(kPa) | 100~100.2 |
|----------------------|-----------|------------------------------|-------|------------------------|-----------|

### Test Equipment List and Details:

| Manufacturer    | Description           | Model                 | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------------|-----------------------|---------------|------------------|----------------------|
| Sunol Sciences  | Antenna               | JB6                   | A082520-5     | 2020/10/19       | 2023/10/18           |
| R&S             | EMI Test Receiver     | ESR3                  | 102724        | 2023/3/31        | 2024/3/30            |
| TIMES MICROWAVE | Coaxial Cable         | LMR-600-UltraFlex     | C-0470-02     | 2023/7/16        | 2024/7/15            |
| TIMES MICROWAVE | Coaxial Cable         | LMR-600-UltraFlex     | C-0780-01     | 2023/7/16        | 2024/7/15            |
| Sonoma          | Amplifier             | 310N                  | 186165        | 2023/7/16        | 2024/7/15            |
| ETS-Lindgren    | Horn Antenna          | 3115                  | 9912-5985     | 2020/10/13       | 2023/10/12           |
| R&S             | Spectrum Analyzer     | FSV40                 | 101591        | 2023/3/31        | 2024/3/30            |
| MICRO-COAX      | Coaxial Cable         | UFA210A-1-1200-70U300 | 217423-008    | 2023/8/6         | 2024/8/5             |
| MICRO-COAX      | Coaxial Cable         | UFA210A-1-2362-300300 | 235780-001    | 2023/8/6         | 2024/8/5             |
| Mini            | Pre-amplifier         | ZVA-183-S+            | 5969001149    | 2022/11/9        | 2023/11/8            |
| Audix           | Test Software         | E3                    | 201021 (V9)   | N/A              | N/A                  |
| PASTERNAK       | Horn Antenna          | PE9852/2F-20          | 112002        | 2021/2/5         | 2024/2/4             |
| Quinstar        | Preamplifier          | QLW-18405536-JO       | 15964001005   | 2022/9/16        | 2023/9/15            |
| MICRO-COAX      | Coaxial Cable         | UFB142A-1-2362-200200 | 235772-001    | 2023/8/6         | 2024/8/5             |
| E-Microwave     | Band Rejection Filter | 5150-5850MHz          | OE01902423    | 2023/8/6         | 2024/8/5             |
| Mini Circuits   | High Pass Filter      | VHF-6010+             | 31119         | 2023/8/6         | 2024/8/5             |
| PASTERNAK       | Horn Antenna          | PE9850/2F-20          | 072001        | 2021/2/5         | 2024/2/4             |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data:

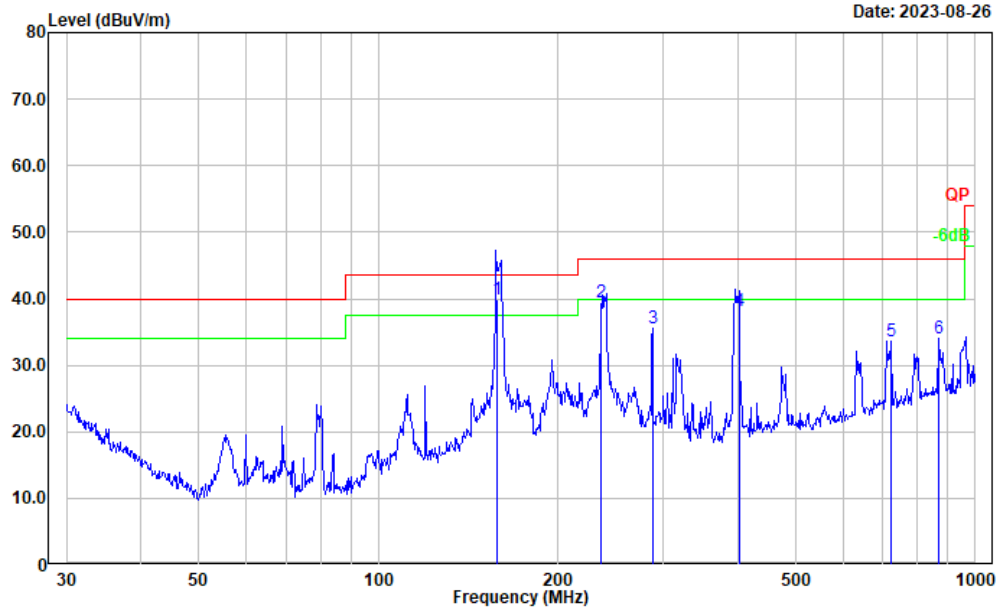
Please refer to the below table and plots.

Testing with Low, middle, high channel per FCC part 15.31(m)/ RSS-Gen with each operation mode (802.11a/n ht20/n ht40 /ac vht80), the worst case mode as below:

## 1) 30MHz-1GHz (802.11n40 model 5755MHz was tested)

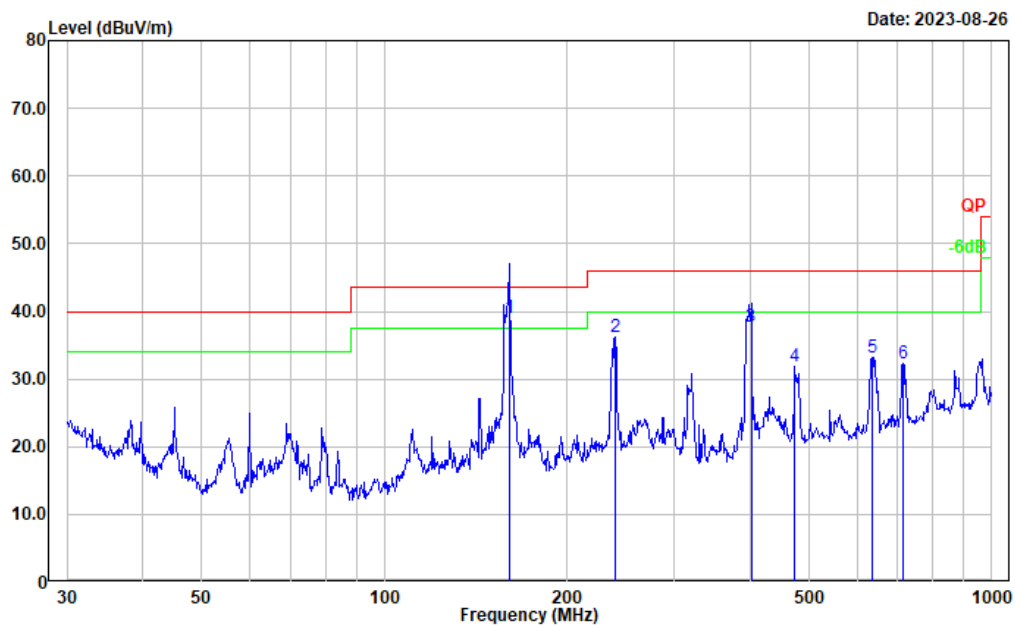
Project No.: CR230744293-RF  
Tester: Vic Du  
Test Mode: Transmitting  
Polarization: horizontal  
Note:

Date: 2023-08-26



| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 157.603            | 51.97             | -12.05           | 39.92              | 43.50             | 3.58           | QP       |
| 2   | 236.471            | 52.48             | -13.06           | 39.42              | 46.00             | 6.58           | QP       |
| 3   | 287.990            | 46.63             | -11.16           | 35.47              | 46.00             | 10.53          | Peak     |
| 4   | 401.639            | 46.89             | -8.72            | 38.17              | 46.00             | 7.83           | QP       |
| 5   | 724.261            | 36.72             | -3.10            | 33.62              | 46.00             | 12.38          | Peak     |
| 6   | 869.130            | 35.24             | -1.21            | 34.03              | 46.00             | 11.97          | Peak     |

Project No.: CR230744293-RF  
Tester: Vic Du  
Test Mode: Transmitting  
Polarization: vertical  
Note:



| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 160.564            | 51.17             | -12.12           | 39.05              | 43.50             | 4.45           | QP       |
| 2   | 239.987            | 49.28             | -13.02           | 36.26              | 46.00             | 9.74           | Peak     |
| 3   | 401.534            | 46.37             | -8.72            | 37.65              | 46.00             | 8.35           | QP       |
| 4   | 473.835            | 38.22             | -6.30            | 31.92              | 46.00             | 14.08          | Peak     |
| 5   | 636.134            | 37.61             | -4.49            | 33.12              | 46.00             | 12.88          | Peak     |
| 6   | 714.173            | 35.66             | -3.39            | 32.27              | 46.00             | 13.73          | Peak     |

**2) 1GHz-40GHz:****5150-5250MHz****802.11a:**

| Frequency<br>(MHz)       | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low Channel: 5180 MHz    |                   |          |                |                  |                    |                   |                |
| 5150.000                 | 31.46             | PK       | V              | 38.64            | 64.08              | 74.00             | 9.92           |
| 5150.000                 | 17.87             | AV       | V              | 38.64            | 50.49              | 54.00             | 3.51           |
| 10360.000                | 48.33             | PK       | V              | 19.18            | 61.49              | 68.20             | 6.71           |
| Middle Channel: 5200 MHz |                   |          |                |                  |                    |                   |                |
| 10400.000                | 48.40             | PK       | V              | 19.16            | 61.54              | 68.20             | 6.66           |
| High Channel: 5240 MHz   |                   |          |                |                  |                    |                   |                |
| 5350.000                 | 28.47             | PK       | V              | 39.03            | 61.48              | 74.00             | 12.52          |
| 5350.000                 | 14.19             | AV       | V              | 39.03            | 47.20              | 54.00             | 6.80           |
| 10480.000                | 48.27             | PK       | V              | 18.86            | 61.11              | 68.20             | 7.09           |

**802.11n ht20:**

| Frequency<br>(MHz)       | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low Channel: 5180MHz     |                   |          |                |                  |                    |                   |                |
| 5150.000                 | 31.90             | PK       | V              | 38.64            | 64.52              | 74.00             | 9.48           |
| 5150.000                 | 18.03             | AV       | V              | 38.64            | 50.65              | 54.00             | 3.35           |
| 10360.000                | 48.09             | PK       | V              | 19.18            | 61.25              | 68.20             | 6.95           |
| Middle Channel: 5200 MHz |                   |          |                |                  |                    |                   |                |
| 10400.000                | 47.90             | PK       | V              | 19.16            | 61.04              | 68.20             | 7.16           |
| High Channel: 5240 MHz   |                   |          |                |                  |                    |                   |                |
| 5350.000                 | 28.70             | PK       | V              | 39.03            | 61.71              | 74.00             | 12.29          |
| 5350.000                 | 14.37             | AV       | V              | 39.03            | 47.38              | 54.00             | 6.62           |
| 10480.000                | 48.10             | PK       | V              | 18.86            | 60.94              | 68.20             | 7.26           |

**802.11n ht40:**

| Frequency<br>(MHz)     | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|------------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                        | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low Channel: 5190 MHz  |                   |          |                |                  |                    |                   |                |
| 5150.000               | 32.21             | PK       | V              | 38.64            | 64.83              | 74.00             | 9.17           |
| 5150.000               | 18.27             | AV       | V              | 38.64            | 50.89              | 54.00             | 3.11           |
| 10380.000              | 47.94             | PK       | V              | 19.17            | 61.09              | 68.20             | 7.11           |
| High Channel: 5230 MHz |                   |          |                |                  |                    |                   |                |
| 5350.000               | 28.78             | PK       | V              | 39.03            | 61.79              | 74.00             | 12.21          |
| 5350.000               | 15.06             | AV       | V              | 39.03            | 48.07              | 54.00             | 5.93           |
| 10460.000              | 48.03             | PK       | V              | 18.94            | 60.95              | 68.20             | 7.25           |

**802.11ac vht80:**

| Frequency (MHz) | Receiver       |          | Polar (H/V) | Factor (dB/m) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|----------------|----------|-------------|---------------|-----------------|----------------|-------------|
|                 | Reading (dBμV) | Detector |             |               |                 |                |             |
| 5150.000        | 31.93          | PK       | V           | 38.64         | 64.55           | 74.00          | 9.45        |
| 5150.000        | 18.38          | AV       | V           | 38.64         | 51.00           | 54.00          | 3.00        |
| 5350.000        | 29.10          | PK       | V           | 39.03         | 62.11           | 74.00          | 11.89       |
| 5350.000        | 16.14          | AV       | V           | 39.03         | 49.15           | 54.00          | 4.85        |
| 10420.000       | 47.87          | PK       | V           | 19.09         | 60.94           | 68.20          | 7.26        |

Note:

Result = Reading + Factor- Distance extrapolation Factor

For 1-40GHz:

Distance extrapolation Factor =  $20 \log (\text{specific distance } [3\text{m}]/\text{test distance } [1.5\text{m}])$  dB = 6.02 dB

**5725-5850MHz:****802.11a:**

| Frequency<br>(MHz)       | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low Channel: 5745MHz     |                   |          |                |                  |                    |                   |                |
| 5725.000                 | 39.70             | PK       | V              | 39.48            | 73.16              | 122.20            | 49.04          |
| 5720.000                 | 37.12             | PK       | V              | 39.49            | 70.59              | 110.80            | 40.21          |
| 5700.000                 | 29.39             | PK       | V              | 39.51            | 62.88              | 105.20            | 42.32          |
| 5650.000                 | 28.50             | PK       | V              | 39.49            | 61.97              | 68.20             | 6.23           |
| 11490.000                | 47.50             | PK       | V              | 20.67            | 62.15              | 74.00             | 11.85          |
| 11490.000                | 33.87             | AV       | V              | 20.67            | 48.52              | 54.00             | 5.48           |
| Middle Channel: 5785 MHz |                   |          |                |                  |                    |                   |                |
| 11570.000                | 47.20             | PK       | V              | 20.83            | 62.01              | 74.00             | 11.99          |
| 11570.000                | 32.96             | AV       | V              | 20.83            | 47.77              | 54.00             | 6.23           |
| High Channel: 5825 MHz   |                   |          |                |                  |                    |                   |                |
| 5850.000                 | 37.79             | PK       | V              | 39.49            | 71.26              | 122.20            | 50.94          |
| 5855.000                 | 35.98             | PK       | V              | 39.51            | 69.47              | 110.80            | 41.33          |
| 5875.000                 | 31.27             | PK       | V              | 39.60            | 64.85              | 105.20            | 40.35          |
| 5925.000                 | 29.78             | PK       | V              | 39.68            | 63.44              | 68.20             | 4.76           |
| 11650.000                | 46.41             | PK       | V              | 21.07            | 61.46              | 74.00             | 12.54          |
| 11650.000                | 32.24             | AV       | V              | 21.07            | 47.29              | 54.00             | 6.71           |

**802.11n ht20:**

| Frequency<br>(MHz)       | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low Channel: 5745MHz     |                   |          |                |                  |                    |                   |                |
| 5725.000                 | 40.85             | PK       | V              | 39.48            | 74.31              | 122.20            | 47.89          |
| 5720.000                 | 38.63             | PK       | V              | 39.49            | 72.10              | 110.80            | 38.70          |
| 5700.000                 | 29.88             | PK       | V              | 39.51            | 63.37              | 105.20            | 41.83          |
| 5650.000                 | 28.65             | PK       | V              | 39.49            | 62.12              | 68.20             | 6.08           |
| 11490.000                | 47.30             | PK       | V              | 20.67            | 61.95              | 74.00             | 12.05          |
| 11490.000                | 33.01             | AV       | V              | 20.67            | 47.66              | 54.00             | 6.34           |
| Middle Channel: 5785 MHz |                   |          |                |                  |                    |                   |                |
| 11570.000                | 47.06             | PK       | V              | 20.83            | 61.87              | 74.00             | 12.13          |
| 11570.000                | 32.83             | AV       | V              | 20.83            | 47.64              | 54.00             | 6.36           |
| High Channel: 5825 MHz   |                   |          |                |                  |                    |                   |                |
| 5850.000                 | 39.06             | PK       | V              | 39.49            | 72.53              | 122.20            | 49.67          |
| 5855.000                 | 37.19             | PK       | V              | 39.51            | 70.68              | 110.80            | 40.12          |
| 5875.000                 | 31.78             | PK       | V              | 39.60            | 65.36              | 105.20            | 39.84          |
| 5925.000                 | 29.94             | PK       | V              | 39.68            | 63.60              | 68.20             | 4.60           |
| 11650.000                | 46.21             | PK       | V              | 21.07            | 61.26              | 74.00             | 12.74          |
| 11650.000                | 32.09             | AV       | V              | 21.07            | 47.14              | 54.00             | 6.86           |

**802.11n ht40:**

| Frequency<br>(MHz)     | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|------------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                        | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low Channel: 5755 MHz  |                   |          |                |                  |                    |                   |                |
| 5725.000               | 43.70             | PK       | V              | 39.48            | 77.16              | 122.20            | 45.04          |
| 5720.000               | 40.34             | PK       | V              | 39.49            | 73.81              | 110.80            | 36.99          |
| 5700.000               | 33.44             | PK       | V              | 39.51            | 66.93              | 105.20            | 38.27          |
| 5650.000               | 28.93             | PK       | V              | 39.49            | 62.40              | 68.20             | 5.80           |
| 11510.000              | 47.25             | PK       | V              | 20.67            | 61.90              | 74.00             | 12.10          |
| 11510.000              | 33.66             | AV       | V              | 20.67            | 48.31              | 54.00             | 5.69           |
| High Channel: 5795 MHz |                   |          |                |                  |                    |                   |                |
| 5850.000               | 37.98             | PK       | V              | 39.49            | 71.45              | 122.20            | 50.75          |
| 5855.000               | 36.10             | PK       | V              | 39.51            | 69.59              | 110.80            | 41.21          |
| 5875.000               | 33.70             | PK       | V              | 39.60            | 67.28              | 105.20            | 37.92          |
| 5925.000               | 30.14             | PK       | V              | 39.68            | 63.80              | 68.20             | 4.40           |
| 11590.000              | 46.94             | PK       | V              | 20.88            | 61.80              | 74.00             | 12.20          |
| 11590.000              | 33.42             | AV       | V              | 20.88            | 48.28              | 54.00             | 5.72           |

**802.11ac vht80:**

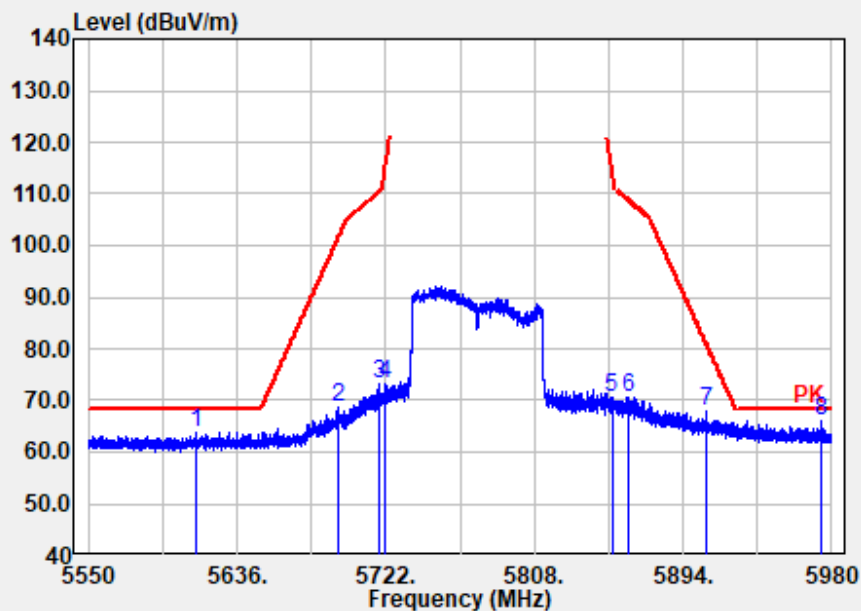
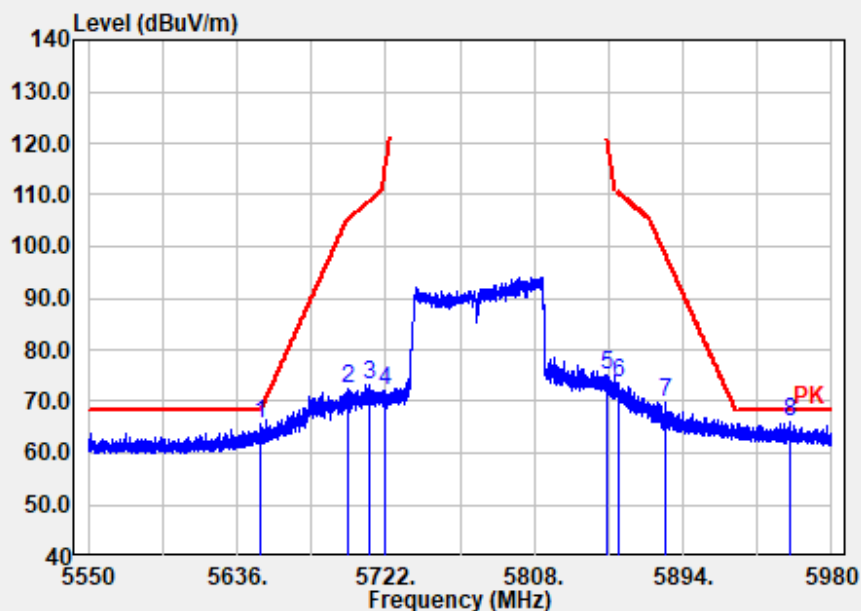
| Frequency<br>(MHz) | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                    | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| 5725.000           | 43.64             | PK       | V              | 39.48            | 77.10              | 122.20            | 45.10          |
| 5720.000           | 40.56             | PK       | V              | 39.49            | 74.03              | 110.80            | 36.77          |
| 5700.000           | 36.72             | PK       | V              | 39.51            | 70.21              | 105.20            | 34.99          |
| 5650.000           | 29.65             | PK       | V              | 39.49            | 63.12              | 68.20             | 5.08           |
| 5850.000           | 39.61             | PK       | V              | 39.49            | 73.08              | 122.20            | 49.12          |
| 5855.000           | 37.80             | PK       | V              | 39.51            | 71.29              | 110.80            | 39.51          |
| 5875.000           | 34.97             | PK       | V              | 39.60            | 68.55              | 105.20            | 36.65          |
| 5925.000           | 31.24             | PK       | V              | 39.68            | 64.90              | 68.20             | 3.30           |
| 11550.000          | 47.48             | PK       | V              | 20.78            | 62.24              | 74.00             | 11.76          |
| 11550.000          | 34.61             | AV       | V              | 20.78            | 49.37              | 54.00             | 4.63           |

Note:

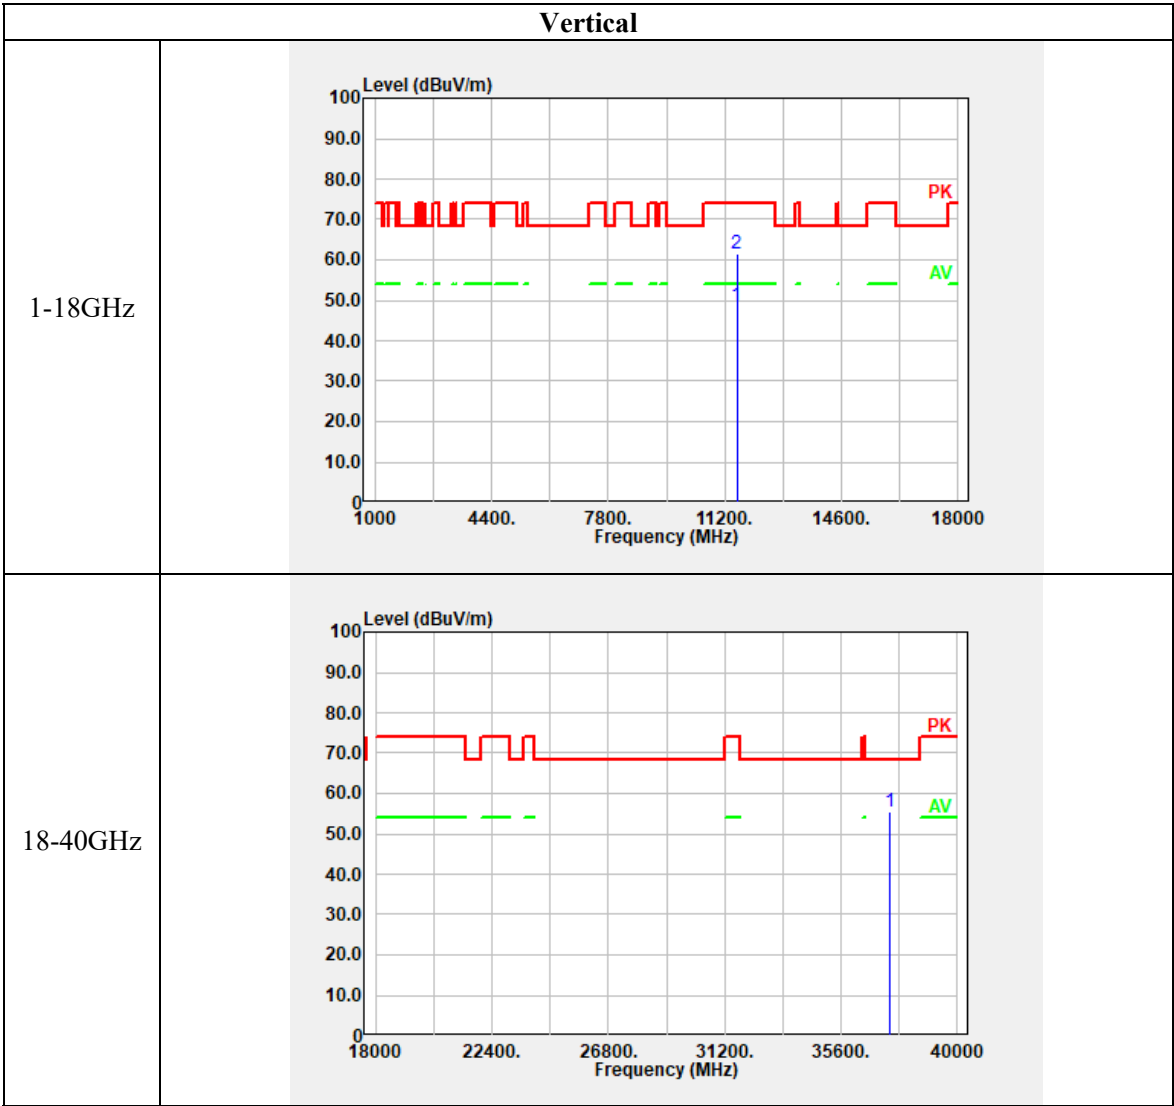
Result = Reading + Factor- Distance extrapolation Factor

For 1-40GHz:

Distance extrapolation Factor =  $20 \log (\text{specific distance } [3\text{m}] / \text{test distance } [1.5\text{m}])$  dB = 6.02 dB

**Worst Test plots for Band Edge Measurements (Radiated)****802.11 ac80****Test Channel:****5775MHz****Ant. Polar. :****Horizontal****802.11 ac80****Test Channel:****5775MHz****Ant. Polar. :****Vertical**

**Worst Test plots (802.11ac vht80 5775MHz was the worst)**



**4.3 26dB attenuated below the channel power:**

|                |           |              |              |
|----------------|-----------|--------------|--------------|
| Serial Number: | 29F9-2    | Test Date:   | 2023/7/22    |
| Test Site:     | RF        | Test Mode:   | Transmitting |
| Tester:        | Arthur Su | Test Result: | Pass         |

**Environmental Conditions:**

|                      |      |                              |    |                        |       |
|----------------------|------|------------------------------|----|------------------------|-------|
| Temperature:<br>(°C) | 24.5 | Relative<br>Humidity:<br>(%) | 54 | ATM Pressure:<br>(kPa) | 100.5 |
|----------------------|------|------------------------------|----|------------------------|-------|

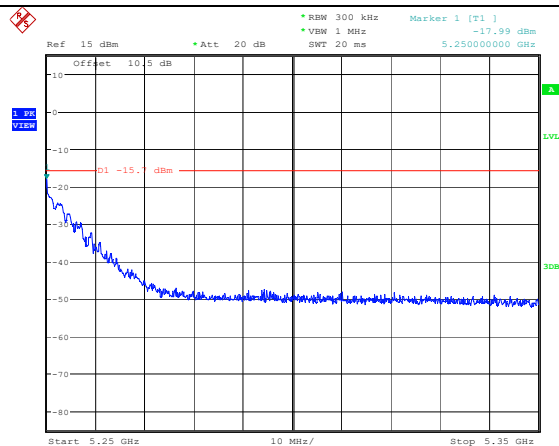
**Test Equipment List and Details:**

| Manufacturer | Description        | Model         | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------|---------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer  | FSU26         | 200120        | 2023/4/18        | 2024/4/17            |
| zhuoxiang    | Coaxial Cable      | SMA-178       | 211003        | Each time        | N/A                  |
| eastsheep    | Coaxial Attenuator | 2W-SMA-JK-18G | 21060302      | Each time        | N/A                  |

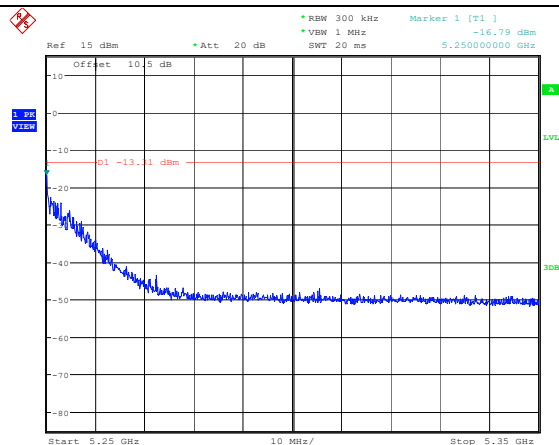
*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data:**

Note: the requirement is for 5150-5250 MHz band. The channel power please refer to the power test result in section 4.5.

**5150-5250MHz:****26dB attenuated below the channel power**802.11a  
Highest Channel

Date: 22.JUL.2023 06:54:42

**26dB attenuated below the channel power**802.11n ht20  
Highest Channel

Date: 22.JUL.2023 06:56:40

802.11n ht40  
Highest Channel



802.11ac vht80  
Middle Channel



**4.4 Emission Bandwidth:**

|                |           |              |              |
|----------------|-----------|--------------|--------------|
| Serial Number: | 29F9-2    | Test Date:   | 2023/7/22    |
| Test Site:     | RF        | Test Mode:   | Transmitting |
| Tester:        | Arthur Su | Test Result: | Pass         |

**Environmental Conditions:**

|                      |      |                              |    |                        |       |
|----------------------|------|------------------------------|----|------------------------|-------|
| Temperature:<br>(°C) | 24.5 | Relative<br>Humidity:<br>(%) | 54 | ATM Pressure:<br>(kPa) | 100.5 |
|----------------------|------|------------------------------|----|------------------------|-------|

**Test Equipment List and Details:**

| Manufacturer | Description        | Model         | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------|---------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer  | FSU26         | 200120        | 2023/4/18        | 2024/4/17            |
| zhuoxiang    | Coaxial Cable      | SMA-178       | 211003        | Each time        | N/A                  |
| eastsheep    | Coaxial Attenuator | 2W-SMA-JK-18G | 21060302      | Each time        | N/A                  |

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data:**

5150-5250 MHz:

| Test Modes                                                                                                                                 | Test Frequency (MHz) | 26 dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|--------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-----------------------|------------------------------|
| 802.11a                                                                                                                                    | 5180                 | 20.32                 | 16.84                        |
|                                                                                                                                            | 5200                 | 20.28                 | 16.84                        |
|                                                                                                                                            | 5240                 | 20.48                 | 16.84                        |
| 802.11n ht20                                                                                                                               | 5180                 | 20.72                 | 17.84                        |
|                                                                                                                                            | 5200                 | 20.6                  | 17.84                        |
|                                                                                                                                            | 5240                 | 20.68                 | 17.80                        |
| 802.11n ht40                                                                                                                               | 5190                 | 41.44                 | 36.32                        |
|                                                                                                                                            | 5230                 | 41.36                 | 36.32                        |
| 802.11ac vht80                                                                                                                             | 5210                 | 82.56                 | 76.16                        |
| Note:<br>the 99% Occupied Bandwidth have not fall into the band 5250-5350MHz,<br>please refer to the test plots of 99% Occupied Bandwidth. |                      |                       |                              |

5725-5850 MHz:

| Test Modes                                                                                                                                                                                 | Test Frequency (MHz) | 6 dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------------|------------------------------|
| 802.11a                                                                                                                                                                                    | 5745                 | 16.36                | 17.16                        |
|                                                                                                                                                                                            | 5785                 | 16.36                | 17.36                        |
|                                                                                                                                                                                            | 5825                 | 16.12                | 17.48                        |
| 802.11n ht20                                                                                                                                                                               | 5745                 | 17.6                 | 17.96                        |
|                                                                                                                                                                                            | 5785                 | 17.4                 | 18.12                        |
|                                                                                                                                                                                            | 5825                 | 17.64                | 18.16                        |
| 802.11n ht40                                                                                                                                                                               | 5755                 | 36.16                | 37.12                        |
|                                                                                                                                                                                            | 5795                 | 36.24                | 38.32                        |
| 802.11ac vht80                                                                                                                                                                             | 5775                 | 76.68                | 76.48                        |
| Note:<br>6dB Emission Bandwidth Limit: $\geq 0.5$ MHz<br>the 99% Occupied Bandwidth have not fall into the band 5470-5725MHz,<br>please refer to the test plots of 99% Occupied Bandwidth. |                      |                      |                              |

## 26dB Emission Bandwidth

Ref 25 dBm      • Att 30 dB      • Res 300 kHz      Delta 2 [T1]      • BW 1 MHz      -1.53 dB      • SWT 1 s      20.32000000 MHz

Offset 1015 dB

Marker 1 [T1]      -24.18 dBm  
5.169880000 GHz

Marker 3 [T1]      -1.52 dBm  
5.181480000 GHz

01 -24.18 dBm

Center 5.18 GHz      4 MHz/      Span 40 MHz

\* RBW 300 kHz Delta 2 [T1]  
 \* VNM 1 MHz -0.46 dB  
 \* SWT 1 s 20.280000000 MHz

Ref 25 dBm  
 Att 30 dB

Offset 10.5 dB  
 Marker 1 [T1]  
 -20.40 dBm  
 5.189880000 GHz  
 Marker 3 [T1]  
 -0.82 dBm  
 5.201520000 GHz

01 -24.18 dBm

Center 5.2 GHz  
 Span 40 MHz  
 4 MHz/

Ref 25 dBm Att 30 dB SWT 1 s RBM 300 kHz VBM 1 MHz Delta 2 [T1] -0.56 dB 20.480000000 MHz

Offset 1015 dB

Marker 1 [T1] -24.15 dBm  
5.229800000 GHz  
Marker 3 [T1] -0.56 dBm  
5.238560000 GHz

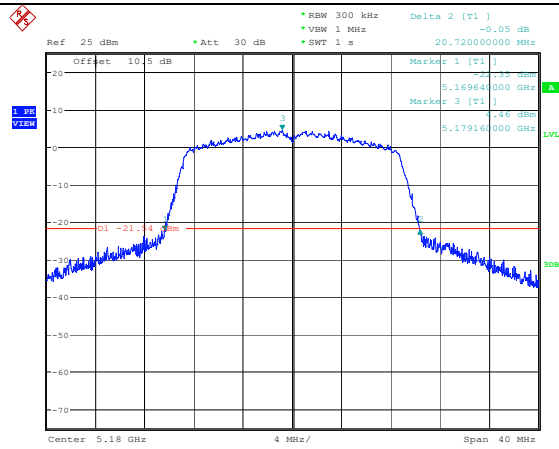
3

D1 -24.15 dBm

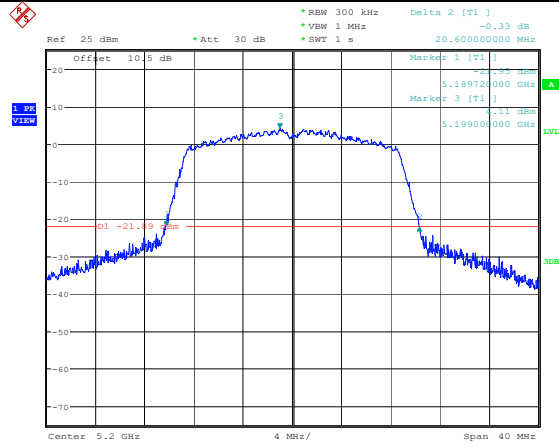
Center 5.24 GHz 4 MHz/ Span 40 MHz

Page 51 of 79

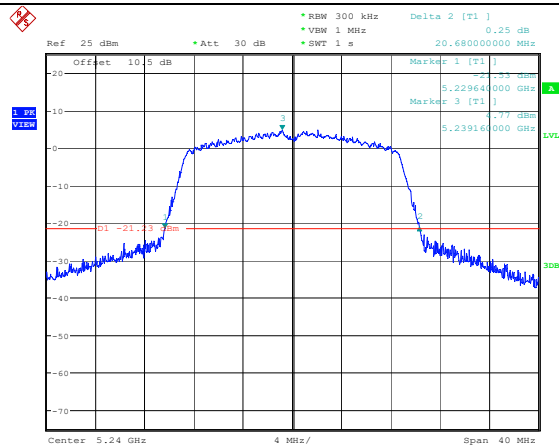
## 26dB Emission Bandwidth

802.11n ht20  
Lowest Channel

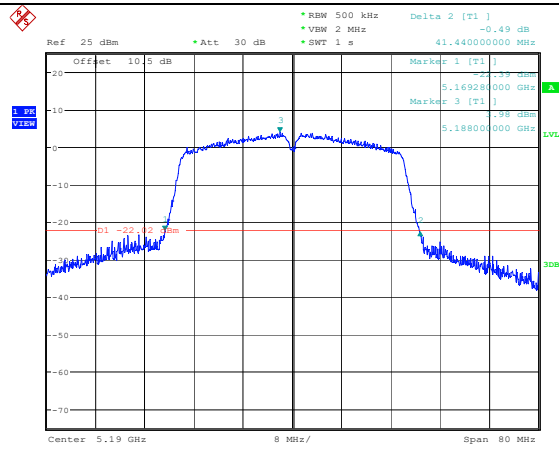
Date: 22.JUL.2023 03:38:17

802.11n ht20  
Middle Channel

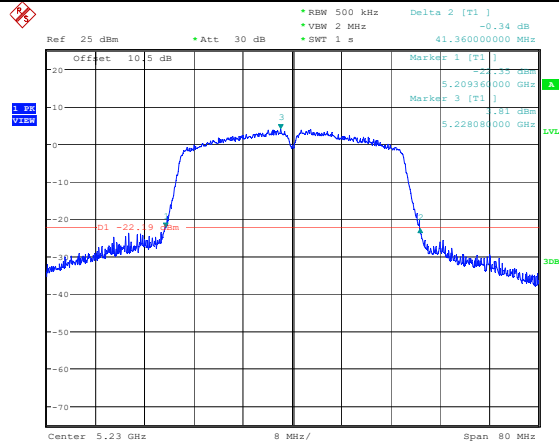
Date: 22.JUL.2023 03:41:32

802.11n ht20  
Highest Channel

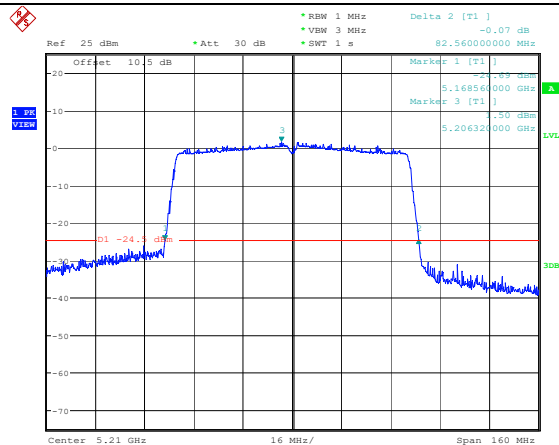
Date: 22.JUL.2023 03:45:00

**26dB Emission Bandwidth**802.11n ht40  
Lowest Channel

Date: 22.JUL.2023 03:56:07

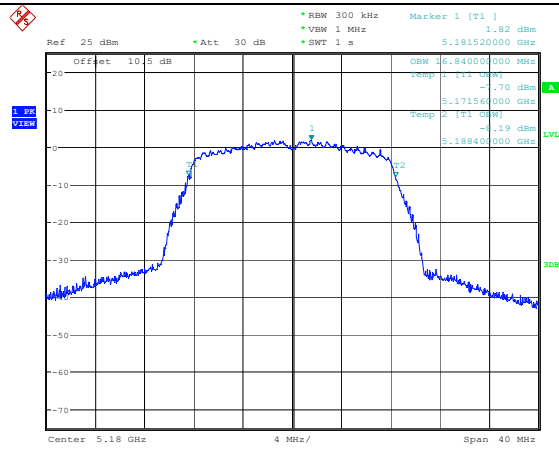
802.11n ht40  
Highest Channel

Date: 22.JUL.2023 03:59:31

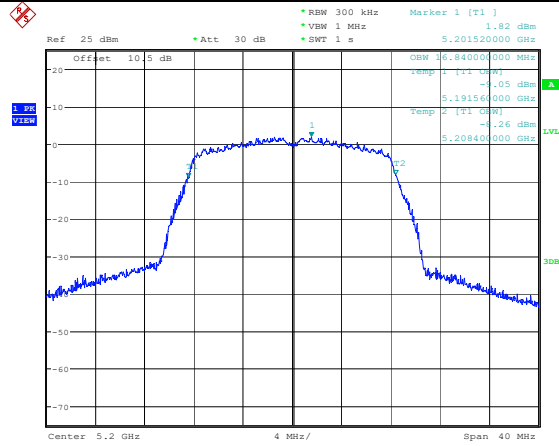
802.11ac vht80  
Middle Channel

Date: 22.JUL.2023 04:08:32

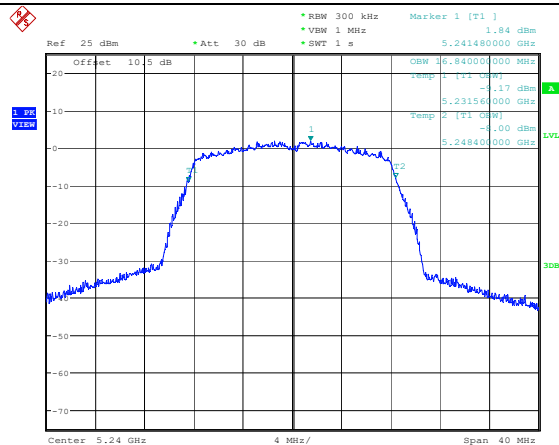
## 99% Emission Bandwidth

802.11a  
Lowest Channel

Date: 22.JUL.2023 03:20:26

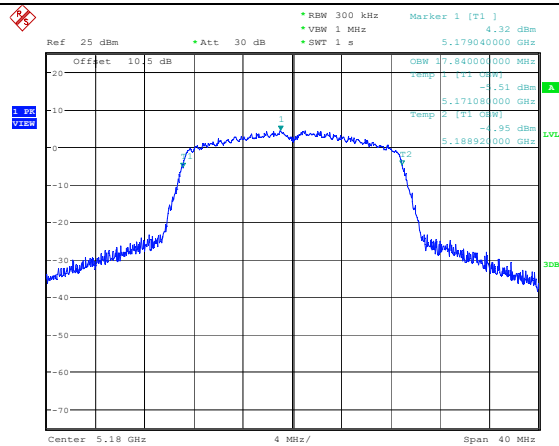
802.11a  
Middle Channel

Date: 22.JUL.2023 03:23:25

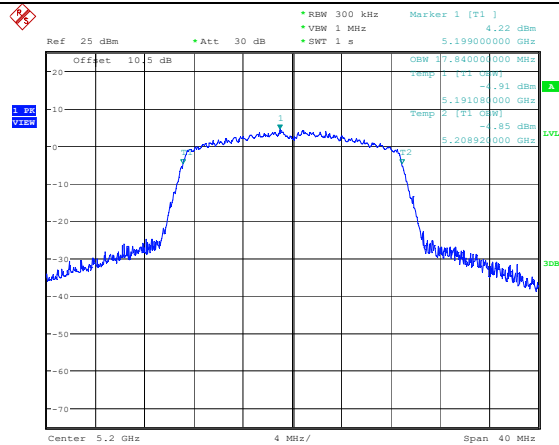
802.11a  
Highest Channel

Date: 22.JUL.2023 03:25:49

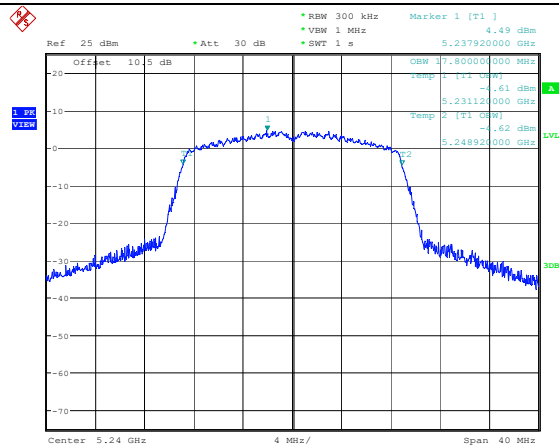
## 99% Emission Bandwidth

802.11n ht20  
Lowest Channel

Date: 22.JUL.2023 03:37:43

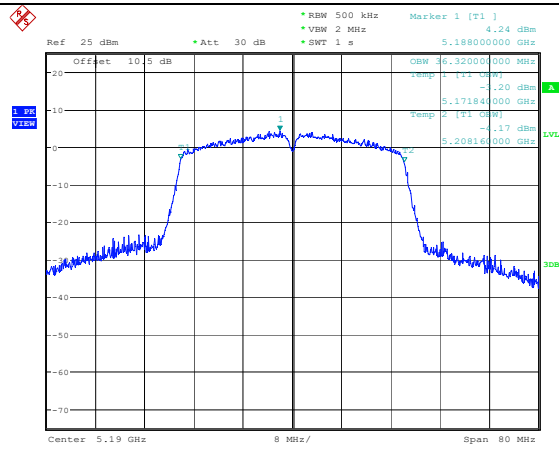
802.11n ht20  
Middle Channel

Date: 22.JUL.2023 03:40:56

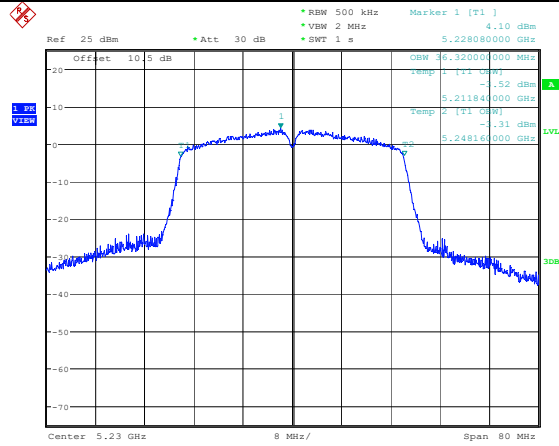
802.11n ht20  
Highest Channel

Date: 22.JUL.2023 03:44:25

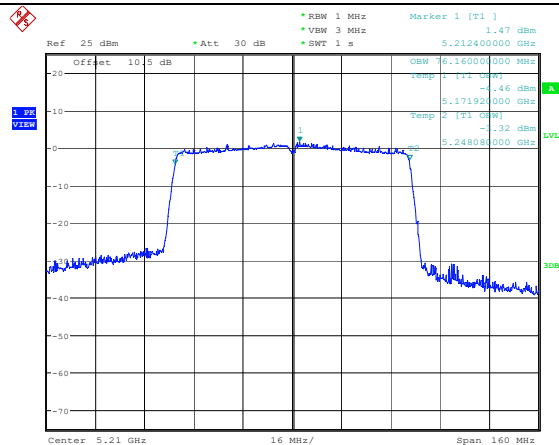
## 99% Emission Bandwidth

802.11n ht40  
Lowest Channel

Date: 22.JUL.2023 03:55:33

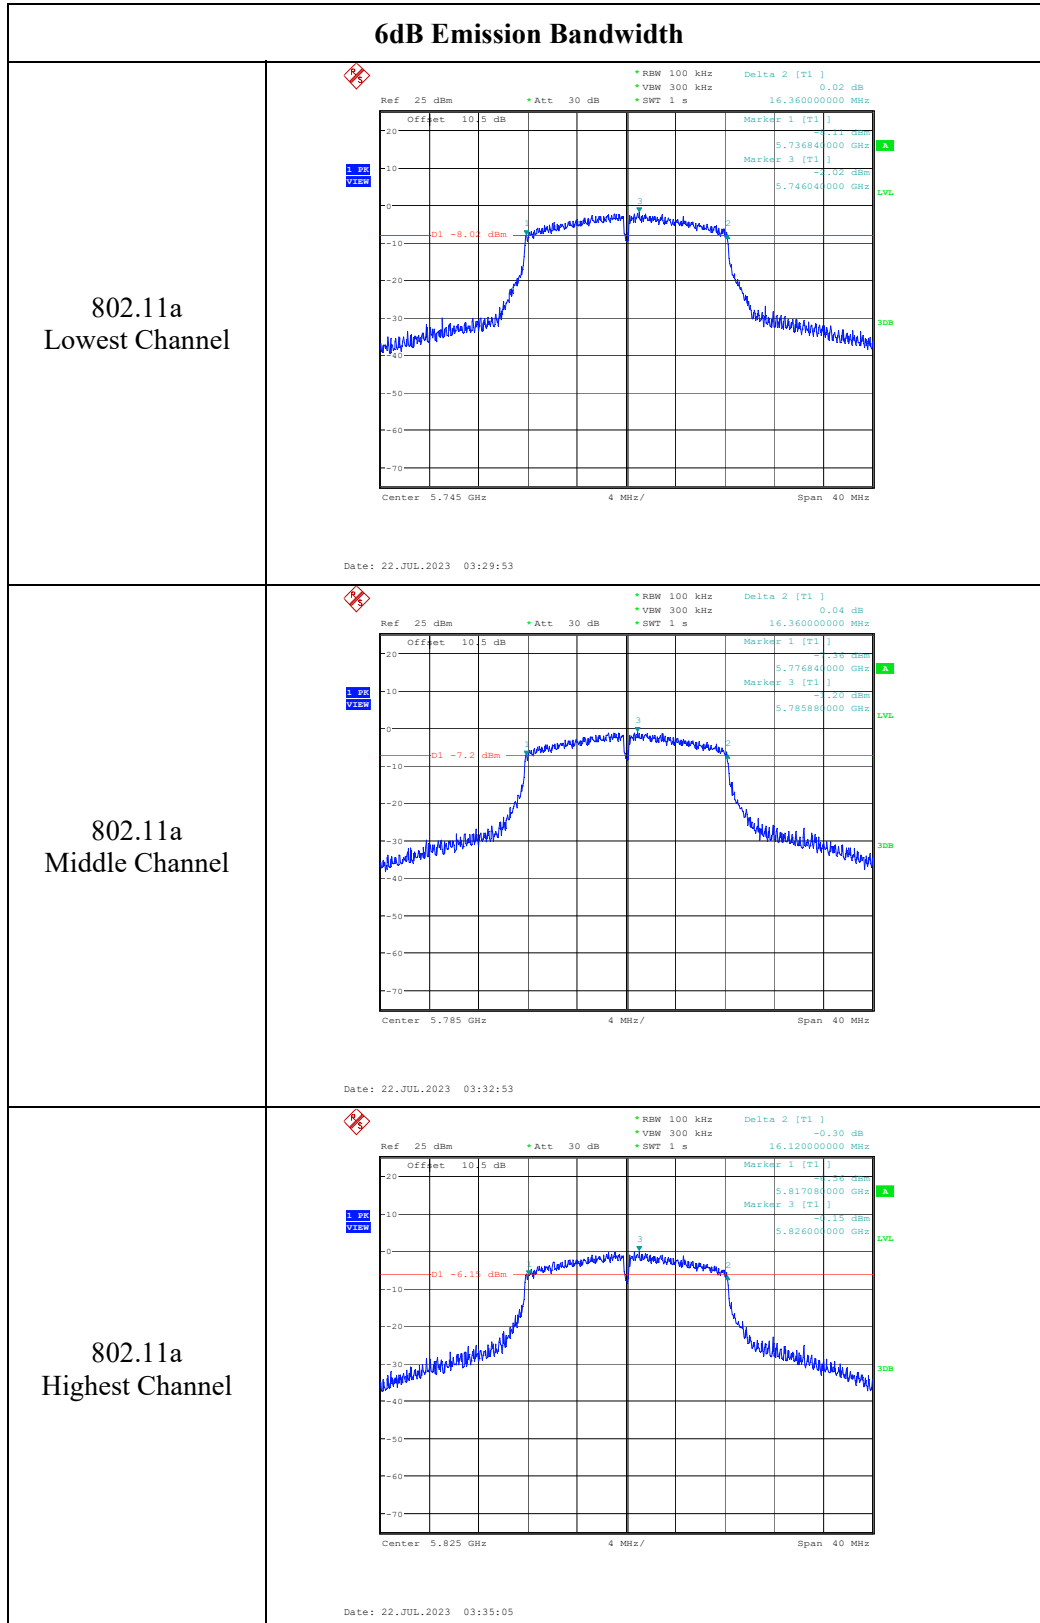
802.11n ht40  
Highest Channel

Date: 22.JUL.2023 03:58:44

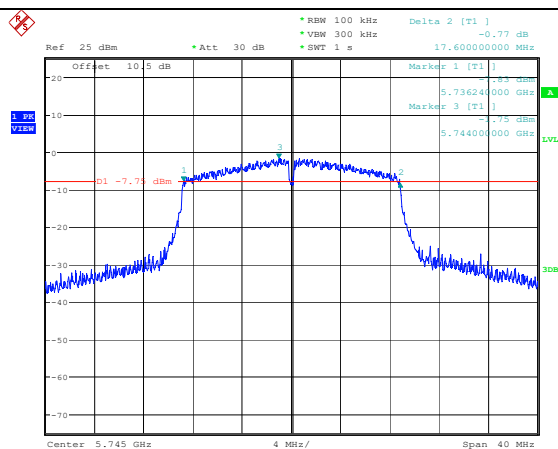
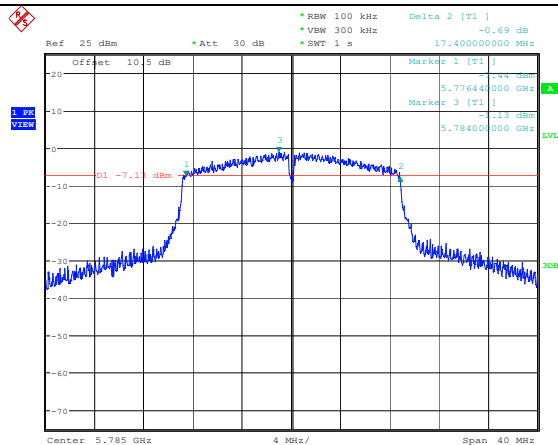
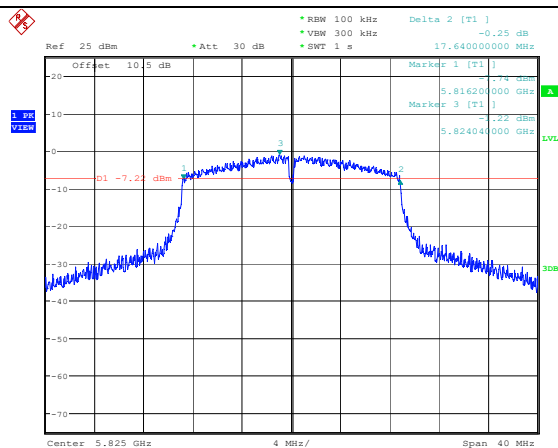
802.11ac vht80  
Middle Channel

Date: 22.JUL.2023 04:07:57

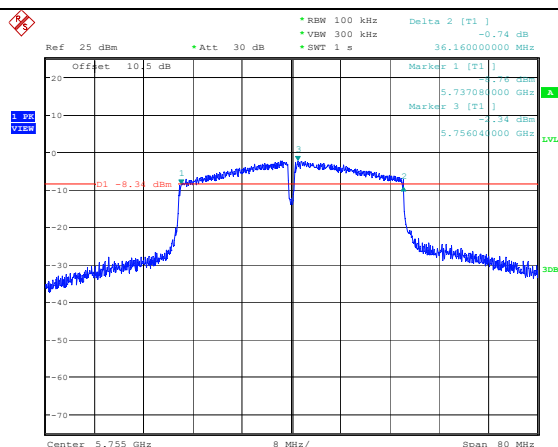
## 5725-5850MHz:



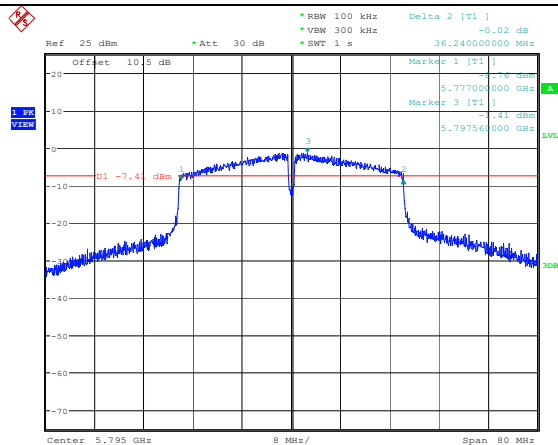
## 6dB Emission Bandwidth

802.11n ht20  
Lowest Channel802.11n ht20  
Middle Channel802.11n ht20  
Highest Channel

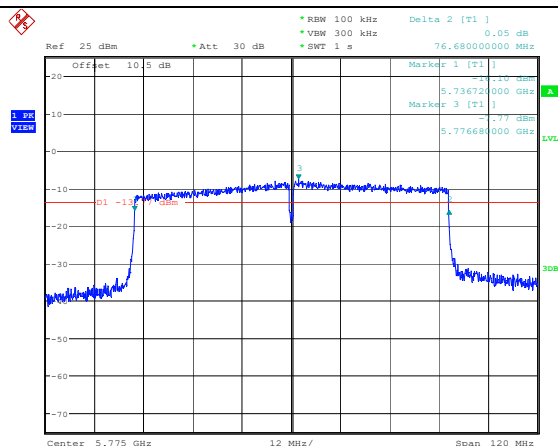
## 6dB Emission Bandwidth

802.11n ht40  
Lowest Channel

Date: 22.JUL.2023 04:01:55

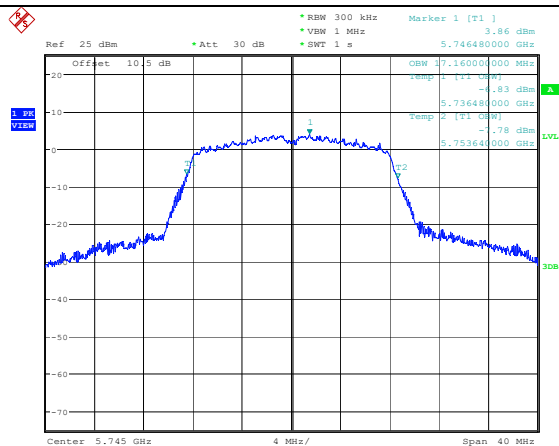
802.11n ht40  
Highest Channel

Date: 22.JUL.2023 04:04:59

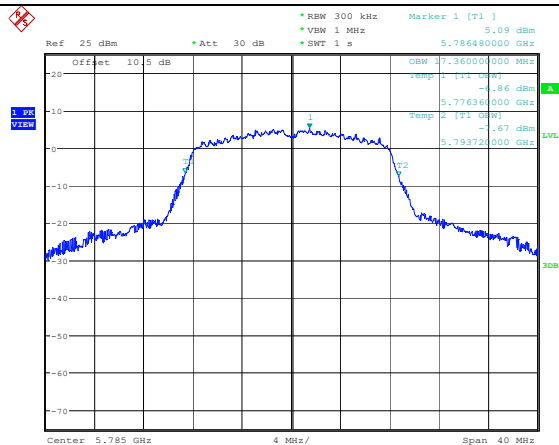
802.11ac vht80  
Middle Channel

Date: 22.JUL.2023 04:11:11

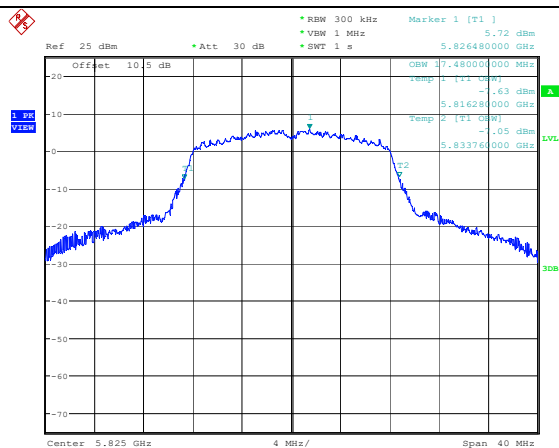
## 99% Emission Bandwidth

802.11a  
Lowest Channel

Date: 22.JUL.2023 03:29:18

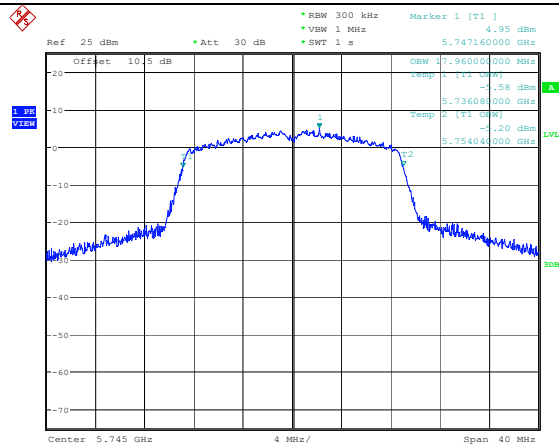
802.11a  
Middle Channel

Date: 22.JUL.2023 03:32:16

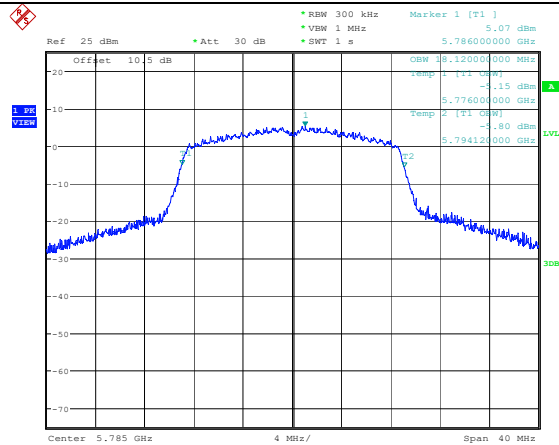
802.11a  
Highest Channel

Date: 22.JUL.2023 03:34:42

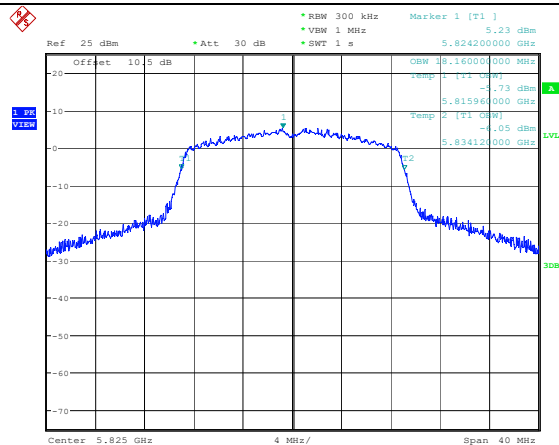
## 99% Emission Bandwidth

802.11n ht20  
Lowest Channel

Date: 22.JUL.2023 03:47:01

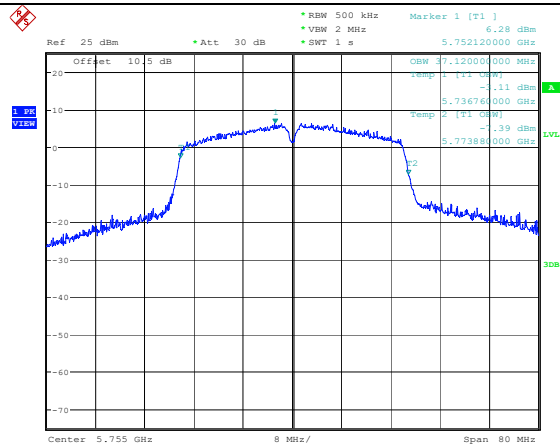
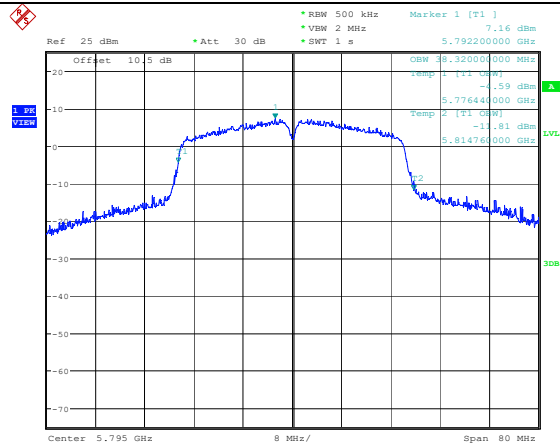
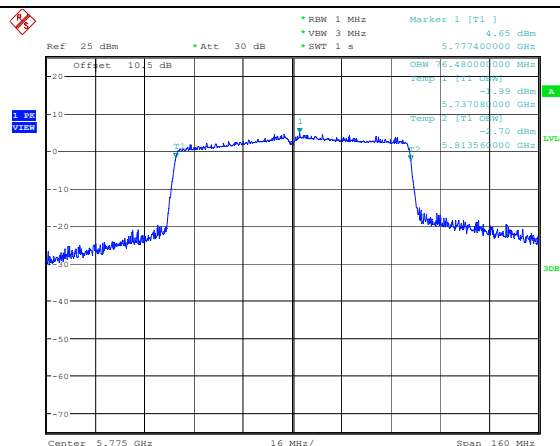
802.11n ht20  
Middle Channel

Date: 22.JUL.2023 03:49:51

802.11n ht20  
Highest Channel

Date: 22.JUL.2023 03:52:23

## 99% Emission Bandwidth

802.11n ht40  
Lowest Channel802.11n ht40  
Highest Channel802.11ac vht80  
Middle Channel

**4.5 Maximum Conducted Output Power:**

|                |           |              |              |
|----------------|-----------|--------------|--------------|
| Serial Number: | 29F9-2    | Test Date:   | 2023/7/22    |
| Test Site:     | RF        | Test Mode:   | Transmitting |
| Tester:        | Arthur Su | Test Result: | Pass         |

**Environmental Conditions:**

|                      |      |                              |    |                        |       |
|----------------------|------|------------------------------|----|------------------------|-------|
| Temperature:<br>(°C) | 24.5 | Relative<br>Humidity:<br>(%) | 54 | ATM Pressure:<br>(kPa) | 100.5 |
|----------------------|------|------------------------------|----|------------------------|-------|

**Test Equipment List and Details:**

| Manufacturer | Description        | Model         | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------|---------------|---------------|------------------|----------------------|
| zhuoxiang    | Coaxial Cable      | SMA-178       | 211003        | Each time        | N/A                  |
| eastsheep    | Coaxial Attenuator | 2W-SMA-JK-18G | 21060302      | Each time        | N/A                  |
| Anritsu      | Power Meter        | ML2495A       | 1106009       | 2022/8/5         | 2023/8/4             |
| Anritsu      | Pulse Power Sensor | MA2411A       | 10780         | 2022/8/5         | 2023/8/4             |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

5150-5250 MHz:

| Test Modes     | Test Frequency<br>(MHz) | Max. Conducted Average Output<br>Power<br>(dBm) |           | EIRP<br>(dBm) |               |
|----------------|-------------------------|-------------------------------------------------|-----------|---------------|---------------|
|                |                         | Result                                          | FCC Limit | Result        | RSS-247 Limit |
| 802.11a        | 5180                    | 11.71                                           | 24        | 13.53         | 22.26         |
|                | 5200                    | 10.22                                           | 24        | 12.04         | 22.26         |
|                | 5240                    | 10.30                                           | 24        | 12.12         | 22.26         |
| 802.11n ht20   | 5180                    | 12.08                                           | 24        | 13.90         | 22.51         |
|                | 5200                    | 12.34                                           | 24        | 14.16         | 22.51         |
|                | 5240                    | 12.69                                           | 24        | 14.51         | 22.50         |
| 802.11n ht40   | 5190                    | 12.62                                           | 24        | 14.44         | 23.00         |
|                | 5230                    | 12.72                                           | 24        | 14.54         | 23.00         |
| 802.11ac vht80 | 5210                    | 8.94                                            | 24        | 10.76         | 23.00         |

Note:

The device is a client device.

5725-5850 MHz:

| Test Modes     | Test Frequency<br>(MHz) | Max. Conducted Average Output<br>Power<br>(dBm) |       |
|----------------|-------------------------|-------------------------------------------------|-------|
|                |                         | Result                                          | Limit |
| 802.11a        | 5745                    | 13.59                                           | 30    |
|                | 5785                    | 13.7                                            | 30    |
|                | 5825                    | 13.46                                           | 30    |
| 802.11n ht20   | 5745                    | 13.44                                           | 30    |
|                | 5785                    | 13.53                                           | 30    |
|                | 5825                    | 13.3                                            | 30    |
| 802.11n ht40   | 5755                    | 13.85                                           | 30    |
|                | 5795                    | 13.28                                           | 30    |
| 802.11ac vht80 | 5775                    | 13.25                                           | 30    |

**4.6 Maximum power spectral density:**

|                |           |              |              |
|----------------|-----------|--------------|--------------|
| Serial Number: | 29F9-2    | Test Date:   | 2023/7/22    |
| Test Site:     | RF        | Test Mode:   | Transmitting |
| Tester:        | Arthur Su | Test Result: | Pass         |

**Environmental Conditions:**

|                      |      |                              |    |                        |       |
|----------------------|------|------------------------------|----|------------------------|-------|
| Temperature:<br>(°C) | 24.5 | Relative<br>Humidity:<br>(%) | 54 | ATM Pressure:<br>(kPa) | 100.5 |
|----------------------|------|------------------------------|----|------------------------|-------|

**Test Equipment List and Details:**

| Manufacturer | Description        | Model         | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------|---------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer  | FSU26         | 200120        | 2023/4/18        | 2024/4/17            |
| zhuoxiang    | Coaxial Cable      | SMA-178       | 211003        | Each time        | N/A                  |
| eastsheep    | Coaxial Attenuator | 2W-SMA-JK-18G | 21060302      | Each time        | N/A                  |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

5150-5250 MHz:

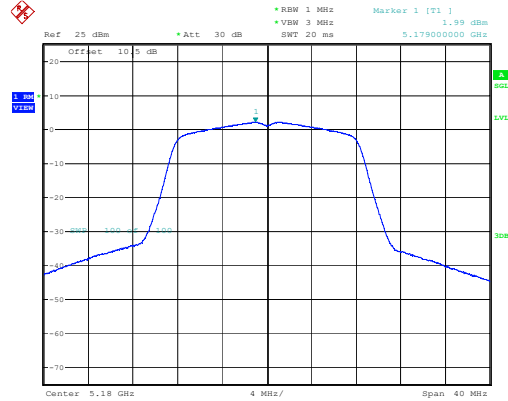
| Test Modes     | Test Frequency<br>(MHz) | Reading<br>(dBm/MHz) | Maximum Conducted<br>Power Spectral Density<br>(dBm/MHz) |           | Maximum EIRP Power<br>Spectral Density<br>(dBm/MHz) |                  |
|----------------|-------------------------|----------------------|----------------------------------------------------------|-----------|-----------------------------------------------------|------------------|
|                |                         |                      | Result                                                   | FCC Limit | Result                                              | RSS-247<br>Limit |
| 802.11a        | 5180                    | 1.99                 | 1.99                                                     | 11        | 3.81                                                | 10               |
|                | 5200                    | -0.48                | -0.48                                                    | 11        | 1.34                                                | 10               |
|                | 5240                    | -0.44                | -0.44                                                    | 11        | 1.38                                                | 10               |
| 802.11n ht20   | 5180                    | 1.17                 | 1.17                                                     | 11        | 2.99                                                | 10               |
|                | 5200                    | 1.44                 | 1.44                                                     | 11        | 3.26                                                | 10               |
|                | 5240                    | 1.82                 | 1.82                                                     | 11        | 3.64                                                | 10               |
| 802.11n ht40   | 5190                    | -1.1                 | -1.10                                                    | 11        | 0.72                                                | 10               |
|                | 5230                    | -0.99                | -0.99                                                    | 11        | 0.83                                                | 10               |
| 802.11ac vht80 | 5210                    | -8.42                | -8.42                                                    | 11        | -6.60                                               | 10               |

5725-5850 MHz:

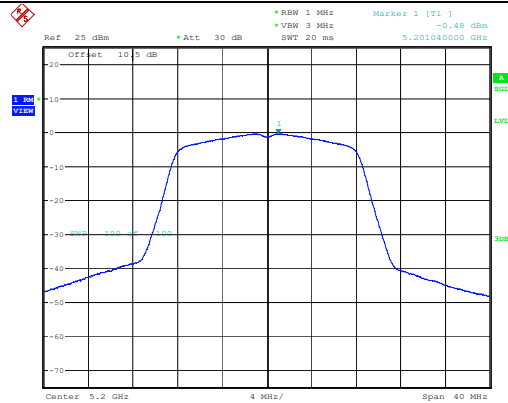
| Test Modes     | Test Frequency (MHz) | Reading (dBm/500kHz) | Maximum Power Spectral Density (dBm/500kHz) |       |
|----------------|----------------------|----------------------|---------------------------------------------|-------|
|                |                      |                      | Result                                      | Limit |
| 802.11a        | 5745                 | 0.04                 | 0.04                                        | 30    |
|                | 5785                 | 0.13                 | 0.13                                        | 30    |
|                | 5825                 | -0.04                | -0.04                                       | 30    |
| 802.11n ht20   | 5745                 | -0.22                | -0.22                                       | 30    |
|                | 5785                 | -0.12                | -0.12                                       | 30    |
|                | 5825                 | -0.26                | -0.26                                       | 30    |
| 802.11n ht40   | 5755                 | -2.70                | -2.70                                       | 30    |
|                | 5795                 | -3.34                | -3.34                                       | 30    |
| 802.11ac vht80 | 5775                 | -7.12                | -7.12                                       | 30    |

## 5150-5250MHz:

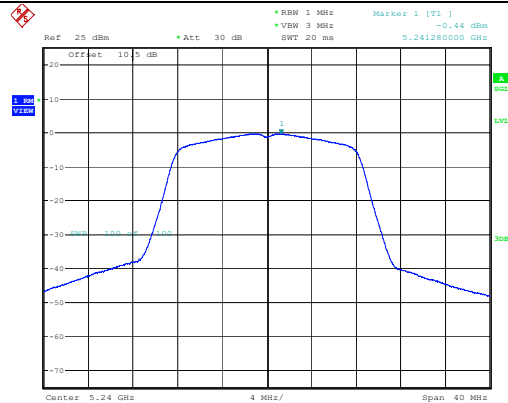
## Maximum power spectral density

802.11a  
Lowest Channel

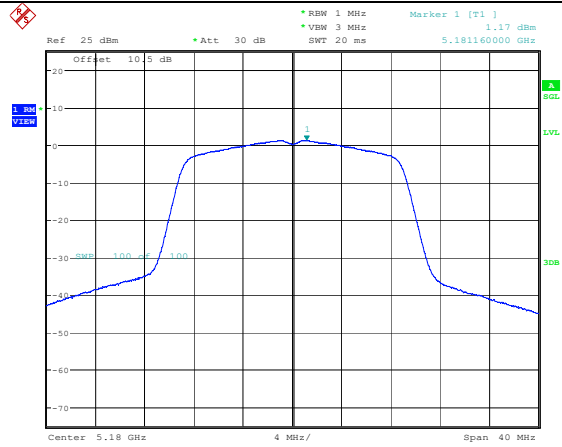
Date: 22.JUL.2023 05:02:44

802.11a  
Middle Channel

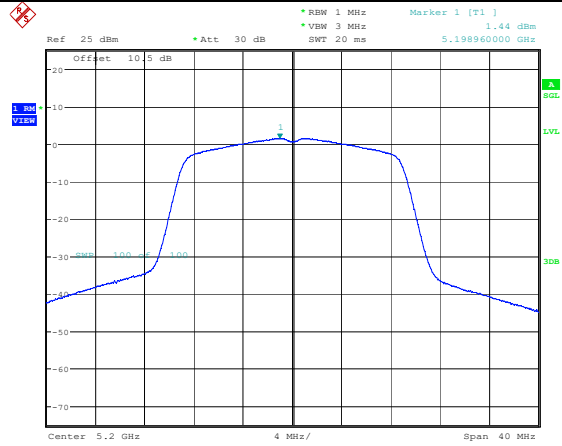
Date: 22.JUL.2023 05:05:34

802.11a  
Highest Channel

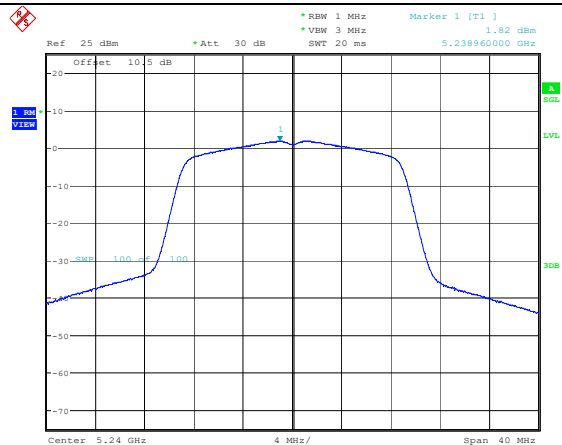
Date: 22.JUL.2023 05:06:46

**Maximum power spectral density**802.11n ht20  
Lowest Channel

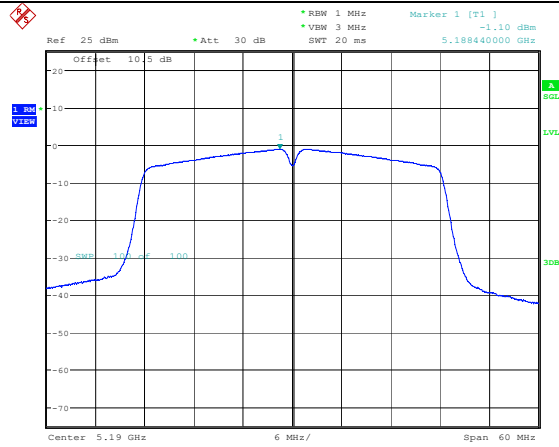
Date: 22.JUL.2023 05:08:52

802.11n ht20  
Middle Channel

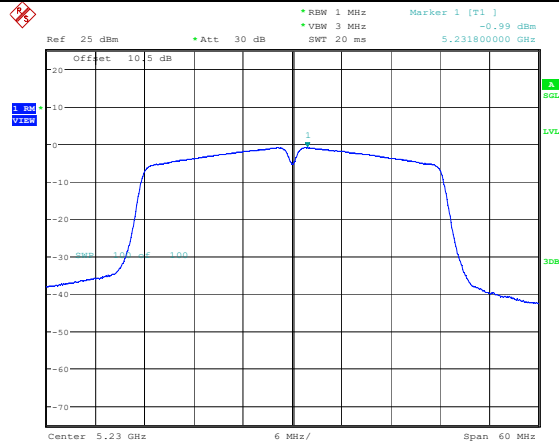
Date: 22.JUL.2023 05:10:09

802.11n ht20  
Highest Channel

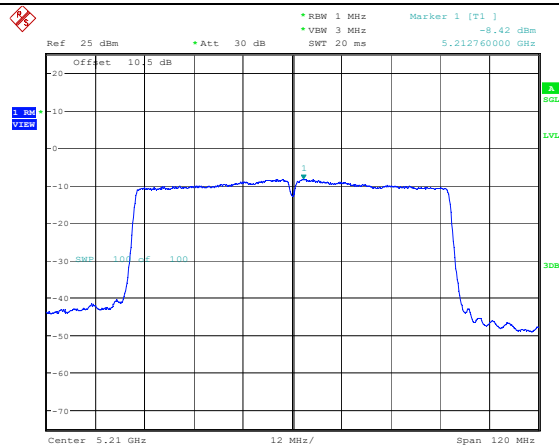
Date: 22.JUL.2023 05:11:56

**Maximum power spectral density**802.11n ht40  
Lowest Channel

Date: 22.JUL.2023 05:14:04

802.11n ht40  
Highest Channel

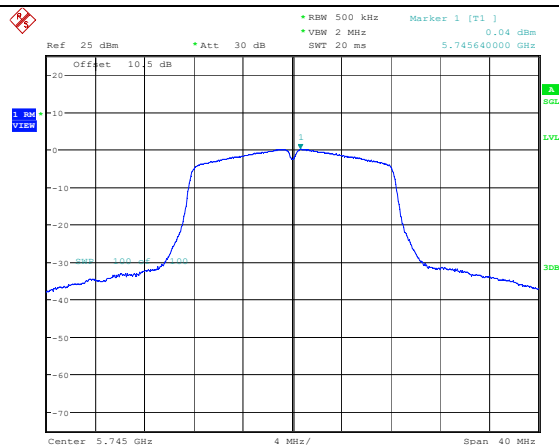
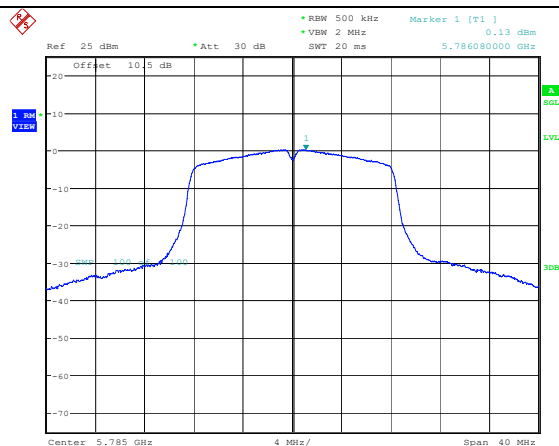
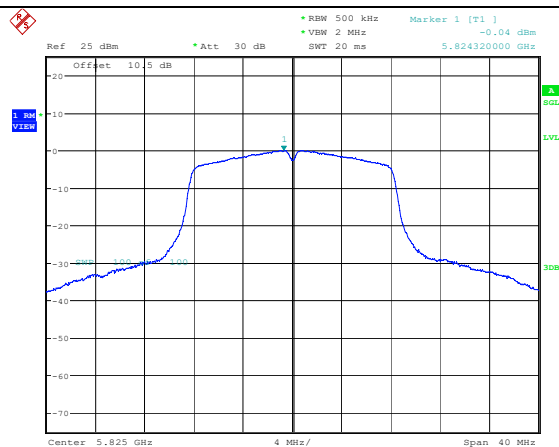
Date: 22.JUL.2023 05:15:18

802.11ac vht80  
Middle Channel

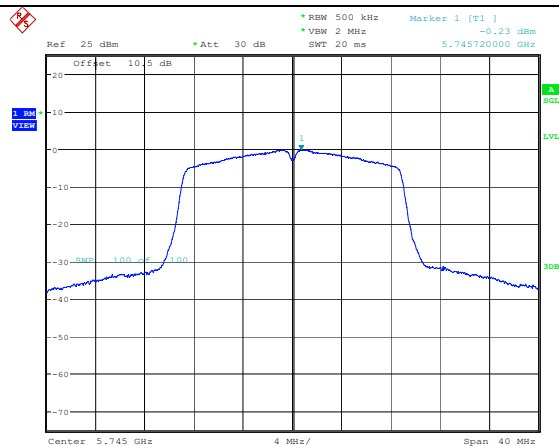
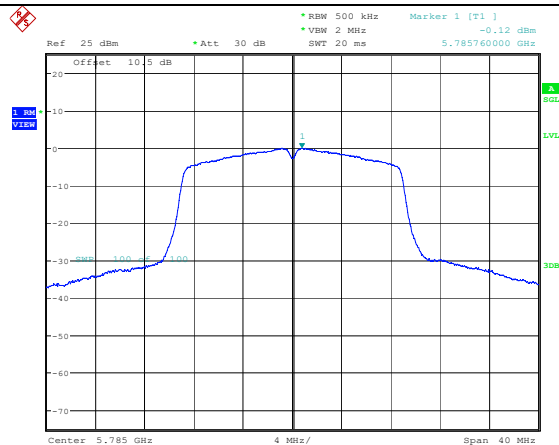
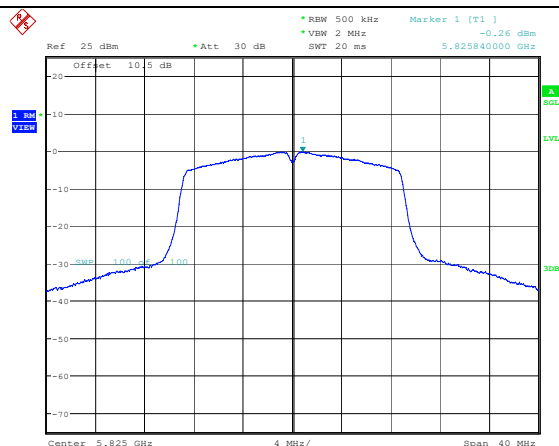
Date: 22.JUL.2023 05:53:07

## 5725-5850MHz

## Maximum power spectral density

802.11a  
Lowest Channel802.11a  
Middle Channel802.11a  
Highest Channel

## Maximum power spectral density

802.11n ht20  
Lowest Channel802.11n ht20  
Middle Channel802.11n ht20  
Highest Channel

| Maximum power spectral density          |                                                                                                                                                                                                                                        |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>802.11n ht40<br/>Lowest Channel</p>  | <p>Ref: 25 dBm    Att: 30 dB    RBW: 500 kHz    Marker 1 [T1]: ~2.70 dBm<br/>Offset: 10.5 dB    VBW: 2 MHz    SWT: 20 ms    5.757580000 GHz</p> <p>Center: 5.755 GHz    6 MHz/    Span: 60 MHz</p> <p>Date: 22.JUL.2023 05:46:24</p>   |
| <p>802.11n ht40<br/>Highest Channel</p> | <p>Ref: 25 dBm    Att: 30 dB    RBW: 500 kHz    Marker 1 [T1]: ~3.34 dBm<br/>Offset: 10.5 dB    VBW: 2 MHz    SWT: 20 ms    5.797580000 GHz</p> <p>Center: 5.795 GHz    6 MHz/    Span: 60 MHz</p> <p>Date: 22.JUL.2023 05:47:55</p>   |
| <p>802.11 ac 80<br/>Middle Channel</p>  | <p>Ref: 25 dBm    Att: 30 dB    RBW: 500 kHz    Marker 1 [T1]: ~7.12 dBm<br/>Offset: 10.5 dB    VBW: 2 MHz    SWT: 20 ms    5.777520000 GHz</p> <p>Center: 5.775 GHz    12 MHz/    Span: 120 MHz</p> <p>Date: 22.JUL.2023 05:50:52</p> |

**4.6 Duty Cycle:**

|                |           |              |              |
|----------------|-----------|--------------|--------------|
| Serial Number: | 29F9-2    | Test Date:   | 2023/7/22    |
| Test Site:     | RF        | Test Mode:   | Transmitting |
| Tester:        | Arthur Su | Test Result: | N/A          |

**Environmental Conditions:**

|                      |      |                              |    |                        |       |
|----------------------|------|------------------------------|----|------------------------|-------|
| Temperature:<br>(°C) | 24.5 | Relative<br>Humidity:<br>(%) | 54 | ATM Pressure:<br>(kPa) | 100.5 |
|----------------------|------|------------------------------|----|------------------------|-------|

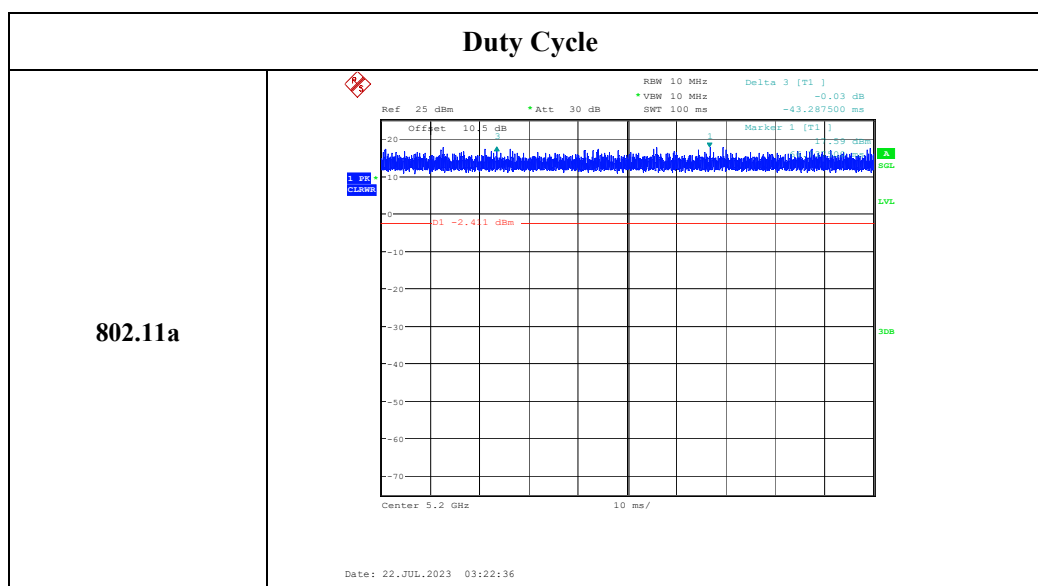
**Test Equipment List and Details:**

| Manufacturer | Description        | Model         | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------|---------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer  | FSU26         | 200120        | 2023/4/18        | 2024/4/17            |
| zhuoxiang    | Coaxial Cable      | SMA-178       | 211003        | Each time        | N/A                  |
| eastsheep    | Coaxial Attenuator | 2W-SMA-JK-18G | 21060302      | Each time        | N/A                  |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

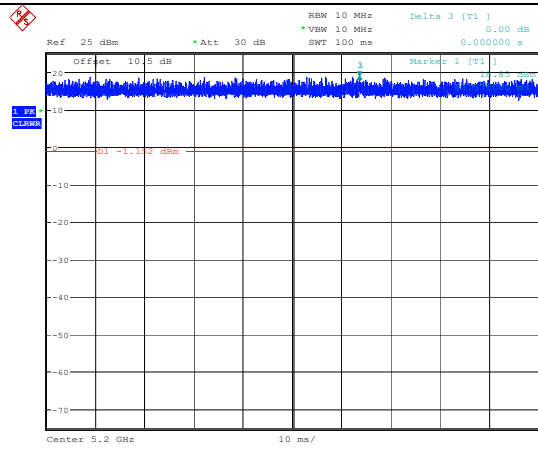
**Test Data:**

| Test Modes     | Ton (ms) | Ton+off (ms) | Duty cycle (%) | 1/T (Hz) | Duty Factor (dB) | VBW setting (KHz) |
|----------------|----------|--------------|----------------|----------|------------------|-------------------|
| 802.11a        | 100      | 100          | 100.00         | /        | /                | 10                |
| 802.11ac ht20  | 100      | 100          | 100.00         | /        | /                | 10                |
| 802.11ac ht40  | 100      | 100          | 100.00         | /        | /                | 10                |
| 802.11ac vht80 | 100      | 100          | 100.00         | /        | /                | 10                |



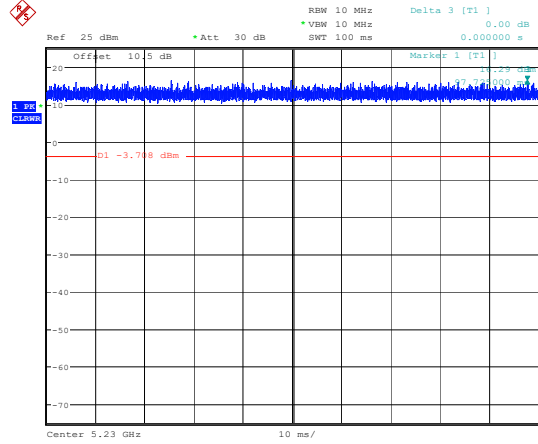
## Duty Cycle

802.11n ht20



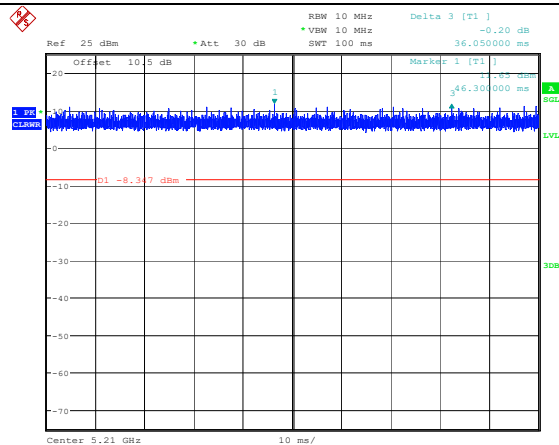
Date: 22.JUL.2023 03:39:45

802.11n ht40



Date: 22.JUL.2023 03:57:20

802.11ac vht80



Date: 22.JUL.2023 04:06:44

## 5. RF EXPOSURE EVALUATION

### 5.1 Maximum Permissible Exposure (MPE)

#### 5.1.1 Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

| (B) Limits for General Population/Uncontrolled Exposure |                               |                               |                                     |                          |
|---------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Frequency Range (MHz)                                   | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm <sup>2</sup> ) | Averaging Time (minutes) |
| 0.3–1.34                                                | 614                           | 1.63                          | *(100)                              | 30                       |
| 1.34–30                                                 | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | 30                       |
| 30–300                                                  | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300–1500                                                | /                             | /                             | f/1500                              | 30                       |
| 1500–100,000                                            | /                             | /                             | 1.0                                 | 30                       |

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

#### Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

### 5.1.2 Measurement Result

| Mode       | Frequency<br>(MHz) | Antenna Gain |           | Tune up conducted power |        | Evaluation Distance<br>(cm) | Power Density<br>(mW/cm <sup>2</sup> ) | MPE Limit<br>(mW/cm <sup>2</sup> ) |
|------------|--------------------|--------------|-----------|-------------------------|--------|-----------------------------|----------------------------------------|------------------------------------|
|            |                    | (dBi)        | (numeric) | (dBm)                   | (mW)   |                             |                                        |                                    |
| NFC        | 13.56              | /            | /         | -30.52                  | 0.0009 | 20                          | 0.00000018                             | 0.979                              |
| BT         | 2402-2480          | 3.46         | 2.22      | 13.0                    | 19.95  | 20                          | 0.0088                                 | 1                                  |
| BLE        | 2402-2480          | 3.46         | 2.22      | 7.0                     | 5.01   | 20                          | 0.0022                                 | 1                                  |
| 2.4G Wi-Fi | 2412-2462          | 3.46         | 2.22      | 24.5                    | 281.84 | 20                          | 0.1245                                 | 1                                  |
| 5.2G Wi-Fi | 5180-5240          | 0.87         | 1.22      | 13.0                    | 19.95  | 20                          | 0.0048                                 | 1                                  |
| 5.8G Wi-Fi | 5745-5825          | 1.82         | 1.52      | 14.0                    | 25.12  | 20                          | 0.0076                                 | 1                                  |

Note:

The tune-up power and antenna gain was declared by the applicant.

The BT, 2.4G Wi-Fi and 5G Wi-Fi cannot transmit simultaneously.

For NFC, the power of EUT: E Field@3m is 64.68dBuV/m = -30.52dBm

Note:  $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$  for  $d = 3 \text{ m}$ .

**Result: The device compliant the MPE-Based Exemption at 20cm distances.**

## 5.2 Exemption Limits for Routine Evaluation – RF Exposure Evaluation

### 5.2.1 Applicable Standard

According to RSS-102 Clause 2.5.2

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $4.49/f^{0.5}$  W (adjusted for tune-up tolerance), where  $f$  is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $1.31 \times 10^{-2} f^{0.6834}$  W (adjusted for tune-up tolerance), where  $f$  is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

### 5.2.2 Calculated Data:

| Mode       | Frequency (MHz) | Antenna Gain | Conducted output power including Tune-up Tolerance | EIRP   |        | Exemption limits (mW) |
|------------|-----------------|--------------|----------------------------------------------------|--------|--------|-----------------------|
|            |                 | (dBi)        | (dBm)                                              | (dBm)  | (mW)   |                       |
| NFC        | 13.56           | /            | /                                                  | -30.52 | 0.0009 | 1000                  |
| BT         | 2402-2480       | 3.46         | 13.0                                               | 16.46  | 44.26  | 2676                  |
| BLE        | 2402-2480       | 3.46         | 7.0                                                | 10.46  | 11.12  | 2676                  |
| 2.4G Wi-Fi | 2412-2462       | 3.46         | 24.5                                               | 27.96  | 625.17 | 2684                  |
| 5.2G Wi-Fi | 5180-5240       | 0.87         | 13.0                                               | 13.87  | 24.38  | 4507                  |
| 5.8G Wi-Fi | 5745-5825       | 1.82         | 14.0                                               | 15.82  | 38.19  | 4845                  |

Note:

The Maximum Conducted Power including Tune-up Tolerance was declared by manufacturer.

The BT, 2.4G Wi-Fi and 5G Wi-Fi cannot transmit simultaneously.

For NFC, the power of EUT: E Field@3m is 64.68dBuV/m = -30.52dBm

Note:  $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$  for  $d = 3 \text{ m}$ .

So the device is compliance exemption from Routine Evaluation Limits –RF exposure Evaluation.

**Result:** Compliance

## **6. EUT PHOTOGRAPHS**

---

Please refer to the attachment CR230744293-EXP EUT EXTERNAL PHOTOGRAPHS and  
CR230744293-INP EUT INTERNAL PHOTOGRAPHS

## 7. TEST SETUP PHOTOGRAPHS

---

Please refer to the attachment CR230744293-00D-TSP TEST SETUP PHOTOGRAPHS.

**===== END OF REPORT =====**