



RF Test Report

For

Applicant Name: Guangdong Huaduo Intelligent Technology Co., Ltd.
Unit 301, 3rd Floor, No. 7-3, Xinhui Road, Wusha Community,
Address: Daliang Street, Shunde District, Foshan City, Guangdong Province,
China (address declaration)
EUT Name: Interactive flat panel, Interactive flat panel display, Interactive display,
Interactive touch monitor
Brand Name: N/A
Model Number: HD-MX2-750M5
Series Model Number: Refer to section 2

Issued By

Company Name: BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park,
Address: Tantou Community, Songgang Street, Bao'an District, Shenzhen,
China

Report Number: BTF230725R00602
Test Standards: 47 CFR Part 15.247
Test Conclusion: Pass
FCC ID: 2BCMU-HDMX2750M5
Test Date: 2023-07-25 to 2023-10-27
Date of Issue: 2023-10-30

Prepared By:

Elma.Yang

Date:

elma.yang / Project Engineer
2023-10-30

Approved By:

Ryan.CJ

Date:

Ryan.CJ / EMC Manager
2023-10-30



Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2023-10-30	Original
<i>Note: Once the revision has been made, then previous versions reports are invalid.</i>		

Table of Contents

1	INTRODUCTION	5
1.1	Identification of Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Announcement	5
2	PRODUCT INFORMATION.....	6
2.1	Application Information	6
2.2	Manufacturer Information.....	6
2.3	Factory Information	6
2.4	General Description of Equipment under Test (EUT)	6
2.5	Technical Information	6
3	SUMMARY OF TEST RESULTS	7
3.1	Test Standards.....	7
3.2	Uncertainty of Test	7
3.3	Summary of Test Result	7
4	TEST CONFIGURATION	8
4.1	Test Equipment List	8
4.2	Test Auxiliary Equipment	10
4.3	Test Modes.....	10
5	EVALUATION RESULTS (EVALUATION).....	11
5.1	Antenna requirement	11
6	RADIO SPECTRUM MATTER TEST RESULTS (RF).....	11
6.1	Conducted Emission at AC power line	11
6.1.1	E.U.T. Operation:	11
6.1.2	Test Setup Diagram:	12
6.1.3	Test Data:	13
6.2	Occupied Bandwidth	15
6.2.1	E.U.T. Operation:	15
6.2.2	Test Setup Diagram:	16
6.2.3	Test Data:	16
6.3	Maximum Conducted Output Power	17
6.3.1	E.U.T. Operation:	17
6.3.2	Test Setup Diagram:	17
6.3.3	Test Data:	17
6.4	Power Spectral Density	18
6.4.1	E.U.T. Operation:	18
6.4.2	Test Setup Diagram:	18
6.4.3	Test Data:	18
6.5	Emissions in non-restricted frequency bands	19
6.5.1	E.U.T. Operation:	19
6.5.2	Test Setup Diagram:	19
6.5.3	Test Data:	19
6.6	Band edge emissions (Radiated).....	20
6.6.1	E.U.T. Operation:	20
6.6.2	Test Setup Diagram:	20
6.6.3	Test Data:	21
6.7	Emissions in frequency bands (below 1GHz)	22
6.7.1	E.U.T. Operation:	23
6.7.2	Test Setup Diagram:	23
6.7.3	Test Data:	24

6.8	Emissions in frequency bands (above 1GHz)	28
6.8.1	E.U.T. Operation:	28
6.8.2	Test Setup Diagram:	28
6.8.3	Test Data:	29
7	TEST SETUP PHOTOS	32
8	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	35
APPENDIX.....		36
IC	MT7663BUN	37
IC	AIC8800D.....	99

1 Introduction

1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

1.2 Identification of the Responsible Testing Location

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130
FCC Registration Number:	518915
Designation Number:	CN1330

1.3 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 Product Information

2.1 Application Information

Company Name:	Guangdong Huaduo Intelligent Technology Co., Ltd.
Address:	Unit 301, 3rd Floor, No. 7-3, Xinhui Road, Wusha Community, Daliang Street, Shunde District, Foshan City, Guangdong Province, China (address declaration)

2.2 Manufacturer Information

Company Name:	Guangdong Huaduo Intelligent Technology Co., Ltd.
Address:	Unit 301, 3rd Floor, No. 7-3, Xinhui Road, Wusha Community, Daliang Street, Shunde District, Foshan City, Guangdong Province, China (address declaration)

2.3 Factory Information

Company Name:	Guangdong Huaduo Intelligent Technology Co., Ltd.
Address:	Unit 301, 3rd Floor, No. 7-3, Xinhui Road, Wusha Community, Daliang Street, Shunde District, Foshan City, Guangdong Province, China (address declaration)

2.4 General Description of Equipment under Test (EUT)

EUT Name:	Interactive flat panel, Interactive flat panel display, Interactive display, Interactive touch monitor
Test Model Number:	HD-MX2-750M5
Series Model Number:	HD-MX2-550M5, HD-MX2-650M5, HD-MX2-860M5, HD-MX2-980M5, HD-MX2-A10M5, HD-DY1-550M5, HD-DY1-650M5, HD-DY1-750M5, HD-DY1-860M5, HD-BM3-750M5, HD-BM3-860M5, HD-BM3-980M5, HD-DG1-550M5, HD-DG1-650M5, HD-DG1-750M5, HD-DG1-860M5, HD-ADE-550E1, HD-ADE-500E1, HD-ADE-490E1, HD-ADE-430E1, HD-ADE-320E1, HD-ADE-215E1, HD-CAC-156E3, HD-CAC-236E3, HD-CAC-320E3, HD-CAC-430E3
Description of Model name differentiation:	Only the model name is different, the others are the same.

2.5 Technical Information

Power Supply:	120V/60Hz
Rate power:	100-240V~50/60Hz 8.0A Max
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz;
Number of Channels:	802.11b/g/n(HT20): 11 Channels;
Modulation Type:	802.11b: DSSS(CCK, DQPSK, DBPSK); 802.11g: OFDM(BPSK, QPSK, 16QAM, 64QAM); 802.11n(HT20): OFDM (BPSK, QPSK, 16QAM, 64QAM)
Antenna Type:	External ANT(MIMO:2*1+2*1)
Antenna Gain [#] :	2 dBi
Note: [#] : The antenna gain provided by the applicant, and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.	

3 Summary of Test Results

3.1 Test Standards

The tests were performed according to following standards:

47 CFR Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

3.2 Uncertainty of Test

Item	Measurement Uncertainty
Conducted Emission (150 kHz-30 MHz)	±2.64dB
Occupied Bandwidth	±69kHz
Transmitter Power, Conducted	±0.87dB
Power Spectral Density	±0.69dB
Conducted Spurious Emissions	±0.95dB
Radiated Spurious Emissions (above 1GHz)	1-6GHz: ±3.94dB 6-18GHz: ±4.16dB
Radiated Spurious Emissions (30M - 1GHz)	±4.12dB

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.3 Summary of Test Result

Item	Standard	Requirement	Result
Antenna requirement	47 CFR Part 15.247	47 CFR 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15.247	47 CFR 15.207(a)	Pass
Occupied Bandwidth	47 CFR Part 15.247	47 CFR 15.247(a)(2)	Pass
Maximum Conducted Output Power	47 CFR Part 15.247	47 CFR 15.247(b)(3)	Pass
Power Spectral Density	47 CFR Part 15.247	47 CFR 15.247(e)	Pass
Emissions in non-restricted frequency bands	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Band edge emissions (Radiated)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Emissions in frequency bands (below 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Emissions in frequency bands (above 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass

4 Test Configuration

4.1 Test Equipment List

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	00953	2022-11-24	2023-11-23
Coaxial Switcher	SCHWARZBECK	CX210	CX210	2022-11-24	2023-11-23
V-LISN	SCHWARZBECK	NSLK 8127	01073	2022-11-24	2023-11-23
LISN	AFJ	LS16/110VAC	16010020076	2023-02-23	2024-02-22
EMI Receiver	ROHDE&SCHWARZ	ESCI3	101422	2022-11-24	2023-11-23

Emissions in non-restricted frequency bands					
Occupied Bandwidth					
Maximum Conducted Output Power					
Power Spectral Density					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Emissions in frequency bands (above 1GHz)					
Band edge emissions (Radiated)					
Emissions in frequency bands (below 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-10m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

4.2 Test Auxiliary Equipment

The EUT was tested as an independent device.

4.3 Test Modes

No.	Test Modes	Description
TM1	802.11b mode	Keep the EUT in 802.11b transmitting mode.
TM2	802.11g mode	Keep the EUT in 802.11g transmitting mode.
TM3	802.11n(HT20) mode	Keep the EUT in 802.11n(HT20) transmitting mode.

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	--

6 Radio Spectrum Matter Test Results (RF)


6.1 Conducted Emission at AC power line

Test Requirement:	Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Method:	ANSI C63.10-2013 section 6.2 ANSI C63.10-2020 section 6.2		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
*Decreases with the logarithm of the frequency.			
Procedure:	Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		
	Refer to ANSI C63.10-2020 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		

6.1.1 E.U.T. Operation:


Operating Environment:	
Temperature:	23.5 °C
Humidity:	45.6 %
Atmospheric Pressure:	1010 mbar

6.1.2 Test Setup Diagram:

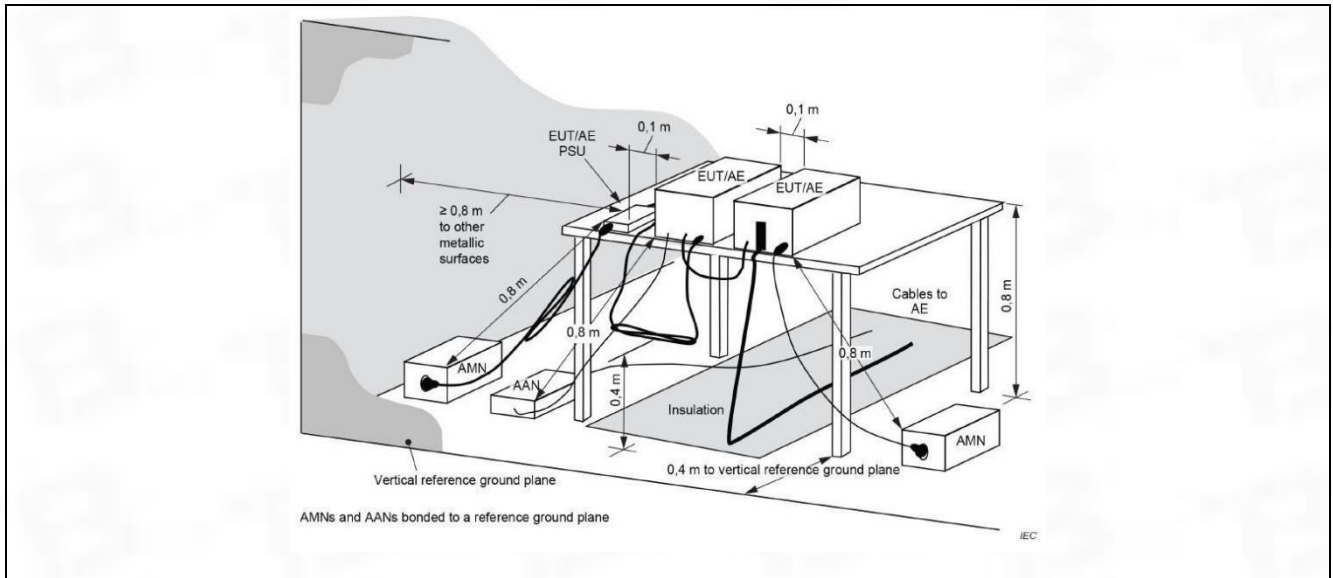


6.1.3 Test Data:

TM1 / Line: Line / Band: 2400-2483.5 MHz / BW: 20 / CH: M

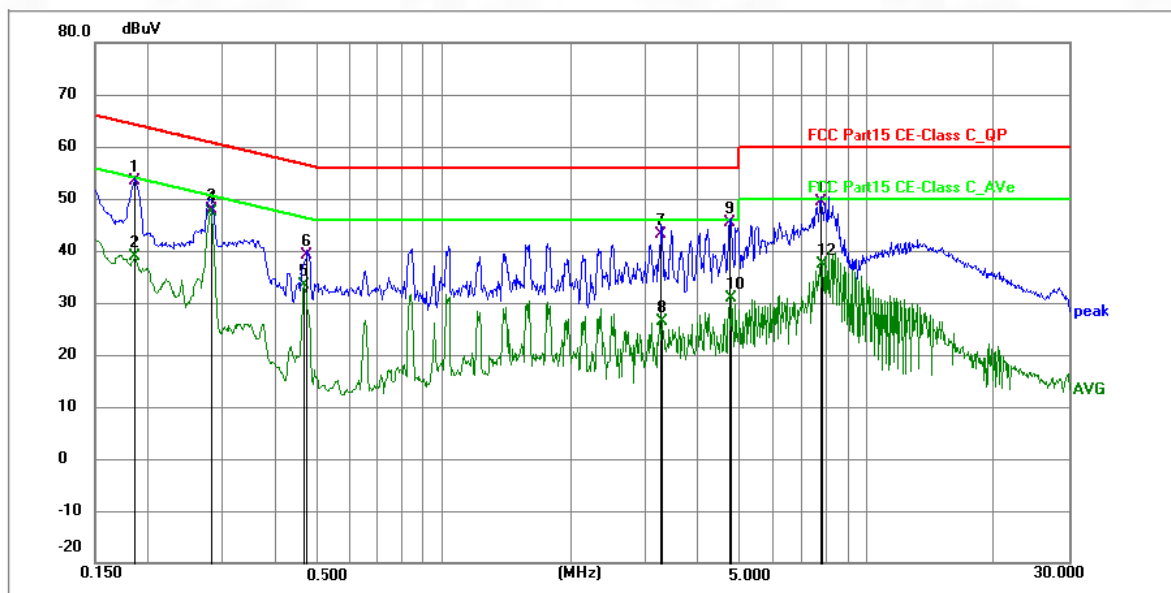

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1860	42.83	10.57	53.40	64.21	-10.81	QP	P	
2	0.1860	28.27	10.57	38.84	54.21	-15.37	AVG	P	
3	0.2805	37.20	10.60	47.80	60.80	-13.00	QP	P	
4 *	0.2805	36.71	10.60	47.31	50.80	-3.49	AVG	P	
5	0.4650	22.76	10.61	33.37	46.60	-13.23	AVG	P	
6	0.4740	28.59	10.61	39.20	56.44	-17.24	QP	P	
7	3.2683	32.38	10.72	43.10	56.00	-12.90	QP	P	
8	3.2865	15.72	10.72	26.44	46.00	-19.56	AVG	P	
9	4.7220	34.51	10.79	45.30	56.00	-10.70	QP	P	
10	4.7895	20.04	10.80	30.84	46.00	-15.16	AVG	P	
11	7.7460	38.61	10.79	49.40	60.00	-10.60	QP	P	
12	7.8315	26.51	10.80	37.31	50.00	-12.69	AVG	P	

TM1 / Line: Neutral / Band: 2400-2483.5 MHz / BW: 20 / CH: M

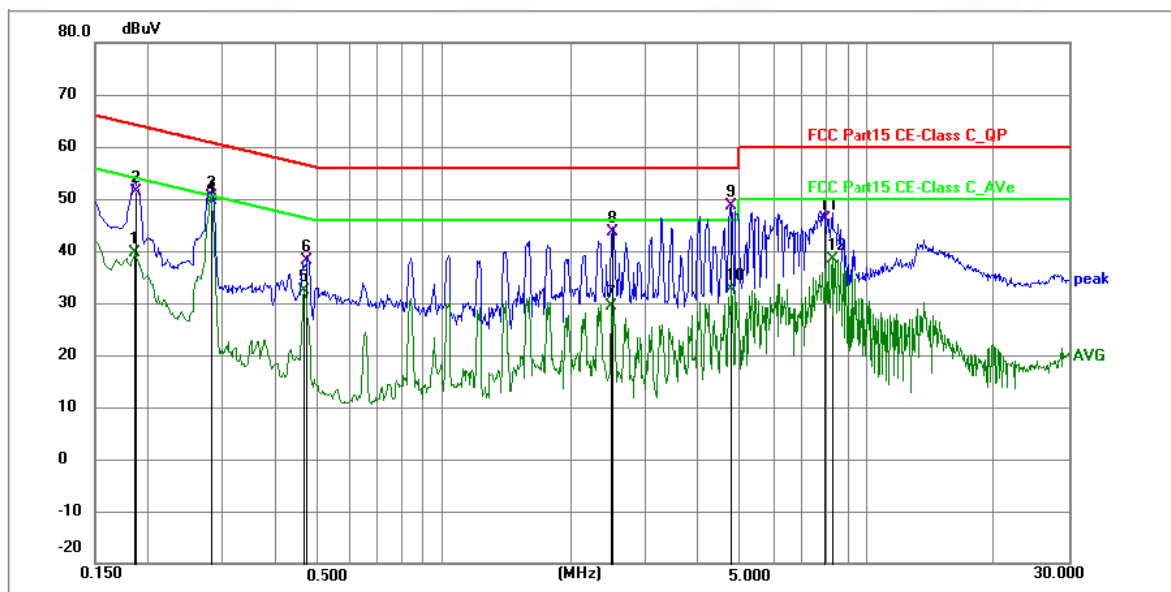

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1860	29.07	10.57	39.64	54.21	-14.57	AVG	P	
2	0.1873	40.83	10.57	51.40	64.16	-12.76	QP	P	
3	0.2805	39.80	10.60	50.40	60.80	-10.40	QP	P	
4 *	0.2805	39.11	10.60	49.71	50.80	-1.09	AVG	P	
5	0.4650	21.67	10.61	32.28	46.60	-14.32	AVG	P	
6	0.4740	27.49	10.61	38.10	56.44	-18.34	QP	P	
7	2.4944	18.73	10.70	29.43	46.00	-16.57	AVG	P	
8	2.5034	33.00	10.70	43.70	56.00	-12.30	QP	P	
9	4.7625	37.90	10.80	48.70	56.00	-7.30	QP	P	
10	4.7940	21.71	10.80	32.51	46.00	-13.49	AVG	P	
11	7.9214	35.30	10.80	46.10	60.00	-13.90	QP	P	
12	8.2364	27.66	10.83	38.49	50.00	-11.51	AVG	P	


6.2 Occupied Bandwidth

Test Requirement:	47 CFR 15.247(a)(2)
Test Method:	ANSI C63.10-2013, section 11.8 ANSI C63.10-2020, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Procedure:	a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. 11.8.1 Option 1 The steps for the first option are as follows: a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max-hold. e) Sweep = No faster than coupled (auto) time. f) Allow the trace to stabilize. g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value. 11.8.2 Option 2 The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times \text{RBW}$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

6.2.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.5 °C
Humidity:	45.6 %
Atmospheric Pressure:	1010 mbar

6.2.2 Test Setup Diagram:

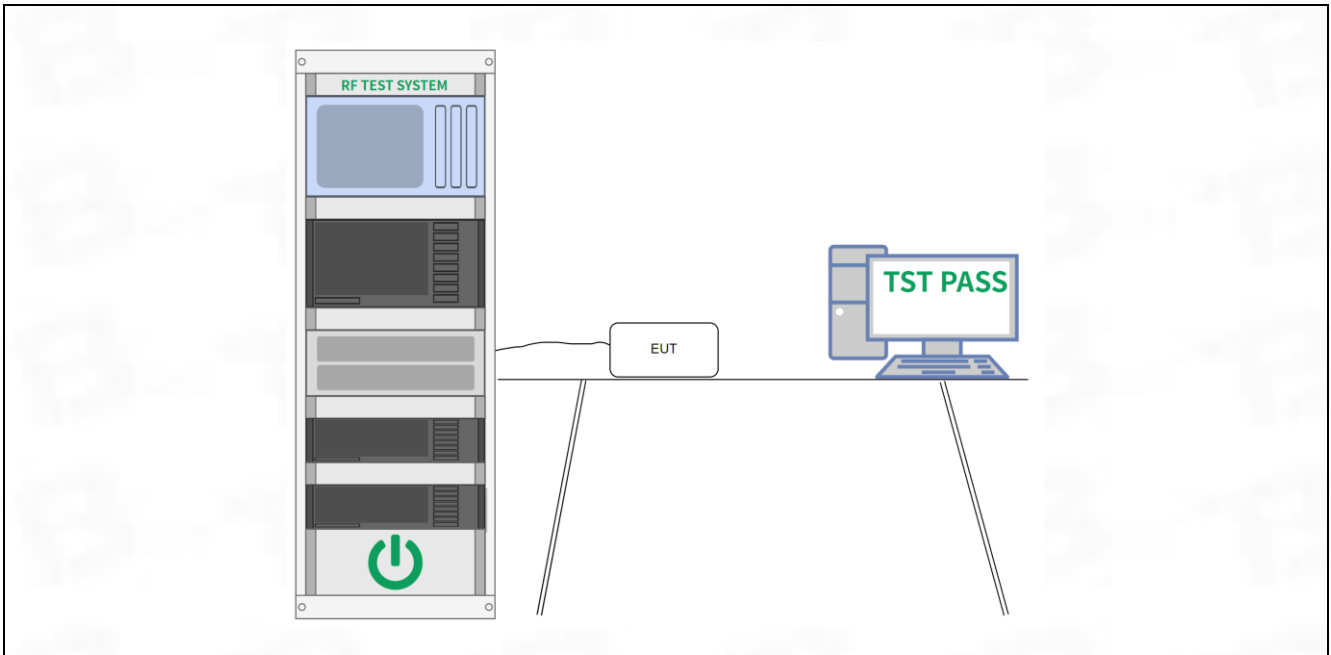

6.2.3 Test Data:

Please Refer to Appendix for Details.


6.3 Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(3)
Test Method:	ANSI C63.10-2013, section 11.9.1 ANSI C63.10-2020 section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Procedure:	ANSI C63.10-2013, section 11.9.1 Maximum peak conducted output power ANSI C63.10-2020, section 11.9.1 Maximum peak conducted output power

6.3.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.5 °C
Humidity:	45.6 %
Atmospheric Pressure:	1010 mbar

6.3.2 Test Setup Diagram:

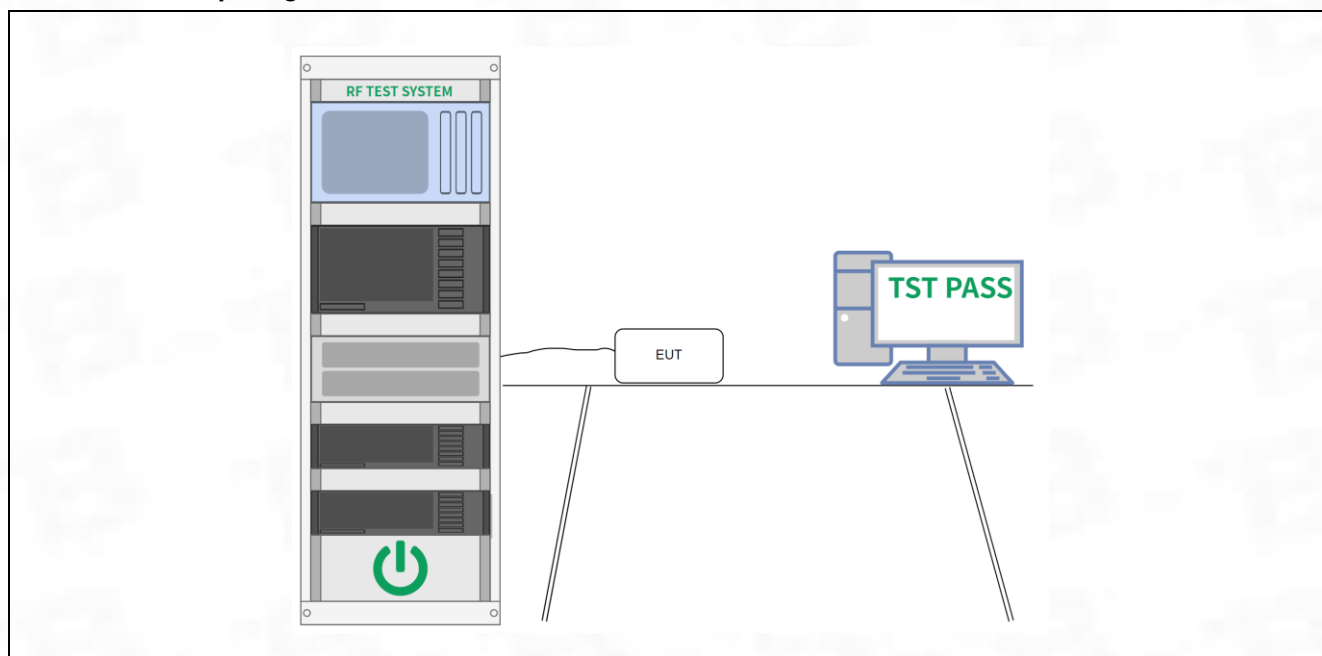

6.3.3 Test Data:

Please Refer to Appendix for Details.


6.4 Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Method:	ANSI C63.10-2013, section 11.10 ANSI C63.10-2020, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Procedure:	ANSI C63.10-2013, section 11.10, Maximum power spectral density level in the fundamental emission ANSI C63.10-2020, section 11.10, Maximum power spectral density level in the fundamental emission

6.4.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.5 °C
Humidity:	45.6 %
Atmospheric Pressure:	1010 mbar

6.4.2 Test Setup Diagram:

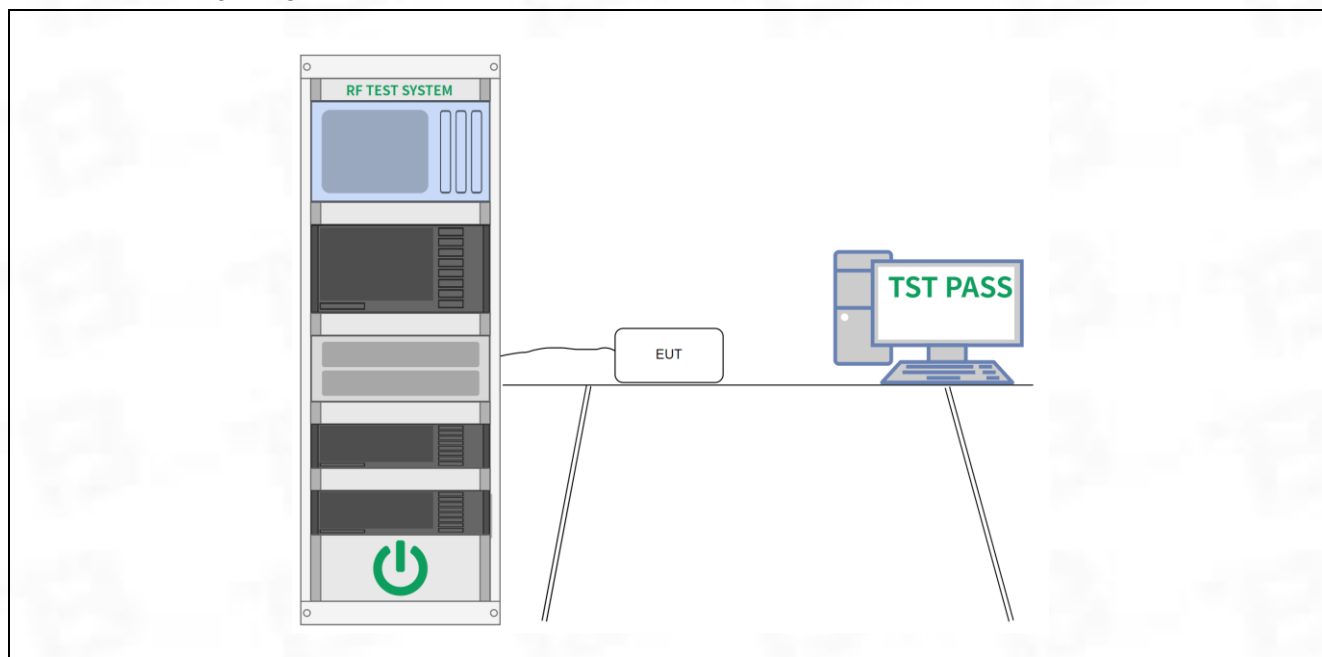

6.4.3 Test Data:

Please Refer to Appendix for Details.


6.5 Emissions in non-restricted frequency bands

Test Requirement:	47 CFR 15.247(d)
Test Method:	ANSI C63.10-2013 section 11.11 ANSI C63.10-2020 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Procedure:	ANSI C63.10-2013 Section 11.11.1, Section 11.11.2, Section 11.11.3 ANSI C63.10-2020 Section 11.11.1, Section 11.11.2, Section 11.11.3

6.5.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.5 °C
Humidity:	45.6 %
Atmospheric Pressure:	1010 mbar

6.5.2 Test Setup Diagram:

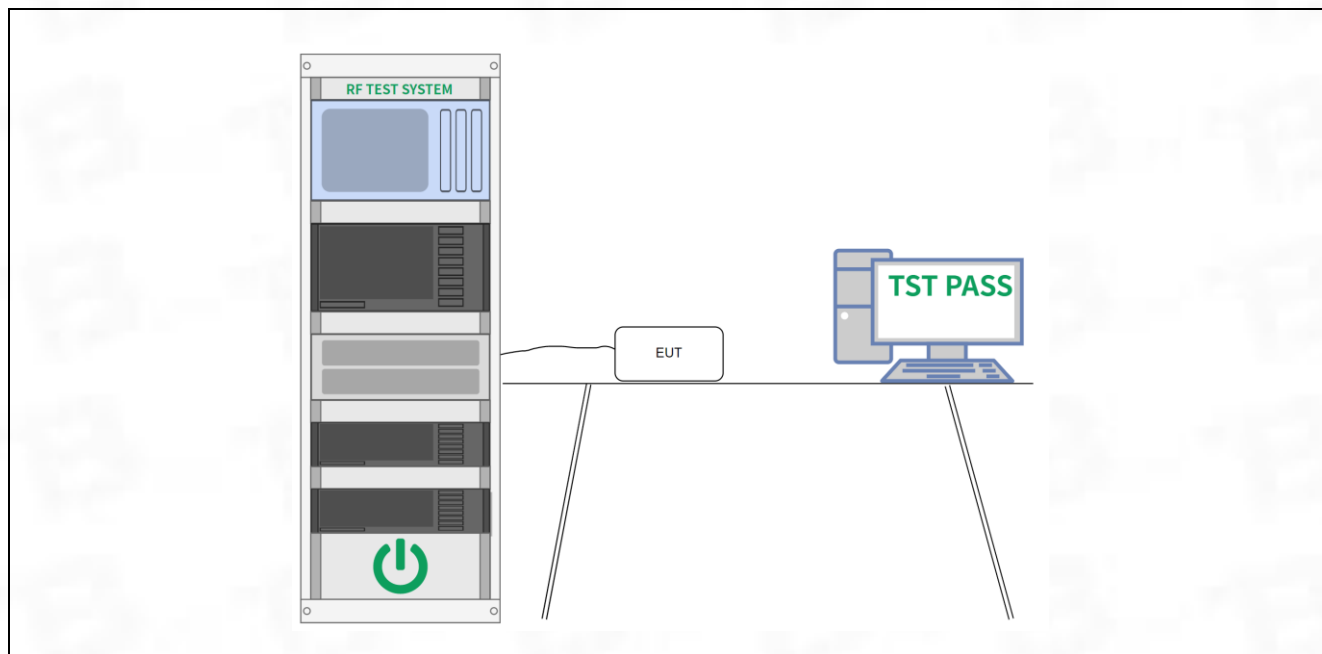

6.5.3 Test Data:

Please Refer to Appendix for Details.


6.6 Band edge emissions (Radiated)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Method:	ANSI C63.10-2013 section 6.10 ANSI C63.10-2020 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2013 section 6.10.5.2 ANSI C63.10-2020 section 6.10.5.2		

6.6.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.5 °C
Humidity:	45.6 %
Atmospheric Pressure:	1010 mbar

6.6.2 Test Setup Diagram:

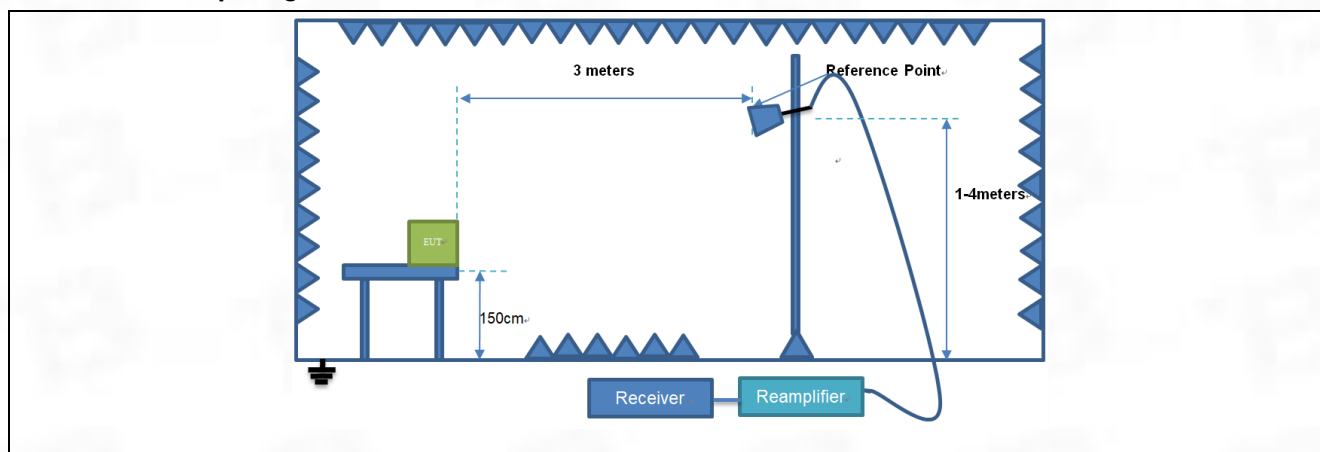

6.6.3 Test Data:

Note: All the mode have been tested, and only the worst case of 802.11b mode are in the report
IC MT7663BUN (ANT1) :

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2310.000	64.34	-30.59	33.75	74.00	-40.25	peak	P
2	2390.000	73.74	-30.49	43.25	74.00	-30.75	peak	P
3 *	2400.000	83.83	-30.48	53.35	74.00	-20.65	peak	P

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2310.000	66.74	-30.59	36.15	74.00	-37.85	peak	P
2	2390.000	75.93	-30.49	45.44	74.00	-28.56	peak	P
3 *	2400.000	82.67	-30.48	52.19	74.00	-21.81	peak	P

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	2483.500	80.53	-30.39	50.14	74.00	-23.86	peak	P
2	2500.000	72.13	-30.37	41.76	74.00	-32.24	peak	P

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	2483.500	81.03	-30.39	50.64	74.00	-23.36	peak	P
2	2500.000	69.63	-30.37	39.26	74.00	-34.74	peak	P

IC AIC8800D(ANT1)

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2310.000	74.46	-31.35	43.11	74.00	-30.89	peak	P
2	2390.000	75.91	-31.46	44.45	74.00	-29.55	peak	P
3	2400.000	78.59	-31.52	47.07	74.00	-26.93	peak	P

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2310.000	75.44	-31.46	43.98	74.00	-30.02	peak	P
2	2390.000	76.89	-31.57	45.32	74.00	-28.68	peak	P
3	2400.000	79.57	-31.63	47.94	74.00	-26.06	peak	P

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	81.57	-31.40	50.17	74.00	-23.83	peak	P
2	2500.000	79.60	-31.51	48.09	74.00	-25.91	peak	P

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	81.88	-31.36	50.52	74.00	-23.48	peak	P
2	2500.000	79.91	-31.47	48.44	74.00	-25.56	peak	P

6.7 Emissions in frequency bands (below 1GHz)


Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Method:	ANSI C63.10-2013 section 6.6.4 ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g.,			

	§§ 15.231 and 15.241.
Procedure:	ANSI C63.10-2013 section 6.6.4
	ANSI C63.10-2020 section 6.6.4

6.7.1 E.U.T. Operation:


Operating Environment:	
Temperature:	23.5 °C
Humidity:	45.6 %
Atmospheric Pressure:	1010 mbar

6.7.2 Test Setup Diagram:

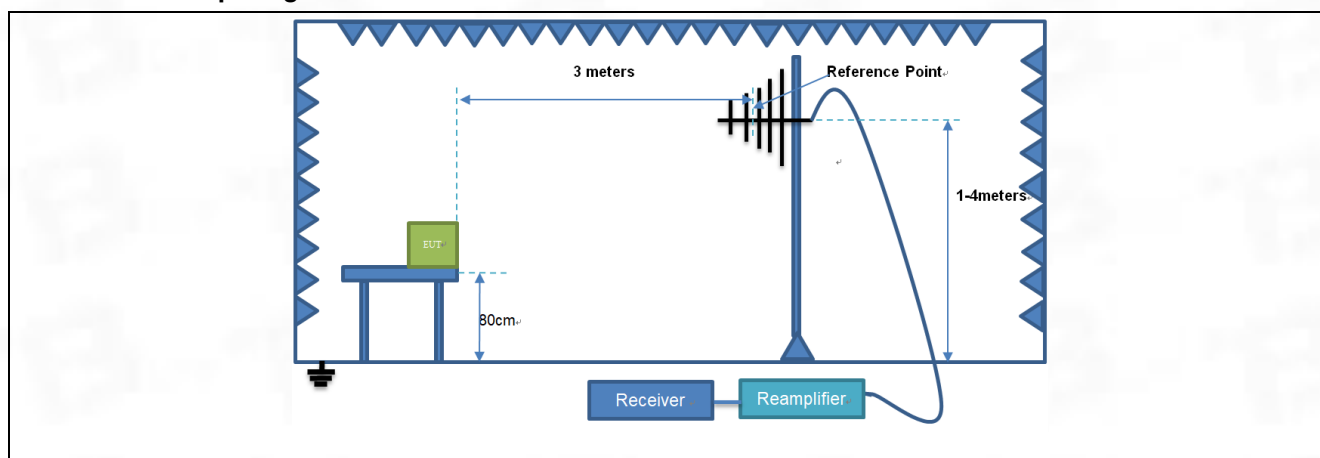


6.7.3 Test Data:

Note: All the mode have been tested, and only the worst case of 802.11b mode are in the report
 TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

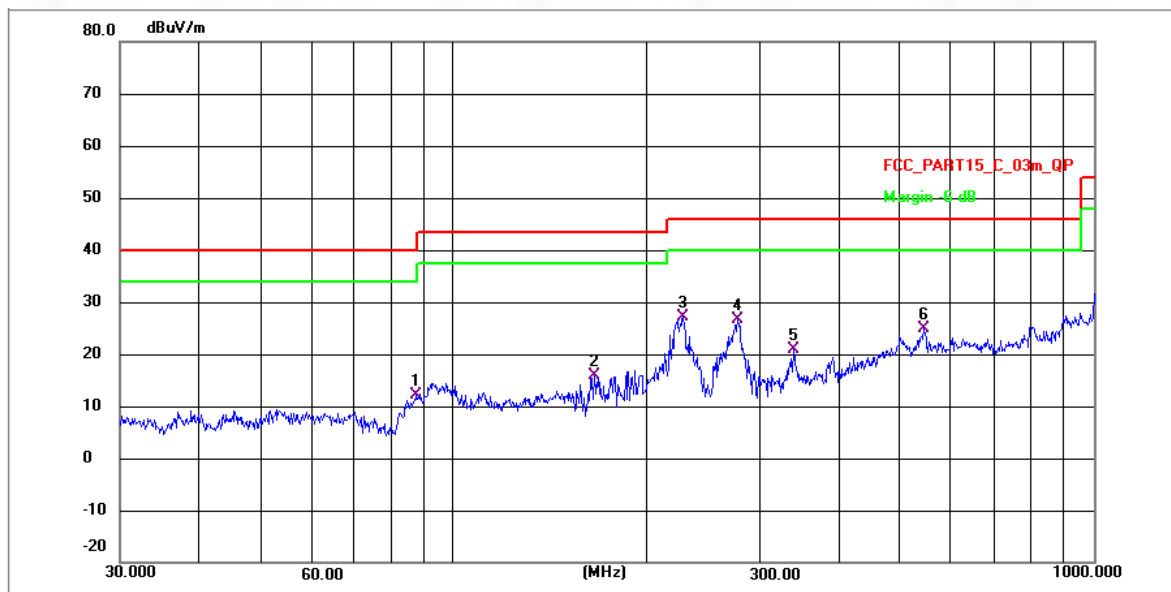

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	87.7246	42.31	-30.25	12.06	40.00	-27.94	QP	P
2	165.7770	43.57	-27.64	15.93	43.50	-27.57	QP	P
3 *	228.0901	53.18	-26.10	27.08	46.00	-18.92	QP	P
4	278.0668	52.27	-25.61	26.66	46.00	-19.34	QP	P
5	338.4000	46.01	-25.12	20.89	46.00	-25.11	QP	P
6	544.2274	46.37	-21.60	24.77	46.00	-21.23	QP	P


TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

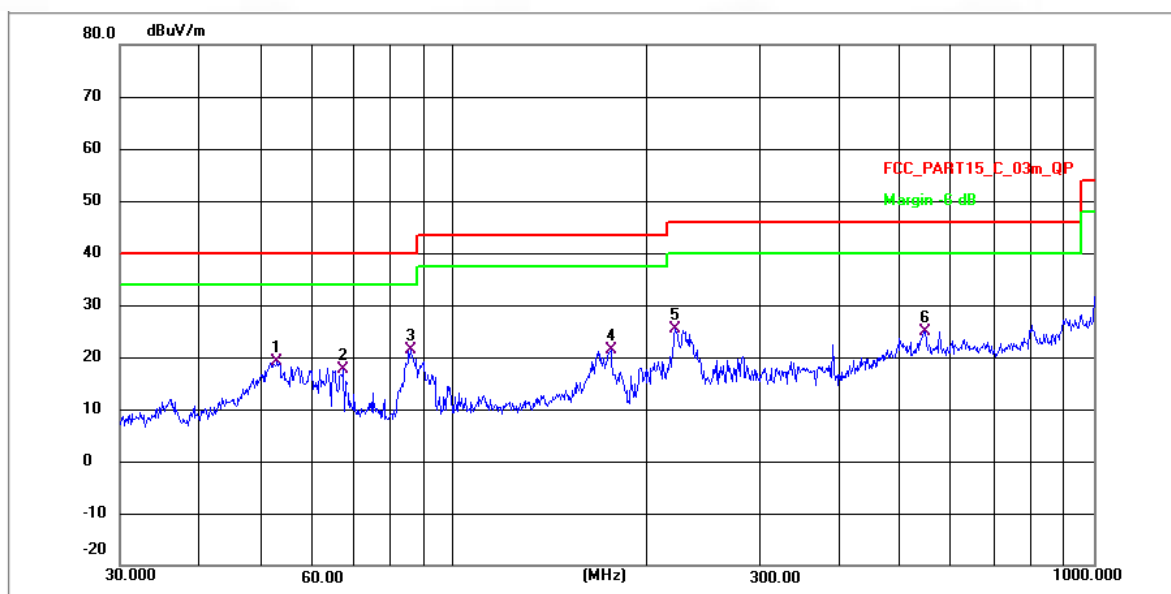

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	52.8524	39.41	-20.28	19.13	40.00	-20.87	QP	P
2	67.0844	37.60	-20.04	17.56	40.00	-22.44	QP	P
3 *	85.8983	51.94	-30.56	21.38	40.00	-18.62	QP	P
4	175.6516	48.83	-27.55	21.28	43.50	-22.22	QP	P
5	221.7804	51.65	-26.38	25.27	46.00	-20.73	QP	P
6	546.1390	46.54	-21.62	24.92	46.00	-21.08	QP	P


IC AIC8800D(ANT2)

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

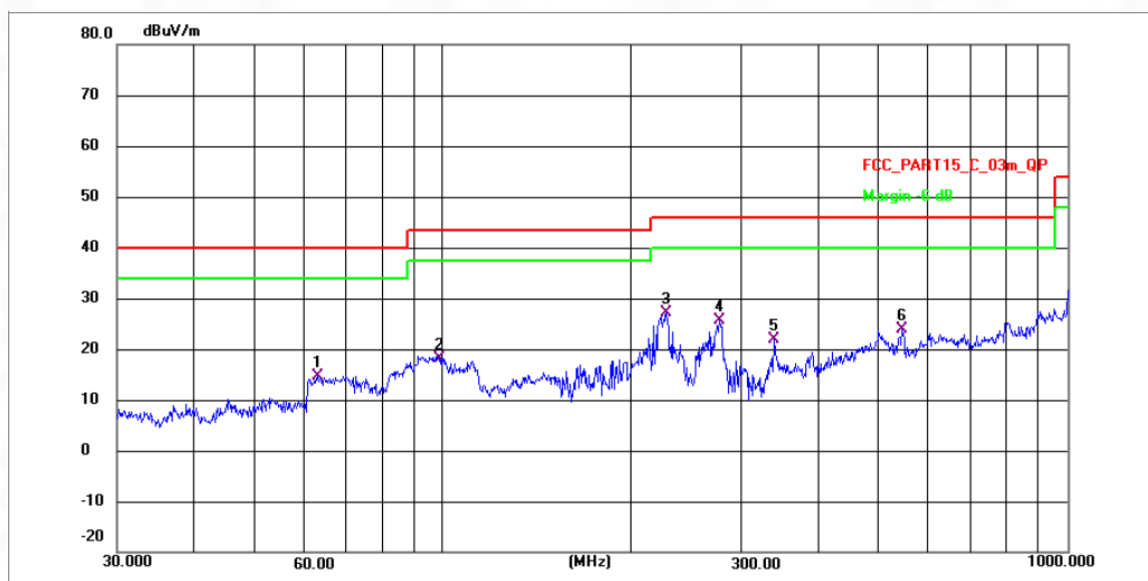

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	62.9810	32.75	-18.16	14.59	40.00	-25.41	QP	P
2	98.6594	46.70	-28.45	18.25	43.50	-25.25	QP	P
3 *	228.0901	53.18	-26.10	27.08	46.00	-18.92	QP	P
4	278.0668	51.27	-25.61	25.66	46.00	-20.34	QP	P
5	338.4000	47.01	-25.12	21.89	46.00	-24.11	QP	P
6	544.2273	45.37	-21.60	23.77	46.00	-22.23	QP	P

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

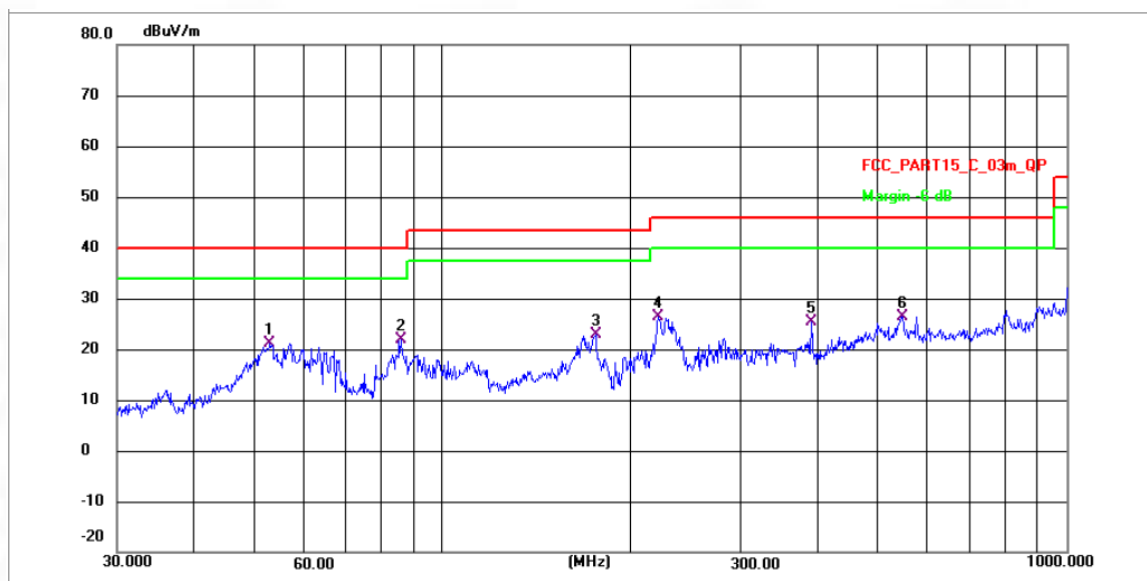

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	52.8524	41.41	-20.28	21.13	40.00	-18.87	QP	P
2 *	85.8983	52.44	-30.56	21.88	40.00	-18.12	QP	P
3	175.6516	50.33	-27.55	22.78	43.50	-20.72	QP	P
4	221.7803	52.65	-26.38	26.27	46.00	-19.73	QP	P
5	390.0380	50.11	-24.71	25.40	46.00	-20.60	QP	P
6	546.1390	48.04	-21.62	26.42	46.00	-19.58	QP	P


6.8 Emissions in frequency bands (above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Method:	ANSI C63.10-2013 section 6.6.4 ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2013 section 6.6.4 ANSI C63.10-2020 section 6.6.4		

6.8.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.5 °C
Humidity:	45.6 %
Atmospheric Pressure:	1010 mbar

6.8.2 Test Setup Diagram:

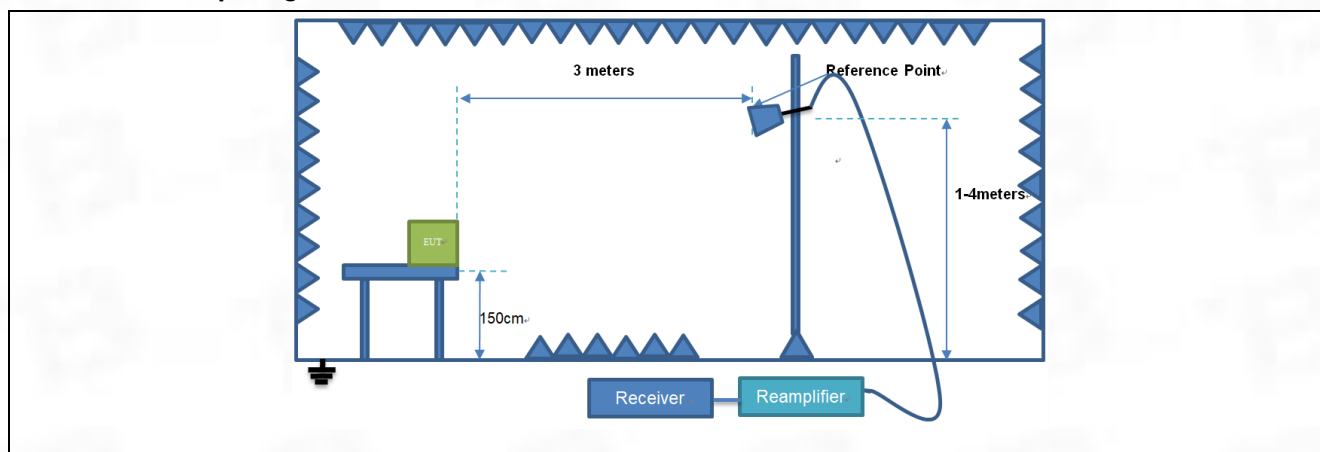

6.8.3 Test Data:

Note: All the mode have been tested, and only the worst case of 802.11b mode are in the report

IC MT7663BUN (ANT1) :

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4310.625	66.49	-28.86	37.63	74.00	-36.37	peak	P
2	6285.695	64.61	-25.35	39.26	74.00	-34.74	peak	P
3	9021.160	67.70	-24.26	43.44	74.00	-30.56	peak	P
4	11728.463	70.22	-22.67	47.55	74.00	-26.45	peak	P
5	14462.667	72.21	-21.19	51.02	74.00	-22.98	peak	P
6 *	16048.638	73.04	-21.36	51.68	74.00	-22.32	peak	P

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3718.740	65.54	-29.03	36.51	74.00	-37.49	peak	P
2	5230.196	66.98	-27.17	39.81	74.00	-34.19	peak	P
3	8094.493	72.29	-25.49	46.80	74.00	-27.20	peak	P
4	10024.895	72.08	-24.30	47.78	74.00	-26.22	peak	P
5	11988.951	71.55	-22.21	49.34	74.00	-24.66	peak	P
6 *	13793.101	72.44	-21.04	51.40	74.00	-22.60	peak	P

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3284.121	61.58	-29.25	32.33	74.00	-41.67	peak	P
2	5081.188	63.44	-27.30	36.14	74.00	-37.86	peak	P
3	7294.573	66.86	-24.84	42.02	74.00	-31.98	peak	P
4	9739.285	67.75	-23.72	44.03	74.00	-29.97	peak	P
5	12433.621	69.84	-21.69	48.15	74.00	-25.85	peak	P
6 *	15213.027	71.73	-20.86	50.87	74.00	-23.13	peak	P

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3260.475	62.81	-29.28	33.53	74.00	-40.47	peak	P
2	5222.643	67.44	-27.19	40.25	74.00	-33.75	peak	P
3	7422.180	67.84	-24.80	43.04	74.00	-30.96	peak	P
4	10298.023	71.73	-24.43	47.30	74.00	-26.70	peak	P
5	12924.635	70.62	-21.38	49.24	74.00	-24.76	peak	P
6 *	15641.063	71.71	-21.52	50.19	74.00	-23.81	peak	P

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3587.818	62.97	-29.04	33.93	74.00	-40.07	peak	P
2	5778.630	65.15	-26.05	39.10	74.00	-34.90	peak	P
3	8207.577	69.46	-25.44	44.02	74.00	-29.98	peak	P
4	11028.179	69.72	-23.41	46.31	74.00	-27.69	peak	P
5	14177.087	69.32	-21.13	48.19	74.00	-25.81	peak	P
6 *	16886.163	67.30	-18.49	48.81	74.00	-25.19	peak	P

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3019.192	60.00	-29.50	30.50	74.00	-43.50	peak	P
2	5224.153	64.96	-27.19	37.77	74.00	-36.23	peak	P
3	7134.019	62.20	-24.89	37.31	74.00	-36.69	peak	P
4	10342.767	67.06	-24.44	42.62	74.00	-31.38	peak	P
5	14136.169	65.94	-21.12	44.82	74.00	-29.18	peak	P
6 *	17798.235	68.98	-16.65	52.33	74.00	-21.67	peak	P

IC AIC8800D(ANT1)

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2271.365	76.64	-29.64	47.00	74.00	-27.00	peak	P
2	3670.365	80.01	-30.15	49.86	74.00	-24.14	peak	P
3	7284.045	80.64	-30.37	50.27	74.00	-23.73	peak	P
4	8264.315	78.24	-31.15	47.09	74.00	-26.91	peak	P
5	10566.206	78.68	-31.64	47.04	74.00	-26.96	peak	P
6	14224.817	80.30	-30.73	49.57	74.00	-24.43	peak	P

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2132.254	76.78	-29.61	47.17	74.00	-26.83	peak	P
2	3531.254	80.15	-30.12	50.03	74.00	-23.97	peak	P
3	7144.934	80.78	-30.34	50.44	74.00	-23.56	peak	P
4	8125.204	78.38	-31.12	47.26	74.00	-26.74	peak	P
5	10427.095	78.82	-31.61	47.21	74.00	-26.79	peak	P
6	14085.706	80.44	-30.70	49.74	74.00	-24.26	peak	P

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2034.326	76.64	-29.40	47.24	74.00	-26.76	peak	P
2	3433.326	80.01	-29.91	50.10	74.00	-23.90	peak	P
3	7047.006	80.64	-30.13	50.51	74.00	-23.49	peak	P
4	8027.276	78.24	-30.91	47.33	74.00	-26.67	peak	P
5	10329.167	78.68	-31.40	47.28	74.00	-26.72	peak	P
6	13987.778	80.30	-30.49	49.81	74.00	-24.19	peak	P

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1894.624	76.76	-29.31	47.45	74.00	-26.55	peak	P
2	3293.624	80.13	-29.82	50.31	74.00	-23.69	peak	P
3	6907.304	80.76	-30.04	50.72	74.00	-23.28	peak	P
4	7887.574	78.36	-30.82	47.54	74.00	-26.46	peak	P
5	10189.465	78.80	-31.31	47.49	74.00	-26.51	peak	P
6	13848.076	80.42	-30.40	50.02	74.00	-23.98	peak	P


TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2227.326	75.74	-29.50	46.24	74.00	-27.76	peak	P
2	3626.326	79.11	-30.01	49.10	74.00	-24.90	peak	P
3	7240.006	79.74	-30.23	49.51	74.00	-24.49	peak	P
4	8220.276	77.34	-31.01	46.33	74.00	-27.67	peak	P
5	10522.167	77.78	-31.50	46.28	74.00	-27.72	peak	P
6	14180.778	79.40	-30.59	48.81	74.00	-25.19	peak	P

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	1925.362	75.84	-29.40	46.44	74.00	-27.56	peak	P
2	3324.362	79.21	-29.91	49.30	74.00	-24.70	peak	P
3	6938.042	79.84	-30.13	49.71	74.00	-24.29	peak	P
4	7918.312	77.44	-30.91	46.53	74.00	-27.47	peak	P
5	10220.203	77.88	-31.40	46.48	74.00	-27.52	peak	P
6	13878.814	79.50	-30.49	49.01	74.00	-24.99	peak	P

7 Test Setup Photos

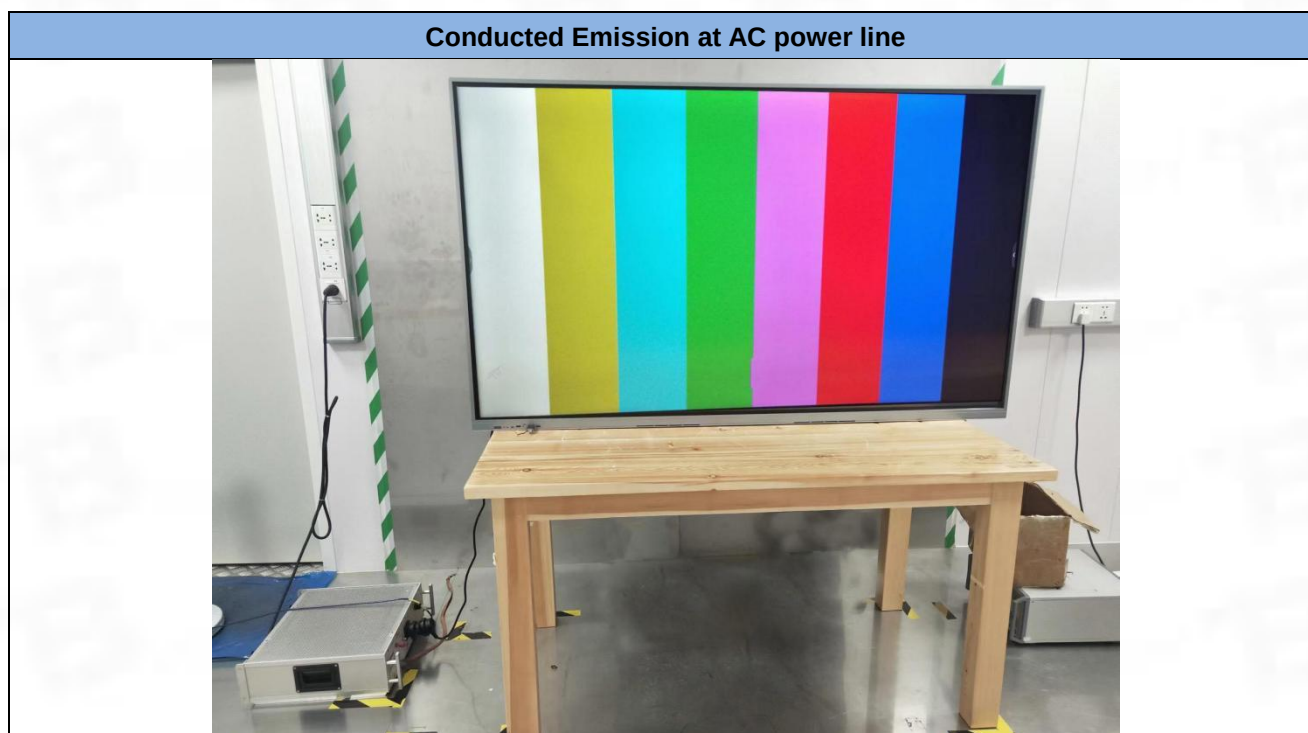

**Occupied Bandwidth
Maximum Conducted Output Power
Power Spectral Density
Emissions in non-restricted frequency bands**



Band edge emissions (Radiated)
Emissions in frequency bands (above 1GHz)



Emissions in frequency bands (below 1GHz)



8 EUT Constructional Details (EUT Photos)

Please refer to the report BTF230725R00601

Appendix

IC MT7663BUN

Not: All modes are tested, only the worst mode antenna 1 is shown here

1. Duty Cycle


1.1 Ant1

1.1.1 Test Result


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	SISO	2412	8.383	8.413	99.64	0.02	0.04
		2437	8.384	8.414	99.64	0.02	0.04
		2462	8.383	8.413	99.64	0.02	0.04
802.11g	SISO	2412	1.393	1.428	97.55	0.11	0.13
		2437	1.392	1.428	97.48	0.11	0.10
		2462	1.392	1.427	97.55	0.11	0.03
802.11n (HT20)	MIMO	2412	1.302	1.336	97.46	0.11	0.03
		2437	1.302	1.336	97.46	0.11	0.04
		2462	1.302	1.336	97.46	0.11	0.03

1.1.2 Test Graph


802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

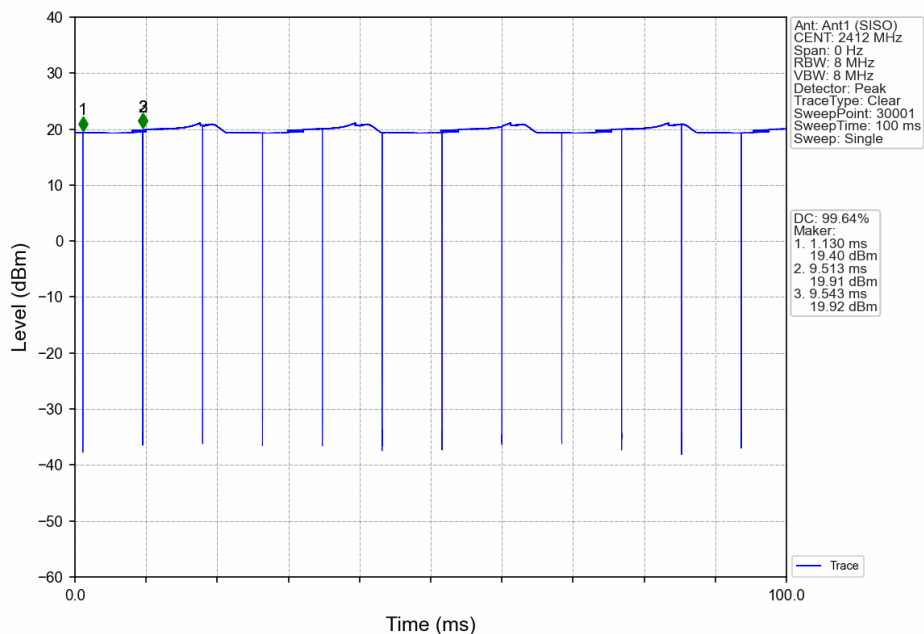


802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

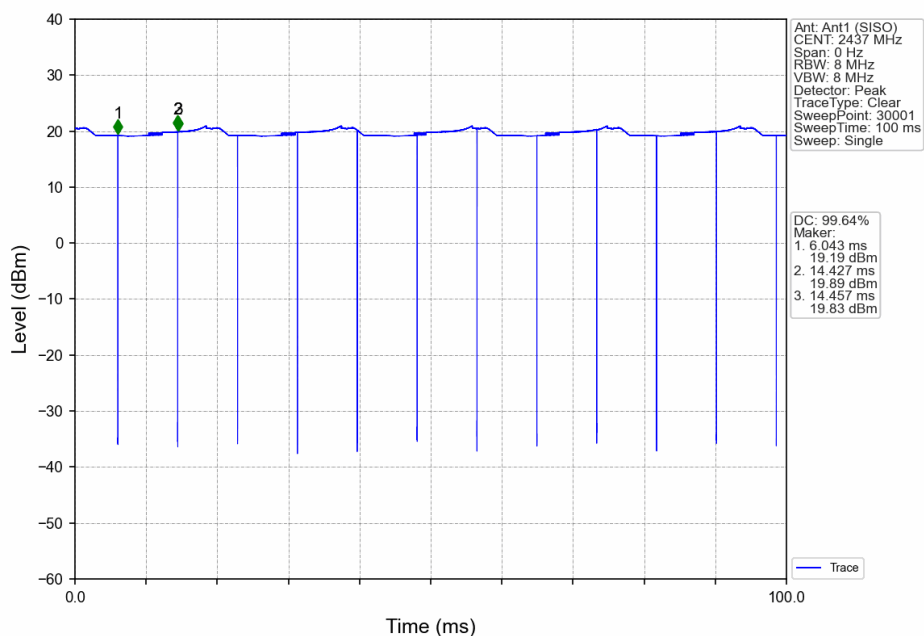


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

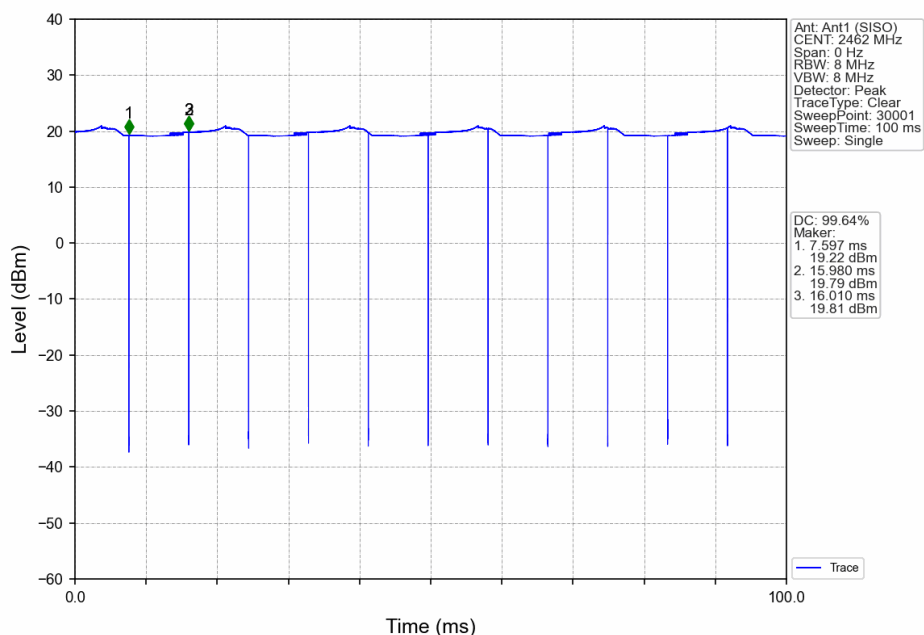


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

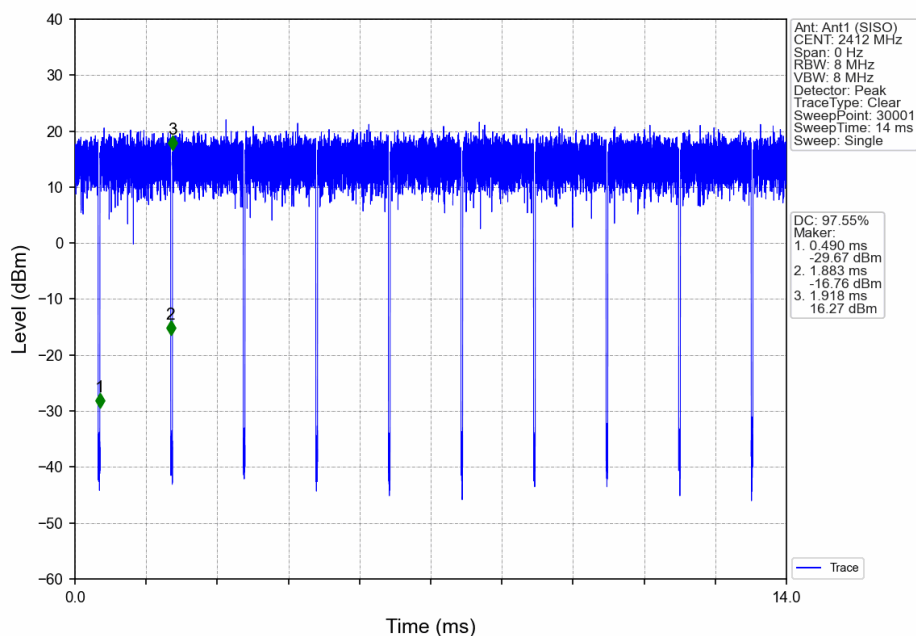


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

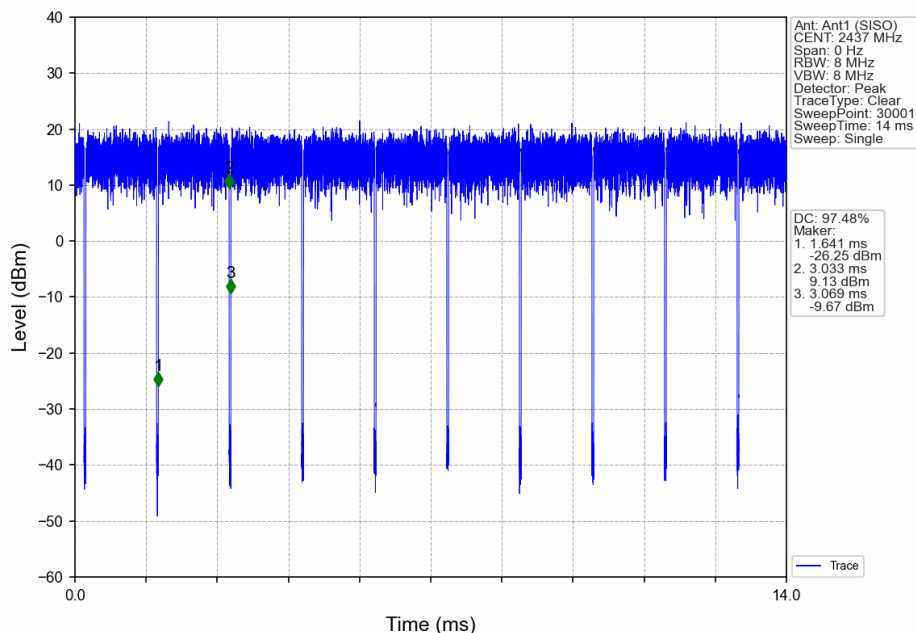


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

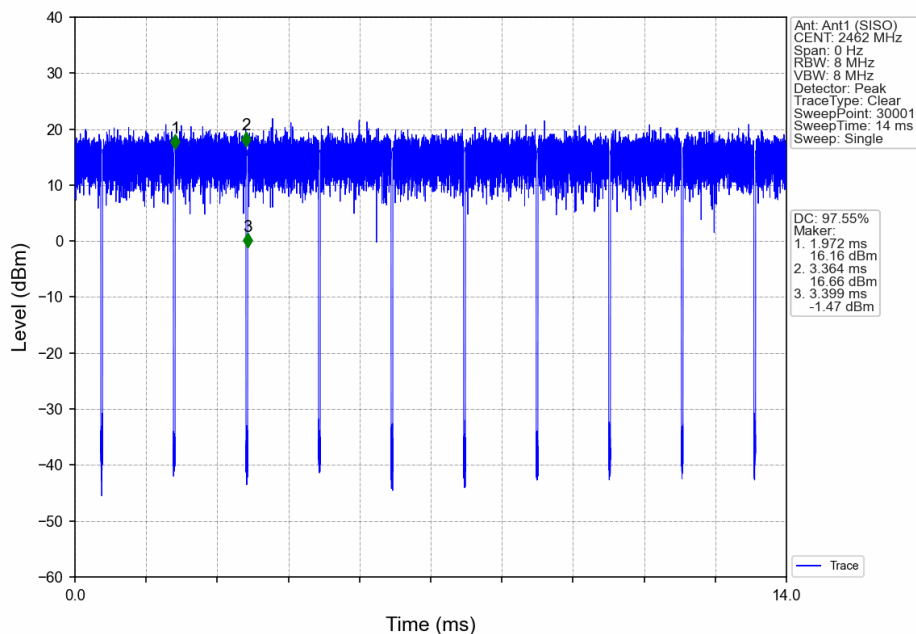


802.11n(HT20)_LCH_2412MHz_Ant1 (MIMO)_NTNV

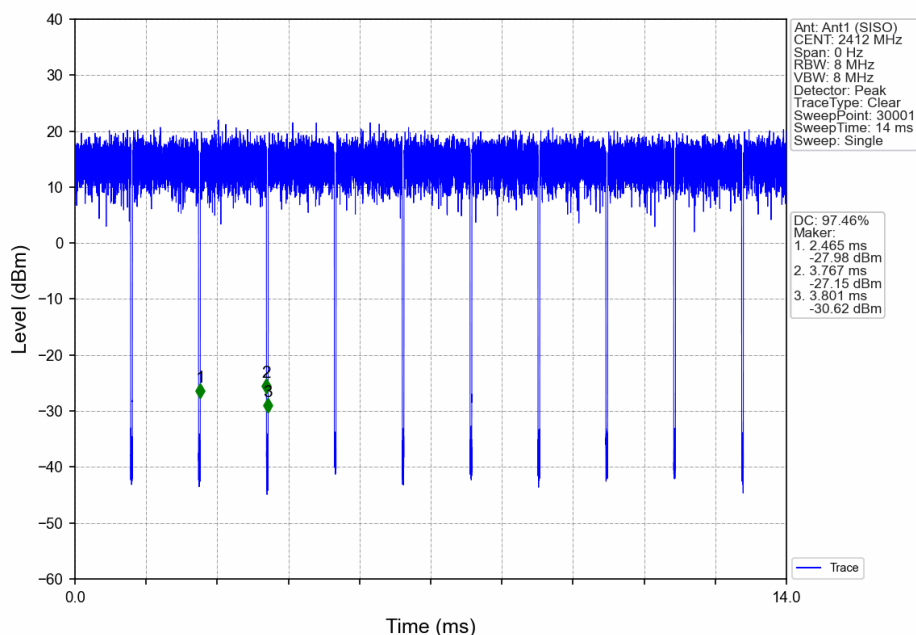

802.11n(HT20)_MCH_2437MHz_Ant1 (MIMO)_NTNV

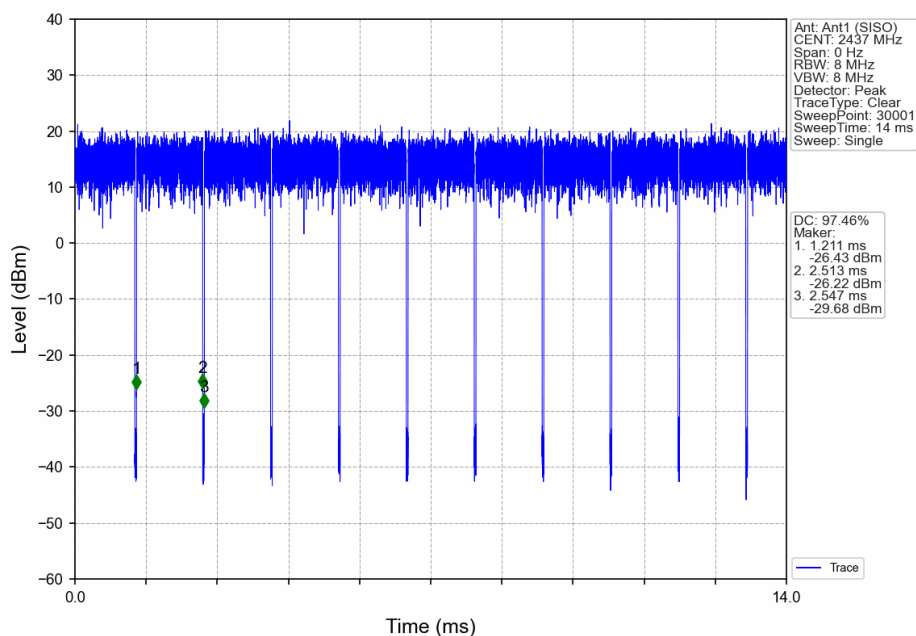

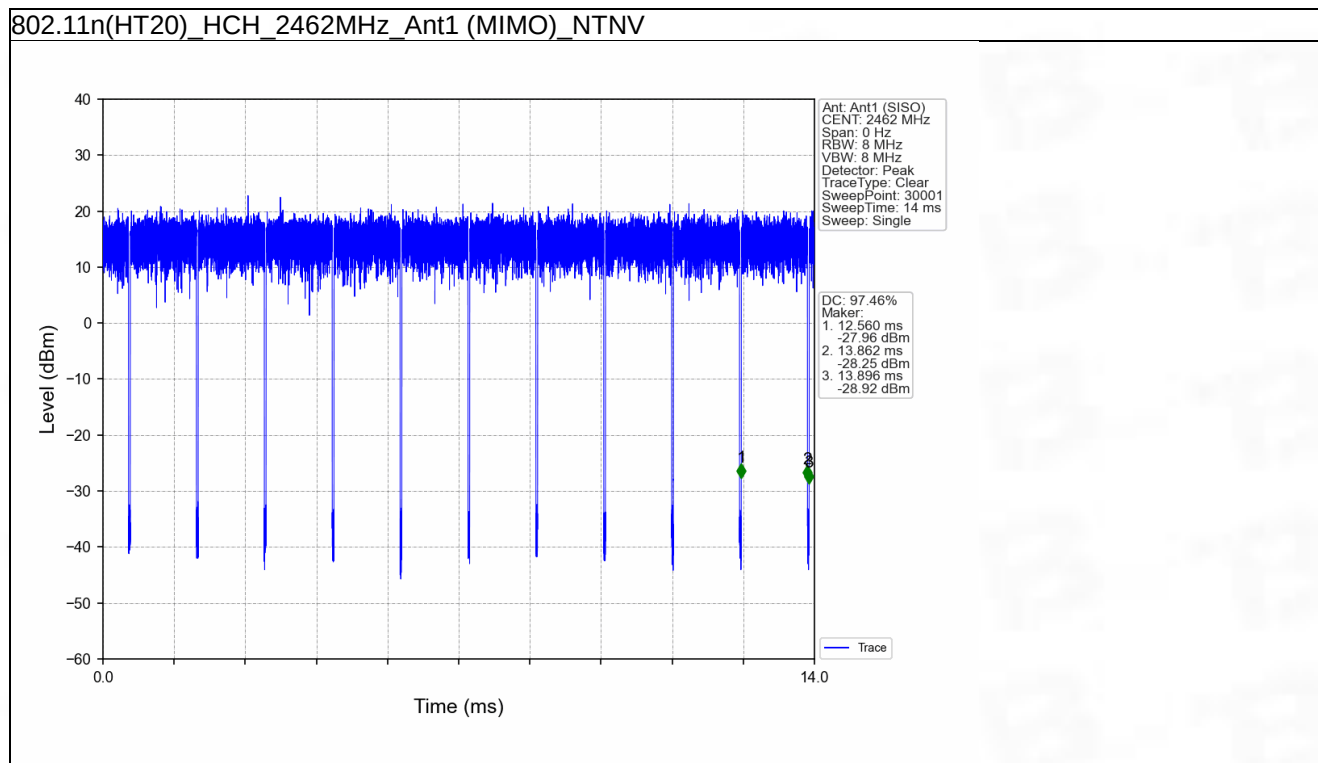


1.2 Ant2


1.2.1 Test Result

Ant2							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	SISO	2412	8.384	8.414	99.64	0.02	0.04
		2437	8.383	8.413	99.64	0.02	0.00
		2462	8.383	8.413	99.64	0.02	0.00
802.11g	SISO	2412	1.393	1.428	97.55	0.11	0.03
		2437	1.393	1.427	97.62	0.10	0.03
		2462	1.393	1.428	97.55	0.11	0.03
802.11n (HT20)	MIMO	2412	1.301	1.336	97.38	0.12	0.03
		2437	1.301	1.336	97.38	0.12	0.03
		2462	1.302	1.336	97.46	0.11	0.03


1.2.2 Test Graph

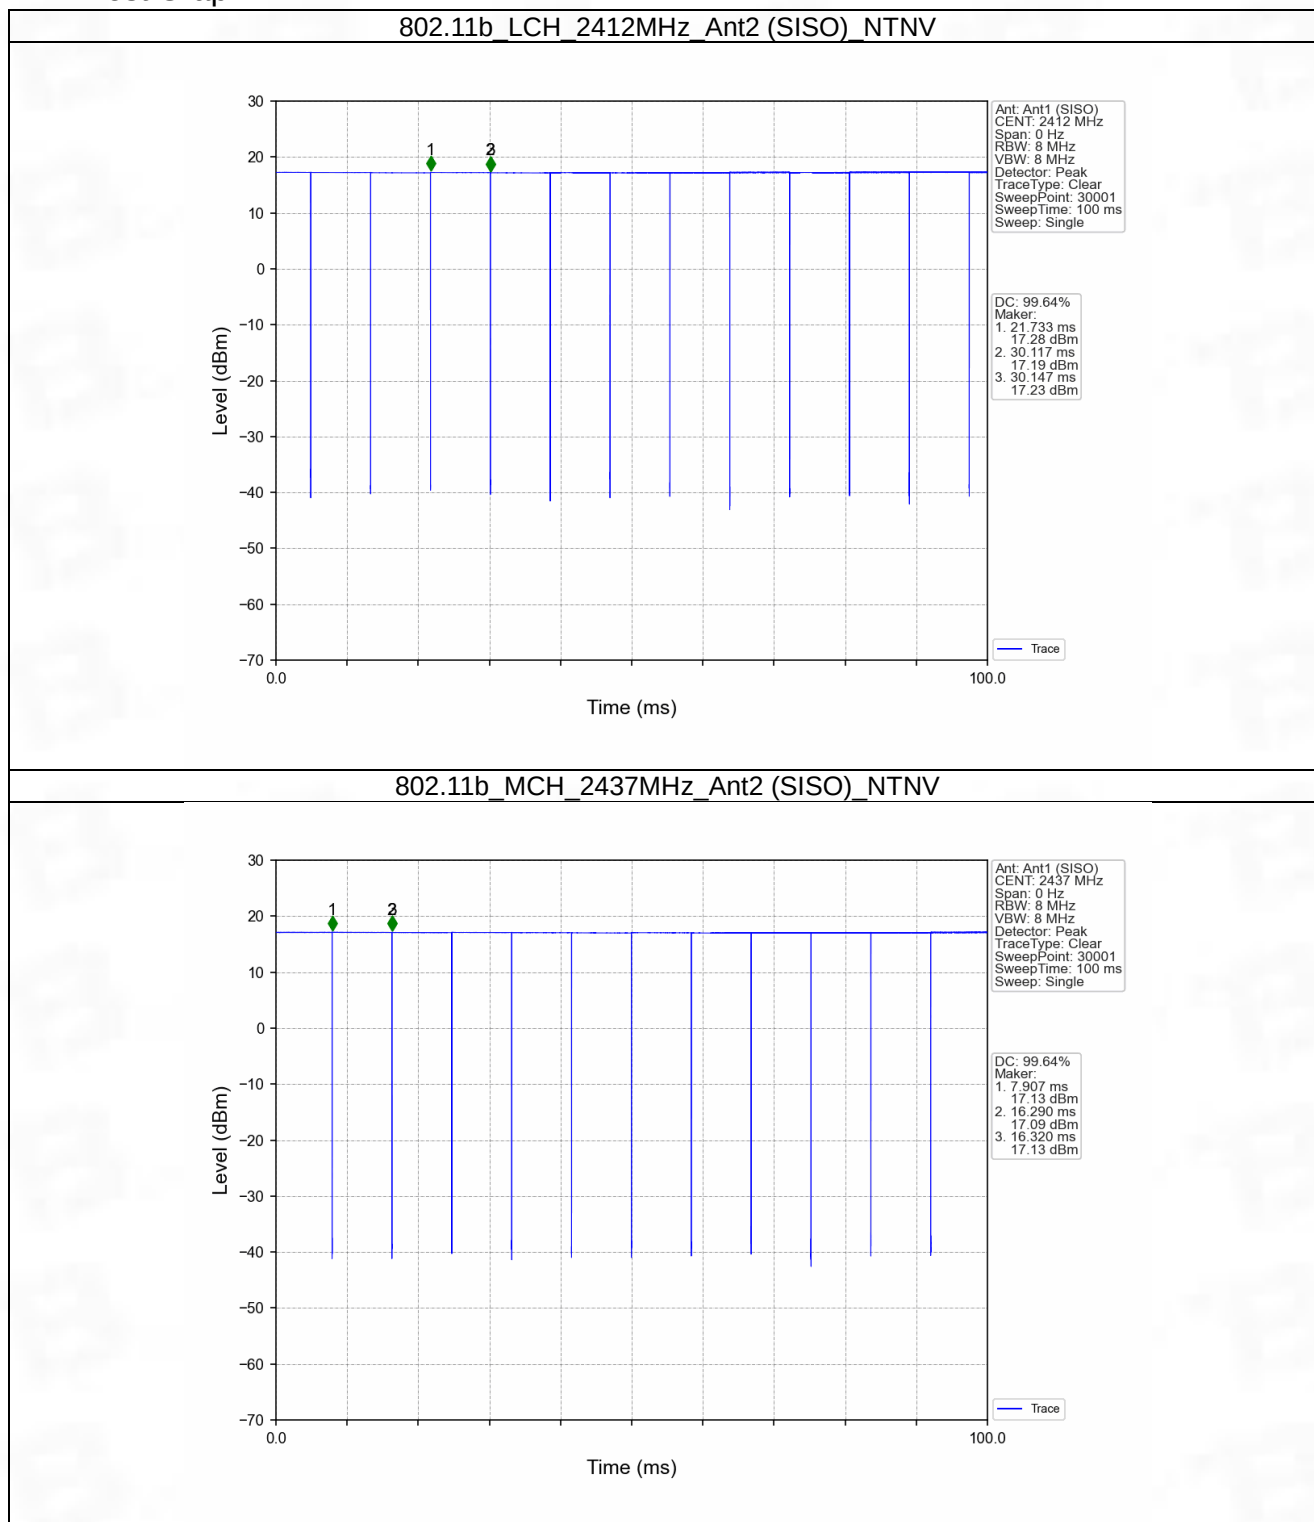


802.11b_HCH_2462MHz_Ant2 (SISO)_NTNV

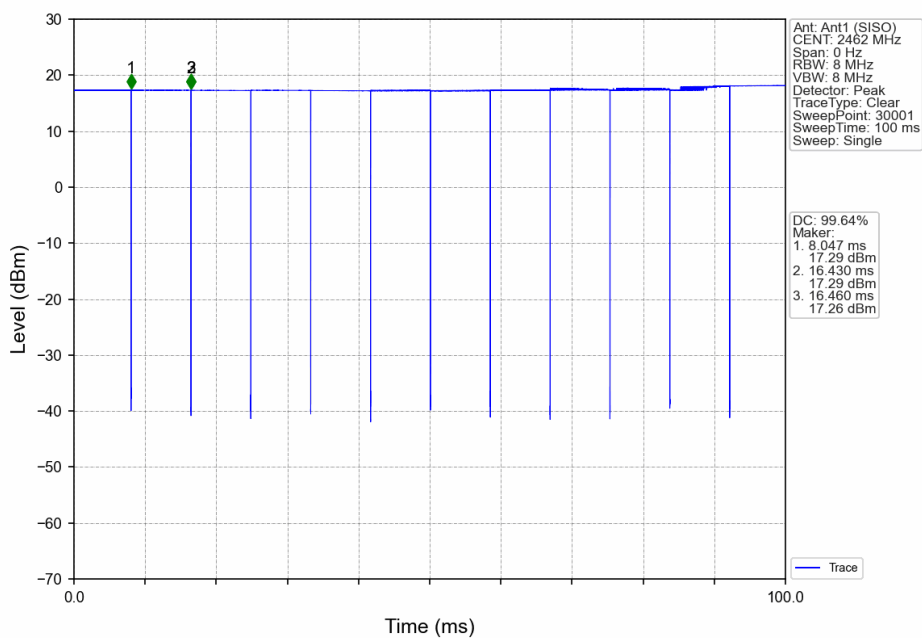


802.11g_LCH_2412MHz_Ant2 (SISO)_NTNV

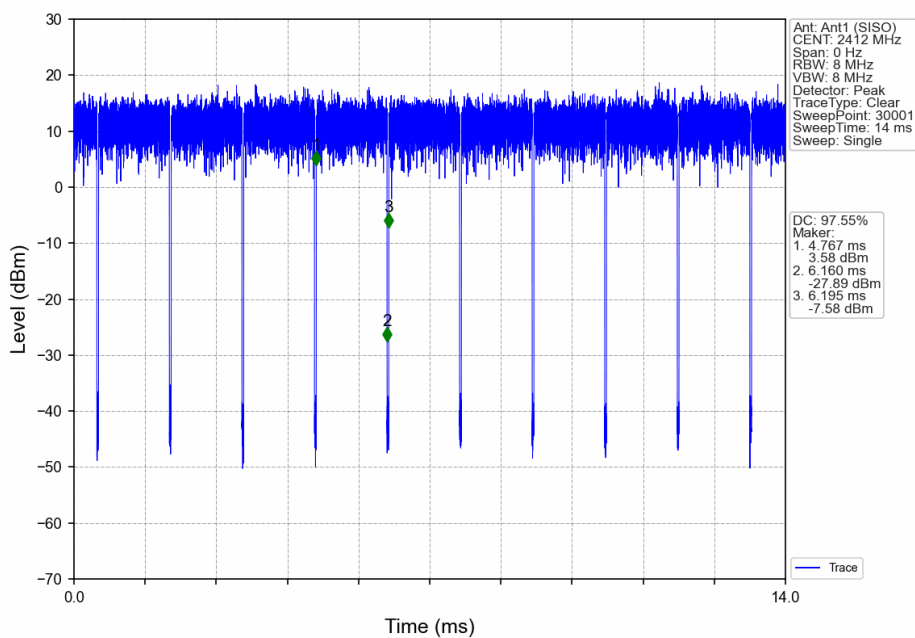


802.11g_MCH_2437MHz_Ant2 (SISO)_NTNV

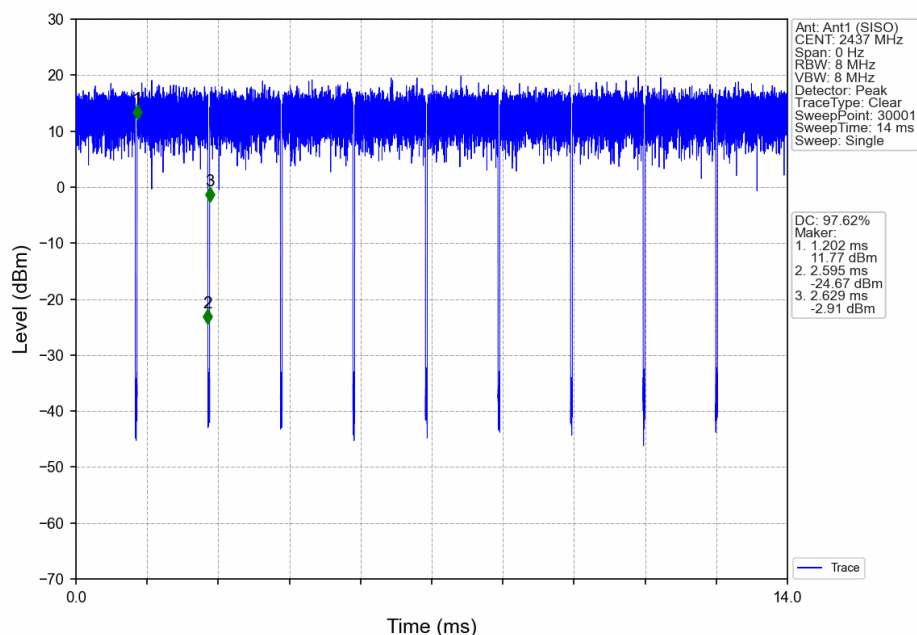


802.11g_HCH_2462MHz_Ant2 (SISO)_NTNV

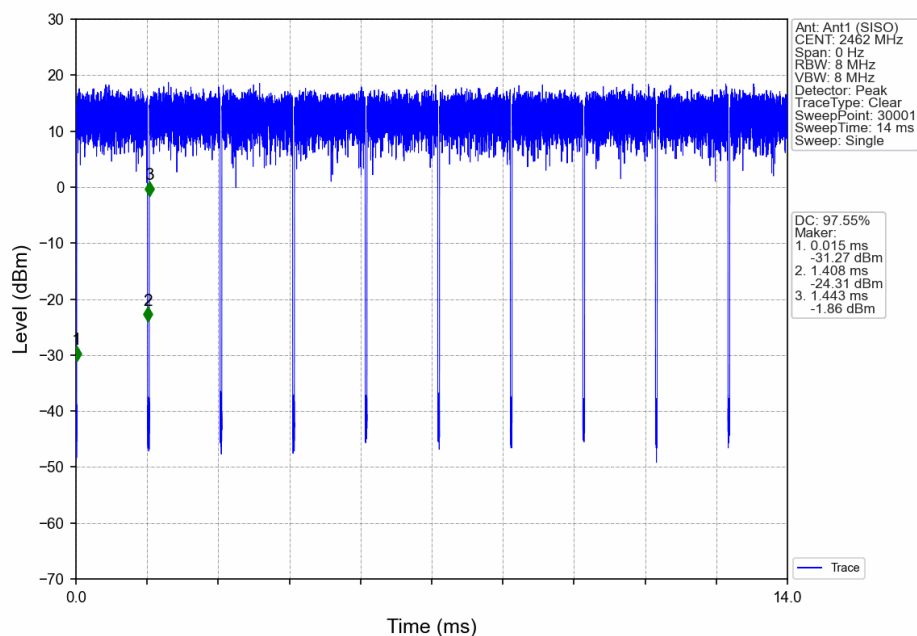


802.11n(HT20)_LCH_2412MHz_Ant2 (MIMO)_NTNV

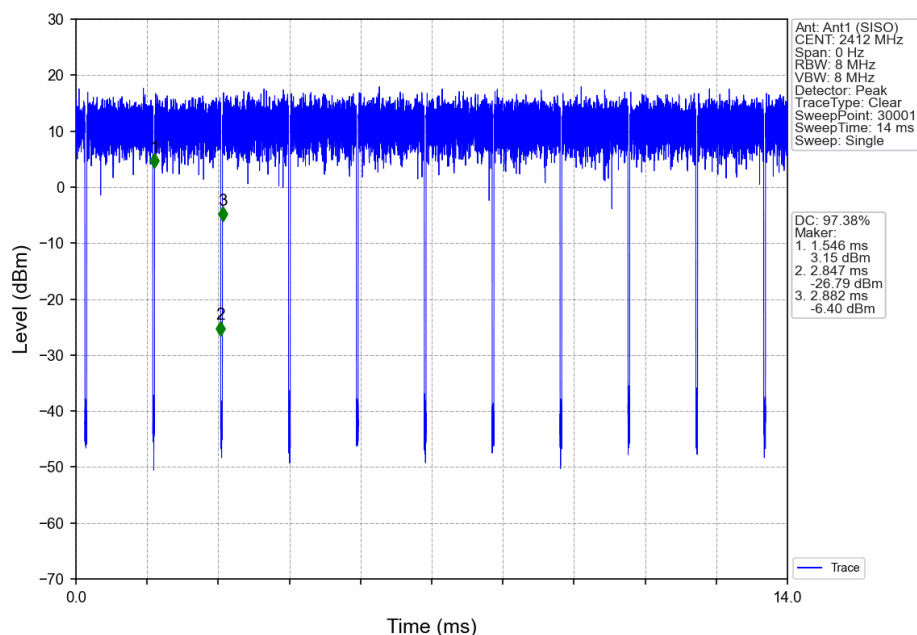

802.11n(HT20)_MCH_2437MHz_Ant2 (MIMO)_NTNV

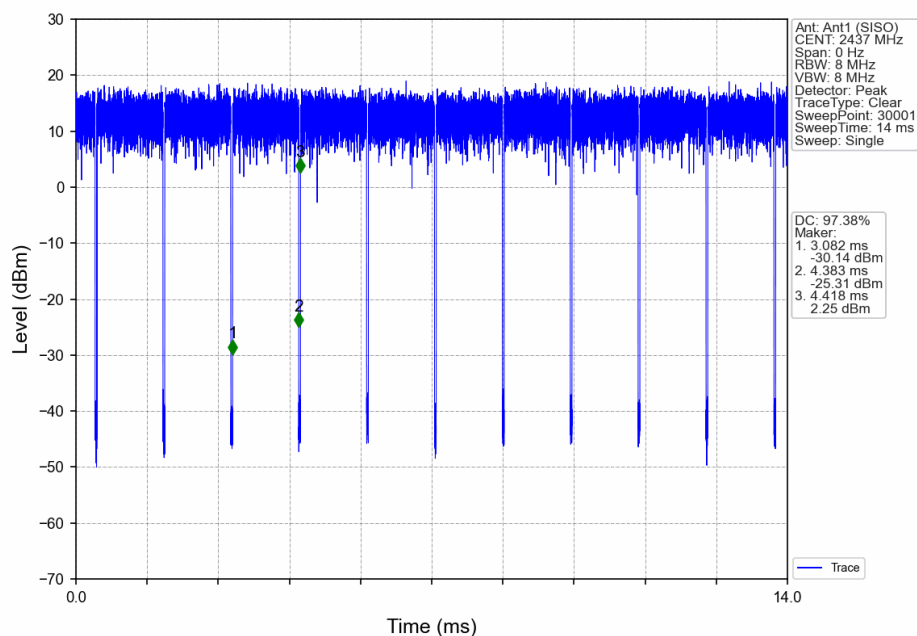

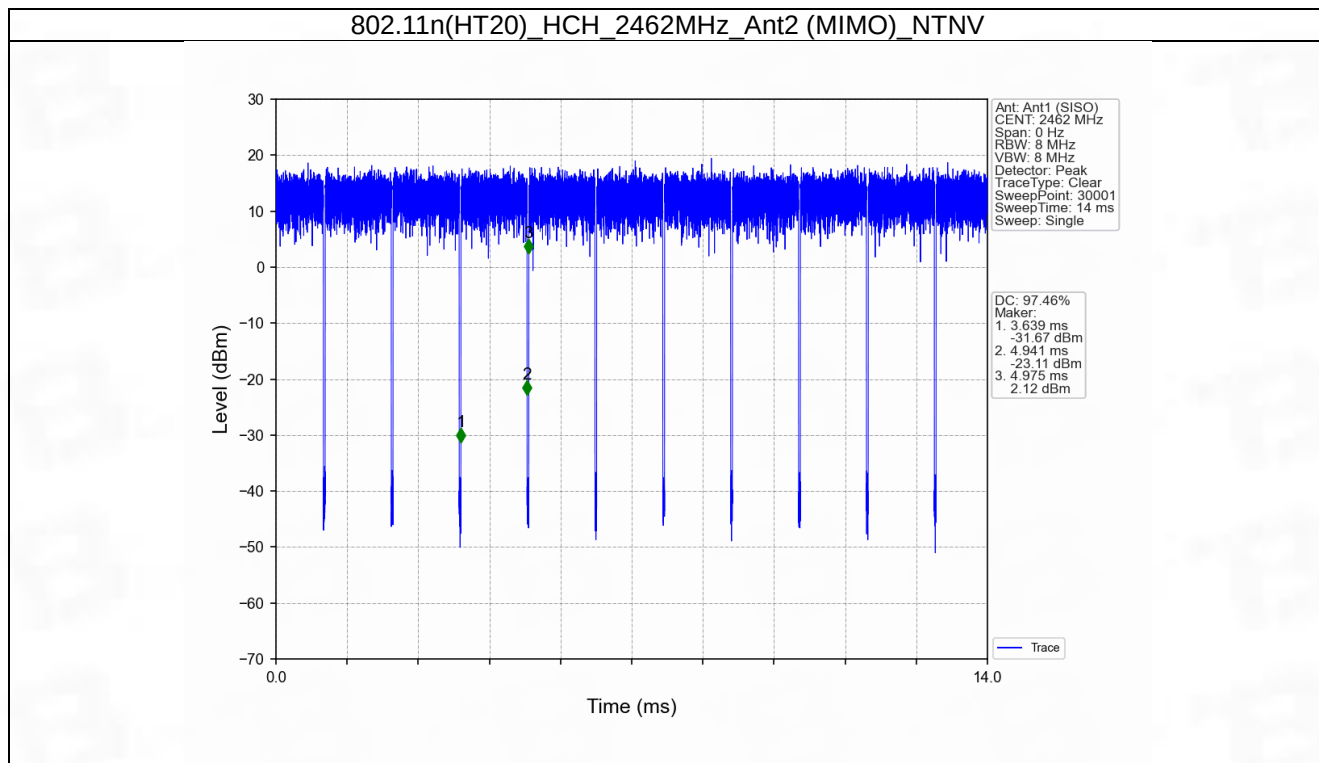

2. Bandwidth


2.1 OBW

2.1.1 Test Result


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)	Verdict
				Result	
802.11b	SISO	2412	1	12.984	Pass
		2437	1	12.944	Pass
		2462	1	12.930	Pass
802.11g	SISO	2412	1	17.517	Pass
		2437	1	17.524	Pass
		2462	1	17.559	Pass
802.11b	SISO	2412	2	12.303	Pass
		2437	2	12.359	Pass
		2462	2	12.621	Pass
802.11g	SISO	2412	2	17.653	Pass
		2437	2	18.012	Pass
		2462	2	17.833	Pass
802.11n (HT20)	MIMO	2412	1&2	18.367	Pass
		2437	1&2	18.421	Pass
		2462	1&2	18.424	Pass

2.1.2 Test Graph


802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

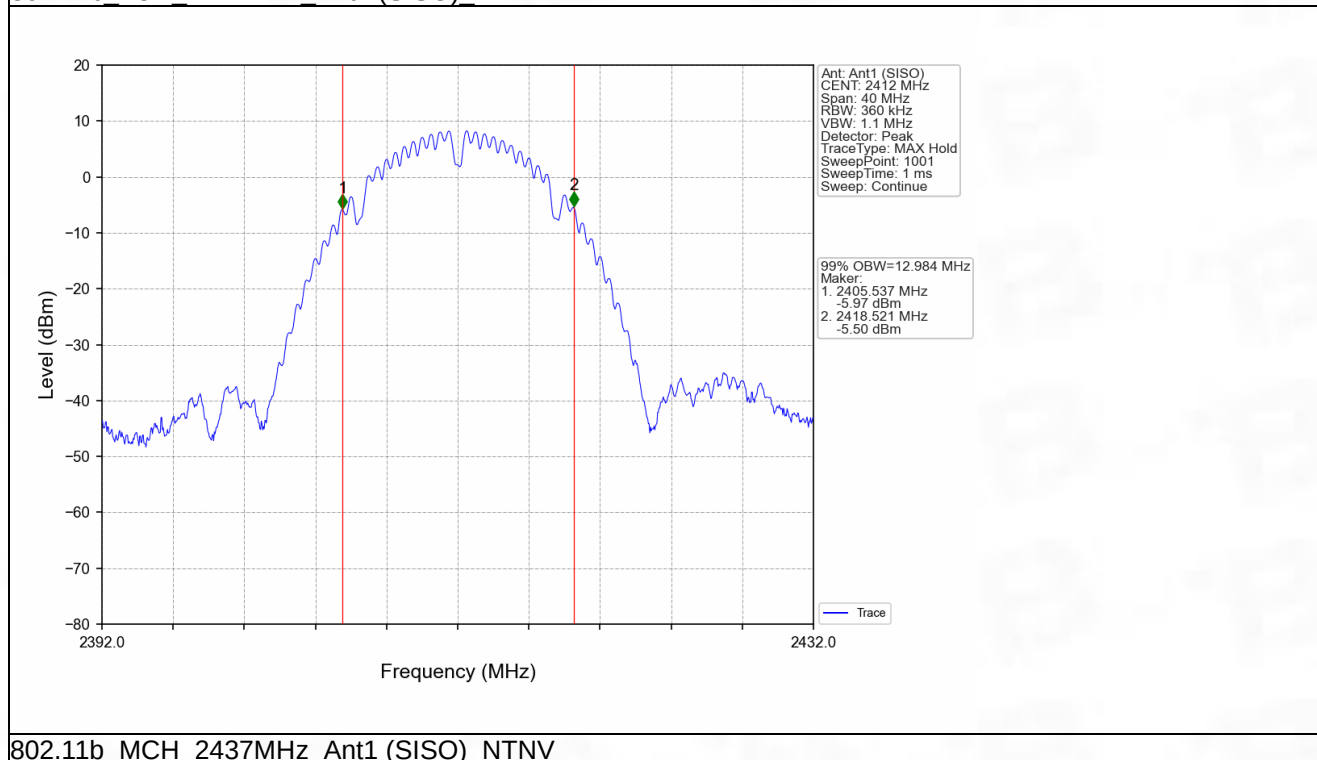


802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

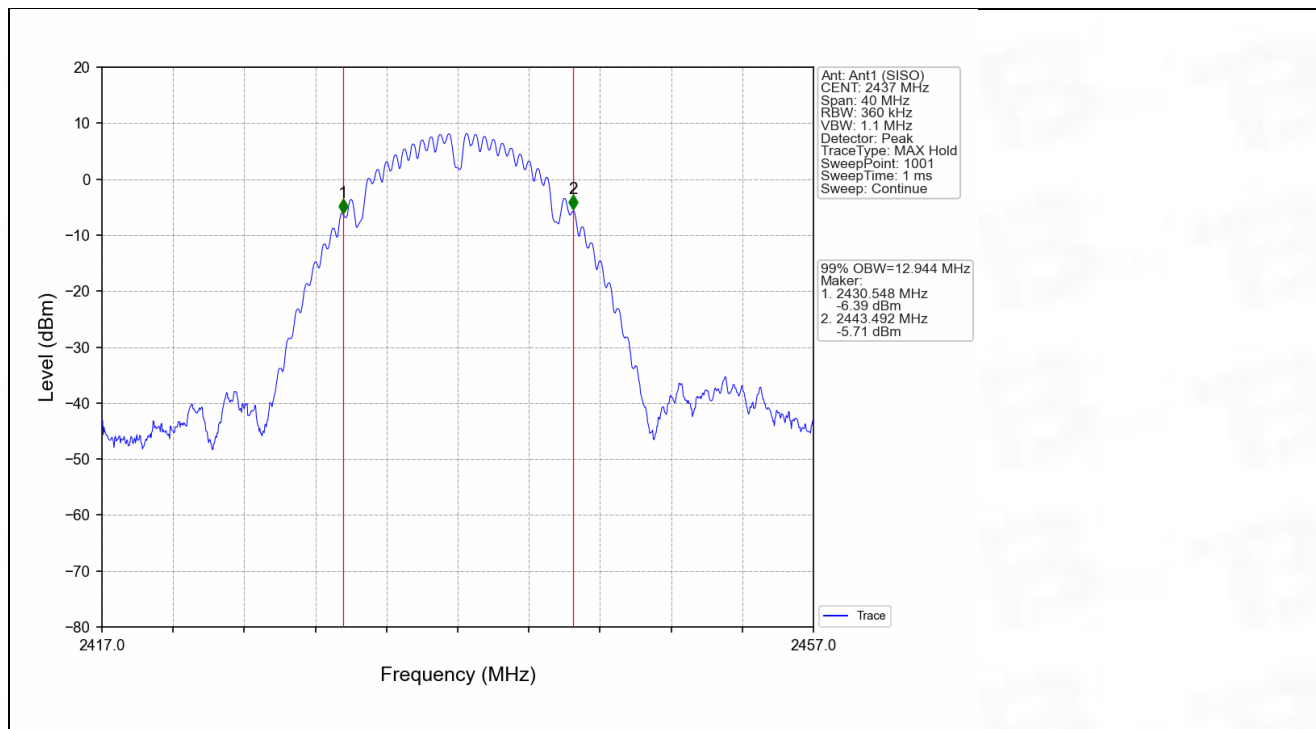


802.11b HCH 2462MHz Ant1 (SISO) NTN

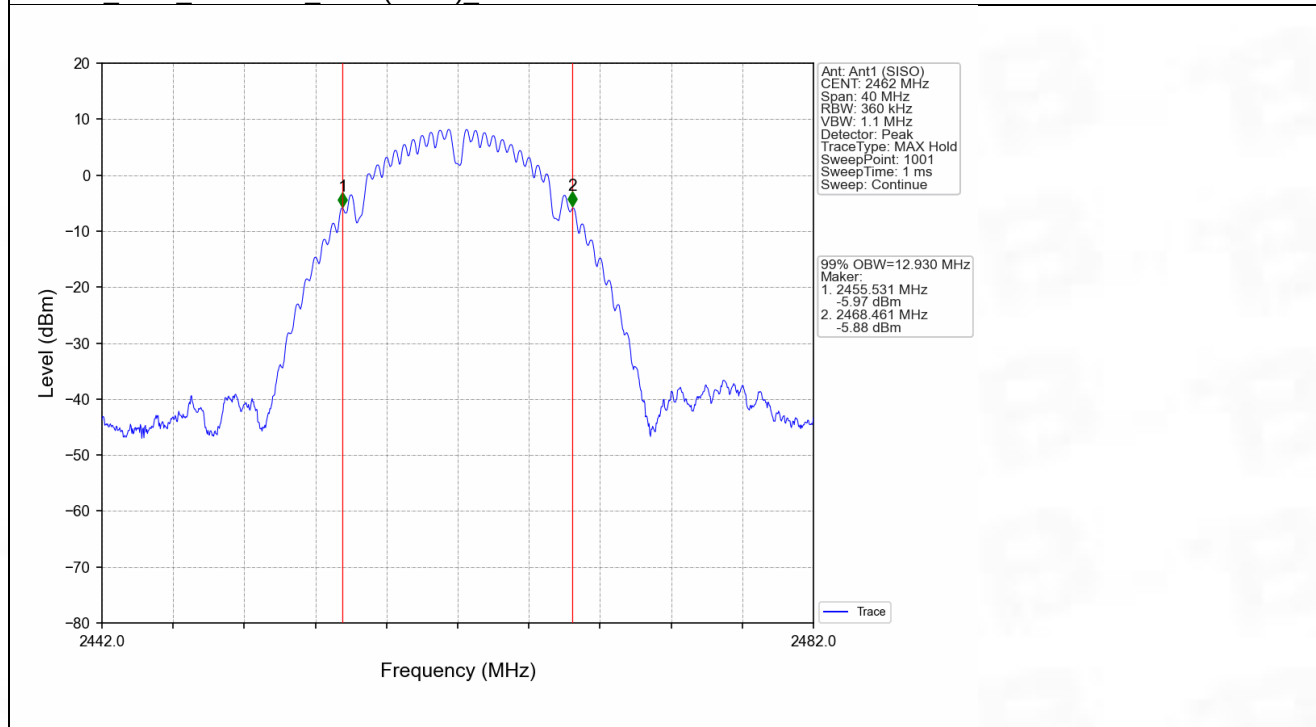


802.11g LCH 2412MHz Ant1 (SISO) NTN

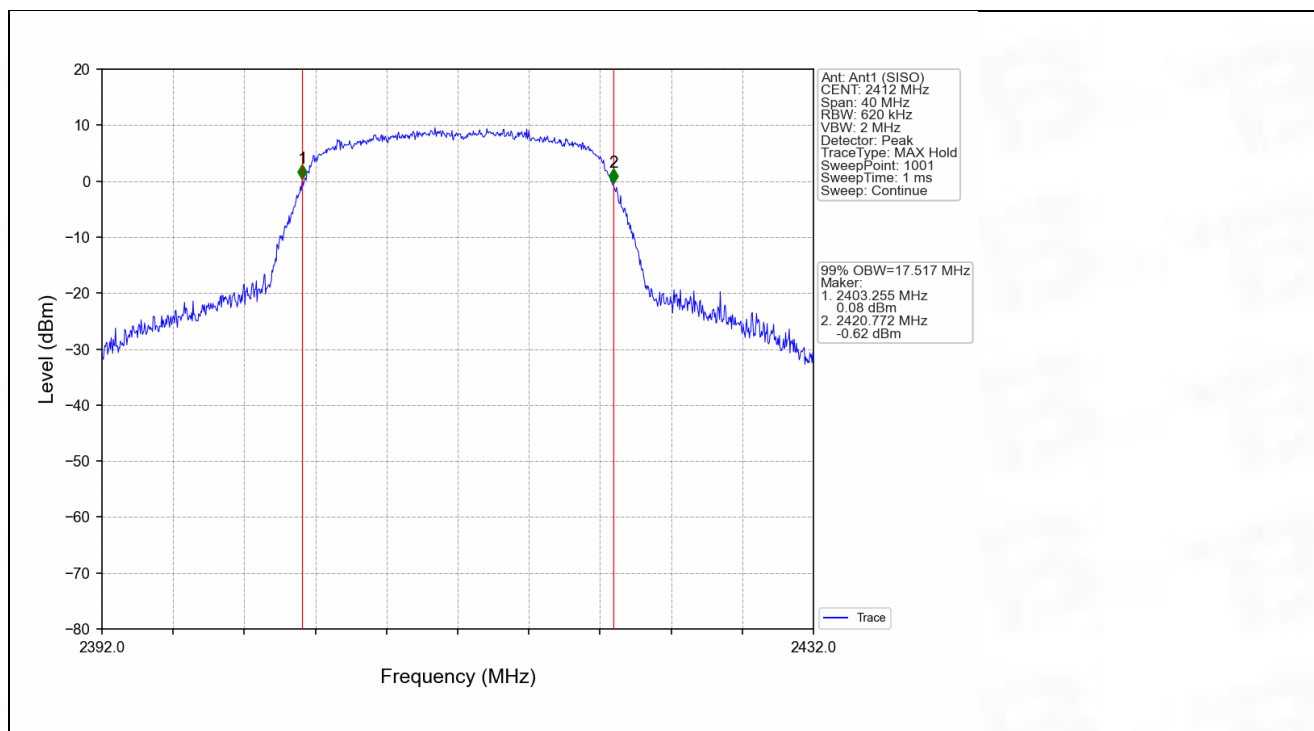


802.11g MCH 2437MHz Ant1 (SISO) NTN

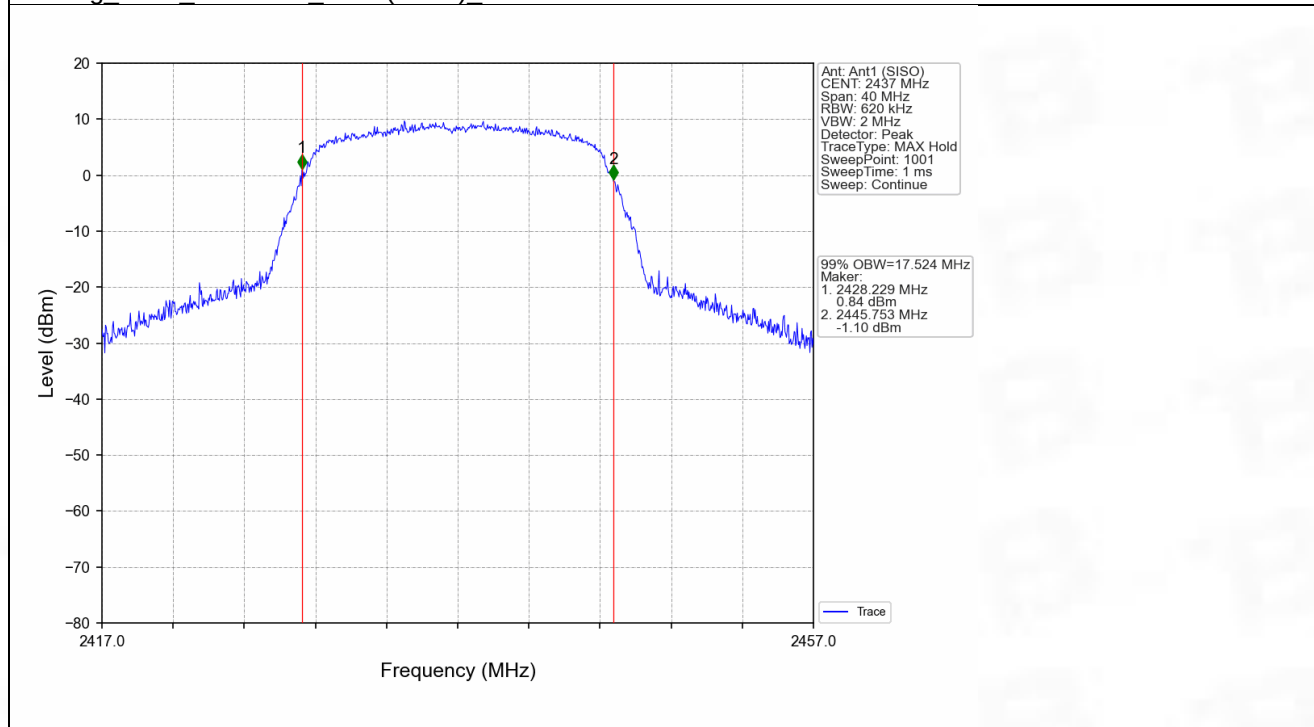


802.11g HCH 2462MHz Ant1 (SISO) NTN

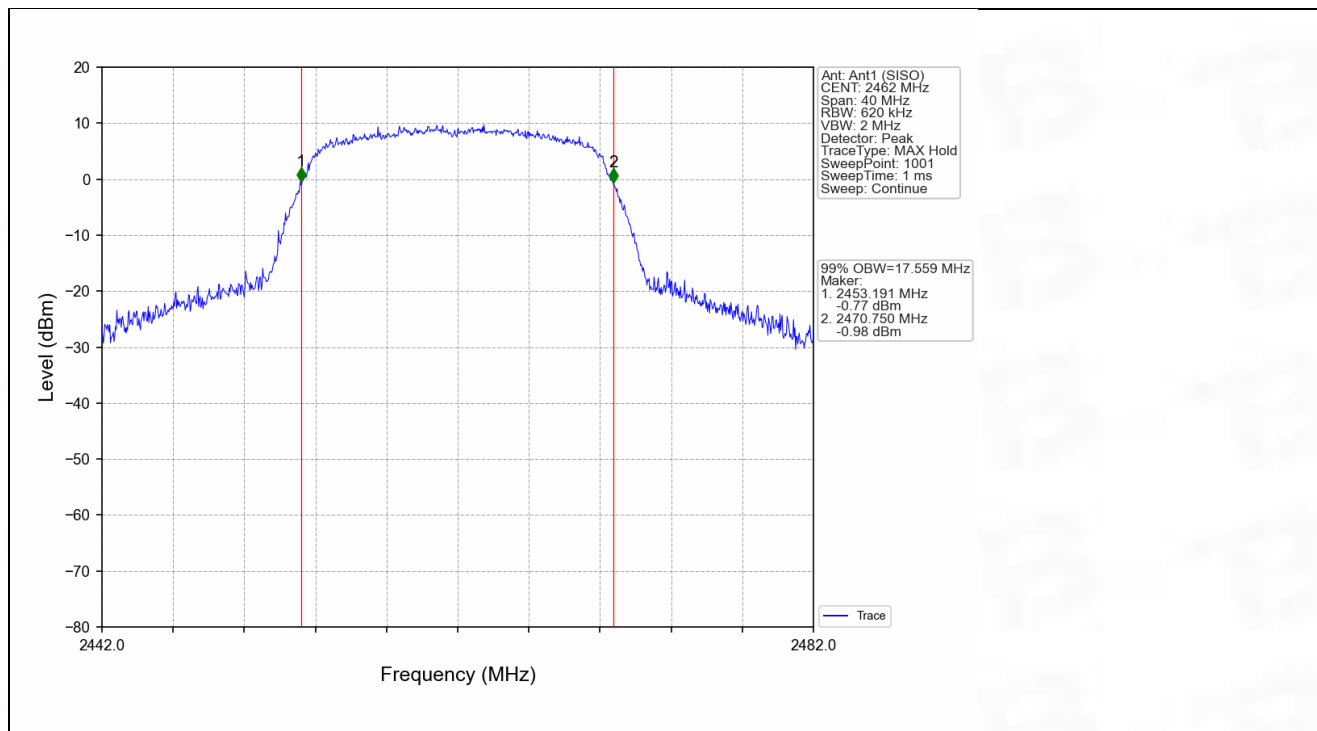


802.11b_LCH_2412MHz_Ant2 (SISO)_NTNV

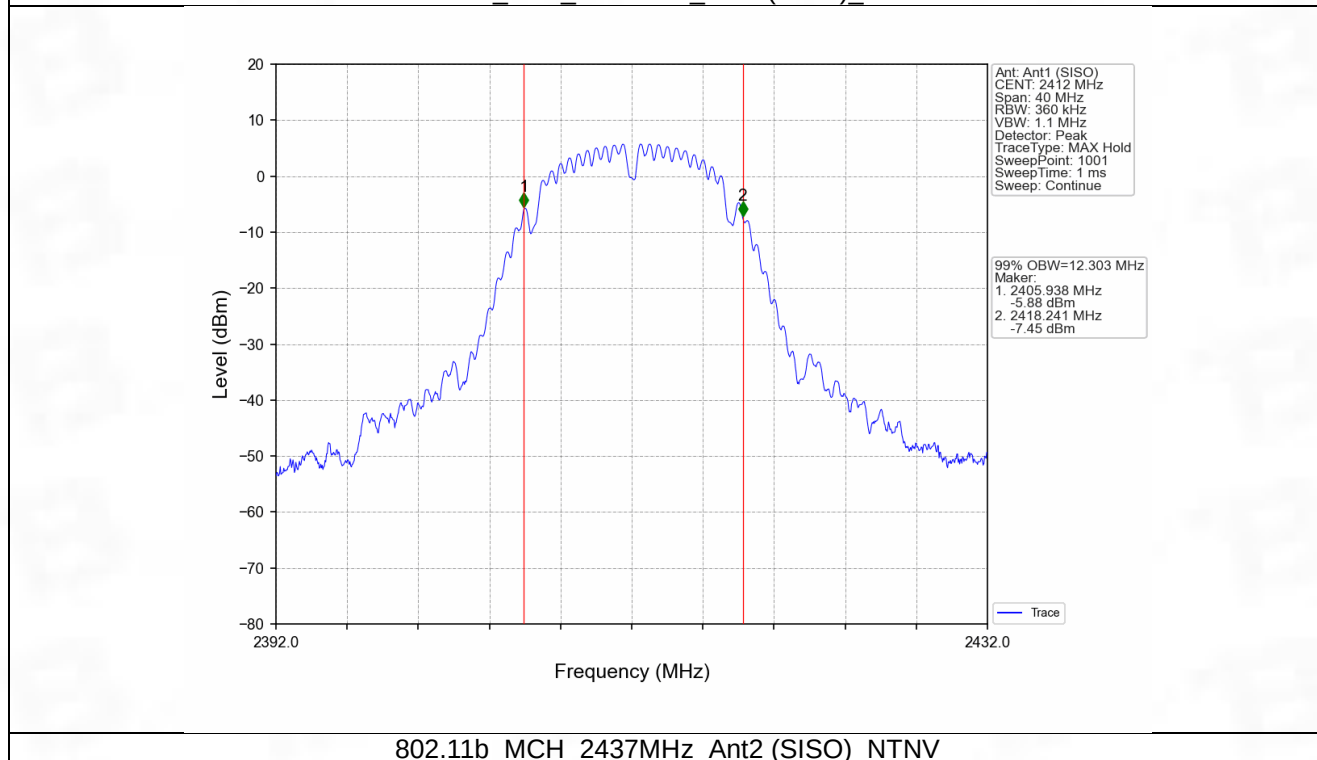


802.11b_MCH_2437MHz_Ant2 (SISO)_NTNV

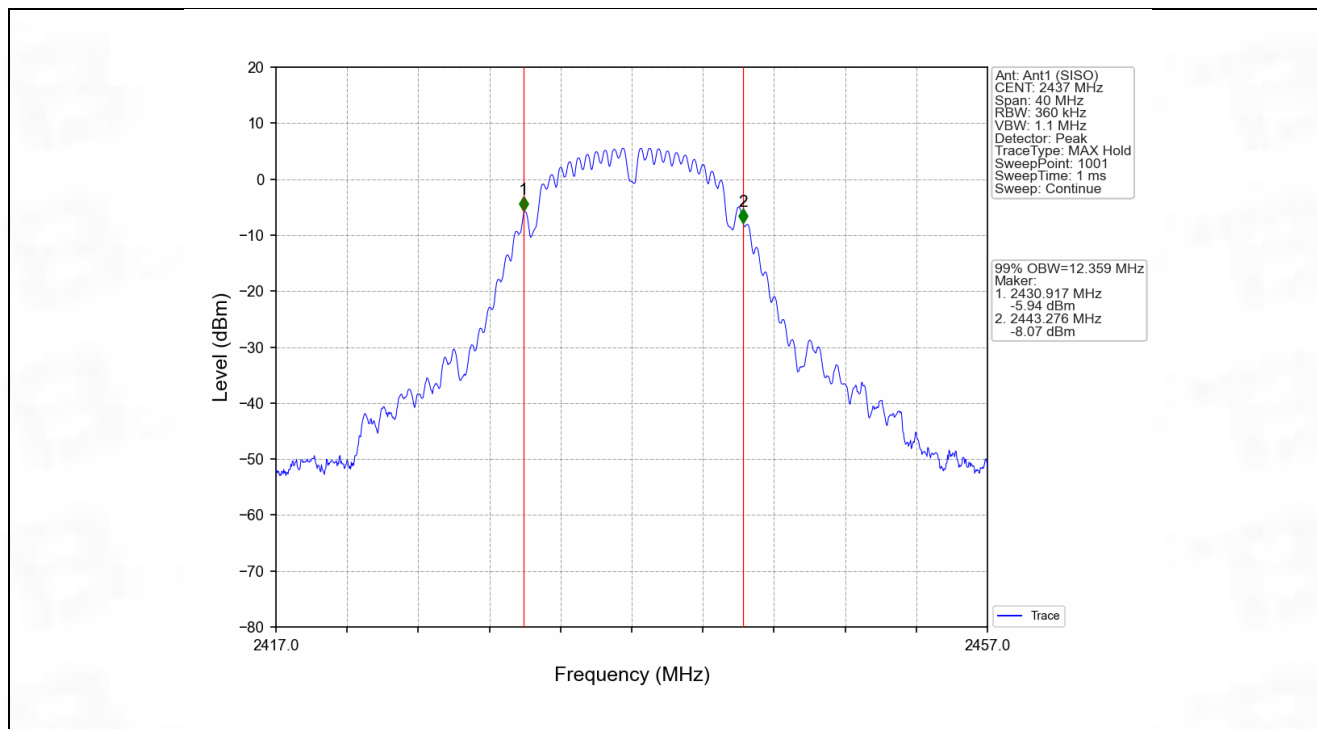


802.11b HCH_2462MHz_Ant2 (SISO)_NTNV

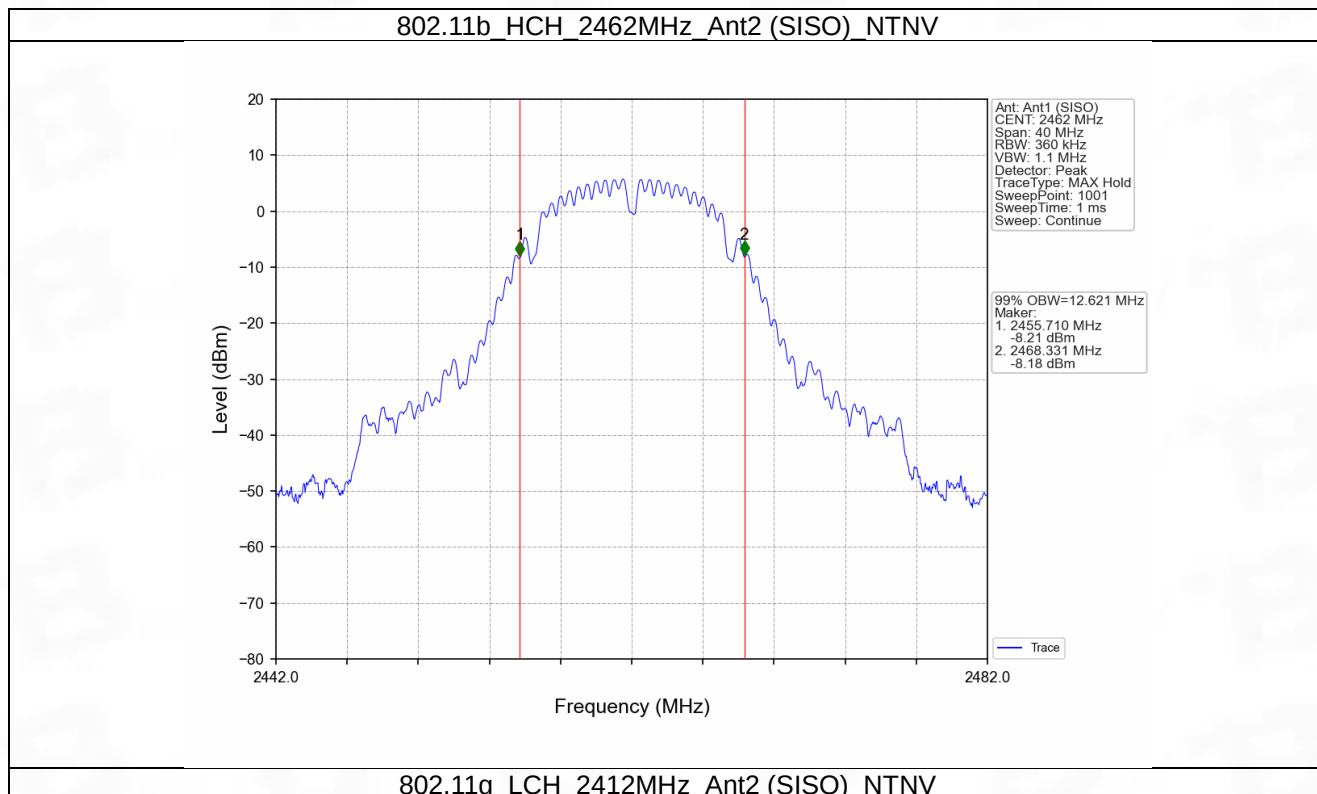


802.11g LCH_2412MHz_Ant2 (SISO)_NTNV

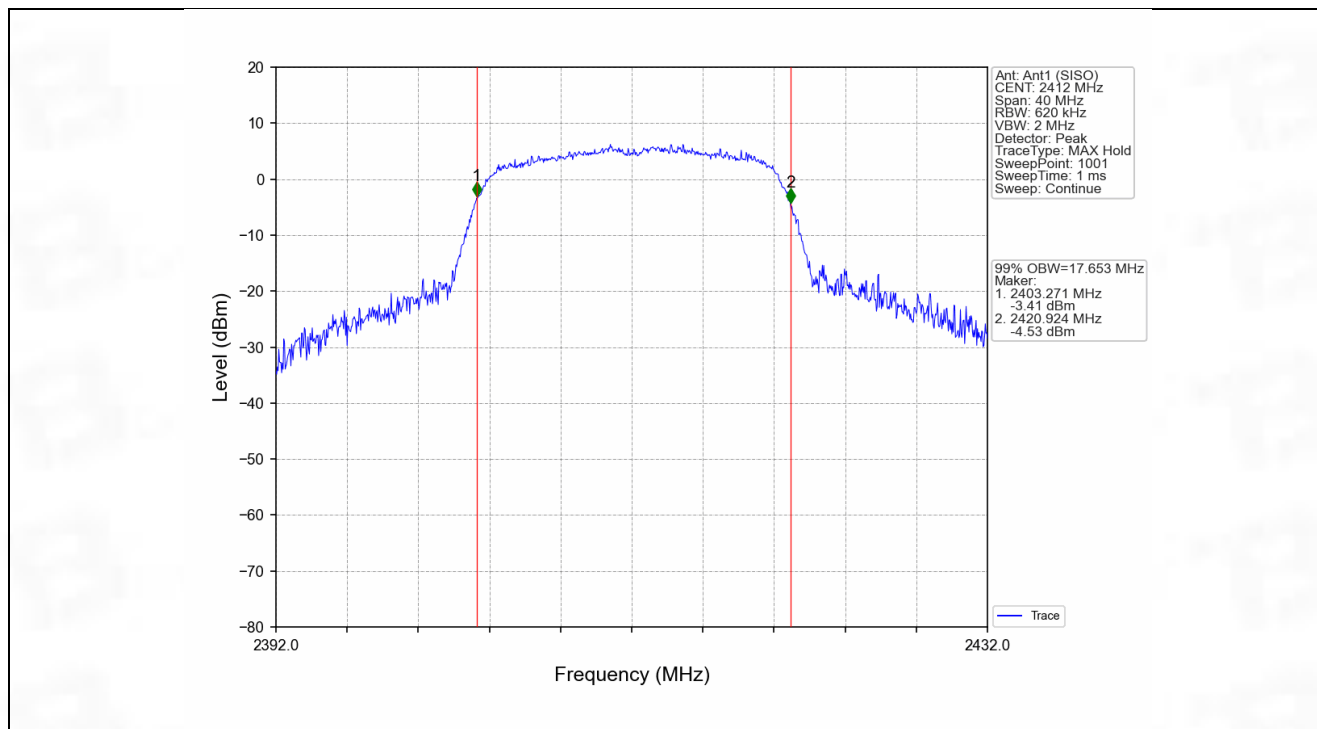


802.11g MCH_2437MHz_Ant2 (SISO) NTN

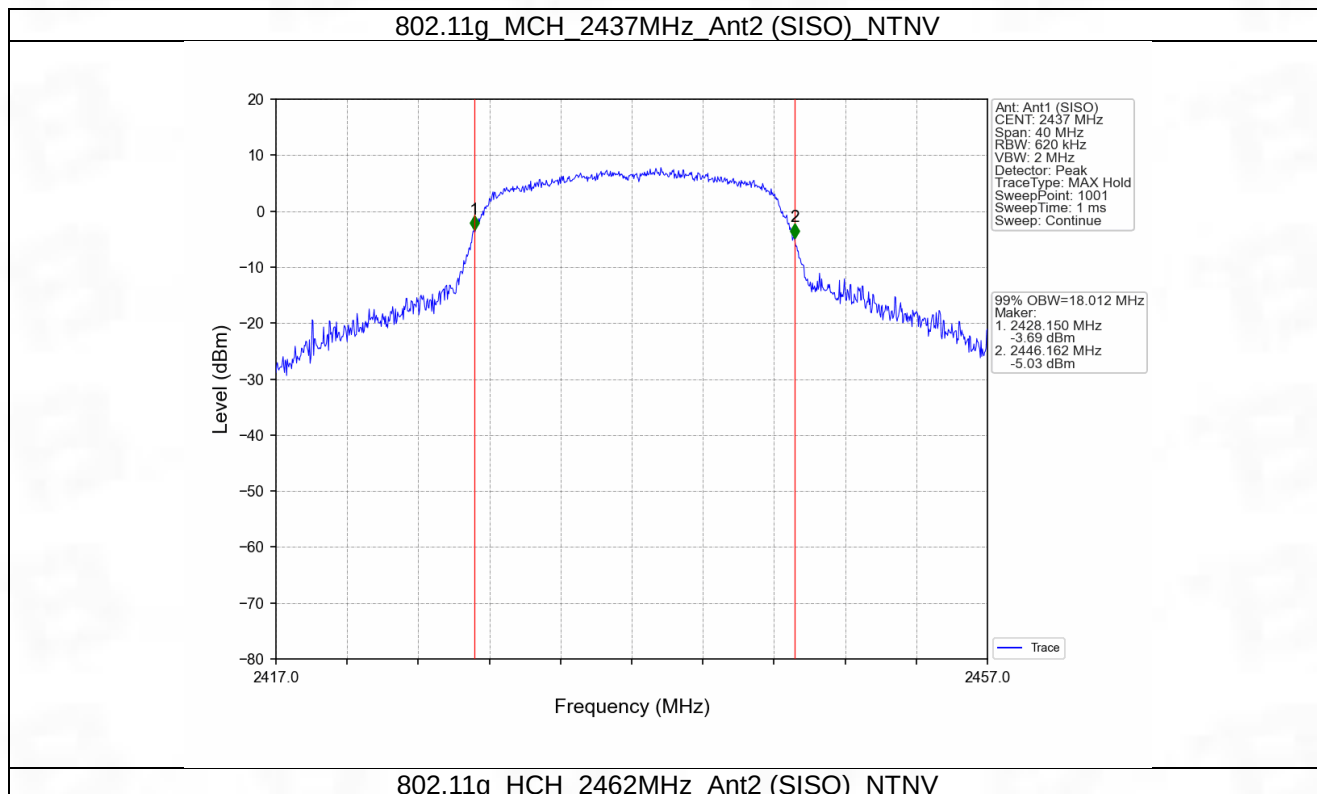


802.11g HCH_2462MHz_Ant2 (SISO) NTN

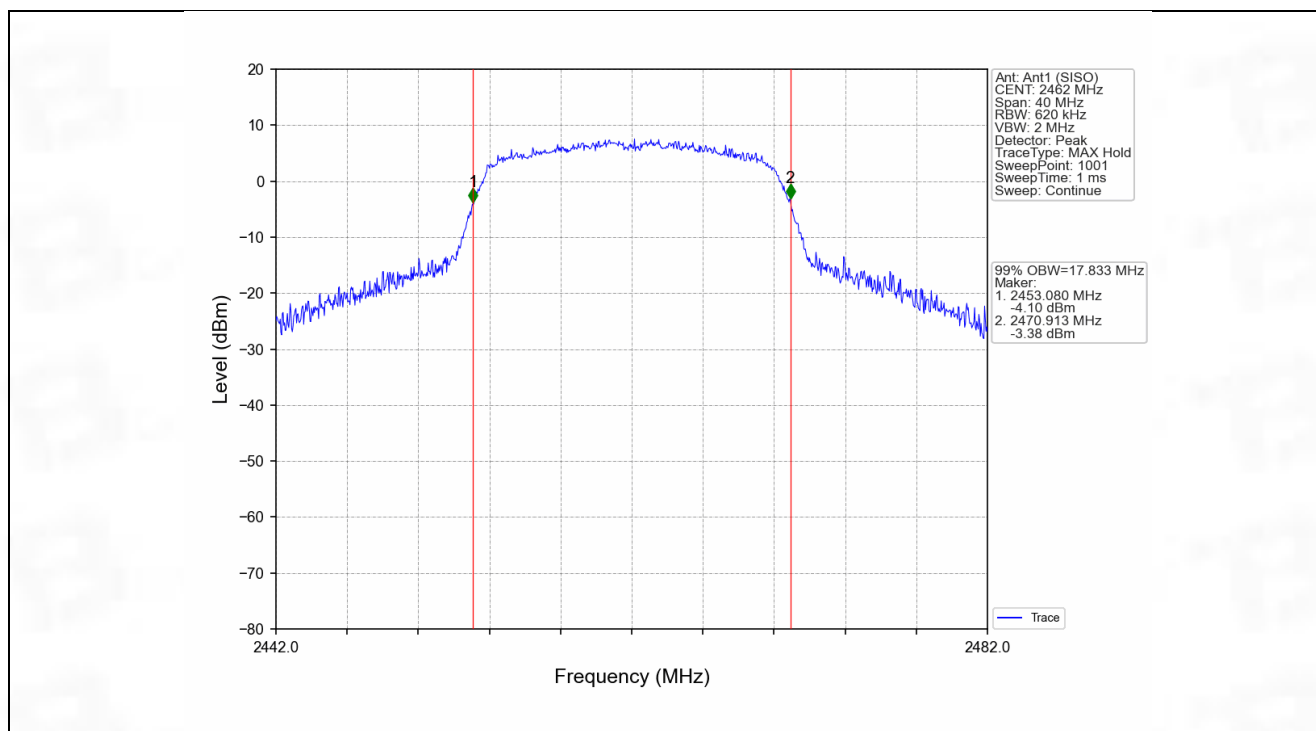


802.11n(HT20) LCH 2412MHz Ant1 (MIMO) NTN

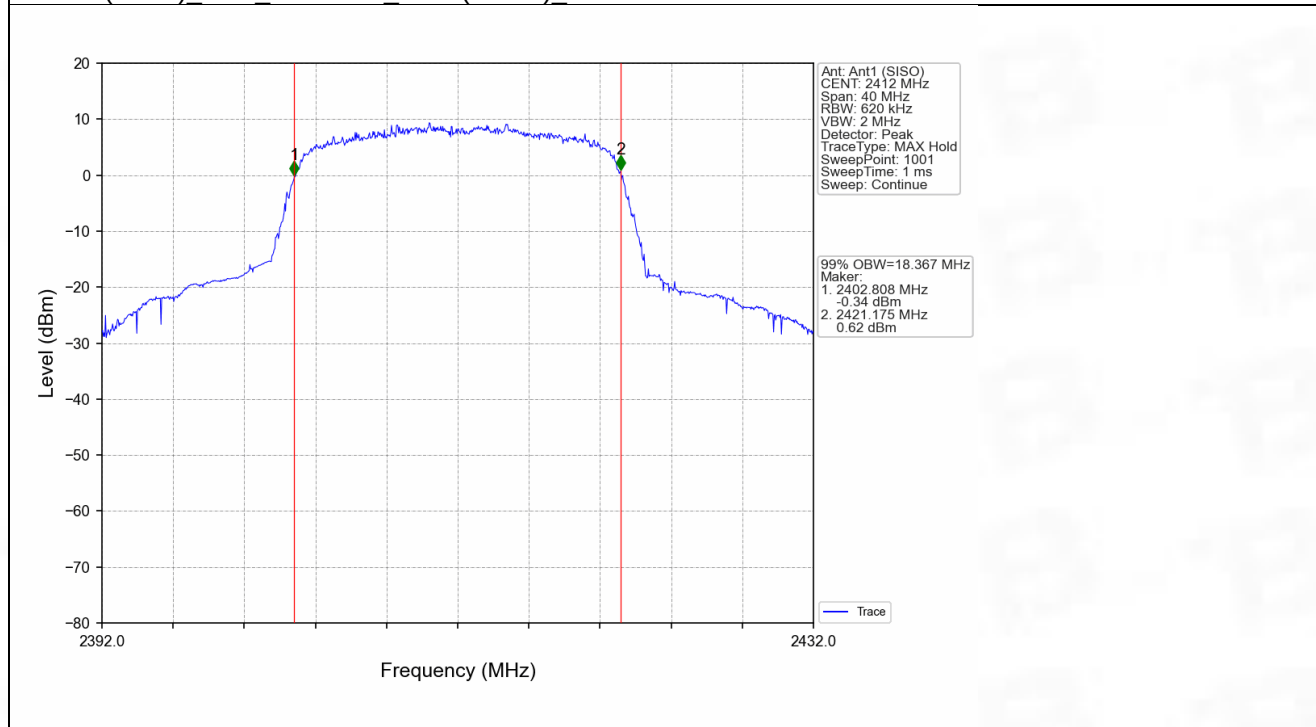

802.11n(HT20) MCH 2437MHz Ant1 (MIMO) NTN

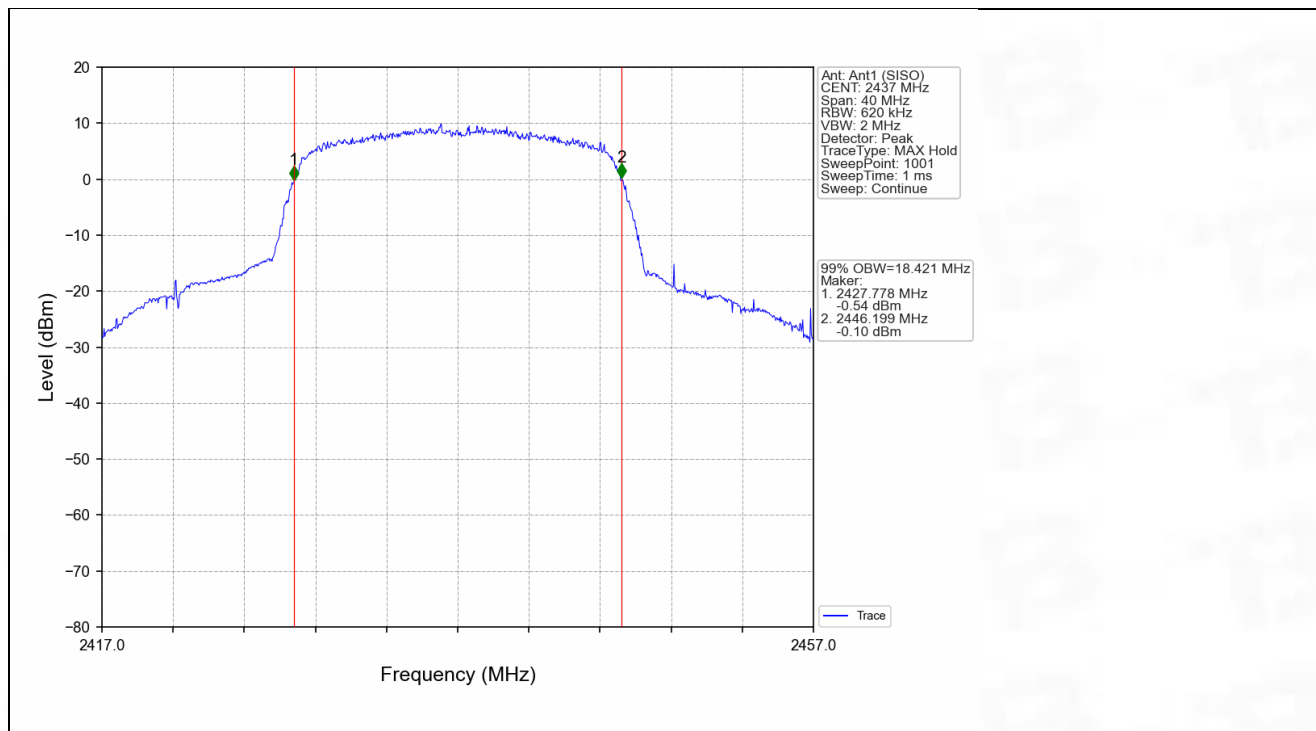

802.11n(HT20)_HCH_2462MHz_Ant1 (MIMO)_NTNV

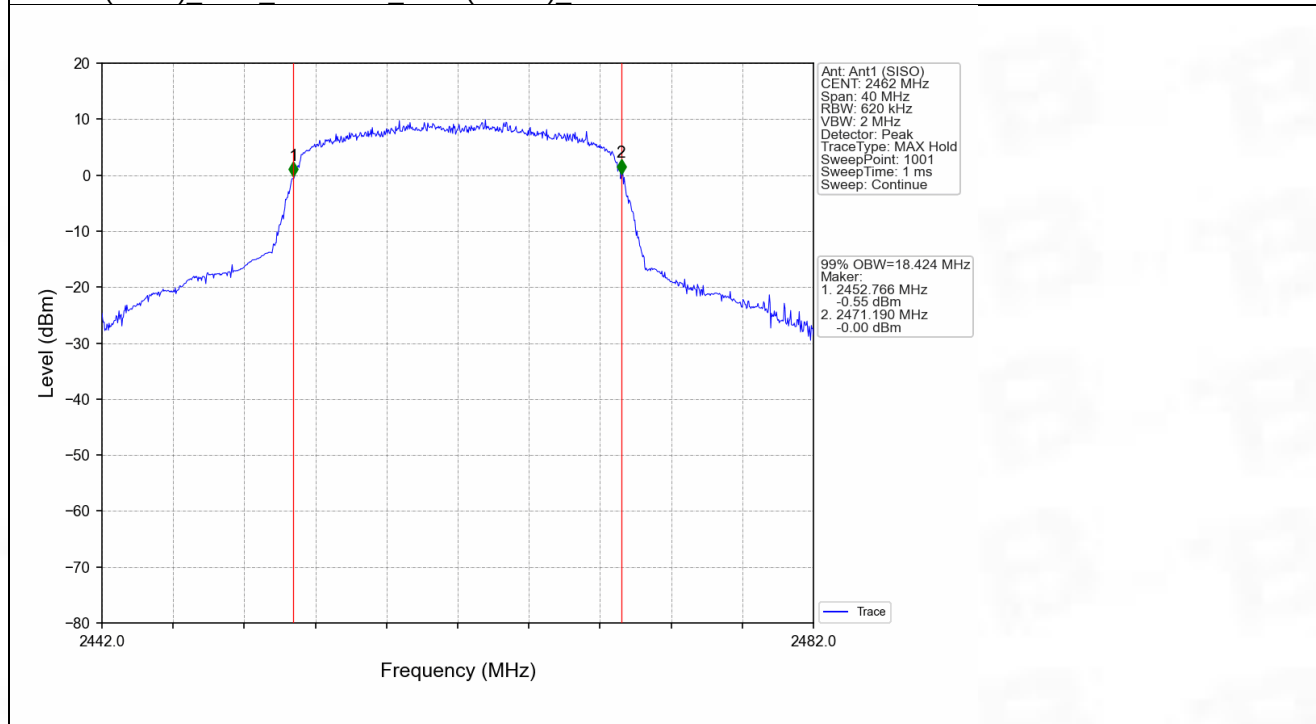


2.2 6dB BW

2.2.1 Test Result


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11b	SISO	2412	1	8.095	≥ 0.5	Pass
		2437	1	8.078	≥ 0.5	Pass
		2462	1	8.087	≥ 0.5	Pass
802.11g	SISO	2412	1	15.173	≥ 0.5	Pass
		2437	1	15.530	≥ 0.5	Pass
		2462	1	15.166	≥ 0.5	Pass
802.11b	SISO	2412	1	9.122	≥ 0.5	Pass
		2437	2	9.106	≥ 0.5	Pass
		2462	2	10.026	≥ 0.5	Pass
802.11g	SISO	2412	2	15.476	≥ 0.5	Pass
		2437	2	15.352	≥ 0.5	Pass
		2462	2	15.174	≥ 0.5	Pass
802.11n (HT20)	MIMO	2412	1&2	15.348	≥ 0.5	Pass
		2437	1&2	15.142	≥ 0.5	Pass
		2462	1&2	15.173	≥ 0.5	Pass

2.2.2 Test Graph


802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

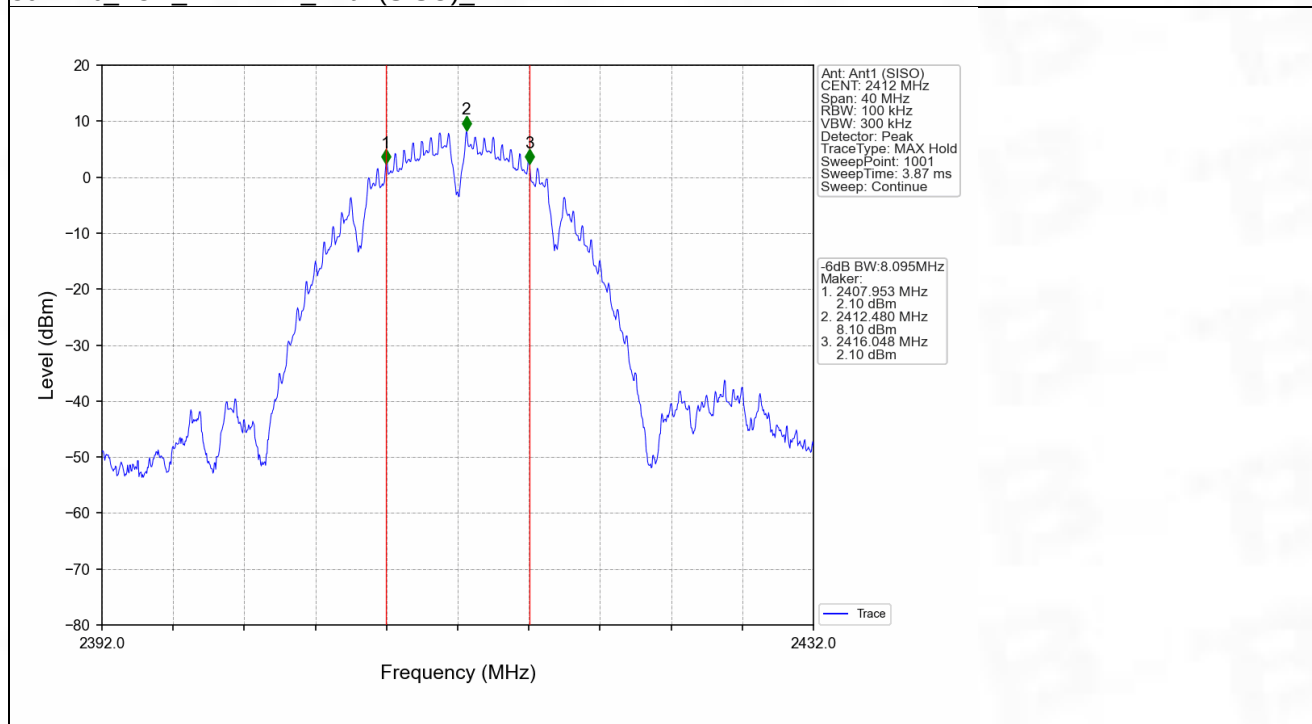


802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

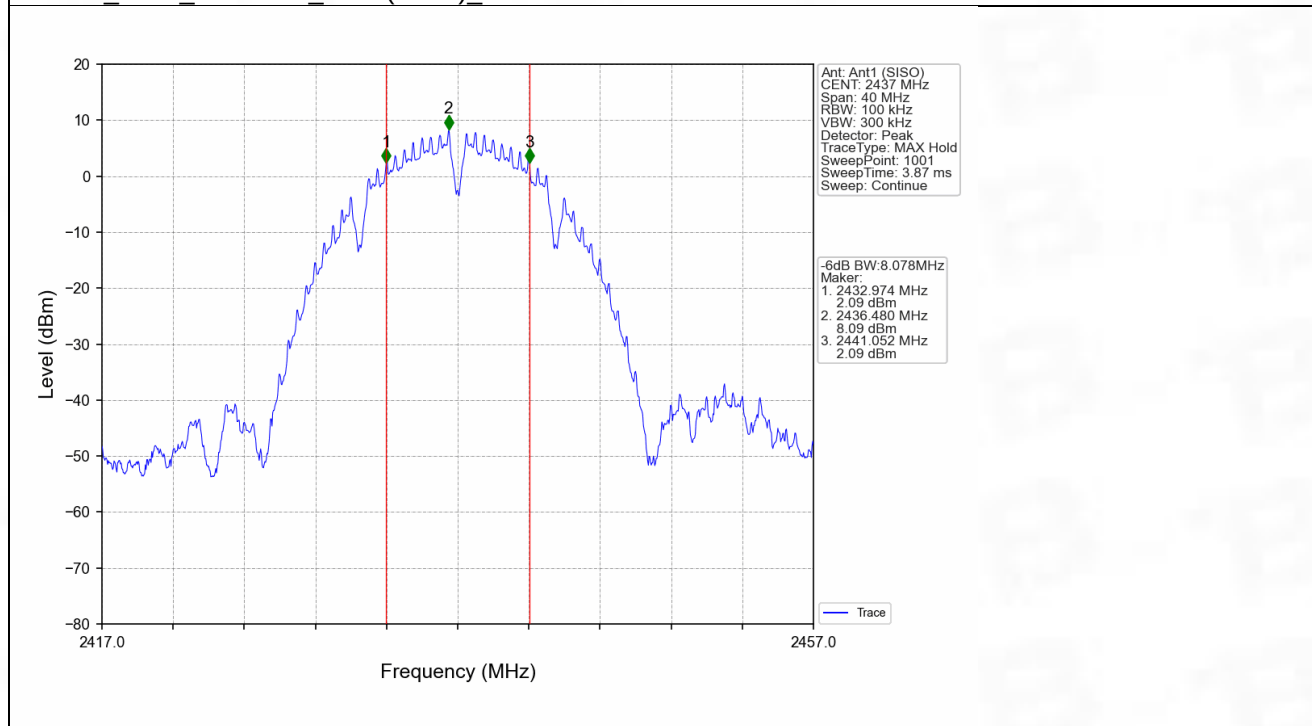


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

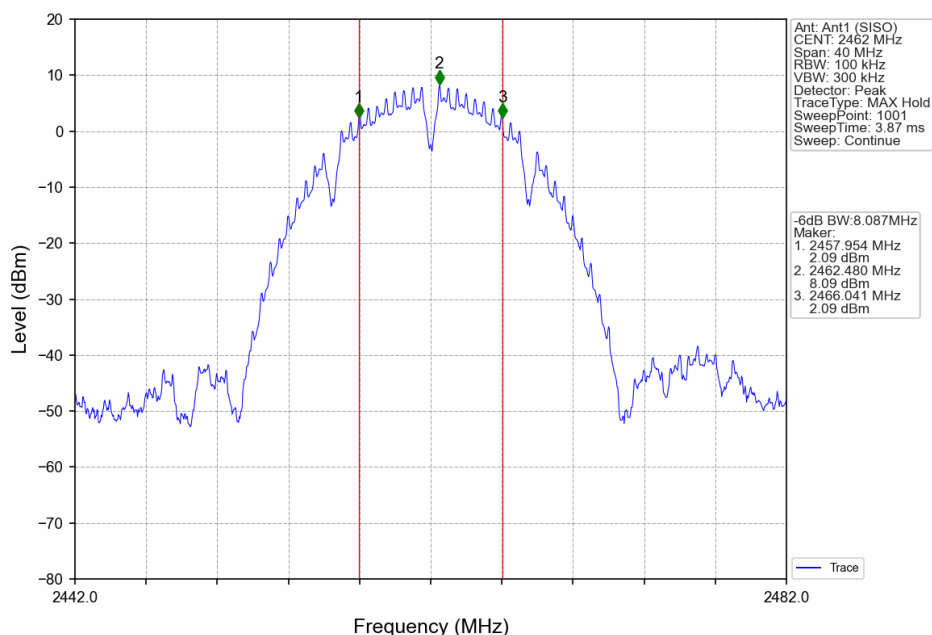


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

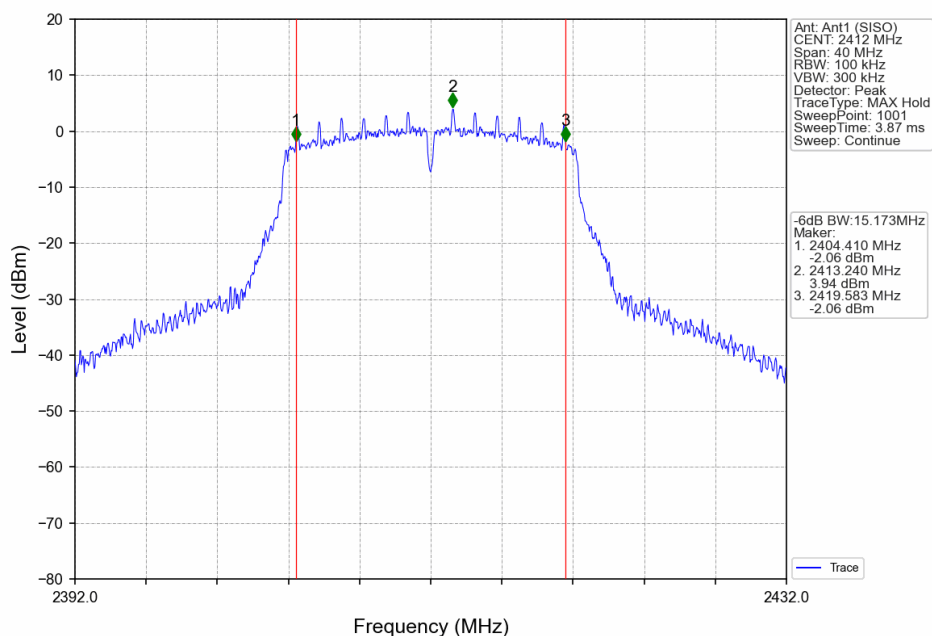


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

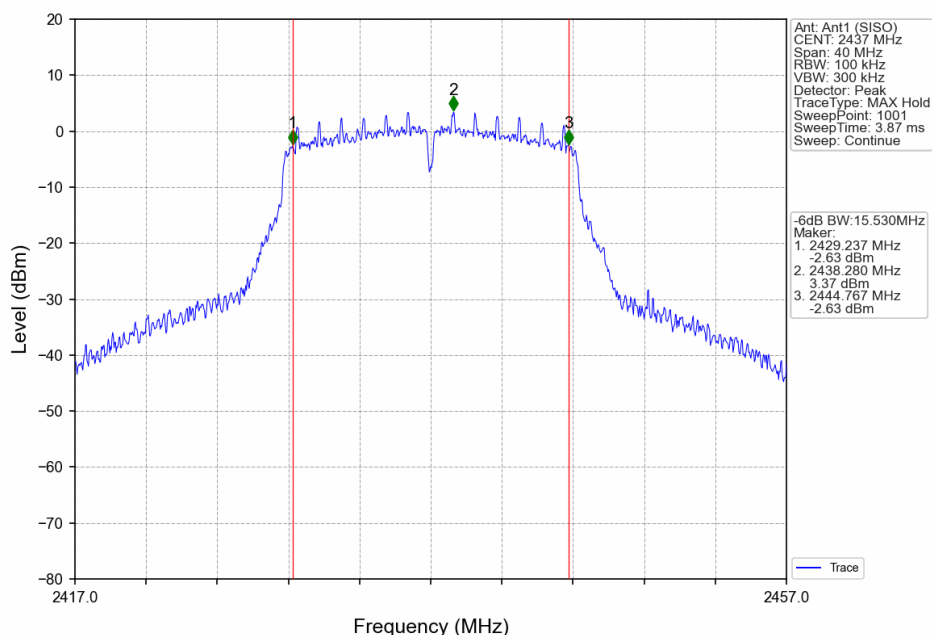


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

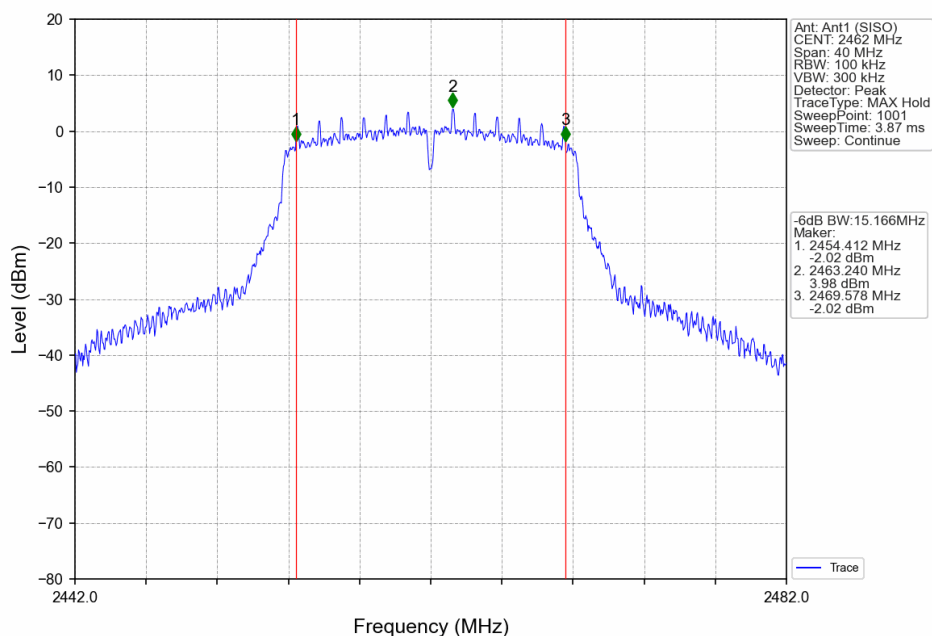


802.11b_LCH_2412MHz_Ant2 (SISO)_NTNV

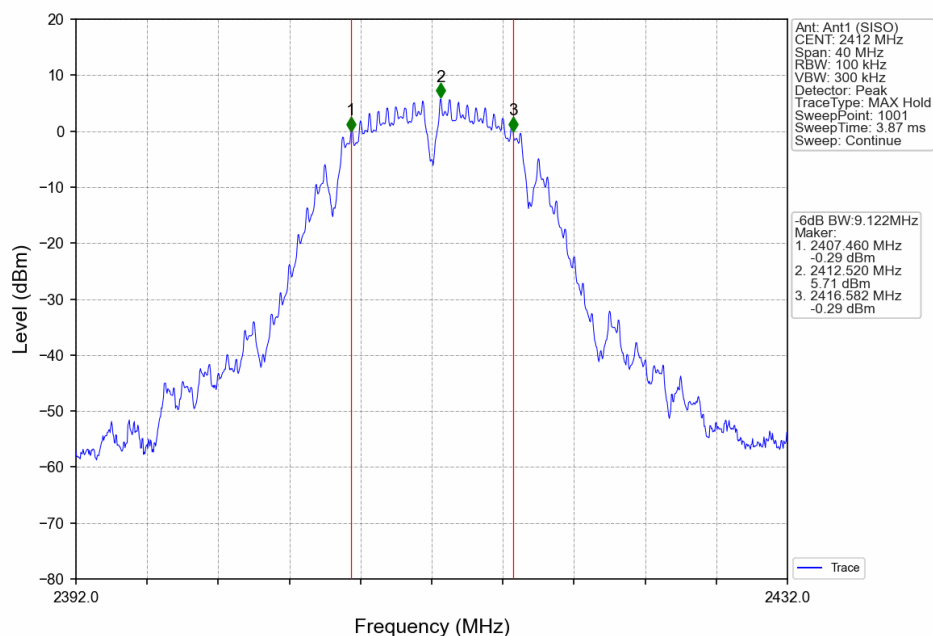


802.11b_MCH_2437MHz_Ant2 (SISO)_NTNV

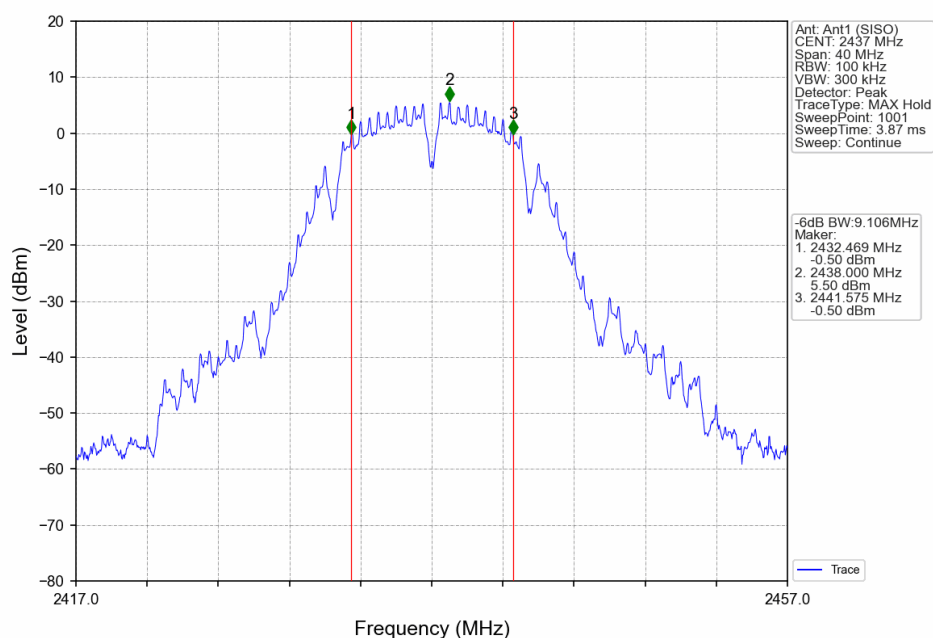


802.11b_HCH_2462MHz_Ant2 (SISO)_NTNV

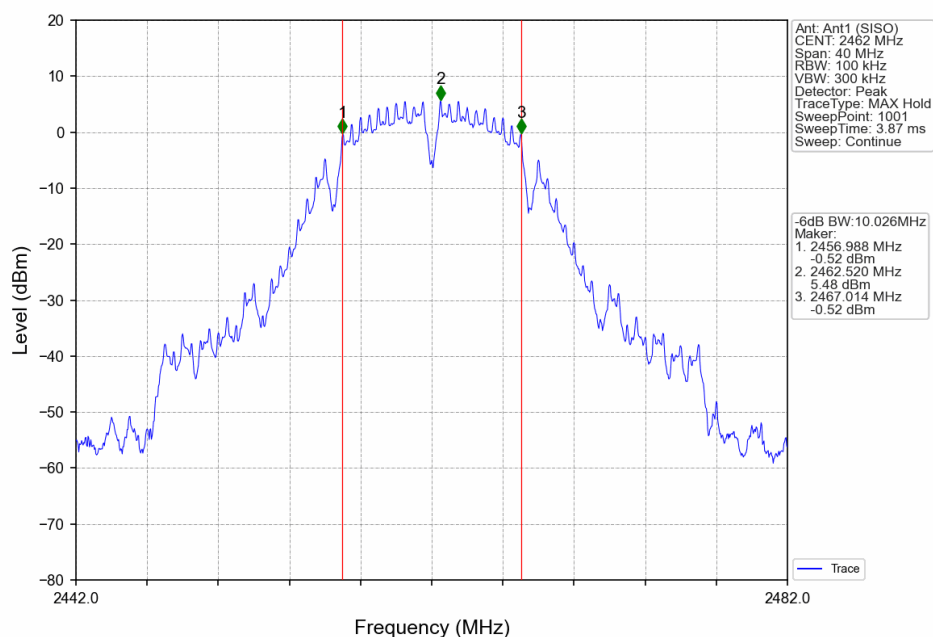


802.11g LCH_2412MHz_Ant2 (SISO)_NTNV

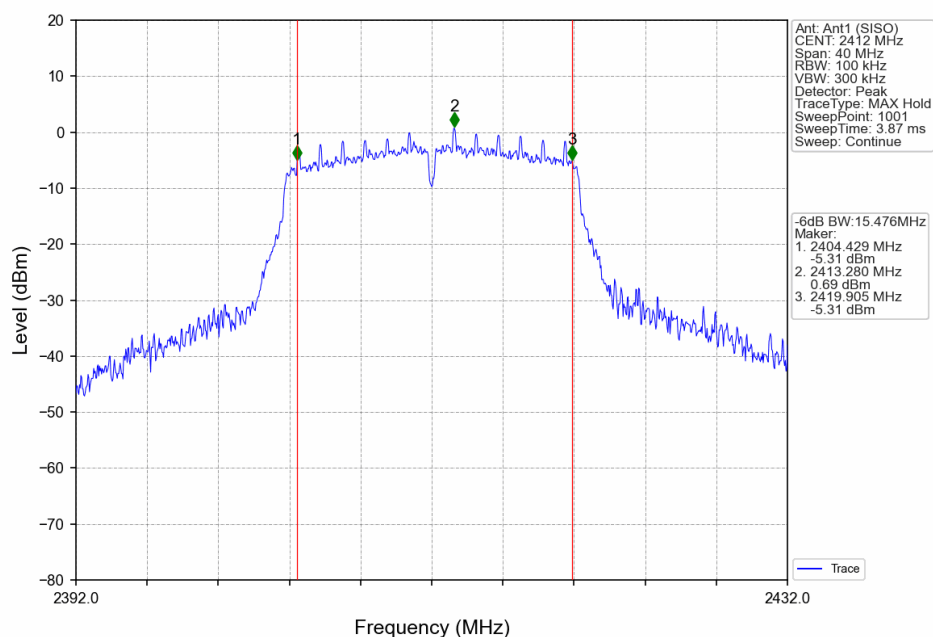


802.11g MCH_2437MHz_Ant2 (SISO)_NTNV

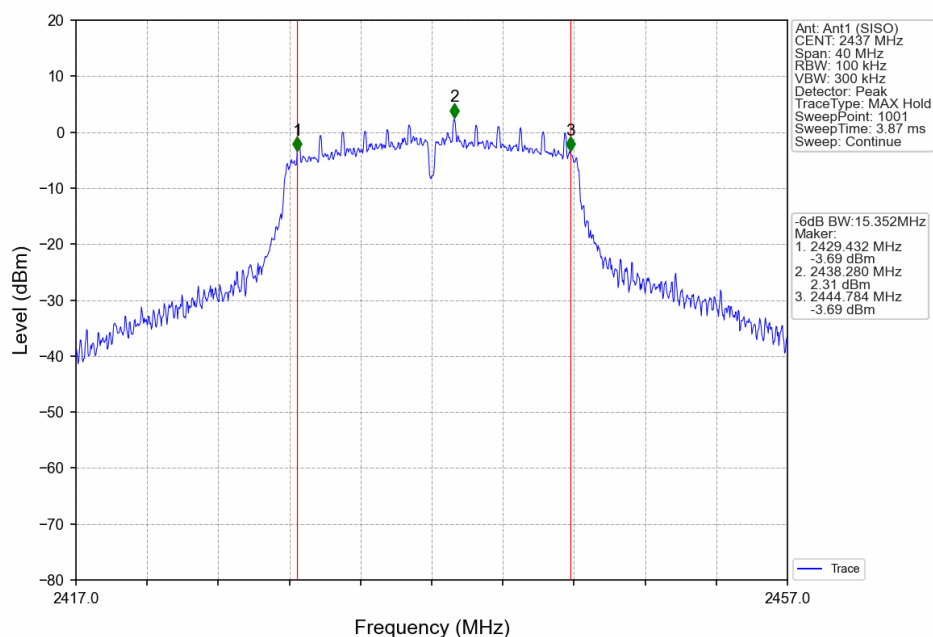


802.11g HCH_2462MHz_Ant2 (SISO)_NTNV

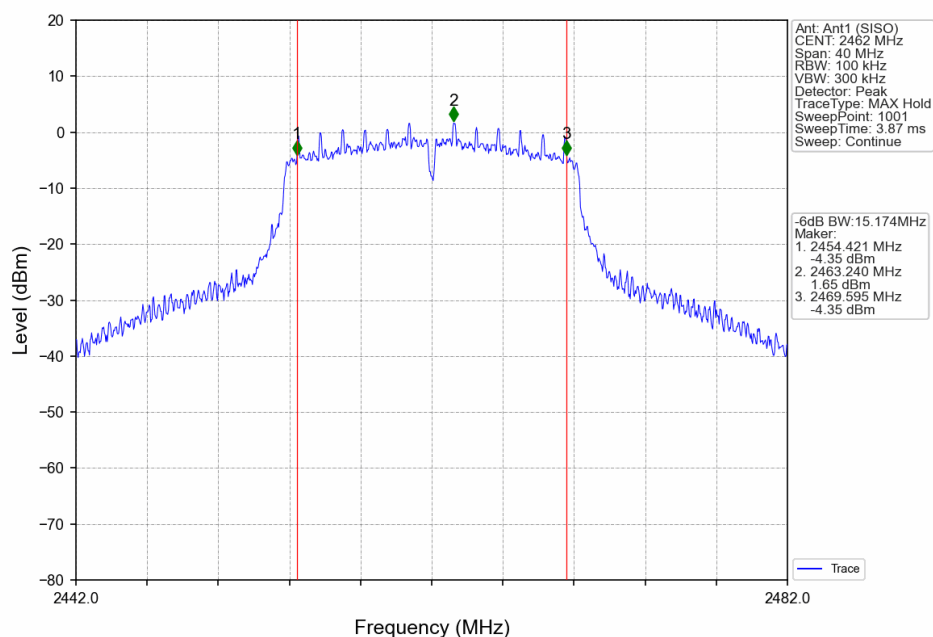


802.11n(HT20)_LCH_2412MHz_Ant1&2 (MIMO)_NTNV

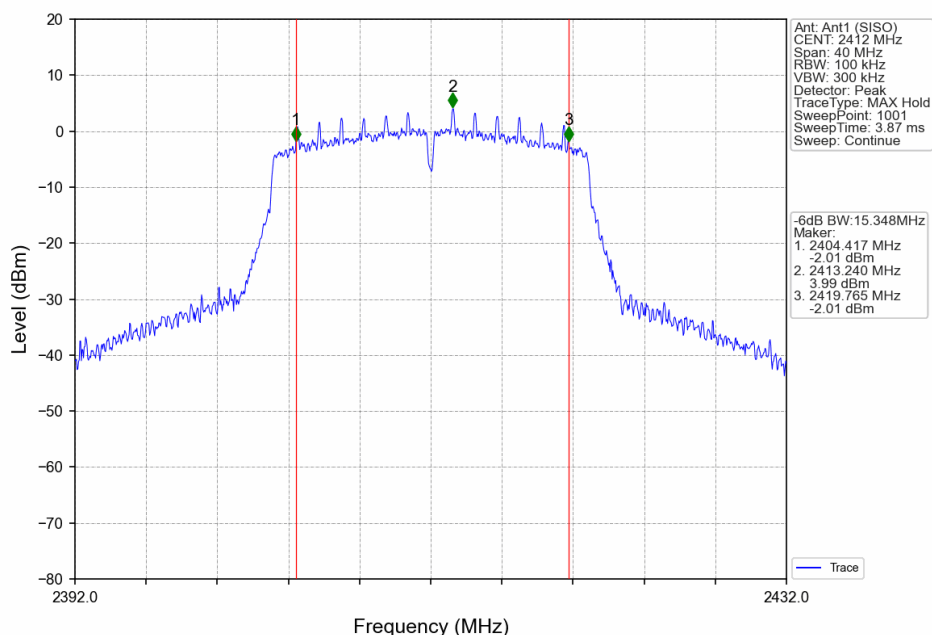

802.11n(HT20)_MCH_2437MHz_Ant1&2 (MIMO)_NTNV

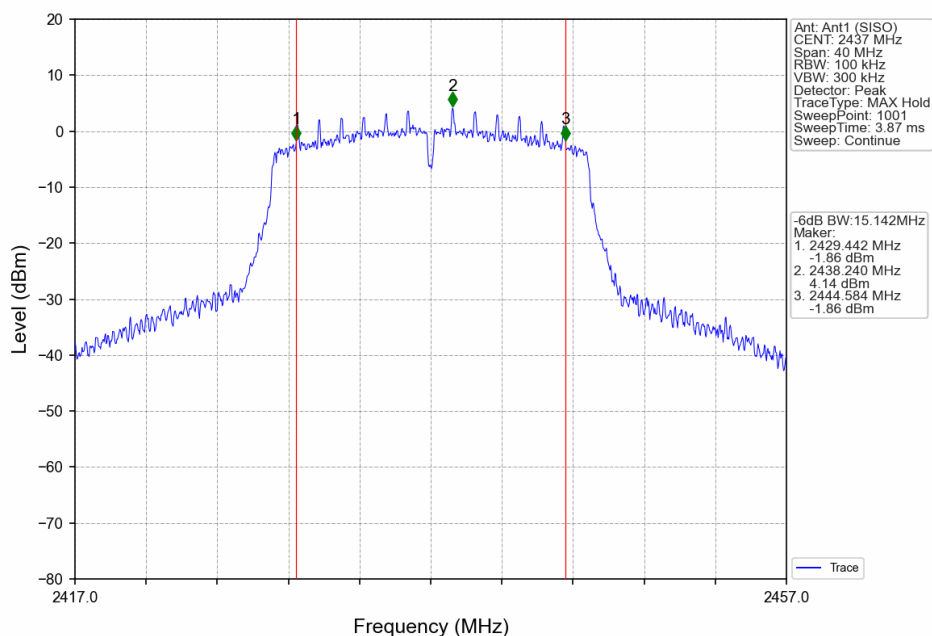

802.11n(HT20)_HCH_2462MHz_Ant1&2 (MIMO)_NTNV

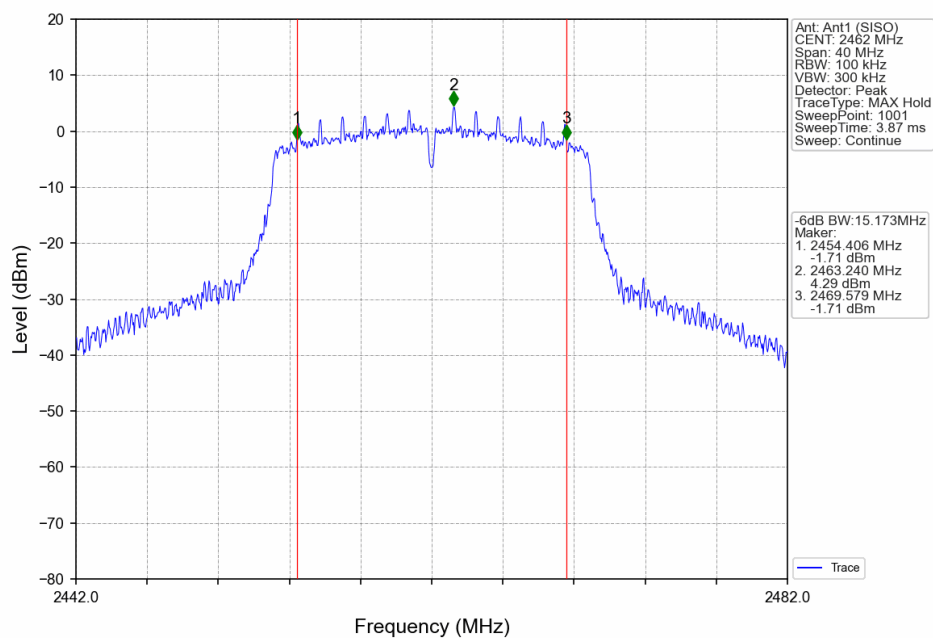

3. Maximum Conducted Output Power

3.1 Power

3.1.1 Test Result

7.12.1 Test Result							
Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)				Verdict
			ANT1	ANT2	MIMO	Limit	
802.11b	SISO	2412	13.91	16.65	/	<=30	Pass
		2437	13.96	16.45	/	<=30	Pass
		2462	13.96	16.83	/	<=30	Pass
802.11g	SISO	2412	17.41	18.20	/	<=30	Pass
		2437	17.33	19.58	/	<=30	Pass
		2462	17.23	19.51	/	<=30	Pass
802.11n (HT20)	MIMO	2412	17.15	18.17	20.70	<=30	Pass
		2437	17.06	19.48	21.45	<=30	Pass
		2462	17.11	19.34	21.38	<=30	Pass
Note1: Antenna Gain: Ant1: 2.00dBi; Ant2: 2.00dBi; Note2: Directional Gain: Uncorrelated(Directional Gain = Ant Gain)							

4. Maximum Power Spectral Density

4.1 PSD


4.1.1 Test Result

7.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)				Verdict
			ANT1	ANT2	MIMO	Limit	
802.11b	SISO	2412	-6.32	-4.70	/	<=8	Pass
		2437	-6.55	-8.49	/	<=8	Pass
		2462	-7.50	-8.98	/	<=8	Pass
802.11g	SISO	2412	-10.52	-13.95	/	<=8	Pass
		2437	-10.27	-13.15	/	<=8	Pass
		2462	-11.96	-13.15	/	<=8	Pass
802.11n (HT20)	MIMO	2412	-11.75	-15.43	-10.20	<=8	Pass
		2437	-10.71	-13.06	-8.71	<=8	Pass
		2462	-11.10	-12.18	-8.59	<=8	Pass
Note1: Antenna Gain: Ant1: 2.0dBi; Ant2: 2.0dBi;							
Note2: Directional Gain: Uncorrelated(Directional Gain = Ant Gain)							

4.1.2 Test Graph


802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

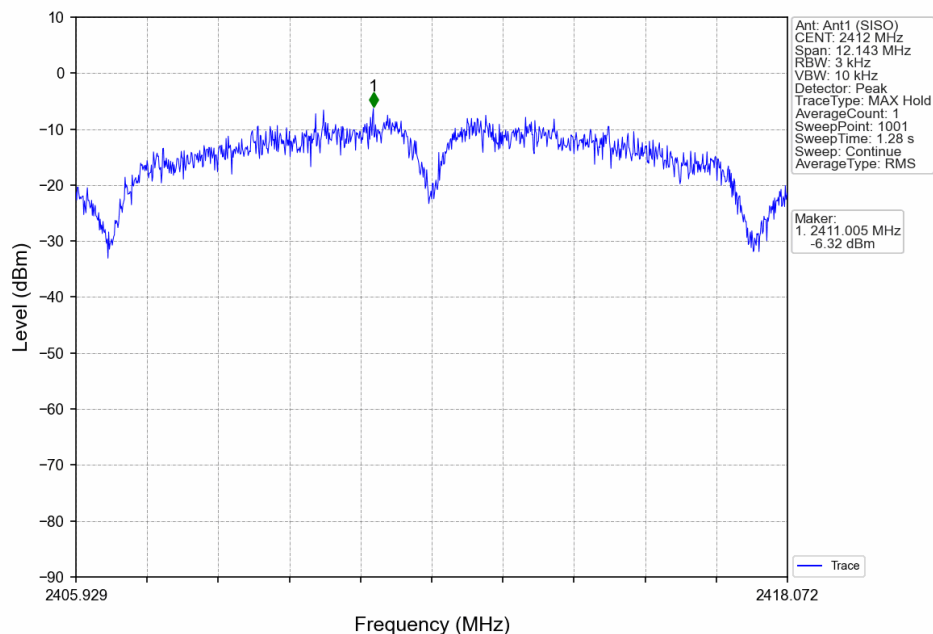


802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

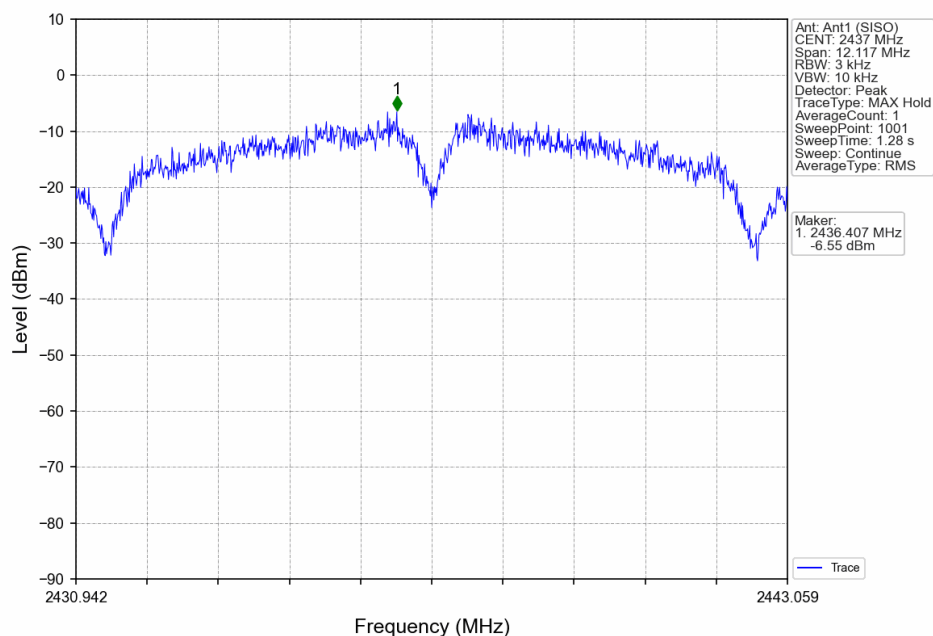


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

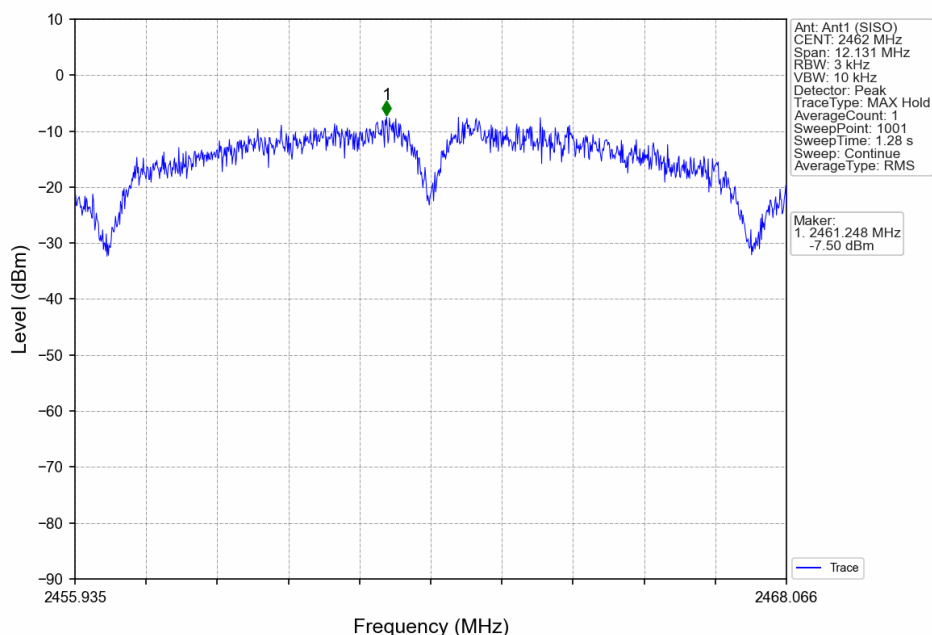


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

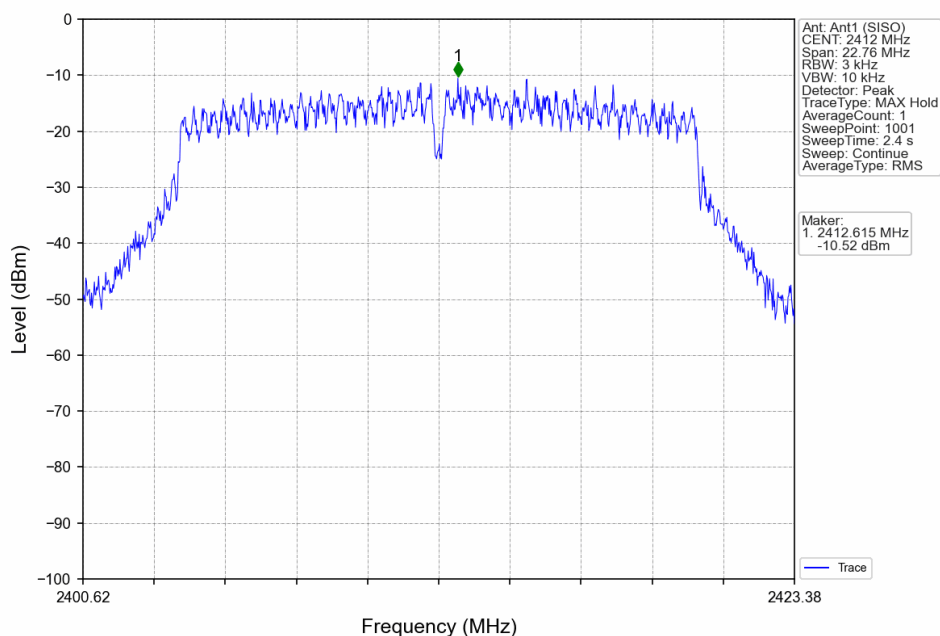


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

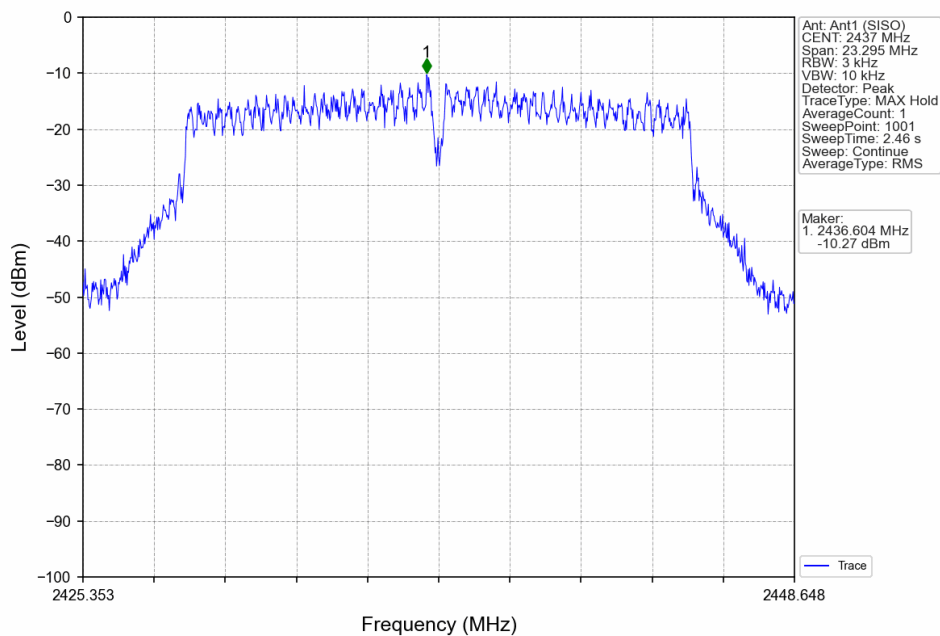


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

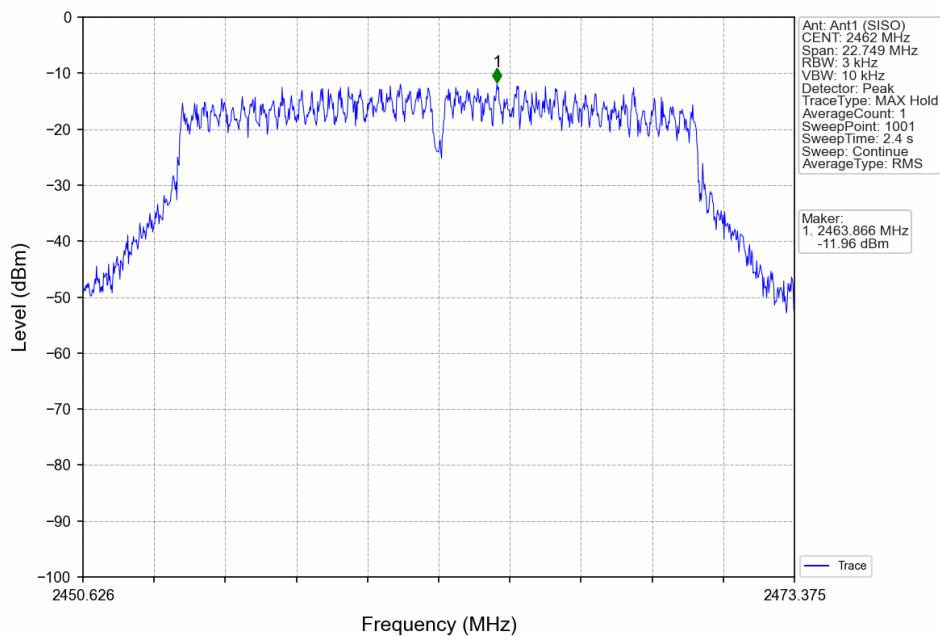


802.11n(HT20)_LCH_2412MHz_Ant1 (MIMO)_NTNV

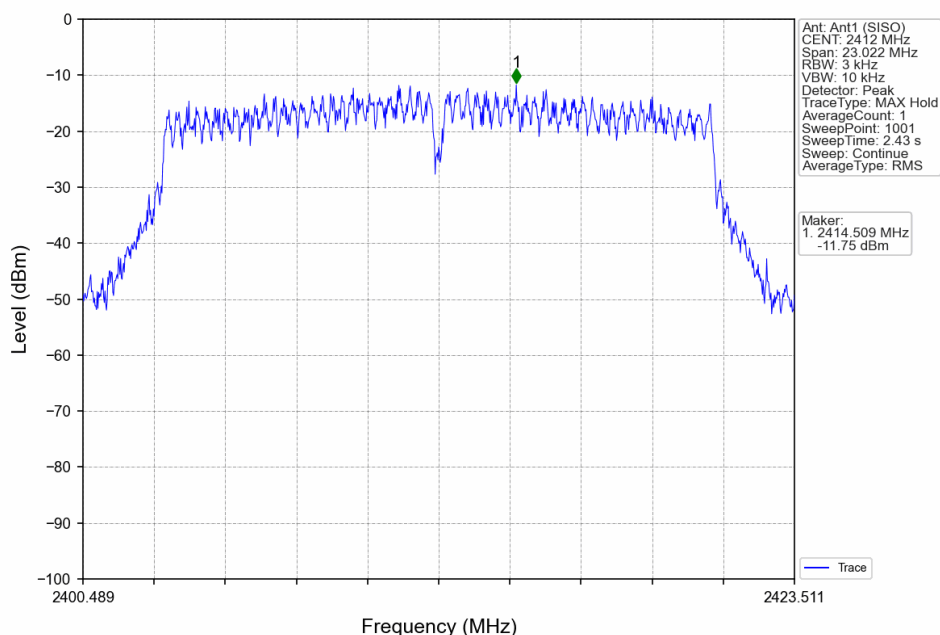


802.11n(HT20)_MCH_2437MHz_Ant1 (MIMO)_NTNV

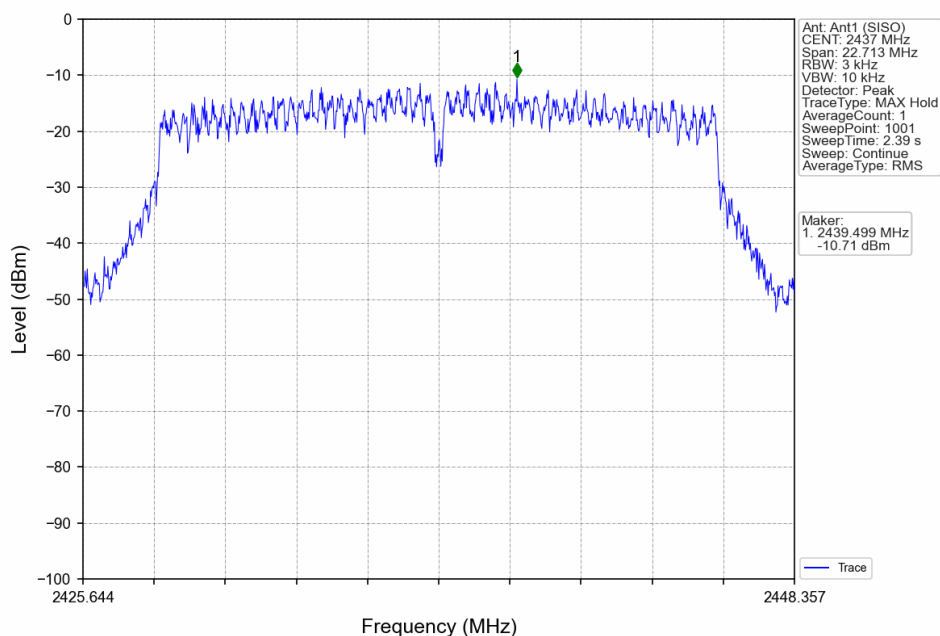


802.11n(HT20)_HCH_2462MHz_Ant1 (MIMO)_NTNV

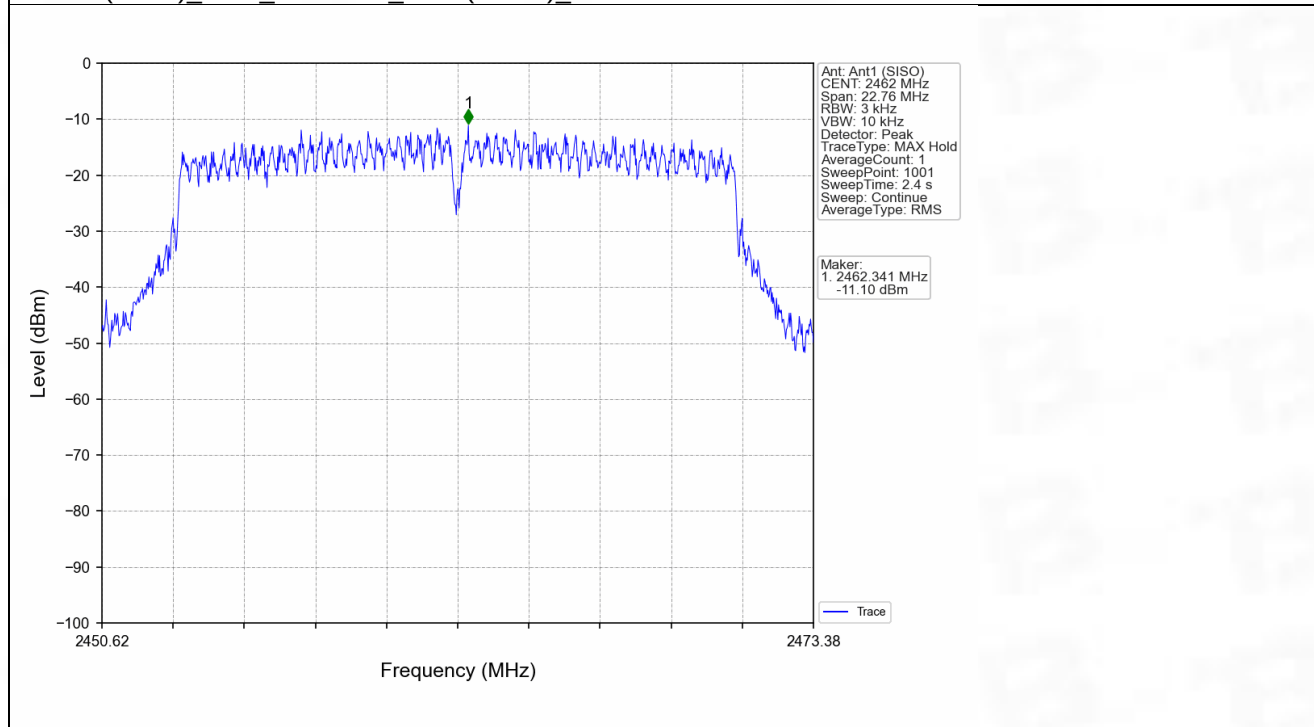


802.11b_LCH_2412MHz_Ant2 (SISO)_NTNV

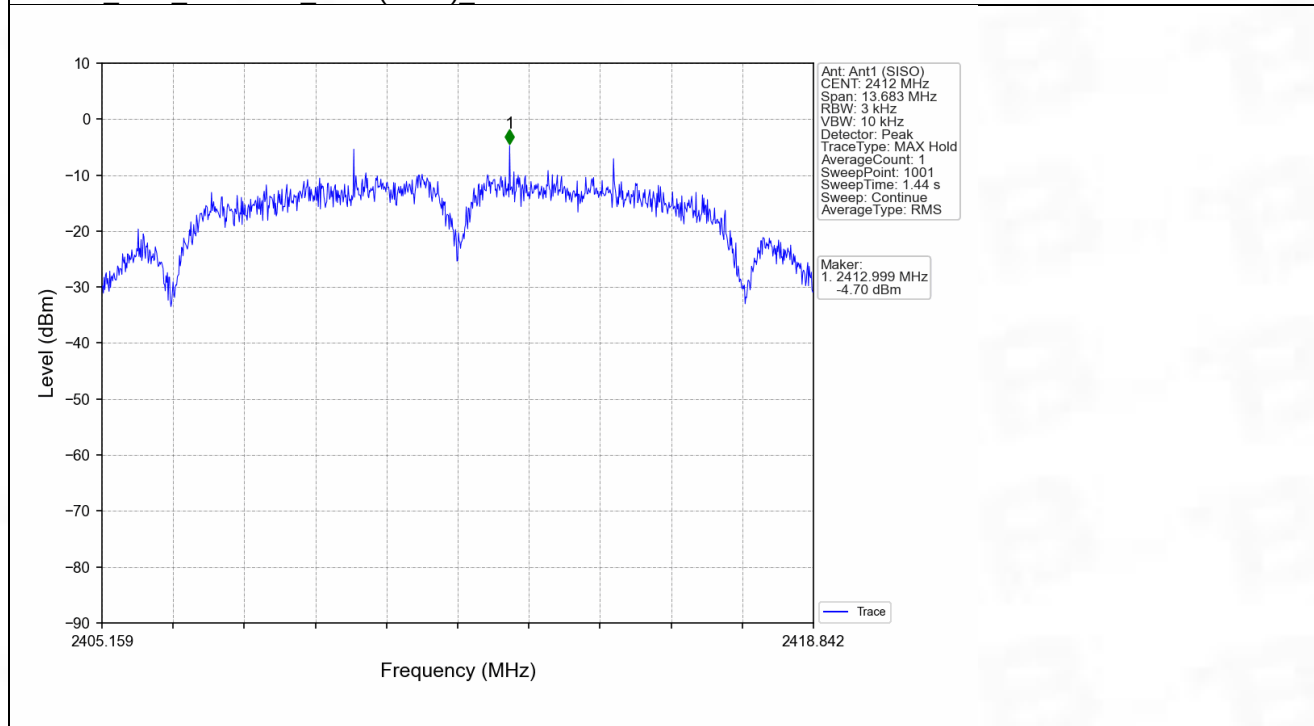

802.11b_MCH_2437MHz_Ant2 (SISO)_NTNV

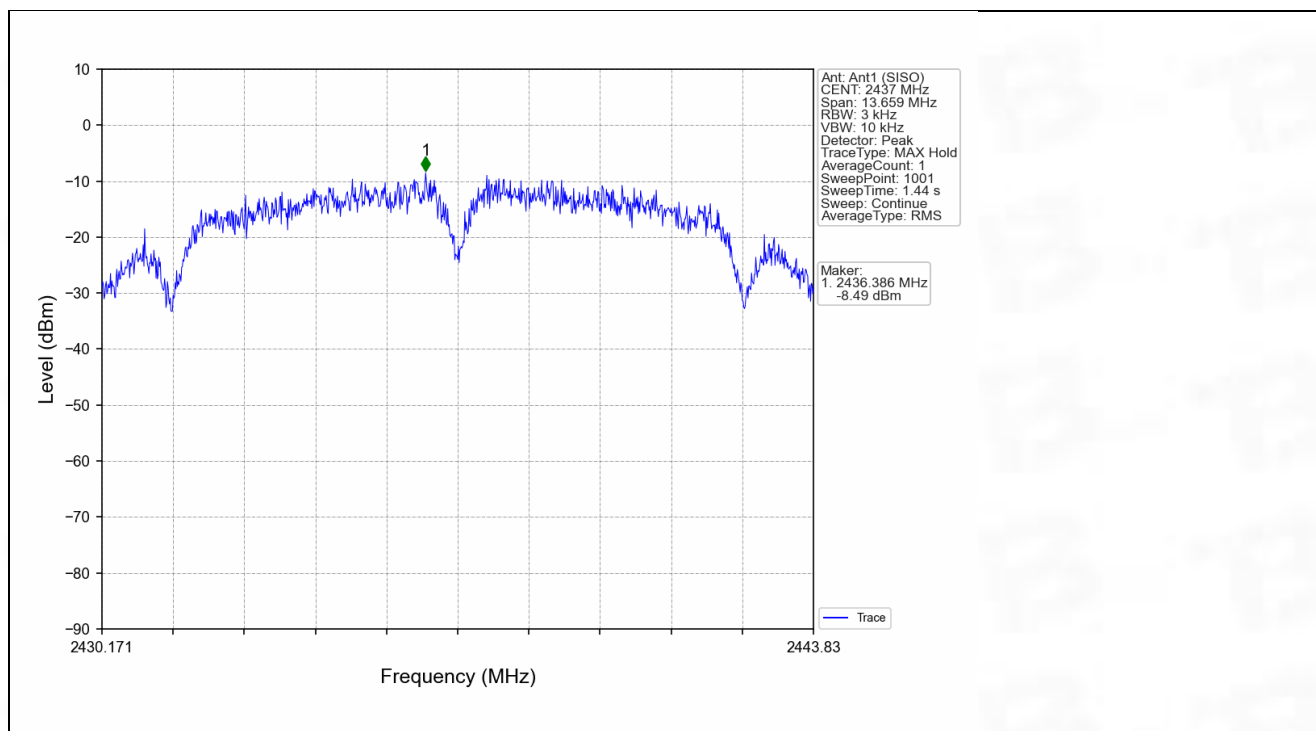

802.11b HCH 2462MHz Ant2 (SISO) NTNV

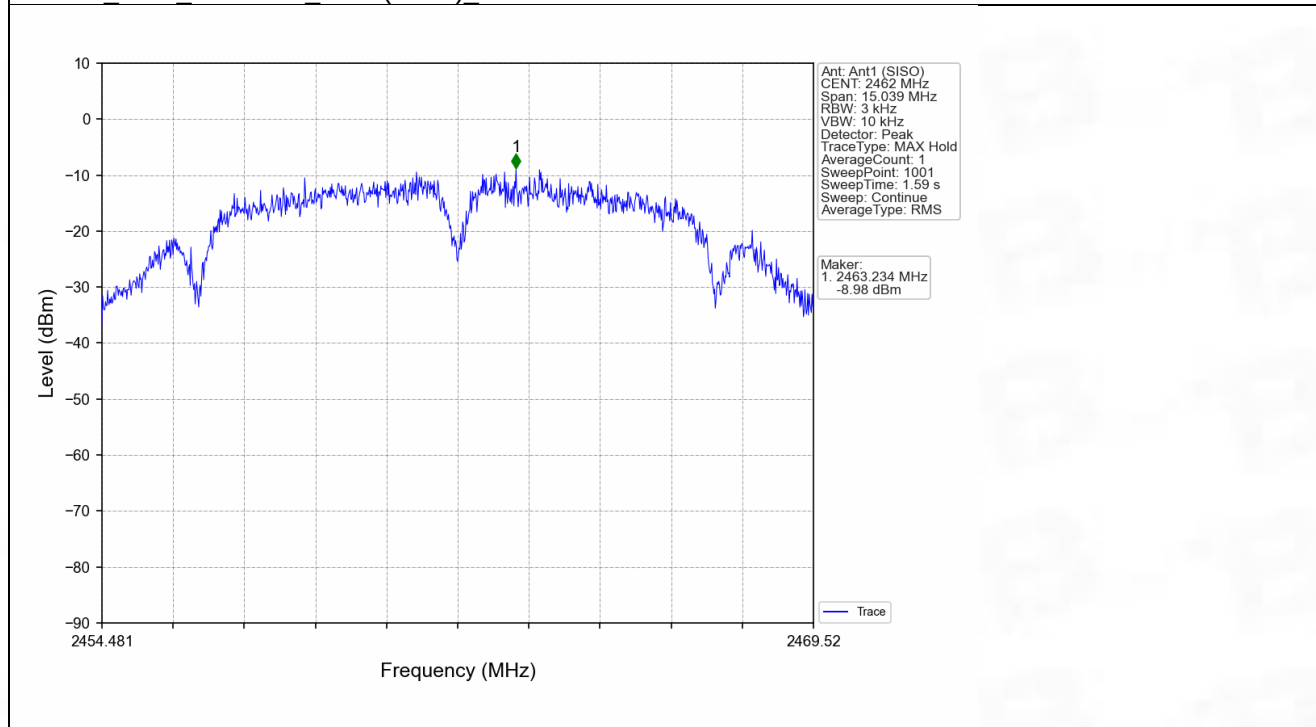

802.11g LCH 2412MHz Ant2 (SISO) NTNV