



TEST REPORT

Product Name: Tablet
FCC ID: 2BCNP-BS-PAD
Trademark: BLACK SHARK
Model Number: BSA1, BSA2, BSA3, BSA4, BSA5, BSA6, BSA7, BSA8, BSA9, BSA10, BSA11, BSA12, BSA13, BSA14, BSA15, BSA16, BSA17, BSA18, BSA19, BSA20, BSA21, BSA22, BSA23, BSA24, BSA25, BSA26, BSA27, BSA28, BSA29, BSA30, BSA31, BSA32, BSA33, BSA34, BSA35, BSA36, BSA37, BSA38, BSA39, BSA40.
Prepared For: Blackshark Technologies (Nanchang) Co., Ltd
Address: R1001, F10 of Floor 3-23, R201 of Building 8 and 9, No.528, Shuanggang West Street, Nanchang City, Jiangxi Province, China
Manufacturer: Blackshark Technologies (Nanchang) Co., Ltd
Address: R1001, F10 of Floor 3-23, R201 of Building 8 and 9, No.528, Shuanggang West Street, Nanchang City, Jiangxi Province, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: May. 14, 2024
Sample tested Date: May. 14, 2024 to May. 28, 2024
Issue Date: May. 28, 2024
Report No.: CTB240528017RF
Test Standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407
Test Results: PASS
Remark: This is WIFI-5GHz band radio test report.

Compiled by:

Zhou Kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	8
4.5 Test Mode	9
4.6 Test Environment	10
5. TEST FACILITY AND TEST INSTRUMENT USED	11
5.1 Test Facility	11
5.2 Test Instrument Used	11
6. AC POWER LINE CONDUCTED EMISSION	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test procedure	13
6.4 Test Result	15
7. RADIATED SPURIOUS EMISSIONS	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	17
7.3 Test procedure	18
7.4 Test Result	19
8. BAND EDGE	25
8.1 Block Diagram Of Test Setup	25
8.2 Limit	25
8.3 Test procedure	25
8.4 Test Result	26
9. CONDUCTED PEAK OUTPUT POWER	34
9.1 Block Diagram Of Test Setup	34
9.2 Limit	34
9.3 Test procedure	35
9.4 Test Result	36
10. EMISSION BANDWIDTH& OCCUPIED BANDWIDTH	50
10.1 Block Diagram Of Test Setup	50
10.2 Limits	50
10.3 Test Procedure	50
10.4 Test Results	52
11. POWER SPECTRAL DENSITY	66
11.1 Block Diagram Of Test Setup	66
11.2 Limit	66
11.3 Test procedure	66

11.4	Test Result	68
12.	FREQUENCY STABILITY	82
12.1	Block Diagram Of Test Setup	82
12.2	Limit	82
12.3	Test procedure	82
12.4	Test Result	83
13.	OPERATION IN THE ABSENCE OF INFORMATION TO THE TRANSMIT ...	95
13.1	Requirement	95
13.2	Test Results	95
14.	ANTENNA REQUIREMENT	96
15.	EUT TEST SETUP PHOTOGRAPHS	97
<i>(NOTE: N/A MEANS NOT APPLICABLE)</i>		



1. VERSION

Report No.	Issue Date	Description	Approved
CTB240528017RF	May. 28, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.407 (b)(9)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033v02r01	PASS
Band edge	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033v02r01	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033v02r01	PASS
Emission Bandwidth & Occupied Bandwidth	47 CFR Part 15 Subpart E Section 15.407 (a)(e)	KDB789033v02r01	PASS
Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033v02r01	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	KDB789033v02r01	PASS
Operation in the absence of information to the transmit	47 CFR Part 15 Subpart E Section 15.407 (c)	47 CFR Part 15 Subpart E	PASS
Antenna Requirement	47 CFR Part 15 Subpart E Section 15.203	/	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Uncertainty
1	Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
2	Adjacent channel power	$U=\pm 1.3\text{dB}$
3	Conducted Adjacent channel power	$U=\pm 1.38\text{dB}$
4	Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
5	Conducted output power below 1G	$U=\pm 0.9\text{dB}$
6	Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
7	Conduction spurious emissions	$U=\pm 2.8\text{dB}$
8	Out of band emission	$U=\pm 54\text{Hz}$
9	3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
10	3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
11	humidity uncertainty	$U=\pm 5.3\%$
12	Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
13	Supply volyages	$U=\pm 3\%$
14	Time	$U=\pm 5\%$
15	Conducted Emission (150KHz-30MHz)	3.2 dB
16	3m camber Radiated spurious emission(9KHz-30MHz)	4.8dB
17	3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	BSA1, BSA2, BSA3, BSA4, BSA5, BSA6, BSA7, BSA8, BSA9, BSA10, BSA11, BSA12, BSA13, BSA14, BSA15, BSA16, BSA17, BSA18, BSA19, BSA20, BSA21, BSA22, BSA23, BSA24, BSA25, BSA26, BSA27, BSA28, BSA29, BSA30, BSA31, BSA32, BSA33, BSA34, BSA35, BSA36, BSA37, BSA38, BSA39, BSA40.
Model Description:	All the model are the same circuit and RF module, only different for model name .Test sample model: BSA1
Wi-Fi Specification:	IEEE 802.11a/b/g/n/ac
Hardware Version:	P30-T616-V2.0-230703-L1
Software Version:	ussi_arm64_full_release-w23.07.1-p1-20240430
Operation Frequency:	IEEE 802.11a/n/ac(20M): 5150MHz ~5250MHz/ 4 channel IEEE 802.11n/ac(40M): 5150MHz ~5250MHz/ 2 channel IEEE 802.11ac(80M): 5150MHz ~5250MHz/ 1 channel IEEE 802.11a/n/ac(20M): 5250MHz ~5350 MHz/ 4 channel IEEE802.11n/ac(40M): 5250MHz ~5350 MHz/ 2 channel IEEE802.11ac(80M): 5250MHz ~5350 MHz/ 1 channel IEEE 802.11a/n/ac(20M): 5470MHz ~5725 MHz/ 11 channel IEEE802.11n/ac(40M): 5470MHz ~5725 MHz/ 5 channel IEEE802.11ac(80M): 5470MHz ~5725 MHz/ 3 channel IEEE 802.11a/n/ac(20M): 5725MHz ~5850MHz/ 5 channel IEEE 802.11n/ac(40M): 5725MHz ~5850MHz/ 2 channel IEEE 802.11ac(80M): 5725MHz ~5850MHz/ 1 channel
Max. RF output power:	WiFi (5G): 18.98dBm
Type of Modulation:	WiFi: OFDM
Antenna installation:	Internal antenna
Antenna Gain:	WiFi (5.2G) : 0.68dBi WiFi (5.3G) : 1.75dBi WiFi (5.6G) : 1.53dBi WiFi (5.8G) : 2.84dBi
Ratings:	Input: 100-240V~, 50/60Hz, 0.5A USB-C Output: 5.0V□3.0A, 9.0V□2.22A, 12.0V□1.67A DC 3.85V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

For 802.11a/n/ac(20M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz
For 802.11a/n/ac(20M) Operation in the 5250MHz ~5350 MHz band			
Channel	Frequency	Channel	Frequency
52	5260MHz	60	5300MHz
56	5280MHz	64	5320MHz
For 802.11a/n/ac(20M) Operation in the 5470MHz ~5725 MHz band			
Channel	Frequency	Channel	Frequency
100	5500MHz	124	5620 MHz
104	5520MHz	128	5640 MHz
108	5540MHz	132	5660 MHz
112	5560MHz	136	5680MHz
116	5580MHz	140	5700MHz
120	5600 MHz		
For 802.11a/n/ac(20M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz	NA	NA
For 802.11n/ac(40M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz
For 802.11n/ac(40M) Operation in the 5250MHz ~5350 MHz band			
Channel	Frequency	Channel	Frequency
54	5270MHz	62	5310MHz
For 802.11n/ac(40M) Operation in the 5470MHz ~5725 MHz band			
Channel	Frequency	Channel	Frequency
102	5510MHz	126	5630MHz
110	5550MHz	134	5670MHz
118	5590MHz		
For 802.11n/ac(40M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz
For 802.11ac(80M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
42	5210MHz	NA	NA
For 802.11ac(80M) Operation in the 5250MHz ~5350 MHz band			
Channel	Frequency	Channel	Frequency
58	5290MHz	NA	NA
For 802.11ac(80M) Operation in the 5470MHz ~5725 MHz band			

Channel	Frequency	Channel	Frequency
106	5530MHz	138	5690MHz
122	5610 MHz		
For 802.11ac(80M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	NA	NA
155	5775MHz	NA	NA

NOTE: Dutycycle>98%.

Test mode	rate
802.11a	54M
802.11n	500M
802.11/ac	500M

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11a/n/ac(20M)	5150MHz ~5250 MHz	Channel 36	Channel 40	Channel 48
		5180MHz	5200MHz	5240MHz
802.11n/ac(40M)		Channel 38	N/A	Channel 46
		5190MHz	N/A	5230MHz
802.11ac(80M)	5250MHz ~5350 MHz	N/A	Channel 42	N/A
		N/A	5210MHz	N/A
802.11a/n/ac(20M)		Channel 52	Channel 56	Channel 64
		5260MHz	5280MHz	5320MHz
802.11n/ac(40M)	5470MHz ~5725 MHz	Channel 54	N/A	Channel 62
		5270MHz	N/A	5310MHz
802.11ac(80M)		N/A	Channel 58	N/A
		N/A	5290MHz	N/A
802.11a/n/ac(20M)	5725MHz ~5850 MHz	Channel 100	Channel 116	Channel 140
		5500MHz	5580MHz	5700MHz
802.11n/ac(40M)		Channel 102	N/A	Channel 134
		5510MHz	N/A	5670MHz
802.11ac(80M)		N/A	Channel 106	N/A
		N/A	5530MHz	N/A
802.11a/n/ac(20M)		Channel 149	Channel 157	Channel 165
		5745MHz	5785MHz	5825MHz
802.11n/ac(40M)		Channel 151	N/A	Channel 159
		5755MHz	N/A	5795MHz
802.11ac(80M)		N/A	Channel 155	N/A
		N/A	5775MHz	N/A

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):NV	3.85V
Normal Temperature(°C):NT	23
Low Temperature(°C):LT	0
High Temperature(°C):HT	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhua Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08


21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2023.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2023.10.30

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
7	Communication test set	R&S	CMW500	108058	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	2024.07.05
4	Amplifier	HP	8447E	2945A02747	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
11	Communication test set	R&S	CMW500	108058	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

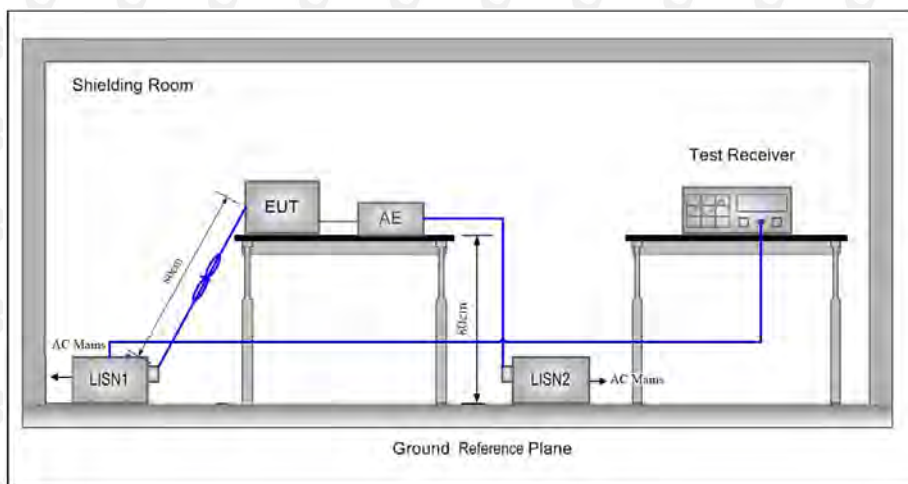

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under

test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


6.4 Test Result

Test Specification: Neutral

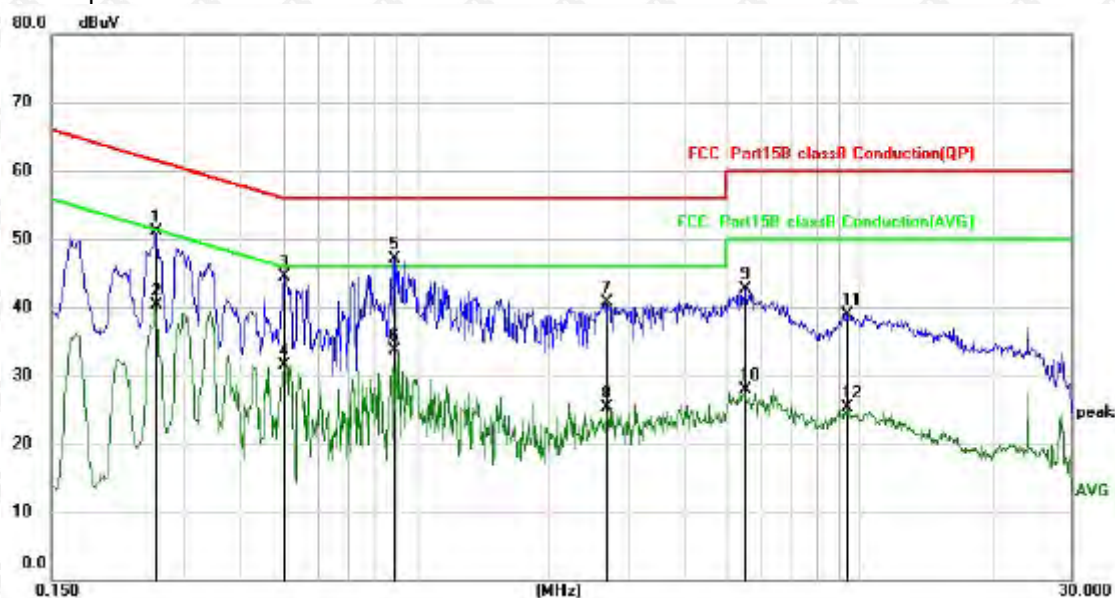

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2580	41.11	9.96	51.07	61.50	-10.43	QP
2		0.2580	30.25	9.96	40.21	51.50	-11.29	AVG
3		0.5020	34.55	9.99	44.54	56.00	-11.46	QP
4		0.5020	21.60	9.99	31.59	46.00	-14.41	AVG
5	*	0.8940	37.00	10.01	47.01	56.00	-8.99	QP
6		0.8940	23.67	10.01	33.68	46.00	-12.32	AVG
7		2.6739	30.54	10.16	40.70	56.00	-15.30	QP
8		2.6739	15.20	10.16	25.36	46.00	-20.64	AVG
9		5.5179	32.30	10.42	42.72	60.00	-17.28	QP
10		5.5179	17.39	10.42	27.81	50.00	-22.19	AVG
11		9.3900	28.35	10.57	38.92	60.00	-21.08	QP
12		9.3900	14.67	10.57	25.24	50.00	-24.76	AVG

Test Specification: Line

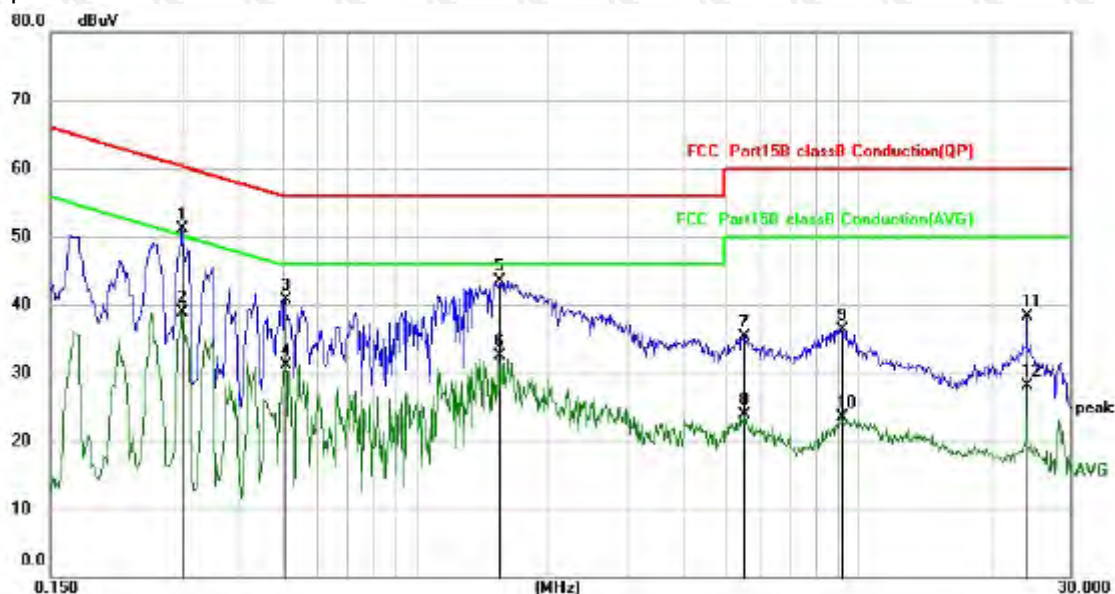

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.2977	41.15	9.96	51.11	60.31	-9.20	QP
2		0.2977	28.89	9.96	38.85	50.31	-11.46	AVG
3		0.5100	30.72	9.99	40.71	56.00	-15.29	QP
4		0.5100	21.11	9.99	31.10	46.00	-14.90	AVG
5		1.5380	33.41	10.05	43.46	56.00	-12.54	QP
6		1.5380	22.38	10.05	32.43	46.00	-13.57	AVG
7		5.5300	24.81	10.42	35.23	60.00	-24.77	QP
8		5.5300	13.39	10.42	23.81	50.00	-26.19	AVG
9		9.1539	25.83	10.56	36.39	60.00	-23.61	QP
10		9.1539	12.91	10.56	23.47	50.00	-26.53	AVG
11		23.9300	27.34	10.97	38.31	60.00	-21.69	QP
12		23.9300	17.12	10.97	28.09	50.00	-21.91	AVG

Remark:

- Factor = Cable loss + LISN factor, Margin = Limit – Level
- All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- All the test modes completed for test. Only the worst result of was reported.

7. RADIATED SPURIOUS EMISSIONS

7.1 Block Diagram Of Test Setup

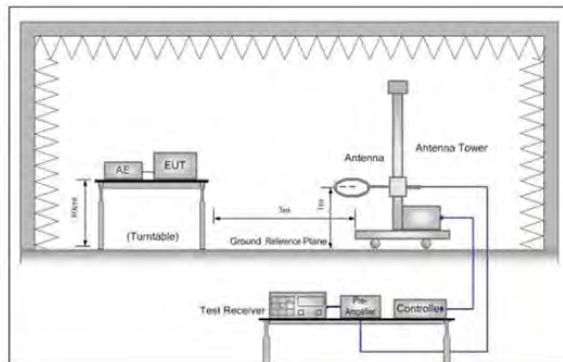


Figure 1. Below 30MHz

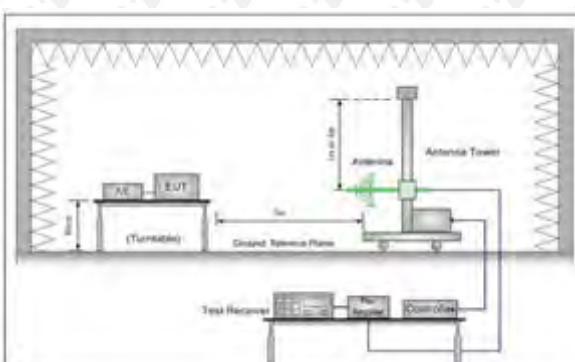


Figure 2. 30MHz to 1GHz

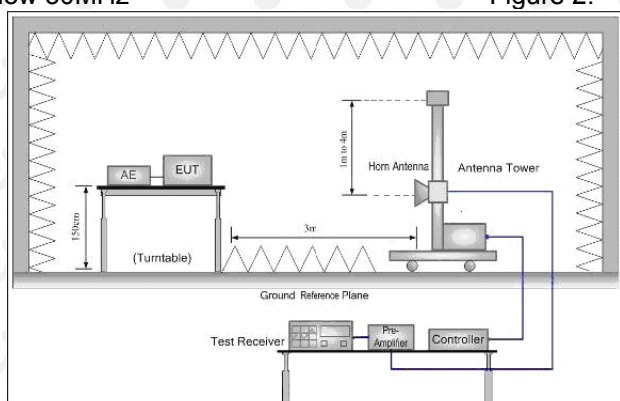


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	$20\log 2400/F \text{ (kHz)} + 80$	Quasi-peak	3
0.490MHz-1.705MHz	$20\log 24000/F \text{ (kHz)} + 40$	Quasi-peak	3
1.705MHz-30MHz	$20\log 30 + 40$	Quasi-peak	3
30MHz-88MHz	40.0	Quasi-peak	3
88MHz-216MHz	43.5	Quasi-peak	3
216MHz-960MHz	46.0	Quasi-peak	3
960MHz-1GHz	54.0	Quasi-peak	3
Above 1GHz	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

If radiated measurements are performed, field strength is then converted to EIRP as follows:

(i) $EIRP = ((E \cdot d)^2) / 30$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

(ii) Working in dB units, the above equation is equivalent to:

$$EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$$

(iii) Or, if d is 3 meters:

$$EIRP[dBm] = E[dB\mu V/m] - 95.2$$

7.3 Test procedure

Below 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).

h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

j. Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

30MHz-1GHz Test Results:

Modulation : 802.11a (the worst data)

Test Channel : 5180MHz

Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		47.7422	33.32	-6.22	27.10	40.00	-12.90	QP
2		61.0244	29.46	-6.87	22.59	40.00	-17.41	QP
3		153.2003	30.02	-3.29	26.73	43.50	-16.77	QP
4	*	287.9904	39.90	-5.26	34.64	46.00	-11.36	QP
5		622.8900	26.13	3.07	29.20	46.00	-16.80	QP
6		948.7609	26.64	7.36	34.00	46.00	-12.00	QP

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		47.7421	36.09	-6.22	29.87	40.00	-10.13	QP
2		69.6003	33.38	-8.00	25.38	40.00	-14.62	QP
3	*	151.8632	37.14	-3.24	33.90	43.50	-9.60	QP
4		287.9904	35.71	-5.26	30.45	46.00	-15.55	QP
5		550.9479	27.57	1.36	28.93	46.00	-17.07	QP
6		876.7827	28.02	6.77	34.79	46.00	-11.21	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

- The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11a20 (the worst)

Radiated Spurious Emission (Above 1GHz):

Modulation : 802.11(a) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5180MHz									
10360	40.74	16.39	57.13	74	-16.87	PK	1.19	41	H
10360	25.84	16.39	42.23	54	-11.77	AV	1.49	67	H
10360	40.06	16.39	56.45	74	-17.55	PK	1.42	152	V
10360	26.32	16.39	42.71	54	-11.29	AV	1.15	134	V
Channel:5240MHz									
10480	40.74	16.11	56.85	74	-17.15	PK	1.81	47	H
10480	26.42	16.11	42.53	54	-11.47	AV	1.01	247	H
10480	40.22	16.11	56.33	74	-17.67	PK	1.25	189	V
10480	26.12	16.11	42.23	54	-11.77	AV	1.58	137	V
Channel:5260MHz									
10520	39.95	16.39	56.34	74	-17.66	PK	1.48	199	H
10520	25.52	16.39	41.91	54	-12.09	AV	1.39	169	H
10520	41.41	16.39	57.80	74	-16.20	PK	1.44	163	V
10520	25.19	16.39	41.58	54	-12.42	AV	1.57	268	V
Channel:5320MHz									
10640	40.88	16.39	57.27	74	-16.73	PK	1.55	285	H
10640	25.15	16.39	41.54	54	-12.46	AV	1.31	43	H
10640	40.85	16.39	57.24	74	-16.76	PK	1.33	345	V
10640	27.01	16.39	43.40	54	-10.60	AV	1.38	296	V
Channel:5500MHz									
11000	40.82	16.39	57.21	74	-16.79	PK	1.44	215	H
11000	27.93	16.39	44.32	54	-9.68	AV	1.08	202	H
11000	41.21	16.39	57.60	74	-16.40	PK	1.11	182	V
11000	26.57	16.39	42.96	54	-11.04	AV	1.34	189	V

Channel:5700MHz									
11400	40.50	16.39	56.89	74	-17.11	PK	1.58	259	H
11400	25.79	16.39	42.18	54	-11.82	AV	1.11	61	H
11400	40.96	16.39	57.35	74	-16.65	PK	1.30	18	V
11400	26.91	16.39	43.30	54	-10.70	AV	1.46	22	V
Channel:5745MHz									
11490	40.43	17.46	57.89	74	-16.11	PK	1.28	348	H
11490	26.48	17.46	43.94	54	-10.06	AV	1.46	239	H
11490	41.28	17.46	58.74	74	-15.26	PK	1.30	91	V
11490	27.31	17.46	44.77	54	-9.23	AV	1.50	277	V
Channel:5825MHz									
11650	39.83	17.57	57.40	74	-16.60	PK	1.58	65	H
11650	26.18	17.57	43.75	54	-10.25	AV	1.88	277	H
11650	40.55	17.57	58.12	74	-15.88	PK	1.39	125	V
11650	25.90	17.57	43.47	54	-10.53	AV	1.39	165	V

Modulation : 802.11(n40) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5190MHz									
10380	41.95	16.34	58.29	74	-15.71	PK	1.58	333	H
10380	26.03	16.34	42.37	54	-11.63	AV	1.88	131	H
10380	40.25	16.34	56.59	74	-17.41	PK	1.24	98	V
10380	27.53	16.34	43.87	54	-10.13	AV	1.46	168	V
Channel:5230MHz									
10460	39.15	16.15	55.30	74	-18.70	PK	1.69	47	H
10460	25.18	16.15	41.33	54	-12.67	AV	1.15	342	H
10460	40.53	16.15	56.68	74	-17.32	PK	1.49	184	V
10460	26.09	16.15	42.24	54	-11.76	AV	1.46	45	V

Channel:5270MHz									
10540	41.42	16.34	57.76	74	-16.24	PK	1.09	121	H
10540	26.58	16.34	42.92	54	-11.08	AV	1.71	164	H
10540	39.81	16.34	56.15	74	-17.85	PK	1.19	60	V
10540	25.05	16.34	41.39	54	-12.61	AV	1.17	21	V
Channel:5310MHz									
10620	39.53	16.34	55.87	74	-18.13	PK	1.87	204	H
10620	25.35	16.34	41.69	54	-12.31	AV	1.74	266	H
10620	39.67	16.34	56.01	74	-17.99	PK	1.87	162	V
10620	27.51	16.34	43.85	54	-10.15	AV	1.12	322	V
Channel:5510MHz									
11020	41.55	16.34	57.89	74	-16.11	PK	1.78	30	H
11020	27.83	16.34	44.17	54	-9.83	AV	1.62	329	H
11020	39.88	16.34	56.22	74	-17.78	PK	1.22	142	V
11020	27.67	16.34	44.01	54	-9.99	AV	1.18	114	V
Channel:5670MHz									
11340	39.67	16.34	56.01	74	-17.99	PK	1.86	37	H
11340	25.29	16.34	41.63	54	-12.37	AV	1.29	58	H
11340	39.38	16.34	55.72	74	-18.28	PK	1.48	80	V
11340	27.18	16.34	43.52	54	-10.48	AV	1.50	360	V
Channel:5755MHz									
11510	40.43	17.49	57.92	74	-16.08	PK	1.43	83	H
11510	25.15	17.49	42.64	54	-11.36	AV	1.70	122	H
11510	40.89	17.49	58.38	74	-15.62	PK	1.61	102	V
11510	26.18	17.49	43.67	54	-10.33	AV	1.16	298	V
Channel:5795MHz									
11590	39.29	17.52	56.81	74	-18.25	PK	1.18	31	H
11590	25.22	17.52	42.74	54	-17.19	AV	1.78	73	H
11590	41.62	17.52	59.14	74	-14.86	PK	1.80	185	V
11590	27.43	17.52	44.95	54	-9.05	AV	1.02	108	V

Modulation : 802.11(VH80) (the worst data)


Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5210MHz									
10420	41.54	16.25	57.79	74	-16.21	PK	1.10	133	H
10420	27.20	16.25	43.45	54	-10.55	AV	1.80	201	H
10420	41.17	16.25	57.42	74	-16.58	PK	1.27	124	V
10420	27.15	16.25	43.40	54	-10.60	AV	1.03	21	V
Channel:5290MHz									
10580	40.38	16.25	56.63	74	-17.37	PK	1.90	60	H
10580	27.55	16.25	43.80	54	-10.20	AV	1.17	301	H
10580	40.05	16.25	56.30	74	-17.70	PK	1.39	339	V
10580	27.77	16.25	44.02	54	-9.98	AV	1.11	289	V
Channel:5530MHz									
11060	39.77	17.50	57.27	74	-16.73	PK	1.65	278	H
11060	25.35	17.50	42.85	54	-11.15	AV	1.44	164	H
11060	39.18	17.50	56.68	74	-17.32	PK	1.90	256	V
11060	26.73	17.50	44.23	54	-9.77	AV	1.25	276	V
Channel:5775MHz									
11550	41.75	17.50	59.25	74	-14.75	PK	1.70	120	H
11550	27.06	17.50	44.56	54	-9.44	AV	1.21	3	H
11550	40.55	17.50	58.05	74	-15.95	PK	1.36	169	V
11550	26.45	17.50	43.95	54	-10.05	AV	1.53	171	V

Remark:

- 1.Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits
- 2.The EUT was tested in the low, high channel and the worst case position data was reported.
- 3.Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. BAND EDGE

8.1 Block Diagram Of Test Setup

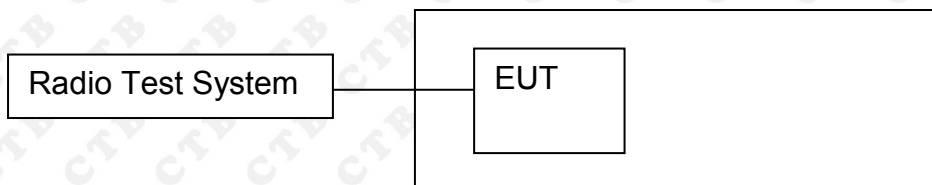

8.2 Limit

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

8.3 Test procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.4 Test Result


Test Graph

5150-5250MHz




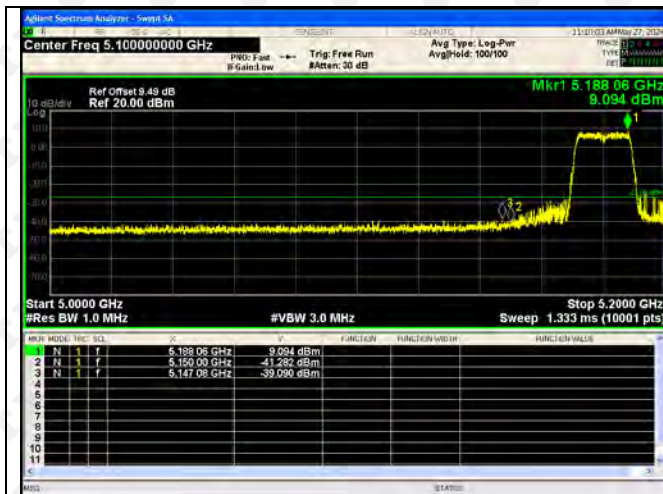


802.11n(HT40)-5190

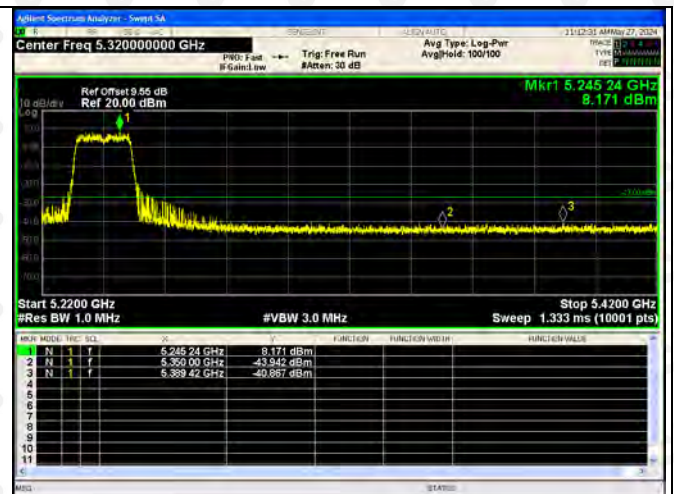


802.11n(HT40)-5230

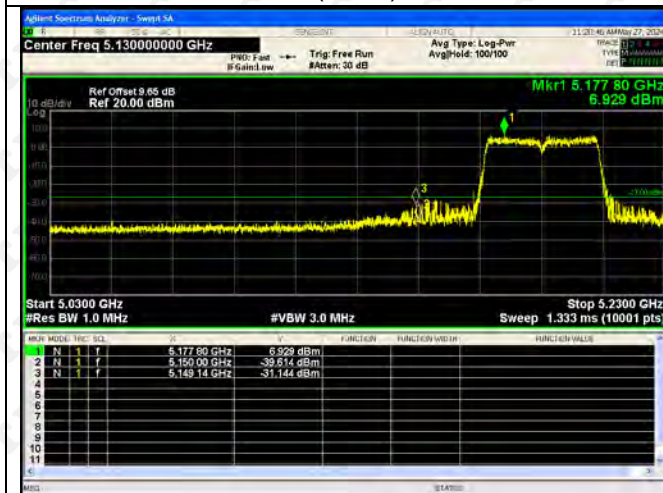


802.11ac(VH80)-5210

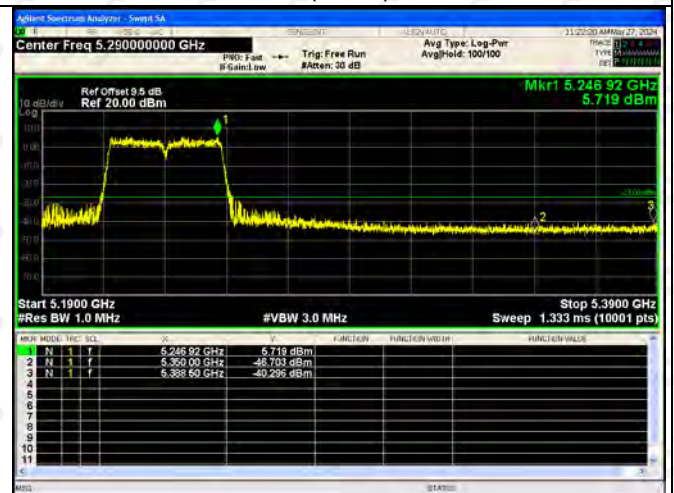


5250-5350MHz:

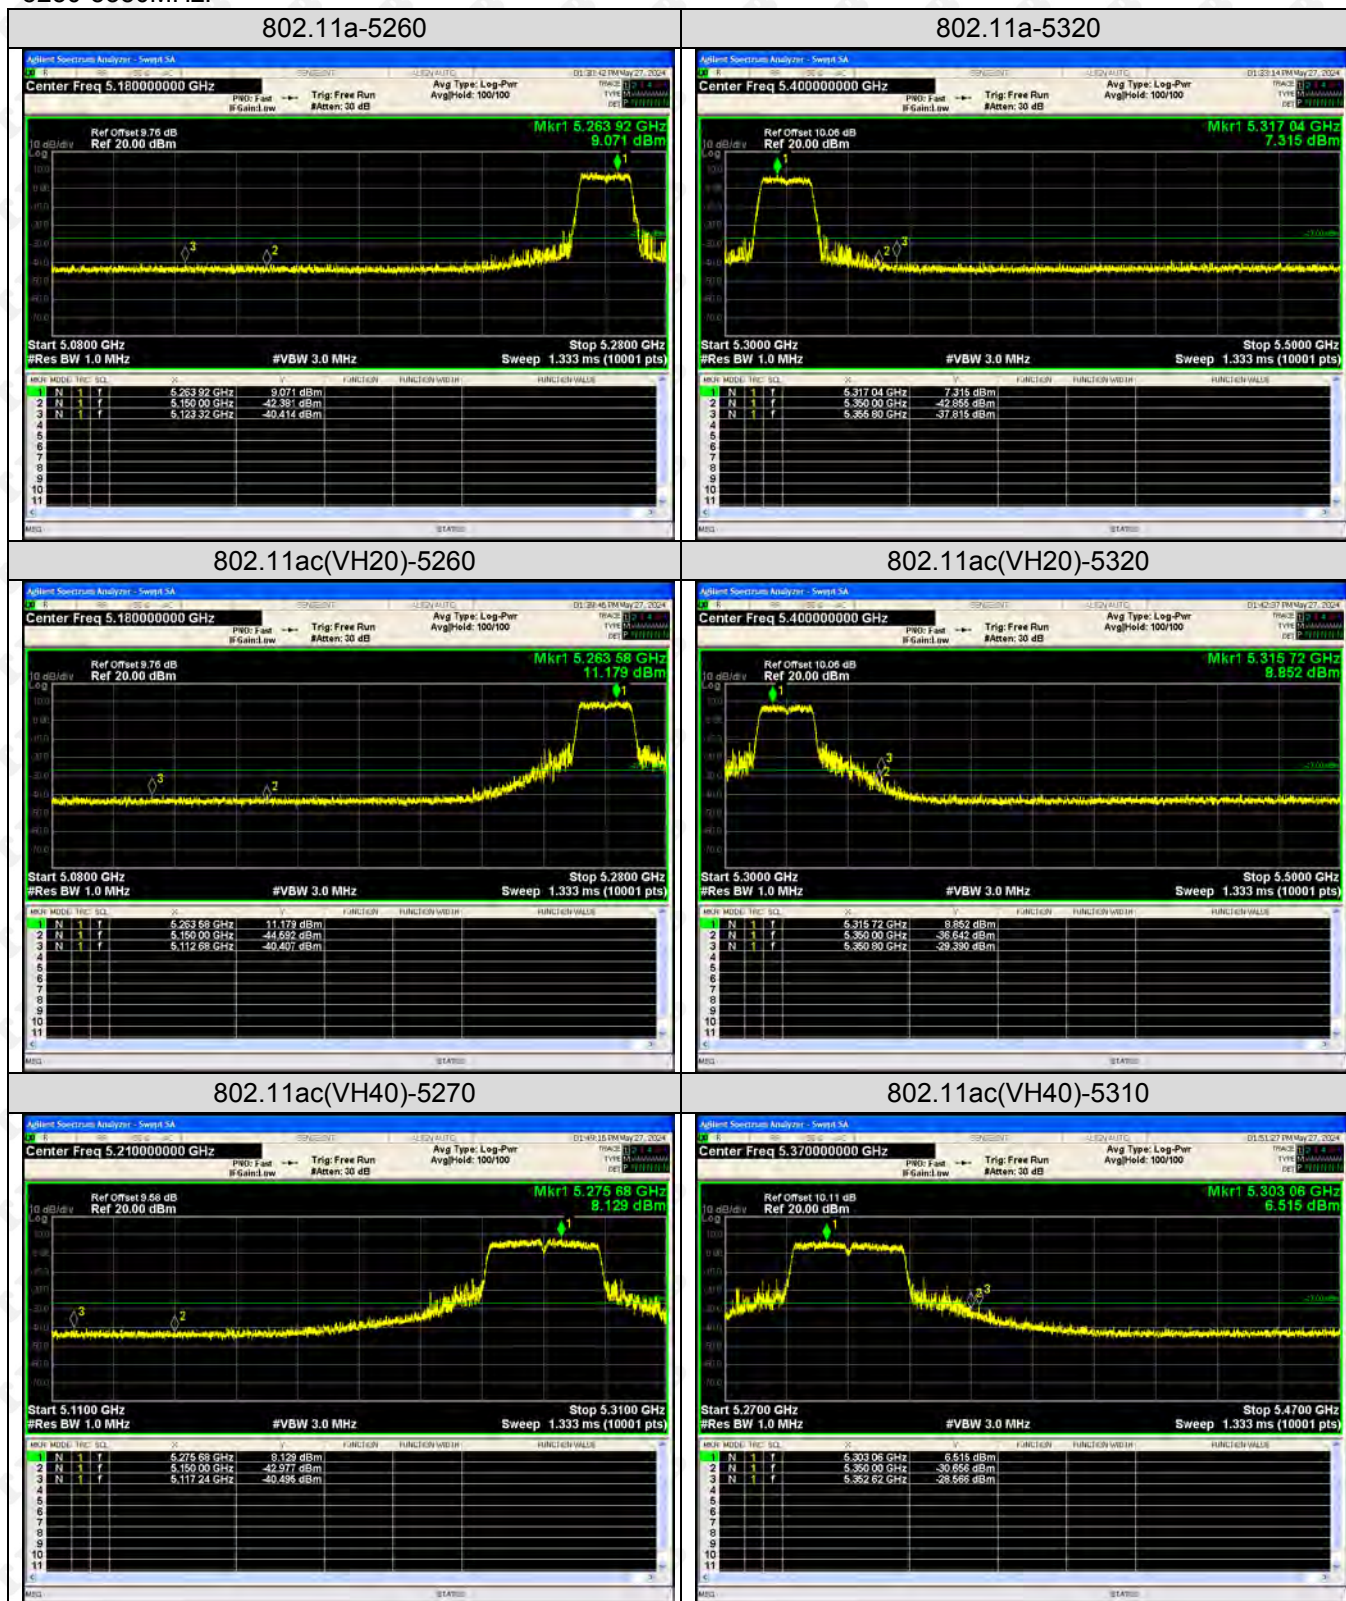

802.11n(HT20)-5260

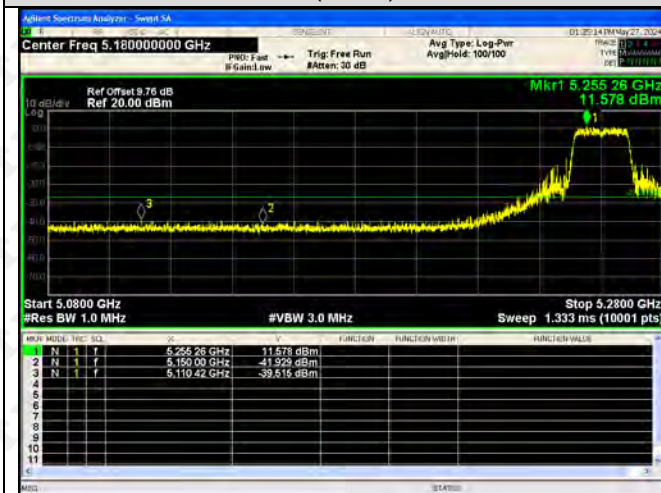


802.11n(HT20)-5320

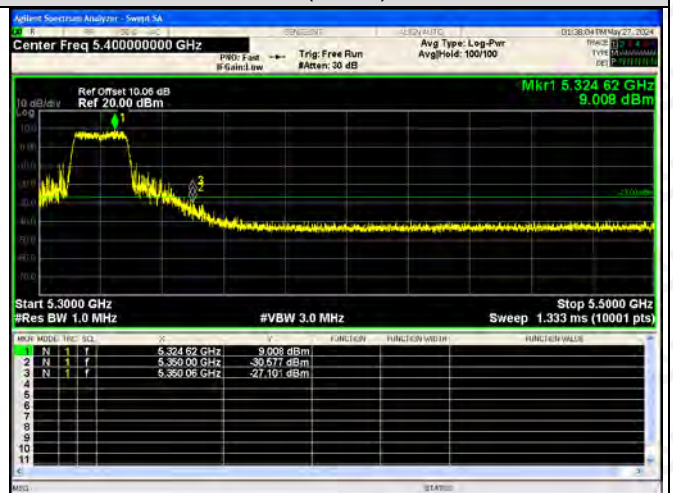

802.11n(HT40)-5270




802.11n(HT40)-5310

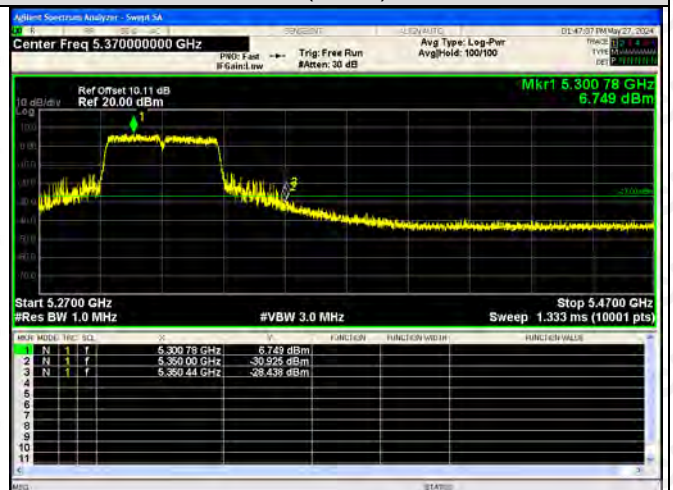


802.11ac(VH80)-5290




5470-5725MHz:

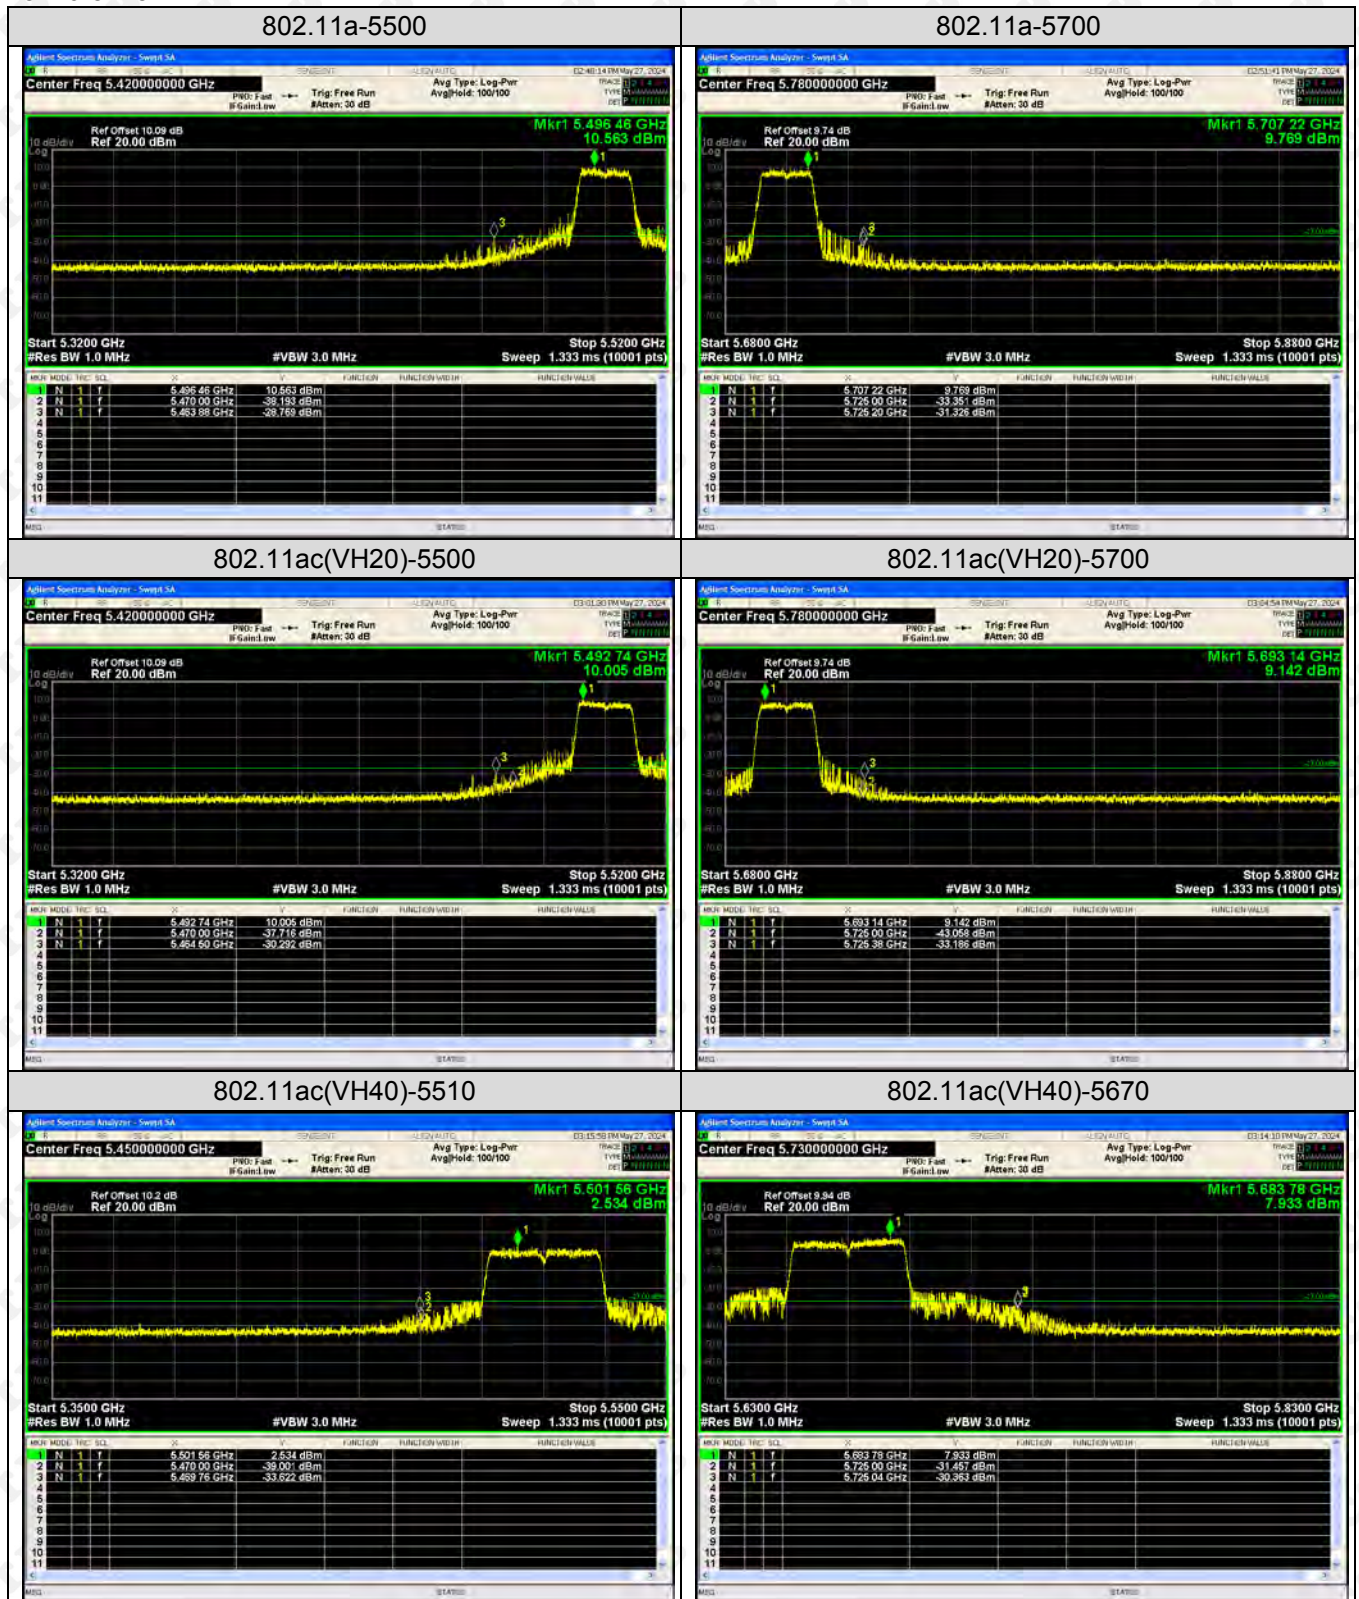


802.11n(HT20)-5500

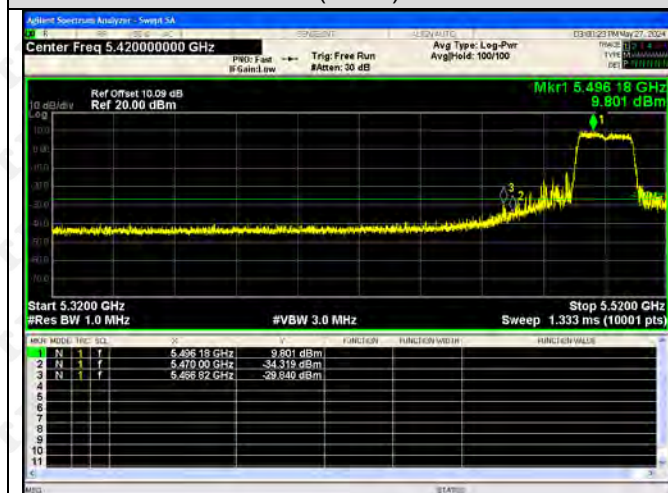


802.11n(HT20)-5700

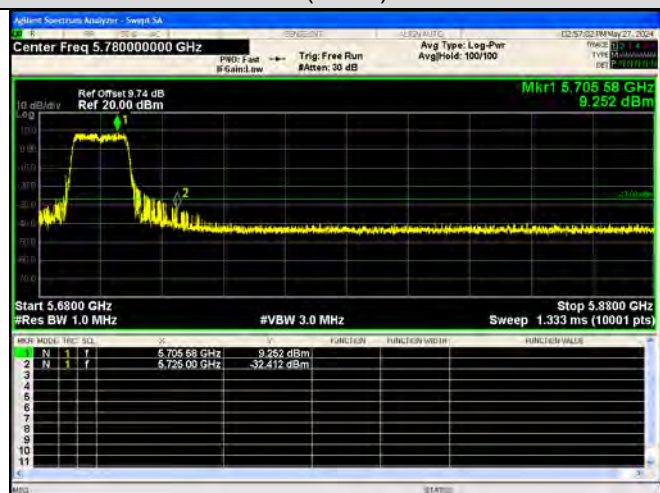


802.11n(HT40)-5510

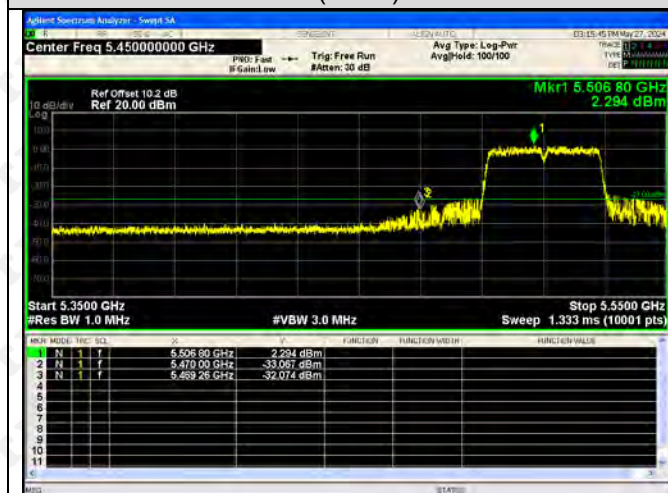

802.11n(HT40)-5670

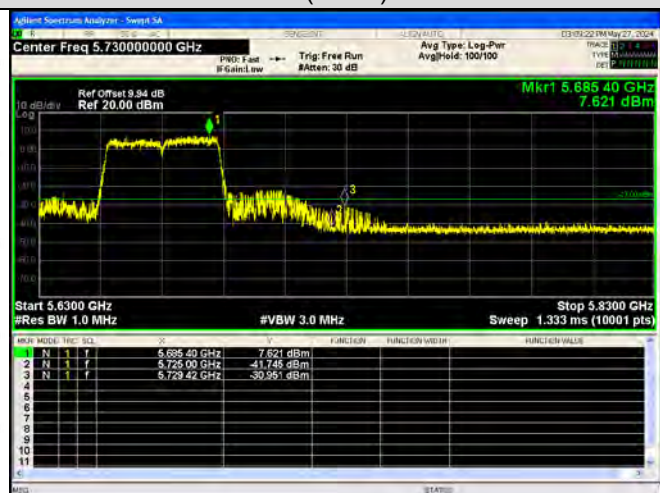


802.11ac(VH80)-5530

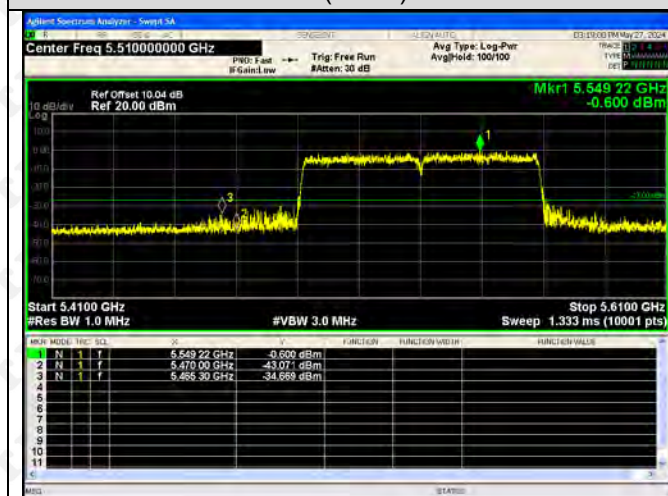

5725-5850MHz


802.11a-5745

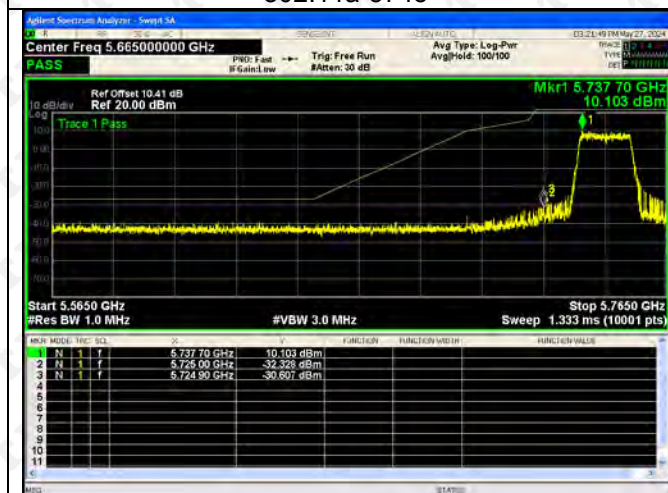

802.11a-5825




802.11ac(VH20)-5745

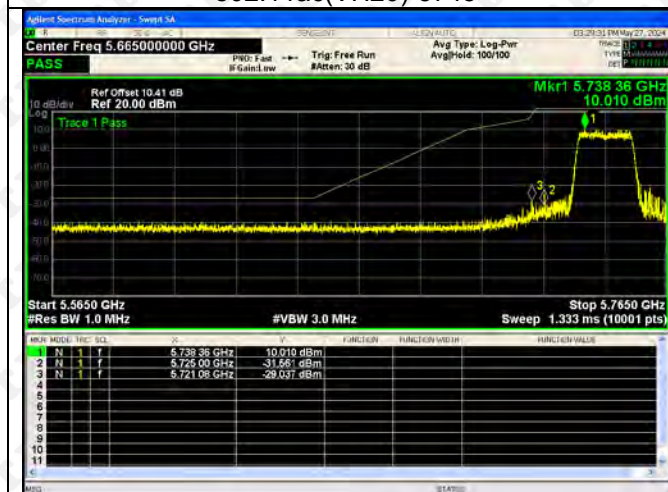

802.11ac(VH20)-5825



802.11ac(VH40)-5755

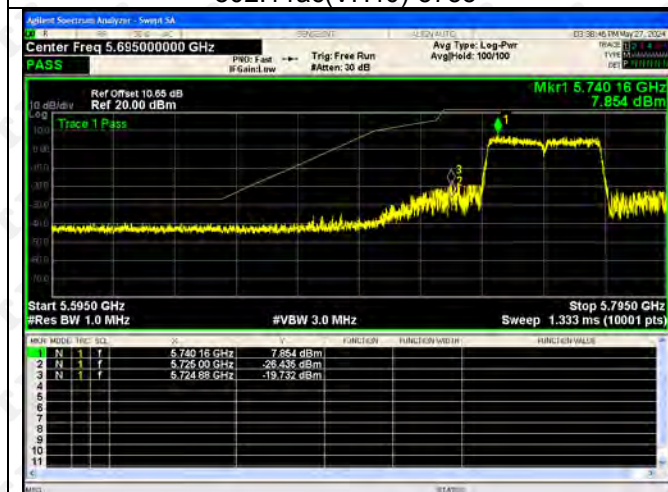

802.11ac(VH40)-5795




802.11(n20)-5745


802.11(n20)-5825




802.11(n40)-5755

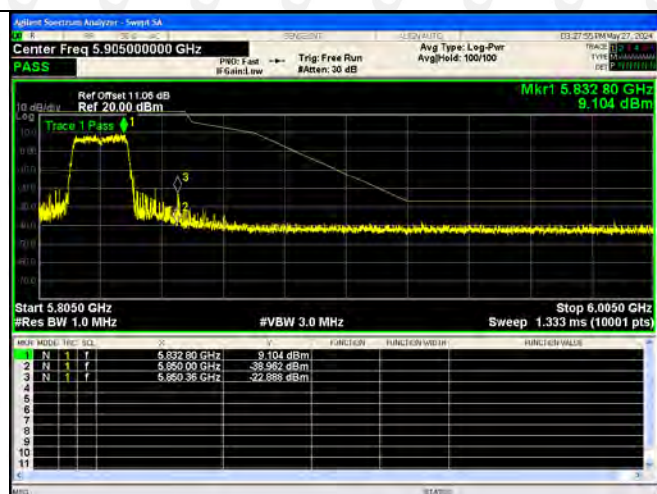

802.11(n40)-5795

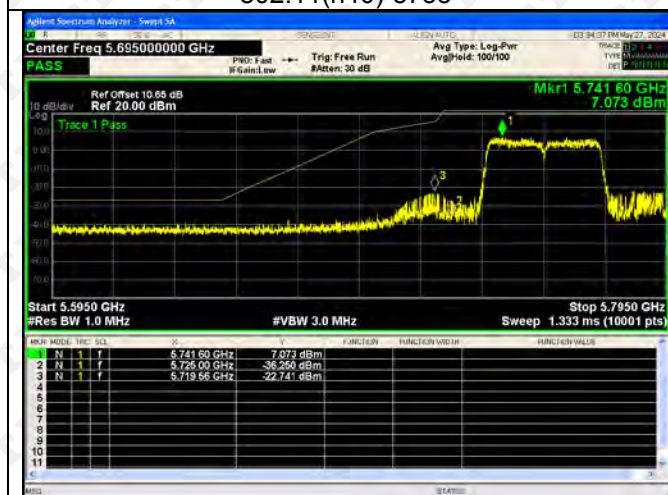


802.11ac(VH80)-5775

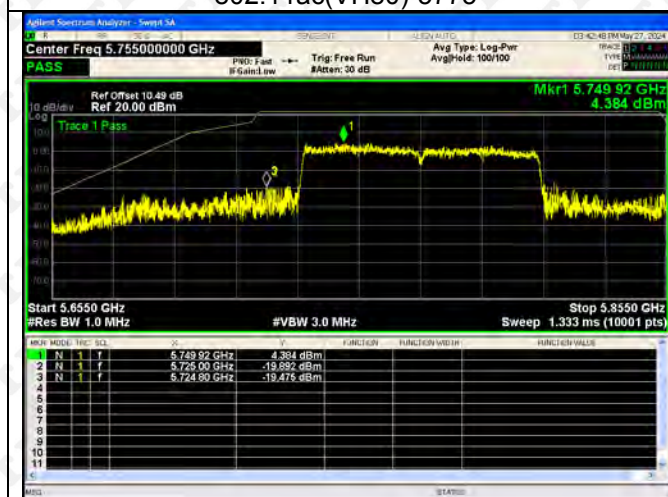

9. CONDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

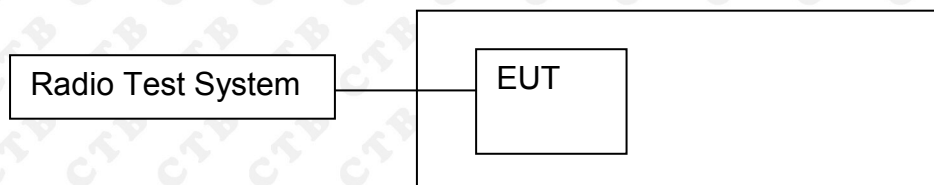

9.2 Limit

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p.

at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

(5) The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a

bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

(h) Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS).

(1) Transmit power control (TPC). U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

9.3 Test procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

(i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW $\geq$ 3 MHz.

(iv) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle $< 98\%$, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."

(viii) Trace average at least 100 traces in power averaging (rms) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

9.4 Test Result

5150-5250MHz:

Test mode1	Test Channel (MHz)	Output Power dBm	Limit dBm
802.11a20	5180	16.596	23.98
	5200	16.191	23.98
	5240	15.902	23.98
802.11ac20	5180	18.627	23.98
	5200	18.196	23.98
	5240	17.591	23.98
802.11ac40	5190	18.982	23.98
	5230	18.108	23.98
802.11ac80	5210	14.243	23.98
802.11n(HT20)	5180	16.836	23.98
	5200	16.469	23.98
	5240	15.809	23.98
802.11n(HT40)	5190	16.994	23.98
	5230	16.246	23.98

5250-5350 MHz

Test mode1	Test Channel (MHz)	Output Power dBm	Limit dBm
802.11a20	5260	16.753	23.98
	5280	16.216	23.98
	5320	14.917	23.98
802.11ac20	5260	18.394	23.98
	5280	17.947	23.98
	5320	16.603	23.98
802.11ac40	5270	18.66	23.98
	5310	17.601	23.98
802.11ac80	5290	17.675	23.98
802.11n(HT20)	5260	18.71	23.98
	5280	18.158	23.98
	5320	16.884	23.98
802.11n(HT40)	5270	18.827	23.98
	5310	17.805	23.98


5470-5725MHz:


Test mode1	Test Channel (MHz)	Output Power dBm	Limit dBm
802.11a20	5500	17.691	23.98
	5580	18.825	23.98
	5700	17.107	23.98
802.11ac20	5500	17.785	23.98
	5580	18.876	23.98
	5700	17.306	23.98
802.11ac40	5510	18.167	23.98
	5670	17.68	23.98
802.11ac80	5530	15.711	23.98
802.11n(HT20)	5500	17.729	23.98
	5580	18.776	23.98
	5700	17.191	23.98
802.11n(HT40)	5510	17.963	23.98
	5670	17.572	23.98


5725-5850MHz:

Test mode1	Test Channel (MHz)	Output Power dBm	Limit dBm
802.11a20	5745	17.225	30
	5785	16.289	30
	5825	17.089	30
802.11ac20	5745	17.41	30
	5785	16.495	30
	5825	17.232	30
802.11ac40	5755	17.728	30
	5795	17.041	30
802.11ac80	5775	17.314	30
802.11n(HT20)	5745	17.16	30
	5785	16.197	30
	5825	17.132	30
802.11n(HT40)	5755	17.411	30
	5795	16.817	30


5150-5250MHz-Power

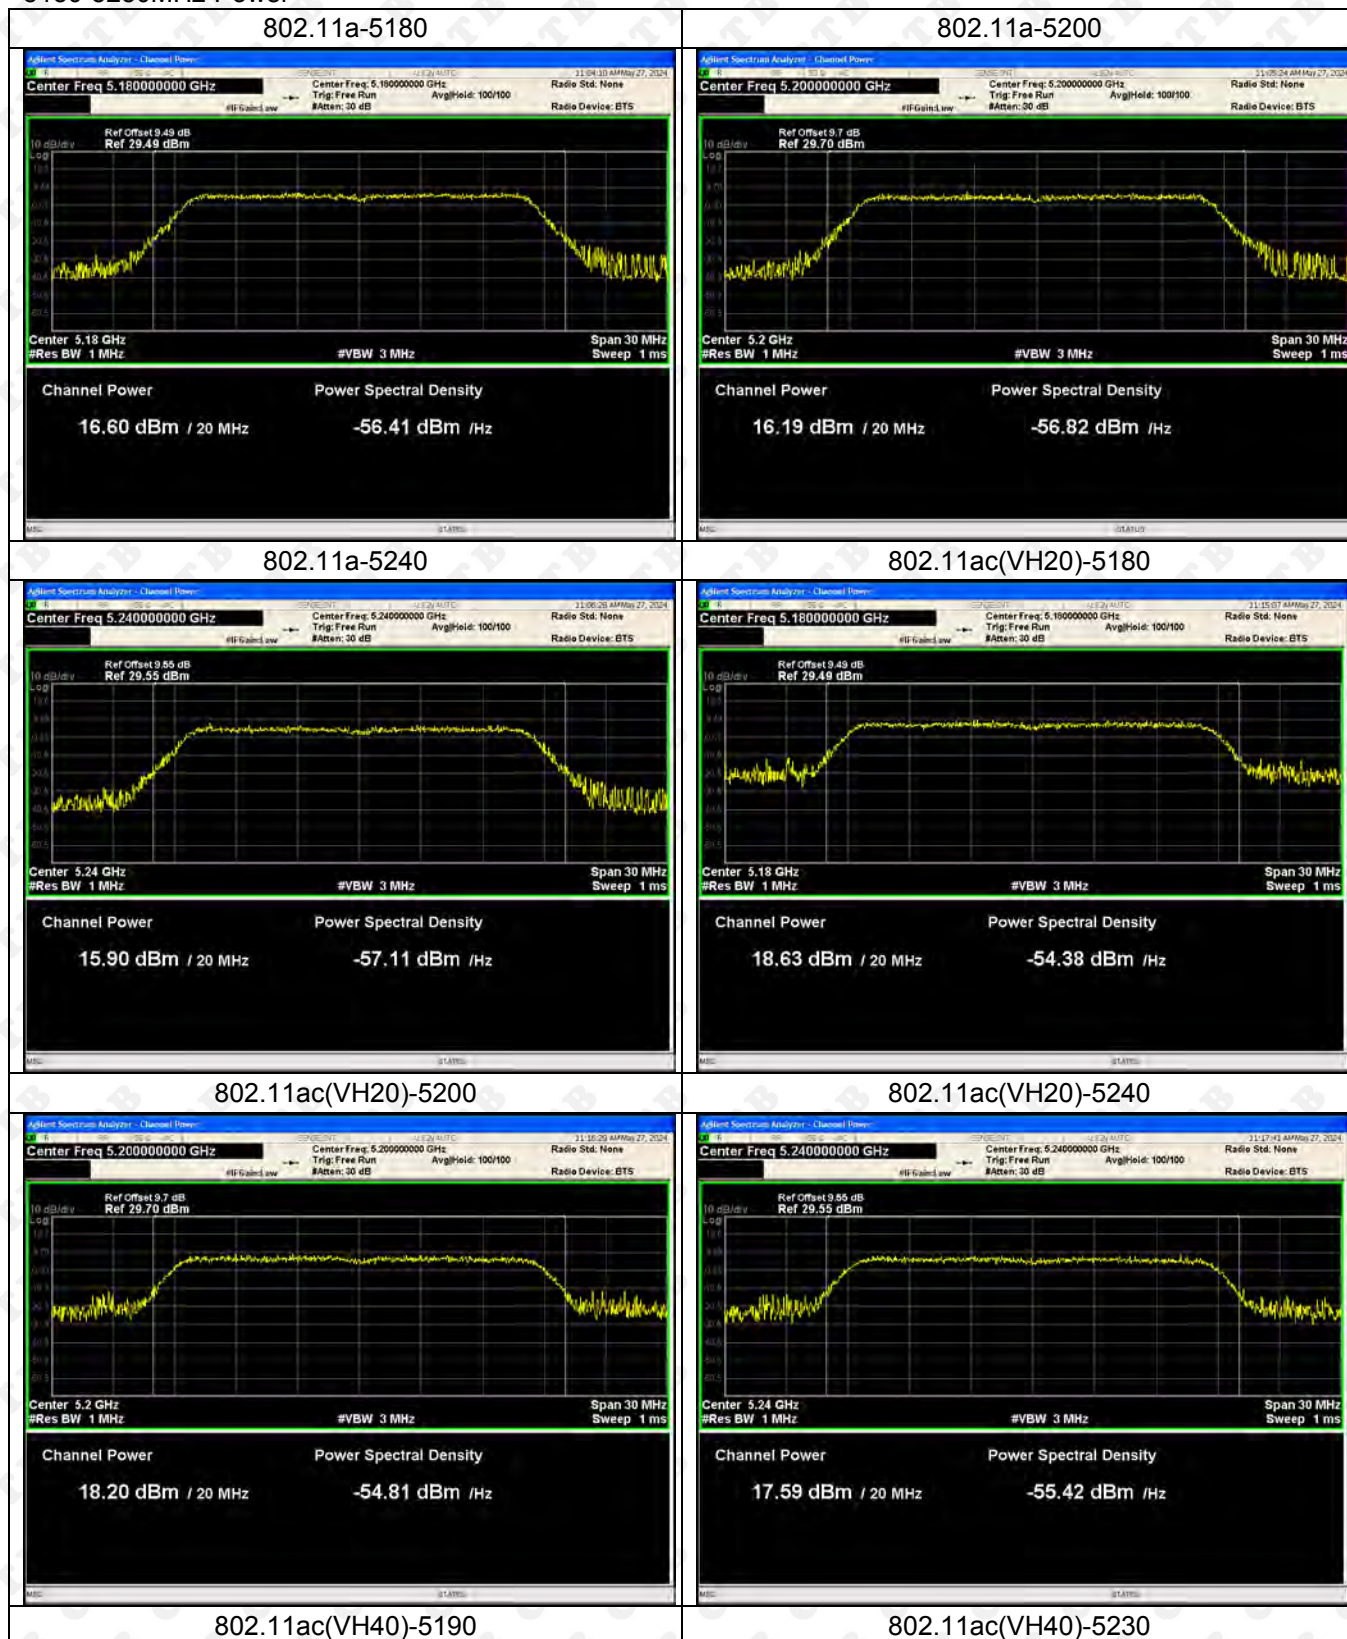


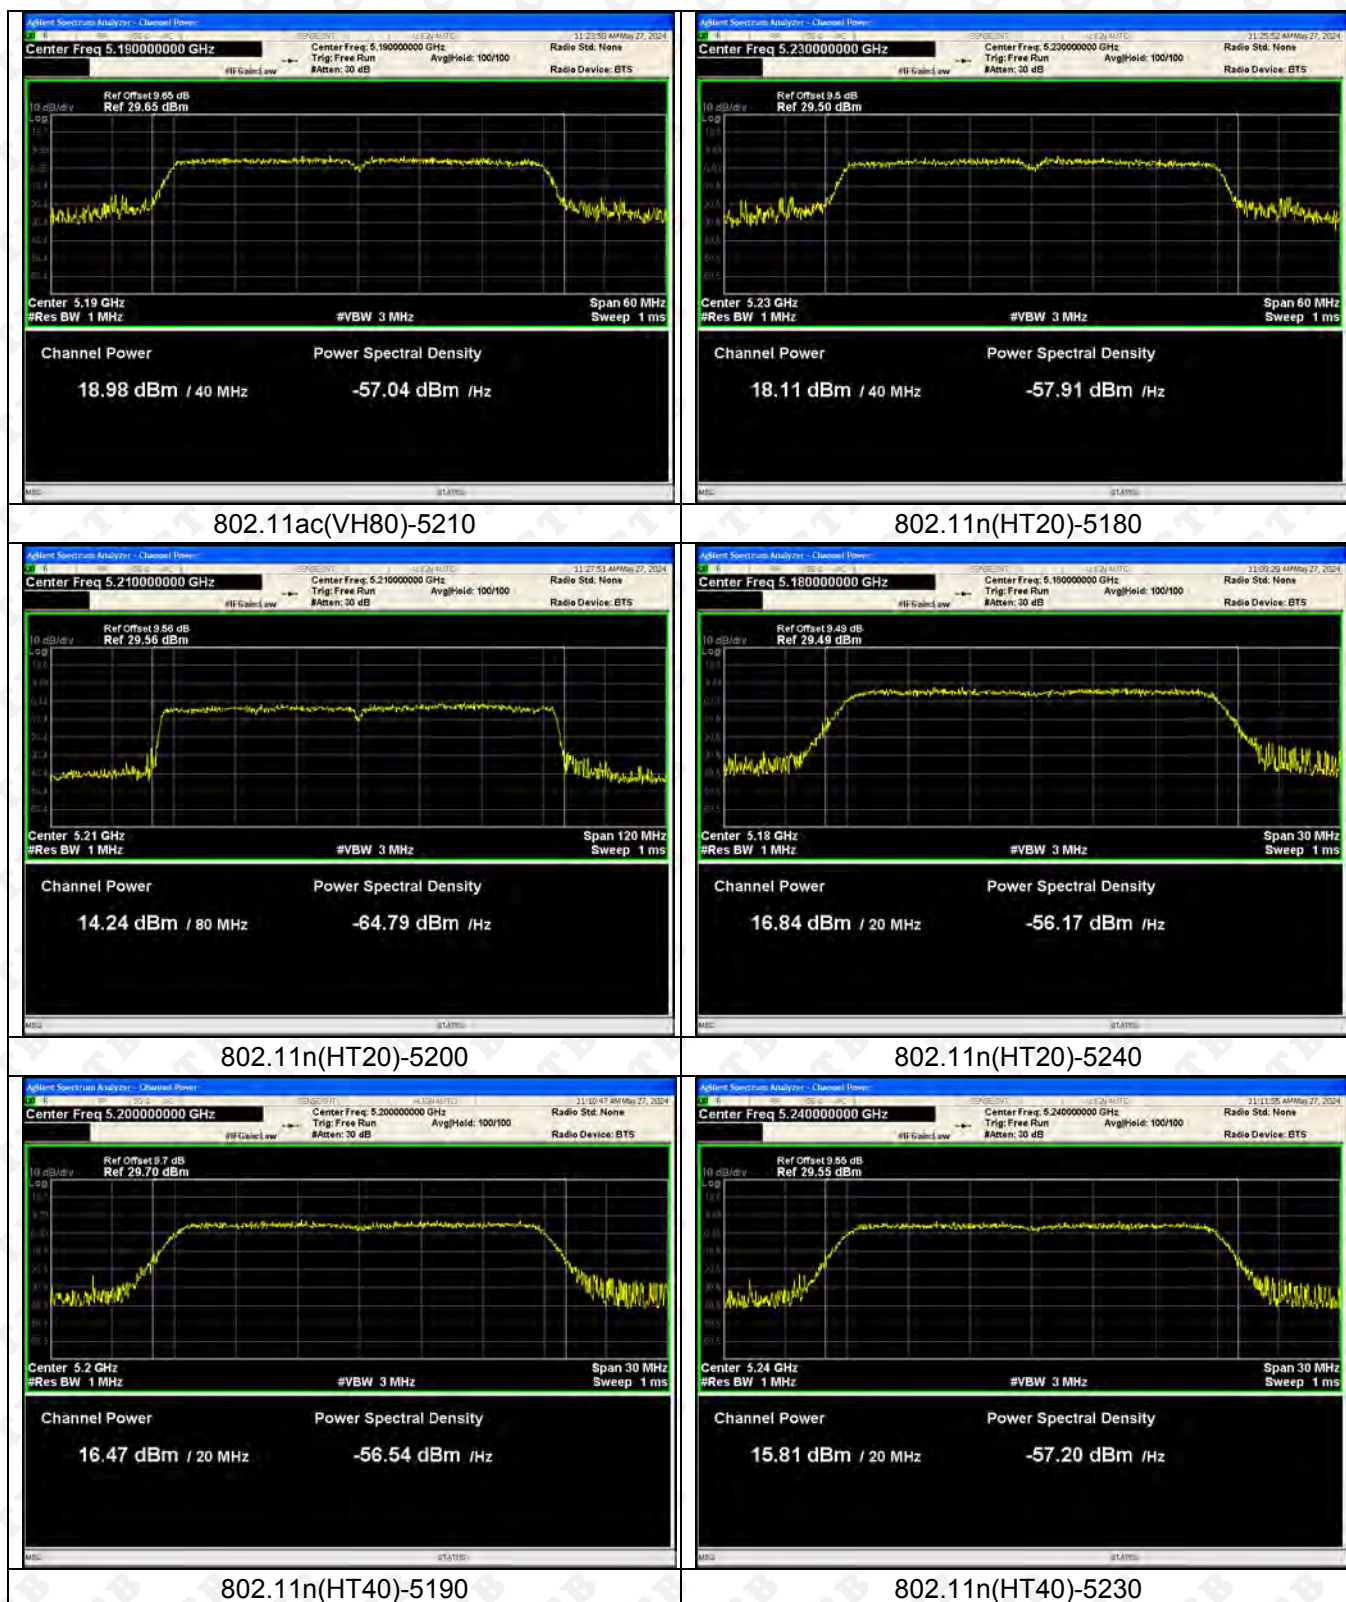


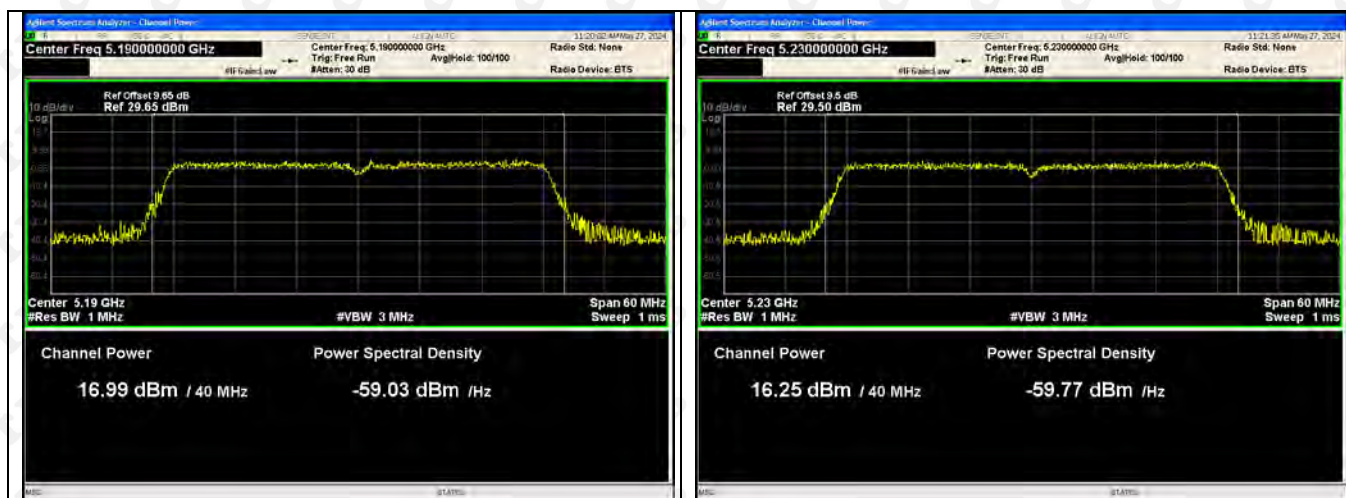


5250-5350MHz-Power

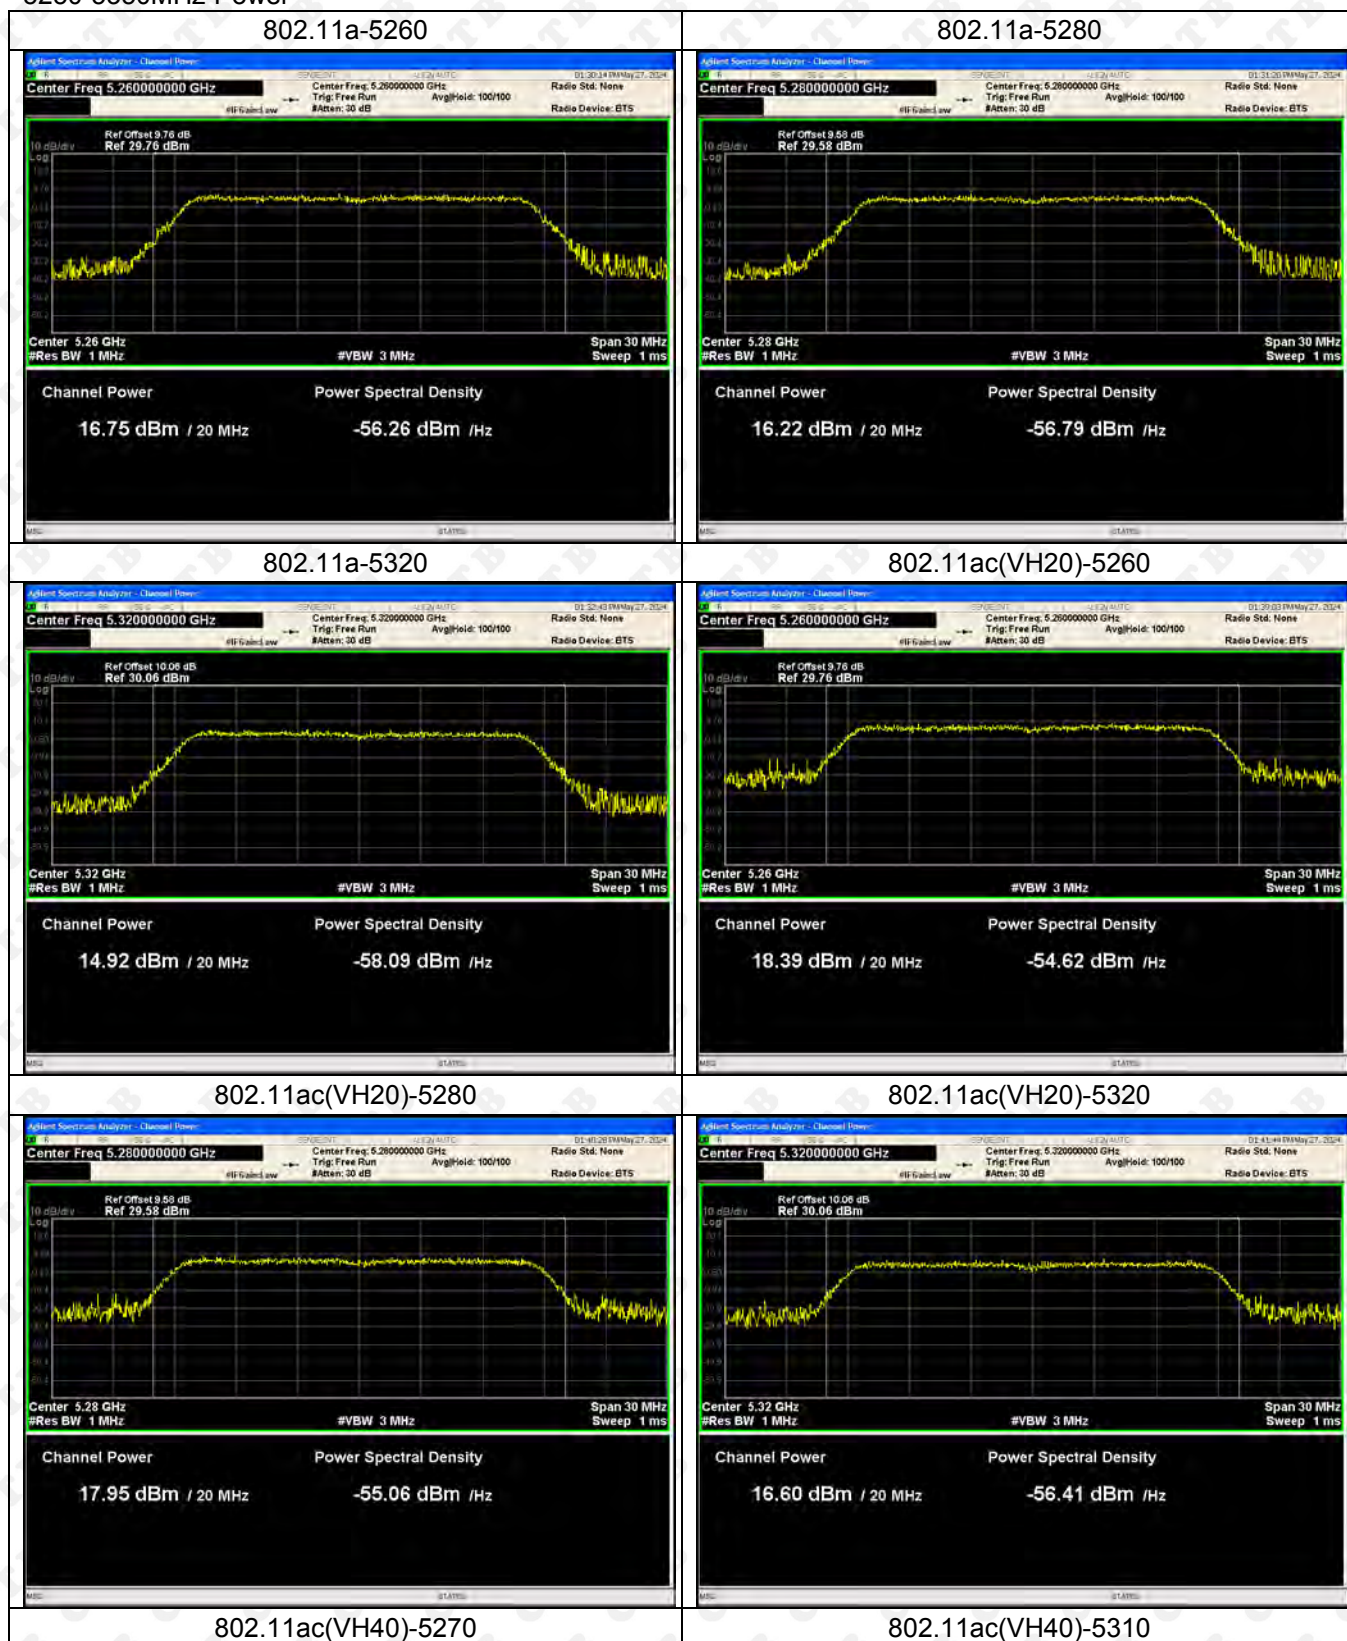


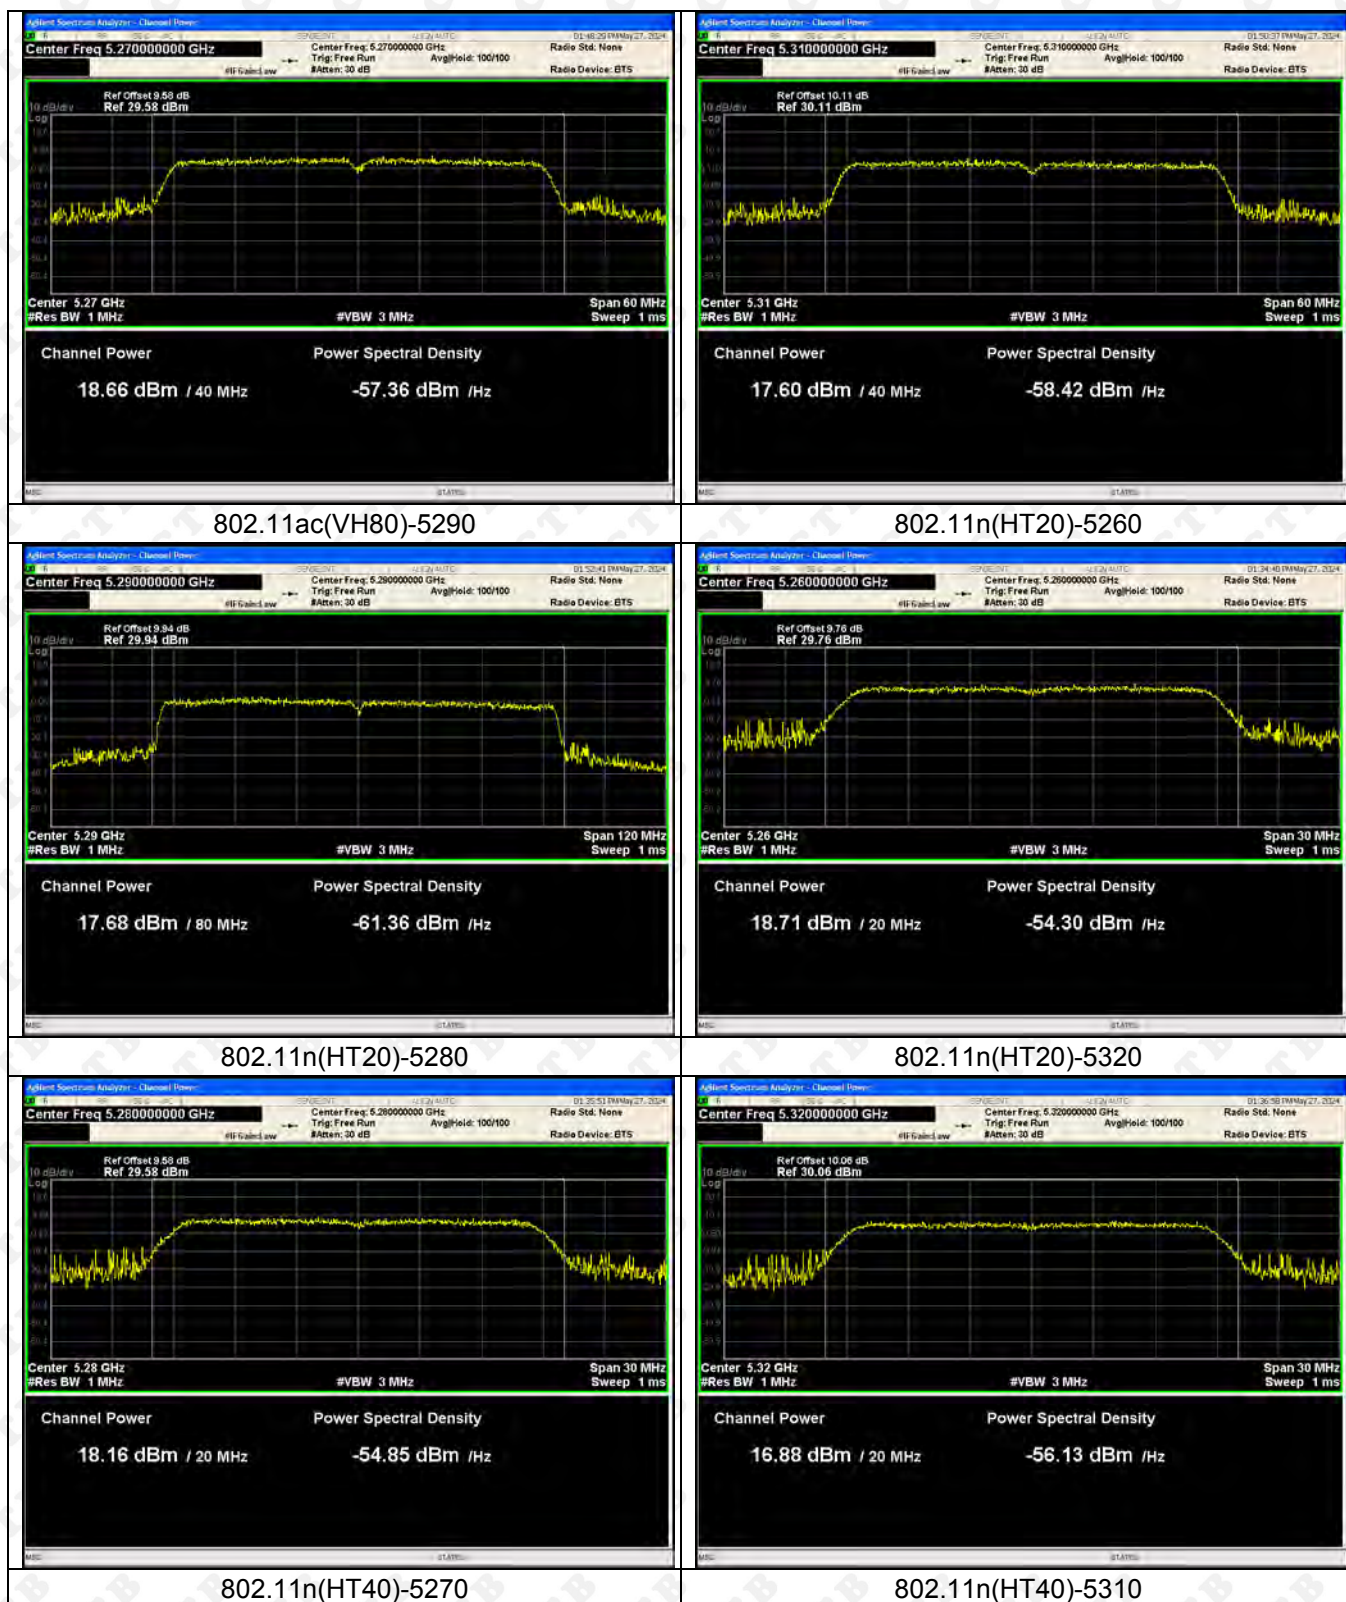


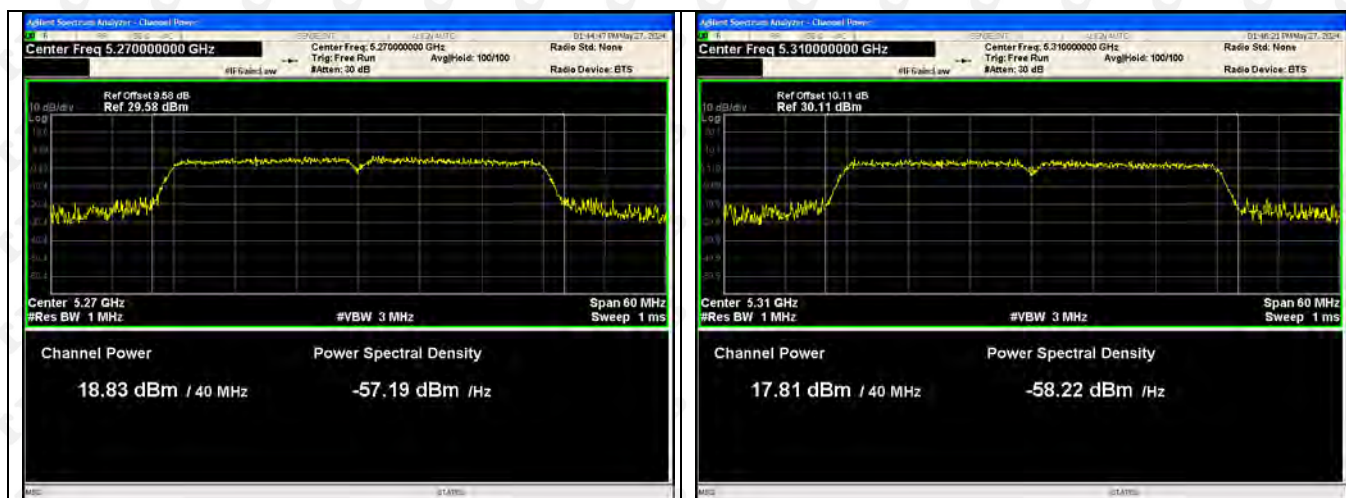


5470-5725MHz-Power

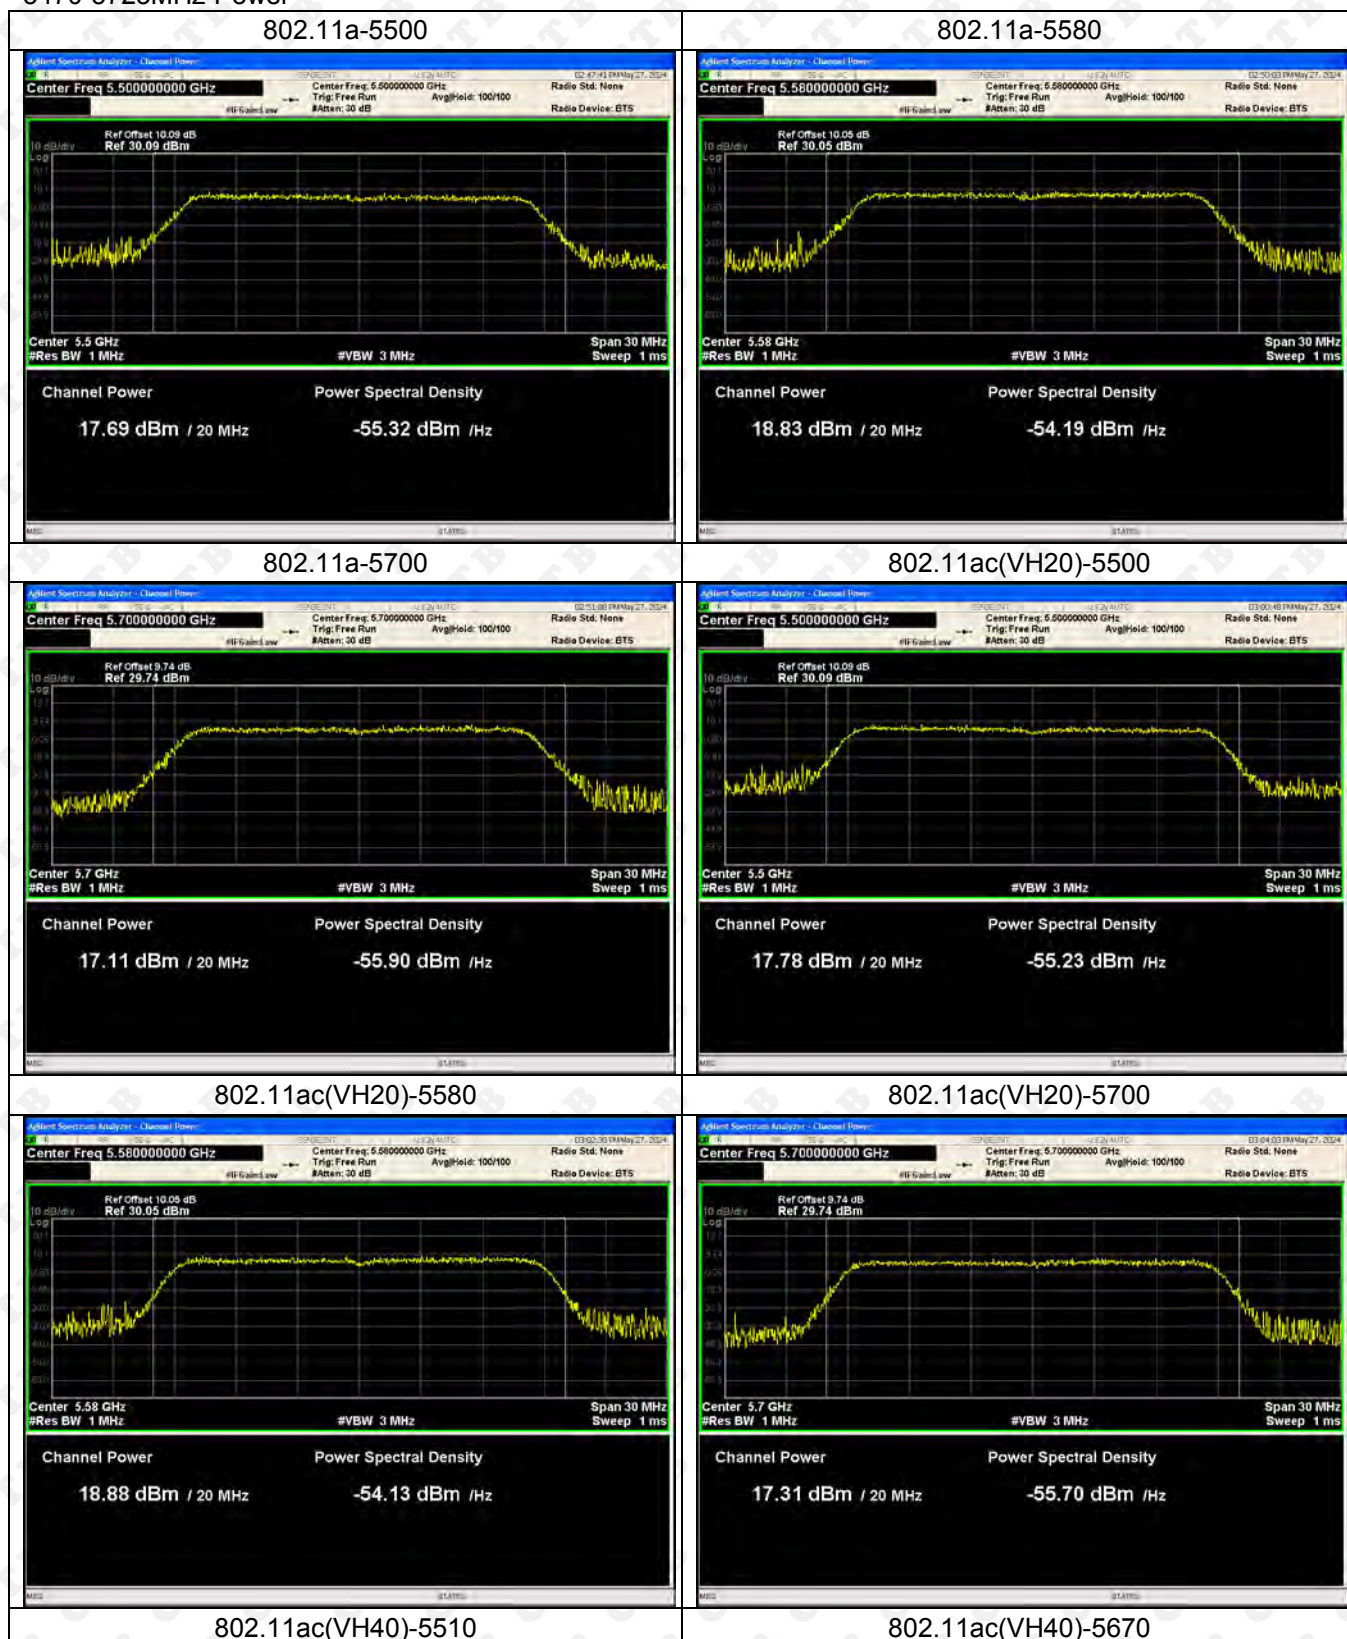


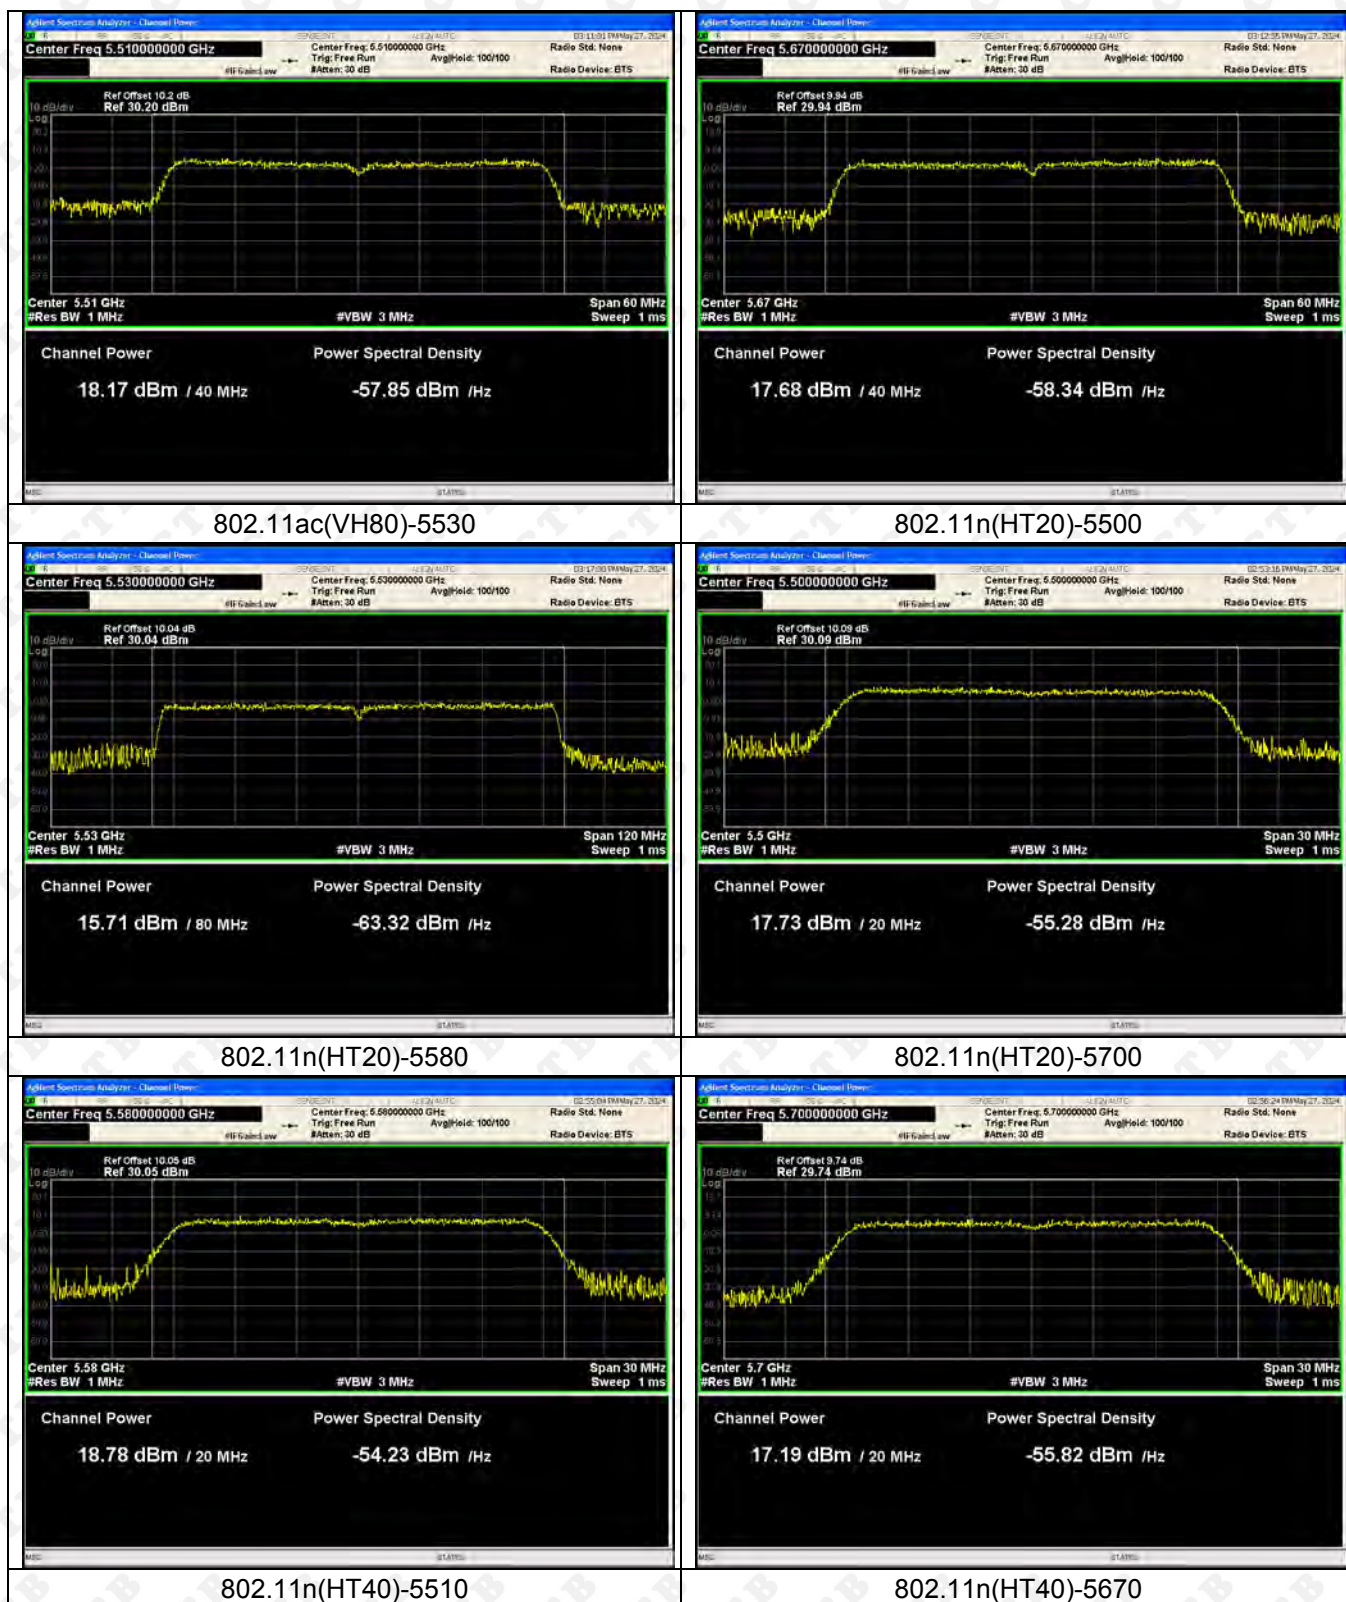


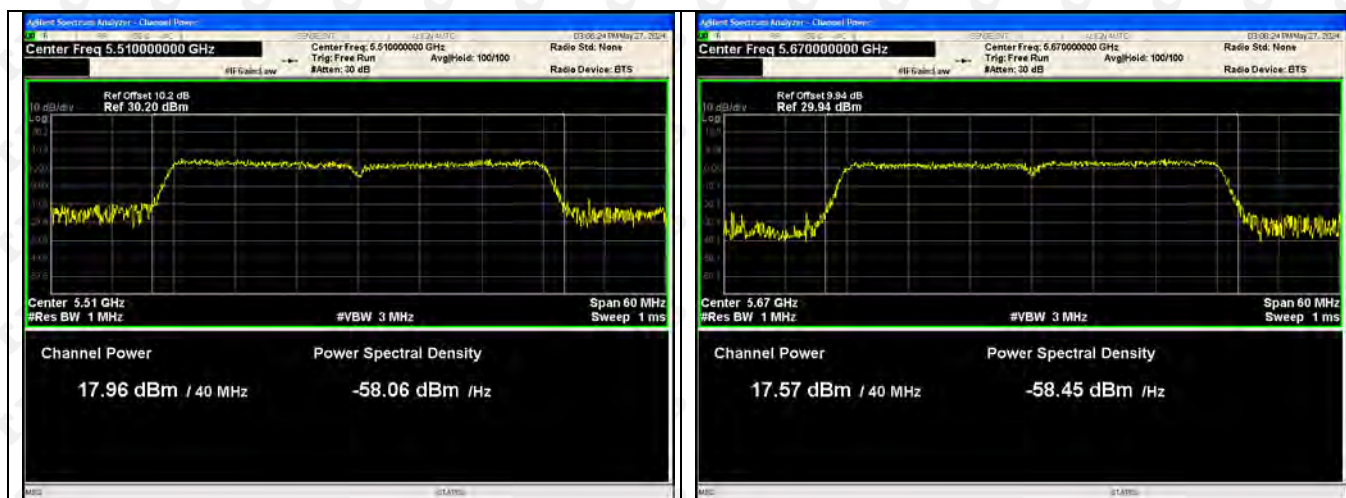

5725-5850MHz-Power

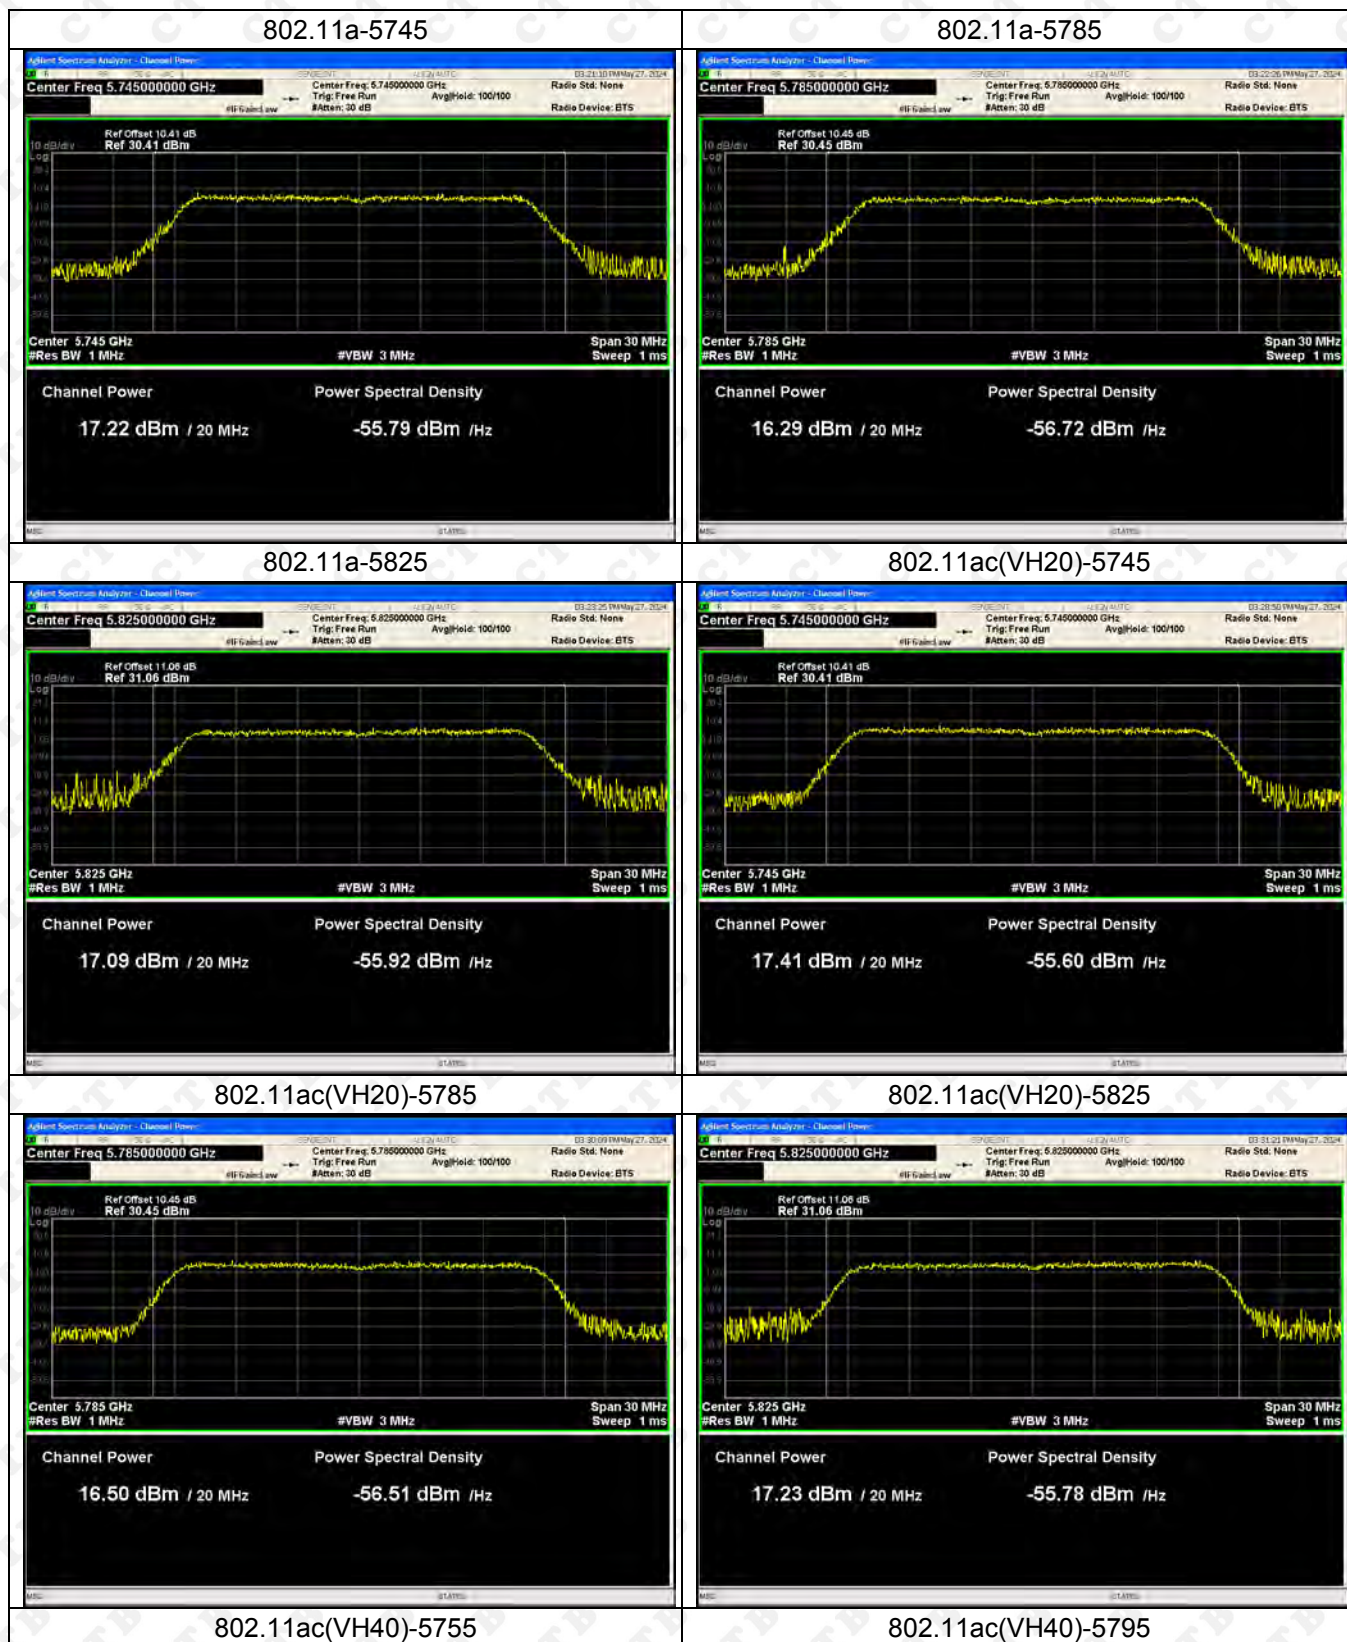


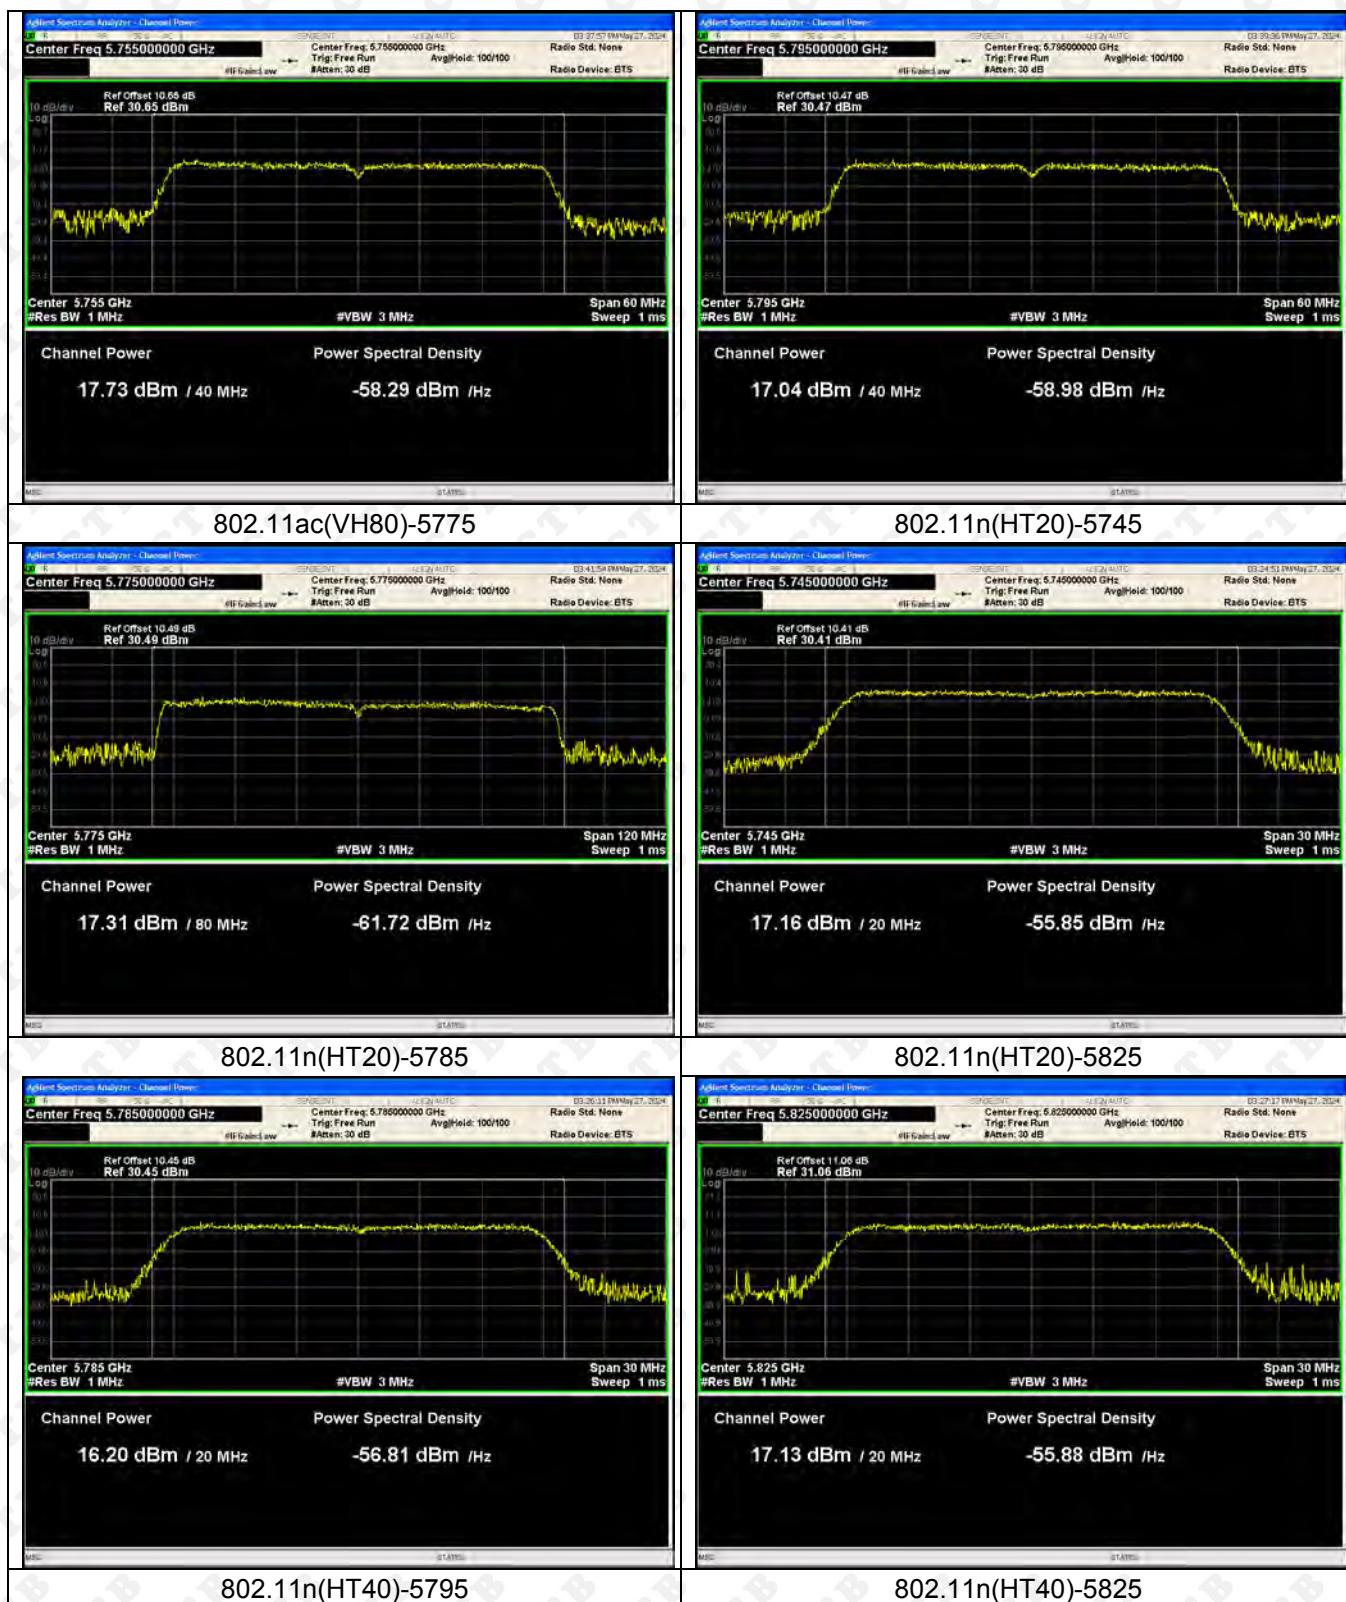

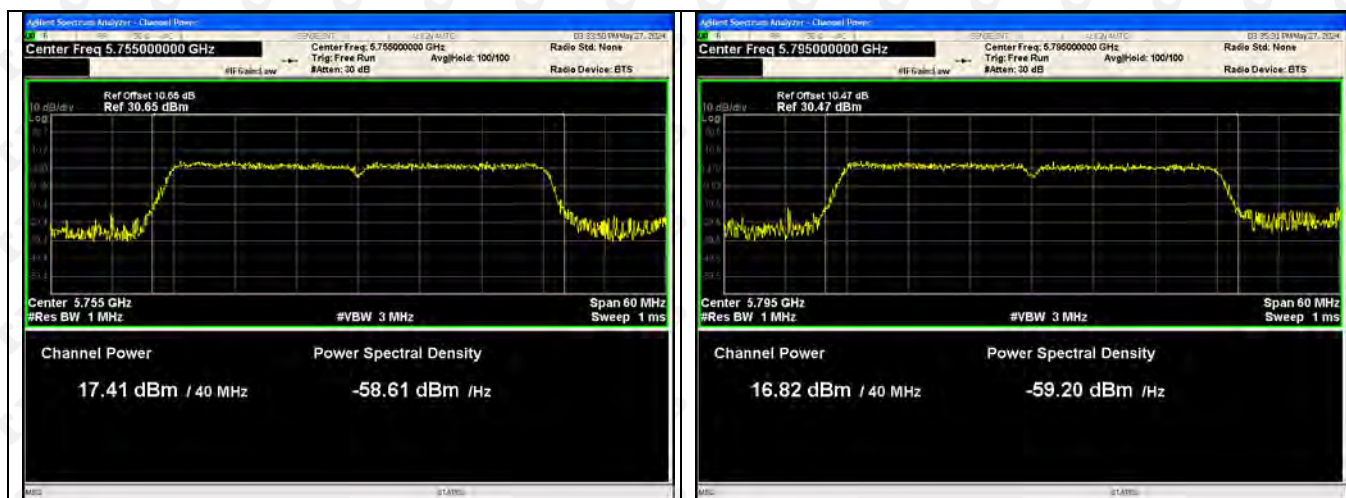

10. EMISSION BANDWIDTH& OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

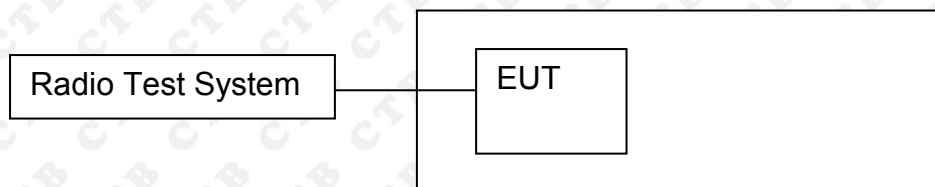

10.2 Limits

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

10.3 Test Procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725–5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725–5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
- Detector = Peak.

- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

D. 99% Occupied Bandwidth

The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. Measurement of the 99% occupied bandwidth is *required* only as a condition for using the optional band-edge measurement techniques described in II.G.3.d). Measurements of 99% occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the 789033 D02 General UNII Test Procedures New Rules v02r01 Page 4 spectrum is integrated when measuring maximum conducted output power as described in II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with Section 15.407(a).

The following procedure shall be used for measuring (99%) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW $\geq 3 * \text{RBW}$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99% power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

10.4 Test Results

5150-5250MHz:

Test mode	Test Channel (MHz)	26dB Bandwidth (MHz)
802.11a	5180	19.458
	5200	19.493
	5240	19.691
802.11ac20	5180	23.861
	5200	23.97
	5240	27.799
802.11ac40	5190	48.627
	5230	48.462
802.11ac80	5210	78.281
802.11n(HT20)	5180	19.901
	5200	19.623
	5240	19.813
802.11n(HT40)	5190	39.186
	5230	39.646

5250-5350 MHz

Test mode	Test Channel (MHz)	26dB Bandwidth (MHz)
802.11a	5260	19.332
	5280	19.303
	5320	19.405
802.11ac20	5260	26.45
	5280	25.878
	5320	26.553
802.11ac40	5270	43.435
	5310	53.544
802.11ac80	5290	78.199
802.11n(HT20)	5260	28.924
	5280	27.772
	5320	29.022
802.11n(HT40)	5270	44.522
	5310	48.337

5470-5725MHz:

Test mode	Test Channel (MHz)	26dB Bandwidth (MHz)
802.11a	5500	21.023
	5580	19.754
	5700	19.137
802.11ac20	5500	22.015
	5580	19.954
	5700	19.874
802.11ac40	5510	59.376
	5670	39.042
802.11ac80	5530	85.033
802.11n(HT20)	5500	19.858
	5580	19.823
	5700	19.71
802.11n(HT40)	5510	39.2
	5670	39.015

5725-5850MHz

Test mode	Test Channel (MHz)	6dB Bandwidth (MHz)
802.11a	5745	16.443
	5785	16.467
	5825	16.462
802.11ac20	5745	17.481
	5785	17.433
	5825	17.551
802.11ac40	5755	36.188
	5795	36.313
802.11ac80	5775	75.519
802.11n(HT20)	5745	17.332
	5785	17.47
	5825	17.62
802.11n(HT40)	5755	36.384
	5795	35.908

Test Graph 5150-5250MHz








5250-5350MHz



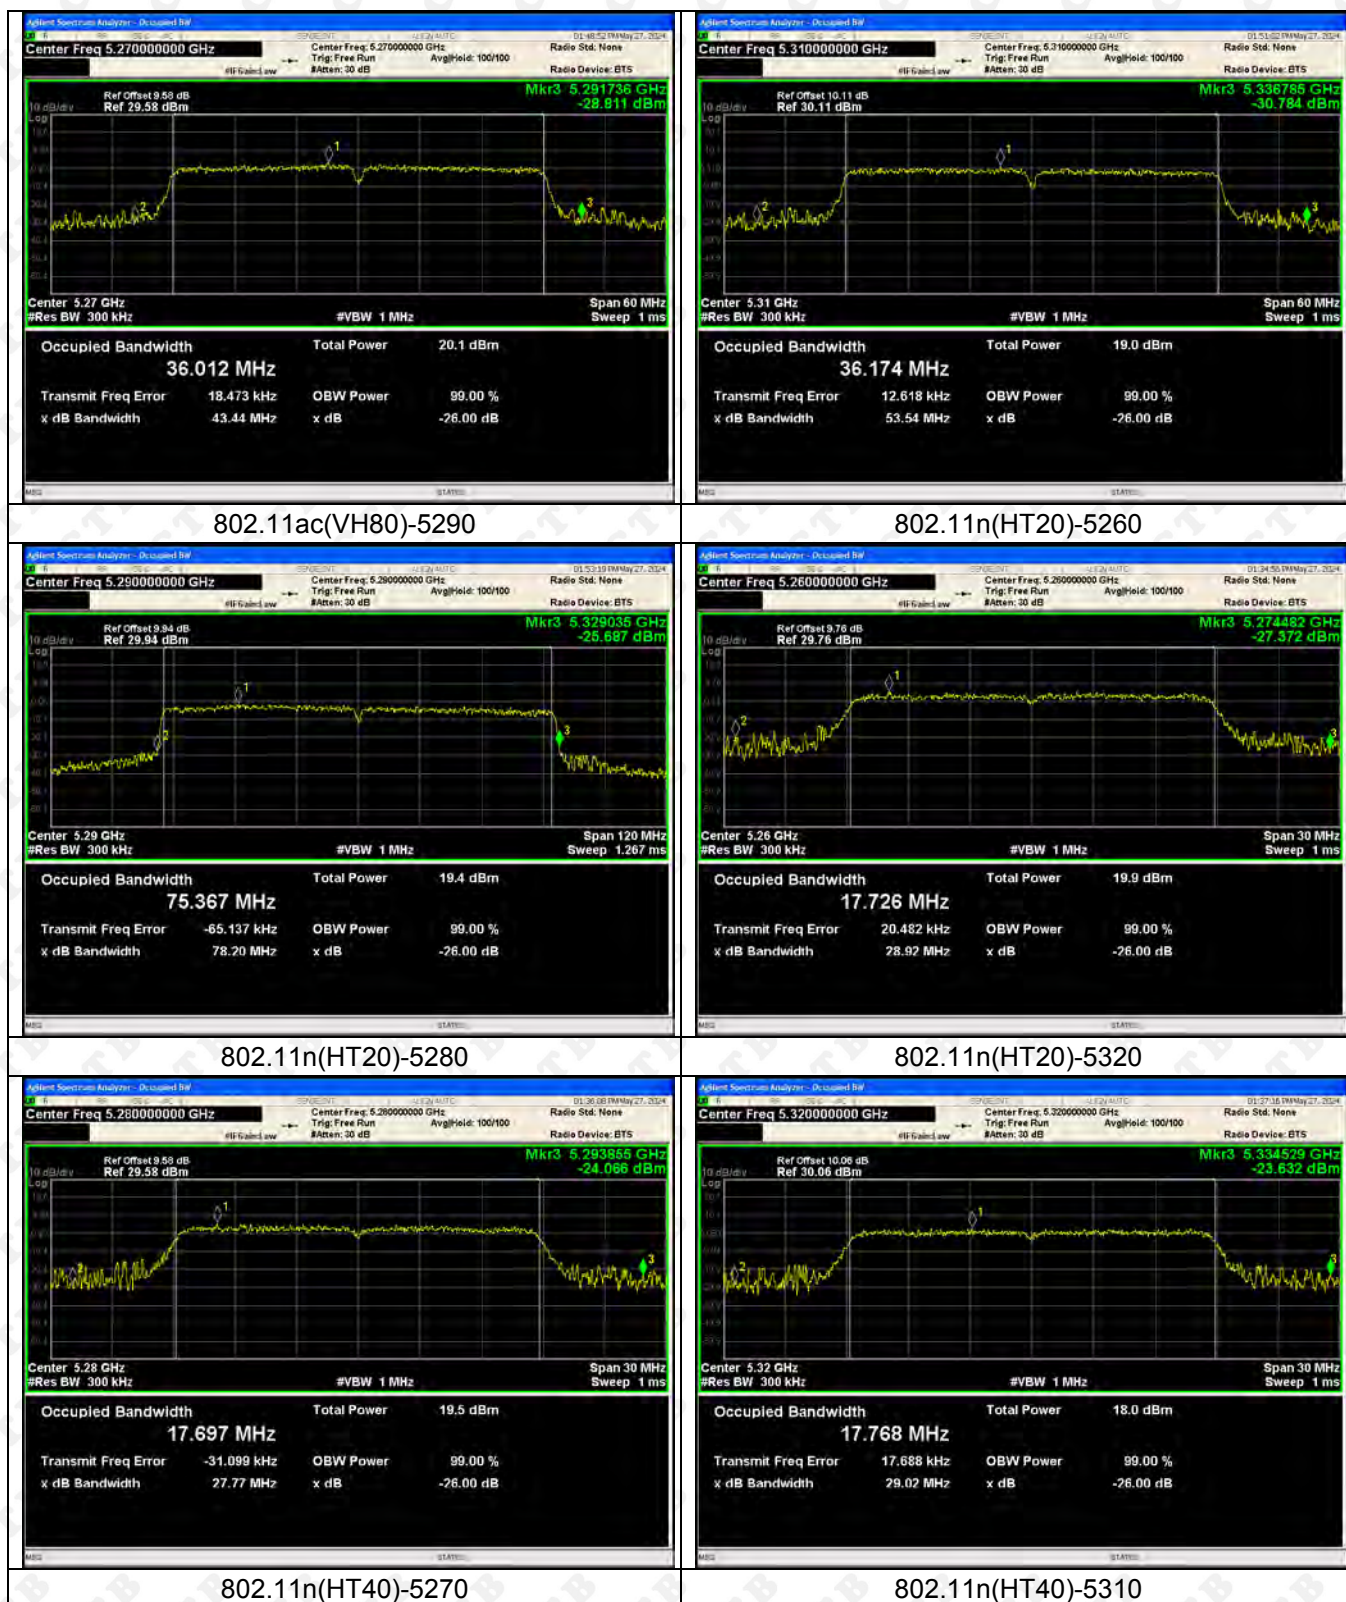



5470-5725MHz









5725-5850MHz




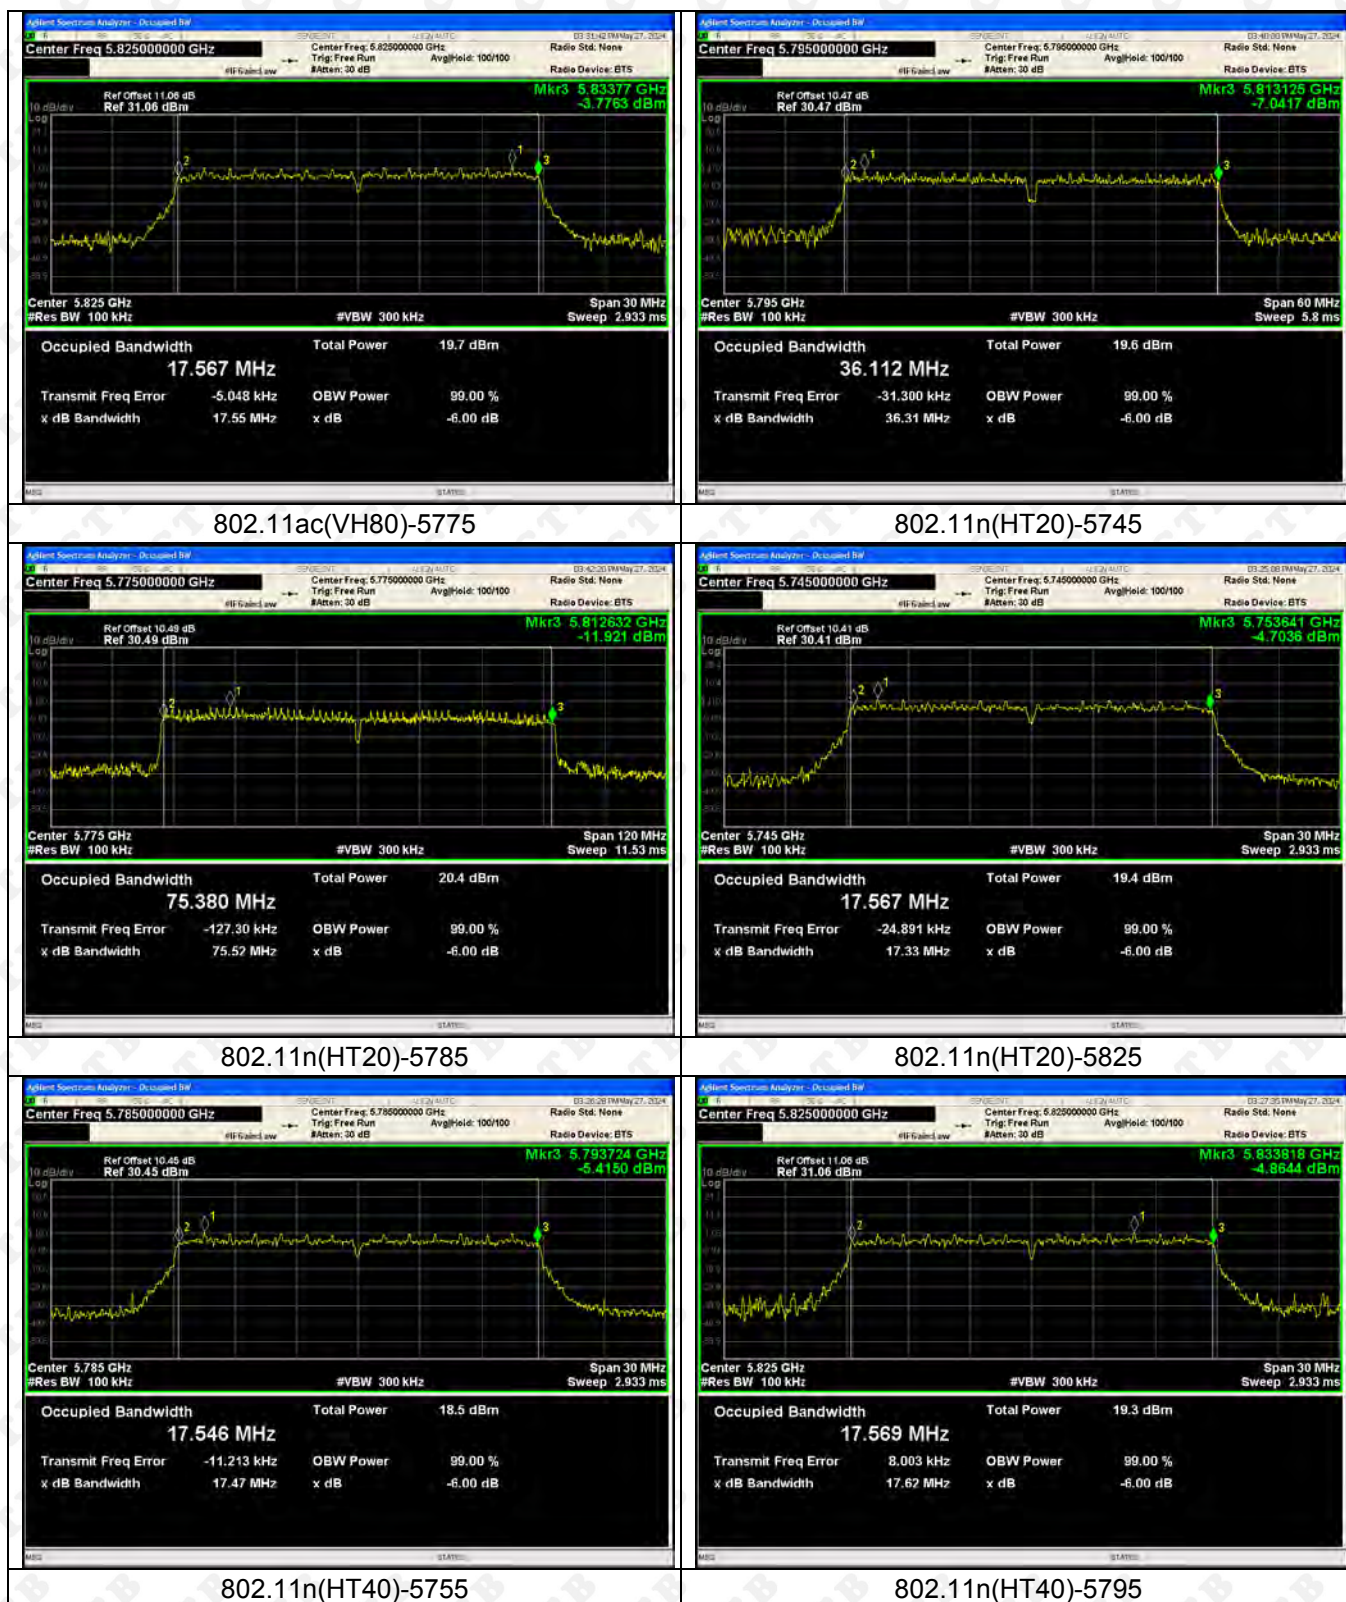

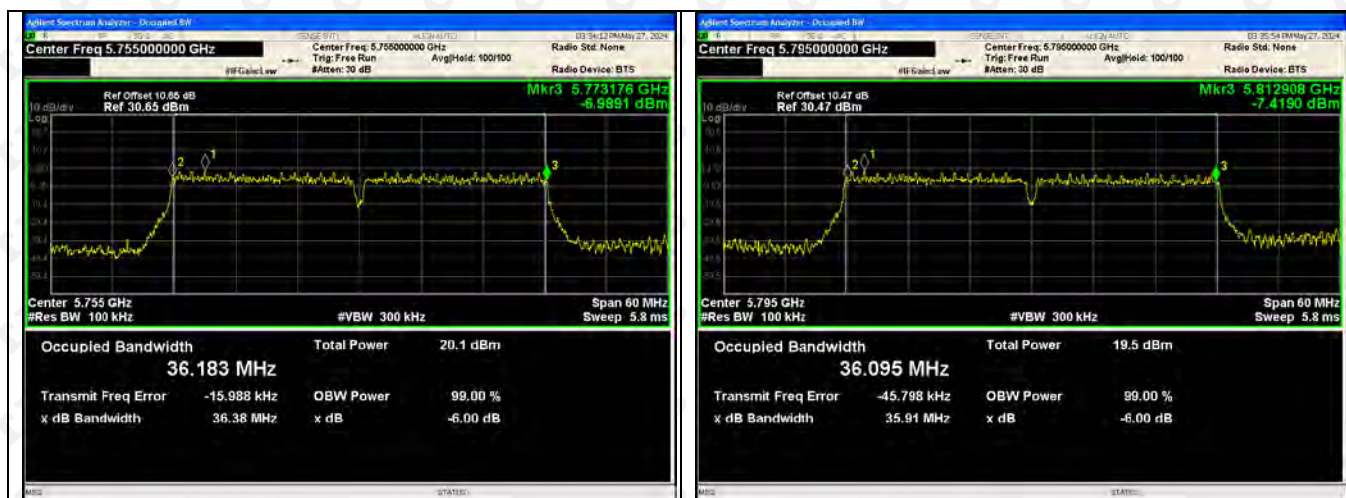

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

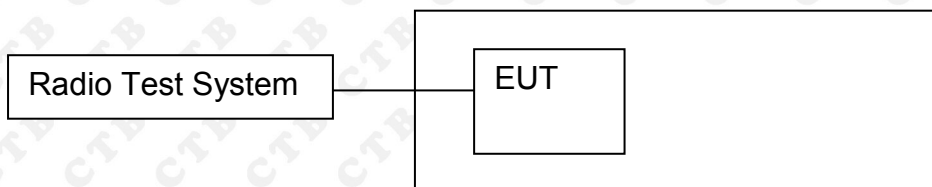

11.2 Limit

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

11.3 Test procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

For devices operating in the bands 5.15–5.25 GHz, 5.25–5.35 GHz, and 5.47–5.725 GHz, the preceding procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725–5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- Set $\text{RBW} \geq 1/T$, where T is defined in II.B.1.a).
- Set $\text{VBW} \geq 3 \text{ RBW}$.

c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz/RBW})$ to the measured result, whereas RBW ($< 500 \text{ kHz}$) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1 \text{ MHz/RBW})$ to the measured result, whereas RBW ($< 1 \text{ MHz}$) is the reduced resolution bandwidth of spectrum analyzer set during measurement.

e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the II.F.5.c) and II.F.5.d), since RBW=100 kHz is available on nearly all spectrum analyzers.

11.4 Test Result

5150-5250MHz:

Test mode	Test Channel (MHz)	PSD [dBm/MHz]	Limit [dBm/MHz]	Result
802.11a	5180	-1.228	11	Pass
	5200	-1.571	11	Pass
	5240	-1.872	11	Pass
802.11ac(VH20)	5180	2.387	11	Pass
	5200	1.762	11	Pass
	5240	1.2	11	Pass
802.11ac(VH40)	5190	-0.683	11	Pass
	5230	-1.104	11	Pass
802.11ac(VH80)	5210	-11.03	11	Pass
802.11n(HT20)	5180	-1.417	11	Pass
	5200	-1.606	11	Pass
	5240	-2.473	11	Pass
802.11n(HT40)	5190	-4.436	11	Pass
	5230	-5.615	11	Pass

5250-5350 MHz

Test mode	Test Channel (MHz)	PSD [dBm/MHz]	Limit [dBm/MHz]	Result
802.11a	5260	-1.055	11	Pass
	5280	-1.273	11	Pass
	5320	-2.961	11	Pass
802.11ac(VH20)	5260	2.194	11	Pass
	5280	1.667	11	Pass
	5320	0.525	11	Pass
802.11ac(VH40)	5270	-0.596	11	Pass
	5310	-1.982	11	Pass
802.11ac(VH80)	5260	-5.183	11	Pass
802.11n(HT20)	5280	2.36	11	Pass
	5320	1.819	11	Pass
	5270	0.57	11	Pass
802.11n(HT40)	5310	-0.537	11	Pass
	5290	-1.562	11	Pass


5500-5700MHz

Test mode	Test Channel (MHz)	PSD [dBm/MHz]	Limit [dBm/MHz]	Result
802.11a	5500	0.364	11	Pass
	5580	1.17	11	Pass
	5700	-0.793	11	Pass
802.11ac(VH20)	5500	1.377	11	Pass
	5580	1.067	11	Pass
	5700	-0.816	11	Pass
802.11ac(VH40)	5510	-3.129	11	Pass
	5670	-3.267	11	Pass
802.11ac(VH80)	5530	-9.536	11	Pass
802.11n(HT20)	5500	-0.02	11	Pass
	5580	1.183	11	Pass
	5700	-1.029	11	Pass
802.11n(HT40)	5510	-3.212	11	Pass
	5670	-2.893	11	Pass

5725-5850 MHz

Test mode	Test Channel (MHz)	PSD [dBm/500kHz]	Limit [dBm/MHz]	Result
802.11a	5745	-3.284	30	Pass
	5785	-4.497	30	Pass
	5825	-2.818	30	Pass
802.11ac(VH20)	5745	-2.864	30	Pass
	5785	-4.312	30	Pass
	5825	-3.295	30	Pass
802.11ac(VH40)	5755	-5.929	30	Pass
	5795	-6.681	30	Pass
802.11ac(VH80)	5775	-9.873	30	Pass
802.11n(HT20)	5745	-3.54	30	Pass
	5785	-4.08	30	Pass
	5825	-3.446	30	Pass
802.11n(HT40)	5755	-6.143	30	Pass
	5795	-7.537	30	Pass

Test Graph 5150-5250MHz

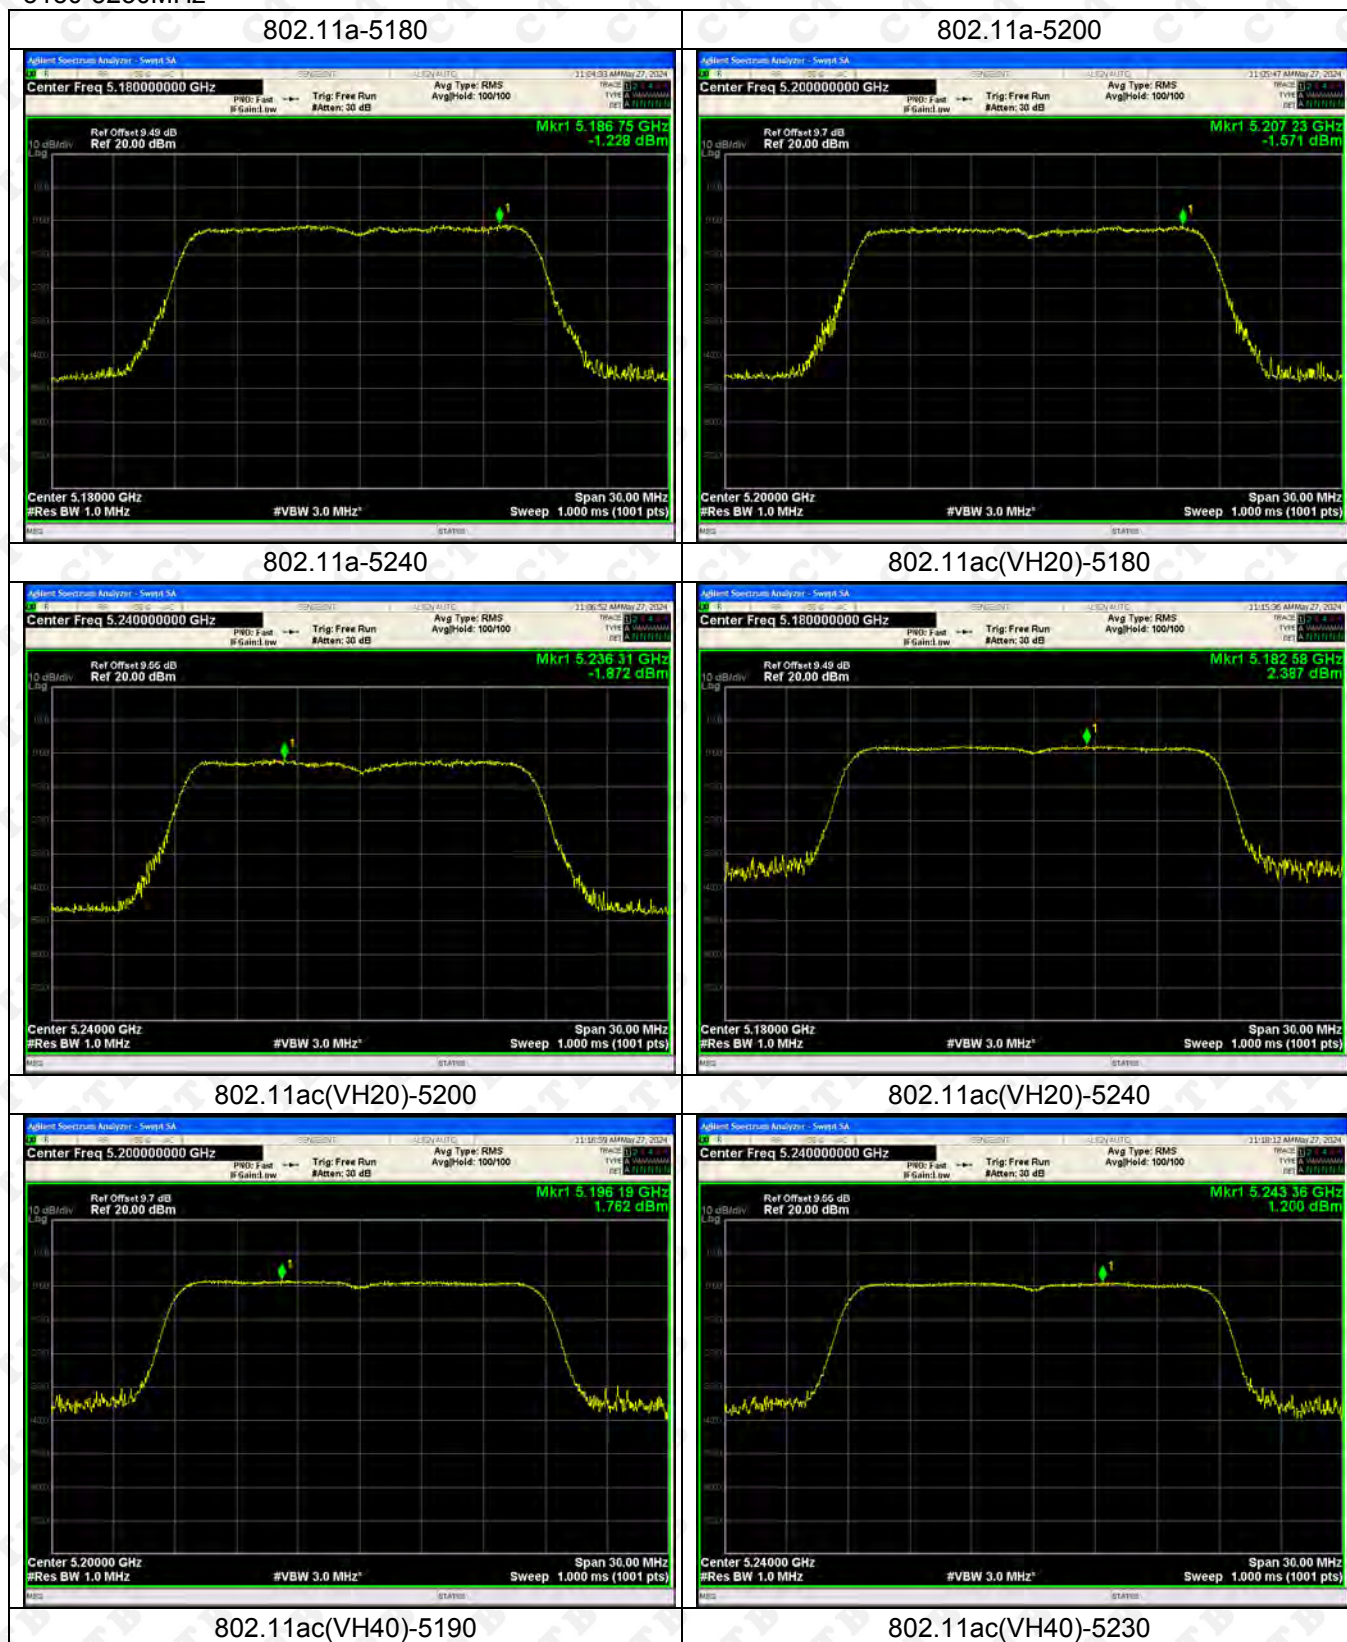




802.11ac(VH80)-5210



802.11n(HT20)-5180



802.11n(HT20)-5200

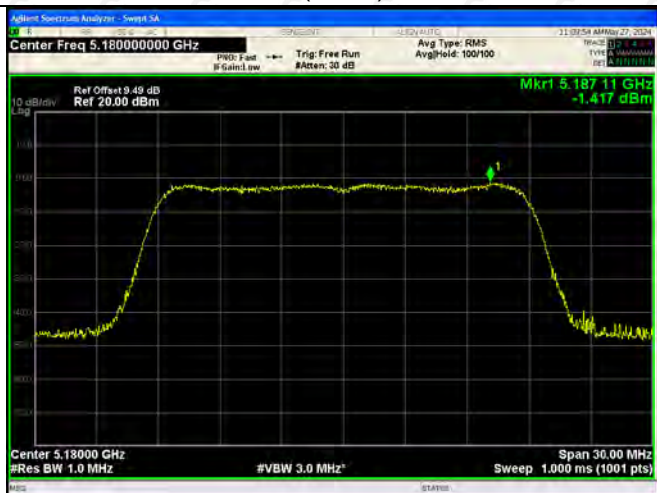


802.11n(HT20)-5240




802.11n(HT40)-5190



802.11n(HT40)-5230

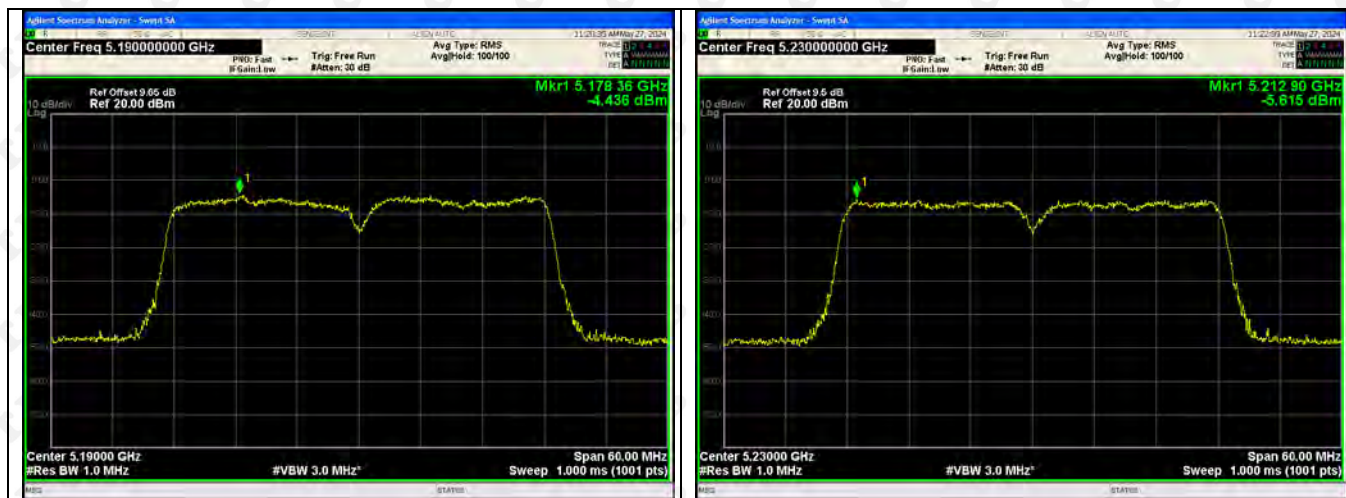

5250-5350MHz

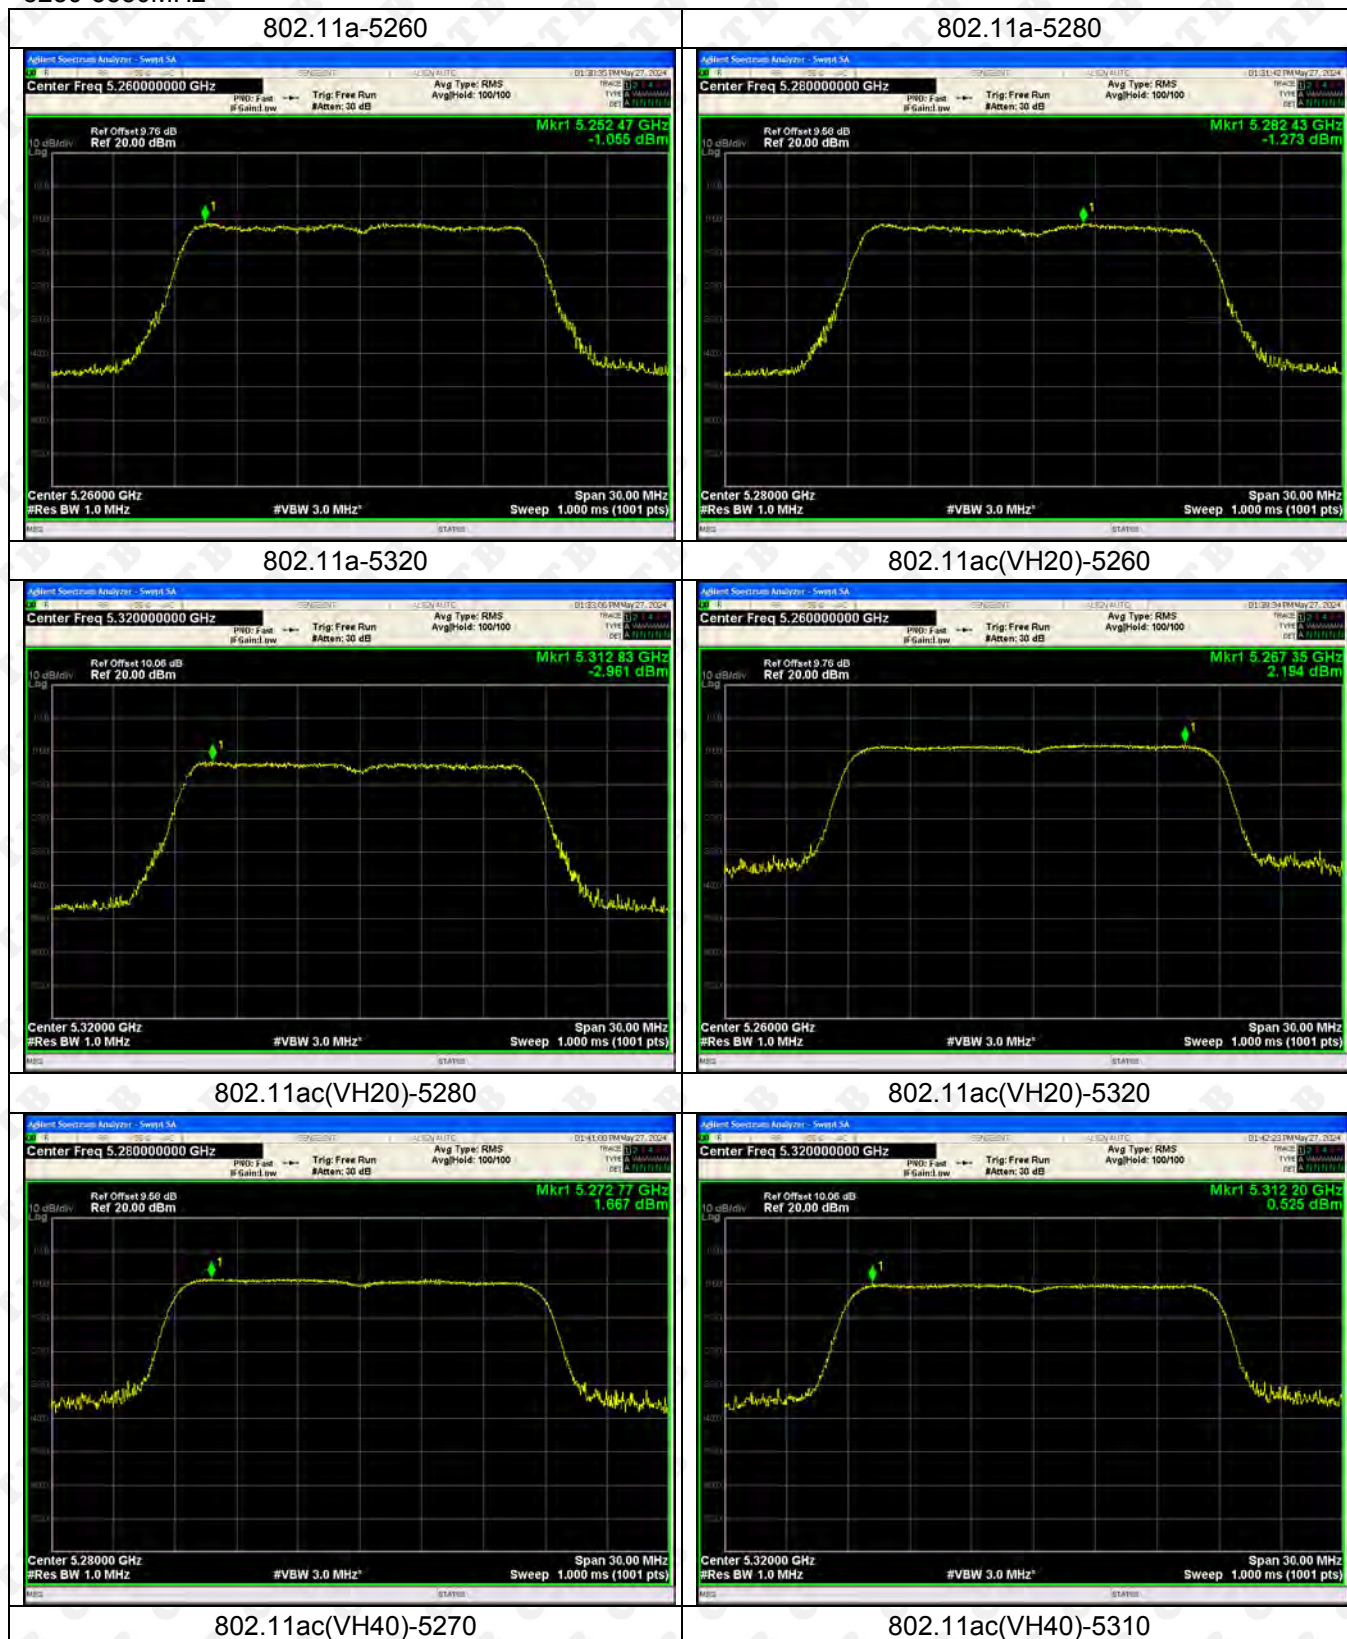



802.11ac(VH80)-5290



802.11n(HT20)-5260



802.11n(HT20)-5280




802.11n(HT20)-5320




802.11n(HT40)-5270



802.11n(HT40)-5310

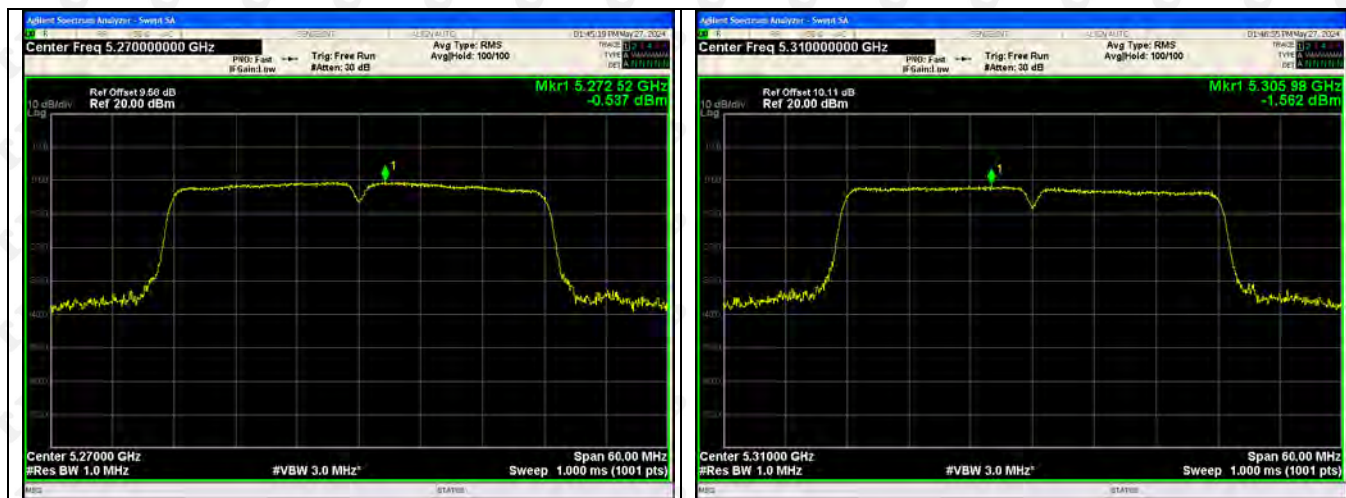

5470-5725MHz

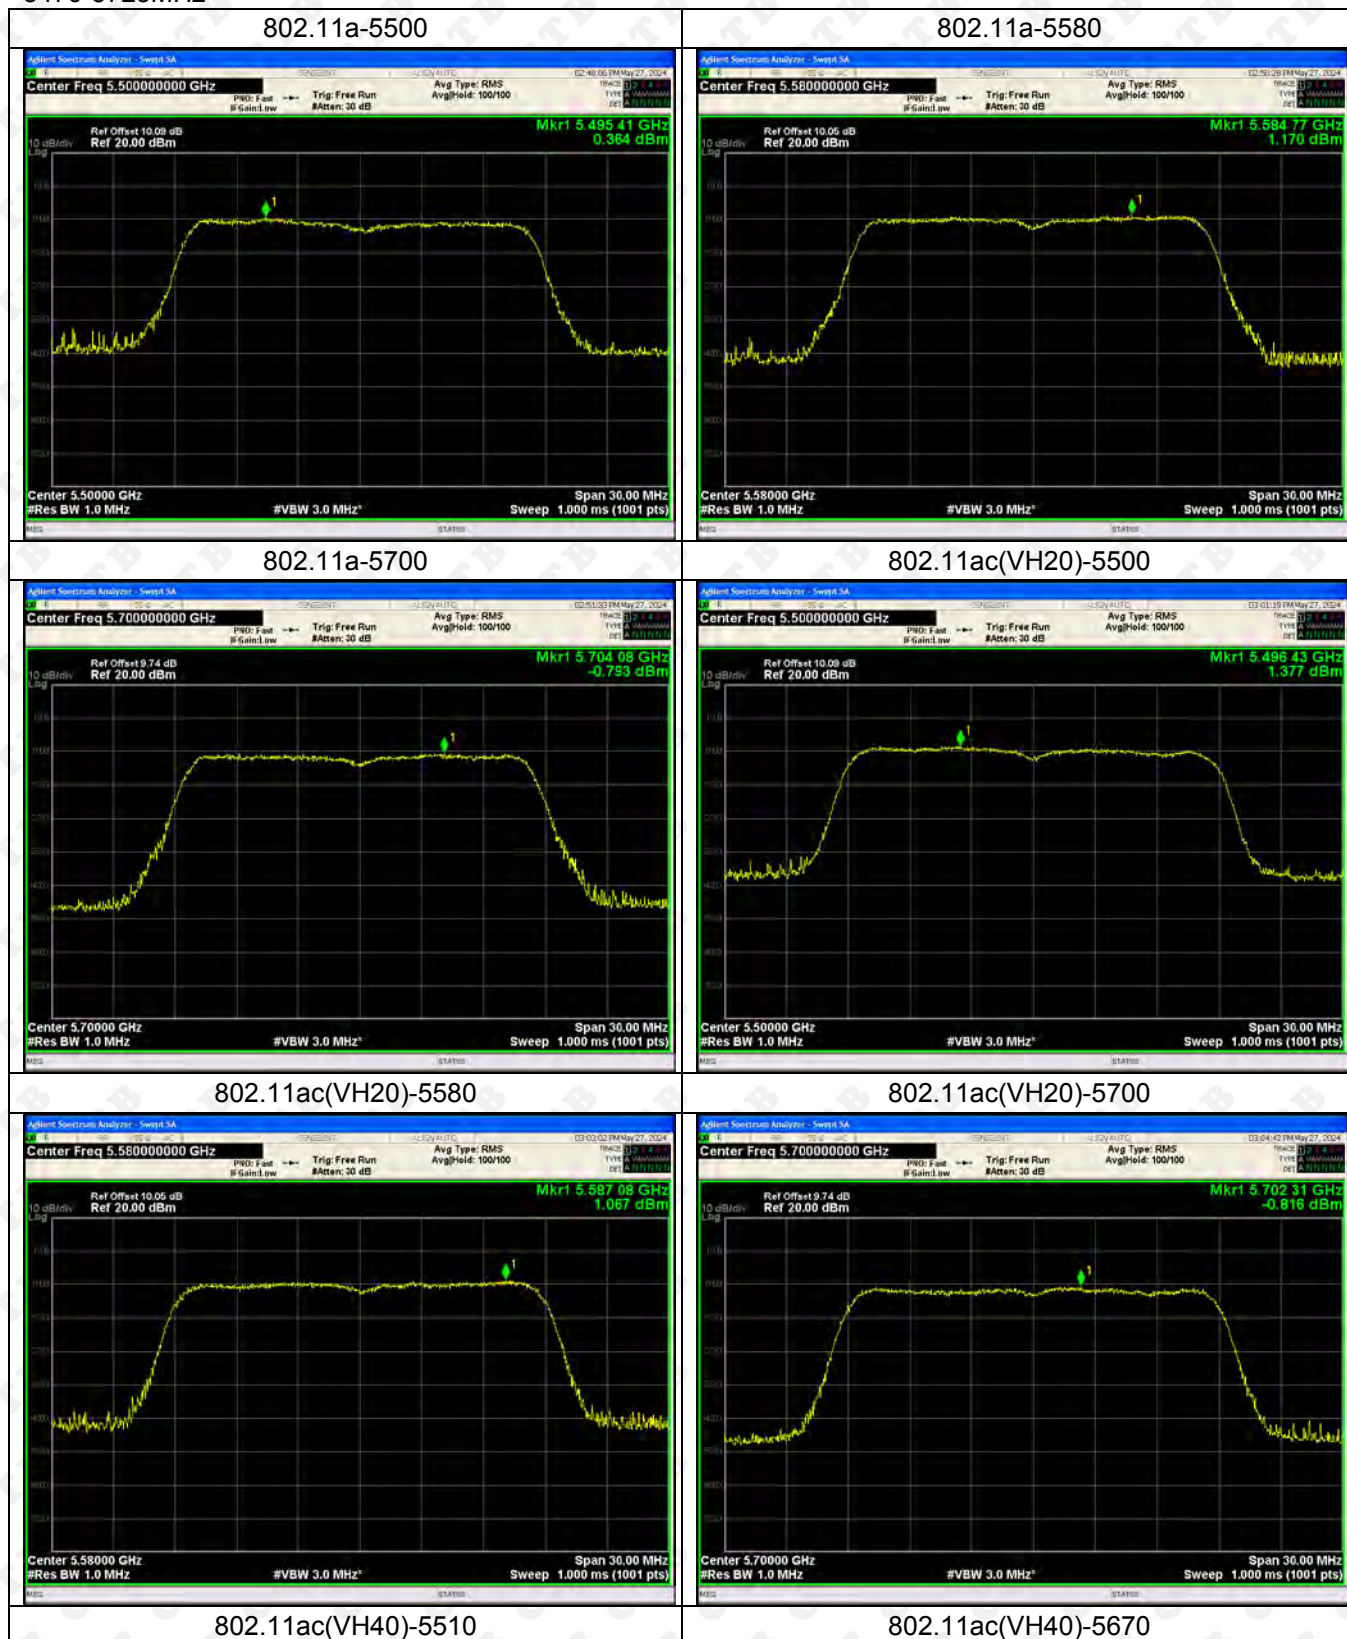



802.11ac(VH80)-5530



802.11n(HT20)-5500



802.11n(HT20)-5580




802.11n(HT20)-5700




802.11n(HT40)-5510



802.11n(HT40)-5670

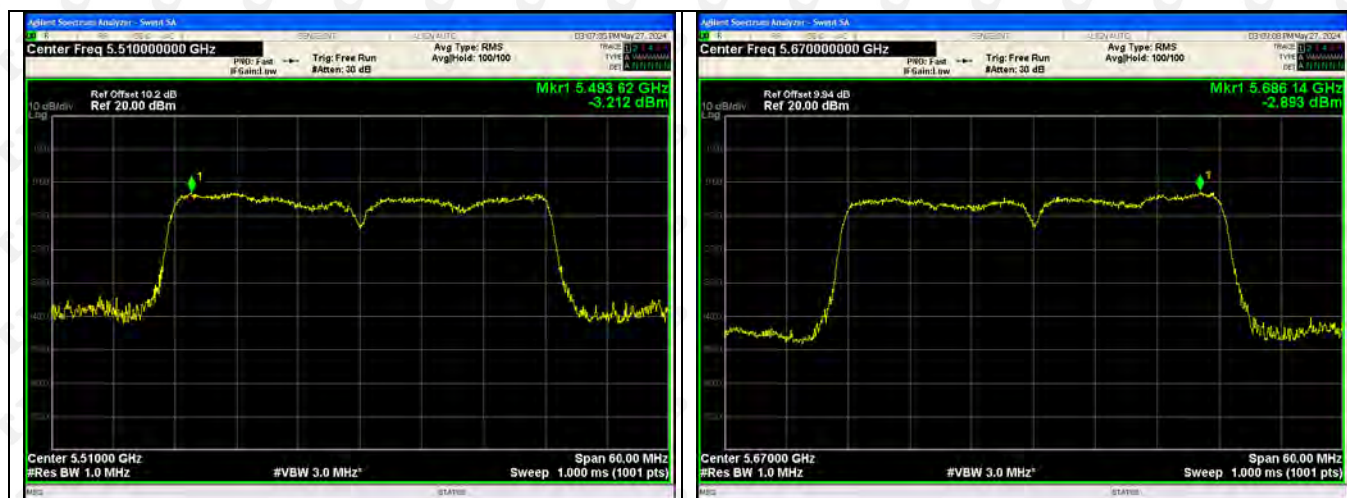

5725-5850MHz

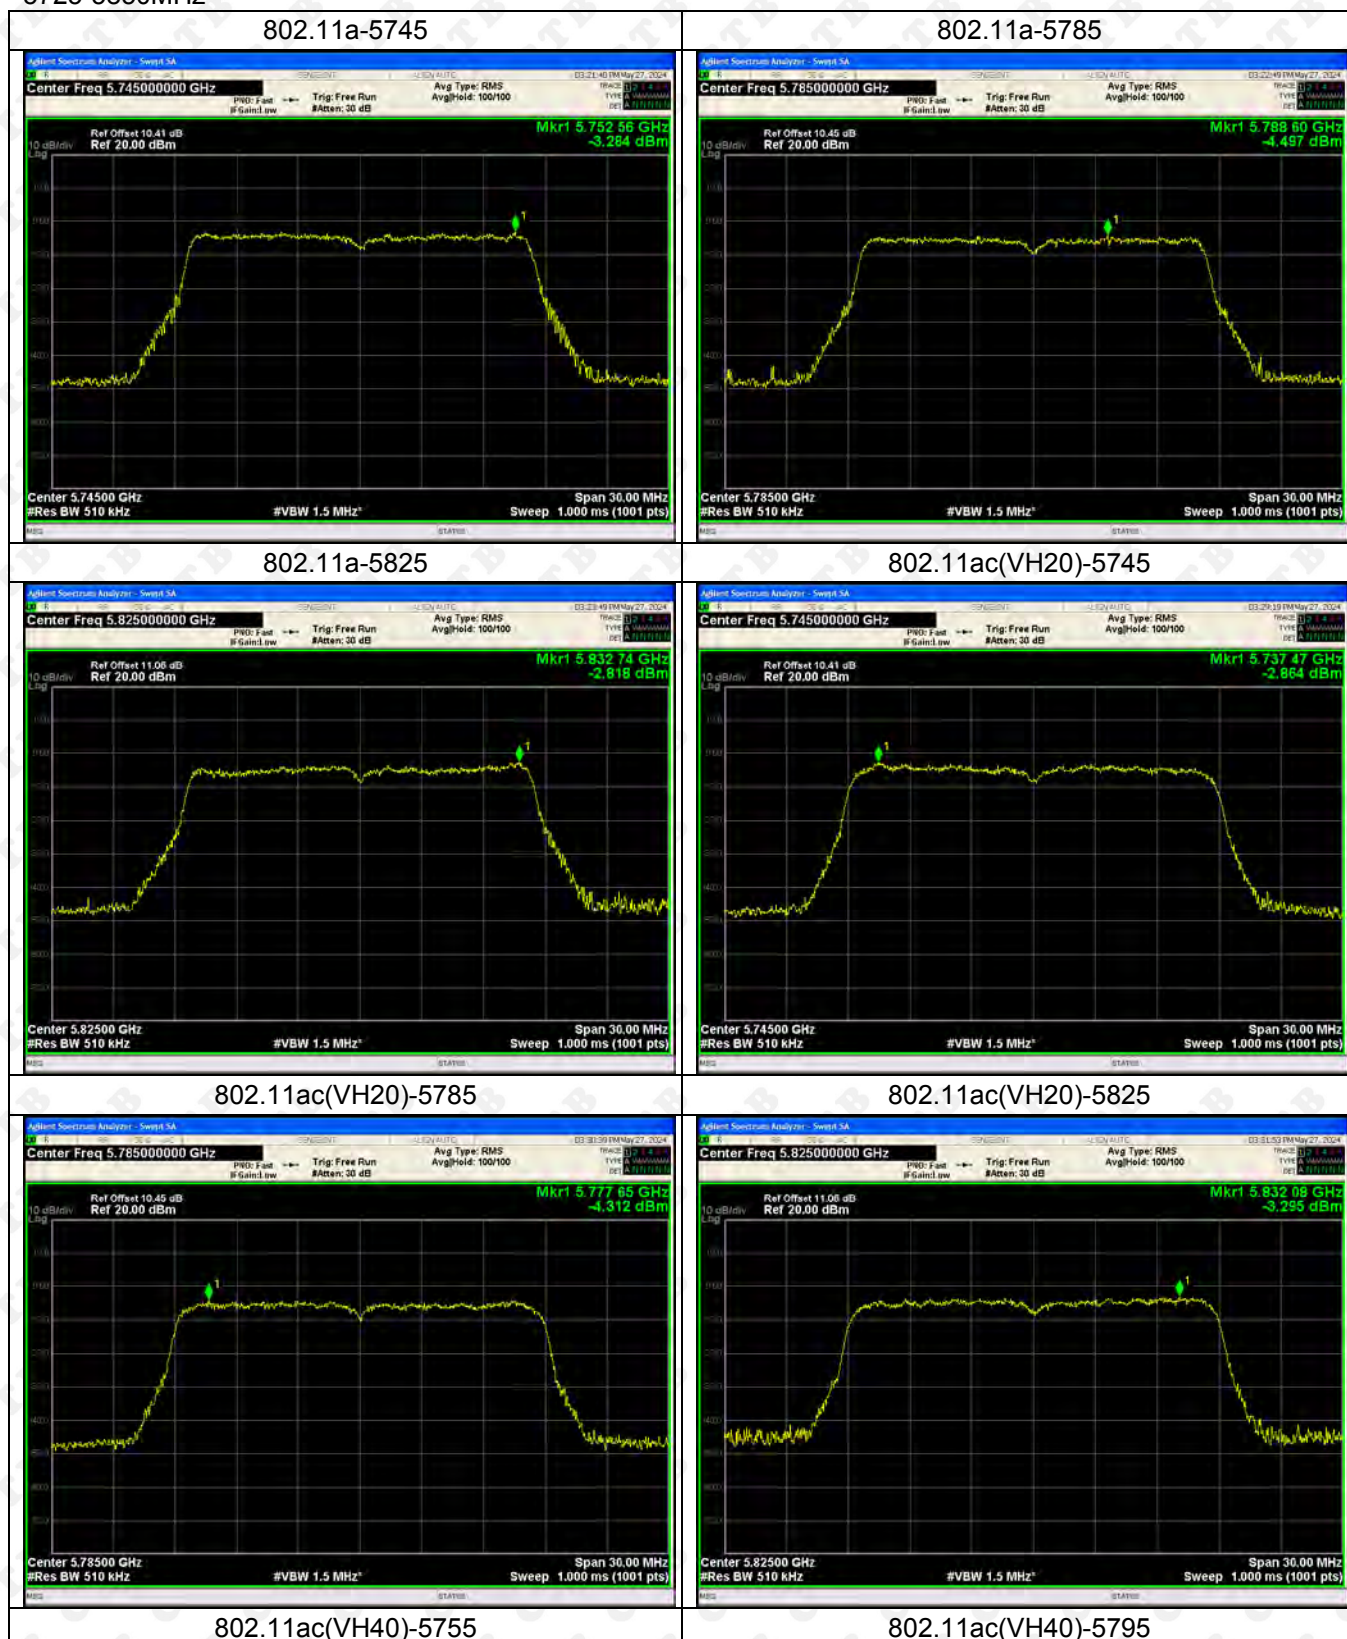



802.11ac(VH80)-5775



802.11n(HT20)-5745



802.11n(HT20)-5785




802.11n(HT20)-5825



802.11n(HT40)-5755




802.11n(HT40)-5795

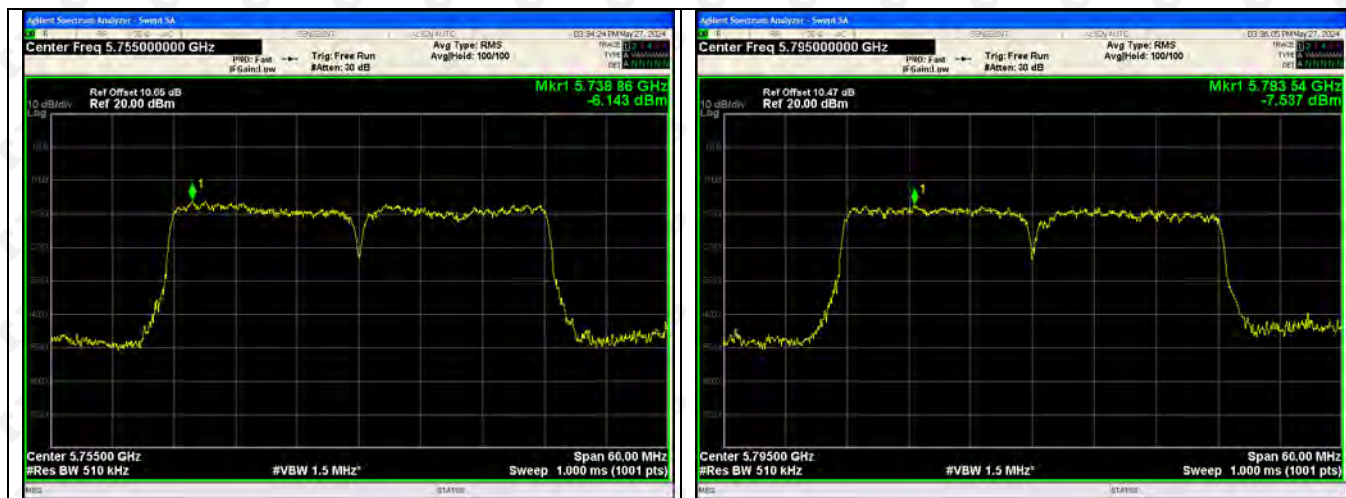

12. FREQUENCY STABILITY

12.1 Block Diagram Of Test Setup

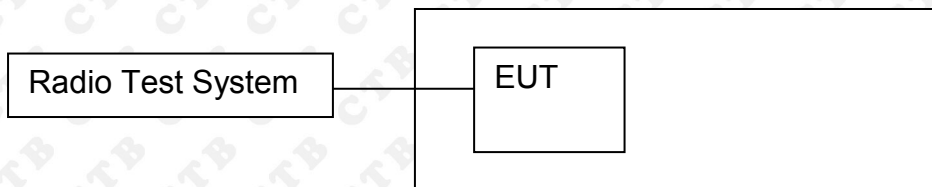

12.2 Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

12.3 Test procedure

1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
2. Set EUT as normal operation.
3. Turn the EUT on and couple its output to spectrum.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
6. Repeat step with the temperature chamber set to the lowest temperature.

12.4 Test Result

TX Frequency (5150-5250MHz)

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	4.40	5180.0758	5180	0.0758	14.6287
		V max (V)	4.84	5180.0272	5180	0.0272	5.2555
		V min (V)	3.96	5180.0373	5180	0.0373	7.2061
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5180.0157	5180	0.0157	3.0246
		T (°C)	10	5180.0156	5180	0.0156	3.0181
		T (°C)	20	5180.0451	5180	0.0451	8.7015
		T (°C)	30	5180.0408	5180	0.0408	7.8735
		T (°C)	40	5180.0163	5180	0.0163	3.1486
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	4.40	5200.0442	5200	0.0442	8.4987
		V max (V)	4.84	5200.0477	5200	0.0477	9.1720
		V min (V)	3.96	5200.0206	5200	0.0206	3.9674
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5200.0430	5200	0.0430	8.2621
		T (°C)	10	5200.0383	5200	0.0383	7.3618
		T (°C)	20	5200.0184	5200	0.0184	3.5465
		T (°C)	30	5200.0105	5200	0.0105	2.0191
		T (°C)	40	5200.0031	5200	0.0031	0.5938
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	4.40	5240.0422	5240	0.0422	8.0543
		V max (V)	4.84	5240.0133	5240	0.0133	2.5300
		V min (V)	3.96	5240.0437	5240	0.0437	8.3315
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5240.0007	5240	0.0007	0.1282
		T (°C)	10	5240.0285	5240	0.0285	5.4436
		T (°C)	20	5240.0003	5240	0.0003	0.0483
		T (°C)	30	5240.0396	5240	0.0396	7.5659
		T (°C)	40	5240.0162	5240	0.0162	3.0958
Limits				±20ppm			
Result				Complies			

TX Frequency (5250-5350MHz)

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	4.40	5260.0414	5260	0.0414	7.8646
		V max (V)	4.84	5260.0480	5260	0.0480	9.1189
		V min (V)	3.96	5260.0200	5260	0.0200	3.8017
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5260.0168	5260	0.0168	3.1856
		T (°C)	10	5260.0855	5260	0.0855	16.2554
		T (°C)	20	5260.0016	5260	0.0016	0.3133
		T (°C)	30	5260.0682	5260	0.0682	12.9616
		T (°C)	40	5260.0666	5260	0.0666	12.6580
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	4.40	5280.0269	5280	0.0269	5.0875
		V max (V)	4.84	5280.0275	5280	0.0275	5.2070
		V min (V)	3.96	5280.0732	5280	0.0732	13.8565
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5280.0199	5280	0.0199	3.7685
		T (°C)	10	5280.0672	5280	0.0672	12.7289
		T (°C)	20	5280.0794	5280	0.0794	15.0405
		T (°C)	30	5280.0257	5280	0.0257	4.8606
		T (°C)	40	5280.0291	5280	0.0291	5.5127
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	4.40	5320.0729	5320	0.0729	13.7054
		V max (V)	4.84	5320.0044	5320	0.0044	0.8293
		V min (V)	3.96	5320.0812	5320	0.0812	15.2664
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5320.0631	5320	0.0631	11.8636
		T (°C)	10	5320.0758	5320	0.0758	14.2443
		T (°C)	20	5320.0160	5320	0.0160	3.0021
		T (°C)	30	5320.0866	5320	0.0866	16.2751
		T (°C)	40	5320.0192	5320	0.0192	3.6174
Limits				±20ppm			
Result				Complies			

TX Frequency (5470-5725MHz)

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	4.40	5550.0542	5500	50.0542	9100.7587
		V max (V)	4.84	5550.0068	5500	50.0068	9092.1395
		V min (V)	3.96	5550.0103	5500	50.0103	9092.7899
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5500.0384	5500	0.0384	6.9864
		T (°C)	10	5500.0085	5500	0.0085	1.5466
		T (°C)	20	5500.0501	5500	0.0501	9.1140
		T (°C)	30	5500.0128	5500	0.0128	2.3199
		T (°C)	40	5500.0579	5500	0.0579	10.5224
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5580MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	4.40	5580.0489	5580	0.0489	8.7590
		V max (V)	4.84	5580.0125	5580	0.0125	2.2444
		V min (V)	3.96	5580.0231	5580	0.0231	4.1477
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5580MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5580.0399	5580	0.0399	7.1573
		T (°C)	10	5580.0357	5580	0.0357	6.3971
		T (°C)	20	5580.0451	5580	0.0451	8.0824
		T (°C)	30	5580.0929	5580	0.0929	16.6484
		T (°C)	40	5580.0144	5580	0.0144	2.5793
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	4.40	5700.0811	5700	0.0811	14.2343
		V max (V)	4.84	5700.0416	5700	0.0416	7.3001
		V min (V)	3.96	5700.0544	5700	0.0544	9.5377
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5700.0777	5700	0.0777	13.6368
		T (°C)	10	5700.0719	5700	0.0719	12.6171
		T (°C)	20	5700.0739	5700	0.0739	12.9586
		T (°C)	30	5700.0863	5700	0.0863	15.1404
		T (°C)	40	5700.0445	5700	0.0445	7.8049
Limits				±20ppm			
Result				Complies			

TX Frequency (5725-5850MHz)

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	4.40	5745.0804	5745	0.0804	13.9890
		V max (V)	4.84	5745.0887	5745	0.0887	15.4338
		V min (V)	3.96	5745.0804	5745	0.0804	13.9890
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5745.0197	5745	0.0197	3.4299
		T (°C)	10	5745.0594	5745	0.0594	10.3458
		T (°C)	20	5745.0548	5745	0.0548	9.5437
		T (°C)	30	5745.0429	5745	0.0429	7.4725
		T (°C)	40	5745.0132	5745	0.0132	2.3036
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	4.40	5785.0641	5785	0.0641	11.0888
		V max (V)	4.84	5785.0024	5785	0.0024	0.4153
		V min (V)	3.96	5785.0165	5785	0.0165	2.8607
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5785.0610	5785	0.0610	10.5472
		T (°C)	10	5785.0860	5785	0.0860	14.8633
		T (°C)	20	5785.0116	5785	0.0116	1.9980
		T (°C)	30	5785.0855	5785	0.0855	14.7778
		T (°C)	40	5785.0582	5785	0.0582	10.0584
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	4.40	5825.0656	5825	0.0656	11.2634
		V max (V)	4.84	5825.0892	5825	0.0892	15.3187
		V min (V)	3.96	5825.0045	5825	0.0045	0.7703
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5825.0161	5825	0.0161	2.7608
		T (°C)	10	5825.0442	5825	0.0442	7.5835
		T (°C)	20	5825.0396	5825	0.0396	6.8035
		T (°C)	30	5825.0027	5825	0.0027	0.4594
		T (°C)	40	5825.0461	5825	0.0461	7.9139
Limits				±20ppm			
Result				Complies			

13. OPERATION IN THE ABSENCE OF INFORMATION TO THE TRANSMIT

13.1 Requirement

15.407(c) requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signal ling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

13.2 Test Results

Operation in the absence of information to the transmit:

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of WLAN message transmitting from remote device and verify whether it shall reconnect. (manufacturer declare)

14. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


EUT Antenna:

The antenna is FPC Antenna and no consideration of replacement. The best case gain of the antenna is WiFi (5.2G) : 0.68dBi, WiFi (5.3G) : 1.75dBi, WiFi (5.6G) : 1.53dBi, WiFi (5.8G) : 2.84dBi.


15. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

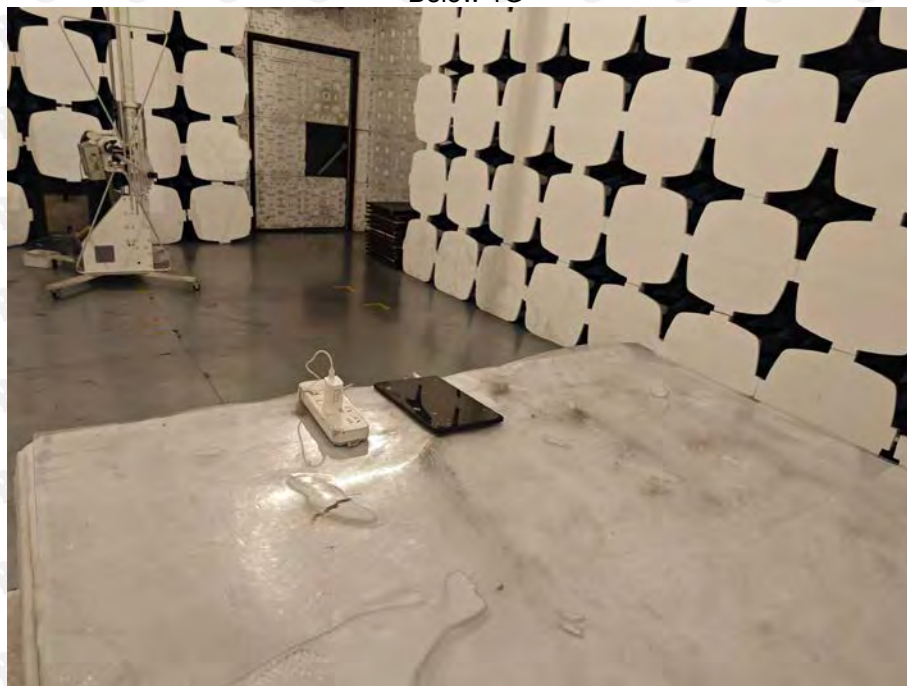

Above 1G

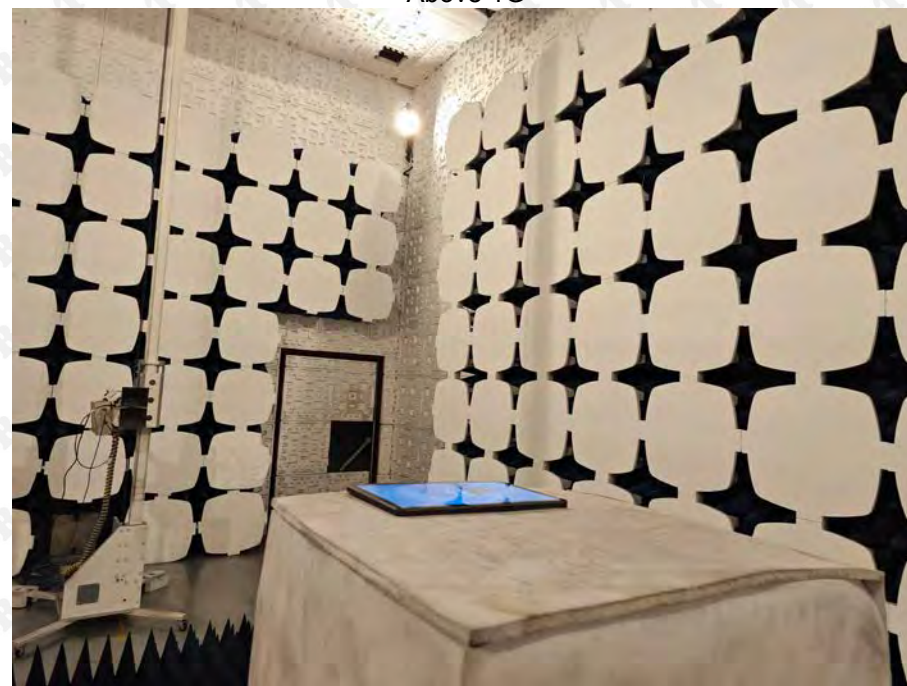

Conducted Emission



***** END OF REPORT *****