

RF Exposure Evaluation

FCC ID: 2BCNR-MOBI-8C-010

1. Client Information

| | | |
|---------------------|---|--|
| Applicant | : | SHENZHEN EESTANDARD TECHNOLOGY CO., LTD |
| Address | : | 601, Building 1, Yibaolai Industrial City, Qiaotou Community, Fuhai Street, Bao 'an District, Shenzhen City, China |
| Manufacturer | : | SHENZHEN EESTANDARD TECHNOLOGY CO., LTD |
| Address | : | 601, Building 1, Yibaolai Industrial City, Qiaotou Community, Fuhai Street, Bao 'an District, Shenzhen City, China |

2. General Description of EUT

| | | | |
|-------------------------------|----------------------|--|--|
| EUT Name | : | Mobi Scale | |
| Model(s) | : | MOBI-8C-010, MOBI-XX-XXX | |
| Sample ID | : | 202212-0155-2-1# & 202212-0155-2-2# | |
| Model Difference | : | All PCB boards and circuit diagrams are the same, the only difference is that model names. | |
| Product Description | Operation Frequency: | 110KHz-205KHz | |
| | Modulation Type: | ASK | |
| | Antenna: | Coil Antenna | |
| Power Supply | : | DC 7.2V by 3000mAh Rechargeable Li-ion battery | |
| Software Version | : | V0.9 | |
| Hardware Version | : | V1.1 | |
| Connecting I/O Port(S) | : | Please refer to the User's Manual | |
| Accessories | : | HUAWEI Mate 40 Pro | |

Note: More test information about the EUT please refer the RF Test Report.

RF Exposure Considerations

1. Measuring Standard

KDB 680106 D01 RF Exposure Wireless Charging App v03.

2. Requirements

According to the item 5.2 of KDB 680106 D01v03:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation:

(1) Power transfer frequency is less than 1 MHz.

(2) Output power from each primary coil is less than or equal to 15 watts.

(3) The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.

(4) Client device is placed directly in contact with the transmitter.

(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).


(6) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.

Limits For Maximum Permissible Exposure (MPE)

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|--|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| (A) Limits for Occupational/Controlled Exposures | | | | |
| 0.3-3.0 | 614 | 1.63 | *(100) | 6 |
| 3.0-30 | 1842/f | 4.89/f | *(900/f ²) | 6 |
| 30-300 | 61.4 | 0.163 | 1.0 | 6 |
| 300-1500 | / | / | f/300 | 6 |
| 1500-100,000 | / | / | 5 | 6 |
| (B) Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3-1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34-30 | 824/f | 2.19/f | *(180/f ²) | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | / | / | f/1500 | 30 |
| 1500-100,000 | / | / | 1.0 | 30 |

F=frequency in MHz
*=Plane-wave equivalent power density
RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

3. Test Setup

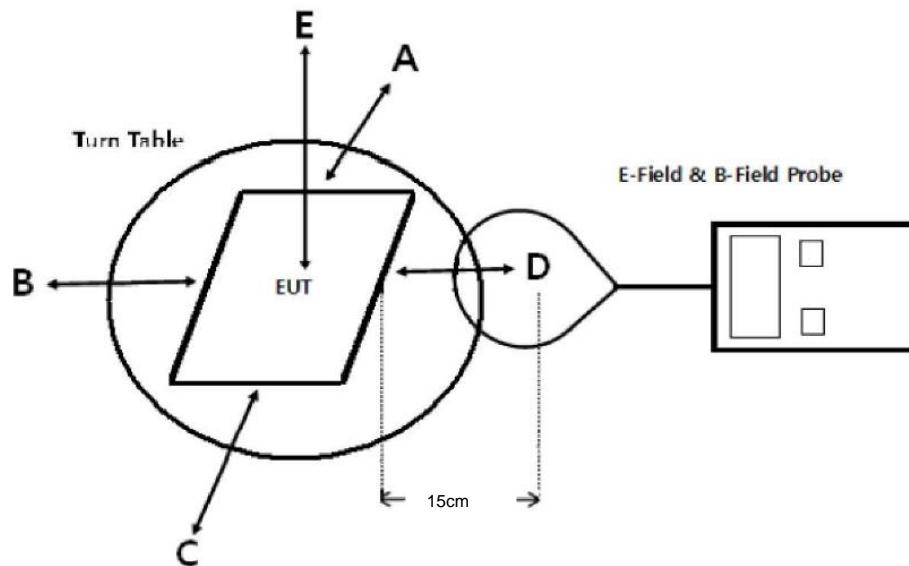

Note: The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface.

4. Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 v03.

Remark:

The EUT's test position A, B, C, D and E is valid for the E and H field measurements.

5. Test Equipment List

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Due Date |
|----------------------|--------------|-----------|------------|---------------|---------------|
| Magnetic field meter | NARDA | ELT-400 | EE030 | Aug. 30, 2023 | Aug. 29, 2024 |
| Magnetic field meter | NARDA | ELT-400 | EE030 | Aug. 29, 2022 | Aug. 30, 2023 |
| Magnetic field probe | NARDA | EP 601 | 811ZX01000 | Jun. 03, 2023 | Jun. 02, 2024 |

6. Deviation From Test Standard

No deviation

7. Mode of operation during the test / Test peripherals used

| Test Modes: | | |
|-------------|---|--------|
| TM1 | AC/DC Adapter + EUT + Mobile Phone (Battery Status: <1%) | record |
| TM2 | AC/DC Adapter + EUT + Mobile Phone (Battery Status: <50%) | record |
| TM3 | AC/DC Adapter + EUT + Mobile Phone (Battery Status: <99%) | record |

8. Test Result

E-Filed Strength at 15 cm from the edges surrounding the EUT and 15 cm above the top surface

| Charging Battery Level | Frequency Range (MHz) | Measured E-Field Strength Values (V/m) | | | | | E-Field Strength 50% Limits (V/m) | E-Field Strength Limits (V/m) | | |
|------------------------------|-----------------------------|--|--------|--------|--------|--------|--|--|--|--|
| | | Test Position | | | | | | | | |
| | | A | B | C | D | E | | | | |
| 99% | 116.5 | 42.611 | 43.348 | 61.451 | 43.732 | 47.131 | 307.0 | 614.0 | | |
| 50% | 116.5 | 46.734 | 42.972 | 49.374 | 47.123 | 42.972 | 307.0 | 614.0 | | |
| 1% | 116.5 | 61.076 | 49.384 | 42.962 | 34.671 | 41.843 | 307.0 | 614.0 | | |

Note: V/m= A/m *377


H-Filed Strength at 15 cm from the edges surrounding the EUT and 15 cm above the top surface

| Charging Battery Level | unit | Frequenc y Range (MHz) | Measured H-Field Strength Values (A/m) | | | | | H-Field Strength 50% Limits (A/m) | H-Field Strength Limits (A/m) | | |
|------------------------------|------|------------------------------|--|--------|--------|--------|--------|--|--|--|--|
| | | | Test Position | | | | | | | | |
| | | | A | B | C | D | E | | | | |
| 99% | uT | 116.5 | 0.1414 | 0.1432 | 0.2031 | 0.142 | 0.1562 | -- | -- | | |
| 99% | A/m | 116.5 | 0.112 | 0.111 | 0.164 | 0.113 | 0.127 | 0.815 | 1.63 | | |
| 50% | uT | 116.5 | 0.155 | 0.1423 | 0.1631 | 0.1556 | 0.1424 | -- | -- | | |
| 50% | A/m | 116.5 | 0.126 | 0.112 | 0.133 | 0.126 | 0.114 | 0.815 | 1.63 | | |
| 1% | uT | 116.5 | 0.2028 | 0.1635 | 0.1425 | 0.1151 | 0.1383 | -- | -- | | |
| 1% | A/m | 116.5 | 0.167 | 0.132 | 0.115 | 0.095 | 0.112 | 0.815 | 1.63 | | |

H-Field Strength at 20cm from the top surface of the EUT

| Charging Battery Level | Unit | Frequency Range (MHz) | Measured H-Field Strength Values (A/m) | | FCC H-Field Strength 50% Limits (A/m) | FCC H-Field Strength Limits (A/m) |
|------------------------------|------|-----------------------------|---|--|---|---|
| | | | Test Position E | | | |
| 99% | uT | 116.5 | 0.1336 | | -- | -- |
| 99% | A/m | 116.5 | 0.103 | | 0.815 | 1.63 |
| 50% | uT | 116.5 | 0.1227 | | -- | -- |
| 50% | A/m | 116.5 | 0.096 | | 0.815 | 1.63 |
| 1% | uT | 116.5 | 0.1375 | | -- | -- |
| 1% | A/m | 116.5 | 0.15 | | 0.815 | 1.63 |

Note: A/m=uT/1.25

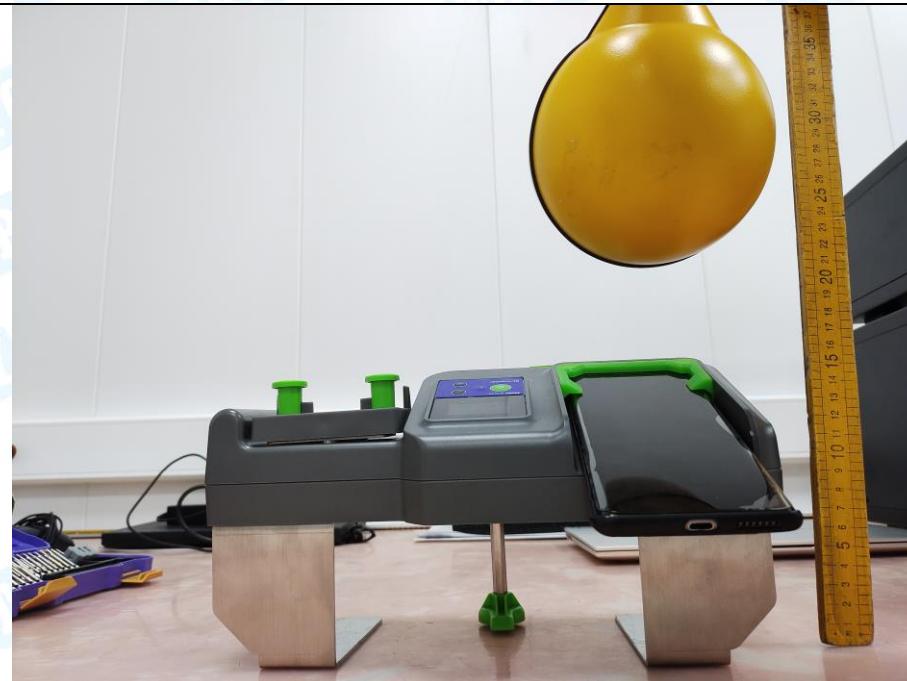9. Test Set-up Photo**Test Set-up Photo**

-----END OF REPORT-----