

Date : 2024-12-09 Page 1 of 40 No. : HMD24100009

**Applicant**: Glow Dreaming Holdings Pty Ltd

Suite 113, 377 New South Head Road, Double Bay, NSW, Australia,

2028

Supplier / Manufacturer: Dongguan Q&S Electronic Manufacturing Company Limited

No.2 North 3rd Street, Xiangmang West Road, Qingxi Town,

Dongguan City, Guangdong Province, China

**Description of Sample(s):** Submitted sample(s) said to be

Product: Glow Sleep Easy Brand Name: Glow Dreaming

Model No.: GD04

FCC ID: 2BCQKGD04

**Date Samples Received** : 2024-10-09

**Date Tested** : 2024-10-09 to 2024-10-16

**Investigation Requested :** Perform ElectroMagnetic Interference measurement in accordance

with FCC 47CFR [Codes of Federal Regulations] Part 15: 2017 and

ANSI C63.10:2013 for FCC Certification.

**Conclusions** : The submitted product COMPLIED with the requirements of Federal

Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described

above and on Section 2.2 in this Test Report.

**Remarks**: Bluetooth DTS (GFSK)

Test by Susu





Date: 2024-12-09 Page 2 of 40 : HMD24100009 No. **CONTENT:** Cover Page 1 of 40 Content Page 2 of 40 <u>1.0</u> **General Details** 1.1 **Test Laboratory** Page 3 of 40 1.2 Equipment Under Test [EUT] Page 3 of 40 Description of EUT operation 1.3 Date of Order Page 3 of 40 Page 3 of 40 1.4 Submitted Sample(s) Page 3 of 40 1.5 **Test Duration** Country of Origin 1.6 Page 3 of 40 Page 4 of 40 1.7 RF Module Details Antenna Details 1.8 Page 4 of 40 1.9 Channel List Page 4 of 40 2.0 **Technical Details** 2.1 Investigations Requested Page 5 of 40 2.2 Test Standards and Results Summary Page 6 of 40 <u>3.0</u> **Test Results** 3.1 Emission Page 7-35 of 40 Appendix A List of Measurement Equipment Page 36 of 40 Appendix B Photograph(s) of Product Page 37-40 of 40



Date : 2024-12-09 Page 3 of 40

No. : HMD24100009

### 1.0 General Details

### 1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd.

**EMC Laboratory** 

10 Dai Wang Street, Taipo Industrial Estate, New Territories, Hong Kong

Telephone: 852 2666 1888 Fax: 852 2664 4353

### 1.2 Equipment Under Test [EUT]

### **Description of Sample(s)**

Product: Glow Sleep Easy

Manufacturer: Dongguan O&S Electronic Manufacturing Company Limited

No.2 North 3rd Street, Xiangmang West Road, Qingxi Town,

Dongguan City, Guangdong Province, China

Brand Name: Glow Dreaming

Model Number: GD04

Rating: 24Vd.c. by Adaptor

The AC/DC adaptor was provided by the applicant with following details:

Brand name: N/A, Model no.: MP12-240065-AX, Input: 100-240Va.c. 50/60Hz 0.4A Max,

Output: 24Vd.c. 0.65A 15.6W

#### 1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Glow Sleep Easy. The transmission signal is digital modulated with channel frequency range 2402-2480MHz. The R.F. signal was modulated by IC; the type of modulation used was digital transmission Modulation.

#### 1.3 Date of Order

2024-08-21

#### 1.4 Submitted Sample(s):

1 Sample

#### 1.5 Test Duration

2024-10-09 to 2024-10-16

#### 1.6 Country of Origin

China



Date : 2024-12-09 Page 4 of 40

No. : HMD24100009

#### 1.7 RF Module Details

Module Model Number: Nrf52810 Module FCC ID: N/A

Module Transmission Type: Bluetooth 5.0 BLE

Modulation: GFSK Data Rates: 1Mbps

Frequency Range: 2400-2483.5MHz Carrier Frequencies: 2402MHz – 2480MHz

Module Specification (specification provided by manufacturer)

#### 1.8 Antenna Details

Antenna Type: Integrated antenna

Antenna Gain: 0.0dBi

#### 1.9 Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480




Date : 2024-12-09 Page 5 of 40 No. : HMD24100009

#### 2.0 Technical Details

#### 2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2017 Regulations and ANSI C63.10:2013 for FCC Certification. The device was realized by test software, and there is no power set.

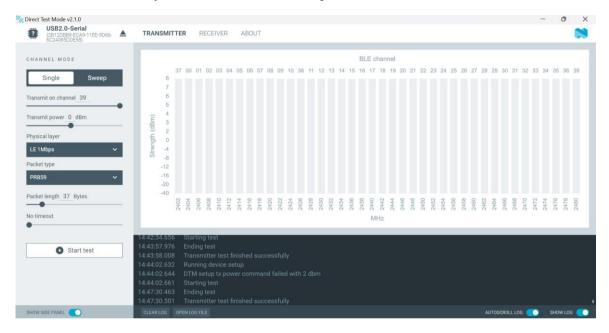



Date : 2024-12-09 Page 6 of 40 No. : HMD24100009

## 2.2 Test Standards and Results Summary Tables

	EMISSION Results Summary											
Test Condition Test Requirement Test Method Class / Test Resu												
			Severity	Pass	Failed	N/A						
Maximum Peak Output Power	FCC 47CFR 15.247(b)(3)	ANSI C63.10: 2013	N/A	$\boxtimes$								
Radiated Spurious	FCC 47CFR 15.209	ANSI C63.10: 2013	N/A	$\boxtimes$								
Emissions	FCC 47CFR 15.205											
AC Mains Conducted Emissions	FCC 47CFR 15.207	ANSI C63.10: 2013	N/A	$\boxtimes$								
Conducted Spurious Emissions	FCC 47CFR 15.247(d)	ANSI C63.10: 2013	N/A	$\boxtimes$								
Power Spectral Density	FCC 47CFR 15.247(e)	ANSI C63.10: 2013	N/A	$\boxtimes$								
6dB Bandwidth	FCC 47CFR 15.247(a)(2)	ANSI C63.10: 2013	N/A	$\boxtimes$								
Band Edge Emissions	FCC 47CFR 15.247(d)	ANSI C63.10: 2013	N/A	$\boxtimes$								
(Radiated)												
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	$\boxtimes$								

Note: N/A - Not Applicable



Date : 2024-12-09 Page 7 of 40

No. : HMD24100009

3.0 Test Results

3.1 Emission

#### 3.1.1 Maximum Peak Output Power

Test Requirement: FCC 47CFR 15.247(b)(3)
Test Method: ANSI C63.10: 2013

Test Date: 2024-10-09

Mode of Operation: Bluetooth DTS Tx mode

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

#### **Test Method:**

The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in Watt.

#### **Spectrum Analyzer Setting:**

RBW = 2 MHz,

VBW= 6 MHz,


Sweep = Auto,

Span = 6 MHz

Detector = Peak,

Trace = Max. hold

#### **Test Setup:**

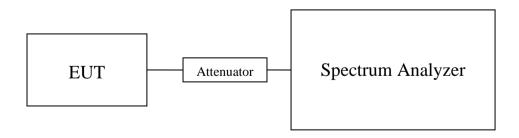

Note: a temporary antenna connector was soldered to the RF output.



Date : 2024-12-09 Page 8 of 40

No. : HMD24100009

### Limits for Peak Output Power of Fundamental & Harmonics Emissions [FCC 47CFR 15.247]:

For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt (30dBm)

Results of BT DTS Tx Mode (2402MHz to 2480MHz) : Pass (TX Unit) (GFSK 1Mbps)											
Channel	Channel Frequency(MHz) Conducted Antenna Gain(dBi) E.I.R.P(dBm) E.I.R.P (Watt)										
0	2402	-0.778	0	-0.778	0.000836						
19	2440	-0.874	0	-0.874	0.000818						
39	2480	-1.031	0	-1.031	0.000789						

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB

1GHz to 26GHz 1.7dB




Date : 2024-12-09 Page 9 of 40

No. : HMD24100009

Test plot of Maximum Peak Conducted Output Power:

Bluetooth Communication mode (BT DTS-GFSK 1Mbps, 2402MHz)

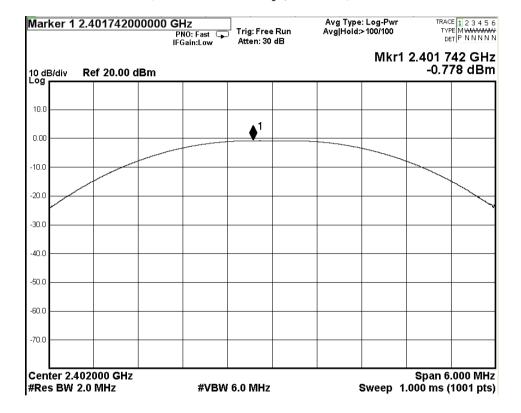




Date : 2024-12-09 Page 10 of 40

No. : HMD24100009

### Bluetooth Communication mode (BT DTS-GFSK 1Mbps, 2440MHz)

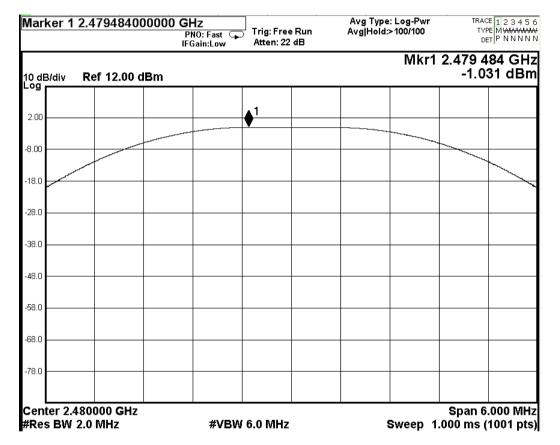




Date : 2024-12-09 Page 11 of 40

No. : HMD24100009

### Bluetooth Communication mode (BT DTS-GFSK 1Mbps, 2480MHz)

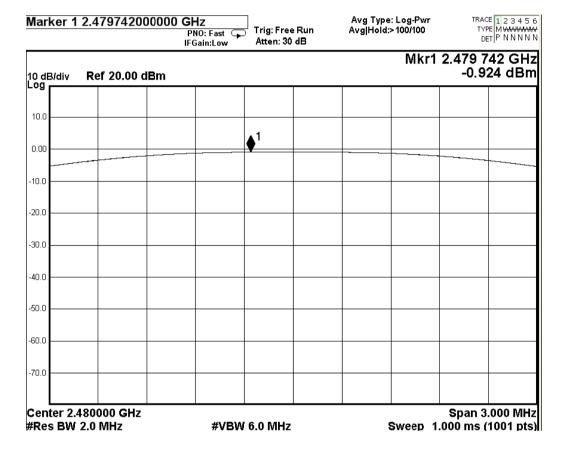



Date : 2024-12-09 Page 12 of 40 No. : HMD24100009

#### 3.1.2 Radiated Emissions

Test Requirement: FCC 47CFR 15.209
Test Method: ANSI C63.10:2013
Test Date: 2024-10-10 to 2024-10-14

Mode of Operation: Tx mode / Bluetooth Communication mode (GFSK)

Ambient Temperature: 25°C Relative Humidity: 50% Atmospheric Pressure: 101 kPa

#### **Test Method:**

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semi-anechoic Chamber\*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\* Semi-Anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with Registration Number: HK0001

Test Firm Registration Number: 367672

.



Date : 2024-12-09 Page 13 of 40 No. : HMD24100009

### **Spectrum Analyzer Setting:**

9KHz – 30MHz (Pk & Av) RBW: 10kHz

VBW: 30kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

30MHz - 1GHz (QP) RBW: 120kHz

VBW: 120kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

Above 1GHz (Pk) RBW: 1MHz

VBW: 1MHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold


Above 1GHz (Av) RBW: 1MHz

VBW: 10Hz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

#### **Test Setup:**

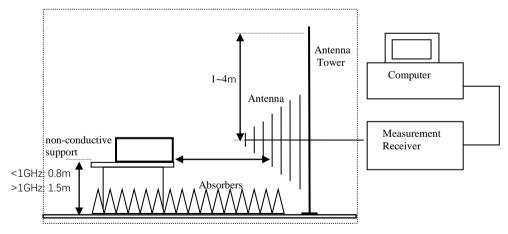

- Ground Plane
- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30 MHz to 1000 MHz made with Bi-log antennas, above 1000 MHz horn antennas are used.

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group



Date : 2024-12-09 Page 14 of 40

No. : HMD24100009

#### Limits for Radiated Emissions FCC 47 CFR 15.209]:

2	
Frequency Range	Quasi-Peak Limits
[MHz]	$[\mu V/m]$
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

\* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty (9kHz-30MHz): 2.0dB

(30MHz -1GHz): 4.9dB (1GHz -6GHz): 4.02dB (6GHz -26.5GHz): 4.03dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date : 2024-12-09 Page 15 of 40 No. : HMD24100009

Result of Tx mode (2402.0 MHz) (GFSK 1Mbps) (9kHz – 30MHz): Pass

	Field Strength of Spurious Emissions								
	Peak Value								
Frequency	Frequency Measured Correction Field Field Limit E-Field								
	Level	Factor	Strength	Strength		Polarity			
MHz	MHz dBuV dB/m dBuV/m uV/m uV/m								
	Emissions	detected are r	nore than 20	dB below the	FCC Limits				

### Result of Tx mode (2402.0 MHz) (GFSK 1Mbps) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value										
Frequency	Measured	Correction	Field	Limit	Margin	E-Field					
	Level @3m	Factor	Strength	@3m		Polarity					
MHz	dΒμV	dB/m	$dB\mu V/m$	dBμV/m	dB						
4804.0	56.3	0.82	57.1	74.0	16.9	Vertical					
4804.0	56.9	0.52	57.4	74.0	16.6	Horizontal					
7206.0	50.0	7	57.0	74.0	17.0	Vertical					
7206.0	50.3	6.5	56.8	74.0	17.2	Horizontal					
9608.0	46.4	8.5	54.9	74.0	19.1	Vertical					
9608.0	47.1	8.3	55.4	74.0	18.6	Horizontal					
12010.0	44.9	10.9	55.8	74.0	18.2	Vertical					
12010.0	45.1	10.8	55.9	74.0	18.1	Horizontal					

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dΒμV	dB/m	$dB\mu V/m$	dBμV/m	dB					
4804.0	41.3	0.82	42.1	54.0	11.9	Vertical				
4804.0	41.4	0.52	41.9	54.0	12.1	Horizontal				
7206.0	35.0	7	42.0	54.0	12.0	Vertical				
7206.0	35.1	6.5	41.6	54.0	12.4	Horizontal				
9608.0	32.1	8.5	40.6	54.0	13.4	Vertical				
9608.0	32.6	8.3	40.9	54.0	13.1	Horizontal				
12010.0	30.6	10.9	41.5	54.0	12.5	Vertical				
12010.0	30.0	10.8	40.8	54.0	13.2	Horizontal				



Date : 2024-12-09 Page 16 of 40 No. : HMD24100009

Result of Tx mode (2440.0 MHz) (GFSK 1Mbps) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions									
	Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	MHz dBuV dB/m dBuV/m uV/m uV/m								
	Emissions detected are more than 20 dB below the FCC Limits								

### Result of Tx mode (2440.0 MHz) (GFSK 1Mbps) (Above 1GHz): Pass

	Field Strength of Spurious Emissions									
	Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dΒμV	dB/m	$dB\mu V/m$	dBμV/m	dB					
4880.0	56.8	0.82	57.6	74.0	16.4	Vertical				
4880.0	56.6	0.52	57.1	74.0	16.9	Horizontal				
7320.0	50.0	7	57.0	74.0	17.0	Vertical				
7320.0	50.7	6.5	57.2	74.0	16.8	Horizontal				
9760.0	47.2	8.5	55.7	74.0	18.3	Vertical				
9760.0	47.4	8.3	55.7	74.0	18.3	Horizontal				
12200.0	45.1	10.9	56.0	74.0	18.0	Vertical				
12200.0	44.9	10.8	55.7	74.0	18.3	Horizontal				

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m	S	Polarity				
MHz	dΒμV	dB/m	dBμV/m	dBμV/m	dB					
4880.0	41.2	0.82	42.0	54.0	12.0	Vertical				
4880.0	41.0	0.52	41.5	54.0	12.5	Horizontal				
7320.0	34.8	7	41.8	54.0	12.2	Vertical				
7320.0	34.9	6.5	41.4	54.0	12.6	Horizontal				
9760.0	32.2	8.5	40.7	54.0	13.3	Vertical				
9760.0	33.1	8.3	41.4	54.0	12.6	Horizontal				
12200.0	30.1	10.9	41.0	54.0	13.0	Vertical				
12200.0	30.3	10.8	41.1	54.0	12.9	Horizontal				



Date : 2024-12-09 Page 17 of 40 No. : HMD24100009

## Result of Tx mode (2480.0 MHz) (GFSK 1Mbps) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions									
	Peak Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field				
	Level	Factor	Strength	Strength		Polarity				
MHz	MHz dBuV dB/m dBuV/m uV/m uV/m									
	Emissions detected are more than 20 dB below the FCC Limits									

### Result of Tx mode (2480.0 MHz) (GFSK 1Mbps) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value										
Frequency	Measured	Correction	Field	Limit	Margin	E-Field					
	Level @3m	Factor	Strength	@3m		Polarity					
MHz	dΒμV	dB/m	dBμV/m	$dB\mu V/m$	dB	_					
4960.0	56.5	0.82	57.3	74.0	16.7	Vertical					
4960.0	57.0	0.52	57.5	74.0	16.5	Horizontal					
7440.0	50.0	7	57.0	74.0	17.0	Vertical					
7440.0	50.7	6.5	57.2	74.0	16.8	Horizontal					
9920.0	45.8	8.5	54.3	74.0	19.7	Vertical					
9920.0	47.0	8.3	55.3	74.0	18.7	Horizontal					
12400.0	44.5	10.9	55.4	74.0	18.6	Vertical					
12400.0	45.0	10.8	55.8	74.0	18.2	Horizontal					

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB					
4960.0	41.1	0.82	41.9	54.0	12.1	Vertical				
4960.0	40.8	0.52	41.3	54.0	12.7	Horizontal				
7440.0	34.6	7	41.6	54.0	12.4	Vertical				
7440.0	34.8	6.5	41.3	54.0	12.7	Horizontal				
9920.0	33.2	8.5	41.7	54.0	12.3	Vertical				
9920.0	32.9	8.3	41.2	54.0	12.8	Horizontal				
12400.0	30.0	10.9	40.9	54.0	13.1	Vertical				
12400.0	30.4	10.8	41.2	54.0	12.8	Horizontal				



Date : 2024-12-09 Page 18 of 40 No. : HMD24100009

### **Radiated Emissions Measurement:**

#### Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

#### Result: RF Radiated Emissions (Lowest)-GFSK 1Mbps

Field Strength of Band-edge Compliance								
			Peak Value					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB			
2390.0	47.6	-4.8	42.8	74.0	31.2	Vertical		
2390.0	48.1	-4.7	43.4	74.0	30.6	Horizontal		

	Field Strength of Band-edge Compliance									
l	Average Value									
ſ	Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
ı		Level @3m	Factor	Strength	@3m		Polarity			
l	MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB				
	2390.0	42.1	-4.8	37.3	54.0	16.7	Vertical			
ſ	2390.0	42.3	-4.7	37.6	54.0	16.4	Horizontal			

Result: RF Radiated Emissions (Highest) -GFSK 1Mbps

	25010 111 110010000 (111 <b>9</b> 1100) 01 211 11110 <b>)</b>								
	Field Strength of Band-edge Compliance								
	Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB				
2483.5	58.8	-4.8	54.0	74.0	20.0	Vertical			
2483.5	59.0	-4.7	54.3	74.0	19.7	Horizontal			

Field Strength of Band-edge Compliance								
		A	verage Valu	e				
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB			
2483.5	44.2	-4.8	39.4	54.0	14.6	Vertical		
2483.5	44.0	-4.7	39.3	54.0	14.7	Horizontal		




Date : 2024-12-09 Page 19 of 40

No. : HMD24100009

### Results of Bluetooth mode (2402.0 MHz) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases) Horizontal

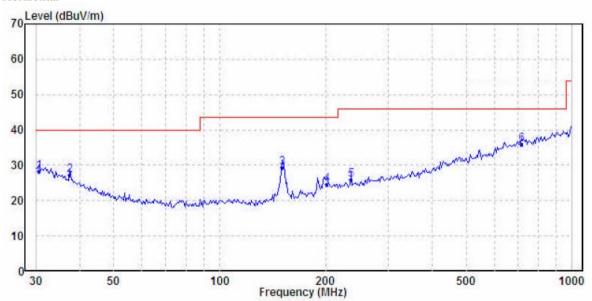

Ambient Temperature: 22.9C Relative Humidity : 52.4% Air Pressure : 101.0kPa

	Freq	Level	Limit Line	Over Limit	Remark	Pol/Phase
		$\overline{\mathtt{dBuV/m}}$	$\overline{\mathtt{dBuV/m}}$	dB		·
1	30.638	28.21	40.00	-11.79	QP	Horizontal
2	37.548	27.15	40.00	-12.85	QP	Horizontal
3	150.538	29.31	43.50	-14.19	QP	Horizontal
4	200.688	24.69	43.50	-18.81	QP	Horizontal
5	235.816	25.98	46.00	-20.02	QP	Horizontal
6	719.200	35.82	46.00	-10.18	QP	Horizontal




Date : 2024-12-09 Page 20 of 40

No. : HMD24100009

### Results of Bluetooth mode (2402.0 MHz) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases) Vertical

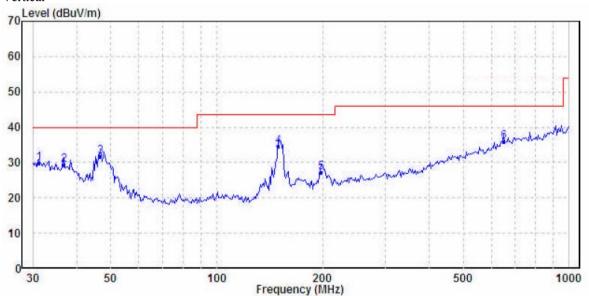

Ambient Temperature: 22.9C Relative Humidity : 52.4% Air Pressure : 101.0kPa

	Freq	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	$\overline{\mathtt{dBuV/m}}$	$\overline{\mathtt{dBuV/m}}$	dB		
1	31.289	29.87	40.00	-10.13	QP	Vertical
2	36.766	29.35	40.00	-10.65	QP	Vertical
3	46.666	31.66	40.00	-8.34	QP	Vertical
4	149.486	34.68	43.50	-8.82	QP	Vertical
5	197.893	27.33	43.50	-16.17	QP	Vertical
6	651.942	35.96	46.00	-10.04	QP	Vertical



Date : 2024-12-09 Page 21 of 40

No. : HMD24100009

#### 3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207 Test Method: ANSI C63.10:2013

Test Date: 2024-10-16
Mode of Operation: TX mode
Test Voltage: 120Va.c. 60Hz

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

#### **Test Method:**


The test was performed in accordance with ANSI ANSI C63.10:2013, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

### **Receiver Setting:**

Bandw. = 9 kHz, Meas. Time= 10.0 ms, Step Width = 5.0kHz

Detector = MaxPeak and CISPR AV

#### **Test Setup:**

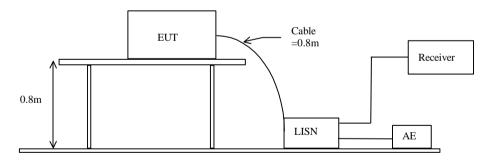

#### Limits for Conducted Emissions (FCC 47 CFR 15.207):

Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency.

Remarks:

Calculated measurement uncertainty (0.15MHz - 30MHz): 3.25dB


<sup>-\*-</sup> Emission(s) that is far below the corresponding limit line.



Date : 2024-12-09 Page 22 of 40 No. : HMD24100009

#### Results of Bluetooth mode (L): PASS

Please refer to the following diagram for individual results.

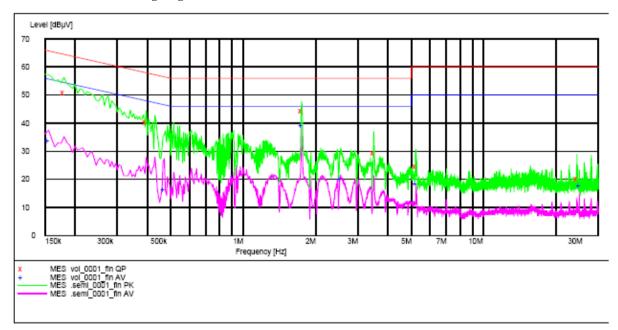

MEASUREMENT	RESULT: "Y	701_0001_	fin QP"			
Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dΒμV	₫B	đΒμV	đВ		
0.180000	50.80	9.7	65	13.6	L1	GND
0.395000	40.10	9.7	58	17.9	L1	GND
1.750000	44.40	9.8	56	11.6	L1	GND
3.500000	29.40	9.8	56	26.6	L1	GND
5.240000	24.50	9.9	60	35.5	L1	GND
24.510000	20.00	10.6	60	40.0	L1	GND
MEASUREMENT	RESULT: "	701_0001_	fin AV"			
MEASUREMENT Frequency	_	ol_0001_ Transd	-	Margin	Line	PE
	Level		-		Line	PE
Frequency	Level dBµV	Transd	Limit	Margin	Line L1	PE GND
Frequency MHz	Level dBµV 33.70	Transd dB	Limit dBµV	Margin dB		
Frequency MHz 0.155000	Level dBµV 33.70 16.20	Transd dB 9.7	Limit dBµV 56	Margin dB 22.0	L1	GND
Frequency MHz 0.155000 0.470000	Level dBµV 33.70 16.20 39.10	Transd dB 9.7 9.7	Limit dBµV 56 47	Margin dB 22.0 30.3	L1 L1 L1	GND GND
Frequency MHz 0.155000 0.470000 1.755000	Level dBµV 33.70 16.20 39.10 20.20	Transd dB 9.7 9.7 9.8	Limit dBµV 56 47 46	Margin dB 22.0 30.3 6.9	L1 L1 L1	GND GND GND
Frequency MHz 0.155000 0.470000 1.755000 2.545000	Level dBµV 33.70 16.20 39.10 20.20 18.30	Transd dB 9.7 9.7 9.8 9.8	Limit dBµV 56 47 46 46	Margin dB 22.0 30.3 6.9 25.8	L1 L1 L1	GND GND GND GND




Date : 2024-12-09 Page 23 of 40

No. : HMD24100009

#### Results of Bluetooth mode (N): PASS

Please refer to the following diagram for individual results.

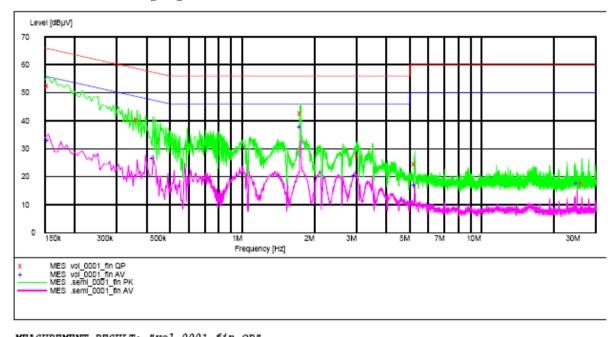

		"	_fin_QP'	vol_0001_	RESULT: "1	MEASUREMENT
ne E	Line	Margin	Limit	Transd	Level	Frequency
		đВ	dΒμV	đВ	dΒμV	MHz
Gl	N	13.3	66	9.7	52.40	0.155000
Gl	N	18.4	59	9.7	40.30	0.365000
Gl	N	13.4	56	9.8	42.60	1.760000
GN	И	28.5	56	9.8	27.50	3.040000
GN	И	35.3	60	9.9	24.70	5.265000
Gl	N	42.3	60	10.8	17.70	26.315000
		**	fin AV	vol_0001_	RESULT: "	MEASUREMENT
ne I	Line		_		_	MEASUREMENT Frequency
ne I	Line	Margin	_	Transd	Level	
ne E Gl	Line N	Margin dB	Limit	Transd	Level dBµV	Frequency
	N	Margin dB	Limit dBµV	Transd dB	Level dBµV 33.00	Frequency MHz
Gl	N N	Margin dB 22.8 20.7	Limit dBµV 56	Transd dB 9.7	Level dBµV 33.00 26.70	Frequency MHz 0.155000
GI GI	N N	Margin dB 22.8 20.7 8.2	Limit dBµV 56 47	Transd dB 9.7 9.7	Level dBμV 33.00 26.70 37.80	Frequency MHz 0.155000 0.425000
GI GI GI	N N N	Margin dB 22.8 20.7 8.2 25.4	Limit dBµV 56 47 46	Transd dB 9.7 9.7 9.8	Level dBµV 33.00 26.70 37.80 20.60	Frequency MHZ 0.155000 0.425000 1.750000
GI GI GI	N N N	Margin dB 22.8 20.7 8.2 25.4	Limit dBµV 56 47 46 46	Transd dB 9.7 9.7 9.8 9.8	Level dBµV 33.00 26.70 37.80 20.60	Frequency MHZ 0.155000 0.425000 1.750000 2.955000



Date : 2024-12-09 Page 24 of 40

No. : HMD24100009

### 3.1.4 Power Spectral Density

Test Requirement: FCC 47CFR 15.247(e)
Test Method: ANSI C63.10:2013

Test Date: 2024-10-15 Mode of Operation: Tx mode

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

#### **Test Method:**

The RF output of the EUT was connected to the spectrum analyzer. Set the fundamental frequency as the center frequency of the spectral analyzer. Use RBW=3kHz, VBW= 10KHz, Set the span to 1.5 times the DTS channel bandwidth. Detector = peak, Sweep time = auto couple, Trace mode = max hold. Measure the Power Spectral Density (PSD) and record the results in dBm.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

### **Test Limit:**

The maximum power spectral density (PSD) shall not exceeded 8dBm in any 3kHz band.


Results of Tx Mode GFSK 1Mbps (Tx:2402MHz to 2480MHz) : Pass (Tx Unit) Maximum power spectral density

Transmitter Frequency (MHz)	Maximum Power spectral density level / 3kHz band (dBm)	Maximum Power spectral density / 3kHz band limit
2402.0	-16.252	8dBm
2440.0	-16.139	8dBm
2480.0	-16.551	8dBm




Date: 2024-12-09 Page 25 of 40 No. : HMD24100009

Tx mode GFSK 1Mbps (Tx: 2402MHz to 2480MHz)

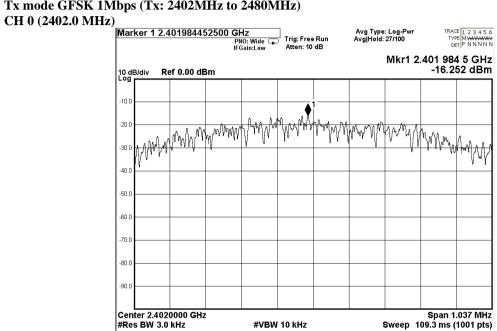


CH 19 (2440.0 MHz)

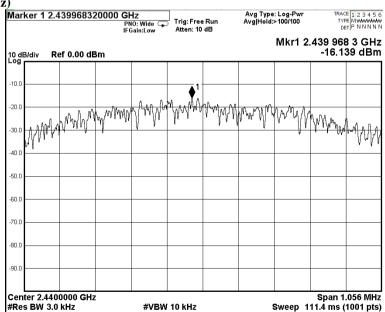



Date : 2024-12-09 Page 26 of 40 No. : HMD24100009

CH 39 (2480.0 MHz)

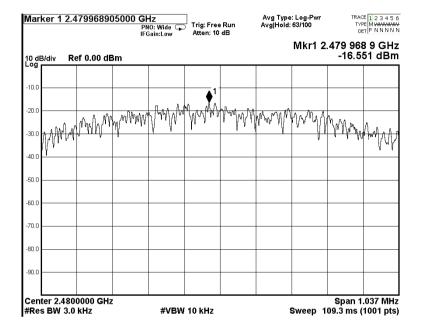



Date : 2024-12-09 Page 27 of 40 No. : HMD24100009

### 3.1.5 6dB Spectrum Bandwidth Measurement

Test Requirement: FCC 47CFR 15.247(a)(2)
Test Method: ANSI C63.10:2013

Test Date: 2024-10-15 Mode of Operation: Tx mode

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.



Date : 2024-12-09 Page 28 of 40

No. : HMD24100009

### **Limits for 6dB Spectrum Bandwidth Measurement:**

Center Frequency	6dB Bandwidth	FCC Limits
[MHz]	[KHz]	[kHz]
2402.0	691.0	> 500

6dB Bandwidth of Fundamental Emission on GFSK 1Mbps (2402MHz)

Center Freq: 2.402000000 GHz Radio S

Trig: Free Run Avg|Hold:>10/10 Radio Std: None x dB -6.00 dB #Atten: 10 dB Radio Device: BTS #IFGain:Low Ref 20.00 dBm 10 dB/div Log 10.0 0.00 -10.0 -20.0 -30.0 -40.0 -50.0 -60.0 70.0 Center 2.402 GHz Span 3 MHz #Res BW 100 kHz **#VBW** 300 kHz Sweep 1 ms T - 4 - 1 D - - - - -C 00 JB...

Occupied Bandwidtr		Total Power	5.82 GBM	
1.0	0683 MHz			
Transmit Freq Error	11.500 kHz	OBW Power	99.00 %	
x dB Bandwidth	691.0 kHz	x dB	-6.00 dB	



Date : 2024-12-09 Page 29 of 40

No. : HMD24100009

### **Limits for 6dB Spectrum Bandwidth Measurement:**

Frequency Range	6dB Bandwidth	FCC Limits
[MHz]	[KHz]	[kHz]
2440.0	704.0	> 500

6dB Bandwidth of Fundamental Emission on GFSK 1Mbps (2440MHz) Center Freq: 2.440000000 GHz Center Freq 2.440000000 GHz Rádio Std: None Avg|Hold:>10/10 Trig: Free Run #IFGain:Low #Atten: 10 dB Radio Device: BTS 10 dB/div Ref 20.00 dBm Log 10.0 0.00 -10.0 -20.0 -30.0 -40.0 -50.0 -60 O -70.0 Center 2.44 GHz Span 3 MHz #Res BW 100 kHz **#VBW 300 kHz** Sweep 1 ms

Occupied Bandwidth		Total Power	5.81 dBm	
1.0	0737 MHz			
Transmit Freq Error	11.485 kHz	OBW Power	99.00 %	
x dB Bandwidth	704.0 kHz	x dB	-6.00 dB	



Date : 2024-12-09 Page 30 of 40

No. : HMD24100009

### **Limits for 6dB Spectrum Bandwidth Measurement:**

Frequency Range	6dB Bandwidth	FCC Limits
[MHz]	[KHz]	[kHz]
2480.0	691.0	> 500

6dB Bandwidth of Fundamental Emission on GFSK 1Mbps (2480MHz) Center Freq: 2.480000000 GHz Radio Std: None Center Freq 2.480000000 GHz Trig: Free Run Avg|Hold:>10/10 #IFGain:Low #Atten: 10 dB Radio Device: BTS 10 dB/div Ref 20.00 dBm Loa 10.0 0.00 10.0 -20.0 30.0 40 N -50.0 -60.0 70.0 Center 2.48 GHz Span 3 MHz #Res BW 100 kHz **#VBW 300 kHz** Sweep 1 ms Occupied Bandwidth **Total Power** 5.46 dBm

1.0	0754 MHz			
Transmit Freq Error	11.515 kHz	OBW Power	99.00 %	
x dB Bandwidth	691.0 kHz	x dB	-6.00 dB	



Date : 2024-12-09 Page 31 of 40 No. : HMD24100009

#### 3.1.6 Band Edges Measurement

Test Requirement: FCC 47CFR 15.247
Test Method: ANSI C63.10:2013

Test Date: 2024-10-13 Mode of Operation: Tx mode

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

#### **Test Method:**

The band edge is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. The RBW are set to 100kHz and VBW are set to 300kHz for this measurement.

#### **Test Setup:**

As Test Setup of clause 3.1.2 in this test report.



Date : 2024-12-09 Page 32 of 40 No. : HMD24100009

### **Band-edge Compliance of RF Conducted Emissions Measurement:**


#### Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

#### **Band-edge Compliance of RF Conducted Emissions Measurement:**

Frequency Range	Reference level	Limit	The highest conducted band edge emission	Result
[MHz]	[dBm]	[dBm]	[dBm]	
2400 – Lowest Fundamental (2402)	-1.473	-21.473	-49.835	PASS

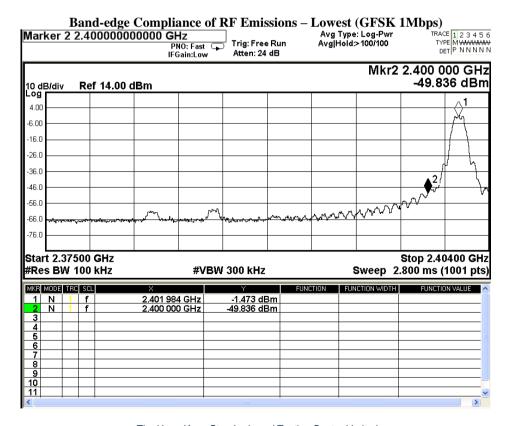

The Hong Kong Standards and Testing Centre Limited


Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group



Date : 2024-12-09 Page 33 of 40 No. : HMD24100009

### **Band-edge Compliance of RF Conducted Emissions Measurement:**

Frequency Range	Reference level	Limit	The highest conducted band edge emission	Result
[MHz]	[dBm]	[dBm]	[dBm]	
2483.5 - Highest Fundamental (2480)	-1.142	-21.142	-54.113	PASS

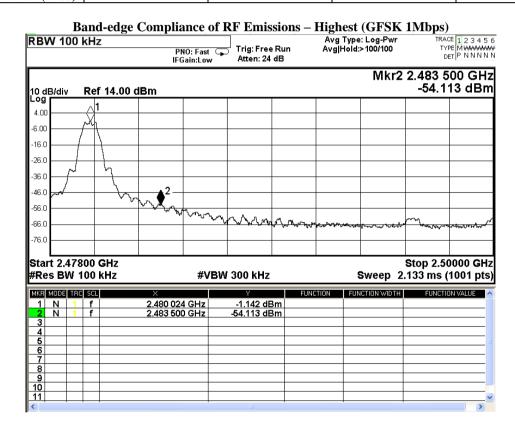




Date : 2024-12-09 Page 34 of 40 No. : HMD24100009

#### **Compliance of RF Emissions Measurement:**

#### Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

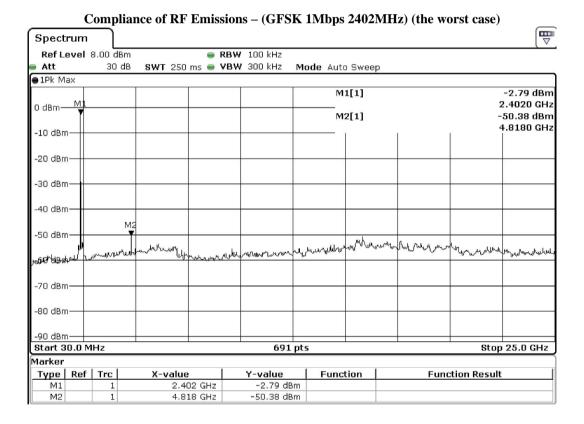



Date : 2024-12-09 Page 35 of 40 No. : HMD24100009

### 3.1.7 Antenna Requirement

Ambient Temperature: 25°C Relative Humidity: 51% Atmospheric Pressure: 101 kPa

**Test Requirements: § 15.203** 

#### **Test Specification:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **Test Results:**

This is Integrated antenna. There is no external antenna, the antenna gain = 0.0dBi. User is unable to remove or changed the Antenna.



Page 36 of 40

Date : 2024-12-09 No. : HMD24100009

Appendix A

### List of Measurement Equipment

#### **Radiated Emission**

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-LINDGREN	FACT-3		2024-04-18	2029-04-18
EM356	ANTENNA POSITIONING TOWER	ETS-LINDGREN	2171B	00150346	N/A	N/A
EM293	SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	N9020A	MY50510152	2023-03-21	2025-03-21
EM363	SIGNAL ANALYZER(10HZ- 40GHZ)	R & S	FSV40	101231	2024-01-17	2026-01-17
EM299	BROADBAND HORN ANTENNA	ETS-LINDGREN	3115	00114120	2023-01-25	2025-01-25
EM300	PYRAMIDAL STANDARD GAIN HORN ANTENNA	ETS-LINDGREN	3160-09	00130130	2023-01-16	2025-01-16
EM301	PYRAMIDAL STANDARD GAIN HORN ANTENNA	ETS-LINDGREN	3160-10	00130988	2023-02-15	2025-02-15
EM353	LOOP ANTENNA	ETS_LINDGREN	6502	00206533	2022-09-26	2025-09-26
EM355	BICONILOG ANTENNA	ETS-LINDGREN	3143B	00094856	2022-08-26	2025-08-26
EM200	DUAL CHANNEL POWER METER	R & S	NRVD	100592	2023-08-02	2025-08-02

## **Line Conducted**

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM232	LISN	SCHAFFNER	NNB41	04/100082	2023-05-30	2025-05-30
EM181	EMI TEST RECEIVER	R & S	ESIB7	100072	2024-04-18	2025-04-18
EM179	IMPULSE LIMITER	R & S	ESH3-Z2	357.8810.52/54	2023-03-17	2025-03-17
EM154	SHIELDING ROOM	SIEMENS MATSUSHITA COMPONENTS	N/A	803-740-057- 99A	2022-02-06	2027-02-06
N/A	MEASUREMENT AND EVALUATION SOFTWARE	ROHDE & SCHWARZ	BSIB-K1	V1.20	N/A	N/A

### Remarks:-

CM Corrective Maintenance

N/A Not Applicable
TBD To Be Determined



Date: 2024-12-09 Page 37 of 40 No. : HMD24100009

Appendix B


**Photographs of EUT** 



Inner circuit top view




Inner circuit top view

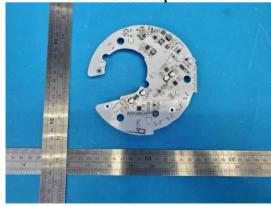

View of the product



Inner circuit bottom view

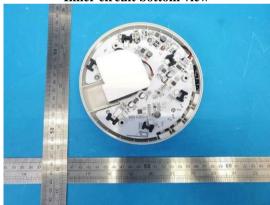

Inner circuit bottom view




The Hong Kong Standards and Testing Centre Limited Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Date : 2024-12-09 Page 38 of 40 No. : HMD24100009

## Photographs of EUT

Inner circuit top view

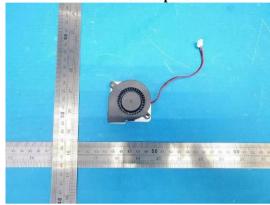






Date : 2024-12-09 Page 39 of 40 No. : HMD24100009

**Photographs of EUT** 



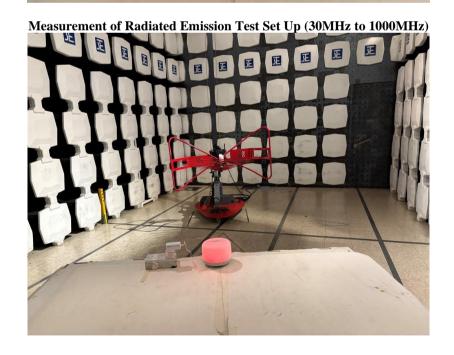

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong


Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.



Date : 2024-12-09 Page 40 of 40 No. : HMD24100009

**Photographs of EUT** 

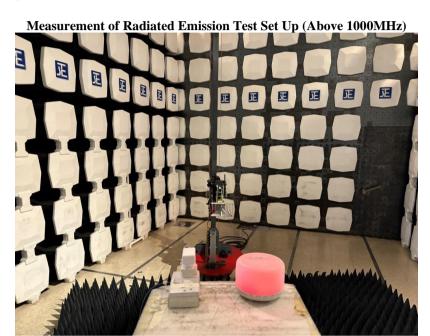

Measurement of Conducted Emission Test Set Up



\*\*\*\*\* End of Test Report \*\*\*\*\*

The Hong Kong Standards and Testing Centre Limited

Head Office: 10 Dai Wang Street, Taipo Industrial Estate, Tai Po, N.T., Hong Kong

Unit B, 10/F, Block 1, Tai Ping Industrial Centre, No. 57 Ting Kok Road, Tai Po, N.T., Hong Kong

Tel: +852 2666 1888 Fax: +852 2664 4353 Email: hkstc@stc.group Website: www.stc.group

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Limited.

## **Conditions of Issuance of Test Reports**

- 1. All samples and goods are accepted by The Hong Kong Standards & Testing Centre Limited (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The Company provides its services on the basis that such terms and conditions constitute express agreement between the Company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by the Company as a result of this application for testing service (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to his customer, supplier or other persons directly concerned. Subject to clause 3, the Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall be at liberty to disclose the testing-related documents and/or files anytime to any third-party accreditation and/or recognition bodies for audit or other related purposes. No liabilities whatsoever shall attach to the Company's act of disclosure.
- 4. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 5. The results in Report apply only to the sample as received and do not apply to the bulk, unless the sampling has been carried out by the Company and is stated as such in the Report.
- 6. When a statement of conformity to a specification or standard is provided, the ILAC-G8 Guidance document (and/or IEC Guide 115 in the electrotechnical sector) will be adopted as a decision rule for the determination of conformity unless it is inherent in the requested specification or standard, or otherwise specified in the Report.
- 7. In the event of the improper use the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 8. Sample submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 9. The Company will not be liable for or accept responsibility for any loss or damage howsoever arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 10. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 11. Subject to the variable length of retention time for test data and report stored hereinto as to otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of this test report for a period of three years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after the retention period. Under no circumstances shall we be liable for damages of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.
- 12. Issuance records of the Report are available on the internet at www.stc.group. Further enquiry of validity or verification of the Reports should be addressed to the Company.