


specifications: 2.4GHz,,L=38.20mm


Manufacture:SHENZHEN JIALIDE TECHNOLOGY

mobile:15914166037

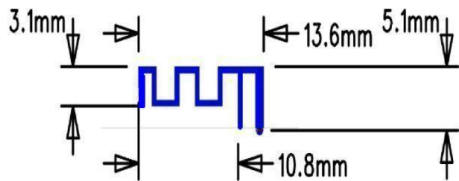


| Passive Test For BT2.4 |          |           |            |            |         |         |          |          |                   |                 |           |           |
|------------------------|----------|-----------|------------|------------|---------|---------|----------|----------|-------------------|-----------------|-----------|-----------|
| Freq (MHz)             | Effi (%) | Effi (dB) | Gain (dBi) | Gain (dBd) | UHS (%) | DHS (%) | Max (dB) | Min (dB) | Directivity (dBi) | Beamwidth (3dB) | AttH (dB) | AttV (dB) |
| 2400                   | 62.98    | -2.01     | 1.7        | -1.35      | 0       | 0       | 0.8      | -14.52   | 2.01              | 60              | 47.36     | 46.86     |
| 2410                   | 55.92    | -2.52     | 0.33       | -1.82      | 0       | 0       | 0.33     | -14.9    | 2.52              | 60              | 47.4      | 46.9      |
| 2420                   | 53.5     | -2.72     | 0.23       | -1.92      | 0       | 0       | 0.23     | -14.9    | 2.72              | 60              | 47.28     | 46.76     |
| 2430                   | 57.48    | -2.4      | 0.53       | -1.62      | 0       | 0       | 0.53     | -14.84   | 2.4               | 60              | 47.35     | 46.78     |
| 2440                   | 51.99    | -2.84     | 0.03       | -2.12      | 0       | 0       | 0.03     | -15.35   | 2.84              | 60              | 47.15     | 46.65     |
| 2450                   | 56.82    | -2.45     | 0.38       | -1.77      | 0       | 0       | 0.38     | -15.12   | 2.45              | 60              | 47.33     | 46.85     |
| 2460                   | 57.83    | -2.38     | 0.59       | -1.56      | 0       | 0       | 0.59     | -15.19   | 2.38              | 60              | 47.72     | 47.22     |
| 2470                   | 46.13    | -3.36     | -0.3       | -2.4       | 0       | 0       | -0.25    | -15.56   | 3.36              | 60              | 47.36     | 46.93     |
| 2480                   | 51.54    | -2.88     | 0.57       | -1.58      | 0       | 0       | 0.57     | -14.09   | 2.88              | 60              | 47.56     | 47.1      |
| 2490                   | 43.76    | -3.59     | 0.14       | -2.01      | 0       | 0       | 0.14     | -13.96   | 3.59              | 60              | 47.05     | 46.67     |
| 2500                   | 43.84    | -3.58     | 0.2        | -1.95      | 0       | 0       | 0.2      | -14.29   | 3.58              | 60              | 47.01     | 46.63     |

2400.00MHz - 2500.00MHz Gain

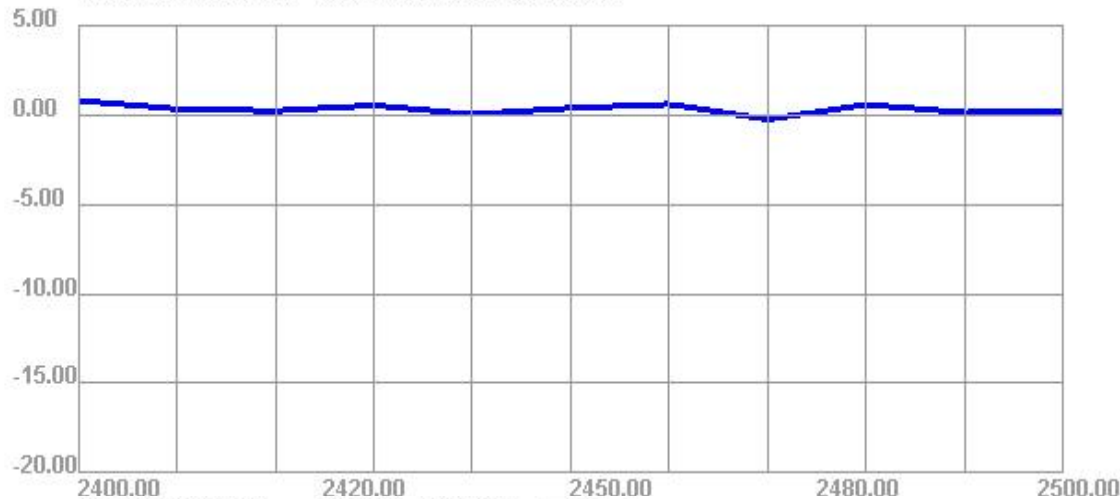


2400.00MHz - 2500.00MHz Efficiency

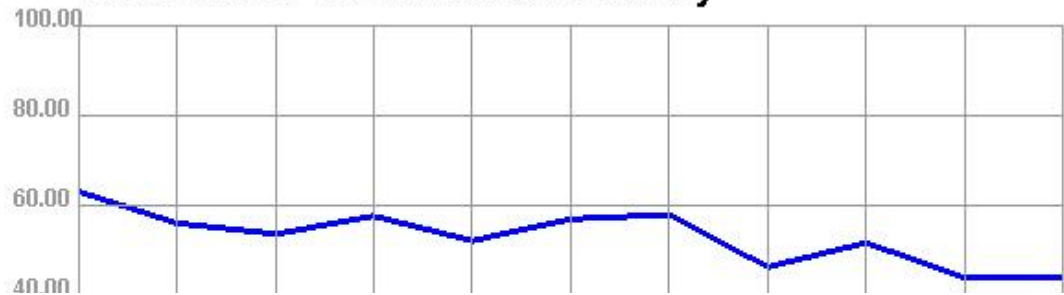





**2400.000MHz**

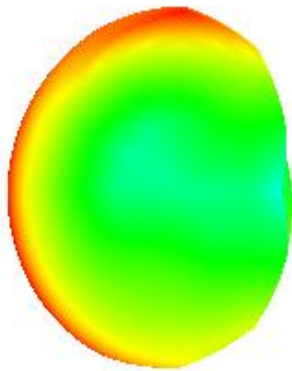


**2400.000MHz H**

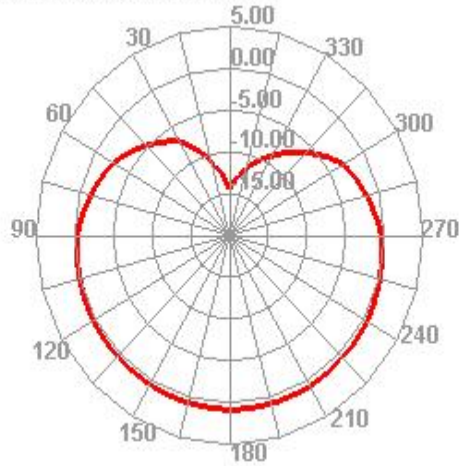


**2400.000MHz E1**

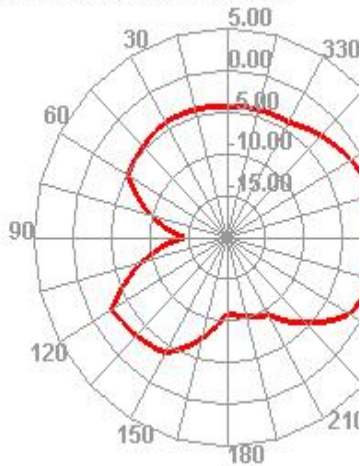


**2400.000MHz E2**

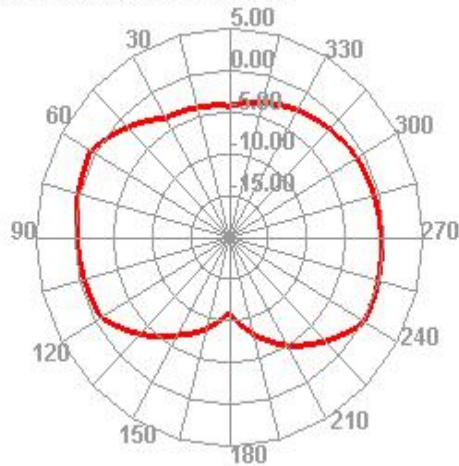


**2450.000MHz**

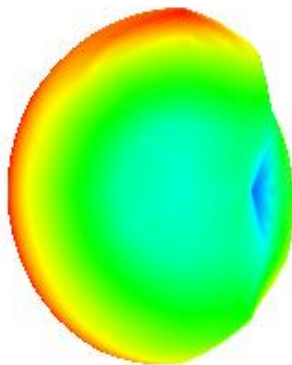


**2450.000MHz H**

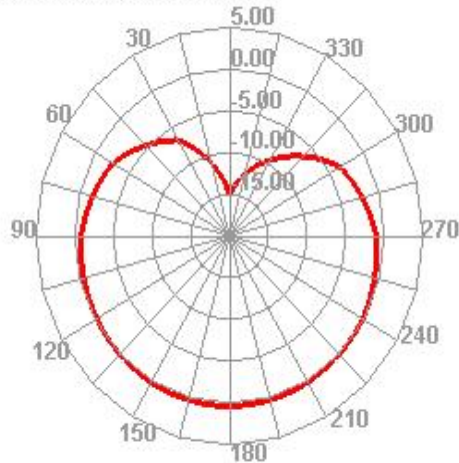


**2450.000MHz E1**

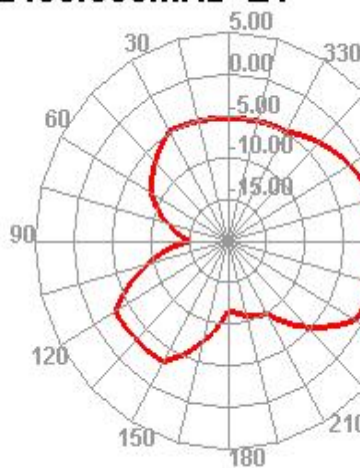


**2450.000MHz E2**

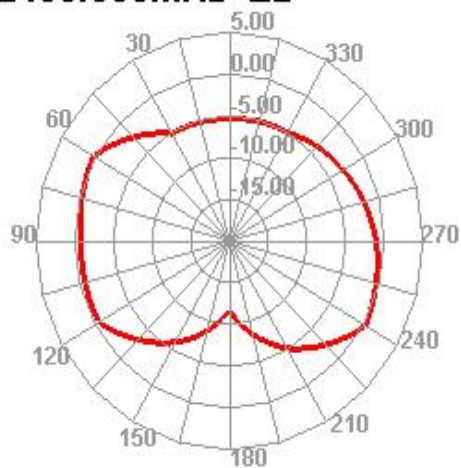


**2500.000MHz**




**2500.000MHz H**

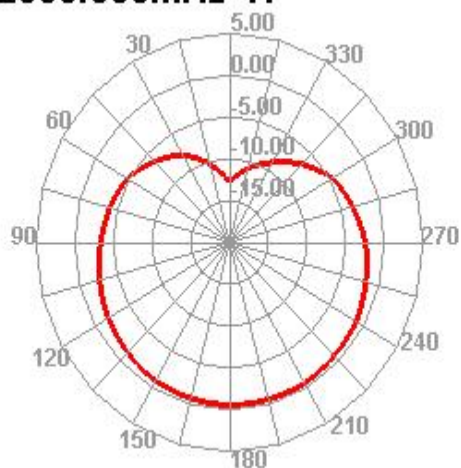

**2500.000MHz E1**

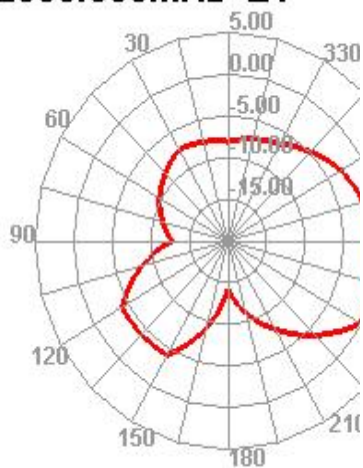

**2500.000MHz E2**

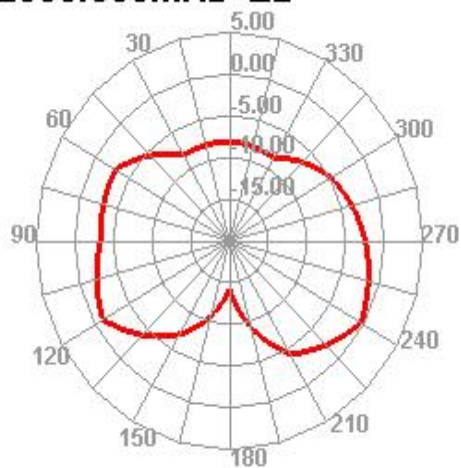

|  |
|--|
|  |
|  |
|  |
|  |
|  |
|  |
|  |
|  |
|  |
|  |
|  |
|  |

| Application Information |              |
|-------------------------|--------------|
| 04Version               | 5.245.351    |
| TotalTime               | 4m 18s 251ms |
| AdditionalInfor         | NULL         |