



CB2L Module Datasheet

Version: 20240902

Online Version

Contents

| | |
|---|-----------|
| 1. Product overview | 2 |
| 1.1. Features | 2 |
| 1.2. Applications | 2 |
| 2. Module interfaces | 4 |
| 2.1. Dimensions and package | 4 |
| 2.2. Pin definition | 4 |
| 2.3. Definitions of test points | 5 |
| 3. Electrical parameters | 7 |
| 3.1. Absolute electrical parameters | 7 |
| 3.2. Normal working conditions | 7 |
| 3.3. RF power consumption | 8 |
| 3.4. Operating current | 8 |
| 4. RF parameters | 11 |
| 4.1. Basic RF features | 11 |
| 4.2. Wi-Fi transmission performance | 11 |
| 4.3. Wi-Fi receiving performance | 11 |
| 4.4. Bluetooth transmission performance | 12 |
| 4.5. Bluetooth receiving performance | 12 |
| 5. Antenna information | 14 |
| 5.1. Antenna type | 14 |
| 5.2. Antenna interference reduction | 14 |
| 6. Packaging information and production instructions | 17 |
| 6.1. Mechanical dimensions | 17 |
| 6.2. Side view | 18 |
| 6.3. Schematic diagram of packaging | 18 |
| 6.4. Diagram of PCB footprint-pin header | 19 |
| 6.5. Production instructions | 21 |
| 6.6. Recommended oven temperature curve | 23 |
| 6.7. Storage conditions | 25 |
| 7. MOQ and packaging information | 27 |

CB2L is a low-power-consumption embedded Wi-Fi module that Tuya has developed. It consists of a highly integrated RF chip BK7231N and a few peripherals. CB2L not only supports the Wi-Fi AP and STA modes, but also supports Bluetooth LE.

1. Product overview

CB2L is built in with a 32-bit MCU whose running speed can be up to 120 MHz, a 2-MB flash memory, and a 256-KB RAM, so as to support the Tuya cloud connection. The MCU instructions specially extended for signal processing can effectively implement audio encoding and decoding. There are 5 channels of 32-bit PWM output, making the chip very suitable for high-quality LED control.

1.1. Features

- Built in with the low-power 32-bit CPU, which can also function as an application processor
- Clock rate: 120 MHz
- Operating voltage: 3.0 to 3.6V
- Peripherals: 5 PWMs
- Wi-Fi connectivity
- 802.11 b/g/n
- Channels 1 to 11@2.4 GHz
- Support WEP, WPA/WPA2, WPA/WPA2 PSK (AES), WPA3 security modes
- Up to +13 dBm output power in 802.11b mode
- Support STA/AP/STA+AP working mode
- Support SmartConfig and AP network configuration manners for Android and iOS devices
- Onboard PCB antenna with a gain of 0.13 dBi
- Operating temperature: -40°C to 105°C
- Bluetooth connectivity
- Support the Bluetooth LE V5.2
- Support the transmit power of 6 dBm in the Bluetooth mode
- Complete Bluetooth coexistence interface
- Onboard PCB antenna with a gain of 0.13 dBi

1.2. Applications


- Intelligent building

- Smart household and home appliances
- Smart socket and light
- Industrial wireless control
- Baby monitor
- Network camera
- Intelligent bus

2. Module interfaces

2.1. Dimensions and package

- CB2L has a row of pins with a spacing of 2 ± 0.1 mm.
- The dimensions of CB2L are 17.3 ± 0.35 mm (L) $\times 15\pm0.35$ mm (W) $\times 2.8\pm0.15$ mm (H).
- Diagram of dimensions of CB2L:

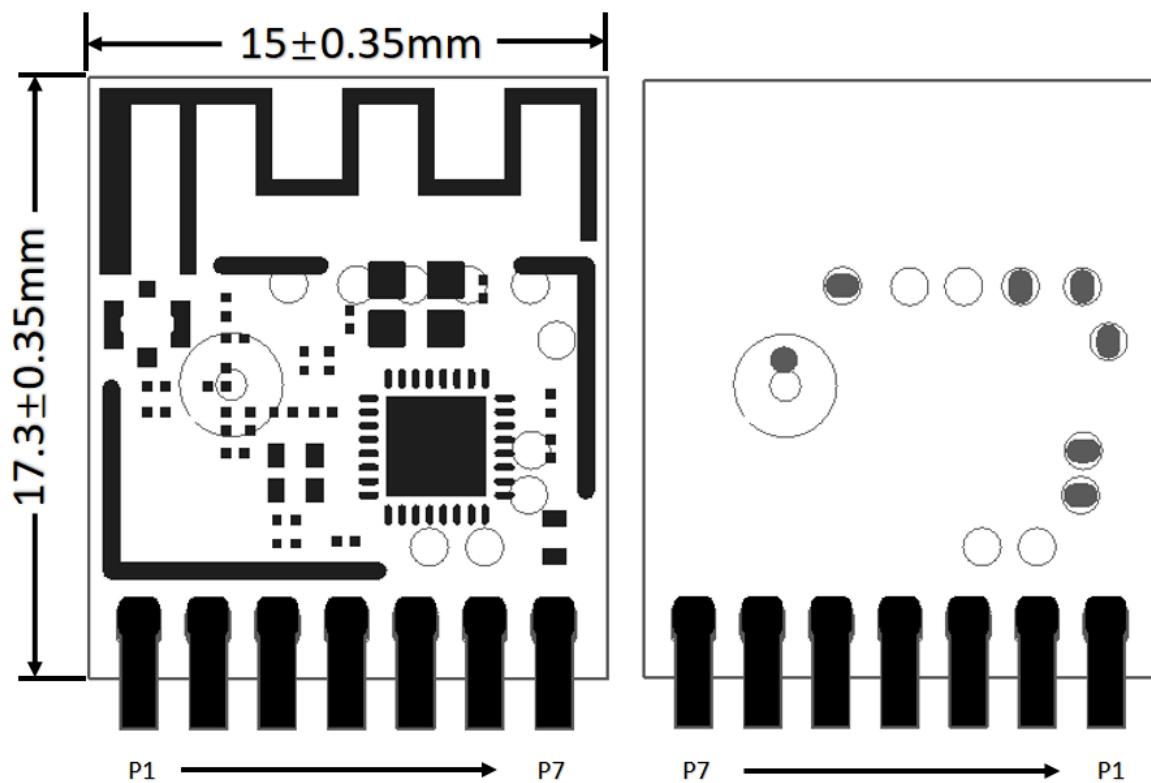

2.2. Pin definition

| Pin number | Symbol | I/O type | Function |
|------------|--------|----------|-------------------------|
| 1 | P8 | I/O | Support hardware PWM |
| 2 | P7 | I/O | Support hardware PWM |
| 3 | P6 | I/O | Support hardware PWM |

| Pin number | Symbol | I/O type | Function |
|------------|--------|----------|-------------------------------|
| 4 | P26 | I/O | Support hardware PWM |
| 5 | P24 | I/O | Support hardware PWM |
| 6 | GND | P | Power supply reference ground |
| 7 | 3V3 | P | Power supply 3V3 |

2.3. Definitions of test points

| Symbol | I/O type | Function |
|--------|----------|---|
| CSN | I/O | It is a mode selection pin. If it is connected to the ground before powered on, enter the firmware test mode. If it is not connected or connected to VCC before powered on, enter the firmware application mode. Correspond to P21 of the IC. |
| RST | I | Hardware reset pin. High level by default, active low. |
| TX1 | I/O | UART1_TX , user serial interface. |
| RX1 | I/O | UART1_RX , user serial interface. |
| TX2 | I/O | LOG TX. |
| GND | P | Power supply reference ground. |
| RF | I/O | RF test point. |

Note: P indicates a power supply pin and I/O indicates an input/output pin.

3. Electrical parameters

3.1. Absolute electrical parameters

| Parameter | Description | Minimum value | Maximum value | Unit |
|-----------------------------------|---------------------|---------------|---------------|------|
| T _s | Storage temperature | -55 | 125 | °C |
| V _{BAT} | Supply voltage | -0.3 | 3.9 | V |
| ESD voltage (human body model) | TAMB-25°C | -4 | 4 | kV |
| ESD voltage (machine model) | TAMB-25°C | -200 | 200 | V |

3.2. Normal working conditions

| Parameter | Description | Minimum value | Typical value | Maximum value | Unit |
|------------------|-----------------------|-----------------------|---------------|----------------------|------|
| T _a | Operating temperature | -40 | - | 105 | °C |
| V _{BAT} | Supply voltage | 3 | 3.3 | 3.6 | V |
| V _{OL} | I/O low level output | V _{SS} | - | V _{SS} +0.3 | V |
| V _{OH} | I/O high level output | V _{BAT} -0.3 | - | V _{BAT} | V |
| I _{max} | I/O drive current | - | 6 | 20 | mA |

| Parameter | Description | Minimum value | Typical value | Maximum value | Unit |
|--------------|-------------|---------------|---------------|---------------|-------|
| Power supply | Power | 100 | - | - | mV/ms |
| θ | slope | | | | |

3.3. RF power consumption

| Working status | Mode | Rate | Transmit power/receive | Average value | Peak value (Typical value)) | Unit |
|----------------|------|--------|------------------------|---------------|-----------------------------|------|
| Transmit | 11b | 11Mbps | +16dBm | 270 | 300 | mA |
| Transmit | 11g | 54Mbps | +15dBm | 260 | 280 | mA |
| Transmit | 11n | MCS7 | +14dBm | 253 | 273 | mA |
| Receive | 11b | 11Mbps | Constantly receive | 73 | 82 | mA |
| Receive | 11g | 54Mbps | Constantly receive | 75 | 82 | mA |
| Receive | 11n | MCS7 | Constantly receive | 75 | 82 | mA |

3.4. Operating current

| Working mode | Working status, $T_a = 25^\circ C$ | Average value | Maximum value (Typical value)) | Unit |
|--------------|------------------------------------|---------------|--------------------------------|------|
| | | | | |

| Working mode | Working status, Ta = 25°C | Average value | Maximum value (Typical value) | Unit |
|--|--|---------------|-------------------------------|------|
| Quick network connection state (Bluetooth) | The module is in the fast network connection state and the Wi-Fi indicator flashes fast | 70 | 270 | mA |
| Quick network connection state (AP) | The module is in the hotspot network connection state and the Wi-Fi indicator flashes slowly | 80 | 305 | mA |
| Quick network connection state (EZ) | The module is in the fast network connection state and the Wi-Fi indicator flashes fast | 87 | 380 | mA |
| Network connected state | The module is connected to the network and the Wi-Fi indicator is always on | 39 | 355 | mA |

| Working mode | Working status, Ta = 25°C | Average value | Maximum value (Typical value) | Unit |
|----------------------------|--|---------------|-------------------------------|------|
| Weakly connected | <p>The module and the hotspot are</p> <p>weakly connected</p> <p>and the Wi-Fi indicator is</p> <p>always on</p> | 205 | 350 | mA |
| Network disconnected state | <p>The module is disconnected</p> <p>and the Wi-Fi indicator is</p> <p>always off</p> | 70 | 270 | mA |

4. RF parameters

4.1. Basic RF features

| Parameter | Description |
|------------------------|--|
| Working frequency | 2.412 to 2.462 GHz |
| Wi-Fi standard | IEEE 802.11 b/g/n (channels 1 to 11) |
| | 11b: 1, 2, 5.5, 11 (Mbps) 11g: 6, 9, 12, |
| Data transmission rate | 18, 24, 36, 48, 54 (Mbps) 11n: HT20 |
| | MCS 0 to 7 |
| Antenna type | PCB antenna with a gain of 0.13 dBi |

4.2. Wi-Fi transmission performance

| Parameter | Minimum value | Typical value | Maximum value | Unit |
|---|---------------|---------------|---------------|------|
| Average RF output power, 802.11b CCK Mode 11M | - | 13 | - | dBm |
| Average RF output power, 802.11g OFDM Mode 54M | - | 13 | - | dBm |
| Average RF output power, 802.11n OFDM Mode MCS7 | - | 13 | - | dBm |
| Frequency error | -20 | - | 20 | ppm |

4.3. Wi-Fi receiving performance

| Parameter | Minimum value | Typical value | Maximum value | Unit |
|---|---------------|---------------|---------------|------|
| PER<8%, RX sensitivity, 802.11b DSSS Mode 11M | - | -88 | - | dBm |
| PER<10%, RX sensitivity, 802.11g OFDM Mode 54M | - | -74 | - | dBm |
| PER<10%, RX sensitivity, 802.11n OFDM Mode MCS7 | - | -72 | - | dBm |
| PER<10%, RX sensitivity, Bluetooth 1M | - | -93 | - | dBm |

4.4. Bluetooth transmission performance

| Parameter | Minimum value | Typical value | Maximum value | Unit |
|-------------------|---------------|---------------|---------------|------|
| Working frequency | 2402 | - | 2480 | MHz |
| Air rate | - | 1 | - | Mbps |
| Transmit power | -20 | 6 | 20 | dBm |
| Frequency error | -150 | - | 150 | KHz |

4.5. Bluetooth receiving performance

| Parameter | Minimum value | Typical value | Maximum value | Unit |
|-------------------------|---------------|---------------|---------------|------|
| RX sensitivity | - | -93 | - | dBm |
| Maximum RF signal input | -10 | - | - | dBm |
| Inter-modulation | - | - | -23 | dBm |

5. Antenna information


5.1. Antenna type



CB2L uses the PCB antenna.

5.2. Antenna interference reduction


To ensure optimal Wi-Fi performance when the Wi-Fi module uses an onboard PCB antenna, it is recommended that the antenna be at least 15 mm away from other metal parts.

To prevent adverse impact on the antenna radiation performance, avoid copper or traces along the antenna area on the PCB.

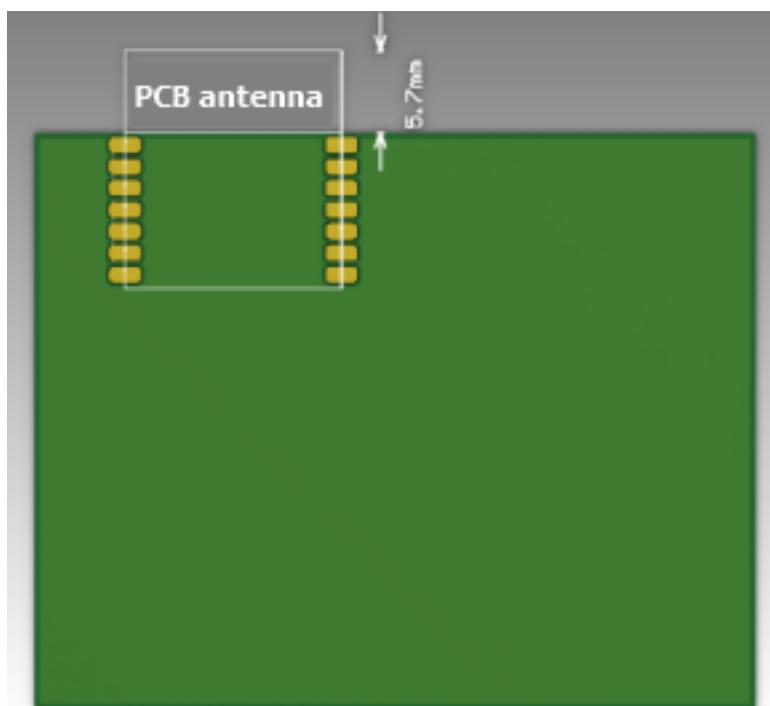

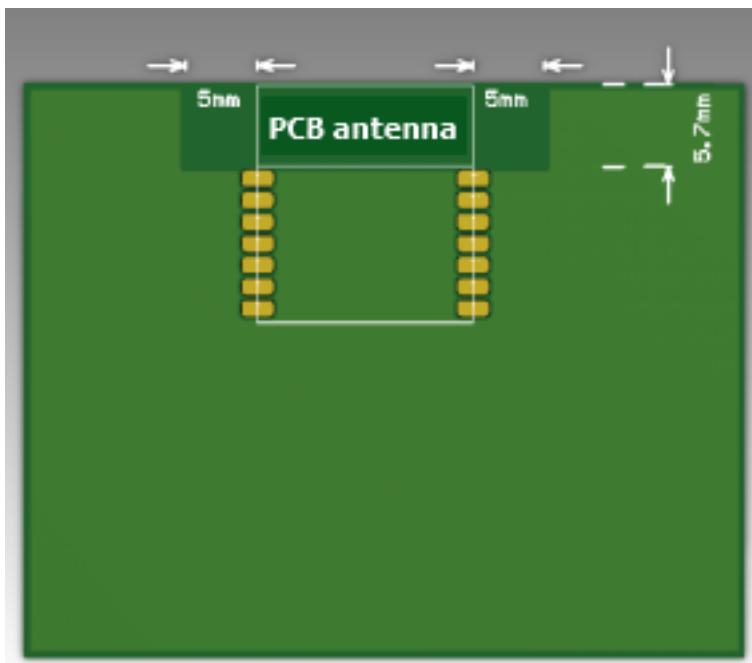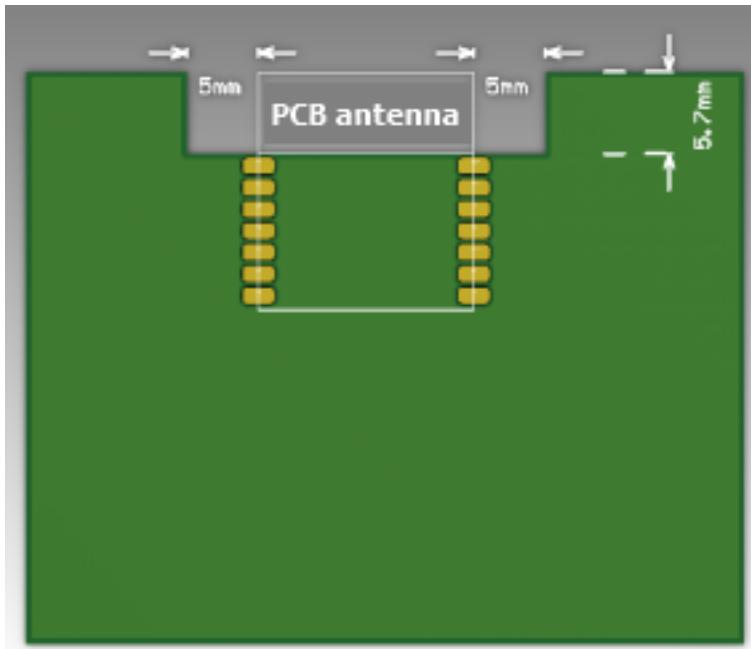


**Do not place any metal in the red area above the antenna.
The recommended diameter of the circular arc is greater than 3 cm.**

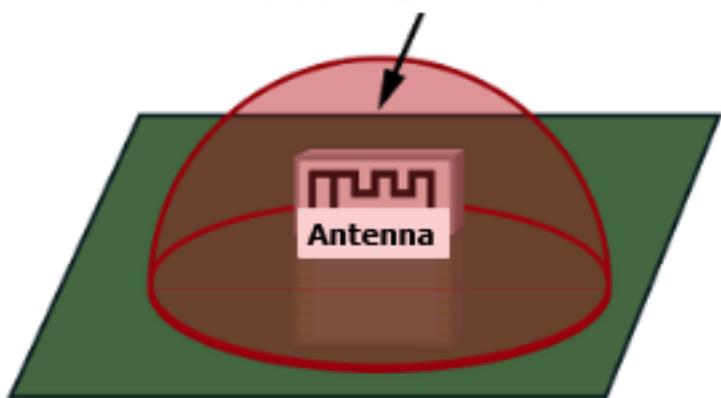


6. Packaging information and production instructions

6.1. Mechanical dimensions


The dimensions of the PCB are 17.3 ± 0.35 mm (L) $\times 15 \pm 0.35$ mm (W) $\times 0.8 \pm 0.1$ mm (H).

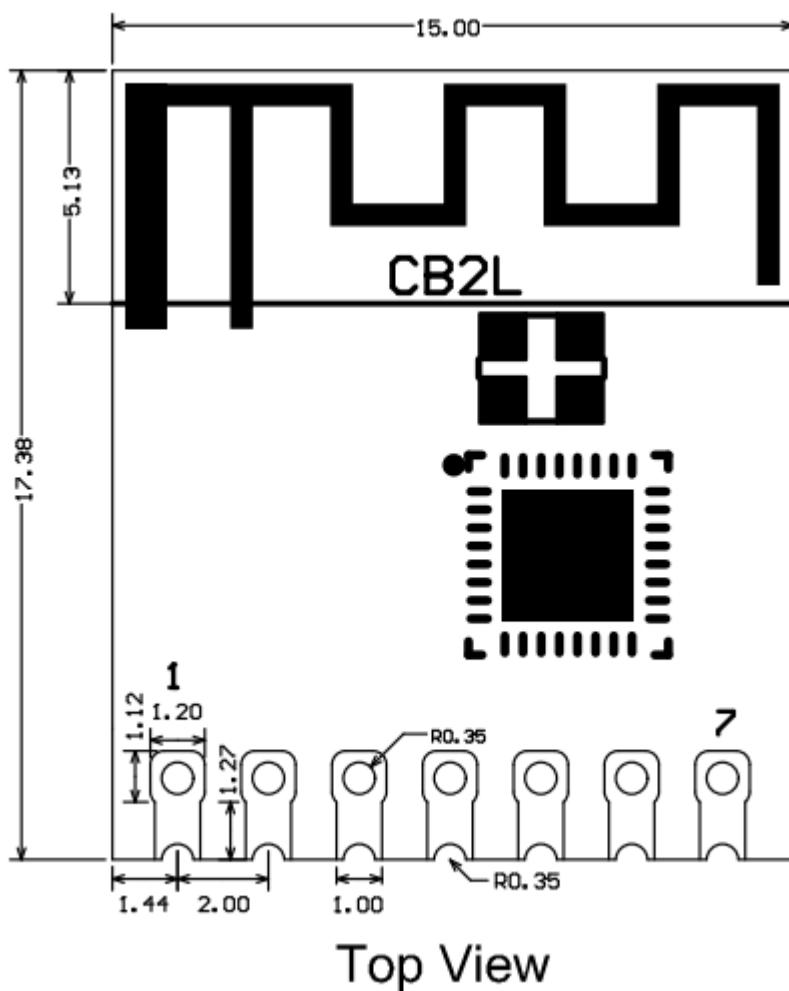

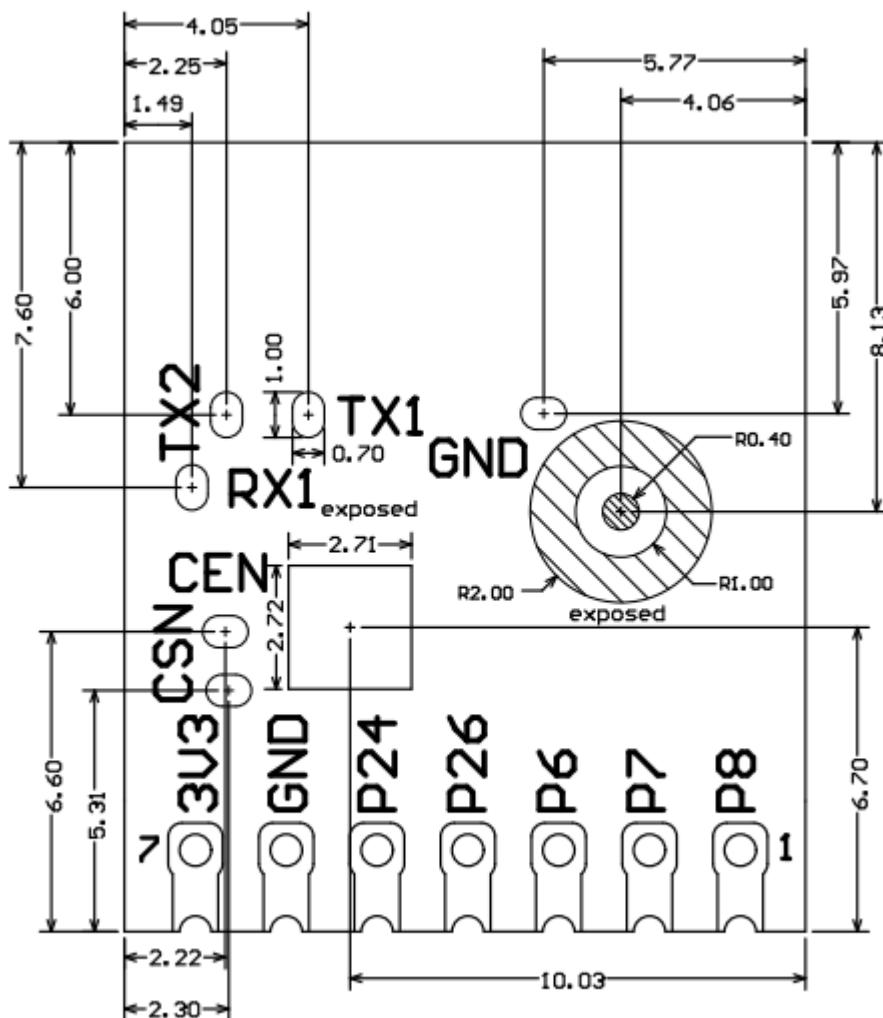


Bottom View

6.2. Side view

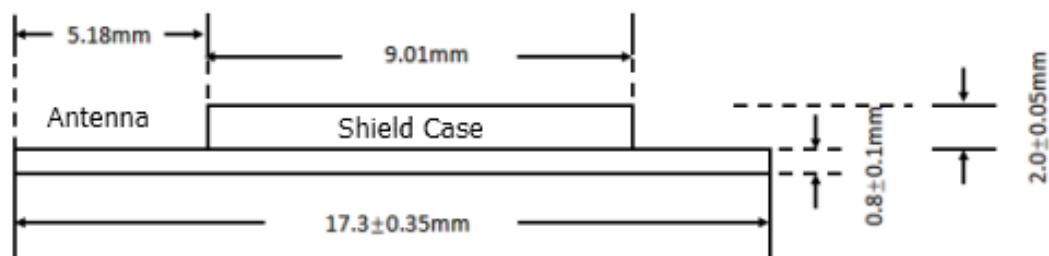


6.3. Schematic diagram of packaging

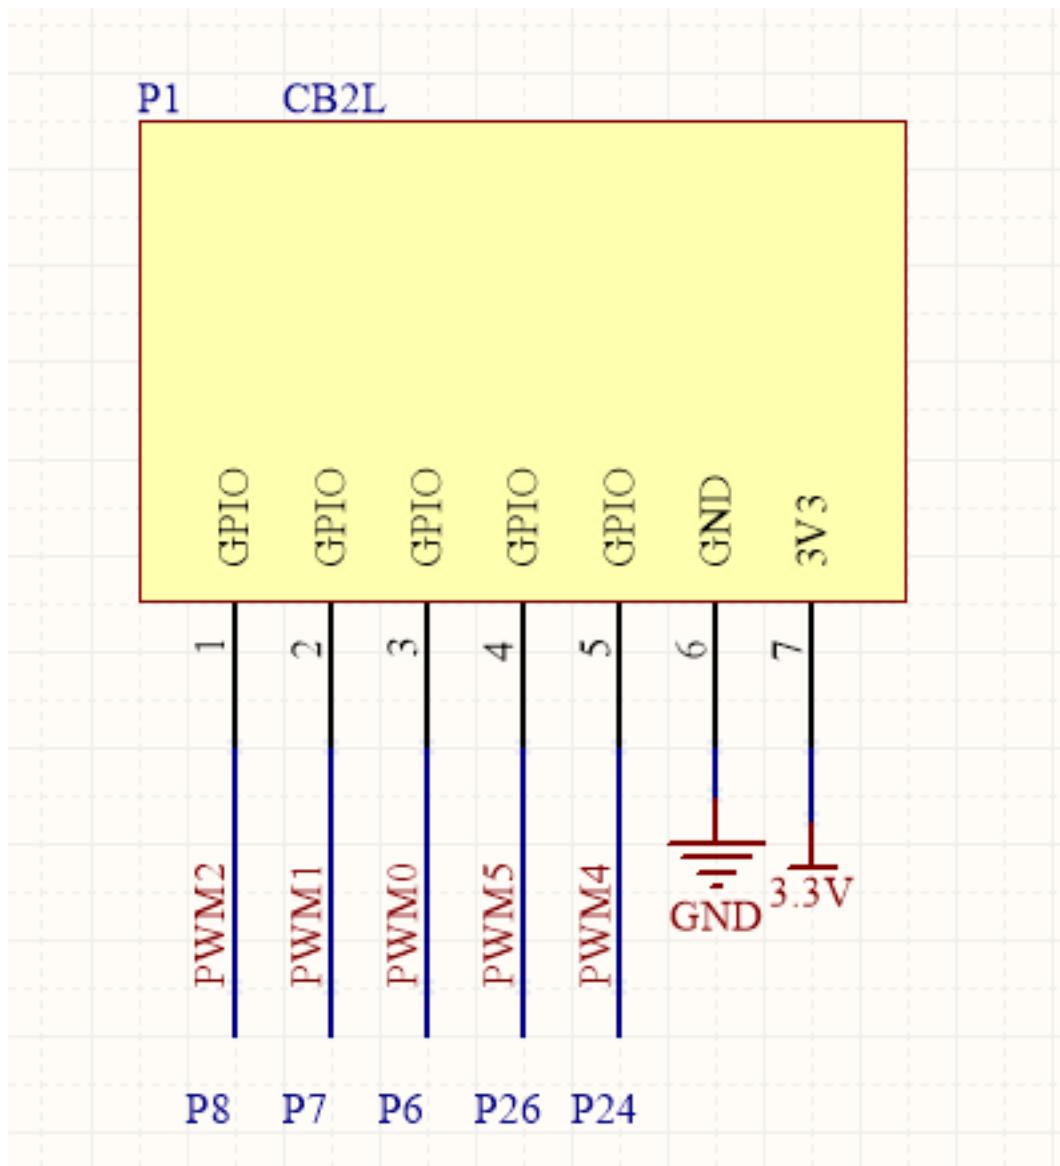


6.4. Diagram of PCB footprint-pin header

CB2L can be packaged with the SMT or pin header. The dimensions for the plug-in are as follows:

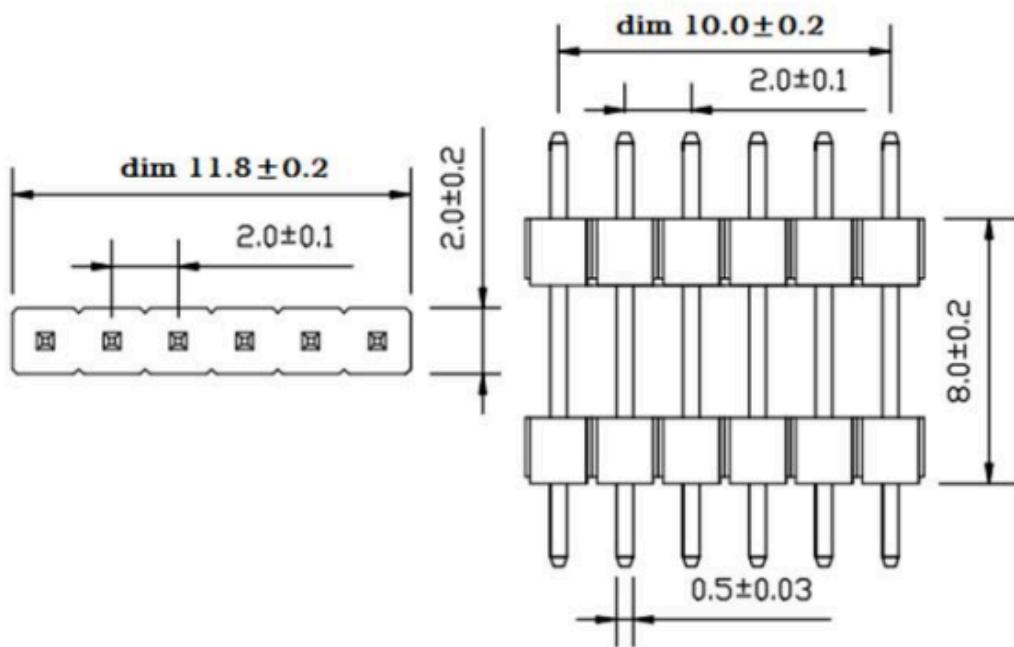

6.4.1. PCB footprint-SMT

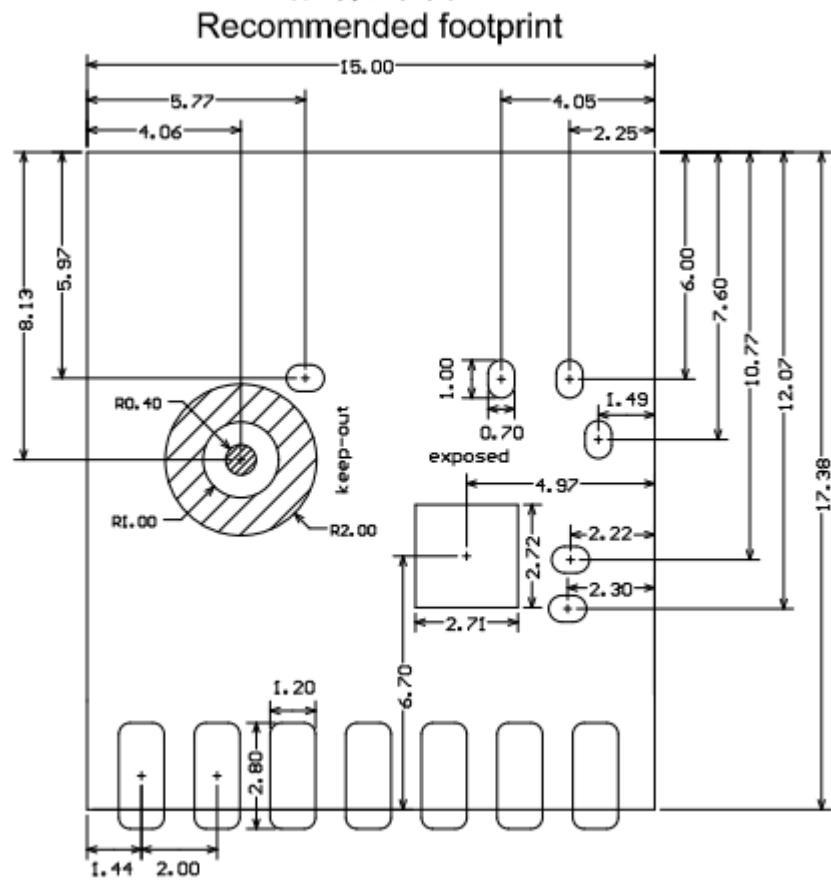




The area indicated as **keep-out** in the diagram above does not require tinning and should not have any traces routed through it.

6.5. Production instructions

1. For the modules that can be packaged with the SMT or in an in-line way, you can select either of them according to the PCB design solutions of customers. If a PCB is designed to be SMT-packaged, package the module with the SMT. If a PCB is designed to be in-line-packaged, package the module in an in-line way. After being unpacked, the module must be soldered within 24 hours. Otherwise, it needs to be put into the drying cupboard where the relative humidity is not greater than 10%; or it needs to be packaged again under vacuum and the exposure time needs to be recorded (the total exposure time cannot exceed 168 hours).
 - (SMT process) SMT devices:
 - Mounter
 - SPI
 - Reflow soldering machine
 - Thermal profiler
 - Automated optical inspection (AOI) equipment
 - (Wave soldering process) Wave soldering devices:
 - Wave soldering equipment
 - Wave soldering fixture
 - Constant-temperature soldering iron
 - Tin bar, tin wire, and flux
 - Thermal profiler
 - Baking devices:
 - Cabinet oven
 - Anti-electrostatic and heat-resistant trays
 - Anti-electrostatic and heat-resistant gloves
2. Storage conditions for a delivered module:

- The moisture-proof bag must be placed in an environment where the temperature is below 40°C and the relative humidity is lower than 90%.
- The shelf life of a dry-packaged product is 12 months from the date when the product is packaged and sealed.
- There is a humidity indicator card (HIC) in the packaging bag.

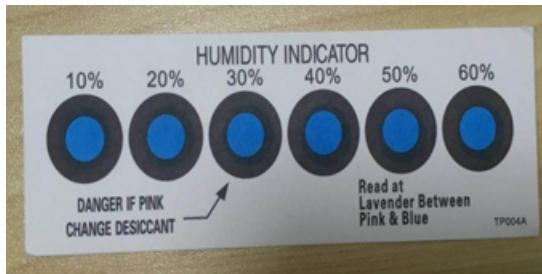

3. The module needs to be baked in the following cases:

- The packaging bag is damaged before unpacking.
- There is no humidity indicator card (HIC) in the packaging bag.
- After unpacking, circles of 10% and above on the HIC become pink.
- The total exposure time has lasted for over 168 hours since unpacking.
- More than 12 months have passed since the sealing of the bag.

4. Baking settings:

- Temperature: 40°C and \leq 5% RH for reel package and 125°C and \leq 5% RH for tray package (please use the heat-resistant tray rather than a plastic container)
- Time: 168 hours for reel package and 12 hours for tray package
- Alarm temperature: 50°C for reel package and 135°C for tray package
- Production-ready temperature after natural cooling: $< 36^\circ\text{C}$
- Re-baking situation: If a module remains unused for over 168 hours after being baked, it needs to be baked again.
- If a batch of modules is not baked within 168 hours, do not use the reflow soldering or wave soldering to solder them. Because these modules are Level-3 moisture-sensitive devices, they are very likely to get damp when exposed beyond the allowable time. In this case, if they are soldered at high temperatures, it may result in device failure or poor soldering.

5. In the whole production process, take electrostatic discharge (ESD) protective measures.


6. To guarantee the passing rate, it is recommended that you use the SPI and AOI to monitor the quality of solder paste printing and mounting.

6.6. Recommended oven temperature curve

Select a proper soldering manner according to the process. For the SMT process, please refer to the recommended oven temperature curve of reflow soldering. For the wave soldering process, please refer to the recommended oven temperature curve of wave soldering. There are some differences between the set temperatures and the actual temperatures. All the temperatures shown in this module datasheet are obtained through actual measurements.

Manner 1: SMT process (Recommended oven temperature curve of reflow soldering)

Set oven temperatures according to the following curve.

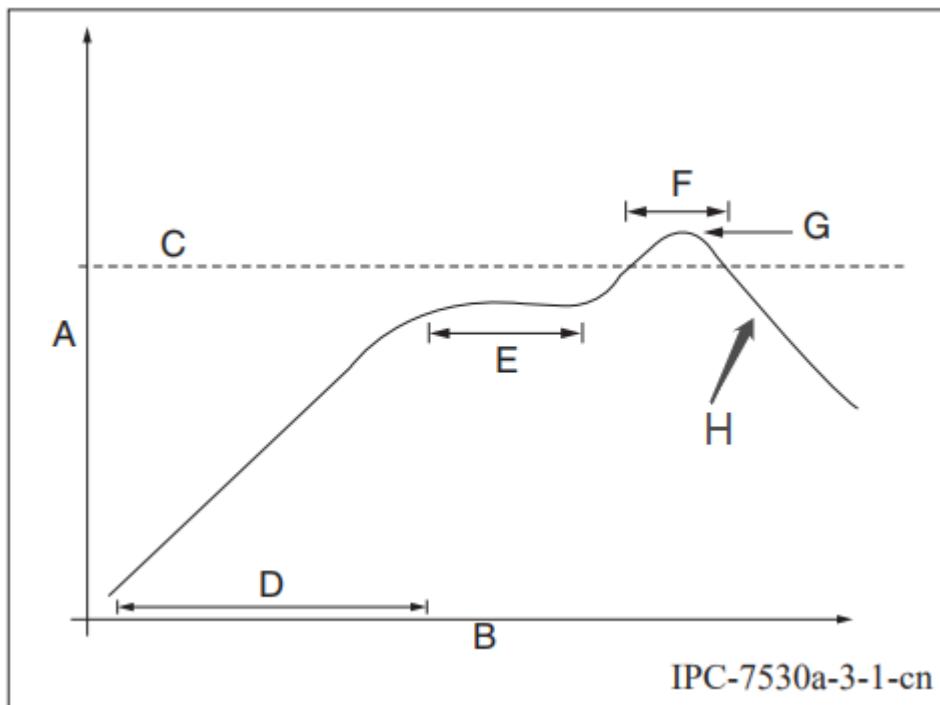

- A: Temperature axis
- B: Time axis
- C: Liquidus temperature: 217 to 220°C
- D: Ramp-up slope: 1 to 3°C/s
- E: Duration of constant temperature: 60 to 120s; the range of constant temperature: 150 to 200°C


- F: Duration above the liquidus: 50 to 70s
- G: Peak temperature: 235 to 245°C
- H: Ramp-down slope: 1 to 4°C/s

Note: The above curve is just an example of the solder paste SAC305.

For more details about other solder pastes, please refer to Recommended oven temperature curve in the solder paste specifications.

Manner 2: Wave soldering process (Oven temperature curve of wave soldering)

Set oven temperatures according to the following temperature curve of wave soldering. The peak temperature is $260^{\circ}\text{C} \pm 5^{\circ}\text{C}$.

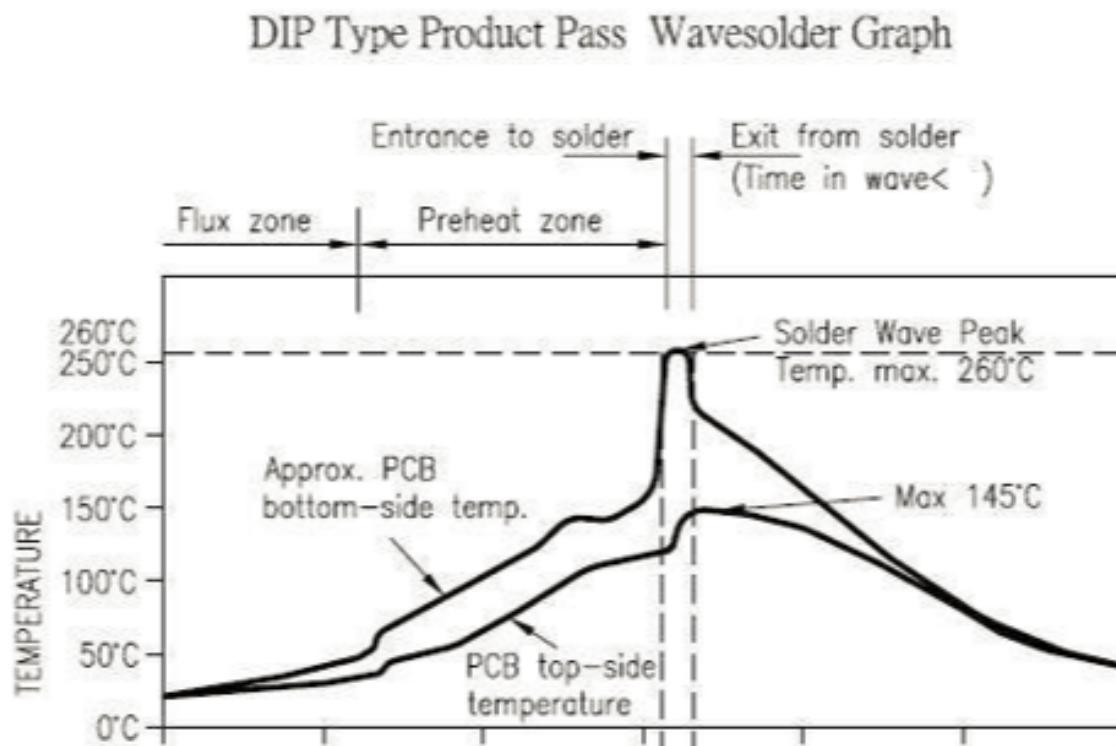

**Suggestions on
oven
temperature
curve of wave
soldering**

**Suggestions on
manual
soldering
temperature**

| | | | |
|-----------------------------|--------------|-----------------------|-----------|
| Preheat temperature | 80 to 130 °C | Soldering temperature | 360±20°C |
| Preheat time | 75 to 100s | Soldering time | <3s/point |
| Peak contact time | 3 to 5s | NA | NA |
| Temperature of tin cylinder | 260±5°C | NA | NA |
| Ramp-up slope | ≤2°C/s | NA | NA |
| Ramp-down slope | ≤6°C/s | NA | NA |

6.7. Storage conditions

| | | |
|--|--|---|
|  | Caution This bag contains MOISTURE-SENSITIVE DEVICES | LEVEL 3 If blank, see adjacent bar code label |
| <ol style="list-style-type: none">Calculated shelf life in sealed bag: 12 months at <40°C and <90% relative humidity (RH)Peak package body temperature: 260 °C If blank, see adjacent bar code labelAfter bag is opened, devices that will be subjected to reflow solder or other high temperature process must be<ol style="list-style-type: none">Mounted within: 168 hours of factory conditions If blank, see adjacent bar code label ≤30°C/60% RH, orStored per J-STD-033Devices require bake, before mounting, if:<ol style="list-style-type: none">Humidity Indicator Card reads >10% for level 2a - 5a devices or >60% for level 2 devices when read at 23 ± 5°C3a or 3b are not metIf baking is required, refer to IPC/JEDEC J-STD-033 for bake procedure | | |
| Bag Seal Date: _____ | | See Production Date For date code information If blank, see adjacent bar code label |
| Note: Level and body temperature defined by IPC/JEDEC J-STD-020 | | |

7. MOQ and packaging information

| Product model | MOQ (pcs) | Shipping packaging method | Modules per reel | Reels per carton |
|------------------|-----------|---------------------------------|---------------------|---------------------|
| CB2L | 4000 | Tape reel | 1000 | 4 |

**Integration instructions for host product manufacturers according to KDB
996369 D03 OEMManual v01**

Conditions on using Shenzhen Linktop IOT Co., Ltd regulatory approvals:

- A. Customer must ensure that its product (The " WIFI/Bluetooth MODULE") is electrically identical to Shenzhen Linktop IOT Co., Ltd reference designs. Customer acknowledges that any modifications to Shenzhen Linktop IOT Co., Ltd reference designs may invalidate regulatory approvals in relation to the CUSTOMER Product, or may necessitate notifications to the relevant regulatory authorities.
- B. Customer is responsible for ensuring that antennas used with the product are of the same type, with same or lower gains as approved and providing antenna reports to Shenzhen Linktop IOT Co., Ltd.
- C. Customer is responsible for regression testing to accommodate changes to Shenzhen Linktop IOT Co., Ltd reference designs, new antennas, and portable RF exposure safety testing/approvals.
- D. Appropriate labels must be affixed to the CUSTOMER Product that comply with applicable regulations in all respects.
- E. A user's manual or instruction manual must be included with the customer product that contains the text as required by applicable law. Without limitation of the foregoing, an example (for illustration purposes only) of possible text to include is set forth below:

2.2 List of applicable FCC rules

FCC Part 15 Subpart C 15.247

2.3 Specific operational use conditions

Radio Technology: Bluetooth BLE

Operation frequency: 2402-2480MHz

Channel No.: 40 channels

Data rate: 1Mbps

Channel Separation: 2MHz

Modulation: GFSK

Antenna Type: PCB antenna, max gain 0.13dBi.

Radio Technology: 2.4G WIFI

Operation frequency: 2412MHz-2462MHz for IEEE 802.11 b, g, n/HT20

Channel No.: 802.11b/802.11g /802.11n (HT20): 11

Modulation type: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK)

IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK)

IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)

Antenna Type: PCB antenna, max gain 0.13dBi.

The module can be used for mobile or portable applications with a maximum 0.13dBi antenna. The host manufacturer installing this module into their product must ensure that the final composit product complies with the FCC requirements by a technical assessment or evaluation to the FCC rules, including the transmitter operation. The host manufacturer has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.

2.4 Limited module procedures

Not applicable. The module is a Single module and complies with the requirement of FCC Part 15.212.

2.5 Trace antenna designs

The antenna used is the PCB antenna on the module.

2.6 RF exposure considerations

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

—Consult the dealer or an experienced radio/ TV technician for help.

The antennas used for this transmitter must be installed to provide a separation distance of at least 20cm from all persons and must not be located or operating in conjunction with any other antenna or transmitter.

2.7 Antennas

Antenna Specification are as follows:

Antenna Type: PCB antenna

Antenna Gain(Peak):0.13 dBi (Provided by customer)

This device is intended only for host manufacturers under the following conditions:

The transmitter module may not be co-located with any other transmitter or antenna;

As long as the conditions above are met, further transmitter test will not be required. However, the host manufacturer is still responsible for testing their end-product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.).

2.8 Label and compliance information

Host product manufacturers need to provide a physical or e-label stating "Contains FCC ID: 2BCSG-BZBK002L" With their finished product.

2.9 Information on test modes and additional testing requirements

Radio Technology: Bluetooth BLE

Operation frequency: 2402-2480MHz

Channel No.: 40 channels

Data rate: 1Mbps

Channel Separation: 2MHz

Modulation: GFSK

Antenna Type: PCB antenna, max gain 0.13dBi.

Radio Technology: 2.4G WIFI

Operation frequency: 2412MHz-2462MHz for IEEE 802.11 b, g, n/HT20

Channel No.: 802.11b/802.11g /802.11n (HT20): 11

Modulation type: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK)

IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK)

IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)

Antenna Type: PCB antenna, max gain 0.13dBi.

Host manufacturer must perform test of radiated & conducted emission and

spurious emission, etc according to the actual test modes for a stand-alone modular transmitter in a host, as well as for multiple simultaneously transmitting modules or other transmitters in a host product.

Only when all the test results of test modes comply with FCC requirements, then the end product can be sold legally.

2.10 Additional testing, Part 15 Subpart B disclaimer

The modular transmitter is only FCC authorized for FCC Part 15 Subpart C 15.247 that the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. If the grantee markets their product as being Part 15 Subpart B compliant (when it also contains unintentional-radiator digital circuitry), then the grantee shall provide a notice stating that the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.