

Prüfbericht-Nr.: Test report no.:	CN23BBCZ 001	Auftrags-Nr.: Order no.:	168438589	Seite 1 von 15 Page 1 of 15
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2023-08-08	
Auftraggeber: Client:	OHM (ChongQing) Electronics Technology CO., LTD. D2 Building, Erlang Overseas Students Pioneer Park, No.71, Kecheng Road, Jiulongpo District, ChongQing City 400039, P. R. China			
Prüfgegenstand: Test item:	Remote Control			
Bezeichnung / Typ-Nr.: Identification / Type no.:	TCT-A12			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	FCC 47 CFR Part 15.231			
Wareneingangsdatum: Date of sample receipt:	2023-08-24	Please refer to Photo Document		
Prüfmuster-Nr.: Test sample no:	A003516162-022			
Prüfzeitraum: Testing period:	2023-08-25 - 2023-08-31			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:			genehmigt von: authorized by:	
Datum: Date: 2023-12-05	Signed by: Bell Hu		Ausstellungsdatum: Issue date: 2023-12-05	Signed by: Jonathan Li
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / Other:	FCC ID: 2BCT6-0001			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

V05

Prüfbericht-Nr.: CN23BBCZ 001
Test report no.:

Seite 2 von 15
Page 2 of 15

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

TEST SUMMARY

5.1.1 Antenna Requirement

RESULT: Pass

5.1.2 Deactivation of the Transmission

RESULT: Pass

5.1.3 20dB Emission Bandwidth and 99% Bandwidth

RESULT: Pass

5.1.4 Field strength of fundamental and Unwanted Emissions in the Spurious Domain

RESULT: Pass

CONTENTS

1. GENERAL REMARKS	5
1.1 COMPLEMENTARY MATERIALS	5
1.2 TEST STANDARD(S)	5
2. TEST SITES	5
2.1 TEST FACILITIES	5
2.2 LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3 TRACEABILITY	7
2.4 CALIBRATION	7
2.5 LOCATION OF ORIGINAL DATA	7
2.6 STATUS OF FACILITY USED FOR TESTING	7
3. GENERAL PRODUCT INFORMATION	8
3.1 PRODUCT FUNCTION AND INTENDED USE	8
3.2 RATINGS AND SYSTEM DETAILS	8
3.3 INDEPENDENT OPERATION MODES	8
3.4 NOISE GENERATING AND NOISE SUPPRESSING PARTS	8
3.5 SUBMITTED DOCUMENTS	8
4. TEST SET-UP AND OPERATION MODES	9
4.1 PRINCIPLE OF CONFIGURATION SELECTION	9
4.2 TEST OPERATION AND TEST SOFTWARE	9
4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
4.4 COUNTERMEASURES TO ACHIEVE ERM COMPLIANCE	9
4.5 TEST SETUP DIAGRAM	10
5. TEST RESULTS	11
5.1 ESSENTIAL REQUIREMENTS OF STANDARD	11
5.1.1 Antenna Requirement	11
5.1.2 Deactivation of the Transmission	12
5.1.3 20dB Emission Bandwidth and 99% Bandwidth	13
5.1.4 Field strength of fundamental and Unwanted Emissions in the Spurious Domain	14
6. SYSTEM MEASUREMENT UNCERTAINTY	15
7. LIST OF TABLES	15

1. GENERAL REMARKS

1.1 COMPLEMENTARY MATERIALS

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of radio spectrum

Appendix B: Photographs of the Test Set-Up

1.2 TEST STANDARD(S)

Applied Rules: FCC 47 CFR Part 15.231

Test Method: ANSI C63.10:2013

2. TEST SITES

2.1 TEST FACILITIES

Test Facilities: TÜV Rheinland (Shenzhen) Co., Ltd.

Address:

No. 362 Huanguan Road Middle, Longhua District, Shenzhen 518110, P.R. China

2.2 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
Wireless Connectivity Tester	R&S	CMW270	101375	25.07.2024
Signal Analyzer	R&S	FSV 40	101441	25.07.2024
Vector Signal Generator	R&S	SMBV100A	263301	25.07.2024
Signal Generator	R&S	SMB100A	115186	25.07.2024
OSP	R&S	OSP 150	101017	21.11.2023
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A
Power Meter	R&S	NRP2	107105	21.11.2023
Power Sensor	R&S	NRP-Z81	105677	25.07.2024
Humid & Temp Programmable Tester	BOST	NTH090-60	19040801	15.03.2024
Shielding Room 8#	Albatross	SR8	APC17151-SR8	22.06.2024
Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	25.07.2024
Signal Analyzer	R&S	FSV 40	101439	25.07.2024
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	25.07.2024
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	25.07.2024
Amplifier	R&S	SCU-18F	180070	25.07.2024
Amplifier	R&S	SCU40A	100475	25.07.2024
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	06.08.2024
Double-Ridged Antenna (1 - 18 GHz)	ETS-LINDGREN	3117	00218717	06.08.2024
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	27.08.2024
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	06.08.2024
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	22.06.2024

Prüfbericht - Nr.: CN23BBCZ 001
Test Report No.:**Seite 7 von 15**
Page 7 of 15

2.3 TRACEABILITY

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4 CALIBRATION

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 LOCATION OF ORIGINAL DATA

The original copies of all test data taken during actual testing were attached at Appendix A of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.6 STATUS OF FACILITY USED FOR TESTING

The TÜV Rheinland (Shenzhen) Co., Ltd. facility located at No. 362 Huanguan Road Middle, Longhua District, Shenzhen 518110, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3. GENERAL PRODUCT INFORMATION

3.1 PRODUCT FUNCTION AND INTENDED USE

The product is remote control at 433MHz band for the industrial control.
For details refer to the User Manual and Technical Description..

3.2 RATINGS AND SYSTEM DETAILS

Table 2: Technical Characteristics of EUT

General Information of EUT	Description
Kind of Equipment:	Remote Control
Type Designation:	TCT-A12
FCC ID:	2BCT6-0001
Operating Frequency:	433.15 MHz - 434.65 MHz
Modulation Type:	GFSK
Antenna Type:	Integral Antenna, 1.8 dBi
Antenna Number:	1
Operating Voltage:	DC 3V Battery powered.
Operating Temperature Range:	-25°C ~ +70°C

Note: As per C63.10 subclause 5.6.1, two frequencies tested, 1 near top and 1 near bottom.

3.3 INDEPENDENT OPERATION MODES

The basic operation modes are:

- A. Transmitting
- B. Idle

3.4 NOISE GENERATING AND NOISE SUPPRESSING PARTS

Refer to the Circuit Diagram.

3.5 SUBMITTED DOCUMENTS

- | | |
|---|--|
| ☒ User Manual | ☒ Rating Label |
| ☒ Circuit Diagram | ☐ PCB Layout |
| ☒ Block Diagram | ☒ Photo Document |
| ☒ Schematics | ☒ Parts List |
| ☐ Model Difference Letter | |

4. TEST SET-UP AND OPERATION MODES

4.1 PRINCIPLE OF CONFIGURATION SELECTION

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 TEST OPERATION AND TEST SOFTWARE

Test operation refers to test setup in chapter 5.

Table 3: Test Environments

Environment Parameter	Selected Values During Tests		
	Temperature	Voltage (Battery)	Relative Humidity
Normal (NTNV)	24.6°C	3V	Ambient

4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT

The EUT was tested together with the following accessories:

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N
--	--	--	--

4.4 COUNTERMEASURES TO ACHIEVE ERM COMPLIANCE

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF). No additional measures were employed to achieve compliance.

4.5 TEST SETUP DIAGRAM

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)


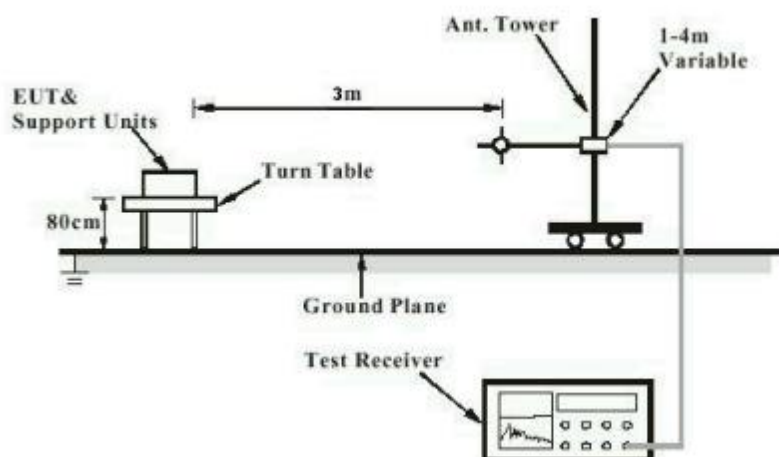


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

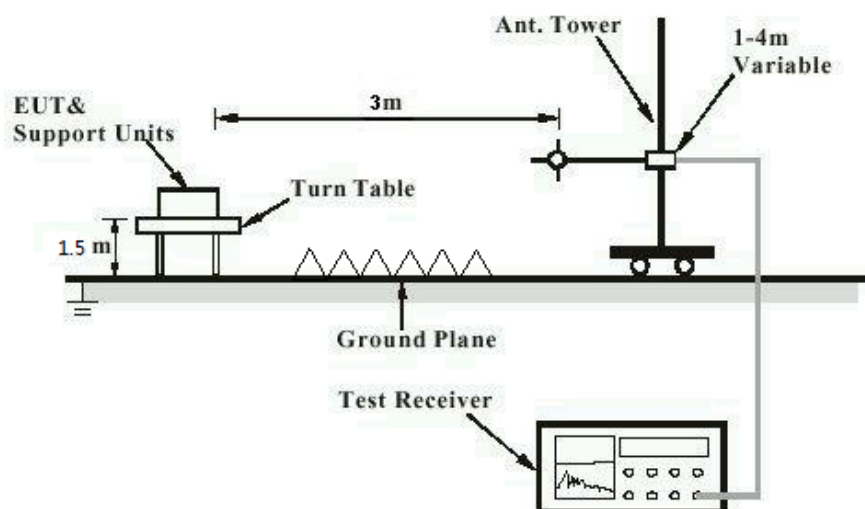

5. TEST RESULTS

5.1 Essential Requirements of Standard

5.1.1 Antenna Requirement

RESULT:**Pass**

Test standard : CFR47 FCC Part 15.203

The EUT have Integral antenna, and the antenna connector is designed with permanent attachment and no consideration of replacement.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN23BBCZ 001

Test Report No.:

Seite 12 von 15

Page 12 of 15

5.1.2 Deactivation of the Transmission

RESULT:**Pass****Test Specification**

Test standard	:	CFR47 FCC Part 15.231
Basic standard	:	ANSI C 63.10:2013
Test requirement	:	CFR47 FCC Part 15.231 (a)(1)
Limit	:	A transmitter activated automatically shall cease transmission within 5 seconds after activation.
Test suite	:	Shielding Room

Test Setup

Date of testing	:	2023-08-29
Test environment:	:	Normal test conditions
Operation mode	:	A
Ambient temperature	:	24.6°C
Relative humidity	:	55%
Atmospheric pressure	:	101kPa

Conclusion:

Refer to attached Appendix A for details of test results.

Prüfbericht - Nr.: CN23BBCZ 001
Test Report No.:**Seite 13 von 15**
Page 13 of 15

5.1.3 20dB Emission Bandwidth and 99% Bandwidth

RESULT:**Pass****Test Specification**

Test standard	:	CFR47 FCC Part 15.231
Basic standard	:	ANSI C 63.10:2013
Test requirement	:	CFR47 FCC Part 15.231 (c)
Limit	:	CFR47 FCC Part 15.231 (c)
Test suite	:	3m Semi Anechoic Room

Test Setup

Date of testing	:	2023-08-29
Test environment:	:	Normal test conditions
Operation mode	:	A
Ambient temperature	:	24.6°C
Relative humidity	:	55%
Atmospheric pressure	:	101kPa

Conclusion:

Refer to attached Appendix A for details of test results.

Prüfbericht - Nr.: CN23BBCZ 001
Test Report No.:Seite 14 von 15
Page 14 of 15

5.1.4 Field strength of fundamental and Unwanted Emissions in the Spurious Domain

RESULT: **Pass****Test Specification**

Test standard	:	CFR47 FCC Part 15.231 CFR47 FCC Part 15.205 CFR47 FCC Part 15.209
Basic standard	:	ANSI C 63.10:2013
Test requirement	:	CFR47 FCC Part 15.231 (b)(1)(2)(3)
Limit	:	CFR47 FCC Part 15.231 (b)
Test suite	:	3m Semi Anechoic Room

Test Setup

Date of testing	:	2023-08-28
Test environment:	:	Normal test conditions
Operation mode	:	A
Ambient temperature	:	Refer to test data
Relative humidity	:	Refer to test data
Atmospheric pressure	:	101kPa

Conclusion:

Refer to attached Appendix A for details of test results.

6. System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

Table 5: System Measurement Uncertainty

Items		Extended Uncertainty
RE	Radiated emission 9 kHz - 30 MHz	±3.97 dB
	Radiated emission 30 MHz - 1 GHz	±4.30 dB
Remark: 95% Confidence Levels, K=2.		

7. LIST OF TABLES

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Technical Characteristics of EUT	8
Table 3: Test Environments.....	9
Table 4: List of Accessories and Auxiliary Equipment.....	9
Table 5: System Measurement Uncertainty	15

Appendix A

Test Results

APPENDIX A.1: TEST RESULTS OF DEACTIVATION OF THE TRANSMISSION2

APPENDIX A.4: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL AND UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN5


 A.4.1 BELOW 1GHZ5

 A.4.2 ABOVE 1GHZ.....9


APPENDIX A.1: TEST RESULTS OF DEACTIVATION OF THE TRANSMISSION

Test Results

Operating Frequency (MHz)	Duration Time (S)	Limit (S)	Result
433.15	1.6377	5	Pass
434.65	1.6377	5	Pass

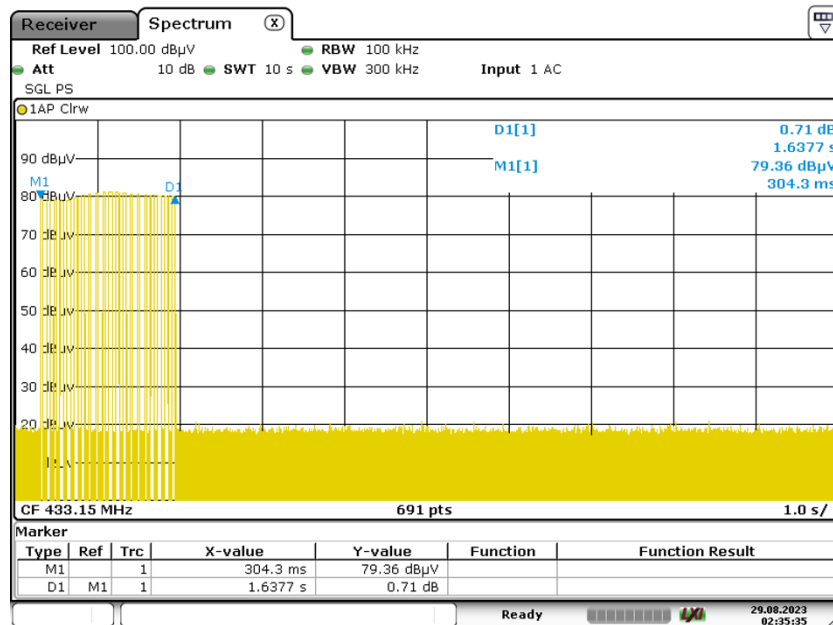

Date: 29.AUG.2023 02:35:35

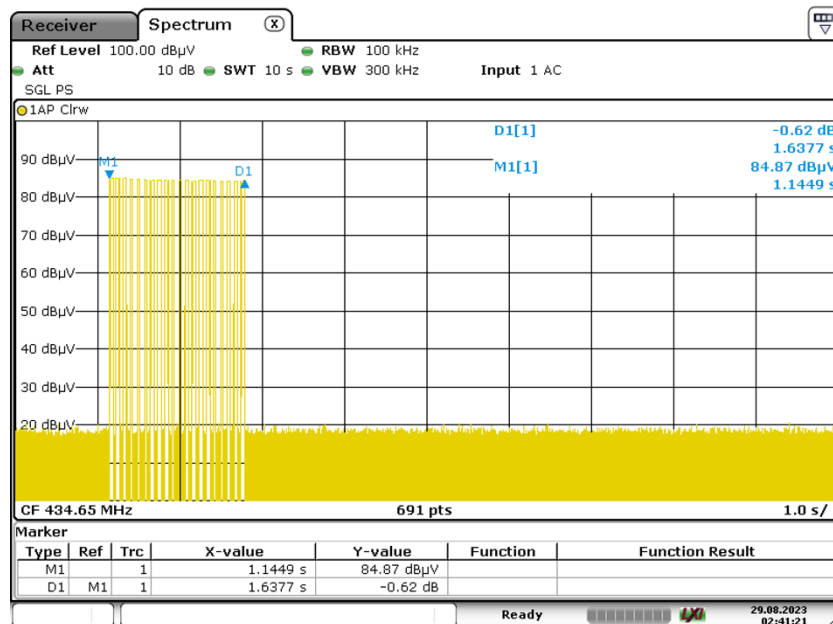


Date: 29.AUG.2023 02:41:22


APPENDIX A.3: TEST RESULTS OF 20dB EMISSION BANDWIDTH AND 99% BANDWIDTH

Test Results


Operation Frequency (MHz)	20dB Emission Bandwidth (KHz)	99% Occupied Bandwidth (KHz)	Limit (KHz)	Result
433.15	19.39	17.66	1083	Pass
434.65	19.39	18.09	1084	Pass

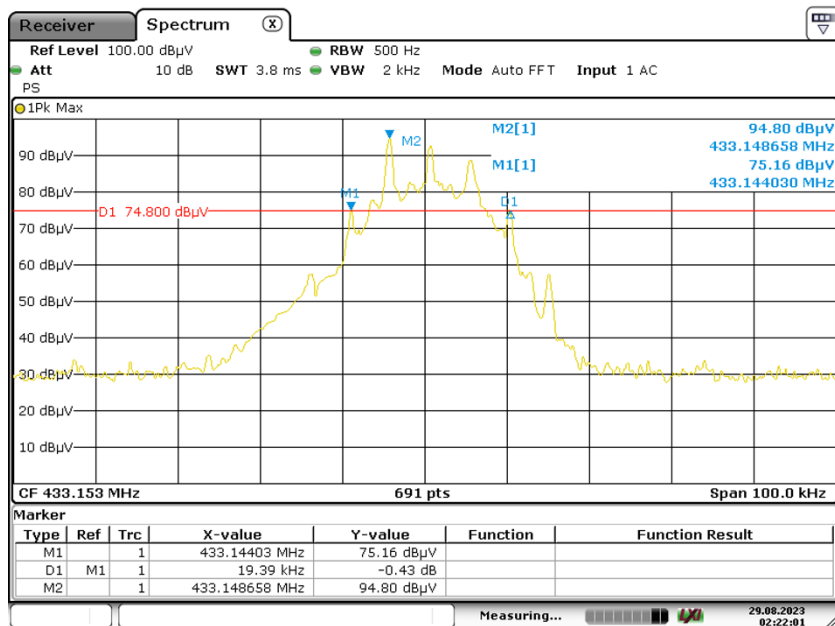


Date: 29.AUG.2023 02:22:01

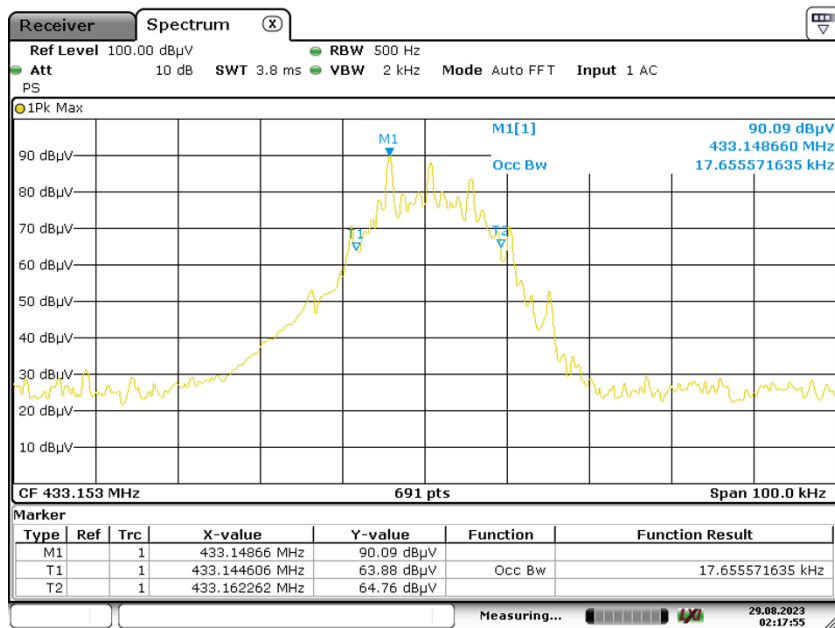

Date: 29.AUG.2023 02:17:56

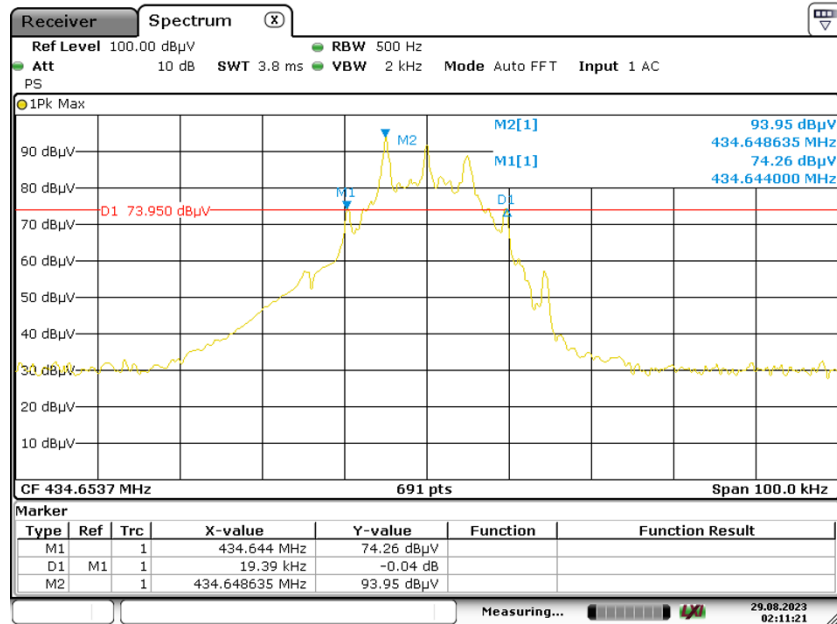


Date: 29.AUG.2023 02:11:22

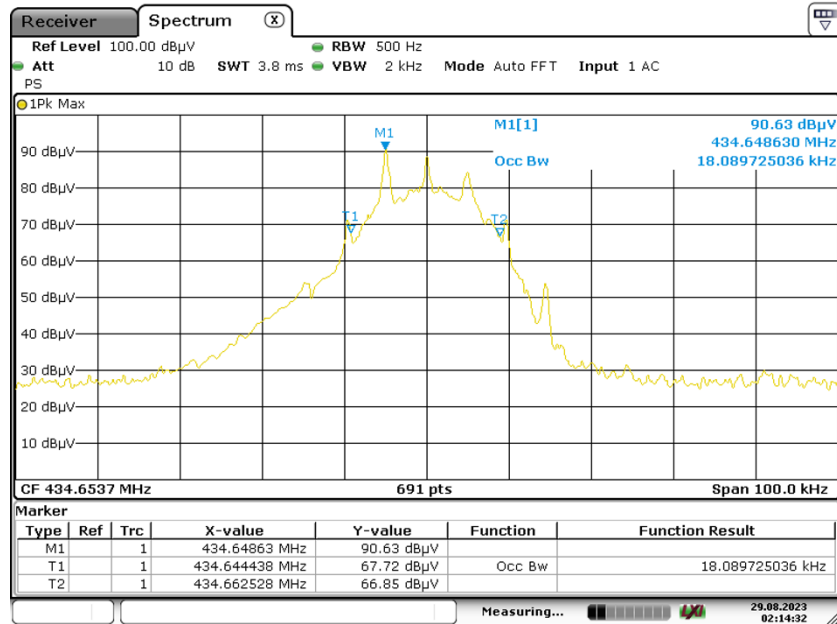

Date: 29.AUG.2023 02:14:32

APPENDIX A.4: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL AND UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN
A.4.1 Below 1GHz
EUT Information


EUT Name:	Remote Controller
Model:	TCT-A12
Test Mode:	A, Low Channel
Order No/Sample No:	168438589/A003516162-022
Test Voltage::	3V
Remark:	Temp 23 Humi:56%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

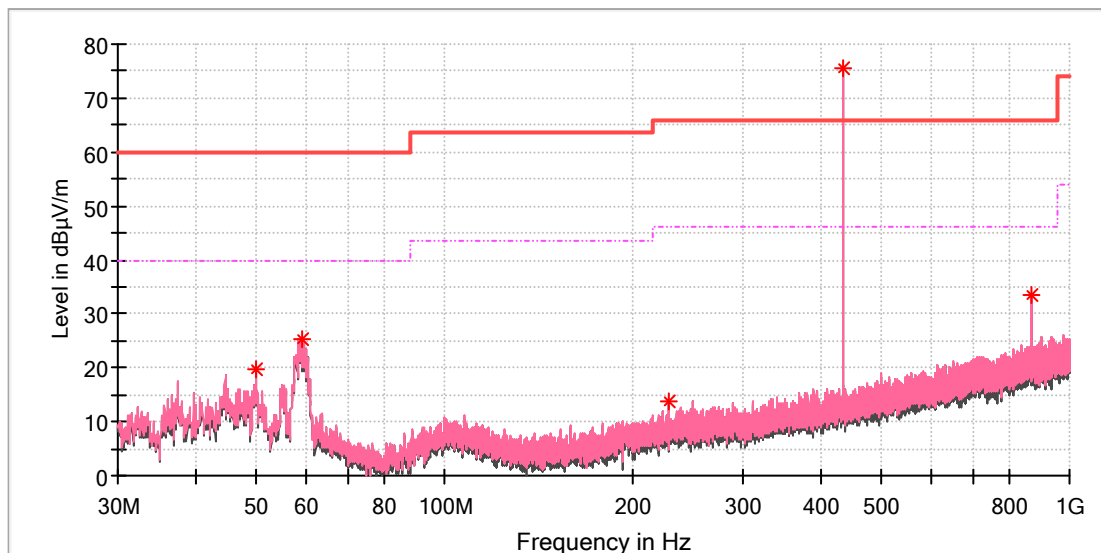
Critical_Freqs

Frequency (MHz)	MaxPeak	Average (dBμV/m)	Limit (dBμV/m)	Margin	Height	Pol	Azimuth	Corr. (dB/)
49.996923	19.73	---	40.00	20.27	100.0	V	31.0	-18.6
59.361154	25.48	---	40.00	14.52	100.0	V	333.0	-19.2
228.700769	13.93	---	46.00	32.07	100.0	V	237.0	-18.5
433.146923	75.71	---	100.82	25.11	100.0	V	355.0	-13.6
433.146923	---	64.41	80.82	16.41	100.0	V	355.0	-13.6
866.326539	33.63	---	80.82	47.19	100.0	V	102.0	-5.7
866.326539	---	22.33	60.82	38.49	100.0	V	102.0	-5.7

EUT Information

EUT Name:	Remote Controller
Model:	TCT-A12
Test Mode:	A, Low Channel
Order No/Sample No:	168438589/A003516162-022
Test Voltage::	3V
Remark:	Temp 23 Humi:56%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

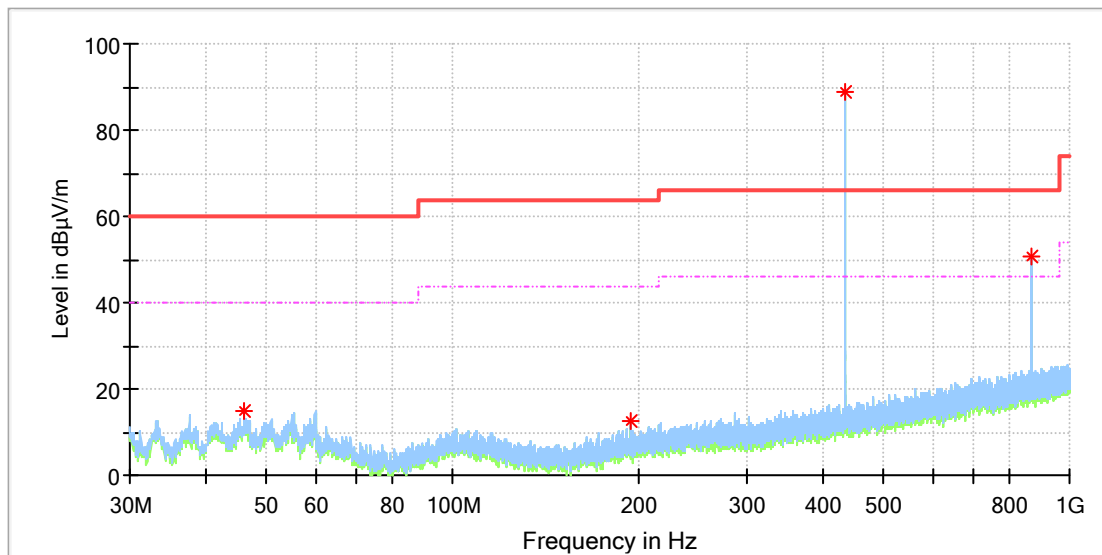


Critical Freqs

Frequency (MHz)	MaxPeak	Average (dBµV/m)	Limit (dBµV/m)	Margin	Height	Pol	Azimuth	Corr. (dB/)
46.005000	14.88	---	40.00	25.12	100.0	H	42.0	-19.0
194.340385	12.66	---	43.50	30.84	100.0	H	68.0	-19.6
433.146923	88.80	---	100.82	12.02	100.0	H	272.0	-13.6
433.146923	---	77.50	80.82	3.32	100.0	H	272.0	-13.6
866.326539	50.69	---	80.82	30.13	100.0	H	251.0	-5.7
866.326539	---	39.39	60.82	21.43	100.0	H	251.0	-5.7

EUT Information

EUT Name:	Remote Controller
Model:	TCT-A12
Test Mode:	A, High Channel
Order No/Sample No:	168438589/A003516162-022
Test Voltage::	3V
Remark:	Temp 23 Humi:56%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

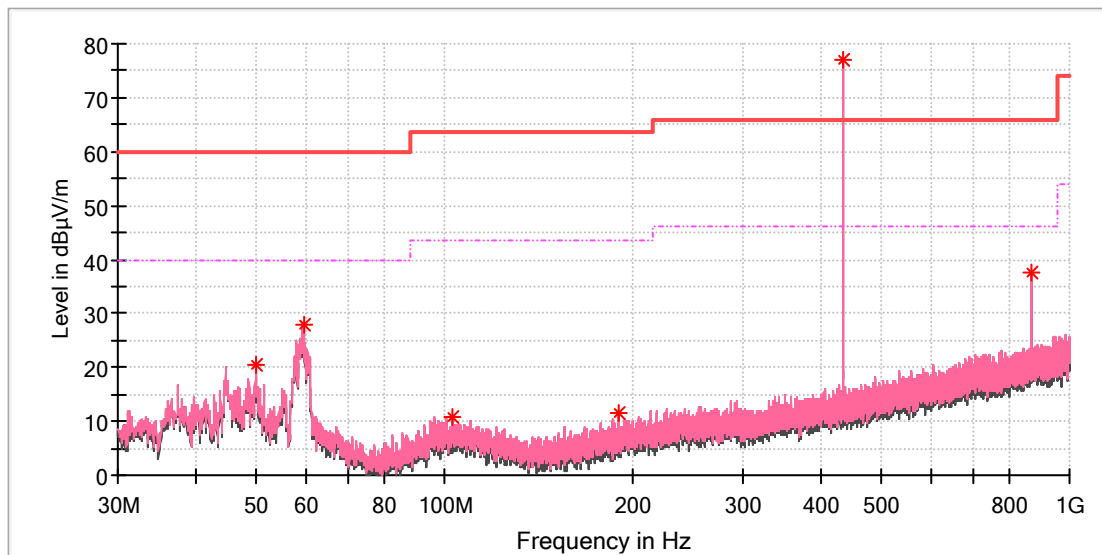


Critical Freqs

Frequency (MHz)	MaxPeak	Average (dBμV/m)	Limit (dBμV/m)	Margin	Height	Pol	Azimuth	Corr. (dB/)
49.996923	20.35	---	40.00	19.65	100.0	V	0.0	-18.6
59.398462	28.07	---	40.00	11.93	100.0	V	260.0	-19.2
103.123077	10.94	---	43.50	32.56	100.0	V	114.0	-19.2
190.236539	11.41	---	43.50	32.09	100.0	V	327.0	-19.9
434.676539	76.84	---	100.82	23.98	100.0	V	38.0	-13.5
434.676539	---	65.54	80.82	15.28	100.0	V	38.0	-13.5
869.311154	37.50	---	80.82	43.32	100.0	V	194.0	-5.7
869.311154	---	26.20	60.82	34.62	100.0	V	194.0	-5.7

EUT Information

EUT Name:	Remote Controller
Model:	TCT-A12
Test Mode:	A, High Channel
Order No/Sample No:	168438589/A003516162-022
Test Voltage::	3V
Remark:	Temp 23 Humi:56%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

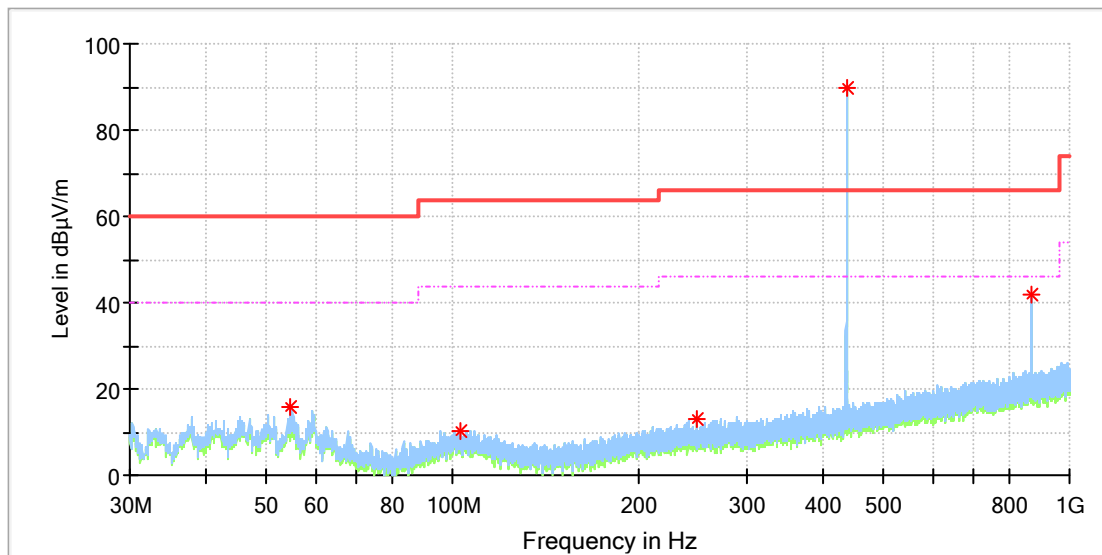


Critical Freqs

Frequency (MHz)	MaxPeak	Average (dBμV/m)	Limit (dBμV/m)	Margin	Height	Pol	Azimuth	Corr. (dB/)
54.548462	15.99	---	40.00	24.01	100.0	H	357.0	-18.7
102.750000	10.39	---	43.50	33.11	100.0	H	45.0	-19.2
248.287308	13.07	---	46.00	32.93	100.0	H	240.0	-17.8
434.676539	89.76	---	100.82	11.06	100.0	H	273.0	-13.5
434.676539	---	78.46	80.82	2.36	100.0	H	273.0	-13.5
869.348462	42.02	---	80.82	38.80	100.0	H	45.0	-5.7
869.348462	---	30.72	60.82	30.10	100.0	H	45.0	-5.7

A.4.2 Above 1GHz

EUT Information


EUT Name:	Remote Controller
Model:	TCT-A12
Test Mode:	A, Low Channel
Order No/Sample No:	168438589/A003516162-022
Test Voltage::	3V
Remark:	Temp 23 Humi:56%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

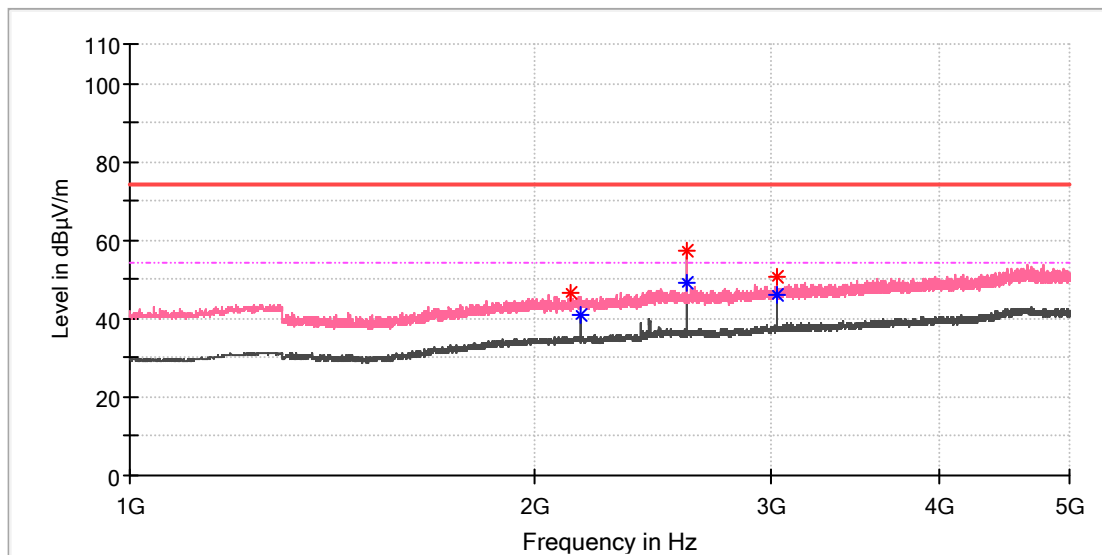**Critical Freqs**

Frequency (MHz)	MaxPeak	Average (dBμV/m)	Limit (dBμV/m)	Margin	Height	Pol	Azimuth	Corr. (dB/m)
2129.725000	46.36	---	74.00	27.64	150.0	V	349.0	6.1
2165.800000	---	40.95	54.00	13.05	150.0	V	151.0	6.2
2598.083333	---	49.31	54.00	4.69	150.0	V	288.0	7.4
2598.700000	57.32	---	74.00	16.68	150.0	V	288.0	7.4
3031.908333	50.66	---	74.00	23.34	150.0	V	319.0	8.6
3031.908333	---	46.24	54.00	7.76	150.0	V	319.0	8.6

EUT Information

EUT Name:	Remote Controller
Model:	TCT-A12
Test Mode:	A, Low Channel
Order No/Sample No:	168438589/A003516162-022
Test Voltage::	3V
Remark:	Temp 23 Humi:56%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

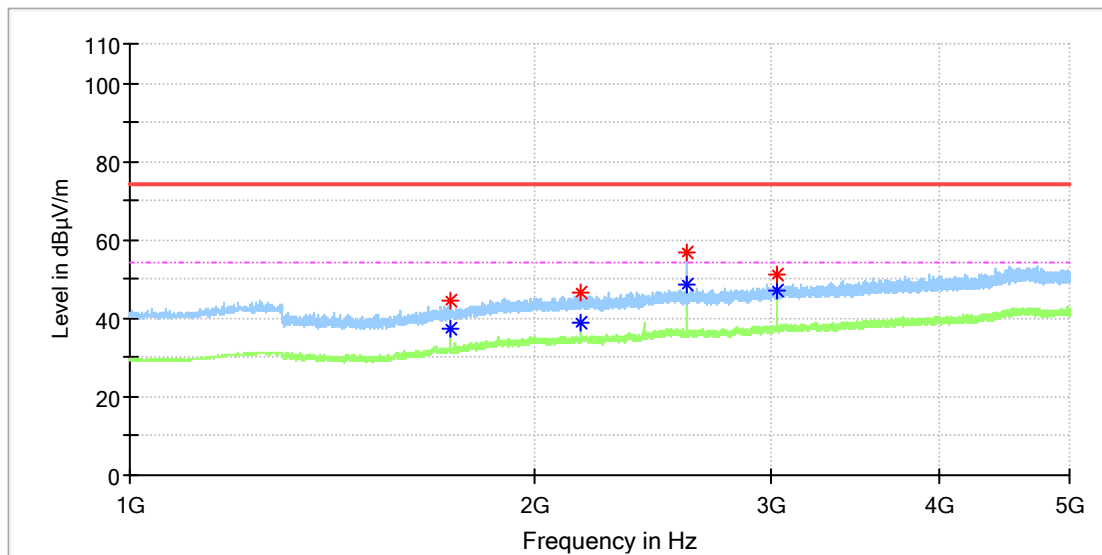


Critical Freqs

Frequency (MHz)	MaxPeak	Average (dBμV/m)	Limit (dBμV/m)	Margin	Height	Pol	Azimuth	Corr. (dB/m)
1732.283333	---	37.34	54.00	16.66	150.0	H	51.0	3.5
1732.591667	44.27	---	74.00	29.73	150.0	H	69.0	3.5
2165.800000	46.62	---	74.00	27.38	150.0	H	59.0	6.2
2165.800000	---	38.72	54.00	15.28	150.0	H	59.0	6.2
2599.008333	56.54	---	74.00	17.46	150.0	H	344.0	7.4
2599.625000	---	48.54	54.00	5.46	150.0	H	225.0	7.4
3031.908333	---	47.15	54.00	6.85	150.0	H	34.0	8.6
3032.216667	51.11	---	74.00	22.89	150.0	H	34.0	8.6

EUT Information

EUT Name:	Remote Controller
Model:	TCT-A12
Test Mode:	A, High Channel
Order No/Sample No:	168438589/A003516162-022
Test Voltage::	3V
Remark:	Temp 23 Humi:56%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

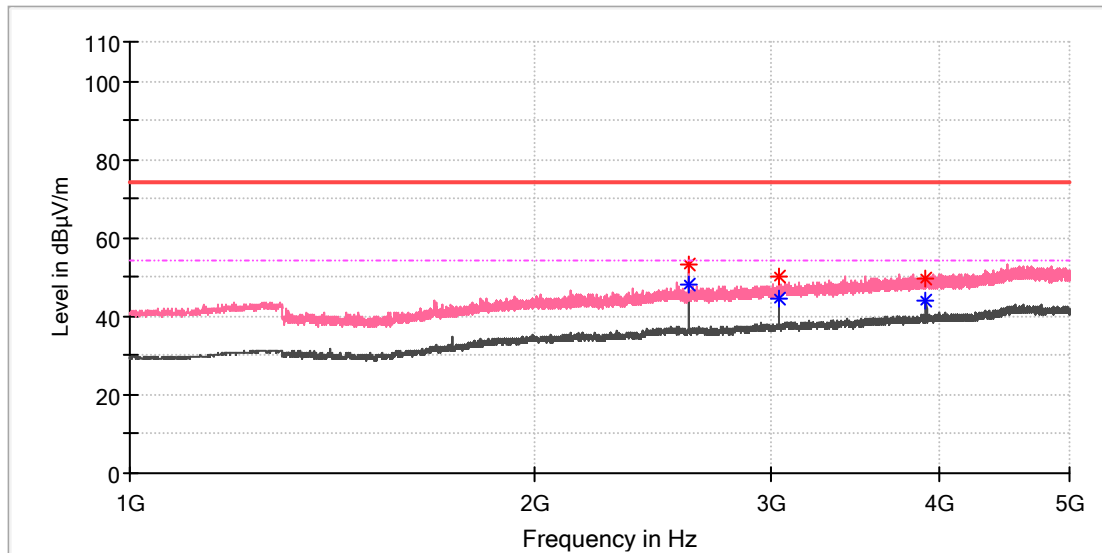


Critical Freqs

Frequency (MHz)	MaxPeak	Average (dBμV/m)	Limit (dBμV/m)	Margin	Height	Pol	Azimuth	Corr. (dB/m)
2607.333333	---	48.15	54.00	5.85	150.0	V	275.0	7.4
2607.950000	53.27	---	74.00	20.73	150.0	V	275.0	7.4
3042.391667	---	44.63	54.00	9.37	150.0	V	302.0	8.6
3042.391667	50.34	---	74.00	23.66	150.0	V	302.0	8.6
3911.891667	49.78	---	74.00	24.22	150.0	V	177.0	10.1
3911.891667	---	43.98	54.00	10.02	150.0	V	177.0	10.1

EUT Information

EUT Name:	Remote Controller
Model:	TCT-A12
Test Mode:	A, High Channel
Order No/Sample No:	168438589/A003516162-022
Test Voltage::	3V
Remark:	Temp 23 Humi:56%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

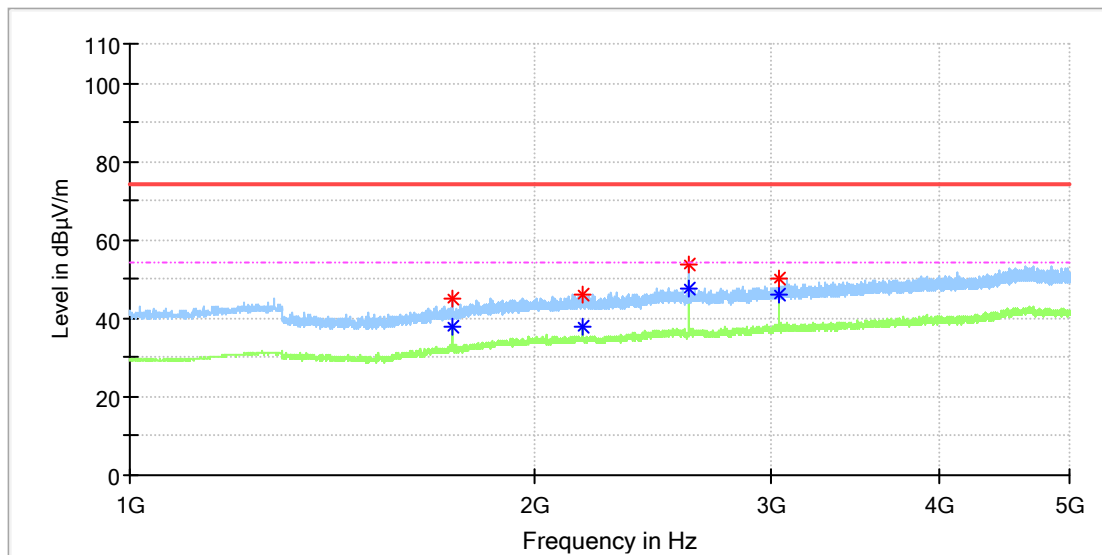

Critical Freqs

Frequency (MHz)	MaxPeak	Average (dBμV/m)	Limit (dBμV/m)	Margin	Height	Pol	Azimuth	Corr. (dB/m)
1738.450000	---	38.01	54.00	15.99	150.0	H	2.0	3.6
1738.450000	44.97	---	74.00	29.03	150.0	H	2.0	3.6
2169.500000	46.23	---	74.00	27.77	150.0	H	189.0	6.2
2173.200000	---	37.77	54.00	16.23	150.0	H	206.0	6.3
2607.333333	---	47.48	54.00	6.52	150.0	H	197.0	7.4
2607.641667	53.77	---	74.00	20.23	150.0	H	197.0	7.4
3042.700000	50.38	---	74.00	23.62	150.0	H	315.0	8.6
3042.700000	---	46.27	54.00	7.73	150.0	H	315.0	8.6