

TEST REPORT

Report No.: BCTC2309714850-3E

Applicant: Shenzhen Great Asia Electronic Co.,Ltd.

Product Name: Tablet PC

Model/Type
reference: VOLT-V010-2

Tested Date: 2023-10-07 to 2023-10-10

Issued Date: 2023-10-26


Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2BCTCVOLT-V010-2

Product Name: Tablet PC
Trademark: N/A
Model/Type Ref.: VOLT-V010-2
Applicant: Shenzhen Great Asia Electronic Co.,Ltd.
Address: Floor 5, Building B, Ruixiangfa Science Park, No. 3, Shangxue Science Park, Bantian,Shenzhen, Guangdong, China, 518129
Manufacturer: Shenzhen Great Asia Electronic Co.,Ltd.
Address: Floor 5, Building B, Ruixiangfa Science Park, No. 3, Shangxue Science Park, Bantian,Shenzhen, Guangdong, China, 518129
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhanche ng , Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2023-10-07
Sample tested Date: 2023-10-07 to 2023-10-10
Issue Date: 2023-10-26
SAR Max. Values is: 1.166 W/kg (1g) for Body
Test Standards: IEEE Std C95.1, 2019/ IEEE Std 1528™-2013/FCC Part 2.1093
Test Results: PASS
Remark: This is SAR test report

Tested by:



Min Zhi Cheng/ Project Handler

Approved by:



Zero Zhou/ Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Standards	6
3. Test Summary	7
4. SAR Limits.....	8
5. Measurement Uncertainty	9
6. Product Information and Test Setup.....	10
6.1 Product Information	10
6.2 Test Setup Configuration	12
6.3 Support Equipment.....	12
6.4 Test Environment	12
7. Test Facility and Test Instrument Used	13
7.1 Test Facility	13
7.2 Test Instrument Used	14
8. Specific Absorption Rate (SAR)	15
8.1 Introduction.....	15
8.2 SAR Definition	15
9. SAR Measurement System	16
9.1 The Measurement System.....	16
9.2 Probe.....	16
9.3 Probe Calibration Process	18
9.4 Phantom	19
9.5 Device Holder.....	19
10. Tissue Simulating Liquids.....	20
10.1 Composition of Tissue Simulating Liquid.....	20
10.2 Limit.....	21
10.3 Tissue Calibration Result.....	22
11. System Check	23
11.1 Purpose of System Performance Check.....	23
11.2 System Setup	23
11.3 Validation Results	24
12. EUT Testing Position.....	25
12.1 Define Two Imaginary Lines on the Handset.....	25
12.2 Cheek Position	25
12.3 Tilted Position	26
12.4 Body Position.....	26
13. SAR Measurement Procedures.....	27
13.1 Measurement Procedures	27
13.2 Spatial Peak SAR Evaluation	27
13.3 Area & Zoom Scan Procedures.....	28
13.4 Volume Scan Procedures.....	29
13.5 SAR Averaged Methods	29
13.6 Power Drift Monitoring	29
14. SAR Test Result.....	30


14.1 Conducted RF Output Power.....	30
14.2 Transmit Antennas and SAR Measurement Position.....	60
14.3 Measured and Reported (Scaled) SAR Results	61
14.4 SAR Measurement Variability.....	67
14.5 Simultaneous Transmission Evaluation	68
15. Test Plots	70
15.2 SAR Test Graph Results	82
16. CALIBRATION CERTIFICATES.....	106
17. EUT Photographs.....	201
18. EUT Test Setup Photographs.....	202

(Note: N/A Means Not Applicable)

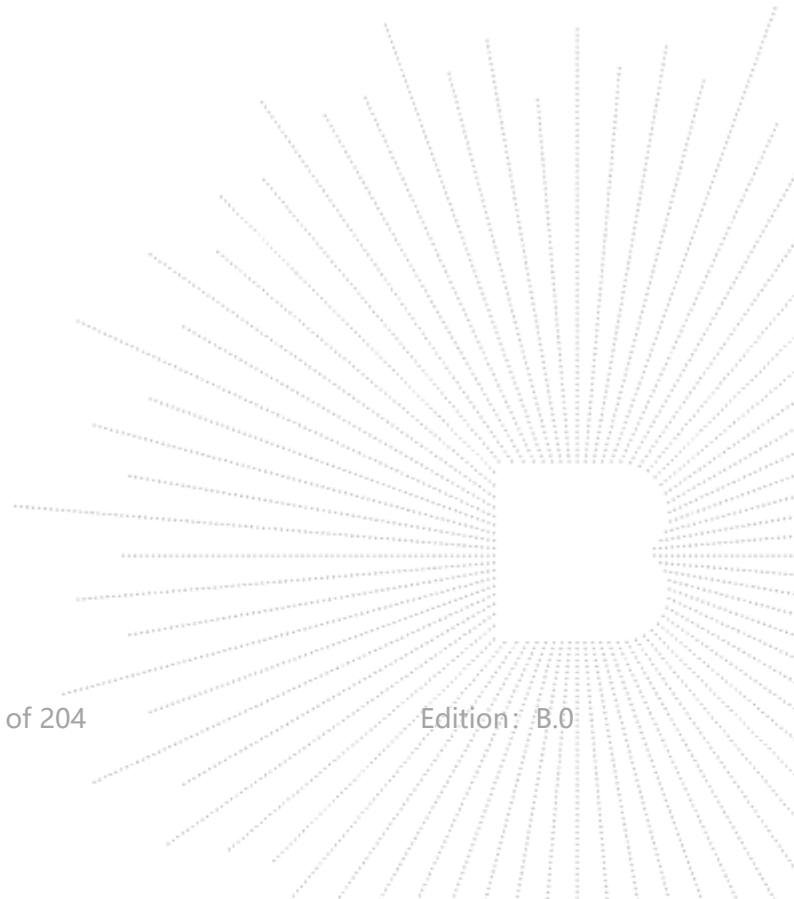

1. Version

Report No.	Issue Date	Description	Approved
BCTC2309714850-3E	2023-10-26	Original	Valid

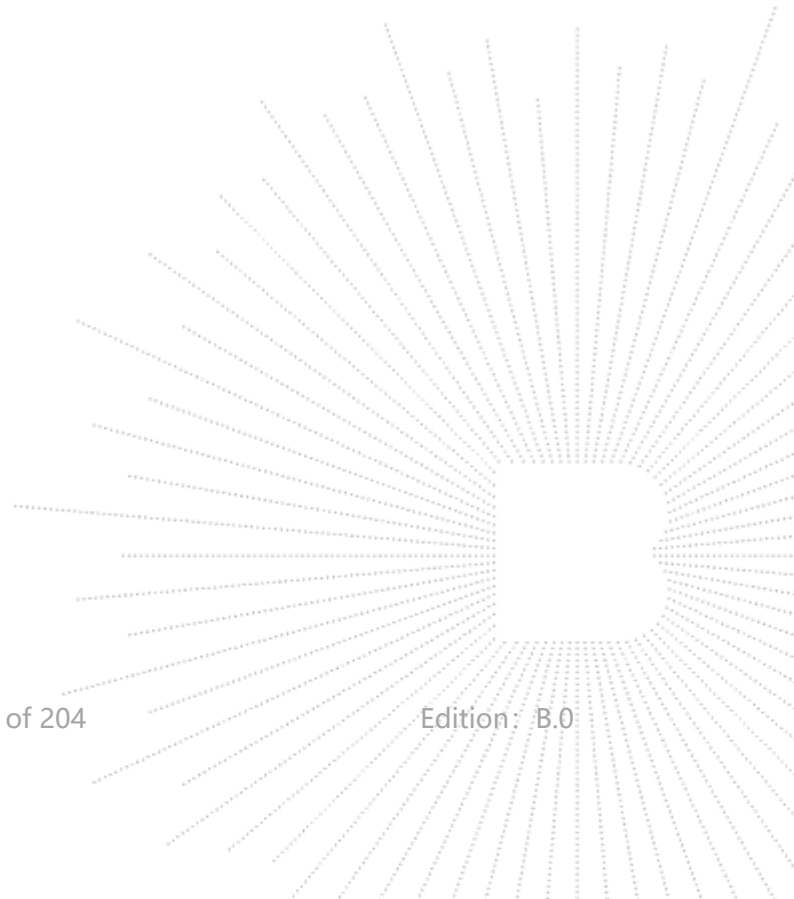

2. Test Standards

IEEE Std C95.1-2019: IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

IEEE Std 1528™-2013: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

FCC Part 2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices

KDB 447498 D01 General RF Exposure Guidance v06: Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz

KDB 865664 D02 RF Exposure Reporting v01r02: RF Exposure Compliance Reporting and Documentation Considerations


KDB 248227 D01 802.11 Wi-Fi SAR v02r02: SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

KDB 941225 D01 3G SAR Procedures: 3G SAR MEAUREMENT PROCEDURES

KDB 941225 D05 SAR for LTE Devices: SAR EVALUATION CONSIDERATIONS FOR LTE DEVICES

KDB 941225 D06 Hotspot Mode v02r01: SAR EVALUATION PROCEDURES FOR PORTABLE DEVICES WITH WIRELESS ROUTER CAPABILITIES

KDB 648474 D04 Handset SAR v01r03: SAR EVALUATION CONSIDERATIONS FOR WIRELESS HANDSETS

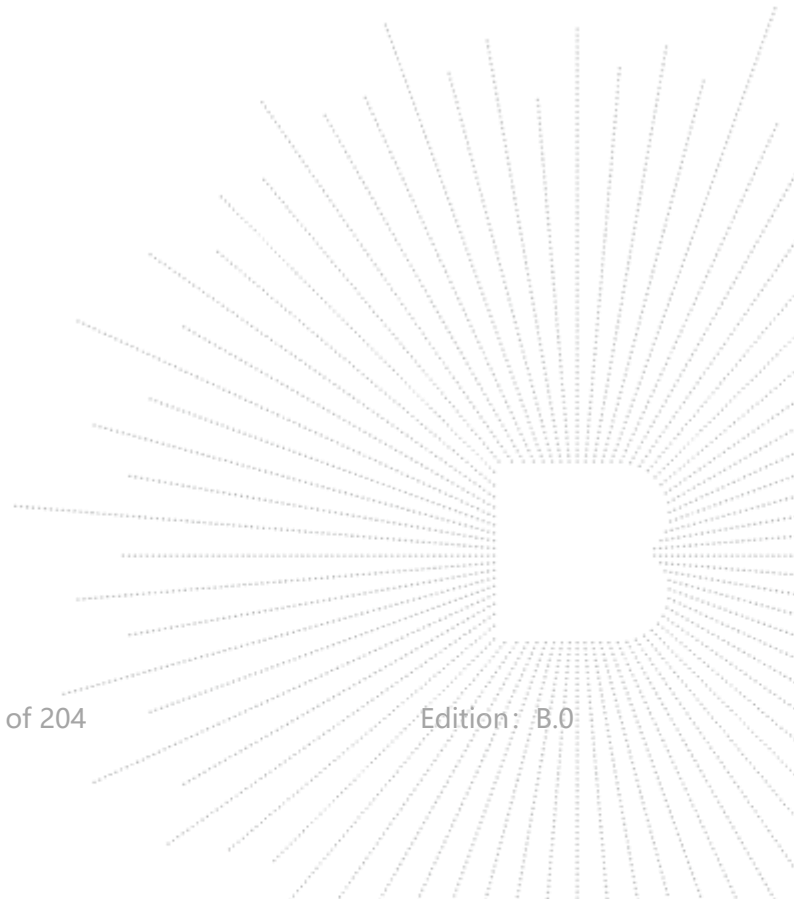


3. Test Summary

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Report SAR1g (W/kg)	SAR1g Limit (W/kg)
	Body (0mm Gap)	
GSM	1.166	1.6
WCDMA	0.795	1.6
LTE	1.114	1.6
WLAN 2.4G	0.396	1.6
Simultaneous Transmission	1.562	1.6

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedure specified in IEEE 1528-2013.

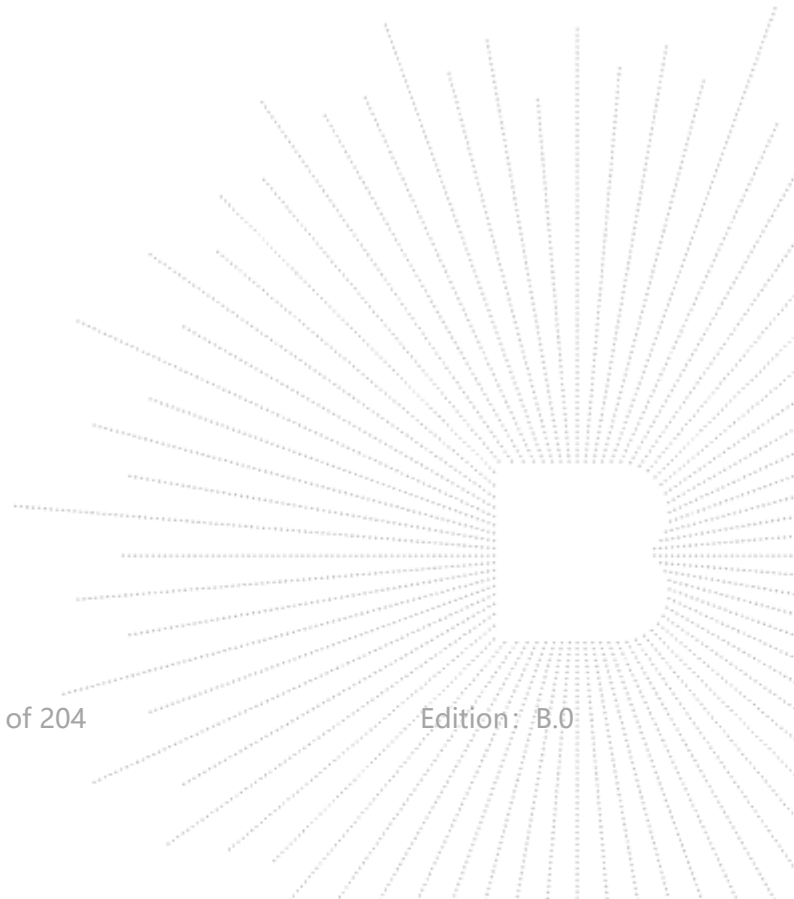


4. SAR Limits

EXPOSURE LIMITS	FCC Limit (1g Tissue)	
	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average(averaged over the whole body)	0.08	0.4
Spatial Peak(averaged over any 1 g of tissue)	1.6	8.0
Spatial Peak(hands/wrists/ feet/anklesaveraged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.


Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

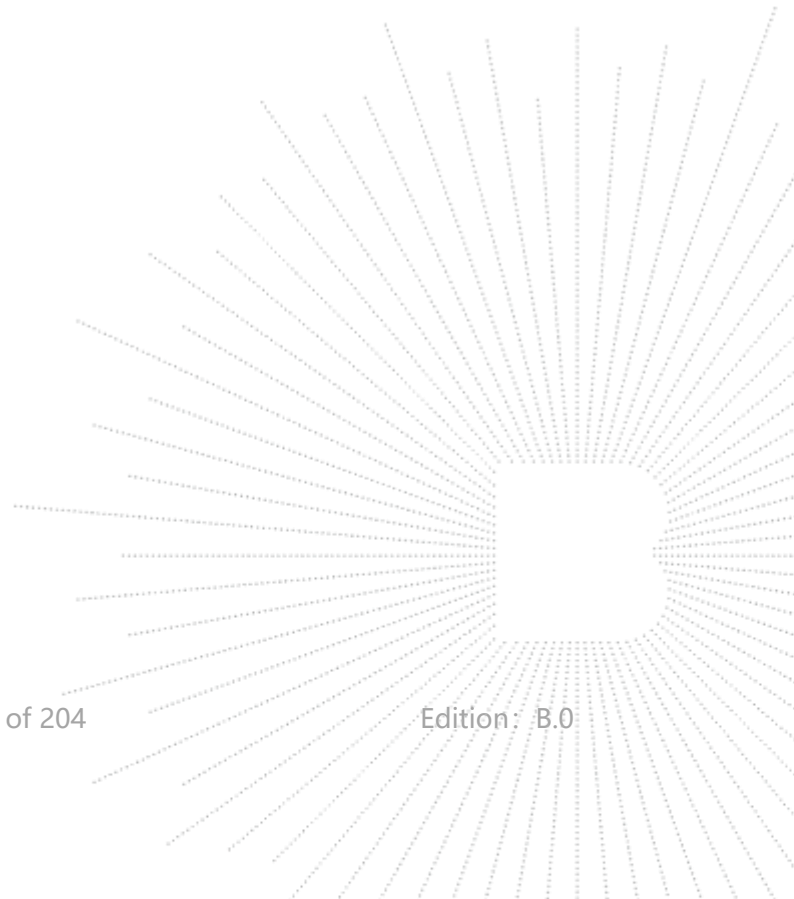

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k=2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.


Therefore, the measurement uncertainty is not required.

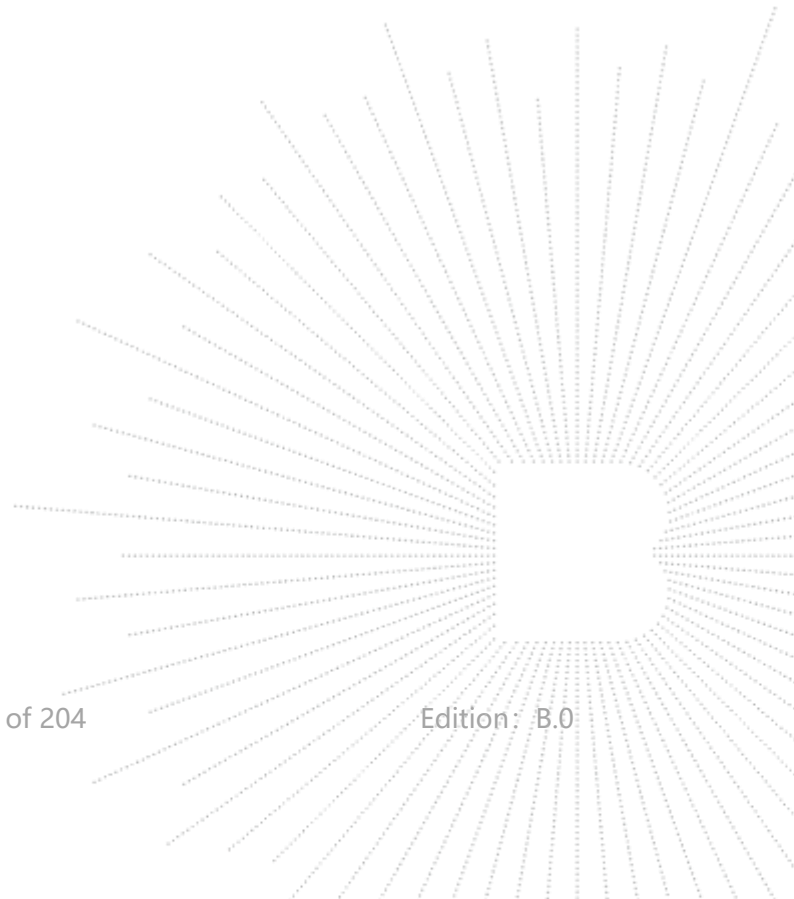


6. Product Information and Test Setup

6.1 Product Information

Model/Type reference:	VOLT-V010-2
Model differences:	N/A
Hardware Version:	N/A
Software Version:	N/A
Ratings:	AC 100-240,50/60Hz
Adapter:	Input:100-240V,50/60Hz,0.3A Output :DC 5V,2A
Battery:	DC 3.7V 4000mAh
Operation Frequency:	Bluetooth: 2402-2480MHz
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK,8DPSK
Number Of Channel	79CH
Antenna installation:	Internal antenna,
Antenna Gain:	0.29dBi
IEEE 802.11 WLAN Mode Supported:	802.11b 802.11g 802.11n(20MHz channel bandwidth) 802.11n(40MHz channel bandwidth)
Operation Frequency:	802.11b/g/n20:2412~2462 MHz 802.11n40:2422~2452 MHz
Type of Modulation:	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Number Of Channel:	11 channels for 802.11b/g/n(HT20); 7 Channels for 802.11n(HT40);
Antenna installation:	Internal antenna
Antenna Gain:	0.29 dBi

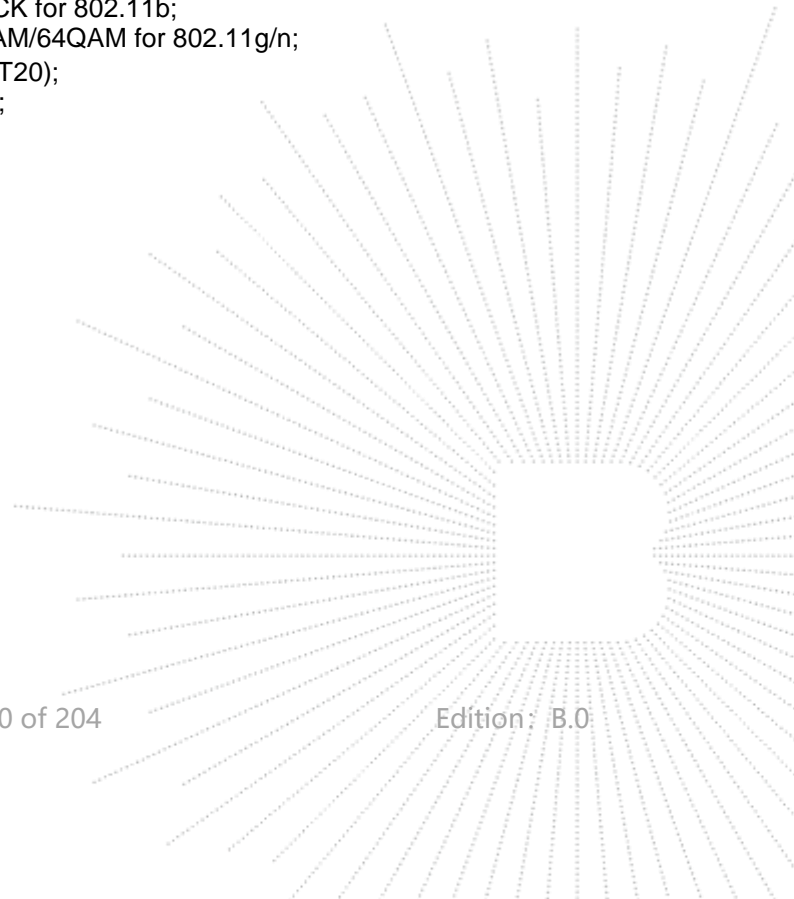

Operation Frequency:	GSM 850: TX: 824~849MHz; RX: 869~894MHz; GSM 1900: TX:1850~1910MHz; RX:1930~1990MHz; WCDMA Band II: TX: 1852.40~1907.60MHz; Rx: 1932.60~1987.40MHz; WCDMA Band V: TX: 826.40~846.60MHz; RX: 871.40~ 891.60MHz;
Type of Modulation:	GSM with GMSK,8PSK Modulation WCDMA Mode with BPSK Modulation
Type of Emission:	GSM 850: 246KGXW GSM 1900: 249KGXW WCDMA Band II: 4M18F9W WCDMA Band V: 4M16F9W
Antenna installation:	Internal antenna
Antenna Gain:	GSM850: -3.32dBi GSM1900: 0.27 dBi WCDMA Band II: 0.27 dBi WCDMA Band V:-3.32 dBi
Tx Frequency:	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500MHz-2570MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704MHz-716MHz LTE Band 41: 2496 MHz ~ 2690 MHz
Rx Frequency:	LTE Band 2: 1930 MHz ~ 1990 MHz LTE Band 4: 2110 MHz ~ 2155 MHz LTE Band 5: 869 MHz ~ 894 MHz LTE Band 7: 2620MHz-2690MHz LTE Band 12: 729 MHz ~ 746 MHz LTE Band 17: 734MHz-746MHz LTE Band 41: 2496 MHz ~ 2690 MHz
Bandwidth:	LTE Band 2: 1.4MHz /3MHz /5MHz /10MHz /15MHz /20MHz LTE Band 4: 1.4MHz /3MHz /5MHz /10MHz /15MHz /20MHz LTE Band 5: 1.4MHz /3MHz /5MHz /10MHz LTE Band 7: 5MHz /10MHz / 15MHz / 20MHz LTE Band 12: 1.4MHz /3MHz /5MHz /10MHz LTE Band 17: 5MHz /10MHz LTE Band 41: 5MHz /10MHz /15MHz /20MHz
Type of Modulation:	QPSK/16QAM
Antenna Type:	Internal Antenna
Antenna Gain:	LTE Band 2: 0.67 dBi LTE Band 4: -1.41dBi LTE Band 5: -3.32 dBi LTE Band 7: -0.2 dBi LTE Band 12: -2.09 dBi LTE Band 17: -2.09 dBi LTE Band 41: 0.58 dBi

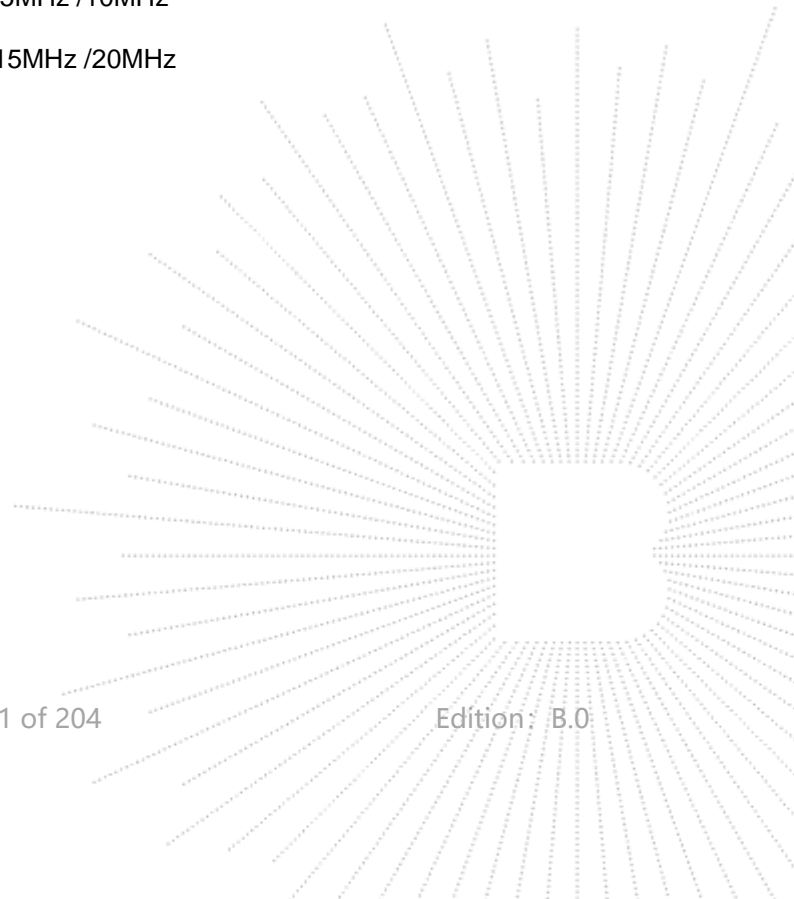

6.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

6.3 Support Equipment

Cable of Product

No.	Cable Type	Quantity	Provider	Length (m)	Shielded	Note
1	--	--	Applicant	---	Yes/No	--
2	--	--	BCTC	--	Yes/No	--

No.	Device Type	Brand	Model	Series No.	Note
1.	---	---	---	---	---
2.	--	--	--	--	--

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


6.4 Test Environment

1. Normal Test Conditions:

Humidity(%):	35-75
Atmospheric Pressure(kPa):	95-105
Temperature(°C):	18-25

2. Extreme Test Conditions:

N/A

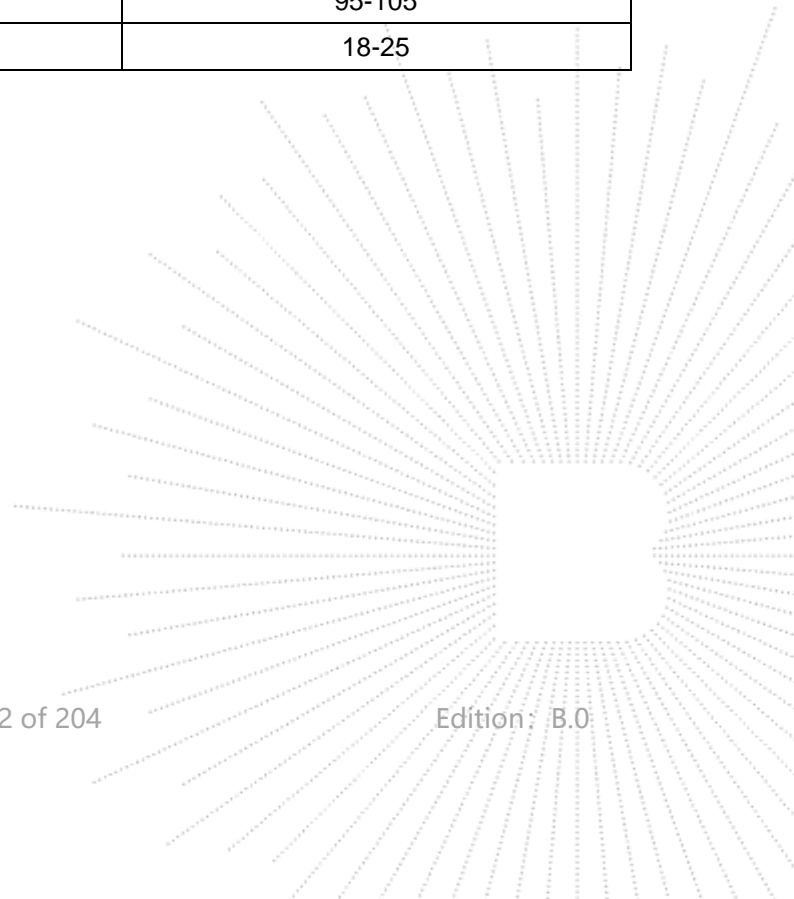


7. Test Facility and Test Instrument Used

7.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850
A2LA certificate registration number is: CN1212
ISED Registered No.: 23583
ISED CAB identifier: CN0017

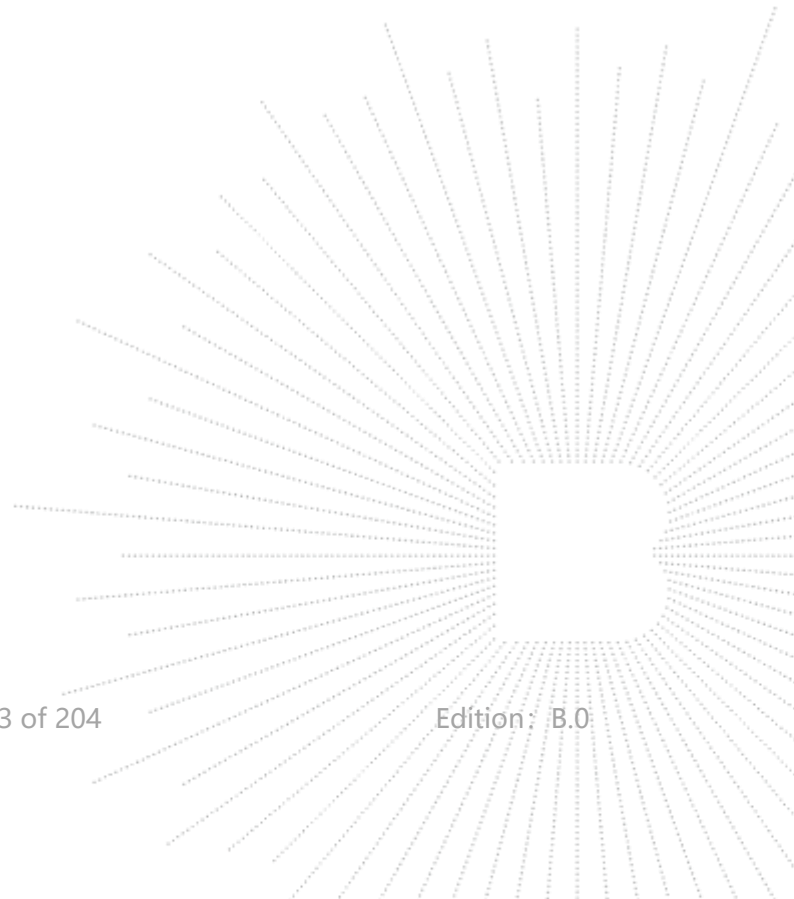

7.2 Test Instrument Used

Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
PC	DELL	\	\	N/A	N/A
SAR Measurement system	SATIMO	\	\	N/A	N/A
Signal Generator	Keysight	83711B	US37100131	Aug. 29, 2023	Aug. 28, 2024
Multimeter	Keithley	1160271	\	Nov. 10, 2022	Nov 09, 2023
S-parameter Network Analyzer	R&S	ZVB 8	101353	Dec. 07, 2022	Dec. 06, 2023
Wideband Radio Communication Tester	R&S	CMW500	\	Nov. 10, 2022	Nov 09, 2023
E SAR PROBE 6GHz	MVG	SSE2	2623-EPGO-420	July 18, 2023	July 17, 2024
DIPOLE 750	SATIMO	SID 750	SN 47/21 DIP 0G835-620	Nov. 25, 2021	Nov. 24, 2024
DIPOLE 835	SATIMO	SID 835	SN 47/21 DIP 0G835-621	Nov. 25, 2021	Nov. 24, 2024
DIPOLE 1800	SATIMO	SID 1800	SN 47/21 DIP 1G800-623	Nov. 25, 2021	Nov. 24, 2024
DIPOLE 1900	SATIMO	SID 1900	SN 47/21 DIP 2G100-624	Nov. 25, 2021	Nov. 24, 2024
DIPOLE 2450	SATIMO	SID 2450	SN 47/21 DIP 2G450-627	Nov. 25, 2021	Nov. 24, 2024
DIPOLE 2600	SATIMO	SID 2600	SN 47/21 DIP 2G600-628	Nov. 25, 2021	Nov. 24, 2024
COMOSAR OPENCoaxial Probe	SATIMO	\	\	Nov. 18, 2022	Nov. 17, 2023
SAR Locator	SATIMO	\	\	Nov. 18, 2022	Nov. 17, 2023
Communication Antenna	SATIMO	\	\	Nov. 18, 2022	Nov. 17, 2023
FEATURE PHONEPOSITIONING DEVICE	SATIMO	\	\	N/A	N/A
DUMMY PROBE	SATIMO	\	\	N/A	N/A
SAM Phantom	MVG	\	SN 13/09 SAM68	N/A	N/A
Liquid measurement Kit	HP	85033D	3423A08186	N/A	N/A
Power meter	Agilent	E4419	\	May 15, 2023	May 14, 2024
Power meter	Agilent	E4419	\	May 15, 2023	May 14, 2024
Power sensor	Agilent	E9300A	\	May 15, 2023	May 14, 2024
Power sensor	Agilent	E9300A	\	May 15, 2023	May 14, 2024
Directional Coupler	Krytar 158020	131467	\	Nov. 10, 2022	Nov 09, 2023

Note:

Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three year extended calibration interval. Each measured dipole is expected to evaluate with following criteria at least on annual interval.

1. There is no physical damage on the dipole;
2. System check with specific dipole is within 10% of calibrated values;
3. The most recent return-loss results, measured at least annually, deviates by no more than 20% from the previous measurement;
4. The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

8. Specific Absorption Rate (SAR)

8.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

8.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$


Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the

electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

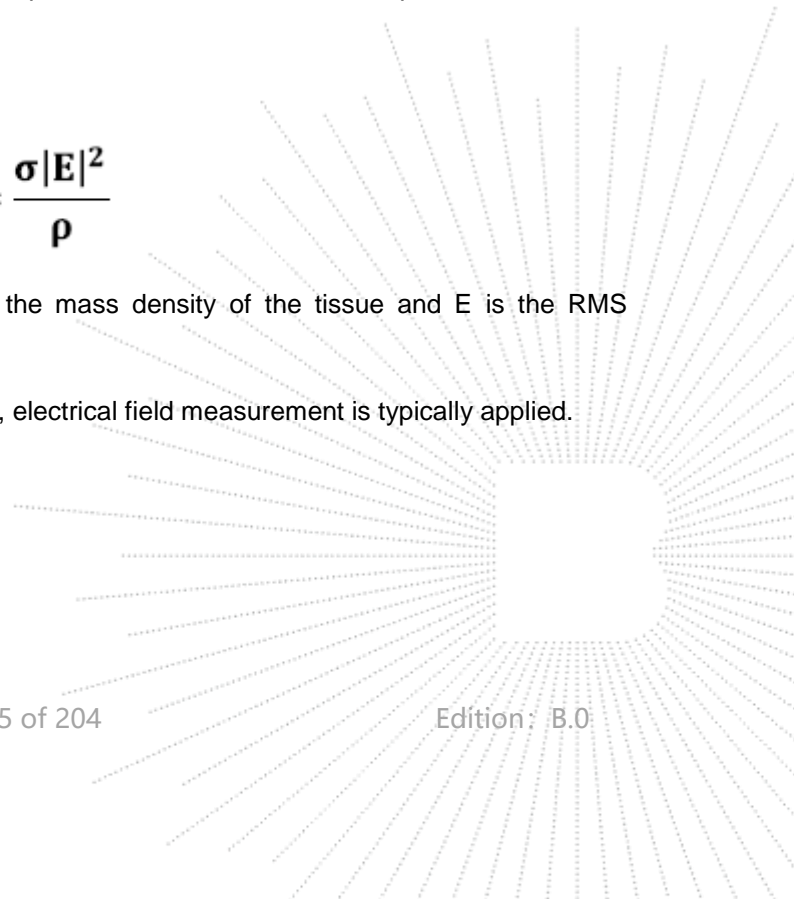

9. SAR Measurement System

9.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.


9.2 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 46/21 EPGO362 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 5 mm
- Distance between probe tip and sensor center: 2.10mm
- Distance between sensor center and the inner phantom surface: 4 mm (repeatability better than +/- 1mm)
- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.50 dB
- Calibration range: 835 to 2500MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEEE 1528 STD, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 62209-1 annex technique using reference guide at the five frequencies.

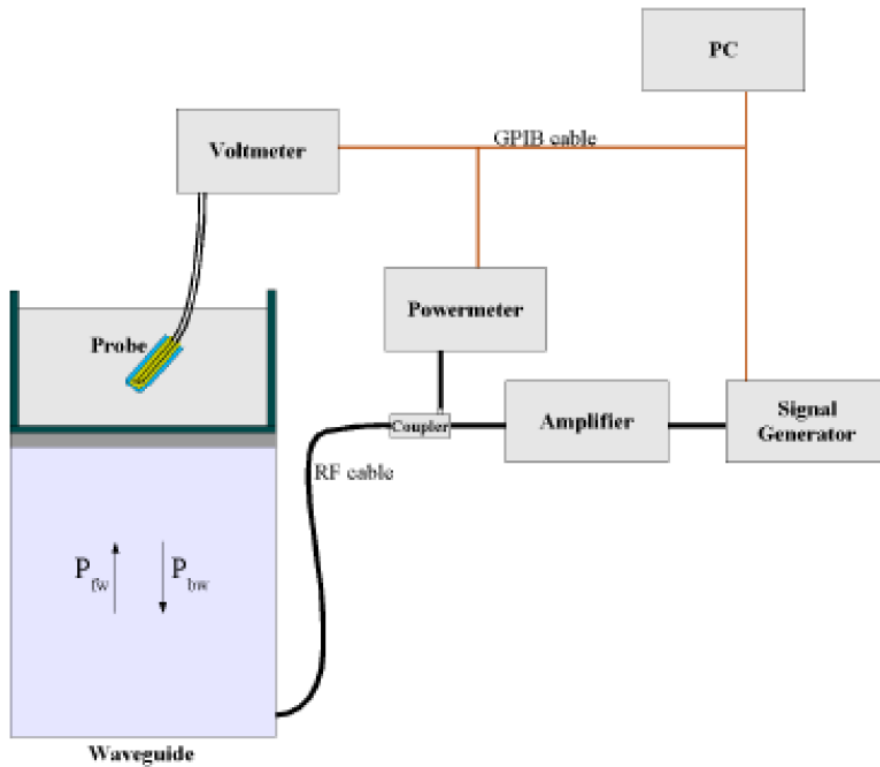

$$SAR = \frac{4(p_{f_w} - p_{p_{bw}})}{ab\delta} \cos^2 \left(\pi \frac{y}{a} \right) e^{-(2\pi/\delta)z}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

δ = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N) = SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N) = V(N) * (1 + V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

9.3 Probe Calibration Process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm².

Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.


SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,

ρ = Tissue density (1.25 g/cm³ for brain tissue)

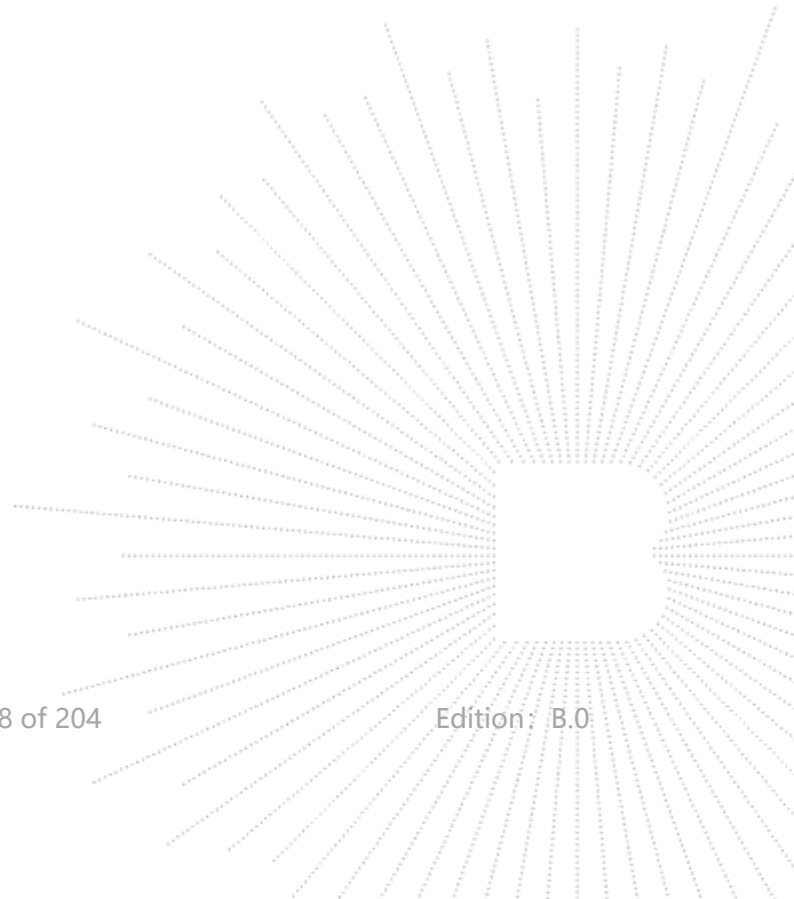


9.4 Phantom


For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

9.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

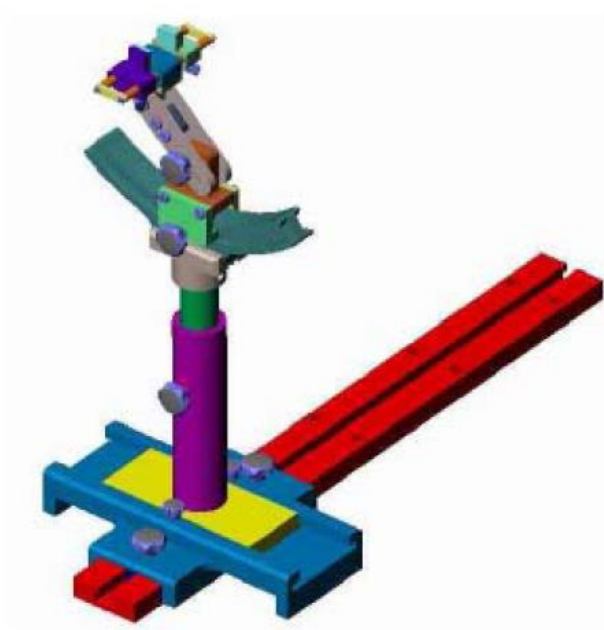

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

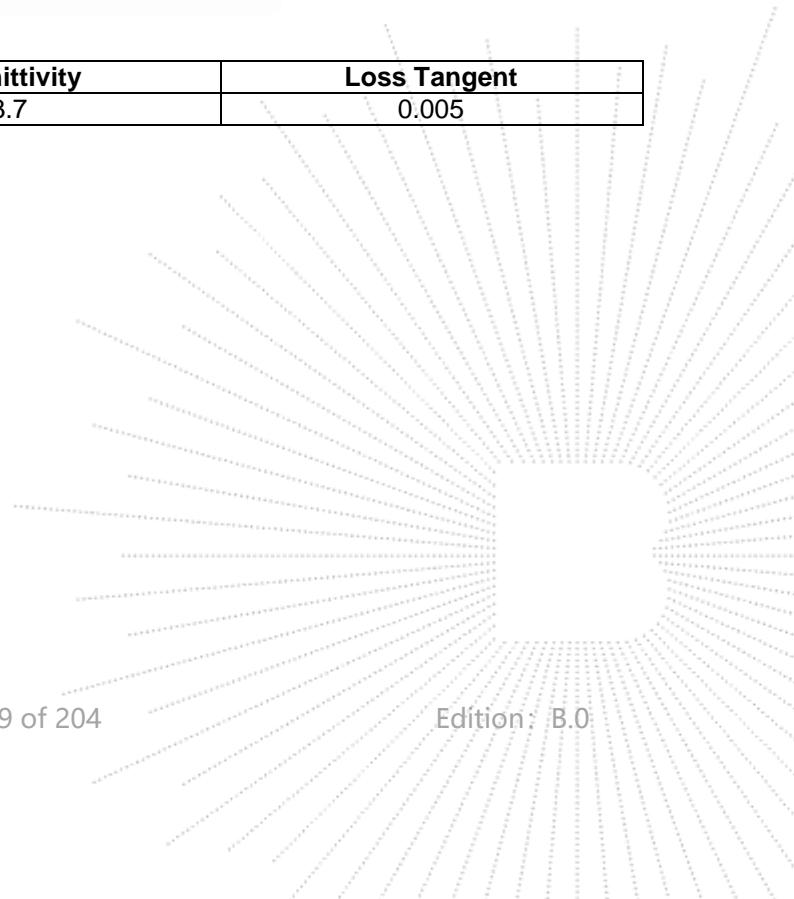

10. Tissue Simulating Liquids

10.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.



Liquid Height for Body SAR

The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	1,2-Propane diol (%)	HEC (%)	Preventol (%)	DGBE (%)
Head/Body						
835	40.3	1.4	57.9	0.2	0.2	0
900	40.3	1.4	57.9	0.2	0.2	0
1800-2000	55.2	0.3	0	0	0	44.5
2450	55.0	0.1	0	0	0	44.9
2600	54.9	0.1	0	0	0	45.0


Frequency (MHz)	Water (%)	Hexyl Carbitol (%)	Triton X-100 (%)
Head/Body			
5000-6000	65.52	17.24	17.24

10.2 Limit

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters

computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Target Frequency (MHz)	Head	
	Conductivity (σ)	Permittivity (ϵ_r)
150	0.76	52.3
300	0.87	45.3
450	0.87	43.5
750	0.89	41.9
835	0.90	41.5
900	0.97	41.5
915	0.98	41.5
1450	1.20	40.5
1610	1.29	40.3
1800-2000	1.40	40.0
2450	1.80	39.2
2600	1.96	39.0
3000	2.40	38.5
5200	4.66	36.0
5400	4.86	35.8
5600	5.07	35.5
5800	5.27	35.3

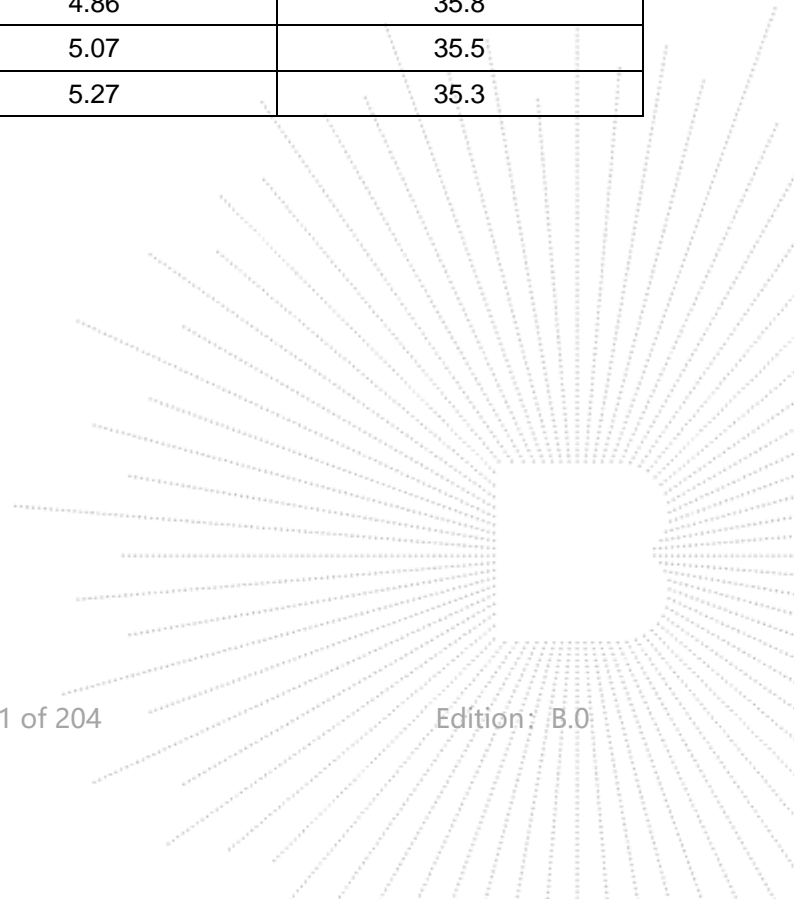

10.3 Tissue Calibration Result


The dielectric parameters of the liquids were verified prior to the SAR evaluation using an R&S ZVB 8. Dielectric Probe Kit and an Agilent Network Analyzer.

Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Frequency (MHz)	Liquid	Target Conductivity (σ)	Target Permittivity (ϵ_r)	Measured Conductivity (σ)	Measured Permittivity (ϵ_r)	Delta (σ)%	Delta (ϵ_r)%	Limit (%)	Temp . TSL (°C)	Date
750	Head	0.89	41.90	0.858	41.560	-3.60	-0.81	±5	22.9	07/10/2023
835	Head	0.90	41.50	0.865	40.822	-3.89	-1.63	±5	22.9	07/10/2023
1800	Head	1.40	40.00	1.386	40.371	-1.00	0.93	±5	22.9	07/10/2023
1900	Head	1.40	40.00	1.410	38.564	0.71	-3.59	±5	22.9	07/10/2023
2450	Head	1.80	39.20	1.860	40.147	3.33	2.42	±5	22.9	07/10/2023
2600	Head	1.96	39.00	1.958	38.675	-0.10	-0.83	±5	22.9	07/10/2023

Remark:

1. The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.
2. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

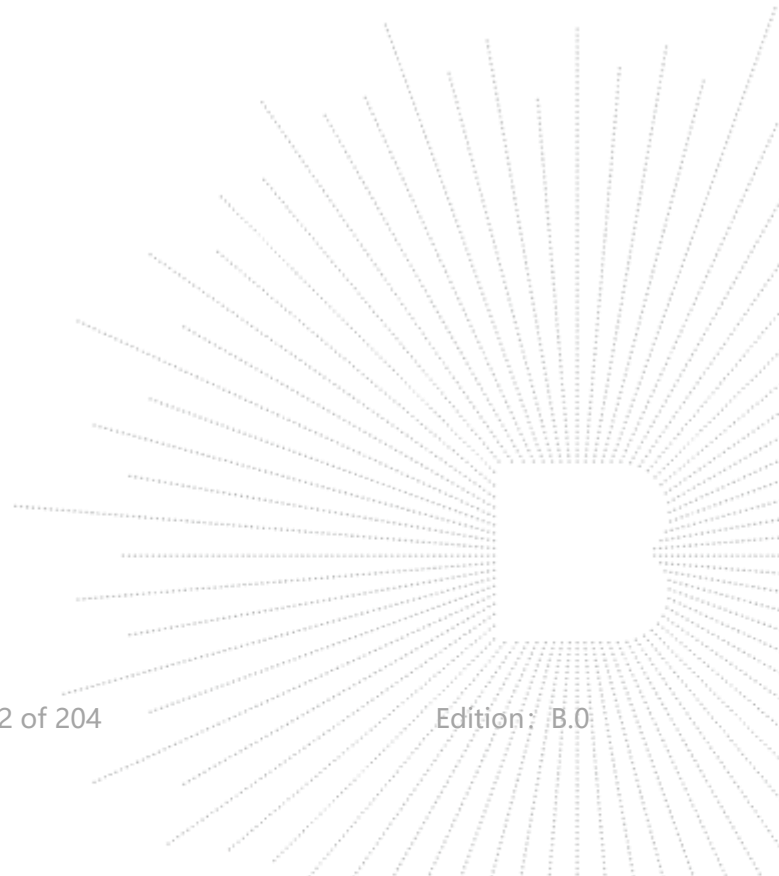


11. System Check

11.1 Purpose of System Performance Check

At the device test frequencies. System check verifies the measurement repeatability of a SAR system before compliance testing and is not a validation of all system specifications. The latter is not required for testing a device but is mandatory before the system is deployed. The system check detects possible short-term drift and unacceptable measurement errors or uncertainties in the system.

11.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 600MHz-6000MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The output power on dipole port must be calibrated to 20 dBm (100 mW) before dipole is connected.

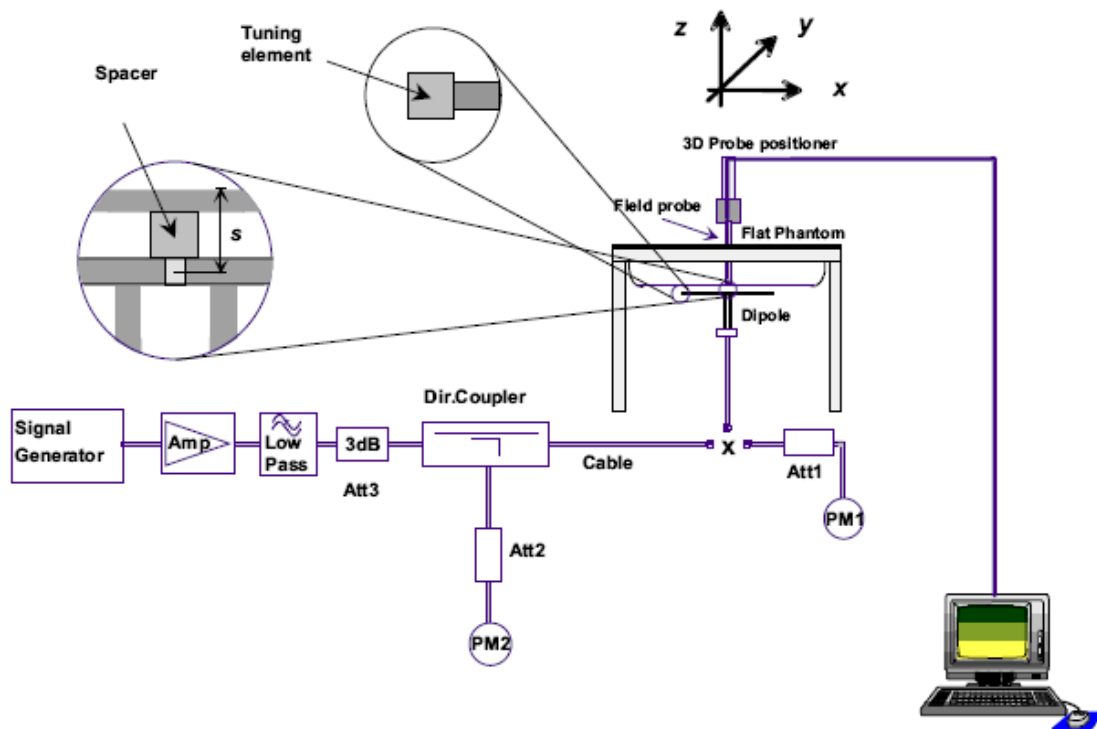

System Verification Setup Block Diagram



Setup Photo of Dipole Antenna

11.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. The following table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency (MHz)	Power	Measured SAR _{1g} (W/Kg)	Normalize to 1 Watt	Drift (%)	1W Target	Difference Percentage (%)	Limit (%)	Liquid Temp	Date
					SAR _{1g} (W/Kg)				
750	250 mW	2.068	8.272	-1.653	8.58	-3.590	±10	22.9	07/10/2023
835	250 mW	2.470	9.879	-0.729	10.01	-1.309	±10	22.9	07/10/2023
1800	250 mW	9.763	39.053	2.388	39.74	-1.729	±10	22.9	07/10/2023
1900	250 mW	10.237	40.947	-2.747	41.26	-0.759	±10	22.9	07/10/2023
2450	250 mW	13.576	54.304	-2.403	55.16	-1.552	±10	22.9	07/10/2023
2600	250 mW	13.581	54.322	1.286	56.5	-3.855	±10	22.9	07/10/2023

12. EUT Testing Position

12.1 Define Two Imaginary Lines on the Handset

(a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.

(b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.

(c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

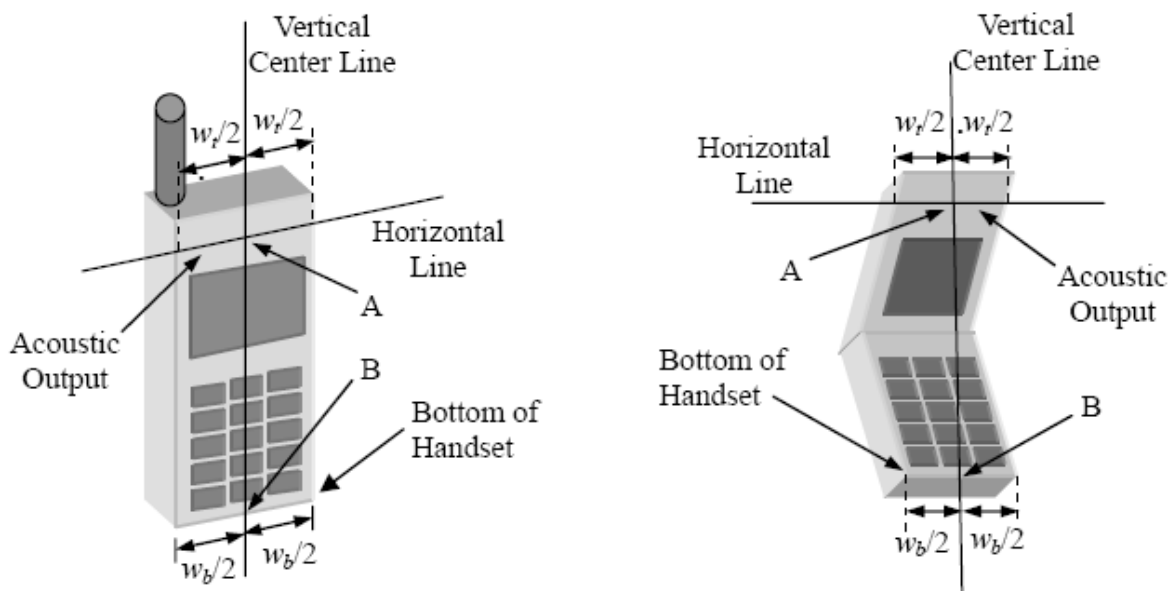


Illustration for Handset Vertical and Horizontal Reference Lines

12.2 Cheek Position

(a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

(b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see below).

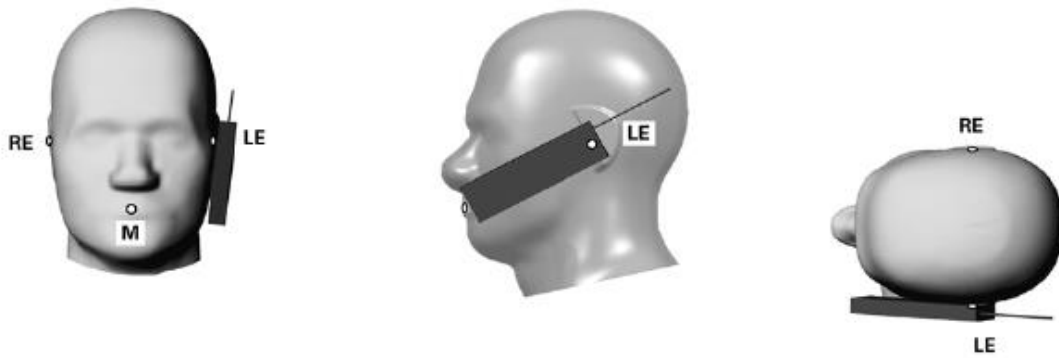


Illustration for Cheek Position

12.3 Tilted Position

- (a) To position the device in the “cheek” position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see below).


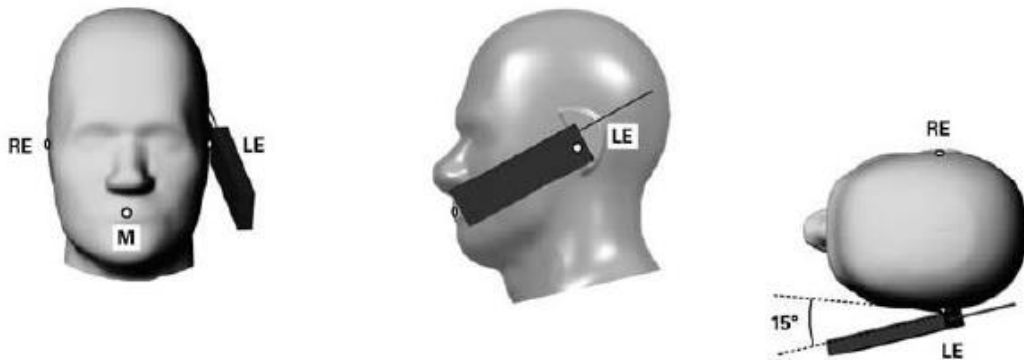


Illustration for Tilted Position

12.4 Body Position

A typical example of a body-worn device is a Mobile Phone , wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person’s body using a carry accessory approved by the wireless device manufacturer.

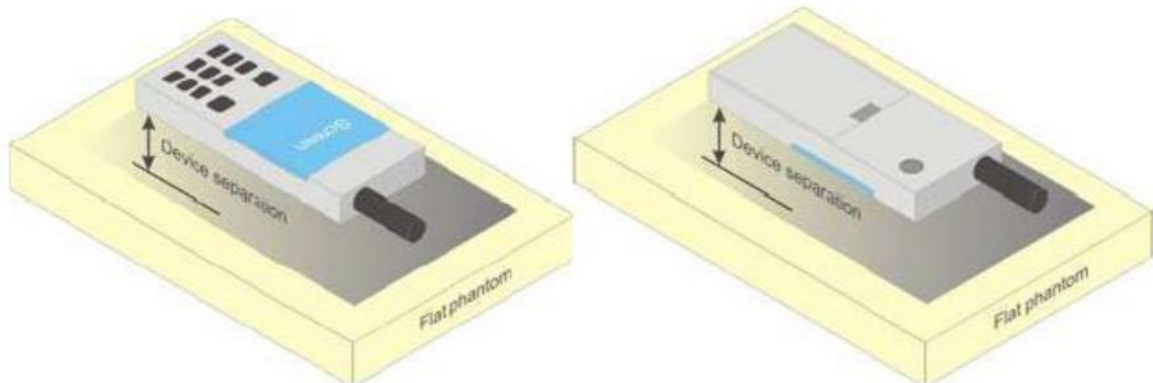

Test positions for body-worn devices

13. SAR Measurement Procedures

13.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

13.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

13.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 mm \pm 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm \pm 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° \pm 1°	20° \pm 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

13.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

13.5 SAR Averaged Methods


The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

13.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

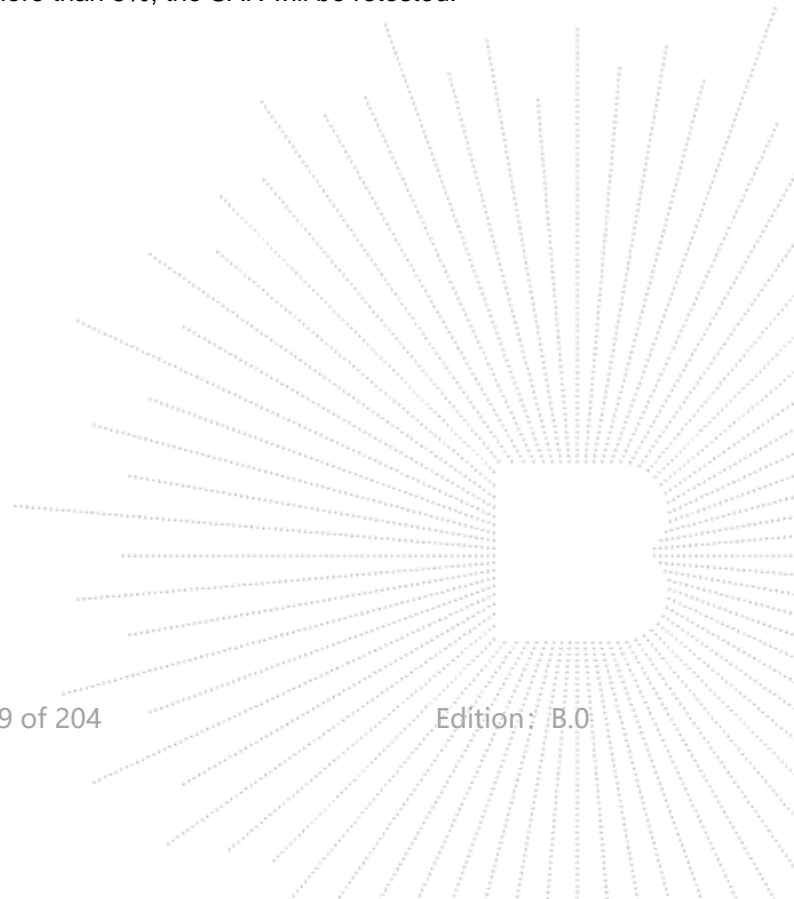

14. SAR Test Result

14.1 Conducted RF Output Power

According KDB 447498 D01 General RF Exposure Guidance v06 Section 4.1 2) states that “Unless it is specified differently in the published RF exposure KDB procedures, these requirements also apply to test reduction and test exclusion considerations. Time-averaged maximum conducted output power applies to SAR and, as required by § 2.1091(c), time-averaged ERP applies to MPE. When an antenna port is not available on the device to support conducted power measurement, such as FRS and certain Part 15 transmitters with built-in integral antennas, the maximum output power allowed for production units should be used to determine RF exposure test exclusion and compliance.”

The Tune-up limit already includes component tolerance. KDB 447498 sec.4.1.(d) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit.

<GSM>

General Note:

1. Per KDB 447498 D01, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions.
3. Per October 2013 TCB Workshop: When the maximum frame-averaged powers levels are within 0.25 dB of each other, test the configuration with the most number of time slots.

Conducted power measurement results

GSM - Burst Average Power (dBm)								
Band	GSM850			Tune-up	GSM1900			Tune-up
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	32.26	31.63	31.63	32.5	29.19	29.13	28.66	29.5

GSM - Source-Based Time-Average Power (dBm)						
Band	GSM850			GSM1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
GSM	23.26	22.63	22.63	20.19	20.13	19.66

Notes: Per KDB 941225 D01, SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GPRS/EDGE (GMSK) or the adjusted SAR of the highest reported SAR of GPRS/EDGE (GMSK) is ≤ 1.2 W/kg.

<W-CDMA>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_o/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_o/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_o/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station R&S CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

General Note


1. Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2kbps can be excluded.
2. By design, AMR and HSDPA/HSUPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.
3. It is expected by the manufacturer that MPR for some HSDPA/HSUPA subtests may differ from the specification of 3GPP, according to the chipset implementation in this model. The implementation and expected deviation are detailed in tune-up procedure exhibit.

Conducted power measurement results

Band	WCDMA Band II				WCDMA Band V			
Channel	9262	9400	9538	Tune-up	4132	4182	4233	Tune-up
Frequency (MHz)	1852.4	1880.0	1907.6		826.4	836.4	846.6	
RMC 12.2K	22.43	22.74	22.86	23.5	23.01	23.26	23.22	23.5
HSDPA Subtest-1	21.35	22.37	22.17	23.0	21.91	22.45	21.95	23.0
HSDPA Subtest-2	20.92	22.02	21.92		21.69	22.22	21.83	
HSDPA Subtest-3	20.49	21.66	21.69		21.48	21.97	21.44	
HSDPA Subtest-4	20.61	21.38	21.45		21.17	21.77	21.26	
HSUPA Subtest-1	21.27	22.23	21.85	23.0	21.74	22.36	21.80	23.0
HSUPA Subtest-2	21.21	22.36	22.11		21.84	22.52	21.97	
HSUPA Subtest-3	21.04	21.82	21.84		21.48	22.11	21.91	
HSUPA Subtest-4	21.13	22.30	22.08		21.84	22.49	21.92	
HSUPA Subtest-5	20.71	22.16	21.74		21.63	22.10	21.54	

Note:

1. Per KDB 941225 D01 v03, the 12.2kbps RMC mode was selected for SAR testing (the primary mode).
2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode (RMC12.2kbps) or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

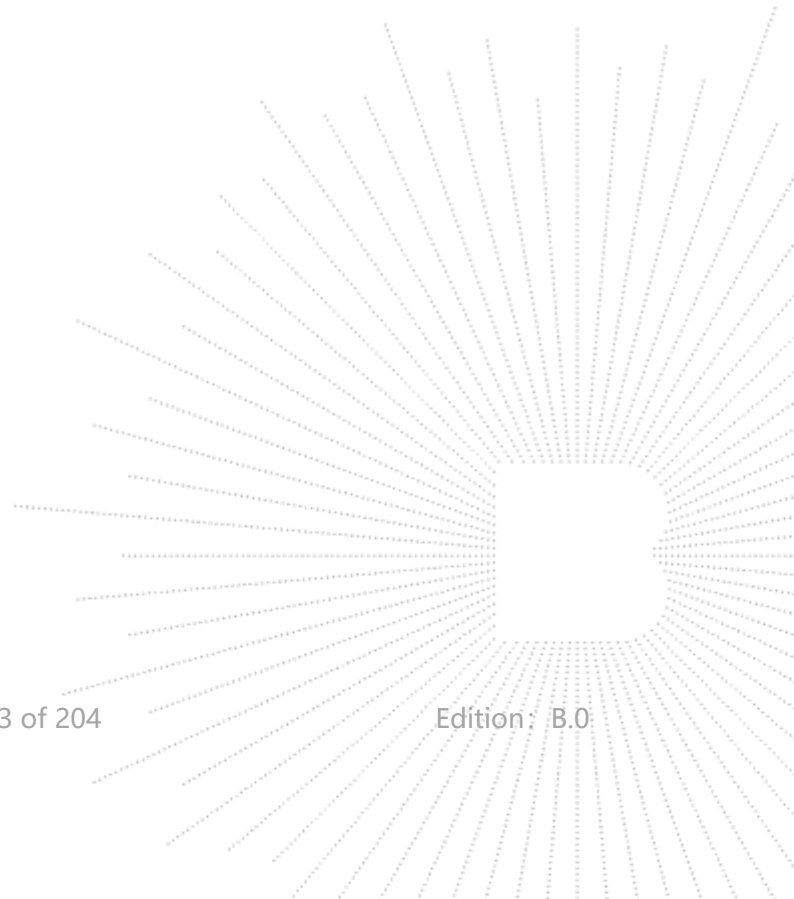

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

LTE QPSK configuration has the highest maximum average output power per 3GPP standard.


Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Power (dBm)
Band2	1.4	18607	1	#0	QPSK	23.47
Band2	1.4	18607	1	#Mid	QPSK	23.57
Band2	1.4	18607	1	#Max	QPSK	23.50
Band2	1.4	18607	3	#0	QPSK	23.40
Band2	1.4	18607	3	#Mid	QPSK	23.45
Band2	1.4	18607	3	#Max	QPSK	23.42
Band2	1.4	18607	6	#0	QPSK	22.46
Band2	1.4	18607	1	#0	16QAM	23.46
Band2	1.4	18607	1	#Mid	16QAM	23.37
Band2	1.4	18607	1	#Max	16QAM	23.45
Band2	1.4	18607	3	#0	16QAM	22.61
Band2	1.4	18607	3	#Mid	16QAM	22.67
Band2	1.4	18607	3	#Max	16QAM	22.61
Band2	1.4	18607	6	#0	16QAM	21.55
Band2	1.4	18900	1	#0	QPSK	23.48
Band2	1.4	18900	1	#Mid	QPSK	23.50
Band2	1.4	18900	1	#Max	QPSK	23.51
Band2	1.4	18900	3	#0	QPSK	23.68
Band2	1.4	18900	3	#Mid	QPSK	23.63
Band2	1.4	18900	3	#Max	QPSK	23.54
Band2	1.4	18900	6	#0	QPSK	22.59
Band2	1.4	18900	1	#0	16QAM	22.66
Band2	1.4	18900	1	#Mid	16QAM	22.66
Band2	1.4	18900	1	#Max	16QAM	22.69
Band2	1.4	18900	3	#0	16QAM	22.64
Band2	1.4	18900	3	#Mid	16QAM	22.61
Band2	1.4	18900	3	#Max	16QAM	22.63
Band2	1.4	18900	6	#0	16QAM	21.63
Band2	1.4	19193	1	#0	QPSK	23.84
Band2	1.4	19193	1	#Mid	QPSK	23.81
Band2	1.4	19193	1	#Max	QPSK	23.85
Band2	1.4	19193	3	#0	QPSK	23.78
Band2	1.4	19193	3	#Mid	QPSK	23.79
Band2	1.4	19193	3	#Max	QPSK	23.74
Band2	1.4	19193	6	#0	QPSK	22.84
Band2	1.4	19193	1	#0	16QAM	23.05
Band2	1.4	19193	1	#Mid	16QAM	22.94
Band2	1.4	19193	1	#Max	16QAM	22.99
Band2	1.4	19193	3	#0	16QAM	23.12
Band2	1.4	19193	3	#Mid	16QAM	23.12
Band2	1.4	19193	3	#Max	16QAM	23.10
Band2	1.4	19193	6	#0	16QAM	21.95
Band2	3	18615	1	#0	QPSK	23.36
Band2	3	18615	1	#Mid	QPSK	23.36
Band2	3	18615	1	#Max	QPSK	23.28
Band2	3	18615	8	#0	QPSK	22.55
Band2	3	18615	8	#Mid	QPSK	22.49
Band2	3	18615	8	#Max	QPSK	22.35
Band2	3	18615	15	#0	QPSK	22.44

Band2	3	18615	1	#0	16QAM	23.51
Band2	3	18615	1	#Mid	16QAM	23.46
Band2	3	18615	1	#Max	16QAM	23.47
Band2	3	18615	8	#0	16QAM	21.40
Band2	3	18615	8	#Mid	16QAM	21.39
Band2	3	18615	8	#Max	16QAM	21.38
Band2	3	18615	15	#0	16QAM	21.60
Band2	3	18900	1	#0	QPSK	23.47
Band2	3	18900	1	#Mid	QPSK	23.49
Band2	3	18900	1	#Max	QPSK	23.55
Band2	3	18900	8	#0	QPSK	22.65
Band2	3	18900	8	#Mid	QPSK	22.66
Band2	3	18900	8	#Max	QPSK	22.57
Band2	3	18900	15	#0	QPSK	22.62
Band2	3	18900	1	#0	16QAM	22.71
Band2	3	18900	1	#Mid	16QAM	22.71
Band2	3	18900	1	#Max	16QAM	22.66
Band2	3	18900	8	#0	16QAM	21.71
Band2	3	18900	8	#Mid	16QAM	21.74
Band2	3	18900	8	#Max	16QAM	21.76
Band2	3	18900	15	#0	16QAM	21.63
Band2	3	19185	1	#0	QPSK	23.80
Band2	3	19185	1	#Mid	QPSK	23.84
Band2	3	19185	1	#Max	QPSK	23.90
Band2	3	19185	8	#0	QPSK	22.78
Band2	3	19185	8	#Mid	QPSK	22.75
Band2	3	19185	8	#Max	QPSK	22.80
Band2	3	19185	15	#0	QPSK	22.83
Band2	3	19185	1	#0	16QAM	23.05
Band2	3	19185	1	#Mid	16QAM	22.99
Band2	3	19185	1	#Max	16QAM	22.99
Band2	3	19185	8	#0	16QAM	21.87
Band2	3	19185	8	#Mid	16QAM	21.78
Band2	3	19185	8	#Max	16QAM	21.85
Band2	3	19185	15	#0	16QAM	21.81
Band2	5	18625	1	#0	QPSK	23.24
Band2	5	18625	1	#Mid	QPSK	23.19
Band2	5	18625	1	#Max	QPSK	23.32
Band2	5	18625	12	#0	QPSK	22.54
Band2	5	18625	12	#Mid	QPSK	22.29
Band2	5	18625	12	#Max	QPSK	22.42
Band2	5	18625	25	#0	QPSK	22.32
Band2	5	18625	1	#0	16QAM	22.65
Band2	5	18625	1	#Mid	16QAM	22.47
Band2	5	18625	1	#Max	16QAM	22.59
Band2	5	18625	12	#0	16QAM	21.41
Band2	5	18625	12	#Mid	16QAM	21.31
Band2	5	18625	12	#Max	16QAM	21.42
Band2	5	18625	25	#0	16QAM	21.51
Band2	5	18900	1	#0	QPSK	23.70
Band2	5	18900	1	#Mid	QPSK	23.63
Band2	5	18900	1	#Max	QPSK	23.63
Band2	5	18900	12	#0	QPSK	22.54
Band2	5	18900	12	#Mid	QPSK	22.63
Band2	5	18900	12	#Max	QPSK	22.64
Band2	5	18900	25	#0	QPSK	22.60
Band2	5	18900	1	#0	16QAM	22.41

Band2	5	18900	1	#Mid	16QAM	22.30
Band2	5	18900	1	#Max	16QAM	22.30
Band2	5	18900	12	#0	16QAM	21.55
Band2	5	18900	12	#Mid	16QAM	21.51
Band2	5	18900	12	#Max	16QAM	21.55
Band2	5	18900	25	#0	16QAM	21.73
Band2	5	19175	1	#0	QPSK	23.66
Band2	5	19175	1	#Mid	QPSK	23.71
Band2	5	19175	1	#Max	QPSK	23.74
Band2	5	19175	12	#0	QPSK	22.79
Band2	5	19175	12	#Mid	QPSK	22.79
Band2	5	19175	12	#Max	QPSK	22.79
Band2	5	19175	25	#0	QPSK	22.74
Band2	5	19175	1	#0	16QAM	22.77
Band2	5	19175	1	#Mid	16QAM	22.76
Band2	5	19175	1	#Max	16QAM	22.77
Band2	5	19175	12	#0	16QAM	21.85
Band2	5	19175	12	#Mid	16QAM	21.83
Band2	5	19175	12	#Max	16QAM	21.74
Band2	5	19175	25	#0	16QAM	21.76
Band2	10	18650	1	#0	QPSK	23.41
Band2	10	18650	1	#Mid	QPSK	23.39
Band2	10	18650	1	#Max	QPSK	23.50
Band2	10	18650	25	#0	QPSK	22.38
Band2	10	18650	25	#Mid	QPSK	22.45
Band2	10	18650	25	#Max	QPSK	22.44
Band2	10	18650	50	#0	QPSK	22.48
Band2	10	18650	1	#0	16QAM	23.58
Band2	10	18650	1	#Mid	16QAM	23.51
Band2	10	18650	1	#Max	16QAM	23.62
Band2	10	18650	25	#0	16QAM	21.37
Band2	10	18650	25	#Mid	16QAM	21.46
Band2	10	18650	25	#Max	16QAM	21.49
Band2	10	18650	50	#0	16QAM	21.48
Band2	10	18900	1	#0	QPSK	23.69
Band2	10	18900	1	#Mid	QPSK	23.69
Band2	10	18900	1	#Max	QPSK	23.77
Band2	10	18900	25	#0	QPSK	22.65
Band2	10	18900	25	#Mid	QPSK	22.53
Band2	10	18900	25	#Max	QPSK	22.58
Band2	10	18900	50	#0	QPSK	22.65
Band2	10	18900	1	#0	16QAM	22.75
Band2	10	18900	1	#Mid	16QAM	22.68
Band2	10	18900	1	#Max	16QAM	22.59
Band2	10	18900	25	#0	16QAM	21.78
Band2	10	18900	25	#Mid	16QAM	21.74
Band2	10	18900	25	#Max	16QAM	21.70
Band2	10	18900	50	#0	16QAM	21.82
Band2	10	19150	1	#0	QPSK	23.68
Band2	10	19150	1	#Mid	QPSK	23.75
Band2	10	19150	1	#Max	QPSK	23.90
Band2	10	19150	25	#0	QPSK	22.75
Band2	10	19150	25	#Mid	QPSK	22.81
Band2	10	19150	25	#Max	QPSK	22.81
Band2	10	19150	50	#0	QPSK	22.76
Band2	10	19150	1	#0	16QAM	22.57
Band2	10	19150	1	#Mid	16QAM	22.60

Band2	10	19150	1	#Max	16QAM	22.86
Band2	10	19150	25	#0	16QAM	22.12
Band2	10	19150	25	#Mid	16QAM	21.82
Band2	10	19150	25	#Max	16QAM	21.84
Band2	10	19150	50	#0	16QAM	21.75
Band2	15	18675	1	#0	QPSK	23.40
Band2	15	18675	1	#Mid	QPSK	23.44
Band2	15	18675	1	#Max	QPSK	23.52
Band2	15	18675	36	#0	QPSK	22.39
Band2	15	18675	36	#Mid	QPSK	22.52
Band2	15	18675	36	#Max	QPSK	22.54
Band2	15	18675	75	#0	QPSK	22.47
Band2	15	18675	1	#0	16QAM	23.62
Band2	15	18675	1	#Mid	16QAM	23.54
Band2	15	18675	1	#Max	16QAM	23.69
Band2	15	18675	36	#0	16QAM	21.47
Band2	15	18675	36	#Mid	16QAM	21.51
Band2	15	18675	36	#Max	16QAM	21.64
Band2	15	18675	75	#0	16QAM	21.60
Band2	15	18900	1	#0	QPSK	23.60
Band2	15	18900	1	#Mid	QPSK	23.69
Band2	15	18900	1	#Max	QPSK	23.61
Band2	15	18900	36	#0	QPSK	22.63
Band2	15	18900	36	#Mid	QPSK	22.54
Band2	15	18900	36	#Max	QPSK	22.52
Band2	15	18900	75	#0	QPSK	22.67
Band2	15	18900	1	#0	16QAM	22.69
Band2	15	18900	1	#Mid	16QAM	22.64
Band2	15	18900	1	#Max	16QAM	22.58
Band2	15	18900	36	#0	16QAM	21.85
Band2	15	18900	36	#Mid	16QAM	21.77
Band2	15	18900	36	#Max	16QAM	21.65
Band2	15	18900	75	#0	16QAM	21.62
Band2	15	19125	1	#0	QPSK	23.60
Band2	15	19125	1	#Mid	QPSK	23.71
Band2	15	19125	1	#Max	QPSK	23.81
Band2	15	19125	36	#0	QPSK	22.62
Band2	15	19125	36	#Mid	QPSK	22.64
Band2	15	19125	36	#Max	QPSK	22.68
Band2	15	19125	75	#0	QPSK	22.73
Band2	15	19125	1	#0	16QAM	23.24
Band2	15	19125	1	#Mid	16QAM	23.40
Band2	15	19125	1	#Max	16QAM	23.49
Band2	15	19125	36	#0	16QAM	21.65
Band2	15	19125	36	#Mid	16QAM	22.10
Band2	15	19125	36	#Max	16QAM	21.77
Band2	15	19125	75	#0	16QAM	22.21
Band2	20	18700	1	#0	QPSK	23.43
Band2	20	18700	1	#Mid	QPSK	23.58
Band2	20	18700	1	#Max	QPSK	23.77
Band2	20	18700	50	#0	QPSK	22.51
Band2	20	18700	50	#Mid	QPSK	22.53
Band2	20	18700	50	#Max	QPSK	22.73
Band2	20	18700	100	#0	QPSK	22.49
Band2	20	18700	1	#0	16QAM	22.14
Band2	20	18700	1	#Mid	16QAM	22.26
Band2	20	18700	1	#Max	16QAM	22.39

Band2	20	18700	50	#0	16QAM	21.58
Band2	20	18700	50	#Mid	16QAM	21.67
Band2	20	18700	50	#Max	16QAM	21.81
Band2	20	18700	100	#0	16QAM	21.56
Band2	20	18900	1	#0	QPSK	23.69
Band2	20	18900	1	#Mid	QPSK	23.73
Band2	20	18900	1	#Max	QPSK	23.78
Band2	20	18900	50	#0	QPSK	22.69
Band2	20	18900	50	#Mid	QPSK	22.55
Band2	20	18900	50	#Max	QPSK	22.55
Band2	20	18900	100	#0	QPSK	22.74
Band2	20	18900	1	#0	16QAM	22.51
Band2	20	18900	1	#Mid	16QAM	22.39
Band2	20	18900	1	#Max	16QAM	22.36
Band2	20	18900	50	#0	16QAM	21.69
Band2	20	18900	50	#Mid	16QAM	21.69
Band2	20	18900	50	#Max	16QAM	21.70
Band2	20	18900	100	#0	16QAM	21.75
Band2	20	19100	1	#0	QPSK	23.73
Band2	20	19100	1	#Mid	QPSK	23.83
Band2	20	19100	1	#Max	QPSK	24.03
Band2	20	19100	50	#0	QPSK	22.59
Band2	20	19100	50	#Mid	QPSK	22.71
Band2	20	19100	50	#Max	QPSK	22.75
Band2	20	19100	100	#0	QPSK	22.77
Band2	20	19100	1	#0	16QAM	22.47
Band2	20	19100	1	#Mid	16QAM	22.62
Band2	20	19100	1	#Max	16QAM	22.76
Band2	20	19100	50	#0	16QAM	21.68
Band2	20	19100	50	#Mid	16QAM	21.71
Band2	20	19100	50	#Max	16QAM	21.81
Band2	20	19100	100	#0	16QAM	21.74

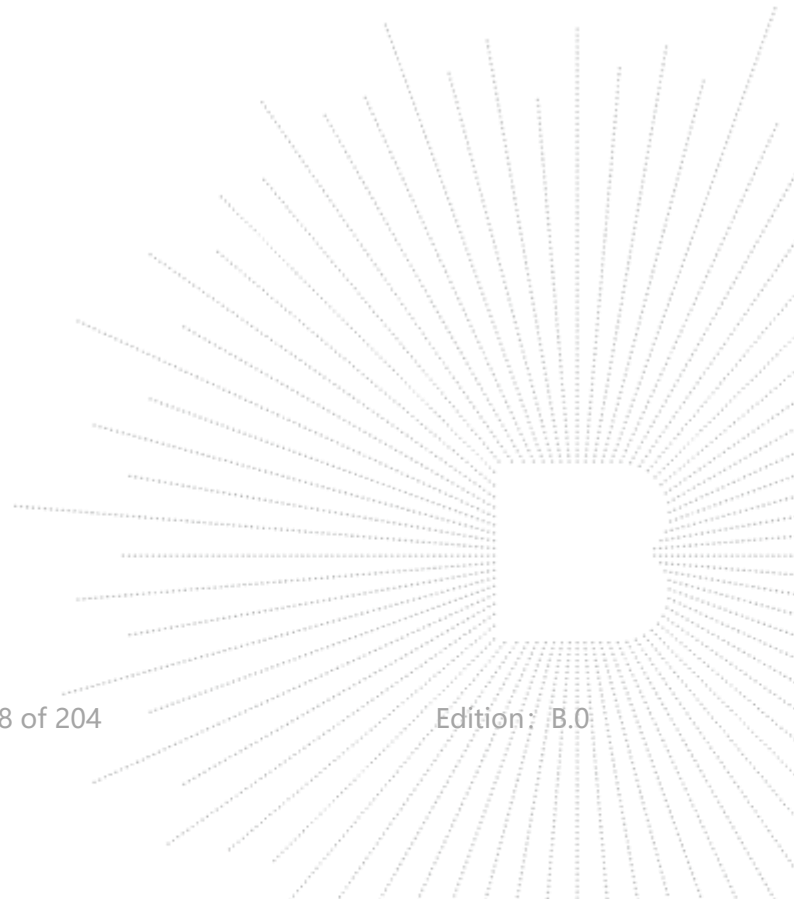


Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Power (dBm)
Band4	1.4	19957	1	#0	QPSK	23.59
Band4	1.4	19957	1	#Mid	QPSK	23.65
Band4	1.4	19957	1	#Max	QPSK	23.62
Band4	1.4	19957	3	#0	QPSK	23.50
Band4	1.4	19957	3	#Mid	QPSK	23.53
Band4	1.4	19957	3	#Max	QPSK	23.57
Band4	1.4	19957	6	#0	QPSK	22.54
Band4	1.4	19957	1	#0	16QAM	23.50
Band4	1.4	19957	1	#Mid	16QAM	23.51
Band4	1.4	19957	1	#Max	16QAM	23.52
Band4	1.4	19957	3	#0	16QAM	22.69
Band4	1.4	19957	3	#Mid	16QAM	22.64
Band4	1.4	19957	3	#Max	16QAM	22.66
Band4	1.4	19957	6	#0	16QAM	21.60
Band4	1.4	20175	1	#0	QPSK	23.60
Band4	1.4	20175	1	#Mid	QPSK	23.57
Band4	1.4	20175	1	#Max	QPSK	23.54
Band4	1.4	20175	3	#0	QPSK	23.70
Band4	1.4	20175	3	#Mid	QPSK	23.68
Band4	1.4	20175	3	#Max	QPSK	23.62
Band4	1.4	20175	6	#0	QPSK	22.63
Band4	1.4	20175	1	#0	16QAM	23.29
Band4	1.4	20175	1	#Mid	16QAM	23.26
Band4	1.4	20175	1	#Max	16QAM	23.33
Band4	1.4	20175	3	#0	16QAM	22.71
Band4	1.4	20175	3	#Mid	16QAM	22.69
Band4	1.4	20175	3	#Max	16QAM	22.72
Band4	1.4	20175	6	#0	16QAM	21.97
Band4	1.4	20393	1	#0	QPSK	23.54
Band4	1.4	20393	1	#Mid	QPSK	23.48
Band4	1.4	20393	1	#Max	QPSK	23.50
Band4	1.4	20393	3	#0	QPSK	23.28
Band4	1.4	20393	3	#Mid	QPSK	23.18
Band4	1.4	20393	3	#Max	QPSK	23.19
Band4	1.4	20393	6	#0	QPSK	22.24
Band4	1.4	20393	1	#0	16QAM	22.85
Band4	1.4	20393	1	#Mid	16QAM	22.76
Band4	1.4	20393	1	#Max	16QAM	22.87
Band4	1.4	20393	3	#0	16QAM	22.69
Band4	1.4	20393	3	#Mid	16QAM	22.64
Band4	1.4	20393	3	#Max	16QAM	22.56
Band4	1.4	20393	6	#0	16QAM	21.95
Band4	3	19965	1	#0	QPSK	23.44
Band4	3	19965	1	#Mid	QPSK	23.42
Band4	3	19965	1	#Max	QPSK	23.39
Band4	3	19965	8	#0	QPSK	22.56
Band4	3	19965	8	#Mid	QPSK	22.54
Band4	3	19965	8	#Max	QPSK	22.43
Band4	3	19965	15	#0	QPSK	22.49
Band4	3	19965	1	#0	16QAM	23.53
Band4	3	19965	1	#Mid	16QAM	23.50
Band4	3	19965	1	#Max	16QAM	23.51
Band4	3	19965	8	#0	16QAM	21.49
Band4	3	19965	8	#Mid	16QAM	21.47

Band4	3	19965	8	#Max	16QAM	21.47
Band4	3	19965	15	#0	16QAM	21.70
Band4	3	20175	1	#0	QPSK	23.51
Band4	3	20175	1	#Mid	QPSK	23.52
Band4	3	20175	1	#Max	QPSK	23.52
Band4	3	20175	8	#0	QPSK	22.59
Band4	3	20175	8	#Mid	QPSK	22.67
Band4	3	20175	8	#Max	QPSK	22.57
Band4	3	20175	15	#0	QPSK	22.65
Band4	3	20175	1	#0	16QAM	23.25
Band4	3	20175	1	#Mid	16QAM	23.24
Band4	3	20175	1	#Max	16QAM	23.31
Band4	3	20175	8	#0	16QAM	21.88
Band4	3	20175	8	#Mid	16QAM	22.30
Band4	3	20175	8	#Max	16QAM	22.31
Band4	3	20175	15	#0	16QAM	22.15
Band4	3	20385	1	#0	QPSK	23.51
Band4	3	20385	1	#Mid	QPSK	23.53
Band4	3	20385	1	#Max	QPSK	23.48
Band4	3	20385	8	#0	QPSK	22.21
Band4	3	20385	8	#Mid	QPSK	22.17
Band4	3	20385	8	#Max	QPSK	22.26
Band4	3	20385	15	#0	QPSK	22.38
Band4	3	20385	1	#0	16QAM	22.77
Band4	3	20385	1	#Mid	16QAM	22.78
Band4	3	20385	1	#Max	16QAM	22.72
Band4	3	20385	8	#0	16QAM	21.38
Band4	3	20385	8	#Mid	16QAM	21.35
Band4	3	20385	8	#Max	16QAM	21.78
Band4	3	20385	15	#0	16QAM	21.39
Band4	5	19975	1	#0	QPSK	23.42
Band4	5	19975	1	#Mid	QPSK	23.32
Band4	5	19975	1	#Max	QPSK	23.34
Band4	5	19975	12	#0	QPSK	22.54
Band4	5	19975	12	#Mid	QPSK	22.42
Band4	5	19975	12	#Max	QPSK	22.51
Band4	5	19975	25	#0	QPSK	22.43
Band4	5	19975	1	#0	16QAM	22.66
Band4	5	19975	1	#Mid	16QAM	22.57
Band4	5	19975	1	#Max	16QAM	22.56
Band4	5	19975	12	#0	16QAM	21.49
Band4	5	19975	12	#Mid	16QAM	21.46
Band4	5	19975	12	#Max	16QAM	21.45
Band4	5	19975	25	#0	16QAM	21.63
Band4	5	20175	1	#0	QPSK	23.63
Band4	5	20175	1	#Mid	QPSK	23.65
Band4	5	20175	1	#Max	QPSK	23.73
Band4	5	20175	12	#0	QPSK	22.61
Band4	5	20175	12	#Mid	QPSK	22.56
Band4	5	20175	12	#Max	QPSK	22.59
Band4	5	20175	25	#0	QPSK	22.70
Band4	5	20175	1	#0	16QAM	22.28
Band4	5	20175	1	#Mid	16QAM	22.38
Band4	5	20175	1	#Max	16QAM	22.42
Band4	5	20175	12	#0	16QAM	21.57
Band4	5	20175	12	#Mid	16QAM	21.97
Band4	5	20175	12	#Max	16QAM	21.98

Band4	5	20175	25	#0	16QAM	22.20
Band4	5	20375	1	#0	QPSK	23.24
Band4	5	20375	1	#Mid	QPSK	23.21
Band4	5	20375	1	#Max	QPSK	23.20
Band4	5	20375	12	#0	QPSK	22.31
Band4	5	20375	12	#Mid	QPSK	22.26
Band4	5	20375	12	#Max	QPSK	22.25
Band4	5	20375	25	#0	QPSK	22.37
Band4	5	20375	1	#0	16QAM	22.40
Band4	5	20375	1	#Mid	16QAM	22.41
Band4	5	20375	1	#Max	16QAM	22.33
Band4	5	20375	12	#0	16QAM	21.34
Band4	5	20375	12	#Mid	16QAM	21.30
Band4	5	20375	12	#Max	16QAM	21.30
Band4	5	20375	25	#0	16QAM	21.33
Band4	10	20000	1	#0	QPSK	23.51
Band4	10	20000	1	#Mid	QPSK	23.51
Band4	10	20000	1	#Max	QPSK	23.49
Band4	10	20000	25	#0	QPSK	22.52
Band4	10	20000	25	#Mid	QPSK	22.43
Band4	10	20000	25	#Max	QPSK	22.38
Band4	10	20000	50	#0	QPSK	22.45
Band4	10	20000	1	#0	16QAM	23.67
Band4	10	20000	1	#Mid	16QAM	23.49
Band4	10	20000	1	#Max	16QAM	23.59
Band4	10	20000	25	#0	16QAM	21.43
Band4	10	20000	25	#Mid	16QAM	21.80
Band4	10	20000	25	#Max	16QAM	21.42
Band4	10	20000	50	#0	16QAM	21.89
Band4	10	20175	1	#0	QPSK	23.65
Band4	10	20175	1	#Mid	QPSK	23.69
Band4	10	20175	1	#Max	QPSK	23.67
Band4	10	20175	25	#0	QPSK	22.60
Band4	10	20175	25	#Mid	QPSK	22.59
Band4	10	20175	25	#Max	QPSK	22.63
Band4	10	20175	50	#0	QPSK	22.63
Band4	10	20175	1	#0	16QAM	22.62
Band4	10	20175	1	#Mid	16QAM	22.68
Band4	10	20175	1	#Max	16QAM	22.72
Band4	10	20175	25	#0	16QAM	21.71
Band4	10	20175	25	#Mid	16QAM	22.11
Band4	10	20175	25	#Max	16QAM	21.69
Band4	10	20175	50	#0	16QAM	22.18
Band4	10	20350	1	#0	QPSK	23.47
Band4	10	20350	1	#Mid	QPSK	23.46
Band4	10	20350	1	#Max	QPSK	23.36
Band4	10	20350	25	#0	QPSK	22.43
Band4	10	20350	25	#Mid	QPSK	22.51
Band4	10	20350	25	#Max	QPSK	22.33
Band4	10	20350	50	#0	QPSK	22.42
Band4	10	20350	1	#0	16QAM	22.61
Band4	10	20350	1	#Mid	16QAM	22.58
Band4	10	20350	1	#Max	16QAM	22.34
Band4	10	20350	25	#0	16QAM	21.94
Band4	10	20350	25	#Mid	16QAM	21.43
Band4	10	20350	25	#Max	16QAM	21.38
Band4	10	20350	50	#0	16QAM	21.45

Band4	15	20025	1	#0	QPSK	23.49
Band4	15	20025	1	#Mid	QPSK	23.48
Band4	15	20025	1	#Max	QPSK	23.54
Band4	15	20025	36	#0	QPSK	22.48
Band4	15	20025	36	#Mid	QPSK	22.43
Band4	15	20025	36	#Max	QPSK	22.45
Band4	15	20025	75	#0	QPSK	22.41
Band4	15	20025	1	#0	16QAM	23.64
Band4	15	20025	1	#Mid	16QAM	23.59
Band4	15	20025	1	#Max	16QAM	23.60
Band4	15	20025	36	#0	16QAM	21.86
Band4	15	20025	36	#Mid	16QAM	21.46
Band4	15	20025	36	#Max	16QAM	21.51
Band4	15	20025	75	#0	16QAM	21.61
Band4	15	20175	1	#0	QPSK	23.62
Band4	15	20175	1	#Mid	QPSK	23.67
Band4	15	20175	1	#Max	QPSK	23.63
Band4	15	20175	36	#0	QPSK	22.60
Band4	15	20175	36	#Mid	QPSK	22.63
Band4	15	20175	36	#Max	QPSK	22.69
Band4	15	20175	75	#0	QPSK	22.68
Band4	15	20175	1	#0	16QAM	22.52
Band4	15	20175	1	#Mid	16QAM	22.67
Band4	15	20175	1	#Max	16QAM	22.64
Band4	15	20175	36	#0	16QAM	21.79
Band4	15	20175	36	#Mid	16QAM	22.22
Band4	15	20175	36	#Max	16QAM	22.22
Band4	15	20175	75	#0	16QAM	22.10
Band4	15	20325	1	#0	QPSK	23.65
Band4	15	20325	1	#Mid	QPSK	23.50
Band4	15	20325	1	#Max	QPSK	23.30
Band4	15	20325	36	#0	QPSK	22.41
Band4	15	20325	36	#Mid	QPSK	22.31
Band4	15	20325	36	#Max	QPSK	22.38
Band4	15	20325	75	#0	QPSK	22.44
Band4	15	20325	1	#0	16QAM	23.36
Band4	15	20325	1	#Mid	16QAM	23.20
Band4	15	20325	1	#Max	16QAM	22.98
Band4	15	20325	36	#0	16QAM	21.58
Band4	15	20325	36	#Mid	16QAM	21.94
Band4	15	20325	36	#Max	16QAM	21.40
Band4	15	20325	75	#0	16QAM	22.02
Band4	20	20050	1	#0	QPSK	23.48
Band4	20	20050	1	#Mid	QPSK	23.40
Band4	20	20050	1	#Max	QPSK	23.61
Band4	20	20050	50	#0	QPSK	22.46
Band4	20	20050	50	#Mid	QPSK	22.45
Band4	20	20050	50	#Max	QPSK	22.44
Band4	20	20050	100	#0	QPSK	22.52
Band4	20	20050	1	#0	16QAM	22.20
Band4	20	20050	1	#Mid	16QAM	22.11
Band4	20	20050	1	#Max	16QAM	22.30
Band4	20	20050	50	#0	16QAM	21.98
Band4	20	20050	50	#Mid	16QAM	21.60
Band4	20	20050	50	#Max	16QAM	22.03
Band4	20	20050	100	#0	16QAM	21.58
Band4	20	20175	1	#0	QPSK	23.56

Band4	20	20175	1	#Mid	QPSK	23.66
Band4	20	20175	1	#Max	QPSK	23.66
Band4	20	20175	50	#0	QPSK	22.50
Band4	20	20175	50	#Mid	QPSK	22.65
Band4	20	20175	50	#Max	QPSK	22.66
Band4	20	20175	100	#0	QPSK	22.67
Band4	20	20175	1	#0	16QAM	22.58
Band4	20	20175	1	#Mid	16QAM	22.75
Band4	20	20175	1	#Max	16QAM	22.77
Band4	20	20175	50	#0	16QAM	21.65
Band4	20	20175	50	#Mid	16QAM	22.17
Band4	20	20175	50	#Max	16QAM	22.05
Band4	20	20175	100	#0	16QAM	22.05
Band4	20	20300	1	#0	QPSK	23.68
Band4	20	20300	1	#Mid	QPSK	23.57
Band4	20	20300	1	#Max	QPSK	23.45
Band4	20	20300	50	#0	QPSK	22.53
Band4	20	20300	50	#Mid	QPSK	22.56
Band4	20	20300	50	#Max	QPSK	22.43
Band4	20	20300	100	#0	QPSK	22.61
Band4	20	20300	1	#0	16QAM	22.73
Band4	20	20300	1	#Mid	16QAM	22.61
Band4	20	20300	1	#Max	16QAM	22.53
Band4	20	20300	50	#0	16QAM	22.09
Band4	20	20300	50	#Mid	16QAM	21.54
Band4	20	20300	50	#Max	16QAM	21.45
Band4	20	20300	100	#0	16QAM	21.53

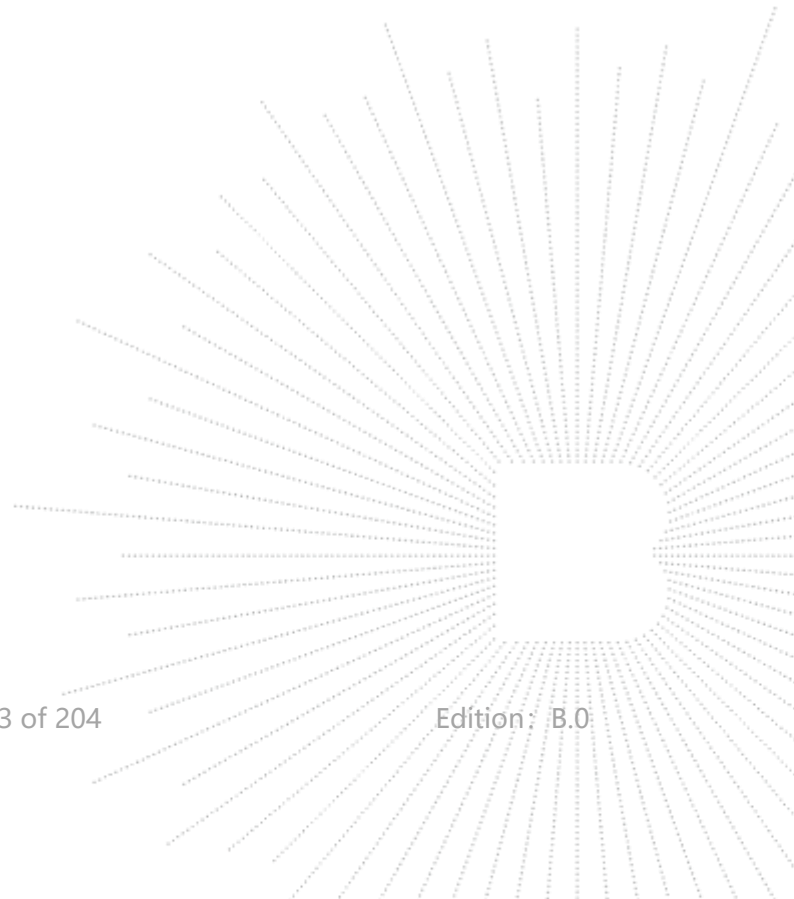

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Power (dBm)
Band5	1.4	20407	1	#0	QPSK	23.97
Band5	1.4	20407	1	#Mid	QPSK	24.02
Band5	1.4	20407	1	#Max	QPSK	23.99
Band5	1.4	20407	3	#0	QPSK	23.92
Band5	1.4	20407	3	#Mid	QPSK	23.96
Band5	1.4	20407	3	#Max	QPSK	23.88
Band5	1.4	20407	6	#0	QPSK	22.95
Band5	1.4	20407	1	#0	16QAM	23.87
Band5	1.4	20407	1	#Mid	16QAM	23.86
Band5	1.4	20407	1	#Max	16QAM	23.89
Band5	1.4	20407	3	#0	16QAM	23.15
Band5	1.4	20407	3	#Mid	16QAM	23.05
Band5	1.4	20407	3	#Max	16QAM	23.11
Band5	1.4	20407	6	#0	16QAM	22.37
Band5	1.4	20525	1	#0	QPSK	23.83
Band5	1.4	20525	1	#Mid	QPSK	23.94
Band5	1.4	20525	1	#Max	QPSK	23.93
Band5	1.4	20525	3	#0	QPSK	24.01
Band5	1.4	20525	3	#Mid	QPSK	23.92
Band5	1.4	20525	3	#Max	QPSK	23.94
Band5	1.4	20525	6	#0	QPSK	22.92
Band5	1.4	20525	1	#0	16QAM	23.61
Band5	1.4	20525	1	#Mid	16QAM	23.58
Band5	1.4	20525	1	#Max	16QAM	23.64
Band5	1.4	20525	3	#0	16QAM	22.96
Band5	1.4	20525	3	#Mid	16QAM	22.91
Band5	1.4	20525	3	#Max	16QAM	22.98
Band5	1.4	20525	6	#0	16QAM	22.30
Band5	1.4	20643	1	#0	QPSK	24.03
Band5	1.4	20643	1	#Mid	QPSK	24.17
Band5	1.4	20643	1	#Max	QPSK	24.10
Band5	1.4	20643	3	#0	QPSK	24.10
Band5	1.4	20643	3	#Mid	QPSK	24.10
Band5	1.4	20643	3	#Max	QPSK	24.06
Band5	1.4	20643	6	#0	QPSK	23.15
Band5	1.4	20643	1	#0	16QAM	24.12
Band5	1.4	20643	1	#Mid	16QAM	24.11
Band5	1.4	20643	1	#Max	16QAM	23.62
Band5	1.4	20643	3	#0	16QAM	23.34
Band5	1.4	20643	3	#Mid	16QAM	23.40
Band5	1.4	20643	3	#Max	16QAM	23.28
Band5	1.4	20643	6	#0	16QAM	22.24
Band5	3	20415	1	#0	QPSK	23.81
Band5	3	20415	1	#Mid	QPSK	23.82
Band5	3	20415	1	#Max	QPSK	23.74
Band5	3	20415	8	#0	QPSK	22.93
Band5	3	20415	8	#Mid	QPSK	22.92
Band5	3	20415	8	#Max	QPSK	22.82
Band5	3	20415	15	#0	QPSK	22.88
Band5	3	20415	1	#0	16QAM	23.88
Band5	3	20415	1	#Mid	16QAM	23.84
Band5	3	20415	1	#Max	16QAM	23.66
Band5	3	20415	8	#0	16QAM	22.15
Band5	3	20415	8	#Mid	16QAM	22.11

Band5	3	20415	8	#Max	16QAM	21.75
Band5	3	20415	15	#0	16QAM	22.25
Band5	3	20525	1	#0	QPSK	23.84
Band5	3	20525	1	#Mid	QPSK	23.83
Band5	3	20525	1	#Max	QPSK	23.94
Band5	3	20525	8	#0	QPSK	22.87
Band5	3	20525	8	#Mid	QPSK	22.83
Band5	3	20525	8	#Max	QPSK	22.84
Band5	3	20525	15	#0	QPSK	22.81
Band5	3	20525	1	#0	16QAM	23.59
Band5	3	20525	1	#Mid	16QAM	23.61
Band5	3	20525	1	#Max	16QAM	23.66
Band5	3	20525	8	#0	16QAM	22.09
Band5	3	20525	8	#Mid	16QAM	22.57
Band5	3	20525	8	#Max	16QAM	22.57
Band5	3	20525	15	#0	16QAM	22.42
Band5	3	20635	1	#0	QPSK	24.03
Band5	3	20635	1	#Mid	QPSK	24.11
Band5	3	20635	1	#Max	QPSK	24.13
Band5	3	20635	8	#0	QPSK	23.02
Band5	3	20635	8	#Mid	QPSK	23.06
Band5	3	20635	8	#Max	QPSK	23.03
Band5	3	20635	15	#0	QPSK	23.05
Band5	3	20635	1	#0	16QAM	24.01
Band5	3	20635	1	#Mid	16QAM	23.95
Band5	3	20635	1	#Max	16QAM	23.91
Band5	3	20635	8	#0	16QAM	22.05
Band5	3	20635	8	#Mid	16QAM	22.11
Band5	3	20635	8	#Max	16QAM	22.09
Band5	3	20635	15	#0	16QAM	22.17
Band5	5	20425	1	#0	QPSK	23.77
Band5	5	20425	1	#Mid	QPSK	23.62
Band5	5	20425	1	#Max	QPSK	23.69
Band5	5	20425	12	#0	QPSK	22.79
Band5	5	20425	12	#Mid	QPSK	22.56
Band5	5	20425	12	#Max	QPSK	22.65
Band5	5	20425	25	#0	QPSK	22.73
Band5	5	20425	1	#0	16QAM	22.95
Band5	5	20425	1	#Mid	16QAM	22.87
Band5	5	20425	1	#Max	16QAM	22.86
Band5	5	20425	12	#0	16QAM	22.04
Band5	5	20425	12	#Mid	16QAM	21.73
Band5	5	20425	12	#Max	16QAM	21.71
Band5	5	20425	25	#0	16QAM	21.86
Band5	5	20525	1	#0	QPSK	23.81
Band5	5	20525	1	#Mid	QPSK	23.86
Band5	5	20525	1	#Max	QPSK	23.94
Band5	5	20525	12	#0	QPSK	22.88
Band5	5	20525	12	#Mid	QPSK	22.90
Band5	5	20525	12	#Max	QPSK	22.93
Band5	5	20525	25	#0	QPSK	22.87
Band5	5	20525	1	#0	16QAM	22.53
Band5	5	20525	1	#Mid	16QAM	22.59
Band5	5	20525	1	#Max	16QAM	22.63
Band5	5	20525	12	#0	16QAM	21.73
Band5	5	20525	12	#Mid	16QAM	22.19
Band5	5	20525	12	#Max	16QAM	22.28

Band5	5	20525	25	#0	16QAM	22.41
Band5	5	20625	1	#0	QPSK	24.03
Band5	5	20625	1	#Mid	QPSK	24.09
Band5	5	20625	1	#Max	QPSK	24.03
Band5	5	20625	12	#0	QPSK	23.10
Band5	5	20625	12	#Mid	QPSK	23.04
Band5	5	20625	12	#Max	QPSK	23.09
Band5	5	20625	25	#0	QPSK	23.12
Band5	5	20625	1	#0	16QAM	23.07
Band5	5	20625	1	#Mid	16QAM	23.02
Band5	5	20625	1	#Max	16QAM	23.03
Band5	5	20625	12	#0	16QAM	22.21
Band5	5	20625	12	#Mid	16QAM	22.04
Band5	5	20625	12	#Max	16QAM	22.03
Band5	5	20625	25	#0	16QAM	22.12
Band5	10	20450	1	#0	QPSK	23.88
Band5	10	20450	1	#Mid	QPSK	23.75
Band5	10	20450	1	#Max	QPSK	23.84
Band5	10	20450	25	#0	QPSK	22.76
Band5	10	20450	25	#Mid	QPSK	22.72
Band5	10	20450	25	#Max	QPSK	22.84
Band5	10	20450	50	#0	QPSK	22.80
Band5	10	20450	1	#0	16QAM	23.91
Band5	10	20450	1	#Mid	16QAM	23.83
Band5	10	20450	1	#Max	16QAM	24.07
Band5	10	20450	25	#0	16QAM	21.73
Band5	10	20450	25	#Mid	16QAM	21.77
Band5	10	20450	25	#Max	16QAM	21.76
Band5	10	20450	50	#0	16QAM	21.82
Band5	10	20525	1	#0	QPSK	23.89
Band5	10	20525	1	#Mid	QPSK	23.93
Band5	10	20525	1	#Max	QPSK	24.16
Band5	10	20525	25	#0	QPSK	22.92
Band5	10	20525	25	#Mid	QPSK	22.85
Band5	10	20525	25	#Max	QPSK	22.85
Band5	10	20525	50	#0	QPSK	22.94
Band5	10	20525	1	#0	16QAM	22.75
Band5	10	20525	1	#Mid	16QAM	22.94
Band5	10	20525	1	#Max	16QAM	23.08
Band5	10	20525	25	#0	16QAM	21.83
Band5	10	20525	25	#Mid	16QAM	22.39
Band5	10	20525	25	#Max	16QAM	21.94
Band5	10	20525	50	#0	16QAM	22.44
Band5	10	20600	1	#0	QPSK	24.03
Band5	10	20600	1	#Mid	QPSK	24.16
Band5	10	20600	1	#Max	QPSK	24.12
Band5	10	20600	25	#0	QPSK	22.93
Band5	10	20600	25	#Mid	QPSK	23.13
Band5	10	20600	25	#Max	QPSK	23.14
Band5	10	20600	50	#0	QPSK	23.11
Band5	10	20600	1	#0	16QAM	22.95
Band5	10	20600	1	#Mid	16QAM	23.06
Band5	10	20600	1	#Max	16QAM	23.02
Band5	10	20600	25	#0	16QAM	22.05
Band5	10	20600	25	#Mid	16QAM	22.12
Band5	10	20600	25	#Max	16QAM	22.11
Band5	10	20600	50	#0	16QAM	22.05

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Power (dBm)
Band7	5	20775	1	#0	QPSK	21.74
Band7	5	20775	1	#Mid	QPSK	21.70
Band7	5	20775	1	#Max	QPSK	21.80
Band7	5	20775	12	#0	QPSK	20.82
Band7	5	20775	12	#Mid	QPSK	20.72
Band7	5	20775	12	#Max	QPSK	20.76
Band7	5	20775	25	#0	QPSK	20.75
Band7	5	20775	1	#0	16QAM	20.50
Band7	5	20775	1	#Mid	16QAM	20.49
Band7	5	20775	1	#Max	16QAM	20.53
Band7	5	20775	12	#0	16QAM	19.64
Band7	5	20775	12	#Mid	16QAM	19.70
Band7	5	20775	12	#Max	16QAM	19.71
Band7	5	20775	25	#0	16QAM	19.90
Band7	5	21100	1	#0	QPSK	21.42
Band7	5	21100	1	#Mid	QPSK	21.58
Band7	5	21100	1	#Max	QPSK	21.64
Band7	5	21100	12	#0	QPSK	20.66
Band7	5	21100	12	#Mid	QPSK	20.66
Band7	5	21100	12	#Max	QPSK	20.70
Band7	5	21100	25	#0	QPSK	20.70
Band7	5	21100	1	#0	16QAM	20.74
Band7	5	21100	1	#Mid	16QAM	20.76
Band7	5	21100	1	#Max	16QAM	20.79
Band7	5	21100	12	#0	16QAM	19.73
Band7	5	21100	12	#Mid	16QAM	19.71
Band7	5	21100	12	#Max	16QAM	19.72
Band7	5	21100	25	#0	16QAM	19.67
Band7	5	21425	1	#0	QPSK	21.22
Band7	5	21425	1	#Mid	QPSK	21.09
Band7	5	21425	1	#Max	QPSK	20.96
Band7	5	21425	12	#0	QPSK	20.18
Band7	5	21425	12	#Mid	QPSK	20.12
Band7	5	21425	12	#Max	QPSK	19.97
Band7	5	21425	25	#0	QPSK	19.96
Band7	5	21425	1	#0	16QAM	20.32
Band7	5	21425	1	#Mid	16QAM	20.17
Band7	5	21425	1	#Max	16QAM	20.19
Band7	5	21425	12	#0	16QAM	18.95
Band7	5	21425	12	#Mid	16QAM	18.99
Band7	5	21425	12	#Max	16QAM	18.94
Band7	5	21425	25	#0	16QAM	19.23
Band7	10	20800	1	#0	QPSK	21.69
Band7	10	20800	1	#Mid	QPSK	21.68
Band7	10	20800	1	#Max	QPSK	21.70
Band7	10	20800	25	#0	QPSK	20.75
Band7	10	20800	25	#Mid	QPSK	20.70
Band7	10	20800	25	#Max	QPSK	20.69
Band7	10	20800	50	#0	QPSK	20.76
Band7	10	20800	1	#0	16QAM	21.73
Band7	10	20800	1	#Mid	16QAM	21.88
Band7	10	20800	1	#Max	16QAM	21.99
Band7	10	20800	25	#0	16QAM	19.70
Band7	10	20800	25	#Mid	16QAM	19.68

Band7	10	20800	25	#Max	16QAM	19.72
Band7	10	20800	50	#0	16QAM	19.76
Band7	10	21100	1	#0	QPSK	21.65
Band7	10	21100	1	#Mid	QPSK	21.65
Band7	10	21100	1	#Max	QPSK	21.68
Band7	10	21100	25	#0	QPSK	20.54
Band7	10	21100	25	#Mid	QPSK	20.69
Band7	10	21100	25	#Max	QPSK	20.68
Band7	10	21100	50	#0	QPSK	20.54
Band7	10	21100	1	#0	16QAM	20.70
Band7	10	21100	1	#Mid	16QAM	20.71
Band7	10	21100	1	#Max	16QAM	20.81
Band7	10	21100	25	#0	16QAM	19.73
Band7	10	21100	25	#Mid	16QAM	19.73
Band7	10	21100	25	#Max	16QAM	19.79
Band7	10	21100	50	#0	16QAM	19.76
Band7	10	21400	1	#0	QPSK	21.31
Band7	10	21400	1	#Mid	QPSK	21.24
Band7	10	21400	1	#Max	QPSK	21.18
Band7	10	21400	25	#0	QPSK	20.09
Band7	10	21400	25	#Mid	QPSK	20.19
Band7	10	21400	25	#Max	QPSK	20.14
Band7	10	21400	50	#0	QPSK	20.22
Band7	10	21400	1	#0	16QAM	20.20
Band7	10	21400	1	#Mid	16QAM	20.24
Band7	10	21400	1	#Max	16QAM	20.05
Band7	10	21400	25	#0	16QAM	19.21
Band7	10	21400	25	#Mid	16QAM	19.25
Band7	10	21400	25	#Max	16QAM	19.13
Band7	10	21400	50	#0	16QAM	19.27
Band7	15	20825	1	#0	QPSK	21.58
Band7	15	20825	1	#Mid	QPSK	21.54
Band7	15	20825	1	#Max	QPSK	21.56
Band7	15	20825	36	#0	QPSK	20.67
Band7	15	20825	36	#Mid	QPSK	20.72
Band7	15	20825	36	#Max	QPSK	20.72
Band7	15	20825	75	#0	QPSK	20.62
Band7	15	20825	1	#0	16QAM	21.81
Band7	15	20825	1	#Mid	16QAM	21.83
Band7	15	20825	1	#Max	16QAM	21.86
Band7	15	20825	36	#0	16QAM	19.78
Band7	15	20825	36	#Mid	16QAM	19.78
Band7	15	20825	36	#Max	16QAM	19.74
Band7	15	20825	75	#0	16QAM	19.75
Band7	15	21100	1	#0	QPSK	21.62
Band7	15	21100	1	#Mid	QPSK	21.63
Band7	15	21100	1	#Max	QPSK	21.63
Band7	15	21100	36	#0	QPSK	20.60
Band7	15	21100	36	#Mid	QPSK	20.60
Band7	15	21100	36	#Max	QPSK	20.65
Band7	15	21100	75	#0	QPSK	20.62
Band7	15	21100	1	#0	16QAM	20.64
Band7	15	21100	1	#Mid	16QAM	20.62
Band7	15	21100	1	#Max	16QAM	20.71
Band7	15	21100	36	#0	16QAM	19.73
Band7	15	21100	36	#Mid	16QAM	19.75
Band7	15	21100	36	#Max	16QAM	19.79

Band7	15	21100	75	#0	16QAM	19.68
Band7	15	21375	1	#0	QPSK	21.43
Band7	15	21375	1	#Mid	QPSK	21.23
Band7	15	21375	1	#Max	QPSK	21.16
Band7	15	21375	36	#0	QPSK	20.23
Band7	15	21375	36	#Mid	QPSK	20.20
Band7	15	21375	36	#Max	QPSK	20.14
Band7	15	21375	75	#0	QPSK	20.06
Band7	15	21375	1	#0	16QAM	21.08
Band7	15	21375	1	#Mid	16QAM	20.92
Band7	15	21375	1	#Max	16QAM	20.90
Band7	15	21375	36	#0	16QAM	19.28
Band7	15	21375	36	#Mid	16QAM	19.23
Band7	15	21375	36	#Max	16QAM	19.05
Band7	15	21375	75	#0	16QAM	19.24
Band7	20	20850	1	#0	QPSK	21.65
Band7	20	20850	1	#Mid	QPSK	21.58
Band7	20	20850	1	#Max	QPSK	21.56
Band7	20	20850	50	#0	QPSK	20.77
Band7	20	20850	50	#Mid	QPSK	20.71
Band7	20	20850	50	#Max	QPSK	20.55
Band7	20	20850	100	#0	QPSK	20.60
Band7	20	20850	1	#0	16QAM	20.46
Band7	20	20850	1	#Mid	16QAM	20.50
Band7	20	20850	1	#Max	16QAM	20.40
Band7	20	20850	50	#0	16QAM	19.84
Band7	20	20850	50	#Mid	16QAM	19.81
Band7	20	20850	50	#Max	16QAM	19.79
Band7	20	20850	100	#0	16QAM	19.66
Band7	20	21100	1	#0	QPSK	21.66
Band7	20	21100	1	#Mid	QPSK	21.67
Band7	20	21100	1	#Max	QPSK	21.70
Band7	20	21100	50	#0	QPSK	20.64
Band7	20	21100	50	#Mid	QPSK	20.53
Band7	20	21100	50	#Max	QPSK	20.66
Band7	20	21100	100	#0	QPSK	20.65
Band7	20	21100	1	#0	16QAM	20.77
Band7	20	21100	1	#Mid	16QAM	20.94
Band7	20	21100	1	#Max	16QAM	20.94
Band7	20	21100	50	#0	16QAM	19.59
Band7	20	21100	50	#Mid	16QAM	19.73
Band7	20	21100	50	#Max	16QAM	19.63
Band7	20	21100	100	#0	16QAM	19.61
Band7	20	21350	1	#0	QPSK	21.56
Band7	20	21350	1	#Mid	QPSK	21.40
Band7	20	21350	1	#Max	QPSK	21.30
Band7	20	21350	50	#0	QPSK	20.27
Band7	20	21350	50	#Mid	QPSK	20.19
Band7	20	21350	50	#Max	QPSK	20.18
Band7	20	21350	100	#0	QPSK	20.20
Band7	20	21350	1	#0	16QAM	20.38
Band7	20	21350	1	#Mid	16QAM	20.11
Band7	20	21350	1	#Max	16QAM	19.96
Band7	20	21350	50	#0	16QAM	19.34
Band7	20	21350	50	#Mid	16QAM	19.30
Band7	20	21350	50	#Max	16QAM	19.25
Band7	20	21350	100	#0	16QAM	19.27


Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Power (dBm)
Band12	1.4	23017	1	#0	QPSK	24.05
Band12	1.4	23017	1	#Mid	QPSK	24.05
Band12	1.4	23017	1	#Max	QPSK	23.95
Band12	1.4	23017	3	#0	QPSK	24.12
Band12	1.4	23017	3	#Mid	QPSK	24.06
Band12	1.4	23017	3	#Max	QPSK	24.05
Band12	1.4	23017	6	#0	QPSK	23.04
Band12	1.4	23017	1	#0	16QAM	23.90
Band12	1.4	23017	1	#Mid	16QAM	23.93
Band12	1.4	23017	1	#Max	16QAM	23.88
Band12	1.4	23017	3	#0	16QAM	23.28
Band12	1.4	23017	3	#Mid	16QAM	23.22
Band12	1.4	23017	3	#Max	16QAM	23.18
Band12	1.4	23017	6	#0	16QAM	22.35
Band12	1.4	23095	1	#0	QPSK	23.88
Band12	1.4	23095	1	#Mid	QPSK	23.88
Band12	1.4	23095	1	#Max	QPSK	23.82
Band12	1.4	23095	3	#0	QPSK	23.99
Band12	1.4	23095	3	#Mid	QPSK	24.00
Band12	1.4	23095	3	#Max	QPSK	23.96
Band12	1.4	23095	6	#0	QPSK	22.84
Band12	1.4	23095	1	#0	16QAM	23.51
Band12	1.4	23095	1	#Mid	16QAM	23.54
Band12	1.4	23095	1	#Max	16QAM	23.53
Band12	1.4	23095	3	#0	16QAM	22.97
Band12	1.4	23095	3	#Mid	16QAM	22.99
Band12	1.4	23095	3	#Max	16QAM	22.95
Band12	1.4	23095	6	#0	16QAM	21.93
Band12	1.4	23173	1	#0	QPSK	24.15
Band12	1.4	23173	1	#Mid	QPSK	24.19
Band12	1.4	23173	1	#Max	QPSK	24.20
Band12	1.4	23173	3	#0	QPSK	23.98
Band12	1.4	23173	3	#Mid	QPSK	24.11
Band12	1.4	23173	3	#Max	QPSK	24.06
Band12	1.4	23173	6	#0	QPSK	23.15
Band12	1.4	23173	1	#0	16QAM	23.60
Band12	1.4	23173	1	#Mid	16QAM	23.82
Band12	1.4	23173	1	#Max	16QAM	23.67
Band12	1.4	23173	3	#0	16QAM	23.38
Band12	1.4	23173	3	#Mid	16QAM	23.40
Band12	1.4	23173	3	#Max	16QAM	23.38
Band12	1.4	23173	6	#0	16QAM	22.19
Band12	3	23025	1	#0	QPSK	23.90
Band12	3	23025	1	#Mid	QPSK	23.87
Band12	3	23025	1	#Max	QPSK	23.91
Band12	3	23025	8	#0	QPSK	23.14
Band12	3	23025	8	#Mid	QPSK	23.06
Band12	3	23025	8	#Max	QPSK	23.00
Band12	3	23025	15	#0	QPSK	23.00
Band12	3	23025	1	#0	16QAM	23.89
Band12	3	23025	1	#Mid	16QAM	23.86
Band12	3	23025	1	#Max	16QAM	23.70
Band12	3	23025	8	#0	16QAM	22.22
Band12	3	23025	8	#Mid	16QAM	22.14

Band12	3	23025	8	#Max	16QAM	22.18
Band12	3	23025	15	#0	16QAM	22.38
Band12	3	23095	1	#0	QPSK	23.89
Band12	3	23095	1	#Mid	QPSK	23.85
Band12	3	23095	1	#Max	QPSK	23.83
Band12	3	23095	8	#0	QPSK	22.97
Band12	3	23095	8	#Mid	QPSK	22.95
Band12	3	23095	8	#Max	QPSK	22.80
Band12	3	23095	15	#0	QPSK	22.91
Band12	3	23095	1	#0	16QAM	23.53
Band12	3	23095	1	#Mid	16QAM	23.53
Band12	3	23095	1	#Max	16QAM	23.43
Band12	3	23095	8	#0	16QAM	22.56
Band12	3	23095	8	#Mid	16QAM	22.17
Band12	3	23095	8	#Max	16QAM	22.18
Band12	3	23095	15	#0	16QAM	22.08
Band12	3	23165	1	#0	QPSK	24.13
Band12	3	23165	1	#Mid	QPSK	24.12
Band12	3	23165	1	#Max	QPSK	24.24
Band12	3	23165	8	#0	QPSK	23.03
Band12	3	23165	8	#Mid	QPSK	23.08
Band12	3	23165	8	#Max	QPSK	23.03
Band12	3	23165	15	#0	QPSK	23.05
Band12	3	23165	1	#0	16QAM	23.76
Band12	3	23165	1	#Mid	16QAM	23.86
Band12	3	23165	1	#Max	16QAM	23.61
Band12	3	23165	8	#0	16QAM	21.99
Band12	3	23165	8	#Mid	16QAM	22.02
Band12	3	23165	8	#Max	16QAM	21.99
Band12	3	23165	15	#0	16QAM	22.08
Band12	5	23035	1	#0	QPSK	23.89
Band12	5	23035	1	#Mid	QPSK	23.76
Band12	5	23035	1	#Max	QPSK	23.81
Band12	5	23035	12	#0	QPSK	22.92
Band12	5	23035	12	#Mid	QPSK	22.76
Band12	5	23035	12	#Max	QPSK	22.77
Band12	5	23035	25	#0	QPSK	22.85
Band12	5	23035	1	#0	16QAM	23.13
Band12	5	23035	1	#Mid	16QAM	22.95
Band12	5	23035	1	#Max	16QAM	23.08
Band12	5	23035	12	#0	16QAM	22.22
Band12	5	23035	12	#Mid	16QAM	22.18
Band12	5	23035	12	#Max	16QAM	22.19
Band12	5	23035	25	#0	16QAM	22.28
Band12	5	23095	1	#0	QPSK	23.92
Band12	5	23095	1	#Mid	QPSK	23.94
Band12	5	23095	1	#Max	QPSK	24.07
Band12	5	23095	12	#0	QPSK	22.83
Band12	5	23095	12	#Mid	QPSK	22.95
Band12	5	23095	12	#Max	QPSK	22.96
Band12	5	23095	25	#0	QPSK	22.93
Band12	5	23095	1	#0	16QAM	22.53
Band12	5	23095	1	#Mid	16QAM	22.59
Band12	5	23095	1	#Max	16QAM	22.80
Band12	5	23095	12	#0	16QAM	22.27
Band12	5	23095	12	#Mid	16QAM	21.83
Band12	5	23095	12	#Max	16QAM	21.89

Band12	5	23095	25	#0	16QAM	22.02
Band12	5	23155	1	#0	QPSK	23.99
Band12	5	23155	1	#Mid	QPSK	23.95
Band12	5	23155	1	#Max	QPSK	24.01
Band12	5	23155	12	#0	QPSK	23.08
Band12	5	23155	12	#Mid	QPSK	23.03
Band12	5	23155	12	#Max	QPSK	23.09
Band12	5	23155	25	#0	QPSK	23.00
Band12	5	23155	1	#0	16QAM	22.93
Band12	5	23155	1	#Mid	16QAM	22.94
Band12	5	23155	1	#Max	16QAM	23.01
Band12	5	23155	12	#0	16QAM	22.34
Band12	5	23155	12	#Mid	16QAM	21.98
Band12	5	23155	12	#Max	16QAM	21.91
Band12	5	23155	25	#0	16QAM	21.95
Band12	10	23060	1	#0	QPSK	23.94
Band12	10	23060	1	#Mid	QPSK	23.92
Band12	10	23060	1	#Max	QPSK	23.86
Band12	10	23060	25	#0	QPSK	22.93
Band12	10	23060	25	#Mid	QPSK	23.01
Band12	10	23060	25	#Max	QPSK	22.98
Band12	10	23060	50	#0	QPSK	23.01
Band12	10	23060	1	#0	16QAM	23.93
Band12	10	23060	1	#Mid	16QAM	24.03
Band12	10	23060	1	#Max	16QAM	23.84
Band12	10	23060	25	#0	16QAM	22.23
Band12	10	23060	25	#Mid	16QAM	21.93
Band12	10	23060	25	#Max	16QAM	22.26
Band12	10	23060	50	#0	16QAM	22.05
Band12	10	23095	1	#0	QPSK	24.02
Band12	10	23095	1	#Mid	QPSK	23.90
Band12	10	23095	1	#Max	QPSK	24.02
Band12	10	23095	25	#0	QPSK	23.01
Band12	10	23095	25	#Mid	QPSK	22.96
Band12	10	23095	25	#Max	QPSK	23.01
Band12	10	23095	50	#0	QPSK	22.92
Band12	10	23095	1	#0	16QAM	22.96
Band12	10	23095	1	#Mid	16QAM	22.97
Band12	10	23095	1	#Max	16QAM	23.06
Band12	10	23095	25	#0	16QAM	22.45
Band12	10	23095	25	#Mid	16QAM	21.98
Band12	10	23095	25	#Max	16QAM	22.02
Band12	10	23095	50	#0	16QAM	22.10
Band12	10	23130	1	#0	QPSK	23.99
Band12	10	23130	1	#Mid	QPSK	24.04
Band12	10	23130	1	#Max	QPSK	24.19
Band12	10	23130	25	#0	QPSK	22.91
Band12	10	23130	25	#Mid	QPSK	23.11
Band12	10	23130	25	#Max	QPSK	23.06
Band12	10	23130	50	#0	QPSK	23.09
Band12	10	23130	1	#0	16QAM	22.80
Band12	10	23130	1	#Mid	16QAM	22.90
Band12	10	23130	1	#Max	16QAM	23.03
Band12	10	23130	25	#0	16QAM	21.98
Band12	10	23130	25	#Mid	16QAM	22.08
Band12	10	23130	25	#Max	16QAM	22.07
Band12	10	23130	50	#0	16QAM	22.05

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Power (dBm)
Band17	5	23755	1	#0	QPSK	23.78
Band17	5	23755	1	#Mid	QPSK	23.91
Band17	5	23755	1	#Max	QPSK	24.00
Band17	5	23755	12	#0	QPSK	22.97
Band17	5	23755	12	#Mid	QPSK	22.98
Band17	5	23755	12	#Max	QPSK	22.96
Band17	5	23755	25	#0	QPSK	22.92
Band17	5	23755	1	#0	16QAM	22.60
Band17	5	23755	1	#Mid	16QAM	22.53
Band17	5	23755	1	#Max	16QAM	22.69
Band17	5	23755	12	#0	16QAM	22.30
Band17	5	23755	12	#Mid	16QAM	22.27
Band17	5	23755	12	#Max	16QAM	21.80
Band17	5	23755	25	#0	16QAM	22.41
Band17	5	23790	1	#0	QPSK	23.90
Band17	5	23790	1	#Mid	QPSK	23.89
Band17	5	23790	1	#Max	QPSK	23.96
Band17	5	23790	12	#0	QPSK	22.92
Band17	5	23790	12	#Mid	QPSK	23.05
Band17	5	23790	12	#Max	QPSK	22.95
Band17	5	23790	25	#0	QPSK	23.00
Band17	5	23790	1	#0	16QAM	22.95
Band17	5	23790	1	#Mid	16QAM	23.01
Band17	5	23790	1	#Max	16QAM	23.00
Band17	5	23790	12	#0	16QAM	21.91
Band17	5	23790	12	#Mid	16QAM	22.05
Band17	5	23790	12	#Max	16QAM	22.33
Band17	5	23790	25	#0	16QAM	21.96
Band17	5	23825	1	#0	QPSK	23.92
Band17	5	23825	1	#Mid	QPSK	23.99
Band17	5	23825	1	#Max	QPSK	23.98
Band17	5	23825	12	#0	QPSK	23.08
Band17	5	23825	12	#Mid	QPSK	23.02
Band17	5	23825	12	#Max	QPSK	23.08
Band17	5	23825	25	#0	QPSK	23.00
Band17	5	23825	1	#0	16QAM	22.97
Band17	5	23825	1	#Mid	16QAM	23.06
Band17	5	23825	1	#Max	16QAM	23.09
Band17	5	23825	12	#0	16QAM	22.31
Band17	5	23825	12	#Mid	16QAM	21.95
Band17	5	23825	12	#Max	16QAM	21.94
Band17	5	23825	25	#0	16QAM	22.13
Band17	10	23780	1	#0	QPSK	23.87
Band17	10	23780	1	#Mid	QPSK	23.82
Band17	10	23780	1	#Max	QPSK	23.98
Band17	10	23780	25	#0	QPSK	22.96
Band17	10	23780	25	#Mid	QPSK	23.01
Band17	10	23780	25	#Max	QPSK	23.02
Band17	10	23780	50	#0	QPSK	22.99
Band17	10	23780	1	#0	16QAM	23.94
Band17	10	23780	1	#Mid	16QAM	23.81
Band17	10	23780	1	#Max	16QAM	23.99
Band17	10	23780	25	#0	16QAM	22.25
Band17	10	23780	25	#Mid	16QAM	21.94
Band17	10	23780	25	#Max	16QAM	22.31

Band17	10	23780	50	#0	16QAM	21.91
Band17	10	23790	1	#0	QPSK	24.05
Band17	10	23790	1	#Mid	QPSK	23.88
Band17	10	23790	1	#Max	QPSK	24.13
Band17	10	23790	25	#0	QPSK	22.95
Band17	10	23790	25	#Mid	QPSK	22.94
Band17	10	23790	25	#Max	QPSK	22.96
Band17	10	23790	50	#0	QPSK	23.06
Band17	10	23790	1	#0	16QAM	22.90
Band17	10	23790	1	#Mid	16QAM	22.96
Band17	10	23790	1	#Max	16QAM	23.07
Band17	10	23790	25	#0	16QAM	21.99
Band17	10	23790	25	#Mid	16QAM	21.99
Band17	10	23790	25	#Max	16QAM	22.46
Band17	10	23790	50	#0	16QAM	22.06
Band17	10	23800	1	#0	QPSK	23.97
Band17	10	23800	1	#Mid	QPSK	24.07
Band17	10	23800	1	#Max	QPSK	24.13
Band17	10	23800	25	#0	QPSK	22.91
Band17	10	23800	25	#Mid	QPSK	23.10
Band17	10	23800	25	#Max	QPSK	23.06
Band17	10	23800	50	#0	QPSK	23.09
Band17	10	23800	1	#0	16QAM	22.80
Band17	10	23800	1	#Mid	16QAM	22.90
Band17	10	23800	1	#Max	16QAM	23.06
Band17	10	23800	25	#0	16QAM	21.98
Band17	10	23800	25	#Mid	16QAM	22.08
Band17	10	23800	25	#Max	16QAM	22.06
Band17	10	23800	50	#0	16QAM	22.06

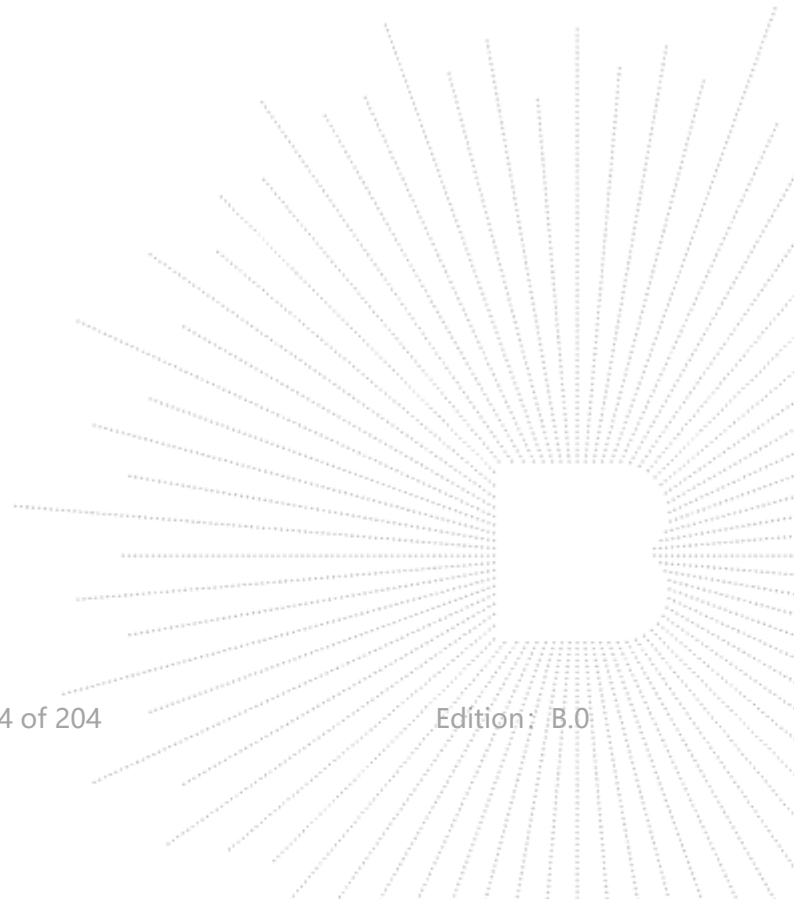

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Power (dBm)
Band41	5	40265	1	#0	QPSK	21.37
Band41	5	40265	1	#Mid	QPSK	21.30
Band41	5	40265	1	#Max	QPSK	21.25
Band41	5	40265	12	#0	QPSK	20.53
Band41	5	40265	12	#Mid	QPSK	20.54
Band41	5	40265	12	#Max	QPSK	20.33
Band41	5	40265	25	#0	QPSK	20.52
Band41	5	40265	1	#0	16QAM	21.04
Band41	5	40265	1	#Mid	16QAM	20.85
Band41	5	40265	1	#Max	16QAM	20.80
Band41	5	40265	12	#0	16QAM	19.59
Band41	5	40265	12	#Mid	16QAM	19.59
Band41	5	40265	12	#Max	16QAM	19.50
Band41	5	40265	25	#0	16QAM	19.61
Band41	5	40740	1	#0	QPSK	21.21
Band41	5	40740	1	#Mid	QPSK	21.10
Band41	5	40740	1	#Max	QPSK	21.17
Band41	5	40740	12	#0	QPSK	20.01
Band41	5	40740	12	#Mid	QPSK	20.11
Band41	5	40740	12	#Max	QPSK	20.06
Band41	5	40740	25	#0	QPSK	19.94
Band41	5	40740	1	#0	16QAM	19.74
Band41	5	40740	1	#Mid	16QAM	19.78
Band41	5	40740	1	#Max	16QAM	19.67
Band41	5	40740	12	#0	16QAM	19.03
Band41	5	40740	12	#Mid	16QAM	19.03
Band41	5	40740	12	#Max	16QAM	19.07
Band41	5	40740	25	#0	16QAM	19.21
Band41	5	41215	1	#0	QPSK	21.24
Band41	5	41215	1	#Mid	QPSK	21.19
Band41	5	41215	1	#Max	QPSK	21.31
Band41	5	41215	12	#0	QPSK	20.17
Band41	5	41215	12	#Mid	QPSK	20.23
Band41	5	41215	12	#Max	QPSK	20.12
Band41	5	41215	25	#0	QPSK	20.08
Band41	5	41215	1	#0	16QAM	19.92
Band41	5	41215	1	#Mid	16QAM	19.90
Band41	5	41215	1	#Max	16QAM	20.01
Band41	5	41215	12	#0	16QAM	19.08
Band41	5	41215	12	#Mid	16QAM	19.14
Band41	5	41215	12	#Max	16QAM	19.23
Band41	5	41215	25	#0	16QAM	19.40
Band41	10	40290	1	#0	QPSK	21.65
Band41	10	40290	1	#Mid	QPSK	21.49
Band41	10	40290	1	#Max	QPSK	21.40
Band41	10	40290	25	#0	QPSK	20.56
Band41	10	40290	25	#Mid	QPSK	20.31
Band41	10	40290	25	#Max	QPSK	20.42
Band41	10	40290	50	#0	QPSK	20.39
Band41	10	40290	1	#0	16QAM	21.11
Band41	10	40290	1	#Mid	16QAM	21.00
Band41	10	40290	1	#Max	16QAM	20.79
Band41	10	40290	25	#0	16QAM	19.56
Band41	10	40290	25	#Mid	16QAM	19.48


Band41	10	40290	25	#Max	16QAM	19.42
Band41	10	40290	50	#0	16QAM	19.51
Band41	10	40740	1	#0	QPSK	21.10
Band41	10	40740	1	#Mid	QPSK	21.07
Band41	10	40740	1	#Max	QPSK	21.04
Band41	10	40740	25	#0	QPSK	19.88
Band41	10	40740	25	#Mid	QPSK	19.86
Band41	10	40740	25	#Max	QPSK	20.00
Band41	10	40740	50	#0	QPSK	19.89
Band41	10	40740	1	#0	16QAM	19.13
Band41	10	40740	1	#Mid	16QAM	19.15
Band41	10	40740	1	#Max	16QAM	19.06
Band41	10	40740	25	#0	16QAM	18.94
Band41	10	40740	25	#Mid	16QAM	19.03
Band41	10	40740	25	#Max	16QAM	19.00
Band41	10	40740	50	#0	16QAM	19.12
Band41	10	41190	1	#0	QPSK	21.16
Band41	10	41190	1	#Mid	QPSK	21.03
Band41	10	41190	1	#Max	QPSK	21.09
Band41	10	41190	25	#0	QPSK	20.26
Band41	10	41190	25	#Mid	QPSK	20.09
Band41	10	41190	25	#Max	QPSK	19.99
Band41	10	41190	50	#0	QPSK	20.13
Band41	10	41190	1	#0	16QAM	20.84
Band41	10	41190	1	#Mid	16QAM	20.94
Band41	10	41190	1	#Max	16QAM	20.72
Band41	10	41190	25	#0	16QAM	19.35
Band41	10	41190	25	#Mid	16QAM	19.18
Band41	10	41190	25	#Max	16QAM	19.07
Band41	10	41190	50	#0	16QAM	19.19
Band41	15	40315	1	#0	QPSK	21.64
Band41	15	40315	1	#Mid	QPSK	21.43
Band41	15	40315	1	#Max	QPSK	21.38
Band41	15	40315	36	#0	QPSK	20.53
Band41	15	40315	36	#Mid	QPSK	20.28
Band41	15	40315	36	#Max	QPSK	20.25
Band41	15	40315	75	#0	QPSK	20.34
Band41	15	40315	1	#0	16QAM	21.21
Band41	15	40315	1	#Mid	16QAM	20.97
Band41	15	40315	1	#Max	16QAM	20.90
Band41	15	40315	36	#0	16QAM	19.58
Band41	15	40315	36	#Mid	16QAM	19.37
Band41	15	40315	36	#Max	16QAM	19.45
Band41	15	40315	75	#0	16QAM	19.36
Band41	15	40740	1	#0	QPSK	21.21
Band41	15	40740	1	#Mid	QPSK	21.08
Band41	15	40740	1	#Max	QPSK	21.05
Band41	15	40740	36	#0	QPSK	19.99
Band41	15	40740	36	#Mid	QPSK	20.06
Band41	15	40740	36	#Max	QPSK	20.06
Band41	15	40740	75	#0	QPSK	20.01
Band41	15	40740	1	#0	16QAM	19.16
Band41	15	40740	1	#Mid	16QAM	19.16
Band41	15	40740	1	#Max	16QAM	19.16
Band41	15	40740	36	#0	16QAM	19.24
Band41	15	40740	36	#Mid	16QAM	19.16
Band41	15	40740	36	#Max	16QAM	19.21

Band41	15	40740	75	#0	16QAM	19.03
Band41	15	41165	1	#0	QPSK	21.12
Band41	15	41165	1	#Mid	QPSK	20.89
Band41	15	41165	1	#Max	QPSK	20.88
Band41	15	41165	36	#0	QPSK	20.19
Band41	15	41165	36	#Mid	QPSK	20.16
Band41	15	41165	36	#Max	QPSK	20.04
Band41	15	41165	75	#0	QPSK	20.15
Band41	15	41165	1	#0	16QAM	20.67
Band41	15	41165	1	#Mid	16QAM	20.19
Band41	15	41165	1	#Max	16QAM	20.20
Band41	15	41165	36	#0	16QAM	19.24
Band41	15	41165	36	#Mid	16QAM	19.19
Band41	15	41165	36	#Max	16QAM	19.01
Band41	15	41165	75	#0	16QAM	19.33
Band41	20	40340	1	#0	QPSK	21.58
Band41	20	40340	1	#Mid	QPSK	21.31
Band41	20	40340	1	#Max	QPSK	21.33
Band41	20	40340	50	#0	QPSK	20.35
Band41	20	40340	50	#Mid	QPSK	20.25
Band41	20	40340	50	#Max	QPSK	20.28
Band41	20	40340	100	#0	QPSK	20.39
Band41	20	40340	1	#0	16QAM	20.34
Band41	20	40340	1	#Mid	16QAM	20.06
Band41	20	40340	1	#Max	16QAM	20.03
Band41	20	40340	50	#0	16QAM	19.70
Band41	20	40340	50	#Mid	16QAM	19.45
Band41	20	40340	50	#Max	16QAM	19.42
Band41	20	40340	100	#0	16QAM	19.45
Band41	20	40740	1	#0	QPSK	21.34
Band41	20	40740	1	#Mid	QPSK	21.17
Band41	20	40740	1	#Max	QPSK	21.15
Band41	20	40740	50	#0	QPSK	20.08
Band41	20	40740	50	#Mid	QPSK	20.12
Band41	20	40740	50	#Max	QPSK	20.18
Band41	20	40740	100	#0	QPSK	20.02
Band41	20	40740	1	#0	16QAM	19.97
Band41	20	40740	1	#Mid	16QAM	19.75
Band41	20	40740	1	#Max	16QAM	19.81
Band41	20	40740	50	#0	16QAM	19.25
Band41	20	40740	50	#Mid	16QAM	19.10
Band41	20	40740	50	#Max	16QAM	19.10
Band41	20	40740	100	#0	16QAM	19.24
Band41	20	41140	1	#0	QPSK	21.54
Band41	20	41140	1	#Mid	QPSK	21.30
Band41	20	41140	1	#Max	QPSK	21.31
Band41	20	41140	50	#0	QPSK	20.41
Band41	20	41140	50	#Mid	QPSK	20.30
Band41	20	41140	50	#Max	QPSK	20.24
Band41	20	41140	100	#0	QPSK	20.25
Band41	20	41140	1	#0	16QAM	20.52
Band41	20	41140	1	#Mid	16QAM	19.33
Band41	20	41140	1	#Max	16QAM	20.28
Band41	20	41140	50	#0	16QAM	19.55
Band41	20	41140	50	#Mid	16QAM	19.48
Band41	20	41140	50	#Max	16QAM	19.41
Band41	20	41140	100	#0	16QAM	19.44

WLAN 2.4G			
Mode	Frequency	Maximum Conducted Output Power	Tune-up power
	(MHz)	(dBm)	(dBm)
802.11b	2412	16.35	17.0
	2437	16.22	
	2462	15.82	
802.11g	2412	16.49	17.0
	2437	16.20	
	2462	15.96	
802.11n20	2412	15.62	17.0
	2437	16.32	
	2462	16.05	
802.11n40	2422	16.64	17.0
	2437	15.78	
	2452	16.42	

Note:

1. When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 b/g/n modes, the channel in the lower order/sequence 802.11 mode (i.e. g, n) is selected. Therefore the SAR measurements performed for the 802.11b modes, as the lowest order modulation, cover 802.11g/n modes.
2. SAR is not required for the following 2.4 GHz OFDM conditions as the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
3. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

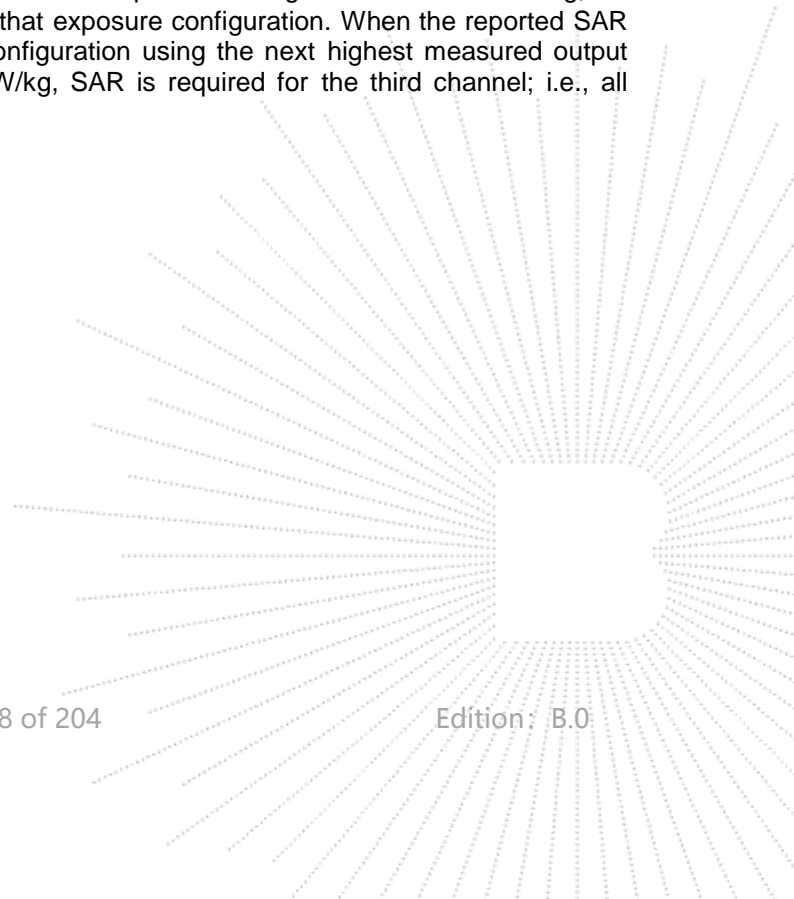

Bluetooth			
Modulation	Frequency (MHz)	Output Power (dBm)	Tune-up power (dBm)
1-DH1	2402	1.66	3.0
	2441	2.34	
	2480	1.25	
2-DH1	2402	1.56	3.5
	2441	2.06	
	2480	2.89	
3-DH1	2402	2.00	3.5
	2441	2.44	
	2480	3.12	

Note:

Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\left[\frac{\text{max. power of channel, including tune-up tolerance, mW}}{\text{min. test separation distance, mm}} \right] \cdot \sqrt{f(\text{GHz})}$$

≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR

f(GHz) is the RF channel transmit frequency in GHz


Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison

Bluetooth Turn up Power (dBm)	Bluetooth Turn up Power (mW)	Separation Distance (mm)	Frequency (GHz)	Result	Exclusion Thresholds
3.5	2.24	5	2.48	0.71	3.0


Per KDB 447498 D01v06, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

According to the calculation results in the table above, BT SAR does not need to be tested.

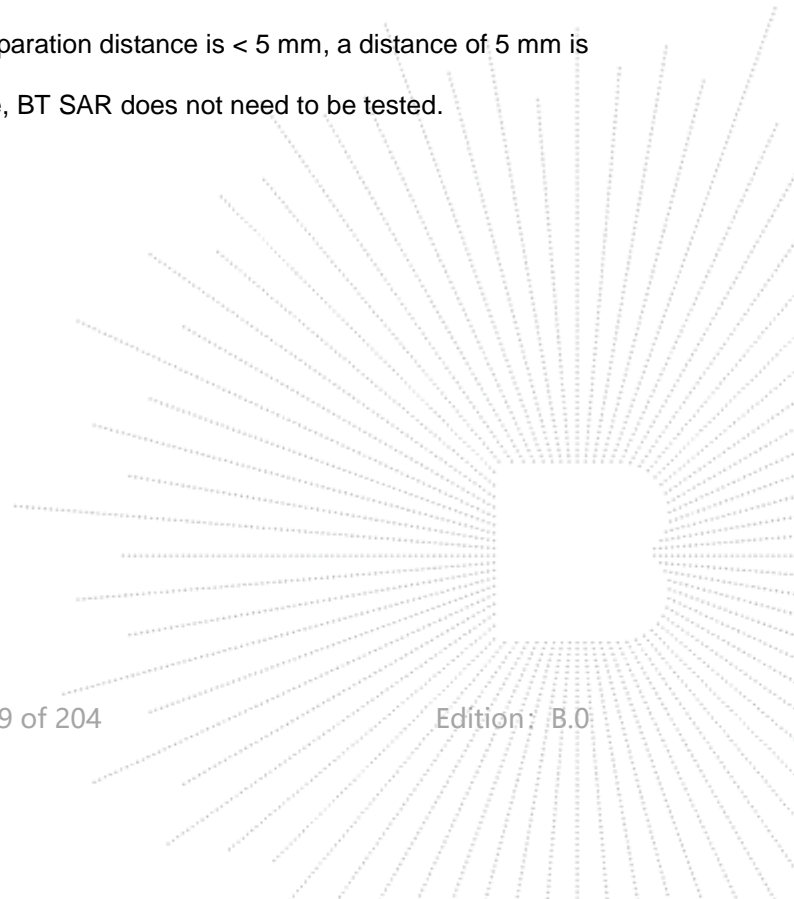

14.2 Transmit Antennas and SAR Measurement Position

EUT Antenna Location:

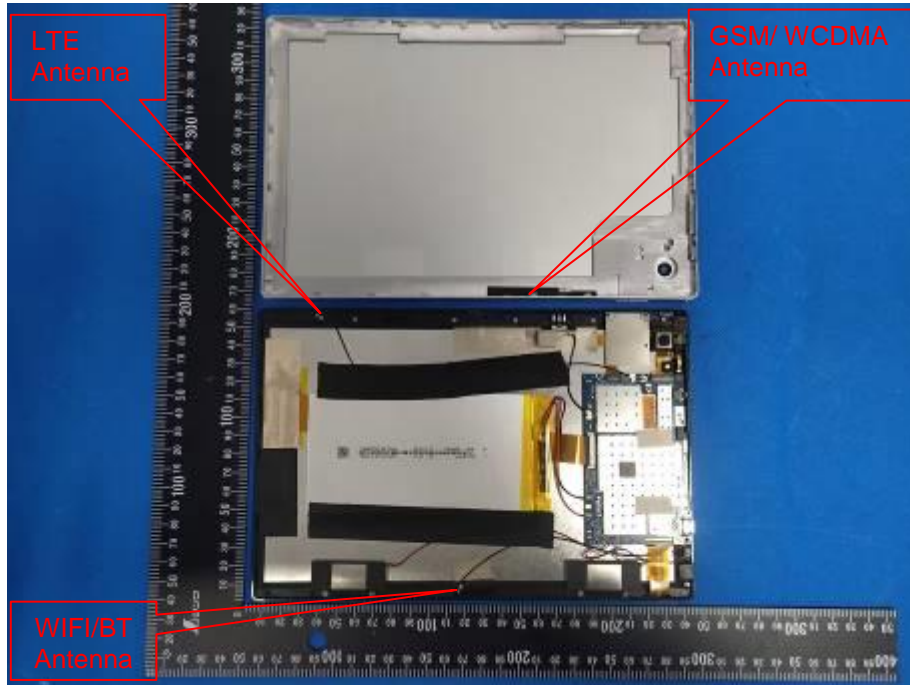

Antennas	Support Band
GSM/ WCDMA	GSM 850/1900+WCDMA Band 2/5
LTE	LTE Band 2/4/5/7/12/17/41
BT/WIFI	BT+ WIFI 2.4G

Distance of The Antenna to the EUT surface and edge (mm)						
Antennas	Front	Back	Top Side	Bottom Side	Left Side	Right Side
GSM/ WCDMA	<25	<25	<25	152	50	125
LTE	<25	<25	<25	152	204	<25
BT/WIFI	<25	<25	144	<25	110	110

EUT Testing Location Evaluation:

Positions for SAR tests; Hotspot mode						
Antennas	Front	Back	Top Side	Bottom Side	Left Side	Right Side
GSM/ WCDMA	Yes	Yes	Yes	No	No	No
LTE	Yes	Yes	Yes	No	No	Yes
BT/WIFI	Yes	Yes	No	Yes	No	No

Note:

1. According to the KDB 941225 D06 Hot Spot SAR v02, the edges with less than 25 mm distance to the antennas need to be tested for SAR.

14.3 Measured and Reported (Scaled) SAR Results

The calculated SAR is obtained by the following formula:

1. Reported SAR for WWAN=Measured SAR * Tune-up Scaling factor
2. Reported SAR for WLAN and Bluetooth=Measured SAR * Tune-up Scaling factor * Duty Cycle Scaling factor
3. Duty Cycle Scaling factor=1/ Duty Cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR v01r03:

1. When the *reported* SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest *reported* SAR configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.
2. when the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, using the same wireless mode test configuration for voice and data, such as UMTS, LTE and Wi-Fi, and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface)
3. For Smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

KDB 941225 D01 3G SAR Procedures:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode (RMC12.2kbps) or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

1. Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
2. When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
3. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
4. SAR measurement is not required for the 16QAM and 64QAM. When the highest maximum output power for 16QAM and 64QAM is $\leq 1/2$ dB higher than the QPSK or when the reported SAR for the QPSK configuration is ≤ 1.45 W/kg.
5. Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

KDB 248227 D01 802.11 Wi-Fi SAR

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements.

For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions.

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.16 The initial test position procedure is described in the following:

- a) When the *reported* SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- b) When the *reported* SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the *reported* SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- c) For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.

When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR

TCB workshop April 2015:

SAR test exclusion can be applied for testing overlapping LTE bands as follows:

- a) The maximum output power, including tolerance, for the smaller band must be less than the larger band to qualify for the SAR test exclusion.
- b) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.

LTE Band 17 (704-716 MHz) is covered by LTE Band 12 (699-716 MHz)

GSM 850											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Body & Hotspot	0	GSM	Front	128	824.2	32.26	32.5	1.057	0.339	0.358	
		GSM	Back	128	824.2	32.26	32.5	1.057	0.060	0.063	
		GSM	Top Side	128	824.2	32.26	32.5	1.057	0.867	0.916	
		GSM	Top Side	190	836.6	31.63	32.5	1.222	0.954	1.166	1
		GSM	Top Side	251	848.8	31.63	32.5	1.222	0.840	1.026	

GSM 1900											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Body & Hotspot	0	GSM	Front	512	1850.2	29.19	29.5	1.074	0.351	0.377	
		GSM	Back	512	1850.2	29.19	29.5	1.074	0.082	0.088	
		GSM	Top Side	512	1850.2	29.19	29.5	1.074	0.650	0.698	2

WCDMA Band II											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Body & Hotspot	0	RMC*	Front	9538	1907.6	22.86	23.5	1.159	0.316	0.366	
		RMC*	Back	9538	1907.6	22.86	23.5	1.159	0.059	0.068	
		RMC*	Top Side	9538	1907.6	22.86	23.5	1.159	0.686	0.795	3

WCDMA Band V											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Body & Hotspot	0	RMC*	Front	4182	836.4	23.26	23.5	1.057	0.217	0.229	
		RMC*	Back	4182	836.4	23.26	23.5	1.057	0.051	0.054	
		RMC*	Top Side	4182	836.4	23.26	23.5	1.057	0.648	0.685	4

FDD-LTE Band 2 (20MHz Bandwidth)											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Body & Hotspot	0	QPSK,1RB	Front	18900	1880	23.90	24.5	1.148	0.417	0.479	
		QPSK,1RB	Back	18900	1880	23.90	24.5	1.148	0.356	0.409	
		QPSK,50%RB	Front	18900	1880	23.90	24.5	1.148	0.157	0.180	
		QPSK,50%RB	Back	18900	1880	23.90	24.5	1.148	0.150	0.172	
		QPSK,1RB	Right Side	18900	1880	23.90	24.5	1.148	0.051	0.059	
		QPSK,50%RB	Right Side	18900	1880	23.90	24.5	1.148	0.033	0.038	
		QPSK,1RB	Top Side	18900	1880	23.90	24.5	1.148	0.690	0.792	5
		QPSK,50%RB	Top Side	18900	1880	23.90	24.5	1.148	0.614	0.705	

FDD-LTE Band 4 (20MHz Bandwidth)											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Body & Hotspot	0	QPSK,1RB	Front	20175	1732.5	23.73	24.0	1.064	0.501	0.533	
		QPSK,1RB	Back	20175	1732.5	23.73	24.0	1.064	0.344	0.366	
		QPSK,50%RB	Front	20175	1732.5	23.73	24.0	1.064	0.461	0.491	
		QPSK,50%RB	Back	20175	1732.5	23.73	24.0	1.064	0.319	0.339	
		QPSK,1RB	Right Side	20175	1732.5	23.73	24.0	1.064	0.020	0.021	
		QPSK,50%RB	Right Side	20175	1732.5	23.73	24.0	1.064	0.015	0.016	
		QPSK,1RB	Top Side	20175	1732.5	23.73	24.0	1.064	0.778	0.828	
		QPSK,1RB	Top Side	20050	1720	23.65	24.0	1.084	0.850	0.921	6
		QPSK,1RB	Top Side	20300	1745	23.68	24.0	1.076	0.806	0.868	
		QPSK,50%RB	Top Side	20175	1732.5	23.73	24.0	1.064	0.706	0.751	

FDD-LTE Band 5 (10MHz Bandwidth)											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Body & Hotspot	0	QPSK,1RB	Front	20600	844	24.17	24.5	1.081	0.353	0.382	
		QPSK,1RB	Back	20600	844	24.17	24.5	1.081	0.102	0.110	
		QPSK,50%RB	Front	20600	844	24.17	24.5	1.081	0.319	0.345	
		QPSK,50%RB	Back	20600	844	24.17	24.5	1.081	0.117	0.127	
		QPSK,1RB	Right Side	20600	844	24.17	24.5	1.081	0.027	0.029	
		QPSK,50%RB	Right Side	20600	844	24.17	24.5	1.081	0.030	0.032	
		QPSK,1RB	Top Side	20600	844	24.17	24.5	1.081	0.644	0.696	7
		QPSK,50%RB	Top Side	20600	844	24.17	24.5	1.081	0.607	0.656	

FDD-LTE Band 7 (20MHz Bandwidth)											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Body & Hotspot	0	QPSK,1RB	Front	21100	2535	21.70	22.0	1.072	0.597	0.640	
		QPSK,1RB	Back	21100	2535	21.70	22.0	1.072	0.335	0.359	
		QPSK,50%RB	Front	21100	2535	21.70	22.0	1.072	0.531	0.569	
		QPSK,50%RB	Back	21100	2535	21.70	22.0	1.072	0.235	0.252	
		QPSK,1RB	Right Side	21100	2535	21.70	22.0	1.072	0.107	0.115	
		QPSK,50%RB	Right Side	21100	2535	21.70	22.0	1.072	0.073	0.078	
		QPSK,1RB	Top Side	21100	2535	21.70	22.0	1.072	1.019	1.092	
		QPSK,1RB	Top Side	20850	2510	20.77	21.5	1.183	0.942	1.114	8
		QPSK,1RB	Top Side	21350	2560	21.56	22.0	1.107	0.909	1.006	
		QPSK,50%RB	Top Side	21100	2535	21.70	22.0	1.072	0.968	1.037	
		QPSK,50%RB	Top Side	20850	2510	20.77	21.5	1.183	0.870	1.029	
		QPSK,50%RB	Top Side	21350	2560	21.56	22.0	1.107	0.809	0.895	
QPSK,100%RB	Top Side	21100	2535	21.70	22.0	1.072	0.691	0.740			

FDD-LTE Band 12 (10MHz Bandwidth)											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Body & Hotspot	0	QPSK,1RB	Front	23130	711	24.19	24.5	1.074	0.392	0.421	
		QPSK,1RB	Back	23130	711	24.19	24.5	1.074	0.187	0.201	
		QPSK,50%RB	Front	23130	711	24.19	24.5	1.074	0.341	0.366	
		QPSK,50%RB	Back	23130	711	24.19	24.5	1.074	0.180	0.193	
		QPSK,1RB	Right Side	23130	711	24.19	24.5	1.074	0.057	0.061	
		QPSK,50%RB	Right Side	23130	711	24.19	24.5	1.074	0.031	0.033	
		QPSK,1RB	Top Side	23130	711	24.19	24.5	1.074	0.716	0.769	9
		QPSK,50%RB	Top Side	23130	711	24.19	24.5	1.074	0.607	0.652	

FDD-LTE Band 17 (10MHz Bandwidth)											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Body & Hotspot	0	QPSK,1RB	Front	23790	710	24.13	24.5	1.089	0.181	0.197	
		QPSK,1RB	Back	23790	710	24.13	24.5	1.089	0.042	0.046	
		QPSK,50%RB	Front	23790	710	24.13	24.5	1.089	0.129	0.140	
		QPSK,50%RB	Back	23790	710	24.13	24.5	1.089	0.051	0.056	
		QPSK,1RB	Right Side	23790	710	24.13	24.5	1.089	0.028	0.030	
		QPSK,50%RB	Right Side	23790	710	24.13	24.5	1.089	0.016	0.017	
		QPSK,1RB	Top Side	23790	710	24.13	24.5	1.089	0.414	0.451	10
		QPSK,50%RB	Top Side	23790	710	24.13	24.5	1.089	0.406	0.442	

FDD-LTE Band 41 (20MHz Bandwidth)											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Body & Hotspot	0	QPSK,1RB	Front	40620	2593	21.64	22.0	1.086	0.305	0.331	
		QPSK,1RB	Back	40620	2593	21.64	22.0	1.086	0.153	0.166	
		QPSK,50%RB	Front	40620	2593	21.64	22.0	1.086	0.281	0.305	
		QPSK,50%RB	Back	40620	2593	21.64	22.0	1.086	0.141	0.153	
		QPSK,1RB	Right Side	40620	2593	21.64	22.0	1.086	0.020	0.022	
		QPSK,50%RB	Right Side	40620	2593	21.64	22.0	1.086	0.031	0.034	
		QPSK,1RB	Top Side	40620	2593	21.64	22.0	1.086	0.529	0.575	11
		QPSK,50%RB	Top Side	40620	2593	21.64	22.0	1.086	0.484	0.526	

WLAN 2.4G											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Body & Hotspot	0	802.11b	Front	6	2437	16.35	17.0	1.161	0.341	0.396	12
		802.11b	Back	6	2437	16.35	17.0	1.161	0.209	0.243	
		802.11b	Bottom Side	6	2437	16.35	17.0	1.161	0.318	0.369	

Remark:

1. The value with the bold is the maximum SAR Value of each test band.
2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels SAR tests are not necessary.

14.4 SAR Measurement Variability

According to KDB865664, Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR value of the initial repeated measurement is < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. A second repeated measurement is required only if the measured result for the initial repeated measurement is within 10% of the SAR limit and vary by more than 20%, which are often related to device and measurement setup difficulties. The following procedures are applied to determine if repeated measurements are required. The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.¹⁹ The repeated measurement results must be clearly identified in the SAR report. All measured SAR, including the repeated results, must be considered to determine compliance and for reporting according to KDB 690783. Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 3) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Test Mode	Frequency Band (MHz)	RF Exposure Configuration	Test Position	Repeated SAR (yes/no)	Highest Measured SAR1-g (W/Kg)	First Repeated	
						Measured SAR1-g (W/Kg)	Largest to Smallest SAR Ratio
GSM 850	836.6	Body & Hotspot	Top Side	Yes	1.166	1.097	1.063
FDD-LTE Band 4 1RB	1720	Body & Hotspot	Top Side	Yes	0.921	0.901	1.022
FDD-LTE Band 7 1RB	2510	Body & Hotspot	Top Side	Yes	1.114	1.098	1.015
FDD-LTE Band 7 50%RB	2535	Body & Hotspot	Top Side	Yes	1.037	1.011	1.026

14.5 Simultaneous Transmission Evaluation

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

Application Simultaneous Transmission information:

No.	Configurations	Body SAR	Hotspot SAR
1	GSM/ WCDMA + WIFI	Yes	Yes
2	LTE + WIFI	Yes	Yes
3	GSM/ WCDMA + Bluetooth	Yes	Yes
4	LTE + Bluetooth	Yes	Yes

Remark:

1. GSM/ WCDMA and LTE cannot be transmitted simultaneously.
2. WIFI and Bluetooth share the same antenna, and cannot transmit simultaneously.
3. According to the KDB 447498 D01 v06, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$ W/kg for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm

Estimated stand alone SAR						
Communication system	Frequency (MHz)	Maximum Power (dBm)	Maximum Power (mW)	Separation Distance (mm)	X	Estimated SAR1-g (W/kg)
Bluetooth*	2480	3.5	2.24	5	7.5	0.094
Bluetooth*	2480	3.5	2.24	10	7.5	0.047

Note:


1. Bluetooth*- Including Lower power Bluetooth
 2. Maximum average power including tune-up tolerance;
 3. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion
4. Per FCC KD B447498 D01, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the transmitting antenna in a specific a physical test configuration is ≤ 1.6 W/Kg. When the sum is greater than the SAR limit, SAR test exclusion is determined by the SAR to peak location separation ratio.

$$\text{Ratio} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{(\text{peak location separation, mm})} < 0.04$$

5. Simultaneous transmission of maximum SAR sum calculation.

RF Exposure Conditions	Test Position	GSM/ WCDMA	WIFI2.4G	Summed SAR (W/kg)	SAR1-g Limit (W/kg)
		Scaled SAR (W/kg)	Scaled SAR (W/kg)		
Body-worn & Hotspot	Front	0.377	0.396	0.773	1.6
	Back	0.088	0.243	0.331	1.6
	Top side	1.166	0.369	1.535	1.6

RF Exposure Conditions	Test Position	LTE	WIFI2.4G	Summed SAR (W/kg)	SAR1-g Limit (W/kg)
		Scaled SAR (W/kg)	Scaled SAR (W/kg)		
Body-worn & Hotspot	Front	0.640	0.396	1.036	1.6
	Back	0.409	0.243	0.652	1.6
	Right Side	0.115	/	0.115	1.6
	Top side	1.114	0.369	1.483	1.6

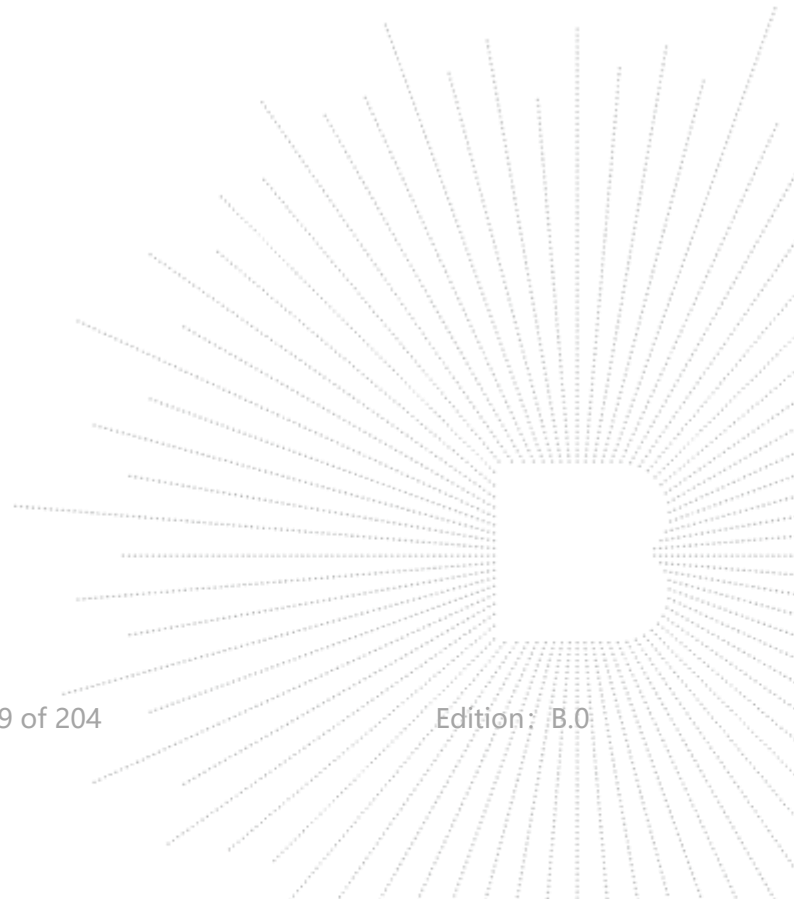

15. Test Plots

15.1 System Performance Check

System check at 750 MHz


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	0.80
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	750.000
Relative permittivity (real part)	41.560
Relative permittivity (imaginary part)	21.182
Conductivity (S/m)	0.858

C. SAR Surface and Volume

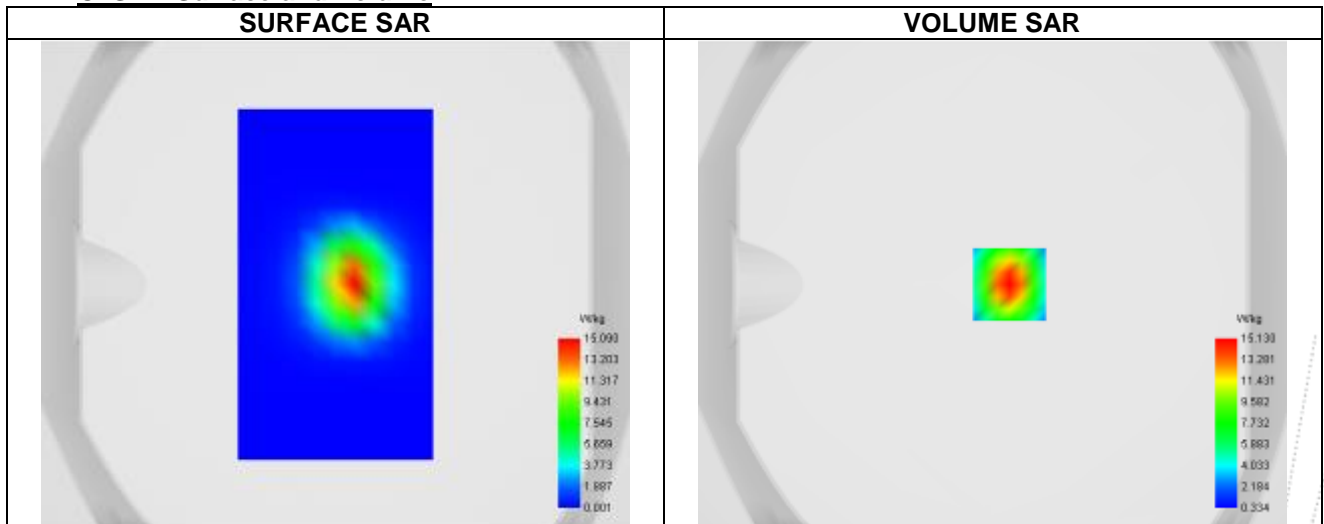




Maximum location: X=7.00, Y=0.00 ; SAR Peak: 4.42 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.780
SAR 1g (W/Kg)	2.068
Variation (%)	-1.653
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	28.802	15.018	7.416	3.658	1.912

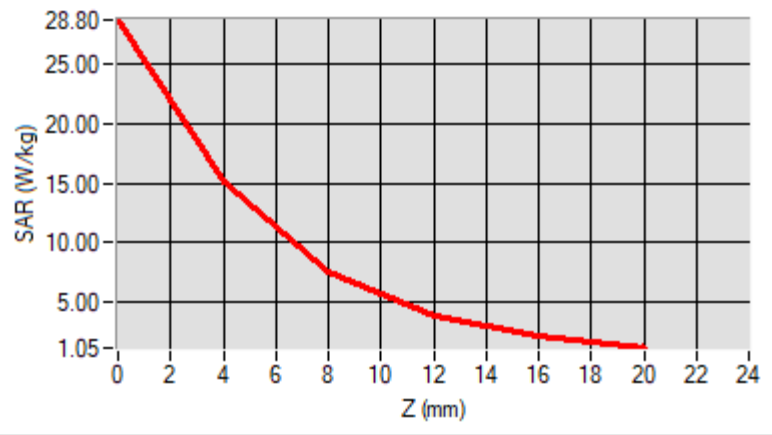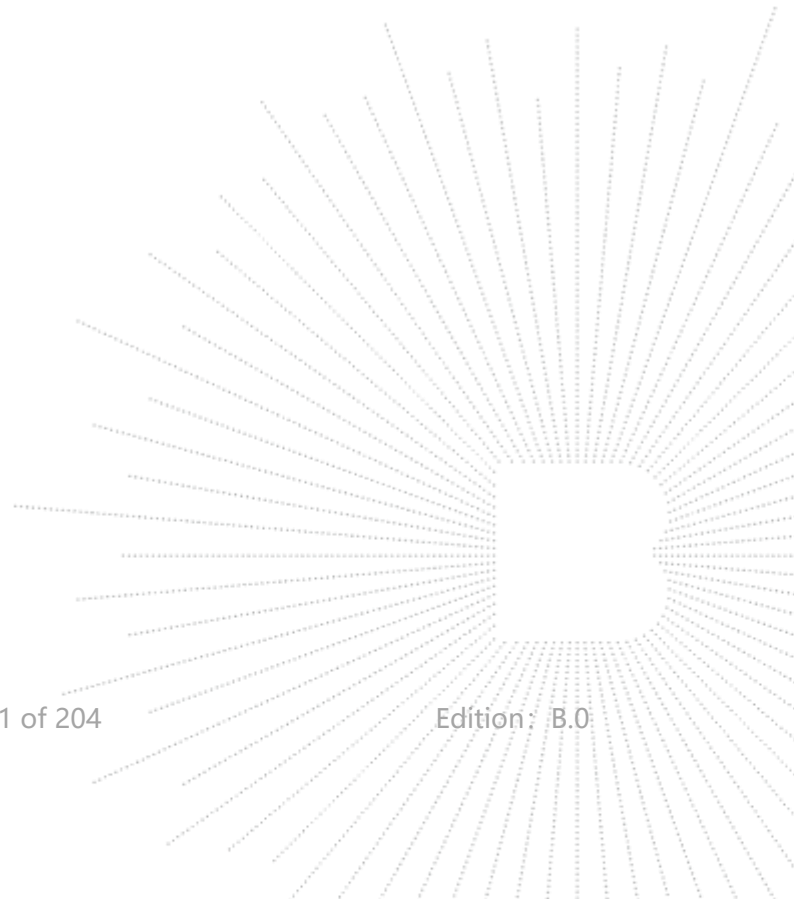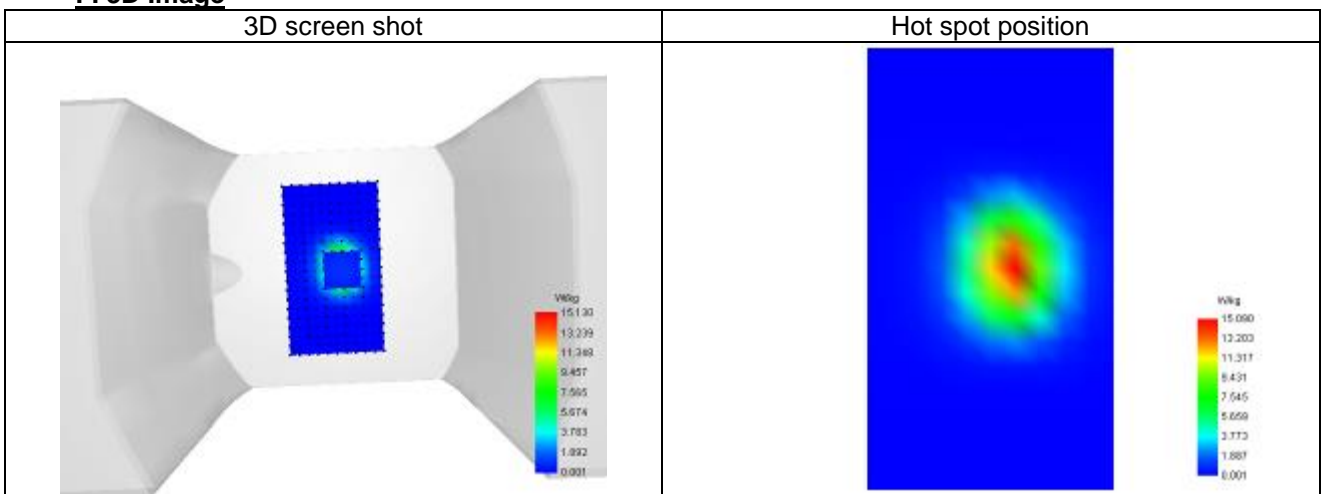
F. 3D Image


System check at 835 MHz


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	0.81
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	835.000
Relative permittivity (real part)	40.822
Relative permittivity (imaginary part)	20.910
Conductivity (S/m)	0.865

C. SAR Surface and Volume



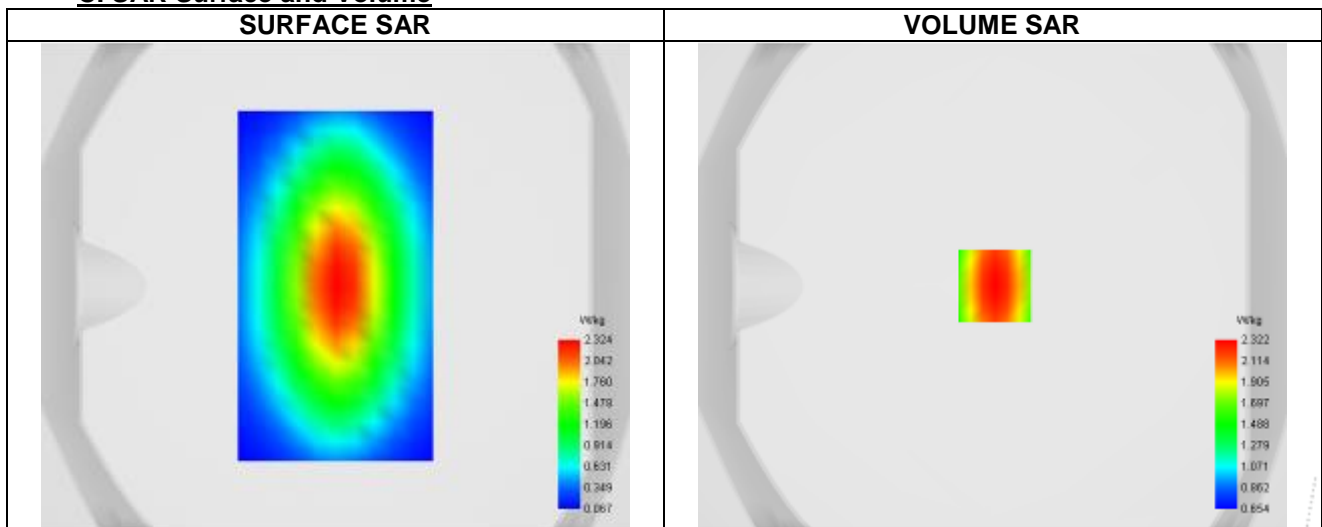


D. SAR 1g & 10g

SAR 10g (W/Kg)	0.754
SAR 1g (W/Kg)	2.470
Variation (%)	-0.729
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	3.108	2.344	1.786	1.395	1.109

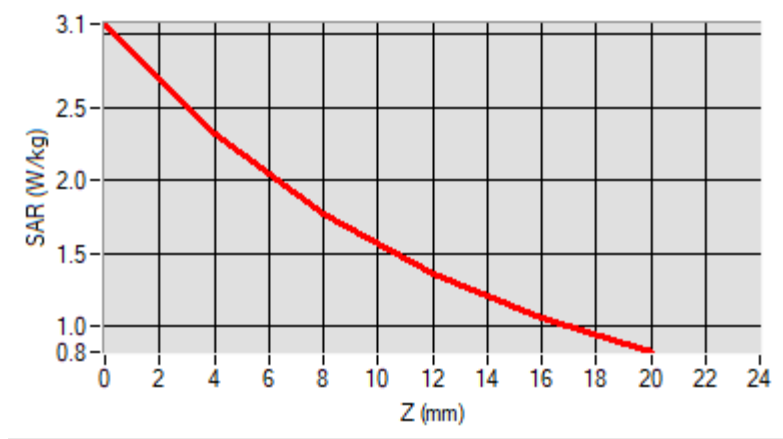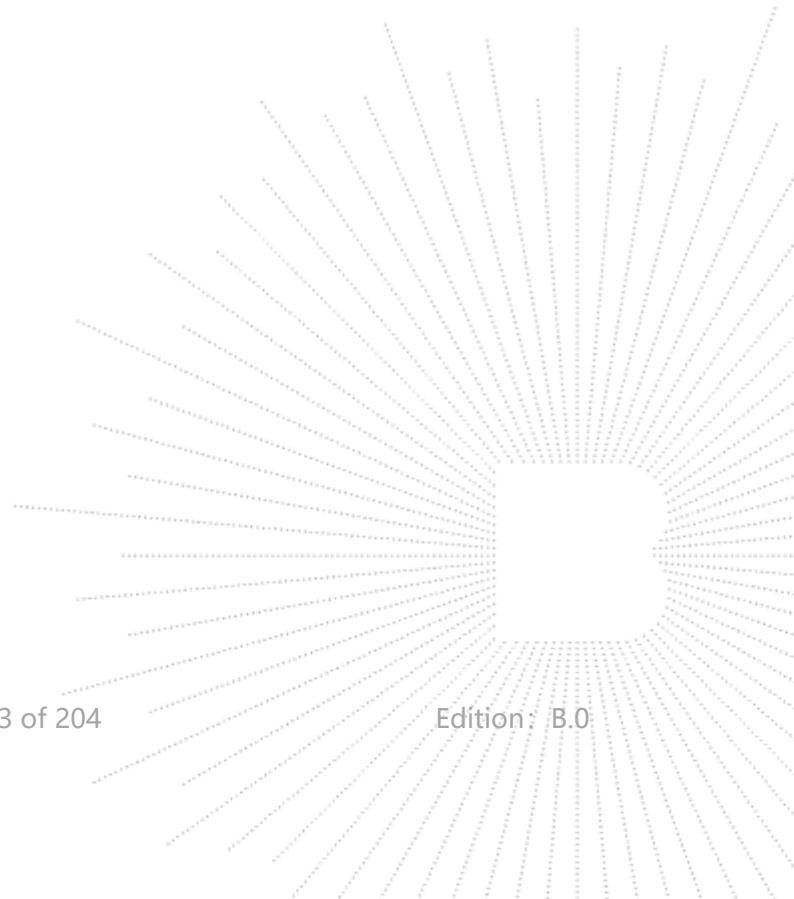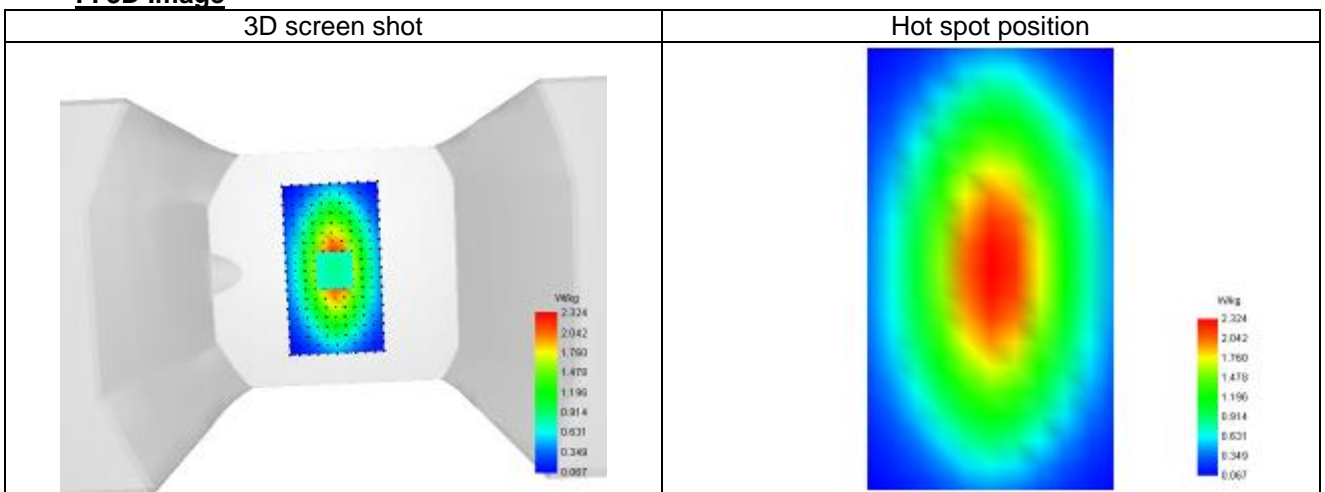
F. 3D Image


System check at 1800 MHz


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	0.96
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1800.000
Relative permittivity (real part)	40.371
Relative permittivity (imaginary part)	15.186
Conductivity (S/m)	1.386

C. SAR Surface and Volume

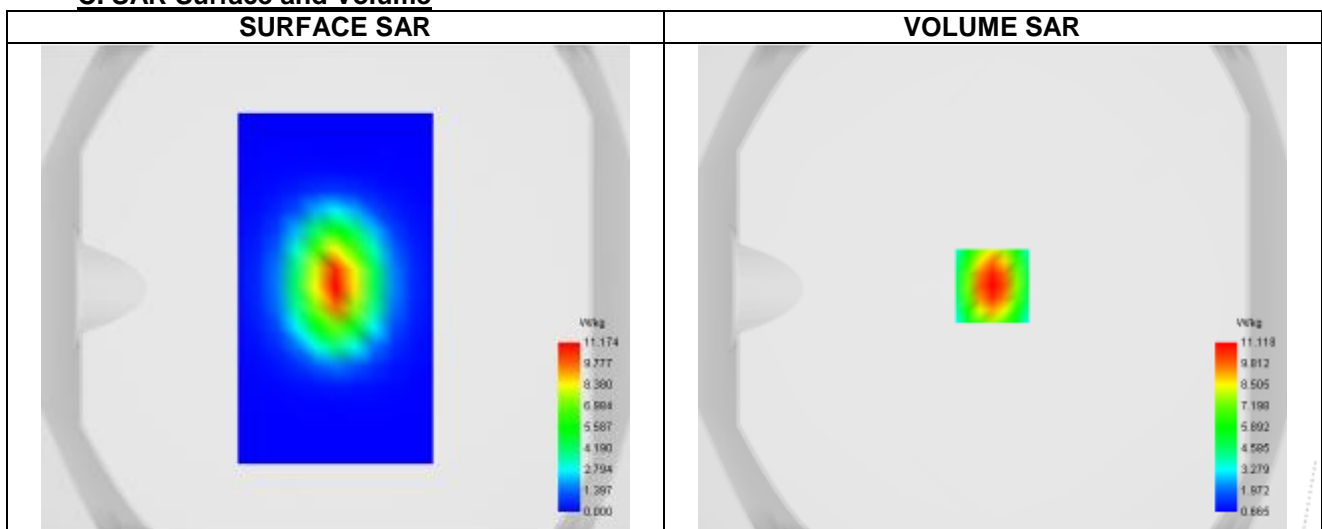




Maximum location: X=0.00, Y=1.00 ; SAR Peak: 22.78 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	5.009
SAR 1g (W/Kg)	9.763
Variation (%)	2.388
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	18.71+	11.234	6.561	3.924	2.453

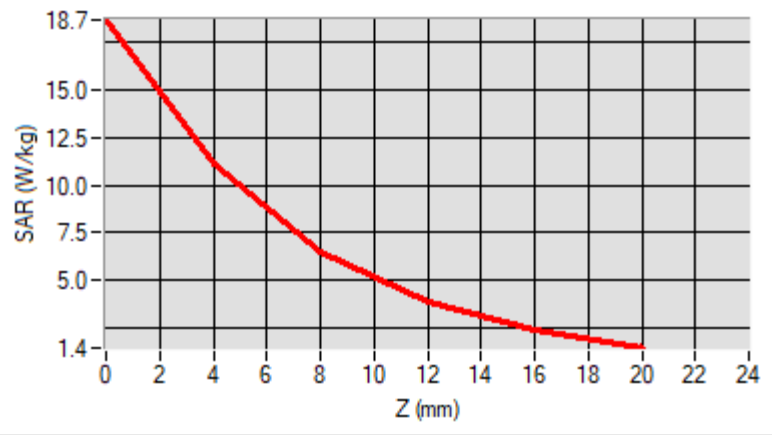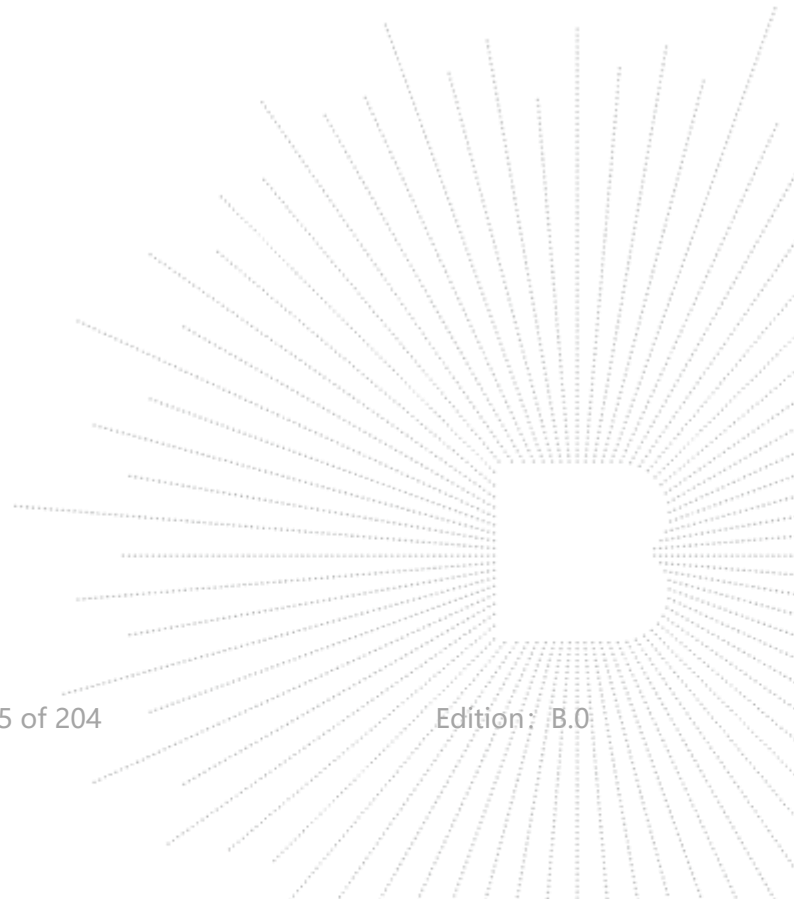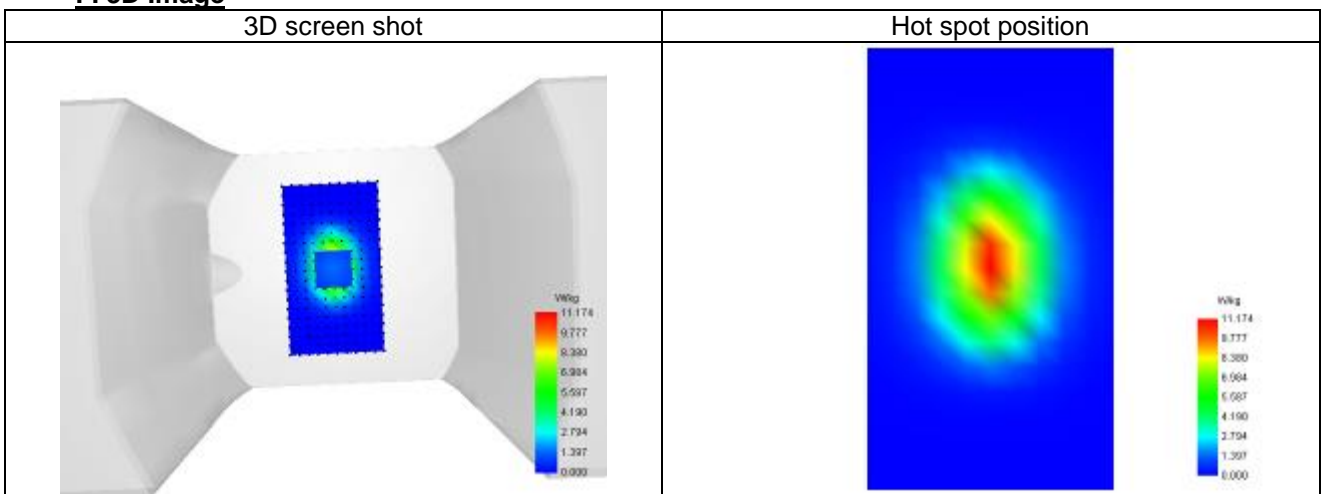
F. 3D Image


System check at 1900 MHz


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.04
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1900.000
Relative permittivity (real part)	38.564
Relative permittivity (imaginary part)	12.866
Conductivity (S/m)	1.410

C. SAR Surface and Volume

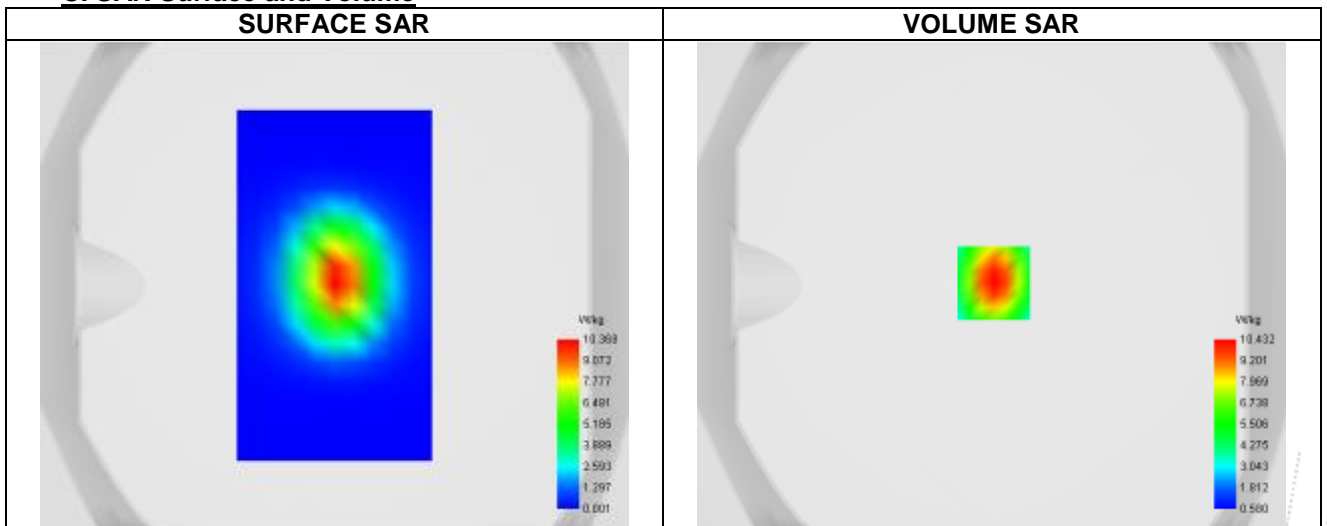




Maximum location: X=1.00, Y=1.00 ; SAR Peak: 22.54 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	5.190
SAR 1g (W/Kg)	10.237
Variation (%)	-2.747
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	17.387	10.484	6.206	3.672	2.184

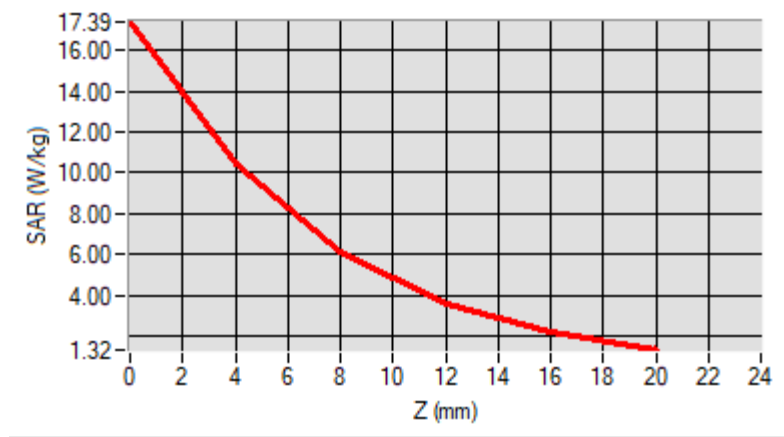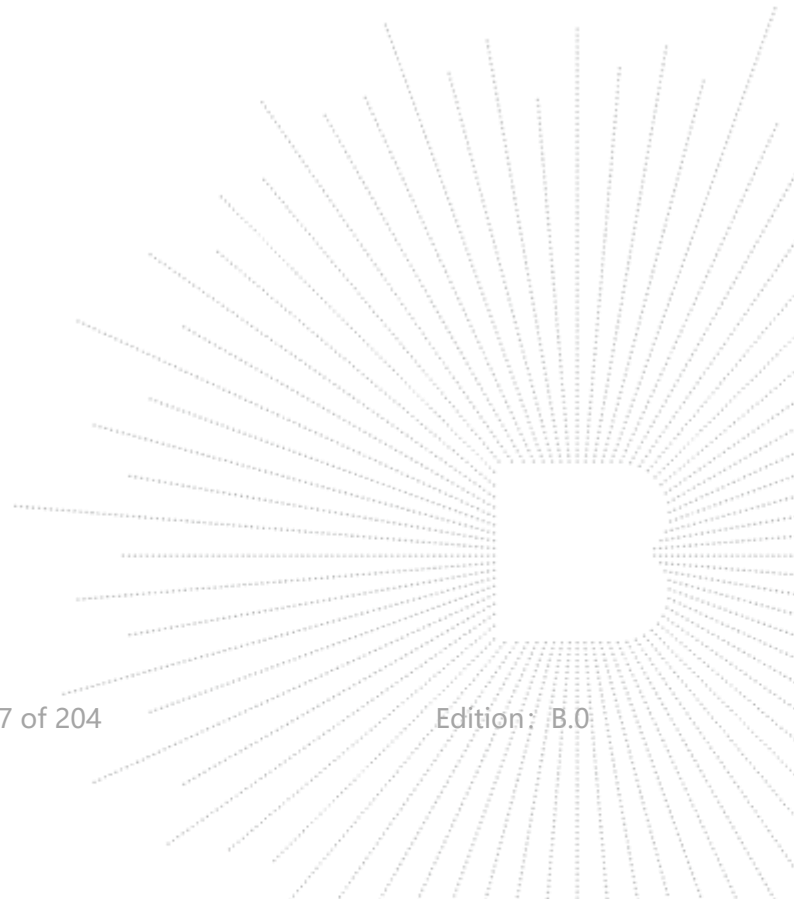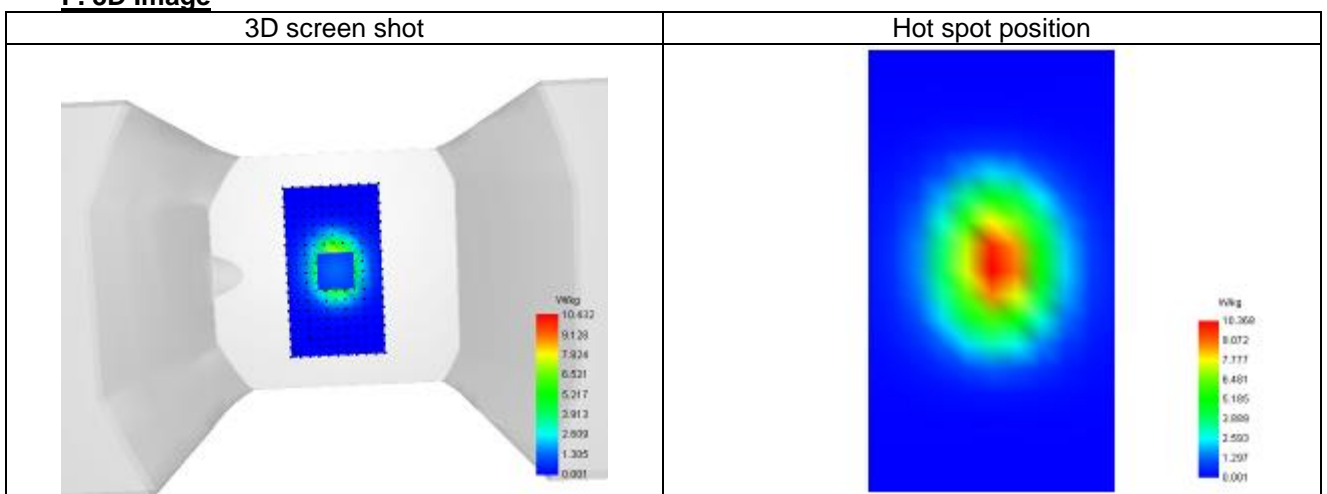
F. 3D Image


System check at 2450 MHz


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.11
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2450.000
Relative permittivity (real part)	40.147
Relative permittivity (imaginary part)	13.242
Conductivity (S/m)	1.860

C. SAR Surface and Volume

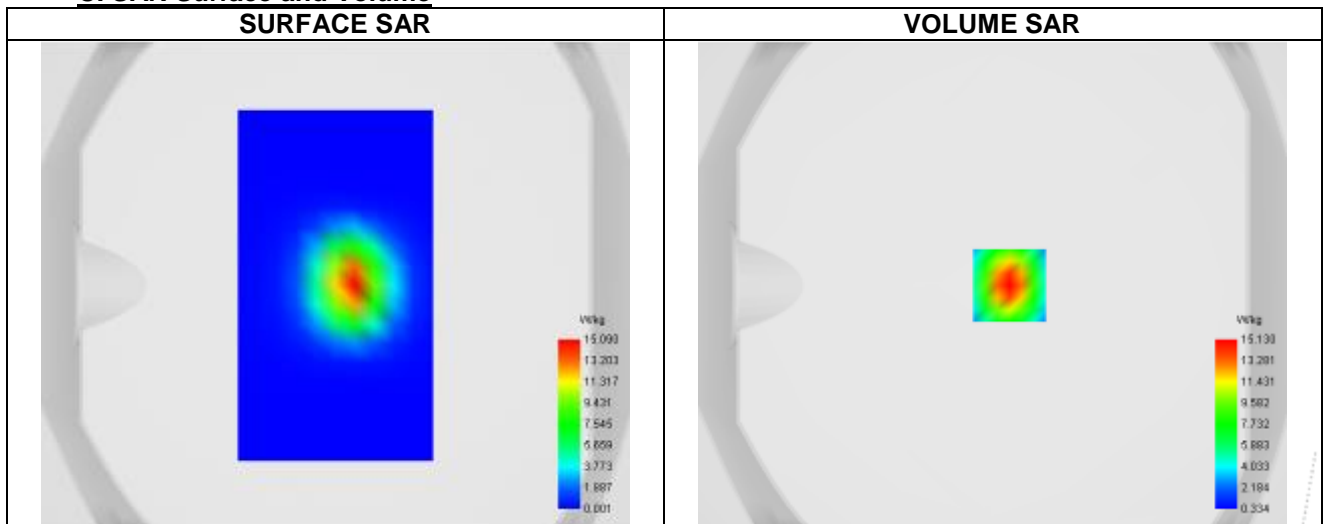




Maximum location: X=7.00, Y=0.00 ; SAR Peak: 29.42 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	6.780
SAR 1g (W/Kg)	13.576
Variation (%)	-2.403
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	28.802	15.018	7.416	3.658	1.912

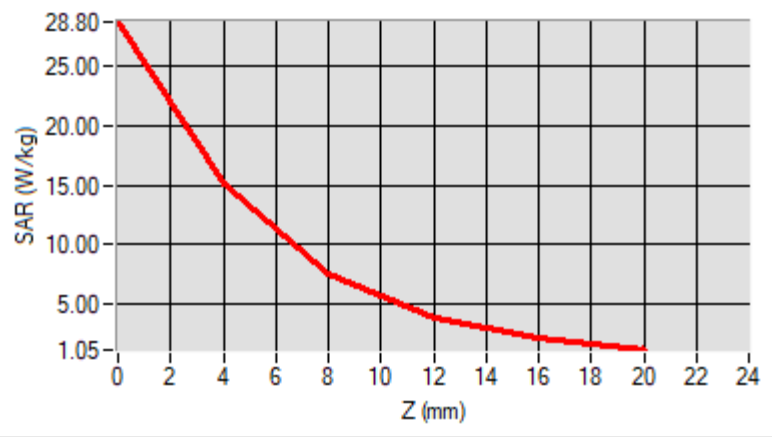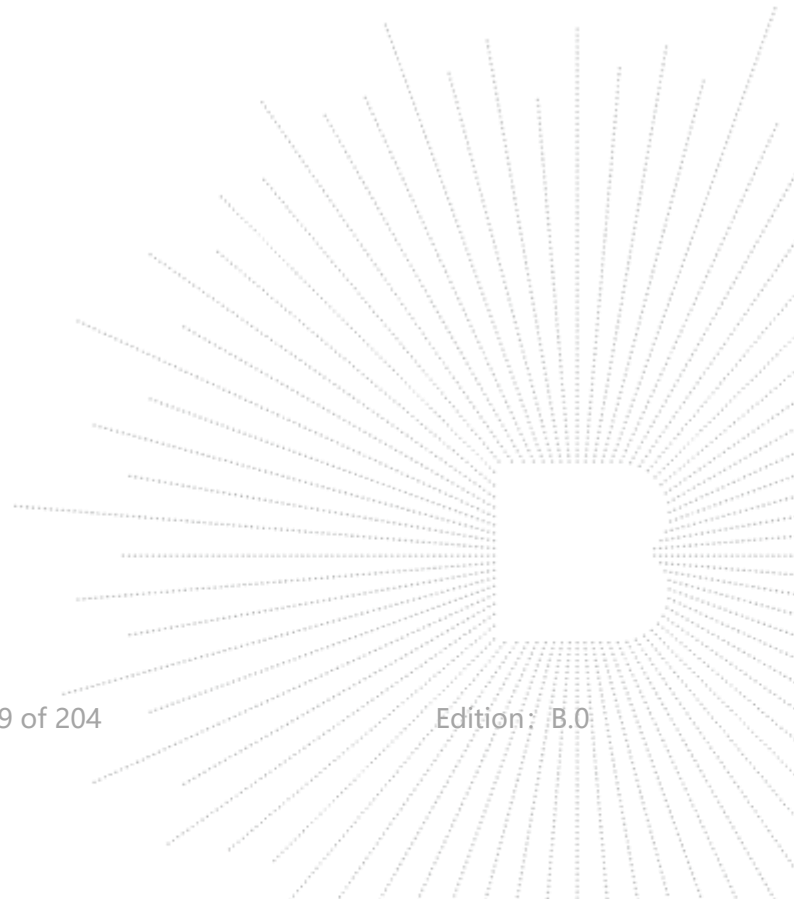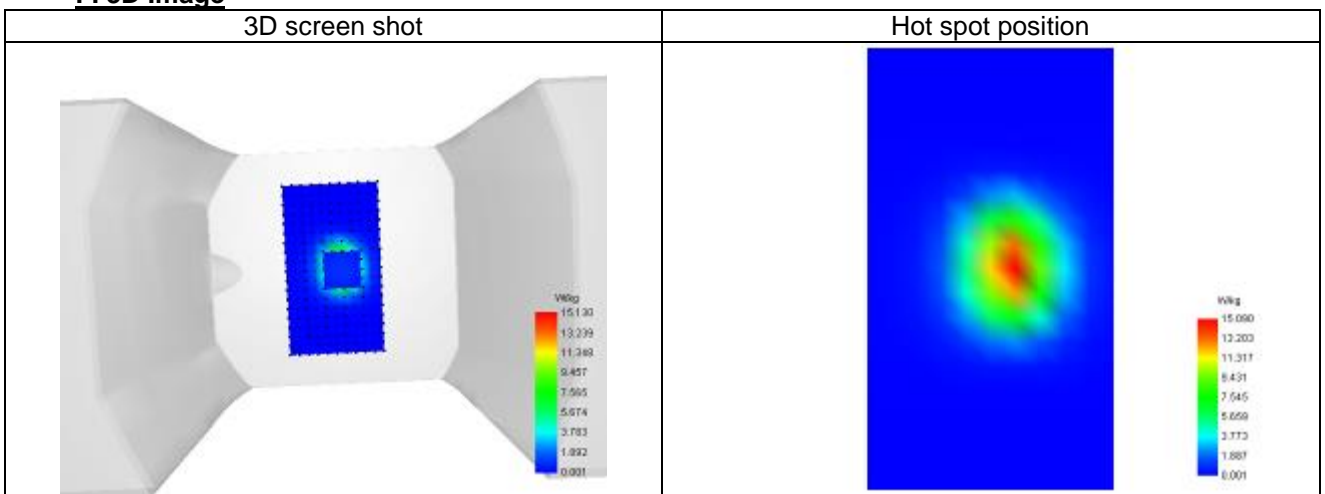
F. 3D Image


System check at 2600 MHz


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.03
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2600.000
Relative permittivity (real part)	38.675
Relative permittivity (imaginary part)	13.906
Conductivity (S/m)	1.958

C. SAR Surface and Volume

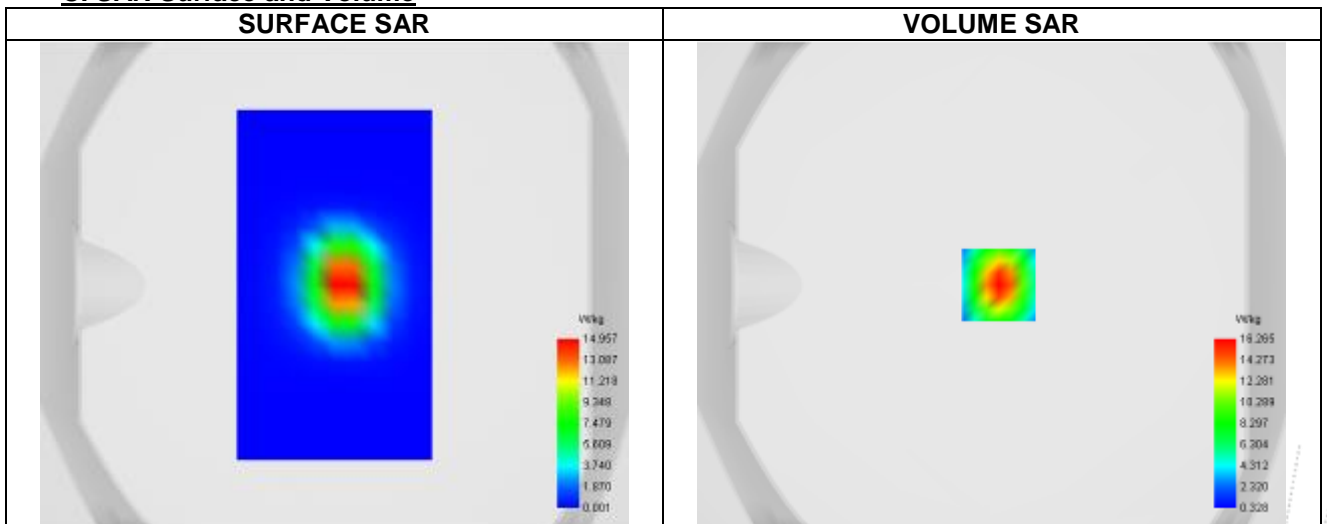




Maximum location: X=3.00, Y=0.00 ; SAR Peak: 31.98 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	6.374
SAR 1g (W/Kg)	13.581
Variation (%)	-3.855
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	31.172	16.108	7.982	3.835	1.964

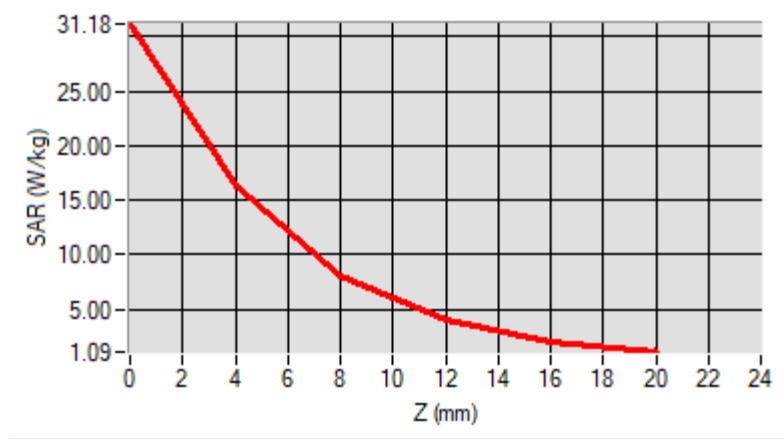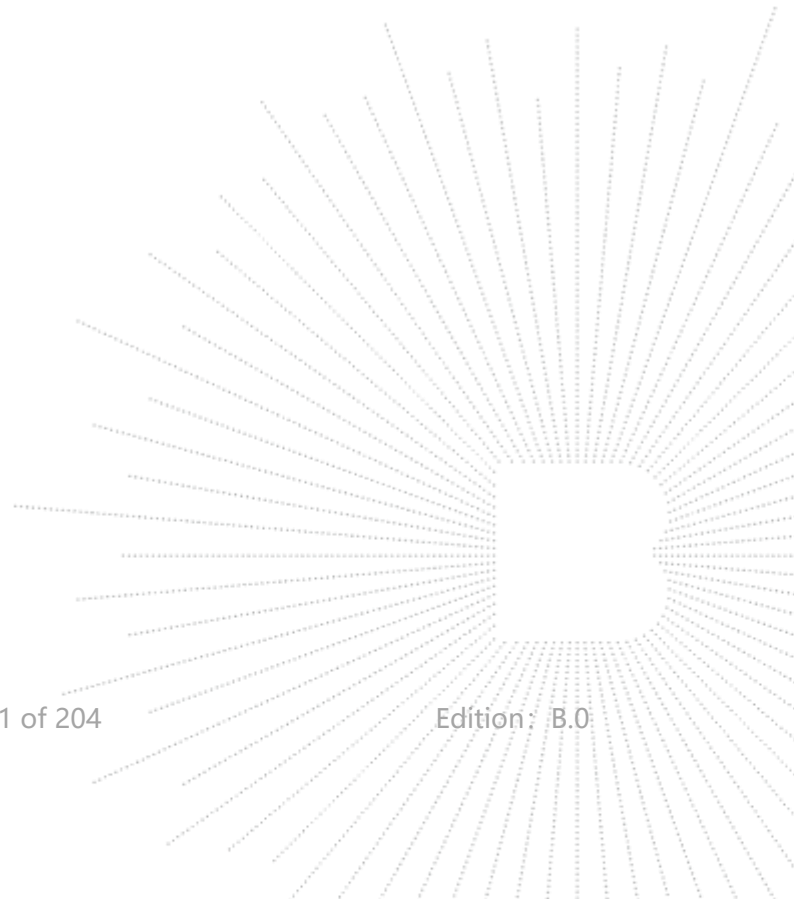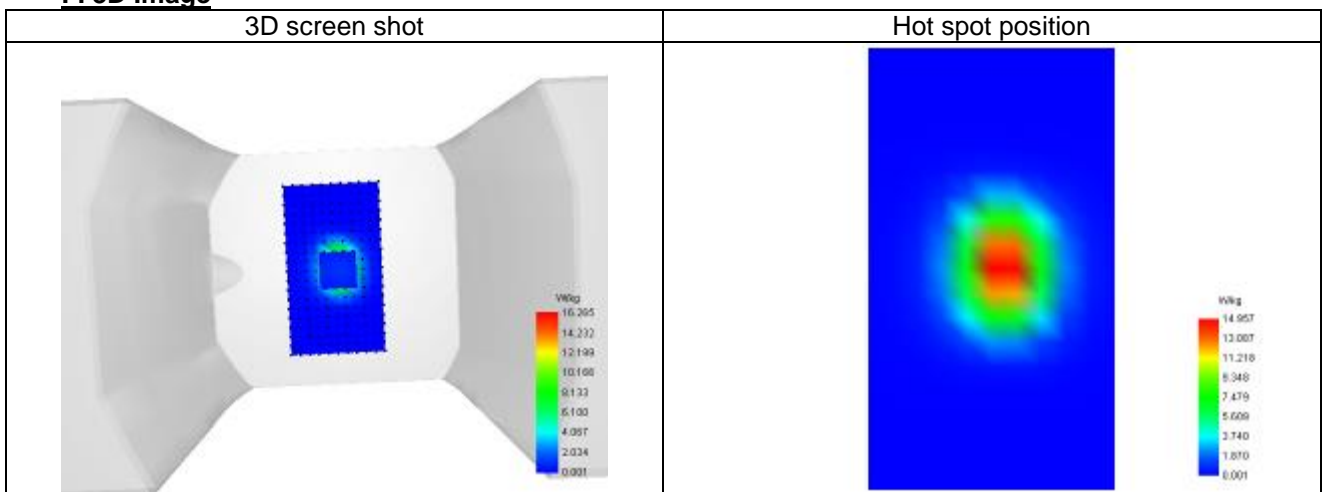
F. 3D Image


15.2 SAR Test Graph Results

SAR plots for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination according to FCC KDB 865664 D02

Plot 1


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	0.81
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	190
Signal	Custom (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	836.600
Relative permittivity (real part)	40.822
Relative permittivity (imaginary part)	19.400
Conductivity (S/m)	0.865

C. SAR Surface and Volume

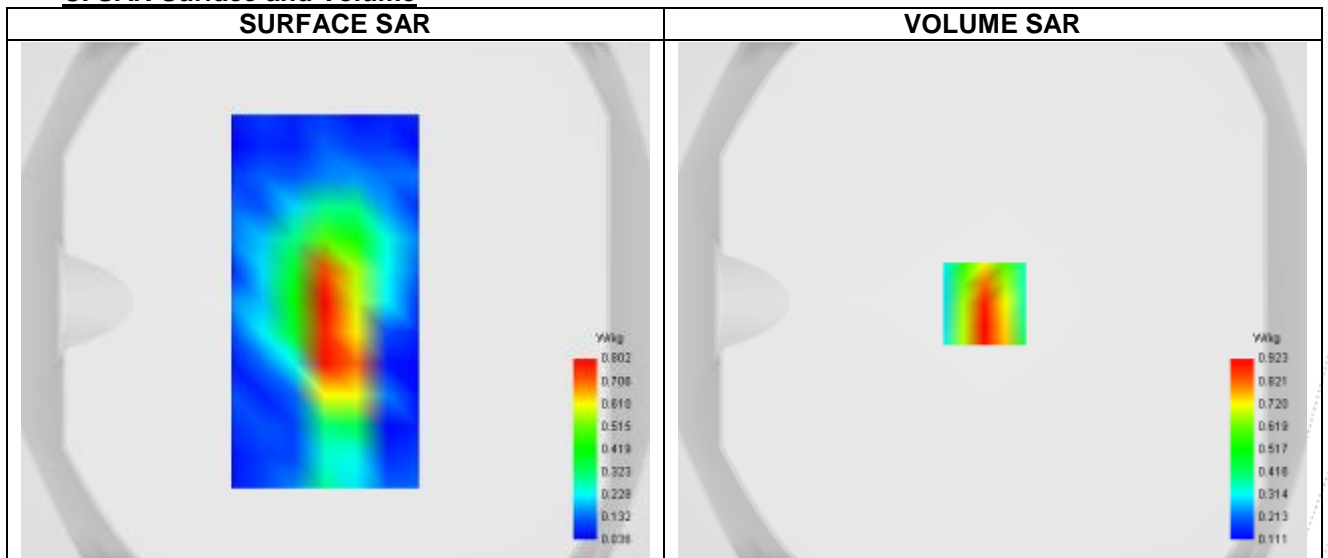

Maximum location: X=-3.00, Y=-1.00 ; SAR Peak: 1.36 W/kg




D. SAR 1g & 10g

SAR 10g (W/Kg)	0.505
SAR 1g (W/Kg)	0.954
Variation (%)	-0.060
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
--------	------	------	------	-------	-------

SAR (W/Kg)	1.708	0.923	0.503	0.344	0.231
------------	-------	-------	-------	-------	-------

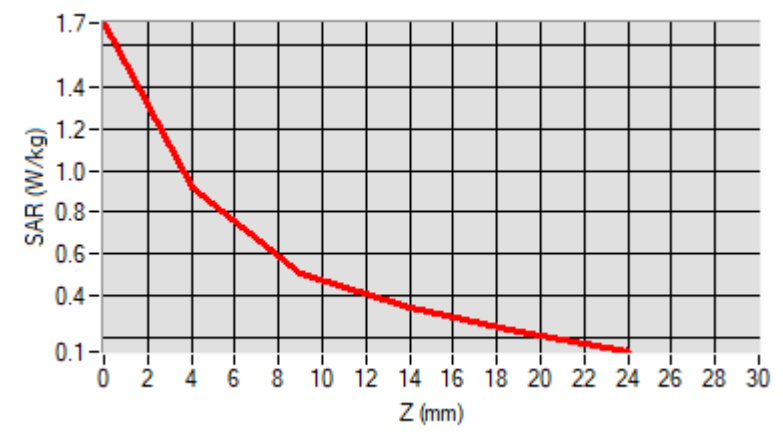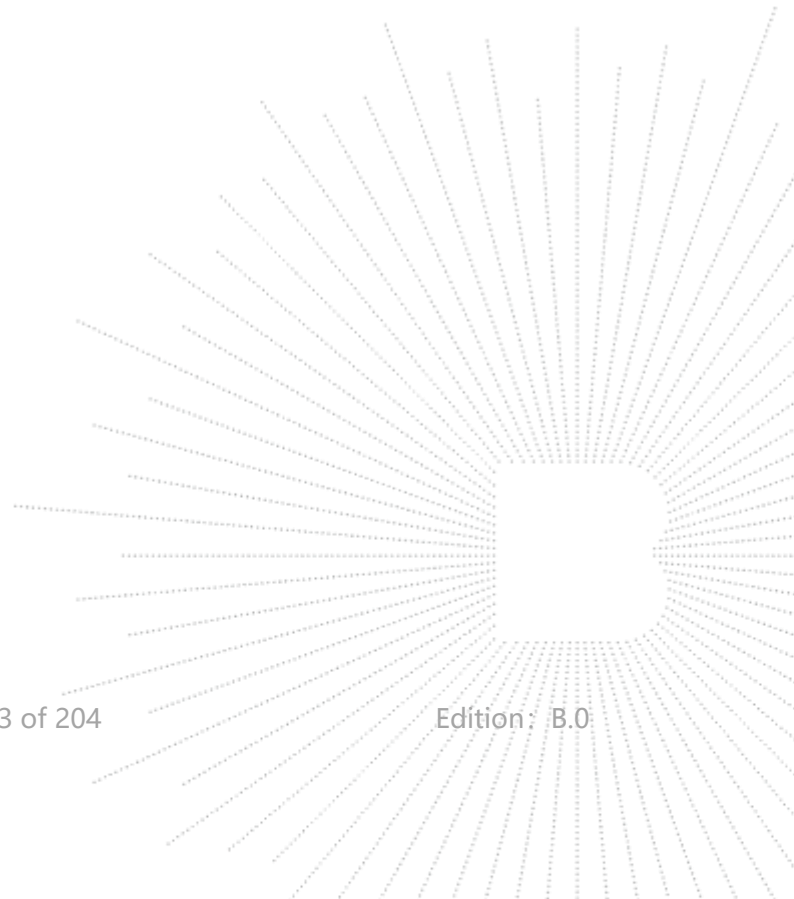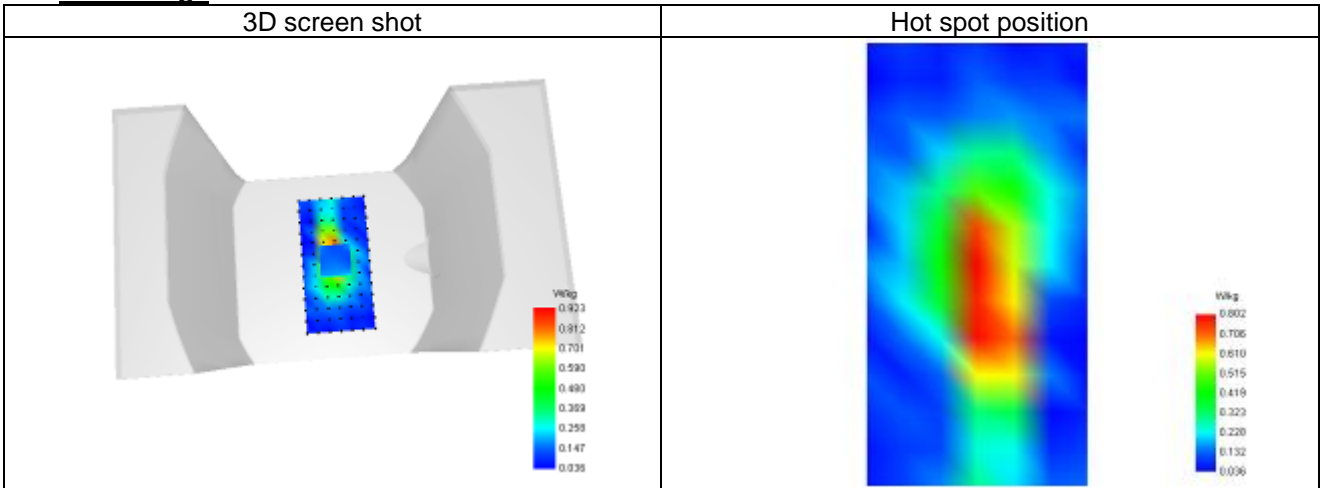
F. 3D Image


Plot 2


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.04
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	512
Signal	Custom (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1850.200
Relative permittivity (real part)	38.564
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.410

C. SAR Surface and Volume

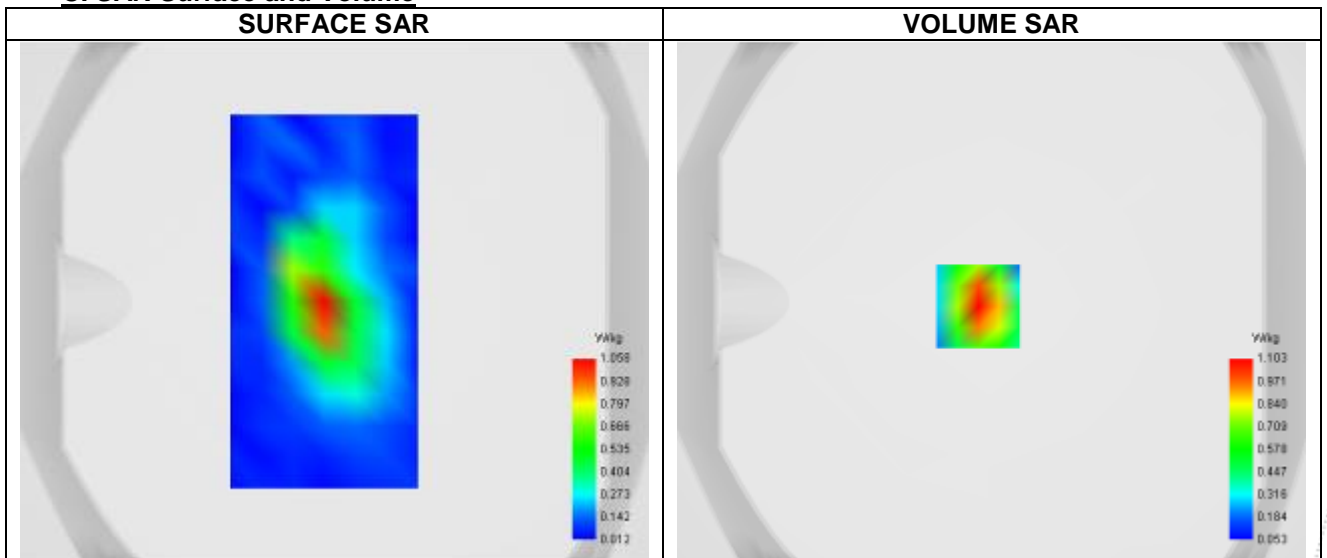




Maximum location: X=-5.00, Y=-2.00 ; SAR Peak: 1.85 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.228
SAR 1g (W/Kg)	0.650
Variation (%)	0.690
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.820	1.103	0.568	0.295	0.165

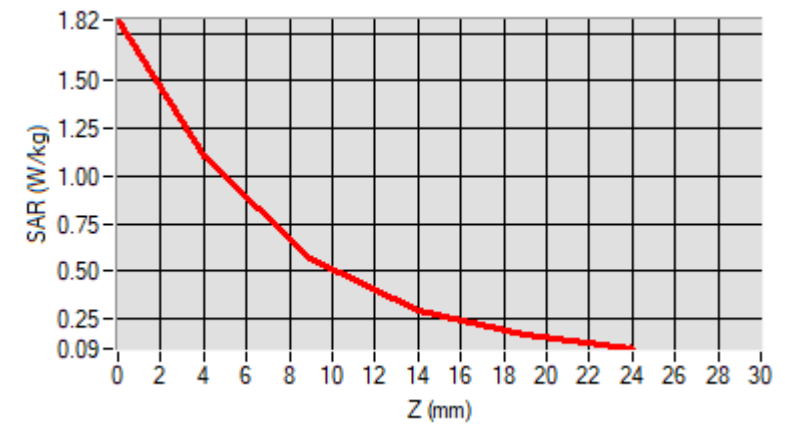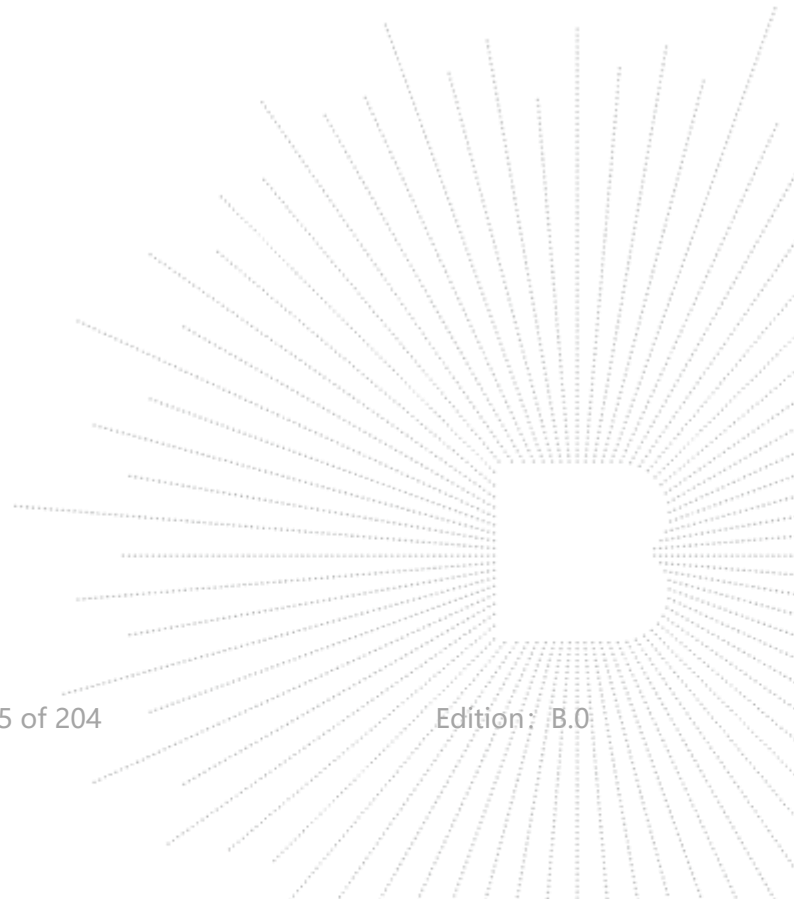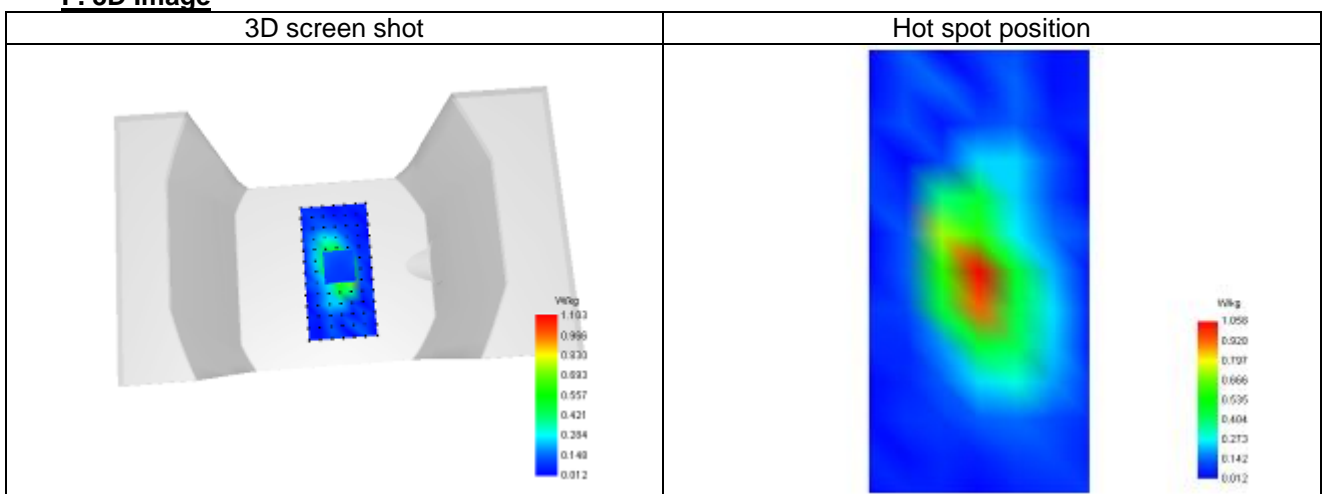
F. 3D Image


Plot 3


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.04
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	Band2_WCDMA1900
Channels	9538
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1907.600
Relative permittivity (real part)	38.564
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.410

C. SAR Surface and Volume

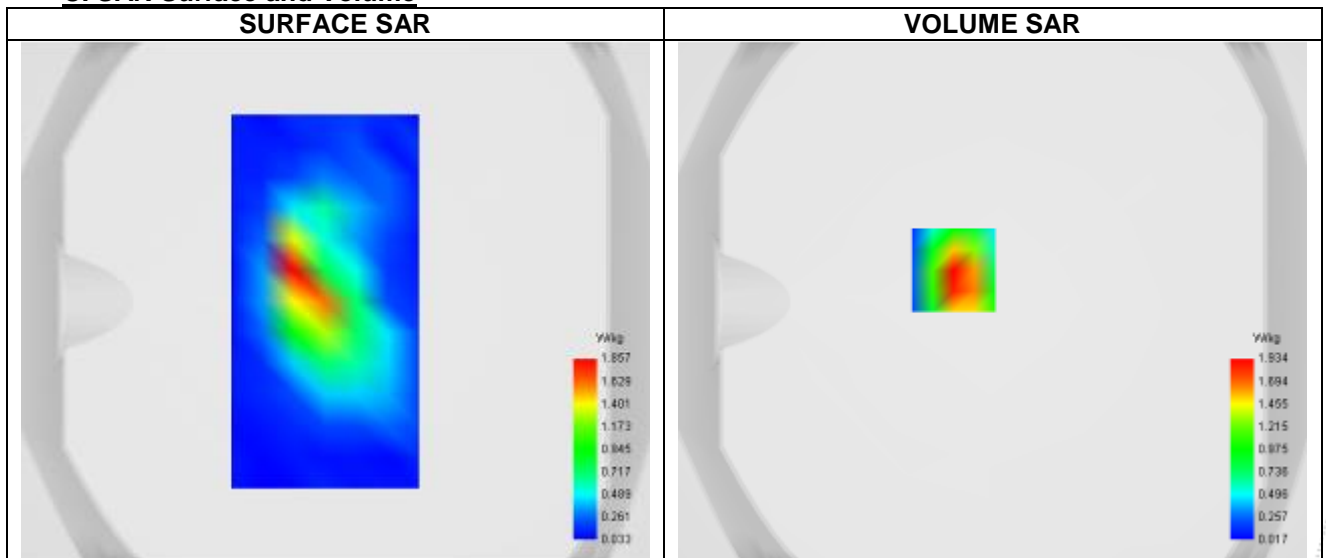




Maximum location: X=-15.00, Y=12.00 ; SAR Peak: 3.87 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.271
SAR 1g (W/Kg)	0.686
Variation (%)	-3.260
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	3.767	1.934	0.770	0.319	0.179

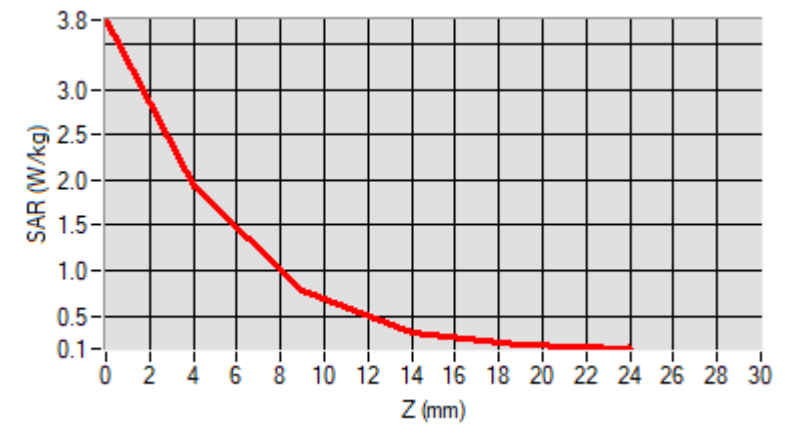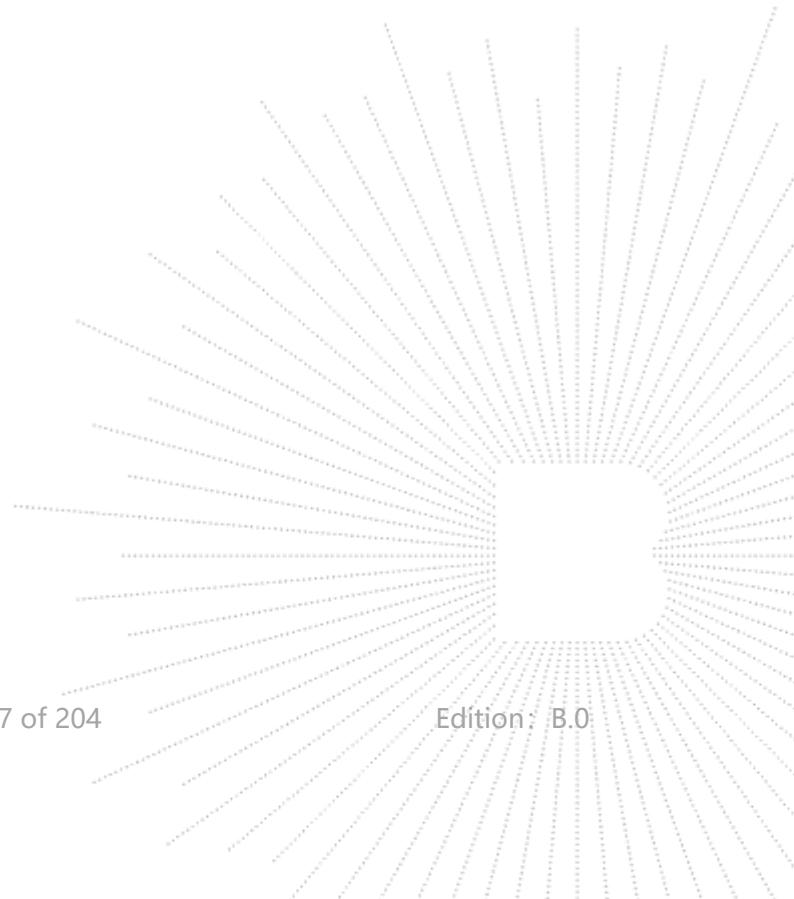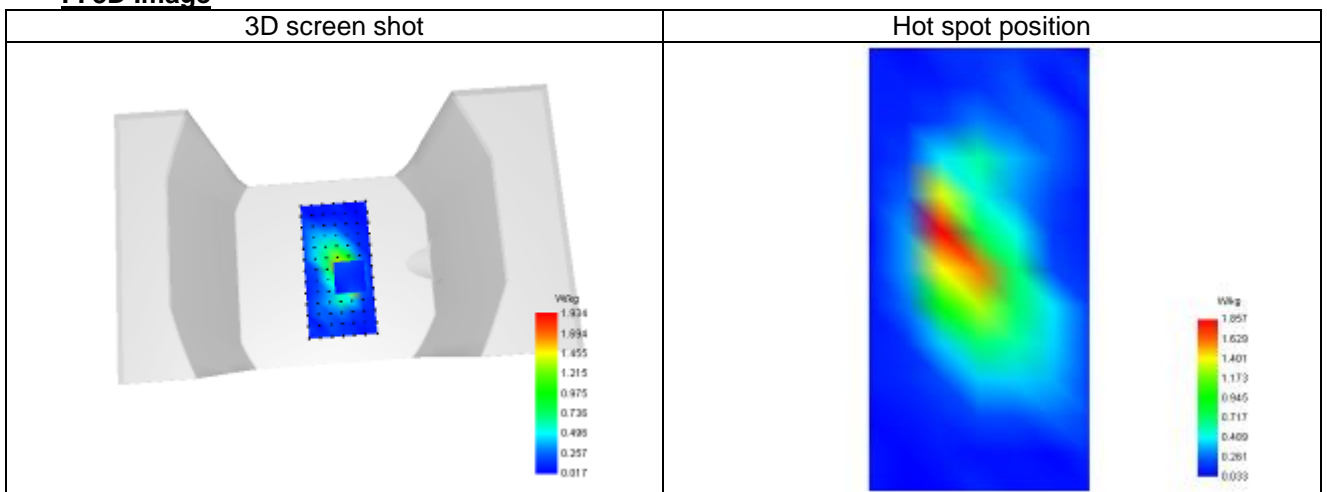
F. 3D Image


Plot 4


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	0.81
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	Band5_WCDMA850
Channels	4182
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	836.400
Relative permittivity (real part)	40.822
Relative permittivity (imaginary part)	20.226
Conductivity (S/m)	0.865

C. SAR Surface and Volume

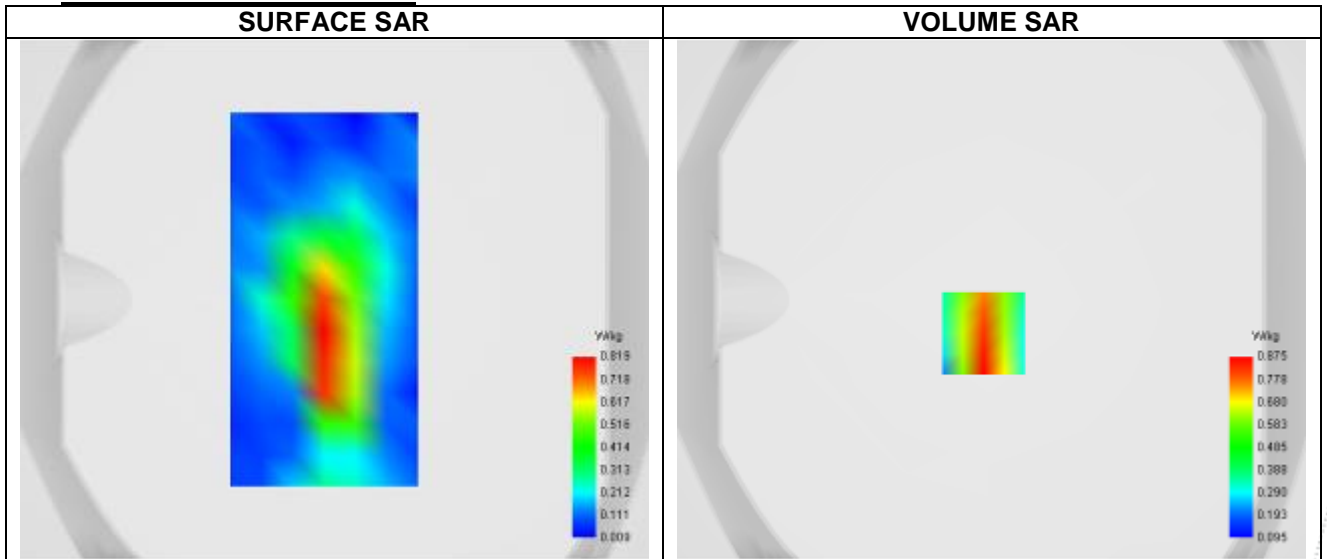




Maximum location: X=-3.00, Y=-13.00 ; SAR Peak: 1.31 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.393
SAR 1g (W/Kg)	0.648
Variation (%)	1.550
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.656	0.875	0.474	0.330	0.228

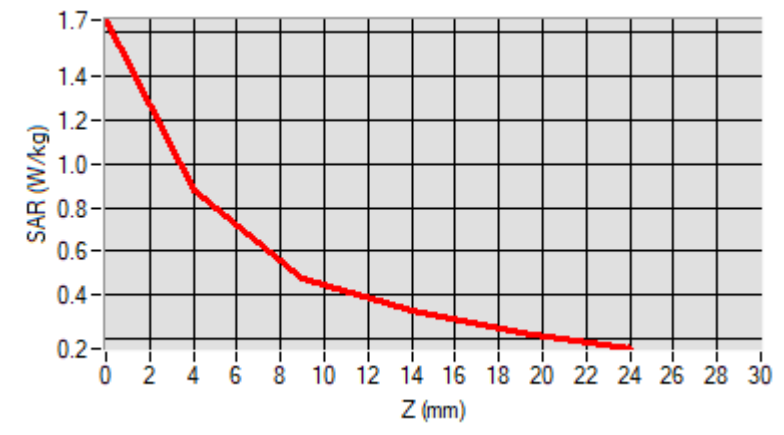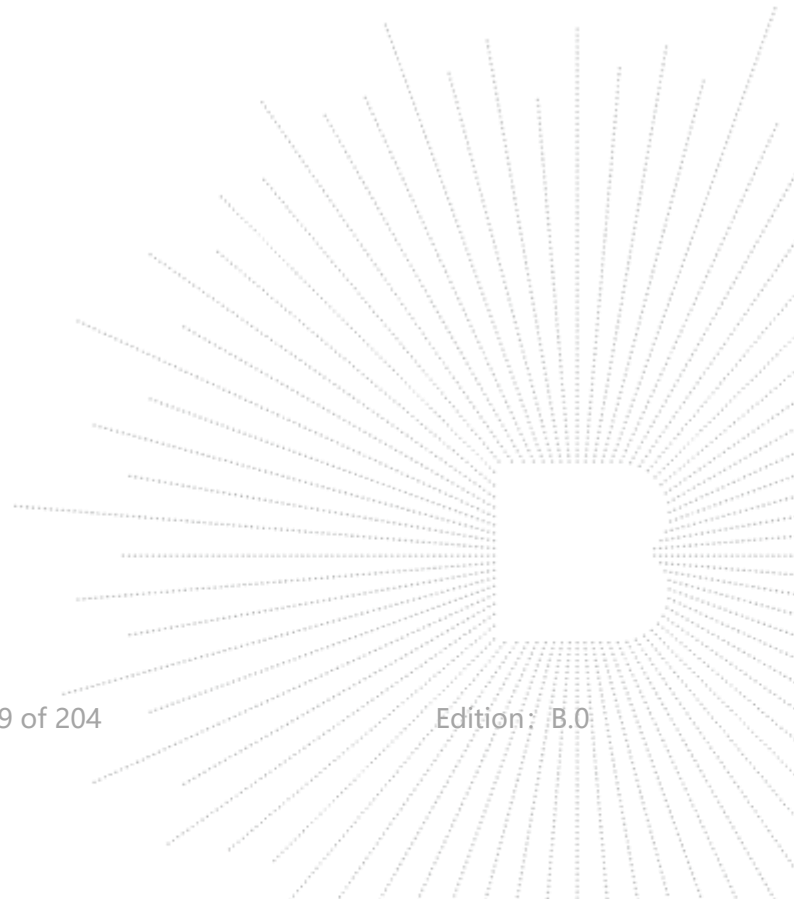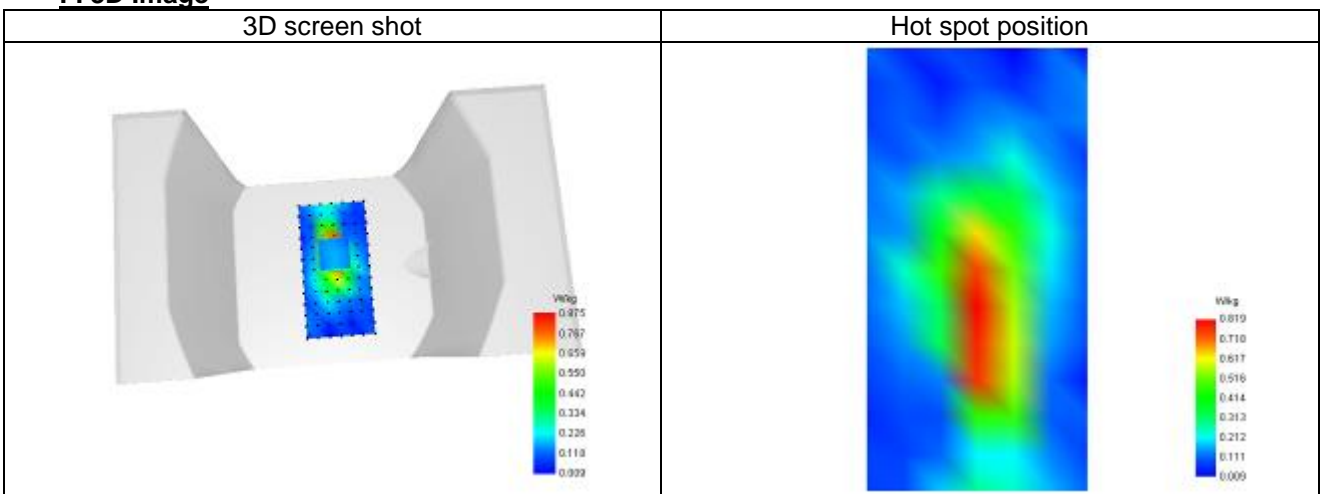
F. 3D Image


Plot 5


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.04
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body
Band	LTE band 2
Channels	18900
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1880.000
Relative permittivity (real part)	38.564
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.410

C. SAR Surface and Volume

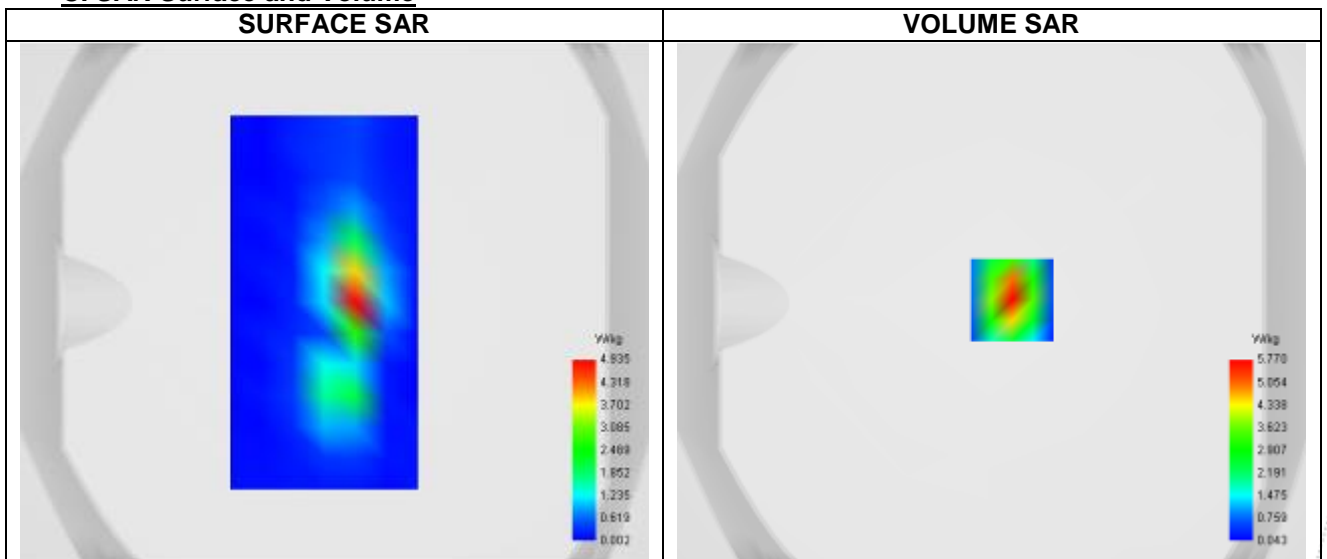




Maximum location: X=8.00, Y=1.00 ; SAR Peak: 10.39 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.320
SAR 1g (W/Kg)	0.690
Variation (%)	-1.280
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	10.413	5.770	2.597	1.191	0.645

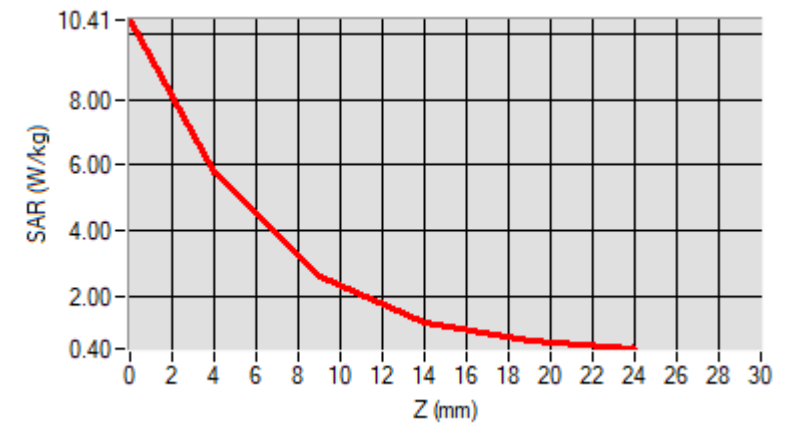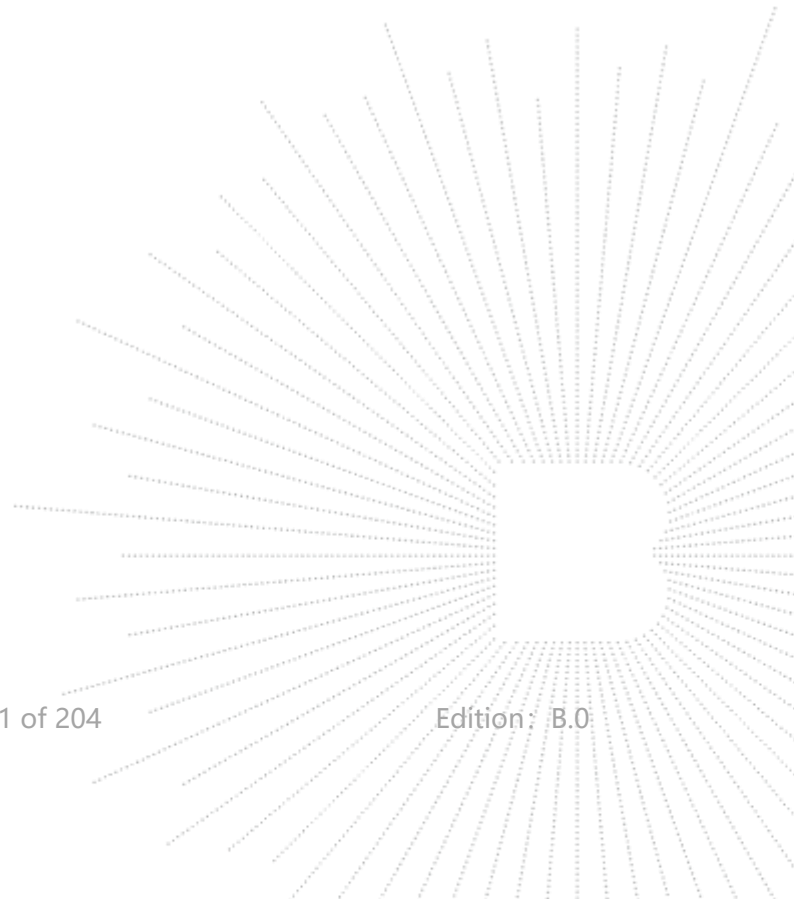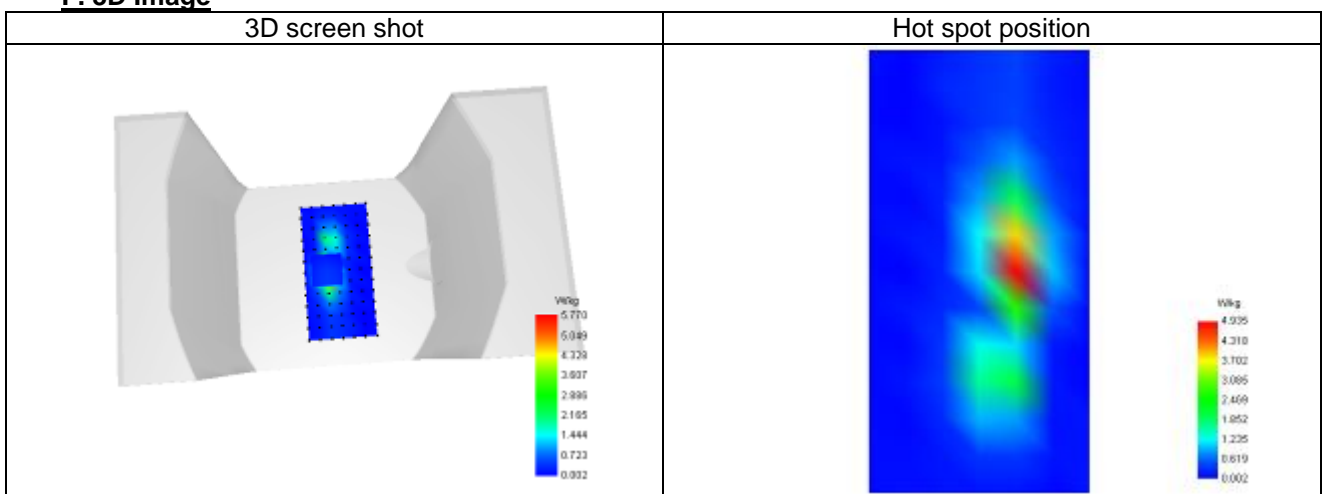
F. 3D Image


Plot 6


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	0.96
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	LTE band 4
Channels	20050
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1720.000
Relative permittivity (real part)	40.371
Relative permittivity (imaginary part)	14.136
Conductivity (S/m)	1.386

C. SAR Surface and Volume

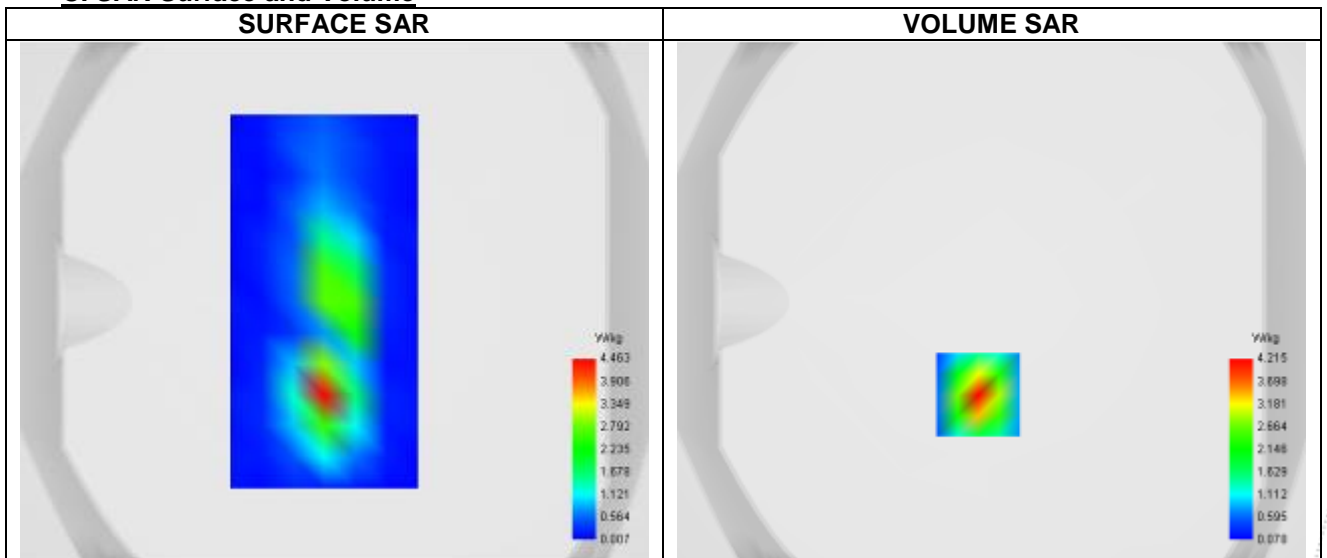




Maximum location: X=-5.00, Y=-36.00 ; SAR Peak: 1.81 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.317
SAR 1g (W/Kg)	0.850
Variation (%)	-1.260
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	6.820	4.215	2.212	1.135	0.589

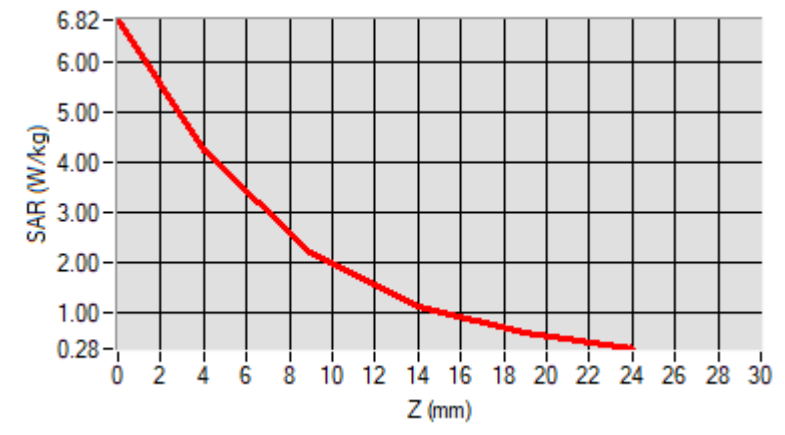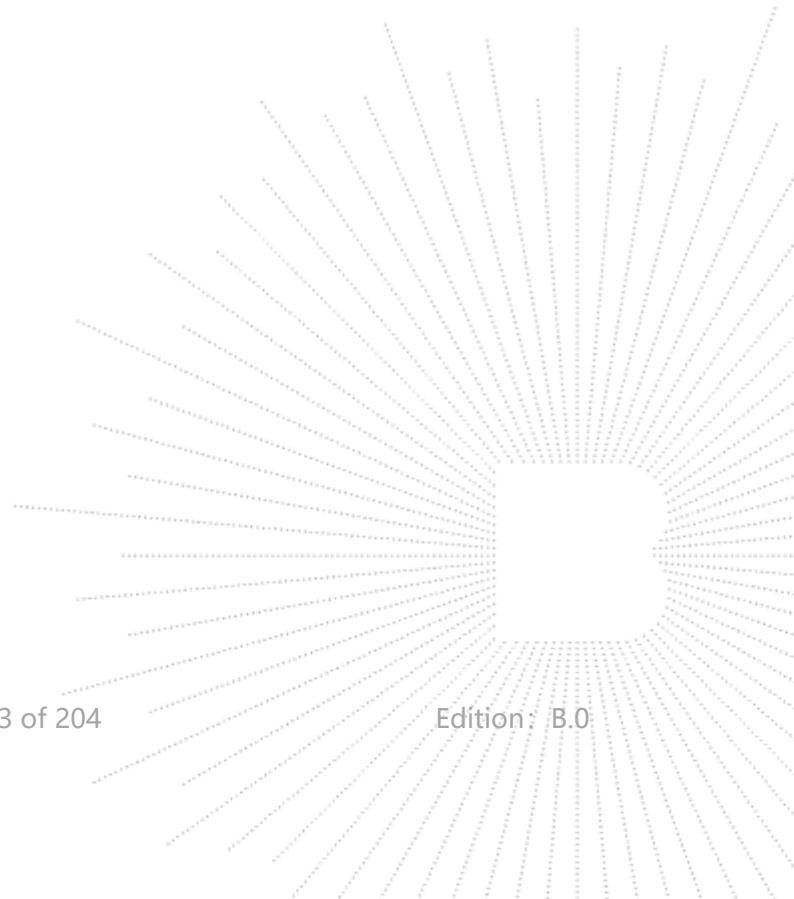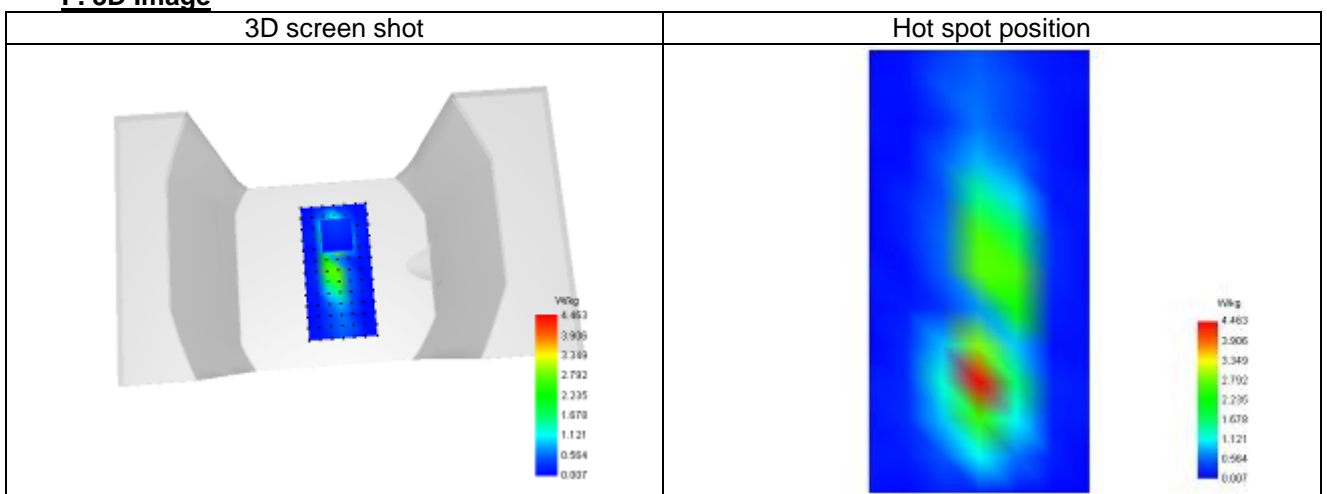
F. 3D Image


Plot 7


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	0.81
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	LTE band 5
Channels	20600
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	844.000
Relative permittivity (real part)	40.822
Relative permittivity (imaginary part)	20.225
Conductivity (S/m)	0.865

C. SAR Surface and Volume

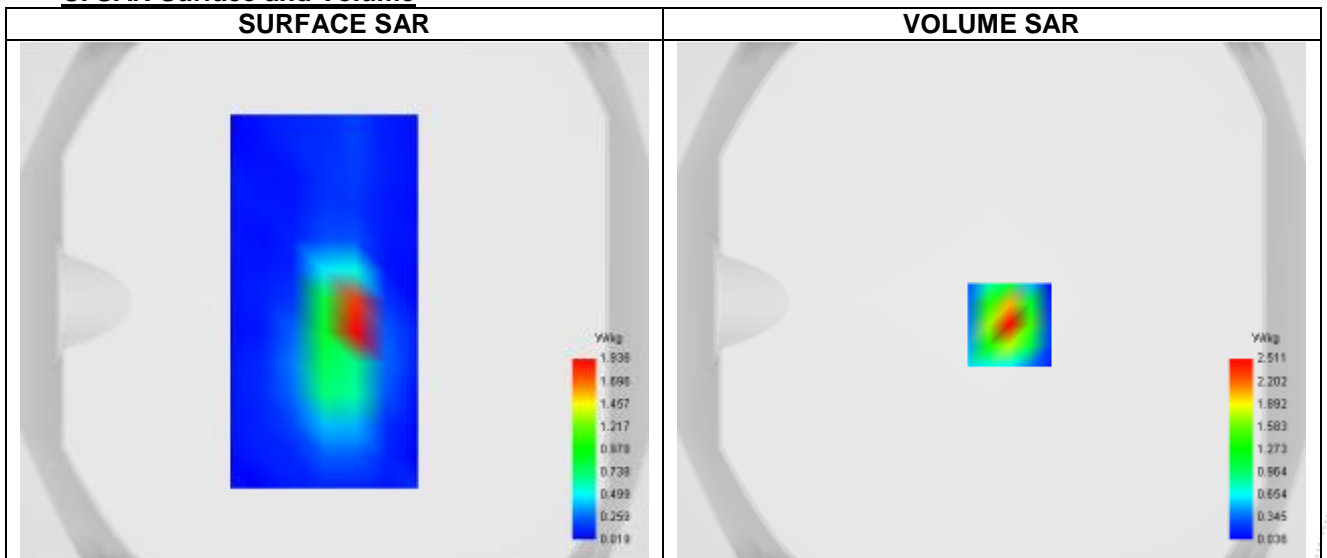




Maximum location: X=7.00, Y=-9.00 ; SAR Peak: 1.17 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.243
SAR 1g (W/Kg)	0.644
Variation (%)	1.650
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	5.166	2.511	0.898	0.323	0.168

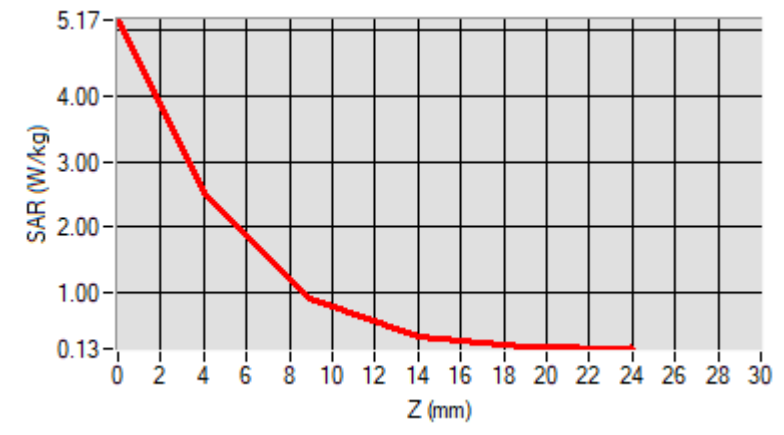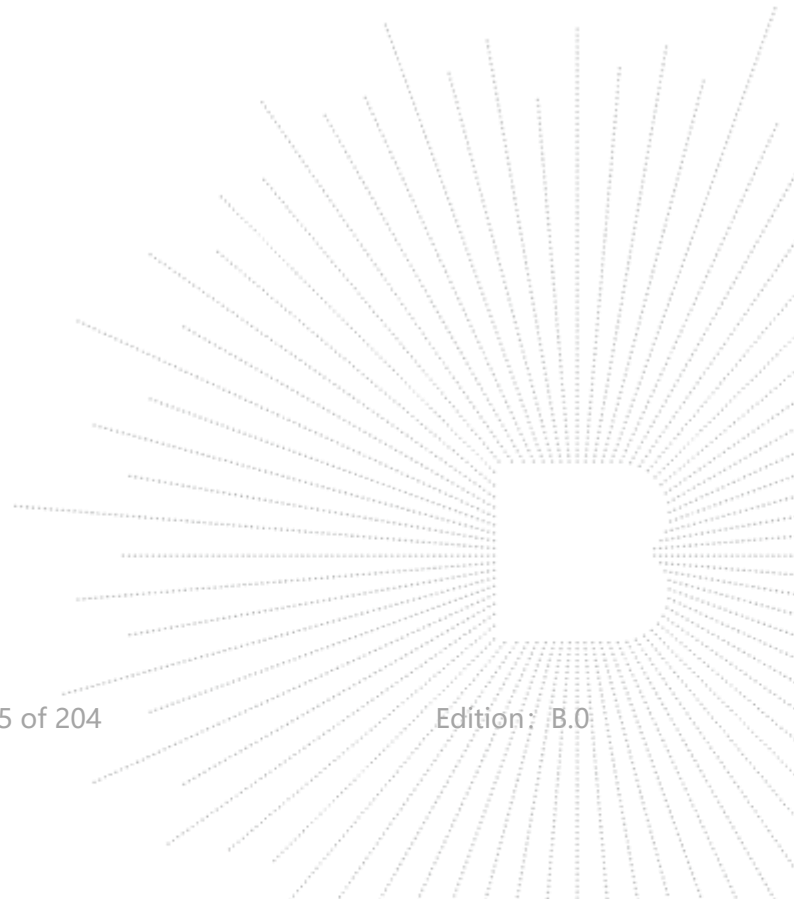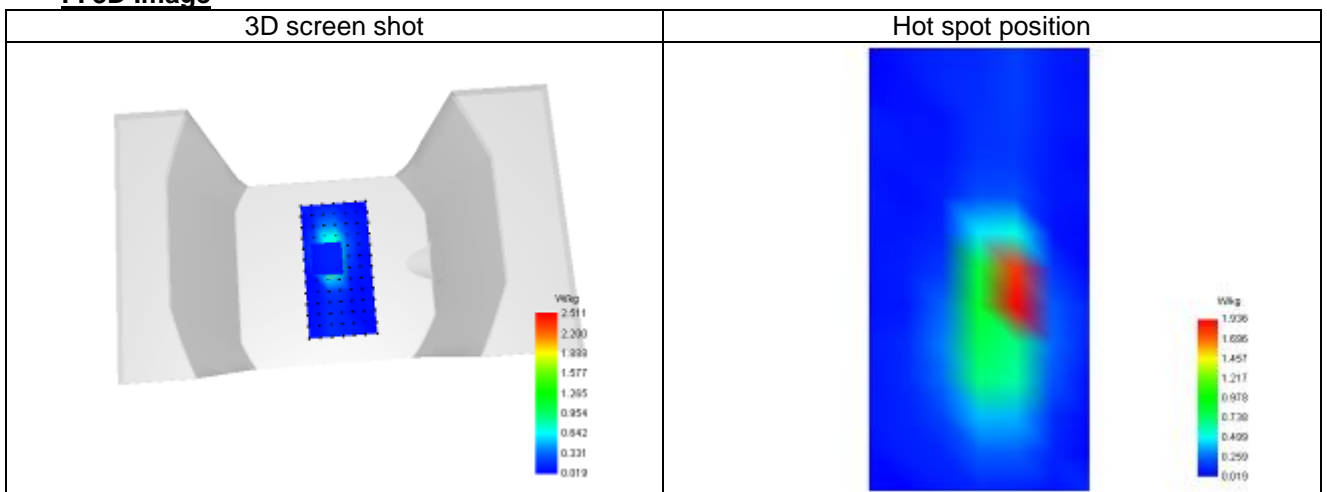
F. 3D Image


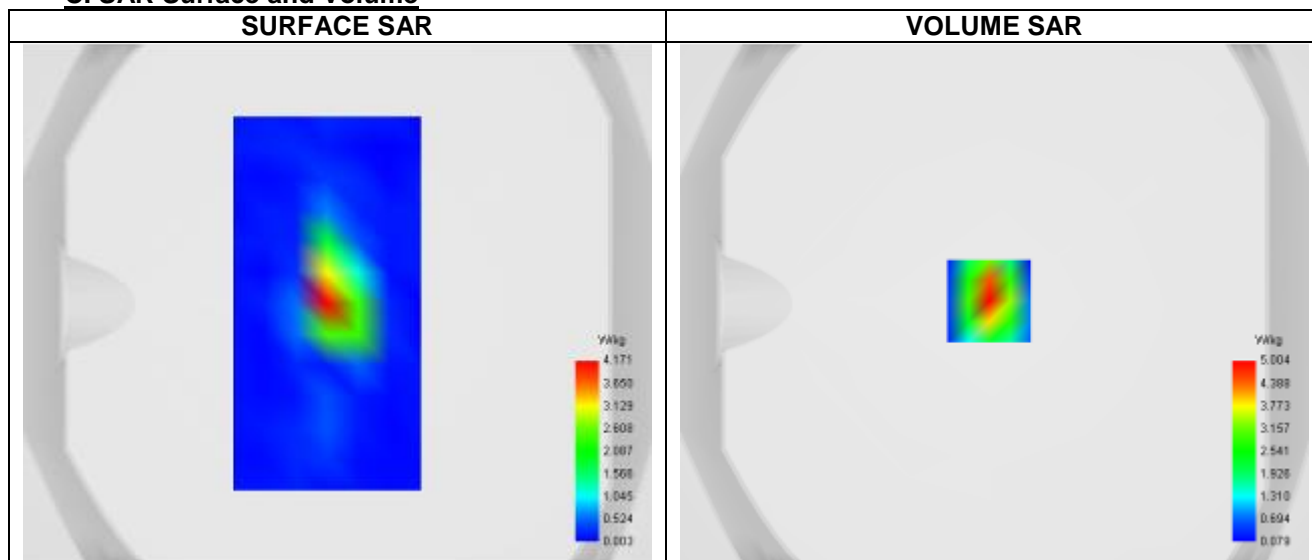
Plot 8

A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.03
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	LTE band 7
Channels	20850
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2510.000
Relative permittivity (real part)	38.675
Relative permittivity (imaginary part)	13.418
Conductivity (S/m)	1.958

C. SAR Surface and Volume


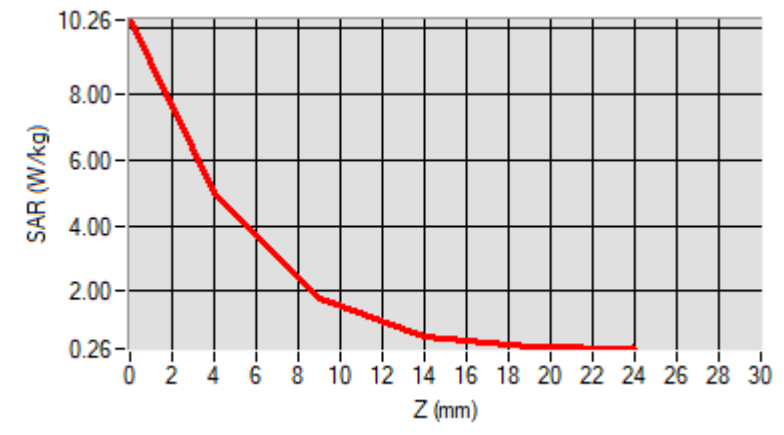
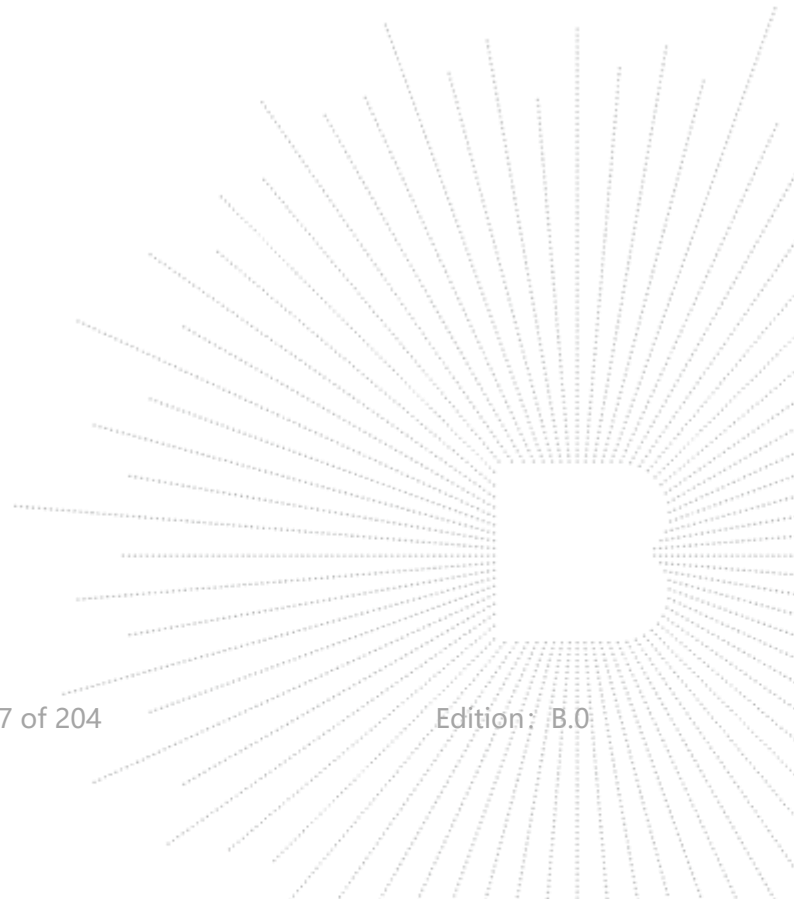
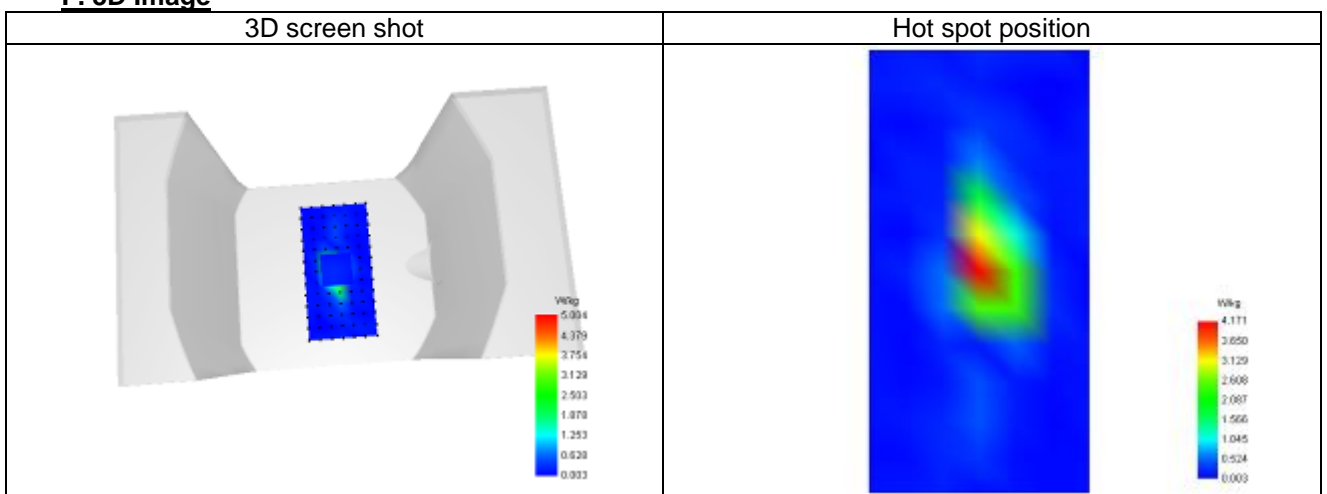
Maximum location: X=-2.00, Y=1.00 ; SAR Peak: 1.29 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.418
SAR 1g (W/Kg)	0.942
Variation (%)	-0.960
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	10.258	5.004	1.801	0.650	0.330


F. 3D Image


Plot 9


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	0.80
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	LTE band 12
Channels	23130
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	711.000
Relative permittivity (real part)	41.560
Relative permittivity (imaginary part)	23.264
Conductivity (S/m)	0.858

C. SAR Surface and Volume



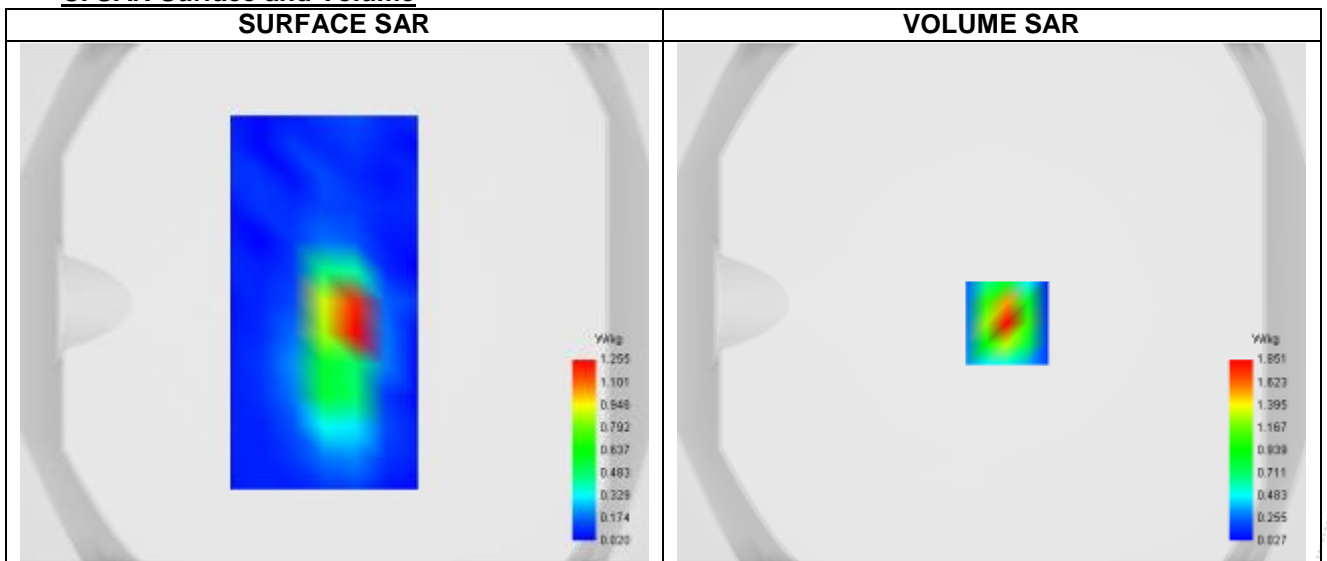


D. SAR 1g & 10g

SAR 10g (W/Kg)	0.303
SAR 1g (W/Kg)	0.716
Variation (%)	0.860
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	3.705	1.851	0.693	0.255	0.123

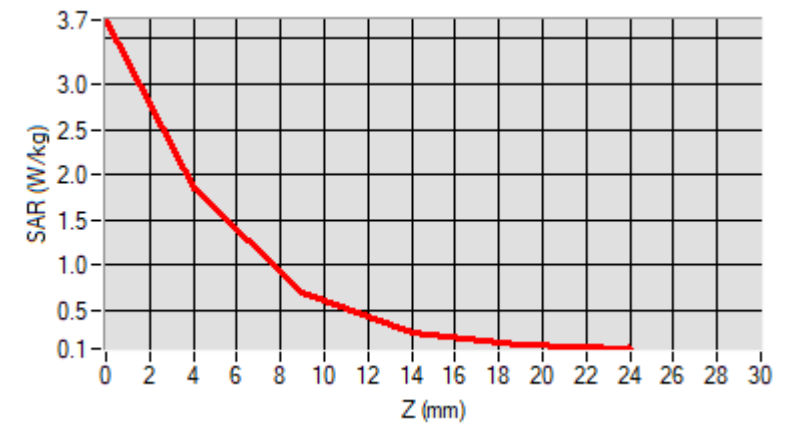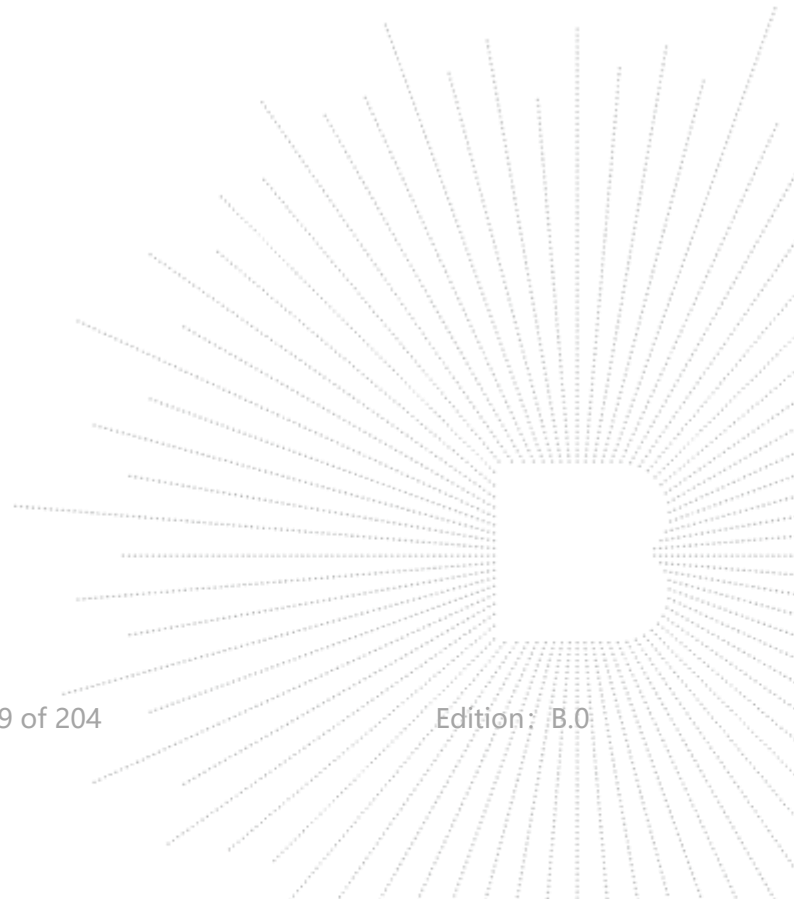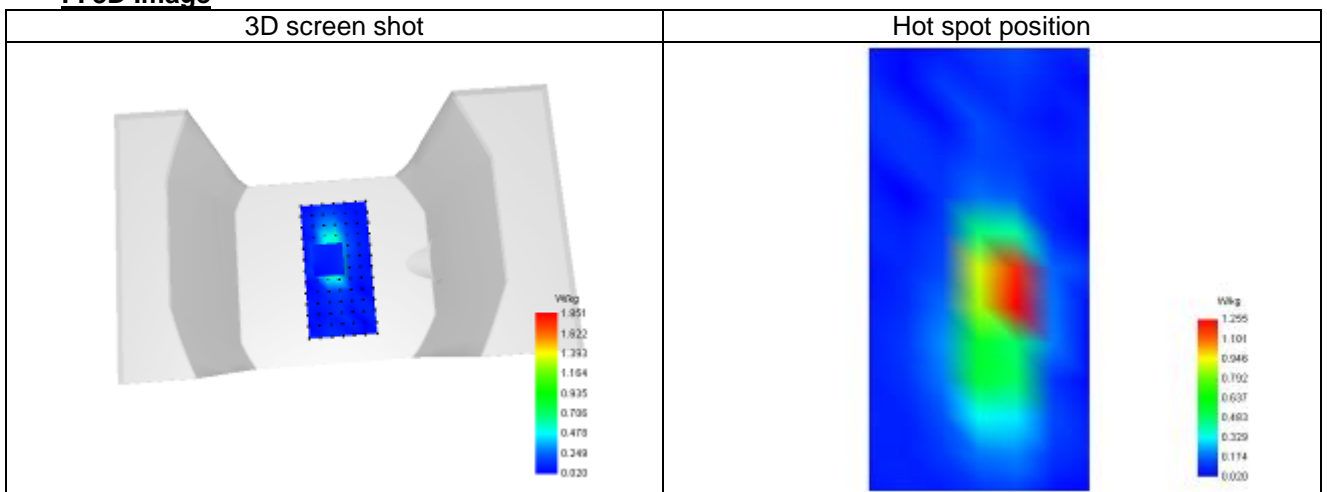
F. 3D Image


Plot 10


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	0.80
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	LTE band 17
Channels	23790
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	710.000
Relative permittivity (real part)	41.560
Relative permittivity (imaginary part)	23.152
Conductivity (S/m)	0.858

C. SAR Surface and Volume

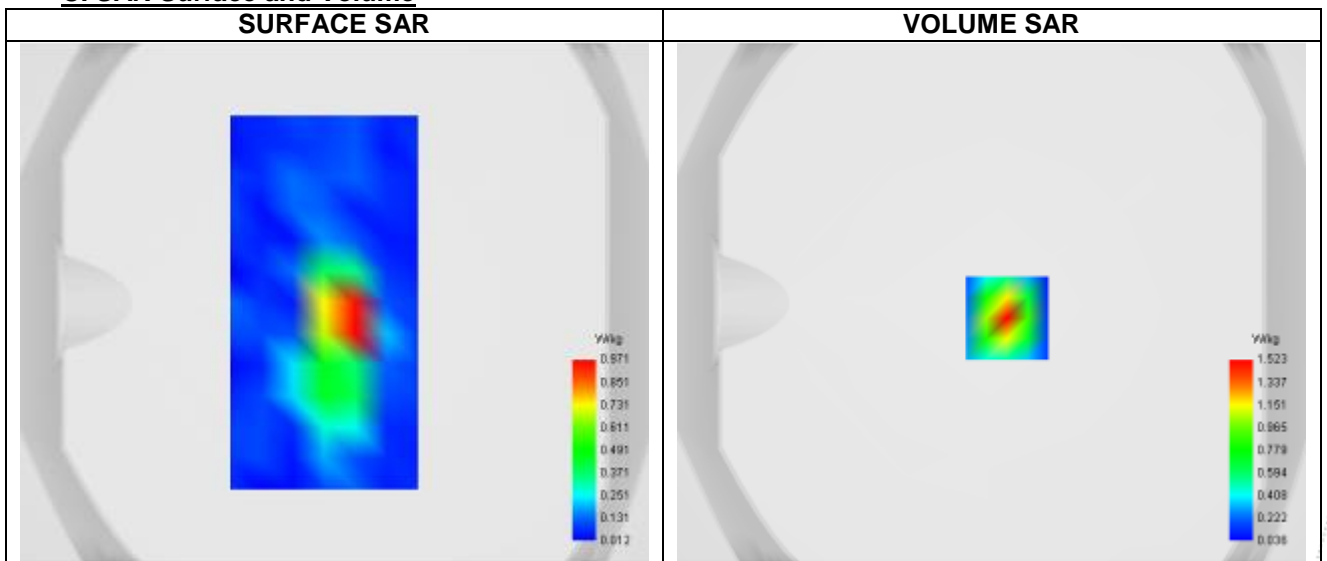




Maximum location: X=6.00, Y=-6.00 ; SAR Peak: 0.98 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.183
SAR 1g (W/Kg)	0.414
Variation (%)	-0.150
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.991	1.523	0.599	0.247	0.143

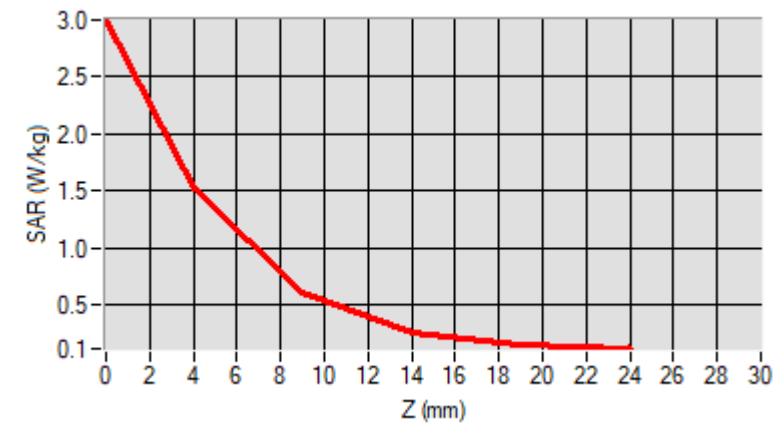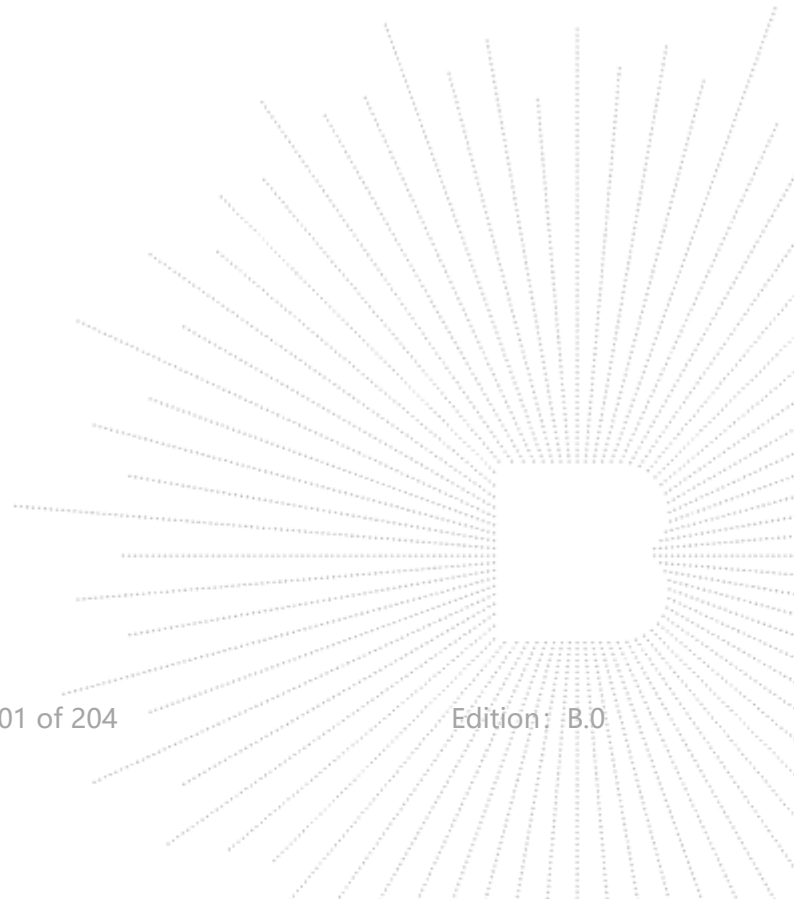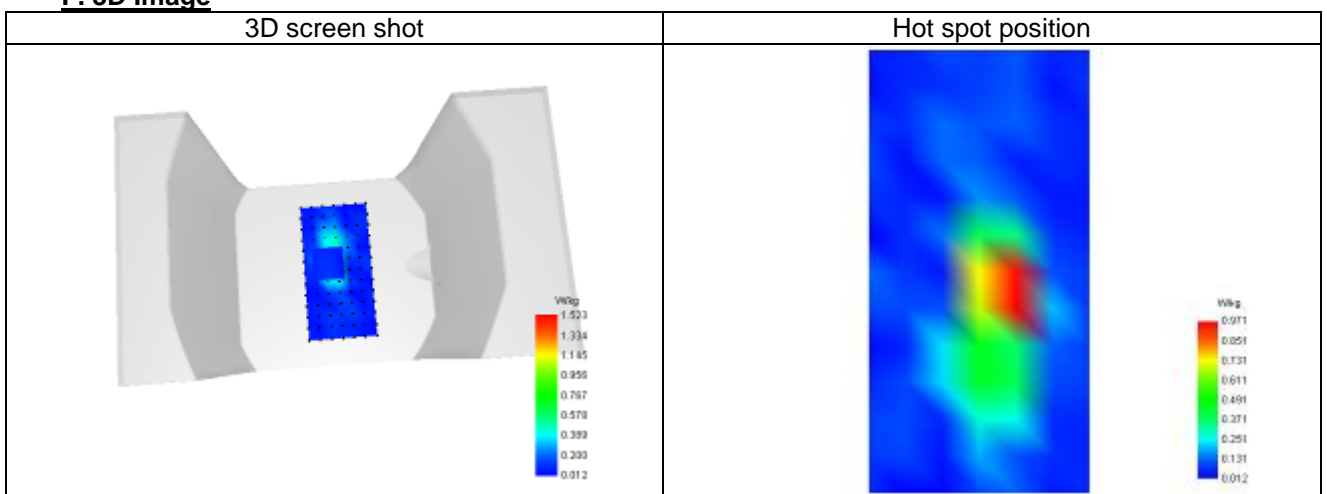
F. 3D Image


Plot 11


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.03
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	LTE band 41
Channels	40620
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2593.000
Relative permittivity (real part)	38.675
Relative permittivity (imaginary part)	13.554
Conductivity (S/m)	1.958

C. SAR Surface and Volume

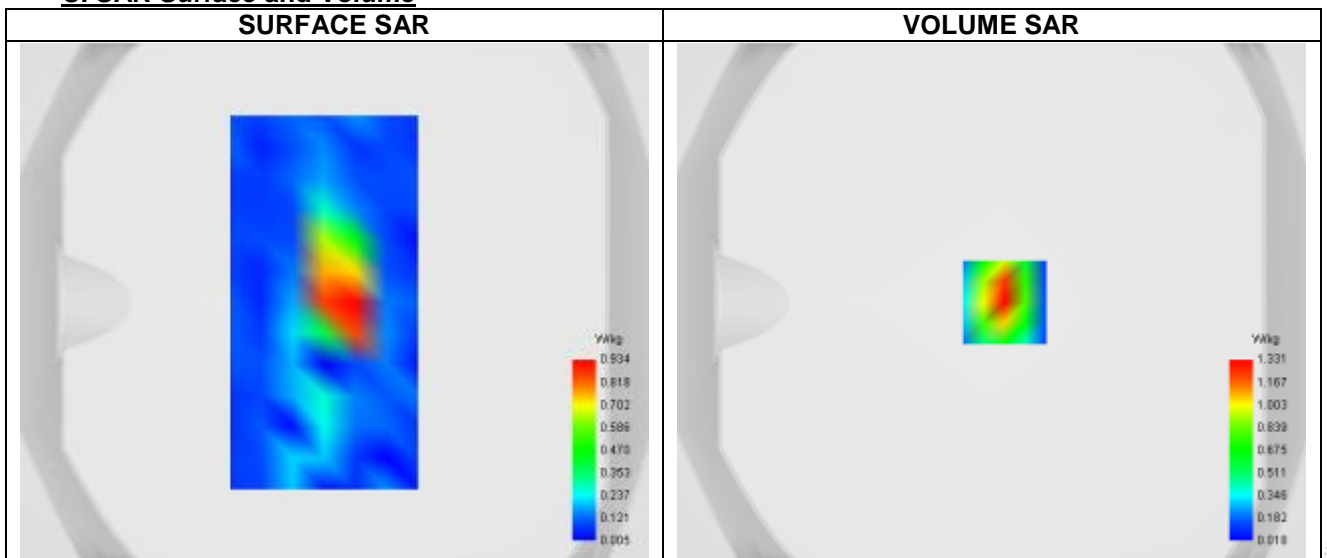

Maximum location: X=5.00, Y=0.00 ; SAR Peak: 2.21 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.215
SAR 1g (W/Kg)	0.529
Variation (%)	-1.620
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.175	1.331	0.712	0.407	0.272