




RF Test Report


For


Applicant Name: PHROZEN TECH CO., LTD.
Address: 3F., NO.287, NIUPU RD., XIANGSHAN DIST., HSINCHU CITY 30091, TAIWAN
EUT Name: Desktop 3D Printer
Brand Name:  phrozen
Model Number: Phrozen Arco FDM 3D Printer
Series Model Number: N/A
FCC ID: 2BCTP-ACROFDN

Issued By

Company name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: 101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

Report number: BTF250402R00801
Test standards: FCC CFR Title 47 Part 15 Subpart C (§15.247)
Test conclusion: Pass
Date of sample receipt: 2025-04-02
Test date: 2025-04-03 to 2025-06-04
Date of issue: 2025-06-17
Test by: 
Sean He / Tester

Prepared by: 
Chris Liu / Project engineer

Approved by: 
Ryan CJ / EMC manager



Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd. All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.



Revision History		
Version	Issue Date	Revisions Content
R_V0	2025-06-17	Original
<i>Note: Once the revision has been made, then previous versions reports are invalid.</i>		

Table of Contents

1 INTRODUCTION	5
1.1 Laboratory Location	5
1.2 Laboratory Facility	5
1.3 Announcement	5
2 PRODUCT INFORMATION	6
2.1 Application Information	6
2.2 Manufacturer Information	6
2.3 Factory Information	6
2.4 General Description of Equipment under Test (EUT)	6
2.5 Technical Information	6
3 SUMMARY OF TEST RESULTS	8
3.1 Test Standards	8
3.2 Uncertainty of Test	8
3.3 Summary of Test Result	8
4 TEST CONFIGURATION	9
4.1 Test Equipment List	9
4.2 Test Auxiliary Equipment	10
4.3 Test Modes	10
4.4 Test software	10
4.5 Test Setup Block	10
5 EVALUATION RESULTS (EVALUATION)	12
5.1 Antenna requirement	12
5.1.1 Conclusion:	12
6 RADIO SPECTRUM MATTER TEST RESULTS (RF)	13
6.1 Conducted Emission at AC power line	13
6.1.1 E.U.T. Operation:	13
6.1.2 Test Setup	14
6.1.3 Test Data:	14
6.2 Occupied bandwidth and DTS bandwidth	16
6.2.1 E.U.T. Operation:	16
6.2.2 Test Setup	16
6.2.3 Test Data:	16
6.3 Maximum Conducted Output Power	17
6.3.1 E.U.T. Operation:	17
6.3.2 Test Setup	17
6.3.3 Test Data:	17
6.4 Power Spectral Density	18
6.4.1 E.U.T. Operation:	18
6.4.2 Test Setup	18
6.4.3 Test Data:	18
6.5 Emissions in non-restricted frequency bands	19
6.5.1 E.U.T. Operation:	19
6.5.2 Test Setup	19
6.5.3 Test Data:	19
6.6 Band edge emissions (Radiated)	20
6.6.1 E.U.T. Operation:	20
6.6.2 Test Setup	21

6.6.3 Test Data:	21
6.7 Emissions in restricted frequency bands (below 1GHz)	22
6.7.1 E.U.T. Operation:	22
6.7.2 Test Setup	23
6.7.3 Test Data:	23
6.8 Emissions in restricted frequency bands (above 1GHz)	25
6.8.1 E.U.T. Operation:	25
6.8.2 Test Setup	26
6.8.3 Test Data:	26
7 TEST SETUP PHOTOS	28
8 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	28

1 Introduction

1.1 Laboratory Location

Test location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
Phone number:	+86-0755-23146130
Fax number:	+86-0755-23146130

1.2 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1409**

BTF Testing Lab (Shenzhen) Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The test firm Registration No. is 518915.

- **CNAS - Registration No.: CNAS L17568**

BTF Testing Lab (Shenzhen) Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L17568.

- **A2LA - Registration No.: 6660.01**

BTF Testing Lab (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.

1.3 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 Product Information

2.1 Application Information

Company Name:	PHROZEN TECH CO., LTD.
Address:	3F., NO.287, NIUPU RD., XIANGSHAN DIST., HSINCHU CITY 30091, TAIWAN

2.2 Manufacturer Information

Company Name:	PHROZEN TECH CO., LTD.
Address:	3F., NO.287, NIUPU RD., XIANGSHAN DIST., HSINCHU CITY 30091, TAIWAN

2.3 Factory Information

Company Name:	DONGGUAN CITY PHROZEN TECH CO., LTD.
Address:	Room 601, No.28, Xinhong Road, Lincun, Tangxia Town, Dongguan City, Guangdong Province, China

2.4 General Description of Equipment under Test (EUT)

EUT name	Desktop 3D Printer
Under test model name	Phrozen Arco FDM 3D Printer
Series model name	N/A
Description of model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Rating:	Model: Phrozen Arco FDM 3D Printer Input: 100-240V AC; 50-60Hz Power: max 900W

2.5 Technical Information

Operation frequency:	2412MHz ~ 2462MHz (for 802.11b/g/n-HT20)
Channel numbers:	11 (for 802.11b/g/n-HT20)
Channel separation:	5MHz
Modulation technology: (IEEE 802.11b)	DSSS-DBPSK, DQPSK, CCK
Modulation technology: (IEEE 802.11g/802.11n)	OFDM-BPSK, QPSK, 16QAM, 64QAM
Data rate:	802.11b: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps 802.11g: 6Mbps, 9Mbps, 12Mbps etc., and up to 54Mbps 802.11n-HT20: 6.5Mbps, 13Mbps, 19.5Mbps etc., and up to 72.2Mbps
Max. Conducted Power:	14.17 dBm (802.11g)
Antenna type:	Internal Antenna
Antenna gain:	0.0 dBi (declare by Applicant)
Antenna transmit mode:	SISO (1TX, 1RX)

Channel List:**For 802.11b/g/n(HT20)**

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz	--	--

3 Summary of Test Results

3.1 Test Standards

Identity	Document Title
FCC CFR Title 47 Part 15 Subpart C (§15.247)	Intentional Radiators - Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10-2020	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of The FCC Rules

3.2 Uncertainty of Test

Measurement	Value
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Supply voltages	±3 %
Time	±5 %
Conducted Emission for LISN (9kHz ~ 150kHz)	±2.97 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.45 dB
Radiated Emission (30MHz ~ 1000MHz)	±4.80 dB
Radiated Emission (1GHz ~ 18GHz)	±4.82 dB

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.3 Summary of Test Result

Item	Standard	Requirement	Result
Antenna requirement	47 CFR Part 15.247	Part 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15.247	47 CFR 15.207(a)	Pass
Occupied bandwidth and DTS bandwidth.	47 CFR Part 15.247	47 CFR 15.247(a)(2)	Pass
Maximum Conducted Output Power	47 CFR Part 15.247	47 CFR 15.247(b)(3)	Pass
Power Spectral Density	47 CFR Part 15.247	47 CFR 15.247(e)	Pass
Emissions in non-restricted frequency bands	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Band edge emissions (Radiated)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Emissions in restricted frequency bands (below 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Emissions in restricted frequency	47 CFR Part 15.247	47 CFR 15.247(d)	Pass

bands (above 1GHz)			
--------------------	--	--	--

4 Test Configuration

4.1 Test Equipment List

Radiated test method					
Test Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI7	101032	2024/10/25	2025/10/24
Signal Analyzer	Rohde & Schwarz	FSQ40	100010	2024/10/25	2025/10/24
Log periodic antenna	Schwarzbeck	VULB 9168	01328	2024/10/28	2025/10/27
Preamplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9744	00246	2024/09/24	2025/09/23
Horn Antenna (1GHz ~ 18GHz)	Schwarzbeck	BBHA9120D	2597	2024/10/30	2025/10/29
Horn Antenna (15GHz ~ 40GHz)	SCHWARZBECK	BBHA9170	1157	2024/10/24	2025/10/23
Preamplifier (1GHz ~ 40GHz)	TST Pass	LNA10180G45	246	2024/09/24	2025/09/23
Test Software	Frad	EZ_EMC	Version: FA-03A2 RE+		

Conducted Emission Test					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI3	101422	2024/10/25	2025/10/24
V-LISN	Schwarzbeck	NSLK 8127	01073	2024/10/25	2025/10/24
Coaxial Switcher	Schwarzbeck	CX210	CX210	2024/10/25	2025/10/24
Pulse Limiter	Schwarzbeck	VTSD 9561-F	00953	2024/10/25	2025/10/24
Test Software	Frad	EZ_EMC	Version: EMC-CON 3A1.1+		

Conducted test method					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Keysight	N9020A	MY50410020	2024/10/25	2025/10/24
ESG Vector Signal Generator	Agilent	E4438C	MY45094854	2024/10/25	2025/10/24
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2024/10/25	2025/10/24
Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	161997	2024/10/25	2025/10/24
Temperature Humidity Chamber	ZZCKONG	ZZ-K02A	20210928007	2024/10/25	2025/10/24
DC Power Supply	Tongmen	etm-6050c	20211026123	2024/10/25	2025/10/24
RF Control Unit	Techy	TR1029-1	/	2024/10/25	2025/10/24
RF Sensor Unit	Techy	TR1029-2	/	2024/10/25	2025/10/24
Test Software	TST Pass	/	Version: 2.0		

4.2 Test Auxiliary Equipment

No.	Description	Manufacturer	Model	Serial Number	Certification
1	N/A	N/A	N/A	N/A	N/A

4.3 Test Modes


No.	Test Modes	Description
TM1	802.11b mode	Keep the EUT in 802.11b transmitting mode.
TM2	802.11g mode	Keep the EUT in 802.11g transmitting mode.
TM3	802.11n(HT20) mode	Keep the EUT in 802.11n(HT20) transmitting mode.

4.4 Test software


Test software:	SecureCRTPortable.exe	Version:	8.7.2
Power Class:	16		

4.5 Test Setup Block


1) Conducted emission measurement:

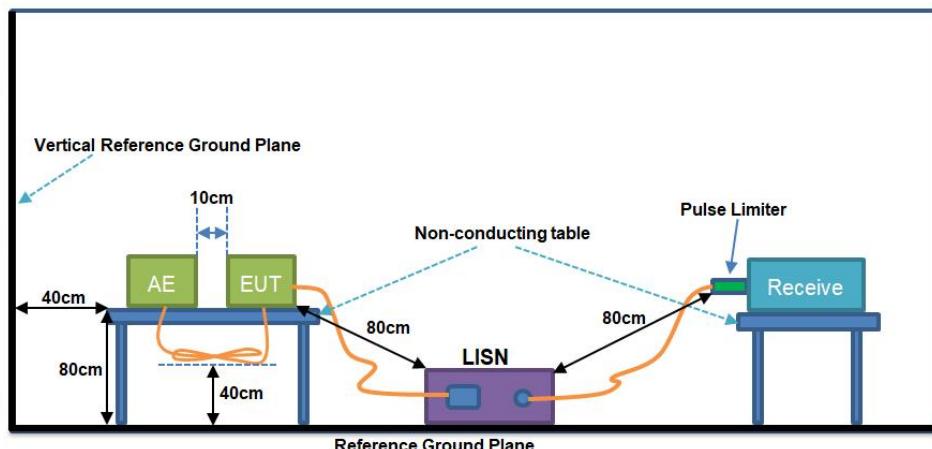

2) Conducted test method:

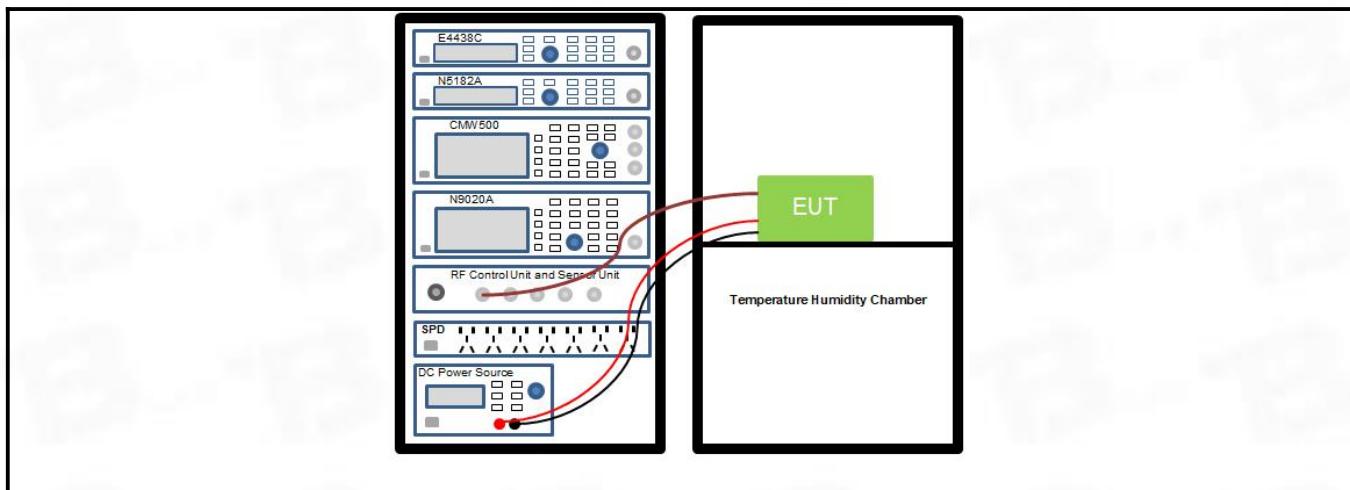

3) Radiated test method:

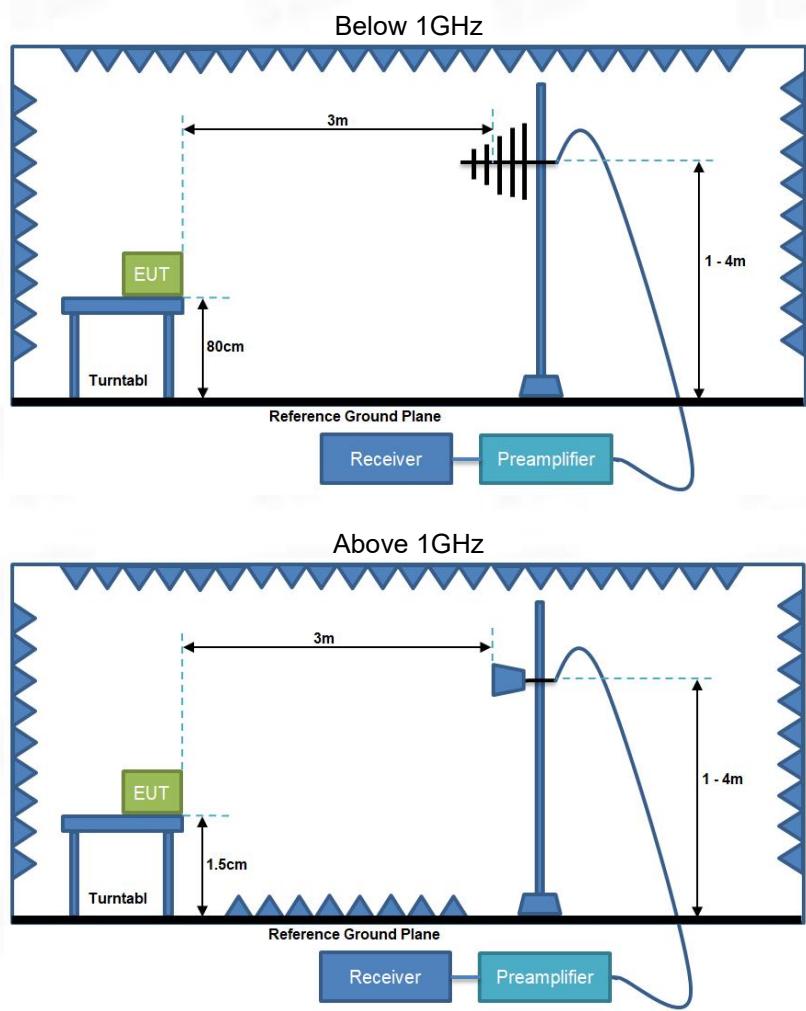


5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	--

5.1.1 Conclusion:

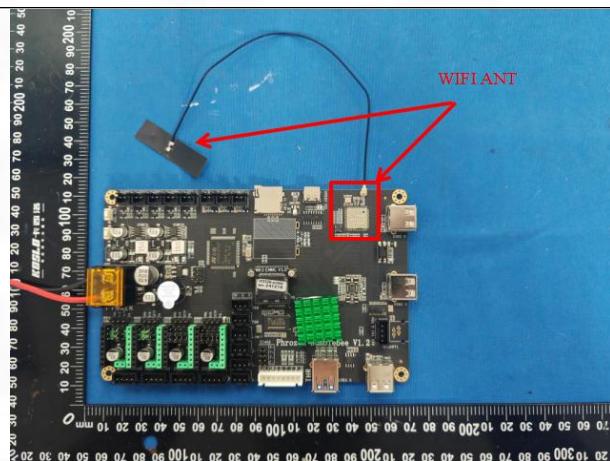

6 Radio Spectrum Matter Test Results (RF)

6.1 Conducted Emission at AC power line

Test Requirement:	Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Method:	Refer to ANSI C63.10-2020 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
	0.15-0.5	Quasi-peak	Average
	0.5-5	66 to 56*	56 to 46*
	5-30	56	46
*Decreases with the logarithm of the frequency.			

6.1.1 E.U.T. Operation:


Operating Environment:	
Temperature:	22.6 °C
Humidity:	54.8 %
Atmospheric Pressure:	1010 hpa
Test Voltage	AC 120V 60Hz

6.1.2 Test Setup


See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.1.3 Test Data:

TM1 / Line: Line

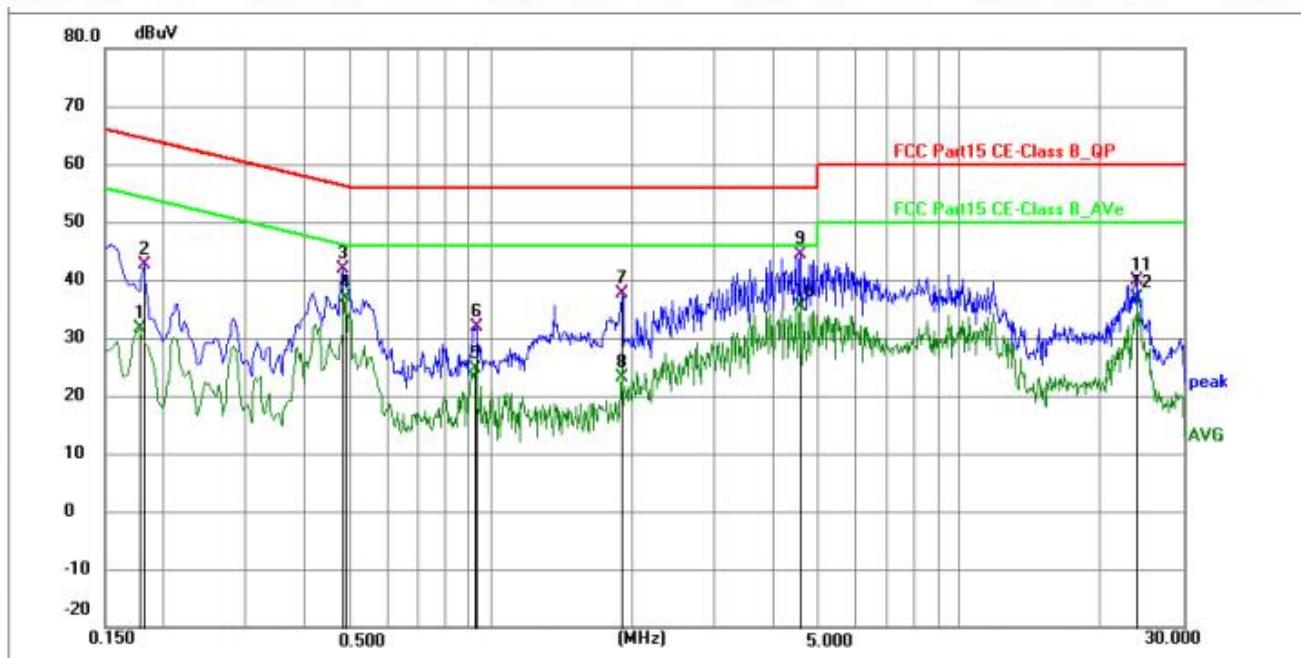

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1770	20.91	10.61	31.52	54.63	-23.11	AVG	P	
2	0.1814	32.06	10.62	42.68	64.42	-21.74	QP	P	
3	0.4830	31.14	10.67	41.81	56.29	-14.48	QP	P	
4 *	0.4873	26.11	10.67	36.78	46.21	-9.43	AVG	P	
5	0.9240	13.72	10.79	24.51	46.00	-21.49	AVG	P	
6	0.9284	21.11	10.80	31.91	56.00	-24.09	QP	P	
7	1.9005	26.87	10.70	37.57	56.00	-18.43	QP	P	
8	1.9005	12.51	10.70	23.21	46.00	-22.79	AVG	P	
9	4.5555	33.47	10.91	44.38	56.00	-11.62	QP	P	
10	4.5555	24.52	10.91	35.43	46.00	-10.57	AVG	P	
11	23.9680	28.59	11.19	39.78	60.00	-20.22	QP	P	
12	23.9680	25.78	11.19	36.97	50.00	-13.03	AVG	P	

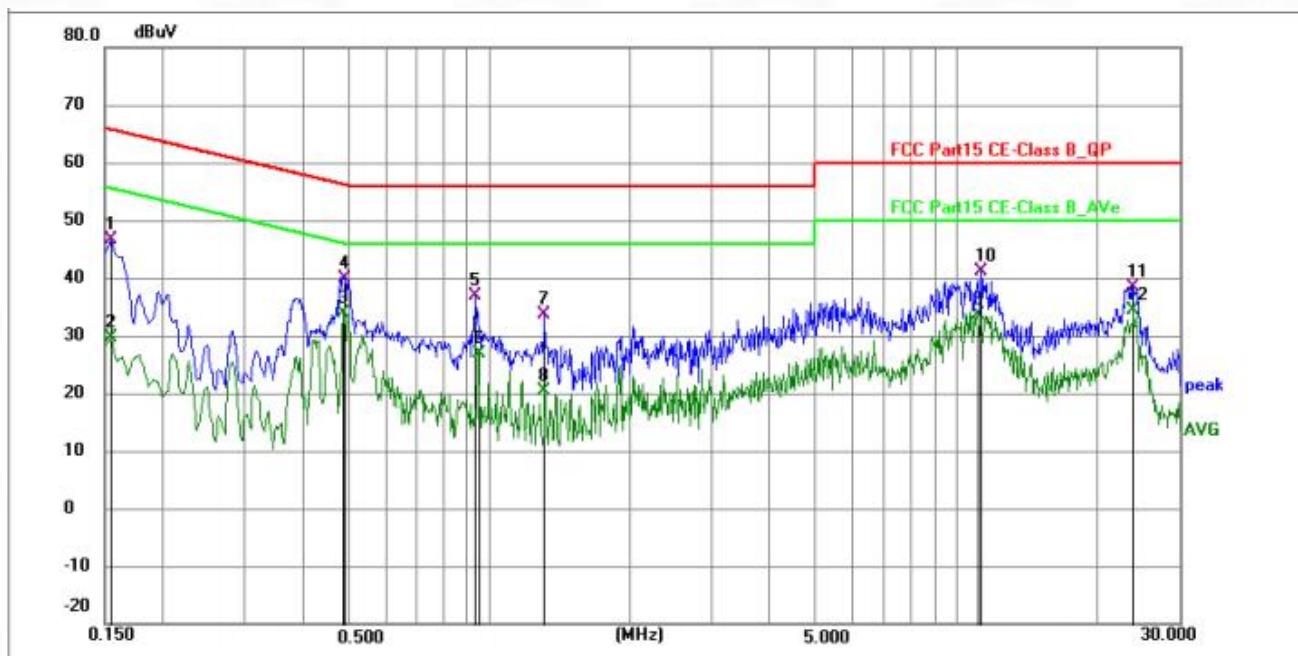TM1 / Line: Neutral


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1544	36.01	10.55	46.56	65.76	-19.20	QP	P	
2	0.1544	18.97	10.55	29.52	55.76	-26.24	AVG	P	
3 *	0.4863	23.00	10.76	33.76	46.23	-12.47	AVG	P	
4	0.4873	29.24	10.76	40.00	56.21	-16.21	QP	P	
5	0.9375	26.09	10.87	36.96	56.00	-19.04	QP	P	
6	0.9510	16.09	10.87	26.96	46.00	-19.04	AVG	P	
7	1.3150	22.84	10.89	33.73	56.00	-22.27	QP	P	
8	1.3150	9.61	10.89	20.50	46.00	-25.50	AVG	P	
9	11.0805	22.65	11.02	33.67	50.00	-16.33	AVG	P	
10	11.2695	30.22	11.01	41.23	60.00	-18.77	QP	P	
11	23.9730	27.11	11.29	38.40	60.00	-21.60	QP	P	
12	23.9730	22.97	11.29	34.26	50.00	-15.74	AVG	P	

Note: Margin=Level-Limit=Reading+factor-Limit

6.2 Occupied bandwidth and DTS bandwidth.

Test Requirement:	Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	DTS bandwidth
Test Limit:	Section (a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Procedure:	<ul style="list-style-type: none"> a) Set RBW = OBW 1%-5%. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.2.1 E.U.T. Operation:

Operating Environment:	
Temperature:	24.1 °C
Humidity:	53.5 %
Atmospheric Pressure:	1010 hpa

6.2.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.2.3 Test Data:

Please Refer to Appendix-2.4GWIFI for Details.

6.3 Maximum Conducted Output Power

Test Requirement:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	Maximum peak conducted output power
Test Limit:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Procedure:	ANSI C63.10-2020, section 11.9.2 Peak Power Meter

6.3.1 E.U.T. Operation:

Operating Environment:	
Temperature:	24.1 °C
Humidity:	53.5 %
Atmospheric Pressure:	1010 hpa

6.3.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.3.3 Test Data:

Please Refer to Appendix-2.4GWIFI for Details.

6.4 Power Spectral Density

Test Requirement:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	Maximum power spectral density level in the fundamental emission
Test Limit:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section.

6.4.1 E.U.T. Operation:

Operating Environment:	
Temperature:	24.1 °C
Humidity:	53.5 %
Atmospheric Pressure:	1010 hpa

6.4.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.4.3 Test Data:

Please Refer to Appendix-2.4GWIFI for Details.

6.5 Emissions in non-restricted frequency bands

Test Requirement:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	Emissions in nonrestricted frequency bands
Test Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Procedure:	ANSI C63.10-2020 Section 11.11.1, Section 11.11.2, Section 11.11.3

6.5.1 E.U.T. Operation:

Operating Environment:	
Temperature:	24.1 °C
Humidity:	53.5 %
Atmospheric Pressure:	1010 hpa
Test Voltage	DC 5V

6.5.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.5.3 Test Data:

Please Refer to Appendix-2.4GWIFI for Details.

6.6 Band edge emissions (Radiated)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2020 section 6.10.5.2		

6.6.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.6 °C
Humidity:	45.3 %
Atmospheric Pressure:	1010 hpa
Test Voltage	AC 120V 60Hz

6.6.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.6.3 Test Data:

Remark: During the test, pre-scan 802.11b, 802.11g, 802.11n20 mode, found 802.11g was worse case mode. The report only reflects the test data of worst mode.

Test Mode: 802.11g Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
2310.00	51.77	3.85	55.62	74.00	-18.38	peak	Pass
2310.00	42.25	3.85	46.10	54.00	-7.90	AV	Pass
2390.00	52.03	3.91	55.94	74.00	-18.06	peak	Pass
2390.00	42.11	3.91	46.03	54.00	-7.97	AV	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
2310.00	50.64	3.85	54.50	74.00	-19.50	peak	Pass
2310.00	40.38	3.85	44.23	54.00	-9.77	AV	Pass
2390.00	51.63	3.91	55.54	74.00	-18.46	peak	Pass
2390.00	40.67	3.91	44.58	54.00	-9.42	AV	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
2483.50	51.76	3.99	55.75	74.00	-18.25	peak	Pass
2483.50	41.04	3.99	45.03	54.00	-8.97	AV	Pass
2500.00	51.49	4.00	55.49	74.00	-18.51	peak	Pass
2500.00	40.73	4.00	44.73	54.00	-9.27	AV	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
2483.50	51.52	3.99	55.51	74.00	-18.49	peak	Pass
2483.50	41.57	3.99	45.56	54.00	-8.44	AV	Pass
2500.00	51.54	4.00	55.54	74.00	-18.46	peak	Pass
2500.00	41.68	4.00	45.68	54.00	-8.32	AV	Pass

Note: Margin=Level-Limit=Reading+factor-Limit

6.7 Emissions in restricted frequency bands (below 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2020 section 6.6.4		

6.7.1 E.U.T. Operation:


Operating Environment:	
Temperature:	23.6 °C
Humidity:	45.3 %
Atmospheric Pressure:	1010 hpa
Test Voltage	DC 5V

6.7.2 Test Setup


See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.7.3 Test Data:

TM1 / Polarization: Horizontal / Band: 2.4G

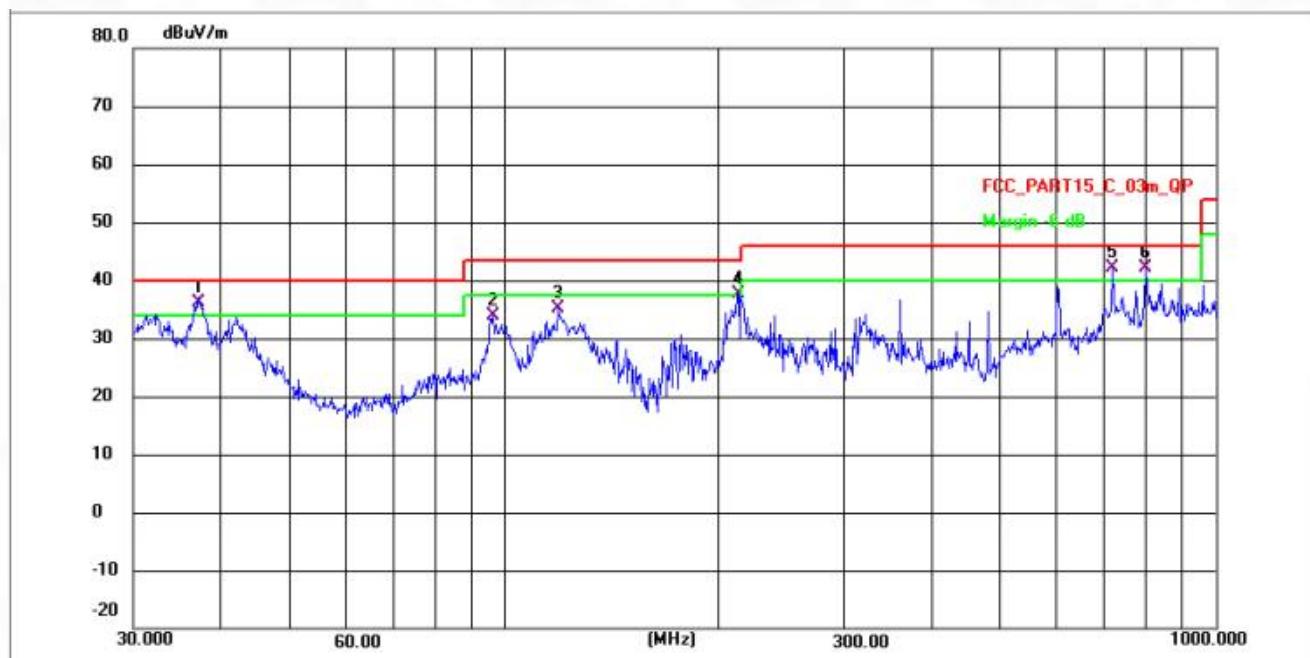

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 !	37.0250	45.75	-9.65	36.10	40.00	-3.90	QP	P
2	96.7750	56.37	-22.52	33.85	43.50	-9.65	QP	P
3	118.8092	57.50	-22.30	35.20	43.50	-8.30	QP	P
4 !	213.7632	59.12	-21.39	37.73	43.50	-5.77	QP	P
5 !	717.9396	59.75	-17.66	42.09	46.00	-3.91	QP	P
6 *	796.1830	60.03	-17.85	42.18	46.00	-3.82	QP	P

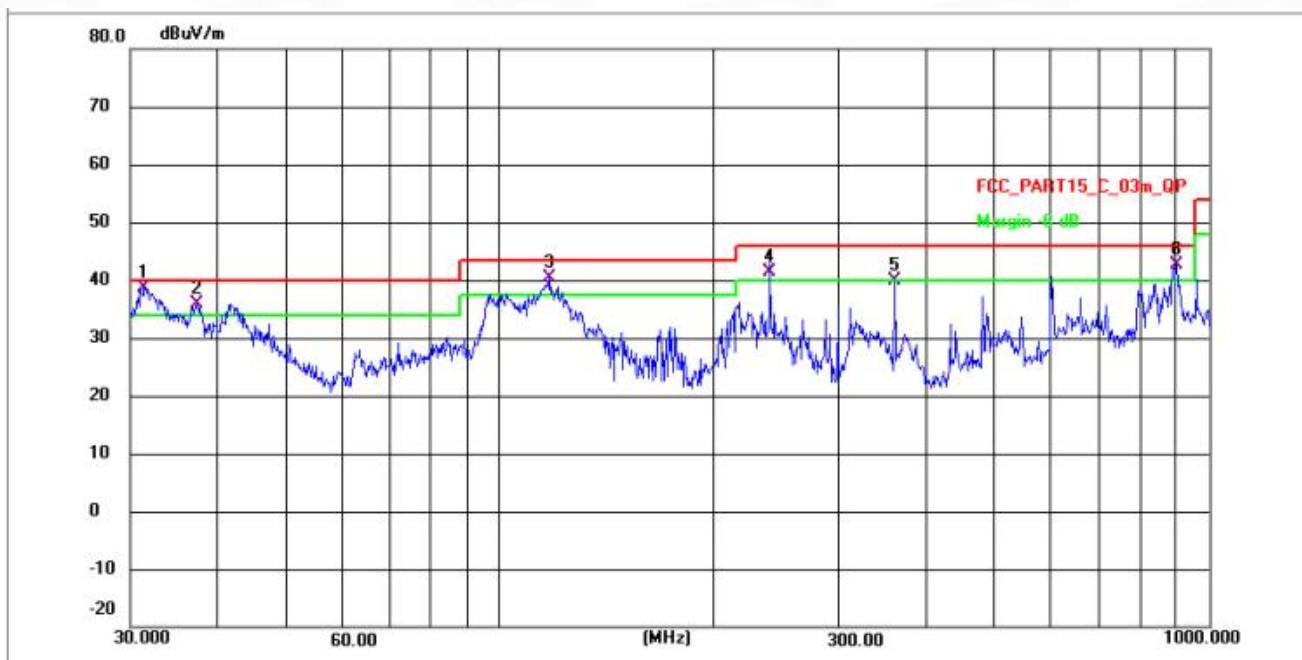TM1 / Polarization: Vertical / Band: 2.4G


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	31.5091	48.40	-9.70	38.70	40.00	-1.30	QP	P
2 !	37.4164	45.52	-9.66	35.86	40.00	-4.14	QP	P
3 !	117.5661	62.67	-22.31	40.36	43.50	-3.14	QP	P
4 !	239.9873	62.65	-21.15	41.50	46.00	-4.50	QP	P
5	360.4476	59.94	-20.15	39.79	46.00	-6.21	QP	P
6 !	903.3093	58.76	-16.20	42.56	46.00	-3.44	QP	P

Note: Margin=Level-Limit=Reading+factor-Limit

6.8 Emissions in restricted frequency bands (above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2020 section 6.6.4		

6.8.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.6 °C
Humidity:	45.3 %
Atmospheric Pressure:	1010 hpa
Test Voltage	DC 5V

6.8.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.8.3 Test Data:

Remark: During the test, pre-scan 802.11b, 802.11g, 802.11n20 mode, found 802.11n20 was worse case mode. The report only reflects the test data of worst mode.

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4824.000	77.99	-48.87	29.12	74.00	-44.88	peak	P
2	4824.000	68.13	-48.87	19.26	54.00	-34.74	AV	P
3	7236.000	76.96	-46.99	29.97	74.00	-44.03	peak	P
4	7236.000	66.34	-46.99	19.35	54.00	-34.65	AV	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4824.000	78.82	-48.87	29.95	74.00	-44.05	peak	P
2	4824.000	67.88	-48.87	19.01	54.00	-34.99	AV	P
3	7236.000	76.97	-46.99	29.98	74.00	-44.02	peak	P
4	7236.000	67.07	-46.99	20.08	54.00	-33.92	AV	P

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	74.00	Margin (dB)	Detector	P/F
1	4874.000	78.91	-48.84	30.07	74.00	-43.93	peak	P
2	4874.000	68.71	-48.84	19.87	54.00	-34.13	AV	P
3	7311.000	76.51	-46.90	29.61	74.00	-44.39	peak	P
4	7311.000	65.81	-46.90	18.91	54.00	-35.09	AV	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4874.000	78.76	-48.84	29.92	74.00	-44.08	peak	P
2	4874.000	68.37	-48.84	19.53	54.00	-34.47	AV	P
3	7311.000	76.23	-46.90	29.33	74.00	-44.67	peak	P
4	7311.000	65.92	-46.90	19.02	54.00	-34.98	AV	P



TM1 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4904.000	78.87	-48.82	30.05	74.00	-43.95	peak	P
2	4904.000	68.15	-48.82	19.33	54.00	-34.67	AV	P
3	7356.000	75.11	-46.84	28.27	74.00	-45.73	peak	P
4	7356.000	65.52	-46.84	18.67	54.00	-35.33	AV	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4904.000	78.53	-48.82	29.70	74.00	-44.30	peak	P
2	4904.000	67.79	-48.82	18.97	54.00	-35.03	AV	P
3	7356.000	75.52	-46.84	28.68	74.00	-45.32	peak	P
4	7356.000	65.59	-46.84	18.75	54.00	-35.25	AV	P

Note: Margin=Level-Limit=Reading+factor-Limit

7 Test Setup Photos

Please refer to the Appendix I Test Setup Photos

8 EUT Constructional Details (EUT Photos)

Please refer to the Appendix II External Photos & Appendix III External Photos



Test Report Number: BTF250402R00801



BTF Testing Lab (Shenzhen) Co., Ltd.

101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict,
Bao'an District, Shenzhen, China

www.btf-lab.com

-- END OF REPORT --