



EMC TEST REPORT

Product Name: High Precision GNSS Receiver

Model Name: T40, T40Pro

FCC ID: 2BCUE-T40

Issued For : Guangzhou Toksurvey Information Technology Co., Ltd

No.9 Caipin Road, Building B, Room 801-6, Huangpu District
Guangzhou, China

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan
District, Shenzhen, Guangdong, China

Report Number: LGT25H161EM03

Sample Received Date: Aug. 20, 2025

Date of Test: Aug. 20, 2025 ~ Sep. 12, 2025

Date of Issue: Sep. 12, 2025

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: Guangzhou Toksurvey Information Technology Co., Ltd
Address: No.9 Caipin Road, Building B, Room 801-6, Huangpu District
Guangzhou, China
Manufacturer: Guangzhou Toksurvey Information Technology Co., Ltd
Address: No.9 Caipin Road, Building B, Room 801-6, Huangpu District
Guangzhou, China
Product Name: High Precision GNSS Receiver
Trademark: TOKNAV
Model Name: T40
Series Model: T40Pro
Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR Part 15 Subpart B ANSI C63.4-2014	PASS

Prepared by:

Terry Zhao

Terry Zhao
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents

1. TEST SUMMARY	5
1.1 TEST LABORATORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	8
2.3 DESCRIPTION OF THE SUPPORT UNITS	8
2.4 MEASUREMENT INSTRUMENTS LIST	9
3. EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.2 RADIATED EMISSION MEASUREMENT	18
APPENDIX I - TEST SETUP	24
APPENDIX II - PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	26



Revision History

Rev.	Issue Date	Revisions
00	Sep. 12, 2025	Initial Issue



1. TEST SUMMARY

EMC Emission				
Standard	Test Item	Limit	Judgement	Remark
FCC 47 CFR Part 15 Subpart B ANSI C63.4-2014	Conducted Emissions	Class B	PASS	
	Radiated Emissions Below 1GHz	Class B	PASS	
	Radiated Emissions Above 1GHz	Class B	PASS	Note 2

Note:

- 1 "N/A" denotes test is not applicable in this Test Report
- 2 If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is less.



1.1 TEST LABORATORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

Test Item	Measurement Frequency Range MHz	Uncertainty dB
Conducted Emissions at AC mains power port	0.009 ~ 30	2.80
Radiated Emissions	0.009 ~ 30	2.16
Radiated Emissions	30 ~ 1000	4.61
Radiated Emissions	1000 ~ 18000	5.49
Note: 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. 2. The measurement uncertainty is not included in the test result.		



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	High Precision GNSS Receiver
Trademark:	TOKNAV
Test Model Name:	T40
Series Model:	T40Pro
Model Difference:	T40 has AR module, laser module, laser camera, T40Pro has AR module, camera.
Adapter:	Input: AC 100-240V 50/60Hz 0.7A Max Output: DC 12V 2A 24.0W Battery Charger: Input: DC 9-12V Output: DC 8.4V 1.5A
Battery:	Capacity: 3400mAh Rated Voltage: 7.2V
Test Voltage:	AC 120V/60Hz for adapter Battery: 7.2V
Hardware Version:	T86R-PCBA.1.1.250410
Software Version:	T86-FMW3.2.635.2507.2767
Connecting I/O Port(s):	Please refer to the Note 1.

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operating mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Mode	Description
Mode 1	Charging+GSM link+BT+Wi-Fi+GPS+NFC+Camera recording
Mode 2	Charging+WCDMA link+BT+Wi-Fi+GPS+NFC+Camera recording
Mode 3	Charging+LTE link+BT+Wi-Fi+GPS+NFC+Camera recording
Mode 4	Battery Charging

Note: Only the data of worst-case was recorded in this report.

2.3 DESCRIPTION OF THE SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
Adapter	N/A	DYS824-120200W-2	N/A	Input: 100-240V 50/60Hz 0.7A Output: 12V, 2A
Antenna	N/A	N/A	N/A	N/A
Battery Charger	N/A	SNLC-S8415-V1.0	N/A	Input: DC 9-12V Output: 8.4V, 1.5A

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Adapter	ASUS	A20045	N/A	Input: 100-240V ~ 50/60Hz 1.6A Output: 5V3A or 9V3A or 12V3A or 15V5A or 20V4.5A
USB-A to USB-C Cable	UGREEN	US287	N/A	1.5m, shielded, without ferrite core

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” means “with core”; “NO” means “without core”.



2.4 MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2025.03.06	2026.03.05
LISN	COM-POWER	LI-115	02032	2025.03.05	2026.03.04
LISN	SCHWARZBECK	NNLK 8122	00160	2025.03.05	2026.03.04
LISN	EMTRACE	PWL-50-3200	00317	2025.03.05	2026.03.04
LISN	EMTRACE	PVDC-150R-200	00353	2025.03.12	2026.03.11
ISN	FCC	T4-02	91317	2025.03.05	2026.03.04
ISN	SCHWARZBECK	NTFM 8158	00303	2025.03.05	2026.03.04
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2025.03.05	2026.03.04
Temperature & Humidity	BT-3	JINGCHUAN G	N.A	2025.03.10	2026.03.09
Testing Software	SKET	EMC-I	V1.4.0.3	N/A	N/A
Radiated Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2025.03.06	2026.03.05
Spectrum Analyzer	Keysight	N9020A	MY50530994	2025.03.05	2026.03.04
Spectrum Analyzer	Keysight	N9010B	MY60242508	2025.03.05	2026.03.04
Active loop Antenna	ETS	6502	00049544	2025.03.11	2028.03.10
Trilog Broadband Antenna	SCHWARZBECK	VULB 9168	01447	2024.05.17	2027.05.16
Horn Antenna	SCHWARZBECK	3115	10SL0060	2025.03.10	2028.03.09
Pre-amplifier (9kHz-1GHz)	EMtrace	RP01A	02017	2025.03.06	2026.03.05
Pre-amplifier (1-26.5G)	Agilent	8449B	3008A4722	2025.03.06	2026.03.05
Temperature & Humidity	BT-3	JINGCHUAN G	N.A	2025.03.10	2026.03.09
Testing Software	SKET	EMC-I	V1.4.0.3	N/A	N/A



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS

FREQUENCY (MHz)	Conducted Emission Limits (dBuV)			
	Class A		Class B	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.5 ~ 5	73.00	60.00	56.00	46.00
5 ~ 30	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor
Margin Level = Measurement Value - Limit Value


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT Test Photos.


3.1.3 TEST SETUP

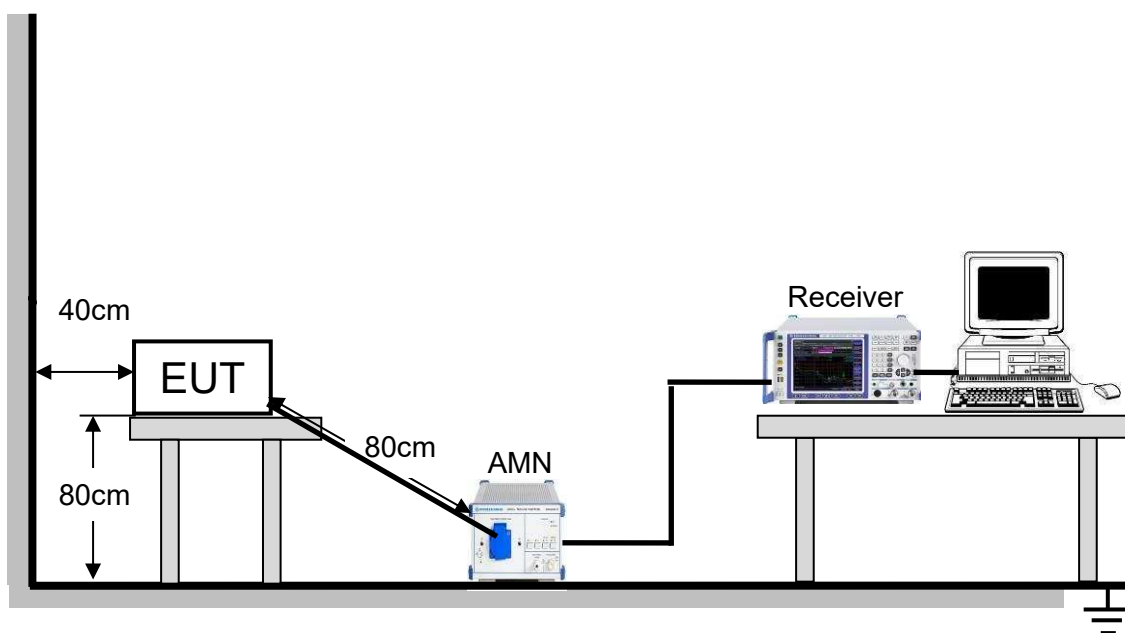



3.1.4 TEST RESULTS


Project: LGT25H161	Test Engineer: LiuH
EUT: High Precision GNSS Receiver	Temperature: 25.8°C
M/N: T40	Humidity: 49%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-08-25
Test Mode: Battery Charging	
Note:	

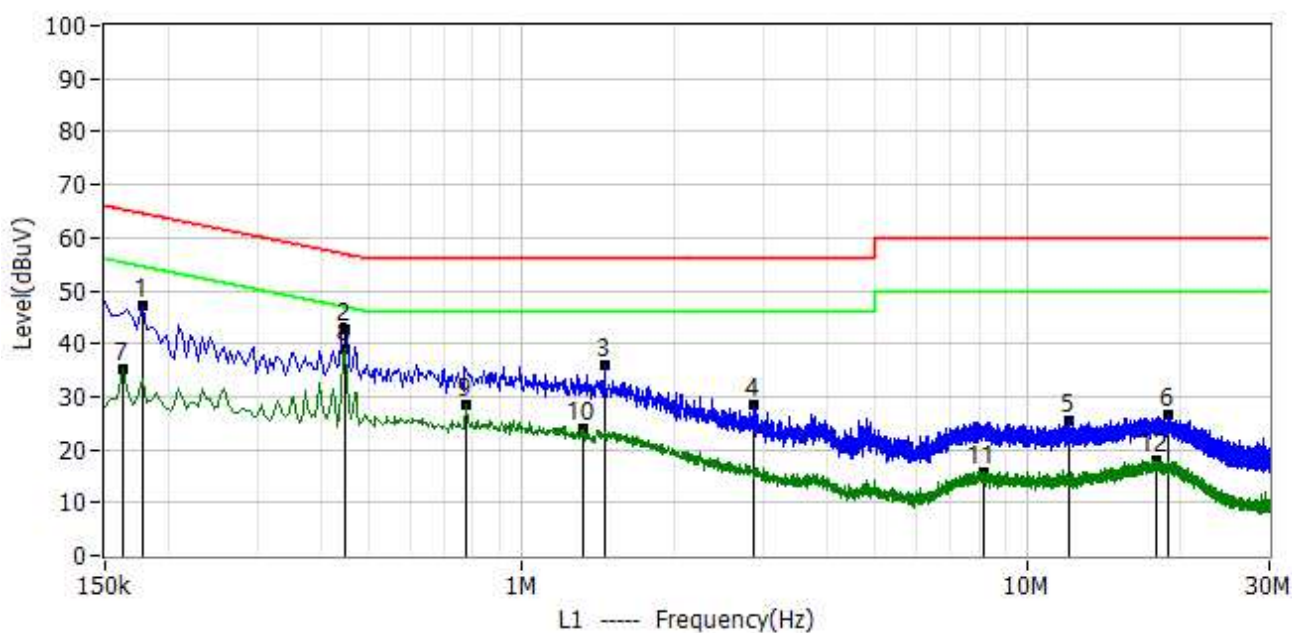

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.178	36.68	10.66	47.34	64.58	-17.24	QP	L1
2*	0.446	31.83	10.89	42.72	56.95	-14.22	QP	L1
3*	1.458	24.79	11.13	35.92	56.00	-20.08	QP	L1
4*	2.870	17.07	11.29	28.36	56.00	-27.64	QP	L1
5*	12.090	13.70	11.59	25.29	60.00	-34.71	QP	L1
6*	18.890	14.69	11.81	26.50	60.00	-33.50	QP	L1
7*	0.162	24.49	10.71	35.20	55.36	-20.16	AV	L1
8*	0.446	28.07	10.89	38.96	46.95	-7.99	AV	L1
9*	0.778	17.74	10.87	28.61	46.00	-17.39	AV	L1
10*	1.318	12.88	11.07	23.95	46.00	-22.05	AV	L1
11*	8.162	4.33	11.44	15.77	50.00	-34.23	AV	L1
12*	17.990	6.33	11.79	18.12	50.00	-31.88	AV	L1




Project: LGT25H161	Test Engineer: LiuH
EUT: High Precision GNSS Receiver	Temperature: 25.8°C
M/N: T40	Humidity: 49%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-08-25
Test Mode: Battery Charging	
Note:	

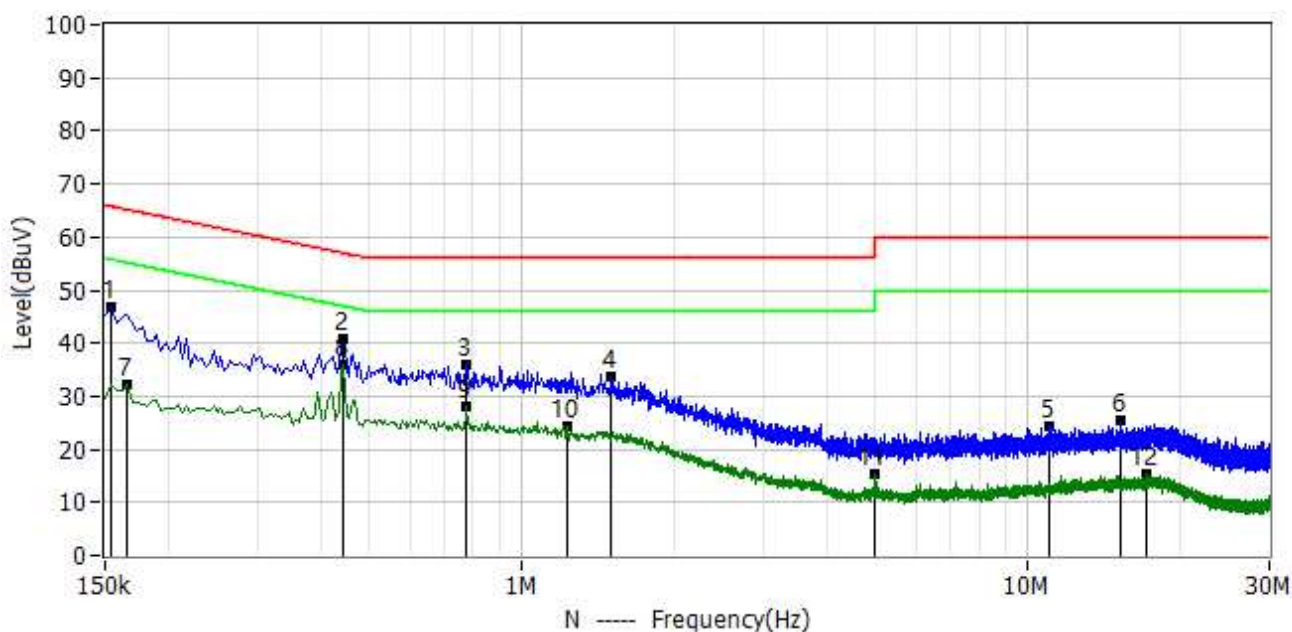

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.154	36.18	10.70	46.88	65.78	-18.90	QP	N
2*	0.442	30.09	10.83	40.92	57.02	-16.10	QP	N
3*	0.774	24.95	10.83	35.78	56.00	-20.22	QP	N
4*	1.498	22.64	11.10	33.74	56.00	-22.26	QP	N
5*	10.970	12.84	11.53	24.37	60.00	-35.63	QP	N
6*	15.230	13.63	11.66	25.29	60.00	-34.71	QP	N
7*	0.166	21.69	10.64	32.33	55.16	-22.83	AV	N
8*	0.442	25.02	10.83	35.85	47.02	-11.17	AV	N
9*	0.778	17.28	10.83	28.11	46.00	-17.89	AV	N
10*	1.230	13.42	10.95	24.37	46.00	-21.63	AV	N
11*	4.998	4.08	11.31	15.39	46.00	-30.61	AV	N
12*	17.218	3.48	11.71	15.19	50.00	-34.81	AV	N




Project: LGT25H161	Test Engineer: LiuH
EUT: High Precision GNSS Receiver	Temperature: 25.8°C
M/N: T40	Humidity: 49%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-08-25
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+NFC+Camera recording	
Note:	

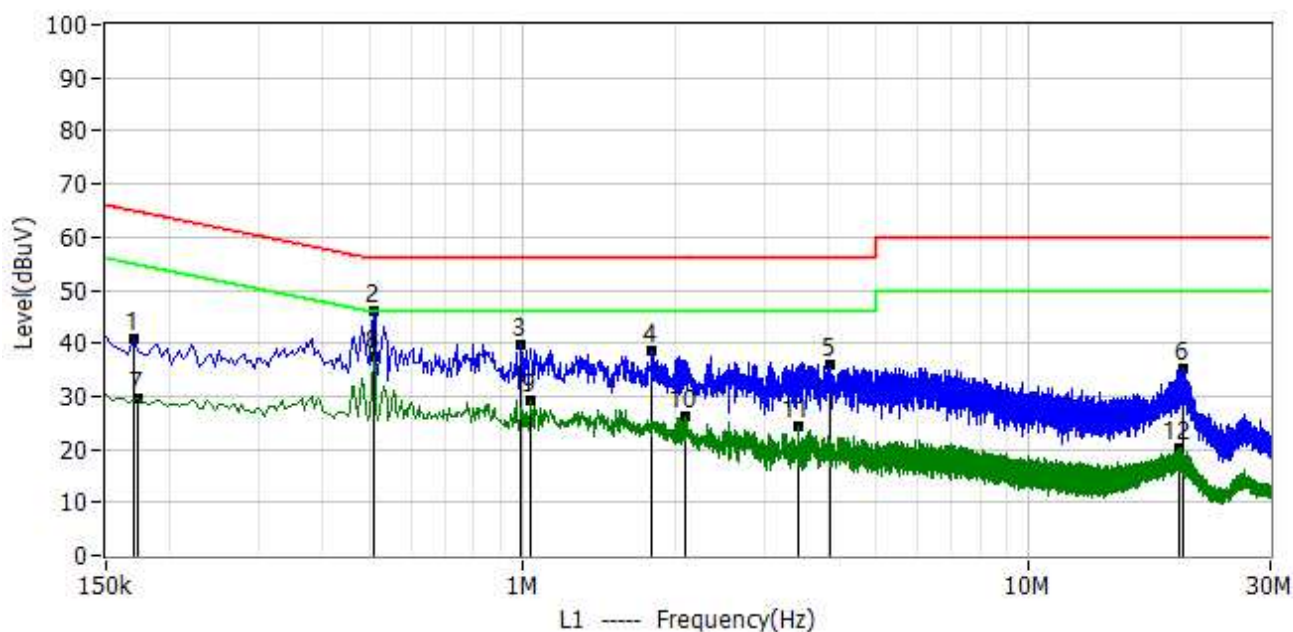

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.170	30.34	10.63	40.97	64.96	-23.99	QP	L1
2*	0.506	35.13	10.93	46.06	56.00	-9.94	QP	L1
3*	0.990	28.96	10.83	39.79	56.00	-16.21	QP	L1
4*	1.802	27.46	11.11	38.57	56.00	-17.43	QP	L1
5*	4.038	24.90	11.23	36.13	56.00	-19.87	QP	L1
6*	20.202	23.21	11.84	35.05	60.00	-24.95	QP	L1
7*	0.174	18.94	10.65	29.59	54.77	-25.17	AV	L1
8*	0.506	26.42	10.93	37.35	46.00	-8.65	AV	L1
9*	1.038	18.29	10.86	29.15	46.00	-16.85	AV	L1
10*	2.102	14.97	11.10	26.07	46.00	-19.93	AV	L1
11*	3.502	13.13	11.28	24.41	46.00	-21.59	AV	L1
12*	19.798	8.32	11.84	20.16	50.00	-29.84	AV	L1




Project: LGT25H161	Test Engineer: LiuH
EUT: High Precision GNSS Receiver	Temperature: 25.8°C
M/N: T40	Humidity: 49%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-08-25
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+NFC+Camera recording	
Note:	

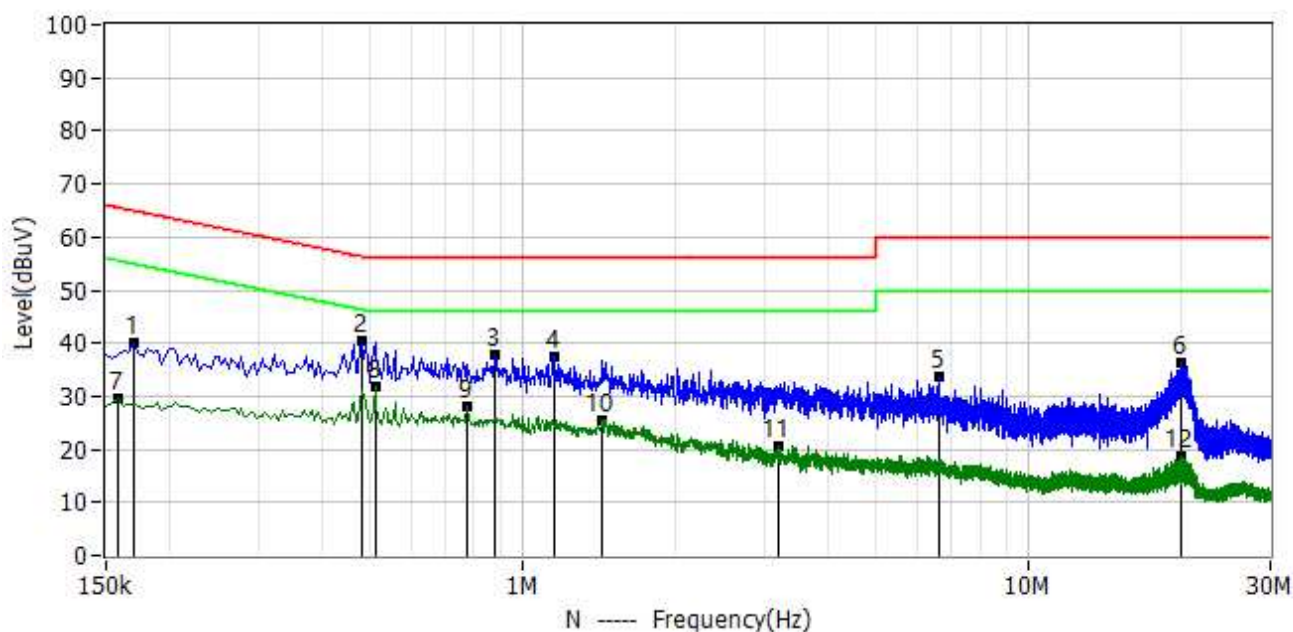

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.170	29.30	10.62	39.92	64.96	-25.04	QP	N
2*	0.482	29.55	10.83	40.38	56.30	-15.92	QP	N
3*	0.882	27.10	10.84	37.94	56.00	-18.06	QP	N
4*	1.150	26.58	10.91	37.49	56.00	-18.51	QP	N
5*	6.650	22.40	11.39	33.79	60.00	-26.21	QP	N
6*	19.958	24.53	11.79	36.32	60.00	-23.68	QP	N
7*	0.158	19.08	10.68	29.76	55.57	-25.81	AV	N
8*	0.510	20.93	10.84	31.77	46.00	-14.23	AV	N
9*	0.778	17.40	10.83	28.23	46.00	-17.77	AV	N
10*	1.434	14.35	11.06	25.41	46.00	-20.59	AV	N
11*	3.194	9.31	11.24	20.55	46.00	-25.45	AV	N
12*	19.958	7.09	11.79	18.88	50.00	-31.12	AV	N




Project: LGT25H161	Test Engineer: LiuH
EUT: High Precision GNSS Receiver	Temperature: 25.8°C
M/N: T40Pro	Humidity: 49%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-09-12
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+NFC+Camera recording	
Note:	

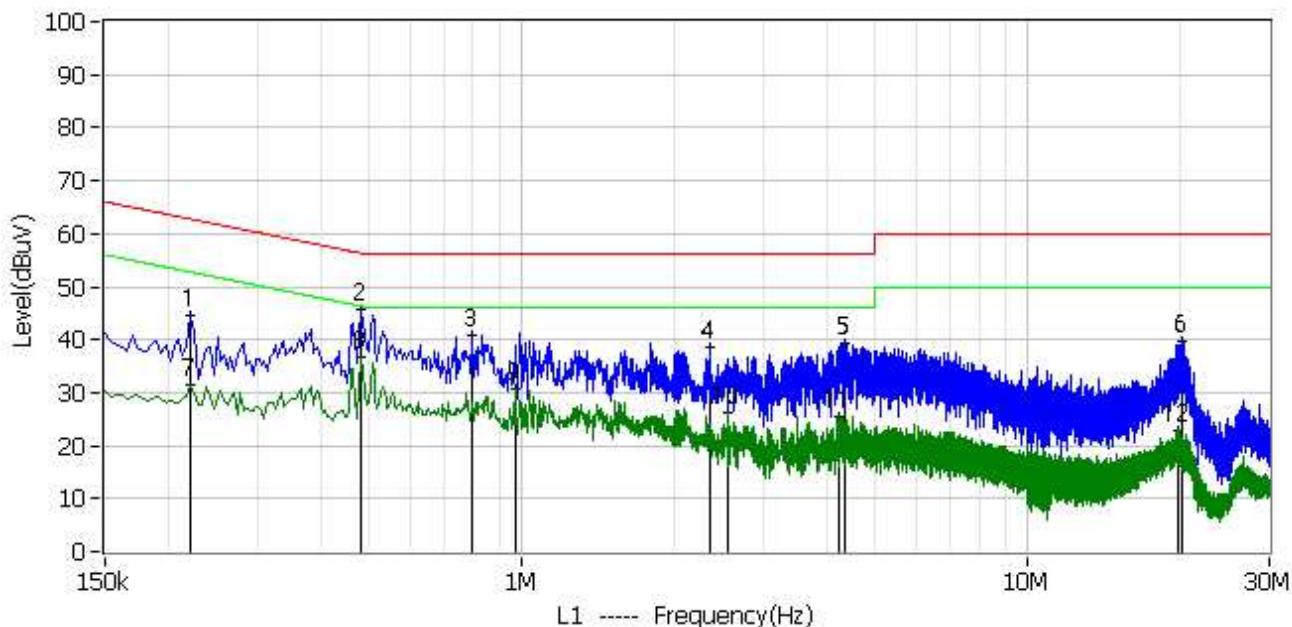

No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.222	33.84	10.75	44.59	62.74	-18.15	QP	L1
2*	0.482	34.79	10.92	45.71	56.30	-10.59	QP	L1
3*	0.798	29.91	10.88	40.79	56.00	-15.21	QP	L1
4*	2.350	27.26	11.14	38.40	56.00	-17.60	QP	L1
5*	4.350	28.12	11.26	39.38	56.00	-16.62	QP	L1
6*	20.202	27.82	11.84	39.66	60.00	-20.34	QP	L1
7*	0.222	20.61	10.75	31.36	52.74	-21.38	AV	L1
8*	0.482	25.79	10.92	36.71	46.30	-9.59	AV	L1
9*	0.970	19.82	10.84	30.66	46.00	-15.34	AV	L1
10*	2.542	14.99	11.17	26.16	46.00	-19.84	AV	L1
11*	4.242	14.07	11.25	25.32	46.00	-20.68	AV	L1
12*	19.798	10.94	11.84	22.78	50.00	-27.22	AV	L1



Project: LGT25H161	Test Engineer: LiuH
EUT: High Precision GNSS Receiver	Temperature: 25.8°C
M/N: T40Pro	Humidity: 49%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-09-12
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+NFC+Camera recording	
Note:	

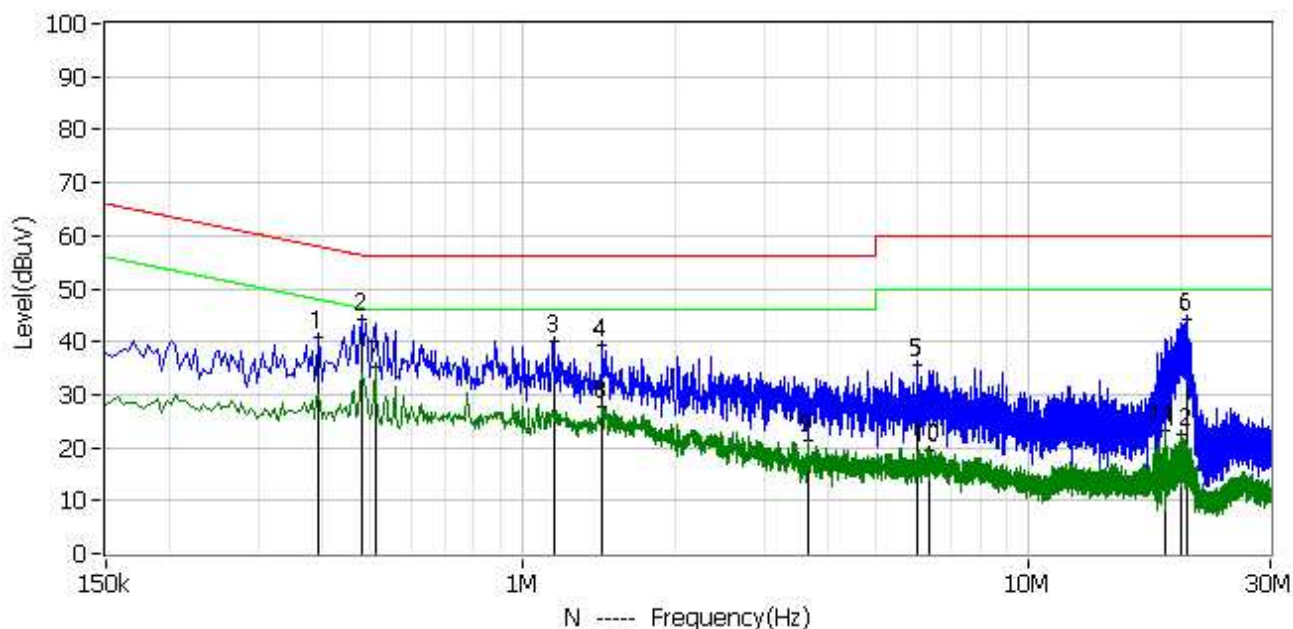

No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.394	29.83	10.82	40.65	57.98	-17.33	QP	N
2*	0.482	33.33	10.83	44.16	56.30	-12.14	QP	N
3*	1.150	29.17	10.91	40.08	56.00	-15.92	QP	N
4*	1.438	28.18	11.06	39.24	56.00	-16.76	QP	N
5*	6.030	24.22	11.36	35.58	60.00	-24.42	QP	N
6*	20.510	32.51	11.79	44.30	60.00	-15.70	QP	N
7*	0.510	24.46	10.84	35.30	46.00	-10.70	AV	N
8*	1.434	16.51	11.06	27.57	46.00	-18.43	AV	N
9*	3.666	10.26	11.26	21.52	46.00	-24.48	AV	N
10*	6.366	8.18	11.37	19.55	50.00	-30.45	AV	N
11*	18.606	11.46	11.75	23.21	50.00	-26.79	AV	N
12*	19.958	10.85	11.79	22.64	50.00	-27.36	AV	N



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS

Below 1 GHz

Frequency (MHz)	Class A	Class B
	Field strength (dBuV/m) (at 3m)	Field strength (dBuV/m) (at 3m)
30 - 88	49.5	40
88 - 216	53.9	43.5
216 - 960	56.9	46
Above 960	60	54

Above 1 GHz

Frequency (MHz)	Class A		Class B	
	Field strength (dBuV/m) (at 3m)		Field strength (dBuV/m) (at 3m)	
	Peak	Average	Peak	Average
Above 1000	80	60	74	54

Frequency Range of Radiated Disturbance Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

Note:


- (1) The limit for radiated test was performed according to FCC Part 15, Subpart B;
- (2) The tighter limit applies at the band edges;
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use),
Margin Level = Measurement Value - Limit Value.

3.2.2 TEST PROCEDURE


- a. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. EUT as the center to the edge of the auxiliary device, the distance from the maximum edge to the center of the antenna is 3 meter.
- c. The height of antenna is varied from 1 meter to 4 meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meter and the rotatable table was turned from 0 degrees to 360 degree to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.2.3 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

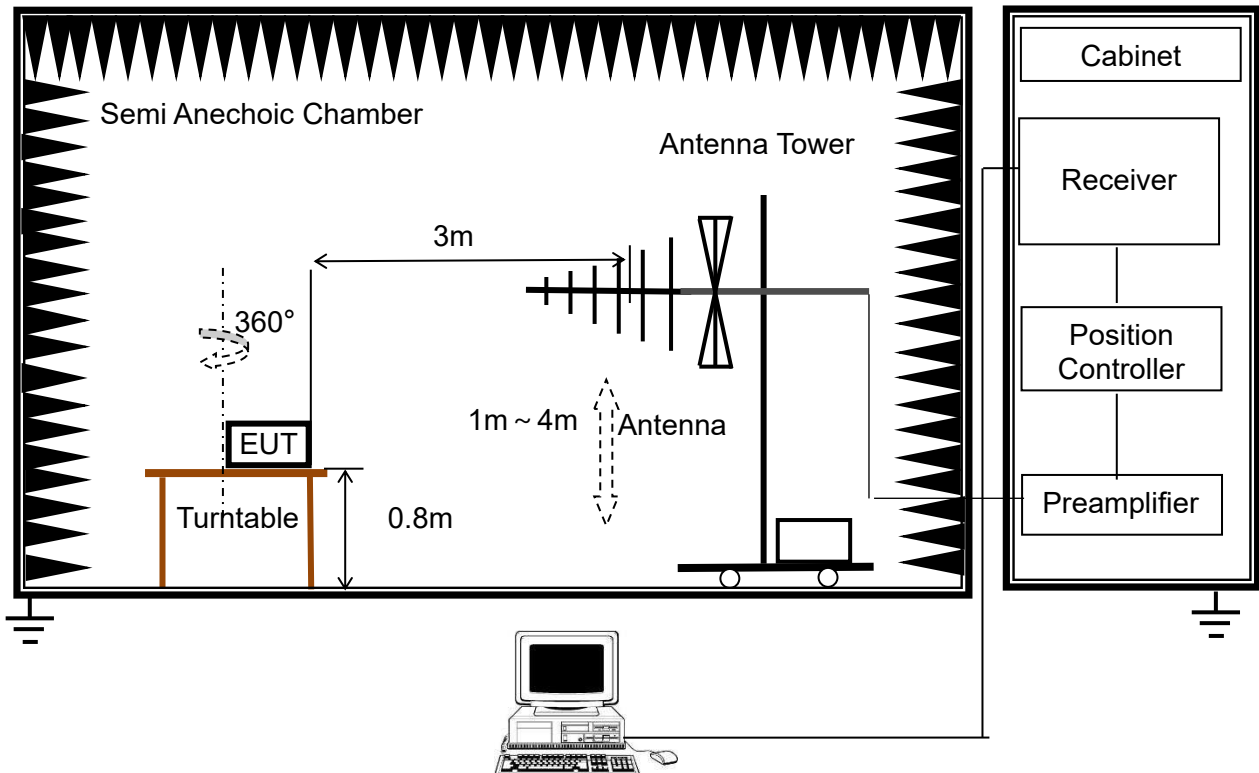

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

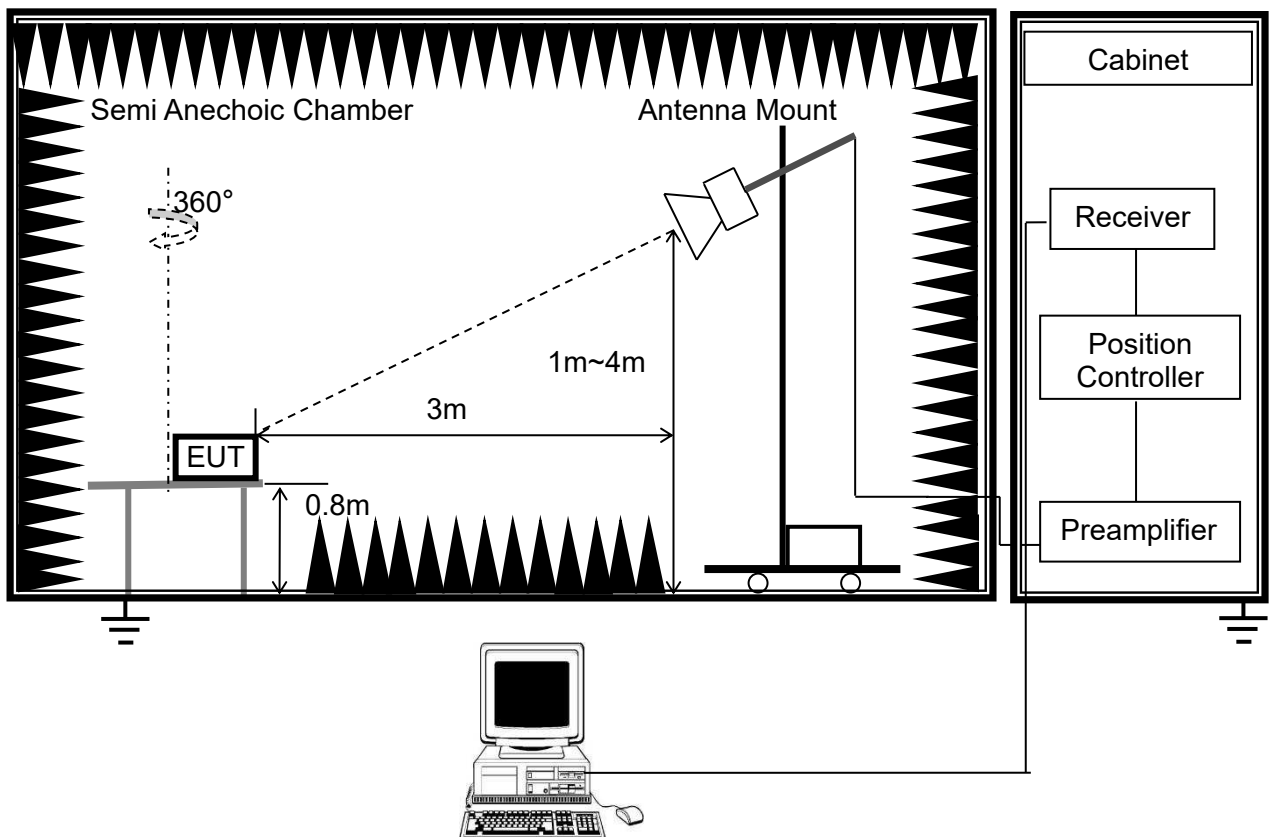





3.2.4 TEST RESULTS

BELOW 1GHZ

Project: LGT25H161	Test Engineer: LiuH
EUT: High Precision GNSS Receiver	Temperature: 24°C
M/N: T40	Humidity: 39%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-08-26
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+NFC+Camera recording	
Note:	

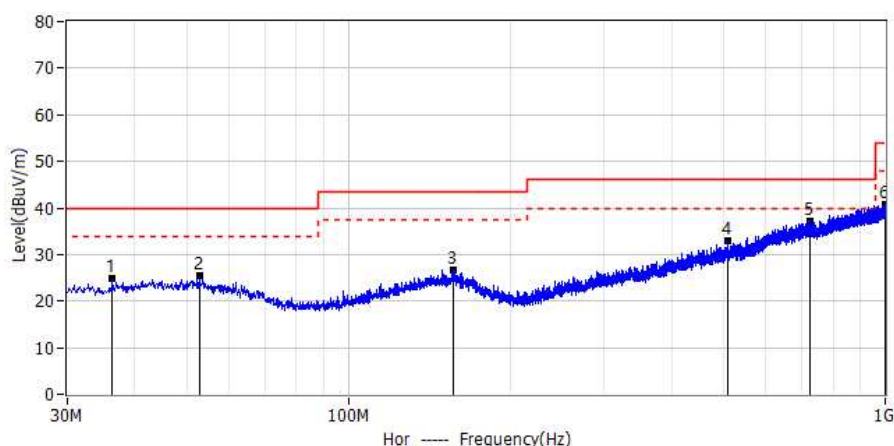


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	36.426	4.66	20.14	24.80	40.00	-15.20	QP	Hor
2*	52.916	4.37	20.95	25.32	40.00	-14.68	QP	Hor
3*	156.949	4.39	22.33	26.72	43.50	-16.78	QP	Hor
4*	509.786	5.37	27.52	32.89	46.00	-13.11	QP	Hor
5*	725.733	5.37	31.82	37.19	46.00	-8.81	QP	Hor
6*	999.758	5.37	35.25	40.62	54.00	-13.38	QP	Hor

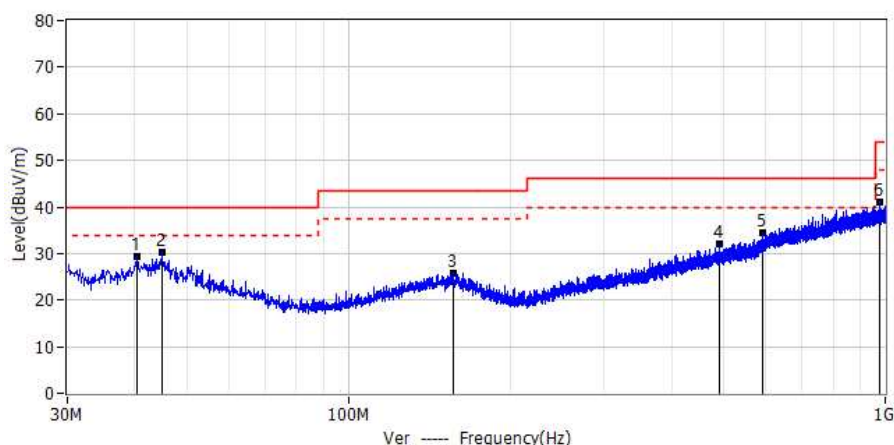


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	40.428	8.99	20.42	29.41	40.00	-10.59	PK	Ver
2*	45.035	9.57	20.70	30.27	40.00	-9.73	PK	Ver
3*	157.191	3.54	22.29	25.83	43.50	-17.67	PK	Ver
4*	489.780	5.04	27.16	32.20	46.00	-13.80	PK	Ver
5*	589.569	5.10	29.21	34.31	46.00	-11.69	PK	Ver
6*	978.175	5.86	35.06	40.92	54.00	-13.08	PK	Ver



Project: LGT25H161	Test Engineer: LiuH
EUT: High Precision GNSS Receiver	Temperature: 24°C
M/N: T40Pro	Humidity: 39%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-08-26
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+NFC+Camera recording	
Note:	

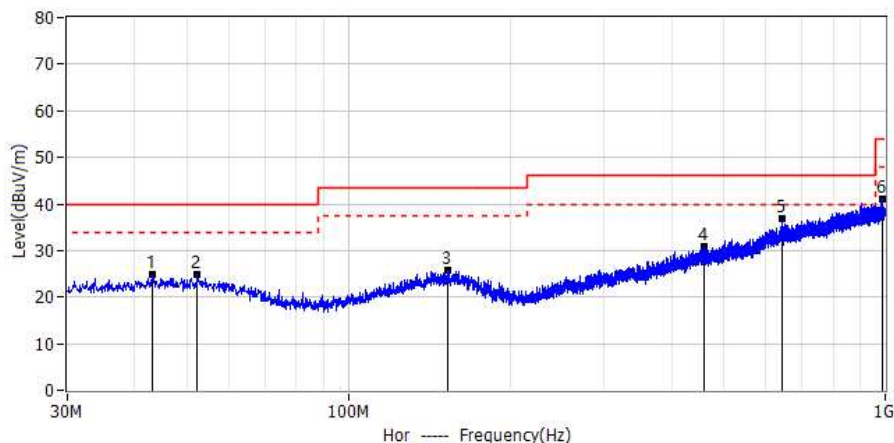

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	43.095	3.93	21.06	24.99	40.00	-15.01	QP	Hor
2*	52.431	4.03	20.80	24.83	40.00	-15.17	QP	Hor
3*	153.190	3.62	22.10	25.72	43.50	-17.78	QP	Hor
4*	459.346	4.53	26.47	31.00	46.00	-15.00	QP	Hor
5*	643.283	6.43	30.48	36.91	46.00	-9.09	QP	Hor
6*	985.935	5.54	35.42	40.96	54.00	-13.04	QP	Hor

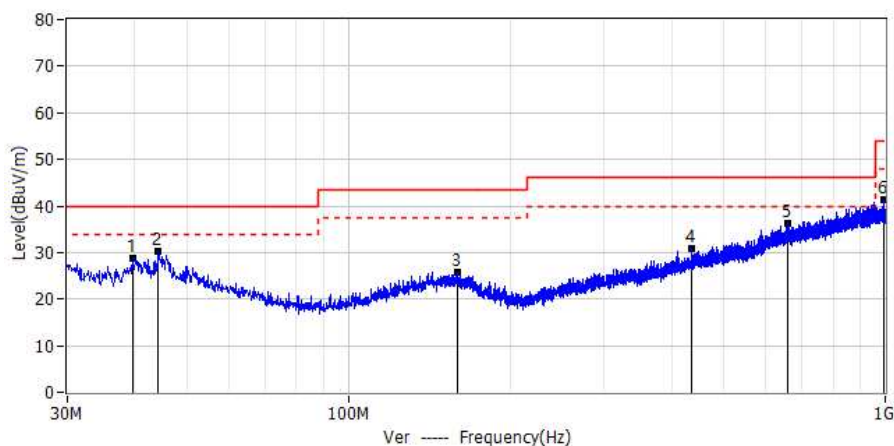


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	39.700	8.61	20.21	28.82	40.00	-11.18	QP	Ver
2*	44.308	9.47	20.90	30.37	40.00	-9.63	QP	Ver
3*	159.374	3.54	22.12	25.66	43.50	-17.84	QP	Ver
4*	436.551	4.65	26.07	30.72	46.00	-15.28	QP	Ver
5*	659.409	5.71	30.51	36.22	46.00	-9.78	QP	Ver
6*	994.544	6.19	35.04	41.23	54.00	-12.77	QP	Ver




ABOVE 1GHZ

Project: LGT25H161	Test Engineer: LiuH
EUT: High Precision GNSS Receiver	Temperature: 24°C
M/N: T40	Humidity: 39%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-08-26
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+NFC+Camera recording	
Note:	

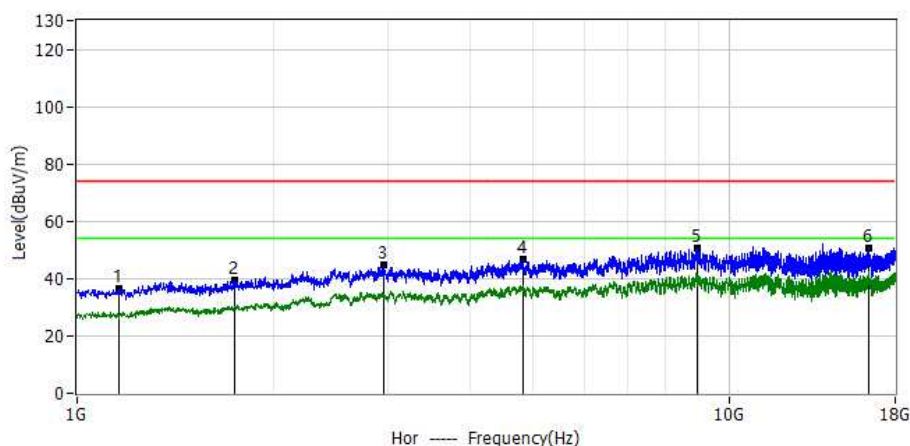


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1161.5000	59.63	-23.34	36.29	74.00	-37.71	PK	Hor
2*	1745.9000	58.36	-18.93	39.43	74.00	-34.57	PK	Hor
3*	2959.2000	53.90	-8.98	44.92	74.00	-29.08	PK	Hor
4*	4829.2000	53.60	-6.83	46.77	74.00	-27.23	PK	Hor
5*	8924.1000	54.33	-3.81	50.52	74.00	-23.48	PK	Hor
6*	16391.4000	49.79	0.77	50.56	74.00	-23.44	PK	Hor

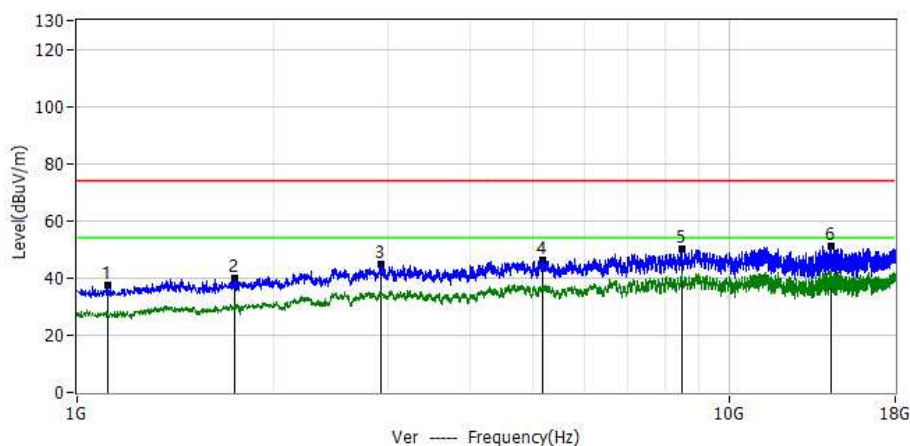


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1112.6000	61.12	-23.77	37.35	74.00	-36.65	PK	Ver
2*	1743.7000	58.72	-18.95	39.77	74.00	-34.23	PK	Ver
3*	2927.4000	54.09	-9.14	44.95	74.00	-29.05	PK	Ver
4*	5188.4000	53.75	-7.64	46.11	74.00	-27.89	PK	Ver
5*	8467.2000	54.60	-4.64	49.96	74.00	-24.04	PK	Ver
6*	14372.6000	50.49	0.72	51.21	74.00	-22.79	PK	Ver



Project: LGT25H161	Test Engineer: LiuH
EUT: High Precision GNSS Receiver	Temperature: 24°C
M/N: T40Pro	Humidity: 39%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-08-26
Test Mode: Charging+GSM link+BT+Wi-Fi+GPS+NFC+Camera recording	
Note:	

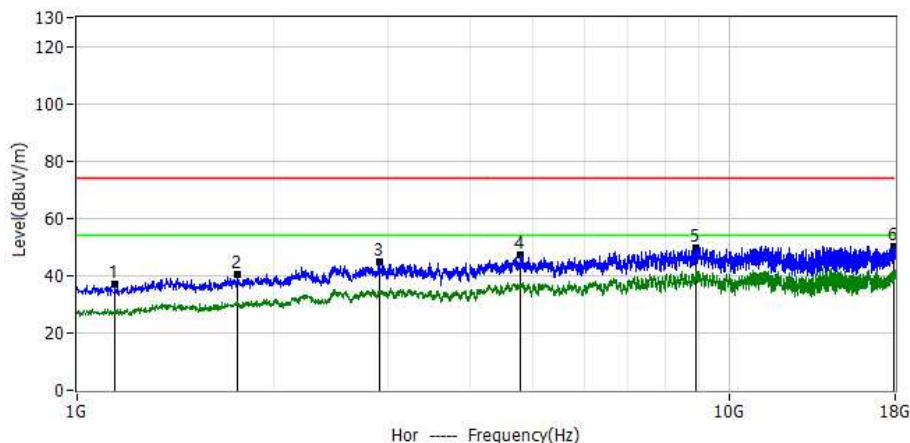


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1144.5000	60.34	-23.49	36.85	74.00	-37.15	PK	Hor
2*	1762.9000	59.01	-18.77	40.24	74.00	-33.76	PK	Hor
3*	2914.6000	53.78	-9.20	44.58	74.00	-29.42	PK	Hor
4*	4791.0000	53.94	-6.79	47.15	74.00	-26.85	PK	Hor
5*	8919.9000	53.70	-3.82	49.88	74.00	-24.12	PK	Hor
6*	17938.4000	48.37	1.99	50.36	74.00	-23.64	PK	Hor

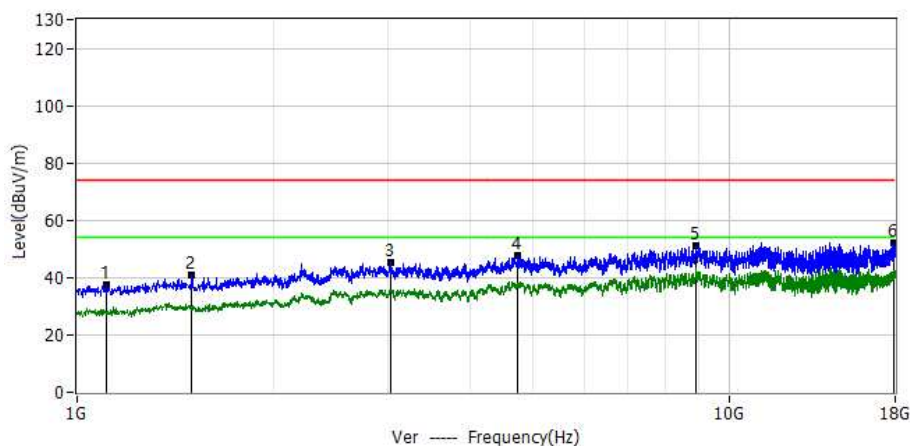

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1108.4000	61.16	-23.81	37.35	74.00	-36.65	PK	Ver
2*	1499.4000	61.63	-20.95	40.68	74.00	-33.32	PK	Ver
3*	3020.9000	54.10	-8.78	45.32	74.00	-28.68	PK	Ver
4*	4731.5000	54.23	-6.73	47.50	74.00	-26.50	PK	Ver
5*	8913.5000	54.95	-3.83	51.12	74.00	-22.88	PK	Ver
6*	17944.7000	50.10	2.00	52.10	74.00	-21.90	PK	Ver

APPENDIX I - TEST SETUP

Set-up for Conducted Emission on AC Mains (CE)

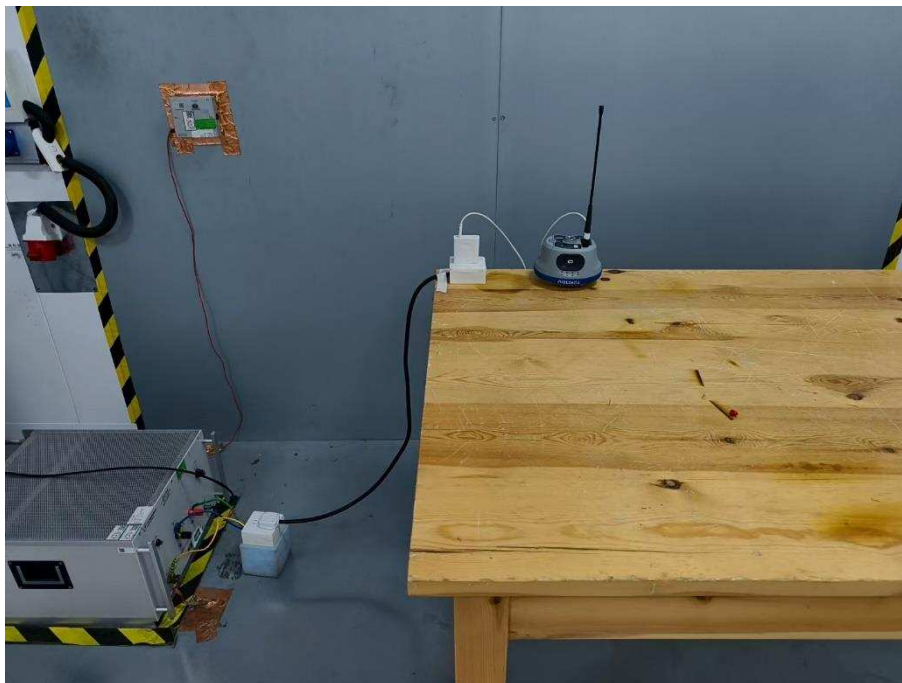

Set-up for Radiated Emission (RE), Below 1GHz



Set-up for Radiated Emission (RE), Above 1GHz



APPENDIX II - PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS

Photo 1

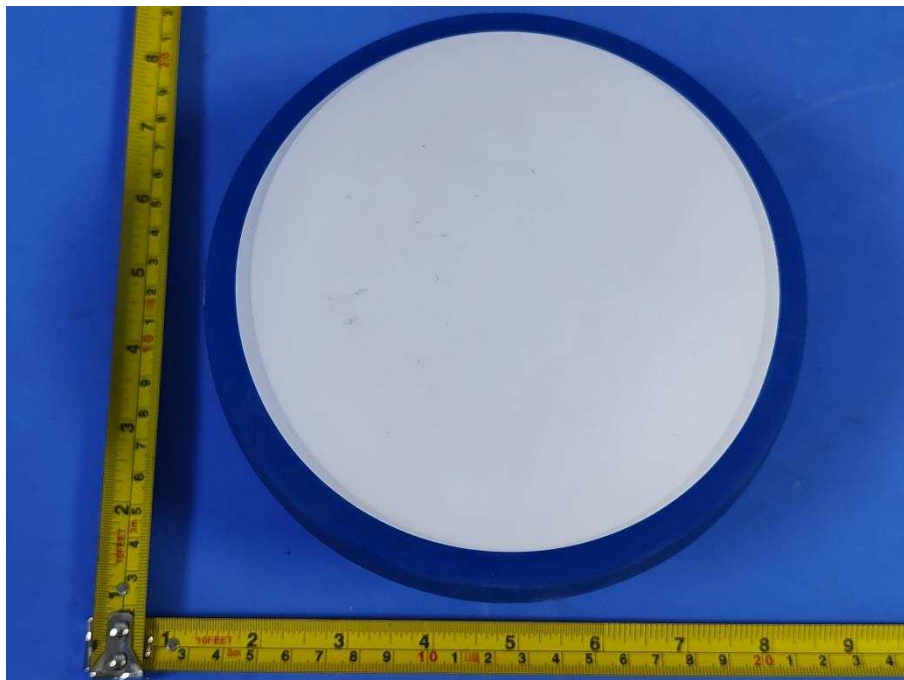


Photo 2

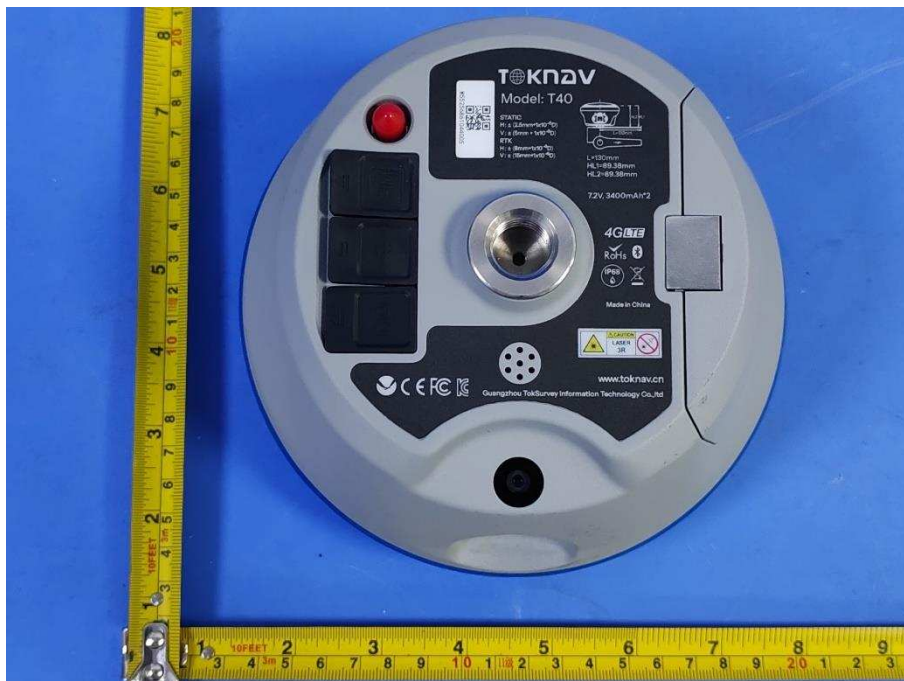


Photo 3



Photo 4



Photo 5

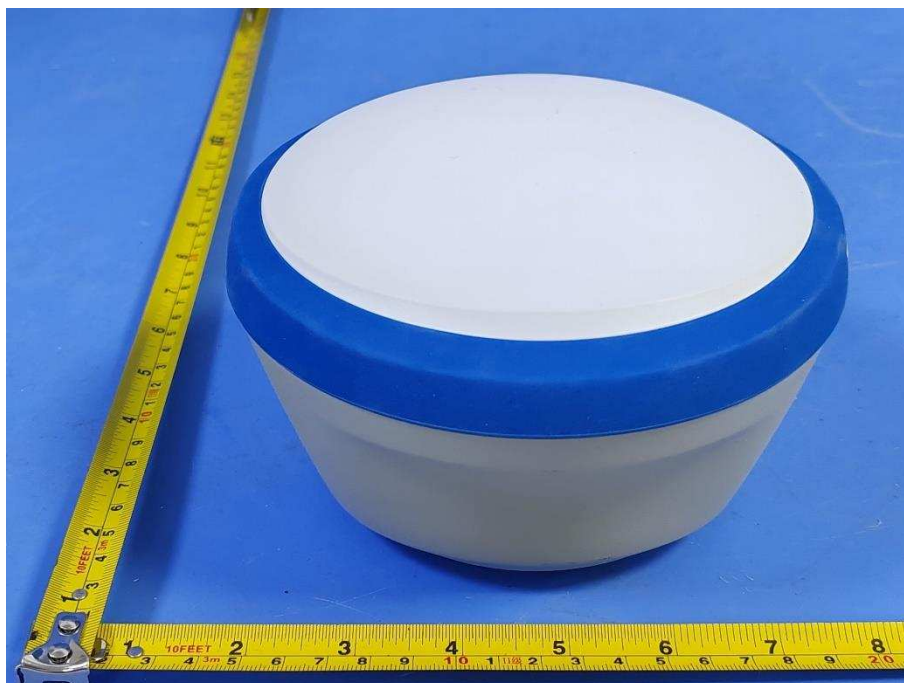


Photo 6



Photo 7



Photo 8



Photo 11

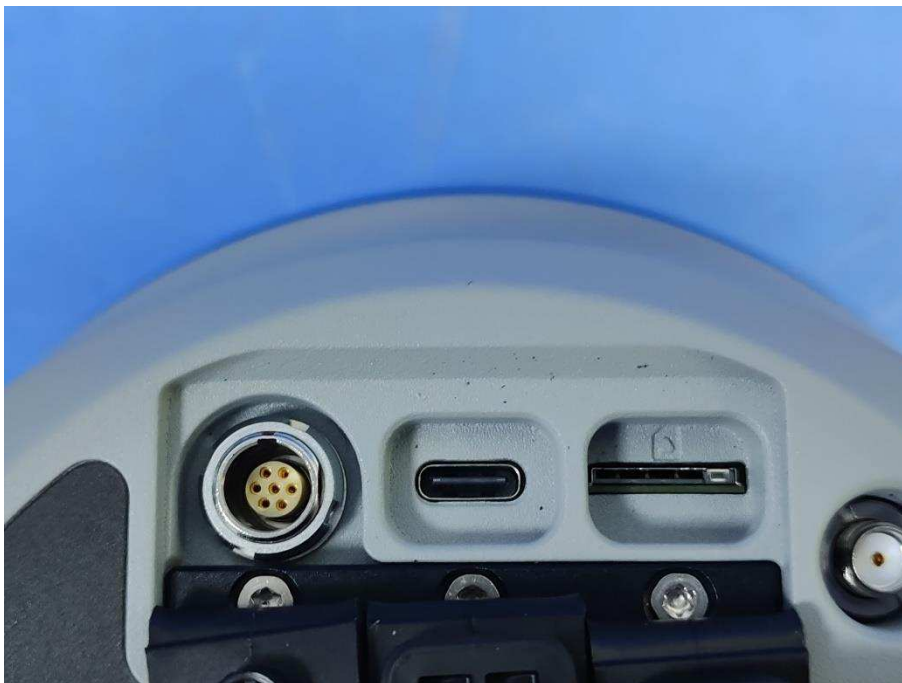


Photo 12



Photo 13



Photo 14



Photo 15



Photo 16



Photo 17



Photo 18



Photo 19



Photo 20

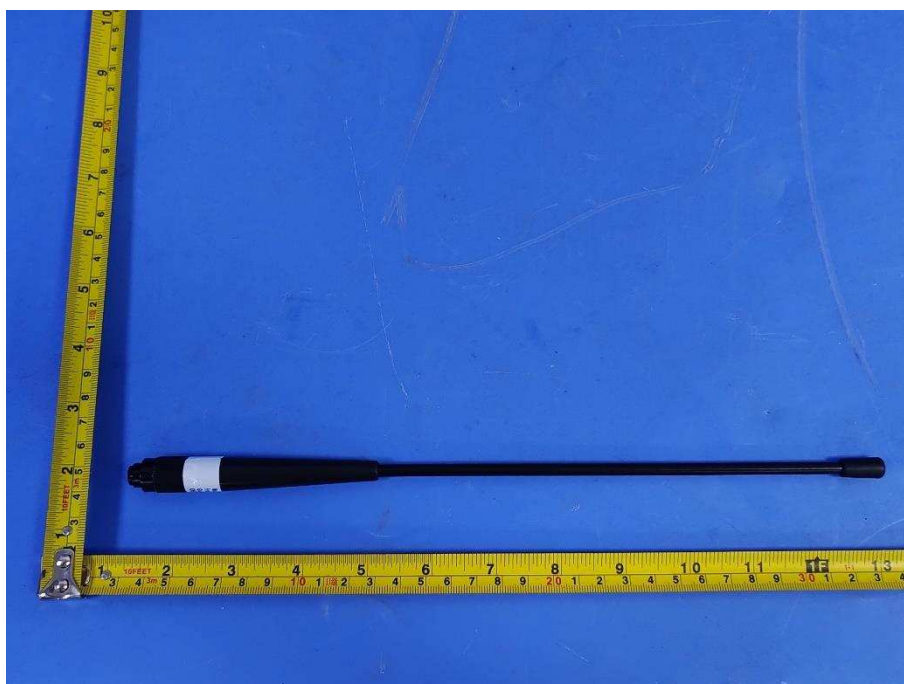


Photo 21

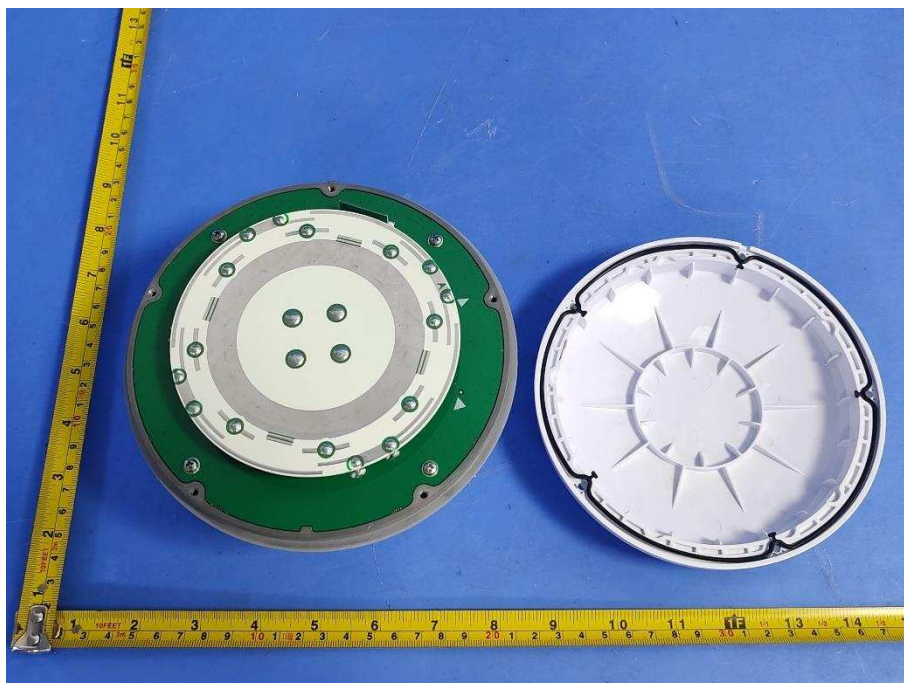


Photo 22



Photo 23

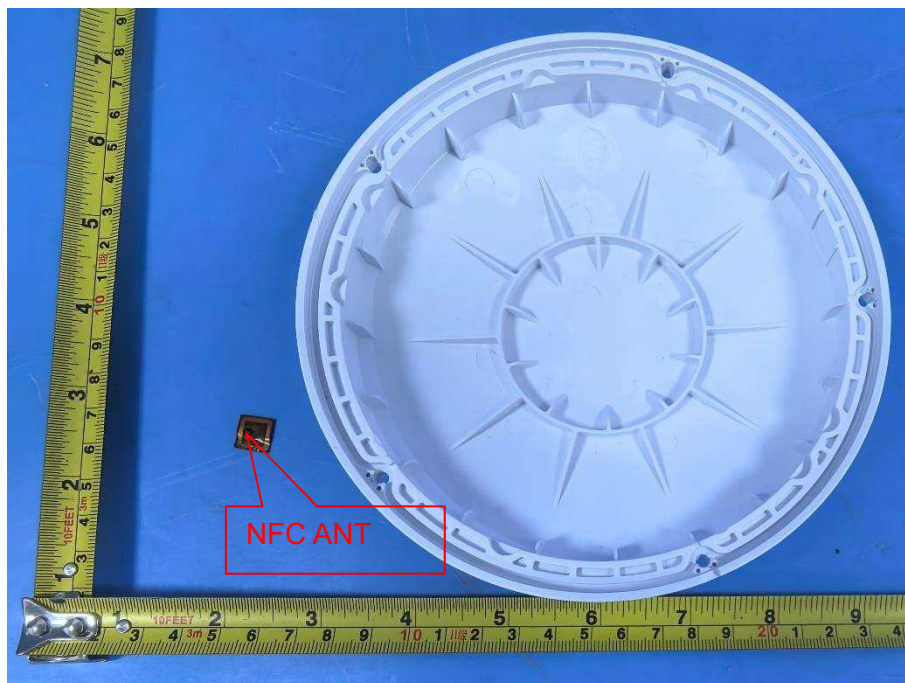


Photo 24

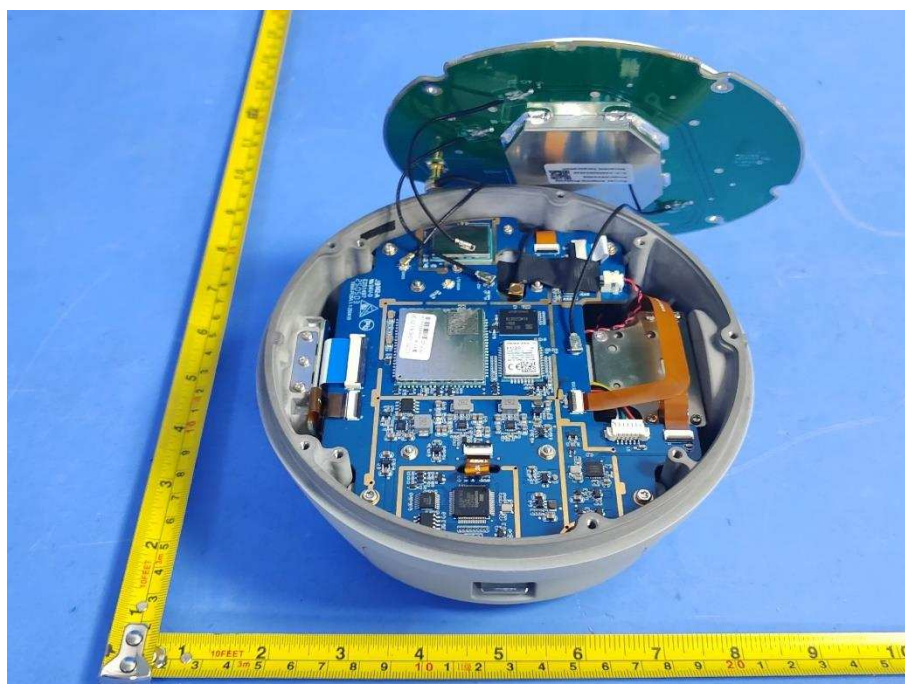


Photo 25

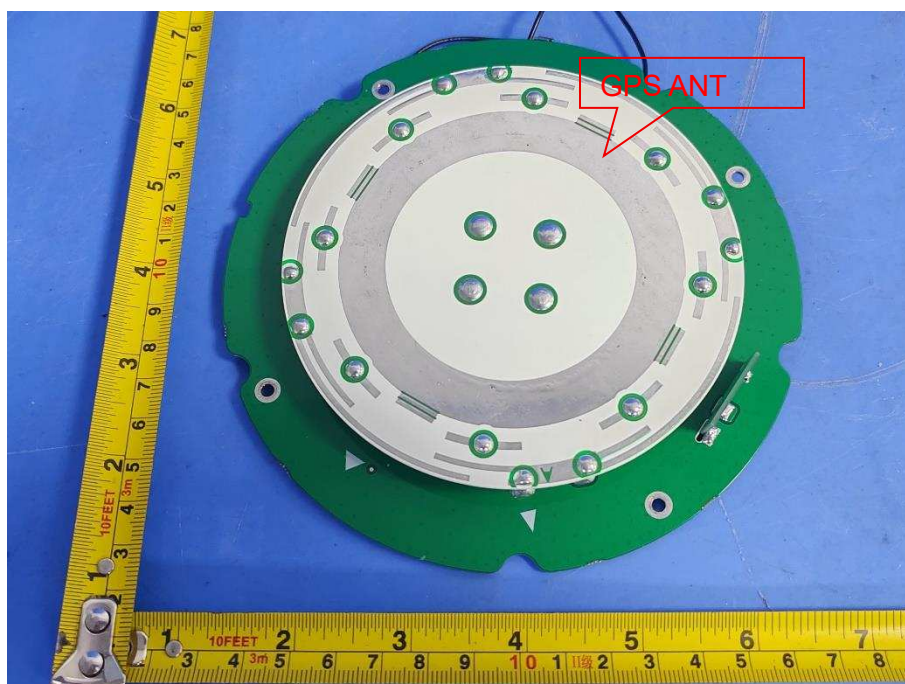


Photo 26

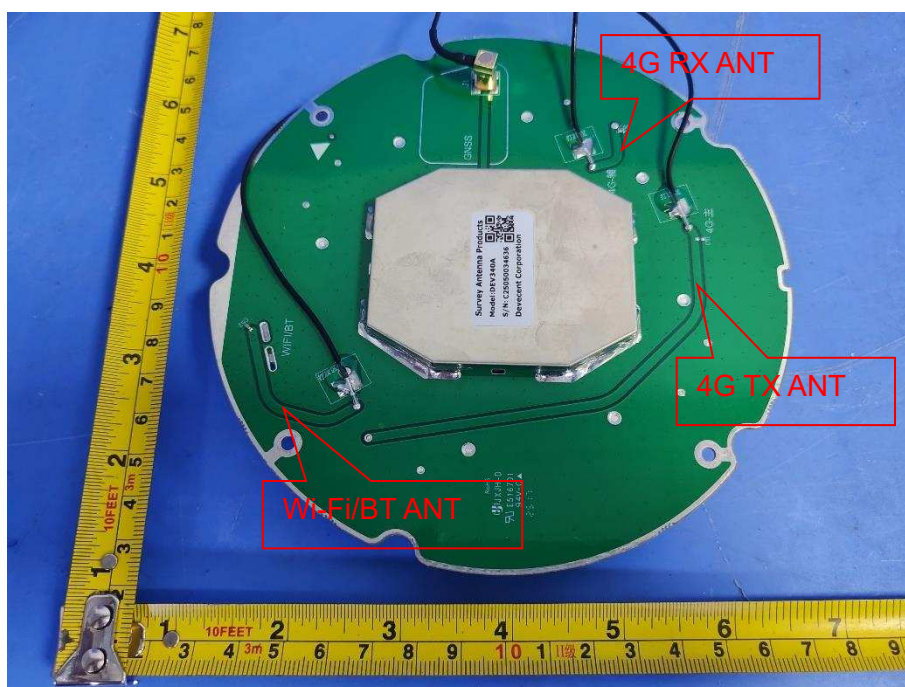


Photo 27

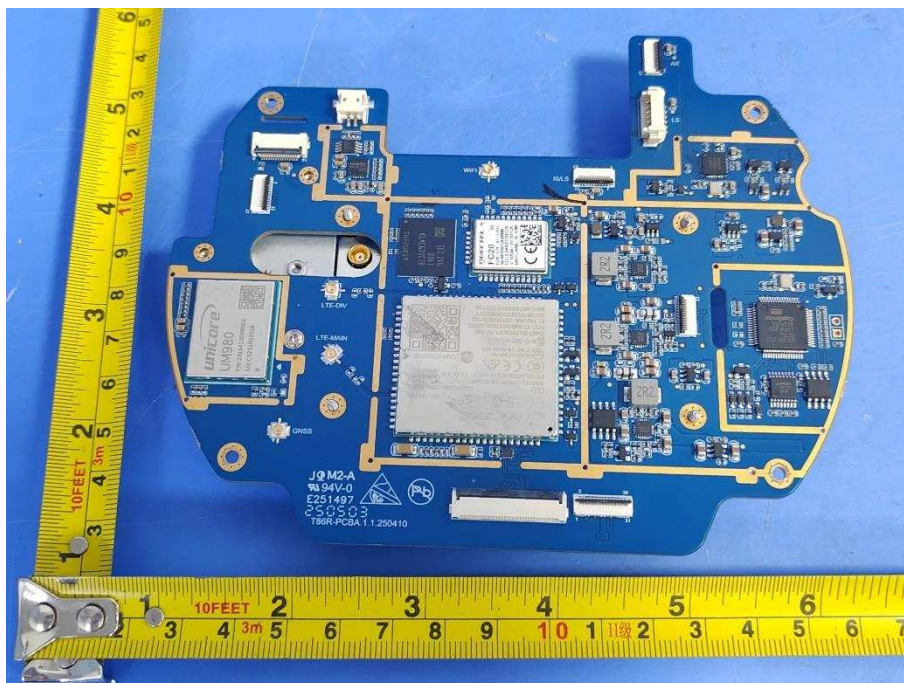


Photo 28

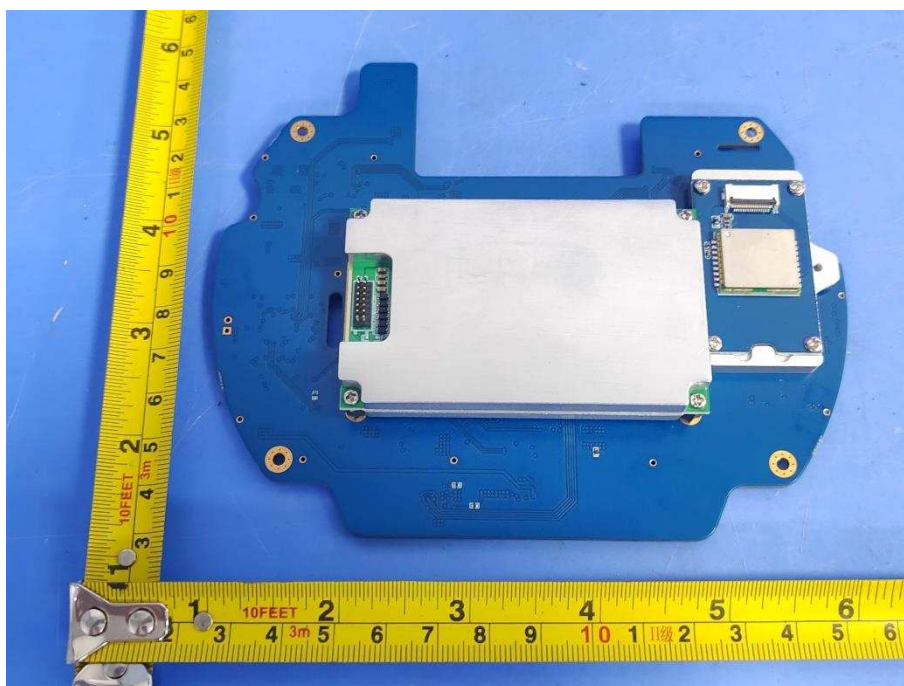


Photo 29

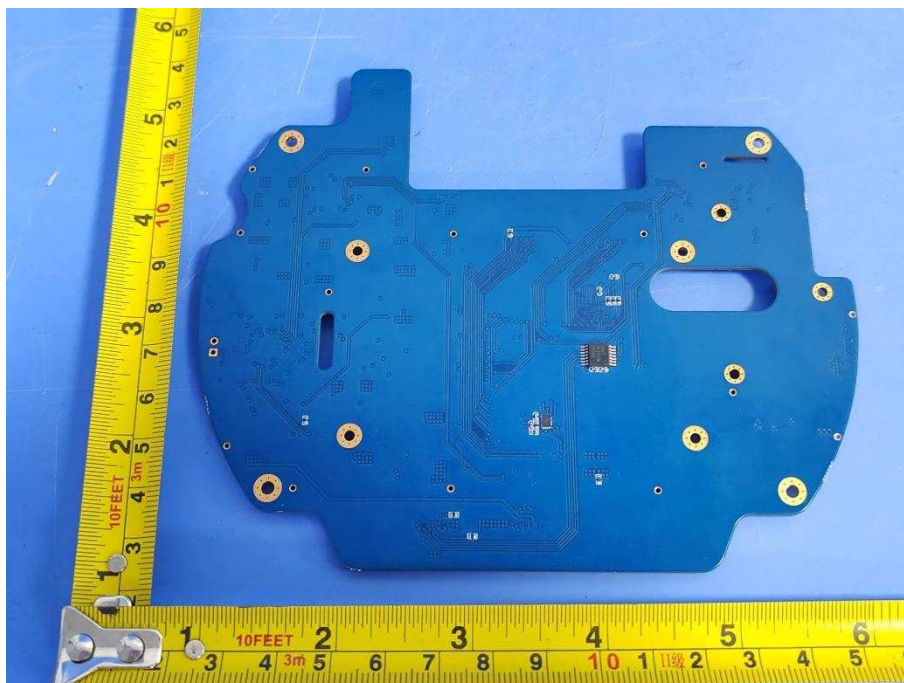


Photo 30

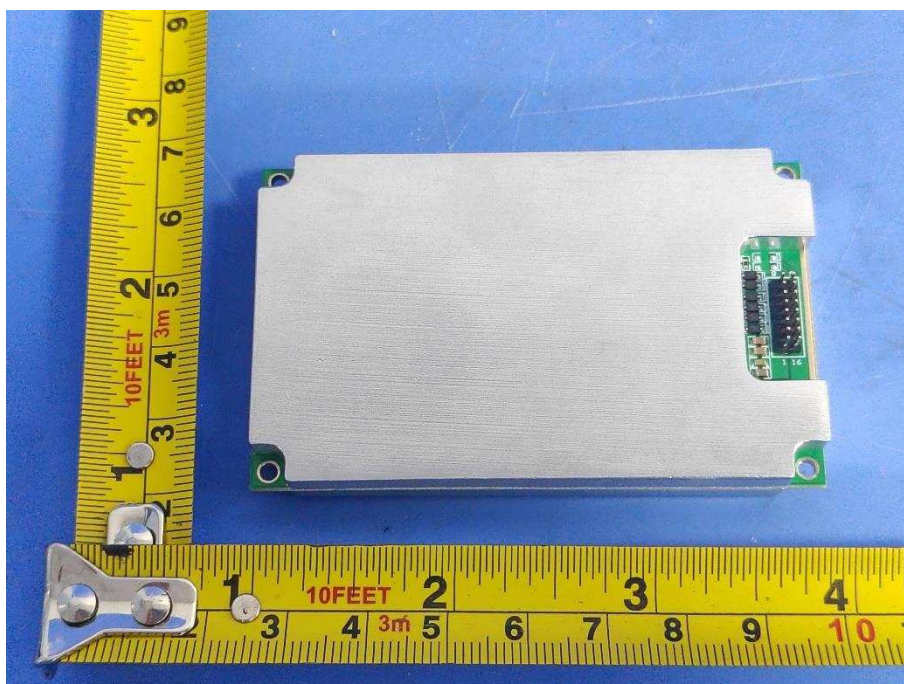


Photo 31

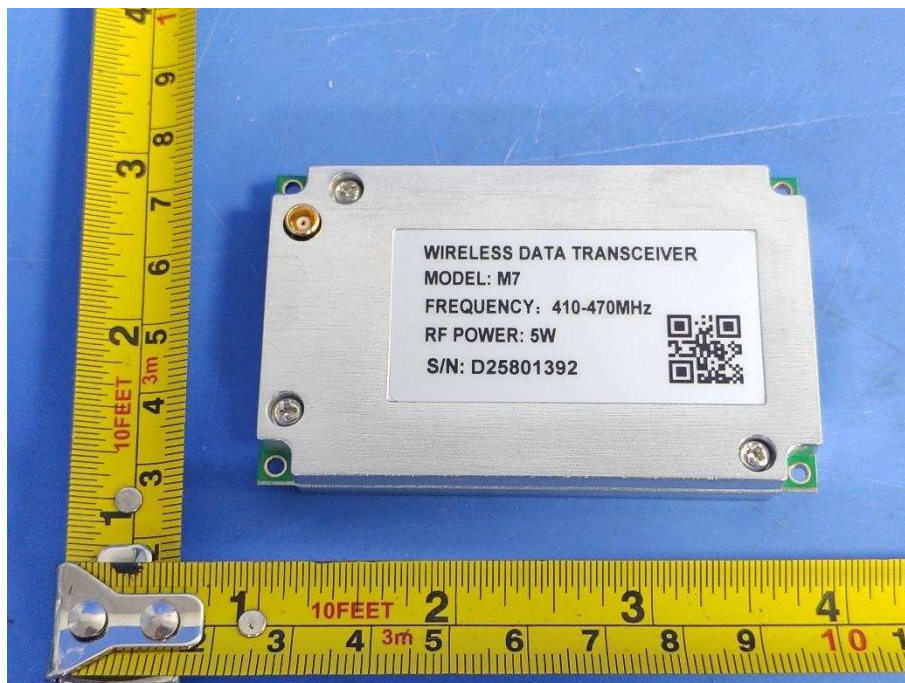


Photo 32

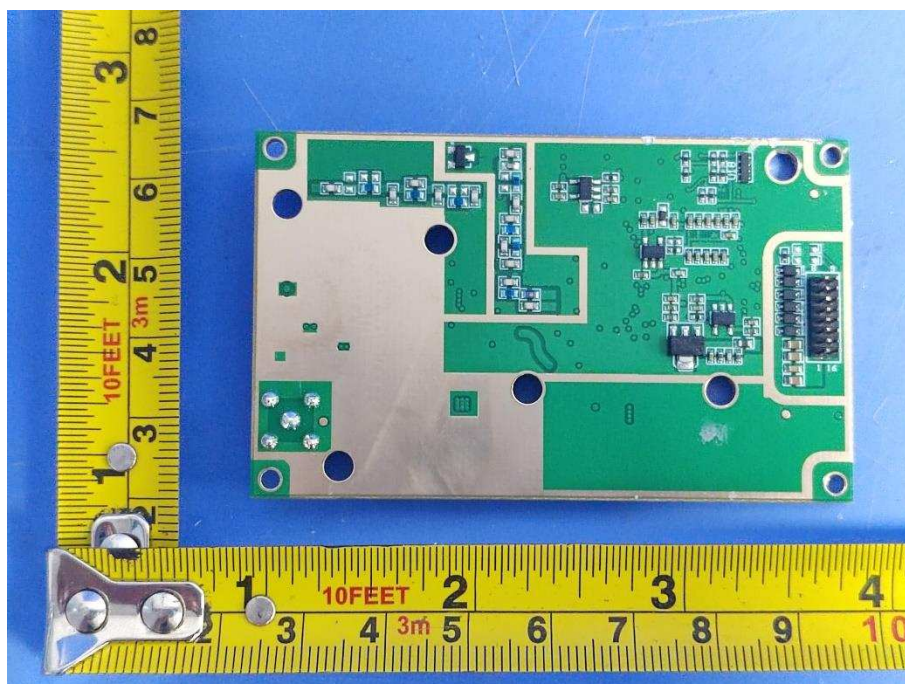


Photo 33

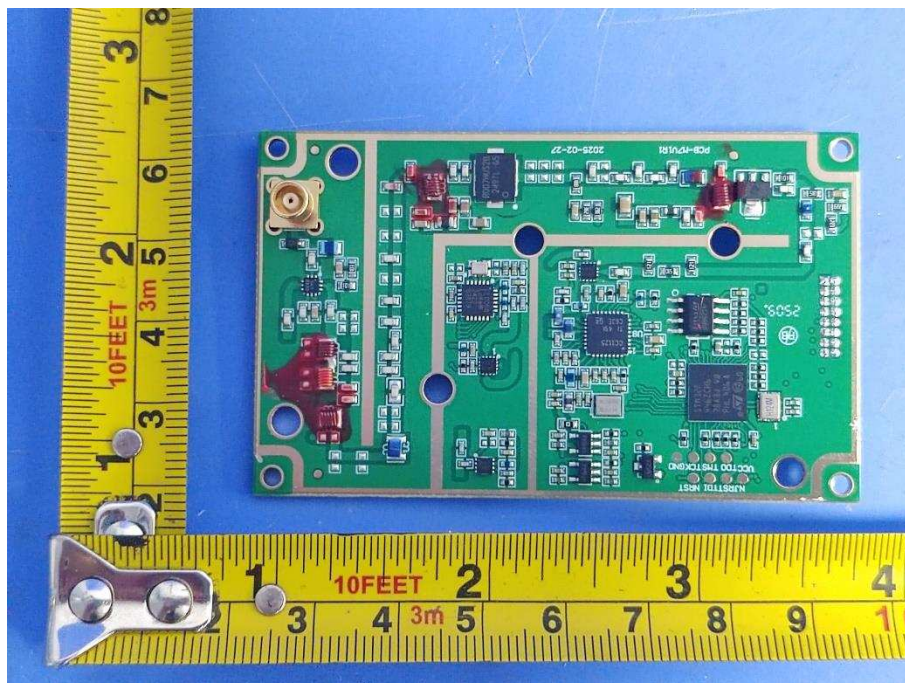


Photo 34

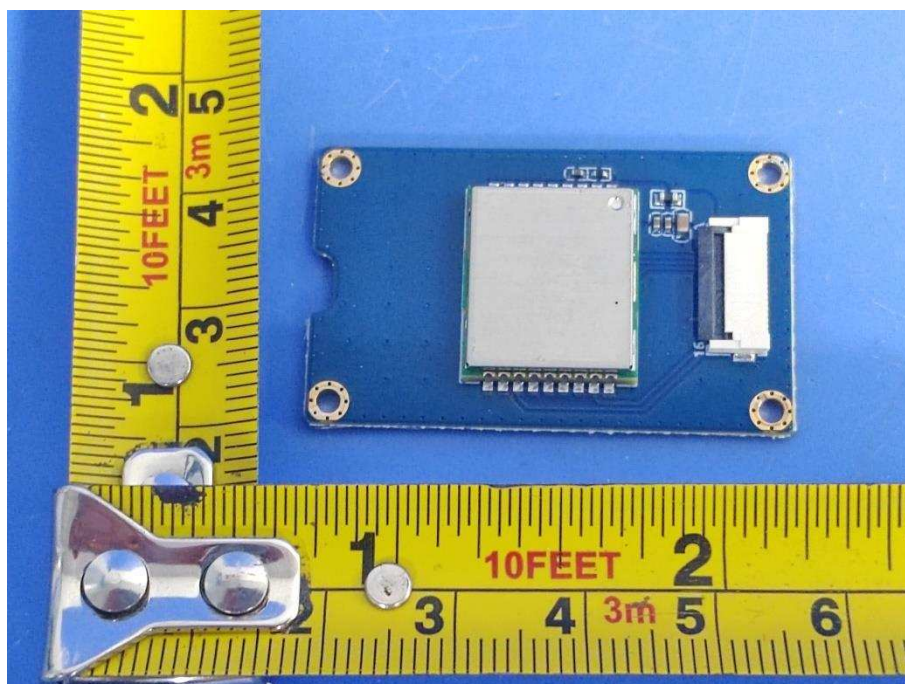


Photo 35

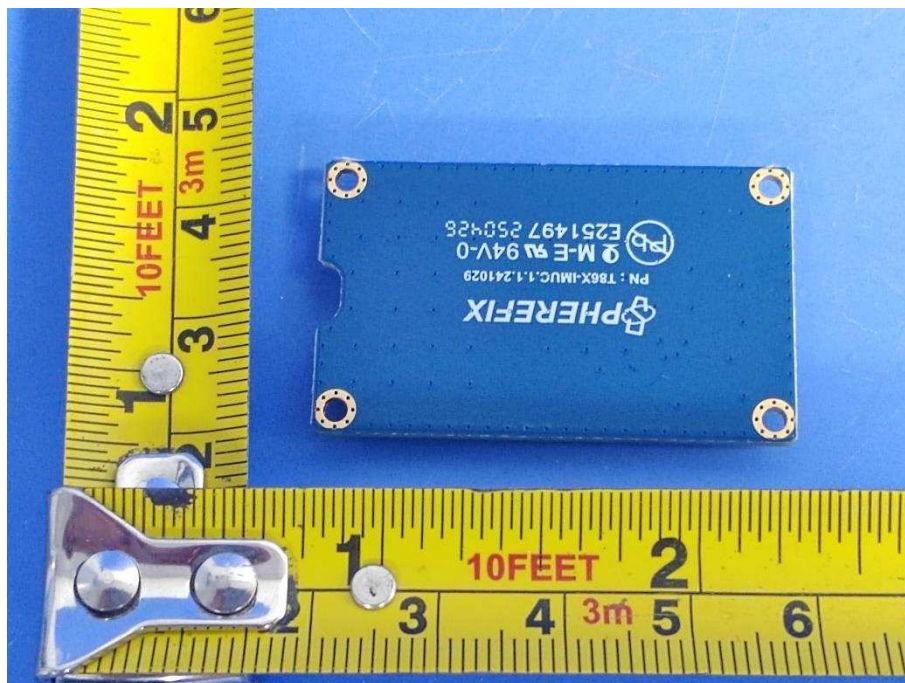


Photo 36

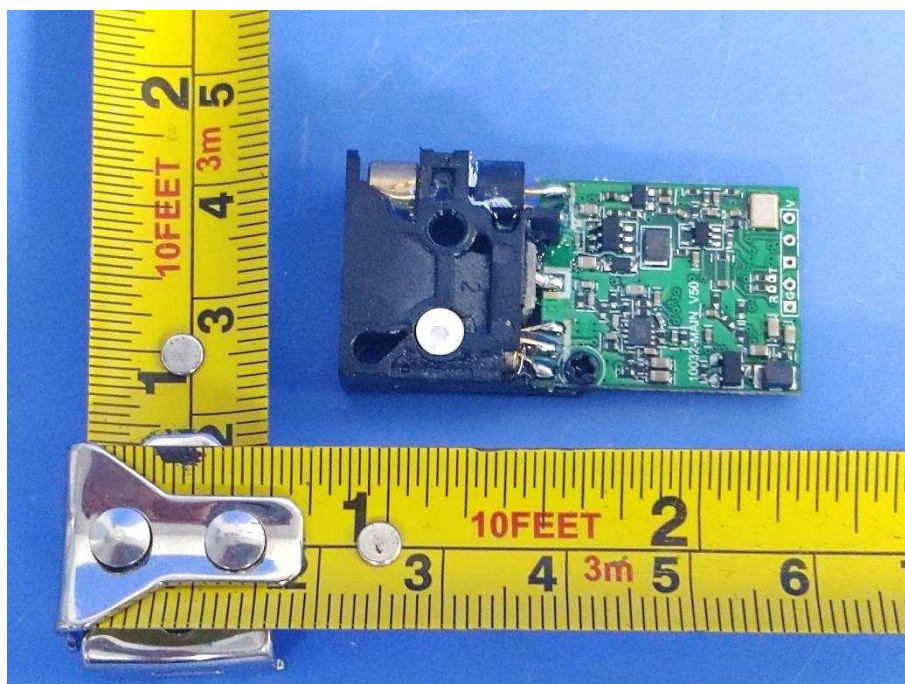


Photo 37

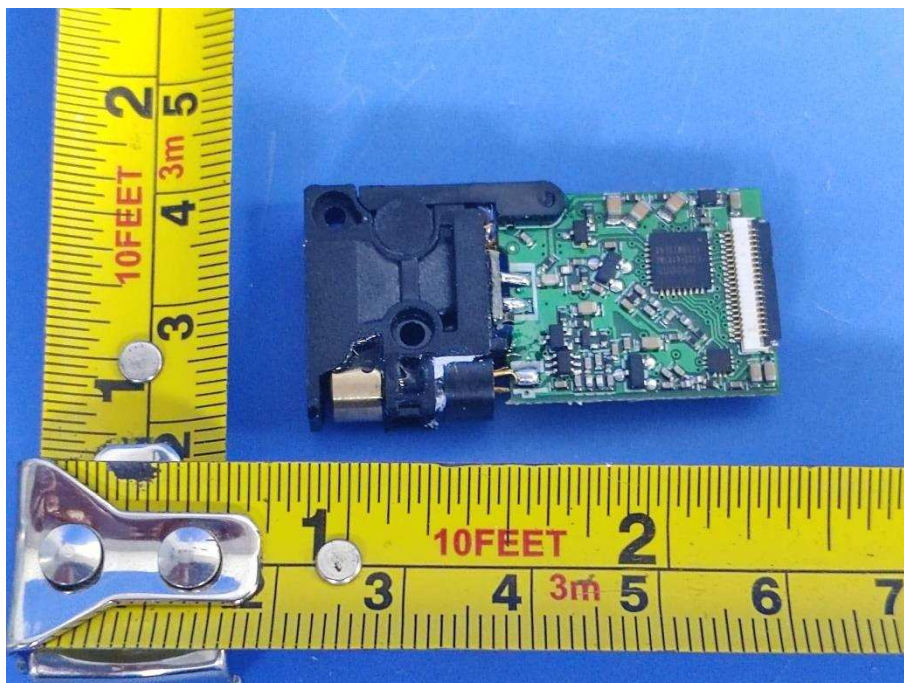


Photo 38

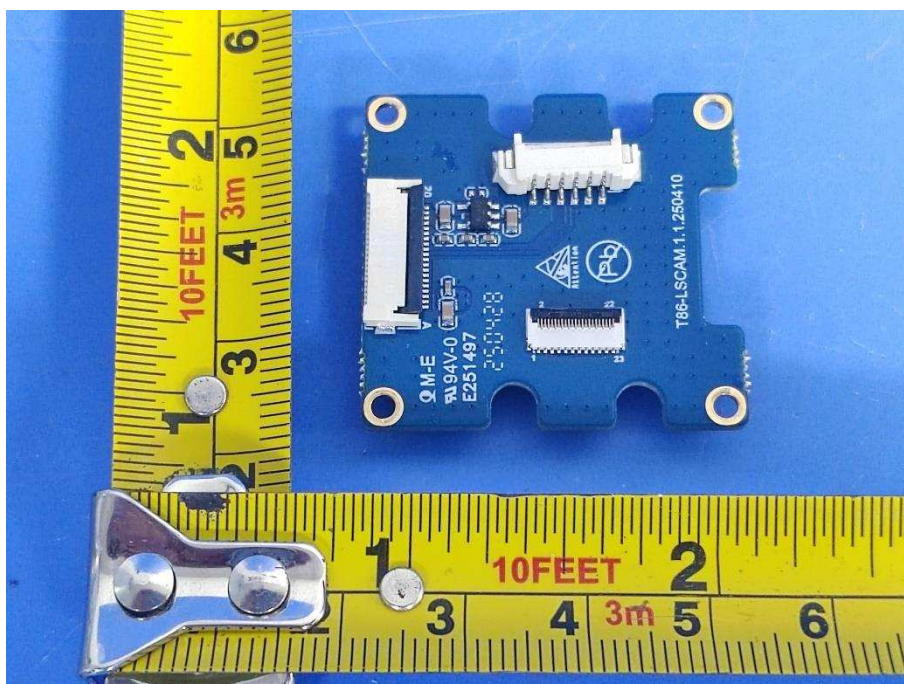


Photo 39

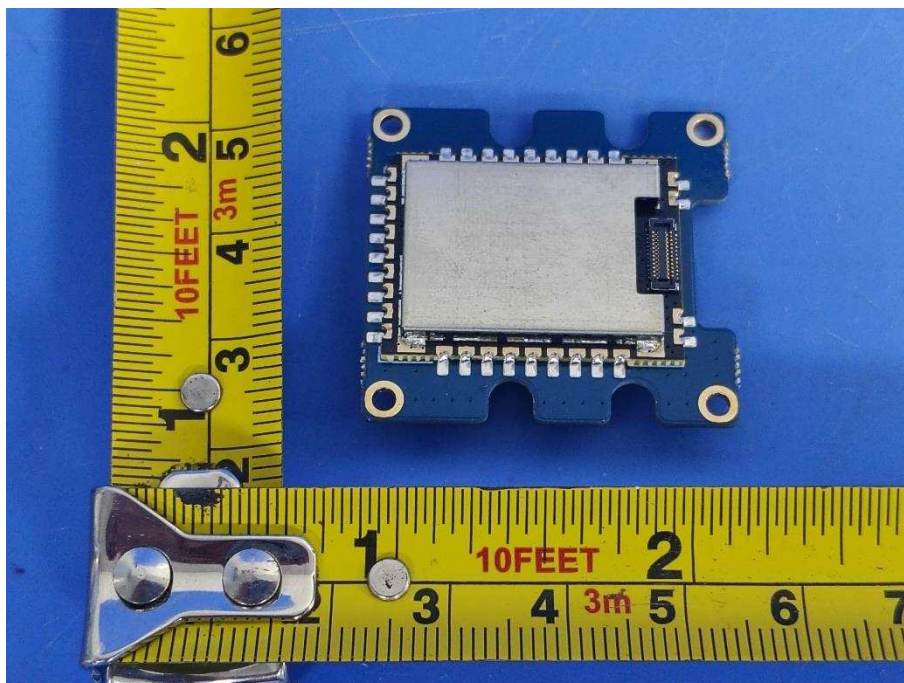


Photo 40

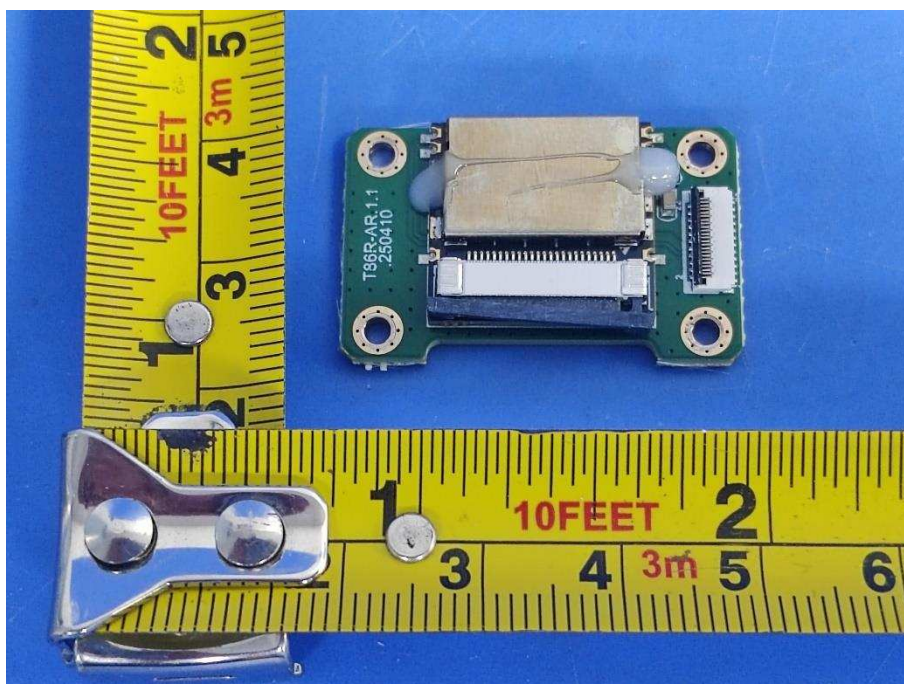


Photo 41

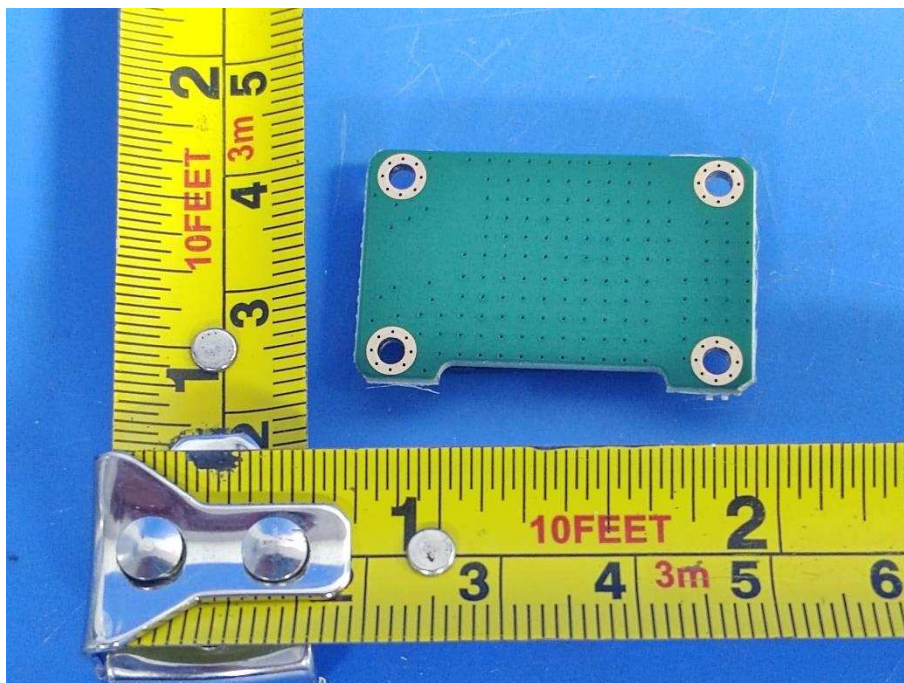


Photo 42

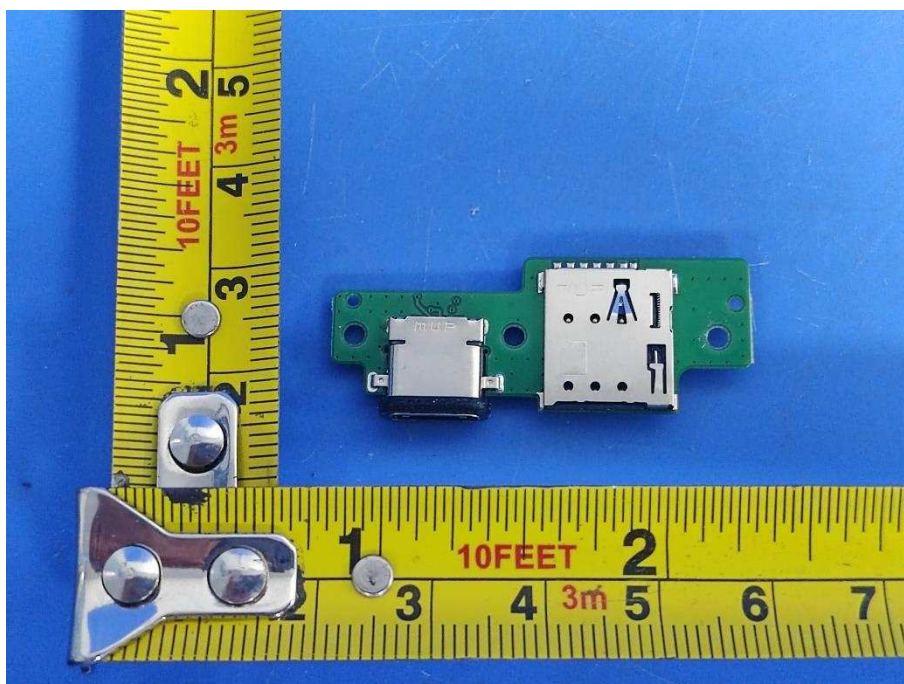


Photo 43

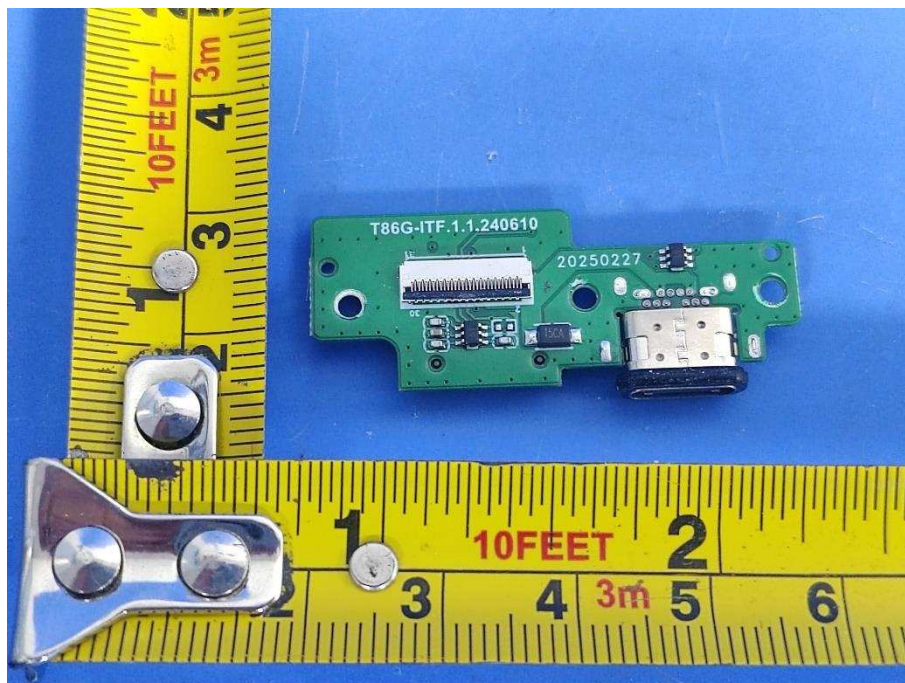


Photo 44

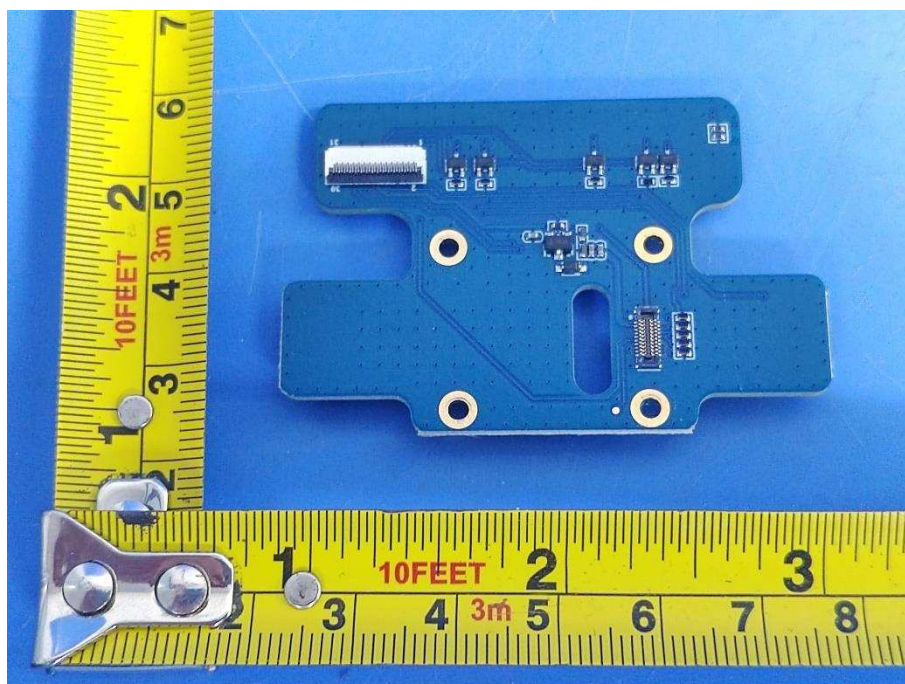


Photo 45

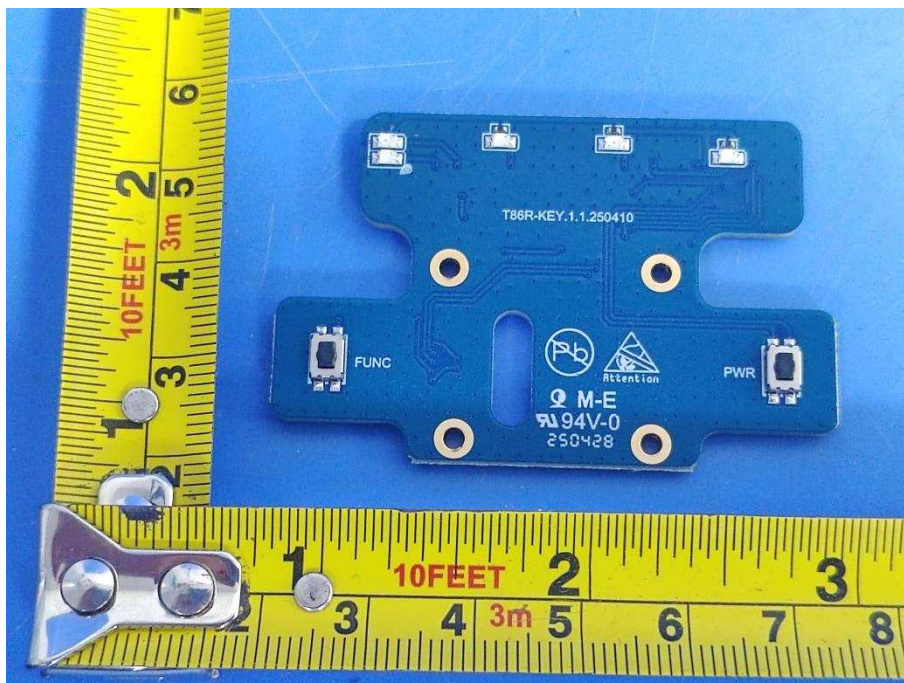


Photo 46



Photo 47



*****END OF THE REPORT*****