


Car Core

INTERTEK TESTING SERVICES

Equipment Photographs

(Internal)

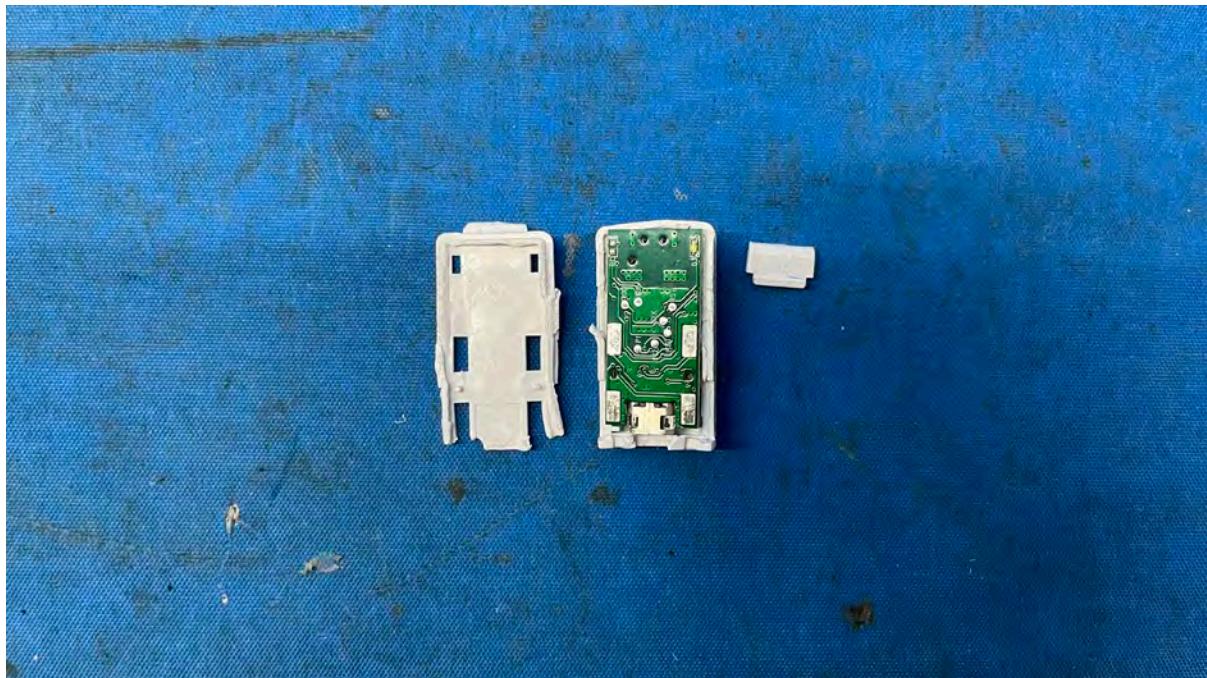

INTERTEK TESTING SERVICES

Equipment Photographs


(Internal)



INTERTEK TESTING SERVICES

Equipment Photographs

(Internal)

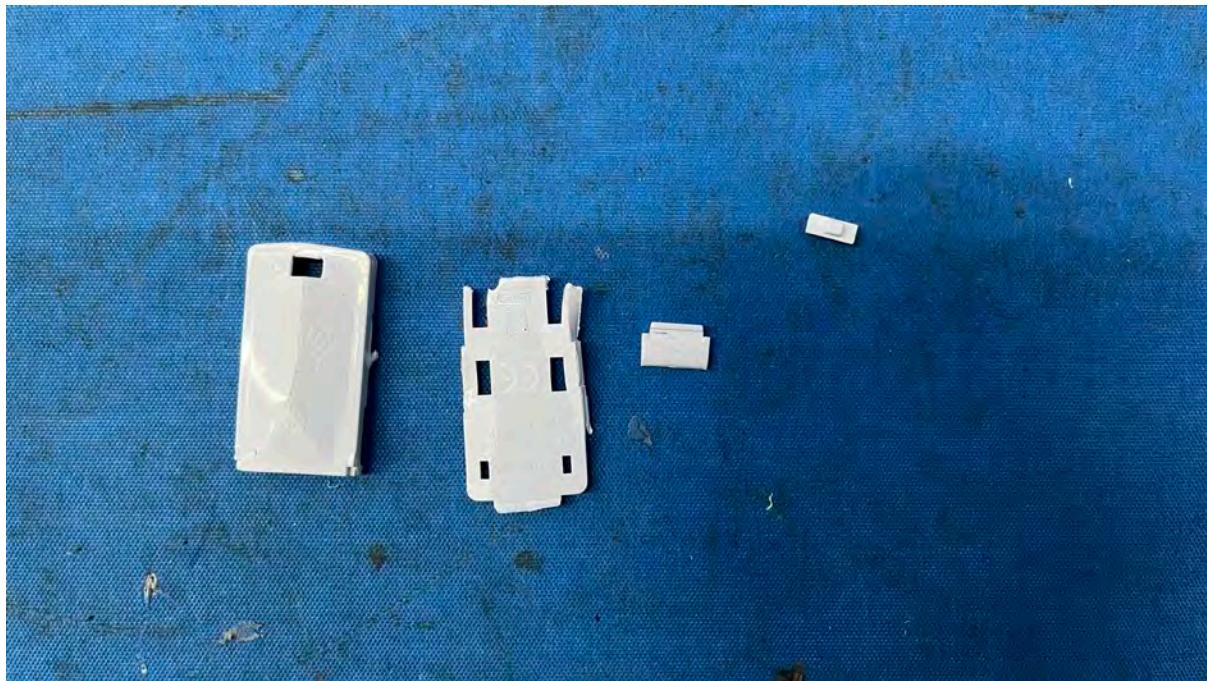

INTERTEK TESTING SERVICES

Equipment Photographs

(Internal)



INTERTEK TESTING SERVICES

Equipment Photographs


(Internal)



INTERTEK TESTING SERVICES

Equipment Photographs

(Internal)

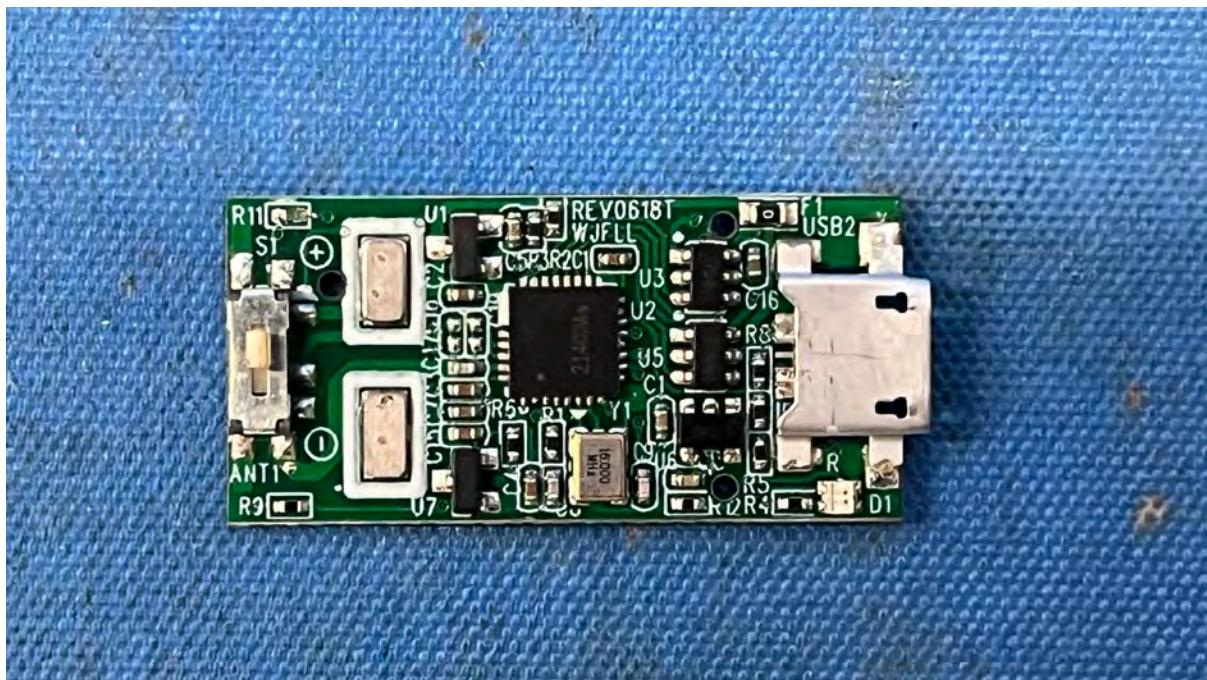


FCC ID: 2BCUGMSBTLIPOS

INTERTEK TESTING SERVICES

Equipment Photographs


(Internal)

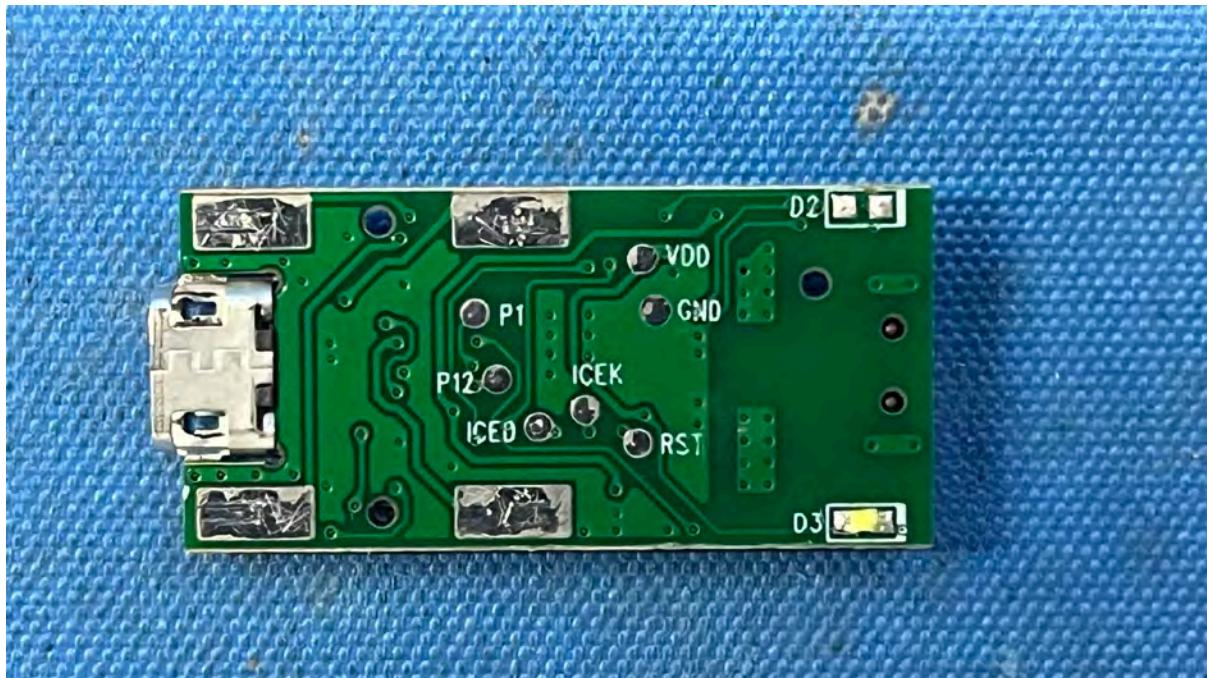

INTERTEK TESTING SERVICES

Equipment Photographs


(Internal)





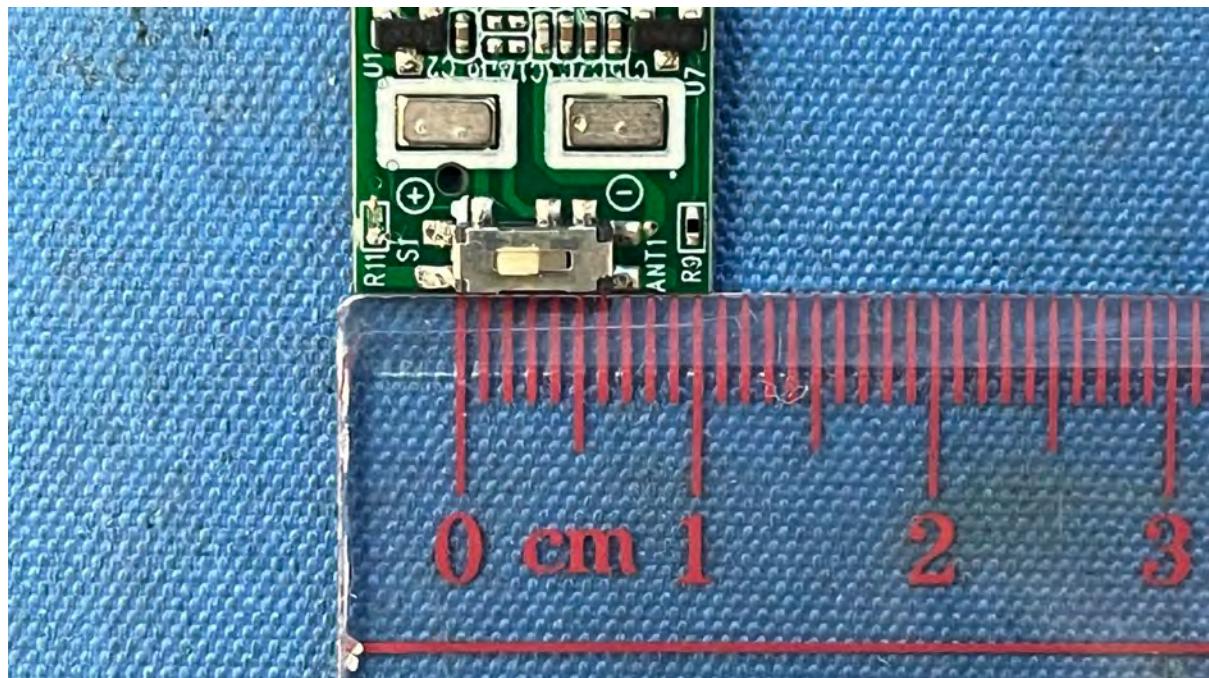


INTERTEK TESTING SERVICES

Equipment Photographs

(Internal)

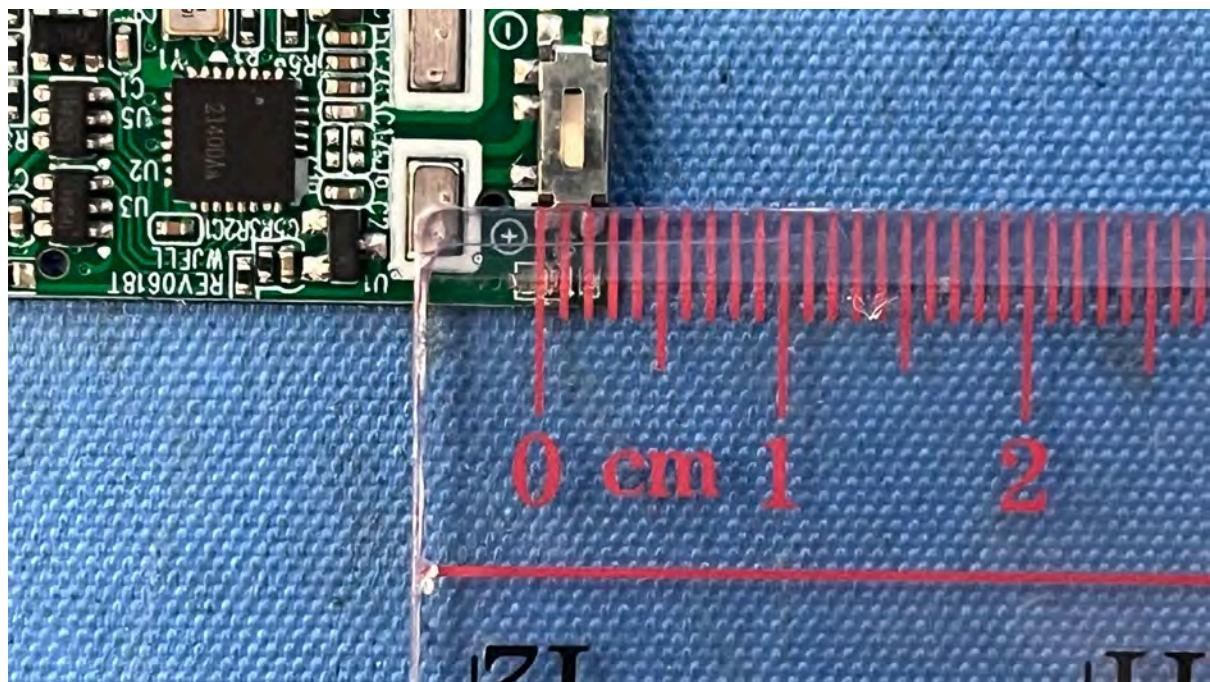

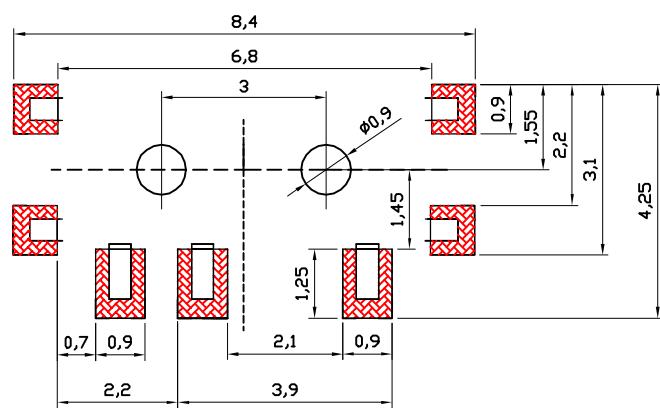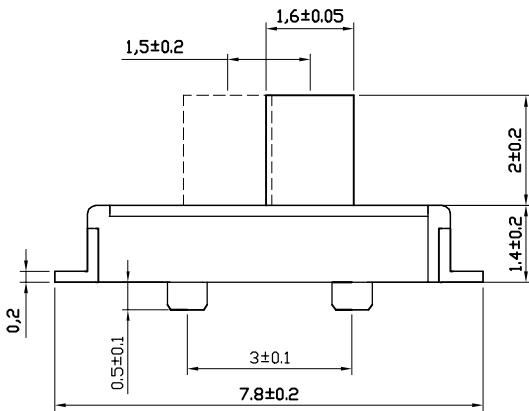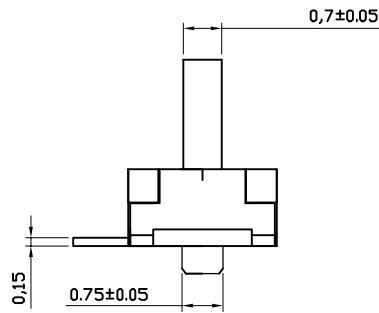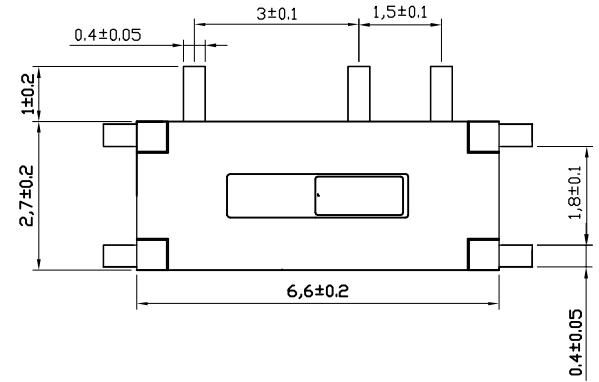

E	弹 片	1	不绣钢	灰 色
D	接触簧片	1	铍青铜	银 白 色
C	盖 子	1	黄 铜	银 白 色
B	底 座	1	LCP 和磷铜	黑 色 与 镀 银
A	推 柄	1	进口增强尼龙	白 色
序号	名 称	数 量	材 料	镀 涂 颜 色

MSK-01J

校对: 郭政 日期: 2013.05.02

项 目	规 格
额定电负荷:	DC12V 0.1A
绝缘电阻:	≥50MΩ
耐压强度:	AC250V (50Hz) 1min
环境温度:	-10 °C ~ +50 °C
相对湿度:	(40 °C) ≤85%
接触电阻:	≤100 mΩ
动作力:	160gf ±50gf
耐温:	≤250 °
寿命:	≤10000次
此数据仅供参考, 实际以样品为准	
审核:	日期:


Car Shells

Star Wars Racers

INTERTEK TESTING SERVICES

Equipment Photographs

(Internal)

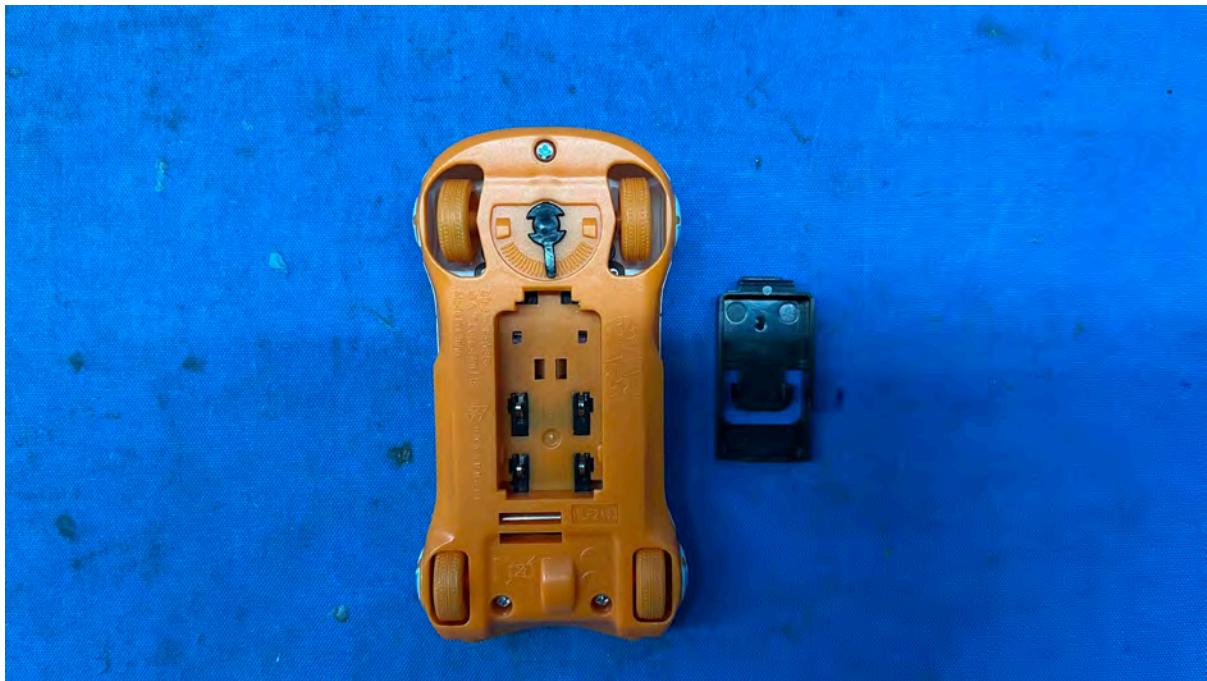

FCC ID: 2BCUGMSBTLIPOS

INTERTEK TESTING SERVICES

Equipment Photographs

(Internal)



FCC ID: 2BCUGMSBTLIPOS

INTERTEK TESTING SERVICES

Equipment Photographs

(Internal)



New Shell Motorsport Collection

INTERTEK TESTING SERVICES

Equipment Photographs

(Internal)



INTERTEK TESTING SERVICES

Equipment Photographs


(Internal)



INTERTEK TESTING SERVICES

Equipment Photographs

(Internal)

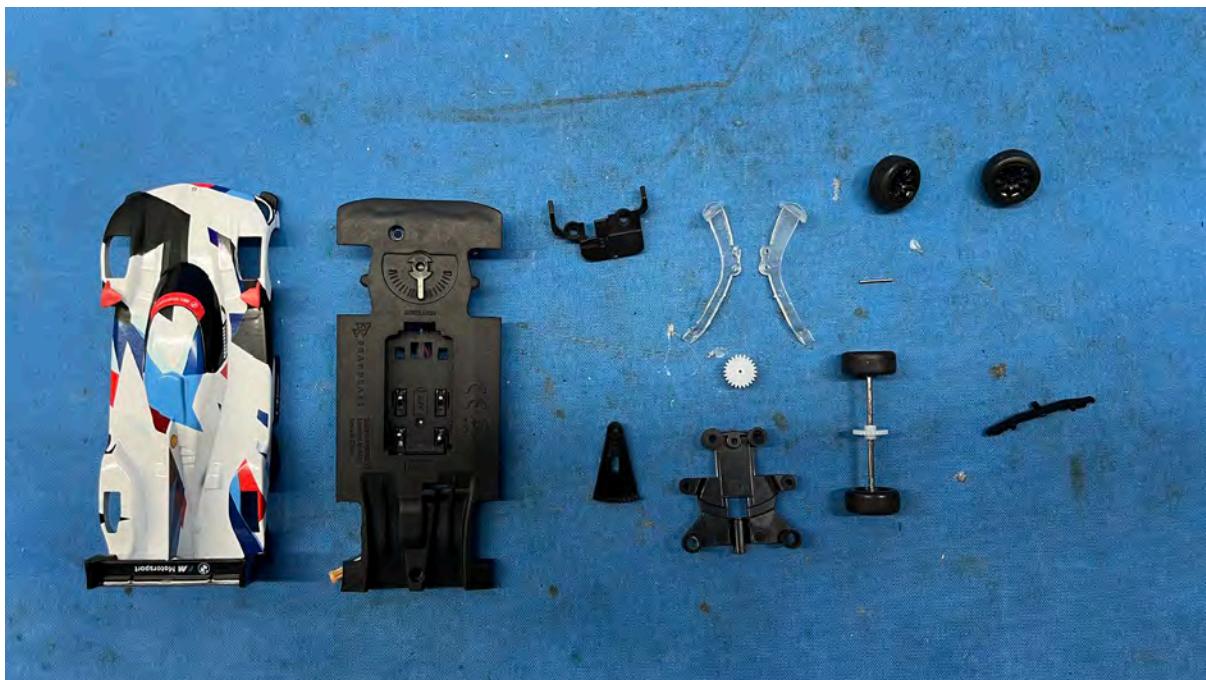

BMW M
Motorsport
Collection

INTERTEK TESTING SERVICES

Equipment Photographs


(Internal)



INTERTEK TESTING SERVICES

Equipment Photographs

(Internal)

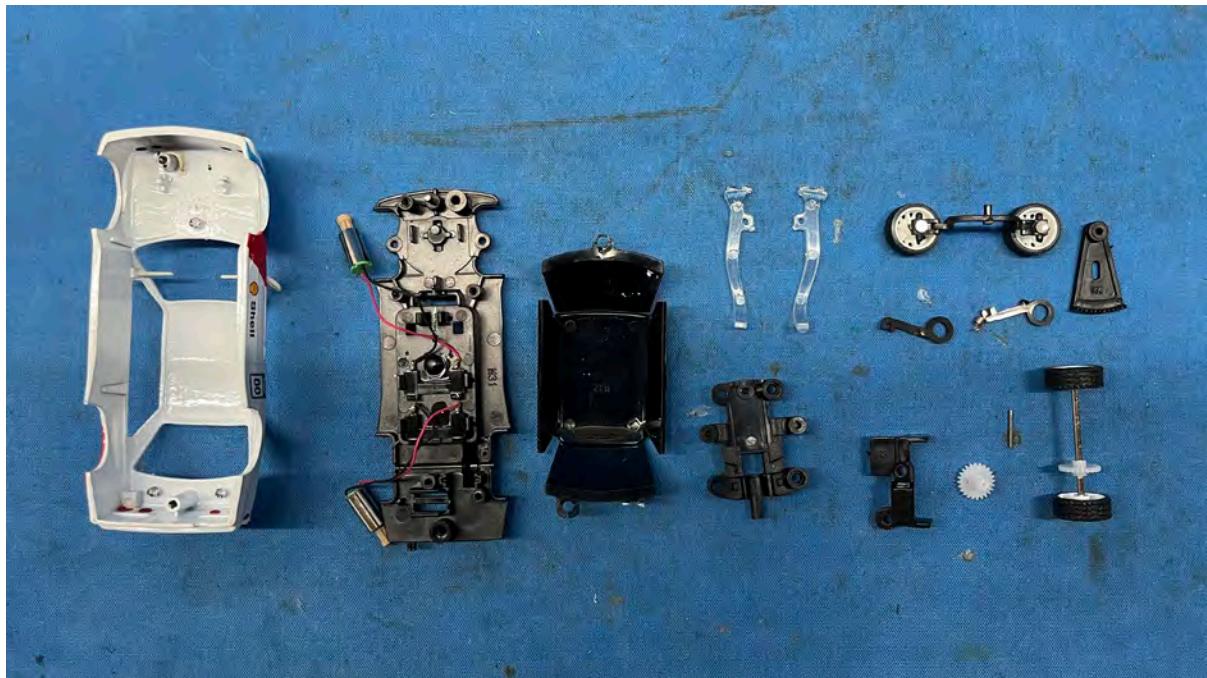

INTERTEK TESTING SERVICES

Equipment Photographs

(Internal)

