



产 品 规 格 书

PRODUCT SPECIFICATION FOR APPROVAL

客 户 名 称:

CUSTOMER

二维四象

产 品 名 称:

PRODUCT NAME

Power Transmitter A11

天线增益:

Max gain:

0dbi

产 品 规 格:

PRODUCT SPEC

Inductance: 6.3uH±10%

Shielding spec:50*5.3*1 with two grooves

Silk covered wire spec: 2 UEW/155 0.08*105*10Ts

Segment Length: 30mm

Double side Type

日 期:

DATE

2023/09/18

版 本 型 号:

VERSION

REV 1.0

版本 Revision	变更内容 Modified Content	责任人 Principle	日期 Date	备注 Note
REV 1.0	首次发布	薛 磊	2023-9-18	

制定/PREPARED BY	审核/CHECKED BY	核准/APPROVED BY
李小云	周小菊	


客户认可签名及盖章 Authorized signature & company chop		
---	--	--

附上的是产品规格书，有任何疑问，请及时反馈给我们，谢谢!



产 品 规 格 SPECIFICATION

一、Mechanical Specification:

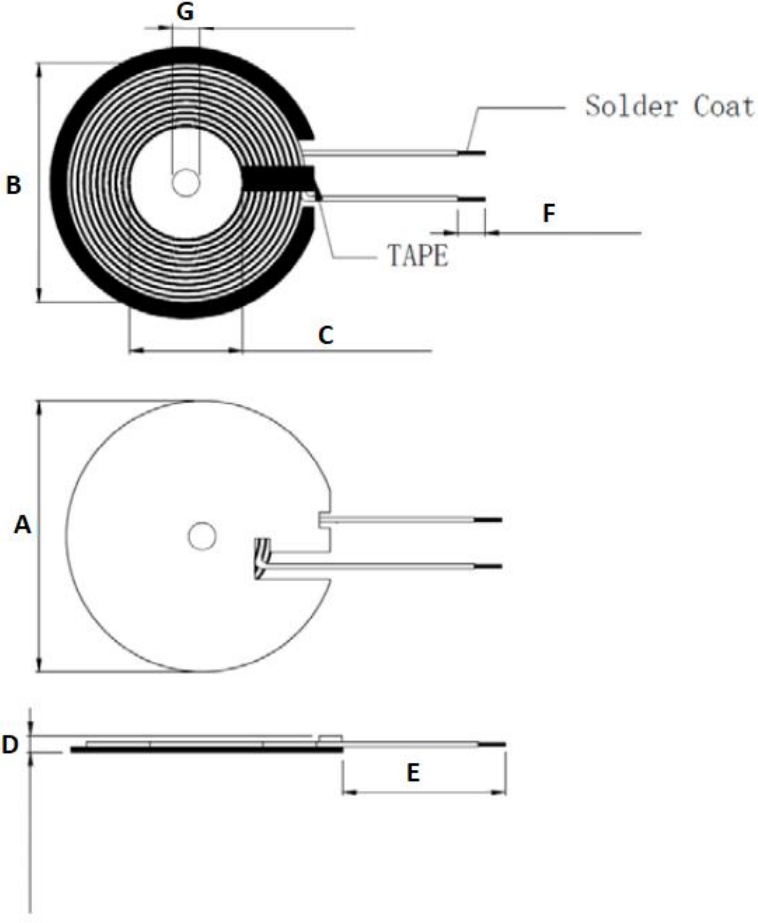	Shielding Outer Diameter (A)	49.5±0.5mm
	Shielding Inner Diameter (G)	5±0.3mm
	Coil Outer Diameter (B)	42±1mm
	Coil Inner Diameter (C)	20.5±0.5mm
	Total Thickness (D)	<2.3mm
	Segment Length (E)	30mm±3mm
	Pin Length (F)	3±2mm
	Shielding Thickness	0.95±0.05mm
	Shielding Shape	Circle with two grooves
	Adhesive Tape	Double side Type

Company: Shenzhen Chenxing Electronic Technology Co., Ltd.


Address: Room 510, Building NO. 4, Xinkecheng industrial park, 51 Dabao Road Baoan District Shenzhen City



深圳市宸兴电子技术有限公司

Shenzhen Chenxing Electronic Technology Co., Ltd.

二、Schematic:

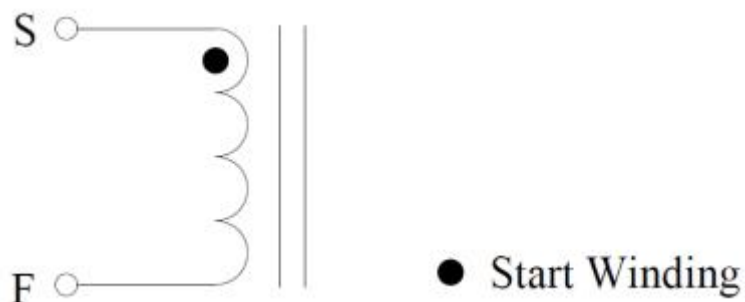

三、Coil Parameter:

端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
S	F	2UEW/155 0.08*105	10Ts	CCW

四、Electrical Specification:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
IND.	S-F	6.3uH±10%	100KHz/1.0V	LCZ METER 1062B

Company: Shenzhen Chenxing Electronic Technology Co., Ltd.

Address: Room 510, Building NO. 4, Xinkecheng industrial park, 51 Dabao Road Baoan District Shenzhen City