

XCHARGE Energy USA Inc

RF TEST REPORT

REPORT TYPE:

FCC Part 15.225 RF Report

MODEL:

Please see details in page 6 of this report

REPORT NUMBER:

2406B0910SHA-001

ISSUE DATE:

December 4, 2024

DOCUMENT CONTROL NUMBER:

TTRF15.225_V1 © 2018 Intertek



TEST REPORT

Report no.: 2406B0910SHA-001

Applicant: XCHARGE Energy USA Inc
19121 Marketplace Avenue, Building 2, Suite 2, 145. Kyle, Texas, 78640

Manufacturer: Beijing X-CHARGE Technology Co., Ltd
No.12 Shuangyang Road, Daxing District, Beijing, 100176

Factory: Beijing X-CHARGE Technology Co., Ltd
No.12 Shuangyang Road, Daxing District, Beijing, 100176

FCC ID: 2BCXO-C7AM

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:


47CFR Part 15 (2023): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2020): American National Standard of Procedures for Compliance Testing of
Unlicensed Wireless Devices

PREPARED BY:

REVIEWED BY:

Project Engineer
Scout Gong



Reviewer
Eric Li

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY.....	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 TECHNICAL SPECIFICATION.....	7
1.3 DESCRIPTION OF TEST FACILITY.....	8
2 TEST SPECIFICATIONS.....	9
2.1 STANDARDS OR SPECIFICATION	9
2.2 MODE OF OPERATION DURING THE TEST	9
2.3 TEST SOFTWARE LIST	9
2.4 TEST PERIPHERALS LIST.....	9
2.5 TEST ENVIRONMENT CONDITION:.....	9
2.6 INSTRUMENT LIST	10
2.7 MEASUREMENT UNCERTAINTY.....	11
3 FUNDAMENTAL EMISSION	12
3.1 LIMIT	12
3.2 MEASUREMENT PROCEDURE	12
3.3 TEST CONFIGURATION	13
3.4 TEST RESULTS OF FUNDAMENTAL EMISSIONS	14
4 SPURIOUS EMISSION	16
4.1 LIMIT	16
4.2 MEASUREMENT PROCEDURE	16
4.3 TEST RESULTS OF RADIATED EMISSIONS	18
5 FREQUENCY STABILITY (TEMPERATURE VARIATION)	22
5.1 TEST LIMIT	22
5.2 TEST CONFIGURATION	22
5.3 TEST PROCEDURE AND TEST SETUP	23
5.4 TEST PROTOCOL.....	23
6 FREQUENCY STABILITY (VOLTAGE VARIATION)	24
6.1 TEST LIMIT	24
6.2 TEST CONFIGURATION	24
6.3 TEST PROCEDURE AND TEST SETUP	24
6.4 TEST PROTOCOL.....	25
7 CONDUCTED EMISSIONS	26
7.1 LIMIT	26
7.2 TEST CONFIGURATION	26
7.3 MEASUREMENT PROCEDURE	27
7.4 TEST RESULTS OF CONDUCTED EMISSIONS.....	28
8 20DB BANDWIDTH	32
8.1 LIMIT	32
8.2 TEST CONFIGURATION.....	32
8.3 TEST PROCEDURE AND TEST SET UP.....	33
8.4 TEST PROTOCOL.....	34
9 ANTENNA REQUIREMENT	35

Revision History

Report No.	Version	Description	Issued Date
2406B0910SHA-001	Rev. 01	Initial issue of report	December 4, 2024

Measurement Result Summary

TEST ITEM	FCC REFERENCE	RESULT
Fundamental emission	15.225(a) (b) (c)	Pass
Spurious emission	15.225(d)	Pass
Frequency stability	15.225(e)	Pass
Conducted emissions	15.207	Pass
99% and 20dB Bandwidth	15.215(c)	Pass
Antenna requirement	15.203	Pass

Notes:

1. NA =Not Applicable
2. The determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.
3. Additions, Deviations and Exclusions from Standards: None.

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	DC Electric Vehicle Charging Station
Type/Model:	C7AM-400-CC, C7AM-360-CC, C7AM-320-CC, C7AM-280-CC, C7AM-240-CC C7AM-400-LQ-CC, C7AM-360-LQ-CC, C7AM-320-LQ-CC, C7AM-280-LQ-CC, C7AM-240-LQ-CC
Description of EUT:	EUT is a DC electric vehicle charger station with RFID function, it supports LTE function. The design, construction and components are the same, the only difference is the output power which is achieved by different numbers of power modules and associated wiring. The model with suffix "LQ" is product with liquid cooling pump and EV connectors. Model C7AM-240-LQ-CC was tested as a representative in this test report. Here is the certificate information about the wireless modules which EUT equipped. The POS machine communicate with the EUT through network cable and the POS machine does not transmit wireless signals. For the wireless modular, FCC ID is 2AANYIR6X5-S. For the POS machine, FCC ID is 2AHPPAPX01.
Rating:	For General models: Input: 3P 480VAC, 60Hz, up to 570A; Output: 200-1000VDC, up to 400A, 240 - 400kW. For models with suffix LQ (Liquid cooled connector): 3P 480VAC, 60Hz, up to 570A; Output: 200-1000VDC, up to 500A, 240 - 400kW.
EUT type:	☒ Tabletop ☐ Floor standing
Software Version:	/
Hardware Version:	/
Serial numbers:	A240610-05-001
Sample received date:	June 10, 2024
Date of test:	June 10, 2024, to November 25, 2024

1.2 Technical Specification

Frequency Range:	13.56 MHz ~ 13.56 MHz
Modulation:	ASK
Antenna:	PCB antenna

1.3 Description of Test Facility

Name:	Intertek Testing Services (Shanghai FTZ) Co., Ltd.
Address:	Building 86, No. 1198 Qinzhou Road (North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L21189
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Member No: 3598 (Registration No.: R-14243, G-10845, C-14723, T-12252)
	A2LA Accreditation Lab Certificate Number: 3309.02

Test were contracted by the following laboratories:

Subcontractor:

Name:	JiangSu Electronic Information Security Testing Evaluation Center
Address:	No.100 of Jinshui Road, Binhu District
A2LA Accreditation Lab Certificate Number:	6385.01

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2023)
ANSI C63.10 (2020)

2.2 Mode of operation during the test

While testing, the internal modulation and continuous transmission was applied.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	SKET Auto EMC Test Software	Keleto	V3.0
Radiated emission	SKET Auto EMC Test Software	Keleto	V3.0

2.4 Test peripherals list

Item No	Description	Band and Model	S/No
1	Resistor Load	-	-

2.5 Test environment condition:

Test items	Temperature	Humidity
Radiated emission	18°C	64% RH
Power line conducted emission	18°C	64% RH

2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Test Receiver	R&S	ESU8	100186	2025-02-23
☒	A.M.N.	-	NNLK8121	8121466	2025-02-05
☒	Shielded room	-	-	PB-06	2025-02-05
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Test Receiver	R&S	ESCI	100065	2025-01-31
☒	Bilog Antenna	-	VULB9162	00682	2025-09-29
☒	Active loop antenna	-	HFH2-Z2	100256	2025-08-14
☒	Semi-anechoic chamber	-	-	4400	2025-01-31
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Spectrum Analyzer	Keysight	N9030B	EC 6078	2025-03-18
☒	Climate chamber	GWS	MT3065	EC 6021	2025-03-07
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Thermo-Hygrograph	Testo	175h1	EC 6640	2025-08-29

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Frequency	Expanded Uncertainty ($k=2$)
Conducted emission at mains ports	9kHz ~ 150kHz	3.10 dB
	150kHz ~ 30MHz	3.10 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.20 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	4.40 dB
	6GHz ~ 18GHz	4.40 dB

3 Fundamental Emission

Test result: **PASS**

3.1 Limit


Frequencies (MHz)	Limit at 30m (dBuV/m)	Limit at 3m (dBuV/m)
13.110 – 13.410	40.50	80.50
13.410 – 13.553	50.50	90.50
13.553 – 13.567	84.00	124.00
13.567 – 13.710	50.50	90.50
13.710 – 14.010	40.50	80.50

3.2 Measurement Procedure

- The EUT was placed on a 0.1m plank above the ground at a 3-meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to PK Detect Function and Specified Bandwidth with Maximum Hold Mode.


NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

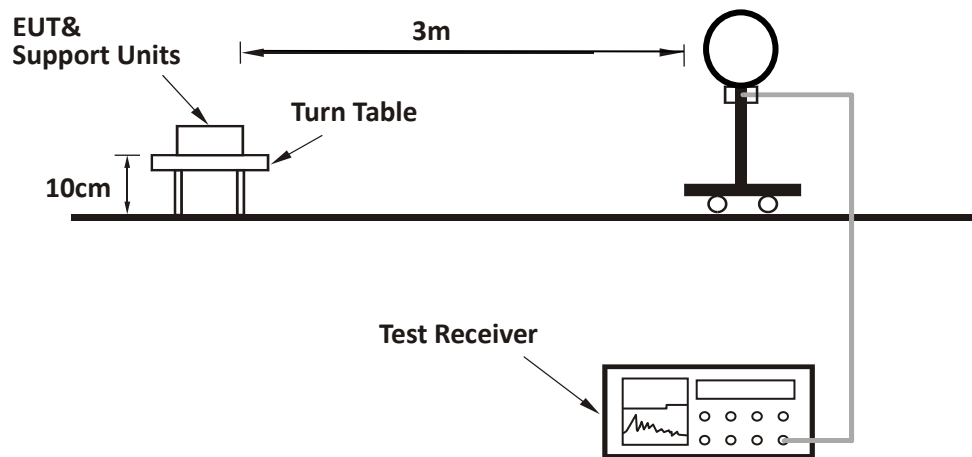
TEST REPORT**3.3 Test Configuration**

3.4 Test Results of Fundamental Emissions


Antenna Polarization: X axis

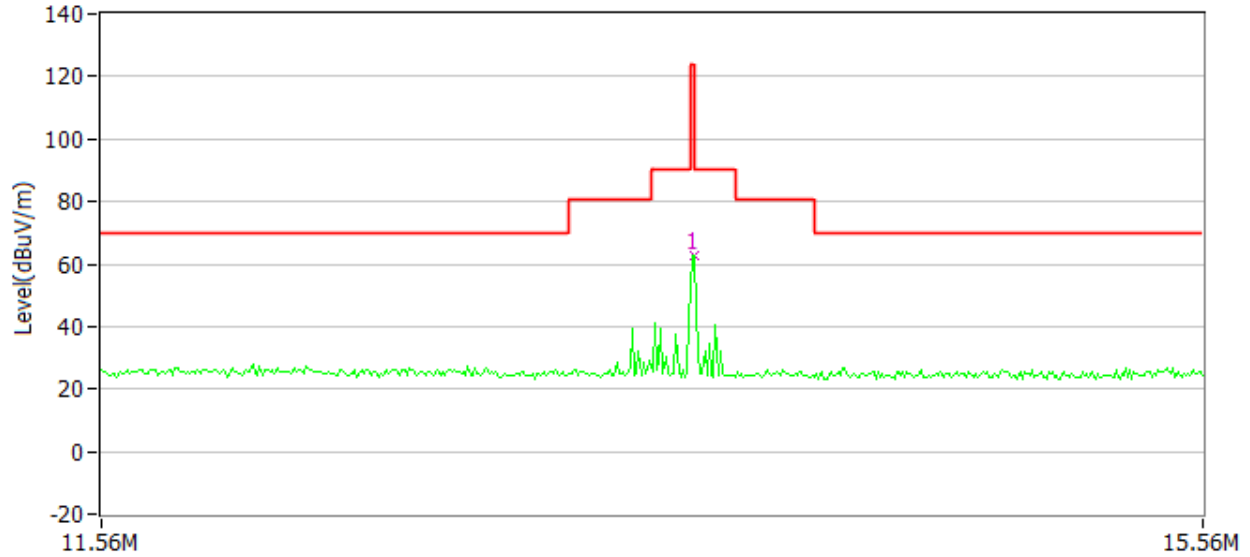

Antenna Polarization: Y axis

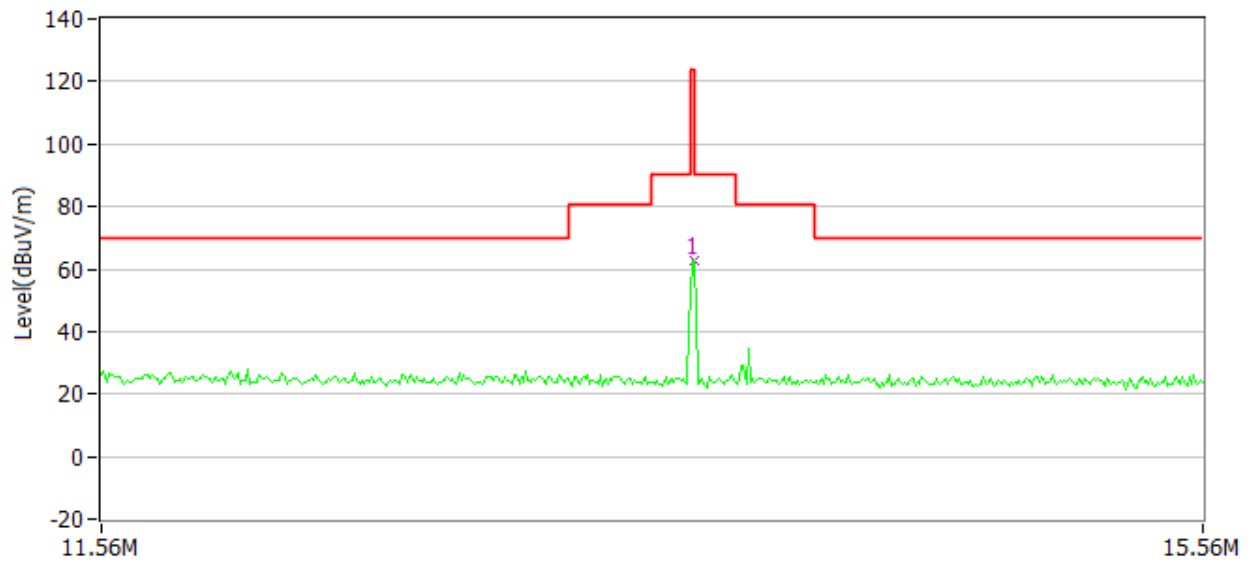

Antenna Polarization: Z axis

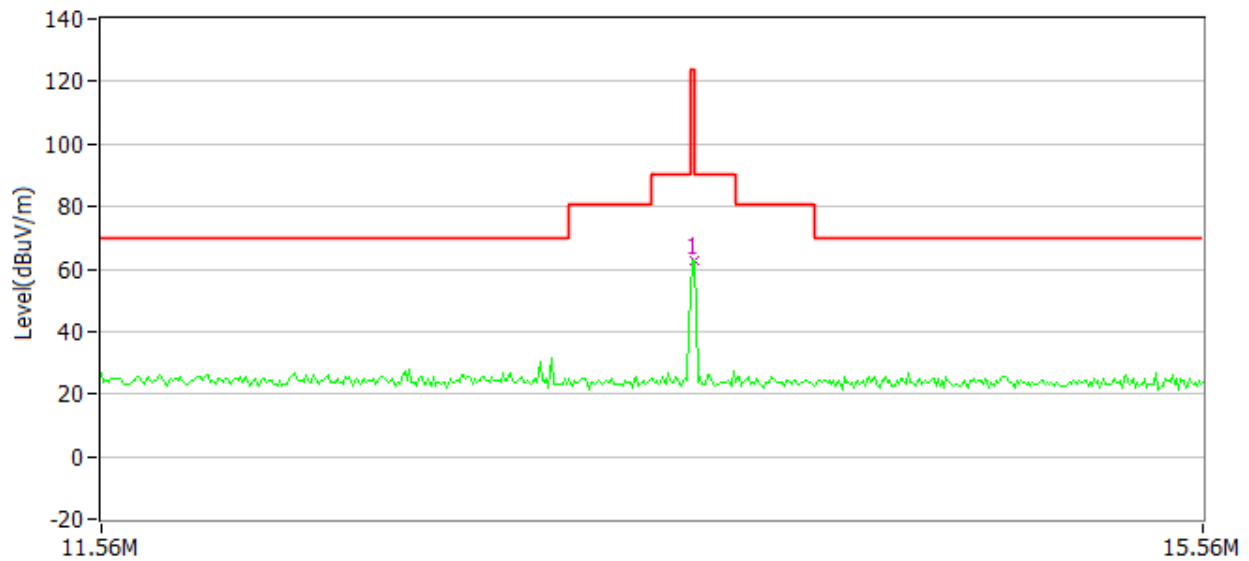

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
X	13.56	62.60	20.50	124.00	61.40	PK
Y	13.56	62.60	20.50	124.00	61.40	PK
Z	13.56	62.60	20.50	124.00	61.40	PK

Remark:

1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading

Example:

Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB

Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV

Limit = 40.00dBuV/m

Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m

Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m

Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB

4 Spurious Emission

Test result: **PASS**

4.1 Limit

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

4.2 Measurement Procedure

For Radiated emission below 30MHz:

- The EUT was placed on a 0.1m plank above the ground at a 10 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

TEST REPORT**For Radiated emission above 30MHz:**

- a) The EUT was placed on a 0.1m plank above the ground at a 10 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


Note:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- 3. All modes of operation were evaluated and the worst-case emissions were reported


4.3 Test Results of Radiated Emissions

Test Curve (below 30MHz):

Antenna Polarization: X axis

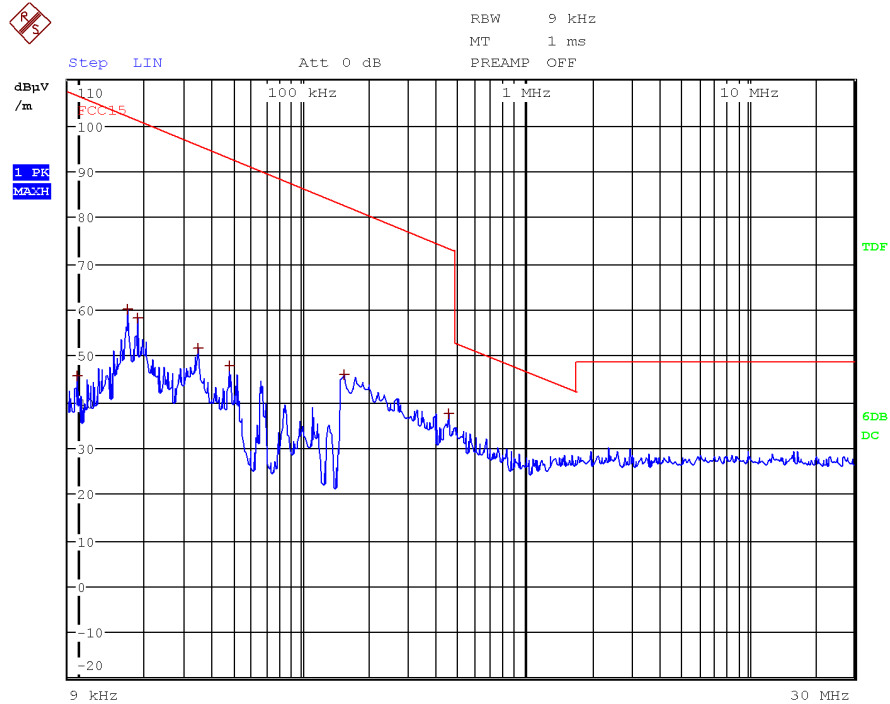

Antenna Polarization: Y axis

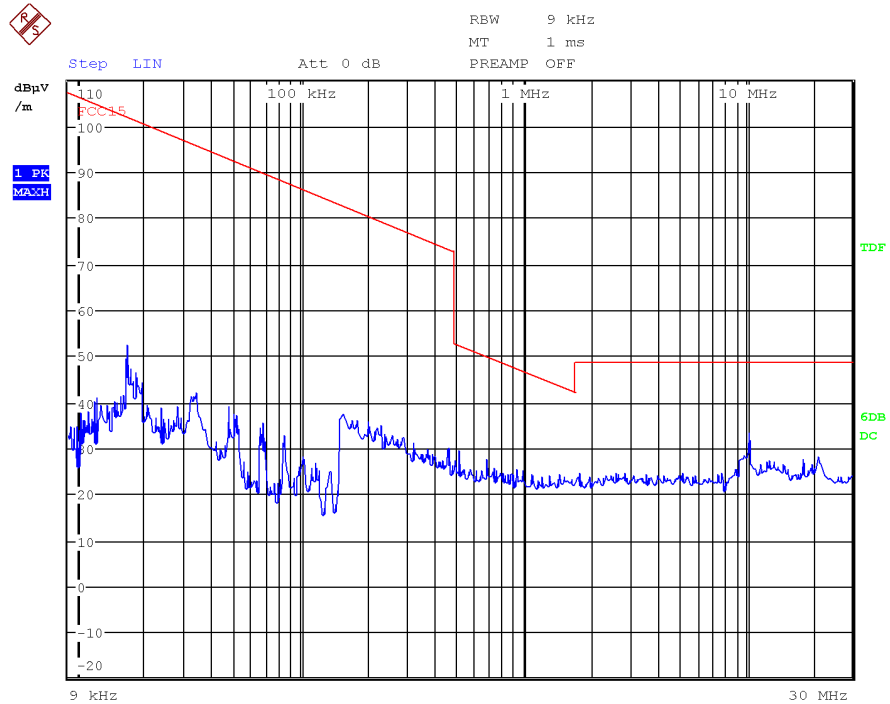

Test data below 30MHz:


Frequency	Limit (dBuV/m)	Corrected Reading (dBuV/m)	Margin (dB)	Detector	Polarity
9.800 kHz	106.85	45.62	61.23	PK	X
16.400 kHz	102.38	60.27	42.11	PK	X
18.300 kHz	101.43	58.35	43.08	PK	X
34.400 kHz	95.96	51.66	44.30	PK	X
47.400 kHz	93.17	47.90	45.27	PK	X
154.500 kHz	82.91	45.83	37.08	PK	X
451.500 kHz	73.60	37.43	36.17	PK	X
12.100 kHz	105.02	41.17	63.85	PK	Y
16.400 kHz	102.38	52.48	49.90	PK	Y
33.900 kHz	96.08	42.05	54.03	PK	Y
47.300 kHz	93.19	39.07	54.12	PK	Y
154.500 kHz	82.92	37.47	45.45	PK	Y
10.356 kHz	48.59	33.52	15.07	PK	Y

Remark:


1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Test Curve (30MHz to 1000MHz):

Horizontal

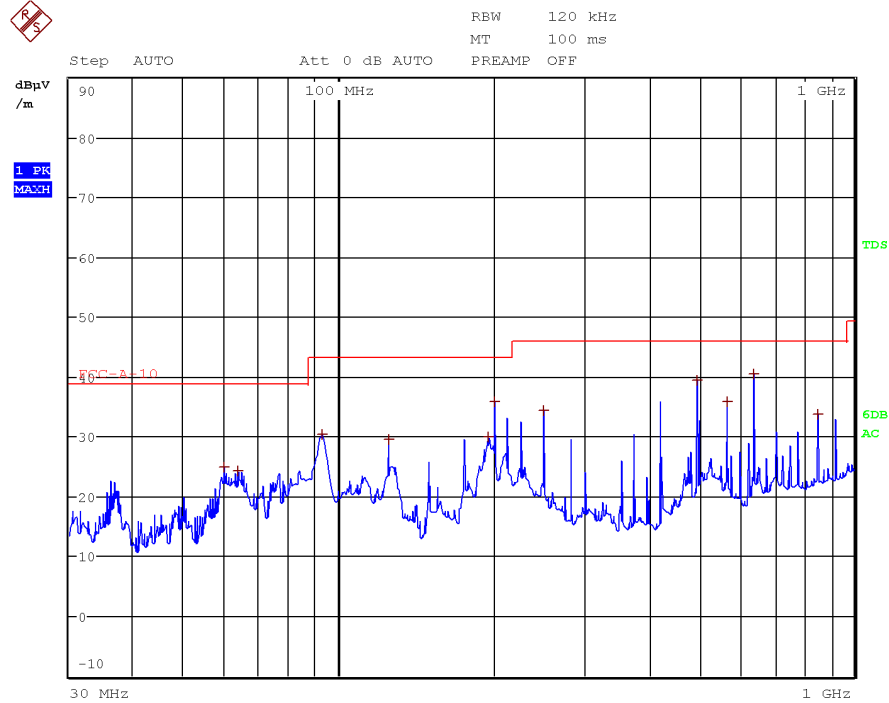

Vertical

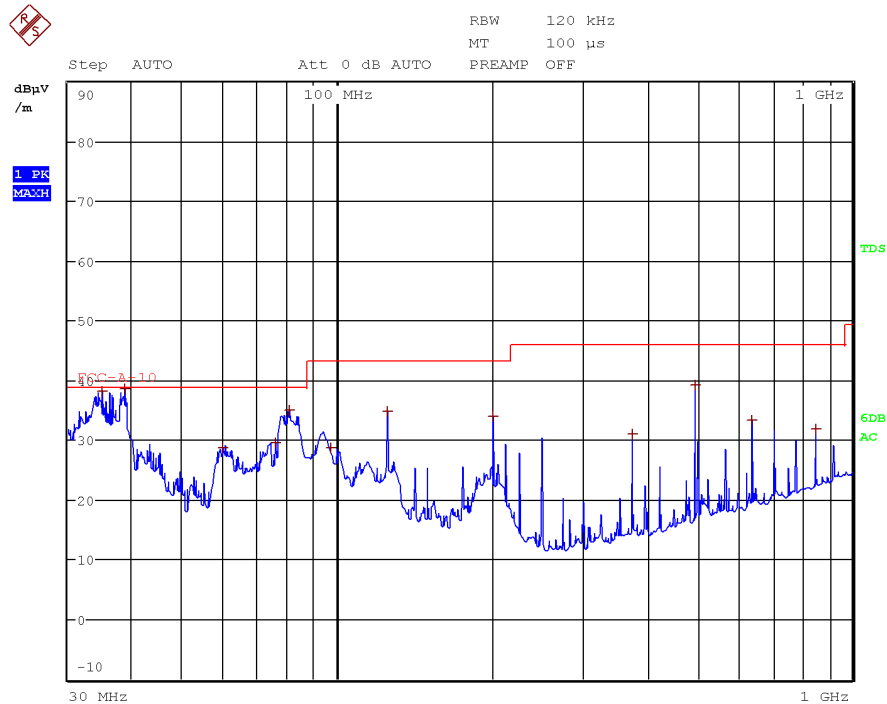

TEST REPORT

Test data (30MHz to 1000MHz)

Frequency (MHz)	Limit (dBuV/m)	Corrected Reading (dBuV/m)	Margin (dB)	Detector	Polar
200.00	43.50	37.90	5.60	PK	Hor
495.08	46.00	40.00	6.00	PK	Hor
636.56	46.00	44.20	1.80	PK	Hor
34.88	39.50	36.00	3.50	PK	Ver
38.60	39.50	36.50	3.00	PK	Ver
80.80	39.50	33.90	5.60	PK	Ver

Remark:

1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example:

Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.
Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$;
Corrected Reading = $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$;
Margin = $40.00\text{dBuV/m} - 10.20\text{dBuV/m} = 29.80\text{dB}$.


5 Frequency Stability (Temperature Variation)

Test result: **PASS**

5.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage.

5.2 Test Configuration

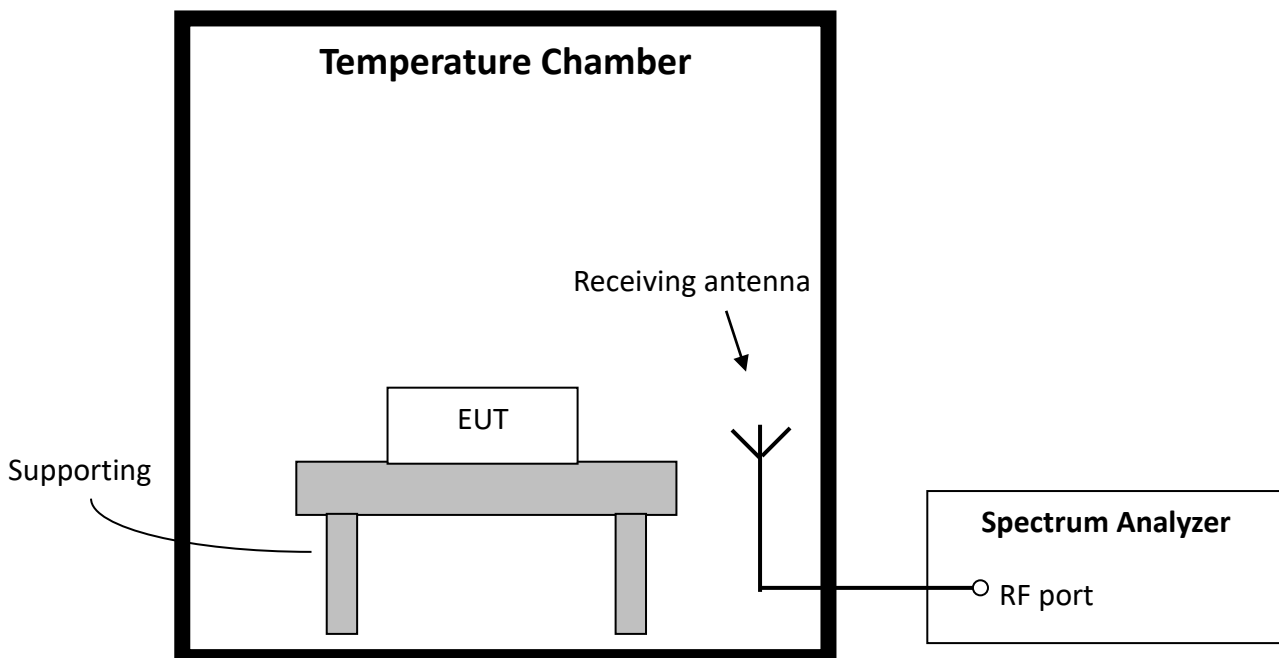

5.3 Test procedure and test setup

Test Procedure as per ANSI 63.10 clause 6.8.1.

5.4 Test protocol

Voltage (V)	Temp (°C)	Freq Measured (MHz)	Freq Nominal (MHz)	Tolerance (%)	Limit (%)
480	-20	13.5606	13.5600	0.0044	± 0.0100
	-10	13.5605		0.0037	
	0	13.5606		0.0044	
	10	13.5607		0.0052	
	20	13.5607		0.0052	
	30	13.5605		0.0037	
	40	13.5604		0.0029	
	50	13.5606		0.0044	


6 Frequency Stability (Voltage Variation)

Test result: **PASS**

6.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

6.2 Test Configuration

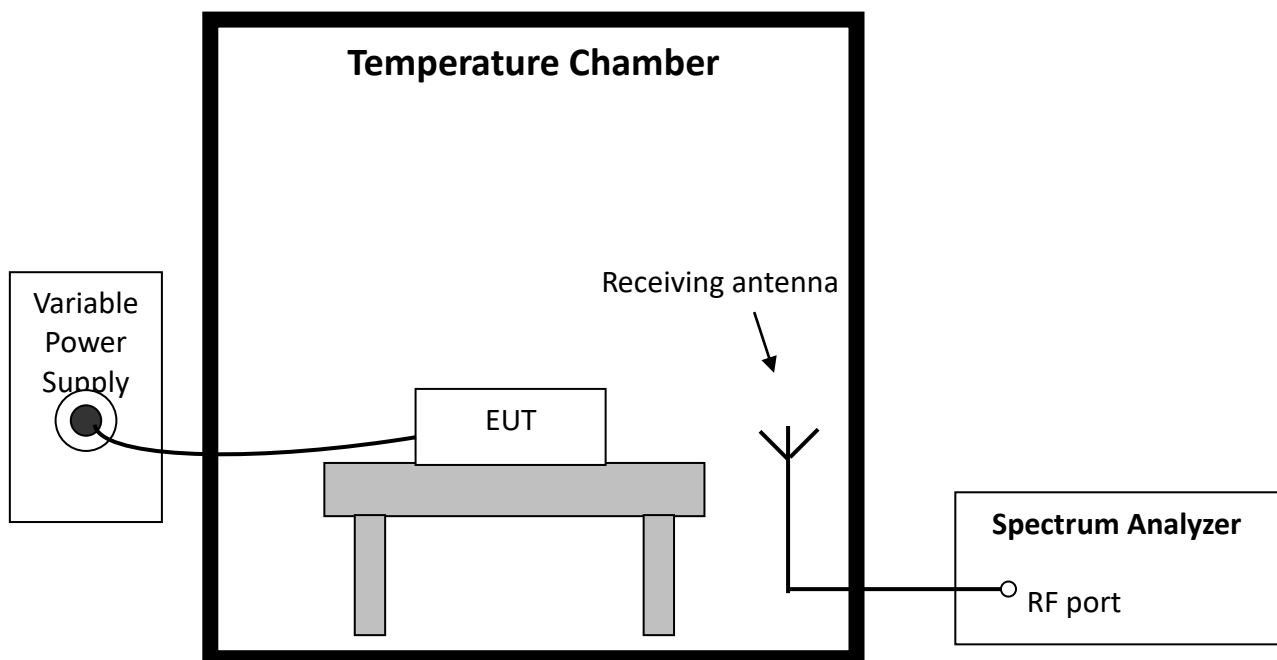

6.3 Test procedure and test setup

Test Procedure as per ANSI 63.10 clause 6.8.2.

6.4 Test protocol

Temp (°C)	Voltage (V)	Freq Measured (MHz)	Freq nominal (MHz)	Tolerance (%)	Limit (%)
20	408	13.5606	13.5600	0.0044	± 0.0100
	480	13.5605		0.0037	
	552	13.5605		0.0037	

7 Conducted emissions


Test result: **PASS**

7.1 Limit

Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	79	66
0.5 ~ 30	73	60

Note: If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

7.2 Test Configuration

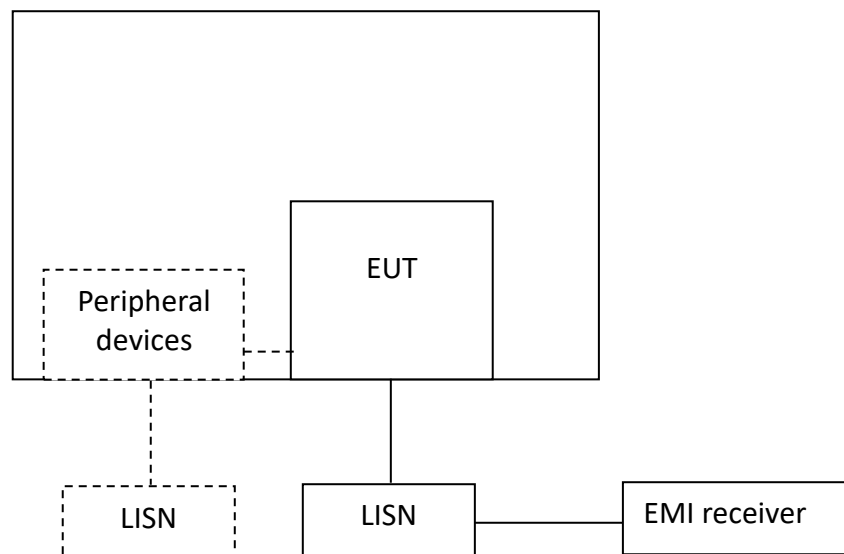

TEST REPORT**7.3 Measurement Procedure**


Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.


The bandwidth of the test receiver is set at 9 kHz.

7.4 Test Results of Conducted Emissions


Test Curve:

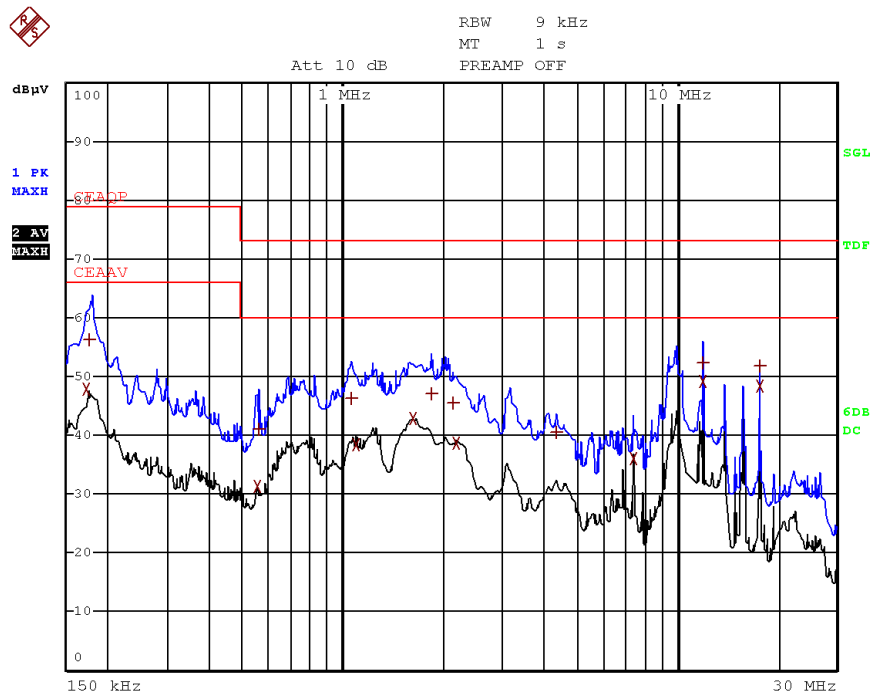


Line L1

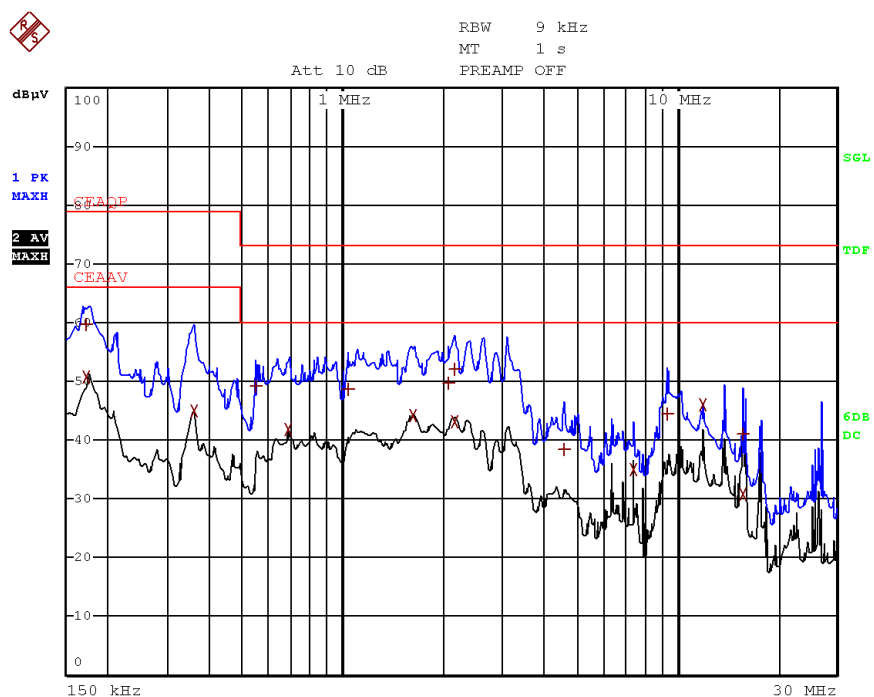

Line L2

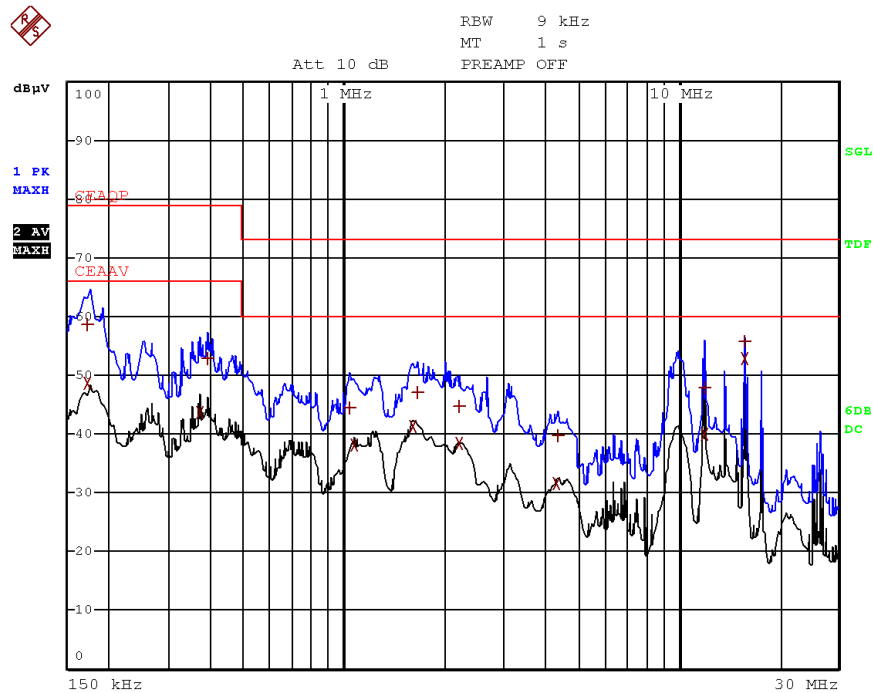

Line L3

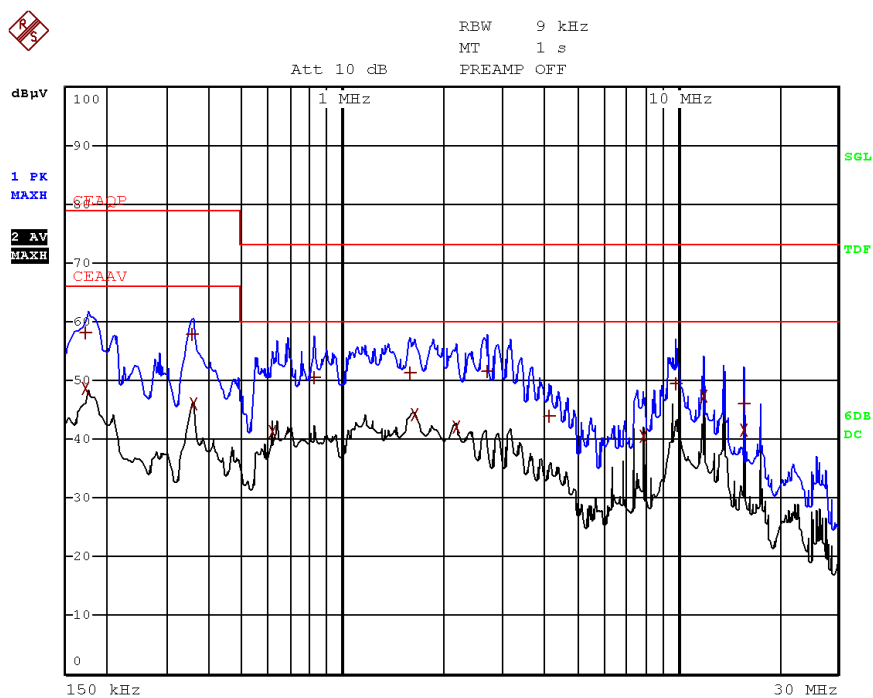

Line N

TEST REPORT

Frequency	Limit (dBuV)	Level (dBuV)	Delta (dB)	Detector	Phase
174.000 kHz	66.00	47.82	18.17	CAV	L1
178.000 kHz	79.00	56.32	22.67	QP	L1
554.000 kHz	60.00	31.40	28.59	CAV	L1
558.000 kHz	73.00	41.08	31.91	QP	L1
1.058 MHz	73.00	46.45	26.54	QP	L1
1.090 MHz	60.00	38.46	21.54	CAV	L1
1.622 MHz	60.00	42.89	17.10	CAV	L1
1.850 MHz	73.00	47.12	25.87	QP	L1
2.142 MHz	73.00	45.41	27.58	QP	L1
2.178 MHz	60.00	38.75	21.24	CAV	L1
4.358 MHz	73.00	40.43	32.56	AP	L1
7.372 MHz	60.00	35.98	24.01	CAV	L1
11.904 MHz	73.00	52.38	20.61	QP	L1
11.904 MHz	60.00	49.09	10.91	CAV	L1
17.624 MHz	73.00	51.92	21.07	QP	L1
17.624 MHz	60.00	48.32	11.67	CAV	L1
174.000 kHz	79.00	59.64	19.35	QP	L2
174.000 kHz	66.00	50.74	15.25	CAV	L2
358.000 kHz	66.00	45.06	20.93	CAV	L2
550.000 kHz	73.00	49.14	23.85	QP	L2
686.000 kHz	60.00	41.75	18.24	CAV	L2
1.038 MHz	73.00	48.64	24.35	QP	L2
1.622 MHz	60.00	44.34	15.65	CAV	L2
2.062 MHz	73.00	49.62	23.37	QP	L2
2.162 MHz	73.00	52.03	20.97	QP	L2
2.166 MHz	60.00	43.30	16.69	CAV	L2
4.614 MHz	73.00	38.44	34.55	QP	L2
7.372 MHz	60.00	35.11	24.88	CAV	L2
9.368 MHz	73.00	44.2	28.57	QP	L2
11.904 MHz	60.00	46.04	13.95	CAV	L2
15.712 MHz	73.00	40.95	32.04	QP	L2
15.712 MHz	60.00	30.90	29.09	CAV	L2
174.000 kHz	79.00	58.69	20.30	QP	L3
174.000 kHz	66.00	48.70	17.29	CAV	L3
370.000 kHz	66.00	43.62	22.37	CAV	L3
390.000 kHz	79.00	52.83	26.16	QP	L3
1.038 MHz	73.00	44.60	28.39	QP	L3
1.078 MHz	60.00	38.21	21.78	CAV	L3
1.614 MHz	60.00	41.35	18.64	CAV	L3
1.666 MHz	73.00	47.14	25.86	QP	L3
2.202 MHz	73.00	44.82	28.18	QP	L3

TEST REPORT

Frequency	Limit (dBuV)	Level (dBuV)	Delta (dB)	Detector	Phase
2.218 MHz	60.00	38.40	21.59	CAV	L3
4.326 MHz	60.00	31.68	28.31	CAV	L3
4.358 MHz	73.00	39.65	33.34	QP	L3
11.936 MHz	73.00	47.86	25.13	QP	L3
11.936 MHz	60.00	40.03	19.96	CAV	L3
15.712 MHz	73.00	55.71	17.28	QP	L3
15.712 MHz	60.00	52.92	7.07	CAV	L3
174.000 kHz	79.00	58.18	20.81	QP	N
174.000 kHz	66.00	48.70	17.29	CAV	N
354.000 kHz	79.00	57.77	21.22	QP	N
358.000 kHz	66.00	46.18	19.81	CAV	N
614.000 kHz	60.00	41.38	18.61	CAV	N
822.000 kHz	73.00	50.64	22.35	QP	N
1.590 MHz	73.00	51.41	21.59	QP	N
1.642 MHz	60.00	44.25	15.74	CAV	N
2.190 MHz	60.00	42.22	17.77	CAV	N
2.694 MHz	73.00	51.49	21.50	QP	N
4.142 MHz	73.00	44.05	28.94	QP	N
7.868 MHz	60.00	40.67	19.32	CAV	N
9.908 MHz	73.00	49.41	23.58	QP	N
11.904 MHz	60.00	47.26	12.73	CAV	N
15.708 MHz	73.00	46.15	26.84	QP	N
15.712 MHz	60.00	41.56	18.43	CAV	N

Note: The signal of 13.56MHz was caused by the RFID module. It is a wanted signal.

Remark:

1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
2. Level = Original Receiver Reading + Correct Factor
3. Delta = Level – Limit
4. If the PK Level is lower than AV limit, the AV test can be elided.
5. the emissions of 13.56MHz are the product's RF signal.


8 20dB Bandwidth

Test result: **PASS**

8.1 Limit

The 20dB bandwidth should be fallen in the allocated operating frequency range.
No limit for 99% bandwidth.

8.2 Test configuration

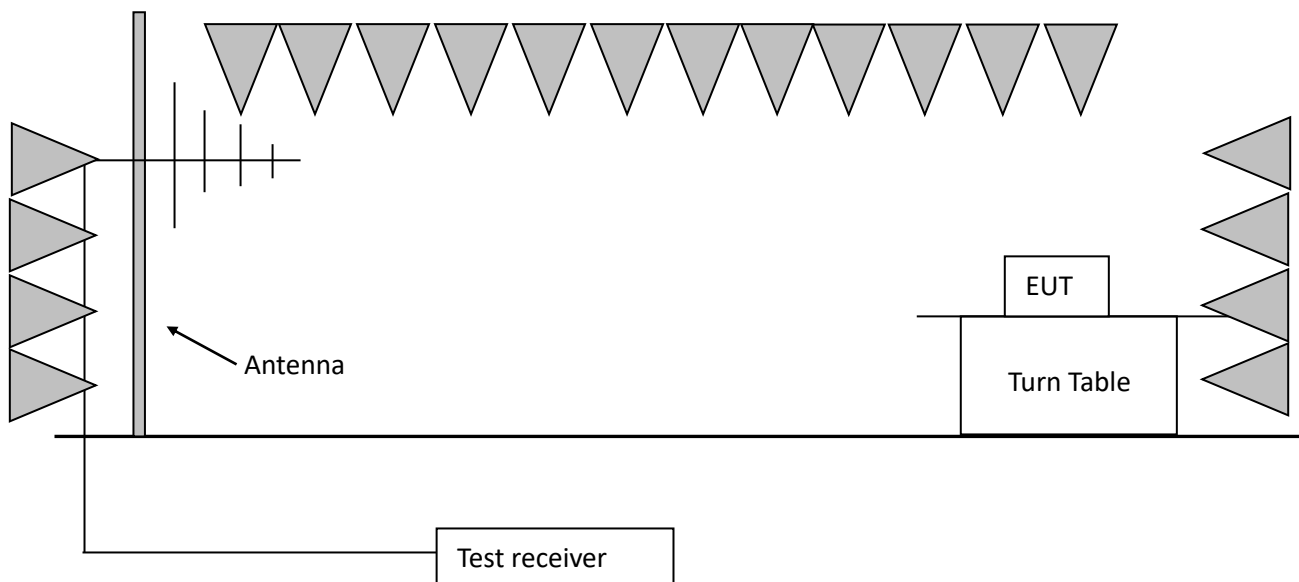

8.3 Test procedure and test set up

The measurement was applied in a 3m semi-anechoic chamber.

The center of the loop antenna shall be 1 m above the horizontal metal ground plane.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set RBW = 1 % to 5 % of the OBW
3. Set VBW $\geq 3 \cdot$ RBW
4. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
5. Use the 99 % power bandwidth function of the instrument (if available).
6. the 20dB bandwidth is also measured with the same setting.

8.4 Test protocol

	Lower point (MHz)	Higher point (MHz)	Bandwidth (kHz)	Allocated bandwidth (MHz)
20dB Bandwidth	13.559473	13.561782	2.309	13.553 ~ 13.567
Occupied bandwidth	13.559655	13.561608	1.953	13.553 ~ 13.567



9 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

***** END *****