

User Manual

Version 1.0



Revision History

Rev No.	Change Notification	Date	Remarks
V1.0	Draft	2023.09.14	

Index

1. FCC and ISED Mandatory	6
1.1 FCC Warning States	6
1.1.1 FCC (EMI) Warning	6
1.1.2 FCC Warning Label	6
1.2 ISED Warning states	7
1.2.1 ISED Warning label	7
1.3 FCC & ISED Label Placement	오류! 책갈피가 정의되어 있지 않습니다.
2. General Information	8
2.1 Repeater Information (FCC & IC ID)	9
2.2 Purpose	9
2.3 Advantages	9
2.4 Exterior	10
2.5 Interior	11
3. Specifications	12
3.1 Frequency Range	12
3.2 RF Specifications	12
3.3 Mechanical Specifications	13
4. Integrated Enclosure Interfaces	14
4.1 DONOR & SERVICE Connector	14
4.2 DC POWER & BATTERY ALARMS Feedthrough	14
4.3 REMOTE ANNUNCIATOR Feedthrough	15
4.4 ALARM Feedthrough	15

4.5	NETWORK Connector	15
5.	LED Indicators	17
5.1	SYSTEM LED	17
5.2	ANNUCIATOR LEDs	17
6.	Installation Guide	19
6.1	Environment	19
6.1.1	Antenna	19
6.1.2	Isolation Check and Gain Setting	19
6.2	Mounting the BDA	19
6.2.1	Installation of Concrete Wall	19
6.2.2	Installation of Wooden Wall	20
7.	Web GUI Configuration	21
7.1	Web GUI Overview	21
7.2	Laptop Configuration for Connect to the Repeater	21
7.2.1	GUI Port Connect	21
7.2.2	NMS Port Connect	22
7.3	Web GUI Connect and Sign In	22
7.4	System Setting Screen	23
7.5	RF Configuration / General / Operation Screen	24
7.6	Filter Screen	25
7.7	Alarm Screen	26
7.8	Table Screen	27
7.9	Firmware Update Screen	27

8. Troubleshooting..... 29

8.1.1 Simple Troubleshooting Method.....29

8.1.2 Troubleshooting Guide Related to System Operation29

8.1.3 Troubleshooting Guide Related to Alarm State.....30

8.1.4 Troubleshooting Guide Related to NMS.....31

1. FCC and ISED Mandatory

1.1 FCC Warning States

1.1.1 FCC Part 15.19 Warning

The device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

1.1.2 FCC Booster warning Label

1) Part 90 and Part 20 Signal Boosters – THIS IS A 90.219 CLASS A DEVICE

WARNING. This is NOT a CONSUMER device. It is designed for installation by FCC LICENSEES and QUALIFIED INSTALLERS. You MUST have an FCC LICENSE or express consent of an FCC Licensee to operate this device. You MUST register Part 90 Class B signal boosters (as defined in 47 CFR 90.219) online at www.fcc.gov/signal-boosters/registration. Unauthorized use may result in significant forfeiture penalties, including penalties in excess of \$100,000 for each continuing violation.

2) Part 90 Signal Boosters – THIS IS A 90.219 CLASS B DEVICE

WARNING. This is NOT a CONSUMER device. It is designed for installation by FCC LICENSEES and QUALIFIED INSTALLERS. You MUST have an FCC LICENSE or express consent of an FCC Licensee to operate this device. You MUST register Class B signal boosters (as defined in 47 CFR 90.219) online at www.fcc.gov/signal-boosters/registration. Unauthorized use may result in significant forfeiture penalties, including penalties in excess of \$100,000 for each continuing violation.

1.1.3 FCC Booster warning statements

Use of unauthorized antennas, cables, and/or coupling devices not conforming with ERP/EIRP and/or indoor-only restrictions is prohibited.

Home/ personal use are prohibited

Only 50 ohm rated antennas, cables and passive equipment shall be used with this remote. Any equipment attached to this device not meeting this standard may cause degradation and unwanted signals in the bi-directional system. All components connected to this device must operate in the frequency range of this device.

1.1.4 FCC Part 15 Class A

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at their own expense.

1.1.5 RF Radiation Exposure

This equipment complies with RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 70 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. RF exposure will be addressed at time of installation and the use of higher gain antennas require larger separation distances.

(DL: Pannel antenna Max. peak gain: 7 dBi, UL: LDPA antenna Max. peak gain: 12 dBi)

1.2 ISED Warning states

1.2.1 ISED Warning label

WARNING: This is NOT a CONSUMER device. It is designed for installation by an installer approved by an ISED licensee. You MUST have an ISED LICENCE or the express consent of an ISED licensee to operate this device.

AVERTISSEMENT: Ce n'est PAS un appareil de consommation. Il est conçu pour être installé par un installateur approuvé par un titulaire de licence d'ISD. Vous DEVEZ avoir une LICENCE d'ISDE ou le consentement exprès d'un titulaire de licence d'ISDE pour utiliser cet appareil.

1.2.2 RSS-GEN (6.8 Transmit antenna)

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Confonctionner avec une antenne d'un type et d'un gain maximal approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

1.2.3 RF Radiation Exposure

This equipment complies with RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 70 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. RF exposure will be addressed at time of installation and the use of higher gain antennas require larger separation distances.

(DL: Pannel antenna Max. peak gain: 7 dBi, UL: LDPA antenna Max. peak gain: 12 dBi)

L'antenne (ou les antennes) doit être installée de façon à maintenir à tout instant une distance minimum de au moins 70 cm entre la source de radiation (l'antenne) et toute personne physique. Cet appareil ne doit pas être installé ou utilisé en conjonction avec une autre antenne ou émetteur.

(DL: Pannel antenna Max. peak gain: 7 dBi, UL: LDPA antenna Max. peak gain: 12 dBi)

1. General Information

This document is primarily written for those who are new to 700/800 0.5W BDA system and wish to tune up the equipment. The document is applicable to below products from Innertron. Model number: IT109B005.

1.1 Repeater Information (FCC & IC ID)

CERTIFICATION	TYPE	ID	NOTES
FCC	B9A	2BCYP-IT7080BDA27DA	
	B9B	2BCYP-IT7080BDA27DB	
IC	B9A	30914-IT109B005A	
	B9B	30914-IT109B005B	

1.2 Purpose


700/800 0.5W BDA is a system that generally supports public safety wireless services indoors, and is necessary for first aid workers and firefighters to communicate with each other in emergencies and normal situations.

700/800 0.5W BDA is a digital repeater that supports 700MHz band and 800MHz band. Bandwidth varies based on FPGA, and up to 32 channels can be selectively serviced through software through Digital Filter.

1.3 Advantages


- 700MHz/800MHz dual band
- 32 channel class A and B filter per band
- Automatic gain control
- UL squelch
- Oscillation detection
- Isolation check
- Auto shutdown to protect repeater from overpower and oscillation
- VSWR Monitoring
- LED for status check

1.4 Exterior

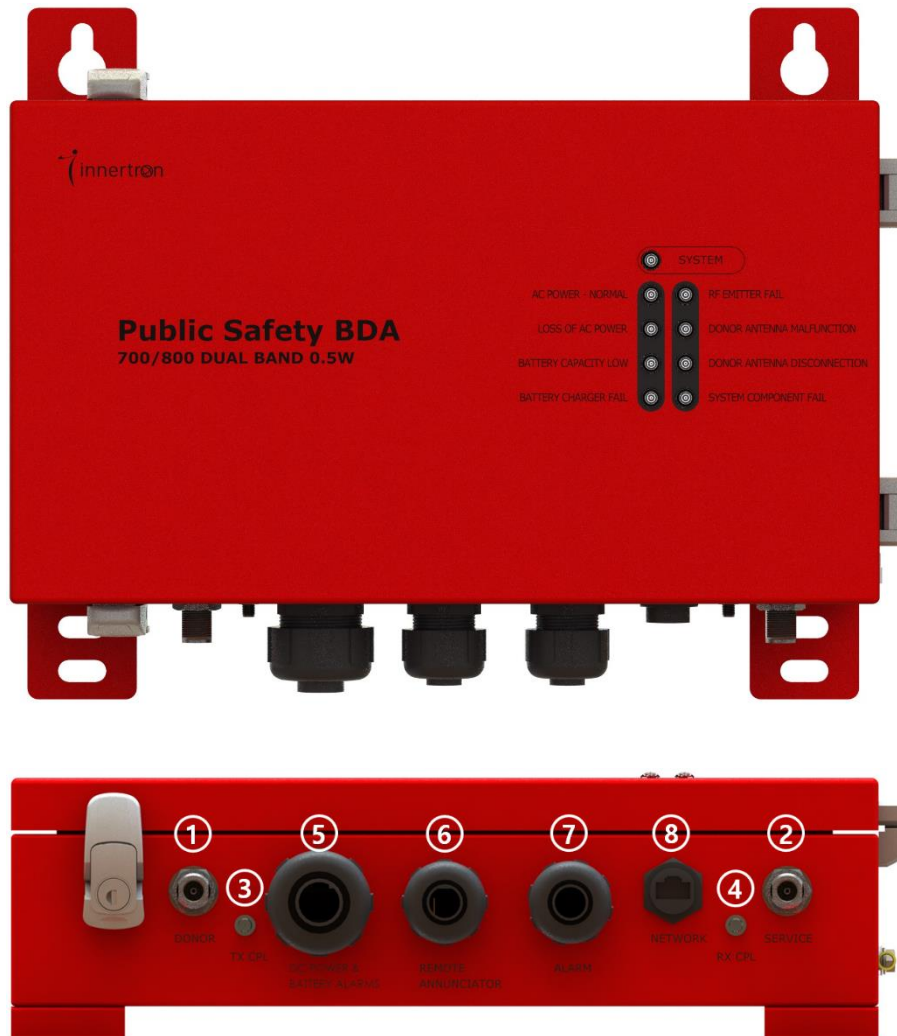

No.	PARAMETER	DESCRIPTION	NOTES
1	DONOR	Donor antenna port	N-type
2	SERVICE	Service antenna port	N-type
3	TX CPL	UL output coupling port	SMA
4	RX CPL	DL output coupling port	SMA
5	DC POWER & BATTERY ALARMS	DC power and associated UL2524 status and alarms	Liquid Tight Conduit Fittings (3/4 inch)
6	REMOTE ANNUNCIATOR	Provide power and alarm signaling to a remote annunciator	Liquid Tight Conduit Fittings (1/2 inch)
7	ALARM	Provide wired connection to alarm	Liquid Tight Conduit Fittings (1/2 inch)
8	NETWORK	Communications with a network	RJ-45

1.5 Interior

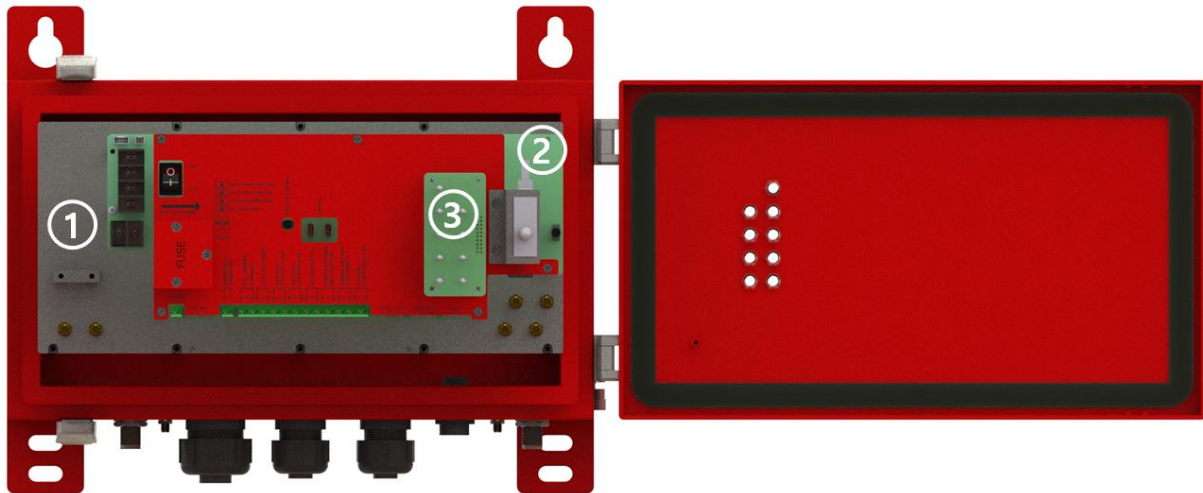

No.	PARAMETER	DESCRIPTION	NOTES
1	RFM & DTU	RF Board, Digital Board and PAMs are built in	Top: RF Board Bottom: DTU, PAM
2	WEB GUI/ALARM Board	Web GUI and Alarm functionality integrated into one board	
3	LED	Display of system and alarm state	9 LEDs

2. Specifications

2.1 Frequency Range

SERVICE BAND	DOWNLINK [MHz]			UPLINK [MHz]		
	LOW	CENTER	HGH	LOW	CENTER	HGH
700MHz (US)	769	772	775	799	802.5	805
700MHz (CANADA)	768	772	776	798	802	806
800MHz (US)	851	856	861	806	815	816
	862	865.5	869	817	820.5	824
800MHz (CANADA)	851	860	869	806	815	824

2.2 RF Specifications

PARAMETER		DOWNLINK	UPLINK
Output Power	700MHz	27dBm	24dBm
	800MHz	27dBm	24dBm
Input Dynamic Range		-63dBm ~ -3dBm	-56dBm ~ +4dBm
Gain Range		30dB ~ 90dB	20dB ~ 80dB
Gain Adjustment Range per CH		30dB/1.0dB steps	
Gain Adjust Accuracy		±1dB	
Input AGC Dynamic Range		60dB	
Max RF Input Power without Overdrive		+0dBm	+10dBm
Max RF Input Power without Damage		+20dBm	
Noise figure		6dB Max @ Max Gain	
Pass Band Ripple		3dB peak to peak	
Number of Channel Filter	Class A	32 Channel	
	Class B	32 Channel	
Filter Bandwidth	Class A	12.5kHz, 75kHz	
	Class B	150kHz, 250kHz	
Delay	Class A	< 60us @ 12.5kHz	
		< 15us @ 75kHz	
	Class B	< 15us @ 150kHz	
		< 15us @ 250kHz	
EVM		≤ 4.0% @ P25 phase 1 and phase 2 modulation	

UL Squelch Threshold	-70~-100dBm @ Per Class A and B Channel, must have a disable
VSWR	≤1.5:1
Spurious	< -13dBm (FCC Title 47 Part 90.219)
Characteristic Impedance	50Ω


2.3 Mechanical Specifications

PARAMETER	DESCRIPTION	NOTES
Dimensions (H x W x D)	380 x 220 x 100mm	
Weight	≤ 7kg	
Operating Voltage	12VDC	
Power Consumption	≤ 70W	
Operating Temperature	-30 ~ +50°C	
Operating Humidity	≤ 95%	
Enclosure Cooling	Convection	
Enclosure Class	UL 50/Type 4X	

3. Integrated Enclosure Interfaces


3.1 DONOR & SERVICE Connector


700/800 0.5W BDA adopts an N-type female connector. If the user wants to use a Mini-DIN 4.3/10 cable or connector, they need an adapter.

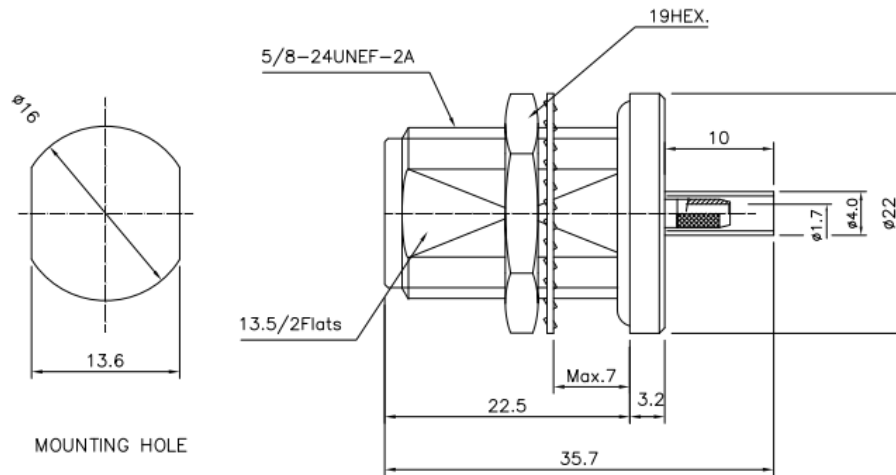

3.2 DC POWER & BATTERY ALARMS Feedthrough

BDA uses only 12V DC voltage. If the user uses other un-recommend input voltages, 700/800 0.5W BDA may be broken. DC POWER & BATTERY ALARM feedthrough uses 3/4 inch liquid tight conduit fittings.

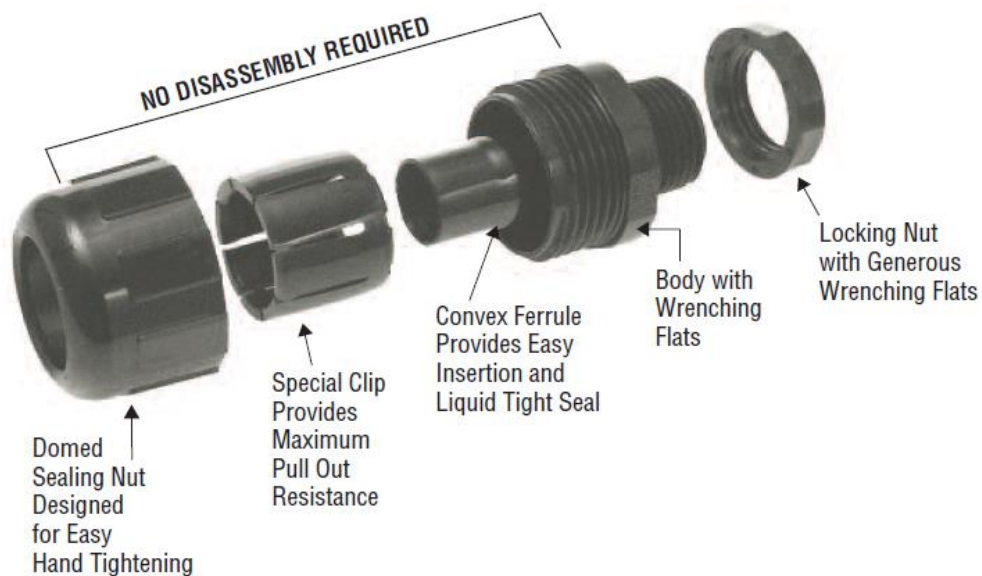

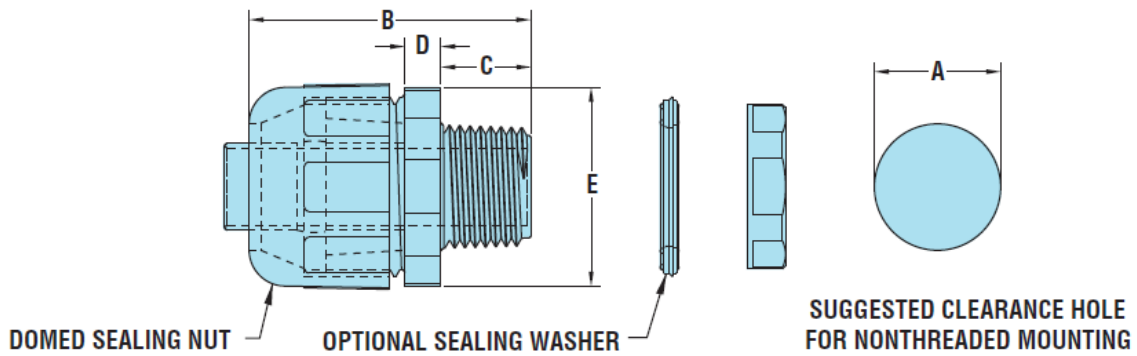

FITS CONDUIT/ TUBING TRADE SIZE	PART NO.		DESCRIPTION	THREAD SIZE	PART DIMENSIONS BODY AND SEALING UNIT									
	Black	Gray			A		B		C		D		E	
					Clearance Hole		Max. O.A. Length		Thread Length		Wrenching Nut Thk.		Flat Size	
1/4	8398	-	HFC 1/4-PG7*	PG7	.492	12,5	1.13	28,7	.45	11,4	.21	5,3	1.00	25,4
3/8	8400	8401	HFC 3/8	1/2" NPT	.875	22,2	1.96	49,8	.63	16,0	.25	6,3	1.33	33,7
1/2	8402	8403	HFC 1/2		**									
3/4	8404	8405	HFC 3/4	3/4" NPT	1.109	28,1	2.04	52,8	.63	16,0	.25	6,3	1.56	39,6
1	8406	8407	HFC 1	1" NPT	1.375	34,9	2.25	57,2	.78	19,8	.25	6,3	1.81	46,0
1-1/4	8638	8639	HFC 1-1/4 †	1-1/4" NPT	1.734	44,0	2.07	52,6	.69	17,4	.25	6,3	2.15	54,6
1-1/2	8640	8641	HFC 1-1/2 †	1-1/2" NPT	1.984	50,4	2.28	57,9	.78	19,8	.28	7,0	2.40	61,0
2	8642	8643	HFC 2 †	2" NPT	2.469	62,7	2.26	66,0	.85	21,6	.31	7,9	2.98	75,6

3.3 REMOTE ANNUNCIATOR Feedthrough


Feedthrough to provide power and alarm signaling to a remote annunciator. That uses 1/2 inch Liquid Tight Conduit Fittings.

3.4 ALARM Feedthrough

Feedthrough to provide wired connection to one status signal and 7 UL2524 required alarms. That uses 1/2 inch Liquid Tight Conduit Fittings.


3.5 NETWORK Connector

Ethernet connector port for communications with a network. User can use the Web GUI to control and monitor the BDA in remote or local locations.

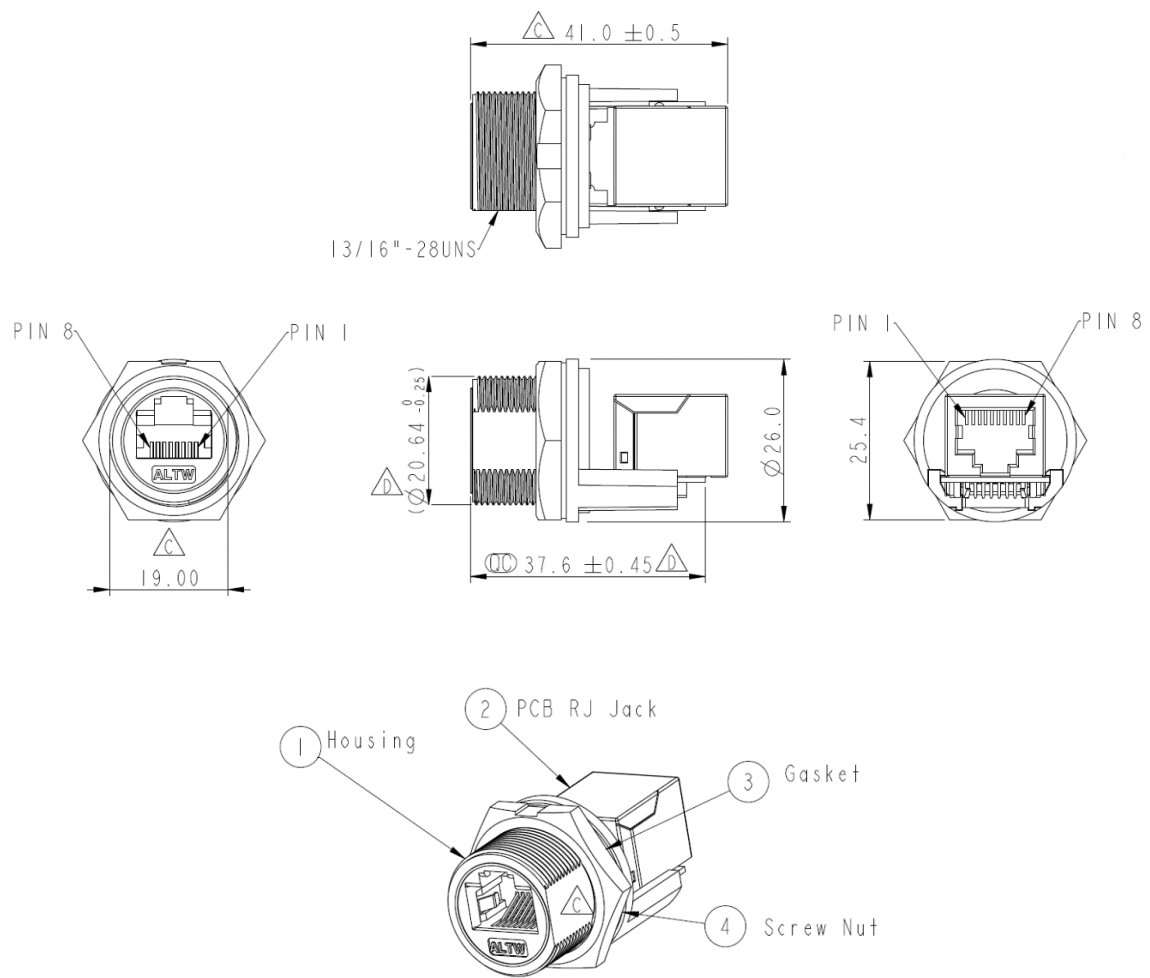

4. LED Indicators

The BDA has 1 system LED and 8 alarm LEDs that visibly display system status and UL2524 alarms.

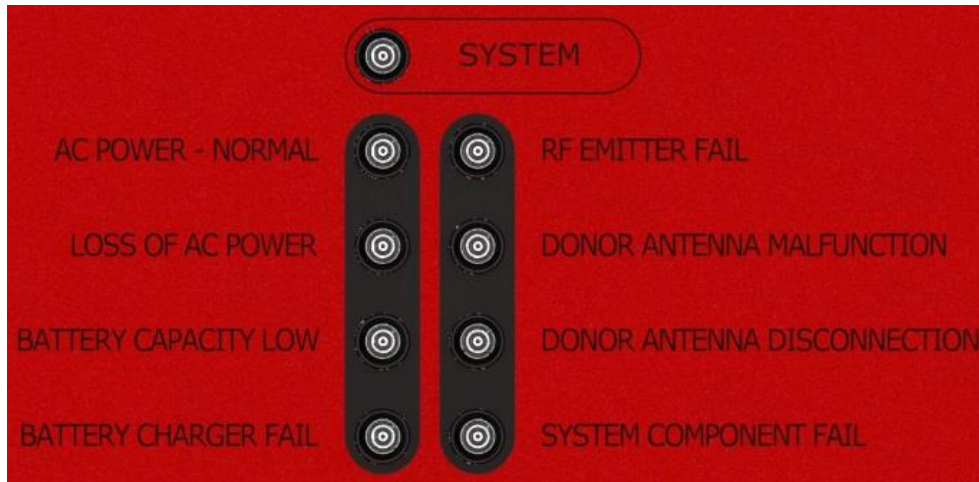

4.1 SYSTEM LED

The SYSTEM LED is a tricolor LED - GREEN, YELLOW, RED

LED COLOR	STATE
GREEN	SYSTEM NORMAL - POWER ON
YELLOW	ANY ALARM DETECTED - SYSTEM OPERATIONAL
RED	ANY ALARM DETECTED - SYSTEM NOT OPERATIONAL
GREEN	ALARM RELAY INTERFACE ALARM ACTIVE BUT MASKED
OFF	NO DC POWER PRESENT

4.2 ANNUNCIATOR LEDs

There are 8 LEDs which colors are defined as follows:

LED COLOR	STATE
GREEN	AC POWER NORMAL
RED	LOSS OF AC POWER
RED	BATTERY CAPACITY LOW
RED	BATTERY CHARGER FAIL
RED	RF EMITTER FAIL

RED	DONOR ANTENNA MALFUNCTION
RED	DONOR ANTENNA DISCONNECTION
RED	SYSTEM COMPONENT FAIL

5. Installation Guide

5.1 Environment

5.1.1 Antenna

The antenna used in the BDA must be certified or an antenna with equivalent specifications. The company shall not bear any liability for any problems arising from the use of an uncertified antenna.

The donor antenna must be mounted outside the building with the strongest cell signals. Mount the donor antenna as high as possible facing towards the desired location of the cell tower and facing the opposite direction of the expected location of the service antenna.

The server antenna must be mounted

5.1.2 Isolation Check and Gain Setting


If the system wants to operate in the max gain state, the system requires sufficient isolation between the donor and service antennas. The system recommends isolation be higher than 20dB above the gain of the system. If isolation is not sufficiently ensured, the Isolation Check function operates to reduce the gain to a level suitable for the ensured isolation.

5.2 Mounting the BDA

Choose a location for the BDA, preferably away from excessive heat, direct sunlight, moisture and is free from high temperatures.


5.2.1 Installation of Concrete Wall

The following illustration is an example of a concrete wall installation.

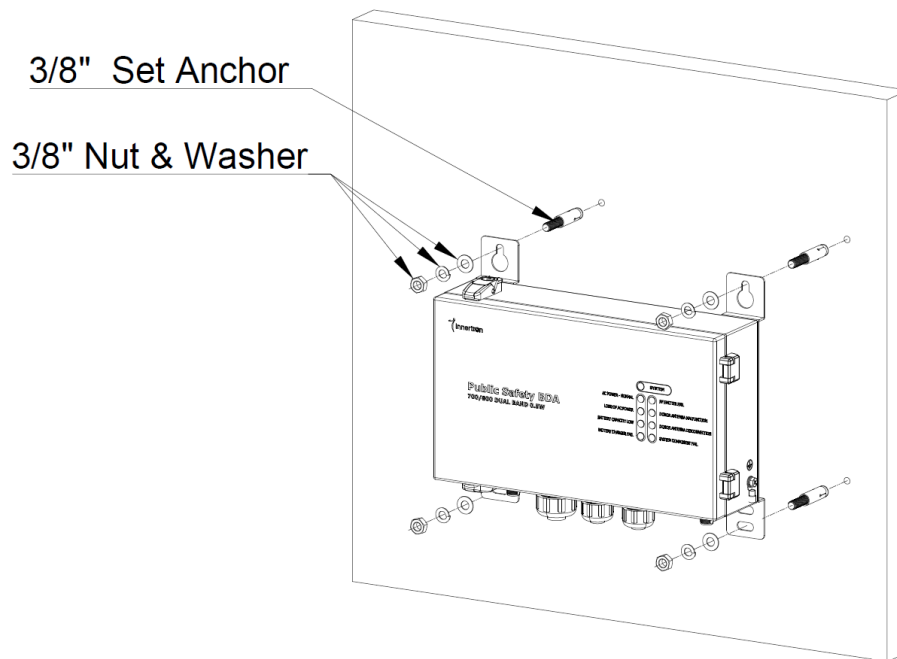

5.2.2 Installation of Wooden Wall

The following illustration is an example of a wooden wall installation.

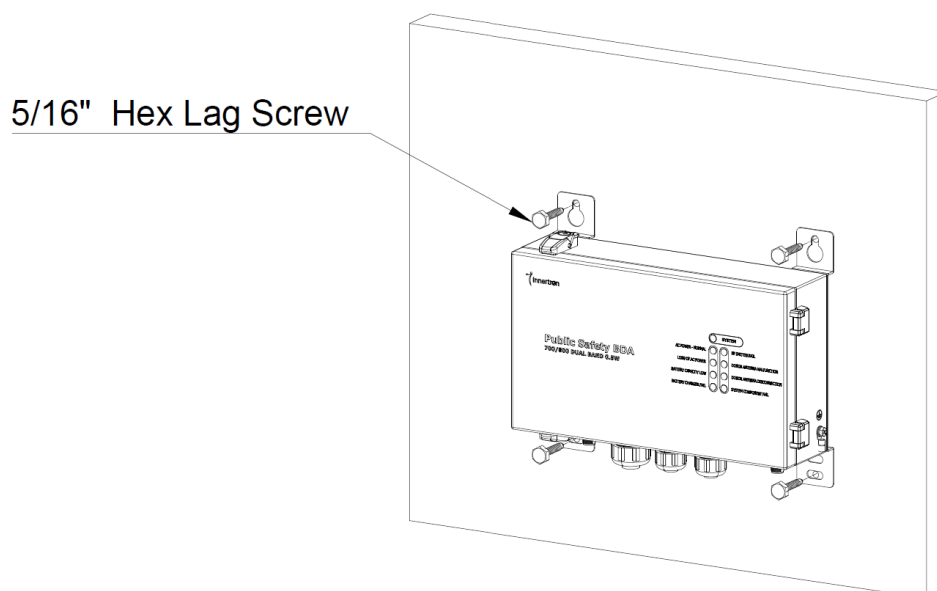

6. Web GUI Configuration


6.1 Web GUI Overview

Supports Web GUI pages through the ethernet interface.

6.2 Laptop Configuration for Connect to the Repeater


Connect the ethernet cable to the GUI port at the bottom of the repeater or the NMS port inside the repeater.

6.2.1 GUI Port Connect

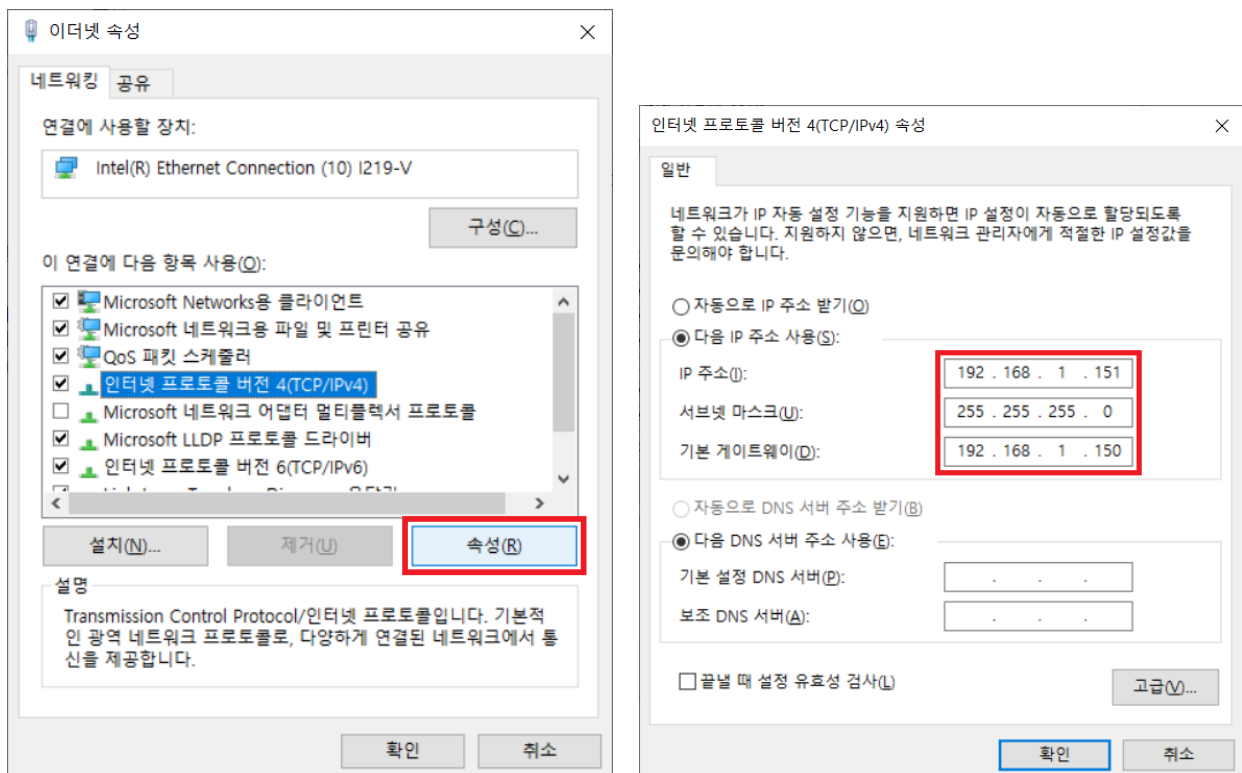

- 1) Select 'Internet Protocol Version 4(TCP/IPv4)' in the Ethernet Properties window and click Properties.
- 2) Enter the IP address (192.168.1.151), the subnet mask (255.255.255.0), and the default gateway (192.168.1.150) as shown in the figure above, and then click OK.

6.2.2 NMS Port Connect

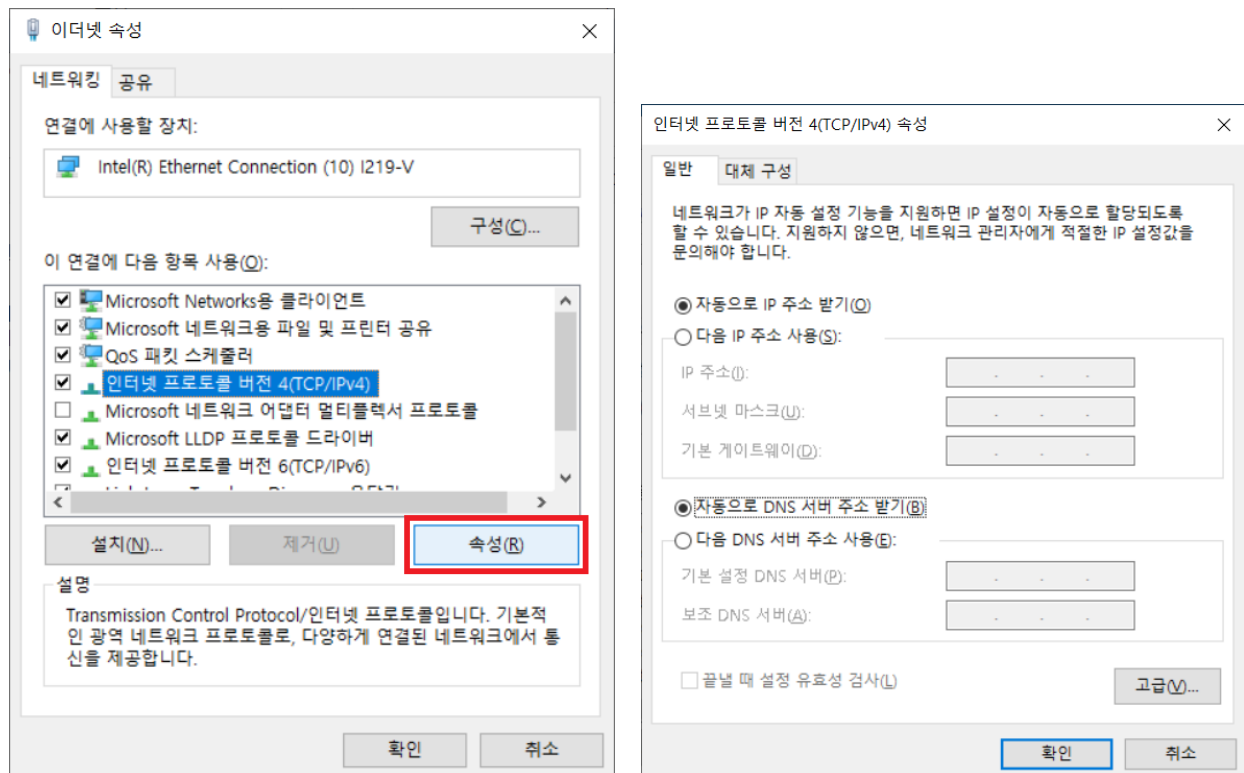


- 1) Select 'Internet Protocol Version 4(TCP/IPv4)' in the Ethernet Properties window and click Properties.
- 2) Select 'Obtain IP address automatically.'
- 3) Select 'Obtain DNS server address automatically and click OK.

6.3 Web GUI Connect and Sign In

- 1) Enter '192.168.1.150/psr.html' in the Internet address window to access the Web GUI.




- 2) On the Web GUI screen, type "admin" in ID and P/W and click Sign In button.

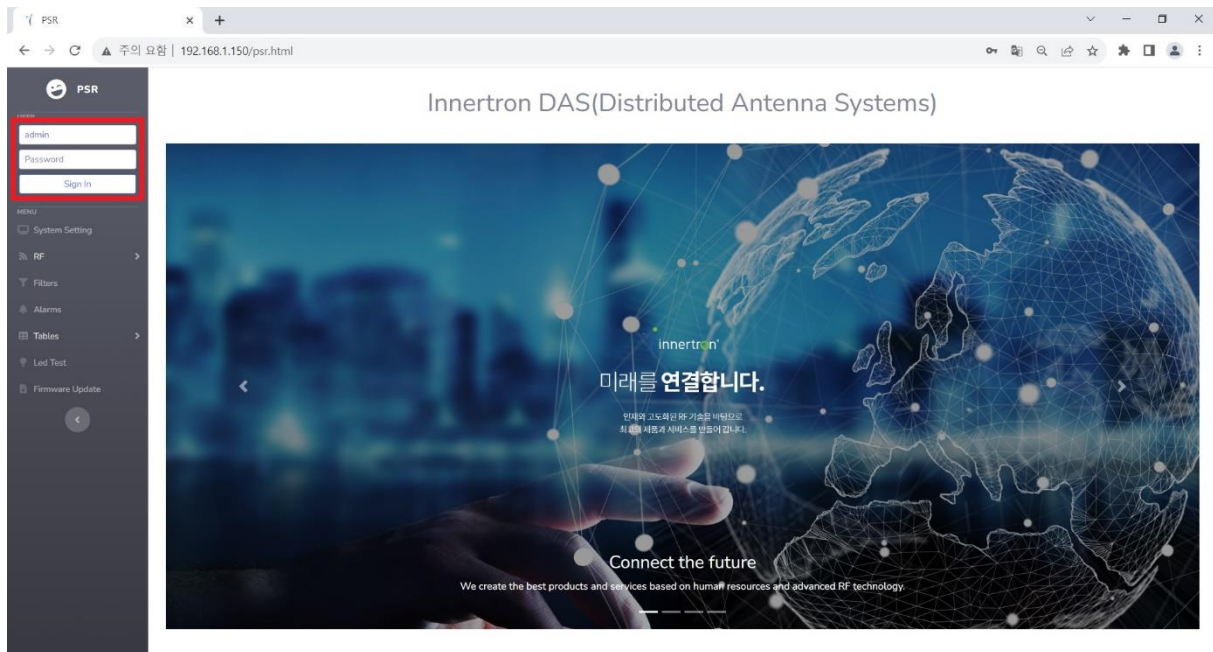

6.4 System Setting Screen

- 1) Can check the system information (Product, Site, Network, etc) on the system setting screen.

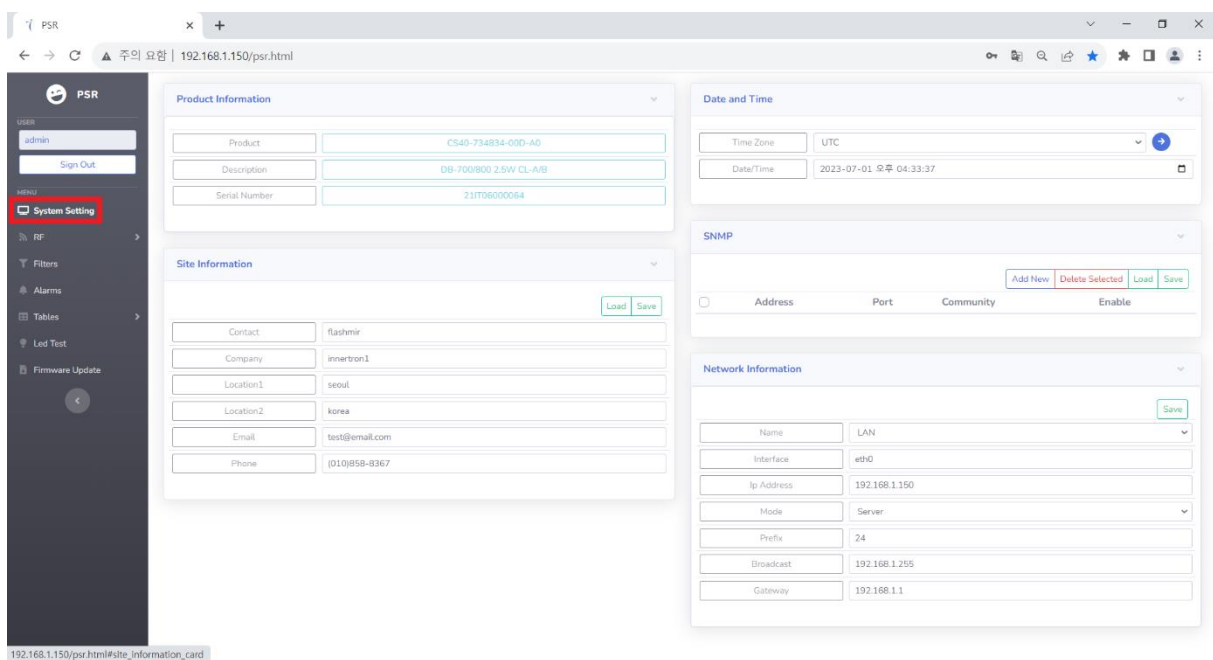

6.5 RF Configuration / General / Operation Screen

1) Can change the RF setting of the repeater on this screen.

The screenshot displays the PSR RF Configuration / General / Operation screen. The interface is divided into two main sections: 700MHz Configuration and 800MHz Configuration. Each section includes a DSP Bypass toggle, Gain settings for DL and UL, Input AGC, Output AGC, Squelch, Squelch Enable, Output Alt AGC, Oscillation, Donor Antenna Level (Malfunction, Disconnect), and Isolation (Frequency, Result). Below these are calibration settings for Frequency Offset, Malfunction Offset, Isolation Offset, DNC Atten Offset, Input Offset, and Output Offset. The 800MHz section has a DSP Bypass toggle set to ON, while the 700MHz section has it set to OFF.

Section	Parameter	DL	UL	Unit	Value
700MHz Configuration	DSP Bypass	OFF			
	Gain	-	90	dB	+
	Input AGC	-	-63.0	dBm	+
	Output AGC	-	27.0	dBm	+
	Squelch	-	-90.0	dBm	+
	Squelch Enable	-	-90.0	dBm	+
	Output Alt AGC	-	-	dBm	+
	Oscillation	-	-	dBm	+
	Donor Antenna Level	-	-95	dBm	+
	Disconnect	-	-100	dBm	+
	Isolation	-	771.500	MHz	+
	Result	-	0.0	dB	+
800MHz Configuration	DSP Bypass	ON			
	Gain	-	90	dB	+
	Input AGC	-	-63.0	dBm	+
	Output AGC	-	27.0	dBm	+
	Squelch	-	-90.0	dBm	+
	Squelch Enable	-	-90.0	dBm	+
	Output Alt AGC	-	-	dBm	+
	Oscillation	-	-	dBm	+
	Donor Antenna Level	-	-95	dBm	+
	Disconnect	-	-100	dBm	+
	Isolation	-	862.000	MHz	+
	Result	-	0.0	dB	+

Section	Parameter	DL	UL	Unit	Value	
700MHz Calibration	Frequency Offset	-	0	Hz	+	
	Malfunction Offset	-	0.0	dB	+	
	Isolation Offset	-	0	dB	+	
	DNC Atten Offset	-	0.0	dB	+	
	Input Offset	-	53.4	dB	+	
	Output Offset	-	36.8	dB	+	
	800MHz Calibration	Frequency Offset	-	0	Hz	+
		Malfunction Offset	-	0.0	dB	+
		Isolation Offset	-	0	dB	+
		DNC Atten Offset	-	0.0	dB	+
		Input Offset	-	52.8	dB	+
		Output Offset	-	37.3	dB	+

The screenshot displays the PSR RF Configuration / General / Operation screen. The interface is divided into three main sections: RF Module Enable/Disable, RF Temperature Alarm Configuration, and RF Configuration Export/Import. The RF Module Enable/Disable section shows a table of modules and their enable status. The RF Temperature Alarm Configuration section shows temperature settings for RFM, HPA, and Alarm Threshold. The RF Configuration Export/Import section shows buttons for Export and Import.

Category	Module	Enable
HPA	DL 700	OFF
	DL 800	OFF
	UL	OFF
HPA_STAT	DL 700	OFF
	DL 800	OFF
	UL	OFF
LNA_SD	DL 700	OFF
	DL 800	OFF
	UL	OFF
PLL_LD	DL 700	ON
	DL 800	ON
	UL 700	ON
	UL 800	ON

Parameter	Value	Unit
RFM Temperature	33	°C
HPA Temperature	0	°C
Alarm Threshold	85	°C

Export: [Export] Import: [Import]

The screenshot displays the PSR web interface with the 'RF Operation' menu item highlighted in the left sidebar. The main content area is divided into four panels:

- Attenuator:** A table showing attenuation settings for different groups (DL700, DL800, UL700, UL800) across four indices. Each index has a value field (0.0 or 30.0 dB) and a 'Put' button. A 'Manual' toggle is at the top right.
- ADC:** A table showing ADC settings for different paths (DL 700, DL 800, UL 700/800) with columns for Name, Value, and Power.
- FPGA:** A table showing FPGA settings for different paths (PS700, PS800) with columns for Name, Raw Value, and Power Value.
- DAC:** A table showing DAC settings for different paths (DL 700, DL 800) with columns for Name, Pin, Ch, Value, and Put.

6.6 Filter Screen

- 1) Can set the frequency and bandwidth of the digital filter on the filter screen.

PSR

주소: 192.168.1.150/psr.html

PSR

admin

Sign Out

MENU

- System Setting
- RF
 - RF Configuration
 - RF General
 - RF Operation
 - Filters**
- Alarms
- Tables
- Led Test
- Firmware Update

700 Filters Configuration


CH	CF		BW	ATT		PWR		EN	ED
	DL	UL		DL	UL	DL	UL		
0	767M	797M	10M	0	0	N/A	N/A	OFF	OFF
1	772M	802M	25K	0	0	N/A	N/A	ON	OFF
2	769.7M	799.7M	25K	0	0	N/A	N/A	OFF	OFF
3	769.9M	799.9M	25K	0	0	N/A	N/A	OFF	OFF
4	770.1M	800.1M	25K	0	0	N/A	N/A	OFF	OFF
5	770.3M	800.3M	25K	0	0	N/A	N/A	OFF	OFF
6	770.5M	800.5M	25K	0	0	N/A	N/A	OFF	OFF
7	770.7M	800.7M	25K	0	0	N/A	N/A	OFF	OFF
8	770.9M	800.9M	25K	0	0	N/A	N/A	OFF	OFF
9	771.1M	801.1M	25K	0	0	N/A	N/A	OFF	OFF
10	771.3M	801.3M	25K	0	0	N/A	N/A	OFF	OFF
11	771.5M	801.5M	25K	0	0	N/A	N/A	OFF	OFF
12	771.7M	801.7M	25K	0	0	N/A	N/A	OFF	OFF
13	771.9M	801.9M	25K	0	0	N/A	N/A	OFF	OFF
14	772.1M	802.1M	25K	0	0	N/A	N/A	OFF	OFF
15	772.3M	802.3M	25K	0	0	N/A	N/A	OFF	OFF
16	772.5M	802.5M	25K	0	0	N/A	N/A	OFF	OFF
17	772.7M	802.7M	25K	0	0	N/A	N/A	OFF	OFF
18	772.9M	802.9M	25K	0	0	N/A	N/A	OFF	OFF
19	773.1M	803.1M	25K	0	0	N/A	N/A	OFF	OFF
20	773.3M	803.3M	25K	0	0	N/A	N/A	OFF	OFF
21	773.5M	803.5M	25K	0	0	N/A	N/A	OFF	OFF
22	773.7M	803.7M	25K	0	0	N/A	N/A	OFF	OFF
23	773.9M	803.9M	25K	0	0	N/A	N/A	OFF	OFF
24	774.1M	804.1M	25K	0	0	N/A	N/A	OFF	OFF
25	774.3M	804.3M	25K	0	0	N/A	N/A	OFF	OFF
26	774.5M	804.5M	25K	0	0	N/A	N/A	OFF	OFF
27	774.7M	804.7M	25K	0	0	N/A	N/A	OFF	OFF
28	774.9M	804.9M	25K	0	0	N/A	N/A	OFF	OFF
29	775.1M	805.1M	25K	0	0	N/A	N/A	OFF	OFF
30	775.3M	805.3M	25K	0	0	N/A	N/A	OFF	OFF
31	775.5M	805.5M	25K	0	0	N/A	N/A	OFF	OFF
32	775.7M	805.7M	25K	0	0	N/A	N/A	OFF	OFF
33	767M	797M	10M	0	0	N/A	N/A	OFF	OFF
34	767M	797M	1M	0	0	N/A	N/A	OFF	OFF
35	767M	797M	1M	0	0	N/A	N/A	OFF	OFF
36	767M	797M	1M	0	0	N/A	N/A	OFF	OFF

800 Filters Configuration

CH	CF		BW	ATT		PWR		EN	ED
	DL	UL		DL	UL	DL	UL		
1	851.21M	806.21M	75K	0	0	N/A	N/A	OFF	OFF
2	851.78M	806.78M	75K	0	0	N/A	N/A	OFF	OFF
3	852.35M	807.35M	75K	0	0	N/A	N/A	OFF	OFF
4	852.92M	807.92M	75K	0	0	N/A	N/A	OFF	OFF
5	853.49M	808.49M	75K	0	0	N/A	N/A	OFF	OFF
6	854.06M	809.06M	75K	0	0	N/A	N/A	OFF	OFF
7	854.63M	809.63M	75K	0	0	N/A	N/A	OFF	OFF
8	855.2M	810.2M	75K	0	0	N/A	N/A	OFF	OFF
9	855.77M	810.77M	75K	0	0	N/A	N/A	OFF	OFF
10	856.34M	811.34M	75K	0	0	N/A	N/A	OFF	OFF
11	856.91M	811.91M	75K	0	0	N/A	N/A	OFF	OFF
12	857.48M	812.48M	75K	0	0	N/A	N/A	OFF	OFF
13	858.05M	813.05M	75K	0	0	N/A	N/A	OFF	OFF
14	858.62M	813.62M	75K	0	0	N/A	N/A	OFF	OFF
15	859.19M	814.19M	75K	0	0	N/A	N/A	OFF	OFF
16	859.76M	814.76M	75K	0	0	N/A	N/A	OFF	OFF
17	860M	815M	25K	0	0	N/A	N/A	OFF	OFF
18	860.9M	815.9M	75K	0	0	N/A	N/A	OFF	OFF
19	861.47M	816.47M	75K	0	0	N/A	N/A	OFF	OFF
20	862.04M	817.04M	75K	0	0	N/A	N/A	OFF	OFF
21	862.61M	817.61M	75K	0	0	N/A	N/A	OFF	OFF
22	863.18M	818.18M	75K	0	0	N/A	N/A	OFF	OFF
23	863.75M	818.75M	75K	0	0	N/A	N/A	OFF	OFF
24	864.32M	819.32M	75K	0	0	N/A	N/A	OFF	OFF
25	864.89M	819.89M	75K	0	0	N/A	N/A	OFF	OFF
26	865.46M	820.46M	75K	0	0	N/A	N/A	OFF	OFF
27	866.03M	821.03M	75K	0	0	N/A	N/A	OFF	OFF
28	866.6M	821.6M	75K	0	0	N/A	N/A	OFF	OFF
29	867.17M	822.17M	75K	0	0	N/A	N/A	OFF	OFF
30	867.74M	822.74M	75K	0	0	N/A	N/A	OFF	OFF
31	868.31M	823.31M	75K	0	0	N/A	N/A	OFF	OFF
32	868.88M	823.88M	75K	0	0	N/A	N/A	OFF	OFF
33	860M	815M	18M	0	0	N/A	N/A	OFF	OFF
34	860M	815M	2M	0	0	N/A	N/A	OFF	OFF
35	860M	815M	1M	0	0	N/A	N/A	OFF	OFF
36	860M	815M	3M	0	0	N/A	N/A	OFF	OFF


6.7 Alarm Screen

- As a screen for checking the alarm state of the repeater, alarm mask may be set and alarm test may be performed.
- The alarm state of the repeater may be checked in an alarm color.
 - Yellow: Any alarm detected but system operation
 - Red: Any alarm detected and system not operation

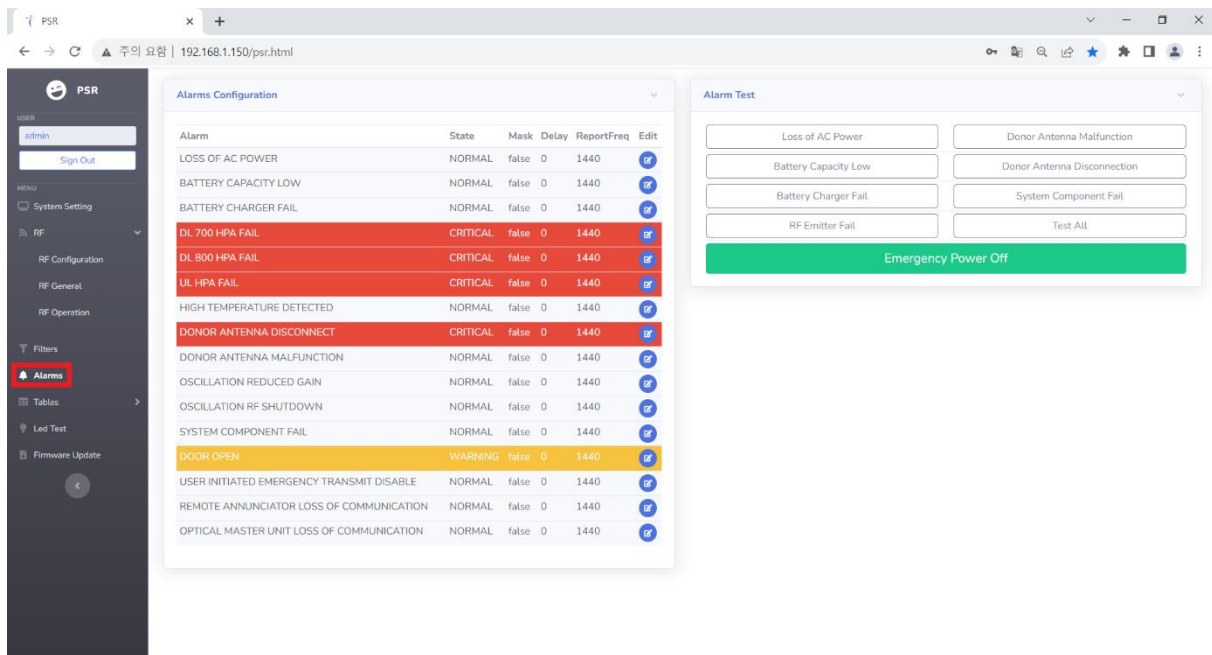


6.8 Table Screen

- 1) Can set various tables (Atten, Power, Temperature, Temperature PLL, DAC) on the table screen.

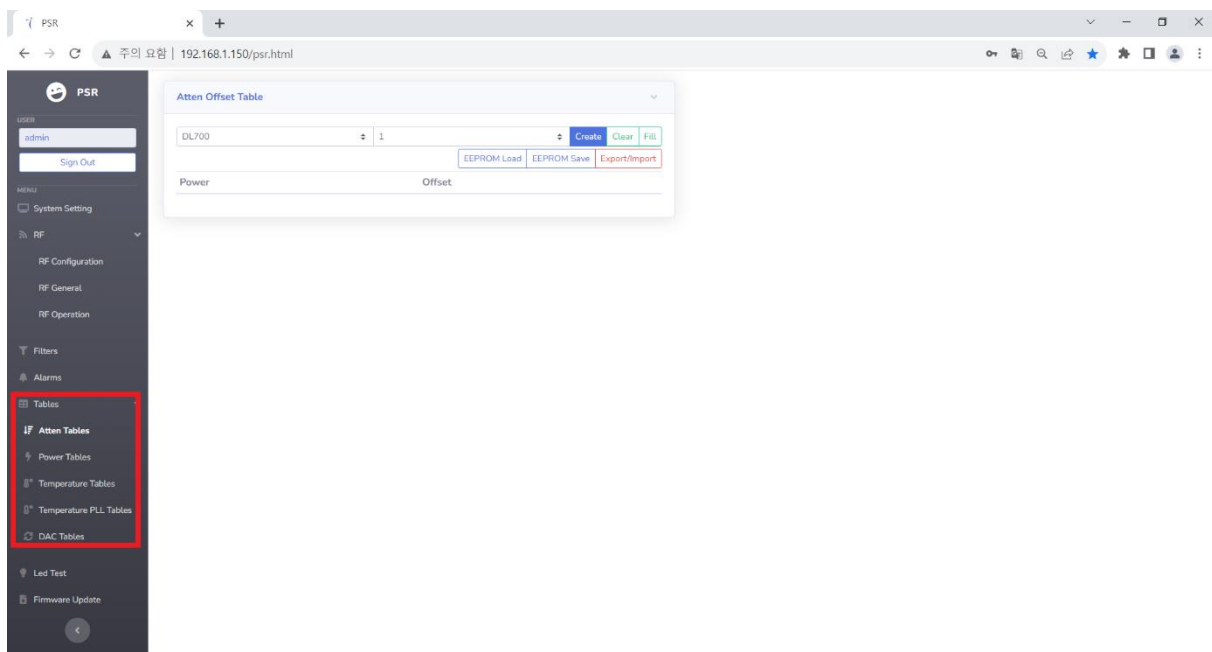

6.9 Firmware Update Screen

- 1) Can download the GUI, FPGA and MCU file on the firmware update screen.

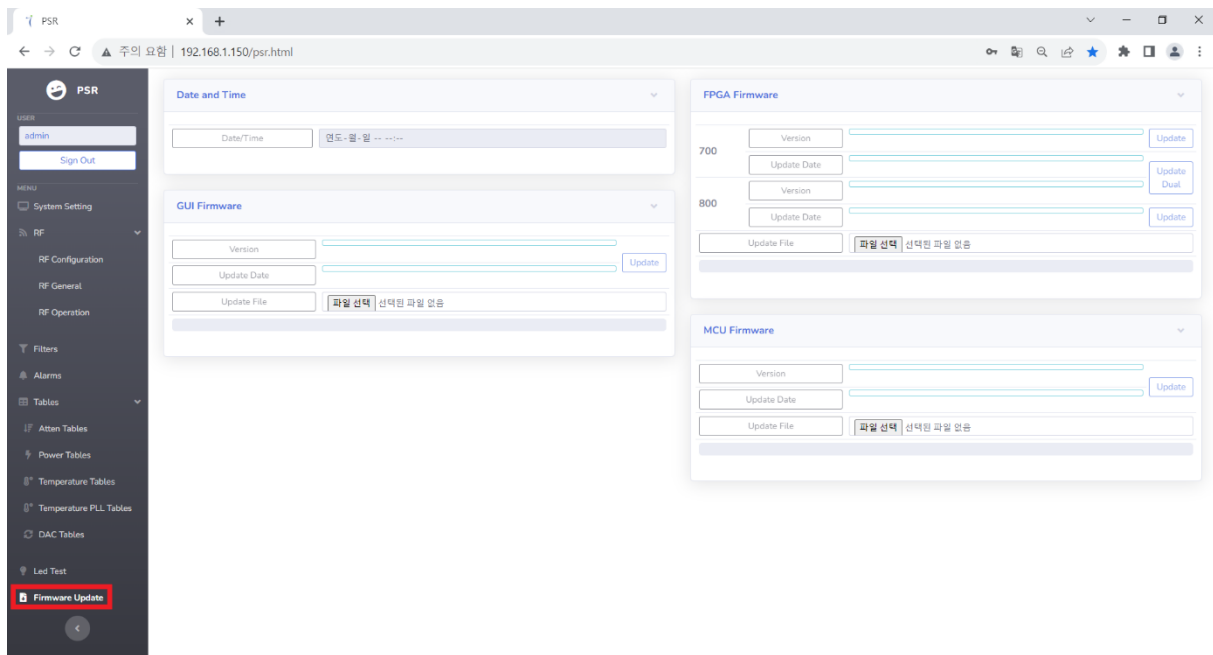

7. Troubleshooting

In case of abnormal operation, technician should diagnose abnormality via remote access or directly connecting to repeater using Ethernet cable. If technician is required to conduct repairs due to major alarm, repeater should first be powered off, and then technician should prepare the proper measurement equipment before trying to fix the problem. In most cases of major repairs, Innertron will simply replace the unit and conduct repairs at the appropriate facility.

7.1.1 Simple Troubleshooting Method

- 1) Verify SYSTEM LED State.
 - System normal : Green LED on
 - Any alarm detected - system operational : Yellow LED on
 - Any alarm detected - system not operational : Red LED on
- 2) Technician should check external and internal connectors to ensure that all connections are tightly secure. These connectors should be cleaned regularly.
- 3) If technician thinks there is a serious problem, call after sales team for over-the-phone technical support. 82-32-816-1456.

7.1.2 Troubleshooting Guide Related to System Operation

PARAMETER	CHECK POINT	TROUBLESHOOTING
Check Before System Operation	System Input Power	- Downlink : -63dBm ~ -3dBm - Uplink : -56dBm ~ +4dBm
	System Gain	- Downlink : 90dB $\pm$ 1.5dB - Uplink : 80dB $\pm$ 1.5dB
	System Output Power	- Downlink : 27dBm $\pm$ 1.5dB - Uplink : 24dBm $\pm$ 1.5dB
Check After System Operation	Check Points After Open For Service	- Verify that the antennas are securely mounted and pointed in the correct directions. - Connection status between antennas and RF cable. - Verify that the BDA is securely mounted. - DC voltage. - Grounding status of electrical circuit. - Coaxial cable(RF) construction status.

7.1.3 Troubleshooting Guide Related to Alarm State

GUI ALARM	FRONT PANEL LED	BDA ACTION	TROUBLESHOOTING
NA	AC POWER - NORMAL	SHUTDOWN	- Check power cable connection.
LOSS OF AC POWER	LOSS OF AC POWER	NONE	- NA
BATTERY CAPACITY LOW	BATTERY CAPACITY LOW	NONE	- NA
BATTERY CHARGER FAIL	BATTERY CHARGER FAIL	NONE	- NA
DL 700 HPA FAIL	RF EMITTER FAIL	700 DL RF SHUTDOWN	- Check HPA is off. - Check BDA is shutdown condition.
DL 800 HPA FAIL	RF EMITTER FAIL	800 DL RF SHUTDOWN	- Check HPA is off. - Check BDA is shutdown condition.
UL HPA FAIL	RF EMITTER FAIL	700 & 800 UL+DL RF SHUTDOWN	- Check HPA is off. - Check BDA is shutdown condition.
HIGH TEMPERATURE DETECTED	SYSTEM COMPONENT FAIL	700 & 800 RF SHUTDOWN	- Check maximum temperature setting. - Check ambient temperature.
	RF EMITTER FAIL		
DONOR ANTENNA DISCONNECT	DONOR ANTENNA DISCONNECTION	NONE	- Check antenna installation direction. - Check donor antenna and RF cable connection status.
	RF EMITTER FAIL		
DONOR ANTENNA MALFUNCTION	DONOR ANTENNA MALFUNCTION	NONE	- Check donor antenna installation direction. - Check donor antenna and RF cable connection status.
OSCILLATION REDUCED GAIN	SYSTEM COMPONENT FAIL	NONE	- Check the direction of the donor antenna and the service antenna.
OSCILLATION RF SHUTDOWN	SYSTEM COMPONENT FAIL	700 & 800 RF SHUTDOWN	- Check the direction of the donor antenna and the service antenna.
	RF EMITTER FAIL		
DOOR OPEN	NA	NONE	- Check the door

7.1.4 Troubleshooting Guide Related to NMS

SYMPTOM	CHECK POINT	TROUBLESHOOTING
Link Fail	Communication Problem	- Re-connection in ethernet cable. - Verify IP address and DHCP function.

If technician thinks there is a serious problem, call after sales team for over-the-phone technical support.
82-32-816-1456.