

MPE REPORT

Power Bank

MODEL No.: MC18

FCC ID: 2BCZD-MC18

REPORT NO.:NCT23037101XE-2

ISSUE DATE: Sep. 22, 2023

Prepared for

Huizhou Mulong Electronic Technology Co., Ltd

Floor 4, No. 138-3 (Plant 2), Xikeng Industrial Zone, Zhongkai High-tech Zone,
Huizhou, Guangdong, China.

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China

TEL: 400-8868-419

FAX: 86-755-27790922

TABLE OF CONTENT

Test Report Description	Page
1. SUMMARY OF TEST RESULT	4
2. GENERAL INFORMATION	5
2.1. DESCRIPTION OF DEVICE (EUT)	5
2.2. DESCRIPTION OF TEST FACILITY	6
2.3. MEASUREMENT UNCERTAINTY	6
3. MEASURING DEVICE AND TEST EQUIPMENT	7
3.1. FOR MPE MEASUREMENT	7
4. RF EXPOSURE	7
4.1. MEASURING STANDARD	8
4.2. REQUIMENTS	8
4.3. TEST CONFIGURATION	9
4.4. LIMITS	10
4.5. MEASURING RESULTS	11
5. PHOTOGRAPHS OF TEST SETUP	15

TEST REPORT DESCRIPTION

Applicant : Huizhou Mulong Electronic Technology Co., Ltd
Address : Floor 4, No. 138-3 (Plant 2), Xikeng Industrial Zone, Zhongkai High-tech Zone, Huizhou, Guangdong, China
Manufacturer : Huizhou Mulong Electronic Technology Co., Ltd
Address : Floor 4, No. 138-3 (Plant 2), Xikeng Industrial Zone, Zhongkai High-tech Zone, Huizhou, Guangdong, China
EUT : Power Bank
Model Name : MC18
Trademark : cDraFixit

Measurement Procedure Used:

FCC Part 1(1.1310) and Part 2(2.1091)
680106 D01 RF Exposure Wireless Charging App v03

The device described above is tested by Shenzhen NCT Testing Technology Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen NCT Testing Technology Co., Ltd. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen NCT Testing Technology Co., Ltd.

Test Engineer:



Keven Wu / Engineer

Technical Manager:



Henry Wang / Manager



1. SUMMARY OF TEST RESULT


EMISSION		
Description of Test Item	Standard & Limits	Results
MPE	FCC Part 1(1.1310) and Part 2(2.1091) 680106 D01 RF Exposure Wireless Charging App v03	Pass
Note: N/A is an abbreviation for Not Applicable.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT	:	Power Bank
Model Number	:	MC18
Power Rating	:	Type-c Input: 5V-3A/9V-2.25A/12V-1.5A(Max) Wireless Output :5W/7.5W/10W/15W USB Output:4.5V-5A/5V-4.5A/5V-3A/9V-2A/12V-1.5A(Max)
Operation Frequency for WPT	:	110-205KHz
Modulation	:	MSK
Antenna Type:	:	Coil Antenna
Date of Received	:	Sep. 11, 2023
Date of Test	:	Sep. 11, 2023 to Sep. 22, 2023

2.2. Test Setup

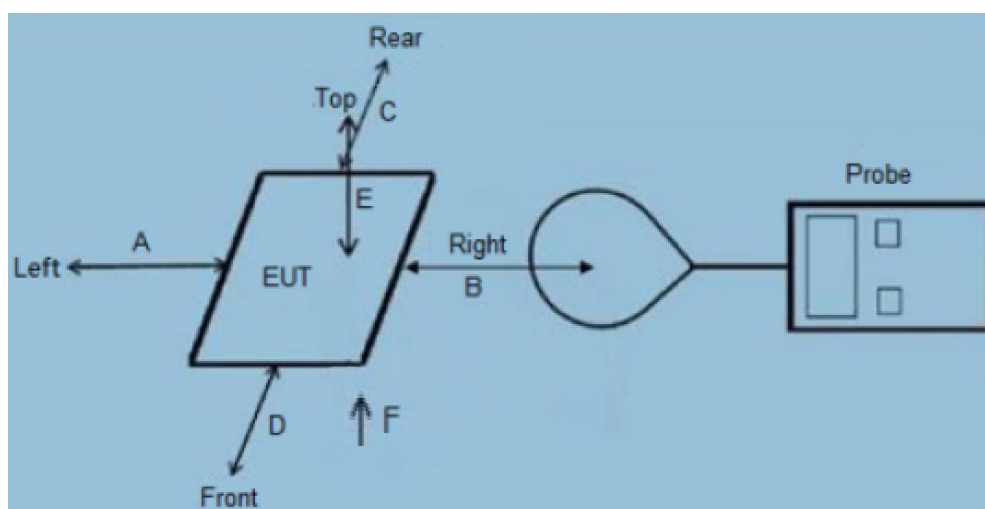

2.3. Description of Test Facility

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27
The certificate is valid until 2028.01.07
The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)
The Certificate Registration Number is L8251

Designation Number: CN1347
Test Firm Registration Number: 894804
Accredited by A2LA, June 14, 2023
The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018
The Conformity Assessment Body Identifier is CN0150
Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.
Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan
District, Shenzhen, People's Republic of China

2.4. Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB

3. MEASURING DEVICE AND TEST EQUIPMENT

3.1. For MPE Measurement

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☒	Exposure Level Tester(1Hz-400KHz)	Narda	EHP-200A	180ZX00634	2023.06.21	2024.06.20

4. RF EXPOSURE

4.1. Measuring Standard

FCC Part 1(1.1310) and Part 2(2.1091)

4.2. Requirments

Three different categories of transmitters are defined by the FCC in OET Bulletin 65. These categories are fixed installation, mobile, and portable and are defined as follows:

- o Fixed Installations: fixed location means that the device, including its antenna, is physically secured at a permanent location and is not able to be easily moved to another location. Additionally, distance to humans from the antenna is maintained to at least 2 meters.
- o Mobile Devices: a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to be generally used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structures and the body of the user or nearby persons. Transmitters designed to be used by consumers or workers that can be easily re-located, such as a wireless modem operating in a laptop computer, are considered mobile devices if they meet the 20 centimeter separation requirement. The FCC rules for evaluating mobile devices for RF compliance are found in 47 CFR §2.1091.
- o Portable Devices: a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user. Portable device requirements are found in Section 2.1093 of the FCC's Rules (47 CFR§2.1093). The FCC also categorizes the use of the device as based upon the user's awareness and ability to exercise control over his or her exposure. The two categories defined are Occupational/ Controlled Exposure and General Population/Uncontrolled Exposure. These two categories are defined as follows:
 - Occupational/Controlled Exposure: In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means. Awareness of the potential for RF exposure in a workplace or similar environment can be provided through specific training as part of a RF safety program. If appropriate, warning signs and labels can also be used to establish such awareness by providing prominent information on the risk of potential exposure and instructions on methods to minimize such exposure risks.
 - General Population/Uncontrolled Exposure: The general population / uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category, and the general population/uncontrolled exposure limits apply to these devices.

4.3. Test configuration

- 1) The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- 2) The measurement probe was placed at test distance (0-20 cm, in 2 cm maximum increment) which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each point (A, B, C, D, E, F) were completed.
- 4) The EUT were measured according to the dictates of 680106 D01 RF Exposure Wireless Charging Apps v03r01

4.4. Equipment Approval Considerations

Requirement for KDB Publication 680106 D01

Condition Requirement	Yes / No	Answers
Power transfer frequency is less than 1 MHz.	Yes	The power transfer frequency is 110-205KHz.
Output power from each primary coil is less than or equal to 15 watts.	Yes	Output power is 15W Max.
The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	Yes	The transfer system includes only single primary.
Client device is placed directly in contact with the transmitter.	Yes	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	No	Portable exposure conditions
The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	Yes	Please refer to the result of Electric Field Emissions and Magnetic Field Emissions.

4.5. Limits

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500	/	/	f/300	6
1,500-100,000	/	/	5	6

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500	/	/	f/1500	30
1,500-100,000	/	/	1.0	30

F=frequency in MHz

*=Plane-wave equivalent power density

According to FCC 680106 D01 RF Exposure Wireless Charging Apps v03r01 Section 3. RF Exposure Requirements clause 3 the Emission-Limits in the frequency range from 100 KHz to 300 KHz should be assessed versus the limits at 300 KHz in Table 1 of CFR 47 - Section 1.310 as following (measured distance shall be 15cm from the center of the probe to the edge of the device):

	E-Field	*/*	B-Field
Frequency	V/m	A/m	uT
0.3 MHz – 3.0 MHz	614	1.613	2.0
3.0 MHz – 30 MHz	824/f (=27.5 _{30MHz})	2.19/f (=0.073 _{30MHz})	--

A KDB inquire was required to determine/confirm the applicable limits below 100 KHz.

Test Mode	Description	Remark
Discharging	Full Load	With Phone
	Half Load	With Phone
	No Load	With Phone

4.6. Measuring Results

Mode	measuring distance (cm)	Measured H-Field Strength Values (A/m)						FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
		Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F		
No Load	0	0.468	0.529	0.582	0.632	0.606	0.603	0.815	1.63
Half Load	0	0.599	0.503	0.575	0.507	0.572	0.519	0.815	1.63
Full Load	0	0.641	0.525	0.510	0.557	0.546	0.463	0.815	1.63
No Load	2	0.495	0.625	0.497	0.540	0.562	0.599	0.815	1.63
Half Load	2	0.616	0.558	0.583	0.466	0.630	0.563	0.815	1.63
Full Load	2	0.496	0.567	0.563	0.621	0.513	0.634	0.815	1.63
No Load	4	0.510	0.606	0.602	0.546	0.606	0.531	0.815	1.63
Half Load	4	0.484	0.513	0.568	0.454	0.463	0.477	0.815	1.63
Full Load	4	0.564	0.626	0.611	0.543	0.509	0.533	0.815	1.63
No Load	6	0.607	0.564	0.496	0.527	0.474	0.570	0.815	1.63
Half Load	6	0.562	0.522	0.459	0.504	0.645	0.473	0.815	1.63
Full Load	6	0.630	0.641	0.515	0.520	0.613	0.552	0.815	1.63
No Load	8	0.375	0.409	0.429	0.424	0.377	0.426	0.815	1.63
Half Load	8	0.368	0.408	0.430	0.432	0.396	0.426	0.815	1.63
Full Load	8	0.438	0.382	0.413	0.400	0.404	0.435	0.815	1.63


Mode	measuring distance (cm)	Measured H-Field Strength Values (A/m)						FCC E-Field Strength 50% Limits (A/m)	FCC E-Field Strength Limits (A/m)
		Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F		
No Load	10	0.420	0.411	0.387	0.381	0.368	0.394	0.815	1.63
Half Load	10	0.415	0.373	0.359	0.381	0.372	0.395	0.815	1.63
Full Load	10	0.394	0.378	0.386	0.450	0.353	0.374	0.815	1.63
No Load	12	0.449	0.426	0.396	0.402	0.448	0.364	0.815	1.63
Half Load	12	0.405	0.364	0.417	0.420	0.449	0.443	0.815	1.63
Full Load	12	0.405	0.431	0.435	0.405	0.406	0.421	0.815	1.63
No Load	14	0.340	0.259	0.286	0.263	0.335	0.297	0.815	1.63
Half Load	14	0.273	0.315	0.307	0.253	0.291	0.277	0.815	1.63
Full Load	14	0.334	0.313	0.267	0.266	0.348	0.344	0.815	1.63
No Load	16	0.275	0.285	0.271	0.278	0.294	0.273	0.815	1.63
Half Load	16	0.276	0.267	0.283	0.290	0.266	0.336	0.815	1.63
Full Load	16	0.320	0.346	0.344	0.265	0.330	0.310	0.815	1.63
No Load	18	0.239	0.166	0.183	0.206	0.196	0.158	0.815	1.63
Half Load	18	0.170	0.191	0.236	0.208	0.216	0.221	0.815	1.63
Full Load	18	0.194	0.212	0.243	0.232	0.188	0.165	0.815	1.63
No Load	20	0.208	0.180	0.190	0.211	0.240	0.167	0.815	1.63
Half Load	20	0.246	0.203	0.151	0.234	0.195	0.160	0.815	1.63
Full Load	20	0.217	0.210	0.193	0.189	0.223	0.231	0.815	1.63

Mode	measuring distance (cm)	Measured E-Field Strength Values (V/m)						FCC E-Field Strength 50% Limits (V/m)	FCC E-Field Strength Limits (V/m)
		Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F		
No Load	0	175	178	172	192	193	173	307	614
Half Load	0	182	182	197	178	178	170	307	614
Full Load	0	195	172	187	188	183	177	307	614
No Load	2	187	175	182	184	175	174	307	614
Half Load	2	180	179	186	186	199	176	307	614
Full Load	2	191	180	172	193	184	181	307	614
No Load	4	170	198	171	197	196	176	307	614
Half Load	4	187	185	195	170	179	191	307	614
Full Load	4	192	181	170	181	192	183	307	614
No Load	6	170	192	193	180	189	183	307	614
Half Load	6	172	182	194	198	186	199	307	614
Full Load	6	183	187	171	193	198	195	307	614
No Load	8	168	151	157	158	164	151	307	614
Half Load	8	153	150	167	159	158	170	307	614
Full Load	8	164	166	153	151	152	153	307	614


Mode	measuring distance (cm)	Measured E-Field Strength Values (V/m)						FCC E-Field Strength 50% Limits (V/m)	FCC E-Field Strength Limits (V/m)
		Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F		
No Load	10	156	155	155	154	150	168	307	614
Half Load	10	155	169	164	164	157	160	307	614
Full Load	10	157	165	153	152	166	162	307	614
No Load	12	161	161	157	157	163	168	307	614
Half Load	12	158	155	161	158	151	151	307	614
Full Load	12	154	161	158	162	166	153	307	614
No Load	14	144	131	138	147	130	147	307	614
Half Load	14	135	140	137	144	141	147	307	614
Full Load	14	149	132	141	135	147	135	307	614
No Load	16	131	137	147	145	139	132	307	614
Half Load	16	135	132	144	141	138	136	307	614
Full Load	16	138	141	145	145	133	132	307	614
No Load	18	128	110	123	107	105	127	307	614
Half Load	18	101	108	114	104	106	115	307	614
Full Load	18	103	111	125	123	126	109	307	614
No Load	20	101	130	101	129	100	100	307	614
Half Load	20	119	104	129	115	130	105	307	614
Full Load	20	125	120	125	100	128	109	307	614

5. PHOTOGRAPHS OF TEST SETUP


Test Position A (0cm)

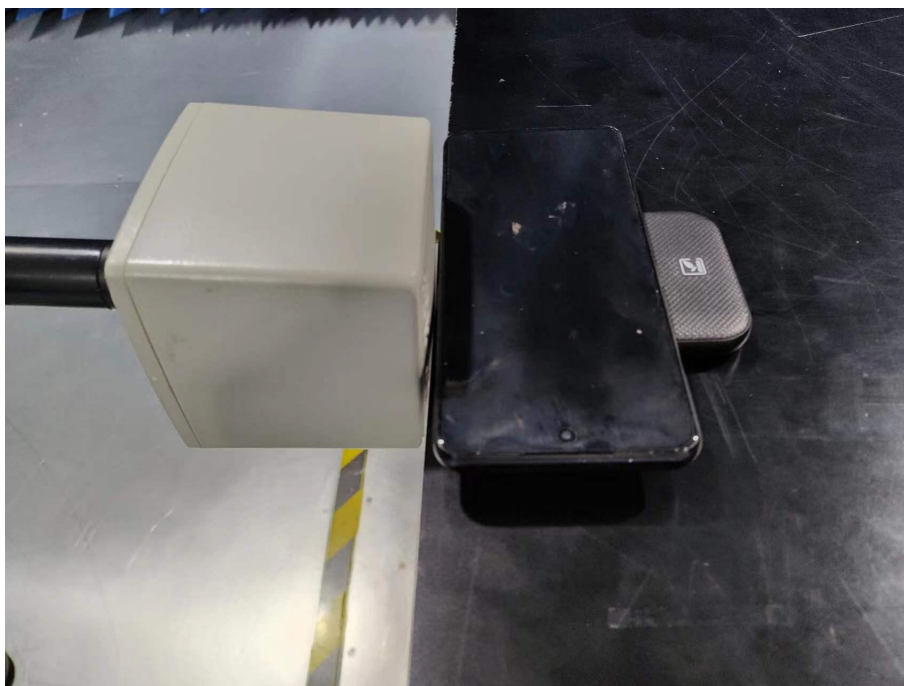


Test Position A (10cm)

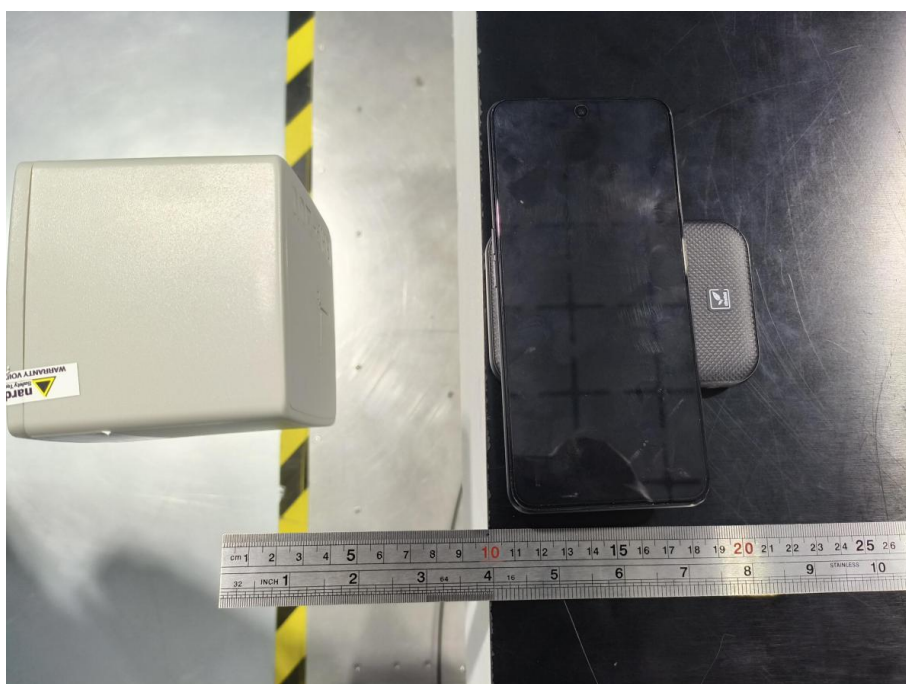


Test Position A (20cm)

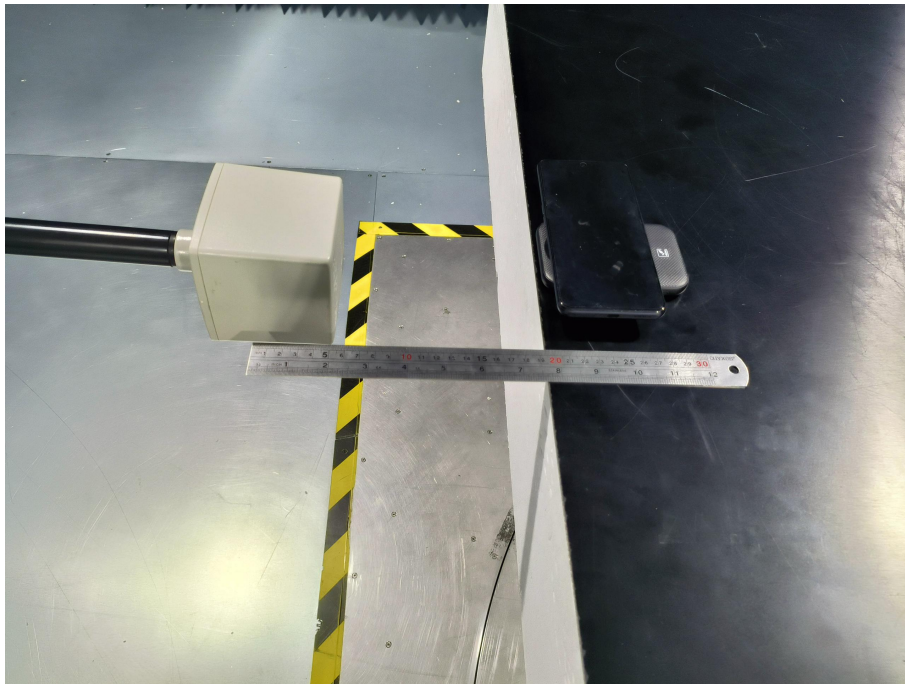


Test Position B (0cm)

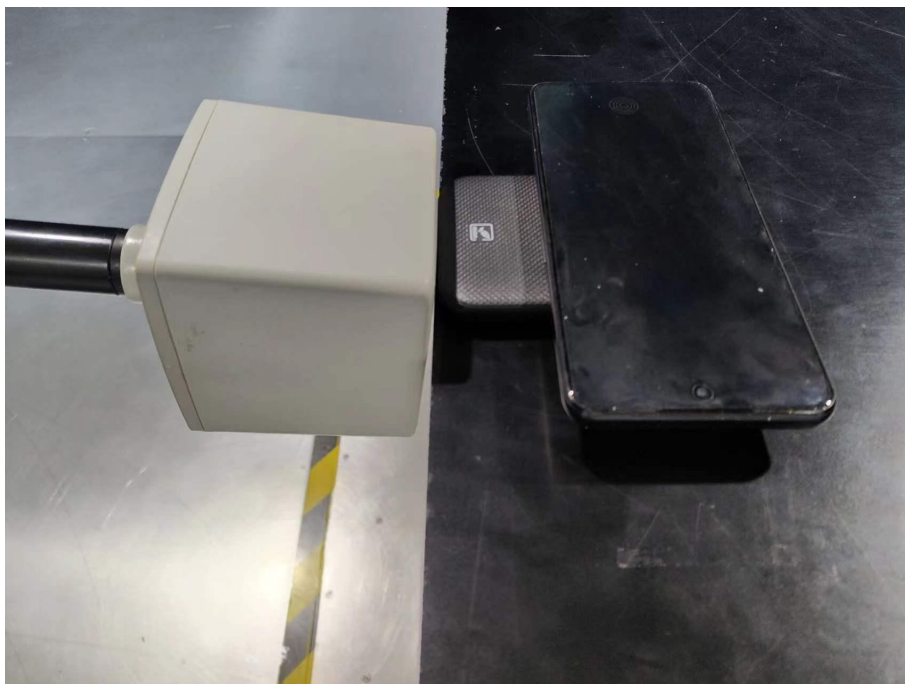


Test Position B (10cm)

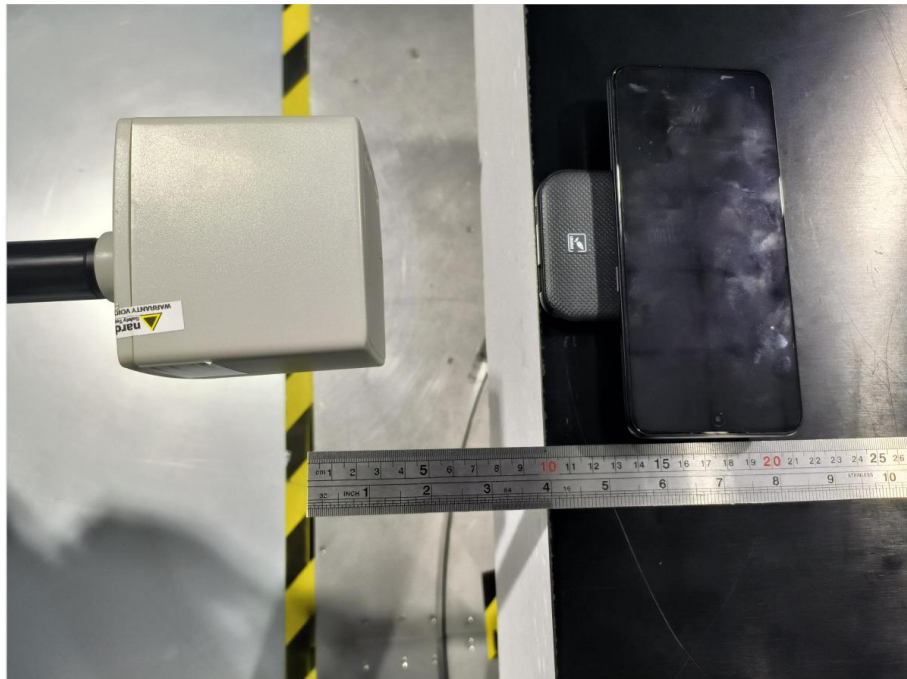


Test Position B (20cm)

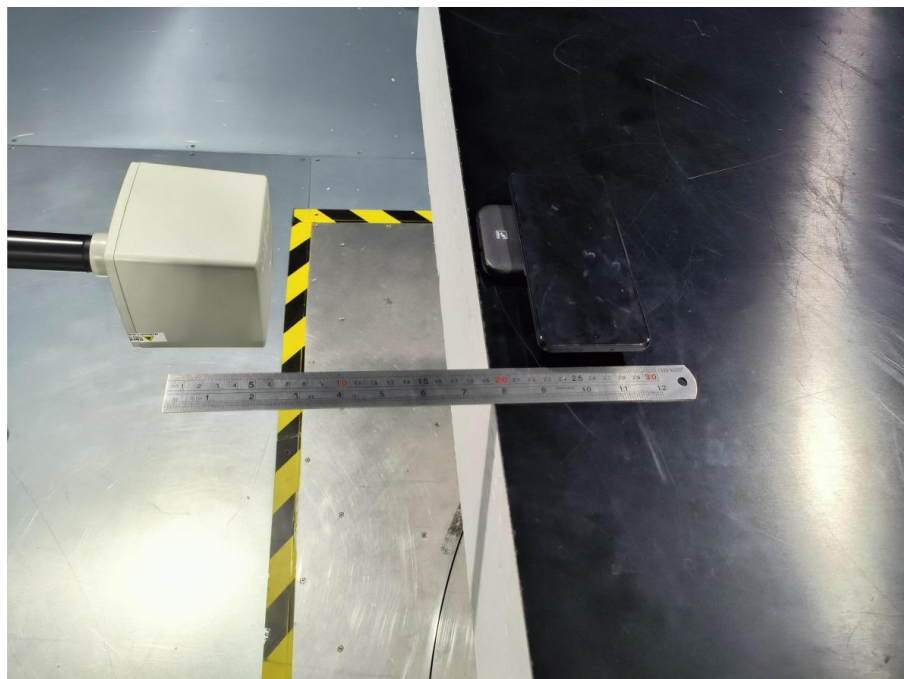


Test Position C (0cm)

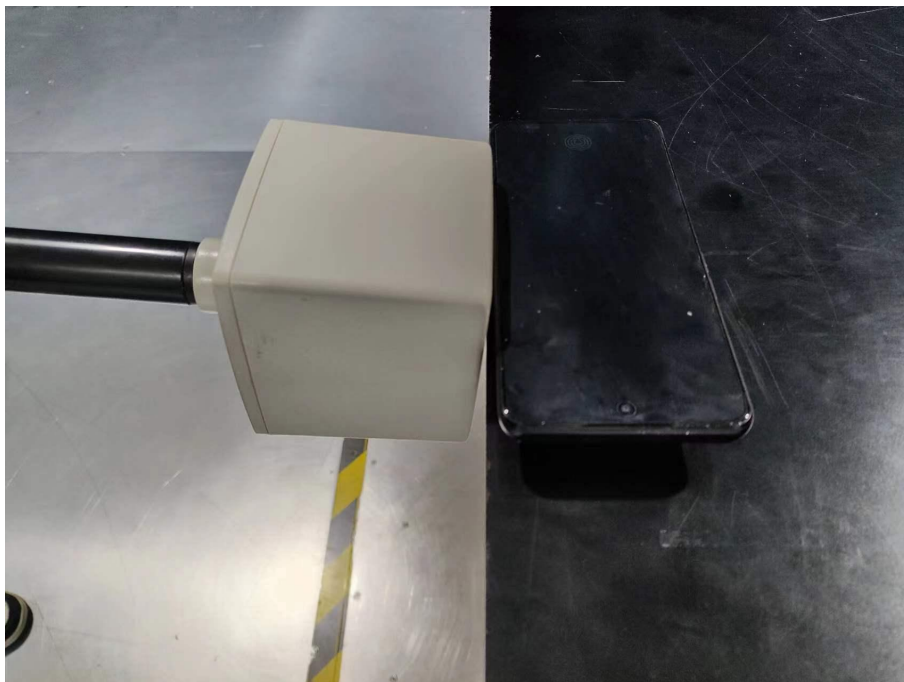


Test Position C (10cm)

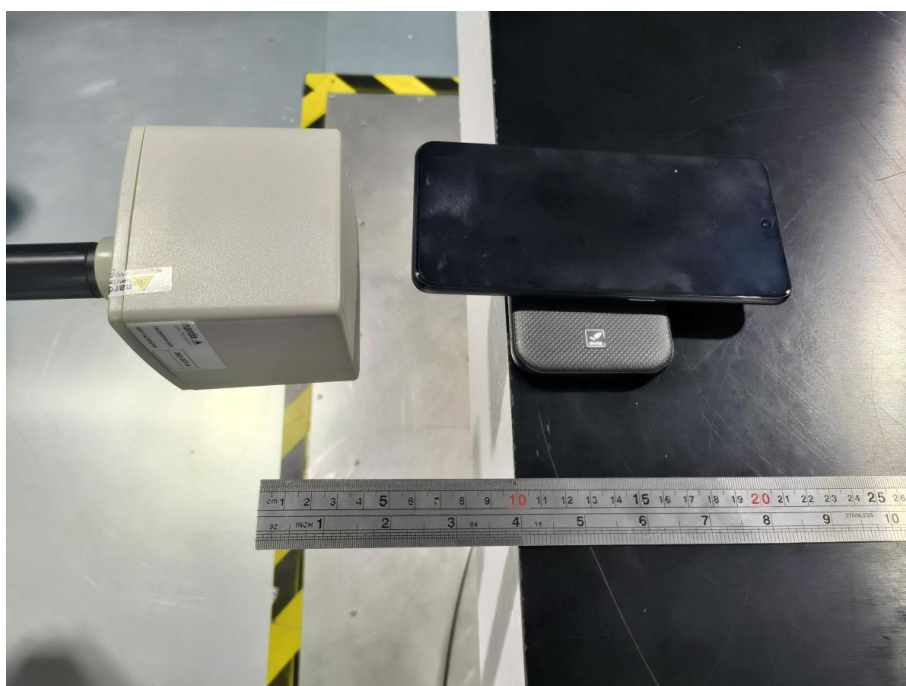


Test Position C (20cm)

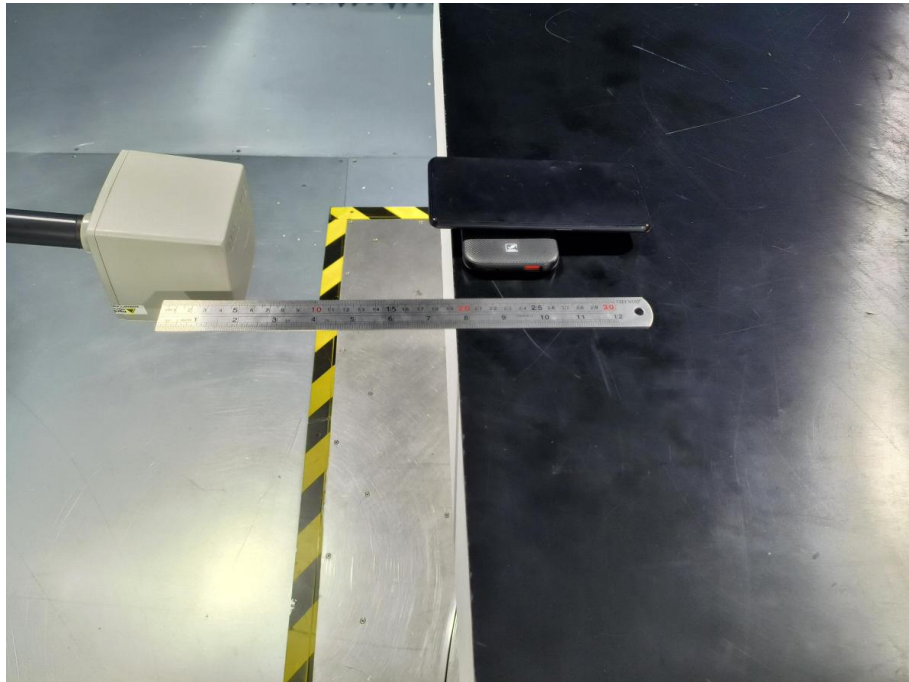


Test Position D (0cm)

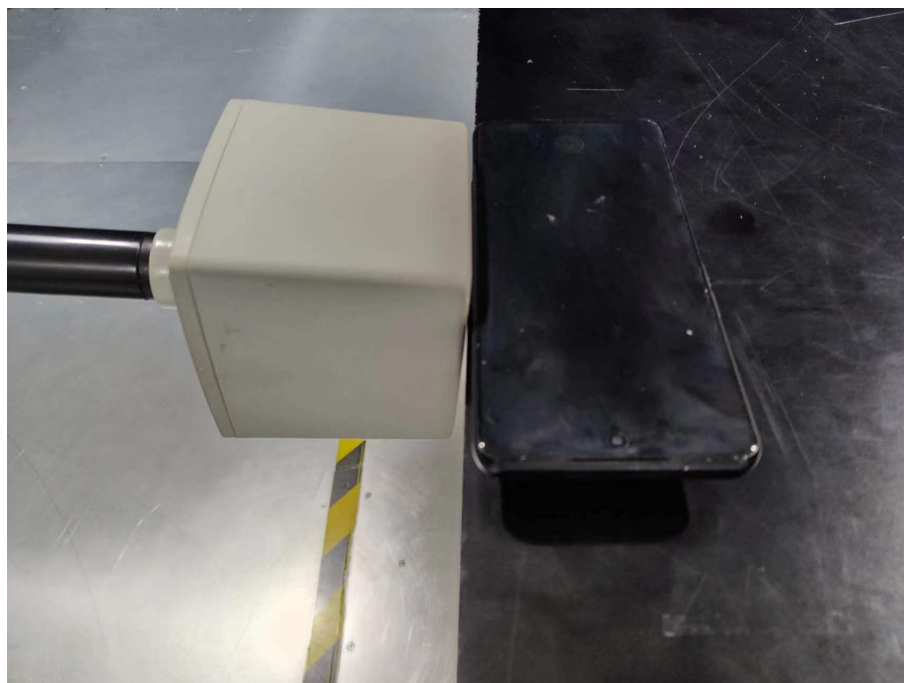

Test Position D (10cm)

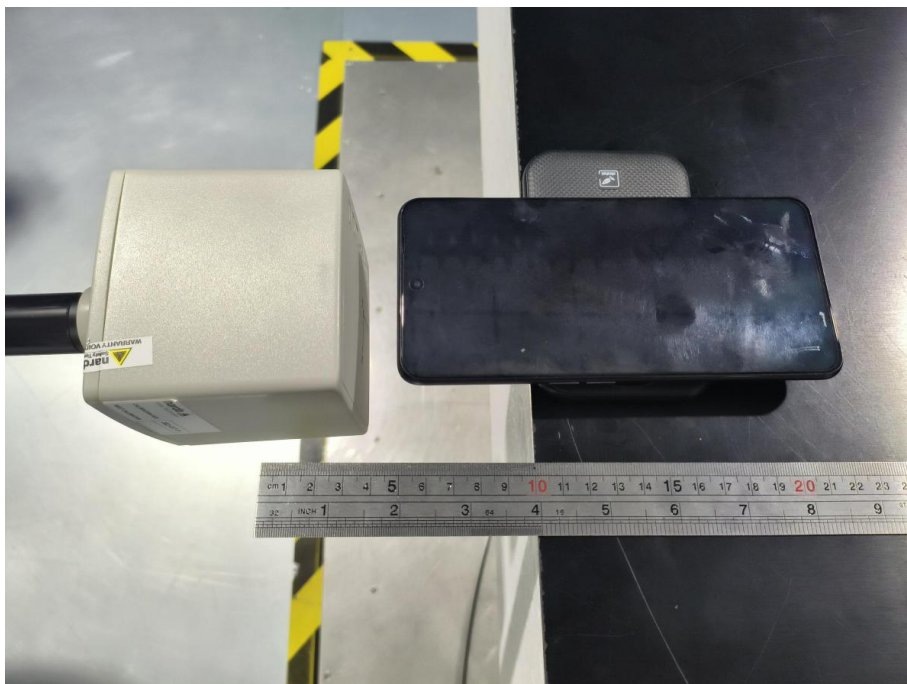


Test Position D (20cm)

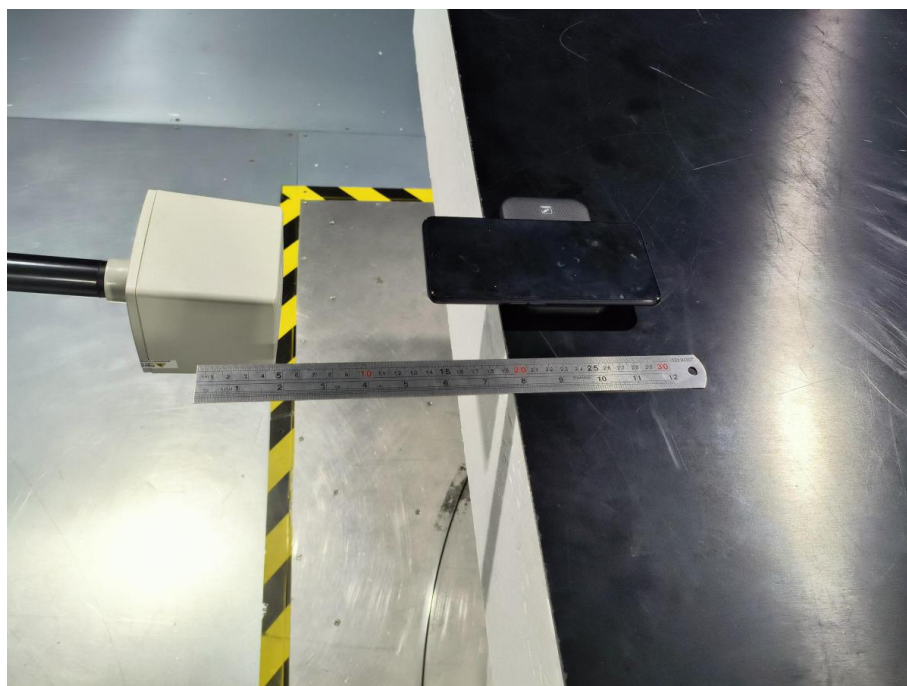


Test Position E (0cm)



Test Position E (10cm)

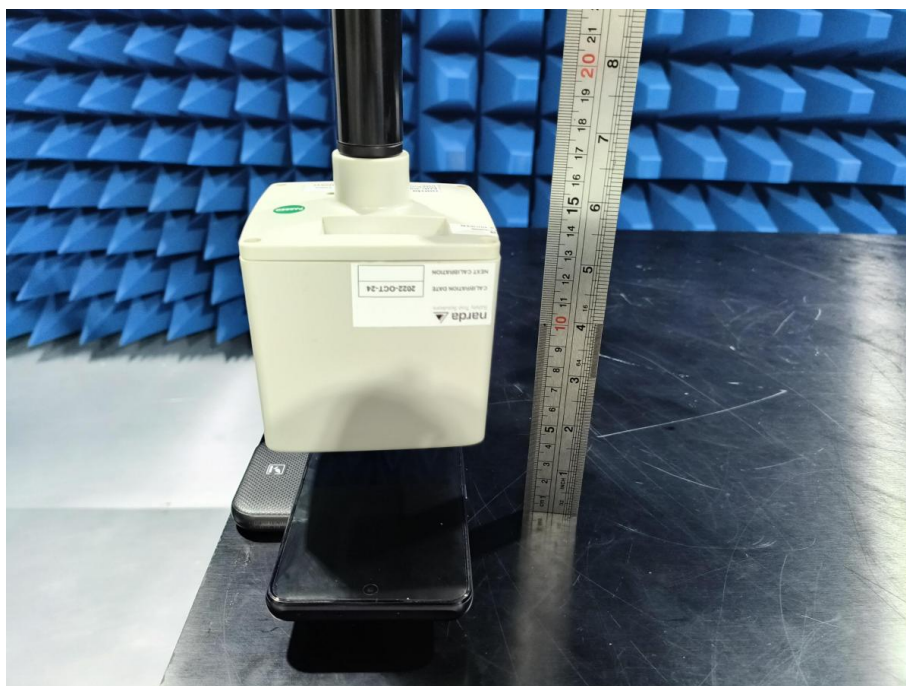

Test Position E (20cm)

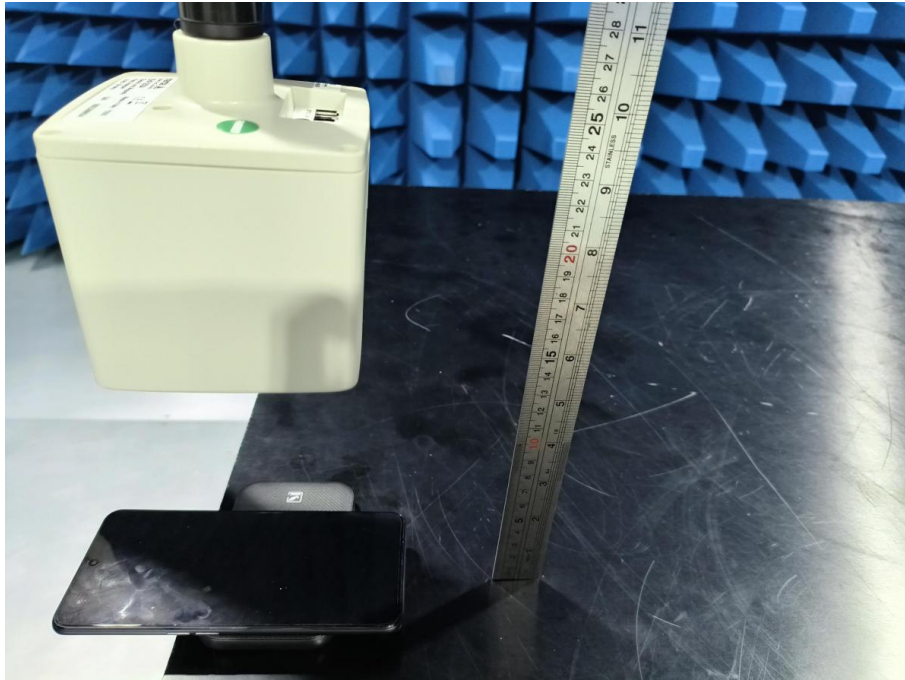

Test Position F (0cm)



Test Position F (10cm)



Test Position F (20cm)

