




WARNING
Only intended
for ages 14+

WF31

User Manual
Gebrauchsanweisung

v1.0

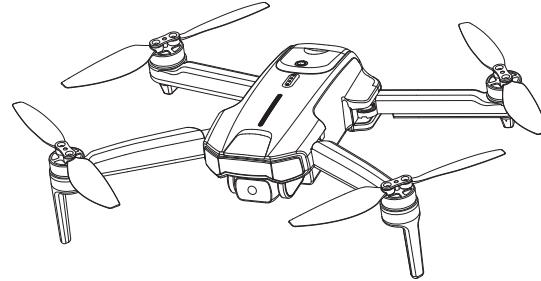

+1 (888) 836-0566

support@wefonetoy.com

CONTENTS

English

01-53

Deutsch

54-104



Product Profile

- 01 Package Contents
- 02 Diagram of the Drone
- 03 Diagram of the Transmitter



Operation Guide

- 07 Charging
- 09 Pre-Flight Preparations
- 14 Pre-Flight Checklist
- 15 Flight



Drone Functions

- 26 Flight Functions
- 36 Stabilization Functions
- 39 APP Functions
- 44 Drone Status Indicator



Appendix

- 45 Specifications
- 47 Contact Us
- 48 Troubleshooting
- 49 Compliance Information

Reading Guidance

Icon

“⚠” essential precautions.

“💡” tips for operation and usage.

Recommended Steps

Our product offers both tutorial videos and the following resources:

- Disclaimer and Safety Guidelines
- Quick Start Guide
- User Manual

For a smooth start, we suggest watching the tutorial videos in the APP and reviewing the "Disclaimer and Safety Guidelines" first. Then, familiarize yourself with the basics through the "Quick Start Guide". For a comprehensive understanding, delve into the "User Manual".

Download the WF FLY App

Simply scan the QR code below.



iOS




Android APP on Google play




Required Operating Systems: iOS 12.0 or later/Android 5.0 or later.

1.1 Package Contents >>

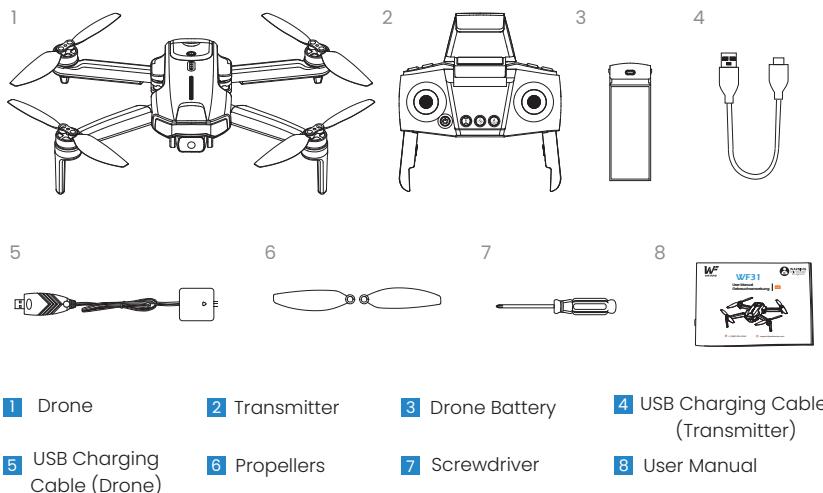

1.2 Diagram of the Drone >>

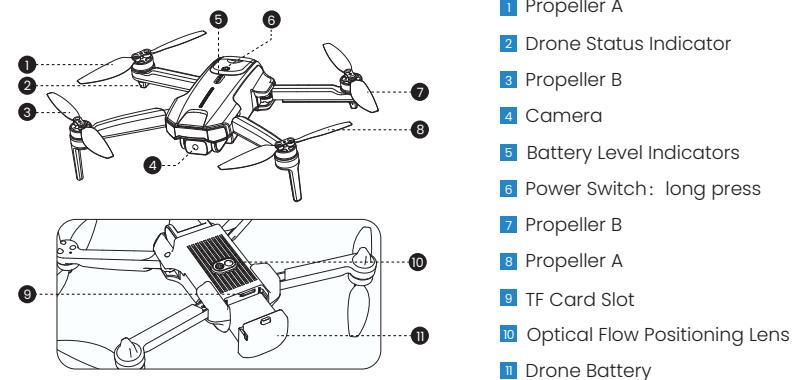


- 💡 · Turning on/off: Long press the power switch on the drone to turn it on/off.
 · The drone status indicators display the status of the flight control system.
 · Battery Level Indicators: Display the current battery level of the drone.


1.3 Diagram of the Transmitter >>

The Transmitter


Front:

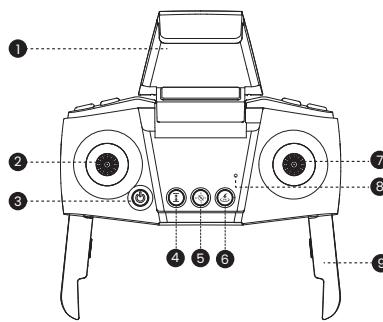

Top:



Bottom:



1 Phone Holder

2 Left Joystick

3 Power Switch: short press

4 Unlock/Takeoff/Landing: short press

5 Headless Mode: short press

Compass Calibration: long press

6 Return to Home/GPS Switch: short press

7 Right Joystick | Speed Switch: short press

8 Transmitter Indicator

9 Foldable Handle

10 Record Video: short press

11 Take Photo: short press

12 Lens Up

13 Lens Down


14 Charging Port

💡 Turning on/off: Short press the power switch on the transmitter to turn it on/off.


1.3 Diagram of the Transmitter >>

Joystick Mode


- MODE 2 : (The default setting, i.e, left joystick as the throttle joystick.)

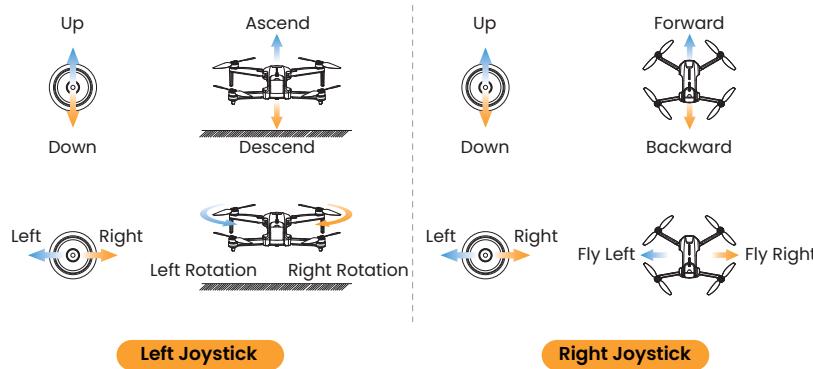


- MODE 1 : To enter MODE 1, turn on the transmitter while holding the button. (Please do not release the button until the transmitter is powered on.)

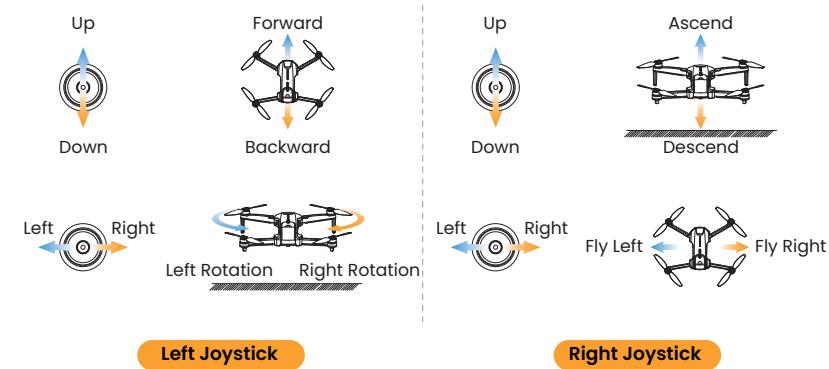


2.1 Charging >>



USB Adapter
(5V/2A)



Charging of the
Drone Battery



Charging of the
Transmitter

- ⚠ Before charging, please read the instructions in the "Battery Safety" section of the "Disclaimer and Safety Guidelines" carefully!
- DO NOT charge the drone battery immediately after a flight as the temperature may be too high. Please wait until it cools down to room temperature before charging again.
 - Please use the original charging cable to charge the battery.

2.1 Charging >>

● **Charging of the Drone Battery:**

- 1 Remove the battery from the drone and connect it to a USB charging cable.
- 2 Plug the USB charging cable into a USB charging port on a power bank or a USB adapter (5V/2A).
- 3 When charging, the red light on the USB charging cable is solid, and the green light keeps flashing; when fully charged, both lights are solid.
- 4 Charging time: About 180 minutes.

● **Charging of the Transmitter:**


* Low Battery Signal: The transmitter indicator flashes green.

- 1 Connect the USB charging cable to the charging port of the transmitter.
- 2 Plug the USB charging cable into a USB charging port on power bank or USB adapter (5V/2A).
- 3 The red indicator light on the transmitter will turn on when the battery is charging, and will turn off when the battery is fully charged.
- 4 Charging time: about 60 minutes.

2.2 Pre-Flight Preparations >>


Arms

All arms of the drone are folded before the drone is packaged at the factory. First, unfold the front arms, then unfold the rear arms.

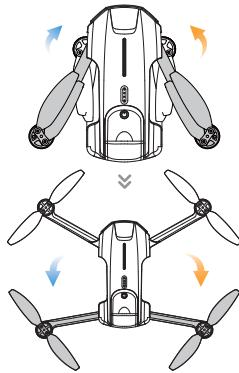

TF Card


To store your photos and videos, insert a TF card (**not included**) into the slot before turning on the drone. This drone supports TF cards (**class 10 or above**) with capacities up to and including 64GB.



2.2 Pre-Flight Preparations >>


Propellers

● Installation:



The drone will not fly unless the correct propeller is installed on the correct motor shaft. Each propeller is labeled with either an "A" or "B" on it. Secure the propeller onto the motor shaft using screws, turning each screw clockwise.

● Removal:



For propeller removal, use a screwdriver (provided) to rotate the screws counter-clockwise and remove the propellers. Be sure to hold the motor while detaching the propeller.




- Please check that the propellers are properly installed and tightened before each flight.
- Exercise caution when attaching/detaching the propellers to prevent any cuts or injuries.

2.2 Pre-Flight Preparations >>

Drone Battery

● Installation:


*Before installing the battery, please check if it has a detachable insulation pad/band. If yes, remove



Push the battery correctly into the drone. Make sure that you hear a click sound, which indicates that the battery is firmly

⚠ The battery should be installed firmly. Otherwise, the flight safety of your drone may be affected. The drone may crash due to a power-cut during the flight.


● Removal:



Turn the drone upside down. Press the lock button on the battery, and pull the battery out from the drone.

2.2 Pre-Flight Preparations >>


Foldable Handle




Expand the foldable handle on the transmitter separately.

Phone Holder

● Expand the phone holder



● Adjust the clamp




Expand the phone holder and place your mobile phone in it. Adjust the clamp to secure your mobile phone.

2.2 Pre-Flight Preparations >>

Transmitter Reception Range


When controlling the drone, promptly adjust the orientation and distance between the transmitter and the drone to ensure that the drone always remains within the optimal reception range.

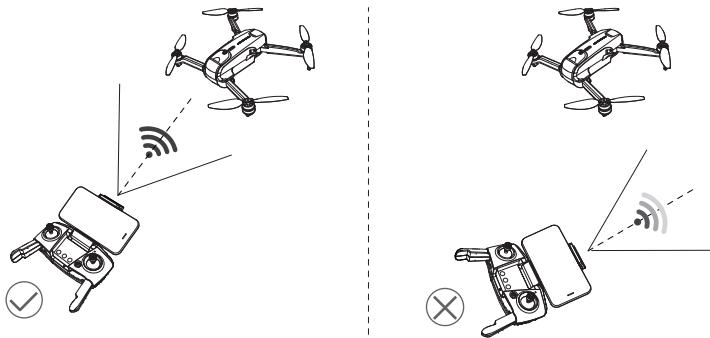

2.3 Pre-Flight Checklist >>



Make sure the transmitter, the mobile phone and the drone battery are fully charged.




Make sure that the camera is clean.



Make sure that there is nothing obstructing the



Make sure the drone arms are unfolded.



Make sure the drone battery and the propellers are mounted securely.




Please ensure that you use only accessories manufactured by our company.


2.4 Flight >>

Pairing


-  · All of the operations shown in this manual are demonstrated using MODE 2.
· Make sure that you go outdoor to an open area to operate the drone.

**1 Turning on the drone:**

Set the drone on a flat, level surface, positioning it so that the front faces away from you and the tail points towards you. Long press the power switch to turn on the drone. The status indicators on the drone begin to flash

**2 Turning on the Transmitter:**

Short press the power switch on the transmitter to turn it on; its indicator light will start to flash.

**3 Pairing:**

Move the left joystick up and then back down to pair the drone with the transmitter. Successful pairing is confirmed when the indicator light on the transmitter changes from flashing to solid.

2.4 Flight >>

Wi-Fi Connection

 Make sure the pairing has finished before going to the Wi-Fi settings on your phone.



- ① Go to the **Wi-Fi** settings on your
- ② Connect to the drone's Wi-Fi network: **WeFone-Fly-*******.
- ③ Run the **WF FLY** app. A successful connection is confirmed when the drone's live video feed is displayed within the app interface.



· Connecting your phone to the drone's Wi-Fi may take some time. Please remain patient and wait for the connection to be established successfully.

· For optimal connectivity, if you're experiencing issues with the WiFi connection or the image transmission in the APP isn't displaying, it's advised to disable your phone's Bluetooth, Mobile Data, and VPN. Alternatively, switch your phone to airplane mode and attempt to reconnect.

· Please ensure that all permissions requested by the app are granted.



The Wi-Fi network created by the drone does not have internet access. As a result, your cellphone might:


- Notify you that the connection isn't secure,
- Indicate there's no internet connection, or
- Suggest switching to cellular data.

(The exact wording may vary based on cellphone models.)

Please disregard these messages. If prompted, select the option to remain connected to the current Wi-Fi.


2.4 Flight >>

Compass Calibration




● STEP 1:

Long press the  button to enter the compass calibration. The transmitter produces a prolonged beep, indicating that the calibration has started. You can now proceed to step 2.



● STEP 2:

Keep the drone parallel to the floor, and spin the drone three times. **The status indicators will turn from flashing quickly to slowly.** You can proceed to step 3.



● STEP 3:


Point the head of the drone upward and spin it three times. The status indicators will change from flashing slowly to solid green or to double red flashes. This indicates that you have successfully performed a compass calibration.

-  · We recommend that the pilot hold the drone approximately 3 ft above the ground while performing the compass calibration.
- To ensure a stable flight, we recommend that pilots perform a compass calibration before each flight.
- DO NOT calibrate the compass in locations where magnetic interference may occur, such as close to magnetite deposits or large metallic structures such as parking structures, steel reinforced basements, bridges, cars, or scaffolding.
- DO NOT carry objects (such as mobile phones) that contain ferromagnetic materials near the drone during calibration.

2.4 Flight >>

GPS Signal Search

After calibrating the compass, put the drone on a flat surface. Make sure there are no external sources of signal interference around. The drone will automatically perform a search for GPS signals. A successful search is confirmed when the drone status indicators turn solid green.

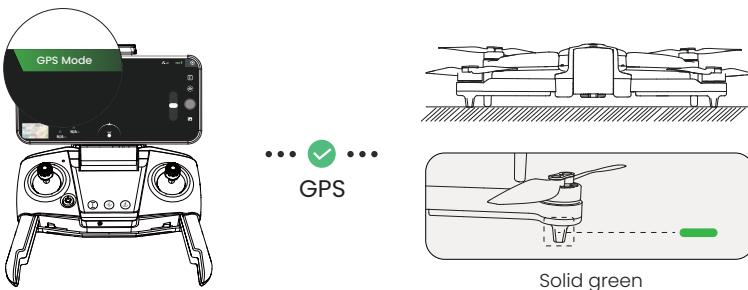

- The default mode is the GPS Mode. When outdoors, once the drone has received GPS signals, it CANNOT exit GPS mode.


- If the GPS signal is weak, or if you intend to fly this drone indoors, you may notice that the drone status indicator emitting double yellow flashes. For a proper takeoff in such scenarios, short press the GPS icon to exit GPS mode. The drone is ready for unlocking and takeoff when the drone indicator turns solid yellow. However, please note that all GPS-related functions will be unavailable in this mode. The drone the maximum flying altitude does not exceed 20ft.

- If the drone takes off in non-GPS mode and the indicator starts to flash green mid-air, this means that the drone has regained GPS signals. Now, if you land the drone and then take off again, it will automatically switch back to GPS mode.

2.4 Flight >>

Gyro-Calibration

Make sure to place the drone on a level surface before calibrating the gyro. Simultaneously push the left joystick and the right joystick to the bottom right corner to calibrate the gyro. The indicator lights on the drone will blink, then turn solid, which indicates that the calibration is completed.

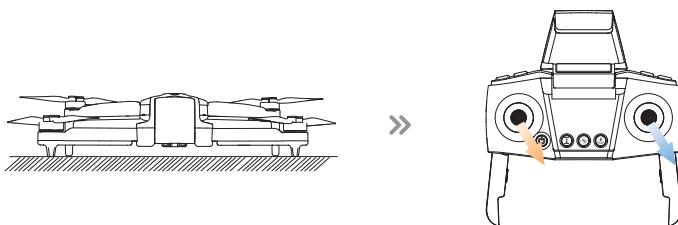


 To ensure a stable flight, we suggest that the pilot calibrates the gyro every time after pairing the drone and after a crash.

2.4 Flight >>

Unlocking the Motors

Short press the  button. The motors will rotate, and the drone is unlocked.

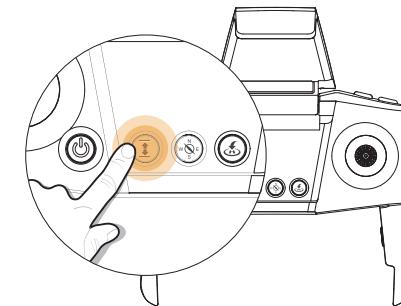


 To lock the motors: Pull the throttle joystick down to lock the motors.

2.4 Flight >>

Takeoff/Landing

 Remember to unlock the motors before takeoff.

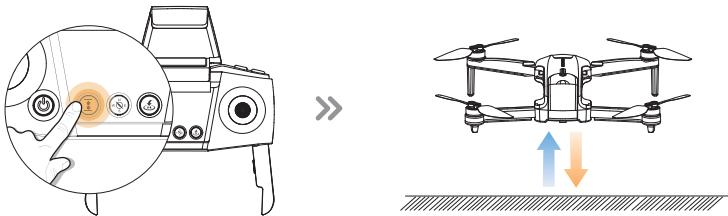


-  Takeoff Short press the  button, the drone will take off automatically and hover at 4 ft. Now you can control the drone by using the joysticks.
-  Landing During the flight, short press the  button, the drone will land on the ground automatically.

3.1 Flight Functions >>

Speed Switch


This drone offers two speed modes: **Low** and **High**. By default, it's set to Low speed.

Short press the right joystick once to toggle between different speeds. A single beep signifies Low speed, while a double beep denotes High speed.




Camera Angle Adjustment

You can adjust the camera to tilt **up** or **down** with the  and  buttons. (The camera has a tilt range of **-70°~0°**.)



3.1 Flight Functions >>

Take Photo/Record Video

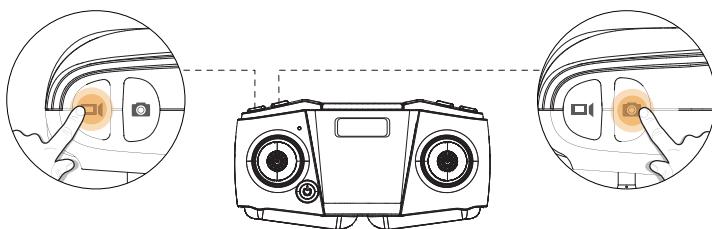

Record Video : Short press the  button on the transmitter. The transmitter will beep twice, indicating that video recording has started. A brief press again stops the recording, and the transmitter will beep twice.


Take Photo : Short press the  button on the transmitter to take a photo. The transmitter will beep once, signaling that a photo has been taken.

 You can't take photos while recording videos.

3.1 Flight Functions >>

Headless Mode


The Headless Mode is a great training tool for beginner pilots. It is also useful when the drone is too far from the pilot (**which makes it difficult to tell its orientation**). It keeps the drone traveling forward, backward, left, or right when you move the right joystick in those directions, regardless of which way the front of the drone is pointed.

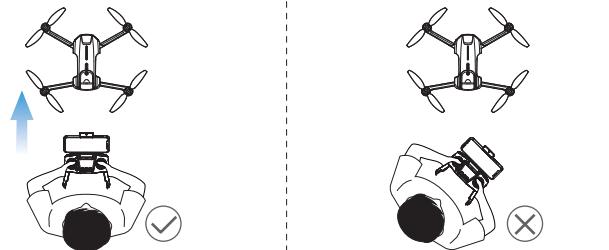

The pilot should stay facing the same direction that the drone's head points to when it takes off.

3.1 Flight Functions >>

Headless Mode

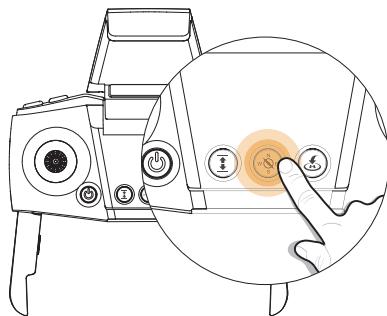

- ① **Activating:** Short press the $\frac{N}{S}$ button to activate. The transmitter will produce a double beep.
- ② **Deactivating:** Press the $\frac{N}{S}$ button once more. A short beep will sound, and the drone status indicators will return to a steady glow, indicating the drone has successfully exited Headless Mode.

* Why is the orientation of the drone important?



In normal flying mode, the control of the drone movement can sometimes be counter-intuitive for beginners. For instance, when the drone is in the air with its head pointing to your right, if you push the right joystick forward, the drone will fly to your right, instead of flying forward.

With the headless mode, the drone has a fixed "head." In Headless Mode, the drone always remembers the side its head points to during takeoff as the front side. This means that if the drone takes off with its head pointing forward, it doesn't matter how the drone is oriented in the air, when you push the right joystick forward, the drone will fly forward. Or, when its head is pointing to you, if you push the right joystick to the left, the drone will fly to your left.

3.1 Flight Functions >>

Emergency Stop

The Emergency Stop function should only be used in an emergency during the flight to avoid any damage or injury. Long press the  button and the  button simultaneously. The transmitter will keep beeping, the drone will descend quickly to the ground.

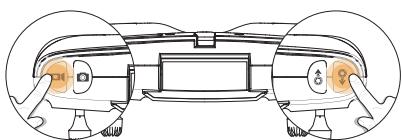

! 31

 Be aware that you risk breakage of the drone if it falls from a large distance or hits anything at a high rate of speed.

Return to Home(RTH)

- The Return to Home function brings the drone back to the recorded Home Point. This function can only be triggered when the drone is in GPS mode.
- The drone's default home point is the location where it first receives a strong GPS signal (the drone status indicators are solid green at this point). The drone will record its takeoff position at that moment as the home point. During flight, if the drone lands at a new location, the position of the next takeoff will become the newly recorded home point.

1 Smart RTH:

When the GPS signal is strong (drone indicator status: solid green) and the Home point is recorded previously, press the  button. The transmitter will beep once, indicating that the Smart RTH is activated. The drone will start flying back to the Home Point automatically.

During the RTH procedure, if the pilot presses the  button again, the drone will exit the RTH procedure immediately.

32

3.1 Flight Functions >>

Return to Home(RTH)

② Failsafe RTH :

The Failsafe RTH will be activated when:


1. The drone receives a strong GPS signal (drone indicator status: solid green); and
2. There is a pre-recorded Home Point; and
3. The connection between the transmitter and the drone is lost for more than 15 seconds.
4. The compass receives no interference.

Once the Failsafe RTH is activated, the drone will start to fly back to the pre-recorded Home Point automatically. If the connection between the drone and the transmitter is re-established during the Failsafe RTH procedure, and you want to exit the Failsafe RTH, you can press the  button again.

* The following are 2 possible returning procedures for Smart RTH and Failsafe RTH:

- ##### ③ Flight altitude < 66ft:
- When the drone's current altitude is lower than 66ft, the drone will first ascend to 66ft altitude, fly back above the Home Point, then descend to the ground.

- ##### ④ Flight altitude ≥ 66ft:
- When the drone's current altitude is higher than or equal to 66ft, the drone will maintain its current altitude, fly back above the Home Point, then descend to the ground.

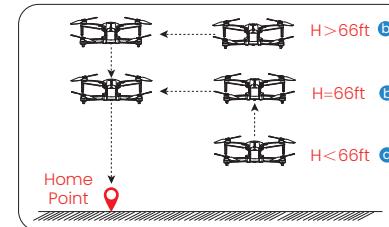

💡 When the drone's flight altitude exceeds 164 ft, the drone will descend during its return flight. Please note that the drone does not have an automatic obstacle avoidance feature. Be careful to avoid collisions or other dangerous situations during the return flight to ensure a safe return.

3.1 Flight Functions >>

Return to Home(RTH)

③ Low Voltage RTH :

To prevent unnecessary risks due to insufficient battery power, the low voltage return-to-home (RTH) function will be automatically triggered when the drone battery is low. According to the remaining power, there are two scenarios:

The First Stage of Low Voltage RTH: The drone will automatically return to the Home Point. While the drone is returning, the lights on the rear arms of the drone keep emitting double red flashes.


* **Attention:** If the drone exits the first stage of low voltage while landing on the ground, you will be restricted to flying it within a "safety zone" , which is centered around the Home Point and has a radius of 66 ft and a height of 66 ft.

The Second Stage of Low Voltage RTH: The drone will descend directly to the ground.

- ⚠ · During the RTH procedure, the drone can NOT avoid obstacles.
- If the GPS signal is weak or unavailable, the RTH cannot be activated.

3.2 Stabilization Functions >>


Altitude-Hold Function

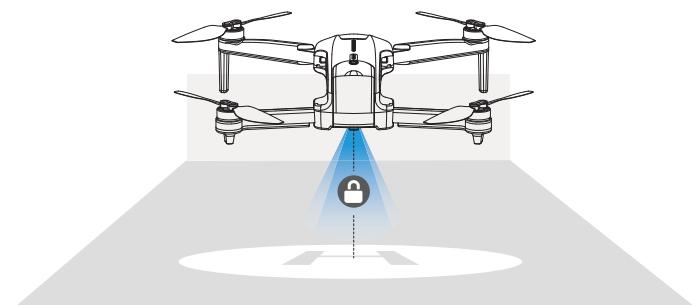

The drone is designed with an altitude-hold function to maintain its altitude after releasing the left joystick. (The left joystick will automatically spring back to the middle)

3.2 Stabilization Functions >>

Optical Flow Positioning



The Optical Flow Positioning System consists of a camera module, which acquires the position information of the drone through visual images to ensure precise positioning of the



- The precision of the Optical Flow Positioning System is easily affected by the light intensity and features of the surface textures. Once the image sensor is not available, your drone will switch on the altitude-hold function automatically. Please exercise utmost caution when operating the drone under these circumstances:



The Optical Flow Positioning System is typically used in an indoor environment when the GPS signal is weak or unavailable. The optimal usage height for Optical Flow Mode is **1.6-9.8 ft**.

- Fly over surfaces without clear patterns or textures.
- Fly over extremely dark or bright surfaces.
- Fly in an area where the lighting changes dramatically and frequently.
- Fly over moving surfaces or objects. (e.g., above crowds, above bushes or grasses swayed by strong winds).
- Fly over water or transparent surfaces.
- Fly over highly light reflective surfaces. (e.g., mirrors).
- Fly over monochrome surfaces (e.g., pure black, red, or green).
- Flying over surfaces with repeating identical patterns or textures (e.g., tiles with the same design).
- Flying speed should be controlled not to be too fast.
- Keep sensors clean at all times.
- DO NOT scratch or tamper with the sensors. DO NOT use the aircraft in dusty or humid environments.
- Make sure that the light is bright enough and the surface is with clear textures so that the Optical Flow Positioning can acquire the movement information through recognizing the ground textures.

3.3 APP Functions >>

App Interface



- 1 Homepage : Tap this icon to return to the main menu.
- 2 Status bar: Displays the current status of the drone.
- 3 GPS Signal : Displays the current GPS signal strength.
- 4 Drone Battery Level : Real-time display of the current battery level of the drone.
- 5 Flight Setting : Tap to enter the setting interface. Alter settings for flight height/distance, etc.
- 6 Speed 50%: Displays the current speed level.
- 7 Takeoff/Landing : Tap this after unlocking to initiate a takeoff/landing.
- 8 Return to Home : Tap to bring the drone back to the Home Point.
- 9 Multi-functions : Tap to choose from multiple functions.

Upon tapping, the GPS Follow function is activated. The drone's head will align with the direction of your smartphone's GPS and follow its movement. (To activate this function, the following conditions must be met: the drone must be in GPS mode, with a flight distance between 5 to 50m, and a flight altitude between 3 to 50m.)

3.3 APP Functions >>

App Interface

- 11 VR : Pair the mobile phone with a pair of VR glasses (not included) first. Then use this function to watch 3D live feed in real-time.
- 12 Waypoint : Make sure the drone is already at or above 49 ft in altitude. Upon tapping, the Waypoint function is activated. The drone will fly along the path specified by the pilot. (This function is only usable in GPS mode.)
- 13 Circle Mode : Make sure the drone is already at or above 49 ft in altitude. The drone will perform a circular flight, either clockwise or counterclockwise, around its current position, with its nose facing inward. (This function is only usable in GPS mode.)
- 14 Camera Angle Adjustment : The camera angle adjustment slider will appear on the right side of the screen. At this point, if you move the slider upward, the drone's camera will tilt upwards by a certain angle; if you move the slider downward, the drone's camera will tilt downwards by a certain angle.
- 15 Map : Tap the Mini Map to switch between Camera View and Map View.

16 Flight Distance D_{N/A_m} ^D: Horizontal distance from the Home Point.

17 Flight Height H_{N/A_m} ^H: Vertical distance from the Home Point.

18 Flight Attitude Display : This feature displays the changes in the drone's attitude, its relative position, and the direction in which the drone's head is pointing. The white circle represents the operator's position, and the white triangle points in the direction the drone's head is facing.

19 Flight Record : Record the relevant parameters of each flight.

20 Photo/Video : Tap to switch between photo taking and video recording.

21 Shutter/Record Button : Tap to take a photo or to start or stop recording a video.

22 Album : Tap to view photos and videos taken by the drone's camera.

3.3 APP Functions >>


Beginner Mode

It's recommended that beginner pilots first familiarize themselves with the drone by using beginner mode. In Beginner mode, which is the default operating mode, the following settings apply:

- ① Flight Height is restricted to a range of 0~98 ft.
- ② Flight Distance is capped between 0~98 ft.

To alter the settings mentioned above, you'll need to turn off beginner mode

 Flight Settings
On APP



3.4 Drone Status Indicator >>

Indicator Status	Meanings
 - - - - -	[Red] Slow Flashing Unsuccessful pairing after powering on the drone.
 x 2 - - - -	[Yellow] Double Flashing Paired successfully/Searching for GPS signals.
 — — —	[Green] Steady GPS signal search successful.
 — — —	[Yellow] Steady Successfully exited GPS mode.
 x 2 - - - - -	[Red] Slow Double Flashing Entered first stage of Low Voltage RTH.
 x 2 - - - -	[Red] Fast Double Flashing Entered second stage of Low Voltage RTH.

4.1 Specifications >>

• DRONE:

Model: WF31	Weight: 214g/7.5oz
Max Flight Time: 26 minutes <small>(in a windless environment)</small>	Max Flight Height: 328 ft/100m
Max Wind Speed Resistance: 3.4m/s	Max Takeoff Altitude: 11483 ft/3500m
Operating Temperature Range: 32° to 104°F (0° to 40°C)	
Size: 266 × 220 × 55 mm (unfolded)	125 × 81 × 55 mm (folded)

• DRONE BATTERY:

Capacity: 1700mAh	Voltage: 7.6V
Battery Type: Lithium-ion Polymer Battery	Energy: 12.92Wh
Charging Temperature Range: 41° to 104°F (5° to 40°C)	
Charging Time: About 180 minutes	

• USB CHARGING CABLE:

Input: 5V/2A	Rated Power: ≤10W
--------------	-------------------

4.1 Specifications >>

• TRANSMITTER:

Operating Frequency: 2408-2472MHz	Max Flight Distance: 1640 ft/500 m <small>(outdoor and unobstructed)</small>
Battery Type: 3.7V 380mAh Lithium-ion Polymer battery	Operating Temperature Range: 32° to 104°F (0° to 40°C)

Charging Time: 60 minutes

• CAMERA :

Operating Frequency: 5150-5250MHz	Controllable Range: -70° to 0°
Photo Resolution: 3840*2160P <small>(when stored in TF card)</small>	3840*2160P <small>(when stored in cellphone)</small>
Video Resolution: 2048*1152P@25fps <small>(when stored in TF card)</small>	1920*1080P@25fps <small>(when stored in cellphone)</small>
Max Transmission Distance: 1640ft/500m <small>(outdoor and unobstructed)</small>	Lens: FOV 100°
Photo Formats: JPEG	Video Formats: MP4
Supported TF Cards: Supports a TF Card (Class 10 or above) with capacity of up to 64 GB	
Supported File Systems: FAT32	

4.2 Contact Us >>

Please do not hesitate to contact us if you need further support.



support@wefonetoy.com



+1 (888) 836-0566

4.3 Troubleshooting >>

Issues	Possible Causes	Suggested Solutions
Motors won't start.	Weak GPS signal.	(1) Ensure you're operating in an area with strong GPS reception. (2) For indoor operations, short press the button to exit GPS mode. (See page 22)
	The battery is running low (as indicated by a flashing battery indicator).	Recharge the battery.
	The compass isn't calibrated (Drone Status Indicators flash yellow).	Conduct a compass calibration. For step-by-step instructions, refer to the "Compass Calibration" section in the user manual. (See page 19)
Unstable flight or abnormal posture	GPS signal instability due to flying near buildings or in areas with obstructions.	Operate the drone in open spaces free from obstructions.
	Compass interference	(1) Manually land the drone immediately and recalibrate the compass. (2) Try operating in a different location, ensuring you're away from buildings, power lines, and signal towers.
	Drone malfunction or after a collision.	Calibrate on a flat surface; push both sticks to the bottom right corner until drone lights become steady.
	Unstable air pressure or poor optical flow condition during flight.	Consider changing to a suitable flight environment. (See page 37)
	Propeller deformation or damage	Replace with new propellers. (See page 10)
Cannot execute TapFly function.	Map is not pre-loaded.	Load the map in the app ahead of time using mobile data or a WiFi network with internet access.
	Flying too low.	Only use this function at altitudes of 49ft or above.

4.4 Compliance Information >>

FCC Notice:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

The Supplier's Declaration of Conformity is available at the following address:

Supplier's Declaration of Conformity

Product Name: Quadcopter

Model NO: WF31

Responsible Party: WULEFT INC.

Responsible Party Address: 123 W. 1st Street, Ste 510, Casper,
Wy, 82601

US Phone Number: 1 (256) 887-5766

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is

4.4 Compliance Information >>

connected.

- Consult the dealer or an experienced radio/TV technician for help. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF Exposure:

The equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This device should be installed and operated with minimum distance 20cm between the radiator & your body (**only for the camera**).

IC Notice:

This device complies with Canada Industry licence-exempt RSS standard(s).

Operation is subject to the following two conditions:

- (1) this device may not cause interference; and
- (2) this device must accept any interference. Including interference that may cause undesired operation of the device.

CAN ICES-003 (B):

Avis d'Industrie Canada

Le présent appareil est conforme aux CNR d'industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage; et
- (2) l'utilisateur de l'appareil doit accepter le brouillage radioélectrique subi même si le brouillage est susceptible d'en compromettre le fonctionnement, mauvais fonctionnement de l'appareil.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

4.4 Compliance Information >>

EU RF Power(EIRP): <14 dBm (2452MHz-2474 MHz)

Caution

1. The max operating of the EUT is 45°C, and shouldn't be lower than -10°C.
2. The device complies with RF specifications when the device used at 0mm from your body.

3. Declaration of Conformity.

We, Xiamen HolyOcean Trading Co, Ltd

hereby, declare that the compliance of the essential requirements with the Directive 2014/53/EU, the RoHS Directive 2011/65/EU and Safety Directive 2009/48/EC have been fully fulfilled on our product with indication below:

Product Name: Quadcopter
Model/Mark:WF31/WEFONE

MARWAY Consulting UG

EC REP Am Maibusch 108-110, 45883, Gelsenkirchen, Germany
MARWAY.UG@outlook.com

4.4 Compliance Information >>

MANUFACTURER INFORMATION:

Manufactured by
Xiamen HolyOcean Trading Co, Ltd
Address: Unit 431-H, BLDG C, Xiamen Intl Shipping CTR, No.93 Xiangyu Rd, Xiamen, China
+1 (888) 836-0566

MTOM Statement:

WF31 is a quadrotor drone. The MTOM of WF31 is 214g, including the propellers, the Flight Battery, TF card, which is compliant with C0 requirements.

Users must follow the instructions below to comply with the MTOM C0 requirements. Otherwise, the drone cannot be used as a C0 aircraft:

1. DO NOT add any payload to the aircraft except the items listed in the List of Items including qualified accessories section.
2. DO NOT use any non-qualified replacement parts, such as flight batteries or propellers, etc.
3. DO NOT retrofit the aircraft.

4.4 Compliance Information >>

List of Items including qualified accessories

1. WF3I Propellers (1g each propeller)
2. WF3I Flight Battery (approx. 70.2 g)
3. WF3I TF card (approx. 0.3 g)

List of Spare and Replacement Parts

1. WF3I Propellers (1g each propeller)
2. WF3I Flight Battery (approx. 70.2 g)

List of Safe Guards

Below is the list of the mechanical safeguards and operation safeguards for WF3I.

1. Emergency Stop function can be performed to stop the motors in case of an emergency. Refer to the Emergency Stop section for details.
2. Prevent the drone from flying in restricted airspace. Refer to the Flight Environment Requirements section for details.
3. The Return to Home (RTH) function. Refer to the GPS Return to Home section for details.
4. The Optical Flow Positioning. Refer to the Optical Flow Positioning section for details.



MADE IN CHINA(CN)