




Y.008.0029

Front glass 0.25mm explosion-proof
film 0.05 (total thickness 0.3)
LT2-B02

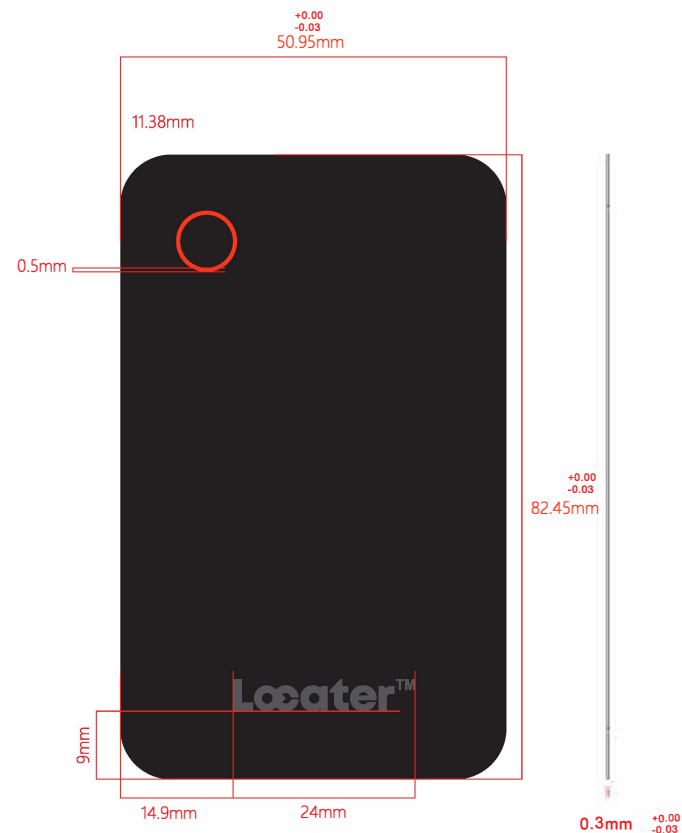


Positive Process: Logo screen printing

Black glass with silk screen printing on the back

	Process : LOGO screnn printing Co1our : PANTONE Cool Gray 11C	Back
	Process : Circ1e screen printing Co1our : PANTONE Bright Red C	

Solar panel thickness 1MM
LT2-B01

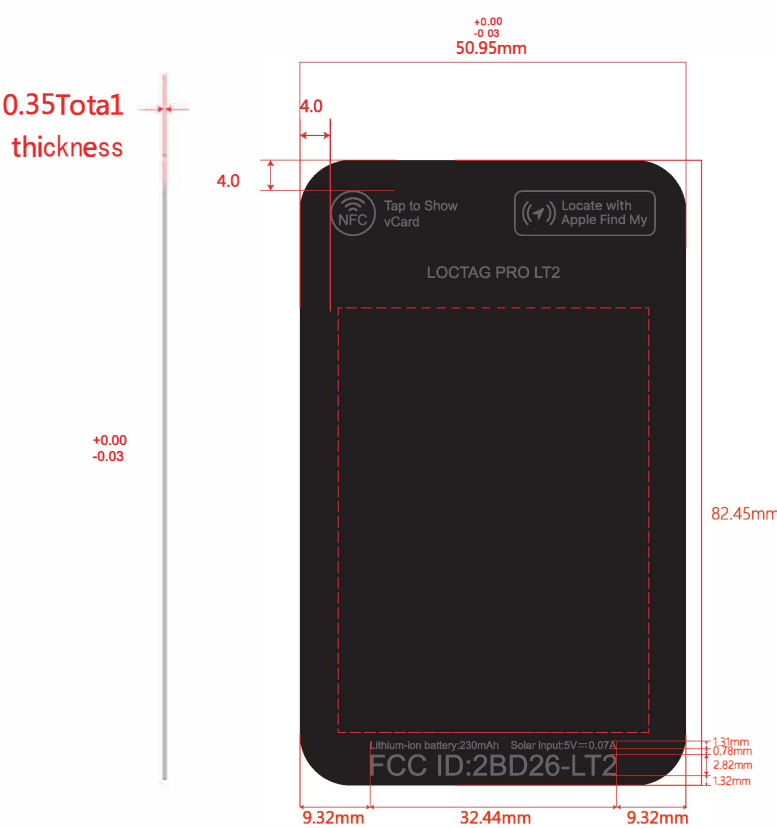

Positive

	Co1our : PANTONE Cool Gray 10C
---	--------------------------------

Craft: Black solar panel dart carving
The red dashed area is the solar panel
and cannot be carved