

# Testing Report

Customer Name: Qingdao Ecopure Filter Co., Ltd.


Product Name: External Antenna

Sample Model: /

Reference Standard: *GB/T 9410-2008; ANSI/IEEE Std 149-1979*

Issue Date: 2024.1.15

|                 |                   |
|-----------------|-------------------|
| Engineer: Zkm's | Date: 2024. 1. 12 |
| Auditor: Eason  | Date: 2024. 1. 15 |
| Approver: Jaron | Date: 2024. 1. 15 |



## Version

| Version No. | Date      | Description                   | Formulate | Approval |
|-------------|-----------|-------------------------------|-----------|----------|
| A0          | 2024.1.15 | For the first time, formulate | Zkris     | Eason    |
|             |           |                               |           |          |
|             |           |                               |           |          |

## Contents


|                                                       |    |
|-------------------------------------------------------|----|
| 1.General Information .....                           | 3  |
| 1.1 General information of testing institutions ..... | 3  |
| 1.2 Testing principle .....                           | 3  |
| 1.3 Test equipment .....                              | 4  |
| 1.4 Test environment .....                            | 4  |
| 1.5 Statement .....                                   | 4  |
| 2.Sample Information .....                            | 5  |
| 2.1 Client information .....                          | 5  |
| 2.2 Description of EUT(S) .....                       | 5  |
| 2.3 EUT appearance .....                              | 6  |
| 2.4 EUT setup photo of free space OTA testing .....   | 6  |
| 3. Test Results .....                                 | 7  |
| 3.1 Test standard .....                               | 7  |
| 3.2 Test uncertainty .....                            | 7  |
| 3.3 Test data .....                                   | 8  |
| 3.3.1 VSWR parameters .....                           | 8  |
| 3.3.2 VSWR data .....                                 | 8  |
| 3.3.3 Typical free space efficiency and gain .....    | 8  |
| 3.3.4 Typical free space radiation pattern .....      | 9  |
| (The following is blank) .....                        | 10 |

# 1.General Information

## 1.1 General information of testing institutions

|           |                                                                                                                                                                                               |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name      | Shenzhen RFI-LAB Communication Technology Co., Ltd.                                                                                                                                           |
| Address   | 103 Building 1 Tingwei Industrial Park, No.6, Liufang Road, Zone 67Xingdong, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong, China                                                  |
| Tel       | 13682621346                                                                                                                                                                                   |
| E-mail    | rfi-lab@tech-now.com                                                                                                                                                                          |
| Equipment | All the equipment used in the report is fixed in 103 Building 1 Tingwei Industrial Park, No.6, Liufang Road, Zone 67Xingdong, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong, China |

## 1.2 Testing principle

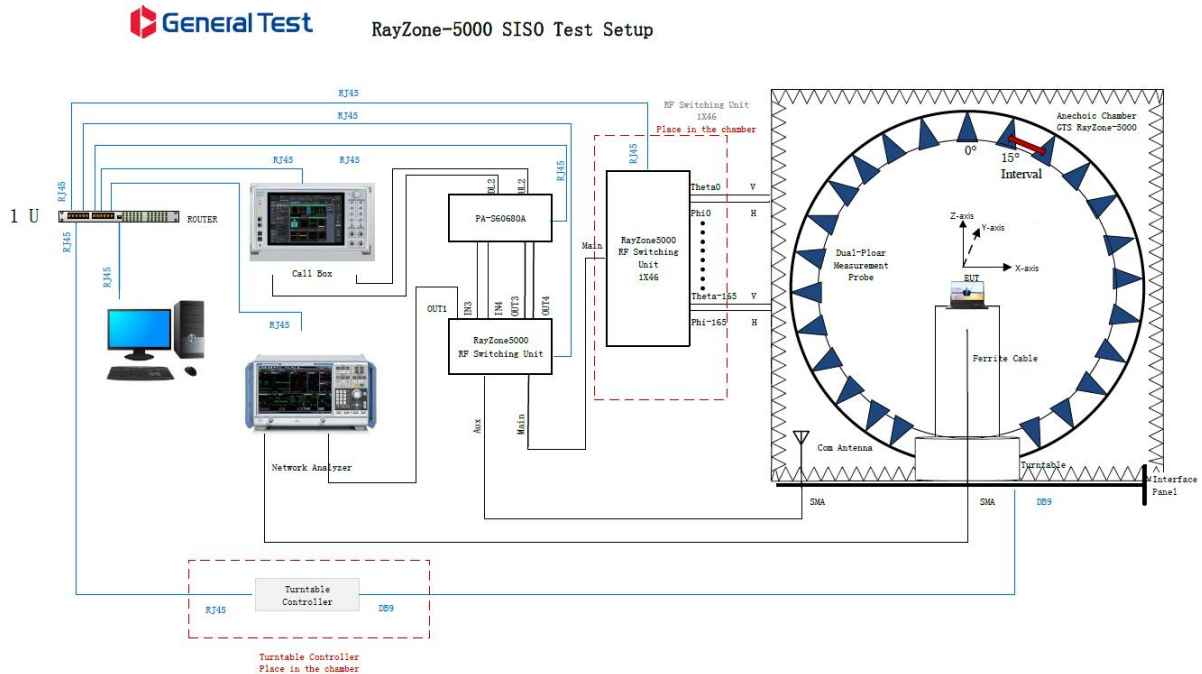

### 1.3 Test equipment

| Equipment        | Model No.    | Serial No.     | Manufacturer | Calibration date | Next calibration date |
|------------------|--------------|----------------|--------------|------------------|-----------------------|
| OTA Test System  | RayZone-5000 | RFI-LAB-RF-D00 | GTS          | 2023.3.14        | 2025.3.13             |
| Network Analyzer | E5071C       | RFI-LAB-RF-D01 | KEYSIGHT     | 2023.5.11        | 2024.5.10             |
| Network Analyzer | E5071C       | RFI-LAB-RF-C02 | KEYSIGHT     | 2023.5.11        | 2024.5.10             |

### 1.4 Test environment

|             |           |
|-------------|-----------|
| Temperature | 23.8°C    |
| Humidity    | 58%RH     |
| Pressure    | 100.27kPa |

### 1.5 Statement

- (1) The test results in the report are only applicable to the tested samples and the tested samples work under the environment described in the report.
- (2) Only Shenzhen RFI-LAB Communication Technology Co., Ltd. have the right to modify the report, and the modification information shall be annotated in the revision form.
- (3) Any objection to this report shall be raised within 30 days after formal confirmation of the report.
- (4) This report is invalid if there is any evidence that the sample information provided is falsified.
- (5) The report is invalid without the signature of the auditor and approver.

## 2.Sample Information



### 2.1 Client information

|                      |                                  |
|----------------------|----------------------------------|
| Name                 | Qingdao Ecopure Filter Co., Ltd. |
| Address              | /                                |
| Contacts             | /                                |
| Tel                  | /                                |
| E-mail               | /                                |
| Manufacturer         | Qingdao Ecopure Filter Co., Ltd. |
| Manufacturer Address | /                                |

### 2.2 Description of EUT(S)

|                 |                                                  |
|-----------------|--------------------------------------------------|
| Product Name    | External Antenna                                 |
| Sample Model    | /                                                |
| Antenna Size    | 82*5mm                                           |
| Serial No.      | /                                                |
| Antenna Type    | External Antenna                                 |
| Test Item       | VSWR;Antenna gain; Efficiency; Radiation pattern |
| Frequency Range | 910-920MHz                                       |
| Received Date   | 2024.1.12                                        |
| Test Date       | 2024.1.12                                        |
| Remark          | The length of the RF cable is 90mm               |

## 2.3 EUT appearance

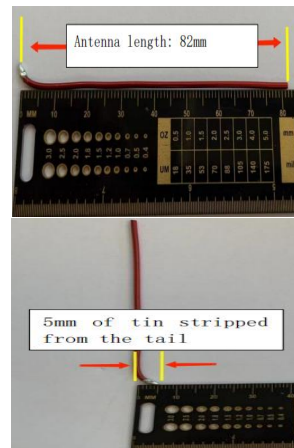
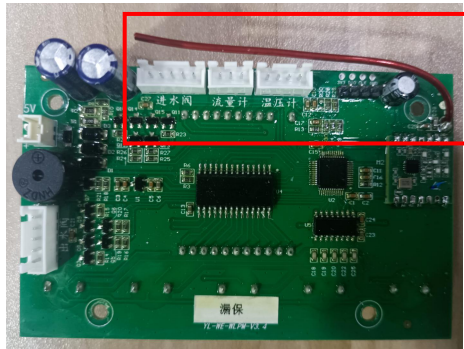


## 2.4 EUT setup photo of free space OTA testing

Planform



Front view

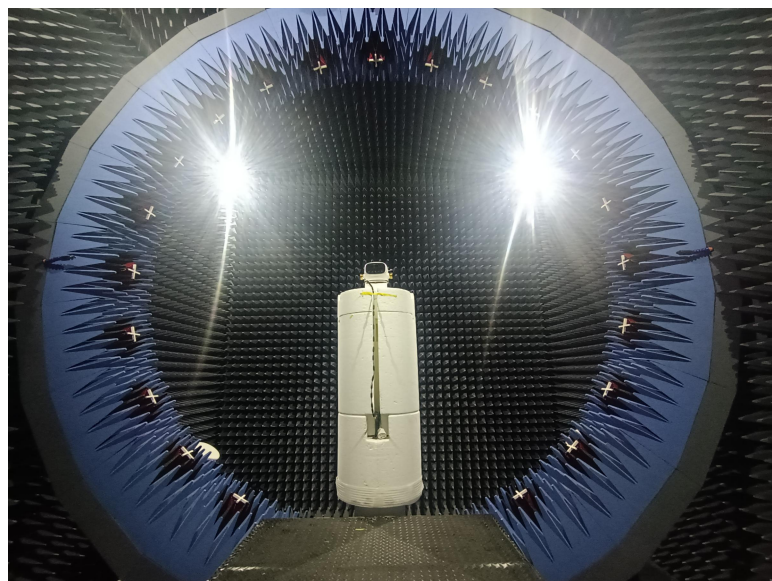

## 3. Test Results

### 3.1 Test standard

| Name                         | Parameter            | Method                                                               | Standard no.           |
|------------------------------|----------------------|----------------------------------------------------------------------|------------------------|
| Mobile communication antenna | Antenna gain         | Generic specification for antennas used in the mobile communications | GB/T 9410-2008         |
|                              | Radiation pattern    |                                                                      |                        |
|                              | VSWR                 |                                                                      |                        |
| Antenna                      | Radiation efficiency | IEEE Standard Test Procedures for Antennas                           | ANSI/IEEE Std 149-1979 |
|                              | Gain and directivity |                                                                      |                        |


### 3.2 Test uncertainty

The uncertainty was calculated on the basis of the GUM published by ISO, using the inclusion factor of  $K=2$  and the 95% confidence level to express the extended uncertainty.

| Item                 | Uncertainty         |
|----------------------|---------------------|
| VSWR                 | $\pm 0.3$           |
| Antenna gain         | $\pm 0.72\text{dB}$ |
| Radiation efficiency | $\pm 0.72\text{dB}$ |

## 3.3 Test data

### 3.3.1 VSWR parameters

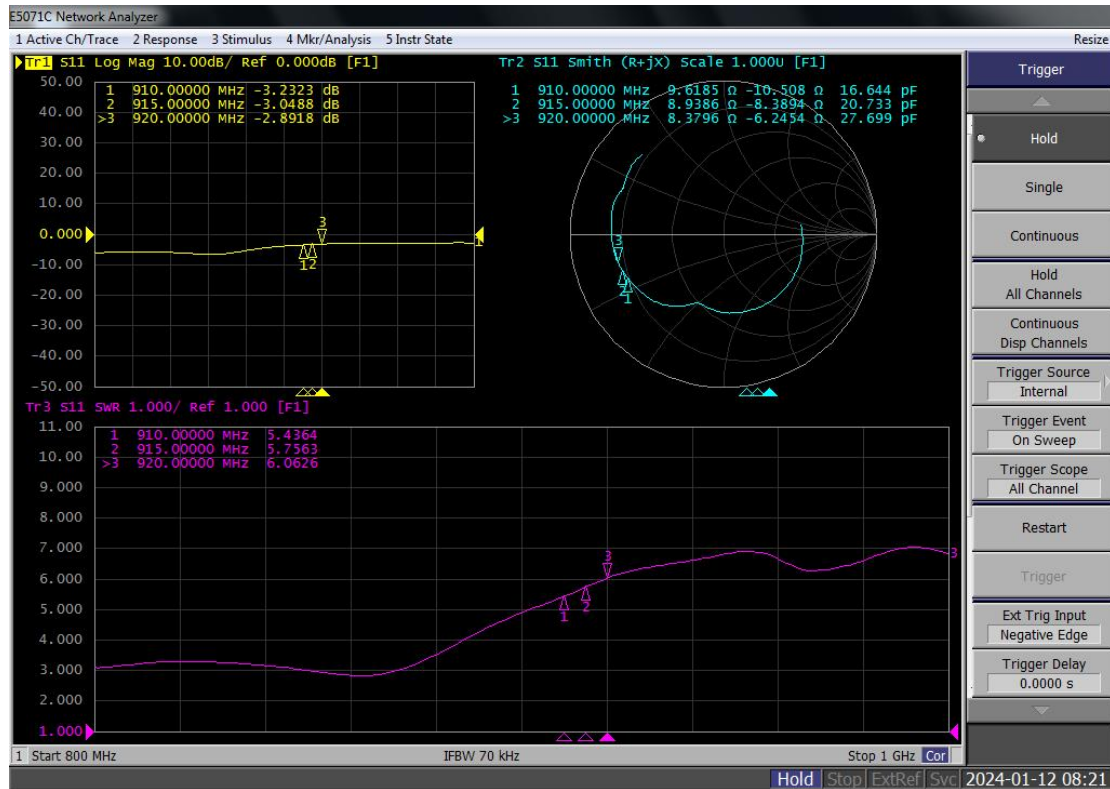

### 3.3.2 VSWR data

| Frequency/MHz | 910    | 915    | 920    |
|---------------|--------|--------|--------|
| VSWR          | 5.4364 | 5.7563 | 6.0626 |


### 3.3.3 Typical free space efficiency and gain

| Frequency/MHz | 910   | 911   | 912   | 913   | 914   | 915   | 916   | 917   | 918   | 919   | 920   |
|---------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Peak Gain/dBi | -3.26 | -3.34 | -3.44 | -3.46 | -3.49 | -3.53 | -3.57 | -3.56 | -3.59 | -3.63 | -3.68 |
| Efficiency/%  | 18.74 | 18.49 | 18.25 | 18.05 | 17.88 | 17.74 | 17.62 | 17.51 | 17.36 | 17.17 | 16.99 |




### 3.3.4 Typical free space radiation pattern


(1) X-Z Plane(unit:dBi):

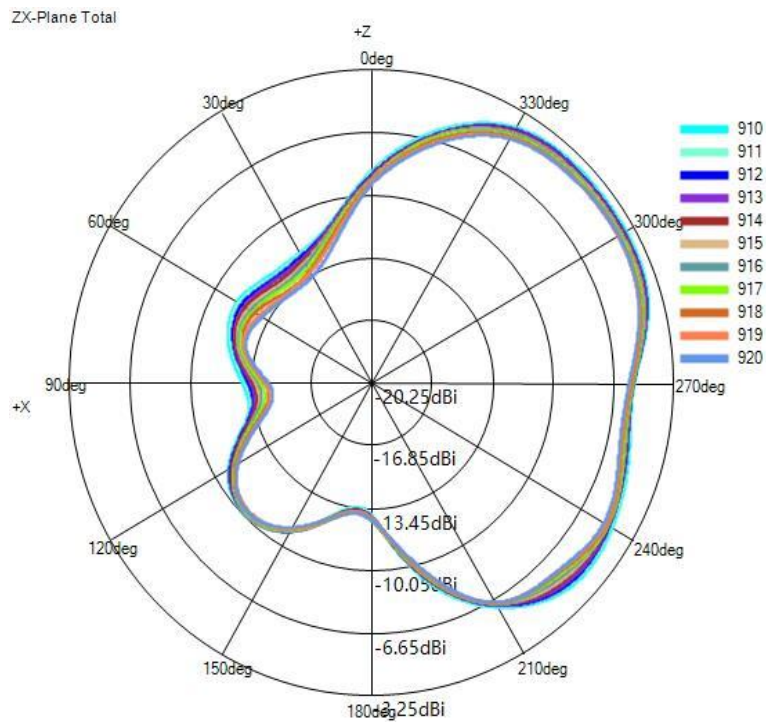


(2) Y-Z Plane(unit:dBi):

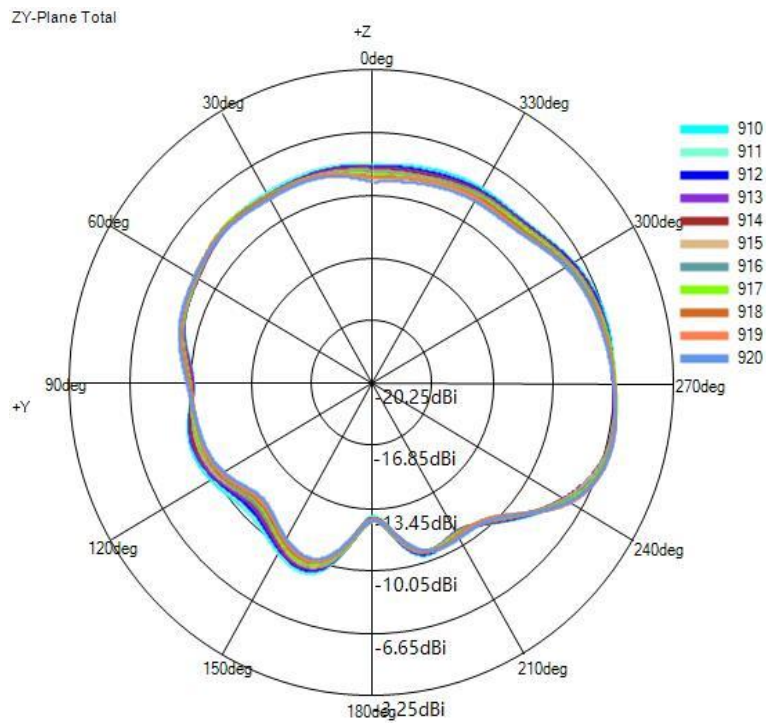

(3) X-Y Plane(unit:dBi):

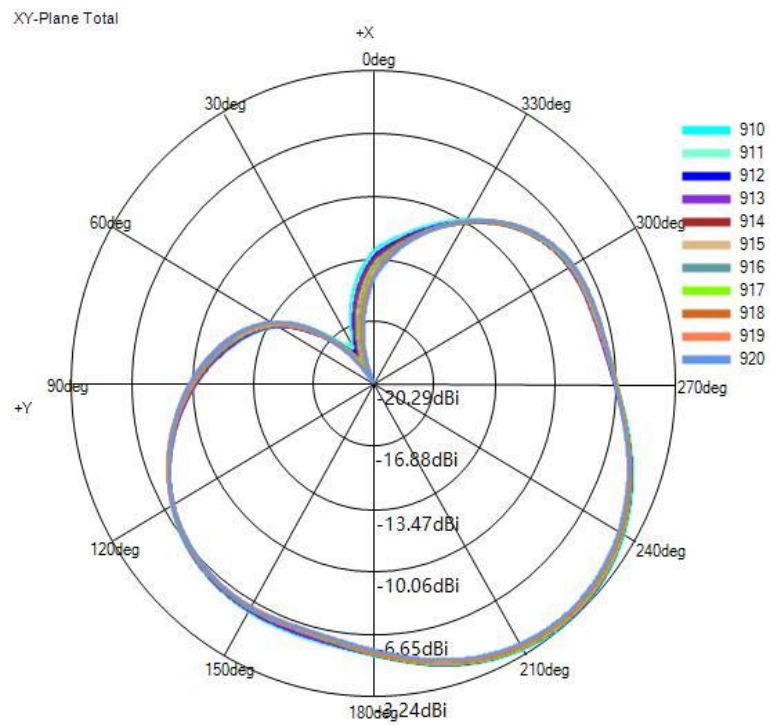

(4) Typical Free Space 3D Radiation Pattern at 910MHz(unit:dBi):

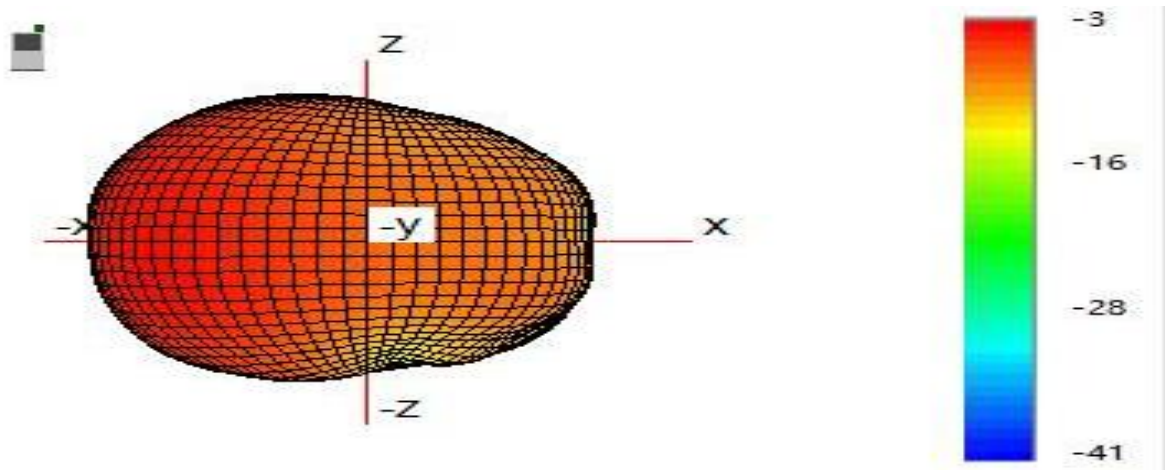

-----End-----

(The following is blank)