




Shenzhen UnionTrust Quality and Technology Co., Ltd.

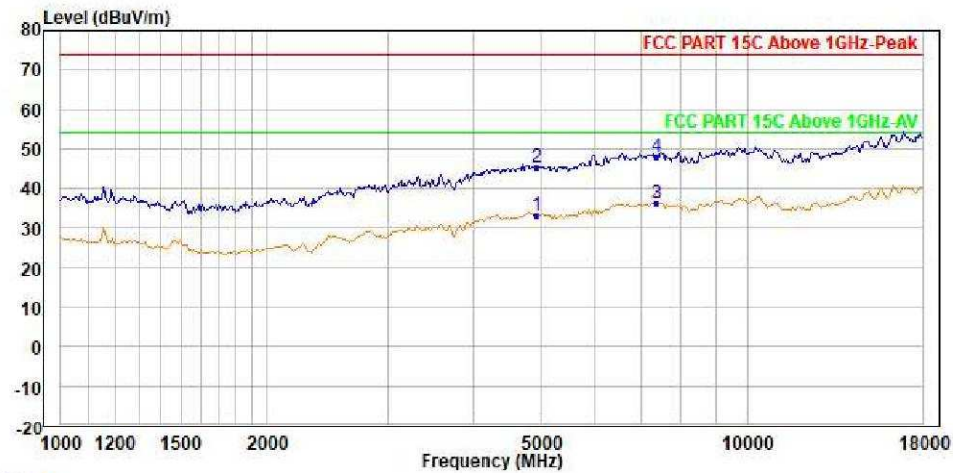


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBAABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	33.18	35.21	34.48	0.00	9.37	45.88	54.00	-20.82	Average
2	4924.000	45.33	47.36	34.48	0.00	9.37	45.88	74.00	-28.67	Peak
3 PP	7386.000	36.09	34.78	36.50	0.00	10.39	45.58	54.00	-17.91	Average
4 PK	7386.000	48.02	46.71	36.50	0.00	10.39	45.58	74.00	-25.98	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

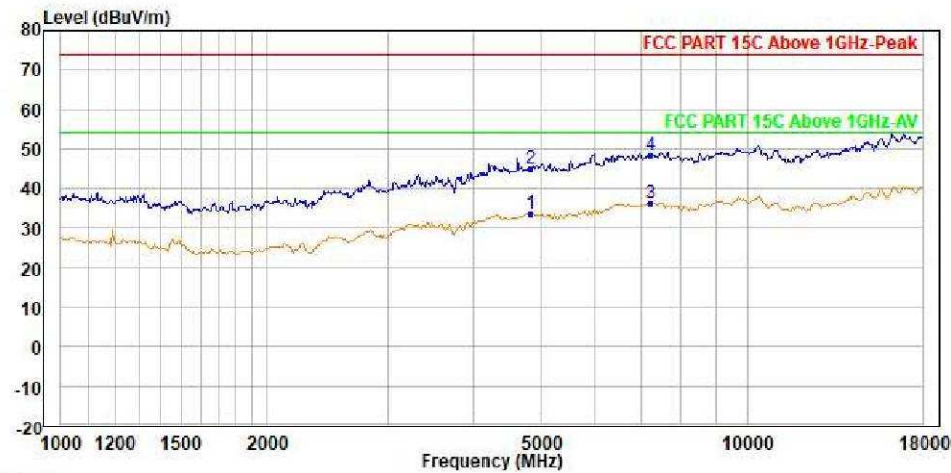


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBAABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	33.69	35.76	34.46	0.00	9.33	45.86	54.00	-20.31	Average
2	4824.000	45.20	47.27	34.46	0.00	9.33	45.86	74.00	-28.80	Peak
3 PP	7236.000	36.44	35.14	36.50	0.00	10.35	45.55	54.00	-17.56	Average
4 PK	7236.000	48.42	47.12	36.50	0.00	10.35	45.55	74.00	-25.58	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

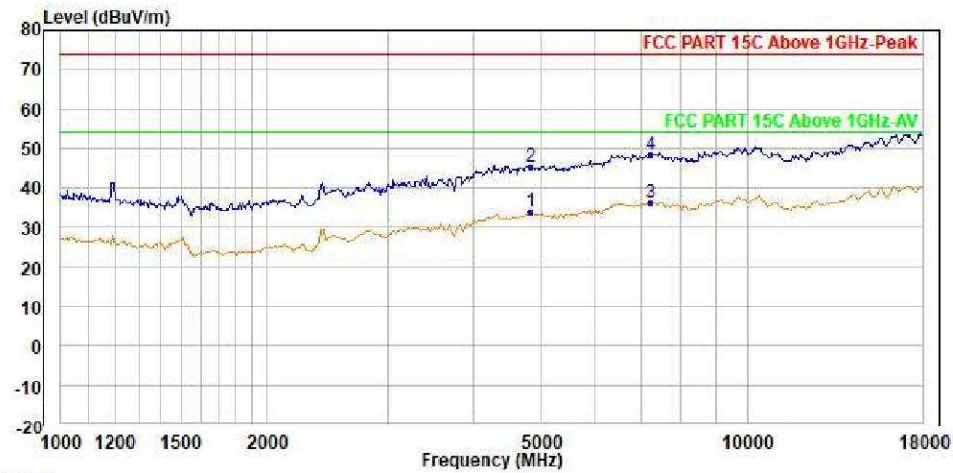


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preampl	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	33.83	35.90	34.46	0.00	9.33	45.86	54.00	-20.17	Average
2	4824.000	45.40	47.47	34.46	0.00	9.33	45.86	74.00	-28.60	Peak
3 PP	7236.000	36.34	35.04	36.50	0.00	10.35	45.55	54.00	-17.66	Average
4 PK	7236.000	48.30	47.00	36.50	0.00	10.35	45.55	74.00	-25.70	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

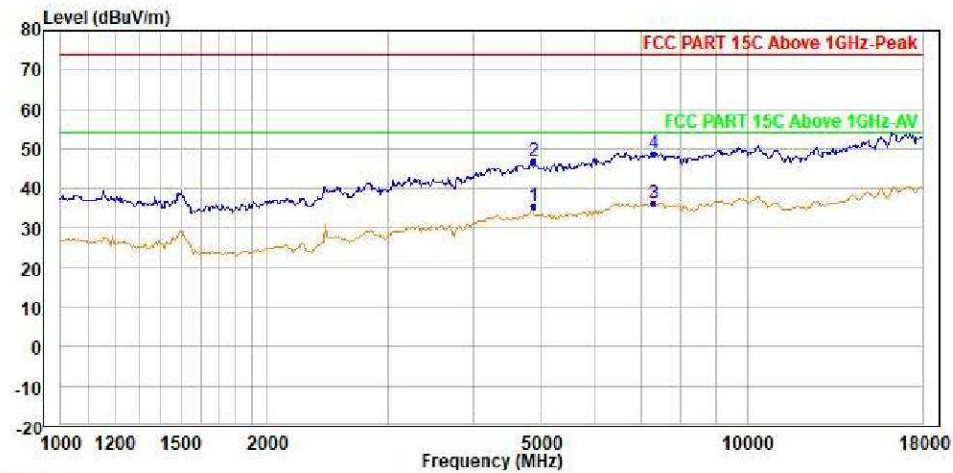


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBAABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	35.35	37.40	34.47	0.00	9.35	45.87	54.00	-18.65	Average
2	4874.000	46.78	48.83	34.47	0.00	9.35	45.87	74.00	-27.22	Peak
3 PP	7311.000	36.39	35.08	36.50	0.00	10.37	45.56	54.00	-17.61	Average
4 PK	7311.000	48.89	47.58	36.50	0.00	10.37	45.56	74.00	-25.11	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

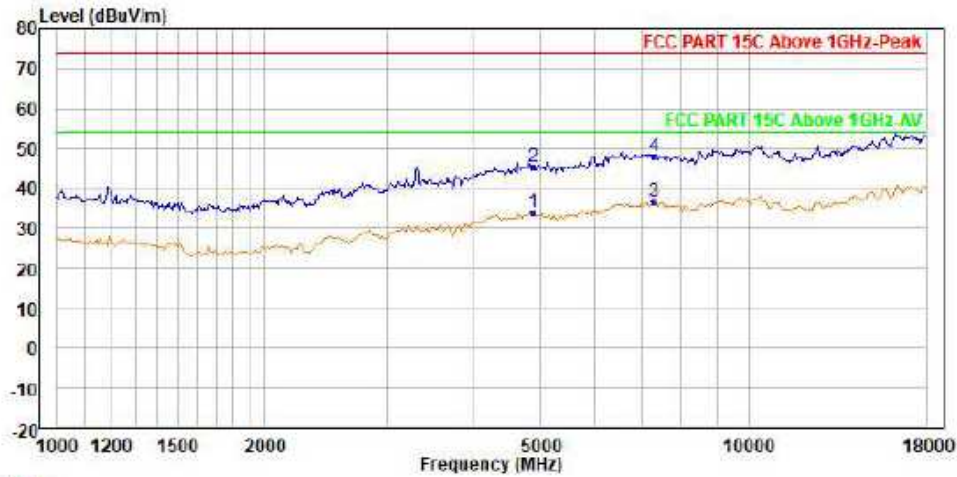


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	33.88	35.93	34.47	0.00	9.35	45.87	54.00	-20.12	Average
2	4874.000	45.51	47.56	34.47	0.00	9.35	45.87	74.00	-28.49	Peak
3 PP	7311.000	36.50	35.19	36.50	0.00	10.37	45.56	54.00	-17.50	Average
4 PK	7311.000	47.92	46.61	36.50	0.00	10.37	45.56	74.00	-26.08	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

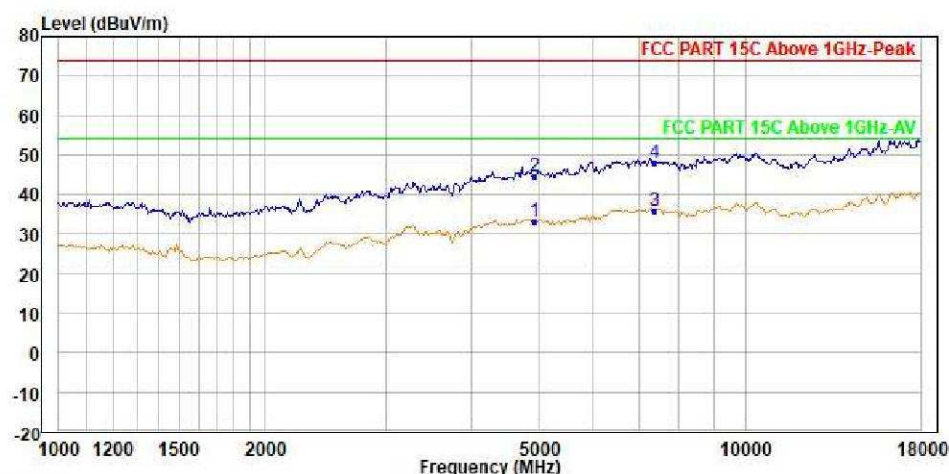


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	33.16	35.19	34.48	0.00	9.37	45.88	54.00	-20.84	Average
2	4924.000	44.61	46.64	34.48	0.00	9.37	45.88	74.00	-29.39	Peak
3	PP 7386.000	36.07	34.76	36.50	0.00	10.39	45.58	54.00	-17.93	Average
4	PK 7386.000	47.97	46.66	36.50	0.00	10.39	45.58	74.00	-26.03	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

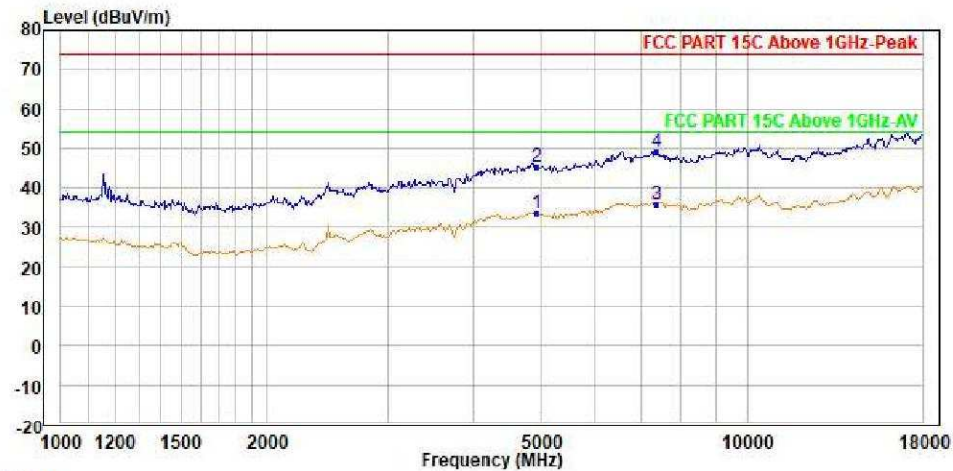


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	33.46	35.49	34.48	0.00	9.37	45.88	54.00	-20.54	Average
2	4924.000	45.44	47.47	34.48	0.00	9.37	45.88	74.00	-28.56	Peak
3	PP 7386.000	36.01	34.70	36.50	0.00	10.39	45.58	54.00	-17.99	Average
4	PK 7386.000	49.16	47.85	36.50	0.00	10.39	45.58	74.00	-24.84	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

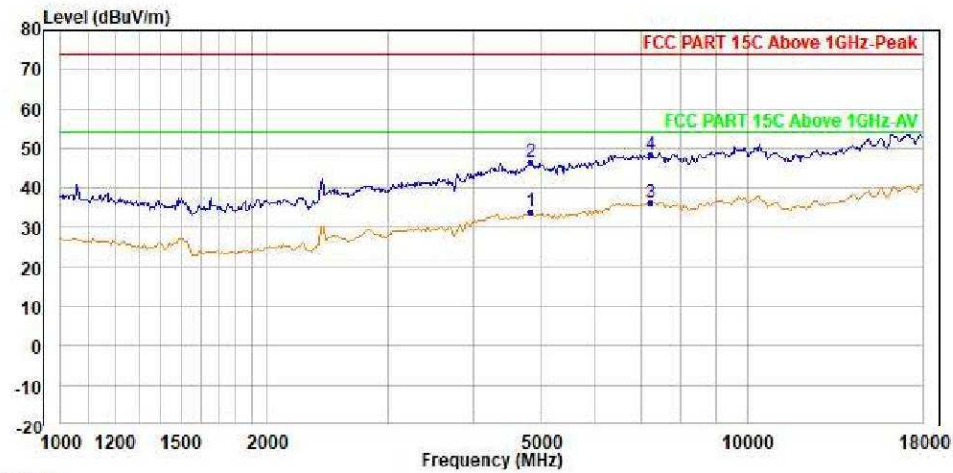


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	34.06	36.13	34.46	0.00	9.33	45.86	54.00	-19.94	Average
2	4824.000	46.61	48.68	34.46	0.00	9.33	45.86	74.00	-27.39	Peak
3 PP	7236.000	36.36	35.06	36.50	0.00	10.35	45.55	54.00	-17.64	Average
4 PK	7236.000	48.27	46.97	36.50	0.00	10.35	45.55	74.00	-25.73	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

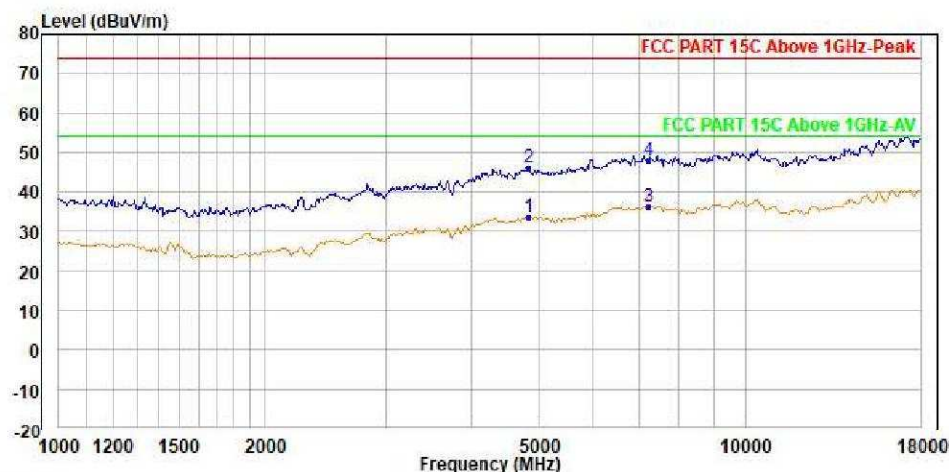


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	33.64	35.71	34.46	0.00	9.33	45.86	54.00	-20.36	Average
2	4824.000	46.30	48.37	34.46	0.00	9.33	45.86	74.00	-27.70	Peak
3 PP	7236.000	36.39	35.09	36.50	0.00	10.35	45.55	54.00	-17.61	Average
4 PK	7236.000	48.04	46.74	36.50	0.00	10.35	45.55	74.00	-25.96	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

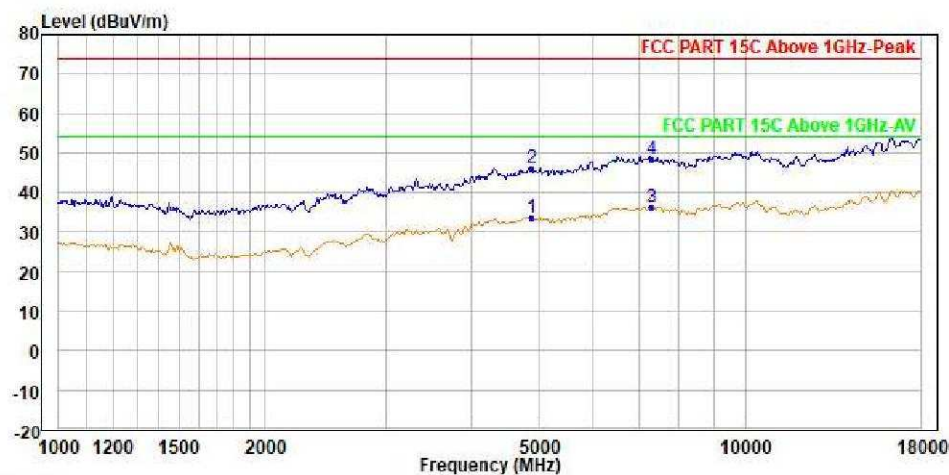


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	33.79	35.84	34.47	0.00	9.35	45.87	54.00	-20.21	Average
2	4874.000	46.32	48.37	34.47	0.00	9.35	45.87	74.00	-27.68	Peak
3 PP	7311.000	36.42	35.11	36.50	0.00	10.37	45.56	54.00	-17.58	Average
4 PK	7311.000	48.63	47.32	36.50	0.00	10.37	45.56	74.00	-25.37	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

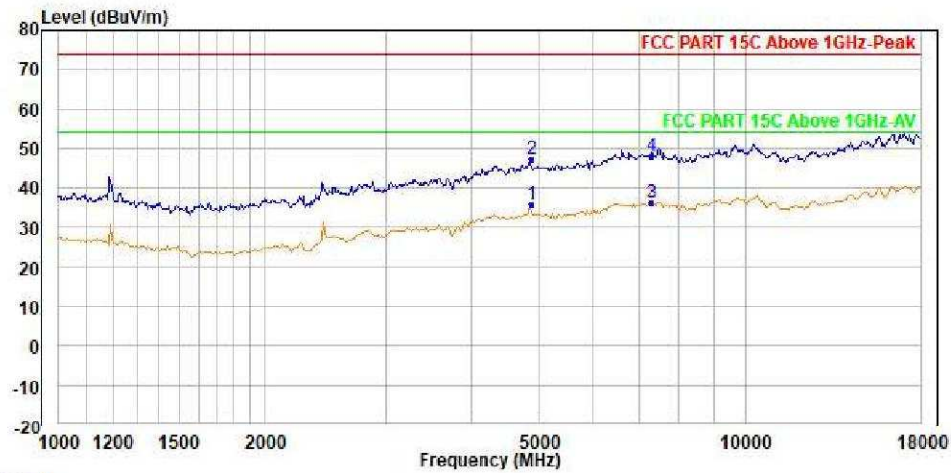


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBAABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	35.88	37.93	34.47	0.00	9.35	45.87	54.00	-18.12	Average
2	4874.000	47.19	49.24	34.47	0.00	9.35	45.87	74.00	-26.81	Peak
3 PP	7311.000	36.27	34.96	36.50	0.00	10.37	45.56	54.00	-17.73	Average
4 PK	7311.000	48.25	46.94	36.50	0.00	10.37	45.56	74.00	-25.75	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

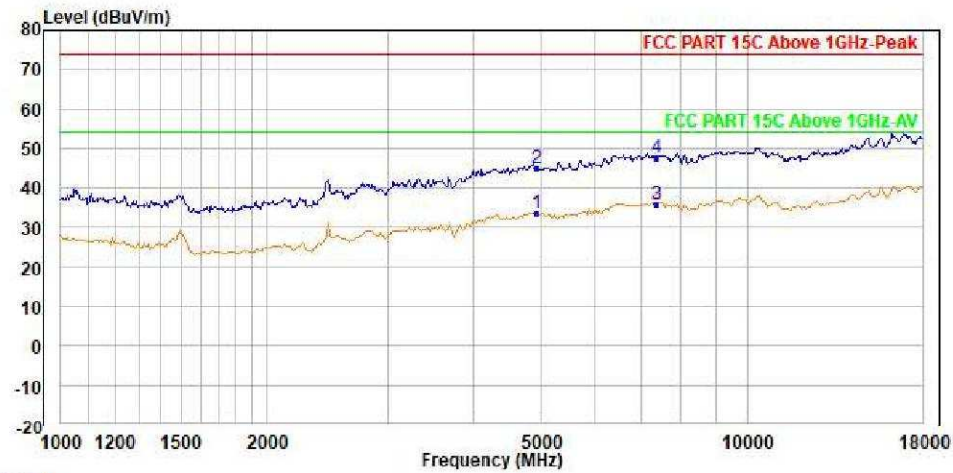


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	33.65	35.68	34.48	0.00	9.37	45.88	54.00	-20.35	Average
2	4924.000	45.02	47.05	34.48	0.00	9.37	45.88	74.00	-28.98	Peak
3 PP	7386.000	36.01	34.70	36.50	0.00	10.39	45.58	54.00	-17.99	Average
4 PK	7386.000	47.52	46.21	36.50	0.00	10.39	45.58	74.00	-26.48	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

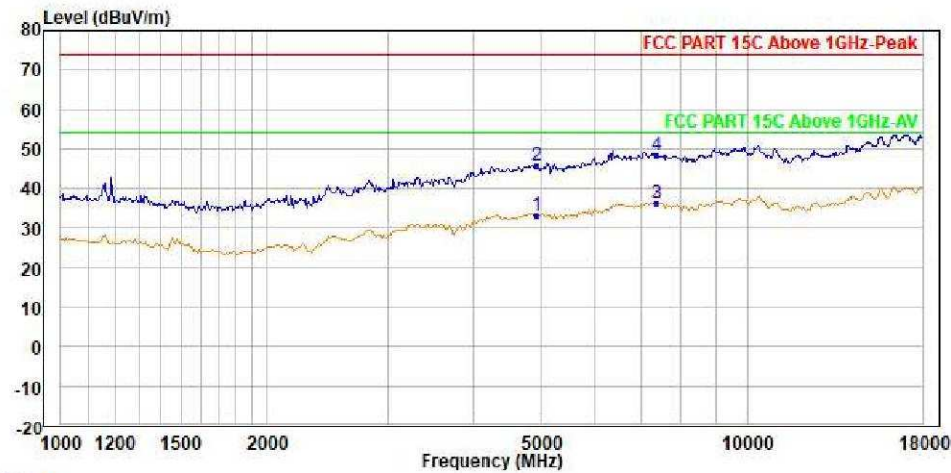


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEABABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	33.28	35.31	34.48	0.00	9.37	45.88	54.00	-20.72	Average
2	4924.000	45.59	47.62	34.48	0.00	9.37	45.88	74.00	-28.41	Peak
3 PP	7386.000	36.09	34.78	36.50	0.00	10.39	45.58	54.00	-17.91	Average
4 PK	7386.000	48.46	47.15	36.50	0.00	10.39	45.58	74.00	-25.54	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

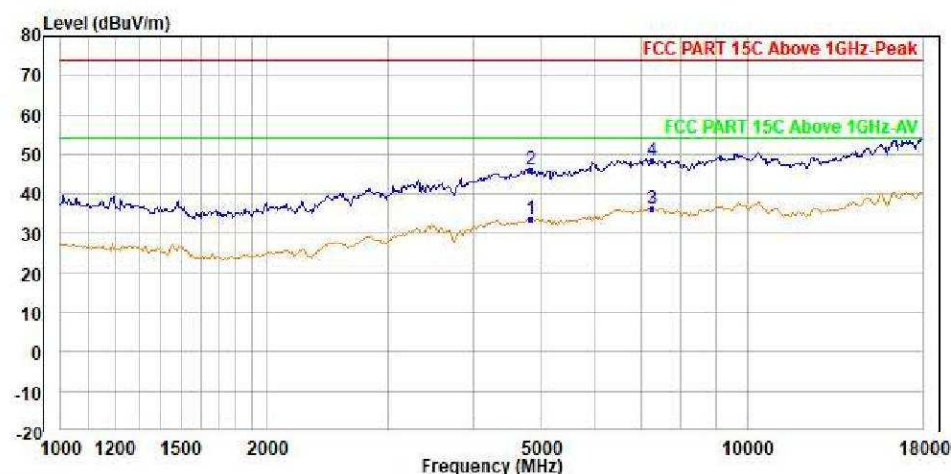


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2422
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4844.000	33.57	35.63	34.47	0.00	9.34	45.87	54.00	-20.43	Average
2	4844.000	46.18	48.24	34.47	0.00	9.34	45.87	74.00	-27.82	Peak
3 PP	7266.000	36.36	35.05	36.50	0.00	10.36	45.55	54.00	-17.64	Average
4 PK	7266.000	48.41	47.10	36.50	0.00	10.36	45.55	74.00	-25.59	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

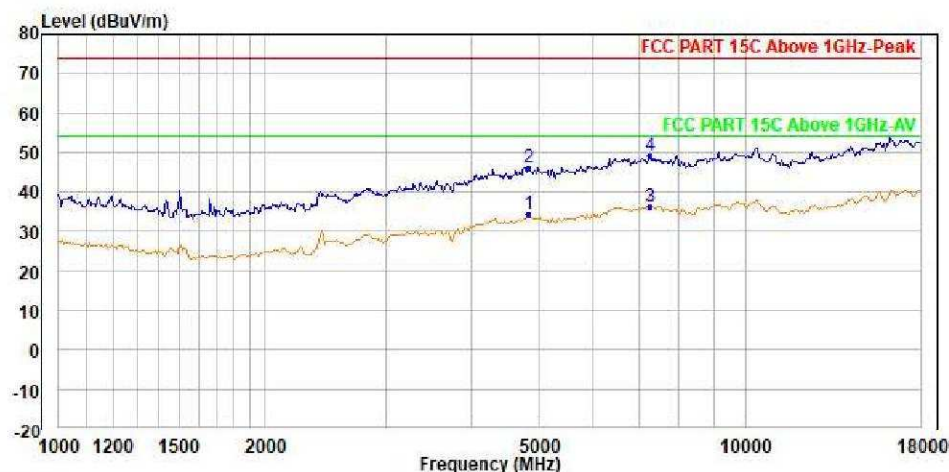


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBAABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2422
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4844.000	34.45	36.51	34.47	0.00	9.34	45.87	54.00	-19.55	Average
2	4844.000	46.14	48.20	34.47	0.00	9.34	45.87	74.00	-27.86	Peak
3 PP	7266.000	36.34	35.03	36.50	0.00	10.36	45.55	54.00	-17.66	Average
4 PK	7266.000	49.15	47.84	36.50	0.00	10.36	45.55	74.00	-24.85	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

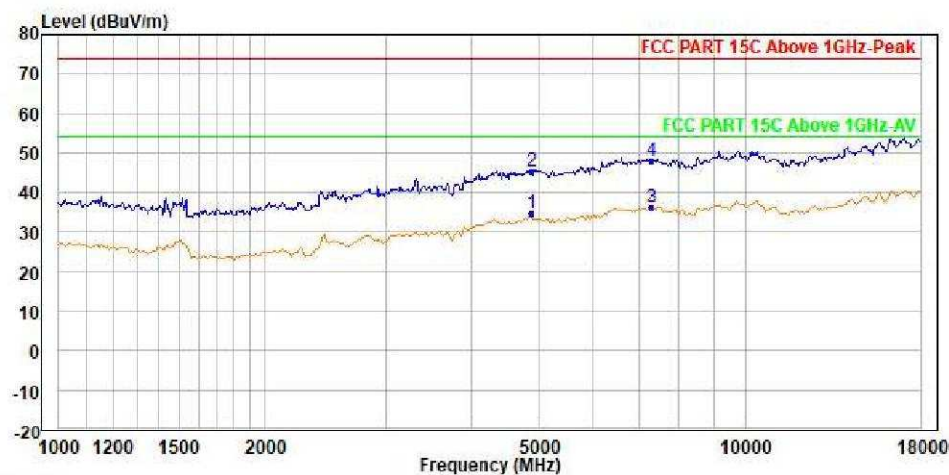


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBAABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	34.87	36.92	34.47	0.00	9.35	45.87	54.00	-19.13	Average
2	4874.000	45.31	47.36	34.47	0.00	9.35	45.87	74.00	-28.69	Peak
3 PP	7311.000	36.29	34.98	36.50	0.00	10.37	45.56	54.00	-17.71	Average
4 PK	7311.000	48.21	46.90	36.50	0.00	10.37	45.56	74.00	-25.79	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

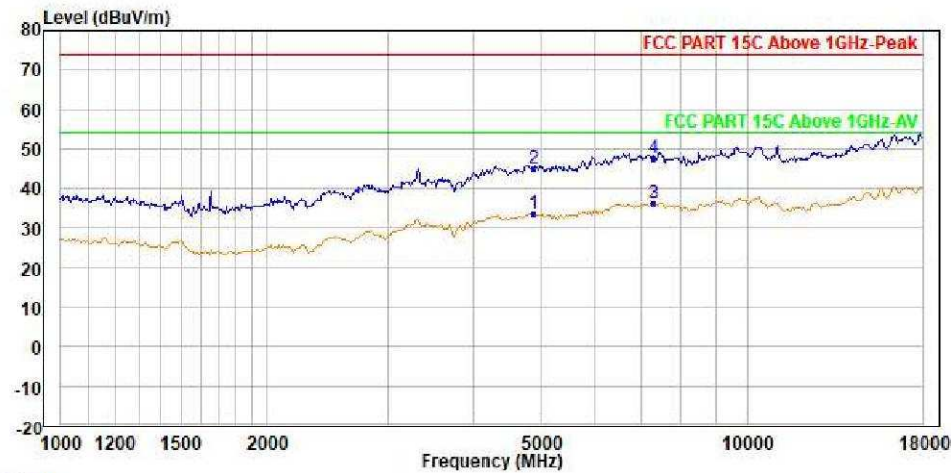


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBAABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	33.67	35.72	34.47	0.00	9.35	45.87	54.00	-20.33	Average
2	4874.000	44.96	47.01	34.47	0.00	9.35	45.87	74.00	-29.04	Peak
3 PP	7311.000	36.34	35.03	36.50	0.00	10.37	45.56	54.00	-17.66	Average
4 PK	7311.000	47.71	46.40	36.50	0.00	10.37	45.56	74.00	-26.29	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

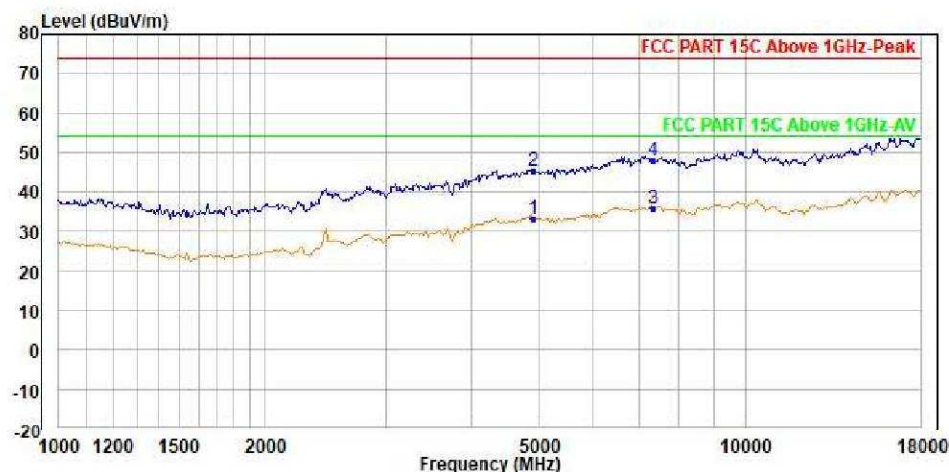


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2452
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4904.000	33.31	35.35	34.48	0.00	9.36	45.88	54.00	-20.69	Average
2	4904.000	45.58	47.62	34.48	0.00	9.36	45.88	74.00	-28.42	Peak
3 PP	7356.000	36.04	34.73	36.50	0.00	10.38	45.57	54.00	-17.96	Average
4 PK	7356.000	48.14	46.83	36.50	0.00	10.38	45.57	74.00	-25.86	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

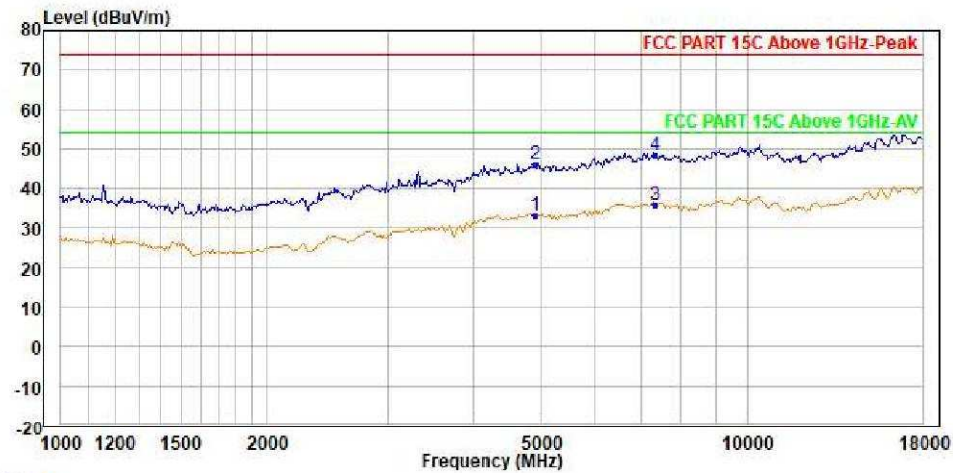


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBAABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2452
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4904.000	33.08	35.12	34.48	0.00	9.36	45.88	54.00	-20.92	Average
2	4904.000	46.06	48.10	34.48	0.00	9.36	45.88	74.00	-27.94	Peak
3 PP	7356.000	35.96	34.65	36.50	0.00	10.38	45.57	54.00	-18.04	Average
4 PK	7356.000	48.28	46.97	36.50	0.00	10.38	45.57	74.00	-25.72	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

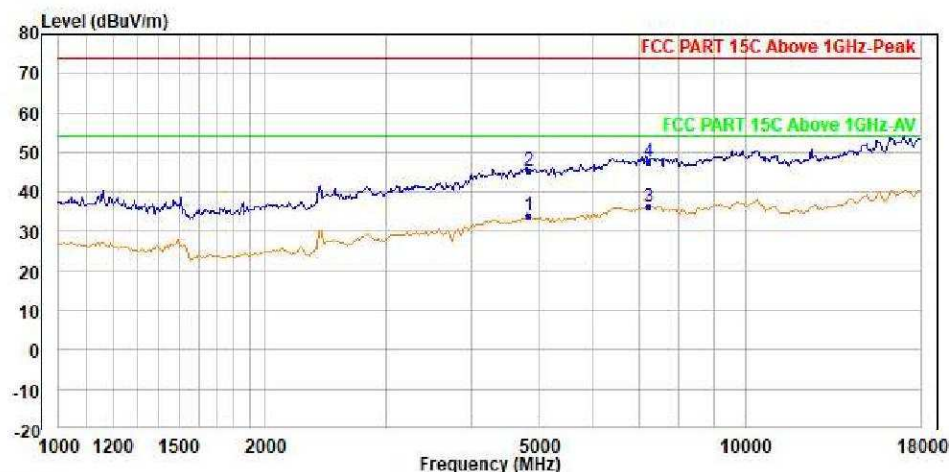


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX20_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	33.94	36.01	34.46	0.00	9.33	45.86	54.00	-20.06	Average
2	4824.000	45.42	47.49	34.46	0.00	9.33	45.86	74.00	-28.58	Peak
3 PP	7236.000	36.29	34.99	36.50	0.00	10.35	45.55	54.00	-17.71	Average
4 PK	7236.000	47.84	46.54	36.50	0.00	10.35	45.55	74.00	-26.16	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

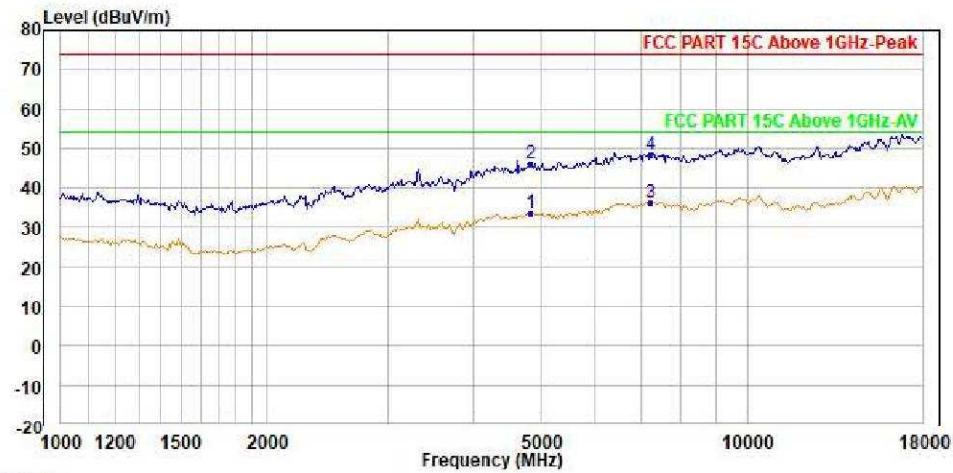


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX20_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	33.50	35.57	34.46	0.00	9.33	45.86	54.00	-20.50	Average
2	4824.000	46.19	48.26	34.46	0.00	9.33	45.86	74.00	-27.81	Peak
3 PP	7236.000	36.24	34.94	36.50	0.00	10.35	45.55	54.00	-17.76	Average
4 PK	7236.000	48.33	47.03	36.50	0.00	10.35	45.55	74.00	-25.67	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

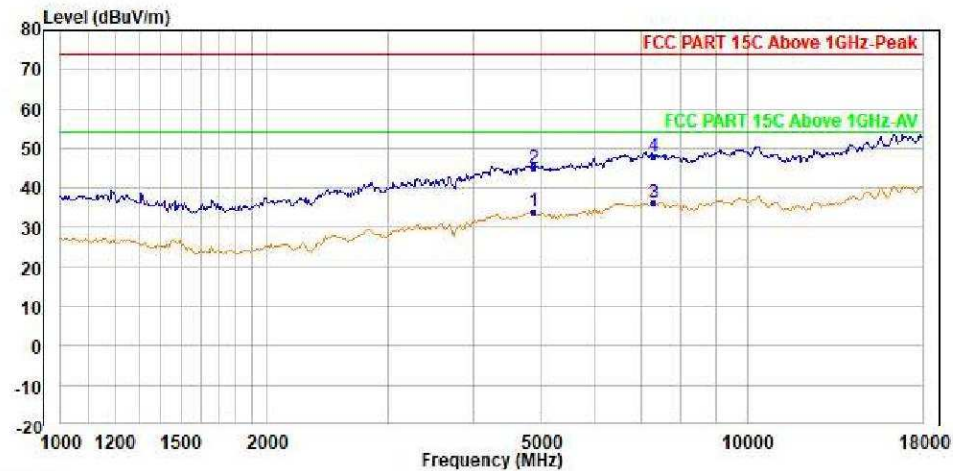


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX20_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	34.00	36.05	34.47	0.00	9.35	45.87	54.00	-20.00	Average
2	4874.000	45.10	47.15	34.47	0.00	9.35	45.87	74.00	-28.90	Peak
3 PP	7311.000	36.39	35.08	36.50	0.00	10.37	45.56	54.00	-17.61	Average
4 PK	7311.000	48.09	46.78	36.50	0.00	10.37	45.56	74.00	-25.91	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

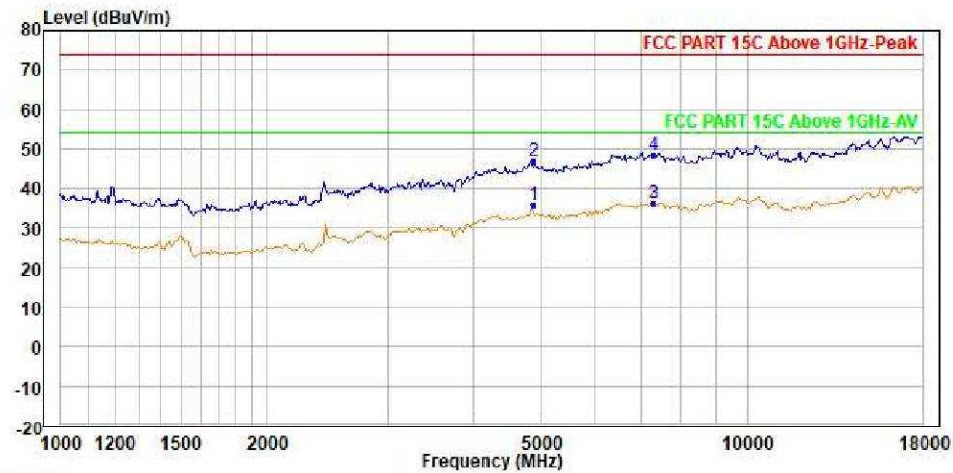


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBAABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX20_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	35.84	37.89	34.47	0.00	9.35	45.87	54.00	-18.16	Average
2	4874.000	46.83	48.88	34.47	0.00	9.35	45.87	74.00	-27.17	Peak
3 PP	7311.000	36.32	35.01	36.50	0.00	10.37	45.56	54.00	-17.68	Average
4 PK	7311.000	48.33	47.02	36.50	0.00	10.37	45.56	74.00	-25.67	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

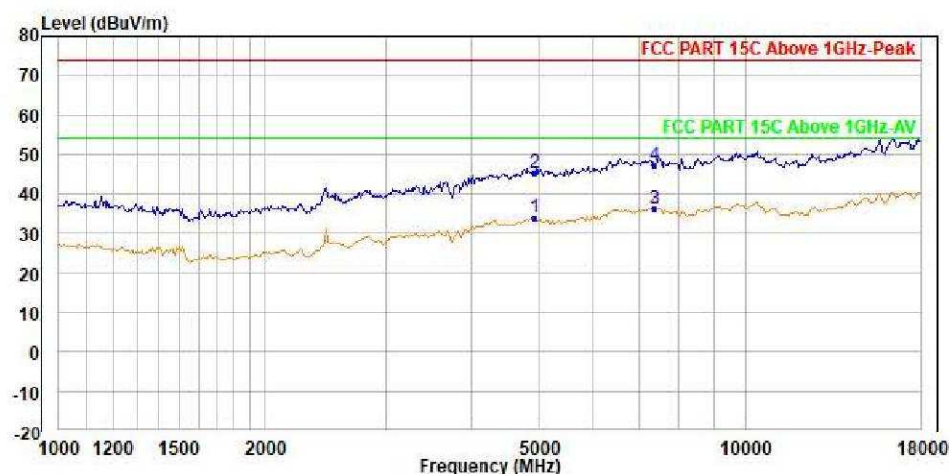


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX20_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	33.86	35.89	34.48	0.00	9.37	45.88	54.00	-20.14	Average
2	4924.000	45.47	47.50	34.48	0.00	9.37	45.88	74.00	-28.53	Peak
3 PP	7386.000	36.09	34.78	36.50	0.00	10.39	45.58	54.00	-17.91	Average
4 PK	7386.000	47.45	46.14	36.50	0.00	10.39	45.58	74.00	-26.55	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

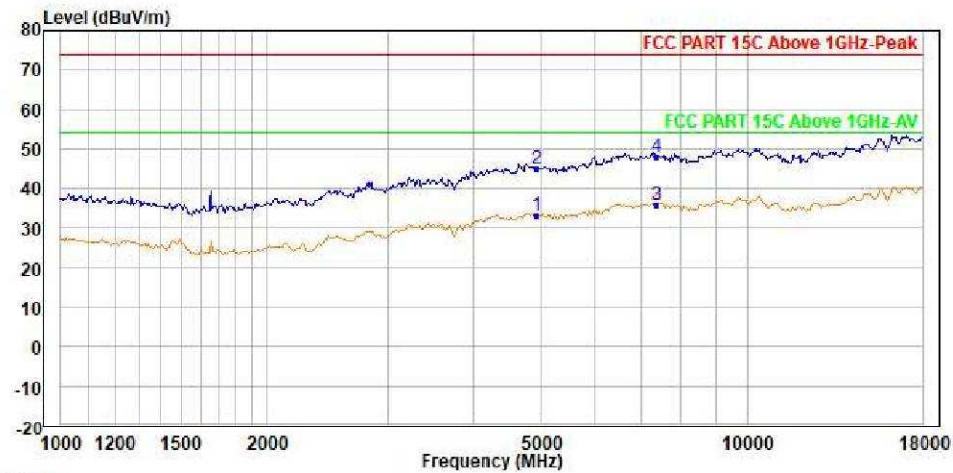

Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX20_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	33.26	35.29	34.48	0.00	9.37	45.88	54.00	-20.74	Average
2	4924.000	44.96	46.99	34.48	0.00	9.37	45.88	74.00	-29.04	Peak
3	PP 7386.000	36.07	34.76	36.50	0.00	10.39	45.58	54.00	-17.93	Average
4	PK 7386.000	48.02	46.71	36.50	0.00	10.39	45.58	74.00	-25.98	Peak