





Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX40_2422
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4844.000	33.54	35.60	34.47	0.00	9.34	45.87	54.00	-20.46	Average
2	4844.000	45.73	47.79	34.47	0.00	9.34	45.87	74.00	-28.27	Peak
3	PP 7266.000	36.29	34.98	36.50	0.00	10.36	45.55	54.00	-17.71	Average
4	PK 7266.000	48.78	47.47	36.50	0.00	10.36	45.55	74.00	-25.22	Peak

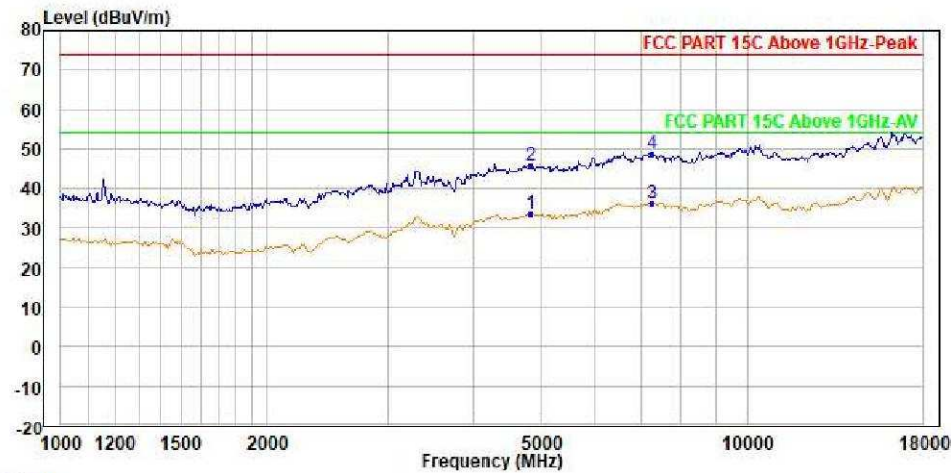

Shenzhen UnionTrust Quality and Technology Co., Ltd.

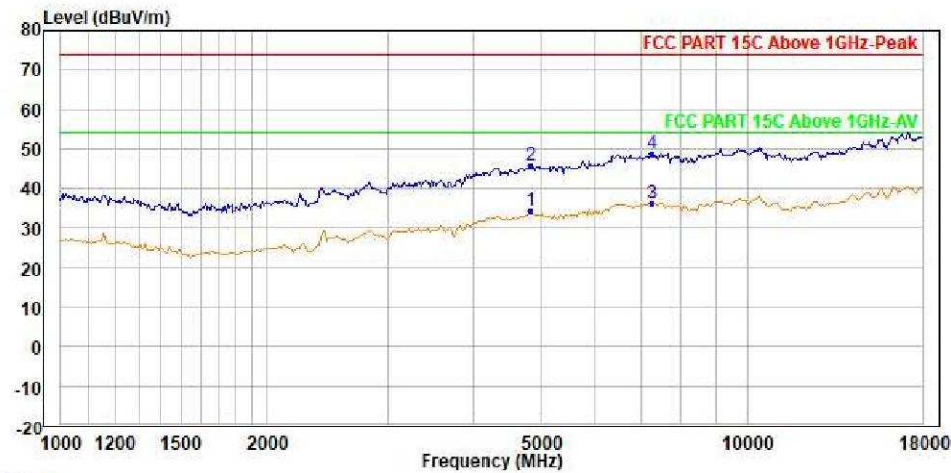


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBAABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX40_2422
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4844.000	34.48	36.54	34.47	0.00	9.34	45.87	54.00	-19.52	Average
2	4844.000	45.79	47.85	34.47	0.00	9.34	45.87	74.00	-28.21	Peak
3 PP	7266.000	36.34	35.03	36.50	0.00	10.36	45.55	54.00	-17.66	Average
4 PK	7266.000	48.85	47.54	36.50	0.00	10.36	45.55	74.00	-25.15	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

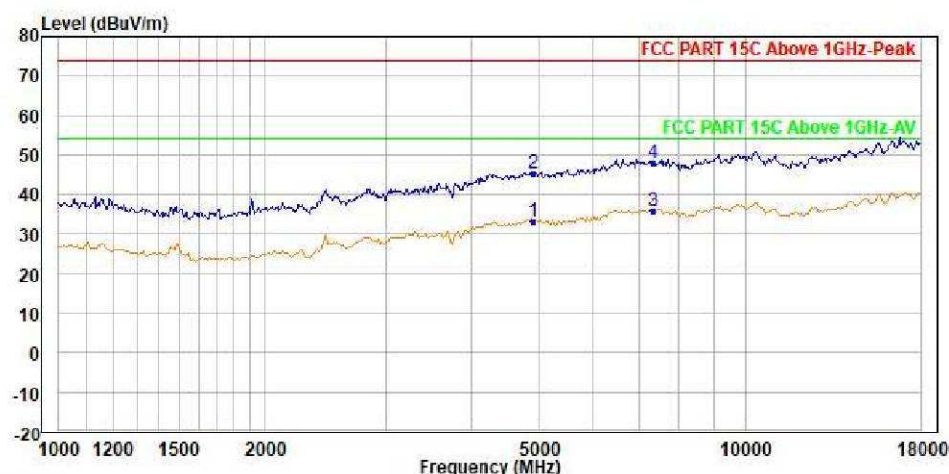


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBAABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX40_2452
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4904.000	33.36	35.40	34.48	0.00	9.36	45.88	54.00	-20.64	Average
2	4904.000	45.25	47.29	34.48	0.00	9.36	45.88	74.00	-28.75	Peak
3	PP 7356.000	35.96	34.65	36.50	0.00	10.38	45.57	54.00	-18.04	Average
4	PK 7356.000	47.99	46.68	36.50	0.00	10.38	45.57	74.00	-26.01	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

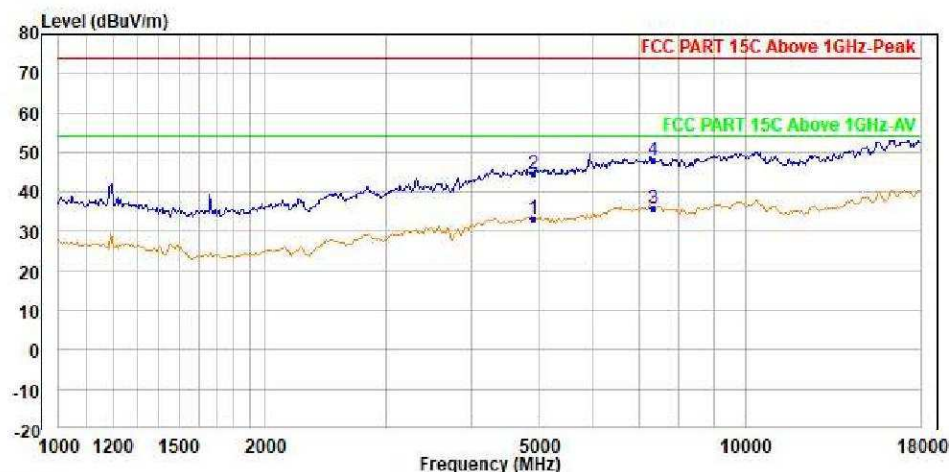


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX40_2452
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4904.000	33.21	35.25	34.48	0.00	9.36	45.88	54.00	-20.79	Average
2	4904.000	44.83	46.87	34.48	0.00	9.36	45.88	74.00	-29.17	Peak
3 PP	7356.000	35.99	34.68	36.50	0.00	10.38	45.57	54.00	-18.01	Average
4 PK	7356.000	48.02	46.71	36.50	0.00	10.38	45.57	74.00	-25.98	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

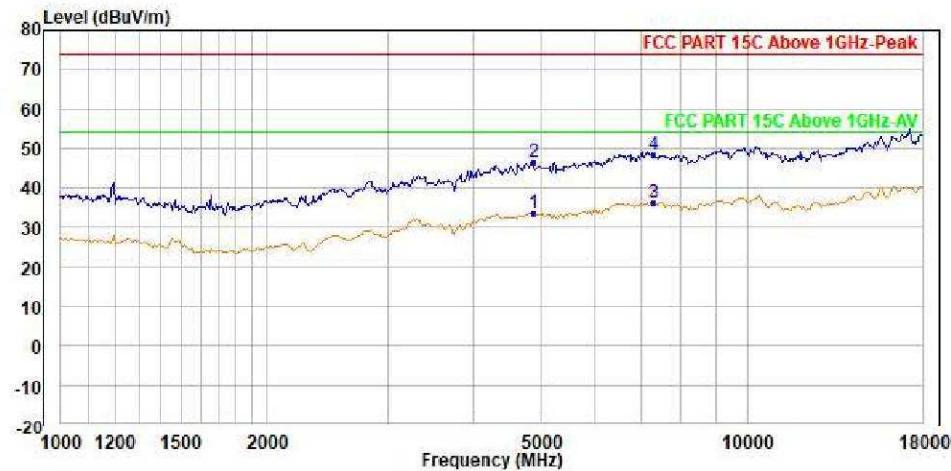


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX40_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	33.63	35.68	34.47	0.00	9.35	45.87	54.00	-20.37	Average
2	4874.000	46.67	48.72	34.47	0.00	9.35	45.87	74.00	-27.33	Peak
3 PP	7311.000	36.42	35.11	36.50	0.00	10.37	45.56	54.00	-17.58	Average
4 PK	7311.000	48.48	47.17	36.50	0.00	10.37	45.56	74.00	-25.52	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

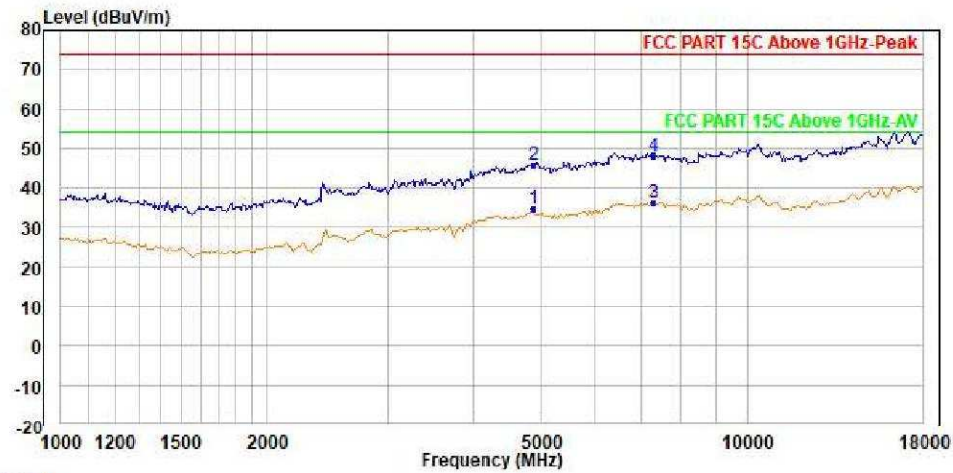


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX40_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	34.57	36.62	34.47	0.00	9.35	45.87	54.00	-19.43	Average
2	4874.000	45.86	47.91	34.47	0.00	9.35	45.87	74.00	-28.14	Peak
3 PP	7311.000	36.42	35.11	36.50	0.00	10.37	45.56	54.00	-17.58	Average
4 PK	7311.000	47.90	46.59	36.50	0.00	10.37	45.56	74.00	-26.10	Peak

Appendix A.6: Test Results of Radiated Emissions in Restricted Bands



Shenzhen UnionTrust Quality and Technology Co., Ltd.

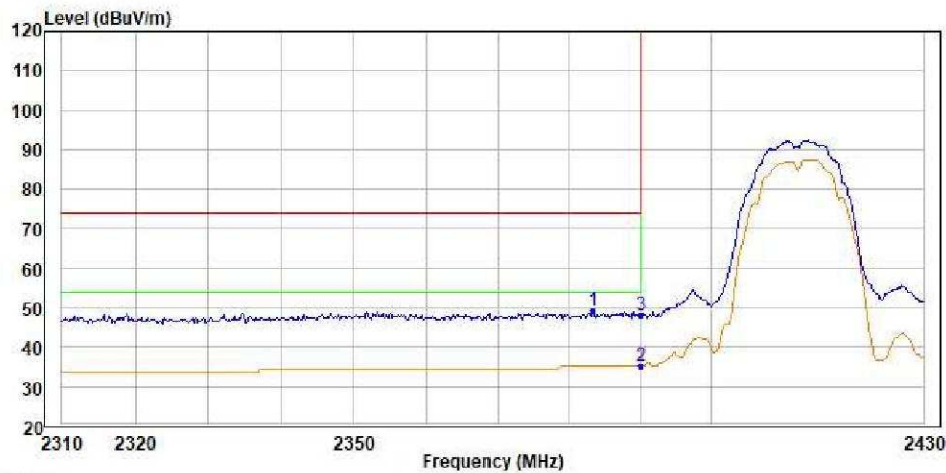


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PK 2383.347	49.17	47.69	31.54	10.00	7.34	47.40	74.00	-24.83	Peak
2	PP 2390.000	35.21	33.71	31.55	10.00	7.35	47.40	54.00	-18.79	Average
3	2390.000	48.32	46.82	31.55	10.00	7.35	47.40	74.00	-25.68	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

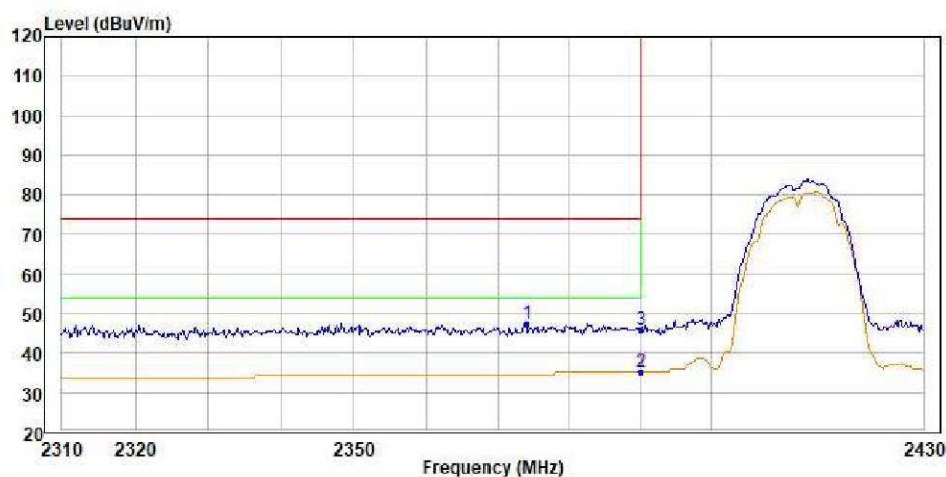


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PK 2373.968	47.56	46.11	31.52	10.00	7.33	47.40	74.00	-26.44	Peak
2	PP 2390.000	35.21	33.71	31.55	10.00	7.35	47.40	54.00	-18.79	Average
3	2390.000	46.03	44.53	31.55	10.00	7.35	47.40	74.00	-27.97	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

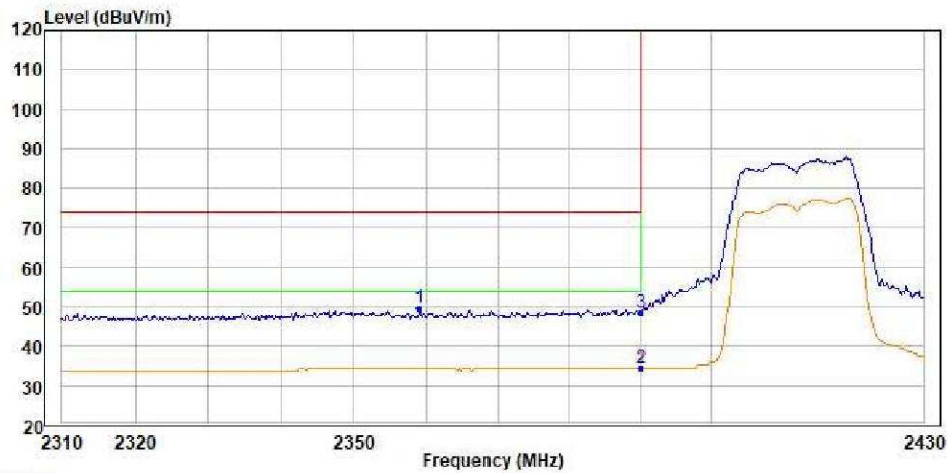


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PK	2359.058	49.72	48.31	31.50	10.00	7.31	47.40	74.00	-24.28	Peak
2 PP	2390.000	34.52	33.02	31.55	10.00	7.35	47.40	54.00	-19.48	Average
3	2390.000	48.33	46.83	31.55	10.00	7.35	47.40	74.00	-25.67	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

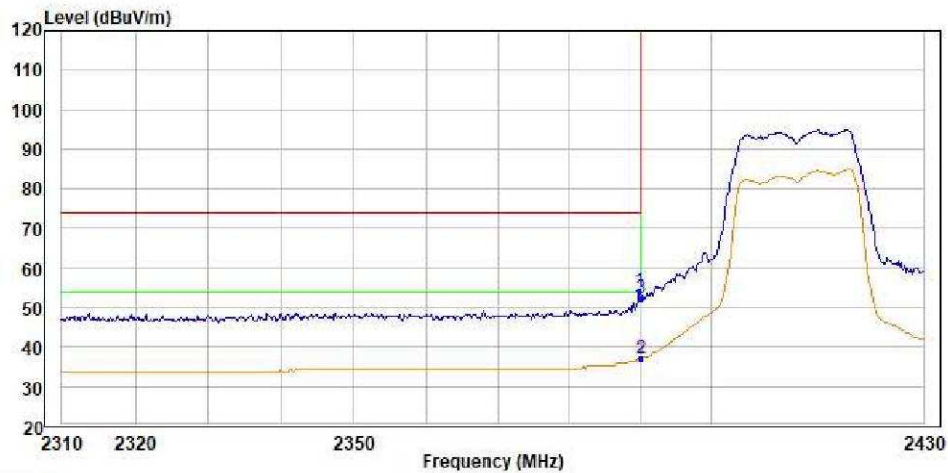


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PK 2389.840	54.17	52.67	31.55	10.00	7.35	47.40	74.00	-19.83	Peak
2	PP 2390.000	37.02	35.52	31.55	10.00	7.35	47.40	54.00	-16.98	Average
3	2390.000	52.46	50.96	31.55	10.00	7.35	47.40	74.00	-21.54	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

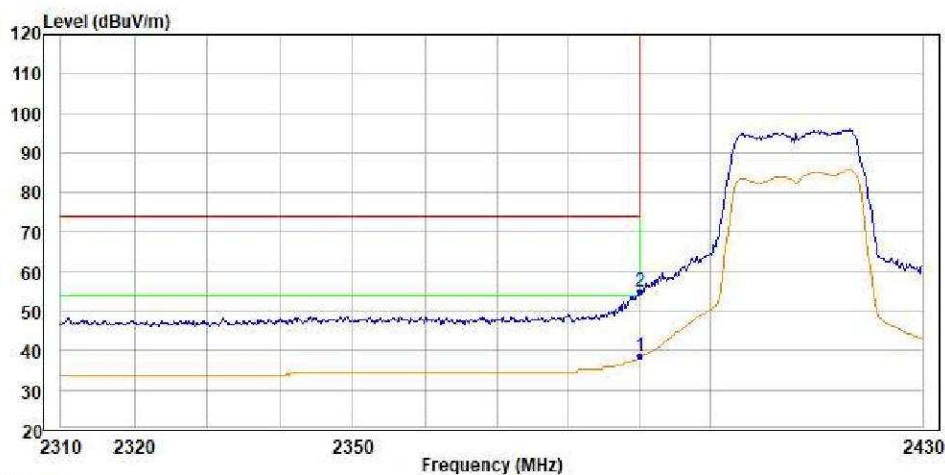


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	38.51	37.01	31.55	10.00	7.35	47.40	54.00	-15.49	Average
2 PK	2390.000	54.82	53.32	31.55	10.00	7.35	47.40	74.00	-19.18	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

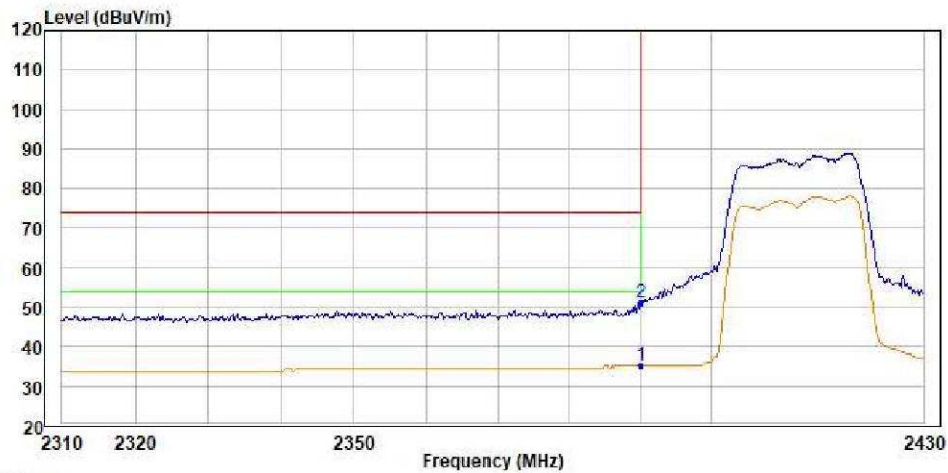


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	35.21	33.71	31.55	10.00	7.35	47.40	54.00	-18.79	Average
2 PK	2390.000	51.04	49.54	31.55	10.00	7.35	47.40	74.00	-22.96	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

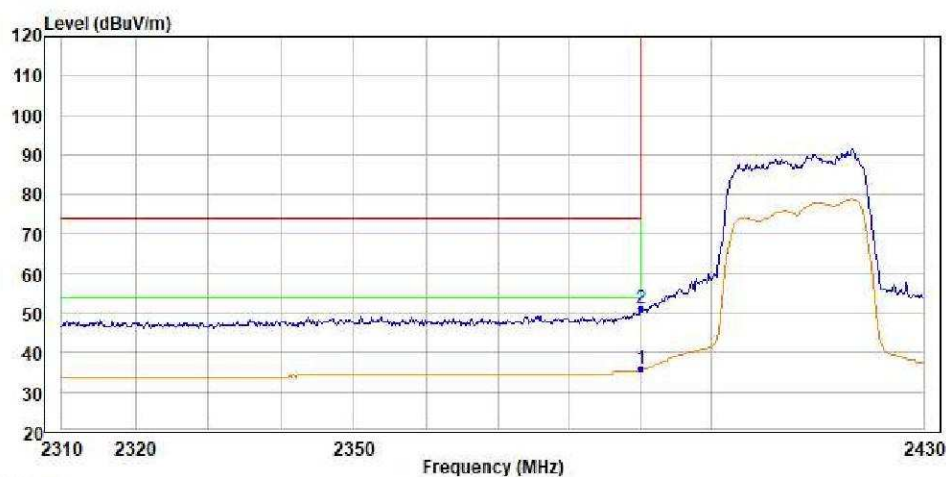


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX20_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2390.000	35.86	34.36	31.55	10.00	7.35	47.40	54.00	-18.14	Average
2	PK 2390.000	51.29	49.79	31.55	10.00	7.35	47.40	74.00	-22.71	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

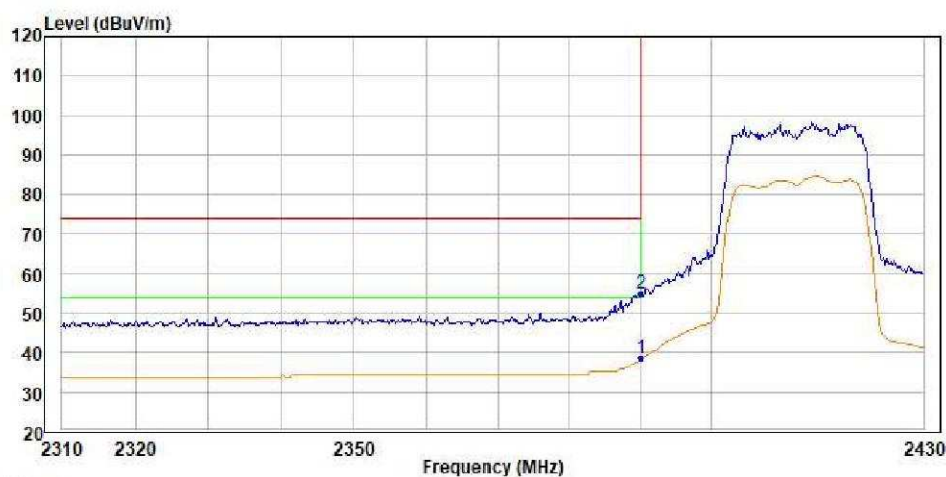


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBAABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX20_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	38.51	37.01	31.55	10.00	7.35	47.40	54.00	-15.49	Average
2 PK	2390.000	55.02	53.52	31.55	10.00	7.35	47.40	74.00	-18.98	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

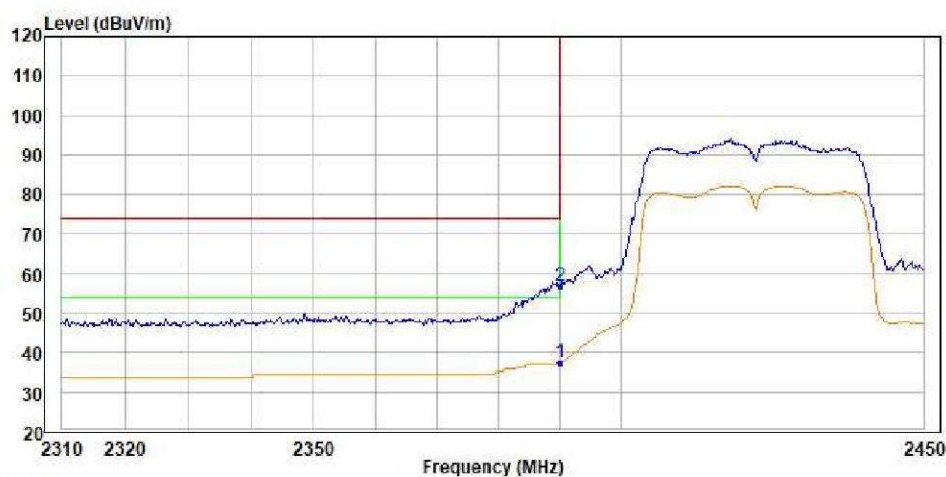


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2422
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	37.54	36.04	31.55	10.00	7.35	47.40	54.00	-16.46	Average
2 PK	2390.000	56.83	55.33	31.55	10.00	7.35	47.40	74.00	-17.17	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

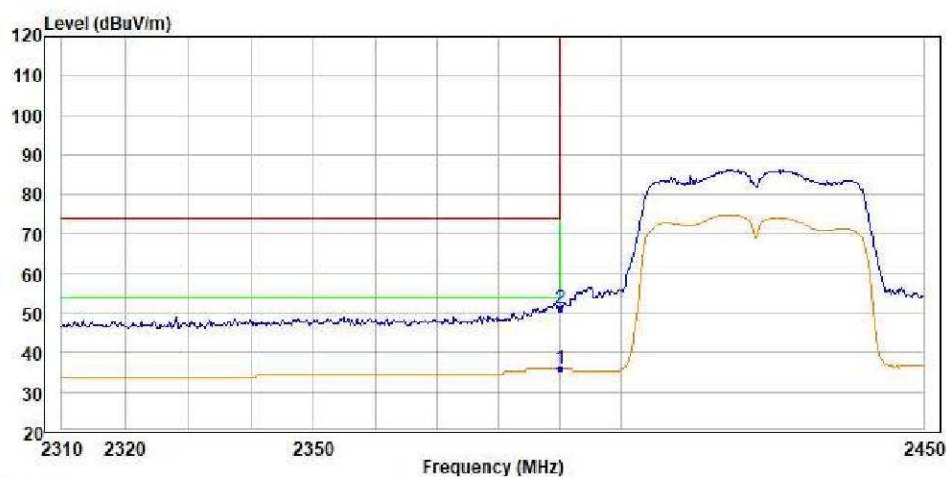


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2422
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preampl	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2390.000	35.86	34.36	31.55	10.00	7.35	47.40	54.00	-18.14	Average
2	PK 2390.000	51.27	49.77	31.55	10.00	7.35	47.40	74.00	-22.73	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

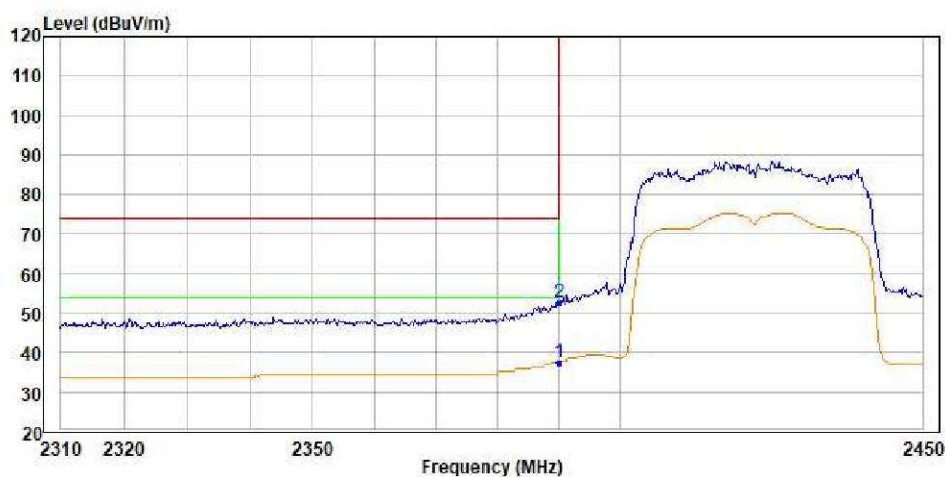


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX40_2422
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2390.000	37.54	36.04	31.55	10.00	7.35	47.40	54.00	-16.46	Average
2	PK 2390.000	52.60	51.10	31.55	10.00	7.35	47.40	74.00	-21.40	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

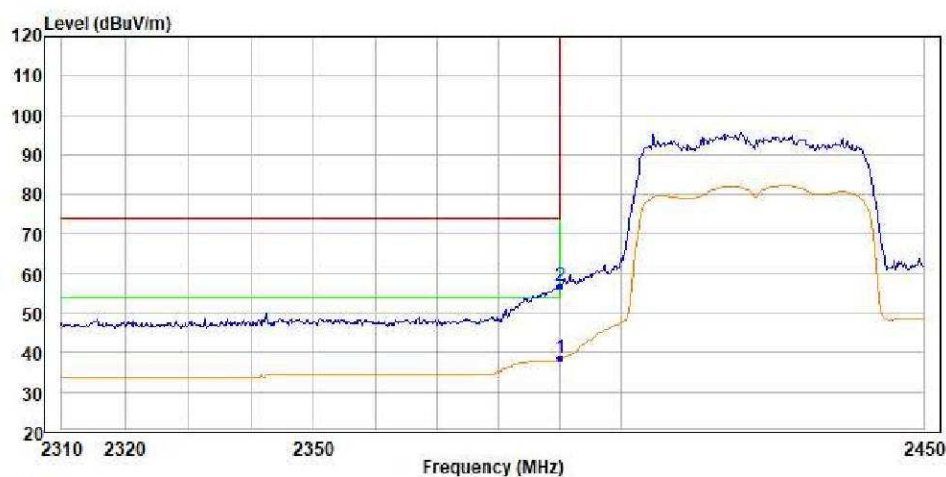


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX40_2422
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2390.000	38.51	37.01	31.55	10.00	7.35	47.40	54.00	-15.49	Average
2 PK	2390.000	56.77	55.27	31.55	10.00	7.35	47.40	74.00	-17.23	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

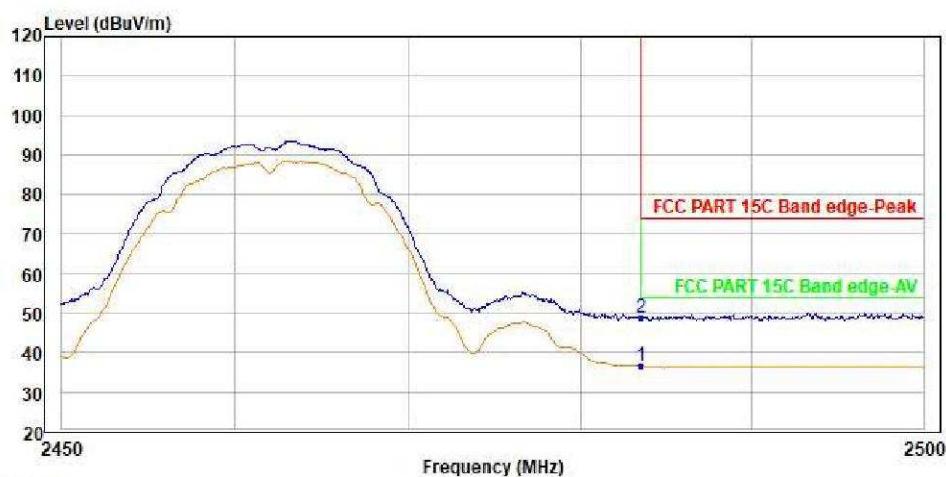


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	36.56	34.81	31.68	10.00	7.47	47.40	54.00	-17.44	Average
2	PK 2483.500	48.71	46.96	31.68	10.00	7.47	47.40	74.00	-25.29	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

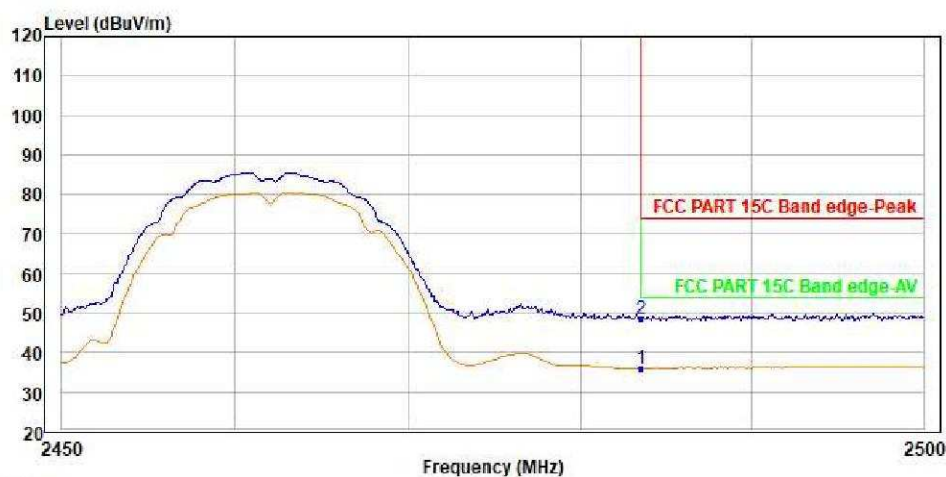


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_B_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	36.01	34.26	31.68	10.00	7.47	47.40	54.00	-17.99	Average
2 PK	2483.500	48.37	46.62	31.68	10.00	7.47	47.40	74.00	-25.63	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

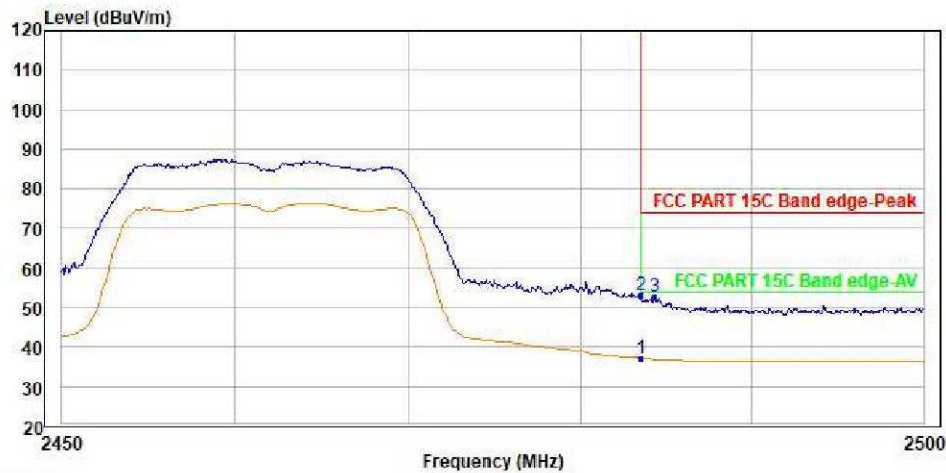


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	37.07	35.32	31.68	10.00	7.47	47.40	54.00	-16.93	Average
2 PK	2483.500	52.92	51.17	31.68	10.00	7.47	47.40	74.00	-21.08	Peak
3	2484.269	52.84	51.09	31.68	10.00	7.47	47.40	74.00	-21.16	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

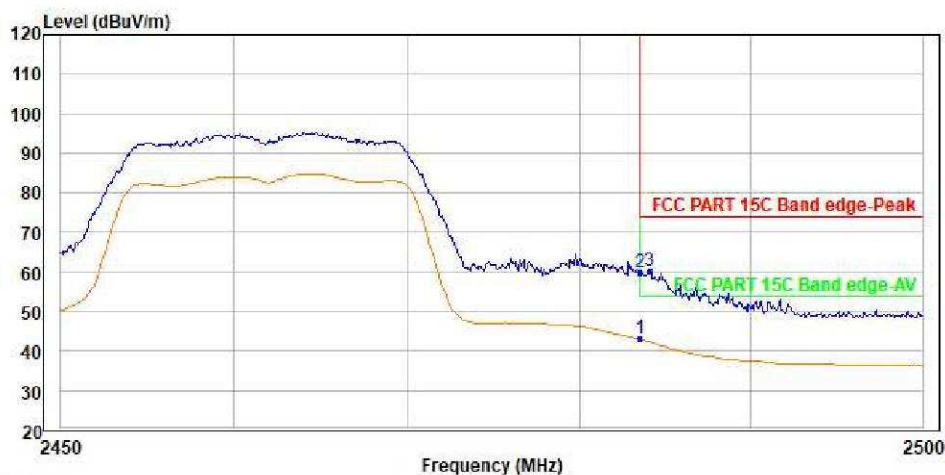


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_G_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	43.09	41.34	31.68	10.00	7.47	47.40	54.00	-10.91	Average
2	2483.500	59.75	58.00	31.68	10.00	7.47	47.40	74.00	-14.25	Peak
3 PK	2484.068	60.48	58.73	31.68	10.00	7.47	47.40	74.00	-13.52	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

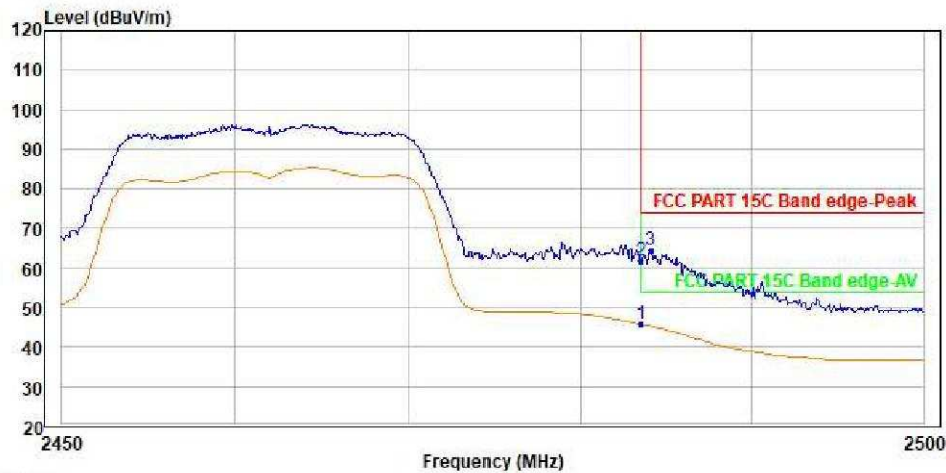


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	45.83	44.08	31.68	10.00	7.47	47.40	54.00	-8.17	Average
2	2483.500	61.85	60.10	31.68	10.00	7.47	47.40	74.00	-12.15	Peak
3 PK	2484.068	64.53	62.78	31.68	10.00	7.47	47.40	74.00	-9.47	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

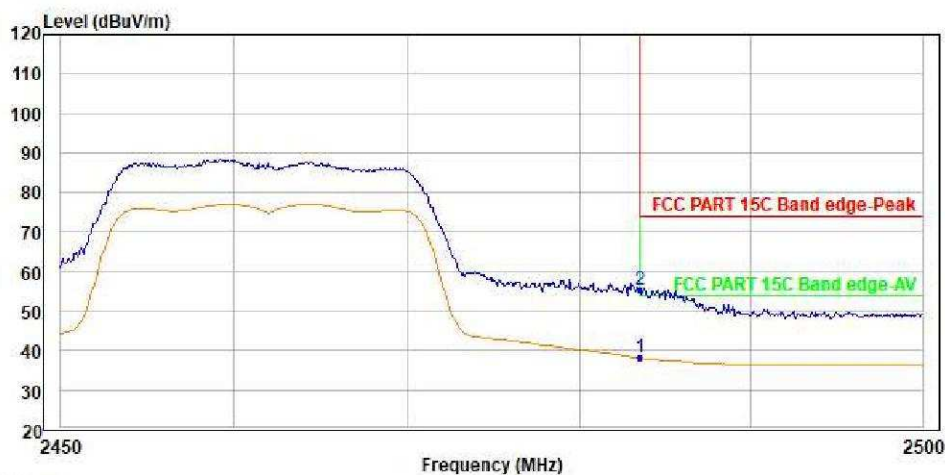


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N20_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	38.23	36.48	31.68	10.00	7.47	47.40	54.00	-15.77	Average
2	PK 2483.500	55.48	53.73	31.68	10.00	7.47	47.40	74.00	-18.52	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

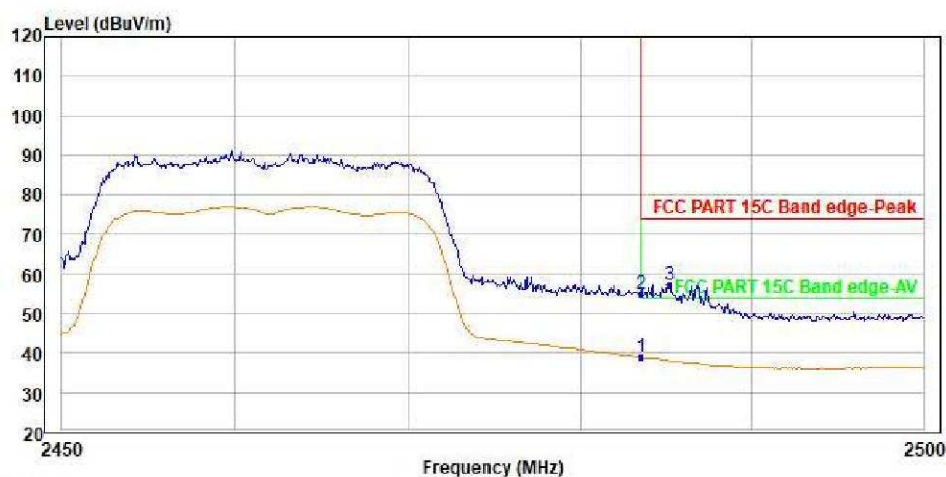


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBAABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX20_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	38.85	37.10	31.68	10.00	7.47	47.40	54.00	-15.15	Average
2	2483.500	55.06	53.31	31.68	10.00	7.47	47.40	74.00	-18.94	Peak
3 PK	2485.170	57.24	55.48	31.68	10.00	7.48	47.40	74.00	-16.76	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

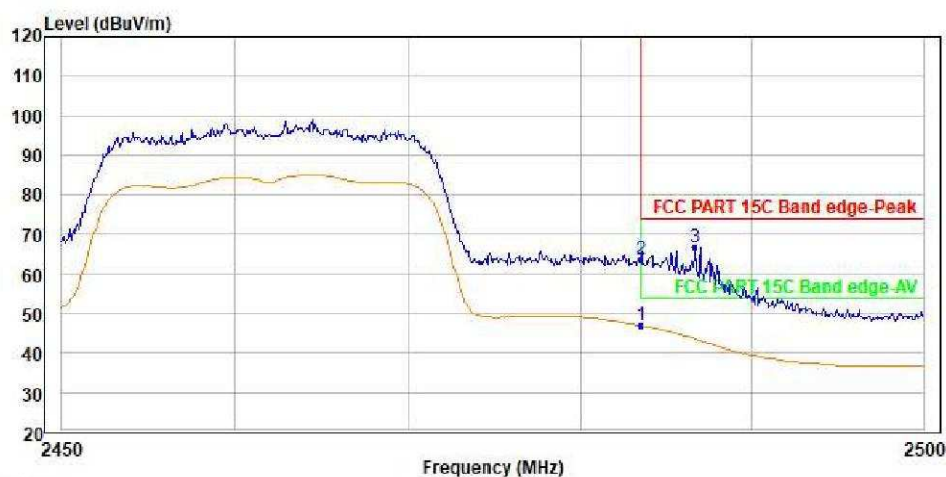


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX20_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	46.93	45.18	31.68	10.00	7.47	47.40	54.00	-7.07	Average
2	2483.500	63.66	61.91	31.68	10.00	7.47	47.40	74.00	-10.34	Peak
3 PK	2486.673	66.69	64.93	31.68	10.00	7.48	47.40	74.00	-7.31	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

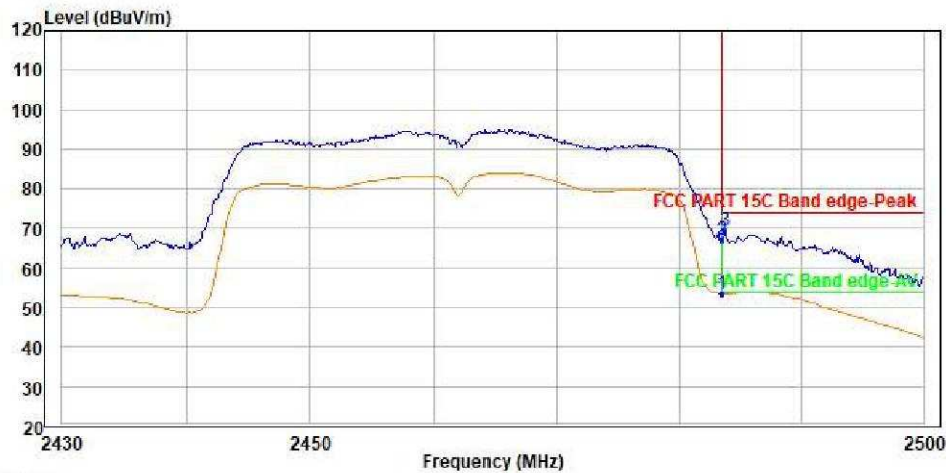


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2452
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	53.53	51.78	31.68	10.00	7.47	47.40	54.00	-0.47	Average
2	2483.500	67.04	65.29	31.68	10.00	7.47	47.40	74.00	-6.96	Peak
3 PK	2483.728	69.28	67.53	31.68	10.00	7.47	47.40	74.00	-4.72	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

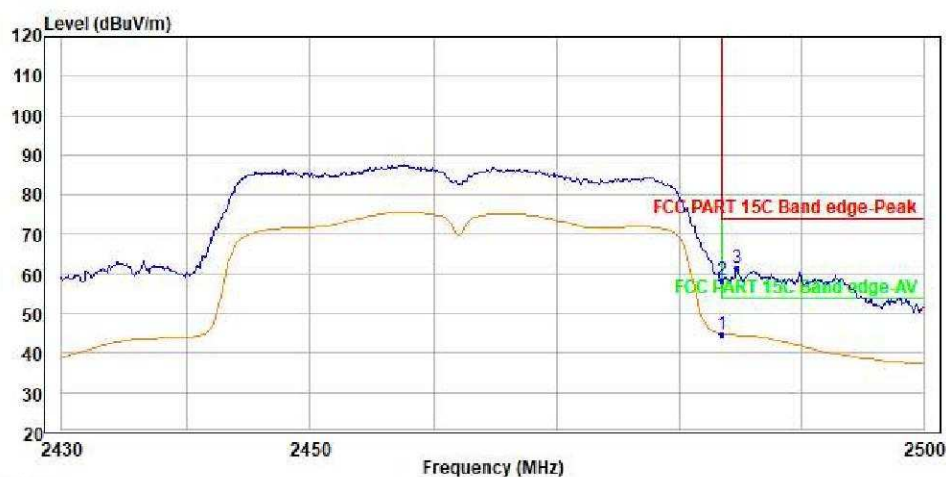


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBAABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_N40_2452
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	44.88	43.13	31.68	10.00	7.47	47.40	54.00	-9.12	Average
2	2483.500	58.55	56.80	31.68	10.00	7.47	47.40	74.00	-15.45	Peak
3 PK	2484.709	61.31	59.55	31.68	10.00	7.48	47.40	74.00	-12.69	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

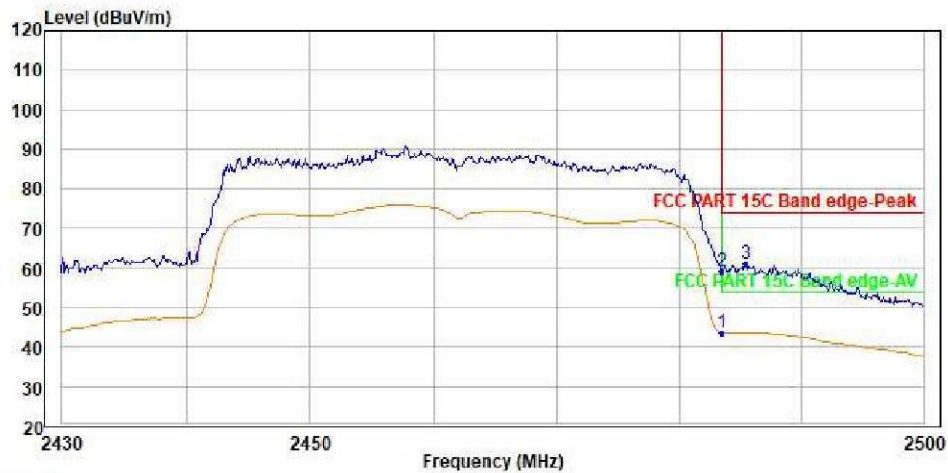


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX40_2452
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	43.69	41.94	31.68	10.00	7.47	47.40	54.00	-10.31	Average
2	2483.500	59.23	57.48	31.68	10.00	7.47	47.40	74.00	-14.77	Peak
3 PK	2485.411	60.89	59.13	31.68	10.00	7.48	47.40	74.00	-13.11	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

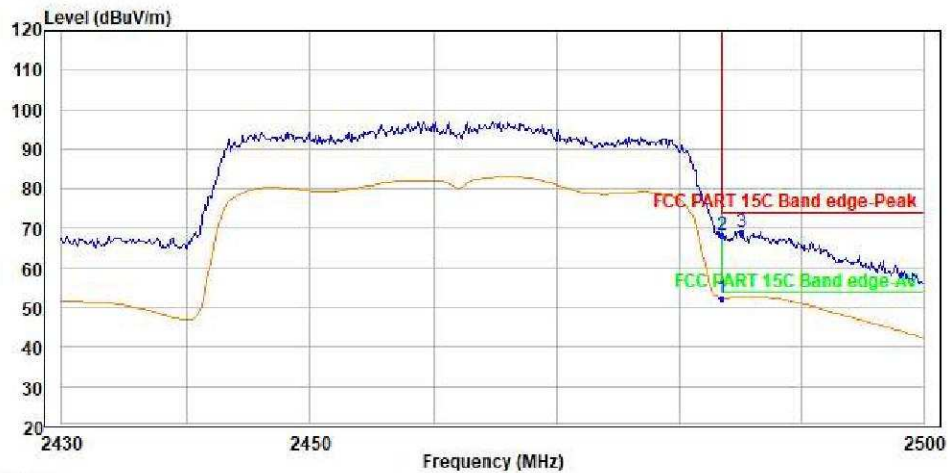

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2.4G_AX40_2452
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	52.46	50.71	31.68	10.00	7.47	47.40	54.00	-1.54	Average
2	2483.500	68.22	66.47	31.68	10.00	7.47	47.40	74.00	-5.78	Peak
3 PK	2484.990	69.10	67.34	31.68	10.00	7.48	47.40	74.00	-4.90	Peak