



BLE_1M-Ant1-2480



BLE_2M-Ant1-2402



BLE_2M-Ant1-2440




BLE_2M-Ant1-2480


Appendix B.4: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Band Edge


TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	5.67	-46.79	≤-14.33	PASS
BLE_1M	Ant1	High	2480	4.76	-46.6	≤-15.24	PASS
BLE_2M	Ant1	Low	2402	5.51	-25.79	≤-14.49	PASS
BLE_2M	Ant1	High	2480	5.07	-46.65	≤-14.93	PASS

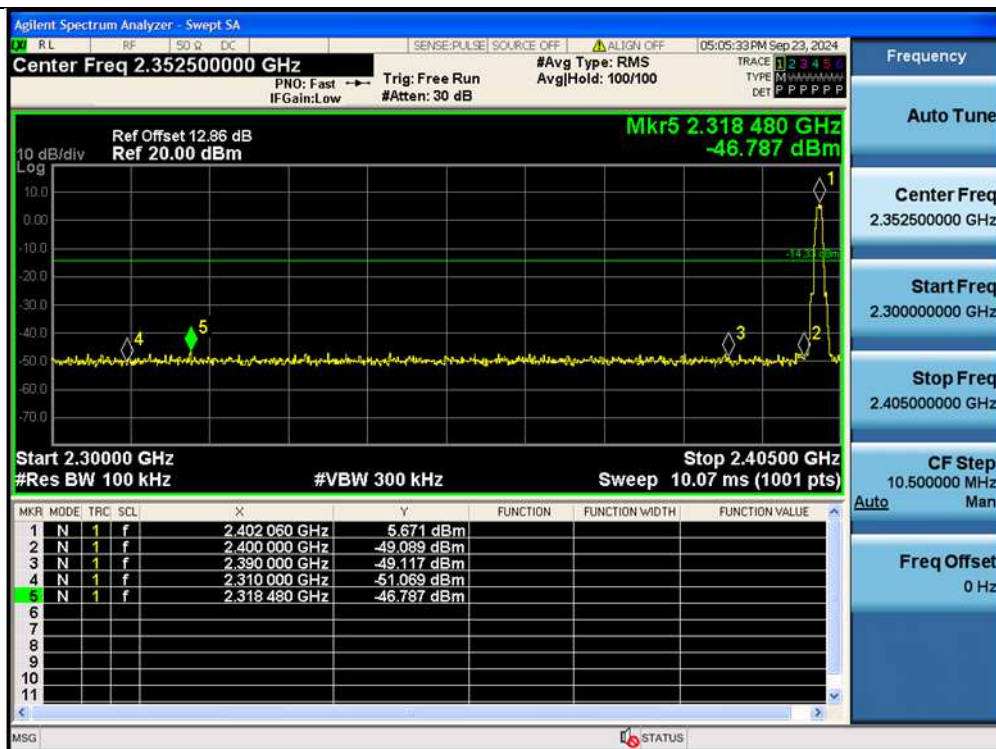


BLE_1M-Ant1-2402-PASS

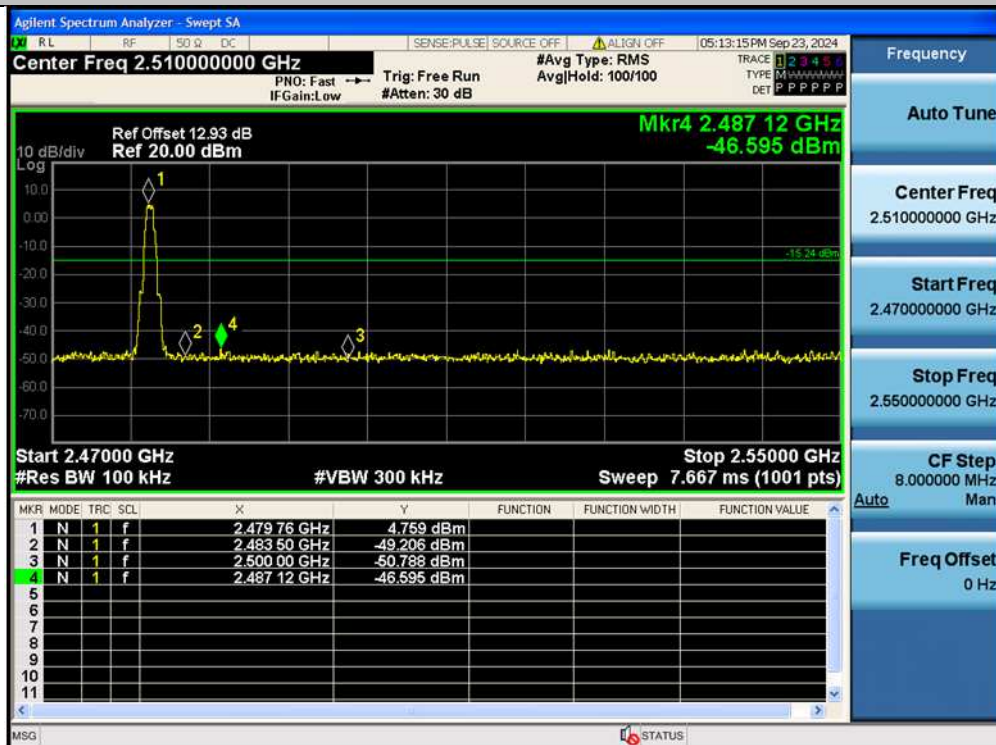

BLE_1M-Ant1-2480-PASS

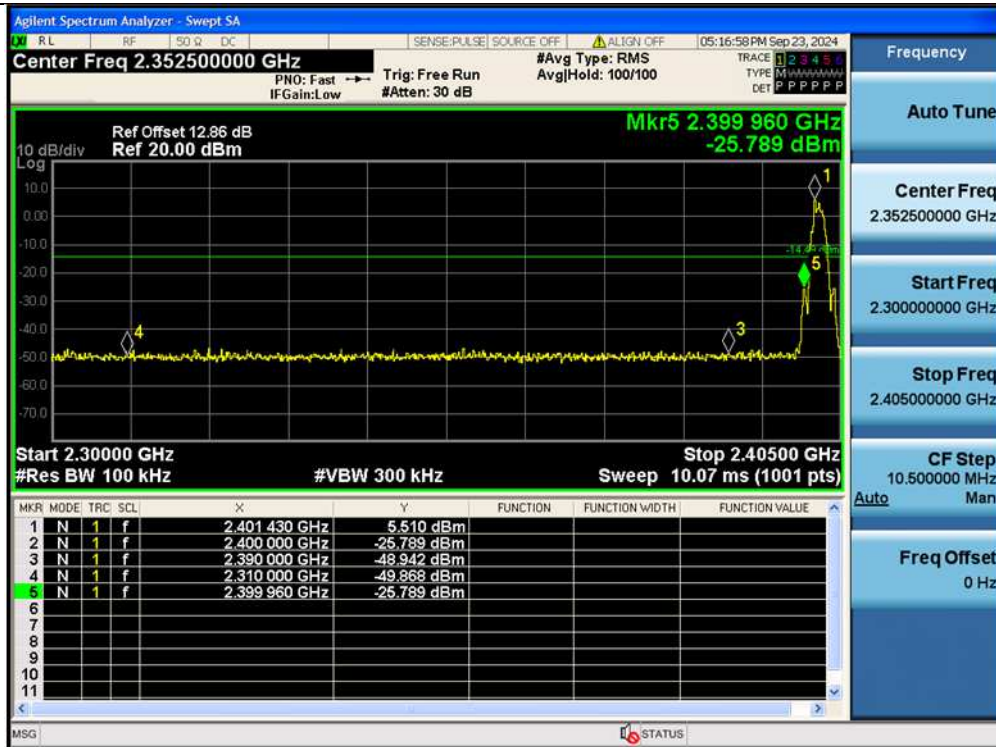

BLE_2M-Ant1-2402-PASS

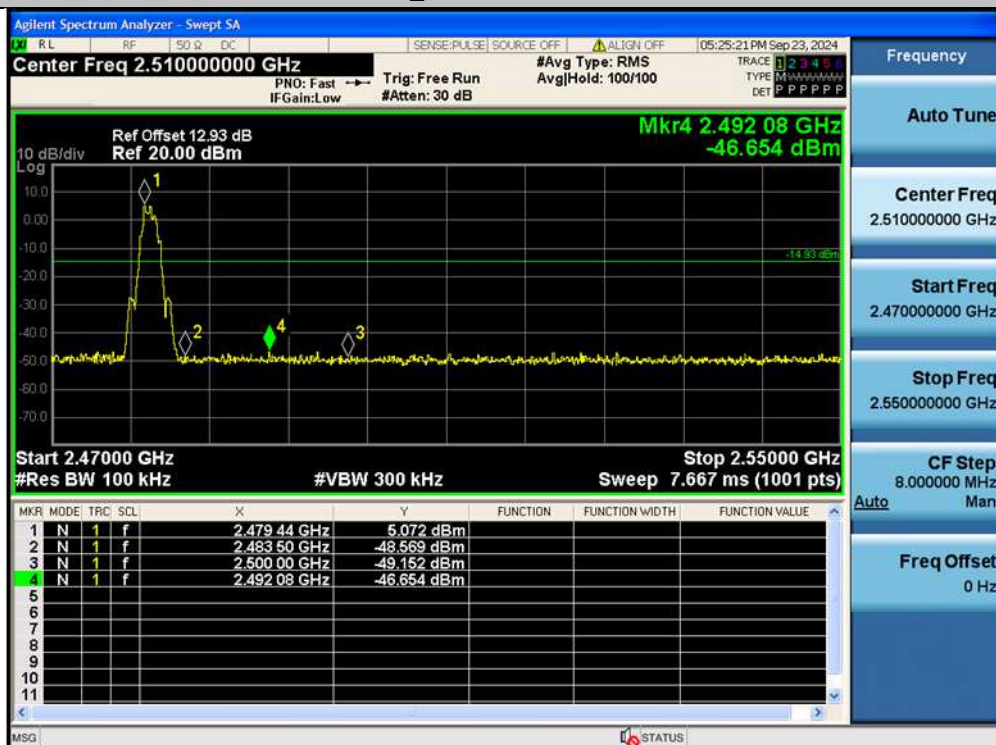


BLE_2M-Ant1-2480-PASS

Conducted Spurious Emission


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	0~Reference	5.22	5.22	---	PASS
BLE_1M	Ant1	2402	30~1000	5.22	-56.97	≤-14.78	PASS
BLE_1M	Ant1	2402	1000~26500	5.22	-47.04	≤-14.78	PASS
BLE_1M	Ant1	2440	0~Reference	5.94	5.94	---	PASS
BLE_1M	Ant1	2440	30~1000	5.94	-57.23	≤-14.06	PASS
BLE_1M	Ant1	2440	1000~26500	5.94	-40.87	≤-14.06	PASS
BLE_1M	Ant1	2480	0~Reference	4.42	4.42	---	PASS
BLE_1M	Ant1	2480	30~1000	4.42	-57.79	≤-15.58	PASS
BLE_1M	Ant1	2480	1000~26500	4.42	-47.27	≤-15.58	PASS
BLE_2M	Ant1	2402	0~Reference	3.01	3.01	---	PASS
BLE_2M	Ant1	2402	30~1000	3.01	-57.4	≤-16.99	PASS
BLE_2M	Ant1	2402	1000~26500	3.01	-47.31	≤-16.99	PASS
BLE_2M	Ant1	2440	0~Reference	4.37	4.37	---	PASS
BLE_2M	Ant1	2440	30~1000	4.37	-57.03	≤-15.63	PASS
BLE_2M	Ant1	2440	1000~26500	4.37	-46.95	≤-15.63	PASS
BLE_2M	Ant1	2480	0~Reference	4.88	4.88	---	PASS
BLE_2M	Ant1	2480	30~1000	4.88	-56.83	≤-15.12	PASS
BLE_2M	Ant1	2480	1000~26500	4.88	-47.48	≤-15.12	PASS




BLE_1M-Ant1-2402-0~Reference-PASS

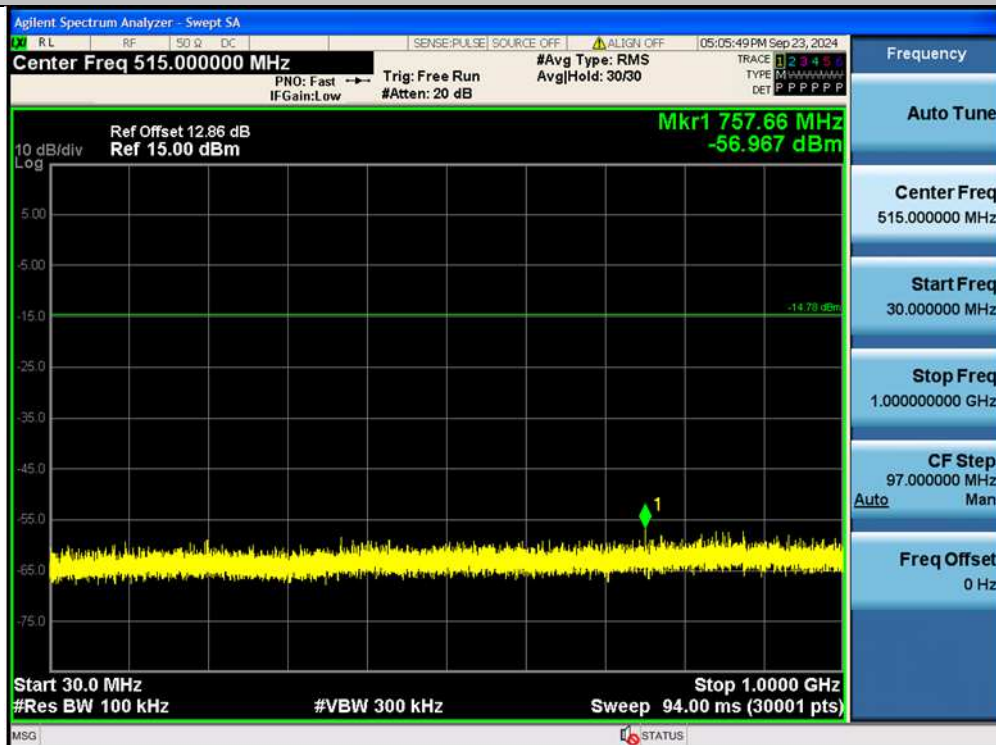


BLE_1M-Ant1-2402-30~1000-PASS

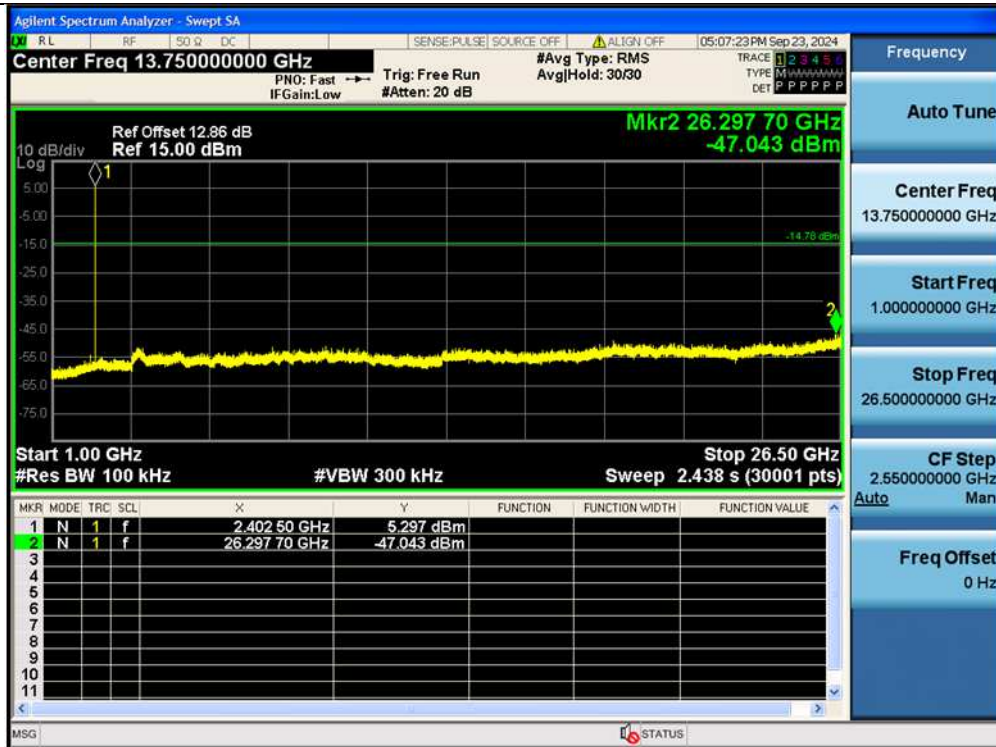


BLE_1M-Ant1-2402-1000~26500-PASS

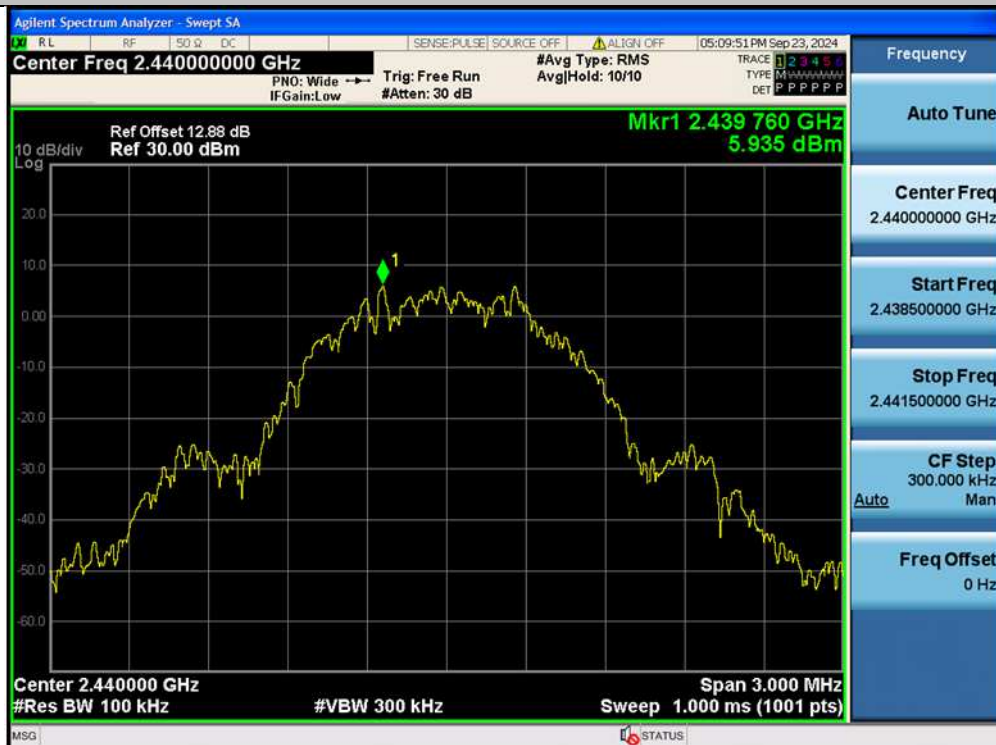

BLE_1M-Ant1-2440-0~Reference-PASS

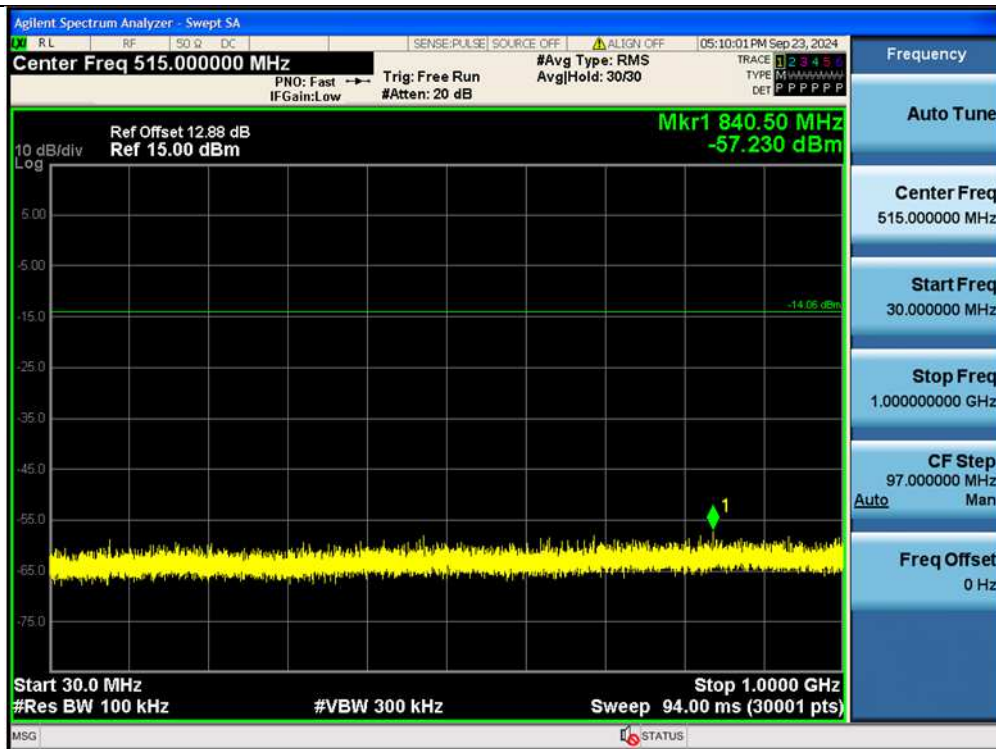


BLE_1M-Ant1-2440-30~1000-PASS

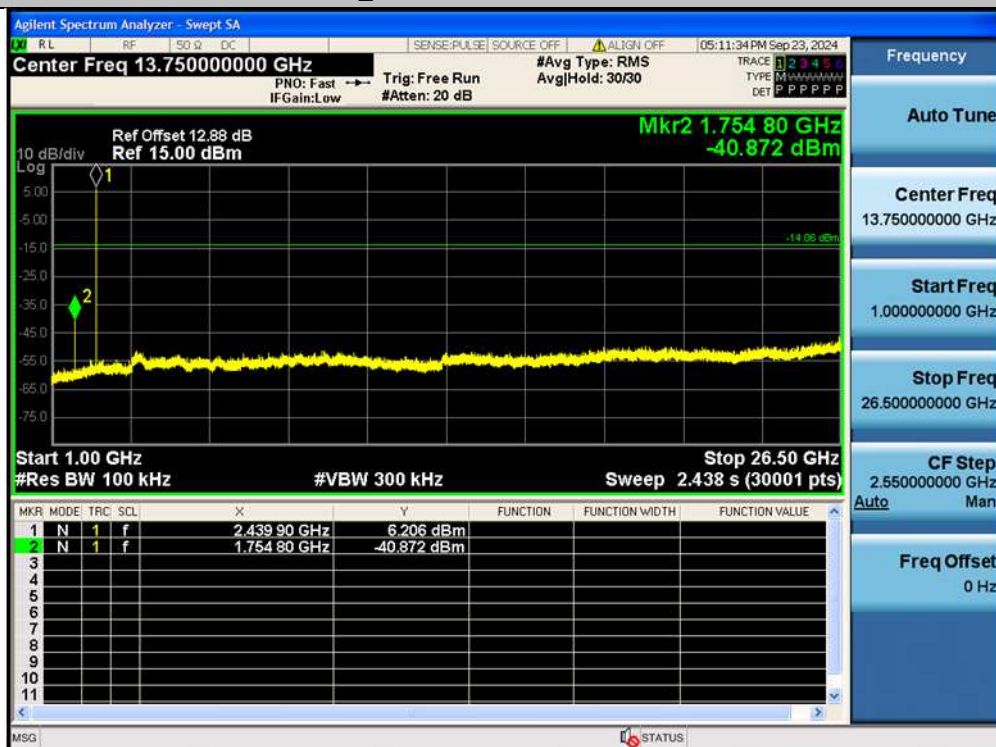


BLE_1M-Ant1-2440-1000~26500-PASS



BLE_1M-Ant1-2480-0~Reference-PASS

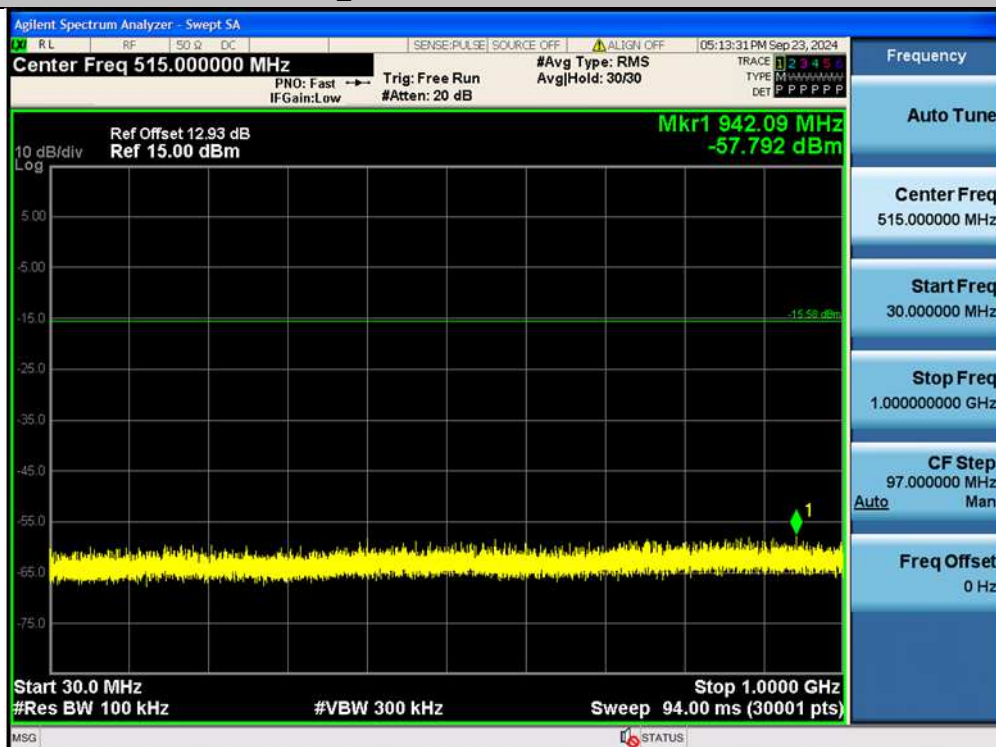


BLE_1M-Ant1-2480-30~1000-PASS

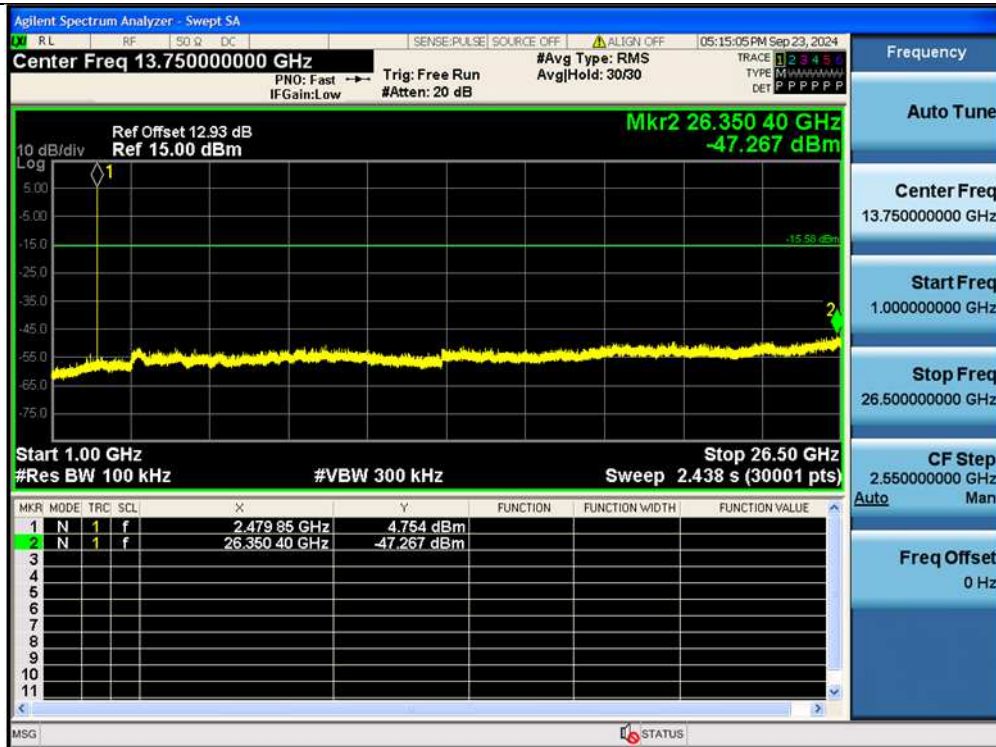

BLE_1M-Ant1-2480-1000~26500-PASS



BLE_2M-Ant1-2402-0~Reference-PASS

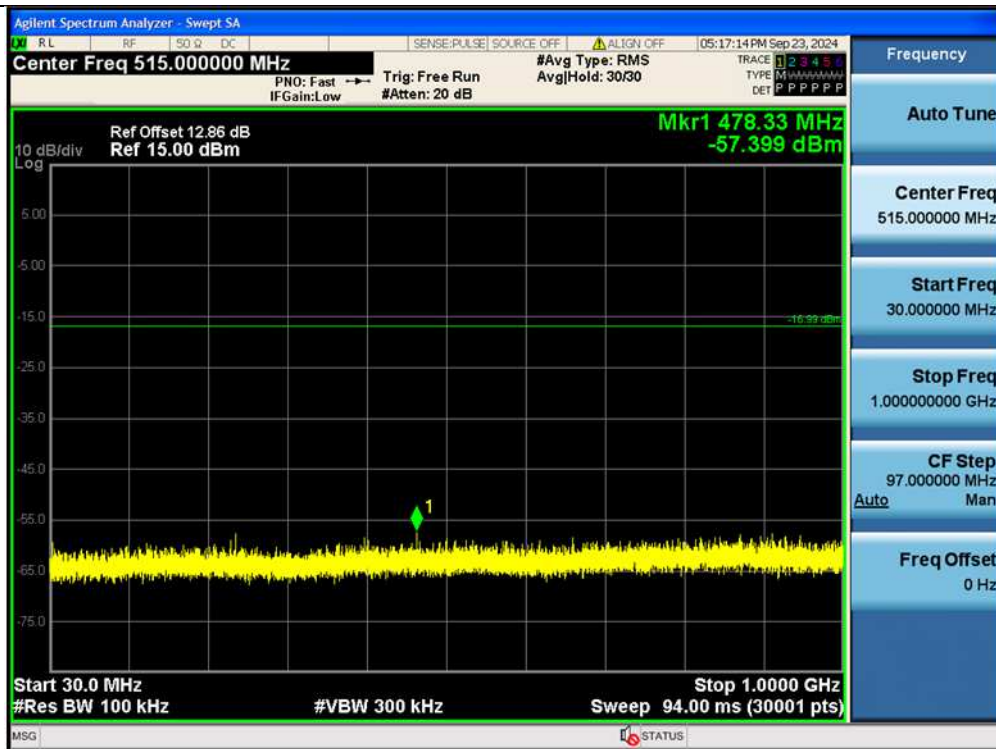


BLE_2M-Ant1-2402-30~1000-PASS




BLE_2M-Ant1-2402-1000~26500-PASS



BLE_2M-Ant1-2440-0~Reference-PASS

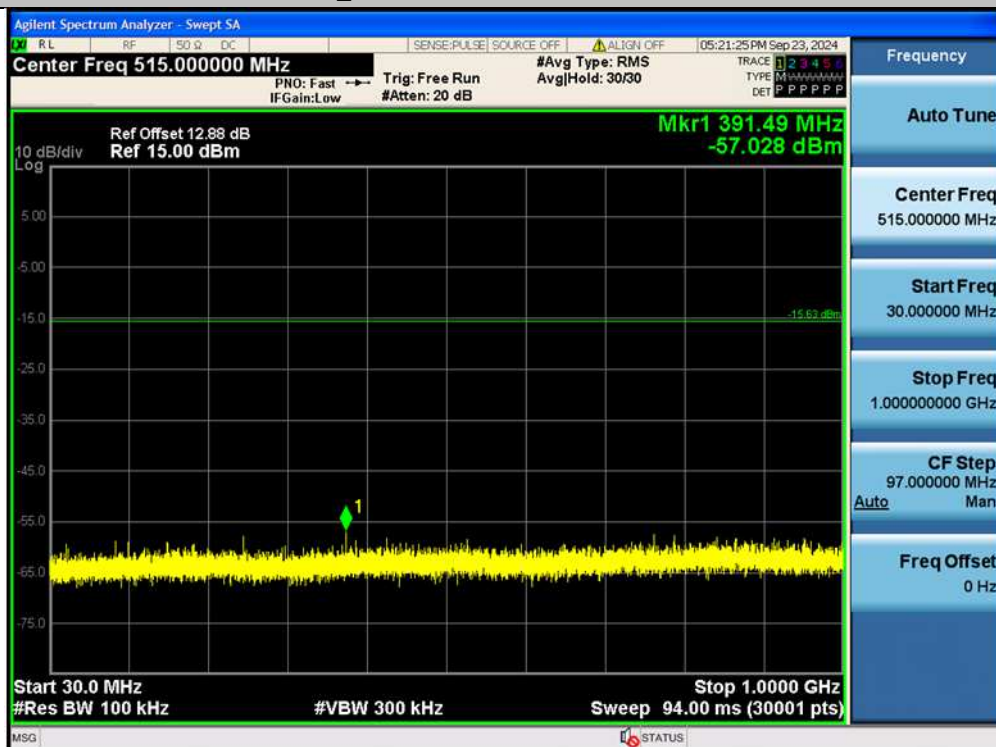


BLE_2M-Ant1-2440-30~1000-PASS

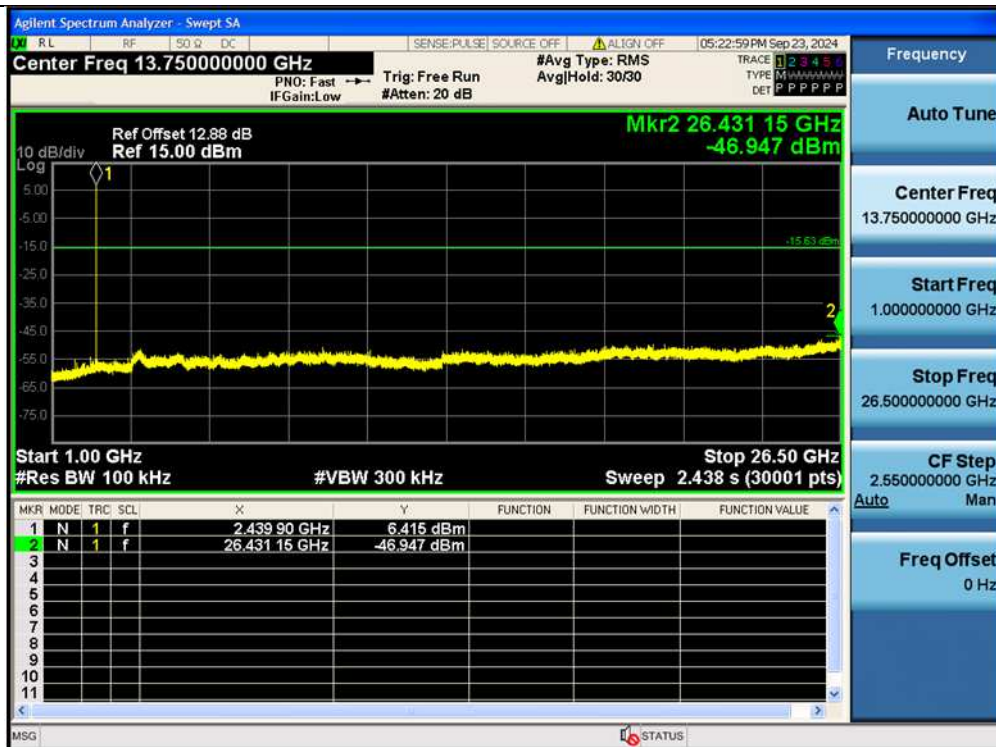

BLE_2M-Ant1-2440-1000~26500-PASS



BLE_2M-Ant1-2480-0~Reference-PASS

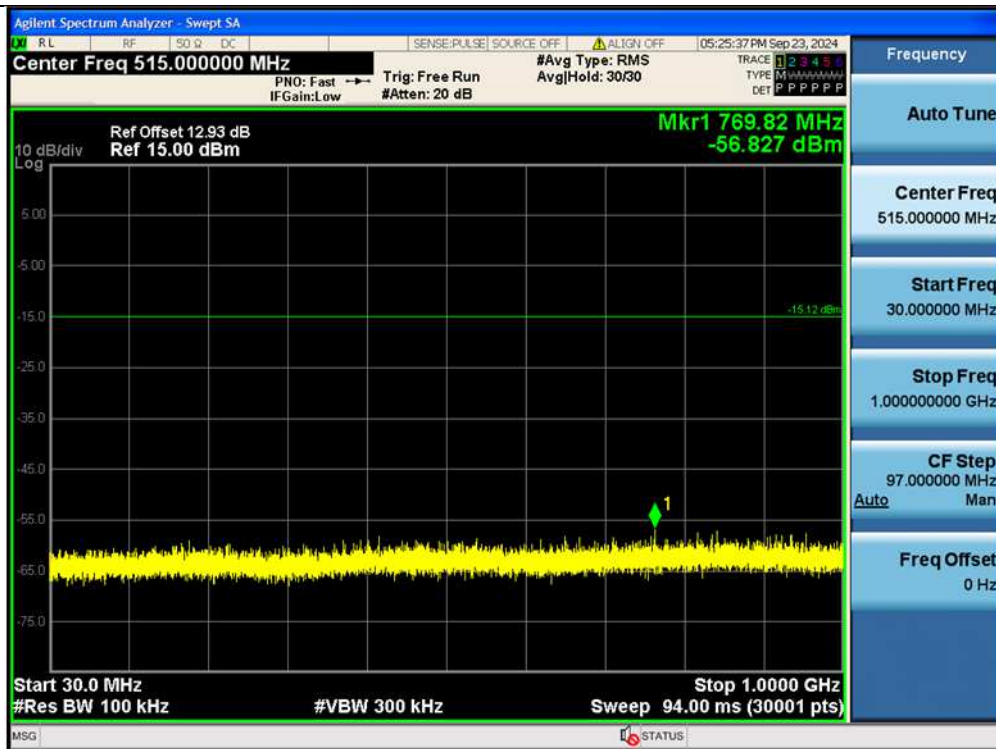

BLE_2M-Ant1-2480-30~1000-PASS



BLE_2M-Ant1-2480-1000~26500-PASS

Appendix B.5: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz - 1GHz



Shenzhen UnionTrust Quality and Technology Co., Ltd.

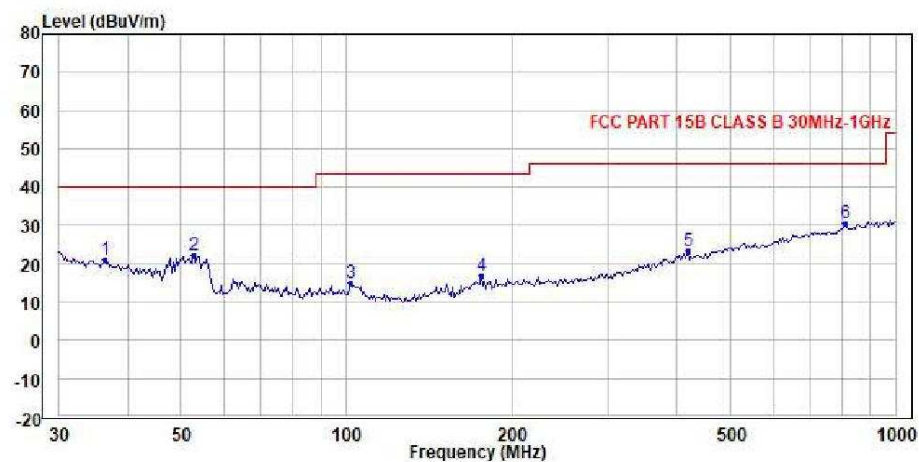


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : BT_LINK
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	36.268	20.90	27.70	21.32	0.00	0.78	28.90	40.00	-19.10	Peak
2	52.634	22.09	36.84	13.35	0.00	0.80	28.90	40.00	-17.91	Peak
3	101.893	15.08	30.75	12.17	0.00	1.06	28.90	43.50	-28.42	Peak
4	176.275	16.78	28.32	16.10	0.00	1.34	28.98	43.50	-26.72	Peak
5	418.378	23.22	27.55	22.97	0.00	1.93	29.23	46.00	-22.78	Peak
6 PP	809.924	30.50	27.20	29.90	0.00	2.59	29.19	46.00	-15.50	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

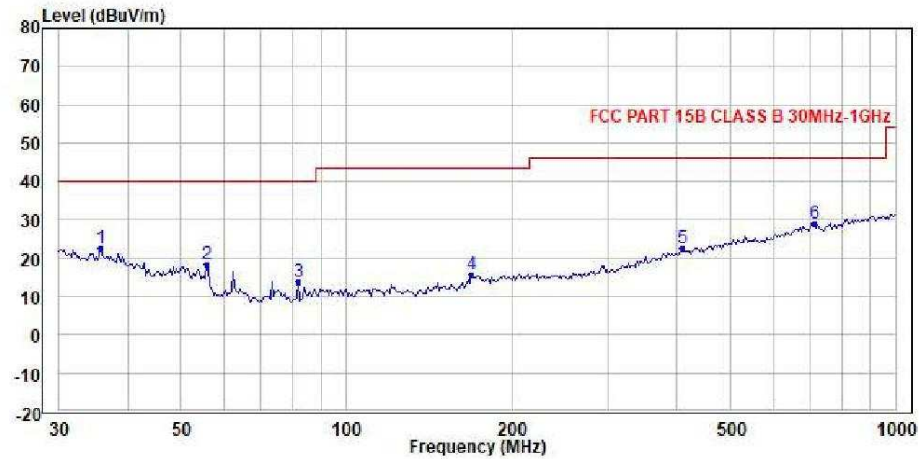


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)
Press : 99.7kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : BT_LINK
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	35.762	22.43	29.16	21.40	0.00	0.77	28.90	40.00	-17.57	Peak
2	55.678	18.24	34.89	11.43	0.00	0.82	28.90	40.00	-21.76	Peak
3	81.948	13.98	31.73	10.19	0.00	0.96	28.90	40.00	-26.02	Peak
4	168.997	15.71	27.87	15.50	0.00	1.31	28.97	43.50	-27.79	Peak
5	409.651	22.74	27.23	22.80	0.00	1.92	29.21	46.00	-23.26	Peak
6 PP	713.692	29.13	27.19	28.87	0.00	2.40	29.33	46.00	-16.87	Peak

1GHz - 18GHz



Shenzhen UnionTrust Quality and Technology Co., Ltd.

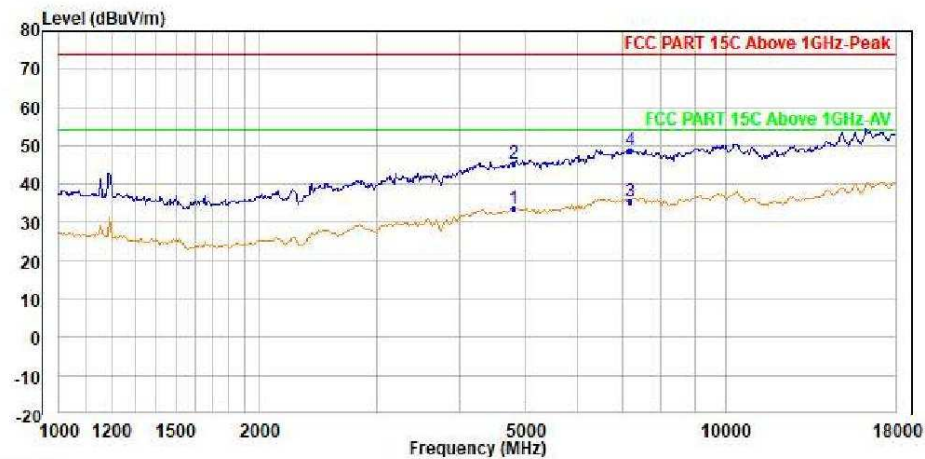


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : BLE_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4804.000	33.48	35.56	34.46	0.00	9.32	45.86	54.00	-20.52	Average
2	4804.000	45.34	47.42	34.46	0.00	9.32	45.86	74.00	-28.66	Peak
3	PP 7206.000	35.61	34.31	36.50	0.00	10.34	45.54	54.00	-18.39	Average
4	PK 7206.000	48.81	47.51	36.50	0.00	10.34	45.54	74.00	-25.19	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

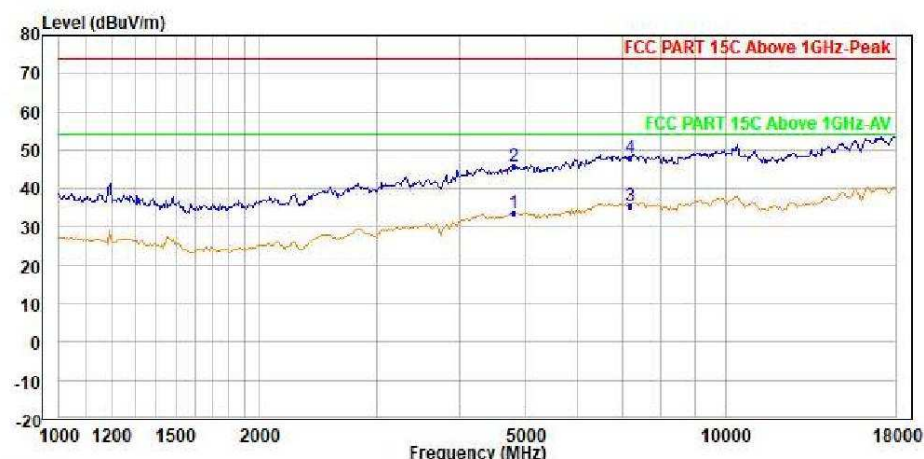


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : BLE_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4804.000	33.51	35.59	34.46	0.00	9.32	45.86	54.00	-20.49	Average
2	4804.000	45.63	47.71	34.46	0.00	9.32	45.86	74.00	-28.37	Peak
3	PP 7206.000	35.70	34.40	36.50	0.00	10.34	45.54	54.00	-18.30	Average
4	PK 7206.000	47.89	46.59	36.50	0.00	10.34	45.54	74.00	-26.11	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

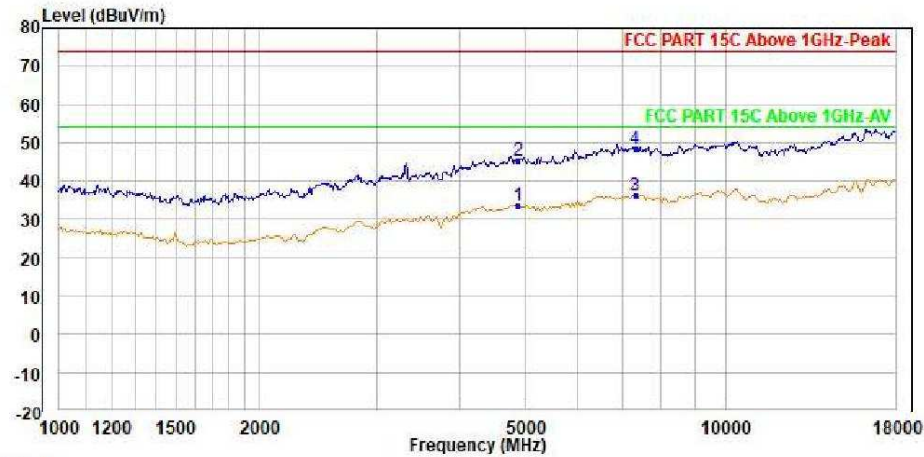


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : BLE_2440
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4880.000	33.71	35.76	34.48	0.00	9.35	45.88	54.00	-20.29	Average
2	4880.000	45.42	47.47	34.48	0.00	9.35	45.88	74.00	-28.58	Peak
3 PP	7320.000	36.32	35.01	36.50	0.00	10.37	45.56	54.00	-17.68	Average
4 PK	7320.000	48.59	47.28	36.50	0.00	10.37	45.56	74.00	-25.41	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

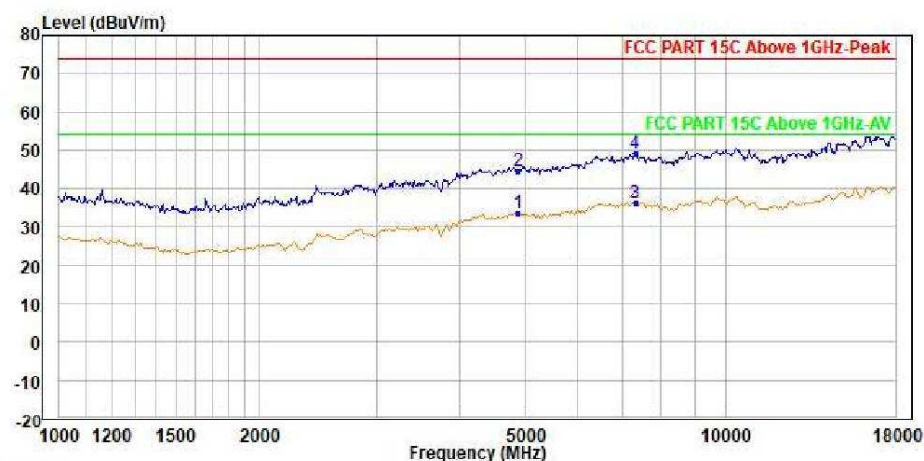


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : BLE_2440
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4880.000	33.47	35.52	34.48	0.00	9.35	45.88	54.00	-20.53	Average
2	4880.000	44.70	46.75	34.48	0.00	9.35	45.88	74.00	-29.30	Peak
3 PP	7320.000	36.17	34.86	36.50	0.00	10.37	45.56	54.00	-17.83	Average
4 PK	7320.000	49.06	47.75	36.50	0.00	10.37	45.56	74.00	-24.94	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

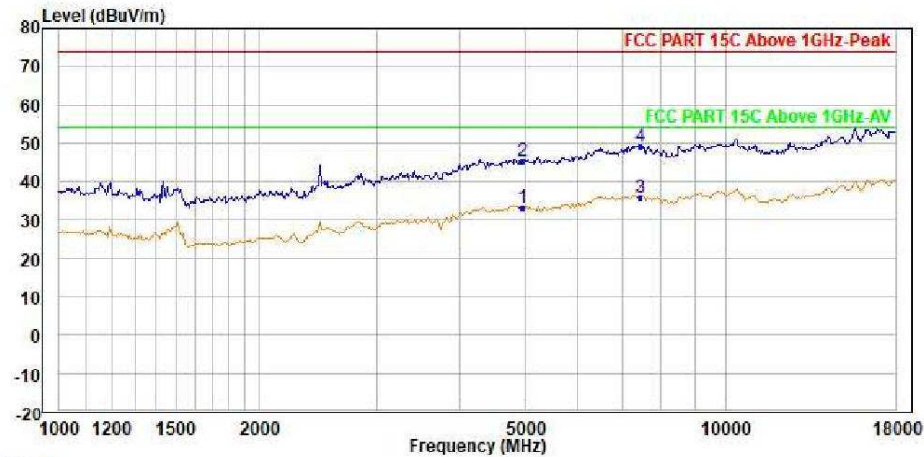


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : BLE_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4960.000	33.32	35.34	34.49	0.00	9.38	45.89	54.00	-20.68	Average
2	4960.000	45.52	47.54	34.49	0.00	9.38	45.89	74.00	-28.48	Peak
3 PP	7440.000	35.83	34.51	36.50	0.00	10.41	45.59	54.00	-18.17	Average
4 PK	7440.000	49.32	48.00	36.50	0.00	10.41	45.59	74.00	-24.68	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

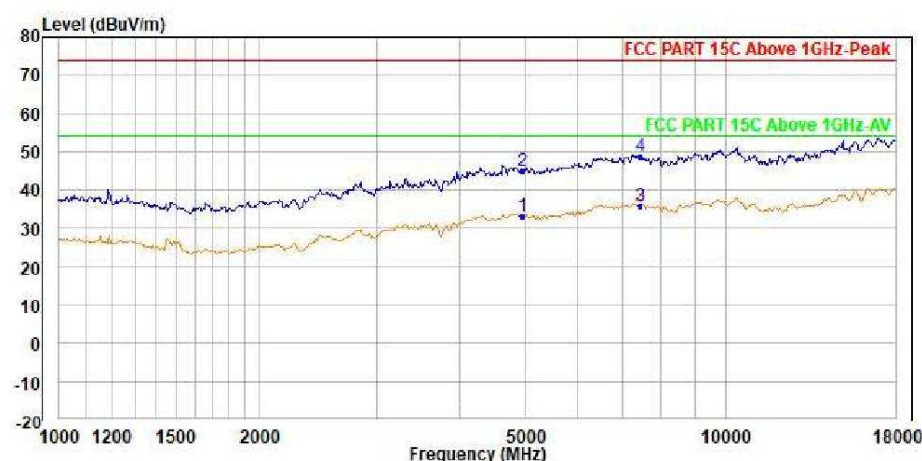


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : BLE_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4960.000	33.37	35.39	34.49	0.00	9.38	45.89	54.00	-20.63	Average
2	4960.000	44.90	46.92	34.49	0.00	9.38	45.89	74.00	-29.10	Peak
3 PP	7440.000	35.72	34.40	36.50	0.00	10.41	45.59	54.00	-18.28	Average
4 PK	7440.000	48.65	47.33	36.50	0.00	10.41	45.59	74.00	-25.35	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

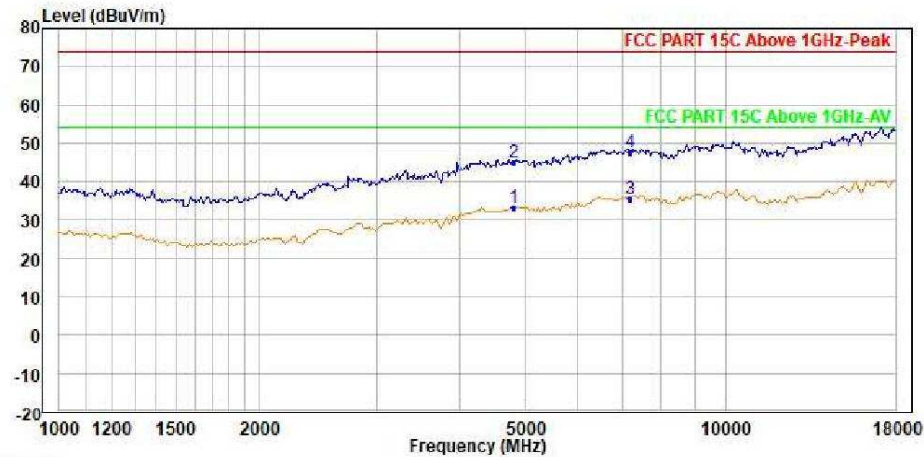


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2LE_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4804.000	33.29	35.37	34.46	0.00	9.32	45.86	54.00	-20.71	Average
2	4804.000	44.89	46.97	34.46	0.00	9.32	45.86	74.00	-29.11	Peak
3	PP 7206.000	35.56	34.26	36.50	0.00	10.34	45.54	54.00	-18.44	Average
4	PK 7206.000	47.76	46.46	36.50	0.00	10.34	45.54	74.00	-26.24	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

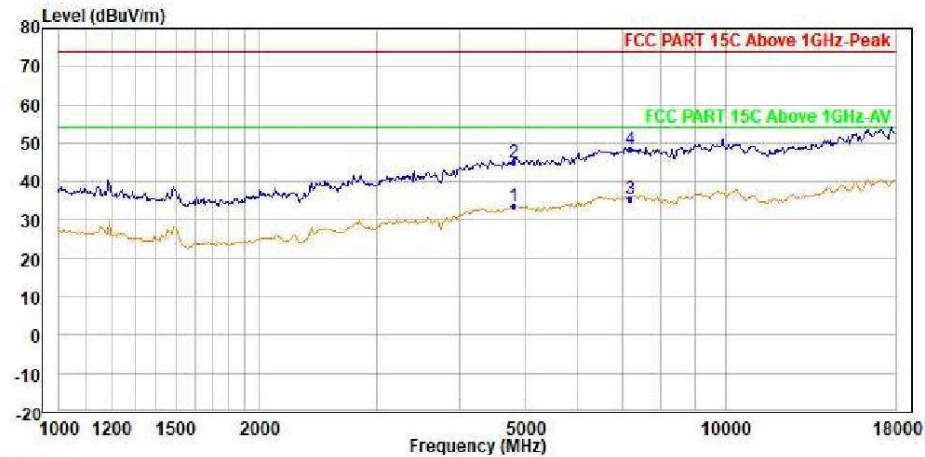


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2LE_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4804.000	33.46	35.54	34.46	0.00	9.32	45.86	54.00	-20.54	Average
2	4804.000	45.02	47.10	34.46	0.00	9.32	45.86	74.00	-28.98	Peak
3 PP	7206.000	35.61	34.31	36.50	0.00	10.34	45.54	54.00	-18.39	Average
4 PK	7206.000	48.50	47.20	36.50	0.00	10.34	45.54	74.00	-25.50	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

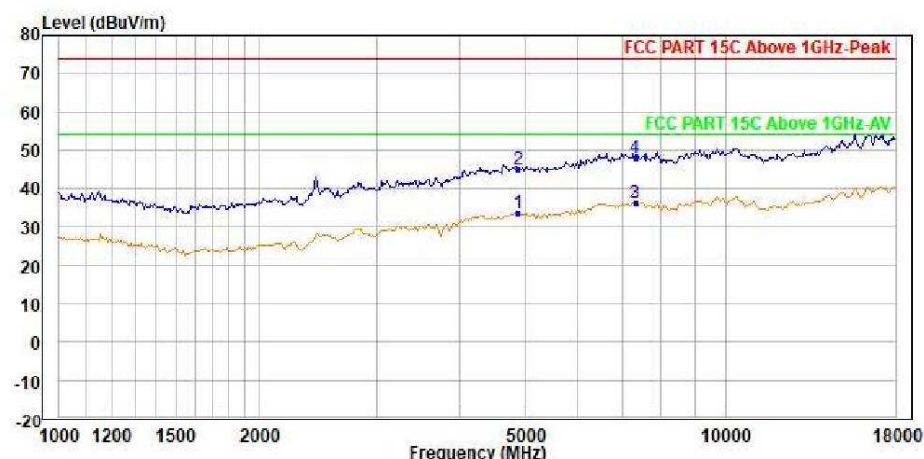


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2LE_2440
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4880.000	33.47	35.52	34.48	0.00	9.35	45.88	54.00	-20.53	Average
2	4880.000	45.18	47.23	34.48	0.00	9.35	45.88	74.00	-28.82	Peak
3 PP	7320.000	36.09	34.78	36.50	0.00	10.37	45.56	54.00	-17.91	Average
4 PK	7320.000	48.16	46.85	36.50	0.00	10.37	45.56	74.00	-25.84	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

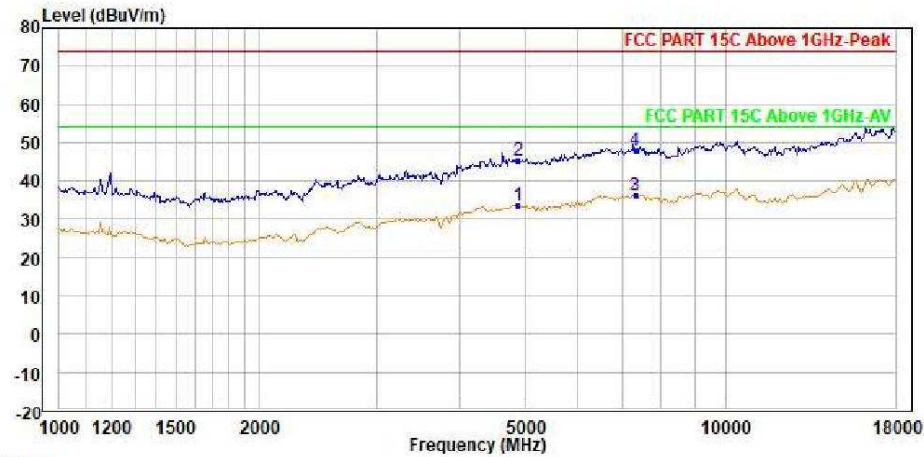


Trace: 1

Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2LE_2440
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4880.000	33.64	35.69	34.48	0.00	9.35	45.88	54.00	-20.36	Average
2	4880.000	45.38	47.43	34.48	0.00	9.35	45.88	74.00	-28.62	Peak
3 PP	7320.000	36.14	34.83	36.50	0.00	10.37	45.56	54.00	-17.86	Average
4 PK	7320.000	47.89	46.58	36.50	0.00	10.37	45.56	74.00	-26.11	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

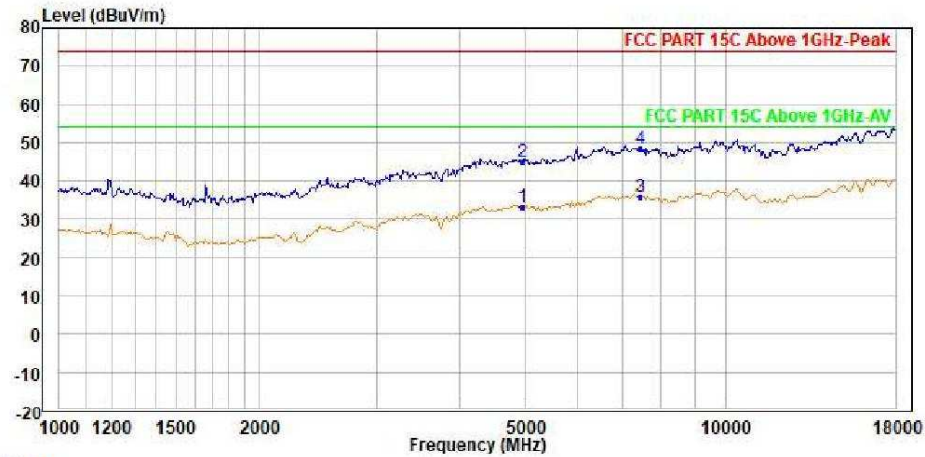


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2LE_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4960.000	33.25	35.27	34.49	0.00	9.38	45.89	54.00	-20.75	Average
2	4960.000	45.09	47.11	34.49	0.00	9.38	45.89	74.00	-28.91	Peak
3 PP	7440.000	35.75	34.43	36.50	0.00	10.41	45.59	54.00	-18.25	Average
4 PK	7440.000	48.55	47.23	36.50	0.00	10.41	45.59	74.00	-25.45	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

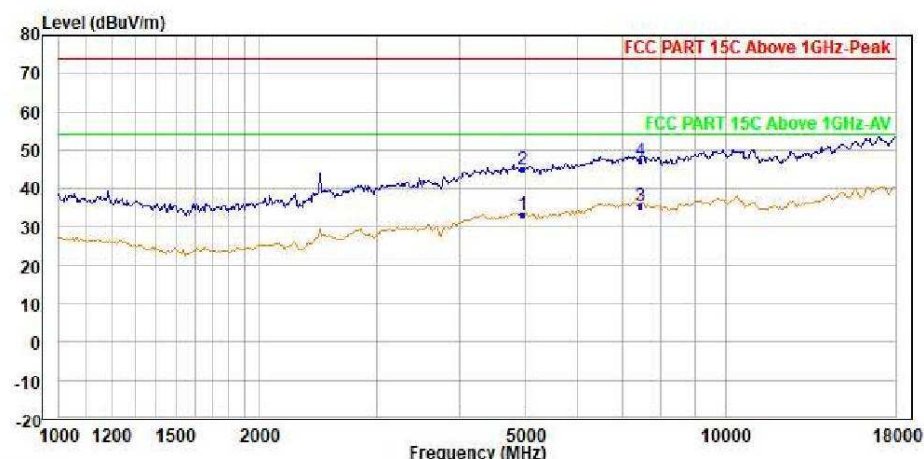


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2LE_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4960.000	33.32	35.34	34.49	0.00	9.38	45.89	54.00	-20.68	Average
2	4960.000	44.90	46.92	34.49	0.00	9.38	45.89	74.00	-29.10	Peak
3 PP	7440.000	35.64	34.32	36.50	0.00	10.41	45.59	54.00	-18.36	Average
4 PK	7440.000	47.46	46.14	36.50	0.00	10.41	45.59	74.00	-26.54	Peak

Appendix B.6: Test Results of Radiated Emissions in Restricted Bands



Shenzhen UnionTrust Quality and Technology Co., Ltd.

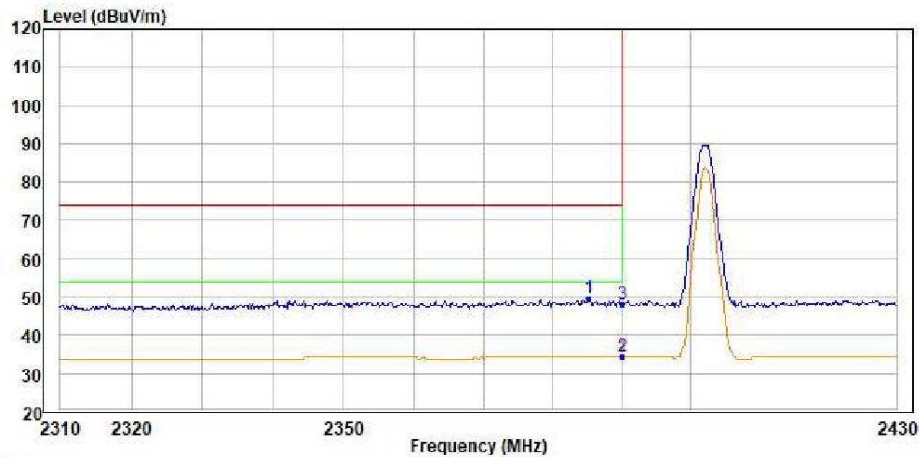


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%) : 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : BLE_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PK 2385.150	49.59	48.10	31.54	10.00	7.35	47.40	74.00	-24.41	Peak
2	PP 2390.000	34.52	33.02	31.55	10.00	7.35	47.40	54.00	-19.48	Average
3	2390.000	48.32	46.82	31.55	10.00	7.35	47.40	74.00	-25.68	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

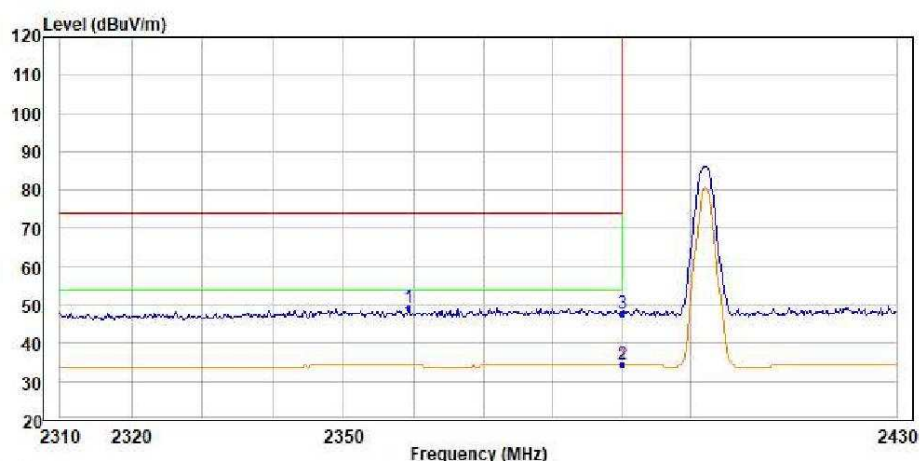


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : BLE_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PK 2359.299	49.27	47.86	31.50	10.00	7.31	47.40	74.00	-24.73	Peak
2	PP 2390.000	34.52	33.02	31.55	10.00	7.35	47.40	54.00	-19.48	Average
3	2390.000	47.73	46.23	31.55	10.00	7.35	47.40	74.00	-26.27	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

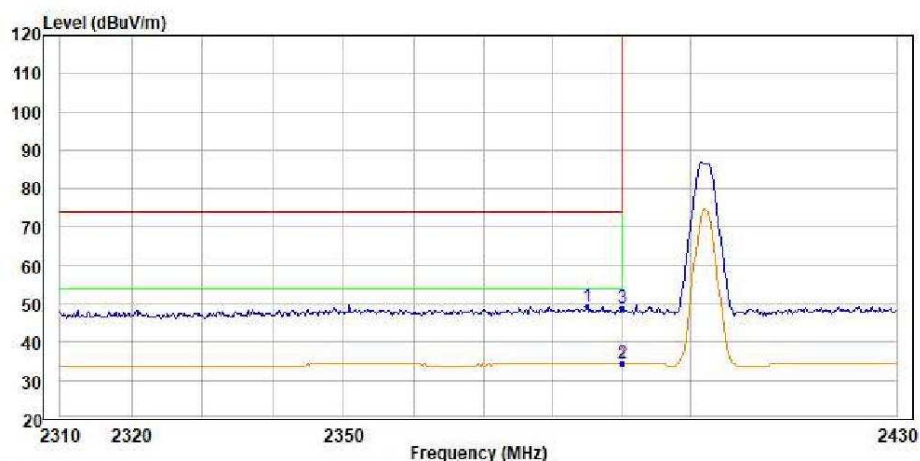


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2LE_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PK 2385.030	49.37	47.88	31.54	10.00	7.35	47.40	74.00	-24.63	Peak
2	PP 2390.000	34.52	33.02	31.55	10.00	7.35	47.40	54.00	-19.48	Average
3	2390.000	48.74	47.24	31.55	10.00	7.35	47.40	74.00	-25.26	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

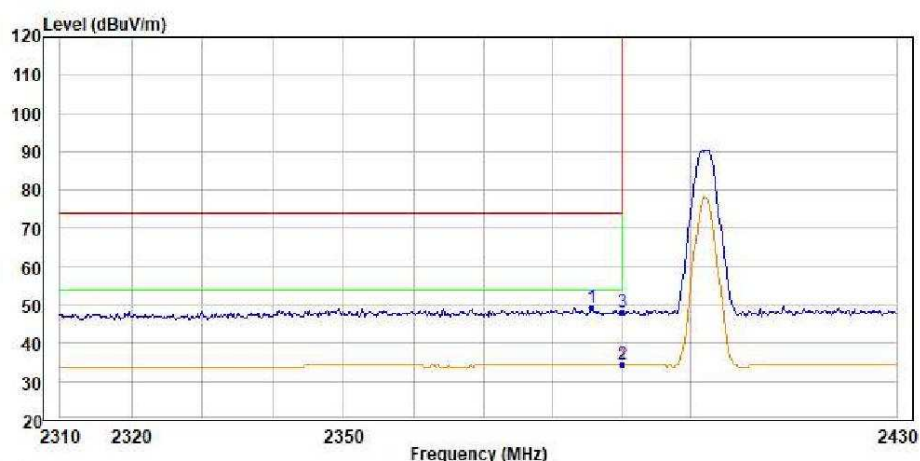


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2LE_2402
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PK 2385.631	49.18	47.69	31.54	10.00	7.35	47.40	74.00	-24.82	Peak
2	PP 2390.000	34.52	33.02	31.55	10.00	7.35	47.40	54.00	-19.48	Average
3	2390.000	48.29	46.79	31.55	10.00	7.35	47.40	74.00	-25.71	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

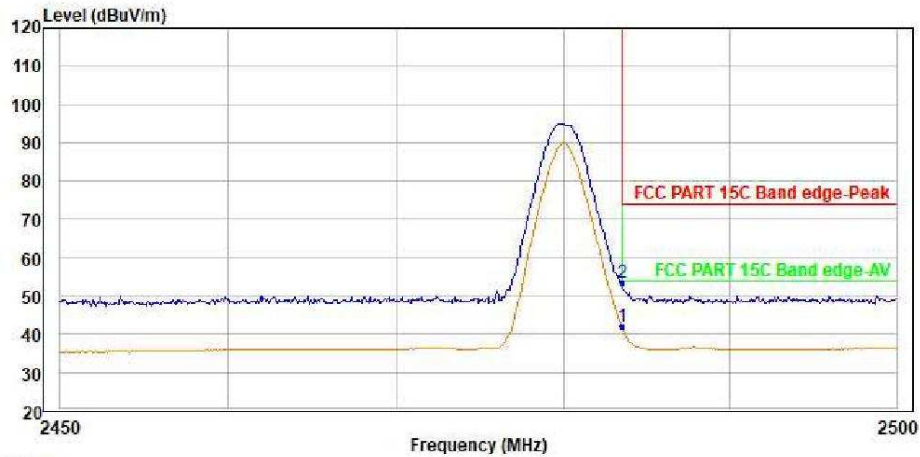


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : BLE_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	42.17	40.42	31.68	10.00	7.47	47.40	54.00	-11.83	Average
2 PK	2483.500	53.62	51.87	31.68	10.00	7.47	47.40	74.00	-20.38	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

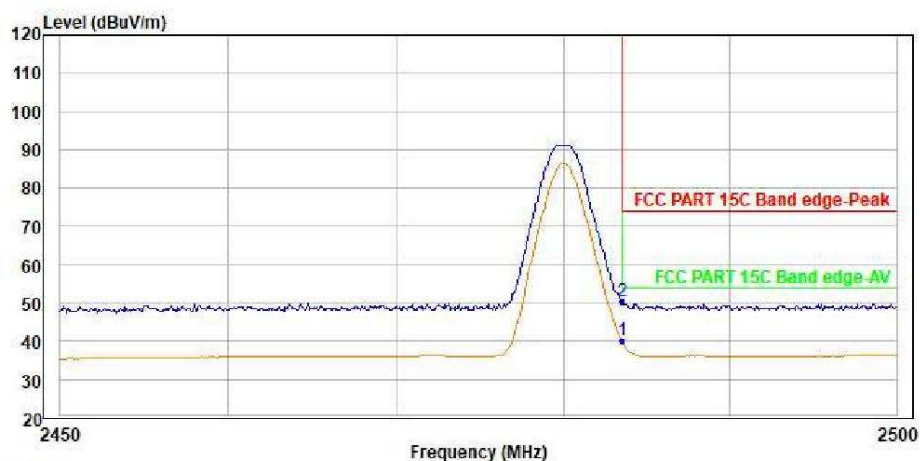


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : BLE_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	2483.500	39.99	38.24	31.68	10.00	7.47	47.40	54.00	-14.01	Average
2 PK	2483.500	50.49	48.74	31.68	10.00	7.47	47.40	74.00	-23.51	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

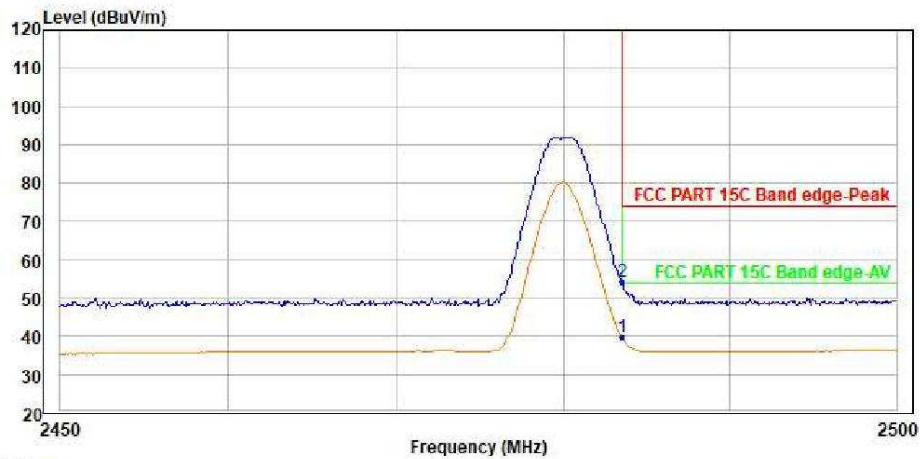


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2LE_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	39.63	37.88	31.68	10.00	7.47	47.40	54.00	-14.37	Average
2	PK 2483.500	54.36	52.61	31.68	10.00	7.47	47.40	74.00	-19.64	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

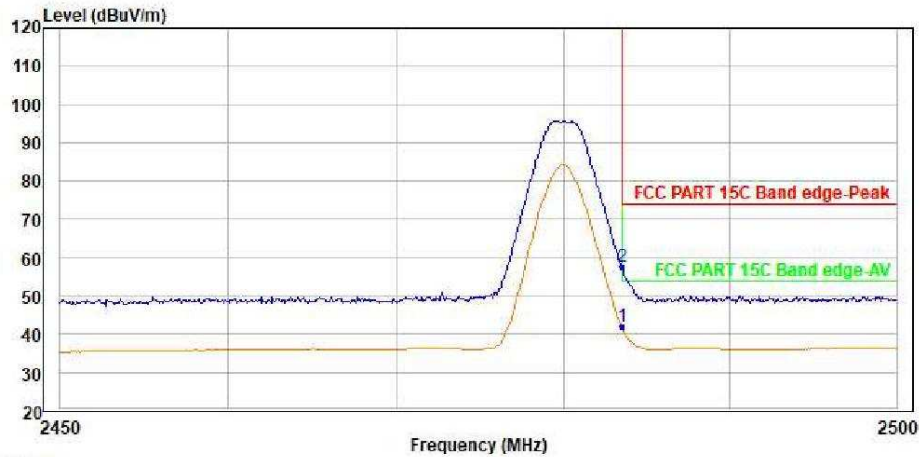

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.7(C)/62.5(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 2LE_2480
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	42.03	40.28	31.68	10.00	7.47	47.40	54.00	-11.97	Average
2	PK 2483.500	57.62	55.87	31.68	10.00	7.47	47.40	74.00	-16.38	Peak