




Shenzhen UnionTrust Quality and Technology Co., Ltd.

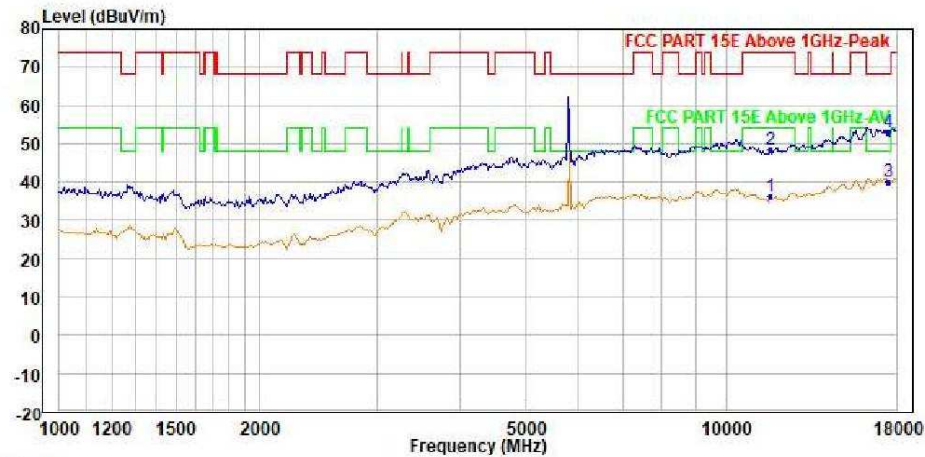


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_A_5825
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11650.000	36.23	34.15	38.88	0.00	12.27	49.07	54.00	-17.77	Average
2	11650.000	48.56	46.48	38.88	0.00	12.27	49.07	74.00	-25.44	Peak
3	PP17475.000	40.10	30.77	41.61	0.00	13.97	46.25	48.20	-8.10	Average
4	PK17475.000	53.11	43.78	41.61	0.00	13.97	46.25	68.20	-15.09	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

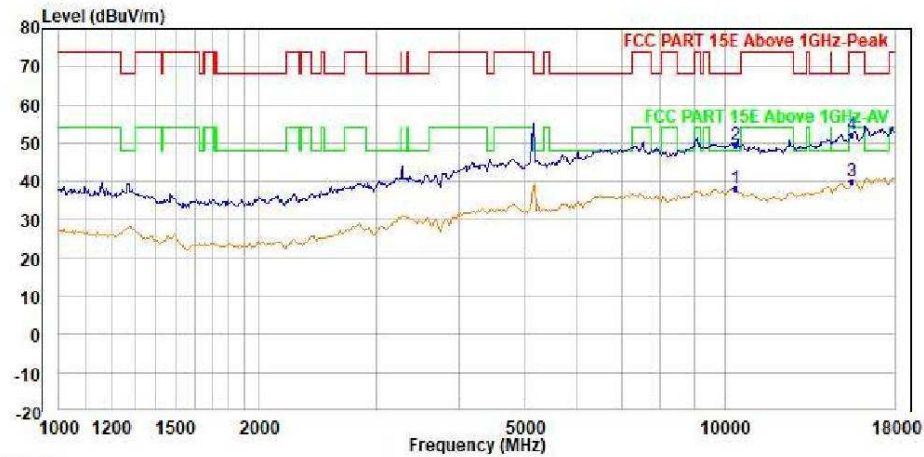


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5180
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10360.000	38.00	34.62	38.45	0.00	11.93	47.00	48.20	-10.20	Average
2	PK10360.000	49.62	46.24	38.45	0.00	11.93	47.00	68.20	-18.58	Peak
3	15540.000	39.96	32.40	41.28	0.00	13.03	46.75	54.00	-14.04	Average
4	15540.000	52.32	44.76	41.28	0.00	13.03	46.75	74.00	-21.68	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

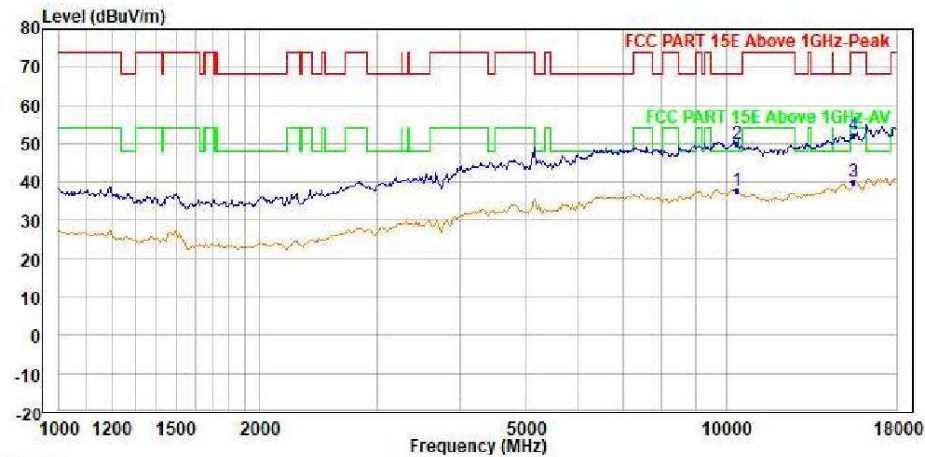


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5180
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10360.000	37.86	34.48	38.45	0.00	11.93	47.00	48.20	-10.34	Average
2	PK10360.000	49.87	46.49	38.45	0.00	11.93	47.00	68.20	-18.33	Peak
3	15540.000	39.89	32.33	41.28	0.00	13.03	46.75	54.00	-14.11	Average
4	15540.000	52.43	44.87	41.28	0.00	13.03	46.75	74.00	-21.57	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

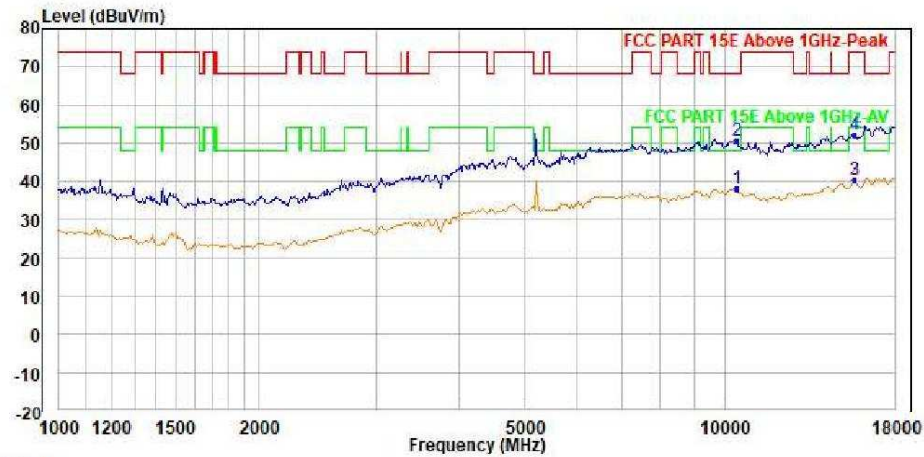


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5220
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10440.000	38.11	34.73	38.59	0.00	11.91	47.12	48.20	-10.09	Average
2	PK10440.000	50.73	47.35	38.59	0.00	11.91	47.12	68.20	-17.47	Peak
3	15660.000	40.38	32.92	41.24	0.00	13.11	46.89	54.00	-13.62	Average
4	15660.000	52.42	44.96	41.24	0.00	13.11	46.89	74.00	-21.58	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

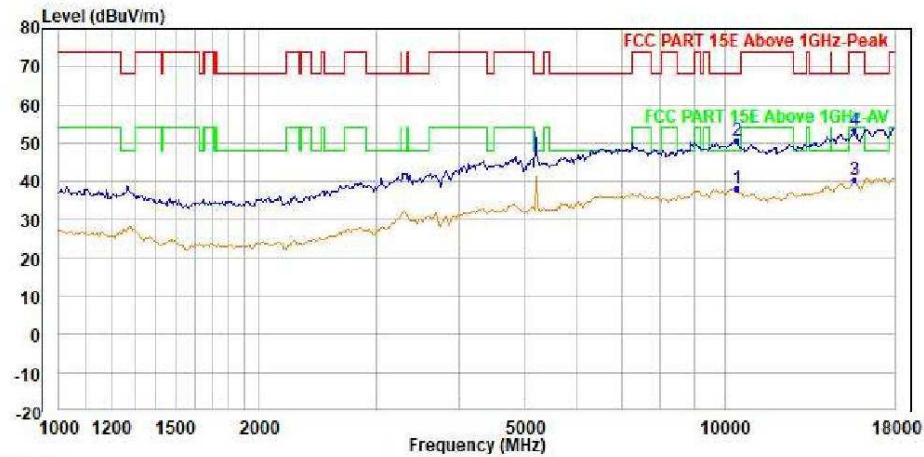


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5220
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10440.000	38.06	34.68	38.59	0.00	11.91	47.12	48.20	-10.14	Average
2	PK10440.000	50.60	47.22	38.59	0.00	11.91	47.12	68.20	-17.60	Peak
3	15660.000	40.45	32.99	41.24	0.00	13.11	46.89	54.00	-13.55	Average
4	15660.000	53.35	45.89	41.24	0.00	13.11	46.89	74.00	-20.65	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

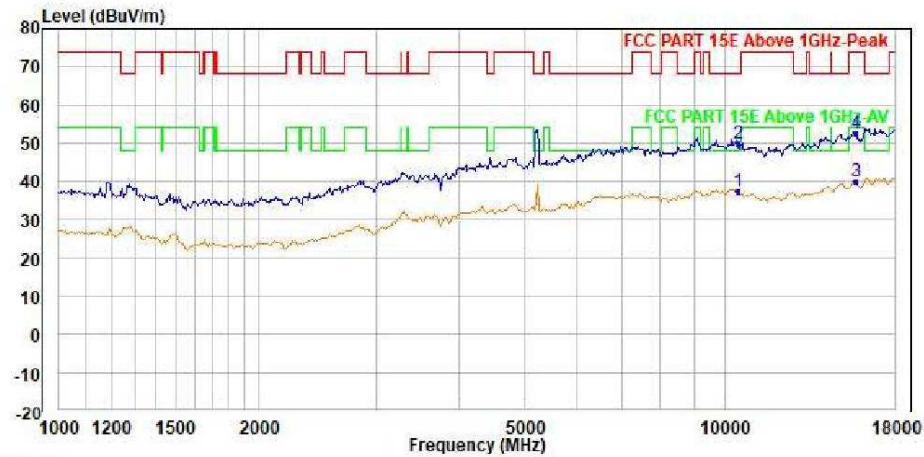


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5240
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10480.000	37.25	33.86	38.66	0.00	11.90	47.17	48.20	-10.95	Average
2	PK10480.000	49.89	46.50	38.66	0.00	11.90	47.17	68.20	-18.31	Peak
3	15720.000	39.97	32.57	41.21	0.00	13.15	46.96	54.00	-14.03	Average
4	15720.000	52.46	45.06	41.21	0.00	13.15	46.96	74.00	-21.54	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

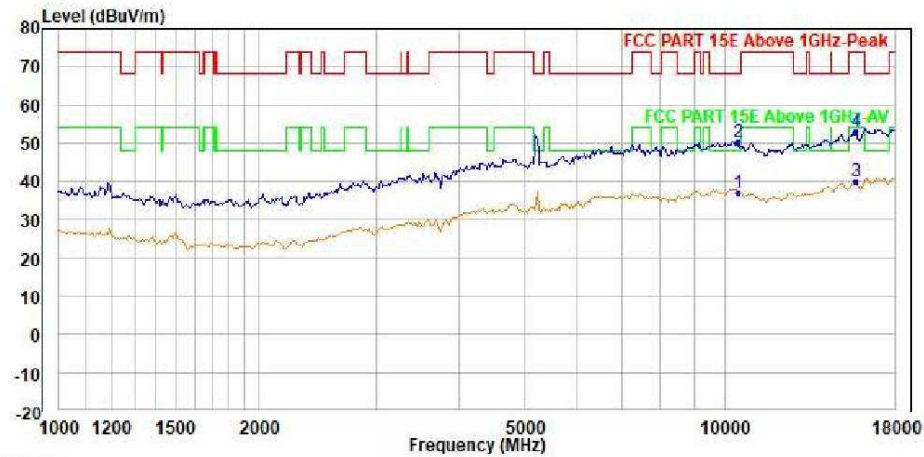


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5240
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10480.000	37.10	33.71	38.66	0.00	11.90	47.17	48.20	-11.10	Average
2	PK10480.000	50.32	46.93	38.66	0.00	11.90	47.17	68.20	-17.88	Peak
3	15720.000	39.94	32.54	41.21	0.00	13.15	46.96	54.00	-14.06	Average
4	15720.000	53.09	45.69	41.21	0.00	13.15	46.96	74.00	-20.91	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

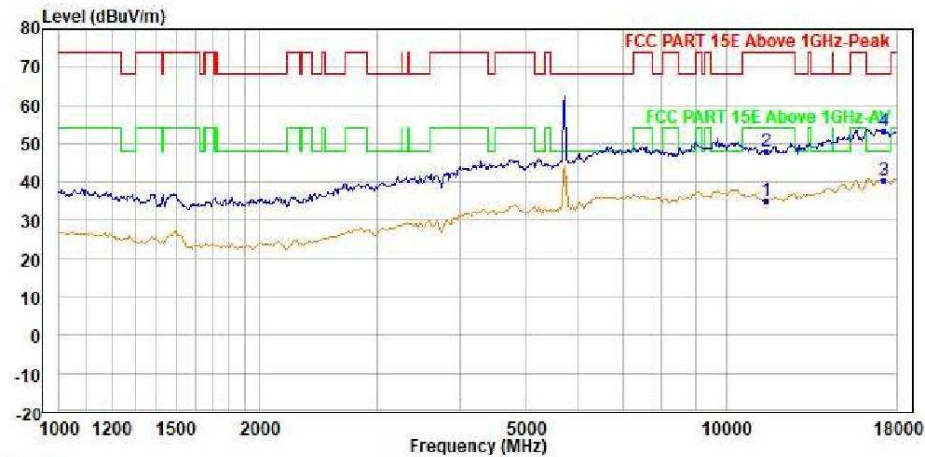


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5745
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11490.000	35.12	33.06	38.70	0.00	12.14	48.78	54.00	-18.88	Average
2	11490.000	48.21	46.15	38.70	0.00	12.14	48.78	74.00	-25.79	Peak
3	PP17235.000	40.54	31.55	41.71	0.00	14.01	46.73	48.20	-7.66	Average
4	PK17235.000	53.41	44.42	41.71	0.00	14.01	46.73	68.20	-14.79	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

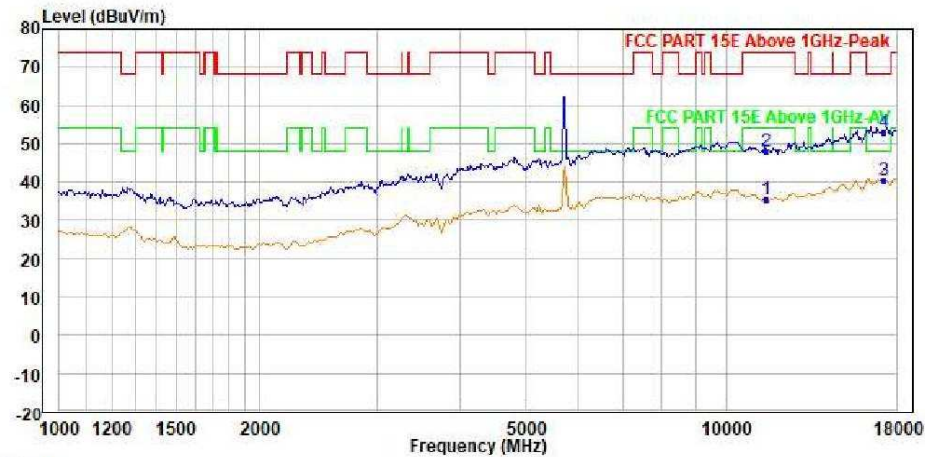


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5745
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11490.000	35.34	33.28	38.70	0.00	12.14	48.78	54.00	-18.66	Average
2	11490.000	48.05	45.99	38.70	0.00	12.14	48.78	74.00	-25.95	Peak
3	PP17235.000	40.54	31.55	41.71	0.00	14.01	46.73	48.20	-7.66	Average
4	PK17235.000	52.88	43.89	41.71	0.00	14.01	46.73	68.20	-15.32	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

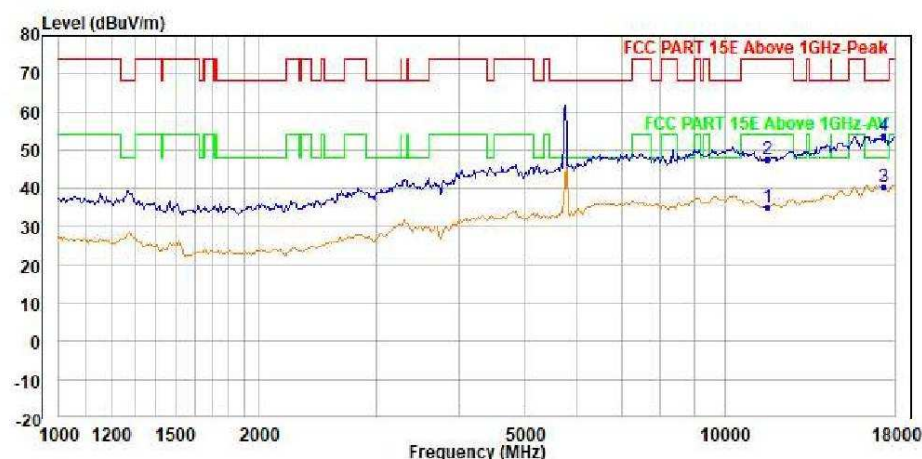


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5785
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11570.000	35.32	33.27	38.78	0.00	12.20	48.93	54.00	-18.68	Average
2	11570.000	47.73	45.68	38.78	0.00	12.20	48.93	74.00	-26.27	Peak
3	PP17355.000	40.64	31.48	41.66	0.00	13.99	46.49	48.20	-7.56	Average
4	PK17355.000	53.73	44.57	41.66	0.00	13.99	46.49	68.20	-14.47	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

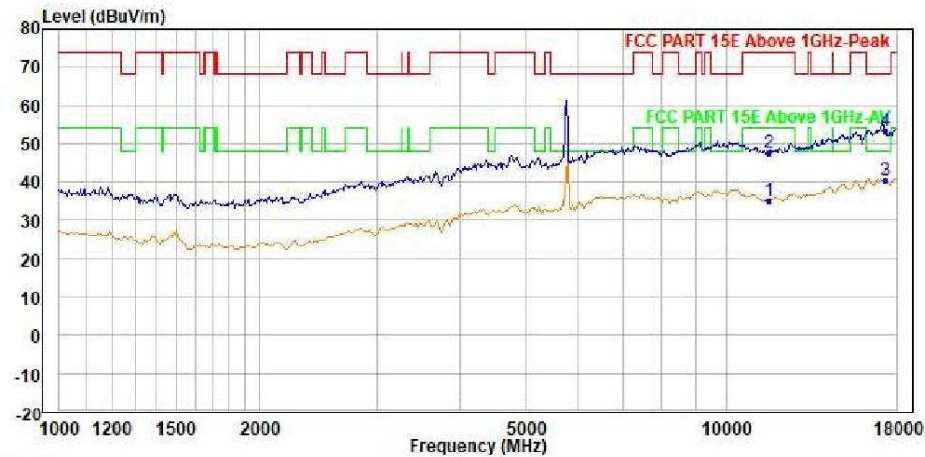


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5785
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11570.000	35.10	33.05	38.78	0.00	12.20	48.93	54.00	-18.90	Average
2	11570.000	47.62	45.57	38.78	0.00	12.20	48.93	74.00	-26.38	Peak
3	PP17355.000	40.64	31.48	41.66	0.00	13.99	46.49	48.20	-7.56	Average
4	PK17355.000	53.28	44.12	41.66	0.00	13.99	46.49	68.20	-14.92	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

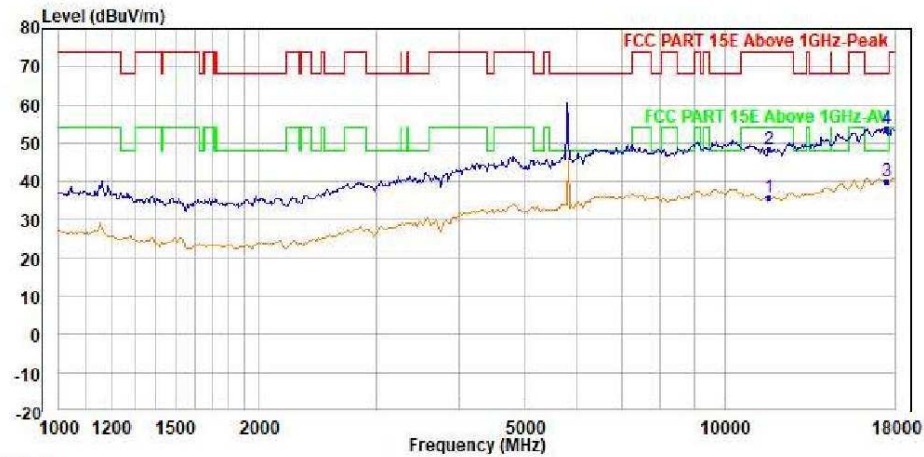


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5825
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11650.000	35.76	33.68	38.88	0.00	12.27	49.07	54.00	-18.24	Average
2	11650.000	48.36	46.28	38.88	0.00	12.27	49.07	74.00	-25.64	Peak
3	PP17475.000	40.06	30.73	41.61	0.00	13.97	46.25	48.20	-8.14	Average
4	PK17475.000	53.78	44.45	41.61	0.00	13.97	46.25	68.20	-14.42	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

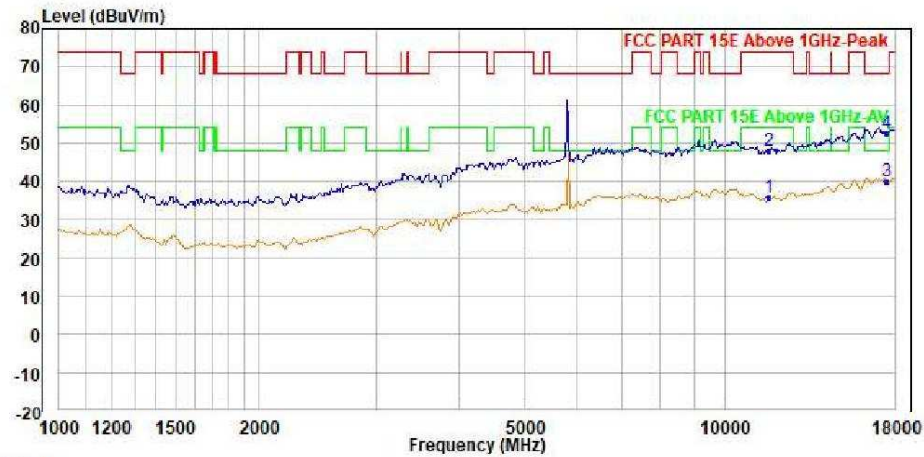


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5825
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11650.000	36.03	33.95	38.88	0.00	12.27	49.07	54.00	-17.97	Average
2	11650.000	48.24	46.16	38.88	0.00	12.27	49.07	74.00	-25.76	Peak
3	PP17475.000	40.02	30.69	41.61	0.00	13.97	46.25	48.20	-8.18	Average
4	PK17475.000	52.49	43.16	41.61	0.00	13.97	46.25	68.20	-15.71	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

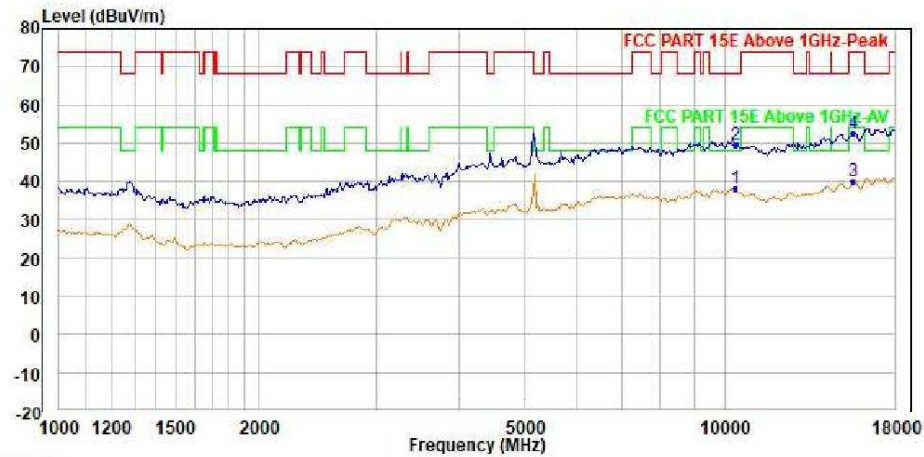


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC40_5190
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10380.000	38.00	34.62	38.48	0.00	11.93	47.03	48.20	-10.20	Average
2	PK10380.000	49.42	46.04	38.48	0.00	11.93	47.03	68.20	-18.78	Peak
3	15570.000	39.96	32.42	41.27	0.00	13.05	46.78	54.00	-14.04	Average
4	15570.000	52.62	45.08	41.27	0.00	13.05	46.78	74.00	-21.38	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

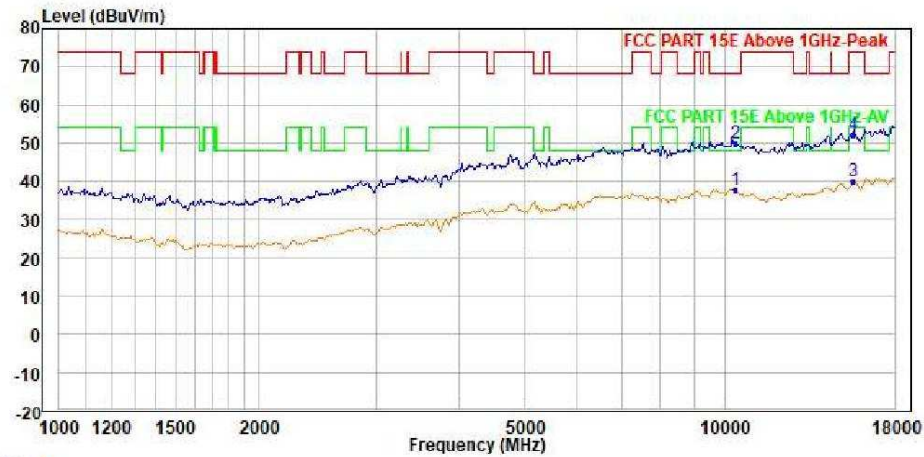


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC40_5190
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10380.000	37.89	34.51	38.48	0.00	11.93	47.03	48.20	-10.31	Average
2	PK10380.000	50.09	46.71	38.48	0.00	11.93	47.03	68.20	-18.11	Peak
3	15570.000	39.93	32.39	41.27	0.00	13.05	46.78	54.00	-14.07	Average
4	15570.000	52.38	44.84	41.27	0.00	13.05	46.78	74.00	-21.62	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

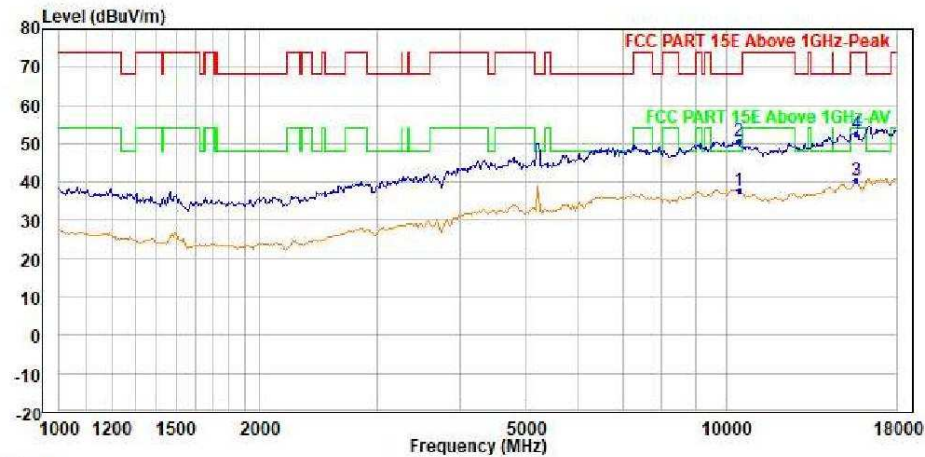


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC40_5230
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10460.000	37.98	34.58	38.63	0.00	11.91	47.14	48.20	-10.22	Average
2	PK10460.000	50.86	47.46	38.63	0.00	11.91	47.14	68.20	-17.34	Peak
3	15690.000	40.38	32.96	41.22	0.00	13.13	46.93	54.00	-13.62	Average
4	15690.000	52.59	45.17	41.22	0.00	13.13	46.93	74.00	-21.41	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

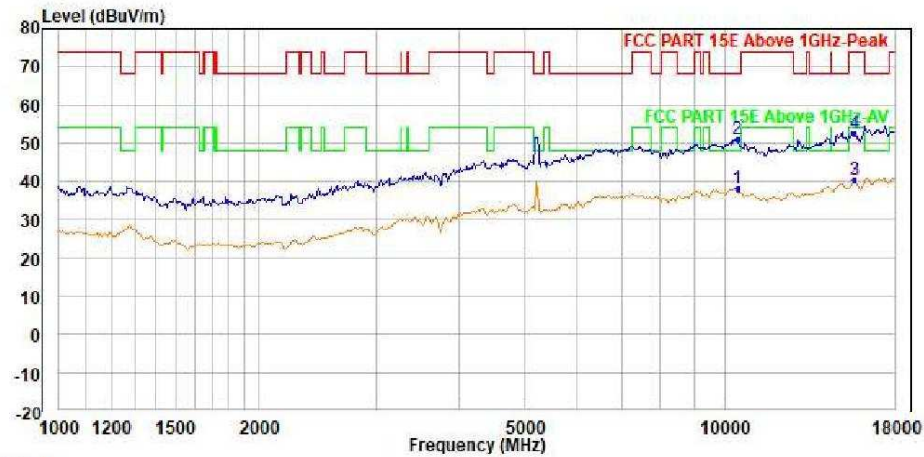


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC40_5230
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10460.000	38.06	34.66	38.63	0.00	11.91	47.14	48.20	-10.14	Average
2	PK10460.000	51.06	47.66	38.63	0.00	11.91	47.14	68.20	-17.14	Peak
3	15690.000	40.42	33.00	41.22	0.00	13.13	46.93	54.00	-13.58	Average
4	15690.000	52.65	45.23	41.22	0.00	13.13	46.93	74.00	-21.35	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

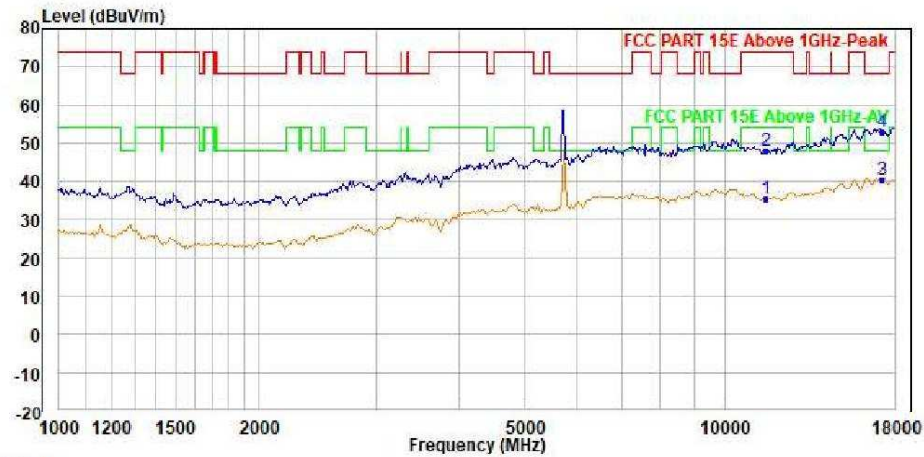


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC40_5755
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11510.000	35.56	33.51	38.71	0.00	12.16	48.82	54.00	-18.44	Average
2	11510.000	48.13	46.08	38.71	0.00	12.16	48.82	74.00	-25.87	Peak
3	PP17265.000	40.54	31.51	41.69	0.00	14.01	46.67	48.20	-7.66	Average
4	PK17265.000	52.91	43.88	41.69	0.00	14.01	46.67	68.20	-15.29	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

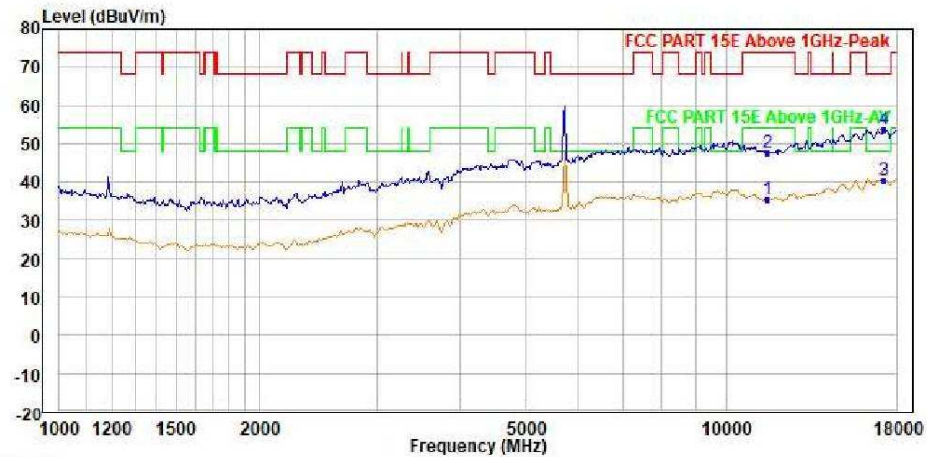


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC40_5755
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11510.000	35.59	33.54	38.71	0.00	12.16	48.82	54.00	-18.41	Average
2	11510.000	47.54	45.49	38.71	0.00	12.16	48.82	74.00	-26.46	Peak
3	PP17265.000	40.54	31.51	41.69	0.00	14.01	46.67	48.20	-7.66	Average
4	PK17265.000	53.67	44.64	41.69	0.00	14.01	46.67	68.20	-14.53	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

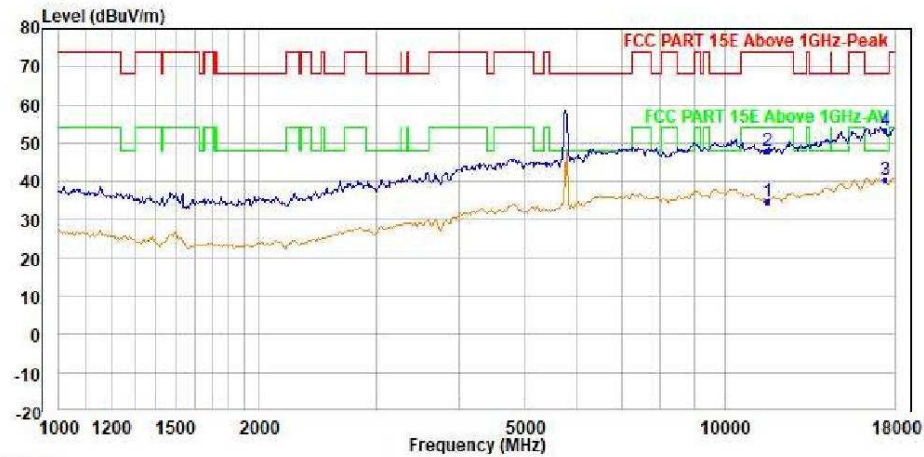


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC40_5795
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11590.000	34.93	32.86	38.81	0.00	12.22	48.96	54.00	-19.07	Average
2	11590.000	47.90	45.83	38.81	0.00	12.22	48.96	74.00	-26.10	Peak
3	PP17385.000	40.64	31.43	41.65	0.00	13.99	46.43	48.20	-7.56	Average
4	PK17385.000	53.53	44.32	41.65	0.00	13.99	46.43	68.20	-14.67	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

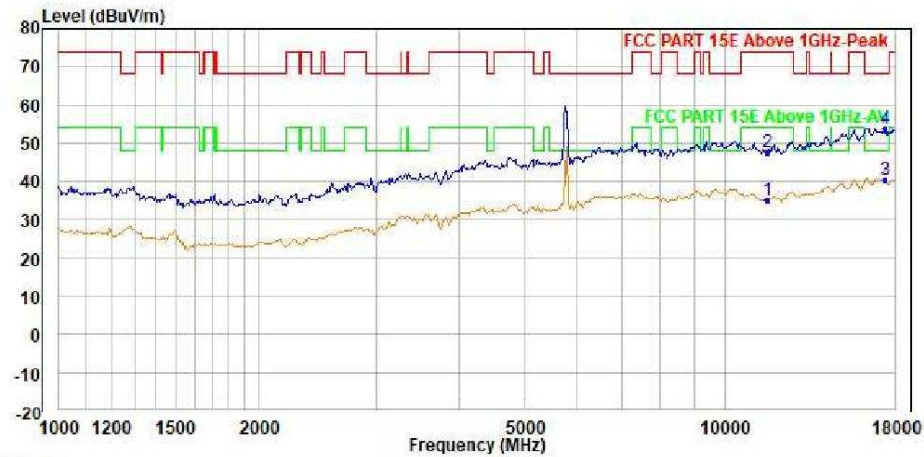


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC40_5795
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11590.000	35.22	33.15	38.81	0.00	12.22	48.96	54.00	-18.78	Average
2	11590.000	47.86	45.79	38.81	0.00	12.22	48.96	74.00	-26.14	Peak
3	PP17385.000	40.64	31.43	41.65	0.00	13.99	46.43	48.20	-7.56	Average
4	PK17385.000	53.63	44.42	41.65	0.00	13.99	46.43	68.20	-14.57	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

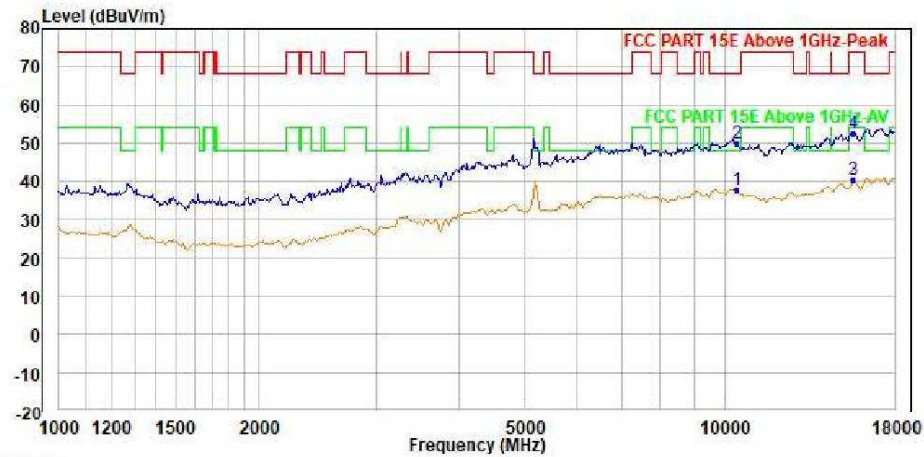


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC80_5210
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10420.000	37.95	34.56	38.56	0.00	11.92	47.09	48.20	-10.25	Average
2	PK10420.000	49.87	46.48	38.56	0.00	11.92	47.09	68.20	-18.33	Peak
3	15630.000	40.42	32.94	41.25	0.00	13.09	46.86	54.00	-13.58	Average
4	15630.000	52.74	45.26	41.25	0.00	13.09	46.86	74.00	-21.26	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

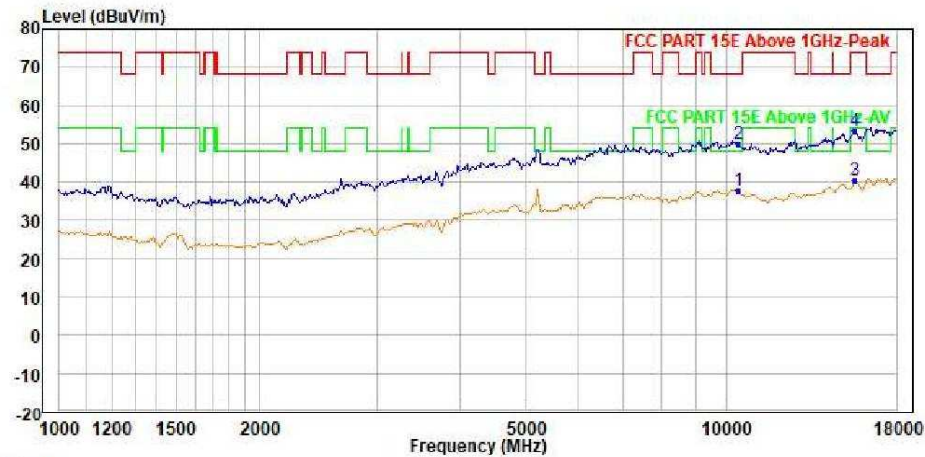


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC80_5210
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10420.000	37.93	34.54	38.56	0.00	11.92	47.09	48.20	-10.27	Average
2	PK10420.000	50.13	46.74	38.56	0.00	11.92	47.09	68.20	-18.07	Peak
3	15630.000	40.38	32.90	41.25	0.00	13.09	46.86	54.00	-13.62	Average
4	15630.000	53.32	45.84	41.25	0.00	13.09	46.86	74.00	-20.68	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

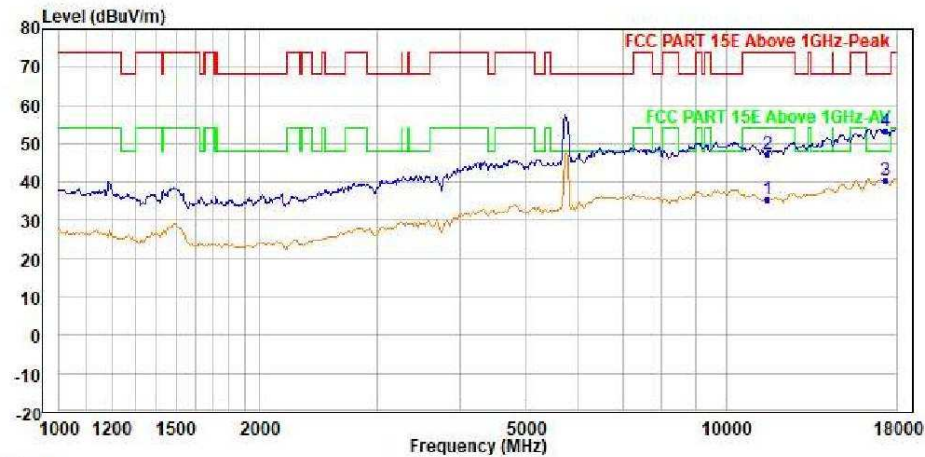


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC80_5775
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11550.000	35.40	33.34	38.76	0.00	12.19	48.89	54.00	-18.60	Average
2	11550.000	47.36	45.30	38.76	0.00	12.19	48.89	74.00	-26.64	Peak
3	PP17325.000	40.54	31.42	41.67	0.00	14.00	46.55	48.20	-7.66	Average
4	PK17325.000	53.49	44.37	41.67	0.00	14.00	46.55	68.20	-14.71	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

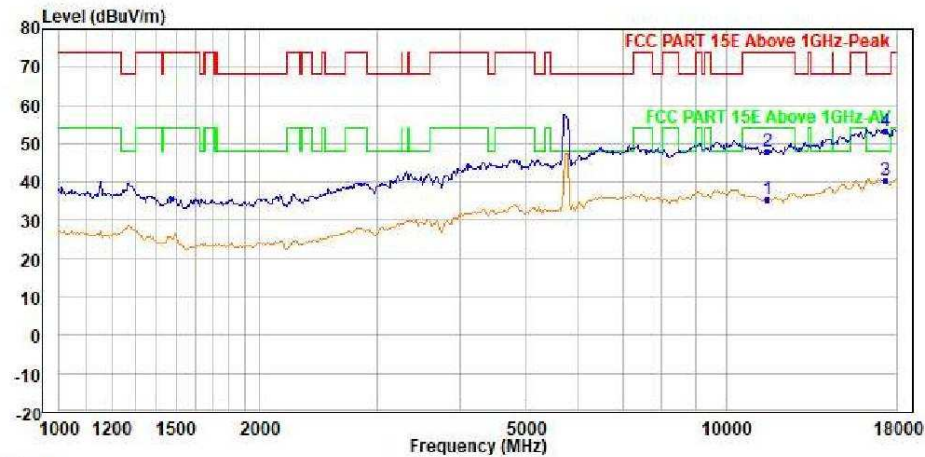


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC80_5775
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11550.000	35.40	33.34	38.76	0.00	12.19	48.89	54.00	-18.60	Average
2	11550.000	47.96	45.90	38.76	0.00	12.19	48.89	74.00	-26.04	Peak
3	PP17325.000	40.54	31.42	41.67	0.00	14.00	46.55	48.20	-7.66	Average
4	PK17325.000	53.46	44.34	41.67	0.00	14.00	46.55	68.20	-14.74	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

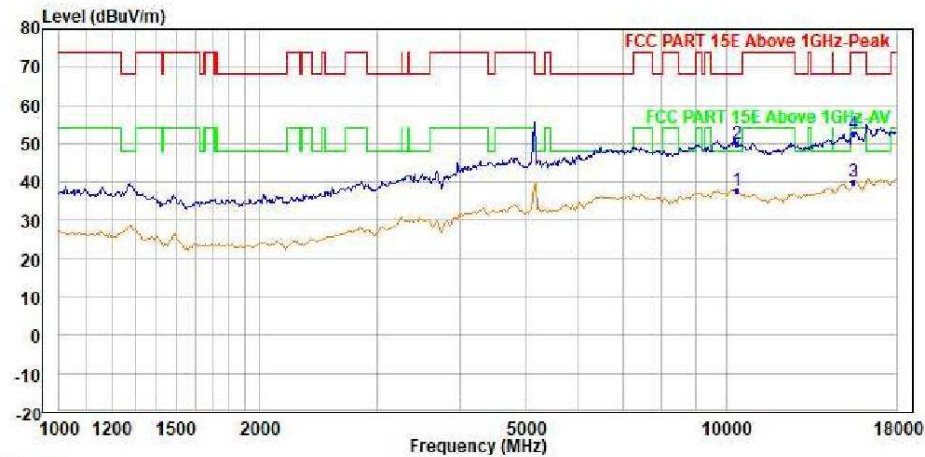


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5180
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10360.000	37.89	34.51	38.45	0.00	11.93	47.00	48.20	-10.31	Average
2	PK10360.000	50.07	46.69	38.45	0.00	11.93	47.00	68.20	-18.13	Peak
3	15540.000	39.89	32.33	41.28	0.00	13.03	46.75	54.00	-14.11	Average
4	15540.000	52.59	45.03	41.28	0.00	13.03	46.75	74.00	-21.41	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

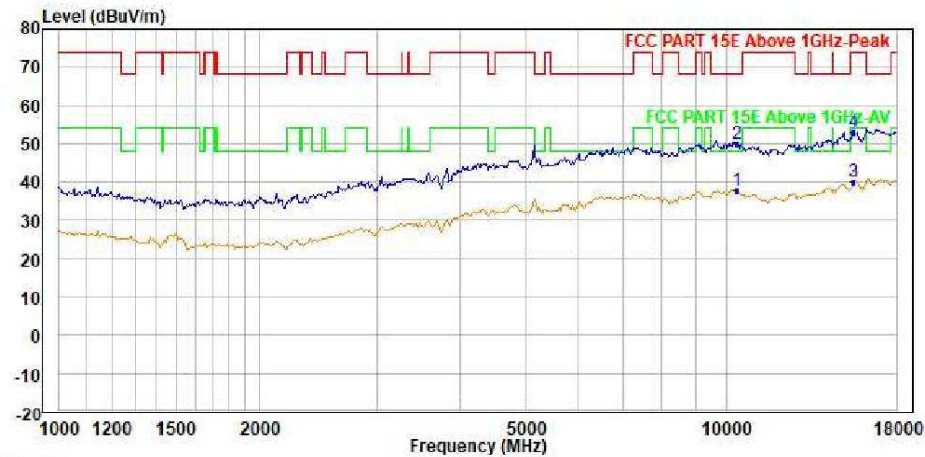


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5180
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10360.000	37.81	34.43	38.45	0.00	11.93	47.00	48.20	-10.39	Average
2	PK10360.000	49.81	46.43	38.45	0.00	11.93	47.00	68.20	-18.39	Peak
3	15540.000	39.89	32.33	41.28	0.00	13.03	46.75	54.00	-14.11	Average
4	15540.000	52.84	45.28	41.28	0.00	13.03	46.75	74.00	-21.16	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

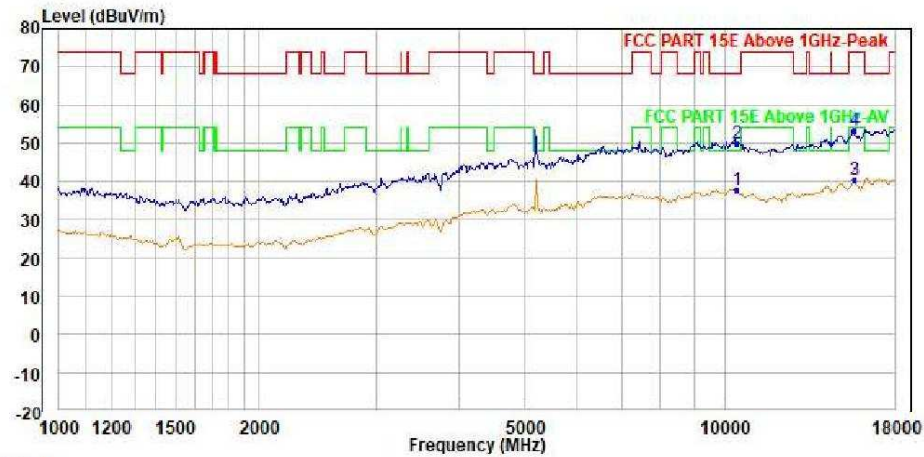


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5220
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10440.000	37.98	34.60	38.59	0.00	11.91	47.12	48.20	-10.22	Average
2	PK10440.000	49.85	46.47	38.59	0.00	11.91	47.12	68.20	-18.35	Peak
3	15660.000	40.32	32.86	41.24	0.00	13.11	46.89	54.00	-13.68	Average
4	15660.000	53.55	46.09	41.24	0.00	13.11	46.89	74.00	-20.45	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

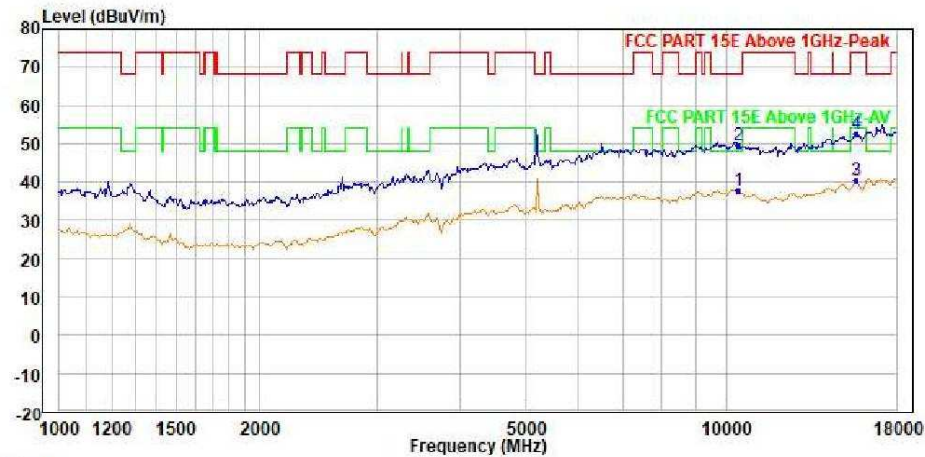


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5220
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10440.000	37.93	34.55	38.59	0.00	11.91	47.12	48.20	-10.27	Average
2	PK10440.000	49.75	46.37	38.59	0.00	11.91	47.12	68.20	-18.45	Peak
3	15660.000	40.35	32.89	41.24	0.00	13.11	46.89	54.00	-13.65	Average
4	15660.000	52.52	45.06	41.24	0.00	13.11	46.89	74.00	-21.48	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

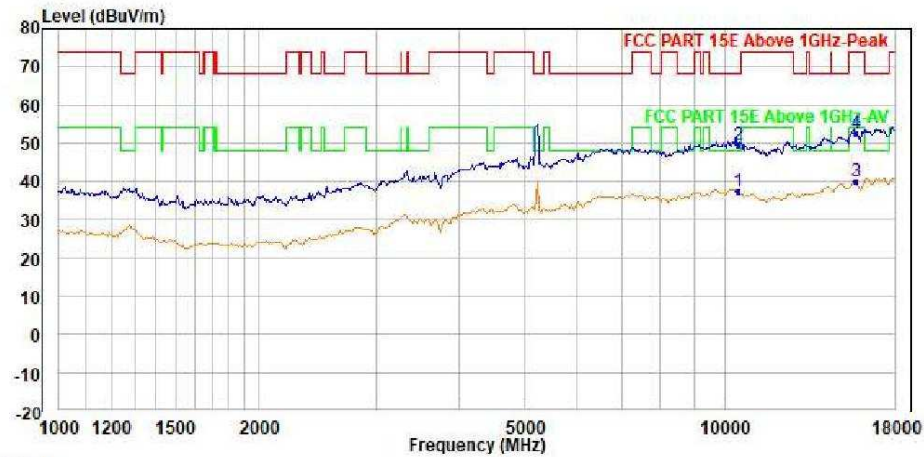


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5240
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10480.000	37.31	33.92	38.66	0.00	11.90	47.17	48.20	-10.89	Average
2	PK10480.000	49.71	46.32	38.66	0.00	11.90	47.17	68.20	-18.49	Peak
3	15720.000	39.90	32.50	41.21	0.00	13.15	46.96	54.00	-14.10	Average
4	15720.000	52.65	45.25	41.21	0.00	13.15	46.96	74.00	-21.35	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

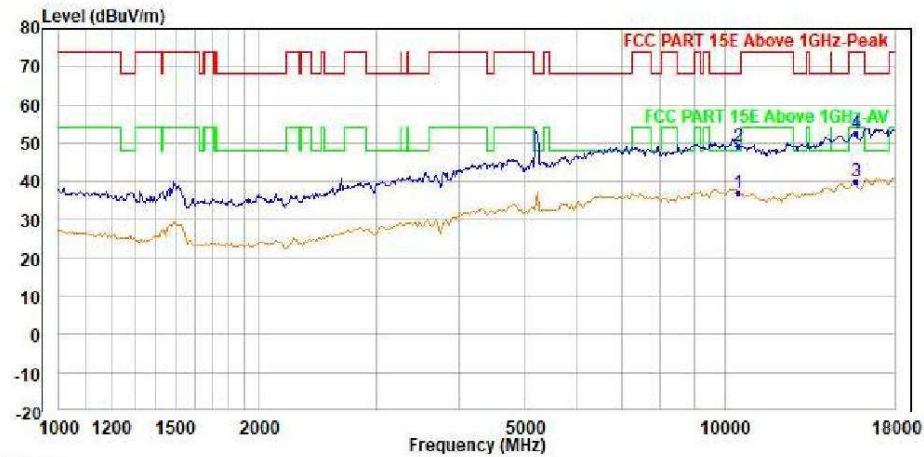


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5240
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10480.000	37.10	33.71	38.66	0.00	11.90	47.17	48.20	-11.10	Average
2	PK10480.000	49.09	45.70	38.66	0.00	11.90	47.17	68.20	-19.11	Peak
3	15720.000	39.90	32.50	41.21	0.00	13.15	46.96	54.00	-14.10	Average
4	15720.000	52.51	45.11	41.21	0.00	13.15	46.96	74.00	-21.49	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

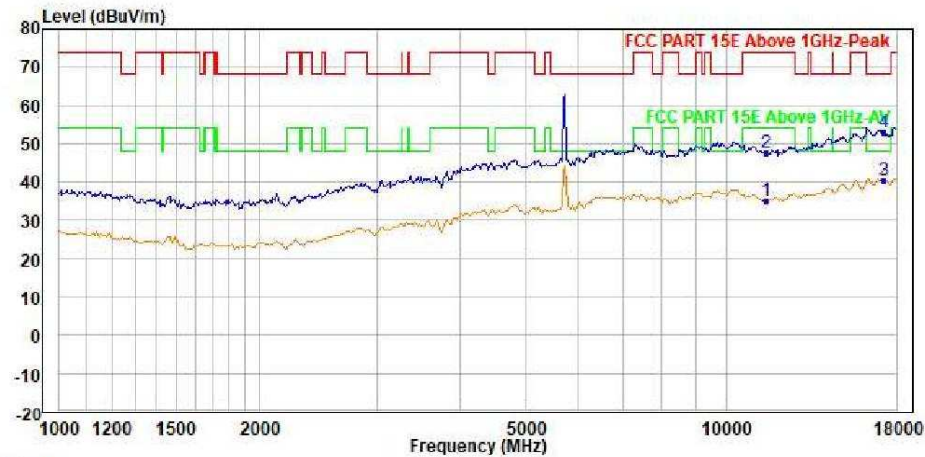


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5745
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11490.000	35.24	33.18	38.70	0.00	12.14	48.78	54.00	-18.76	Average
2	11490.000	47.78	45.72	38.70	0.00	12.14	48.78	74.00	-26.22	Peak
3	PP17235.000	40.58	31.59	41.71	0.00	14.01	46.73	48.20	-7.62	Average
4	PK17235.000	52.84	43.85	41.71	0.00	14.01	46.73	68.20	-15.36	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

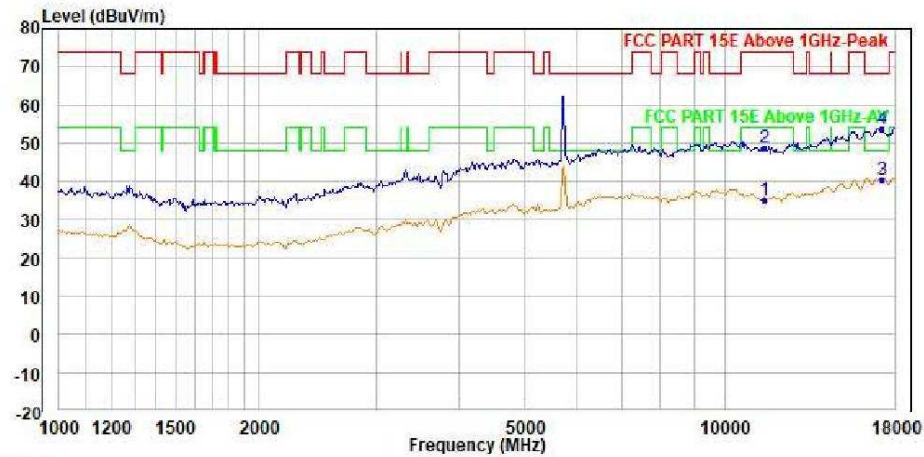


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5745
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11490.000	35.31	33.25	38.70	0.00	12.14	48.78	54.00	-18.69	Average
2	11490.000	48.75	46.69	38.70	0.00	12.14	48.78	74.00	-25.25	Peak
3	PP17235.000	40.62	31.63	41.71	0.00	14.01	46.73	48.20	-7.58	Average
4	PK17235.000	53.89	44.90	41.71	0.00	14.01	46.73	68.20	-14.31	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

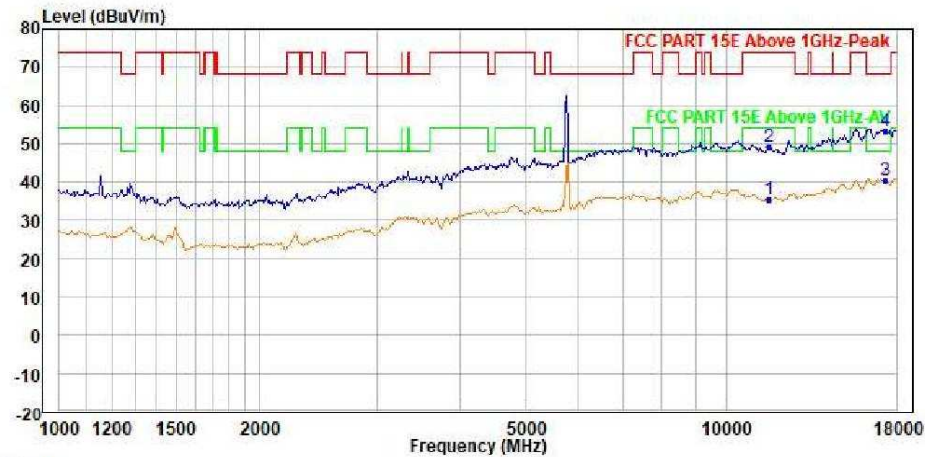


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5785
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11570.000	35.48	33.43	38.78	0.00	12.20	48.93	54.00	-18.52	Average
2	11570.000	49.35	47.30	38.78	0.00	12.20	48.93	74.00	-24.65	Peak
3	PP17355.000	40.57	31.41	41.66	0.00	13.99	46.49	48.20	-7.63	Average
4	PK17355.000	53.48	44.32	41.66	0.00	13.99	46.49	68.20	-14.72	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

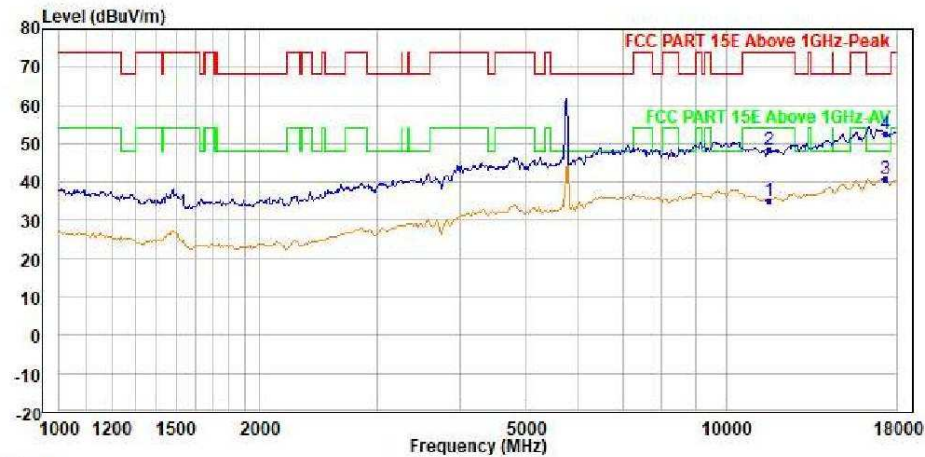

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5785
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11570.000	35.16	33.11	38.78	0.00	12.20	48.93	54.00	-18.84	Average
2	11570.000	48.50	46.45	38.78	0.00	12.20	48.93	74.00	-25.50	Peak
3	PP17355.000	40.68	31.52	41.66	0.00	13.99	46.49	48.20	-7.52	Average
4	PK17355.000	52.51	43.35	41.66	0.00	13.99	46.49	68.20	-15.69	Peak