




Shenzhen UnionTrust Quality and Technology Co., Ltd.

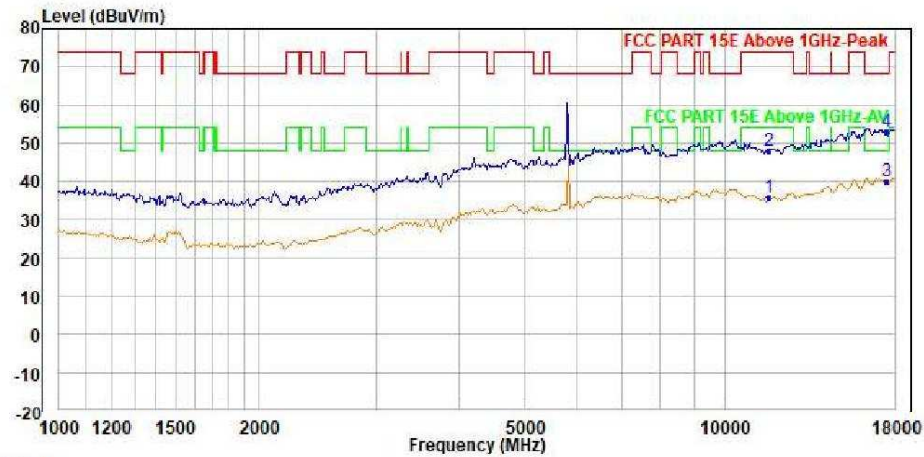


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5825
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11650.000	35.79	33.71	38.88	0.00	12.27	49.07	54.00	-18.21	Average
2	11650.000	48.23	46.15	38.88	0.00	12.27	49.07	74.00	-25.77	Peak
3	PP17475.000	39.98	30.65	41.61	0.00	13.97	46.25	48.20	-8.22	Average
4	PK17475.000	52.83	43.50	41.61	0.00	13.97	46.25	68.20	-15.37	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

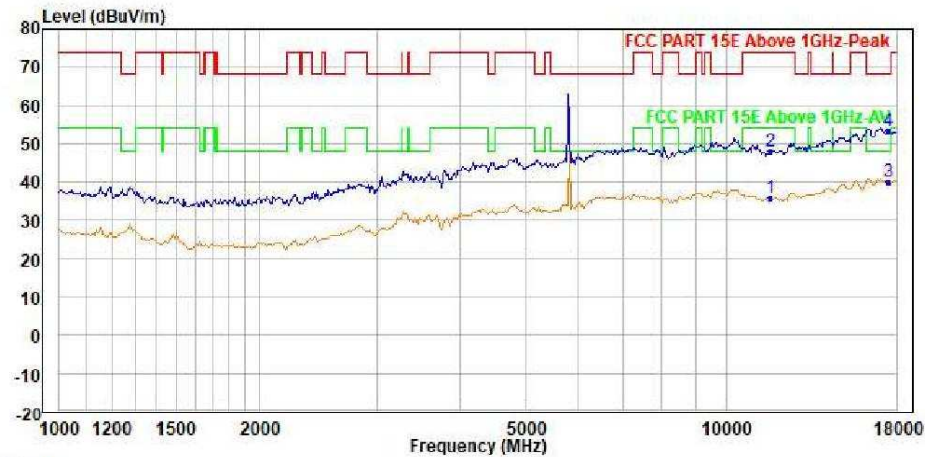


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 25.2(C)/60.4(%)
Press : 99.9kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5825
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11650.000	36.06	33.98	38.88	0.00	12.27	49.07	54.00	-17.94	Average
2	11650.000	48.23	46.15	38.88	0.00	12.27	49.07	74.00	-25.77	Peak
3	PP17475.000	39.98	30.65	41.61	0.00	13.97	46.25	48.20	-8.22	Average
4	PK17475.000	53.57	44.24	41.61	0.00	13.97	46.25	68.20	-14.63	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

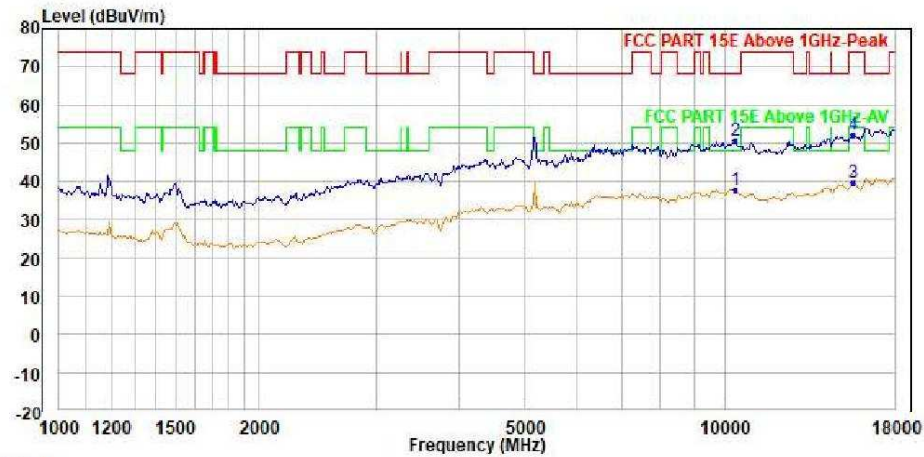


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.0(C)/62.3(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX40_5190
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10380.000	37.89	34.51	38.48	0.00	11.93	47.03	48.20	-10.31	Average
2	PK10380.000	50.60	47.22	38.48	0.00	11.93	47.03	68.20	-17.60	Peak
3	15570.000	39.86	32.32	41.27	0.00	13.05	46.78	54.00	-14.14	Average
4	15570.000	52.28	44.74	41.27	0.00	13.05	46.78	74.00	-21.72	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

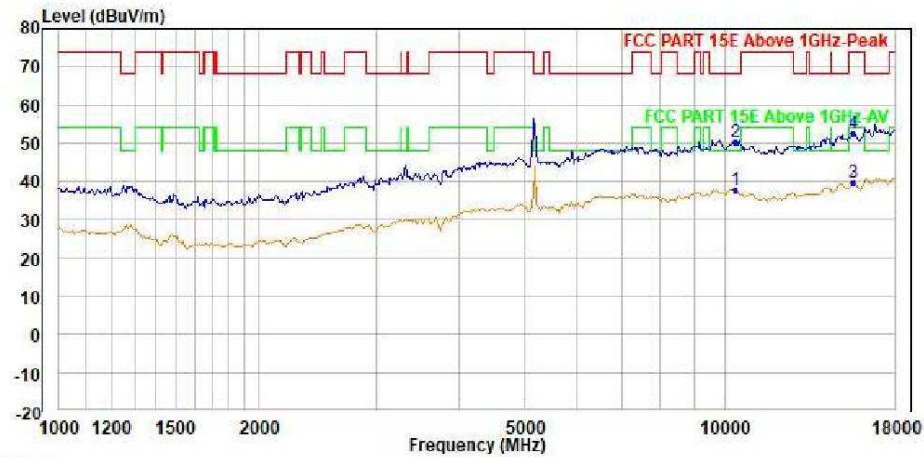


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.0(C)/62.3(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX40_5190
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10380.000	37.97	34.59	38.48	0.00	11.93	47.03	48.20	-10.23	Average
2	PK10380.000	50.28	46.90	38.48	0.00	11.93	47.03	68.20	-17.92	Peak
3	15570.000	39.86	32.32	41.27	0.00	13.05	46.78	54.00	-14.14	Average
4	15570.000	52.52	44.98	41.27	0.00	13.05	46.78	74.00	-21.48	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

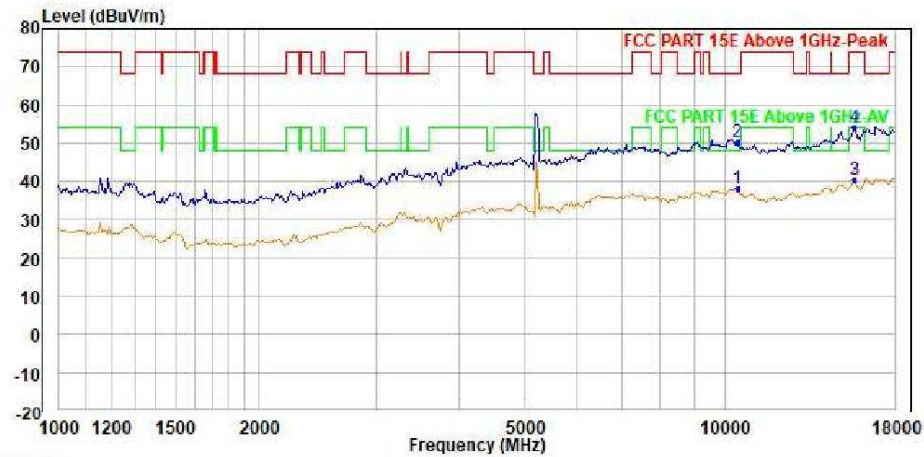


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.0(C)/62.3(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX40_5230
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10460.000	38.11	34.71	38.63	0.00	11.91	47.14	48.20	-10.09	Average
2	PK10460.000	50.28	46.88	38.63	0.00	11.91	47.14	68.20	-17.92	Peak
3	15690.000	40.29	32.87	41.22	0.00	13.13	46.93	54.00	-13.71	Average
4	15690.000	54.03	46.61	41.22	0.00	13.13	46.93	74.00	-19.97	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

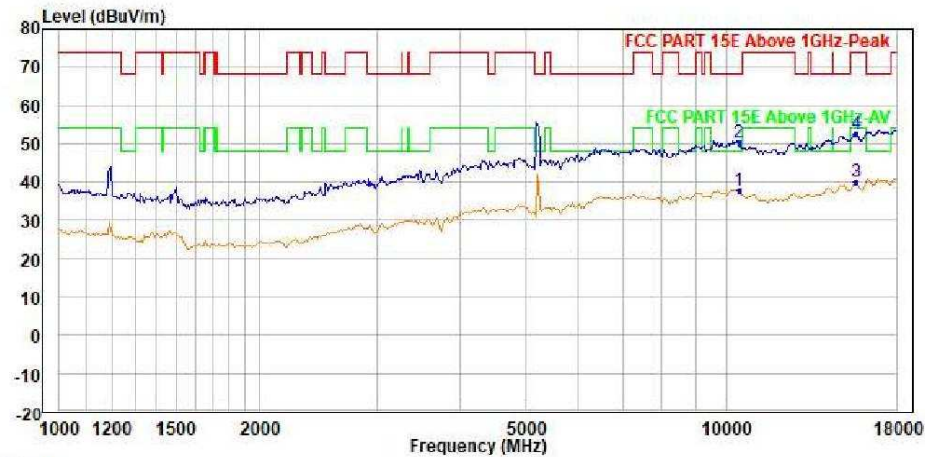


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.0(C)/62.3(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX40_5230
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10460.000	37.98	34.58	38.63	0.00	11.91	47.14	48.20	-10.22	Average
2	PK10460.000	50.36	46.96	38.63	0.00	11.91	47.14	68.20	-17.84	Peak
3	15690.000	40.19	32.77	41.22	0.00	13.13	46.93	54.00	-13.81	Average
4	15690.000	52.70	45.28	41.22	0.00	13.13	46.93	74.00	-21.30	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

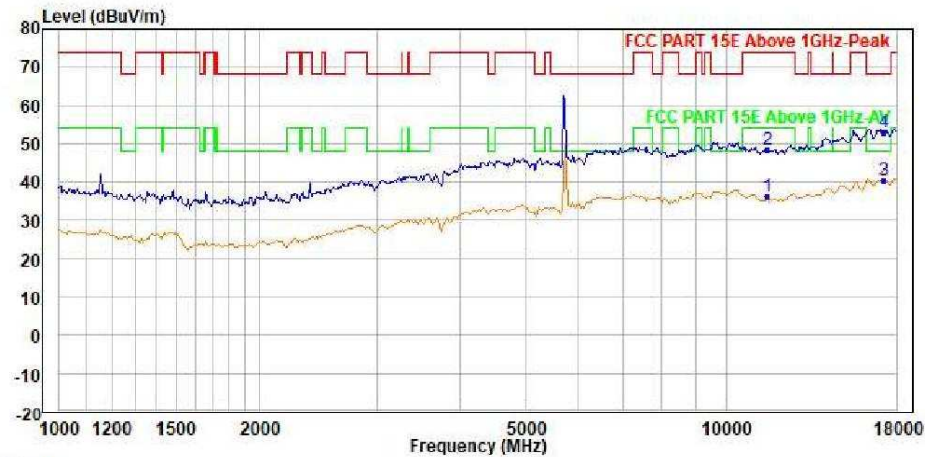


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.0(C)/62.3(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX40_5755
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11510.000	36.15	34.10	38.71	0.00	12.16	48.82	54.00	-17.85	Average
2	11510.000	48.25	46.20	38.71	0.00	12.16	48.82	74.00	-25.75	Peak
3	PP17265.000	40.34	31.31	41.69	0.00	14.01	46.67	48.20	-7.86	Average
4	PK17265.000	53.09	44.06	41.69	0.00	14.01	46.67	68.20	-15.11	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

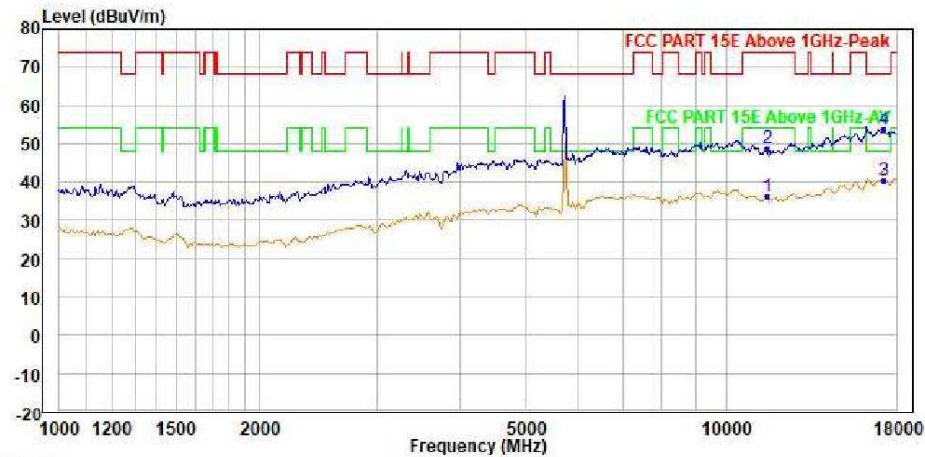


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.0(C)/62.3(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX40_5755
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11510.000	36.43	34.38	38.71	0.00	12.16	48.82	54.00	-17.57	Average
2	11510.000	48.83	46.78	38.71	0.00	12.16	48.82	74.00	-25.17	Peak
3	PP17265.000	40.38	31.35	41.69	0.00	14.01	46.67	48.20	-7.82	Average
4	PK17265.000	53.68	44.65	41.69	0.00	14.01	46.67	68.20	-14.52	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

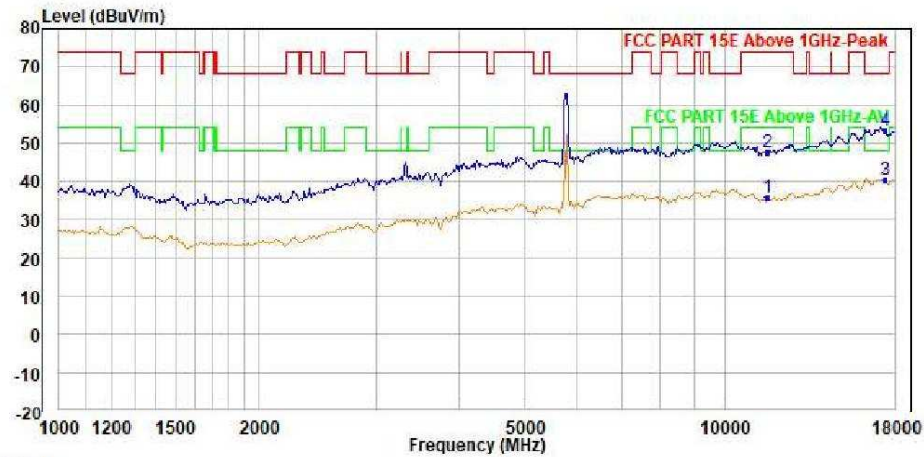


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.0(C)/62.3(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX40_5795
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11590.000	35.78	33.71	38.81	0.00	12.22	48.96	54.00	-18.22	Average
2	11590.000	47.78	45.71	38.81	0.00	12.22	48.96	74.00	-26.22	Peak
3	PP17385.000	40.45	31.24	41.65	0.00	13.99	46.43	48.20	-7.75	Average
4	PK17385.000	53.43	44.22	41.65	0.00	13.99	46.43	68.20	-14.77	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

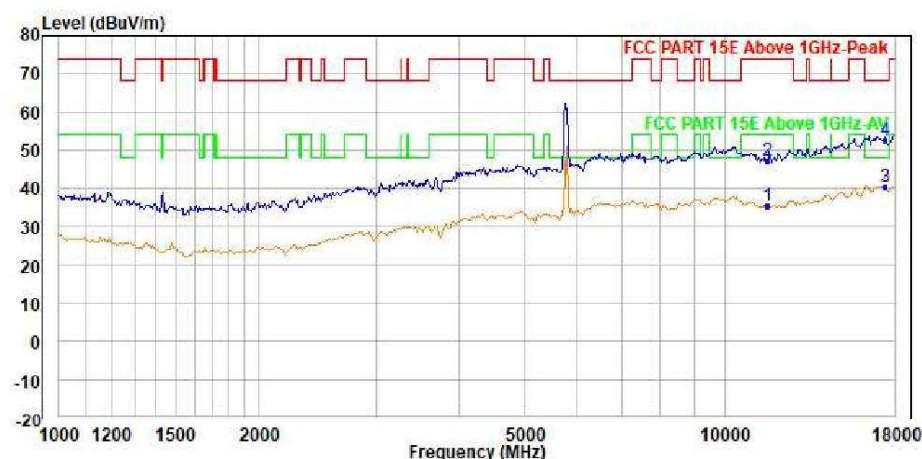


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.0(C)/62.3(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX40_5795
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11590.000	35.41	33.34	38.81	0.00	12.22	48.96	54.00	-18.59	Average
2	11590.000	47.20	45.13	38.81	0.00	12.22	48.96	74.00	-26.80	Peak
3	PP17385.000	40.41	31.20	41.65	0.00	13.99	46.43	48.20	-7.79	Average
4	PK17385.000	52.65	43.44	41.65	0.00	13.99	46.43	68.20	-15.55	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

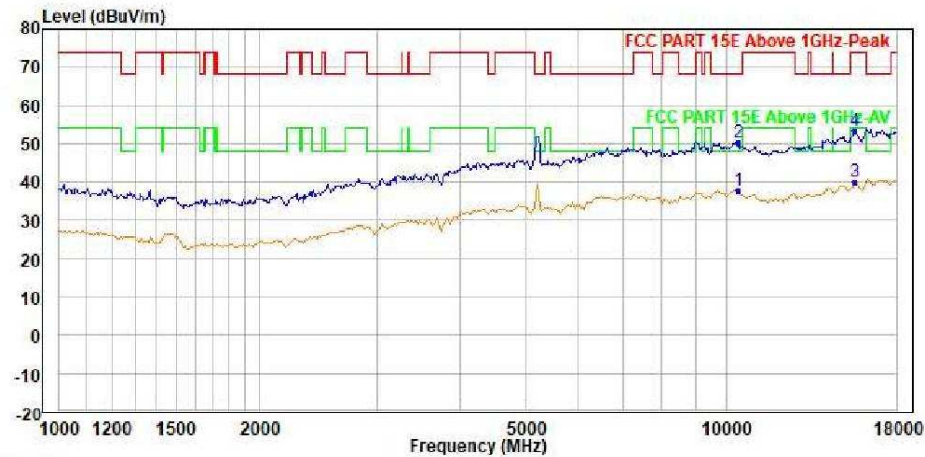


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.0(C)/62.3(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX80_5210
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10420.000	37.84	34.45	38.56	0.00	11.92	47.09	48.20	-10.36	Average
2	PK10420.000	50.26	46.87	38.56	0.00	11.92	47.09	68.20	-17.94	Peak
3	15630.000	40.19	32.71	41.25	0.00	13.09	46.86	54.00	-13.81	Average
4	15630.000	53.54	46.06	41.25	0.00	13.09	46.86	74.00	-20.46	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

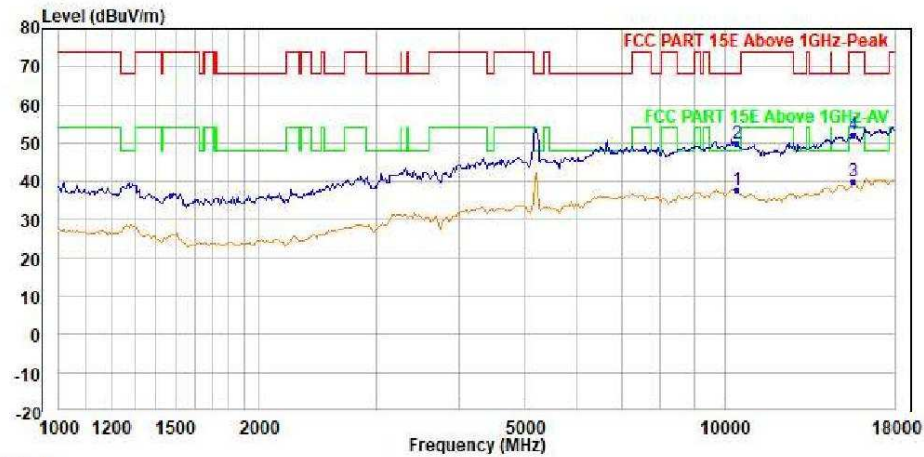


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.0(C)/62.3(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX80_5210
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP10420.000	37.90	34.51	38.56	0.00	11.92	47.09	48.20	-10.30	Average
2	PK10420.000	49.98	46.59	38.56	0.00	11.92	47.09	68.20	-18.22	Peak
3	15630.000	40.19	32.71	41.25	0.00	13.09	46.86	54.00	-13.81	Average
4	15630.000	52.10	44.62	41.25	0.00	13.09	46.86	74.00	-21.90	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

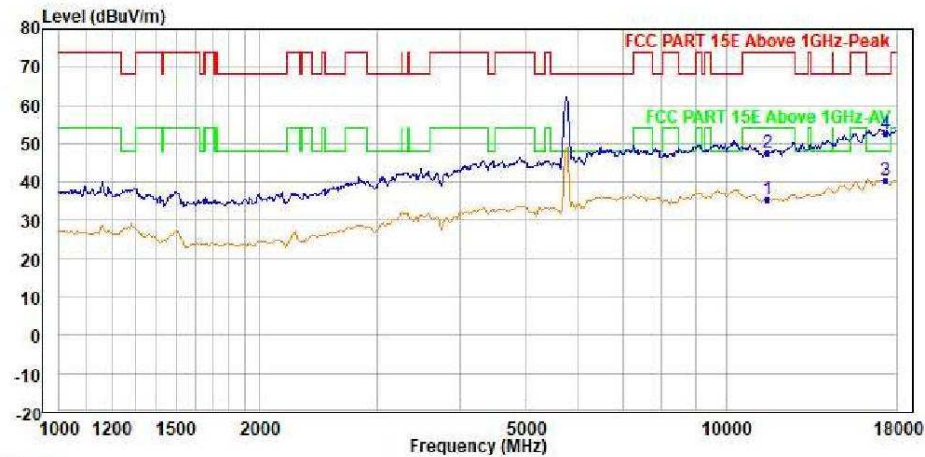


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.0(C)/62.3(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX80_5775
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11550.000	35.49	33.43	38.76	0.00	12.19	48.89	54.00	-18.51	Average
2	11550.000	47.77	45.71	38.76	0.00	12.19	48.89	74.00	-26.23	Peak
3	PP17325.000	40.34	31.22	41.67	0.00	14.00	46.55	48.20	-7.86	Average
4	PK17325.000	52.51	43.39	41.67	0.00	14.00	46.55	68.20	-15.69	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

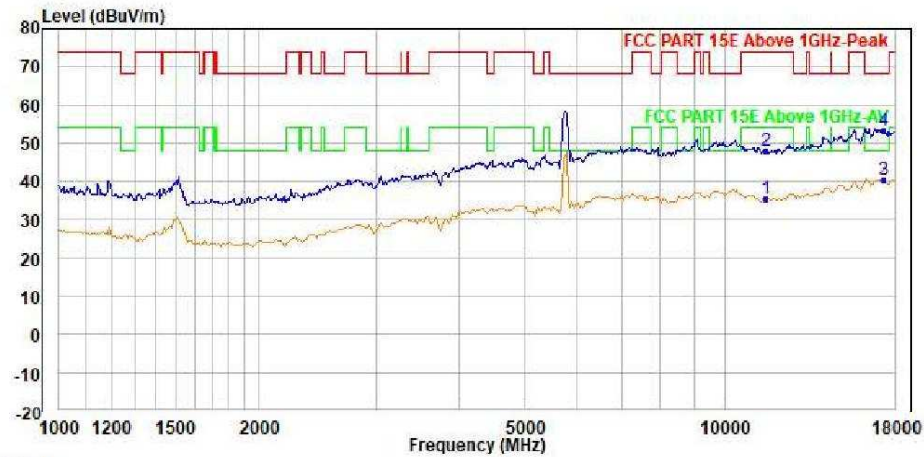


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.0(C)/62.3(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX80_5775
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	11550.000	35.46	33.40	38.76	0.00	12.19	48.89	54.00	-18.54	Average
2	11550.000	47.94	45.88	38.76	0.00	12.19	48.89	74.00	-26.06	Peak
3	PP17325.000	40.30	31.18	41.67	0.00	14.00	46.55	48.20	-7.90	Average
4	PK17325.000	53.27	44.15	41.67	0.00	14.00	46.55	68.20	-14.93	Peak

Appendix A.6: Test Results of Radiated Emissions in Restricted Bands U-NII-1 Band



Shenzhen UnionTrust Quality and Technology Co., Ltd.

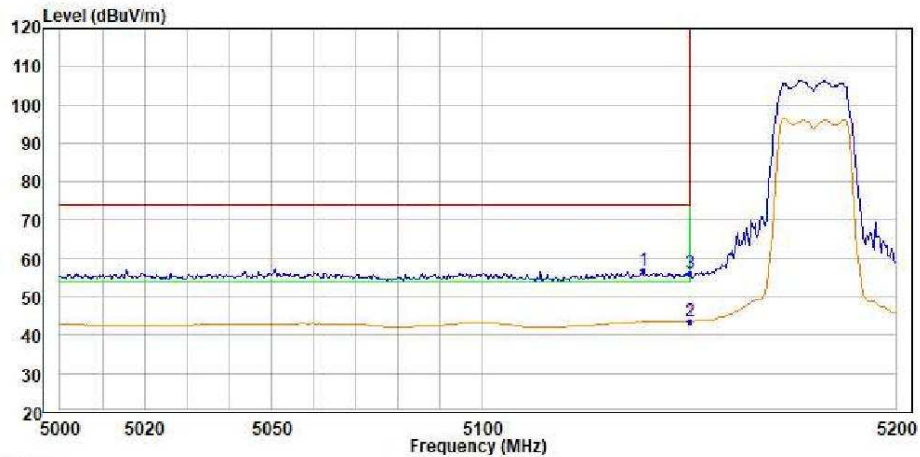


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_A_5180
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PK 5138.677	56.74	48.43	34.61	10.00	9.46	45.76	74.00	-17.26	Peak
2	PP 5150.000	43.65	35.32	34.62	10.00	9.46	45.75	54.00	-10.35	Average
3	5150.000	55.94	47.61	34.62	10.00	9.46	45.75	74.00	-18.06	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

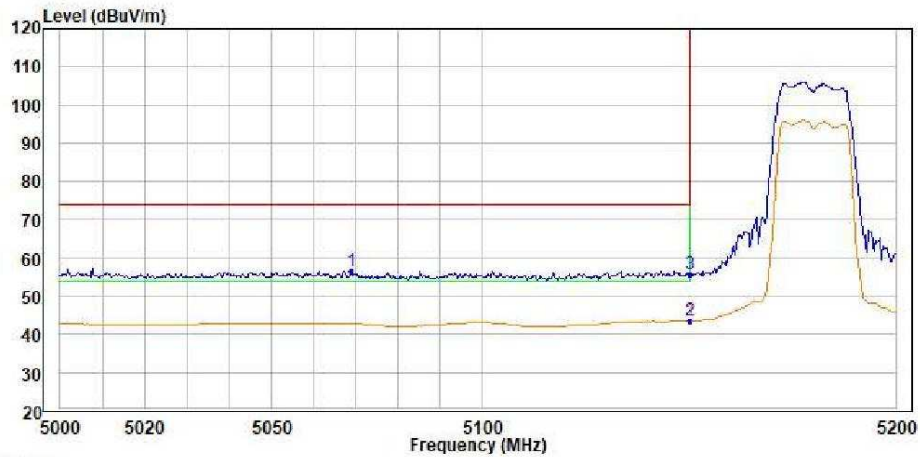


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_A_5180
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PK 5068.938	56.63	48.47	34.56	10.00	9.43	45.83	74.00	-17.37	Peak
2	PP 5150.000	43.65	35.32	34.62	10.00	9.46	45.75	54.00	-10.35	Average
3	5150.000	55.60	47.27	34.62	10.00	9.46	45.75	74.00	-18.40	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

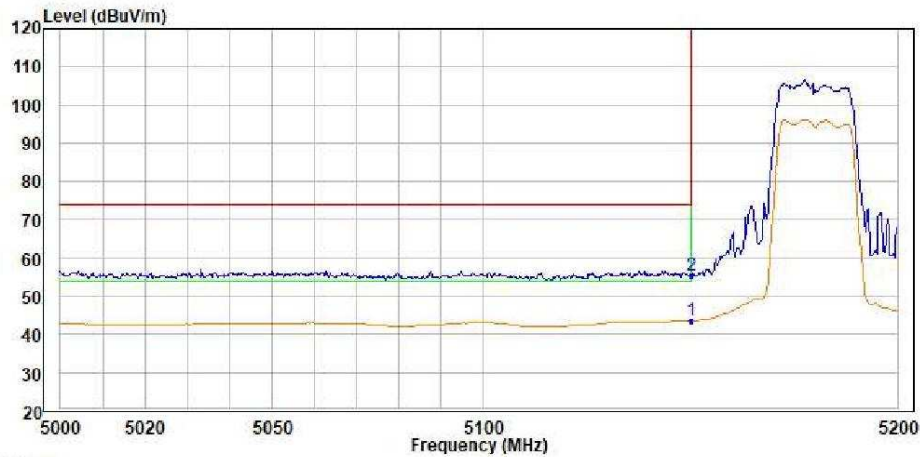


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5180
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 5150.000	43.65	35.32	34.62	10.00	9.46	45.75	54.00	-10.35	Average
2	PK 5150.000	55.52	47.19	34.62	10.00	9.46	45.75	74.00	-18.48	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

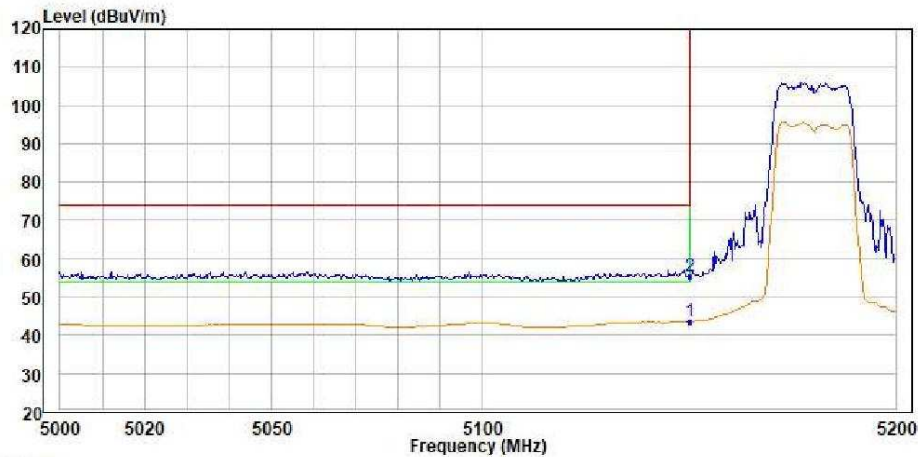


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5180
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preampl Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 5150.000	43.65	35.32	34.62	10.00	9.46	45.75	54.00	-10.35	Average
2	PK 5150.000	55.27	46.94	34.62	10.00	9.46	45.75	74.00	-18.73	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

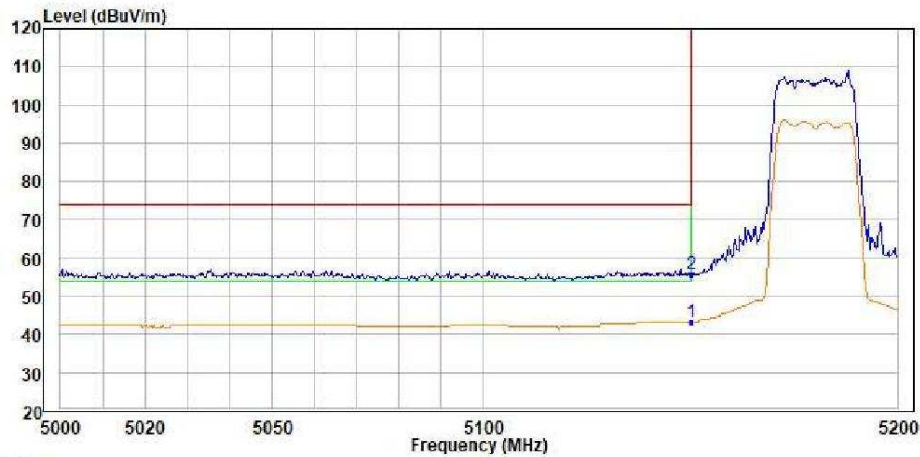


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5180
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamplifier Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 5150.000	43.29	34.96	34.62	10.00	9.46	45.75	54.00	-10.71	Average
2	PK 5150.000	55.63	47.30	34.62	10.00	9.46	45.75	74.00	-18.37	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

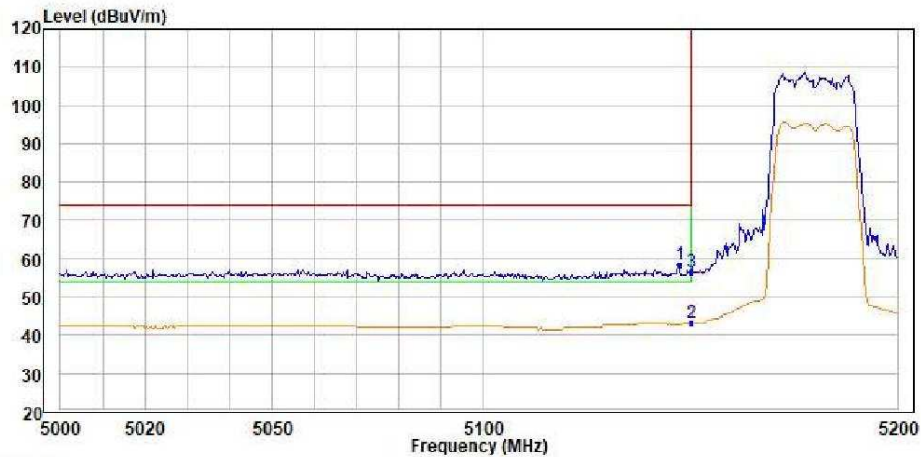


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5180
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preampl Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PK 5147.094	58.43	50.10	34.62	10.00	9.46	45.75	74.00	-15.57	Peak
2	PP 5150.000	43.29	34.96	34.62	10.00	9.46	45.75	54.00	-10.71	Average
3	5150.000	56.32	47.99	34.62	10.00	9.46	45.75	74.00	-17.68	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

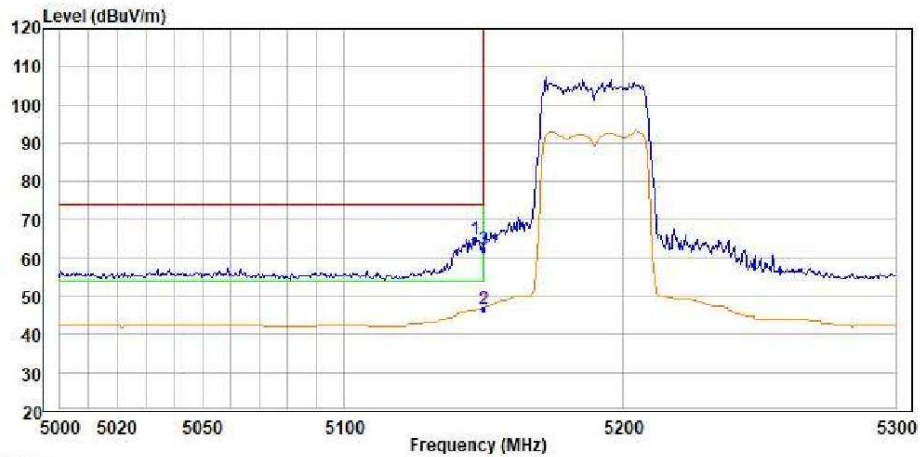


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX40_5190
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PK 5146.693	64.84	56.51	34.62	10.00	9.46	45.75	74.00	-9.16	Peak
2	PP 5150.000	46.61	38.28	34.62	10.00	9.46	45.75	54.00	-7.39	Average
3	5150.000	62.28	53.95	34.62	10.00	9.46	45.75	74.00	-11.72	Peak

		Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
		MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP	5146.693	68.00	59.67	34.62	10.00	9.46	45.75	74.00	-6.00	Peak
2	AV	5150.000	47.37	39.04	34.62	10.00	9.46	45.75	54.00	-6.63	Average
3		5150.000	64.97	56.64	34.62	10.00	9.46	45.75	74.00	-9.03	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

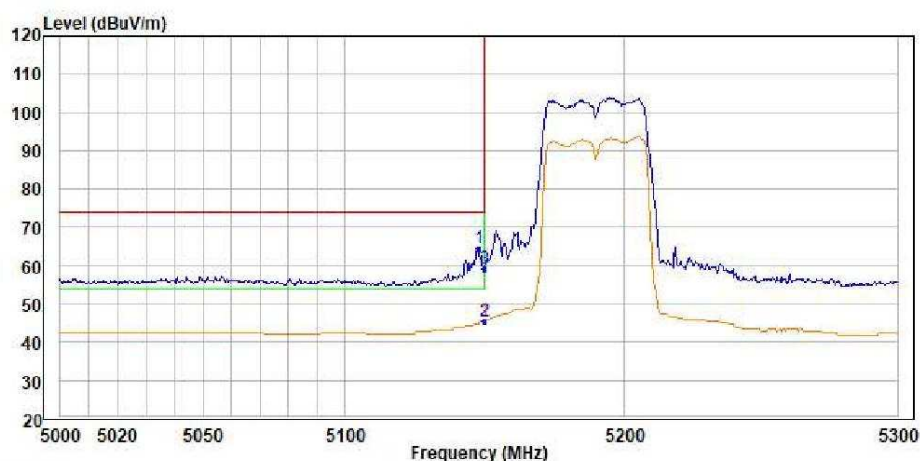


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC40_5190
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PK 5147.896	64.64	56.31	34.62	10.00	9.46	45.75	74.00	-9.36	Peak
2	PP 5150.000	45.34	37.01	34.62	10.00	9.46	45.75	54.00	-8.66	Average
3	5150.000	59.11	50.78	34.62	10.00	9.46	45.75	74.00	-14.89	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

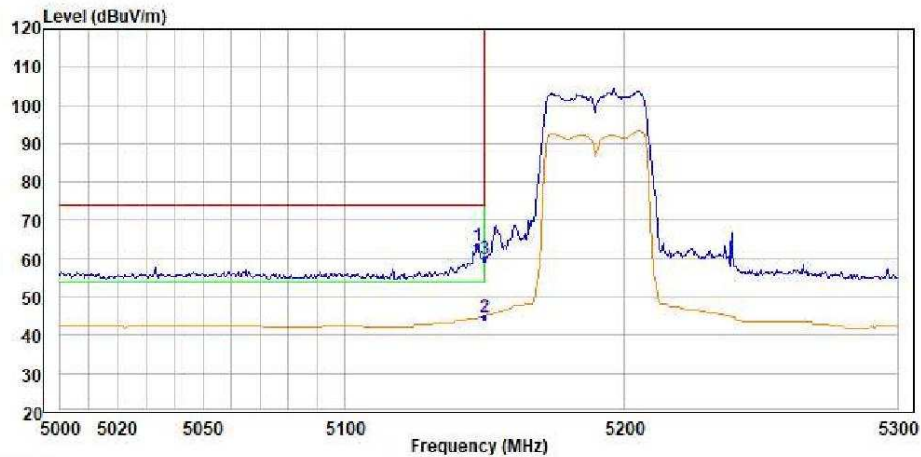


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC40_5190
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PK 5147.294	63.36	55.03	34.62	10.00	9.46	45.75	74.00	-10.64	Peak
2	PP 5150.000	44.87	36.54	34.62	10.00	9.46	45.75	54.00	-9.13	Average
3	5150.000	59.87	51.54	34.62	10.00	9.46	45.75	74.00	-14.13	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

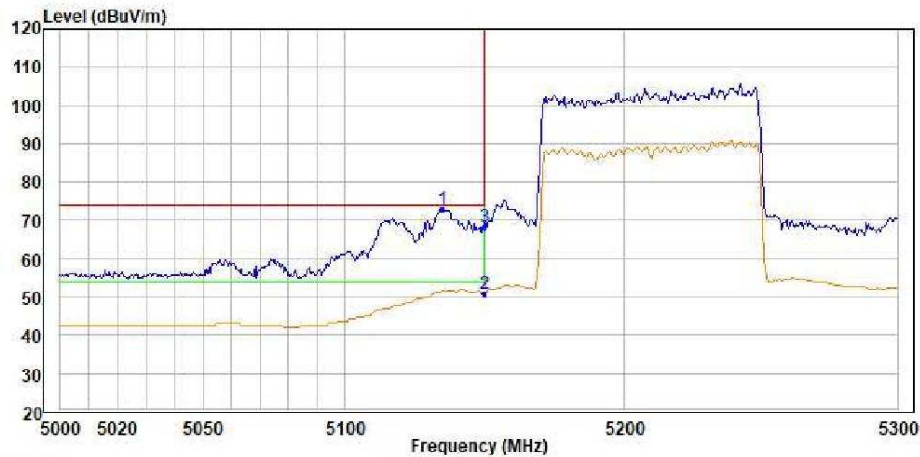


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX80_5210
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 5134.669	72.93	64.63	34.61	10.00	9.46	45.77	74.00	-1.07	Peak
2	AV 5150.000	50.89	42.56	34.62	10.00	9.46	45.75	54.00	-3.11	Average
3	5150.000	68.15	59.82	34.62	10.00	9.46	45.75	74.00	-5.85	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

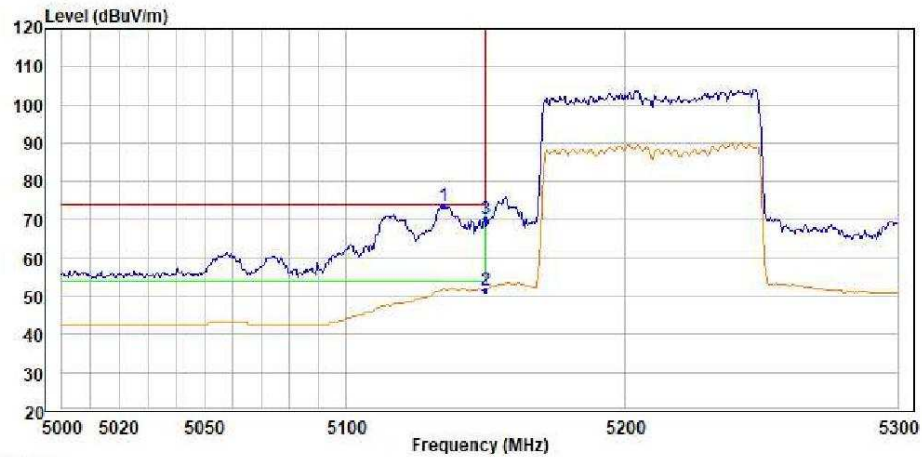


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX80_5210
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 5134.669	73.54	65.24	34.61	10.00	9.46	45.77	74.00	-0.46	Peak
2	AV 5150.000	51.59	43.26	34.62	10.00	9.46	45.75	54.00	-2.41	Average
3	5150.000	70.16	61.83	34.62	10.00	9.46	45.75	74.00	-3.84	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

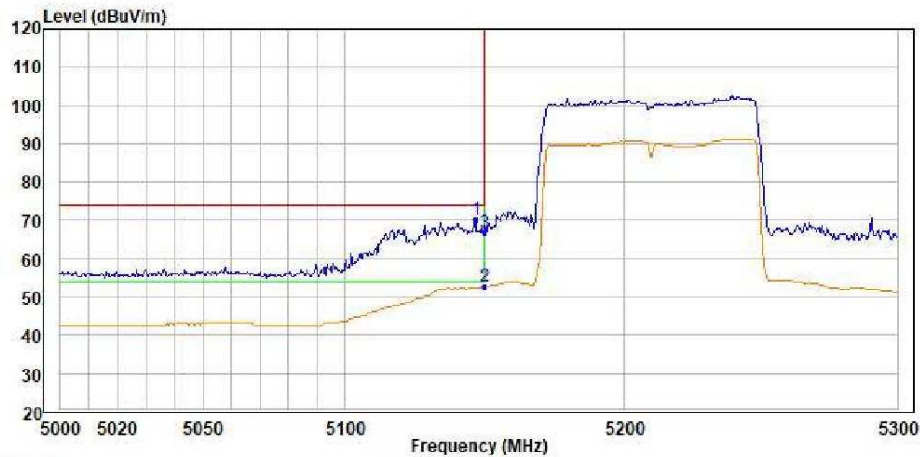


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC80_5210
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PK 5146.693	70.29	61.96	34.62	10.00	9.46	45.75	74.00	-3.71	Peak
2	PP 5150.000	52.63	44.30	34.62	10.00	9.46	45.75	54.00	-1.37	Average
3	5150.000	66.89	58.56	34.62	10.00	9.46	45.75	74.00	-7.11	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

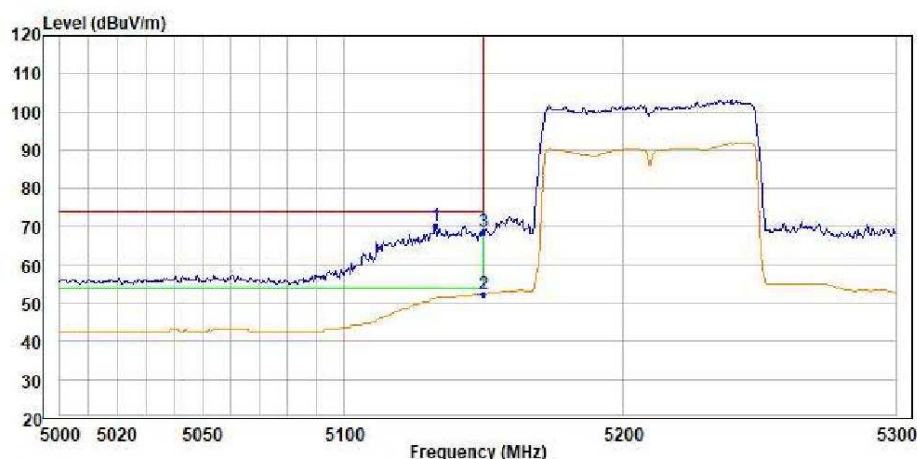


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC80_5210
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PK 5132.866	70.15	61.86	34.61	10.00	9.45	45.77	74.00	-3.85	Peak
2	PP 5150.000	52.43	44.10	34.62	10.00	9.46	45.75	54.00	-1.57	Average
3	5150.000	68.64	60.31	34.62	10.00	9.46	45.75	74.00	-5.36	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

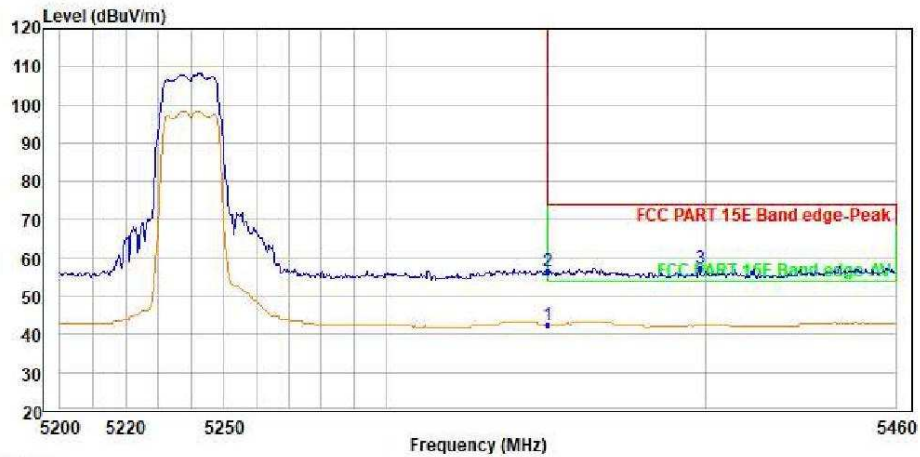


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_A_5240
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	5350.000	42.49	33.72	34.78	10.00	9.54	45.55	54.00	-11.51	Average
2	5350.000	56.41	47.64	34.78	10.00	9.54	45.55	74.00	-17.59	Peak
3 PK	5397.996	57.20	48.32	34.82	10.00	9.56	45.50	74.00	-16.80	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

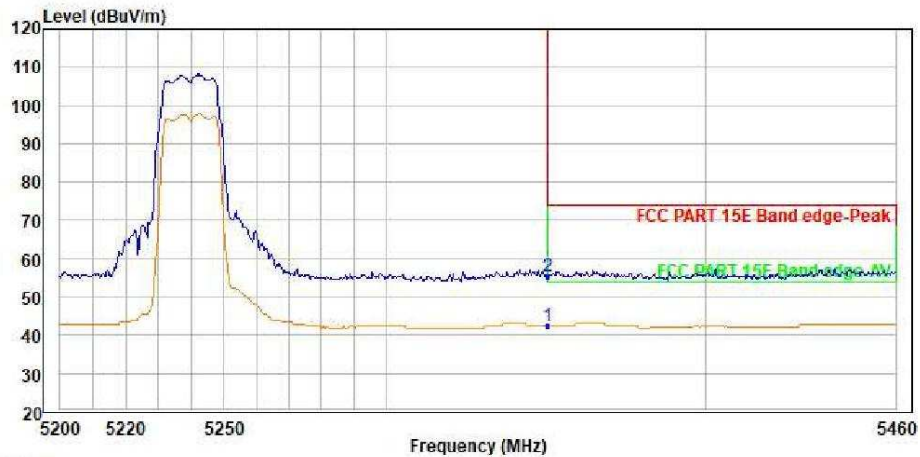


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_A_5240
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 5350.000	42.49	33.72	34.78	10.00	9.54	45.55	54.00	-11.51	Average
2	PK 5350.000	55.34	46.57	34.78	10.00	9.54	45.55	74.00	-18.66	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

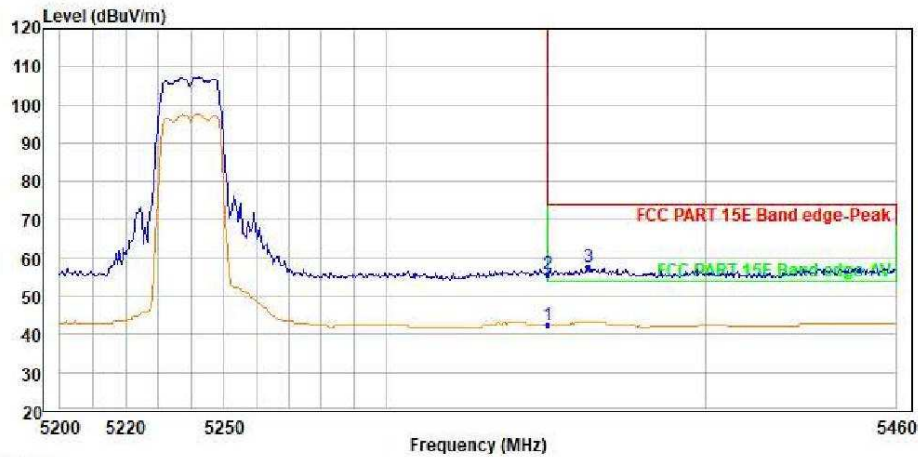


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5240
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamplifier	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	5350.000	42.49	33.72	34.78	10.00	9.54	45.55	54.00	-11.51	Average
2	5350.000	55.79	47.02	34.78	10.00	9.54	45.55	74.00	-18.21	Peak
3 PK	5363.086	57.53	48.73	34.79	10.00	9.55	45.54	74.00	-16.47	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

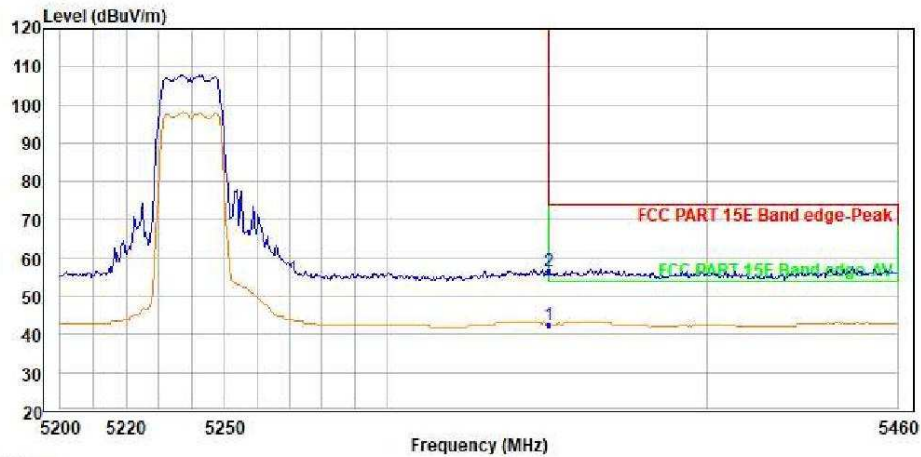


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5240
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 5350.000	42.49	33.72	34.78	10.00	9.54	45.55	54.00	-11.51	Average
2	PK 5350.000	56.53	47.76	34.78	10.00	9.54	45.55	74.00	-17.47	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

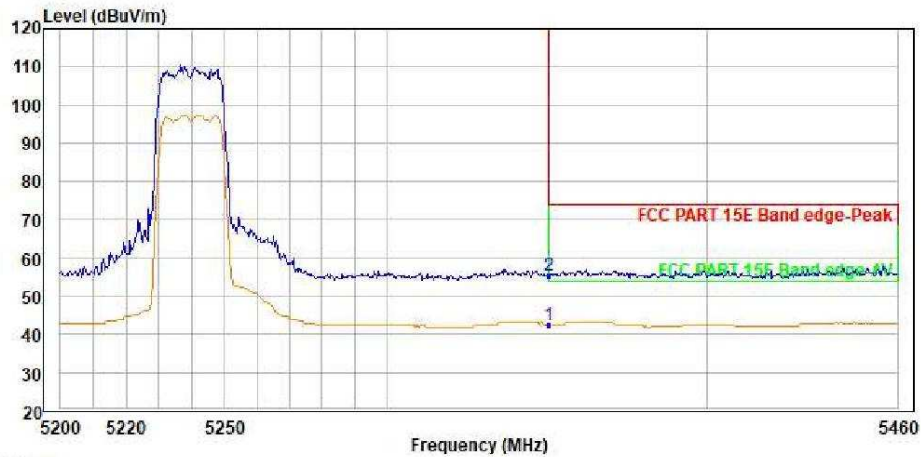


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5240
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 5350.000	42.49	33.72	34.78	10.00	9.54	45.55	54.00	-11.51	Average
2	PK 5350.000	55.45	46.68	34.78	10.00	9.54	45.55	74.00	-18.55	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

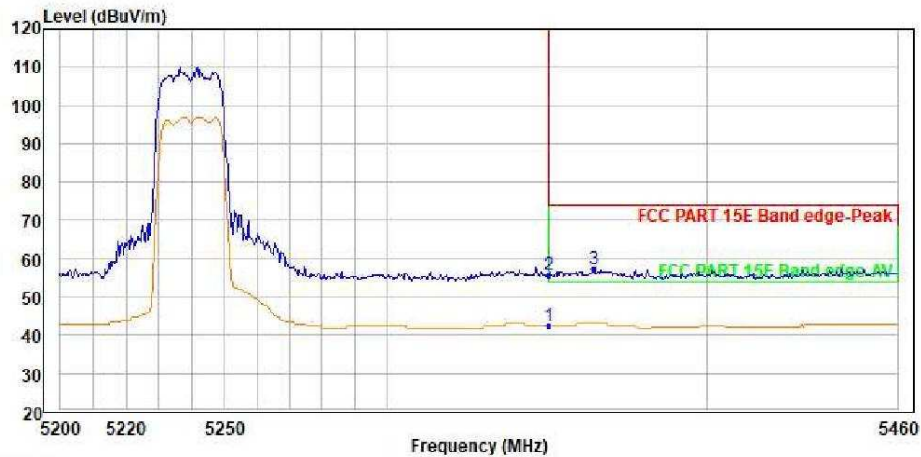


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5240
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	5350.000	42.49	33.72	34.78	10.00	9.54	45.55	54.00	-11.51	Average
2	5350.000	55.78	47.01	34.78	10.00	9.54	45.55	74.00	-18.22	Peak
3 PK	5364.128	57.08	48.28	34.79	10.00	9.55	45.54	74.00	-16.92	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

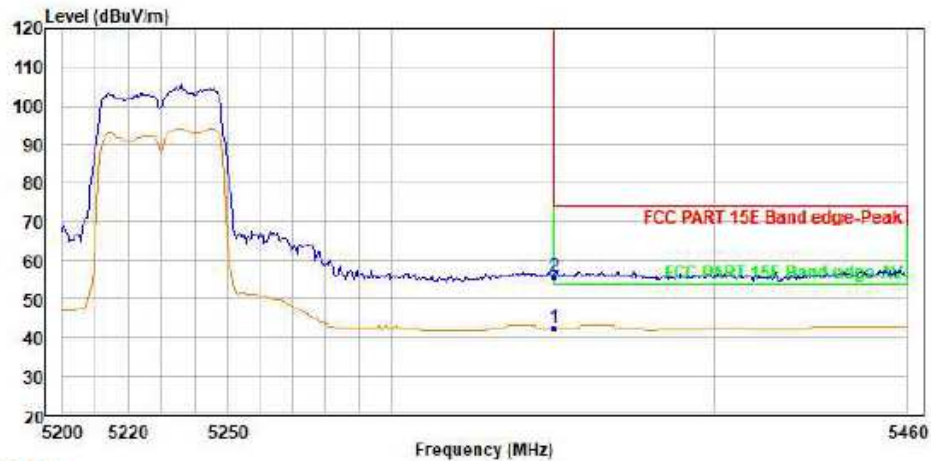

Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC40_5230
Remark :

Freq	Level	Read	Ant	Aux	Cable	Preamp	Limit	Over	
MHz	dBuV/m	Level	Factor	Factor	Loss	Factor	Line	Limit	Remark
		dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP 5350.000	42.49	33.72	34.78	10.00	9.54	45.55	54.00	-11.51	Average
2 PK 5350.000	55.61	46.84	34.78	10.00	9.54	45.55	74.00	-18.39	Peak