




Shenzhen UnionTrust Quality and Technology Co., Ltd.

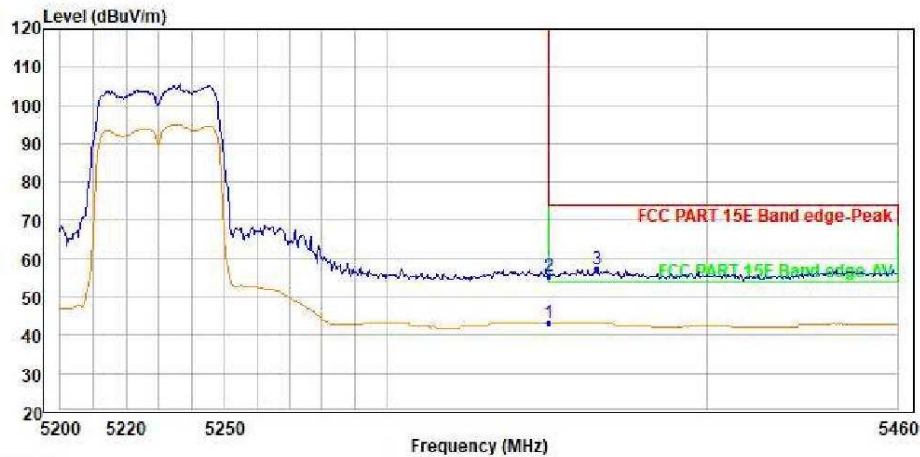


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC40_5230
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	5350.000	43.13	34.36	34.78	10.00	9.54	45.55	54.00	-10.87	Average
2	5350.000	55.28	46.51	34.78	10.00	9.54	45.55	74.00	-18.72	Peak
3 PK	5365.170	57.13	48.32	34.79	10.00	9.55	45.53	74.00	-16.87	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

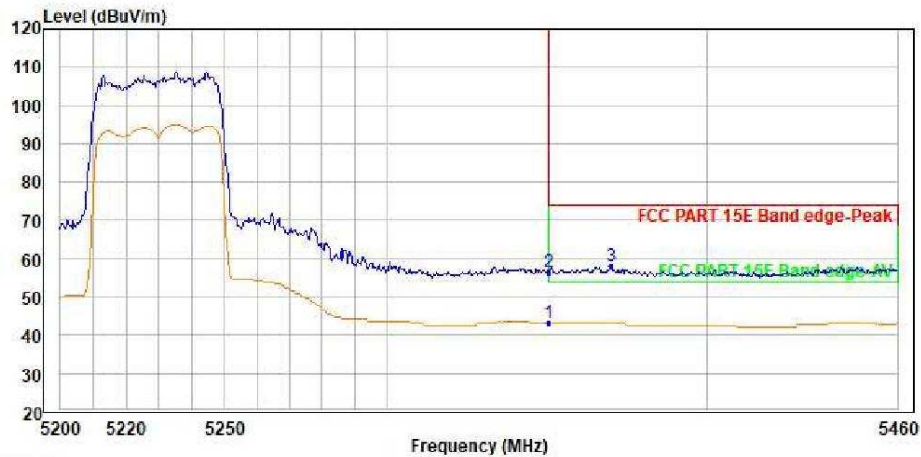


Trace: 1
Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX40_5230
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	5350.000	43.13	34.36	34.78	10.00	9.54	45.55	54.00	-10.87	Average
2	5350.000	56.39	47.62	34.78	10.00	9.54	45.55	74.00	-17.61	Peak
3 PK	5369.860	58.01	49.19	34.80	10.00	9.55	45.53	74.00	-15.99	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

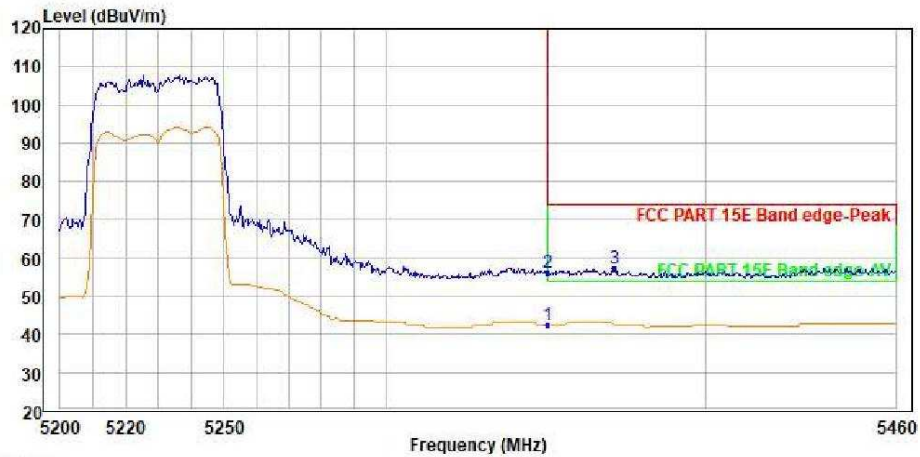


Trace: 1
Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX40_5230
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP	5350.000	42.49	33.72	34.78	10.00	9.54	45.55	54.00	-11.51	Average
2	5350.000	56.13	47.36	34.78	10.00	9.54	45.55	74.00	-17.87	Peak
3 PK	5370.902	57.11	48.29	34.80	10.00	9.55	45.53	74.00	-16.89	Peak

U-NII-3 Band



Shenzhen UnionTrust Quality and Technology Co., Ltd.

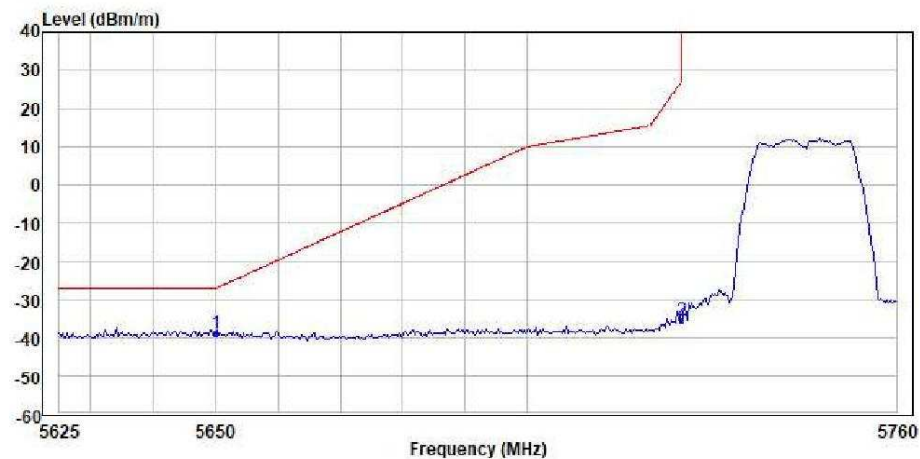


Condition : 3m Horizontal
Temp.(C)/Hum.(%) : 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_A_5745
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	PP 5650.000	-38.64	-59.85	35.08	10.00	21.41	45.28	-27.00	-11.64	Peak
2	5725.000	-35.27	-56.66	35.17	10.00	21.44	45.22	27.00	-62.27	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

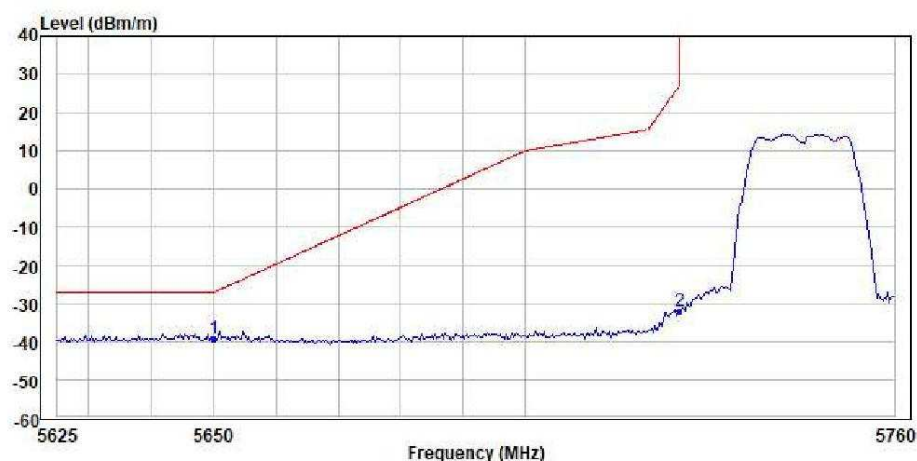


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_A_5745
Remark :

		Read	Ant	Aux	Cable	Preamp	Limit	Over	
Freq	Level	Level	Factor	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1 PP 5650.000	-39.14	-60.35	35.08	10.00	21.41	45.28	-27.00	-12.14	Peak
2 5725.000	-31.92	-53.31	35.17	10.00	21.44	45.22	27.00	-58.92	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

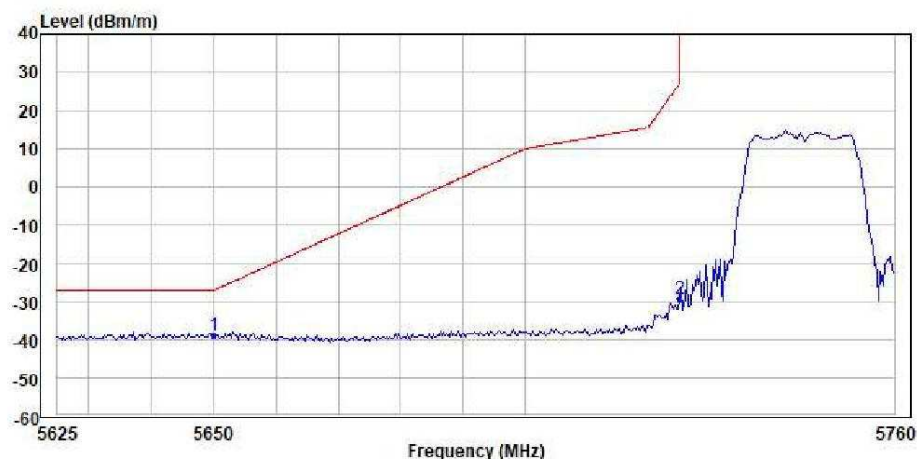


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5745
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	PP 5650.000	-38.78	-59.99	35.08	10.00	21.41	45.28	-27.00	-11.78	Peak
2	5725.000	-29.20	-50.59	35.17	10.00	21.44	45.22	27.00	-56.20	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

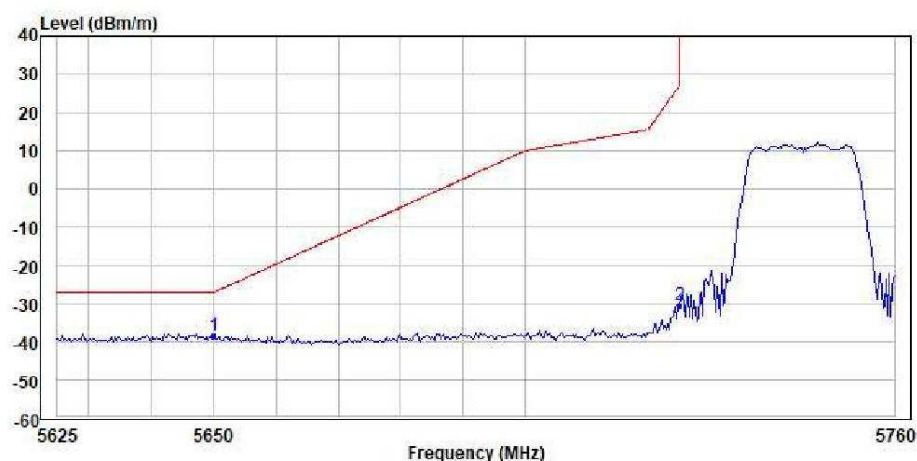


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5745
Remark :

		Read	Ant	Aux	Cable	Preamp	Limit	Over	
Freq	Level	Level	Factor	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1 PP 5650.000	-38.24	-59.45	35.08	10.00	21.41	45.28	-27.00	-11.24	Peak
2 5725.000	-30.45	-51.84	35.17	10.00	21.44	45.22	27.00	-57.45	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

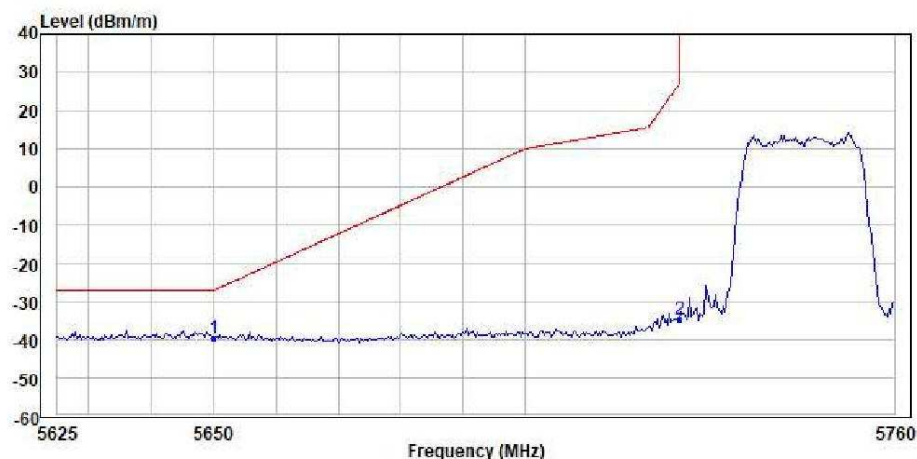


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5745
Remark :

		Read	Ant	Aux	Cable	Preamp	Limit	Over	
Freq	Level	Level	Factor	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1 PP 5650.000	-39.63	-60.84	35.08	10.00	21.41	45.28	-27.00	-12.63	Peak
2 5725.000	-34.47	-55.86	35.17	10.00	21.44	45.22	27.00	-61.47	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

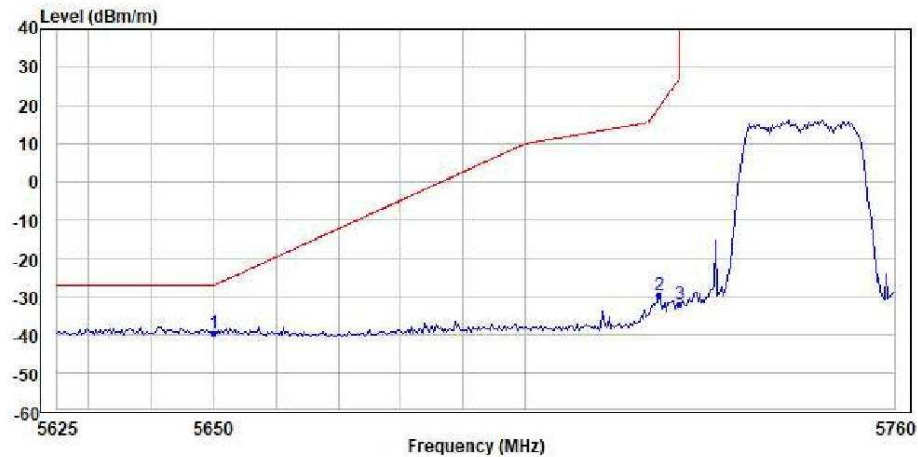


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5745
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1 PP	5650.000	-39.45	-60.66	35.08	10.00	21.41	45.28	-27.00	-12.45	Peak
2	5721.854	-29.40	-50.79	35.17	10.00	21.44	45.22	19.83	-49.23	Peak
3	5725.000	-31.84	-53.23	35.17	10.00	21.44	45.22	27.00	-58.84	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

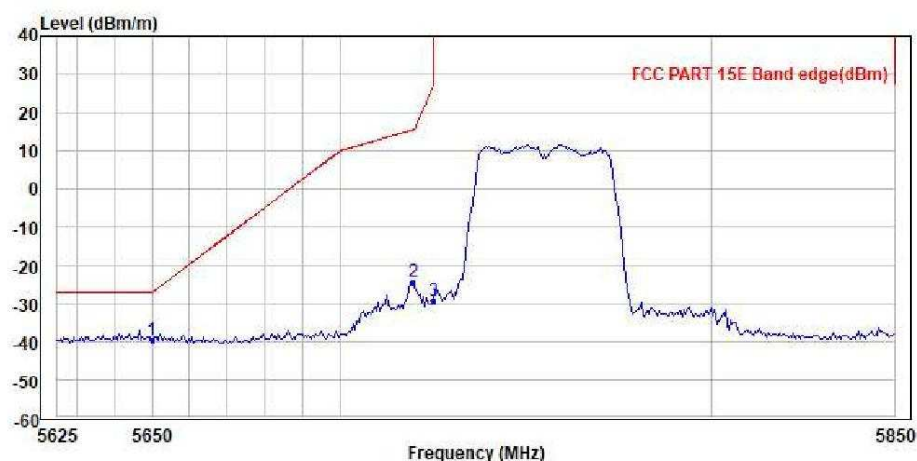


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC40_5755
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	PP 5650.000	-39.43	-60.64	35.08	10.00	21.41	45.28	-27.00	-12.43	Peak
2	5719.689	-24.23	-45.61	35.16	10.00	21.44	45.22	15.51	-39.74	Peak
3	5725.000	-29.30	-50.69	35.17	10.00	21.44	45.22	27.00	-56.30	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

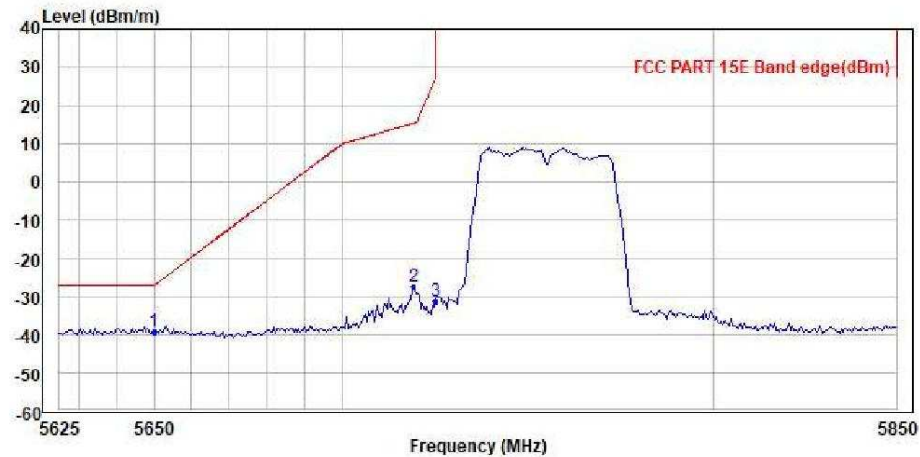


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC40_5755
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	PP 5650.000	-39.02	-60.23	35.08	10.00	21.41	45.28	-27.00	-12.02	Peak
2	5719.238	-27.25	-48.62	35.16	10.00	21.43	45.22	15.39	-42.64	Peak
3	5725.000	-31.01	-52.40	35.17	10.00	21.44	45.22	27.00	-58.01	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

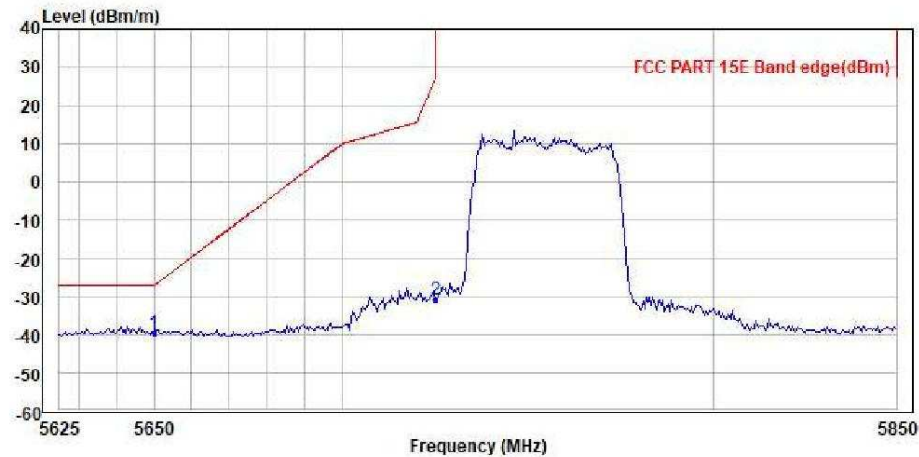


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX40_5755
Remark :

			Read	Ant	Aux	Cable	Preamp	Limit	Over	
	Freq	Level	Level	Factor	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	PP 5650.000	-39.49	-60.70	35.08	10.00	21.41	45.28	-27.00	-12.49	Peak
2	5725.000	-30.67	-52.06	35.17	10.00	21.44	45.22	27.00	-57.67	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

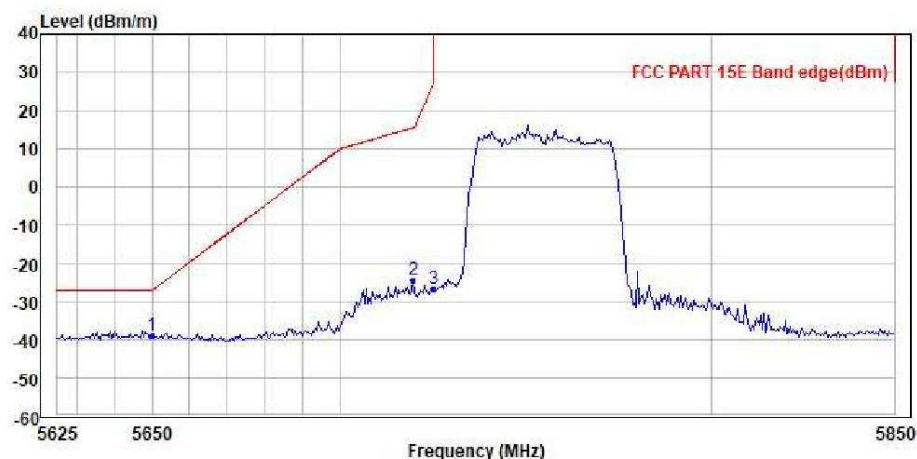


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX40_5755
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1 PP	5650.000	-38.85	-60.06	35.08	10.00	21.41	45.28	-27.00	-11.85	Peak
2	5719.689	-24.13	-45.51	35.16	10.00	21.44	45.22	15.51	-39.64	Peak
3	5725.000	-26.37	-47.76	35.17	10.00	21.44	45.22	27.00	-53.37	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

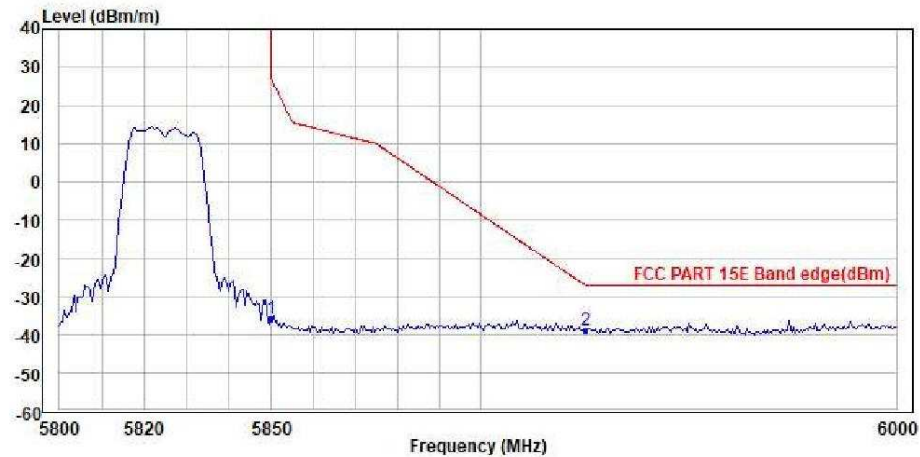


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_A_5825
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamplifier Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	5850.000	-35.81	-57.50	35.32	10.00	21.49	45.12	27.00	-62.81	Peak
2	PP 5925.000	-38.81	-60.68	35.41	10.00	21.52	45.06	-27.00	-11.81	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

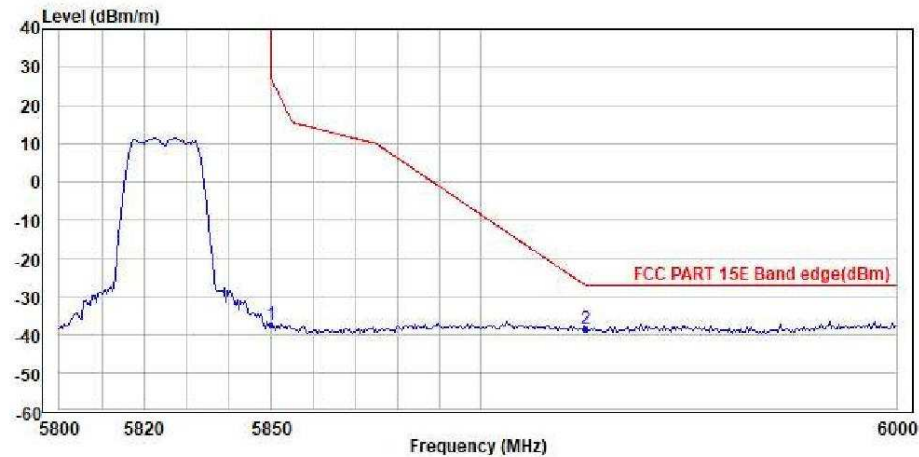


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_A_5825
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamplifier	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	5850.000	-37.10	-58.79	35.32	10.00	21.49	45.12	27.00	-64.10	Peak
2	5925.000	-38.31	-60.18	35.41	10.00	21.52	45.06	-27.00	-11.31	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

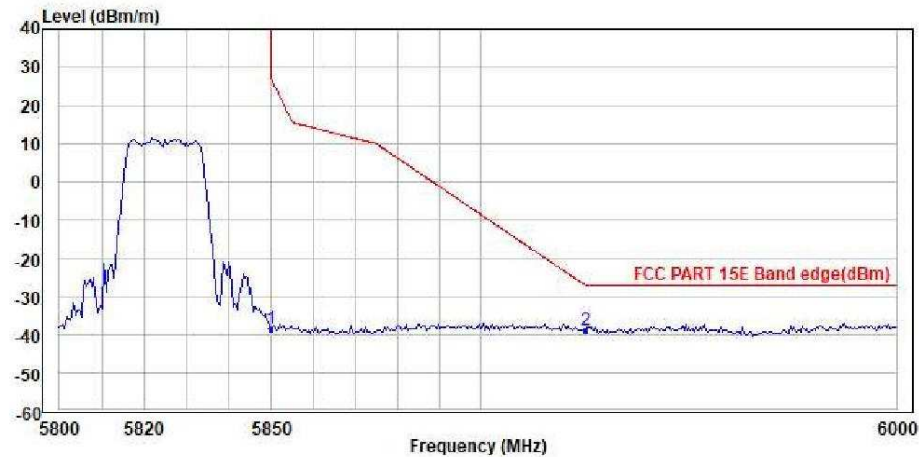


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5825
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	5850.000	-38.19	-59.88	35.32	10.00	21.49	45.12	27.00	-65.19	Peak
2	PP 5925.000	-38.59	-60.46	35.41	10.00	21.52	45.06	-27.00	-11.59	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

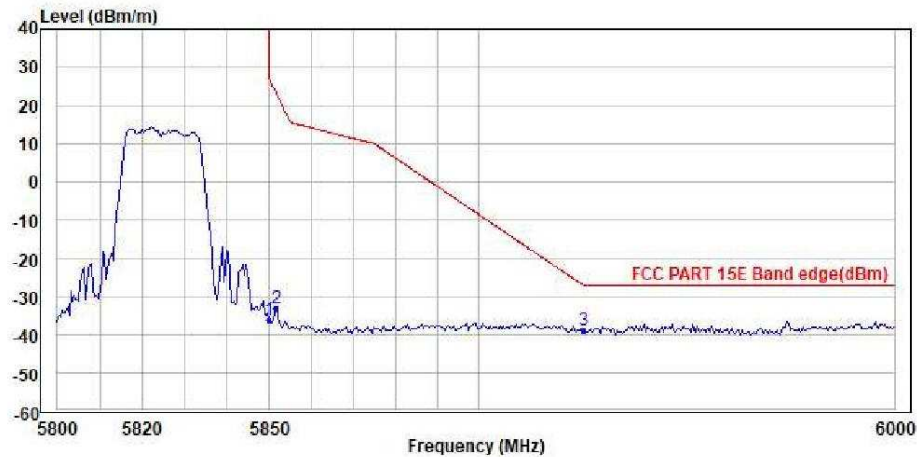


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC20_5825
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamplifier Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	5850.000	-35.89	-57.58	35.32	10.00	21.49	45.12	27.00	-62.89	Peak
2	5851.704	-32.85	-54.54	35.32	10.00	21.49	45.12	23.11	-55.96	Peak
3 PP	5925.000	-38.57	-60.44	35.41	10.00	21.52	45.06	-27.00	-11.57	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

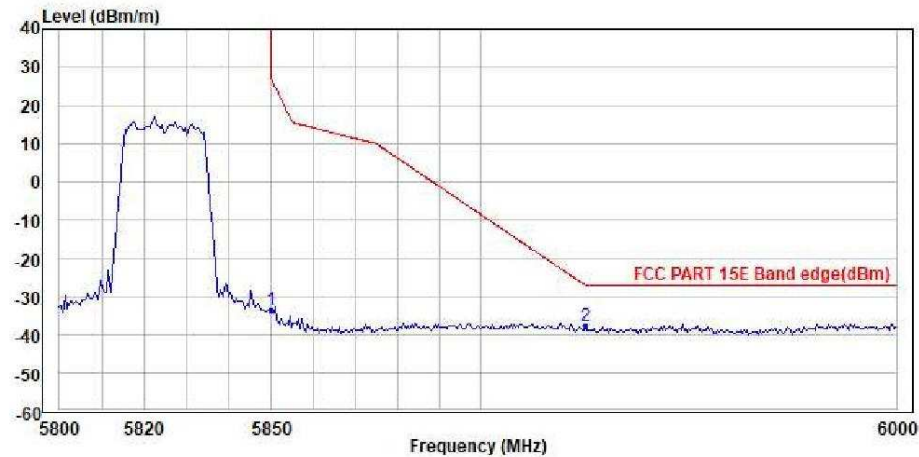


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5825
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamplifier Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	5850.000	-33.34	-55.03	35.32	10.00	21.49	45.12	27.00	-60.34	Peak
2	5925.000	-37.54	-59.41	35.41	10.00	21.52	45.06	-27.00	-10.54	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

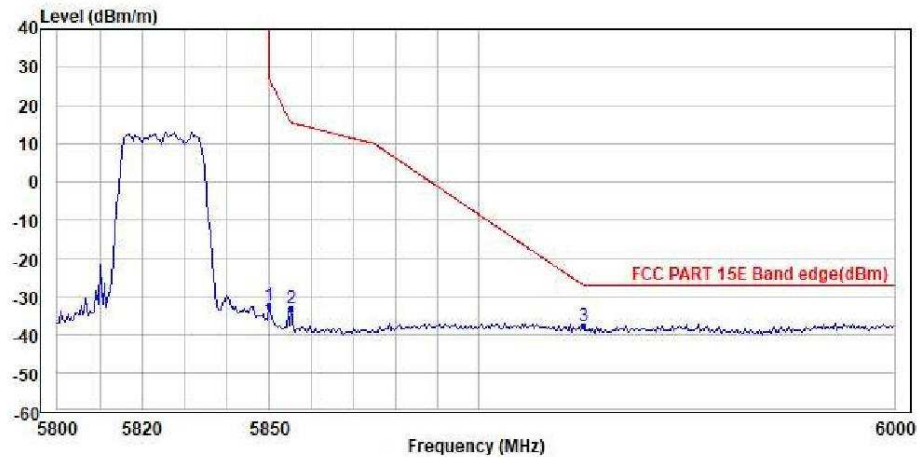


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX20_5825
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	5850.000	-32.30	-53.99	35.32	10.00	21.49	45.12	27.00	-59.30	Peak
2	5855.311	-32.93	-54.63	35.33	10.00	21.49	45.12	15.51	-48.44	Peak
3 PP	5925.000	-37.42	-59.29	35.41	10.00	21.52	45.06	-27.00	-10.42	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

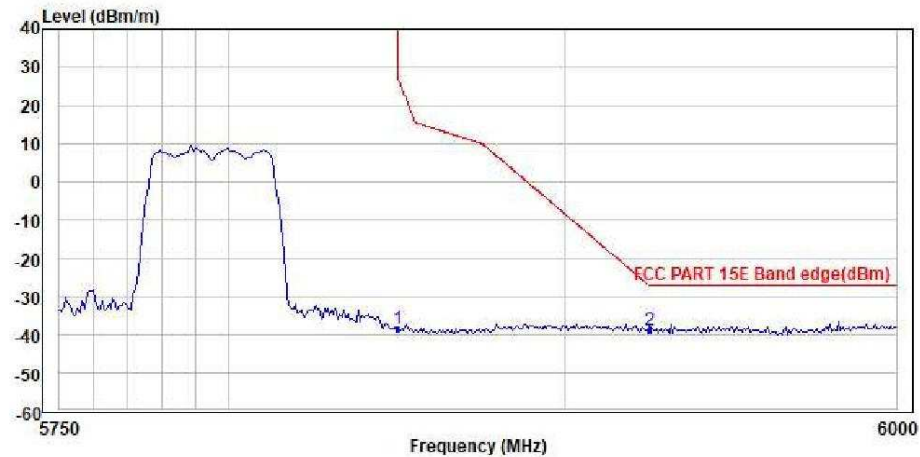


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC40_5795
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	5850.000	-38.24	-59.93	35.32	10.00	21.49	45.12	27.00	-65.24	Peak
2 PP	5925.000	-38.73	-60.60	35.41	10.00	21.52	45.06	-27.00	-11.73	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

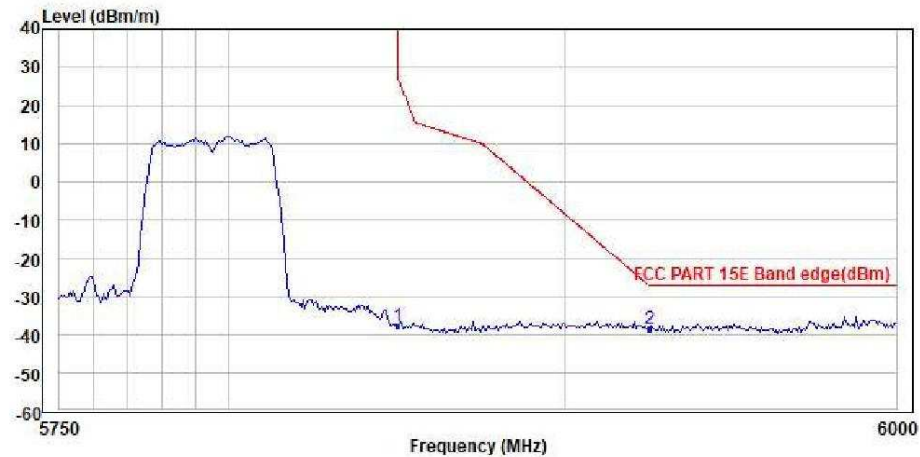


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC40_5795
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	5850.000	-37.52	-59.21	35.32	10.00	21.49	45.12	27.00	-64.52	Peak
2 PP	5925.000	-38.46	-60.33	35.41	10.00	21.52	45.06	-27.00	-11.46	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

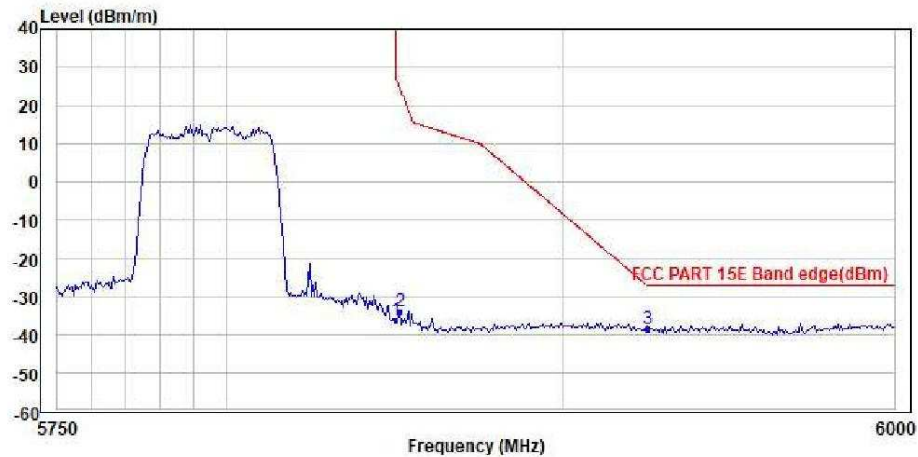


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX40_5795
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	5850.000	-36.23	-57.92	35.32	10.00	21.49	45.12	27.00	-63.23	Peak
2	5851.203	-33.88	-55.57	35.32	10.00	21.49	45.12	24.26	-58.14	Peak
3 PP	5925.000	-38.20	-60.07	35.41	10.00	21.52	45.06	-27.00	-11.20	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

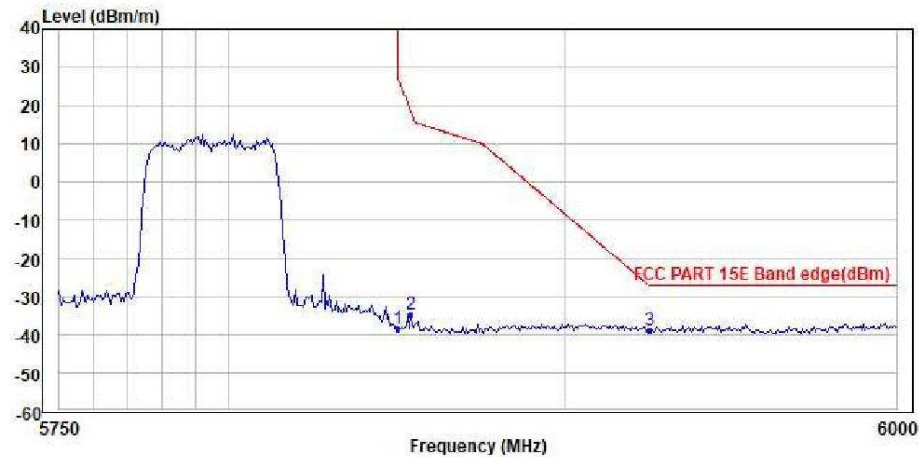


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX40_5795
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	5850.000	-38.33	-60.02	35.32	10.00	21.49	45.12	27.00	-65.33	Peak
2	5853.708	-34.61	-56.30	35.32	10.00	21.49	45.12	18.55	-53.16	Peak
3 PP	5925.000	-38.75	-60.62	35.41	10.00	21.52	45.06	-27.00	-11.75	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

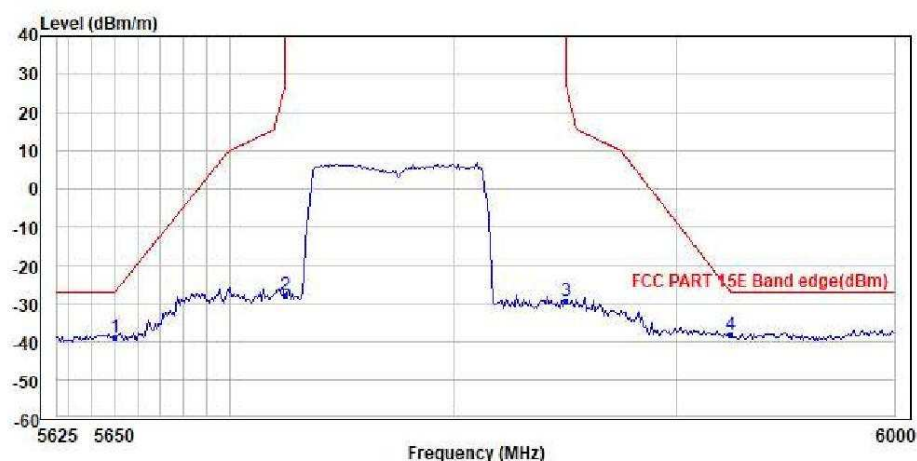


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC80_5775
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	5650.000	-38.87	-60.08	35.08	10.00	21.41	45.28	-27.00	-11.87	Peak
2	5725.000	-27.50	-48.89	35.17	10.00	21.44	45.22	27.00	-54.50	Peak
3	5850.000	-29.21	-50.90	35.32	10.00	21.49	45.12	27.00	-56.21	Peak
4 PP	5925.000	-38.13	-60.00	35.41	10.00	21.52	45.06	-27.00	-11.13	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

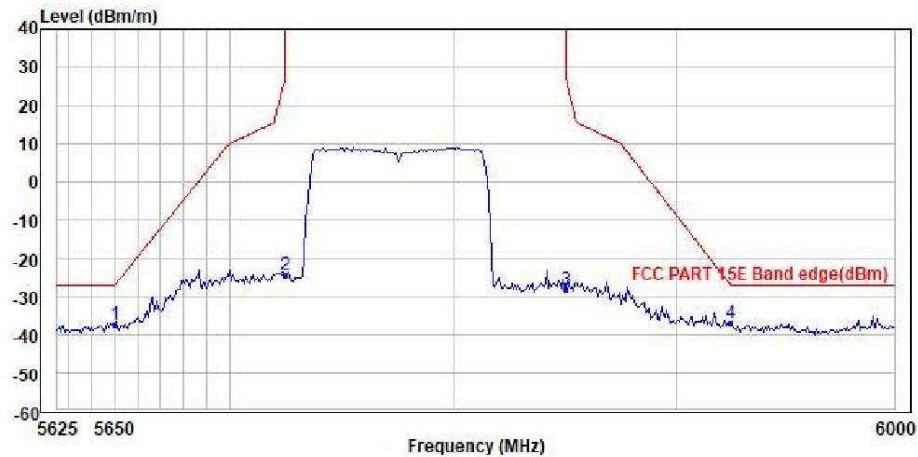


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AC80_5775
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	5650.000	-37.29	-58.50	35.08	10.00	21.41	45.28	-27.00	-10.29	Peak
2	5725.000	-24.40	-45.79	35.17	10.00	21.44	45.22	27.00	-51.40	Peak
3	5850.000	-27.97	-49.66	35.32	10.00	21.49	45.12	27.00	-54.97	Peak
4 PP	5925.000	-36.93	-58.80	35.41	10.00	21.52	45.06	-27.00	-9.93	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

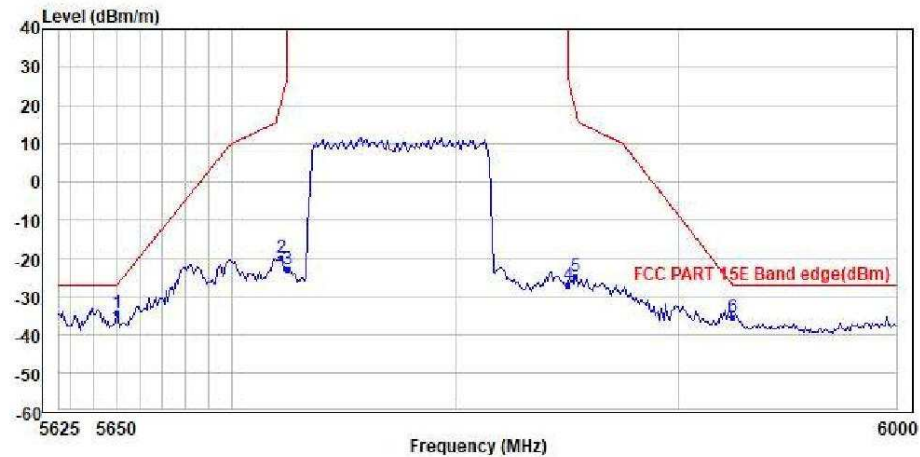


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX80_5775
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	PP 5650.000	-34.22	-55.43	35.08	10.00	21.41	45.28	-27.00	-7.22	Peak
2	5721.944	-19.79	-41.18	35.17	10.00	21.44	45.22	20.03	-39.82	Peak
3	5725.000	-22.60	-43.99	35.17	10.00	21.44	45.22	27.00	-49.60	Peak
4	5850.000	-26.90	-48.59	35.32	10.00	21.49	45.12	27.00	-53.90	Peak
5	5853.457	-24.81	-46.50	35.32	10.00	21.49	45.12	19.12	-43.93	Peak
6	5925.000	-35.29	-57.16	35.41	10.00	21.52	45.06	-27.00	-8.29	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

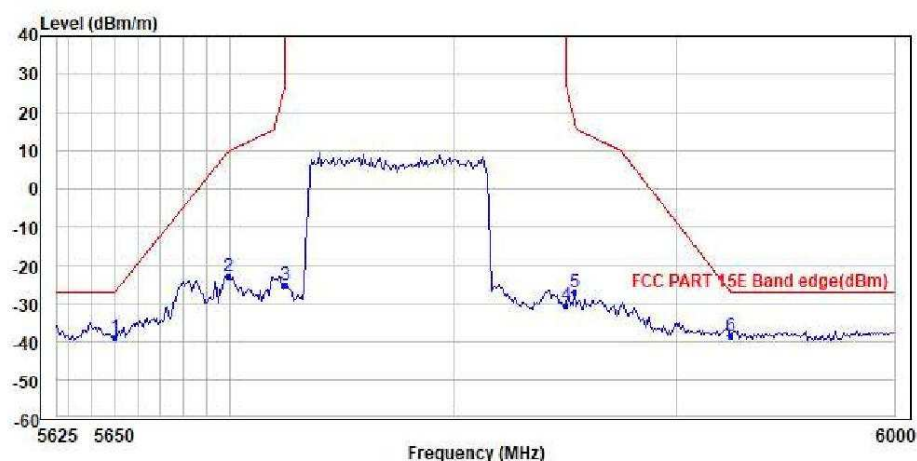

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/64.9(%)
Press : 99.8kpa
Product : ECU-Display Head Unit
Model No. : EEBABCDE1
Power Rating : AC 120V/60Hz
Test Engineer : Jackson
Test Mode : 5G_AX80_5775
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBm/m	dBm	dB/m	dB	dB	dB	dBm/m	dB	
1	5650.000	-38.63	-59.84	35.08	10.00	21.41	45.28	-27.00	-11.63	Peak
2	5699.399	-22.66	-43.99	35.14	10.00	21.43	45.24	9.56	-32.22	Peak
3	5725.000	-25.14	-46.53	35.17	10.00	21.44	45.22	27.00	-52.14	Peak
4	5850.000	-30.31	-52.00	35.32	10.00	21.49	45.12	27.00	-57.31	Peak
5	5854.208	-26.95	-48.65	35.33	10.00	21.49	45.12	17.40	-44.35	Peak
6 PP	5925.000	-38.37	-60.24	35.41	10.00	21.52	45.06	-27.00	-11.37	Peak