

Advertising machine Commercial intelligent terminal

User Manual

I.Product Name


Product model: AI55W

Product name: Advertising machine|Commercial Intelligent Terminal

II.Structural Diagram of the Product





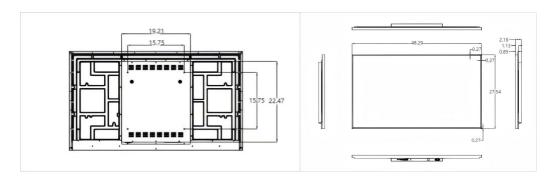

(Unit name: inch)

III.Basic Specifications and Parameters

Display Parameters				
Panel size	55 inches			
Display area size	1209.6(H)*680.4(V))mm			
Aspect ratio	16:9			
Resolution	3840*2160			
Display color	1.07G			
Brightness	700cd/m2(center point, typical value)			
Contrast	1200:1			
Visible angle	89/89/89(Min .)(CR≥ 10)			
Response time	8ms(typical value)			
Field frequency	50/60Hz			
Theoretical service life	30000H			
Power consumption	180W MAX			

Specification Parameters				
Chip	ARM Cortex-A55			
Memory	DDR3 4GB (Built-in)			
Built-in storage capacity	EMMC 32GB (Standard configuration)			
Language	Chinese, English			
Ethernet	100M adaptive Ethernet			
Wi- Fi	Supports 2 .4G 802 . 11 b/g/ n 1T1R WLAN			
Input interface	RJ45 * 1 , HDMI IN * 1 , USB HOST * 2, T-Flash Port			
Output interface	Earphone out* 1			

AV Parameters				
Speaker	4 Ω 5W*2			
Audio mode	Left & Right channel			
Audio format	MP3/WMA			
Video format	Support AVI, MKV, MP4, FLV, WAV, TS, etc			
Image format	Support BMP, JPEG, PNG, GIF, etc			

Product Accessories				
Wall- mounted component	1PC			
Remote control	1PC			
Power cord	1PC			
Antenna rod	1PC			
Quality Certificate	1PC			
User Manual	1PC			

IV.Operating Environment

Operating Environment			
Operating temperature	0°C ~40°C		
Storage temperature	- 10°C ~60°C		
Ambient humidity	<85%		
Operating voltage	220V~50/60Hz		

V.Packaging

See Annex for details.

Please note the following:

- 1. Intellectual Property Statement: The hardware design and software programming of this product are protected by copyright. Unauthorized copying of this product and the contents of the Instruction Manual will be investigated with corresponding legal liability.
- 2. This is a Grade A product. In a standard living environment, this product may cause certain radio interference. In this case, the user may be required to take practical measures against such interference.
- 3. The content in this Instruction Manual is for reference only and does not constitute any form of commitment.
- 4. SHOWTOP reserves the right to improve and change the product design without prior notice.

Warning

In a standard living environment, this product may cause certain radio interference. In this case, the user may be required to take practical measures against such Interference.

VI.Test Report

	Test Report					
Product Model			AI55W	Purpose	To ensure the reliability and practicality of the product	
Prep	Prepared by		Shenzhen SHOWTOP Technology Co., Ltd			
Scop	oe of Applica	ition	SHOWTOP Commercial Advertising Machine			
S/N	Test Item	Quantity	Test Requirement/	/Standards	Test Steps	Test Results
1	Drop impact test	1	Product weight: 9 Kg≤ M≤20 Kg Drop height: 30 CM for corners/edges, 40 CM for top, 40 CM for other sides Drop order: 1 corner, 3 edges, 6 sides		Prepare qualified and verified test equipment and drop test bench; Perform operations on the packaged device according to the experimental requirements; After the experiment, unpack the device and check whether there is any abnormality in appearance, and check whether it is operating normally after powering on. If there is no abnormality, the test is passed and ended.	PASS
2	High and low temperature test	1	Test environment: 1. 45 ±2°C 50%RH 4h 2. 60±2°C 30%RH 4h 325±2°C ORH 4h 410±2°C ORH 4h Test each of the above parameters for more than 4 hours after powering on, check whether the device is operating normally. Test each parameter for more than 4 hours after powering off then powering on, and check whether the device is operating normally		Prepare qualified and verified thermostatic chamber and set the parameters according to the experimental requirements/standards; Place the device into the experimental equipment for testing according to the experimental requirements/standards; After the experiment, check whether there is any abnormality in the equipment. If there is no abnormality, the test is passed and ended.	PASS
3	Electrical Performance test	1	Test condition 1) The product is not dama for 30 minutes at ±20% of 1 operating voltage; 2) Adjust the voltage by ±15 operating voltage by 20V experiting voltage by 20V experiting voltage by 20V experitions or decreasing the following of the voltage by 20V experits of the volt	iged after aging the rated 5% of the rated ach time he voltage), e any	Prepare qualified and verified voltage regulator, and set parameters according to the experimental requirements/standards; A professional test technician conducts the test according to the test requirements; After the test, check whether there is any abnormality in the equipment. If there is no abnormality, the test is passed and ended.	PASS
4	Display test	1	Signal source: The devic screen projection and playb connected to the network at 2.Software version: Latest v. 3. Voltage: Rated Operating 4. Load: Two speakers wor simultaneously, with other pto factory settings; 5.Test environment: Tested temperature of 40±2 °C and 28 % RH for more than 12 h.	oack when and WIFI; version; g voltage; king parameters set at a humidity of	1. A professional test technician tests the machine for more than 12 hours according to the experimental requirements/standards; Check whether the WIFI and network connections are operating normally; 2. Check whether the remote control is operating normally; 3. Check whether the software version is the latest version; 4. After the experiment, check whether there is any abnormality in the equipment. If there is no abnormality, the test is passed and ended.	PASS

VII. Test Report

S/N	Test Item	Quantity	Test Requirement/Standards	Test Steps	Test Results
5	Structural component inspection	1	Metal parts should be free from rust and other mechanical damage. The color of the surface coating should not have any obvious color discrepancy. The operating switches and buttons should work flexibly and reliably, and parts should be fastened and not loose. There should be no obvious installation gaps. The complete device should have sufficient mechanical stability	1.A professional test technican inspects the hardware and structural parts the device according to the inspection requirements/standards; 2.During the inspection, the device should not have any problems other than the standards; inspection ended	PASS
6	Packaging inspection	1	The surface of the packaging should be clean and tidy without obvious defects, such as concave and convex distortions, scratches, cracks, deformations and burrs. The surface coating should not blister, crack, or fall off. The text, graphics and symbols on the outer box, and in the Instruction Manual, etc. should be clear and feature correct indications	Before packaging the device, a professional test technician should inspect the surface, outer box, Instruction Manual, etc. of the device according to the inspection requirements/standards; 2. During the inspection, the device should not have any problems other than the standards; inspection ended.	PASS

Note: The above test requirements/standards are the internal test standards of the commercial display advertising machine industry

FCC Caution.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -Reorient or relocate the receiving antenna.
- -Increase the separation between the equipment and receiver.
- -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.