

**FCC and IC Test report for parts
22.917, 24.238,27.53
RSS-Gen, RSS-130, RSS-132, RSS-133 RSS-139,
(Transmitter spurious emissions only)**



The RvA is signatory to ILAC - MRA



Product name : Locator One
Applicant : Basetime BV
FCC ID : 2BD5V-LOCONE
IC ID : 31799-LOCONE

Test report No. : P000344688 004 Ver 1.0

Laboratory information

Accreditation

Kiwa Nederland B.V. complies with the accreditation criteria for test laboratories as laid down in ISO/IEC 17025:2017. The accreditation covers the quality system of the laboratory as well as the specific activities as described in the authorized annex bearing the accreditation number L248 and is granted by the Dutch Council For Accreditation (RvA: Raad voor Accreditatie).

Kiwa Nederland B.V. is designated by the FCC as an Accredited Test Firm for compliance testing of equipment subject to Certification under Parts 15 & 18. The Designation number is: NL0001.

Kiwa Nederland B.V. is a Wireless Device Testing laboratory recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements.
The Industry Canada company number for Kiwa Nederland B.V. is: 4173A. The CABID is NL0001.

Kiwa Nederland B.V. is a registered Conformity Assessment body (CAB) under the Japan-EC MRA (Agreement on Mutual Recognition between Japan and the European Community). The registration number is: 201.

Documentation

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at Kiwa Nederland B.V.

Testing Location

Test Site	Kiwa Nederland B.V.
Test Site location	Wilmersdorf 50 7327 AC Apeldoorn The Netherlands Tel. +31 88998 3393
Test Site FCC	NL0001
CABID	NL0001

Revision History

Version	Date	Remarks	By
v0.50	27-03-2024	First draft	MHK
v1.00	10-07-2024	Final release	MHK

Table of Contents

Revision History	2
Summary of Test results	4
1 General Description	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Tested Equipment Under Test (EUT)	5
1.4 Product specifications of Equipment under test	6
1.5 Environmental conditions	6
1.6 Measurement standards	6
1.7 Applicable standards	6
1.8 Observation and remarks	6
1.9 Conclusions	7
2 Test configuration of the Equipment Under Test	8
2.1 Test mode	8
2.2 Test setups	8
2.3 Equipment used in the test configuration	9
2.4 Sample calculations	9
3 Test results	10
3.1 Radiated spurious emissions	10
3.1.1 Limit	10
3.1.2 Measurement instruments	10
3.1.3 Test setup	10
3.1.4 Test procedure	10
3.1.5 Measurement Uncertainty	10
3.1.6 Peak table	10
3.1.7 Results of the radiated spurious emissions measurement	11
3.2 Co-Location	19
4 Sample calculations	24

Summary of Test results

FCC	ISED	Description	Section in report	Verdict
22.359 24.238 27.53	RSS-Gen RSS-130 RSS-132 RSS-133 RSS-139	Radiated spurious emissions	3.1	Pass

1 General Description

1.1 Applicant

Client name:	Basetime BV
Address:	Lichtschip 75A, Houten 3991 CP, The Netherlands
Telephone:	+31 30 249 6 149
E-mail:	eltjo.keijer@basetime.nl
Contact name:	E.J. Keijer

1.2 Manufacturer

Manufacturer name:	Basetime BV
Address:	Lichtschip 75A, Houten 3991 CP, The Netherlands
Telephone:	+31 30 249 6 149
E-mail:	eltjo.keijer@basetime.nl
Contact name:	E.J. Keijer

1.3 Tested Equipment Under Test (EUT)

Product name:	Locator One
Brand name:	Basetime BV
FCC ID:	2BD5V-LOCONE
IC:	31799-LOCONE
Product description:	Monitoring Device
Variant model(s):	--
Batch and/or serial No.	--
Software version:	See RF100: Software release No
Hardware version:	V2.2
Date of receipt	20-02-2024
Tests started:	21-02-2024
Testing ended:	28-03-2024

1.4 Product specifications of Equipment under test

Tx Frequency:	B1-B5, B8, B12-B14, B17-B20, B25-B26, B28 and B66
Rx frequency:	B1-B5, B8, B12-B14, B17-B20, B25-B26, B28 and B66
Antenna type	Flexible Patch
Type of modulation:	LTE Modulation
Emission designator	5M00EWX

1.5 Environmental conditions

Test date	29-02-2024	26-03-2024
Ambient temperature	20.9°C	20.3°C
Humidity	36.6%	28.9%

1.6 Measurement standards

- ANSI C63.26:2015

1.7 Applicable standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 22 Subpart C §22.359
- FCC Part 24 Subpart C §24.238
- FCC Part 27 Subpart C §27.53
- RSS-Gen Issue 5
- RSS-130 Issue 2
- RSS-132 Issue 3
- RSS-133 Issue 6, A1
- RSS-139 Issue 3

1.8 Observation and remarks

The EUT contains a pre-certified cellular module, so only radiated spurious emissions are tested. Tests are performed on a representative selection of operating frequency bands.

1.9 Conclusions

The sample of the product showed **NO NON-COMPLIANCES** to the specifications stated in paragraph 1.7 of this report.

The results of the test as stated in this report, are exclusively applicable to the product items as identified in this report. Telefication accepts no responsibility for any properties of product items in this test report, which are not supported by the tests as specified in paragraph 1.7 "*Applicable standards*".

All conducted tests are performed by:

Name : ing M.H.Khan

Review of test methods and report by:

Name : P. van Wanrooij, BASc

The above conclusions have been verified by the following signatory:

Date : 10-07-2024

Name : P. van Wanrooij

Function : Test Engineer

Signature :

A handwritten signature in black ink, appearing to be "P. van Wanrooij", with a stylized, cursive script.

2 Test configuration of the Equipment Under Test

2.1 Test mode


The equipment is configured to connect to a radio communication tester which keeps the transmitter continuously active and transmitting during testing.

Tested channels/bands


Technology	Band	Uplink Frequency range (MHz)
LTE	2	1850 – 1910
	5	824 – 849

2.2 Test setups

Radiated emissions test setup 30 MHz - 1 GHz

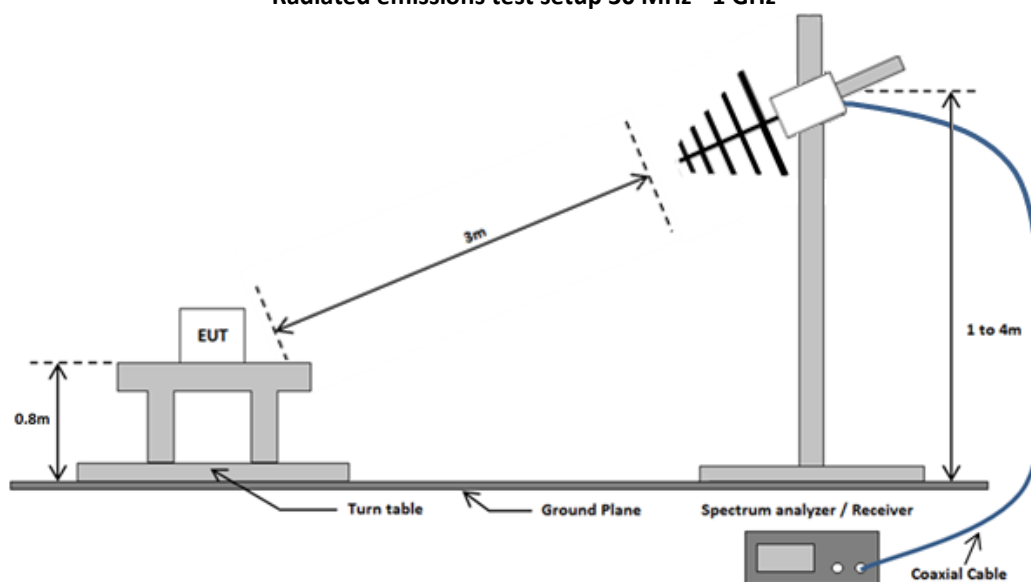

Radiated emissions test setup above 1 GHz

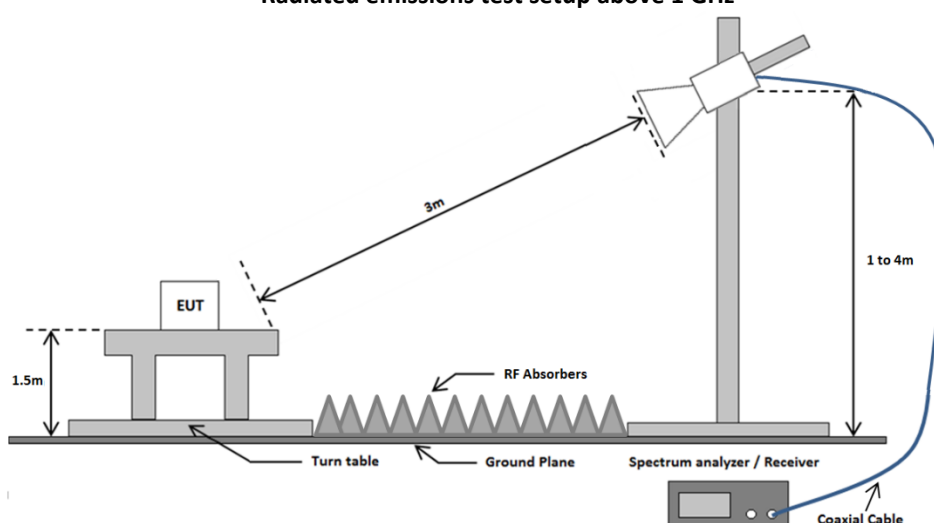

2.3 Equipment used in the test configuration

Description	Manufacturer	Model	ID	Cal. Done date	Cal. due date	Used at Par.
EMI Receiver	Rohde & Schwarz	ESR7	114534	04-2023	04-2024	3.1
Spectrum Analyzer	Rohde & Schwarz	FSV3044	114923	10-2023	10-2024	3.1
1.1 GHz HPF	Wainwright	WHK1.1/15G-10EF	114679	03-2024	03-2026	3.1
3.0 GHz HPF	Wainwright	WHK3.0/18G-10EF	114682	07-2021	07-2024	3.1
Biconical antenna + 6dB attenuator	Schwarzbeck + HP	VHA9103 + 8491A	114436 + 114254	03-2021	03-2024	3.1
Logperiodic antenna	EMCO	3147	114385	03-2021	03-2024	3.1
Horn antenna	EMCO	3115	114607	01-2021	07-2024	3.1
Horn antenna	FLANN-MICROWAVE	20240-25	114518	NA*	NA*	3.1
Horn antenna	Scientific atlanta	12A-26	114517	NA*	NA*	3.1
Preamplifier	μComp	MCNA-40-001080	114771	05-2022	05-2024	3.1
Semi-Anechoic room	ETS Lindgren	SAR	114624	03-2023	03-2026	3.1
Test software	Raditeq	Radimation Version 2023.2.3	--	--	--	3.1

2.4 Sample calculations

All formulas for data conversions and conversion factors are reported in chapter 4 of this test report.

3 Test results

3.1 Radiated spurious emissions

3.1.1 Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB

$P = 23 \text{ dBm} = 0.2 \text{ W}$

$$\text{limit} = 23 \text{ dBm} - [43 + 10 * \log_{10}(0.2)] \text{ dB} = -13 \text{ dBm}$$

3.1.2 Measurement instruments

The measurement instruments are listed in chapter 2.3 of this report.

3.1.3 Test setup

The test setup is as shown in chapter 2.2 of this report.

3.1.4 Test procedure

30 MHz to 26.5 GHz: According to ANSI C63.26-2015 section 5.5.2

30 MHz to 1 GHz: IRN 026 – Method 1

1 GHz to 18 GHz: IRN 026 – Method 2

18 to 26.5 GHz: IRN 026 – Method 3

3.1.5 Measurement Uncertainty

Frequency range	Polarization	Uncertainty
30 – 200 MHz	Horizontal	±4.5 dB
	Vertical	±5.4 dB
200 -1000 MHz	Horizontal	±3.6 dB
	Vertical	±4.6 dB
1 – 18 GHz	Horizontal	±5.7 dB
	Vertical	±5.7 dB
18 – 26.5 GHz	Horizontal	±4.9 dB
	Vertical	±4.9 dB

3.1.6 Peak table

Frequency	Peak	Peak Limit	Height	Polarization	Band
66.3 MHz	22.1 dBμV/m	82.2 dBμV/m	1.5 m	Horizontal	2
153.805 MHz	31.4 dBμV/m	82.2 dBμV/m	1.5 m	Horizontal	2
872.125 MHz	41 dBμV/m	82.2 dBμV/m	1.5 m	Horizontal	2


Frequency	Peak	Peak Limit	Average	Height	Polarization	Band
1.655 GHz	39.2 dBμV/m	82.2 dBμV/m	32 dBμV/m	3 m	Vertical	5
2.483 GHz	41.1 dBμV/m	82.2 dBμV/m	34.5 dBμV/m	4 m	Vertical	5
24.482 GHz	60.5 dBμV/m	82.2 dBμV/m	53.4 dBμV/m	2.5 m	Horizontal	5

3.1.7 Results of the radiated spurious emissions measurement

30 MHz – 250 MHz


Vertical (Band 2)

RadiMation

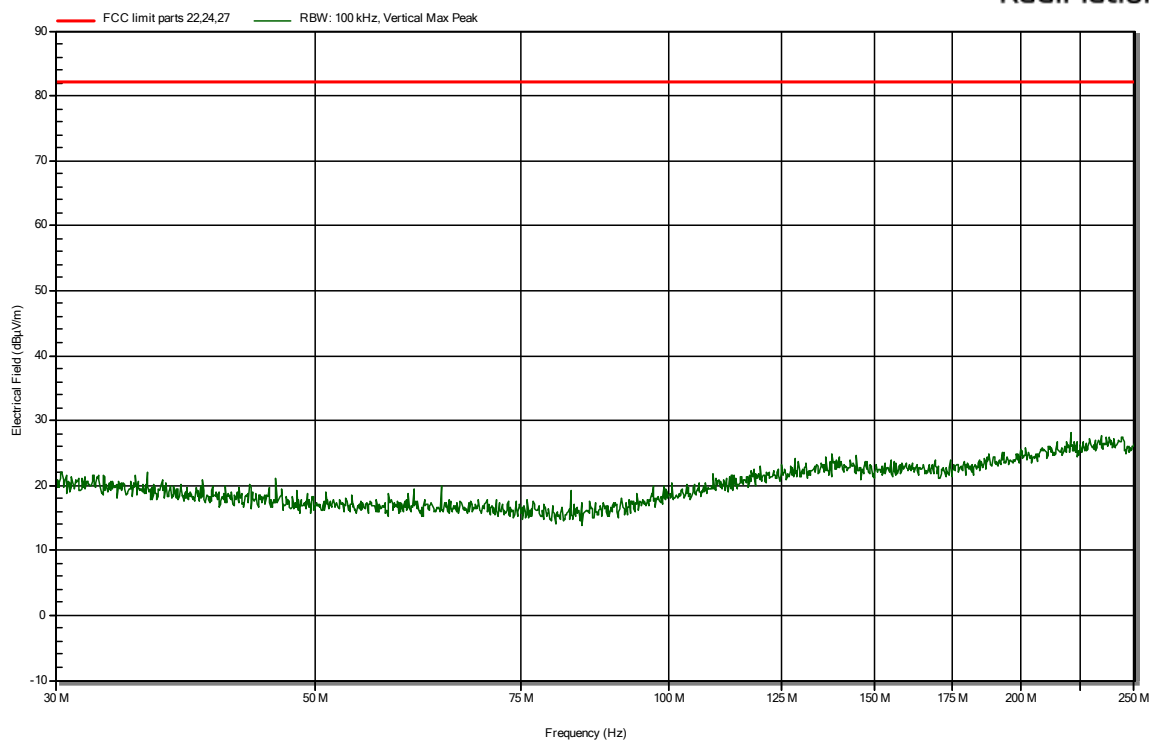


Horizontal (Band 2)

RadiMation

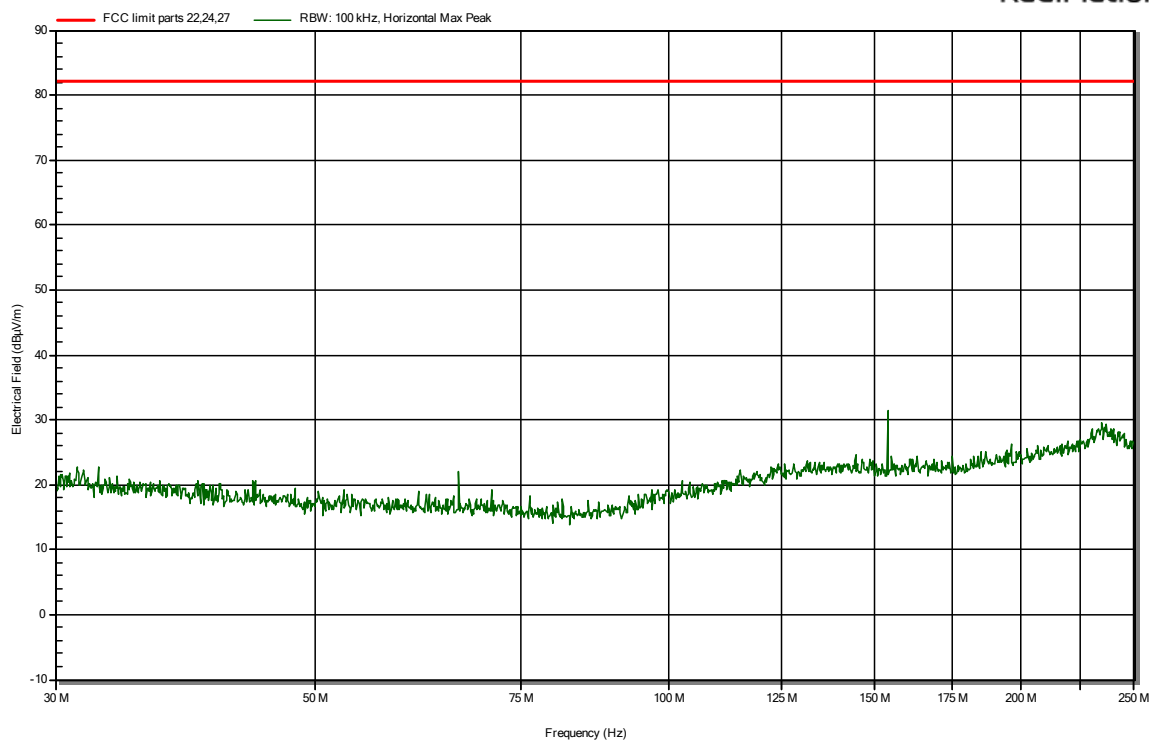


Vertical (Band 5)

RadiMation

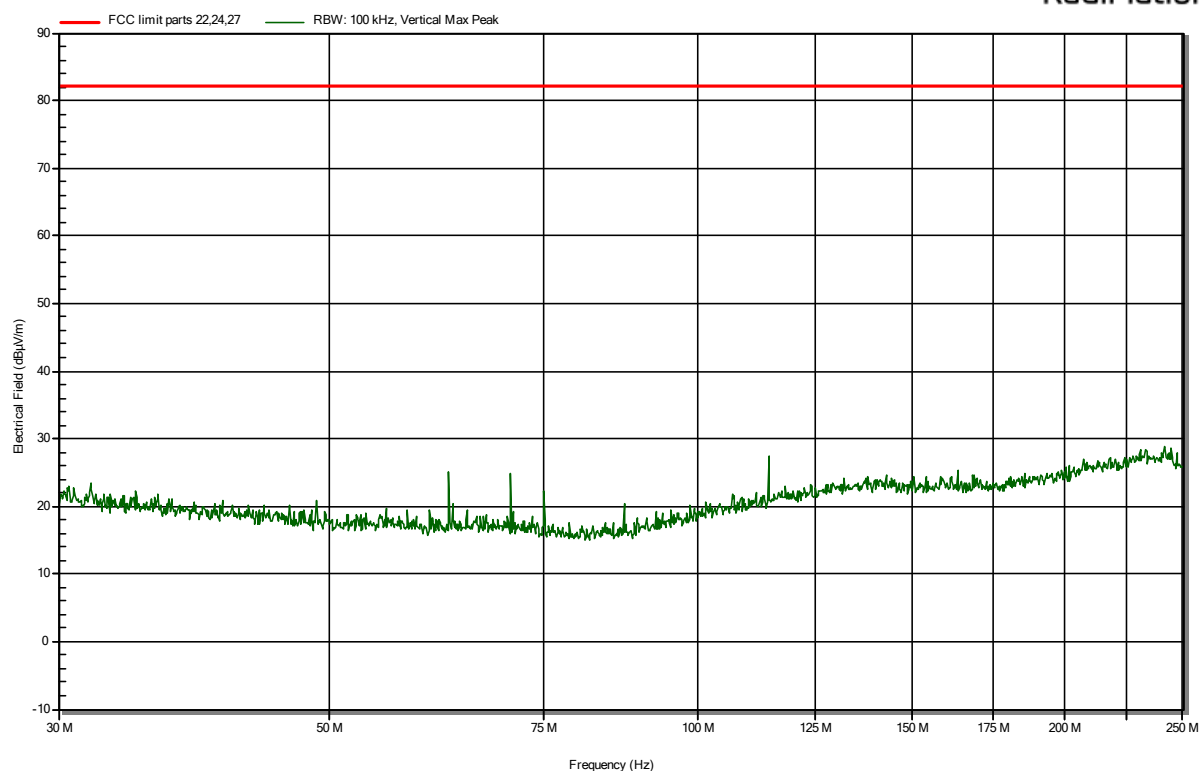

Horizontal (Band 5)


RadiMation

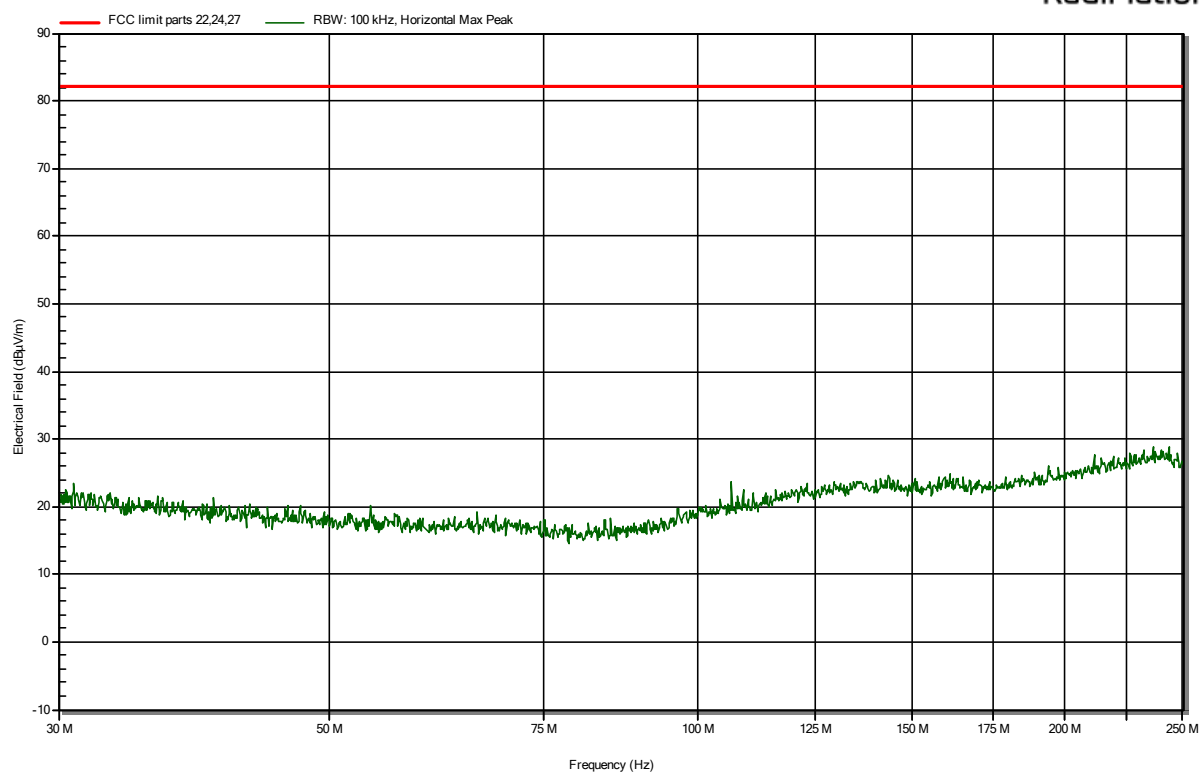

250 MHz – 1000 MHz


Vertical (Band 2)

RadiMation

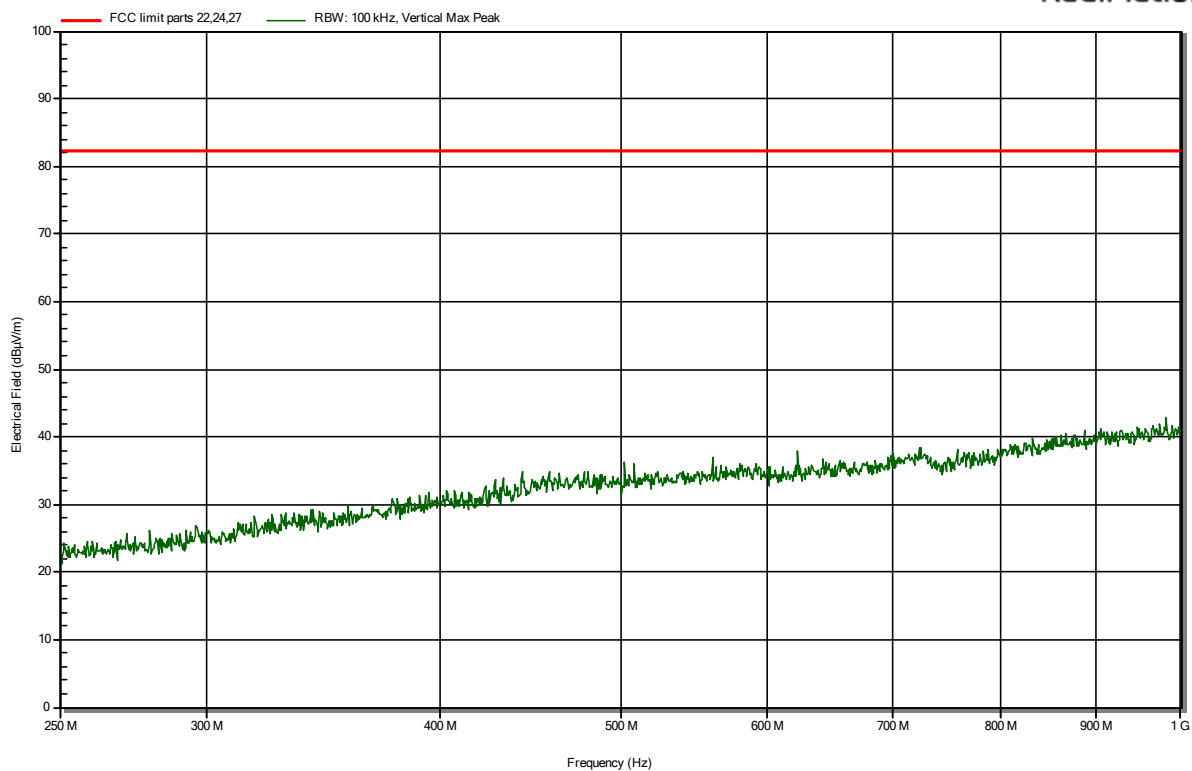


Horizontal (Band 2)

RadiMation

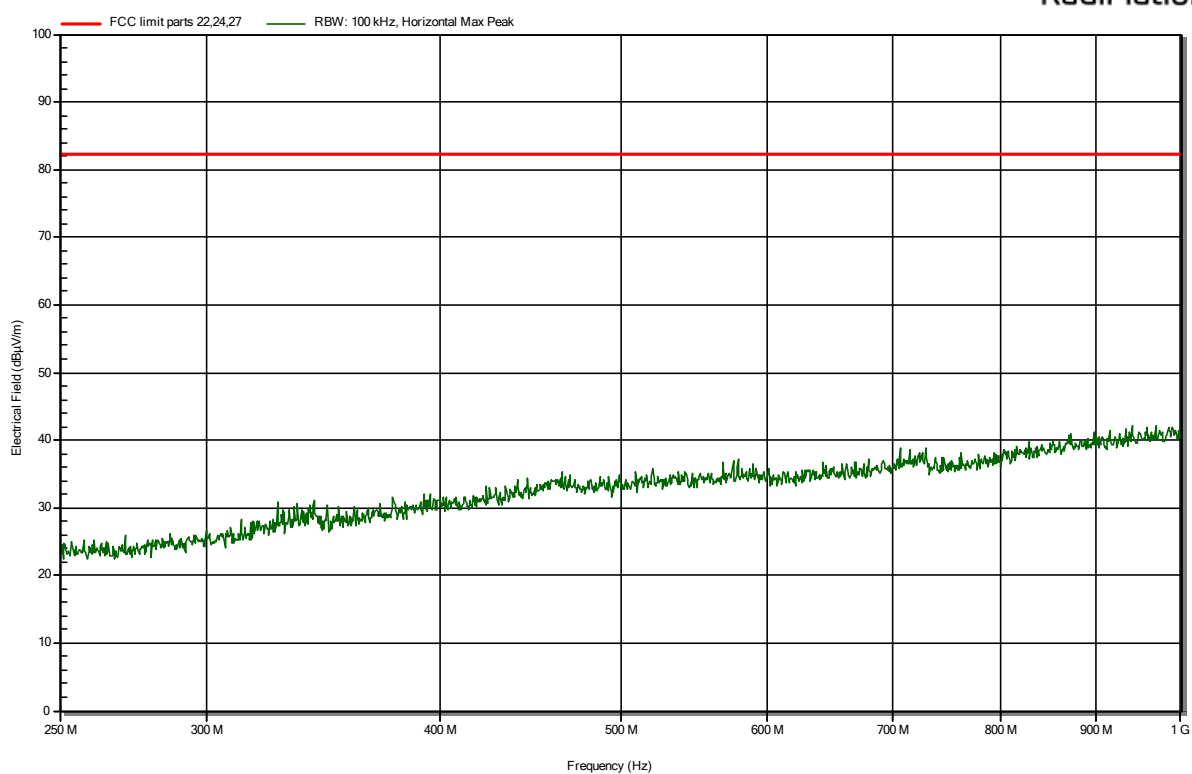


Vertical (Band 5)

RadiMation

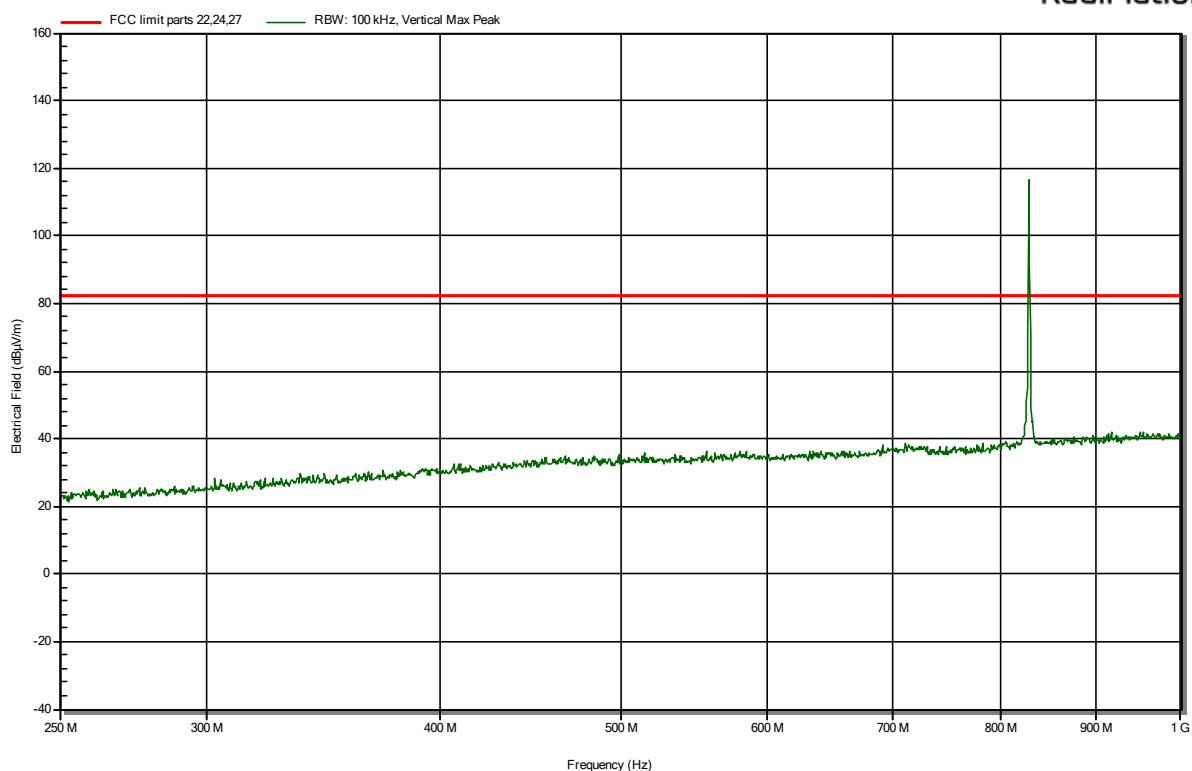

Horizontal (Band 5)

RadiMation

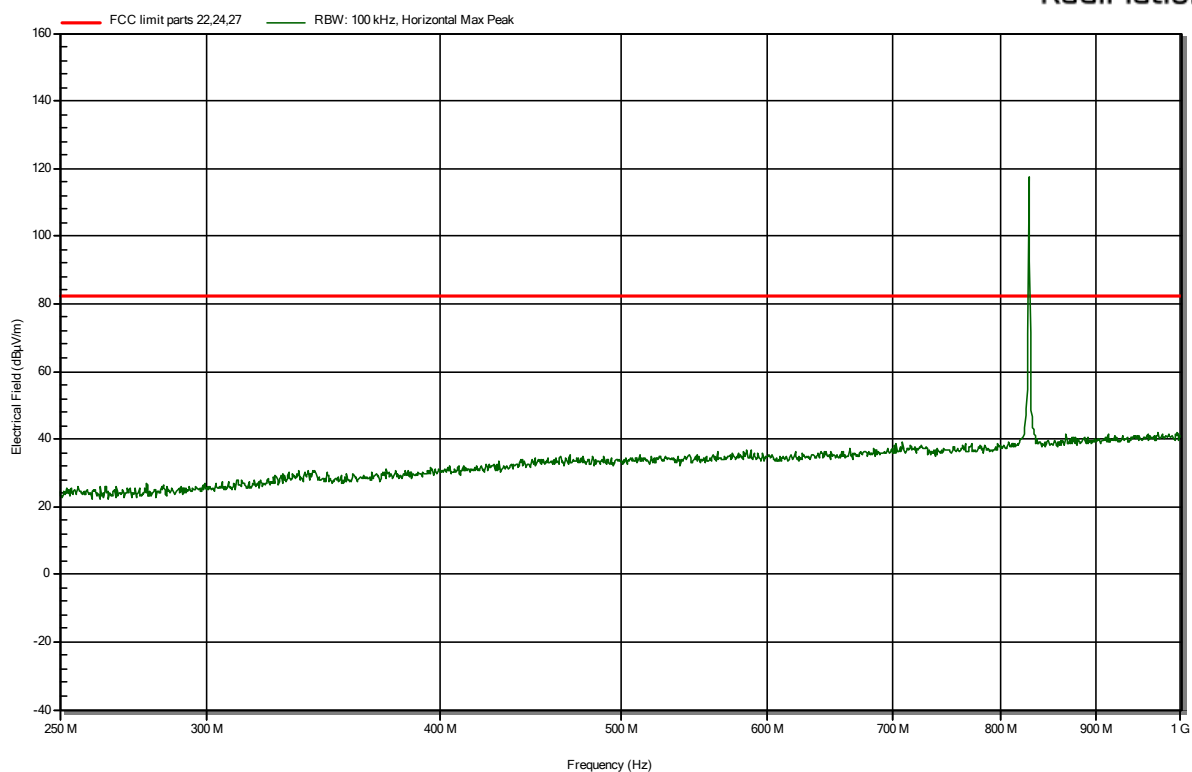


Peak at 849MHz in the plots above is the transmission signal and not subject to the spurious limit.

1 GHz – 18 GHz


Vertical (Band 2)

RadiMation

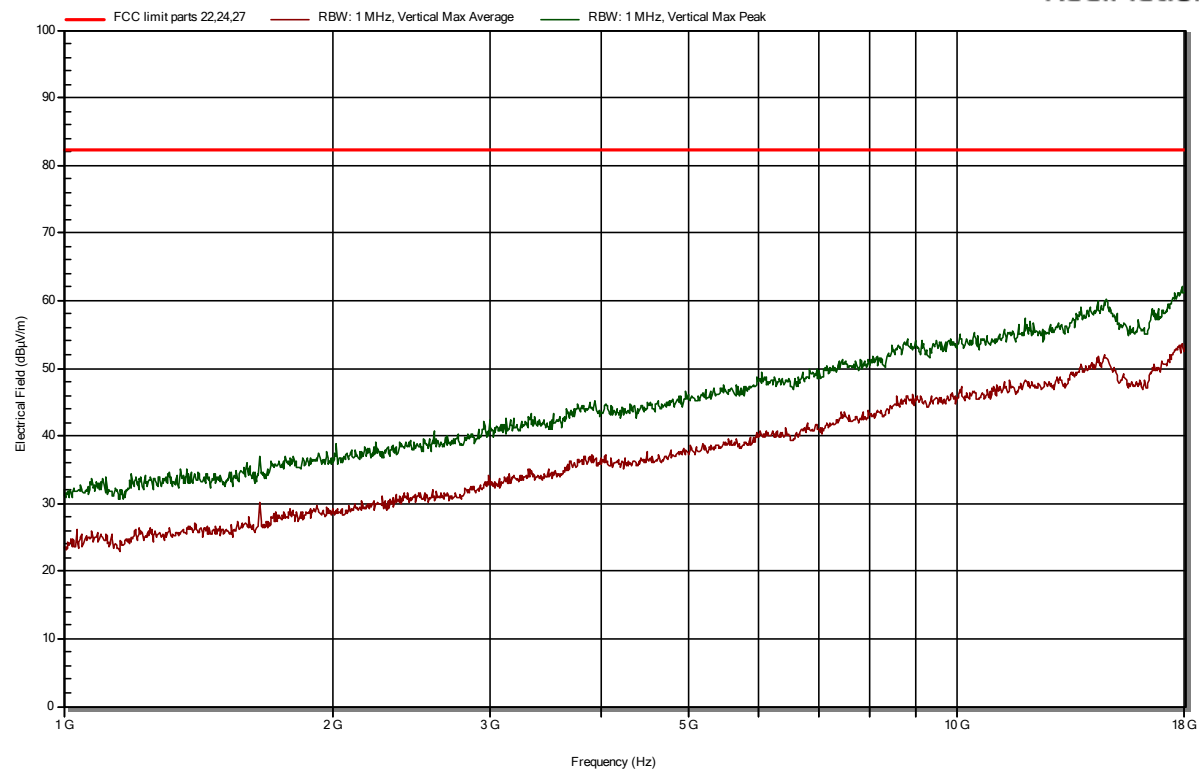


Horizontal (Band 2)

RadiMation

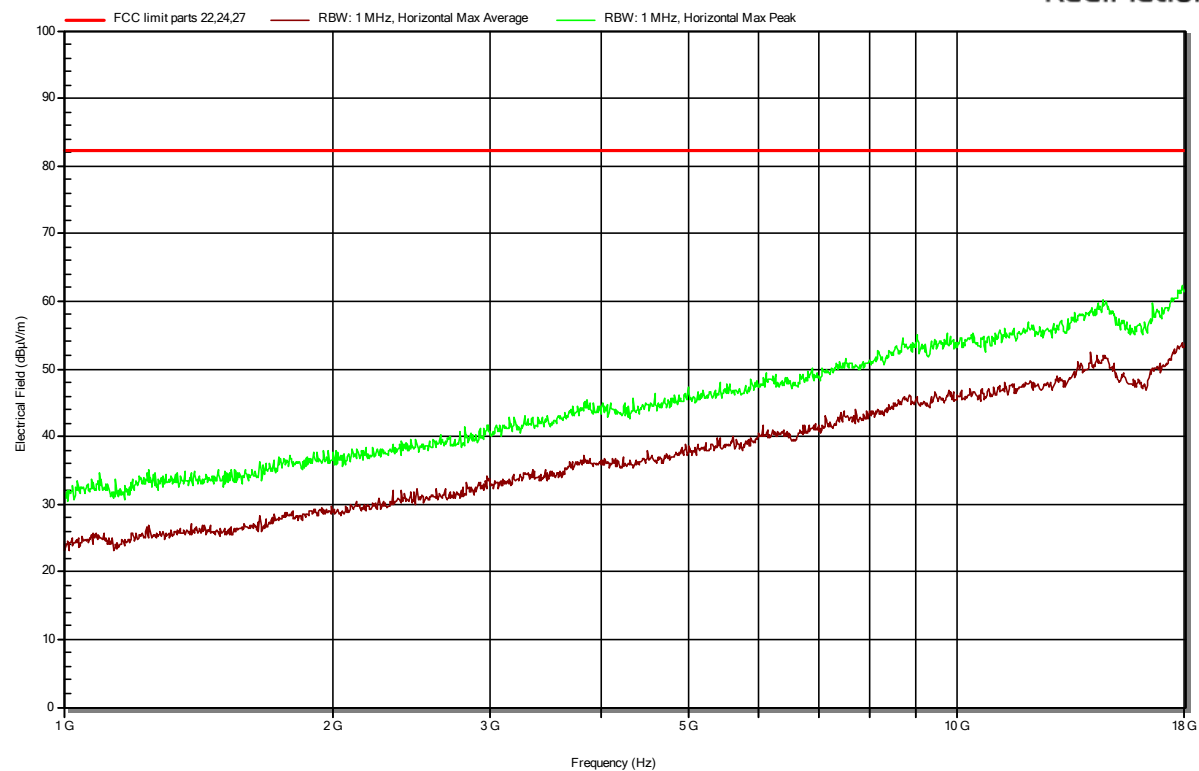


Vertical (Band 5)

RadiMation

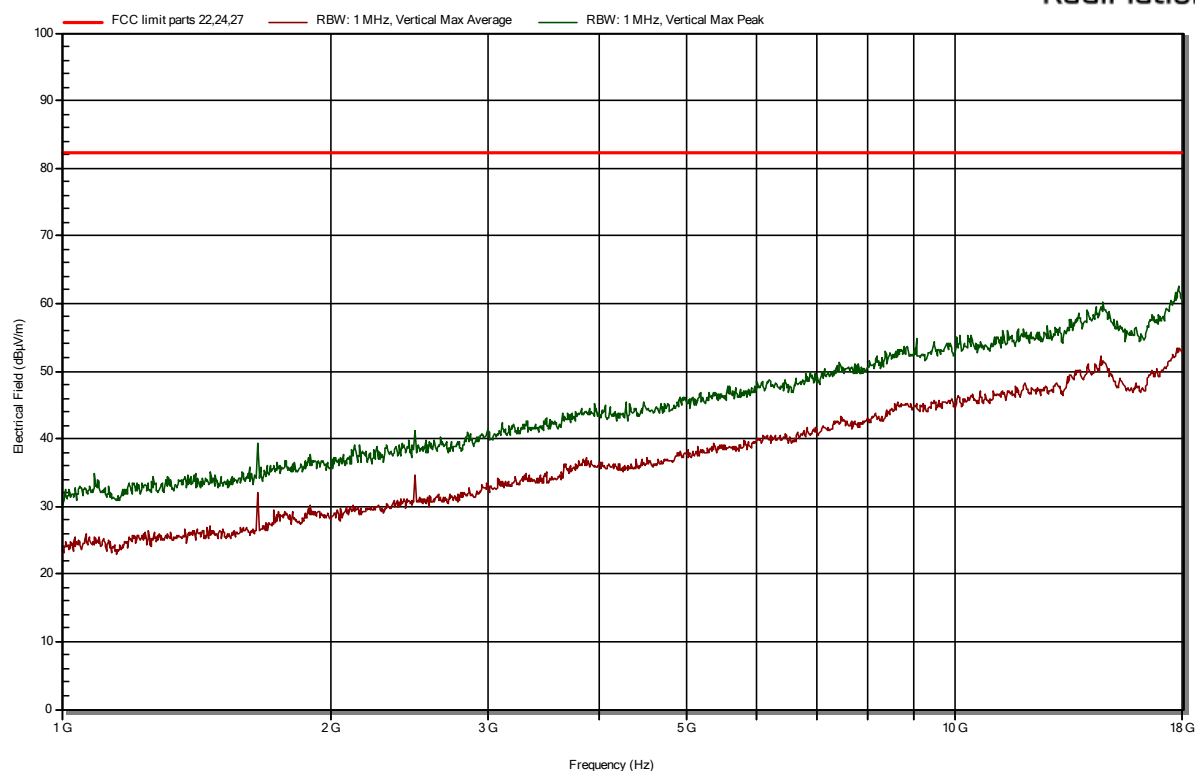

Horizontal (Band 5)


RadiMation

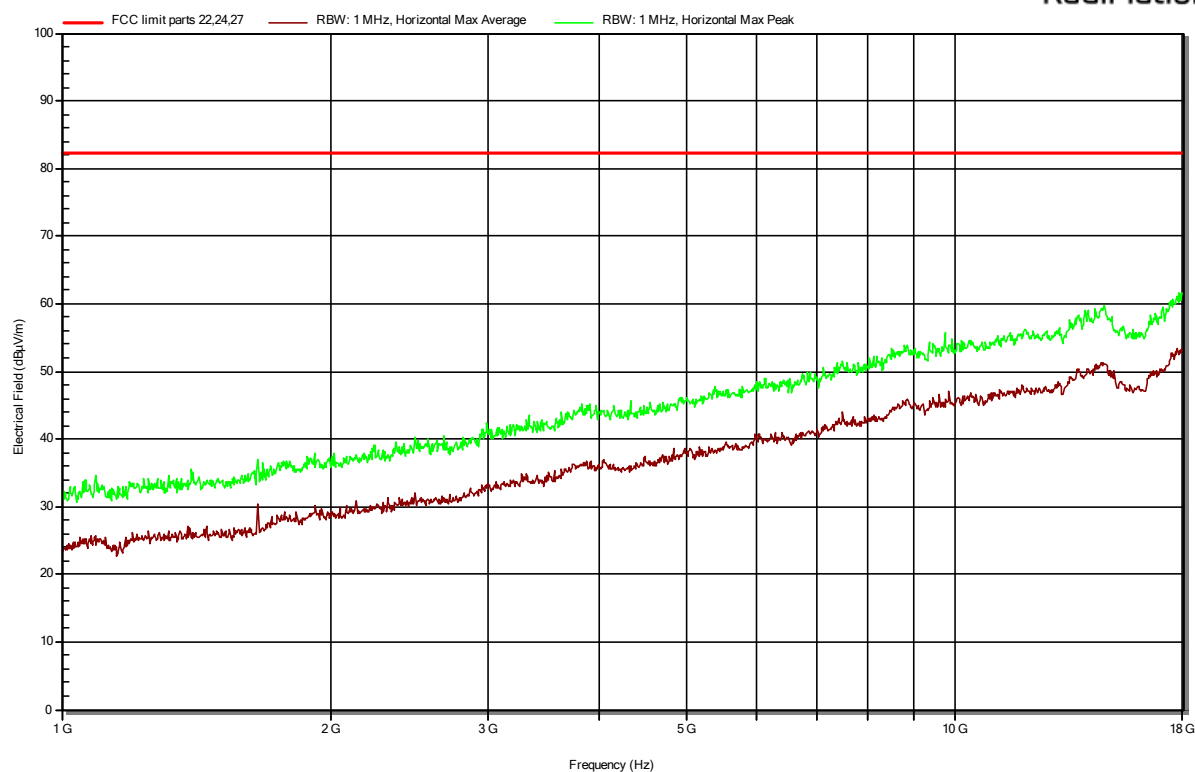

18 GHz – 26.5 GHz


Vertical (Band 2)

RadiMation

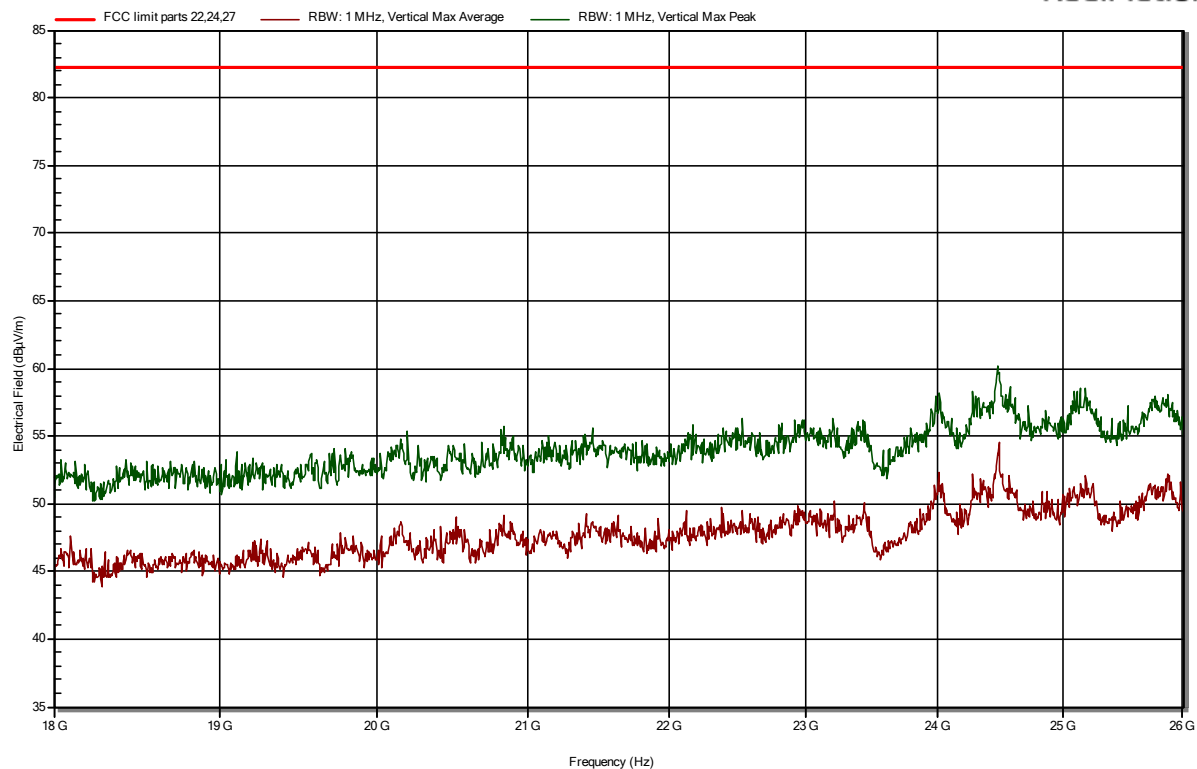


Horizontal (Band 2)

RadiMation

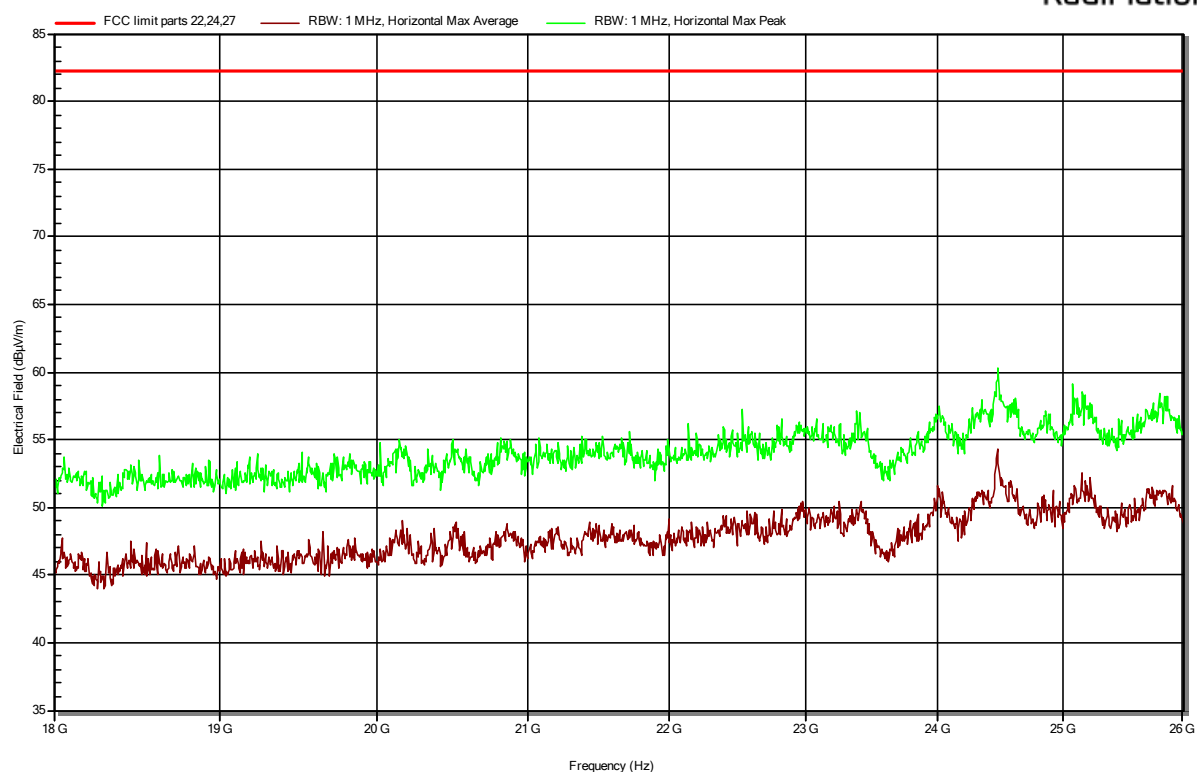


Vertical (Band 5)

RadiMation

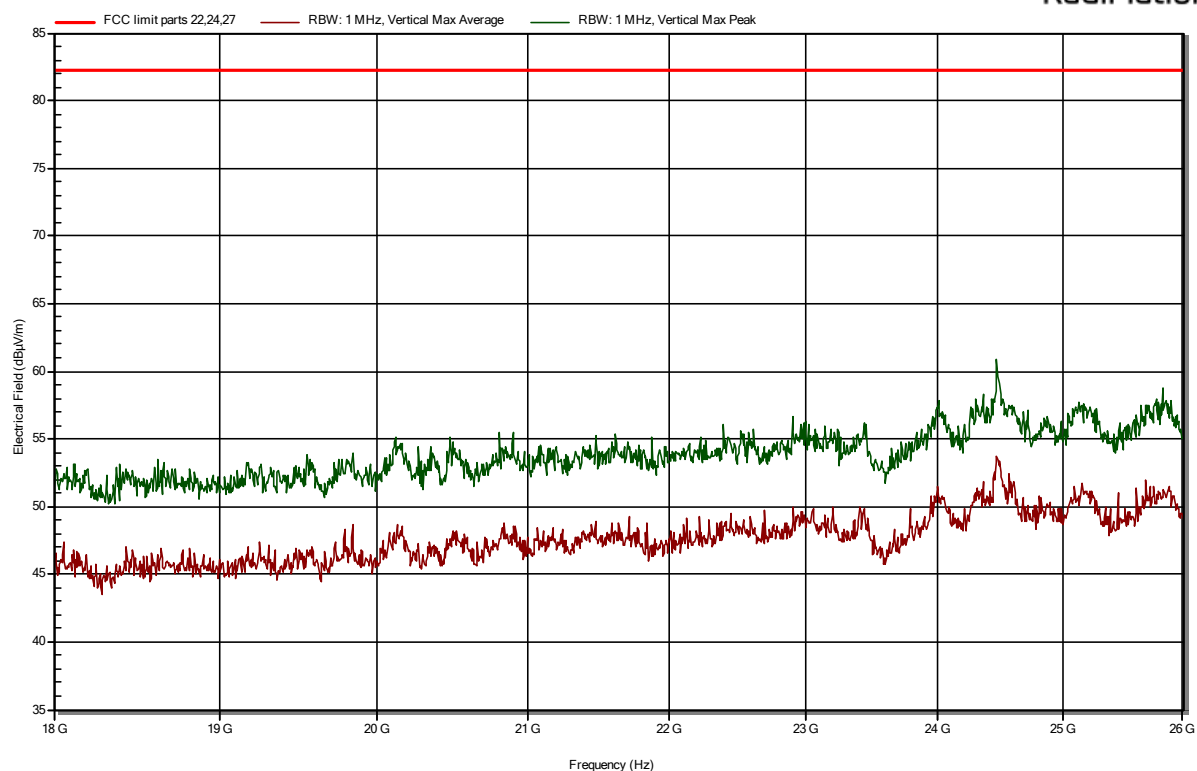

Horizontal (Band 5)


RadiMation

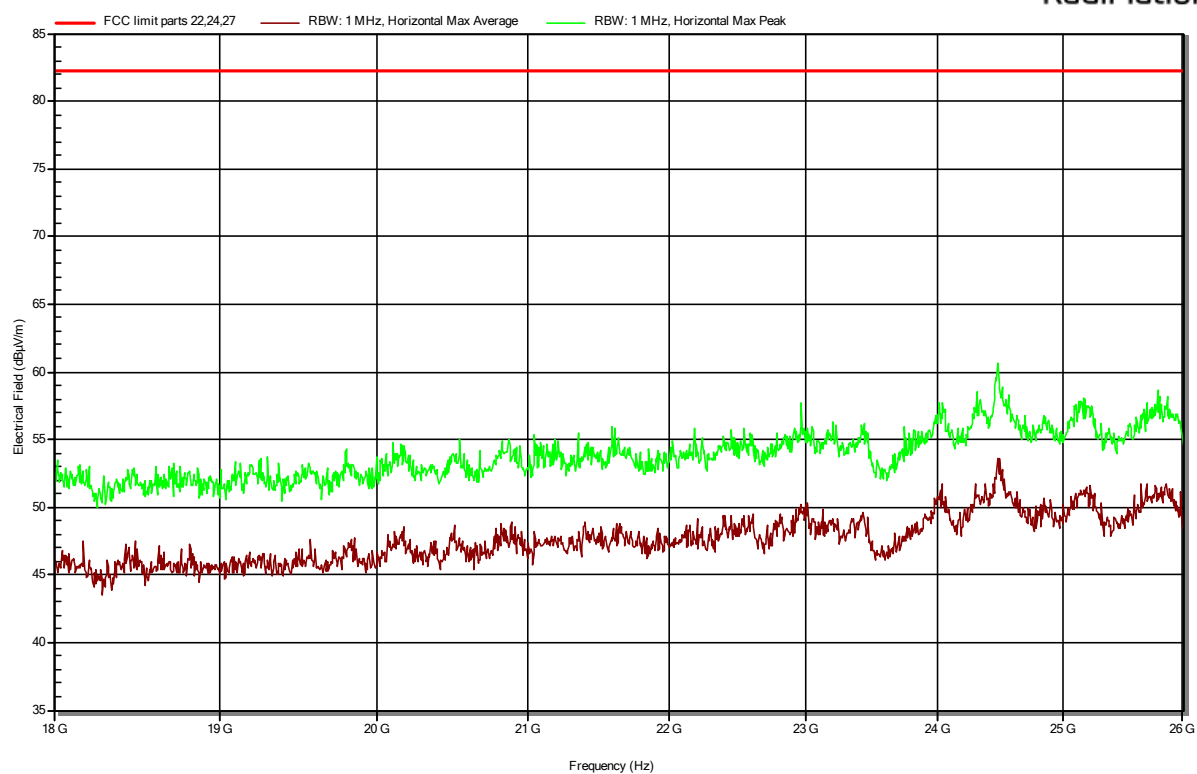

3.2 Co-Location


Co-location was performed on the frequencies of the two closest transmitted frequencies. In this case those are the RADAR and LTE Band 2.

30 MHz – 250 MHz

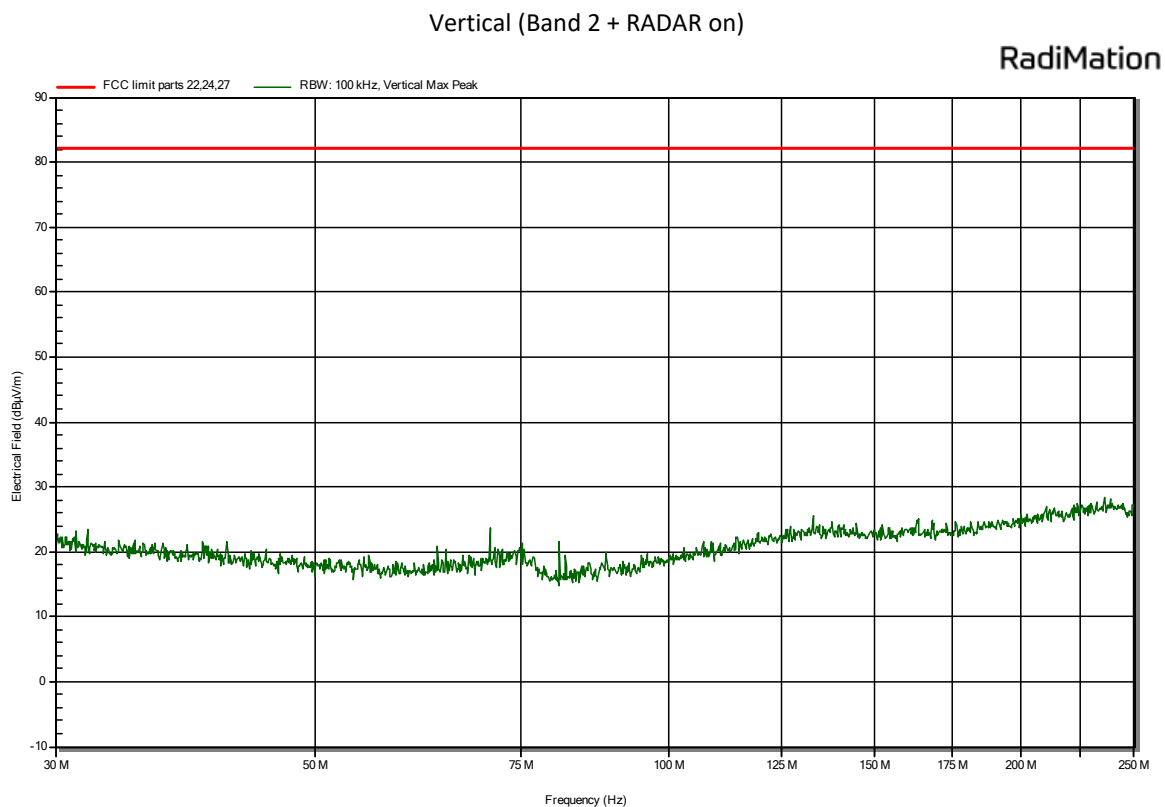

Horizontal (Band 2 + RADAR on)


RadiMation

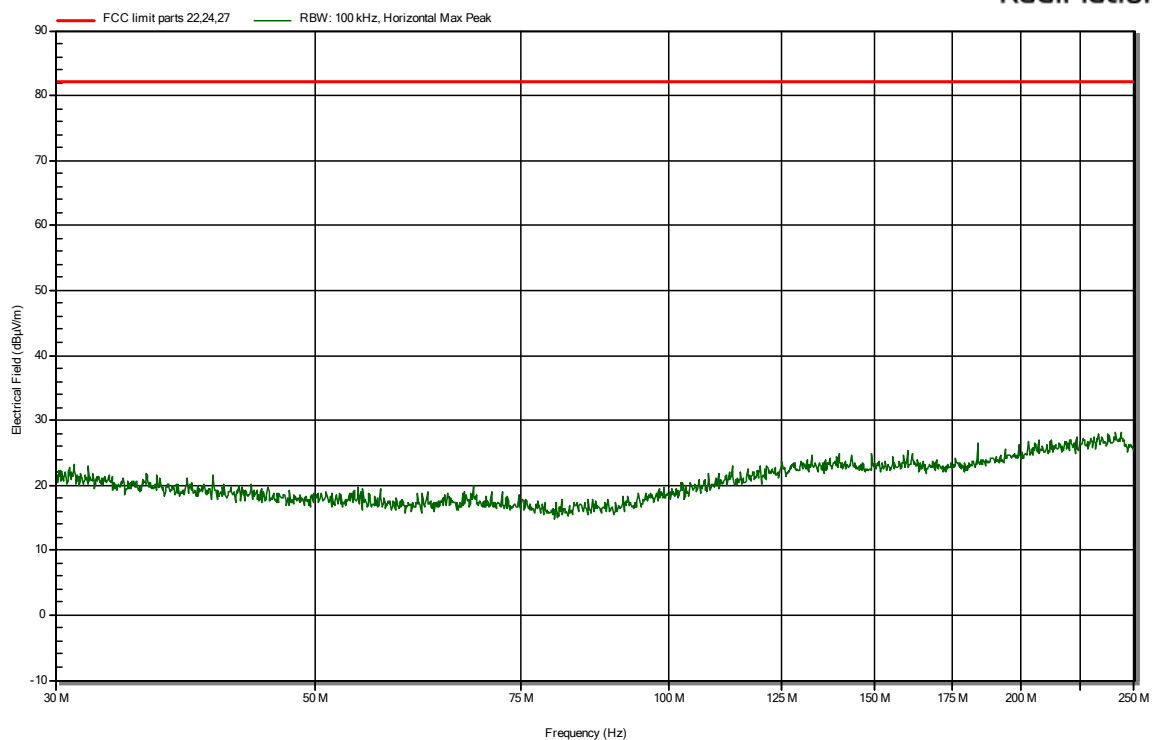

250 MHz – 1000 MHz


Vertical (Band 2 + RADAR on)

RadiMation

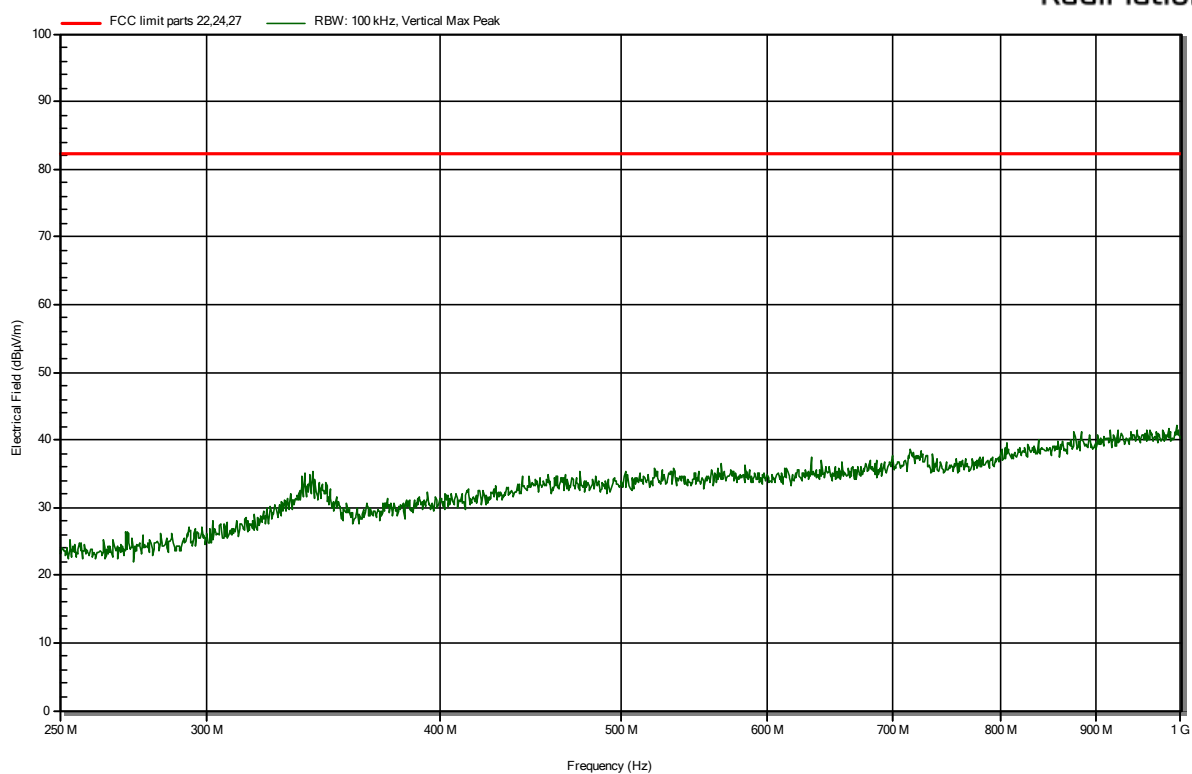

Horizontal (Band 2 + RADAR on)


RadiMation

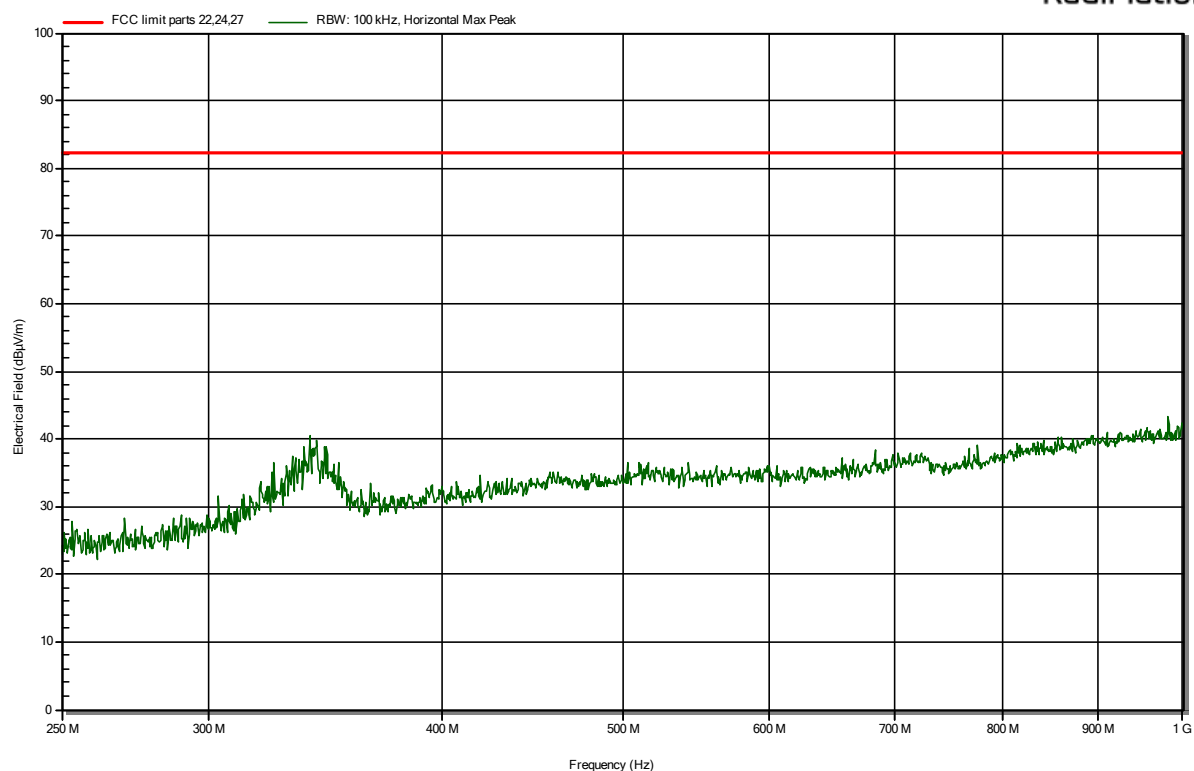

1 GHz – 18 GHz


Vertical (Band 2 + RADAR on)

RadiMation

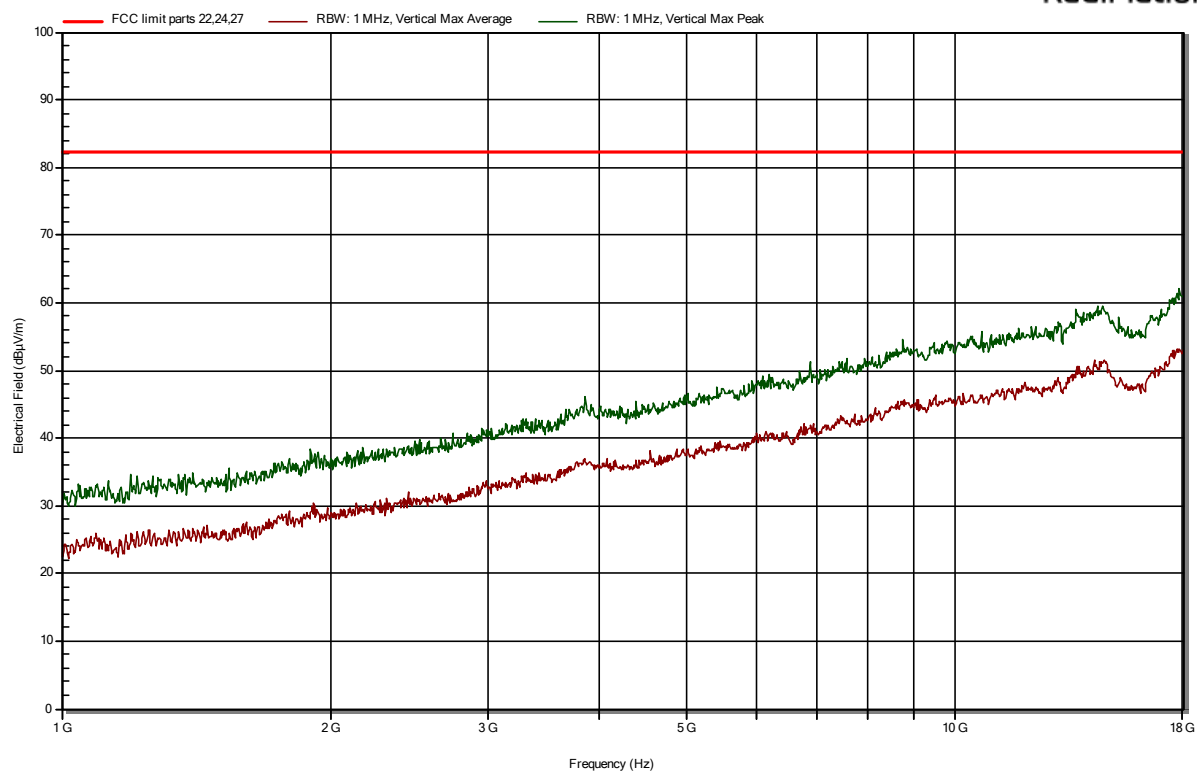

Horizontal (Band 2 + RADAR on)


RadiMation

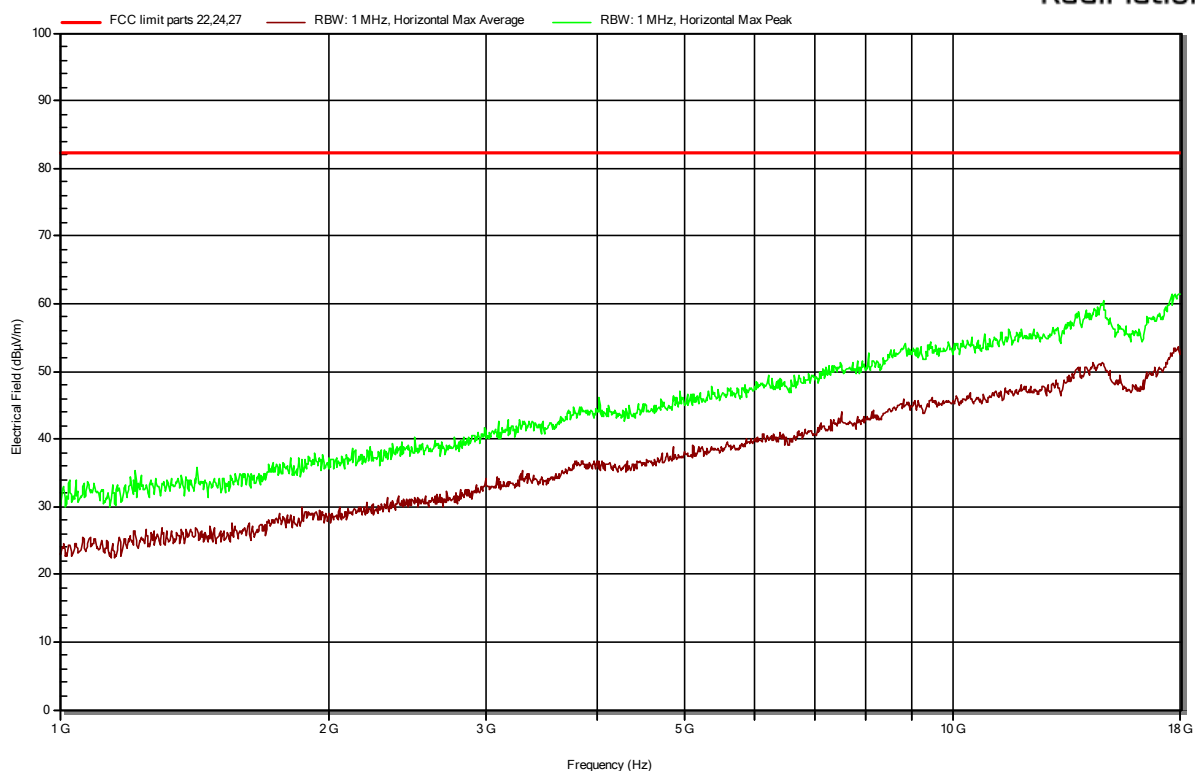

18 GHz – 26.5 GHz


Vertical (Band 2 + RADAR on)

RadiMation

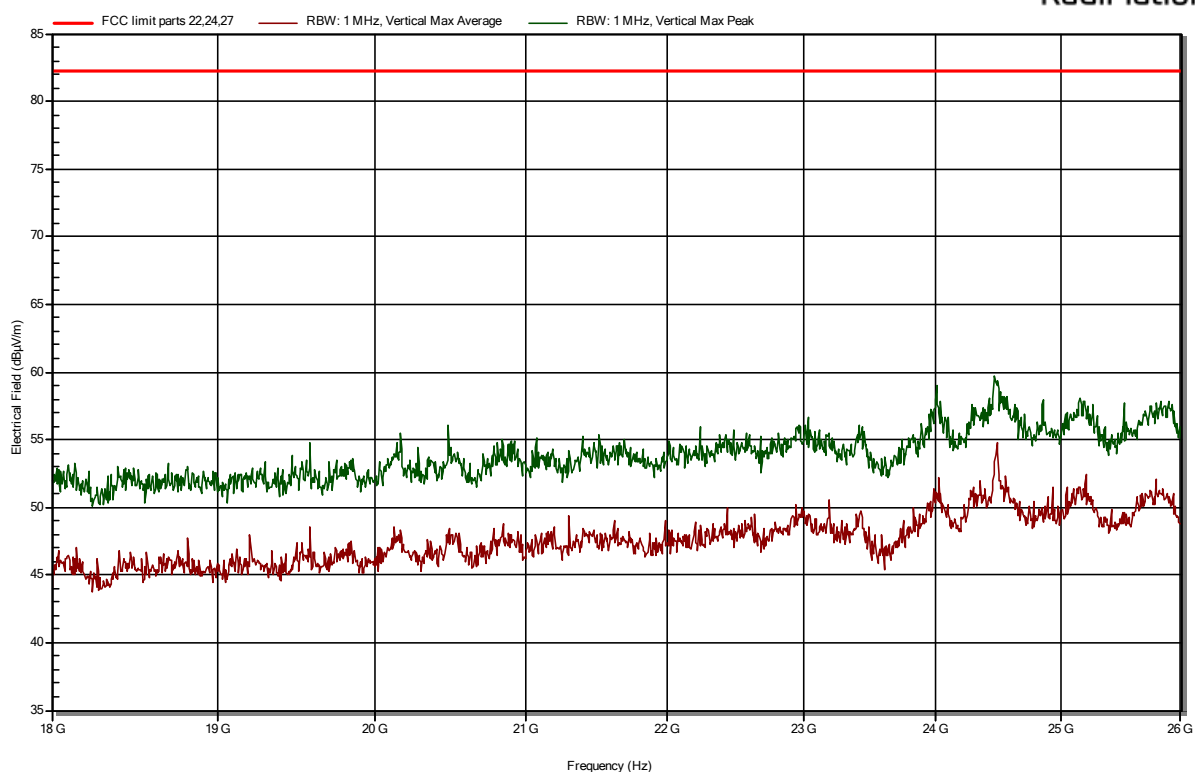

Horizontal (Band 2 + RADAR on)

RadiMation

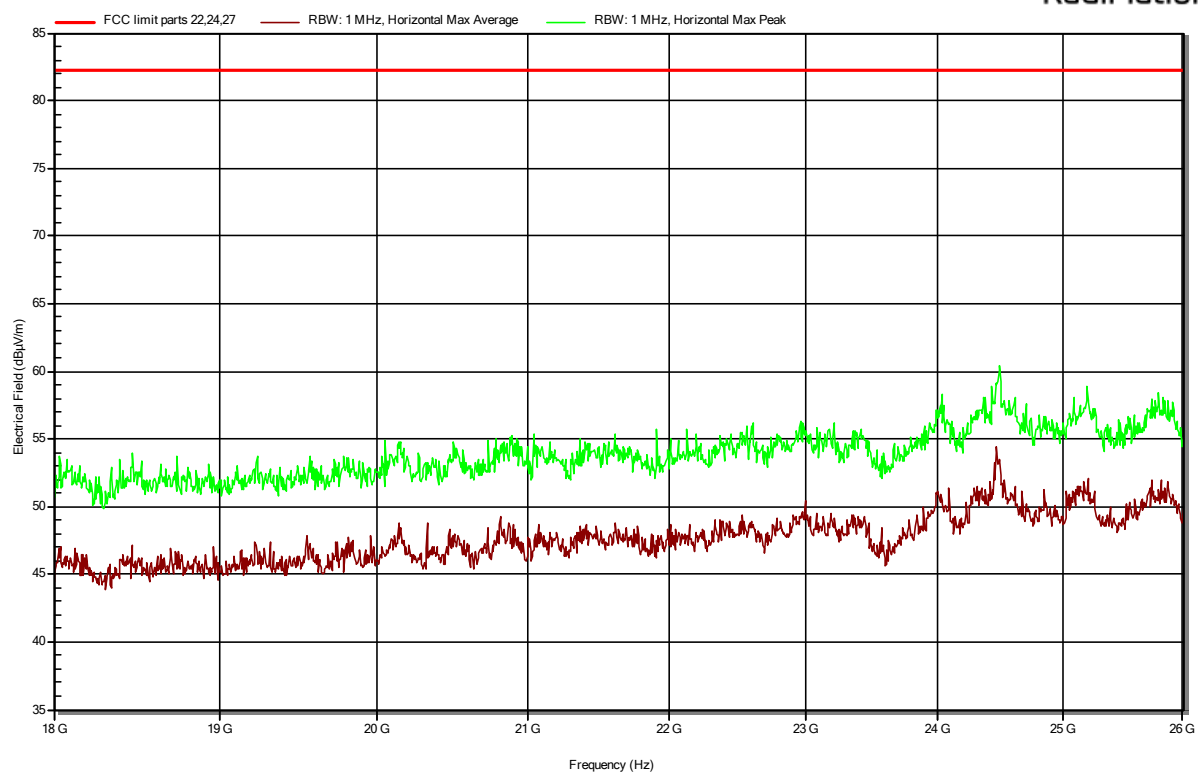

4 Sample calculations

All formulas for data conversions and conversion factors are reported in this chapter.

Conducted emission Measurement (see chapter 3.9):

$$U_{\text{lisn}} (\text{dB}\mu\text{V}) = U (\text{dB}\mu\text{V}) + \text{Corr. (dB)}$$

Where:

U = Measuring receiver voltage

LISN insertion loss = Voltage division factor of LISN

Corr. = sum of single correction factors of used LISN, cables and pulse limiter.

Linear interpolation will be used for frequencies in between the values in the table.

Frequency (Mhz)	Voltage division LISN (db)	Insertion Loss Pulse limiter (dB)	Cable loss (dB)	Corr. (dB)
	Kiwa ID 114159 SN: 892785/004 Rohde & Schwarz ESH3-Z5	Kiwa ID 114160 SN: 5SM03153 Rohde & Schwarz ESH3-Z2	-	
0,15	0,09	9,87	0,02	9,98
0,2	0,1	9,87	0,03	10
0,3	0,1	9,87	0,03	10
0,5	0,1	9,87	0,08	10,05
0,7	0,12	9,87	0,25	10,24
0,8	0,12	9,87	0,25	10,24
1	0,13	9,87	0,11	10,11
2	0,16	9,87	0,15	10,18
3	0,19	9,87	0,21	10,27
5	0,26	9,88	0,21	10,35
7	0,36	9,89	0,25	10,5
8	0,39	9,89	0,25	10,53
10	0,46	9,91	0,29	10,66
15	0,77	9,93	0,34	11,04
20	0,95	9,96	0,37	11,28
25	1,12	9,99	0,43	11,54
30	1,1	10,04	0,45	11,59

Field Strength Measurement (see chapter 3.3):

$$E \text{ (dB}\mu\text{V/m)} = U \text{ (dB}\mu\text{V)} + AF \text{ (dB/m)} + \text{Corr. (dB)}$$

Where:

E = Electric field strength

U = Measuring receiver voltage

AF = Antenna factor

CL = Cable loss

Corr. = sum of single correction factors of used cable and amplifier (if applicable).

Linear interpolation will be used for frequencies in between the values in the table.

Tables shows an extract of the values.

Frequency (Mhz)	AF (dB/m)	Cable loss (dB)	Corr. (dB)
	Kiwa ID 114516 Chase CBL6112A SN: 2308	Id: SAR cable	
30	18,6	0,68	19,28
100	10,7	1,15	11,85
150	10,6	1,41	12,01
200	9,3	1,63	10,93
250	12,6	1,93	14,53
300	13,3	2,12	15,42
350	14,6	2,2	16,8
400	15,5	2,29	17,79
450	16,9	2,53	19,43
500	17,5	2,67	20,17
550	18,4	2,9	21,3
600	18,8	3,02	21,82
650	19,2	3,09	22,29
700	19	3,22	22,22
750	19,8	3,56	23,36
800	19,7	3,69	23,39
900	20,4	3,81	24,21
950	20,8	3,91	24,71
1000	21,2	4,3	25,5

Frequency (Mhz)	AF (dB/m)	Gain (dB)	Cable loss (dB)	Corr. (dB)
	TE 00531 Emco 3115 SN: 9412-4377	TE 11132 Miteq JS4-18004000-30-8P-A1	TE 01315	
1000	23,6	40,4	2,0	66
1500	25,1	40,5	2,4	68
2000	27,1	40,5	2,7	70,3
2500	28,6	40,7	3,2	72,5
3000	30,5	40,7	3,2	74,4
3500	31,2	40,7	3,4	75,3
4000	32,7	40,9	4,9	78,5
4500	32,4	40,9	4,4	77,7
5000	33,2	40,7	4,6	78,5
5500	34,0	40,5	4,5	79
6000	34,6	40,0	5,2	79,8
6500	34,3	39,4	5,9	79,6
7000	35,2	38,6	5,7	79,5
7500	36,4	39,2	5,9	81,5
8000	37,0	38,9	6,3	82,2
8500	37,5	38,4	6,4	82,3
9000	38,1	37,4	6,5	82
9500	37,8	37,0	7,1	81,9
10000	38,2	36,5	7,3	82
10500	38,1	36,7	7,6	82,4
11000	38,3	36,9	8,3	83,5
11500	38,5	37,6	8,1	84,2
12000	39,1	38,3	8,4	85,8
12500	38,7	38,5	8,3	85,5
13000	39,2	38,9	9,2	87,3
13500	40,5	40,2	8,3	89
14000	41,1	40,0	8,2	89,3
14500	41,4	40,1	8,2	89,7
15000	40,2	41,4	8,3	89,9
15500	37,9	41,4	8,6	87,9
16000	37,5	42,8	9,2	89,5
16500	38,6	42,3	8,8	89,7
17000	41,1	43,1	9,4	93,6
17500	42,7	43,2	9,4	95,3
18000	44,0	44,2	9,8	98

Frequency (Mhz)	AF (dB/m)	Gain (dB)	Cable loss (dB)	Corr. (dB)
	TE 00531 Emco 3115 SN: 9412-4377	TE 11132 Miteq JS4-18004000-30-8P-A1	TE 01315	
18000	31,3	26,2	9,8	67,3
19000	31,5	26,1	9,6	67,2
20000	31,7	25,9	11	68,6
21000	31,9	24,3	10,7	66,9
22000	32,1	18,3	10,5	60,9
23000	32,2	18,9	10,8	61,9
24000	32,3	23,6	11,4	67,3
25000	32,4	24,5	11,6	68,5
26000	32,5	25,3	11,7	69,5

END OF REPORT