

TEST REPORT

FCC ID..... :	2BD6MX23PROTAB	
Test Report No..... :	TCT231229E167	
Date of issue..... :	Jan. 22, 2024	
Testing laboratory	SHENZHEN TONGCE TESTING LAB	
Testing location/ address:	2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China	
Applicant's name..... :	GO MD USA LLC	
Address..... :	3385 Airways Blvd STE 201, Memphis, Tennessee 38116 United States	
Manufacturer's name ... :	LHPI Group Inc	
Address..... :	Piso 8 Torre Universal, Federico Boyd, Panama City, Panama	
Standard(s)	FCC CFR Title 47 Part 2 FCC CFR Title 47 Part22 FCC CFR Title 47 Part24 FCC CFR Title 47 Part27 FCC CFR Title 47 Part90	
Product Name..... :	Tablet PC	
Trade Mark	GO MD USA	
Model/Type reference..... :	X23Pro, X23Pro Tab, T39B	
Rating(s)..... :	Refer to EUT description of page 4	
Date of receipt of test item	Dec. 29, 2023	
Date (s) of performance of test..... :	Dec. 29, 2023 ~ Jan. 22, 2024	
Tested by (+signature) ... :	Rleo LIU	
Check by (+signature).... :	Beryl ZHAO	
Approved by (+signature):	Tomsin	

General disclaimer:

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. General Product Information	3
1.1. EUT description	3
1.2. Model(s) list.....	5
1.3. Emission Designator	6
1.4. Test Frequency	9
2. Test Result Summary	14
3. General Information.....	15
3.1. Test environment and mode.....	15
3.2. Description of Support Units.....	20
3.3. Configuration of Tested System	20
3.4. Measurement Results Explanation Example.....	20
4. Facilities and Accreditations	21
4.1. Facilities	21
4.2. Location	21
4.3. Measurement Uncertainty.....	21
5. Test Results and Measurement Data	22
5.1. Effective Radiated Power and Effective Isotropic Radiated Power Measurement	22
5.2. Peak to Average Ratio.....	24
5.3. 99% Occupied Bandwidth and 26dB Bandwidth Measurement	25
5.4. Band Edge and Conducted Spurious Emission Measurement	26
5.5. Field Strength of Spurious Radiation Measurement	28
5.6. Frequency Stability Measurement	56

Appendix B: Photographs of Test Setup

Appendix C: Photographs of EUT

**Test Data: Refer to Appendix For LTE Band 2, Appendix For LTE Band 4,
Appendix For LTE Band 5, Appendix For LTE Band 12,
Appendix For LTE Band 13, Appendix For LTE Band 17,
Appendix For LTE Band 25, Appendix For LTE Band 26,
Appendix For LTE Band 41, Appendix For LTE Band 66
and Appendix For LTE Band 71**

1. General Product Information

1.1. EUT description

Product Name.....:	Tablet PC
Model/Type reference.....:	X23Pro
Sample Number.....:	TCT231229E012-0101
Tx Frequency.....:	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26-1: 814 MHz ~ 824 MHz LTE Band 26-2: 824 MHz ~ 849 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz
Rx Frequency	LTE Band 2: 1930 MHz ~ 1990 MHz LTE Band 4: 2110 MHz ~ 2155 MHz LTE Band 5: 869 MHz ~ 894 MHz LTE Band 12: 729 MHz ~ 746 MHz LTE Band 13: 746 MHz ~ 756 MHz LTE Band 17: 734 MHz ~ 746 MHz LTE Band 25: 1930 MHz ~ 1995 MHz LTE Band 26-1: 859 MHz ~ 869 MHz LTE Band 26-2: 869 MHz ~ 894 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 2110 MHz ~ 2180 MHz LTE Band 71: 617 MHz ~ 652 MHz
Bandwidth.....:	LTE Band 2: 1.4MHz /3MHz /5MHz /10MHz /15MHz /20MHz LTE Band 4: 1.4MHz /3MHz /5MHz /10MHz /15MHz /20MHz LTE Band 5: 1.4MHz /3MHz /5MHz /10MHz LTE Band 12: 1.4MHz /3MHz /5MHz /10MHz LTE Band 13: 5MHz /10MHz LTE Band 17: 5MHz /10MHz LTE Band 25: 1.4MHz /3MHz /5MHz /10MHz /15MHz /20MHz LTE Band 26-1: 1.4MHz /3MHz /5MHz /10MHz LTE Band 26-2: 1.4MHz /3MHz /5MHz /10MHz /15MHz LTE Band 41: 5MHz /10MHz /15MHz /20MHz LTE Band 66: 1.4MHz /3MHz /5MHz /10MHz /15MHz /20MHz LTE Band 71: 5MHz /10MHz /15MHz /20MHz

Maximum Output Power to Antenna.....:	LTE Band 2: 24.89dBm LTE Band 4: 24.61dBm LTE Band 5: 24.63dBm LTE Band 12: 24.59dBm LTE Band 13: 23.81dBm LTE Band 17: 24.62dBm LTE Band 25: 23.71dBm LTE Band 26-1: 24.73dBm LTE Band 26-2: 24.65dBm LTE Band 41: 28.48dBm LTE Band 66: 24.92dBm LTE Band 71: 23.11dBm
99% Occupied Bandwidth.....:	LTE Band 2: 18M1G7D LTE Band 4: 18M1G7D LTE Band 5: 8M99G7D LTE Band 12: 9M00G7D LTE Band 13: 8M97G7D LTE Band 17: 9M00G7D LTE Band 25: 18M0G7D LTE Band 26-1: 8M97G7D LTE Band 26-2: 13M5G7D LTE Band 41: 18M1G7D LTE Band 66: 18M1W7D LTE Band 71: 18M0G7D
Type of Modulation.....:	QPSK/16QAM
Antenna Type.....:	PIFA Antenna
Antenna Gain.....:	LTE Band 2: -0.66dBi LTE Band 4: -0.70dBi LTE Band 5: -0.54dBi LTE Band 12: 0.25dBi LTE Band 13: -0.19dBi LTE Band 17: 0.25dBi LTE Band 25: -0.13dBi LTE Band 26-1: -0.14dBi LTE Band 26-2: -0.14dBi LTE Band 41: -0.26dBi LTE Band 66: -0.68dBi LTE Band 71: -0.83dBi
Rating(s).....:	Adapter Information: MODEL: B0S050200-01A INPUT: AC 100-240V, 50/60Hz, 0.45A OUTPUT: DC 5V, 2000mA Rechargeable Li-ion Battery DC 3.8V

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

1.2. Model(s) list

No.	Model No.	Tested with
1	X23Pro	☒
Other models	X23Pro Tab, T39B	☐

Note: X23Pro is tested model, other models are derivative models. The models are identical in circuit and PCB layout, only different on the model names and color. So the test data of X23Pro can represent the remaining models.

1.3. Emission Designator

LTE Band 2	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
1.4	1M10G7D	0.265	1M09W7D	0.214
3	2M75G7D	0.248	2M75W7D	0.204
5	4M52G7D	0.256	4M50W7D	0.216
10	9M03G7D	0.256	8M97W7D	0.217
15	13M5G7D	0.259	13M5W7D	0.214
20	18M1G7D	0.256	18M0W7D	0.193

LTE Band 4	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
1.4	1M09G7D	0.221	1M09W7D	0.184
3	2M74G7D	0.220	2M73W7D	0.200
5	4M49G7D	0.246	4M49W7D	0.190
10	9M00G7D	0.225	8M97W7D	0.205
15	13M50G7D	0.219	13M5W7D	0.200
20	18M0G7D	0.221	18M1W7D	0.184

LTE Band 5	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
1.4	1M10G7D	0.149	1M10W7D	0.138
3	2M74G7D	0.148	2M73W7D	0.138
5	4M49G7D	0.151	4M49W7D	0.136
10	8M99G7D	0.156	8M98W7D	0.132

LTE Band 12	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
1.4	1M09G7D	0.181	1M10W7D	0.164
3	2M74G7D	0.184	2M74W7D	0.160
5	4M49G7D	0.185	4M50W7D	0.140
10	9M00G7D	0.186	8M97W7D	0.160

LTE Band 13	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
5	4M50G7D	0.140	4M52W7D	0.106
10	8M97G7D	0.133	8M97W7D	0.118

LTE Band 17	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
5	4M50G7D	0.187	4M50W7D	0.161
10	9M00G7D	0.184	8M94W7D	0.158

LTE Band 25	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
1.4	1M09G7D	0.218	1M10W7D	0.178
3	2M74G7D	0.228	2M74W7D	0.177
5	4M49G7D	0.228	4M49W7D	0.171
10	8M99G7D	0.220	8M97W7D	0.194
15	13M5G7D	0.217	13M5W7D	0.191
20	18M0G7D	0.225	18M0W7D	0.171

LTE Band 26-1	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
1.4	1M10G7D	0.172	1M10W7D	0.156
3	2M74G7D	0.166	2M74W7D	0.155
5	4M50G7D	0.175	4M50W7D	0.152
10	8M97G7D	0.175	8M94W7D	0.143

LTE Band 26-2	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	BW(MHz)	Emission Designator (99%OBW)
1.4	1M09G7D	0.163	1M09W7D	0.142
3	2M74G7D	0.172	2M73W7D	0.150
5	4M49G7D	0.167	4M49W7D	0.147
10	8M99G7D	0.172	8M97W7D	0.146
15	13M5G7D	0.167	13M5W7D	0.153

LTE Band 41	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
5	4M50G7D	0.664	4M50W7D	0.579
10	9M00G7D	0.658	9M00W7D	0.594
15	13M5G7D	0.641	13M5W7D	0.582
20	18M1G7D	0.656	18M1W7D	0.618

LTE Band 66	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
1.4	1M09G7D	0.254	1M10W7D	0.224
3	2M74G7D	0.254	2M74W7D	0.225
5	4M50G7D	0.264	4M50W7D	0.203
10	9M03G7D	0.251	9M00W7D	0.235
15	13M5G7D	0.254	13M5W7D	0.233
20	18M1G7D	0.265	18M1W7D	0.201

LTE Band 71	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
5	4M49G7D	0.103	4M49W7D	0.085
10	8M98G7D	0.098	8M97W7D	0.088
15	13M5G7D	0.099	13M5W7D	0.087
20	18M0G7D	0.100	18M0W7D	0.084

1.4. Test Frequency

LTE Band 2(1.4MHz)		LTE Band 2(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
18607	1850.7	18615	1851.5
18900	1880	18900	1880
19193	1909.3	19185	1908.5
LTE Band 2(5MHz)		LTE Band 2(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
18625	1852.5	18650	1855
18900	1880	18900	1880
19175	1907.5	19150	1905
LTE Band 2(15MHz)		LTE Band 2(20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
18675	1857.5	18700	1860
18900	1880	18900	1880
19125	1902.5	19100	1900

LTE Band 4(1.4MHz)		LTE Band 4(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
19957	1710.7	19965	1711.5
20175	1732.5	20175	1732.5
20393	1754.3	20385	1753.5
LTE Band 4(5MHz)		LTE Band 4(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
19975	1712.5	20000	1715
20175	1732.5	20175	1732.5
20375	1752.5	20350	1750
LTE Band 4(15MHz)		LTE Band 4(20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20025	1717.5	20050	1720
20175	1732.5	20175	1732.5
20325	1747.5	20300	1745

LTE Band 5(1.4MHz)		LTE Band 5(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20407	824.7	20415	825.5
20525	836.5	20525	836.5
20643	848.3	20635	847.5
LTE Band 5(5MHz)		LTE Band 5(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20425	826.5	20450	829
20525	836.5	20525	836.5
20625	846.5	20600	844

LTE Band 12(1.4MHz)		LTE Band 12(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
23017	699.7	23025	700.5
23095	707.5	23095	707.5
23173	715.3	23165	714.5
LTE Band 12(5MHz)		LTE Band 12(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
23035	701.5	23060	704
23095	707.5	23095	707.5
23155	713.5	23130	711

LTE Band 13(5MHz)		LTE Band 13(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
23205	779.5	23230	782
23230	782	23230	782
23255	784.5	23230	782

LTE Band 17(5MHz)		LTE Band 17(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
23755	706.5	23780	709
23790	710	23790	710
23825	713.5	23800	711

LTE Band 25(1.4MHz)		LTE Band 25(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26047	1850.7	26055	1851.5
26365	1882.5	26365	1882.5
26683	1914.3	26675	1913.5
LTE Band 25(5MHz)		LTE Band 25(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26065	1852.5	26090	1855
26365	1882.5	26365	1882.5
26665	1912.5	26640	1910
LTE Band 25(15MHz)		LTE Band 25(20MHz)	
26115	1857.5	26140	1860
26365	1882.5	26365	1882.5
26615	1907.5	26590	1905

LTE Band 26-1(1.4MHz)		LTE Band 26-1(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26697	814.7	26705	815.5
26740	819.0	26740	819.0
26783	823.3	26775	822.5
LTE Band 26-1(5MHz)		LTE Band 26-1(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26715	816.5	26740	819
26740	819.0		
26765	821.5		

LTE Band 26-2(1.4MHz)		LTE Band 26-2(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26797	824.7	26805	825.5
26915	836.5	26915	836.5
27033	848.3	27025	847.5
LTE Band 26-2(5MHz)		LTE Band 26-2(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26815	826.5	26840	829
26915	836.5	26915	836.5
27015	846.5	26990	844
LTE Band 26-2(15MHz)			
26865	831.5		
26915	836.5		
26965	841.5		

LTE Band 41(5MHz)		LTE Band 41(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
39675	2498.5	39700	2501
40620	2593	40620	2593
41565	2687.5	41540	2685
LTE Band 41(15MHz)		LTE Band 41(20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
39725	2503.5	39750	2506
40620	2593	40620	2593
41515	2682.5	41490	2680

LTE Band 66(1.4MHz)		LTE Band 66(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
131979	1710.7	131987	1711.5
132322	1745	132322	1745
132665	1779.3	132657	1778.5
LTE Band 66(5MHz)		LTE Band 66(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
131997	1712.5	132022	1715
132322	1745	132322	1745
132647	1777.5	132622	1775
LTE Band 66(15MHz)		LTE Band 66(20MHz)	
132047	1717.5	132072	1720
132322	1745	132322	1745
132597	1772.5	132572	1770

LTE Band 71(5MHz)		LTE Band 71(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
133147	665.5	133172	668
133297	680.5	133297	680.5
133447	695.5	133422	693
LTE Band 71(15MHz)		LTE Band 71(20MHz)	
133197	670.5	133222	673
133297	680.5	133322	680.5
133397	690.5	133372	688

2. Test Result Summary

Requirement	CFR 47 Section	Result
Conducted Output Power	§2.1046; §22.913; §24.232(c); §27.50(d); §27.50(c); §27.50(b); §90.542(a)	PASS
Peak-to-Average Ratio	§2.1046; §24.232(d) §27.50(d); §27.50(c); §27.50(b)	PASS
Effective Radiated Power	§2.1046; §22.913; §24.232(c); §27.50(d); §27.50(c); §27.50(b); §90.542(a)	PASS
Equivalent Isotropic Radiated Power	§2.1046; §22.913; §24.232(c); §27.50(d); §27.50(c); §27.50(b); §90.542(a)	PASS
Occupied Bandwidth	§2.1049; §24.238(b); §27.53; §90.209(a)	PASS
Band Edge	§2.1051; §22.917(a); §27.53(h); §27.53(c); §27.53(g); §24.238(a); §90.543(e)	PASS
Conducted Spurious Emission	§2.1051; §22.917(a); §27.53(h); §27.53(g); §27.53(c); §24.238(a); §90.543(c)	PASS
Field Strength of Spurious Radiation	§2.1053; §22.917(a); §27.53(g); §27.53(c); §27.53(h); §24.238(a); §90.543(c)	PASS
Frequency Stability for Temperature & Voltage	§2.1055; §22.355; §27.54; §24.235; §90.213	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.
5. The EUT has two appearance types, only the camera position is different, and both have been tested, only camera position 1 has the worst test data.

3. General Information

3.1. Test environment and mode

Operating Environment:

Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar

Keep the EUT in communication with CMW500 and select channel with modulation
All modes and data rates and positions were investigated.
Test modes are chosen to be reported as the worst case configuration below:

Test Mode

Band	Radiated TCs	Conducted TCs
LTE Band 2	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)
LTE Band 4	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)
LTE Band 5	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz)
LTE Band 12	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz)
LTE Band 13	QPSK Link (5MHz / 10MHz)	16QAM Link (5MHz / 10MHz)
LTE Band 17	QPSK Link (5MHz / 10MHz)	16QAM Link (5MHz / 10MHz)
LTE Band 25	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)
LTE Band 26-1	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz)
LTE Band 26-2	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz)
LTE Band 41	QPSK Link (5MHz / 10MHz / 15MHz /	16QAM Link (5MHz / 10MHz / 15MHz /

	20MHz)	20MHz)
LTE Band 66	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)
LTE Band 71	QPSK Link (5MHz /10MHz / 15MHz / 20MHz)	16QAM Link (5MHz /10MHz / 15MHz / 20MHz)

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas License Digital Systems v03 with maximum output power. Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission. The sample was placed 0.8m/1.5m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarization. The emissions worst-case are shown in Test Results of the following pages.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	13	-	-	v	v	-	-	v	v	v	v	v	v	v	v
	17	-	-	v	v	-	-	v	v	v	v	v	v	v	v
	25	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	26-1	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	26-2	v	v	v	v	v	-	v	v	v	v	v	v	v	v
	41	-	-	v	v	v	v	v	v	v	v	v	v	v	v
	66	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	71	-	-	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	13	-	-	v	v	-	-	v	v	v	v	v	v	v	v
	17	-	-	v	v	-	-	v	v	v	v	v	v	v	v
	25	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	26-1	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	26-2	v	v	v	v	v	-	v	v	v	v	v	v	v	v
	41	-	-	v	v	v	v	v	v	v	v	v	v	v	v
	66	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	71	-	-	v	v	v	v	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	13	-	-	v	v	-	-	v	v	v	v	v	v	v	v
	17	-	-	v	v	-	-	v	v	v	v	v	v	v	v
	25	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	26-1	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	26-2	v	v	v	v	v	-	v	v	v	v	v	v	v	v
	41	-	-	v	v	v	v	v	v	-	-	v	v	v	v

	66	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	71	-	-	v	v	v	v	v	v	v	v	v	v	v	v
Conducted Band Edge	2	v	v	v	v	v	v	v	v	v	v	v	v	-	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	-	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	-	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	13	-	-	v	v	-	-	v	v	v	v	v	v	v	v
	17	-	-	v	v	-	-	v	v	v	v	v	v	-	v
	25	v	v	v	v	v	v	v	v	v	v	v	v	-	v
	26-1	v	v	v	v	-	-	v	v	v	v	v	v	-	v
	26-2	v	v	v	v	v	-	v	v	v	v	v	v	-	v
	41	-	-	v	v	v	v	v	v	v	-	v	v	-	v
	66	v	v	v	v	v	v	v	v	v	v	v	v	-	v
	71	-	-	v	v	v	v	v	v	v	v	v	v	-	v
Conducted Spurious Emission	2	v	v	v	v	v	v	v	v	v	-	-	v	v	v
	4	v	v	v	v	v	v	v	v	v	-	-	v	v	v
	5	v	v	v	v	-	-	v	v	v	-	-	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	13	-	-	v	v	-	-	v	v	v	v	v	v	v	v
	17	-	-	v	v	-	-	v	v	v	-	-	v	v	v
	25	v	v	v	v	v	v	v	v	v	-	-	v	v	v
	26-1	v	v	v	v	-	-	v	v	v	-	-	v	v	v
	26-2	v	v	v	v	v	-	v	v	v	-	-	v	v	v
	41	-	-	v	v	v	v	v	v	v	-	-	v	v	v
	66	v	v	v	v	v	v	v	v	v	-	-	v	v	v
	71	-	-	v	v	v	v	v	v	v	-	-	v	v	v
Frequency Stability	2	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	4	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	5	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	12	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	13	-	-	v	-	-	-	v	v	v	-	-	v	v	v
	17	-	-	v	-	-	-	v	v	v	-	-	v	v	v
	25	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	26-1	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	26-2	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	41	-	-	v	-	-	-	v	v	v	-	-	v	v	v

	66	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	71	-	-	v	v	v	v	v	v	v	-	-	v	v	v
E.R.P./E.I.R.P.	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	13	-	-	v	v	-	-	v	v	v	v	v	v	v	v
	17	-	-	v	v	-	-	v	v	v	v	v	v	v	v
	25	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	26-1	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	26-2	v	v	v	v	v	-	v	v	v	v	v	v	v	v
	41	-	-	v	v	v	v	v	v	v	v	v	v	v	v
	66	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	71	-	-	v	v	v	v	v	v	v	v	v	v	v	v
	2	-	-	-	-	-	v	v	v	v	-	-	v	v	v
	4	-	-	-	-	-	v	v	v	v	-	-	v	v	v
	5	-	-	-	v	-	-	v	v	v	-	-	v	v	v
	12	-	-	-	v	-	-	v	v	v	-	-	v	v	v
	13	-	-	-	v	-	-	v	v	v	-	-	v	v	v
	17	-	-	-	v	-	-	v	v	v	-	-	v	v	v
	25	-	-	-	-	-	v	v	v	v	-	-	v	v	v
	26-1	-	-	v	-	-	-	v	v	v	-	-	v	v	v
	26-2	-	-	-	-	v	-	v	v	v	-	-	v	v	v
	41	-	-	-	-	-	v	v	v	v	-	-	v	v	v
Note	66	-	-	-	-	-	v	v	v	v	-	-	v	v	v
	71	-	-	-	-	-	v	v	v	v	-	-	v	v	v
1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported.															

3.2. Description of Support Units

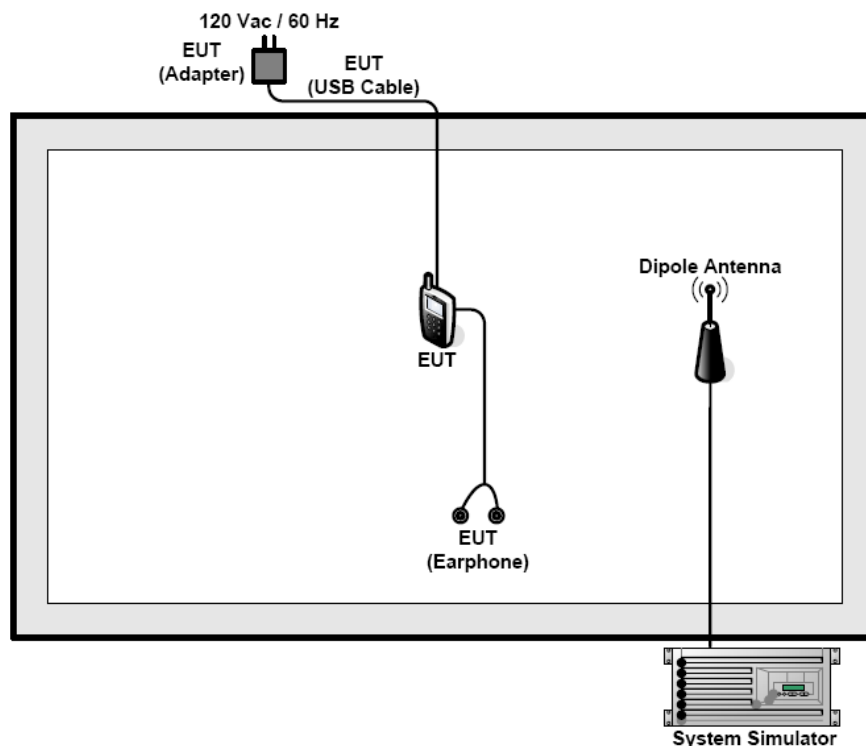
The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

3.3. Configuration of Tested System



3.4. Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level. The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

4. Facilities and Accreditations

4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

SHENZHEN TONGCE TESTING LAB

CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339

4.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	± 3.10 dB
2	RF power, conducted	± 0.12 dB
3	Spurious emissions, conducted	± 0.11 dB
4	All emissions, radiated(<1 GHz)	± 4.56 dB
5	All emissions, radiated(1 GHz - 18 GHz)	± 4.22 dB
6	All emissions, radiated(18 GHz- 40 GHz)	± 4.36 dB

5. Test Results and Measurement Data

5.1. Effective Radiated Power and Effective Isotropic Radiated Power Measurement

5.1.1. Test Specification

Test Requirement:	Refer to section 2
Test Method:	FCC part 2.1046
Limit:	LTE Band 2: 2W LTE Band 4: 1W LTE Band 5: 7W LTE Band 12: 3W LTE Band 13: 3W LTE Band 17: 3W LTE Band 25: 2W LTE Band 26-1: 100W LTE Band 26-2: 7W LTE Band 41: 2W LTE Band 66: 1W LTE Band 71: 3W
Test Setup:	 The diagram illustrates the test setup. On the left, there is a 'System Simulator' represented by a computer monitor icon. A horizontal line connects the simulator to a mobile phone icon on the right, which is labeled 'EUT' (Equipment Under Test).
Test Procedure:	1. The transmitter output port was connected to the system simulator. 2. Set EUT at maximum power through system simulator. 3. Select lowest, middle, highest channels for each band and different modulation. 4. Measure and record the power level from the system simulator. 5. Calculate the ERP and EIRP The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is: $\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$ where: ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas}, typically

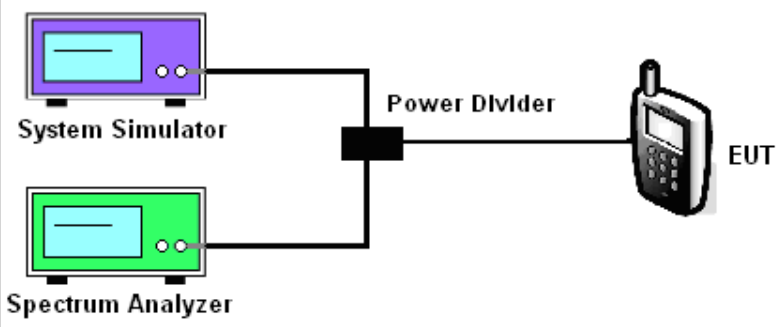
	dBW or dBm); P_{Meas} = measured transmitter output power or PSD, in dBm or dBW; G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP); L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB. <i>Note: For personal/portable radios utilizing an integral antenna, the factor L_C is typically negligible. However, in a fixed station transmit system that utilizes a long cable run between the transmitter and the transmitting antenna, this factor can be significant.</i>
Test Result:	PASS

5.1.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Wideband Radio Communication Tester	R&S	CMW500	114220	Jun. 30, 2024
Combiner Box	Ascentest	AT890-RFB	/	/

5.2. Peak to Average Ratio

5.2.1. Test Specification

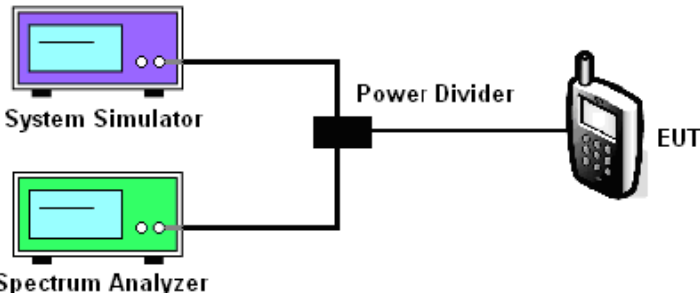
Test Requirement:	Refer to section 2
Test Method:	FCC KDB 971168 D01v03
Limit:	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
Test Setup:	 The diagram illustrates the test setup. A System Simulator (represented by a purple monitor icon) and a Spectrum Analyzer (represented by a green monitor icon) are both connected to a central Power Divider (represented by a black square icon). The Power Divider is then connected to the EUT (Equipment Under Test, represented by a mobile phone icon).
Test Procedure:	1. The testing follows FCC KDB 971168 D01v03 Section 5.7.1. 2. The EUT was connected to spectrum analyzer and system simulator via a power divider. 3. Set EUT to transmit at maximum output power. 4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.
Test Result:	PASS

5.2.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Wideband Radio Communication Tester	R&S	CMW500	114220	Jun. 30, 2024
Spectrum Analyzer	R&S	FSV40-N	102188	Feb. 20, 2024
Combiner Box	Ascentest	AT890-RFB	/	/

5.3. 99% Occupied Bandwidth and 26dB Bandwidth Measurement

5.3.1. Test Specification

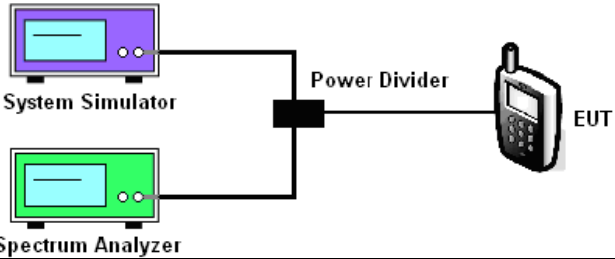
Test Requirement:	Refer to section 2
Test Method:	FCC part 2.1049
Limit:	N/A
Test Setup:	 The diagram shows a System Simulator (purple box) and a Spectrum Analyzer (green box) connected to a Power Divider (black box). The Power Divider is connected to the EUT (Equipment Under Test, a mobile phone). The System Simulator and Spectrum Analyzer are connected to the Power Divider via cables.
Test Procedure:	1. The testing follows FCC KDB 971168 D01v03 Section 4.2. 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider. 3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 4. The 99% occupied bandwidth were measured, set RBW= 1% of OBW, VBW= 3*RBW, sample detector, trace maximum hold. 5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.
Test Result:	PASS

5.3.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Wideband Radio Communication Tester	R&S	CMW500	114220	Jun. 30, 2024
Spectrum Analyzer	R&S	FSV40-N	102188	Feb. 20, 2024
Combiner Box	Ascentest	AT890-RFB	/	/

5.4. Band Edge and Conducted Spurious Emission Measurement

5.4.1. Test Specification

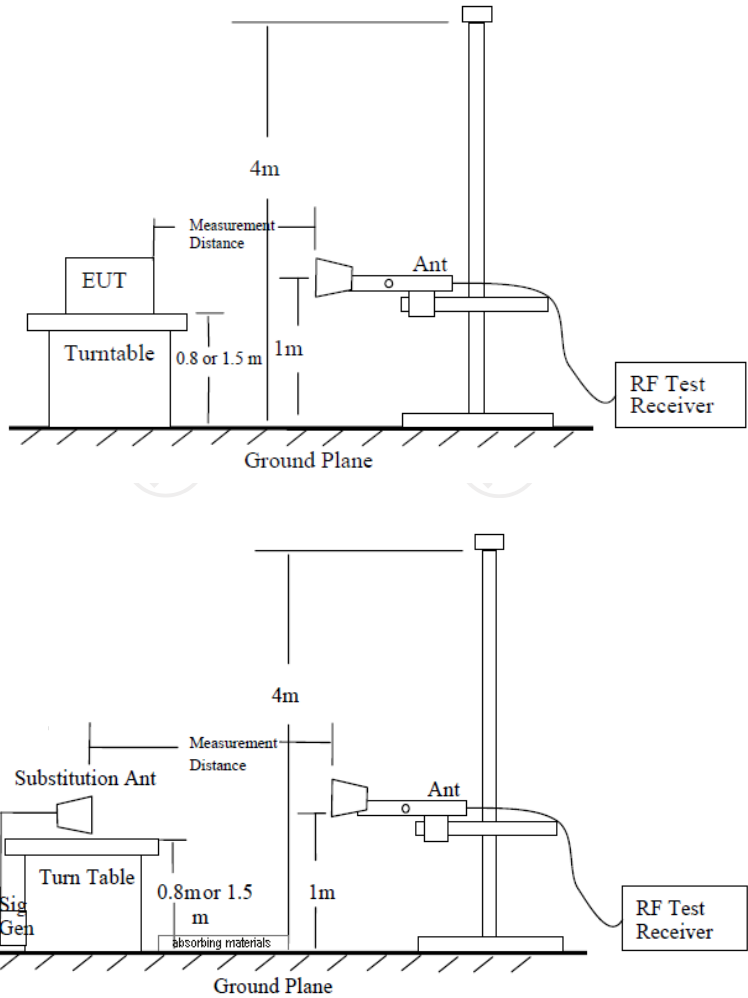
Test Requirement:	Refer to section 2
Test Method:	FCC part2.1051
Limit:	Band2, 4, 5, 12, 17, 25, 26-1, 26-2, 66, 71:-13dbm Band 13: -13dBm/-35dbm Band 41: -10dBm/-13dbm/-25dbm
Test Setup:	 The diagram shows a System Simulator (purple box) and a Spectrum Analyzer (green box) connected to a Power Divider (black box). The Power Divider is connected to the EUT (mobile phone icon). The System Simulator and Spectrum Analyzer are connected to the Power Divider via cables.
Test Procedure:	1. The testing follows FCC KDB 971168 D01v03 Section 6.0. 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider. 3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement. 4. The band edges of low and high channels for the highest RF powers were measured. 5. The conducted spurious emission for the whole frequency range was taken. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS

5.4.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Wideband Radio Communication Tester	R&S	CMW500	114220	Jun. 30, 2024
Spectrum Analyzer	R&S	FSV40-N	102188	Feb. 20, 2024
Combiner Box	Ascentest	AT890-RFB	/	/

5.5. Field Strength of Spurious Radiation Measurement

5.5.1. Test Specification

Test Requirement:	Refer to section 2
Test Method:	FCC part 2.1053
Limit:	Band 5/12/26-1/26-2: 30MHz-10GHz: -13dBm Band 4: 30MHz-18GHz: -13dBm Band 2/25: 30MHz-20GHz: -13dBm Band 7: 30MHz-26GHz: -25dbm Band 41: 30MHz-27GHz: -25dbm Band17/66: 30M-8G: -13dbm Band 71: 30M-7G: -13dbm Band 13: 30MHz-8GHz: -13dbm /-35dbm /-40dbm
Test setup:	
Test Procedure:	1. The testing follows FCC KDB 971168 D01v03 Section 5.8 and ANSI / TIA-603-D-2010Section 2.2.12. 2. The EUT was placed on a rotatable wooden table 0.8&1.5 meters above the ground.

	- The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower. - The table was rotated 360 degrees to determine the position of the highest spurious emission. - The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations. - Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission. - A horn antenna was substituted in place of the EUT and was driven by a signal generator. - Tune the output power of signal generator to the same emission level with EUT maximum spurious emission. - Taking the record of output power at antenna port. - Repeat step 7 to step 8 for another polarization. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$ $ERP \text{ (dBm)} = EIRP - 2.15$ - The RF fundamental frequency should be excluded against the limit line in the operating frequency band. - The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts) $= P(W) - [43 + 10\log(P)] \text{ (dB)}$ $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$ $= -13\text{dBm}.$
Test results:	PASS
Remark:	All modulations have been tested, but only the worst modulation show in this test item.

5.5.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Universal Radio Communication Tester	R&S	CMU200	110188	Jun. 30, 2024
Spectrum Analyzer	R&S	FSQ40	200061	Jun. 30, 2024
Signal Generator	HP	83623B	3614A00396	Feb. 24, 2024
Broadband Antenna	Schwarzbeck	VULB9163	340	Jun. 30, 2024
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jun. 30, 2024
Broadband Antenna	Schwarzbeck	VULB9163	412	Jun. 30, 2024
Horn Antenna	Schwarzbeck	BBHA 9120D	1201	Jun. 30, 2024
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Feb. 24, 2024
Coaxial cable	SKET	RC-18G-N-M	/	Feb. 24, 2024
Coaxial cable	SKET	RC_40G-K-M	/	Feb. 24, 2024
Antenna Mast	Keleto	RE-AM	/	/
EMI Test Software	Shurple Technology	EZ-EMC	/	/

5.5.3. Test Data

Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss+Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

Band	Band 2(QPSK, 20MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3720.00	Vertical	-60.41	23.54	-36.87	-13.00	PASS
5580.00	V	-65.24	23.81	-41.43		
7440.00	V	-81.25	23.96	-57.29		
3720.00	Horizontal	-58.35	23.54	-34.81		
5580.00	H	-64.57	23.81	-40.76		
7440.00	H	-78.42	23.96	-54.46		

Band	Band 2(QPSK, 20MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3760.00	Vertical	-60.85	23.58	-37.27	-13.00	PASS
5640.00	V	-70.26	23.85	-46.41		
7520.00	V	-77.04	23.99	-53.05		
3760.00	Horizontal	-59.54	23.58	-35.96		
5640.00	H	-65.69	23.85	-41.84		
7520.00	H	-79.71	23.99	-55.72		

Band	Band 2(QPSK, 20MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3800.00	Vertical	-62.11	23.60	-38.51	-13.00	PASS
5700.00	V	-70.70	23.88	-46.82		
7600.00	V	-78.87	24.02	-54.85		
3800.00	Horizontal	-57.16	23.60	-33.56		
5700.00	H	-66.08	23.88	-42.20		
7600.00	H	-80.34	24.02	-56.32		

Band	Band 2(16QAM, 20MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3720.00	Vertical	-60.29	23.14	-37.15	-13.00	PASS
5580.00	V	-66.68	23.41	-43.27		
7440.00	V	-79.53	23.76	-55.77		
3720.00	Horizontal	-57.13	23.84	-33.29		
5580.00	H	-64.69	23.51	-41.18		
7440.00	H	-76.07	23.26	-52.81		

Band	Band 2(16QAM, 20MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3760.00	Vertical	-60.10	23.38	-36.72	-13.00	PASS
5640.00	V	-70.43	23.65	-46.78		
7520.00	V	-78.81	23.99	-54.82		
3760.00	Horizontal	-58.62	23.08	-35.54		
5640.00	H	-65.28	23.84	-41.44		
7520.00	H	-79.71	23.96	-55.75		

Band	Band 2(16QAM, 20MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3800.00	Vertical	-61.25	23.61	-37.64	-13.00	PASS
5700.00	V	-71.76	23.84	-47.92		
7600.00	V	-79.53	24.07	-55.46		
3800.00	Horizontal	-57.39	23.62	-33.77		
5700.00	H	-66.49	23.85	-42.64		
7600.00	H	-78.05	24.03	-54.02		

Band	Band 4(QPSK, 20MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3440.00	Vertical	-60.21	23.40	-36.81	-13.00	PASS
5160.00	V	-64.64	23.69	-40.95		
6880.00	V	-79.62	23.75	-55.87		
3440.00	Horizontal	-58.39	23.40	-34.99		
5160.00	H	-64.86	23.69	-41.17		
6880.00	H	-76.52	23.75	-52.77		

Band	Band 4(QPSK, 20MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3465.00	Vertical	-59.88	23.42	-36.46	-13.00	PASS
5197.50	V	-69.55	23.73	-45.82		
6930.00	V	-79.42	23.79	-55.63		
3465.00	Horizontal	-56.55	23.42	-33.13		
5197.50	H	-65.11	23.73	-41.38		
6930.00	H	-79.50	23.79	-55.71		

Band	Band 4(QPSK, 20MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3490.00	Vertical	-61.07	23.46	-37.61	-13.00	PASS
5235.00	V	-70.64	23.77	-46.87		
6980.00	V	-77.75	23.81	-53.94		
3490.00	Horizontal	-57.23	23.46	-33.77		
5235.00	H	-67.41	23.77	-43.64		
6980.00	H	-80.89	23.81	-57.08		

Band	Band 4(16QAM, 20MHz)				Test channel:	Lowest
Test mode:					Temperature :	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3440.00	Vertical	-61.32	23.40	-37.92	-13.00	PASS
5160.00	V	-66.74	23.69	-43.05		
6880.00	V	-79.29	23.75	-55.54		
3440.00	Horizontal	-59.05	23.40	-35.65		
5160.00	H	-64.66	23.69	-40.97		
6880.00	H	-78.13	23.75	-54.38		
Band	Band 4(16QAM, 20MHz)				Test channel:	Middle
Test mode:					Temperature :	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3465.00	Vertical	-59.11	23.42	-35.69	-13.00	PASS
5197.50	V	-71.44	23.73	-47.71		
6930.00	V	-78.80	23.79	-55.01		
3465.00	Horizontal	-57.77	23.42	-34.35		
5197.50	H	-67.52	23.73	-43.79		
6930.00	H	-79.80	23.79	-56.01		
Band	Band 4(16QAM, 20MHz)				Test channel:	Highest
Test mode:					Temperature :	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3490.00	Vertical	-62.19	23.46	-38.73	-13.00	PASS
5235.00	V	-70.38	23.77	-46.61		
6980.00	V	-79.49	23.81	-55.68		
3490.00	Horizontal	-58.73	23.46	-35.27		
5235.00	H	-68.60	23.77	-44.83		
6980.00	H	-80.51	23.81	-56.70		

Band	Band 5(QPSK, 10MHz)				Test channel:	Lowest
Test mode:					Temperature :	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1658.00	Vertical	-61.51	23.15	-38.36	-13.00	PASS
2487.00	V	-65.33	23.24	-42.09		
3316.00	V	-79.85	23.35	-56.50		
1658.00	Horizontal	-60.27	23.15	-37.12		
2487.00	H	-61.79	23.24	-38.55		
3316.00	H	-78.30	23.35	-54.95		
Band	Band 5(QPSK, 10MHz)				Test channel:	Middle
Test mode:					Temperature :	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1673.00	Vertical	-59.85	23.17	-36.68	-13.00	PASS
2509.50	V	-71.45	23.26	-48.19		
3346.00	V	-78.67	23.38	-55.29		
1673.00	Horizontal	-58.71	23.17	-35.54		
2509.50	H	-64.09	23.26	-40.83		
3346.00	H	-78.71	23.38	-55.33		
Band	Band 5(QPSK, 10MHz)				Test channel:	Highest
Test mode:					Temperature :	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1688.00	Vertical	-63.28	23.19	-40.09	-13.00	PASS
2532.00	V	-72.45	23.28	-49.17		
3376.00	V	-83.78	23.40	-60.38		
1688.00	Horizontal	-57.86	23.19	-34.67		
2532.00	H	-67.24	23.28	-43.96		
3376.00	H	-83.40	23.40	-60.00		

Band	Band 5(16QAM, 10MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1658.00	Vertical	-59.28	23.15	-36.13	-13.00	PASS
2487.00	V	-64.35	23.24	-41.11		
3316.00	V	-79.74	23.35	-56.39		
1658.00	Horizontal	-58.72	23.15	-35.57		
2487.00	H	-65.50	23.24	-42.26		
3316.00	H	-78.63	23.35	-55.28		

Band	Band 5(16QAM, 10MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1673.00	Vertical	-59.14	23.17	-35.97	-13.00	PASS
2509.50	V	-71.34	23.26	-48.08		
3346.00	V	-78.68	23.38	-55.30		
1673.00	Horizontal	-56.19	23.17	-33.02		
2509.50	H	-66.80	23.26	-43.54		
3346.00	H	-78.13	23.38	-54.75		

Band	Band 5(16QAM, 10MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1688.00	Vertical	-62.34	23.19	-39.15	-13.00	PASS
2532.00	V	-71.24	23.28	-47.96		
3376.00	V	-79.71	23.40	-56.31		
1688.00	Horizontal	-58.50	23.19	-35.31		
2532.00	H	-67.98	23.28	-44.70		
3376.00	H	-82.14	23.40	-58.74		

Band	Band 12(QPSK, 10MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1408.00	Vertical	-60.61	23.03	-37.58	-13.00	PASS
2112.00	V	-66.80	23.16	-43.64		
2816.00	V	-81.75	23.25	-58.50		
1408.00	Horizontal	-60.43	23.03	-37.40		
2112.00	H	-63.16	23.16	-40.00		
2816.00	H	-78.78	23.25	-55.53		

Band	Band 12(QPSK, 10MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1415.00	Vertical	-60.04	23.05	-36.99	-13.00	PASS
2122.50	V	-70.85	23.18	-47.67		
2830.00	V	-79.43	23.28	-56.15		
1415.00	Horizontal	-57.31	23.05	-34.26		
2122.50	H	-63.06	23.18	-39.88		
2830.00	H	-77.03	23.28	-53.75		

Band	Band 12(QPSK, 10MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1422.00	Vertical	-63.63	23.08	-40.55	-13.00	PASS
2133.00	V	-72.03	23.20	-48.83		
2844.00	V	-82.18	23.31	-58.87		
1422.00	Horizontal	-58.18	23.08	-35.10		
2133.00	H	-66.51	23.20	-43.31		
2844.00	H	-82.39	23.31	-59.08		

Band	Band 12(16QAM, 10MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1408.00	Vertical	-61.12	23.03	-38.09	-13.00	PASS
2112.00	V	-63.53	23.16	-40.37		
2816.00	V	-80.32	23.25	-57.07		
1408.00	Horizontal	-58.99	23.03	-35.96		
2112.00	H	-64.46	23.16	-41.30		
2816.00	H	-78.77	23.25	-55.52		

Band	Band 12(16QAM, 10MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1415.00	Vertical	-59.11	23.05	-36.06	-13.00	PASS
2122.50	V	-71.00	23.18	-47.82		
2830.00	V	-78.64	23.28	-55.36		
1415.00	Horizontal	-59.25	23.05	-36.20		
2122.50	H	-66.18	23.18	-43.00		
2830.00	H	-78.65	23.28	-55.37		

Band	Band 12(16QAM, 10MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1422.00	Vertical	-61.17	23.08	-38.09	-13.00	PASS
2133.00	V	-70.22	23.20	-47.02		
2844.00	V	-78.08	23.31	-54.77		
1422.00	Horizontal	-57.70	23.08	-34.62		
2133.00	H	-67.76	23.20	-44.56		
2844.00	H	-80.80	23.31	-57.49		

Band	Band 13(QPSK, 10MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1564.00	Vertical	-67.84	23.06	-44.81	-40.00	PASS
2346.00	V	-65.21	23.17	-42.10	-13.00	
3128.00	V	-81.10	23.27	-57.88	-13.00	
1564.00	Horizontal	-68.47	23.05	-45.43	-40.00	
2346.00	H	-62.81	23.18	-39.71	-13.00	
3128.00	H	-78.42	23.28	-55.12	-13.00	

Band	Band 13(QPSK, 10MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1564.00	Vertical	-68.75	23.07	-45.68	-40.00	PASS
2346.00	V	-70.39	23.19	-47.20	-13.00	
3128.00	V	-77.47	23.29	-54.18	-13.00	
1564.00	Horizontal	-66.34	23.07	-43.27	-40.00	
2346.00	H	-64.10	23.19	-40.91	-13.00	
3128.00	H	-79.45	23.30	-56.15	-13.00	

Band	Band 13(QPSK, 10MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1564.00	Vertical	-68.12	23.08	-45.04	-40.00	PASS
2346.00	V	-70.74	23.20	-47.54	-13.00	
3128.00	V	-82.05	23.31	-58.74	-13.00	
1564.00	Horizontal	-67.59	23.08	-44.51	-40.00	
2346.00	H	-66.28	23.20	-43.08	-13.00	
3128.00	H	-81.91	23.31	-58.60	-13.00	

Band	Band 13(16QAM, 10MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1564.00	Vertical	-68.87	23.06	-45.81	-40.00	PASS
2346.00	V	-64.26	23.17	-41.09	-13.00	
3128.00	V	-80.28	23.27	-57.01	-13.00	
1564.00	Horizontal	-67.05	23.05	-44.00	-40.00	
2346.00	H	-66.14	23.18	-42.96	-13.00	
3128.00	H	-77.91	23.28	-54.63	-13.00	

Band	Band 13(16QAM, 10MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1564.00	Vertical	-70.21	23.07	-47.14	-40.00	PASS
2346.00	V	-70.04	23.19	-46.85	-13.00	
3128.00	V	-77.68	23.29	-54.39	-13.00	
1564.00	Horizontal	-69.10	23.07	-46.03	-40.00	
2346.00	H	-63.59	23.19	-40.40	-13.00	
3128.00	H	-79.37	23.30	-56.07	-13.00	

Band	Band 13(16QAM, 10MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1564.00	Vertical	-68.71	23.08	-45.63	-40.00	PASS
2346.00	V	-70.40	23.20	-47.20	-13.00	
3128.00	V	-77.64	23.31	-54.33	-13.00	
1564.00	Horizontal	-69.65	23.08	-46.57	-40.00	
2346.00	H	-65.22	23.20	-42.02	-13.00	
3128.00	H	-80.79	23.31	-57.48	-13.00	

Band	Band 17(QPSK, 10MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1418.00	Vertical	-60.19	23.06	-37.13	-13.00	PASS
2127.00	V	-64.05	23.17	-40.88		
2836.00	V	-81.35	23.27	-58.08		
1418.00	Horizontal	-61.09	23.05	-38.04		
2127.00	H	-63.56	23.18	-40.38		
2836.00	H	-78.27	23.28	-54.99		

Band	Band 17(QPSK, 10MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1420.00	Vertical	-58.46	23.07	-35.39	-13.00	PASS
2130.00	V	-71.58	23.19	-48.39		
2840.00	V	-78.78	23.29	-55.49		
1420.00	Horizontal	-56.54	23.07	-33.47		
2130.00	H	-65.40	23.19	-42.21		
2840.00	H	-79.41	23.30	-56.11		

Band	Band 17(QPSK, 10MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1422.00	Vertical	-71.15	23.08	-48.07	-13.00	PASS
2133.00	V	-83.77	23.20	-60.57		
2844.00	V	-56.65	23.31	-33.34		
1422.00	Horizontal	-66.26	23.08	-43.18		
2133.00	H	-81.37	23.20	-58.17		
2844.00	H	-71.92	23.31	-48.61		

Band	Band 17(16QAM, 10MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1418.00	Vertical	-59.45	23.06	-36.39	-13.00	PASS
2127.00	V	-65.77	23.17	-42.60		
2836.00	V	-81.12	23.27	-57.85		
1418.00	Horizontal	-57.04	23.05	-33.99		
2127.00	H	-65.26	23.18	-42.08		
2836.00	H	-77.92	23.28	-54.64		

Band	Band 17(16QAM, 10MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1420.00	Vertical	-58.40	23.07	-35.33	-13.00	PASS
2130.00	V	-70.77	23.19	-47.58		
2840.00	V	-77.98	23.29	-54.69		
1420.00	Horizontal	-57.08	23.07	-34.01		
2130.00	H	-65.24	23.19	-42.05		
2840.00	H	-79.09	23.30	-55.79		

Band	Band 17(16QAM, 10MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1422.00	Vertical	-61.37	23.08	-38.29	-13.00	PASS
2133.00	V	-70.44	23.20	-47.24		
2844.00	V	-78.95	23.31	-55.64		
1422.00	Horizontal	-57.52	23.08	-34.44		
2133.00	H	-66.21	23.20	-43.01		
2844.00	H	-80.02	23.31	-56.71		

Band	Band 25(QPSK, 20MHz)	Test channel:	Lowest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3720.00	Vertical	-61.25	22.16	-39.09	-13.00	PASS
5580.00	V	-68.14	22.99	-45.15		
7440.00	V	-81.93	23.04	-58.89		
3720.00	Horizontal	-62.07	22.16	-39.91		
5580.00	H	-64.08	22.99	-41.09		
7440.00	H	-80.37	23.04	-57.33		

Band	Band 25(QPSK, 20MHz)	Test channel:	Middle
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3765.00	Vertical	-62.24	22.76	-39.48	-13.00	PASS
5647.50	V	-72.45	23.07	-49.38		
7530.00	V	-81.02	23.11	-57.91		
3765.00	Horizontal	-58.27	22.76	-35.51		
5647.50	H	-65.94	23.07	-42.87		
7530.00	H	-80.84	23.11	-57.73		

Band	Band 25(QPSK, 20MHz)	Test channel:	Highest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3810.00	Vertical	-64.48	22.42	-42.06	-13.00	PASS
5715.00	V	-74.05	22.33	-51.72		
7620.00	V	-84.72	23.00	-61.72		
3810.00	Horizontal	-58.56	22.42	-36.14		
5715.00	H	-66.78	22.33	-44.45		
7620.00	H	-84.11	23.00	-61.11		

Band	Band 25(16QAM, 20MHz)				Test channel:	Lowest
Test mode:					Temperature:	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3720.00	Vertical	-61.14	22.16	-38.98	-13.00	PASS
5580.00	V	-65.45	22.99	-42.46		
7440.00	V	-83.59	23.04	-60.55		
3720.00	Horizontal	-60.08	22.16	-37.92		
5580.00	H	-66.52	22.99	-43.53		
7440.00	H	-79.79	23.04	-56.75		
Band	Band 25(16QAM, 20MHz)				Test channel:	Middle
Test mode:					Temperature:	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3765.00	Vertical	-61.46	22.76	-38.70	-13.00	PASS
5647.50	V	-72.27	23.07	-49.20		
7530.00	V	-81.40	23.11	-58.29		
3765.00	Horizontal	-60.13	22.76	-37.37		
5647.50	H	-67.57	23.07	-44.50		
7530.00	H	-80.21	23.11	-57.10		
Band	Band 25(16QAM, 20MHz)				Test channel:	Highest
Test mode:					Temperature:	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3810.00	Vertical	-63.11	22.42	-40.69	-13.00	PASS
5715.00	V	-72.44	22.33	-50.11		
7620.00	V	-79.97	23.00	-56.97		
3810.00	Horizontal	-59.08	22.42	-36.66		
5715.00	H	-68.32	22.33	-45.99		
7620.00	H	-82.81	23.00	-59.81		

Band	Band 26-1(QPSK, 5MHz)	Test channel:	Lowest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1633.00	Vertical	-63.14	21.97	-41.17	-13.00	PASS
2449.50	V	-67.62	22.63	-44.99		
3266.00	V	-82.90	22.83	-60.07		
1633.00	Horizontal	-62.53	21.89	-40.64		
2449.50	H	-63.34	22.54	-40.80		
3266.00	H	-80.11	22.30	-57.81		

Band	Band 26-1(QPSK, 5MHz)	Test channel:	Middle
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1638.00	Vertical	-62.34	22.58	-39.76	-13.00	PASS
2457.00	V	-71.41	22.29	-49.12		
3276.00	V	-82.11	22.49	-59.62		
1638.00	Horizontal	-57.57	22.64	-34.93		
2457.00	H	-65.60	22.45	-43.15		
3276.00	H	-81.58	22.58	-59.00		

Band	Band 26-1(QPSK, 5MHz)	Test channel:	Highest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1643.00	Vertical	-63.31	21.95	-41.36	-13.00	PASS
2464.50	V	-73.74	21.50	-52.24		
3286.00	V	-84.45	22.23	-62.22		
1643.00	Horizontal	-59.68	22.06	-37.62		
2464.50	H	-67.01	21.79	-45.22		
3286.00	H	-84.47	22.37	-62.10		

Band	Band 26-1(16QAM, 5MHz)	Test channel:	Lowest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1633.00	Vertical	-61.42	21.97	-39.45	-13.00	PASS
2449.50	V	-65.20	22.63	-42.57		
3266.00	V	-83.72	22.83	-60.89		
1633.00	Horizontal	-60.11	21.89	-38.22		
2449.50	H	-66.23	22.54	-43.69		
3266.00	H	-80.18	22.30	-57.88		

Band	Band 26-1(16QAM, 5MHz)	Test channel:	Middle
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1638.00	Vertical	-61.08	22.58	-38.50	-13.00	PASS
2457.00	V	-71.91	22.29	-49.62		
3276.00	V	-81.20	22.49	-58.71		
1638.00	Horizontal	-60.32	22.64	-37.68		
2457.00	H	-67.37	22.45	-44.92		
3276.00	H	-81.14	22.58	-58.56		

Band	Band 26-1(16QAM, 5MHz)	Test channel:	Highest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1643.00	Vertical	-62.64	21.95	-40.69	-13.00	PASS
2464.50	V	-71.80	21.50	-50.30		
3286.00	V	-80.11	22.23	-57.88		
1643.00	Horizontal	-59.10	22.06	-37.04		
2464.50	H	-68.05	21.79	-46.26		
3286.00	H	-81.99	22.37	-59.62		

Band	Band 26-2(QPSK, 15MHz)	Test channel:	Lowest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1663.00	Vertical	-64.24	21.17	-43.07	-13.00	PASS
2494.50	V	-68.08	22.03	-46.05		
3326.00	V	-83.17	22.12	-61.05		
1663.00	Horizontal	-62.65	21.01	-41.64		
2494.50	H	-64.96	22.07	-42.89		
3326.00	H	-81.21	21.65	-59.56		

Band	Band 26-2(QPSK, 15MHz)	Test channel:	Middle
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1673.00	Vertical	-62.48	22.03	-40.45	-13.00	PASS
2509.50	V	-72.12	21.51	-50.61		
3346.00	V	-82.36	21.60	-60.76		
1673.00	Horizontal	-58.44	22.18	-36.26		
2509.50	H	-65.67	22.06	-43.61		
3346.00	H	-81.21	21.68	-59.53		

Band	Band 26-2(QPSK, 15MHz)	Test channel:	Highest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1683.00	Vertical	-63.01	21.09	-41.92	-13.00	PASS
2524.50	V	-73.14	20.92	-52.22		
3366.00	V	-74.65	21.56	-53.09		
1683.00	Horizontal	-59.97	21.65	-38.32		
2524.50	H	-67.19	21.22	-45.97		
3366.00	H	-74.90	21.74	-53.16		

Band	Band 26-2(16QAM, 15MHz)				Test channel:	Lowest
Test mode:					Temperature:	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1663.00	Vertical	-62.47	21.17	-41.30	-13.00	PASS
2494.50	V	-65.62	22.03	-43.59		
3326.00	V	-83.09	22.12	-60.97		
1663.00	Horizontal	-61.74	21.01	-40.73		
2494.50	H	-67.71	22.07	-45.64		
3326.00	H	-80.36	21.65	-58.71		
Band	Band 26-2(16QAM, 15MHz)				Test channel:	Middle
Test mode:					Temperature:	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1673.00	Vertical	-62.77	22.03	-40.74	-13.00	PASS
2509.50	V	-72.81	21.51	-51.30		
3346.00	V	-81.50	21.60	-59.90		
1673.00	Horizontal	-61.83	22.18	-39.65		
2509.50	H	-67.95	22.06	-45.89		
3346.00	H	-80.37	21.68	-58.69		
Band	Band 26-2(16QAM, 15MHz)				Test channel:	Highest
Test mode:					Temperature:	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1683.00	Vertical	-63.41	21.09	-42.32	-13.00	PASS
2524.50	V	-72.91	20.92	-51.99		
3366.00	V	-81.22	21.56	-59.66		
1683.00	Horizontal	-59.45	21.65	-37.80		
2524.50	H	-68.68	21.22	-47.46		
3366.00	H	-82.90	21.74	-61.16		

Band	Band 41(QPSK, 20MHz)	Test channel:	Lowest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
5012.00	Vertical	-61.30	22.16	-39.14	-25.00	PASS
7518.00	V	-67.14	22.99	-44.15		
10024.00	V	-81.40	23.04	-58.36		
5012.00	Horizontal	-61.87	22.16	-39.71		
7518.00	H	-63.79	22.99	-40.80		
10024.00	H	-79.90	23.04	-56.86		

Band	Band 41(QPSK, 20MHz)	Test channel:	Middle
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
5186.00	Vertical	-62.01	22.76	-39.25	-25.00	PASS
7779.00	V	-71.32	23.07	-48.25		
10372.00	V	-81.67	23.11	-58.56		
5186.00	Horizontal	-58.05	22.76	-35.29		
7779.00	H	-64.52	23.07	-41.45		
10372.00	H	-79.83	23.11	-56.72		

Band	Band 41(QPSK, 20MHz)	Test channel:	Highest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
5360.00	Vertical	-63.11	22.42	-40.69	-25.00	PASS
8040.00	V	-73.03	22.33	-50.70		
10720.00	V	-84.05	23.00	-61.05		
5360.00	Horizontal	-58.84	22.42	-36.42		
8040.00	H	-66.90	22.33	-44.57		
10720.00	H	-83.49	23.00	-60.49		

Band	Band 41(16QAM, 20MHz)				Test channel:	Lowest
Test mode:					Temperature:	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
5012.00	Vertical	-61.53	22.16	-39.37	-25.00	PASS
7518.00	V	-64.77	22.99	-41.78		
10024.00	V	-82.92	23.04	-59.88		
5012.00	Horizontal	-59.41	22.16	-37.25		
7518.00	H	-65.50	22.99	-42.51		
10024.00	H	-79.09	23.04	-56.05		
Band	Band 41(16QAM, 20MHz)				Test channel:	Middle
Test mode:					Temperature:	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
5186.00	Vertical	-60.11	22.76	-37.35	-25.00	PASS
7779.00	V	-71.52	23.07	-48.45		
10372.00	V	-79.63	23.11	-56.52		
5186.00	Horizontal	-59.90	22.76	-37.14		
7779.00	H	-66.94	23.07	-43.87		
10372.00	H	-79.14	23.11	-56.03		
Band	Band 41(16QAM, 20MHz)				Test channel:	Highest
Test mode:					Temperature:	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
5360.00	Vertical	-62.53	22.42	-40.11	-25.00	PASS
8040.00	V	-71.67	22.33	-49.34		
10720.00	V	-80.20	23.00	-57.20		
5360.00	Horizontal	-59.28	22.42	-36.86		
8040.00	H	-67.19	22.33	-44.86		
10720.00	H	-82.17	23.00	-59.17		

Band	Band 66(QPSK, 20MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3440.00	Vertical	-61.43	23.40	-38.03	-13.00	PASS
5160.00	V	-65.06	23.69	-41.37		
6880.00	V	-81.77	23.75	-58.02		
3440.00	Horizontal	-61.18	23.40	-37.78		
5160.00	H	-64.50	23.69	-40.81		
6880.00	H	-77.46	23.75	-53.71		

Band	Band 66(QPSK, 20MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3490.00	Vertical	-58.54	23.42	-35.12	-13.00	PASS
5235.00	V	-70.75	23.73	-47.02		
6980.00	V	-79.18	23.79	-55.39		
3490.00	Horizontal	-56.46	23.42	-33.04		
5235.00	H	-65.40	23.73	-41.67		
6980.00	H	-78.18	23.79	-54.39		

Band	Band 66(QPSK, 20MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3540.00	Vertical	-61.25	23.46	-37.79	-13.00	PASS
5310.00	V	-71.23	23.77	-47.46		
7080.00	V	-83.18	23.81	-59.37		
3540.00	Horizontal	-56.44	23.46	-32.98		
5310.00	H	-66.87	23.77	-43.10		
7080.00	H	-82.19	23.81	-58.38		

Band	Band 66(16QAM, 20MHz)				Test channel:	Lowest
Test mode:					Temperature :	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3440.00	Vertical	-60.68	23.40	-37.28	-13.00	PASS
5160.00	V	-64.55	23.69	-40.86		
6880.00	V	-80.22	23.75	-56.47		
3440.00	Horizontal	-57.21	23.40	-33.81		
5160.00	H	-64.30	23.69	-40.61		
6880.00	H	-77.99	23.75	-54.24		
Band	Band 66(16QAM, 20MHz)				Test channel:	Middle
Test mode:					Temperature :	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3490.00	Vertical	-59.72	23.42	-36.30	-13.00	PASS
5235.00	V	-71.20	23.73	-47.47		
6980.00	V	-79.92	23.79	-56.13		
3490.00	Horizontal	-57.29	23.42	-33.87		
5235.00	H	-64.74	23.73	-41.01		
6980.00	H	-78.16	23.79	-54.37		
Band	Band 66(16QAM, 20MHz)				Test channel:	Highest
Test mode:					Temperature :	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3540.00	Vertical	-61.44	23.46	-37.98	-13.00	PASS
5310.00	V	-70.77	23.77	-47.00		
7080.00	V	-78.30	23.81	-54.49		
3540.00	Horizontal	-56.24	23.46	-32.78		
5310.00	H	-66.53	23.77	-42.76		
7080.00	H	-80.71	23.81	-56.90		

Band	Band 71(QPSK, 20MHz)	Test channel:	Lowest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1346.00	Vertical	-61.53	23.40	-38.13	-13.00	PASS
2019.00	V	-67.08	23.69	-43.39		
2692.00	V	-83.13	23.75	-59.38		
1346.00	Horizontal	-60.79	23.40	-37.39		
2019.00	H	-65.14	23.69	-41.45		
2692.00	H	-79.67	23.75	-55.92		

Band	Band 71(QPSK, 20MHz)	Test channel:	Middle
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1366.00	Vertical	-62.43	23.42	-39.01	-13.00	PASS
2049.00	V	-73.03	23.73	-49.30		
2732.00	V	-80.00	23.79	-56.21		
1366.00	Horizontal	-59.64	23.42	-36.22		
2049.00	H	-67.18	23.73	-43.45		
2732.00	H	-79.99	23.79	-56.20		

Band	Band 71(QPSK, 20MHz)	Test channel:	Highest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

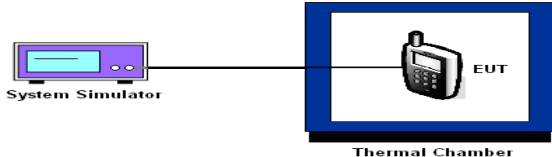
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1376.00	Vertical	-63.04	23.46	-39.58	-13.00	PASS
2064.00	V	-73.80	23.77	-50.03		
2752.00	V	-84.79	23.81	-60.98		
1376.00	Horizontal	-59.84	23.46	-36.38		
2064.00	H	-69.63	23.77	-45.86		
2752.00	H	-83.37	23.81	-59.56		

Band	Band 71(16QAM, 20MHz)				Test channel:	Lowest
Test mode:					Temperature:	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1346.00	Vertical	-61.05	23.40	-37.65	-13.00	PASS
2019.00	V	-65.12	23.69	-41.43		
2692.00	V	-83.44	23.75	-59.69		
1346.00	Horizontal	-59.95	23.40	-36.55		
2019.00	H	-67.39	23.69	-43.70		
2692.00	H	-78.87	23.75	-55.12		
Band	Band 71(16QAM, 20MHz)				Test channel:	Middle
Test mode:					Temperature:	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1366.00	Vertical	-60.27	23.42	-36.85	-13.00	PASS
2049.00	V	-71.54	23.73	-47.81		
2732.00	V	-78.22	23.79	-54.43		
1366.00	Horizontal	-59.04	23.42	-35.62		
2049.00	H	-69.30	23.73	-45.57		
2732.00	H	-81.84	23.79	-58.05		
Band	Band 71(16QAM, 20MHz)				Test channel:	Highest
Test mode:					Temperature:	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1376.00	Vertical	-64.42	23.46	-40.96	-13.00	PASS
2064.00	V	-70.02	23.77	-46.25		
2752.00	V	-80.34	23.81	-56.53		
1376.00	Horizontal	-60.08	23.46	-36.62		
2064.00	H	-68.29	23.77	-44.52		
2752.00	H	-83.61	23.81	-59.80		

5.6. Frequency Stability Measurement

5.6.1. Test Specification

Test Requirement:	FCC part 27.54, FCC part 22.355, 24.235
Test Method:	FCC Part 2.1055
Limit:	±2.5 ppm
Test Setup:	 The diagram shows a 'System Simulator' connected by a line to an 'EUT' (Equipment Under Test) which is placed inside a 'Thermal Chamber'.
Test Procedure:	Test Procedures for Temperature Variation 1. The testing follows FCC KDB 971168 D01v03 Section 9.0. 2. The EUT was set up in the thermal chamber and connected with the system simulator. 3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute. 4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute. Test Procedures for Voltage Variation 1. The testing follows FCC KDB 971168 D01v03 Section 9.0. 2. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator. 3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT. 4. The variation in frequency was measured for the worst case. 5. The worst case(worst bandwidth) for frequency stability reported in the Test Data. The worst bandwidth is as follow: 20M is for LTE Band 2, 20M is for LTE Band 4, 10M is for LTE Band 5, 10M is for LTE Band 12, 10M is for LTE Band 13, 10M is for LTE Band 17, 20M is for LTE Band 25, 10M is for LTE Band 26-1, 15M is for LTE Band 26-2, 20M is for LTE Band 41, 20M is for LTE Band 66, 20M is for LTE Band 71
Test Result:	PASS

5.6.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Wideband Radio Communication Tester	R&S	CMW500	114220	Jun. 30, 2024
Programable tempratuce and humidity chamber	JQ	JQ-2000	/	Jun. 30, 2024
DC power supply	Kingrang	KR3005K	/	Jun. 30, 2024
Combiner Box	AT890-RFB	Ascentest	/	/

Appendix B: Photographs of Test Setup

Refer to the test report No. TCT231229E166

Appendix C: Photographs of EUT

Refer to the test report No. TCT231229E012

Test Data for Appendix Refer to Appendix For LTE Band 2, Appendix For LTE Band 4, Appendix For LTE Band 5, Appendix For LTE Band 12, Appendix For LTE Band 13, Appendix For LTE Band 17, Appendix For LTE Band 25, Appendix For LTE Band 26, Appendix For LTE Band 41, Appendix For LTE Band 66 and Appendix For LTE Band 71

*******END OF REPORT*******