


PCB Antenna

Specifications

Part Number	Band Width (MHz)	Peak Gain (V-XZ)	Average Gain (V-XZ)	VSWR (In BW)	Impedance (Ohm)
F-101S	2400-2500	1.0 dBi	0.5 dBi	< 2.0	50
	Operating Temperature Range : -55 ~+125 °C				
	Storage Temperature Range : -40 ~+85 °C				
	Power Capacity : 3 W max				


photograph

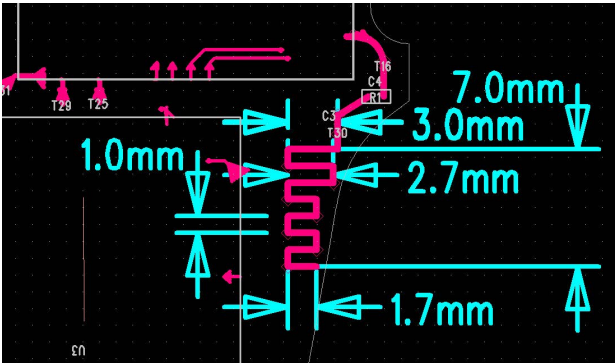

Frequency(MHz)	Efficient(%)	Gain(dBi)
2400	35	0.87
2450	37	1.00
2500	35	0.95

Return loss

F-101

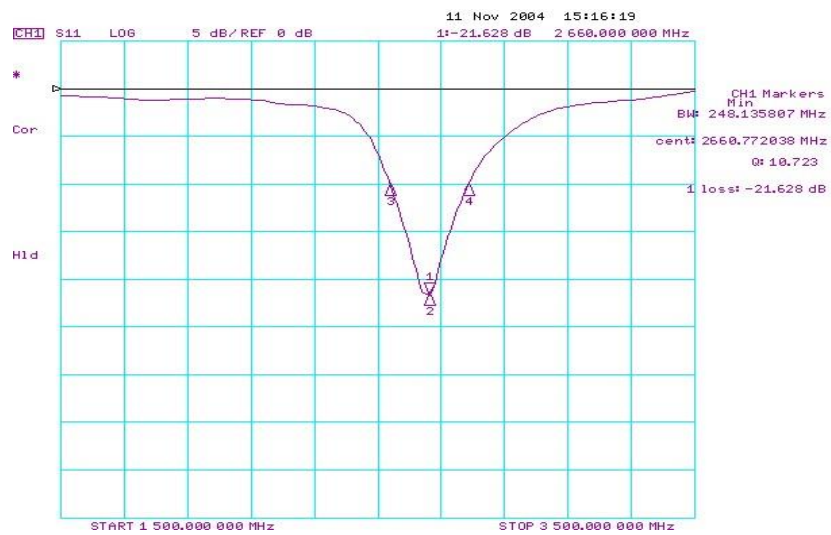

Radiation patterns

