

PCB Antenna

Dimension (mm)

Model No.

PCB_ANTENNA_DS8060-L

Features

RoHS Compliant

Low V.S.W.R.

Matching Free Design

Specification


Freq.: 2400~2500MHz

Impedance: 50ohm

S.W.R: ≤ 2.0

Peak Gain: -0.58 dBi(*Typical


*) Material: PCB RF4

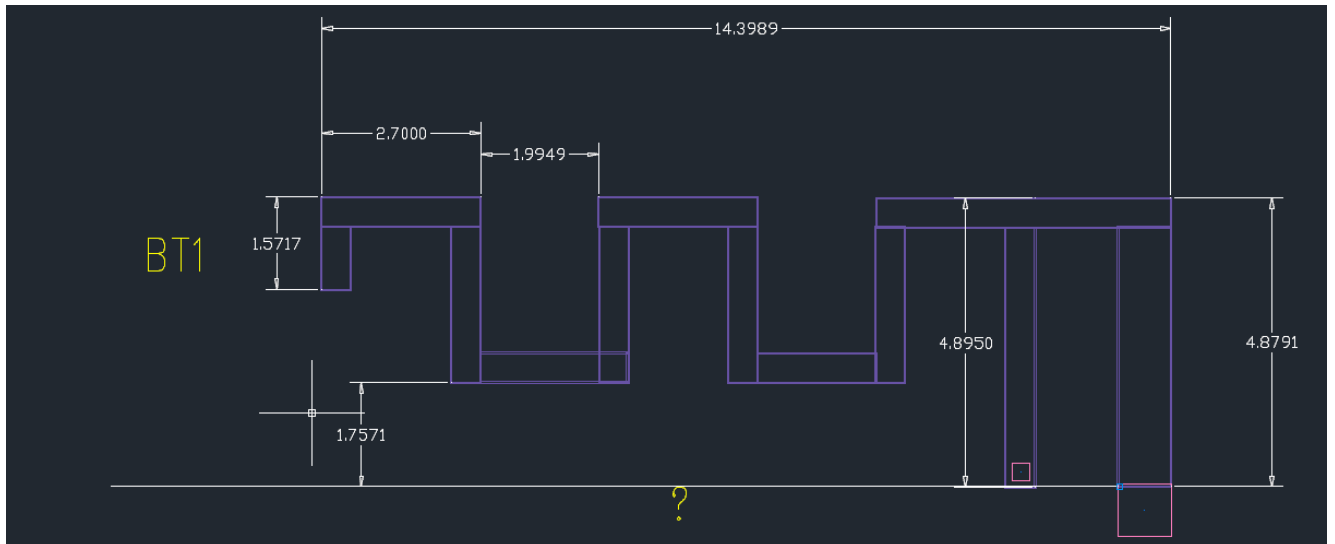


S.W.R & Return Loss Test Data




Radiation Pattern

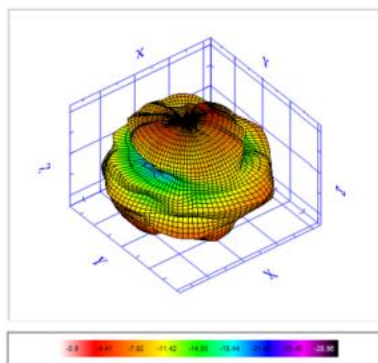


Radiation Pattern at 2400 MHz of Antenna.

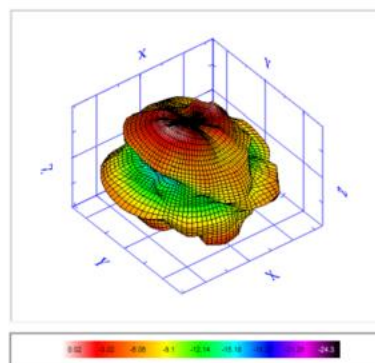

Radiation Pattern at 2450 MHz of Antenna.

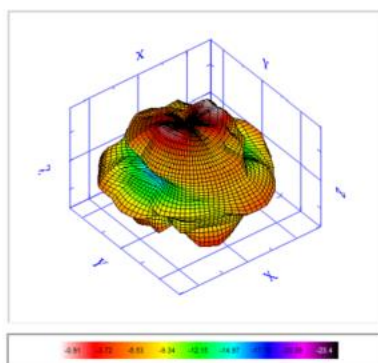

Radiation Pattern at 2480 MHz of Antenna.

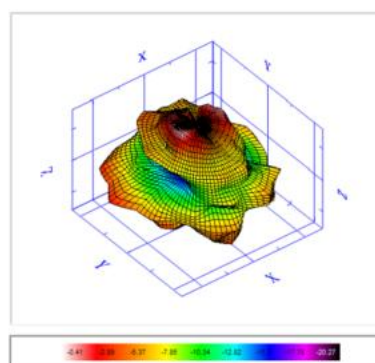

Radiation Pattern at 2500 MHz of Antenna.

Shanghai Alpha AIOT Technology System Co., Ltd.

Address: 2F, 25-1 Hongcao Road, Xuhui District, Shanghai, China info@alpha-rfid.com