


Appendix A: Test Results of FCC Part 15C


APPENDIX A: TEST RESULTS OF FCC PART 15C.....	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
Wireless charging	2
Standby mode.....	5
APPENDIX A.2: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS	7
Wireless charging	7
Standby mode.....	18
Co-location mode.....	29
APPENDIX A.3: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS	40

Appendix A.1: Test Results of 20dB Bandwidth


Wireless charging

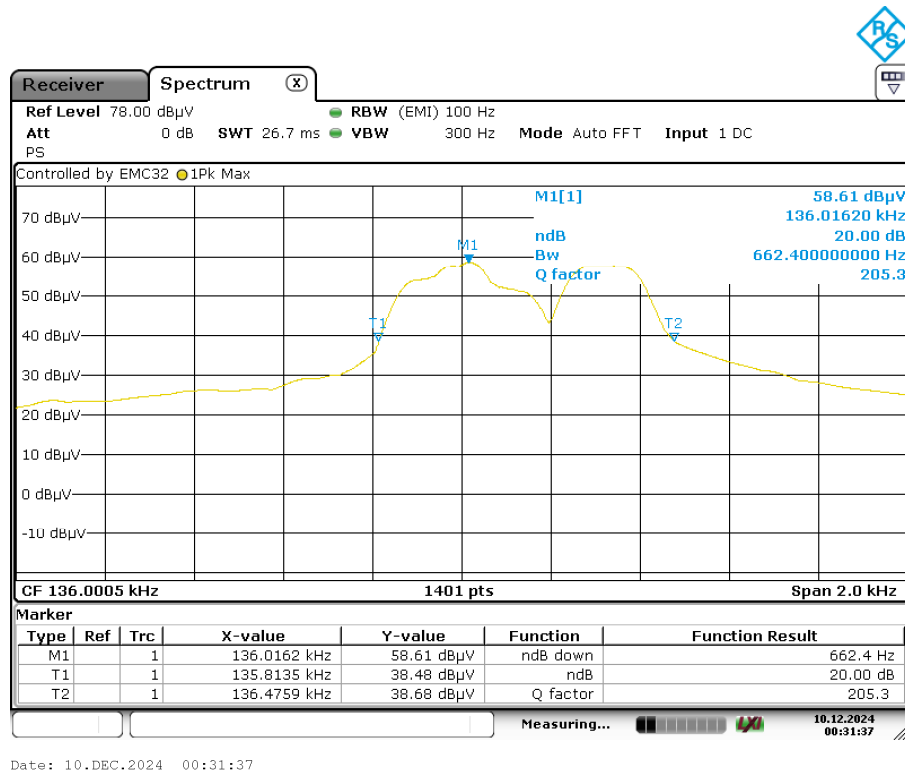


136kHz

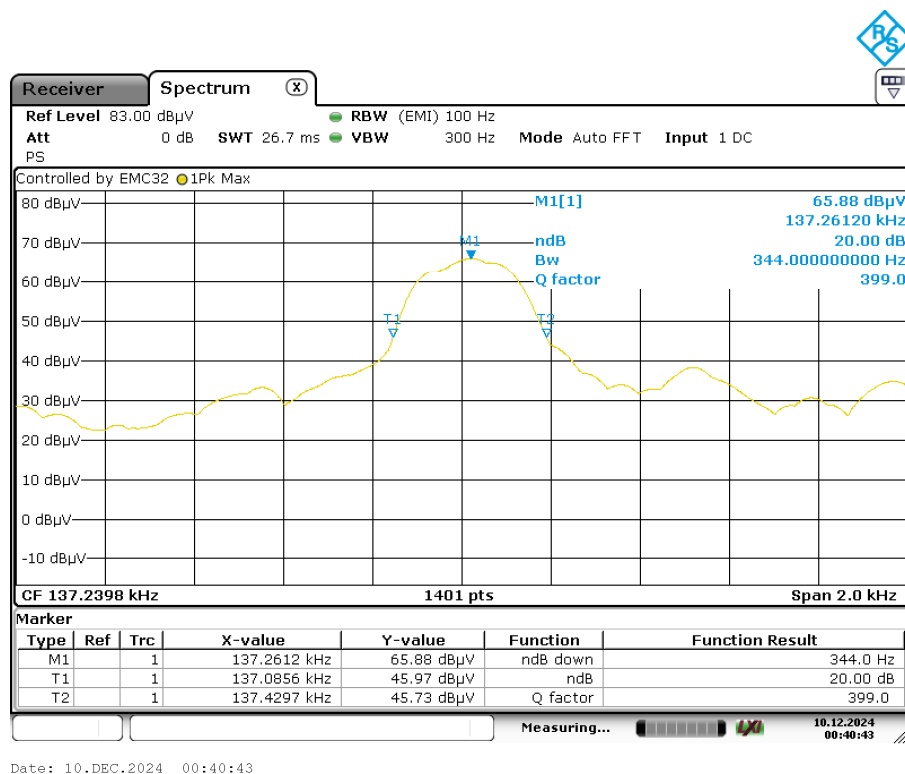


137kHz

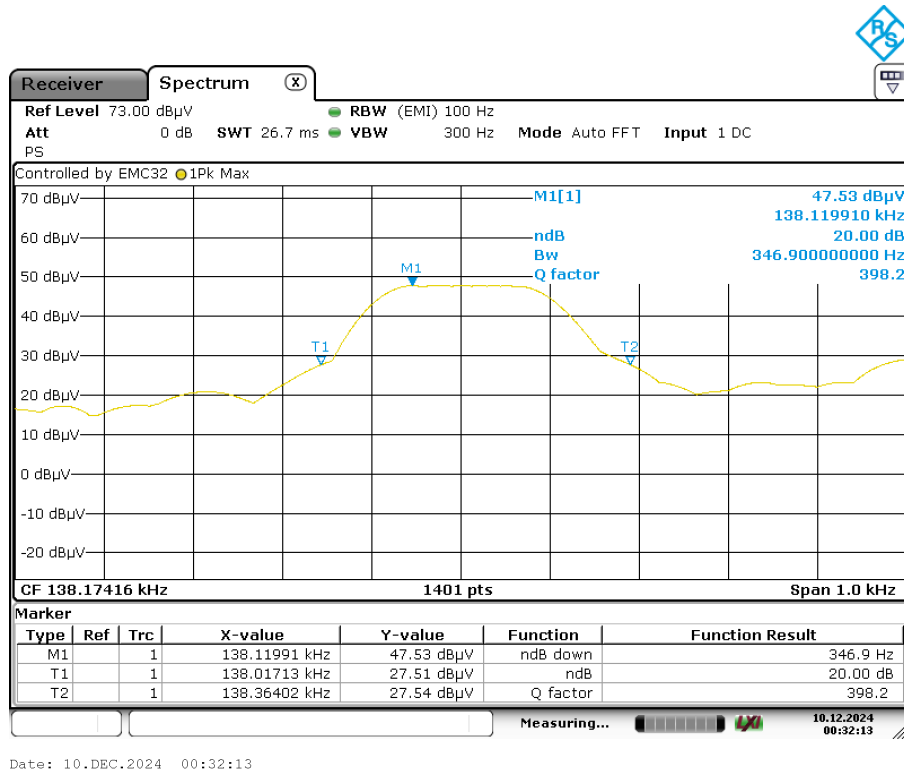


138kHz

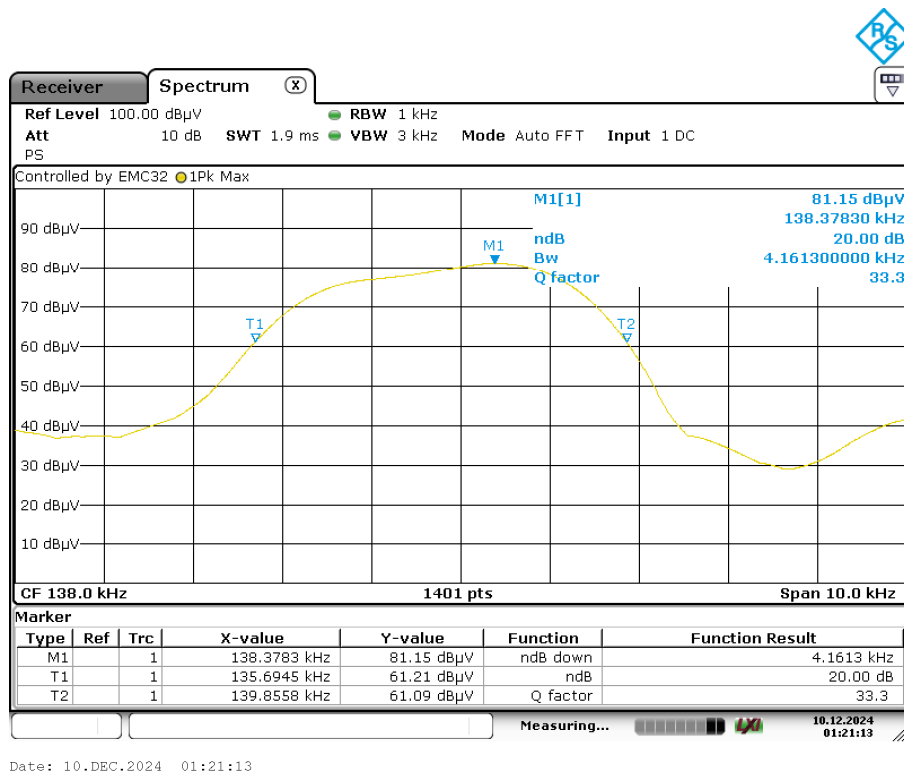

tx 138kHz

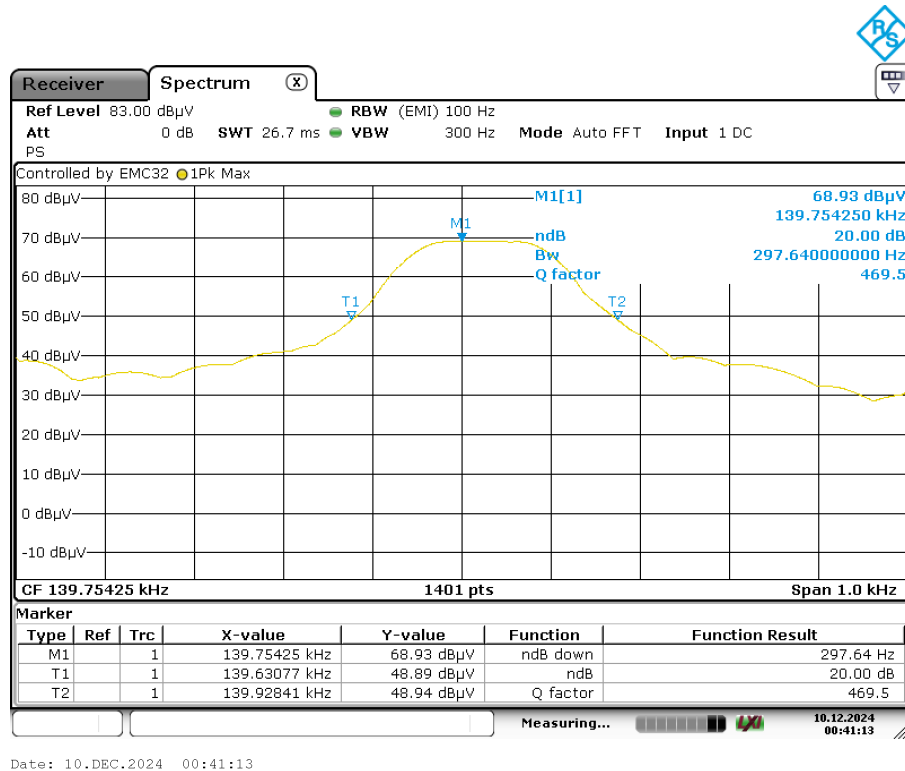


139.7kHz

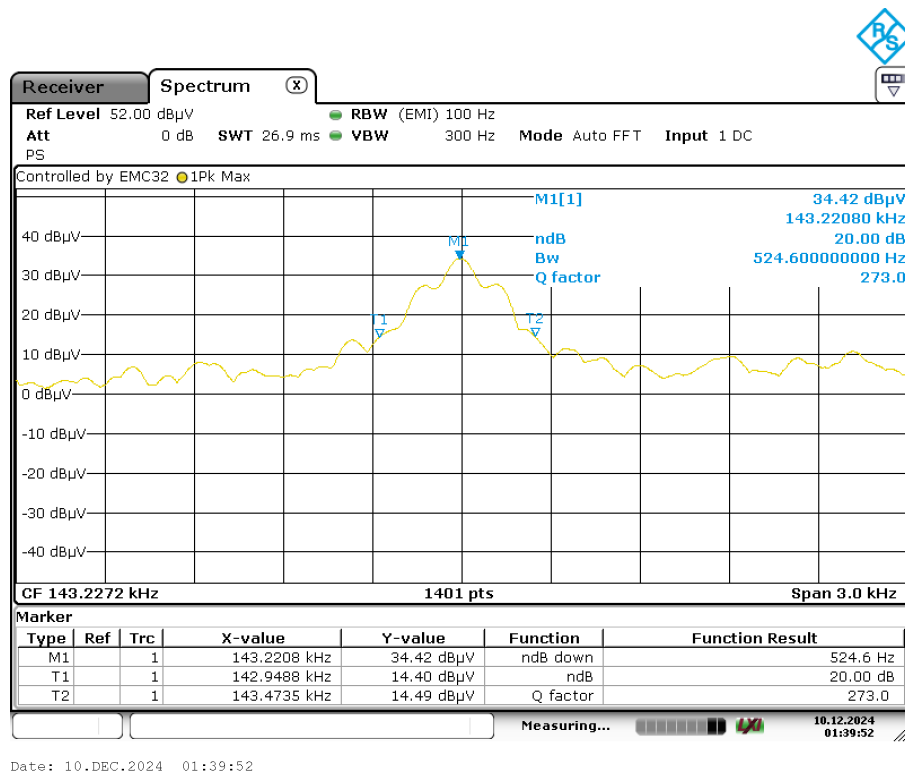


143kHz


Standby mode

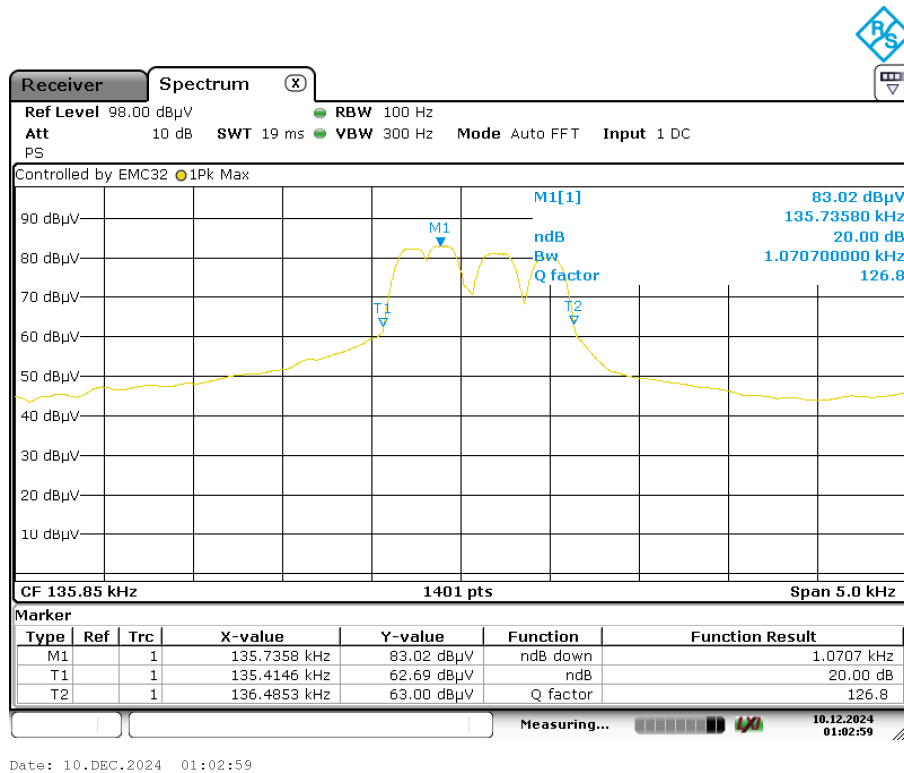


135.7kHz

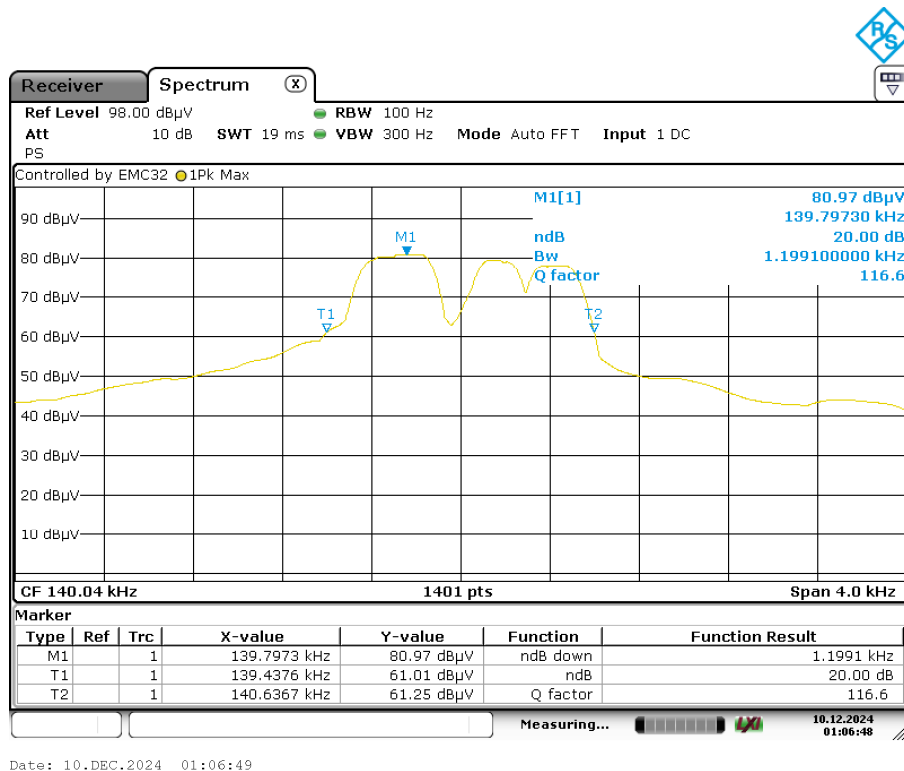

139.8kHz

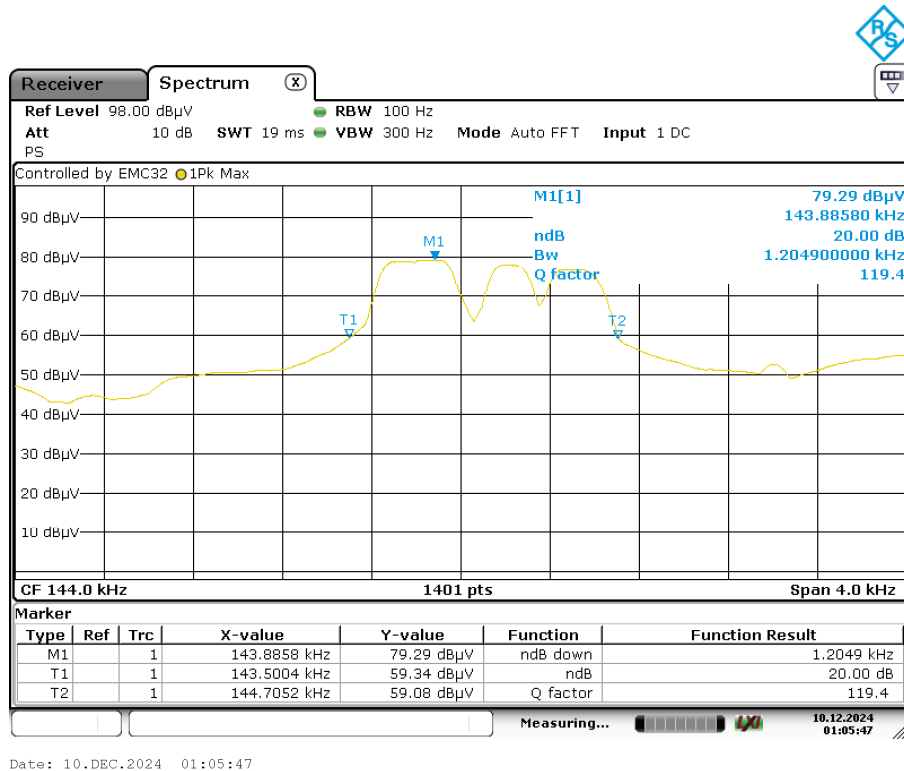

143.8kHz

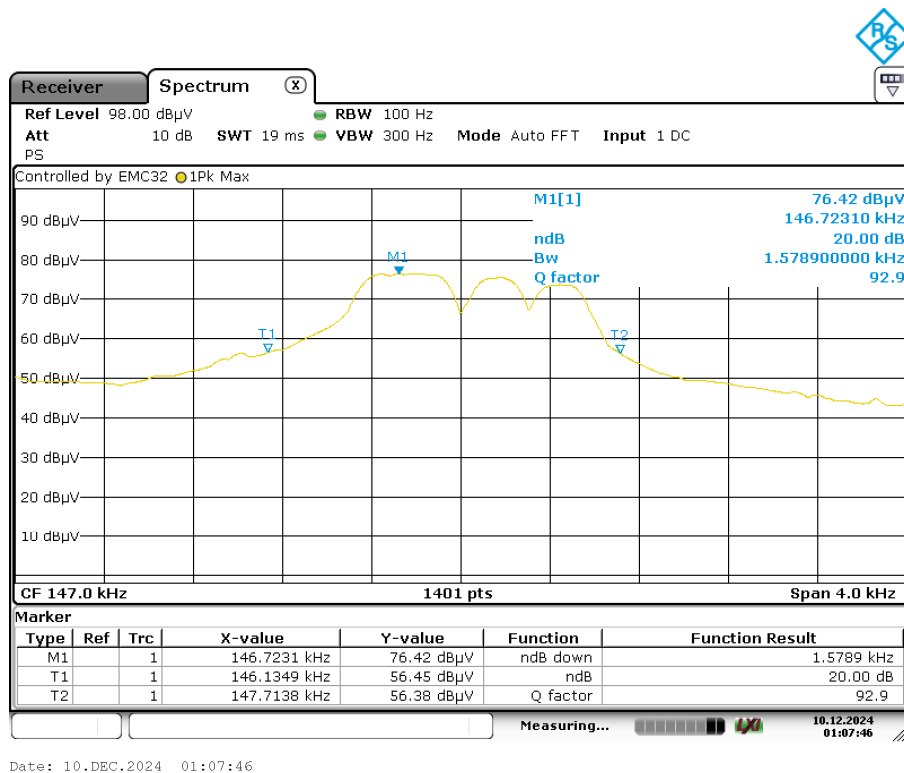

146.7kHz


Appendix A.2: Test Results of Field Strength of Fundamental and Harmonics

Note: The highest waveform in the figure is Fundamental.

Wireless charging

EUT Information

EUT Name:	Presto 2
Model:	9040034310
Test Mode:	Charging
Order No/Sample No:	168515554/A003873212-002
Test Voltage:	120V/60Hz
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

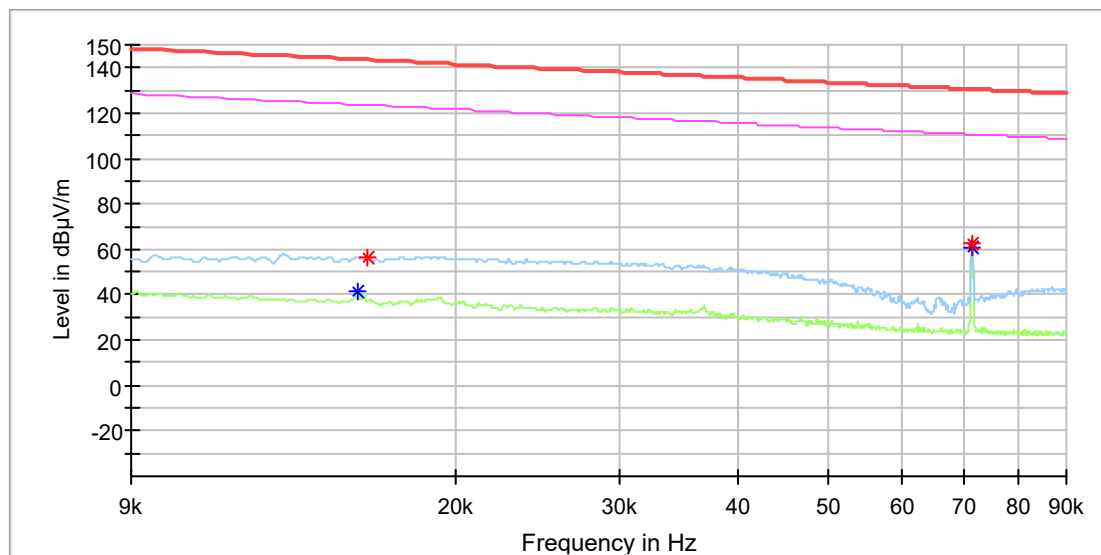


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015711	---	41.37	123.66	82.30	100.0	X	70.0	20.0
0.016116	56.21	---	143.44	87.23	100.0	X	70.0	20.0
0.071370	62.18	---	130.52	68.35	100.0	X	48.0	20.0
0.071370	---	61.14	110.52	49.38	100.0	X	48.0	20.0

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

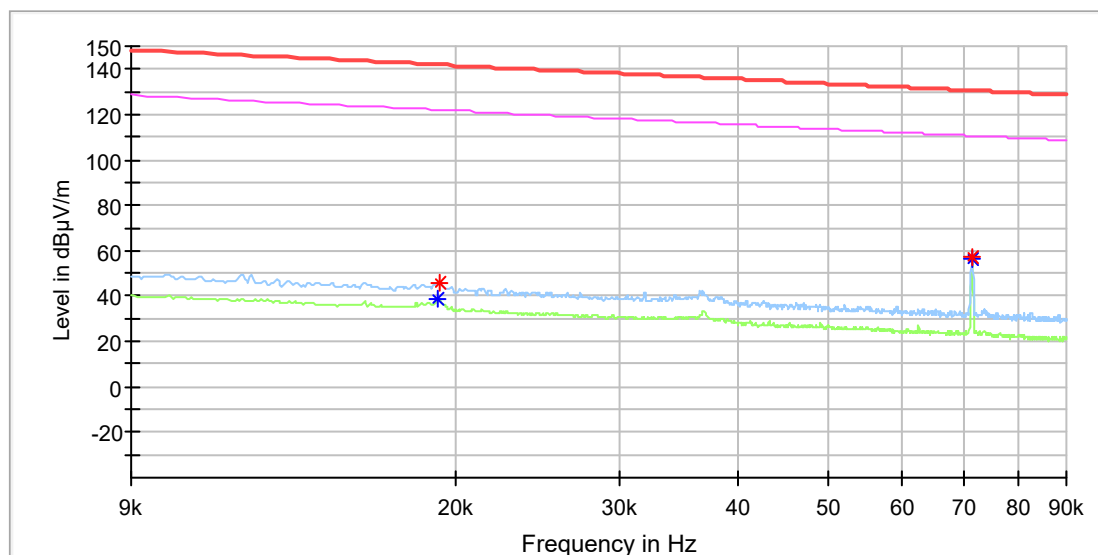


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	---	38.38	121.93	83.55	100.0	Y	143.0	20.0
0.019241	46.07	---	141.90	95.83	100.0	Y	143.0	20.0
0.071370	56.97	---	130.52	73.55	100.0	Y	111.0	20.0
0.071370	---	56.01	110.52	54.51	100.0	Y	111.0	20.0

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

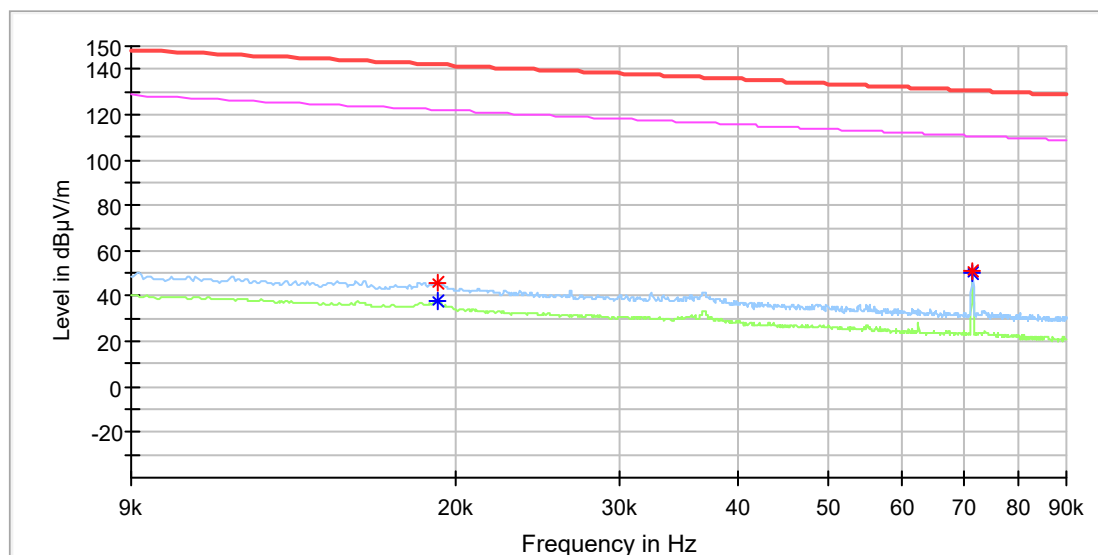


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019125	46.07	---	141.96	95.89	100.0	Z	0.0	20.0
0.019183	---	38.12	121.93	83.81	100.0	Z	0.0	20.0
0.071428	51.45	---	130.52	79.07	100.0	Z	63.0	20.0
0.071428	---	50.36	110.52	60.16	100.0	Z	63.0	20.0

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

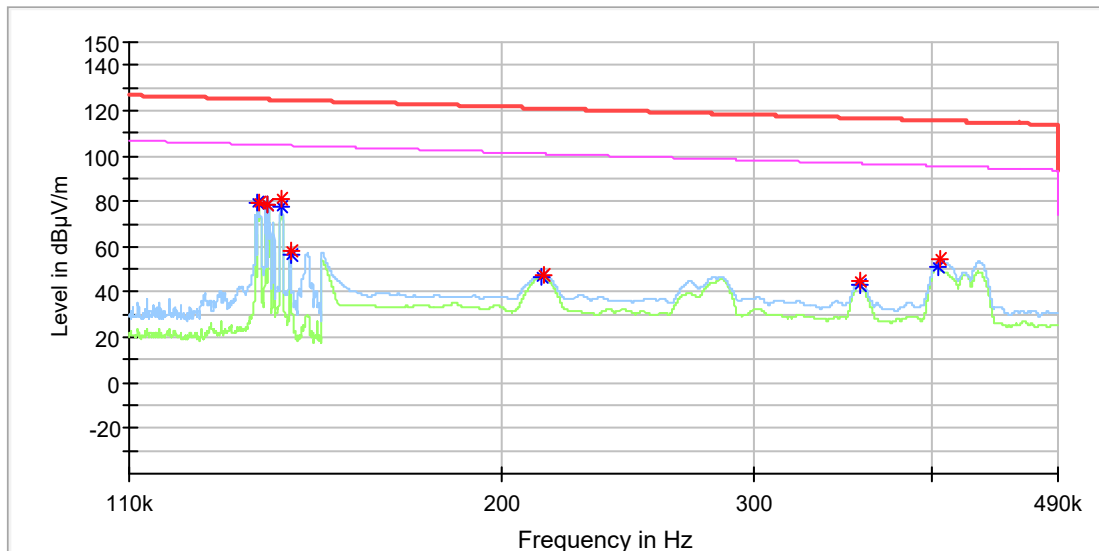


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.135343	---	78.98	104.97	25.99	100.0	X	151.0	20.0
0.135457	79.44	---	124.96	45.52	100.0	X	68.0	20.0
0.137543	78.48	---	124.83	46.34	100.0	X	68.0	20.0
0.137543	---	78.29	104.83	26.54	100.0	X	68.0	20.0
0.140400	---	77.85	104.65	26.80	100.0	X	217.0	20.0
0.140429	81.12	---	124.65	43.53	100.0	X	217.0	20.0
0.142629	---	56.72	104.51	47.79	100.0	X	47.0	20.0
0.142657	57.89	---	124.51	66.63	100.0	X	54.0	20.0
0.213350	---	46.64	101.02	54.38	100.0	X	38.0	20.0
0.213950	47.44	---	120.99	73.55	100.0	X	38.0	20.0
0.356050	---	42.76	96.57	53.81	100.0	X	44.0	20.0
0.356700	44.41	---	116.56	72.15	100.0	X	44.0	20.0
0.403700	---	50.62	95.48	44.86	100.0	X	31.0	20.0
0.405050	54.16	---	115.45	61.29	100.0	X	31.0	20.0

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

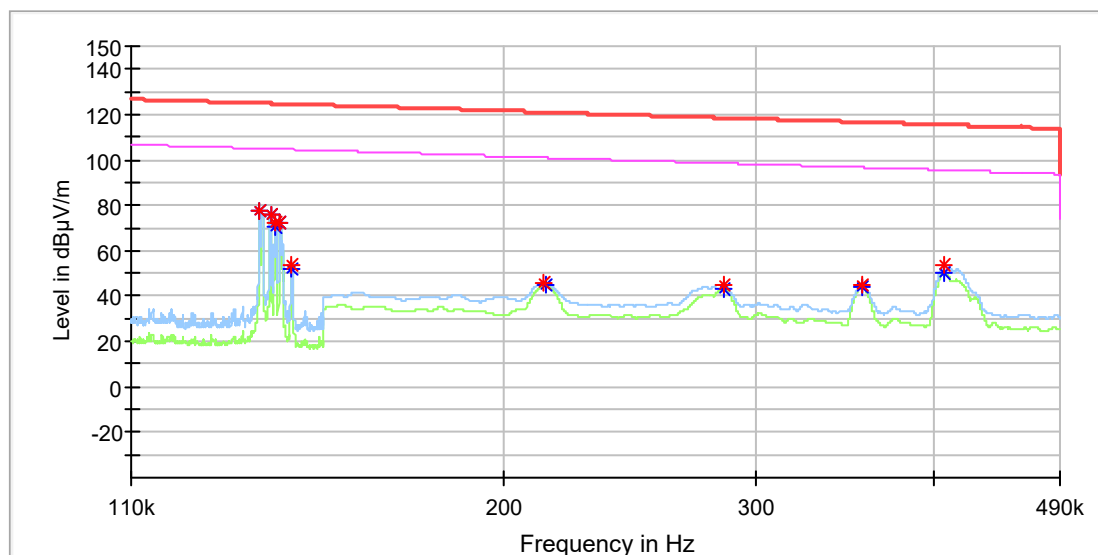


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.135372	77.39	---	124.97	47.57	100.0	Y	104.0	20.0
0.135372	---	77.11	104.97	27.85	100.0	Y	104.0	20.0
0.137629	75.67	---	124.82	49.15	100.0	Y	290.0	20.0
0.137629	---	75.50	104.82	29.32	100.0	Y	290.0	20.0
0.138886	---	70.30	104.75	34.44	100.0	Y	133.0	20.0
0.138914	72.18	---	124.74	52.56	100.0	Y	133.0	20.0
0.139714	---	71.80	104.69	32.89	100.0	Y	275.0	20.0
0.139743	72.01	---	124.69	52.68	100.0	Y	282.0	20.0
0.142514	---	52.26	104.52	52.26	100.0	Y	112.0	20.0
0.142543	53.40	---	124.52	71.12	100.0	Y	112.0	20.0
0.213450	45.62	---	121.01	75.39	100.0	Y	96.0	20.0
0.213900	---	44.74	101.00	56.26	100.0	Y	96.0	20.0
0.285050	---	43.26	98.50	55.24	100.0	Y	109.0	20.0
0.285150	44.53	---	118.50	73.97	100.0	Y	109.0	20.0
0.356400	---	43.71	96.56	52.86	100.0	Y	102.0	20.0
0.356550	44.57	---	116.56	71.99	100.0	Y	102.0	20.0
0.406650	---	50.24	95.42	45.18	100.0	Y	116.0	20.0
0.406900	53.55	---	115.41	61.86	100.0	Y	116.0	20.0

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

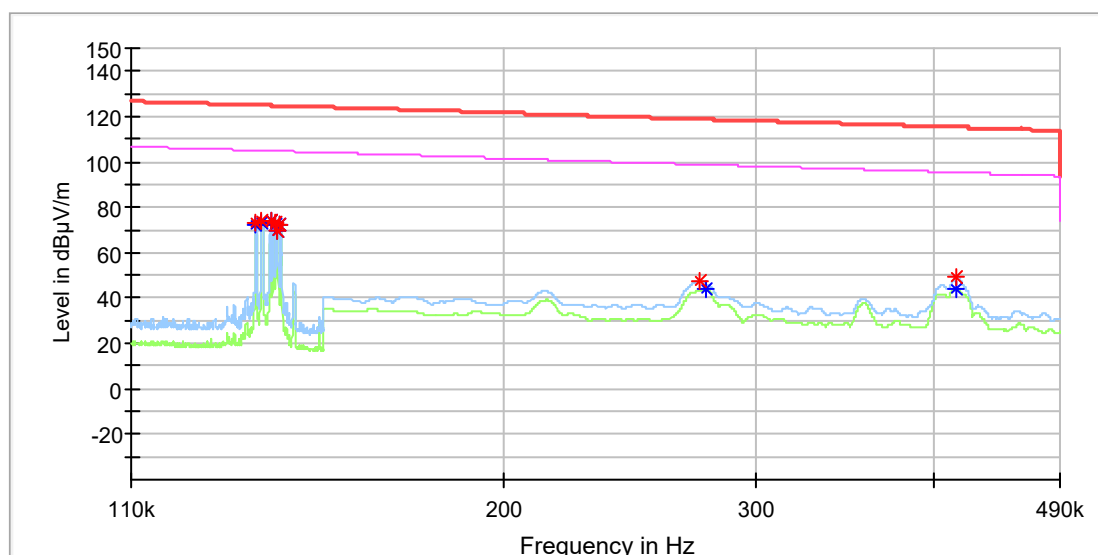


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.134429	72.71	---	125.03	52.32	100.0	Z	79.0	20.0
0.134429	---	72.37	105.03	32.66	100.0	Z	79.0	20.0
0.135772	73.77	---	124.94	51.17	100.0	Z	86.0	20.0
0.135800	---	73.54	104.94	31.40	100.0	Z	93.0	20.0
0.137743	73.95	---	124.82	50.86	100.0	Z	241.0	20.0
0.137772	---	73.66	104.82	31.15	100.0	Z	241.0	20.0
0.138514	72.96	---	124.77	51.80	100.0	Z	249.0	20.0
0.138543	---	71.84	104.77	32.93	100.0	Z	249.0	20.0
0.139143	69.88	---	124.73	54.85	100.0	Z	241.0	20.0
0.139143	---	69.64	104.73	35.09	100.0	Z	241.0	20.0
0.139772	72.64	---	124.69	52.05	100.0	Z	218.0	20.0
0.139772	---	72.38	104.69	32.31	100.0	Z	218.0	20.0
0.274250	47.50	---	118.84	71.34	100.0	Z	146.0	20.0
0.276750	---	44.31	98.76	54.45	100.0	Z	151.0	20.0
0.414050	---	44.35	95.26	50.91	100.0	Z	225.0	20.0
0.415000	49.57	---	115.24	65.67	100.0	Z	211.0	20.0

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

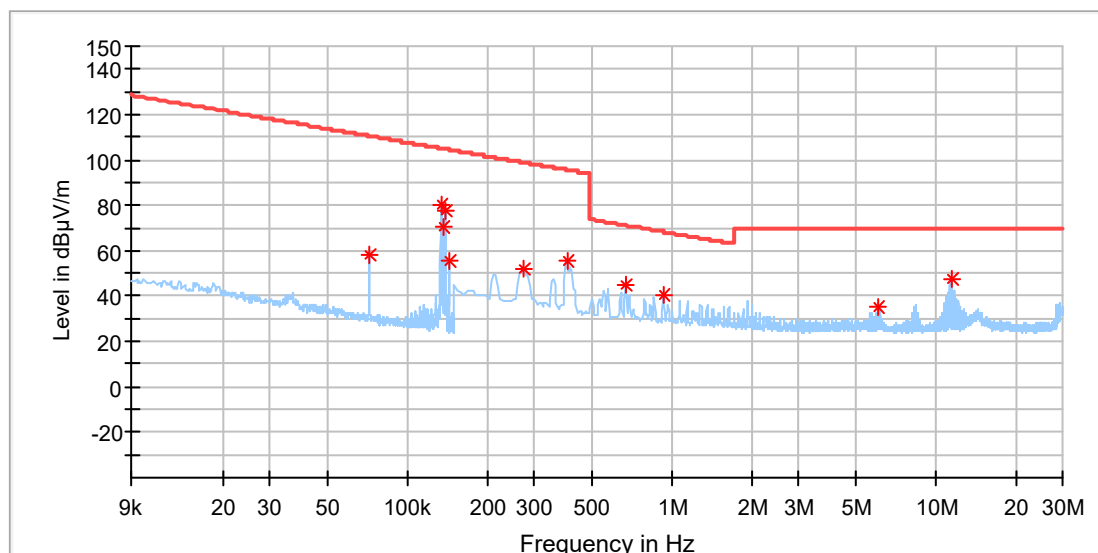

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.071544	58.47	110.50	52.04	100.0	X	56.0	19.9
0.133382	80.61	105.10	24.49	100.0	X	152.0	19.9
0.137310	70.87	104.84	33.97	100.0	X	210.0	19.9
0.138619	77.67	104.76	27.09	100.0	X	116.0	19.9
0.143353	55.76	104.47	48.71	100.0	X	56.0	19.9
0.272912	51.76	98.88	47.12	100.0	X	329.0	19.9
0.400213	55.58	95.56	39.97	100.0	X	156.0	19.9
0.663596	44.44	71.17	26.73	100.0	X	171.0	19.9
0.931368	40.83	68.24	27.41	100.0	X	59.0	19.9
6.036596	34.81	69.50	34.69	100.0	X	218.0	20.1
11.396427	47.32	69.50	22.18	100.0	X	156.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

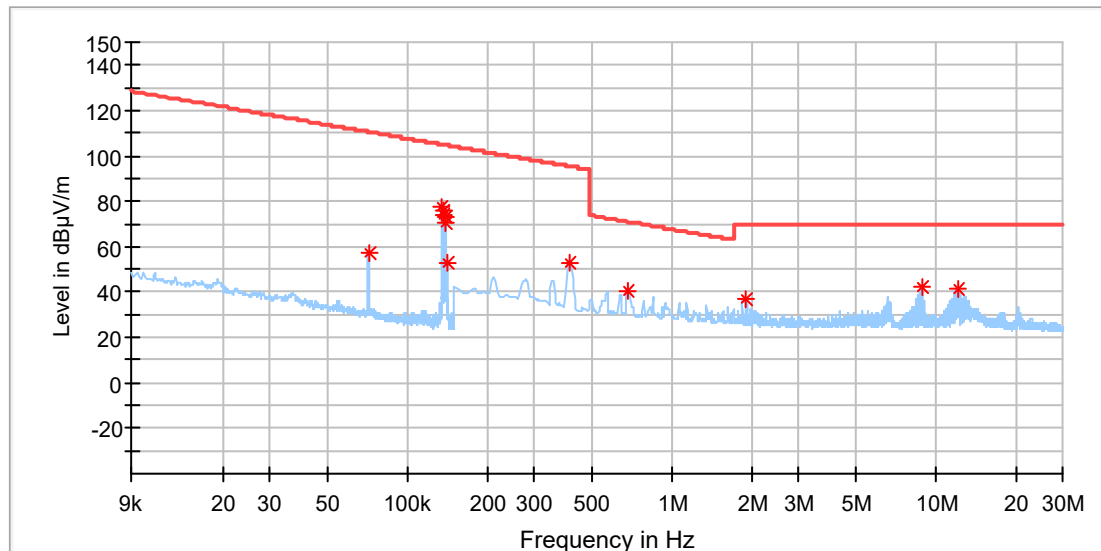

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.071141	57.25	110.55	53.30	100.0	Y	109.0	19.9
0.135497	77.25	104.96	27.71	100.0	Y	104.0	19.9
0.136907	74.26	104.87	30.61	100.0	Y	132.0	19.9
0.137612	75.49	104.83	29.34	100.0	Y	292.0	19.9
0.138821	70.73	104.75	34.02	100.0	Y	118.0	19.9
0.139727	73.44	104.69	31.25	100.0	Y	287.0	19.9
0.142245	52.78	104.54	51.76	100.0	Y	114.0	19.9
0.413383	52.76	95.28	42.52	100.0	Y	127.0	19.9
0.685544	40.19	70.89	30.71	100.0	Y	127.0	19.9
1.919052	36.58	69.50	32.92	100.0	Y	235.0	20.0
8.802110	42.53	69.50	26.97	100.0	Y	24.0	20.2
12.111949	41.55	69.50	27.95	100.0	Y	334.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

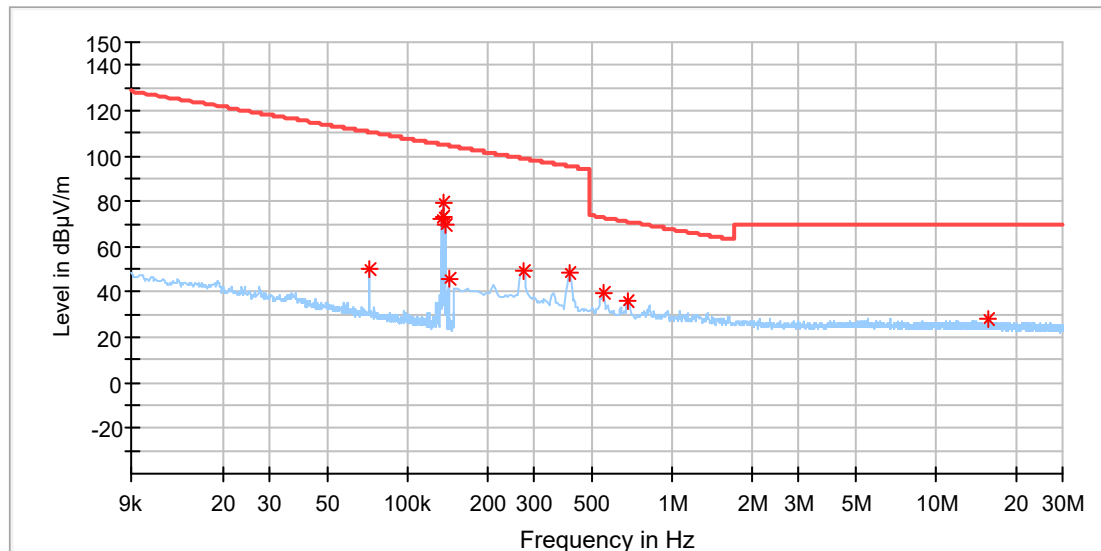

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.071544	49.92	110.50	60.58	100.0	Z	60.0	19.9
0.134490	72.31	105.02	32.71	100.0	Z	85.0	19.9
0.135799	73.22	104.94	31.72	100.0	Z	95.0	19.9
0.137713	79.03	104.82	25.79	100.0	Z	235.0	19.9
0.139224	69.76	104.72	34.97	100.0	Z	240.0	19.9
0.143051	45.57	104.49	58.92	100.0	Z	64.0	19.9
0.272912	49.59	98.88	49.29	100.0	Z	168.0	19.9
0.408993	48.78	95.37	46.59	100.0	Z	225.0	19.9
0.549463	39.79	72.81	33.01	100.0	Z	212.0	19.9
0.685544	35.99	70.89	34.90	100.0	Z	241.0	19.9
15.685169	27.87	69.50	41.63	100.0	Z	132.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

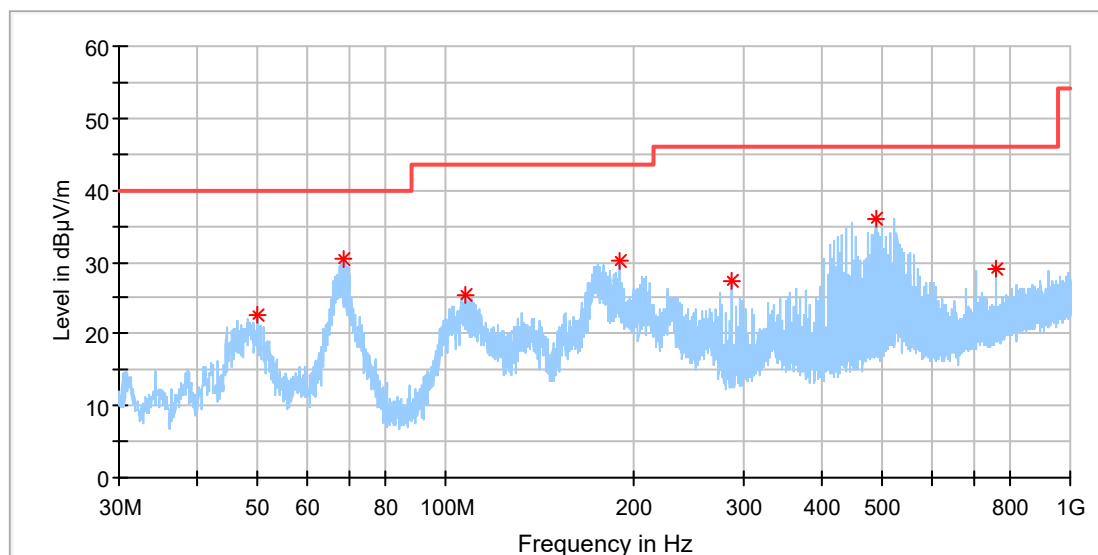

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.108846	22.65	40.00	17.35	100.0	H	260.0	-18.4
68.650769	30.32	40.00	9.68	100.0	H	285.0	-21.5
107.935769	25.36	43.50	18.14	100.0	H	132.0	-19.1
189.565000	30.20	43.50	13.30	100.0	H	268.0	-19.7
288.020000	27.26	46.00	18.74	100.0	H	71.0	-16.6
486.870000	35.90	46.00	10.10	100.0	H	236.0	-12.0
759.365385	29.07	46.00	16.93	100.0	H	164.0	-6.9

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Presto 2
Model:	9040034310
Test Mode:	Charging
Order No/Sample No:	168515554/A003873212-002
Test Voltage:	120V/60Hz
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

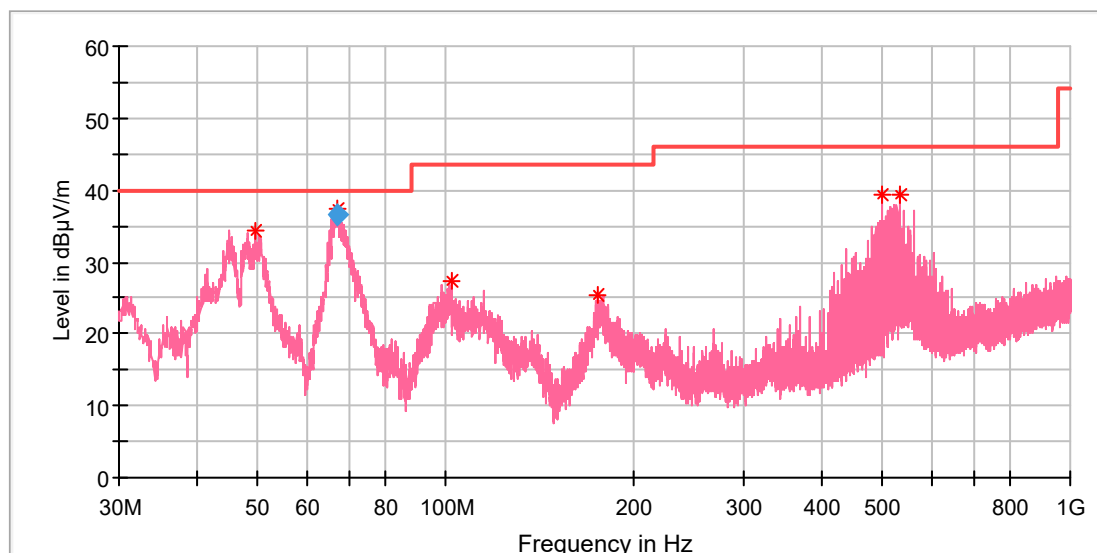

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.586539	34.44	40.00	5.56	100.0	V	158.0	-18.4
66.971923	37.41	40.00	2.59	100.0	V	166.0	-20.9
101.854615	27.26	43.50	16.24	100.0	V	205.0	-19.0
175.126923	25.48	43.50	18.02	100.0	V	196.0	-21.0
500.599231	39.28	46.00	6.72	100.0	V	94.0	-11.8
534.885000	39.24	46.00	6.76	100.0	V	55.0	-11.1


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
66.971923	36.53	40.00	3.47	100.0	V	161.0	-20.8

Standby mode

EUT Information

EUT Name:	Presto 2
Model:	9040034310
Test Mode:	Standby
Order No/Sample No:	168515554/A003873212-002
Test Voltage:	120V/60Hz
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

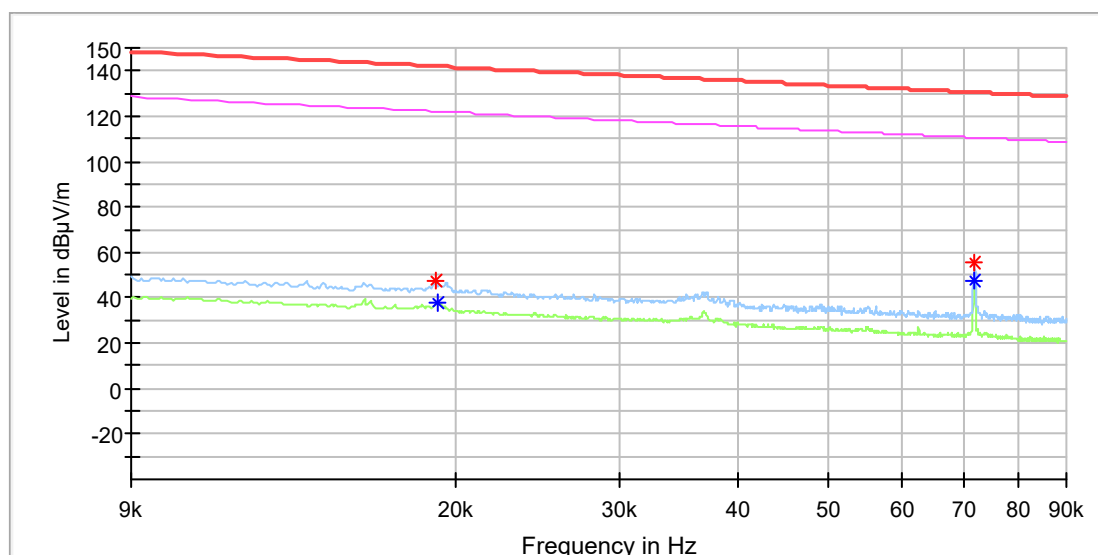


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019067	47.20	---	141.98	94.78	100.0	X	93.0	20.0
0.019183	---	38.15	121.93	83.78	100.0	X	208.0	20.0
0.071775	55.33	---	130.48	75.14	100.0	X	19.0	20.0
0.071775	---	47.77	110.48	62.71	100.0	X	19.0	20.0

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Standby
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

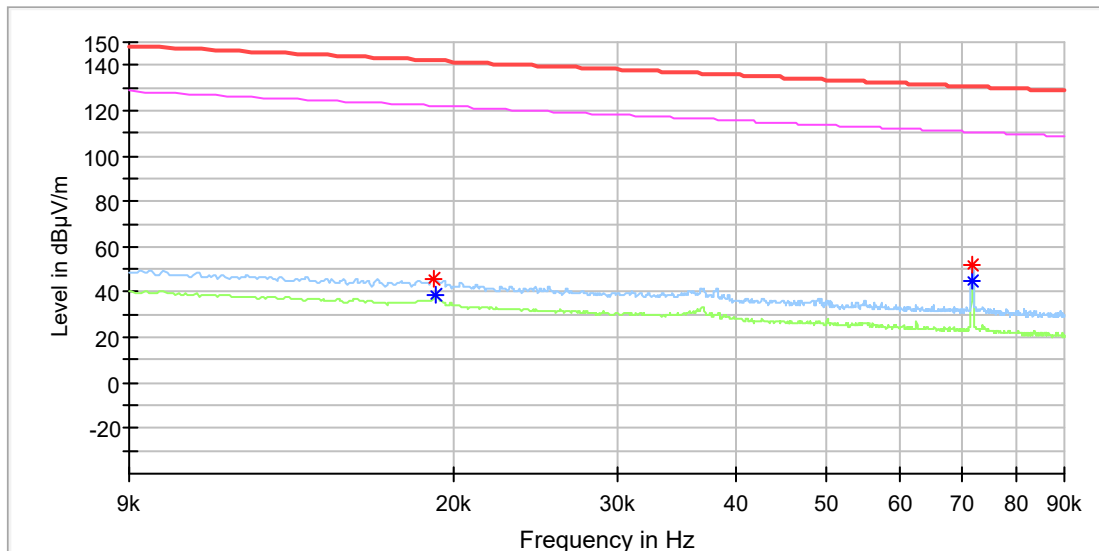


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019009	46.11	---	142.01	95.90	100.0	Y	125.0	20.0
0.019183	---	38.22	121.93	83.71	100.0	Y	243.0	20.0
0.071775	52.09	---	130.48	78.38	100.0	Y	72.0	20.0
0.071775	---	45.09	110.48	65.39	100.0	Y	72.0	20.0

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Standby
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

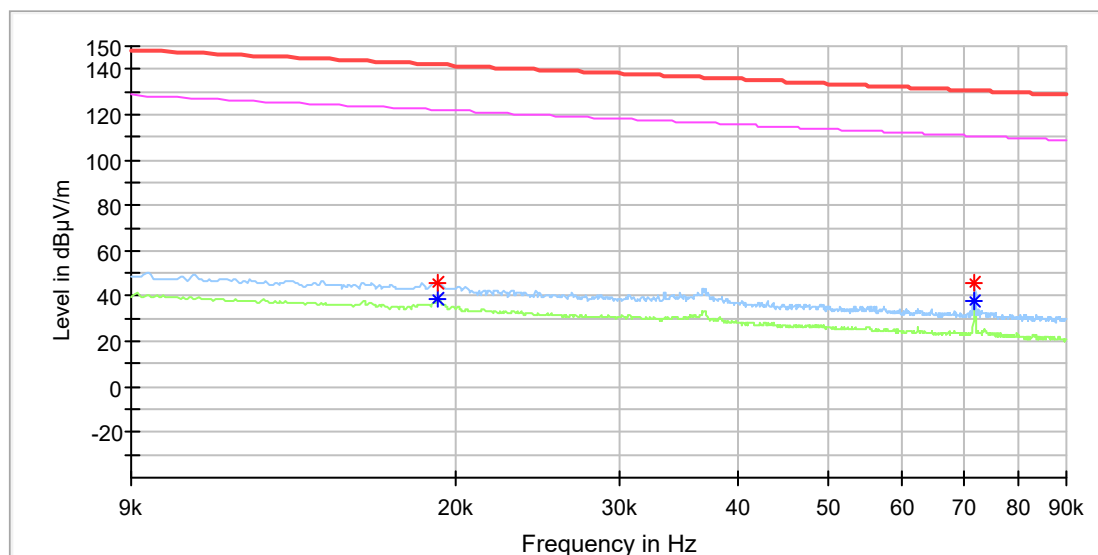


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	46.09	---	141.93	95.84	100.0	Z	325.0	20.0
0.019183	---	38.44	121.93	83.49	100.0	Z	325.0	20.0
0.071775	45.71	---	130.48	84.77	100.0	Z	8.0	20.0
0.071775	---	37.39	110.48	73.09	100.0	Z	8.0	20.0

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Standby
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

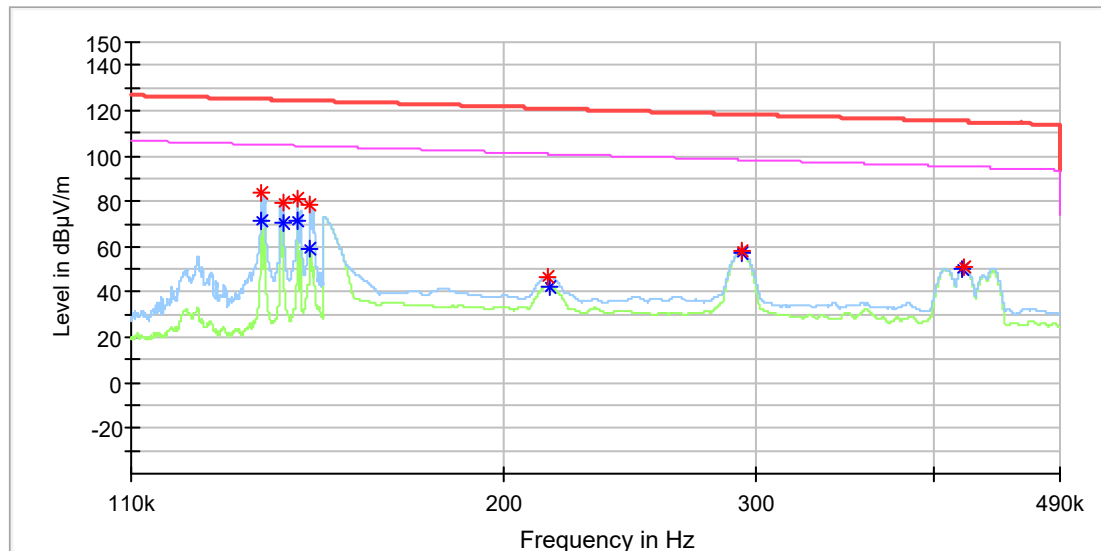


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.135600	83.42	---	124.95	41.54	100.0	X	128.0	20.0
0.135600	---	71.19	104.95	33.76	100.0	X	128.0	20.0
0.140457	79.53	---	124.65	45.12	100.0	X	150.0	20.0
0.140486	---	70.21	104.65	34.44	100.0	X	150.0	20.0
0.143714	80.63	---	124.45	43.81	100.0	X	179.0	20.0
0.143714	---	71.61	104.45	32.84	100.0	X	179.0	20.0
0.146657	78.66	---	124.27	45.62	100.0	X	179.0	20.0
0.146714	---	58.57	104.27	45.70	100.0	X	202.0	20.0
0.215000	47.03	---	120.95	73.92	100.0	X	112.0	20.0
0.215450	---	42.43	100.93	58.51	100.0	X	99.0	20.0
0.293250	58.07	---	118.26	60.19	100.0	X	174.0	20.0
0.293250	---	57.44	98.26	40.82	100.0	X	174.0	20.0
0.419150	---	50.34	95.16	44.82	100.0	X	214.0	20.0
0.419300	50.73	---	115.15	64.43	100.0	X	214.0	20.0

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Standby
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

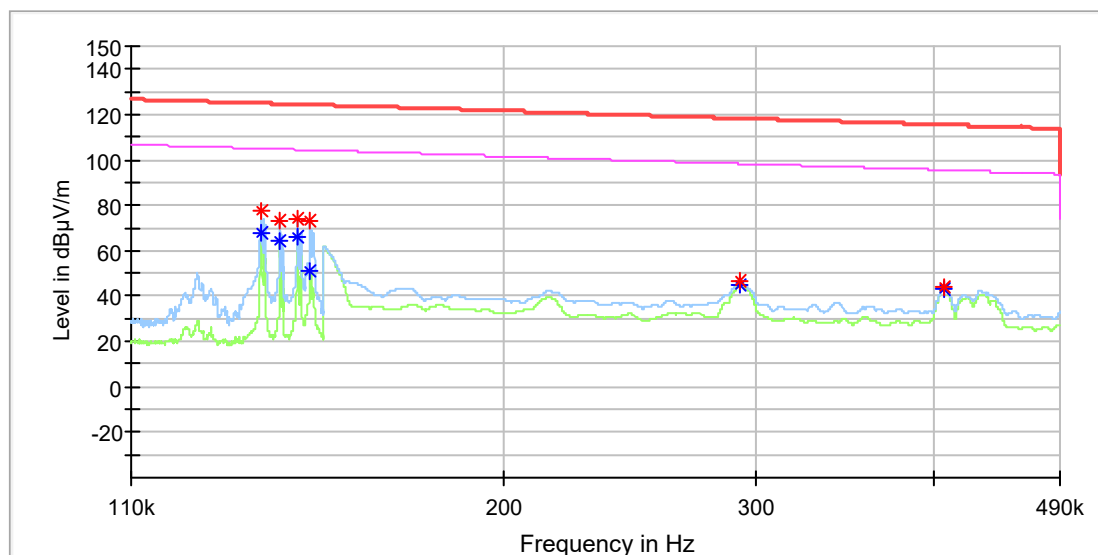


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.135543	---	67.88	104.96	37.08	100.0	Y	90.0	20.0
0.135600	77.25	---	124.95	47.70	100.0	Y	90.0	20.0
0.139686	73.36	---	124.70	51.34	100.0	Y	74.0	20.0
0.139686	---	64.12	104.70	40.57	100.0	Y	74.0	20.0
0.143714	---	65.79	104.45	38.66	100.0	Y	217.0	20.0
0.143771	73.79	---	124.45	50.65	100.0	Y	217.0	20.0
0.146629	72.99	---	124.27	51.28	100.0	Y	272.0	20.0
0.146657	---	51.07	104.27	53.20	100.0	Y	272.0	20.0
0.293050	46.23	---	118.26	72.04	100.0	Y	250.0	20.0
0.293200	---	44.96	98.26	53.30	100.0	Y	250.0	20.0
0.406700	44.16	---	115.42	71.26	100.0	Y	71.0	20.0
0.406700	---	43.39	95.42	52.03	100.0	Y	71.0	20.0

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Standby
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

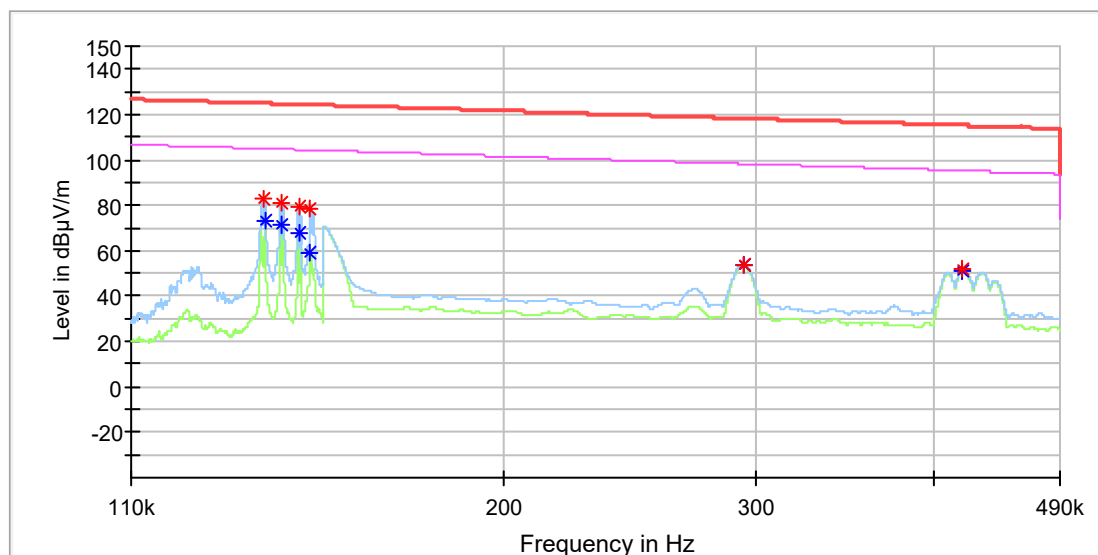


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.136000	83.23	---	124.93	41.69	100.0	Z	149.0	20.0
0.136400	---	73.22	104.90	31.68	100.0	Z	149.0	20.0
0.140143	81.40	---	124.67	43.26	100.0	Z	96.0	20.0
0.140143	---	71.78	104.67	32.89	100.0	Z	96.0	20.0
0.144143	---	67.70	104.42	36.72	100.0	Z	166.0	20.0
0.144171	79.17	---	124.42	45.25	100.0	Z	166.0	20.0
0.146629	78.48	---	124.27	45.79	100.0	Z	232.0	20.0
0.146657	---	59.41	104.27	44.87	100.0	Z	232.0	20.0
0.294150	53.94	---	118.23	64.29	100.0	Z	168.0	20.0
0.294150	---	53.81	98.23	44.42	100.0	Z	168.0	20.0
0.419050	51.78	---	115.16	63.38	100.0	Z	216.0	20.0
0.419100	---	51.41	95.16	43.75	100.0	Z	216.0	20.0

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Standby
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

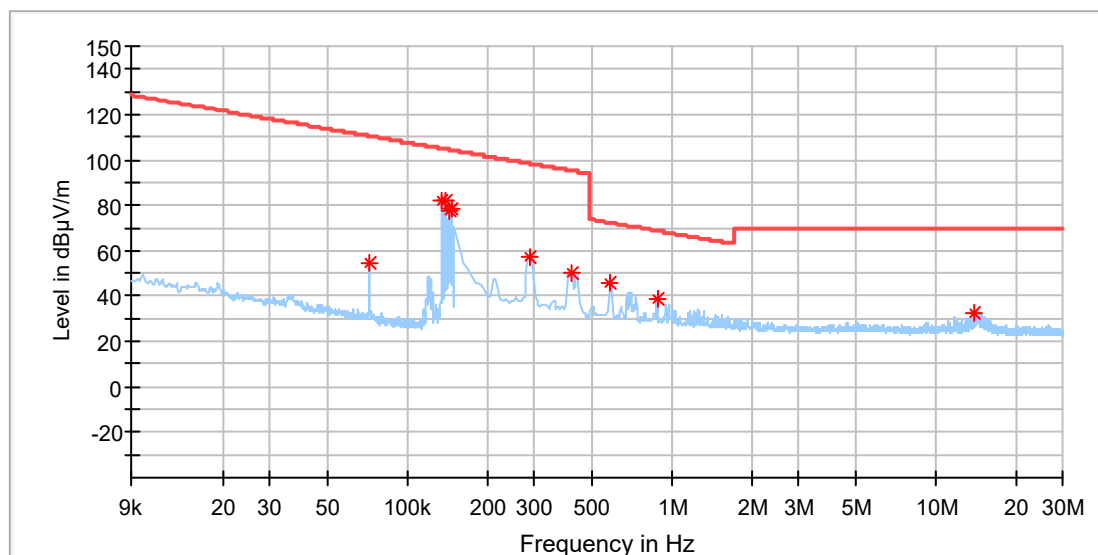

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.071745	54.81	110.48	55.67	100.0	X	0.0	19.9
0.135598	82.36	104.95	22.59	100.0	X	222.0	19.9
0.139727	82.23	104.69	22.46	100.0	X	179.0	19.9
0.143756	77.16	104.45	27.28	100.0	X	152.0	19.9
0.146676	78.12	104.27	26.15	100.0	X	187.0	19.9
0.290471	57.41	98.34	40.93	100.0	X	170.0	19.9
0.417772	50.07	95.18	45.11	100.0	X	150.0	19.9
0.584581	45.75	72.27	26.52	100.0	X	170.0	19.9
0.883081	38.84	68.70	29.85	100.0	X	197.0	19.9
13.938066	32.78	69.50	36.72	100.0	X	77.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Standby
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

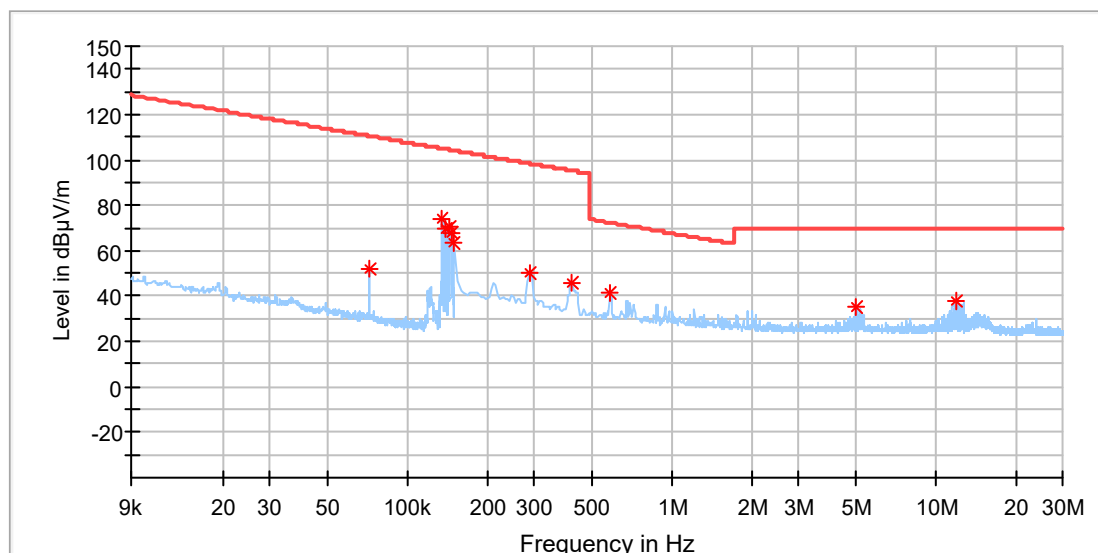

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.071745	51.71	110.48	58.77	100.0	Y	54.0	19.9
0.135598	74.30	104.95	30.65	100.0	Y	264.0	19.9
0.140130	69.71	104.67	34.95	100.0	Y	283.0	19.9
0.143756	70.11	104.45	34.34	100.0	Y	264.0	19.9
0.146777	68.21	104.27	36.06	100.0	Y	109.0	19.9
0.150000	63.56	104.08	40.52	100.0	Y	120.0	19.9
0.290471	50.05	98.34	48.29	100.0	Y	120.0	19.9
0.417772	45.33	95.18	49.85	100.0	Y	115.0	19.9
0.584581	41.23	72.27	31.04	100.0	Y	120.0	19.9
5.018184	34.86	69.50	34.64	100.0	Y	50.0	20.1
11.914412	38.04	69.50	31.46	100.0	Y	10.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Standby
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

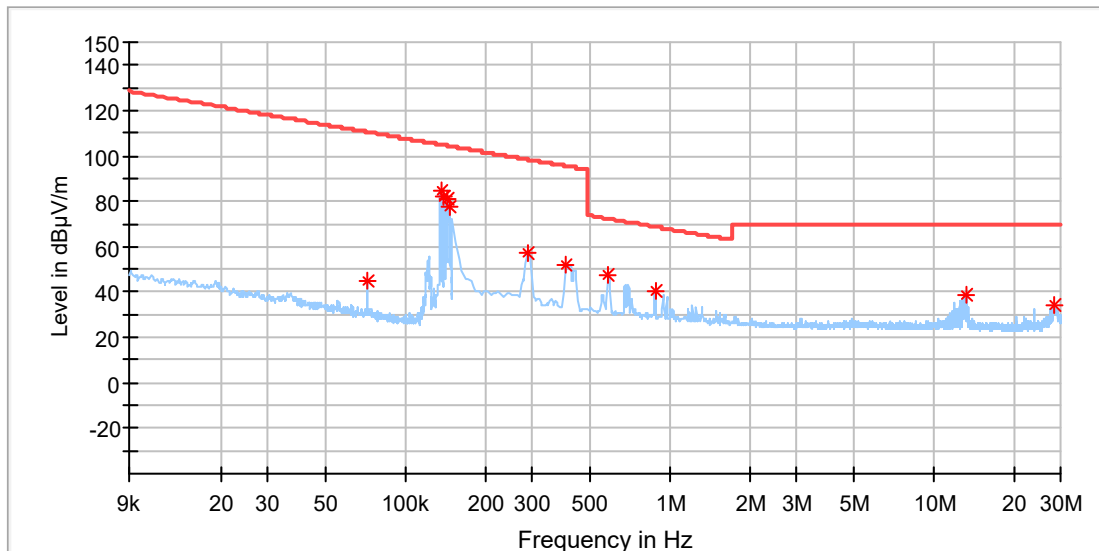

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.071745	45.27	110.48	65.21	100.0	Z	35.0	19.9
0.135699	84.76	104.95	20.19	100.0	Z	217.0	19.9
0.139727	82.07	104.69	22.62	100.0	Z	175.0	19.9
0.143756	80.92	104.45	23.53	100.0	Z	196.0	19.9
0.146676	77.41	104.27	26.86	100.0	Z	217.0	19.9
0.290471	56.81	98.34	41.53	100.0	Z	231.0	19.9
0.404603	52.16	95.46	43.30	100.0	Z	187.0	19.9
0.584581	47.26	72.27	25.01	100.0	Z	231.0	19.9
0.878691	40.55	68.74	28.19	100.0	Z	231.0	19.9
13.156699	38.26	69.50	31.24	100.0	Z	221.0	20.3
28.371419	34.66	69.50	34.84	100.0	Z	327.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Standby
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

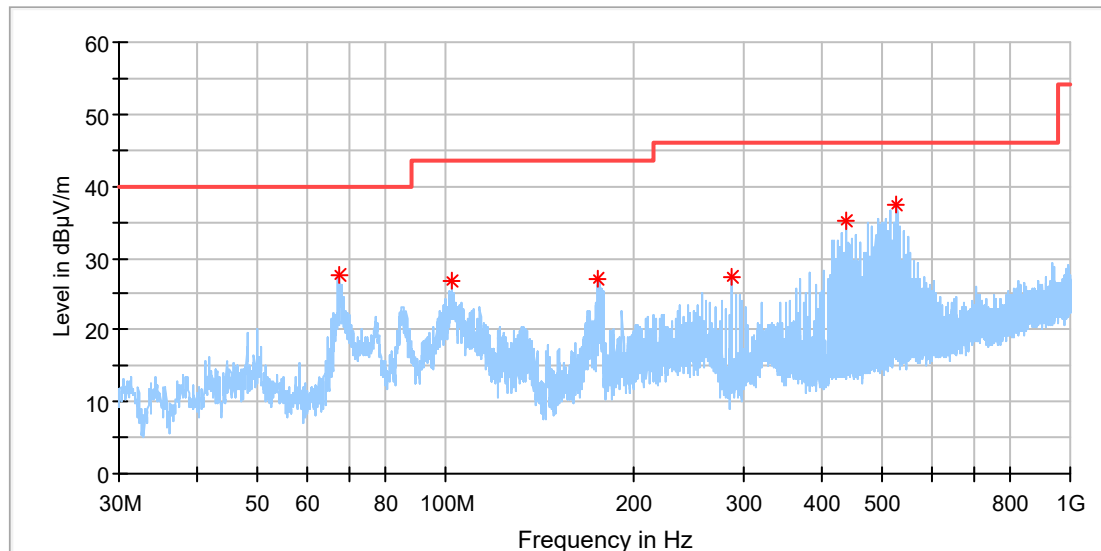

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
67.345000	27.64	40.00	12.36	100.0	H	0.0	-21.1
102.153077	26.92	43.50	16.58	100.0	H	285.0	-19.0
174.940385	27.19	43.50	16.31	100.0	H	89.0	-21.0
288.020000	27.39	46.00	18.61	100.0	H	80.0	-16.6
438.855000	35.09	46.00	10.91	100.0	H	183.0	-13.0
528.020385	37.32	46.00	8.68	100.0	H	220.0	-11.3

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: Standby
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

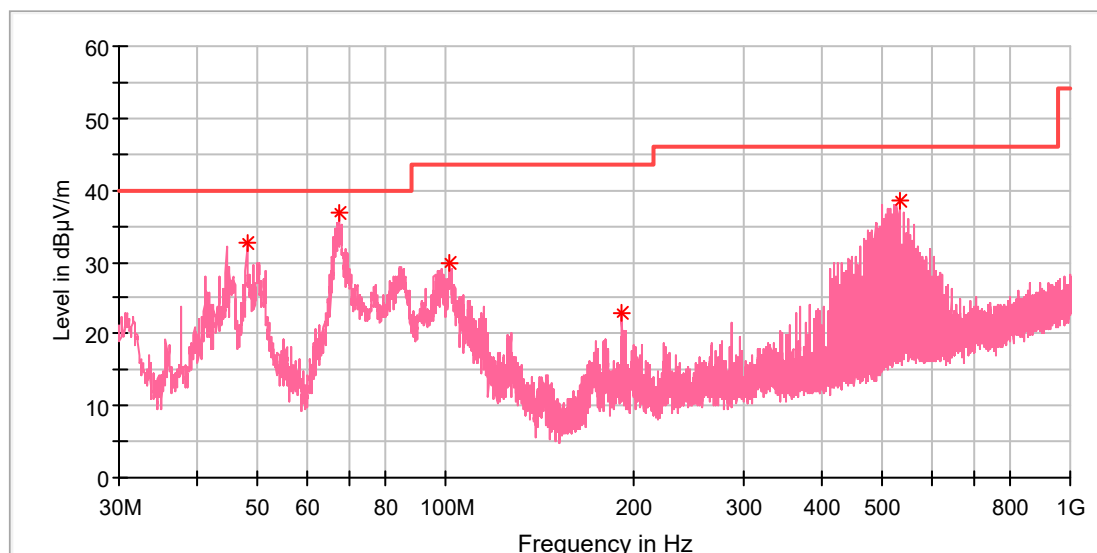

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.982308	32.77	40.00	7.23	100.0	V	309.0	-18.5
67.568846	36.89	40.00	3.11	100.0	V	278.0	-21.1
101.742692	29.80	43.50	13.70	100.0	V	175.0	-19.0
191.952692	23.01	43.50	20.49	100.0	V	167.0	-19.5
534.885000	38.58	46.00	7.42	100.0	V	18.0	-11.1


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Co-location mode

EUT Information

EUT Name:	Presto 2
Model:	9040034310
Test Mode:	NFC+Wireless charging
Order No/Sample No:	168515554/A003873212-002
Test Voltage:	120V/60Hz
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

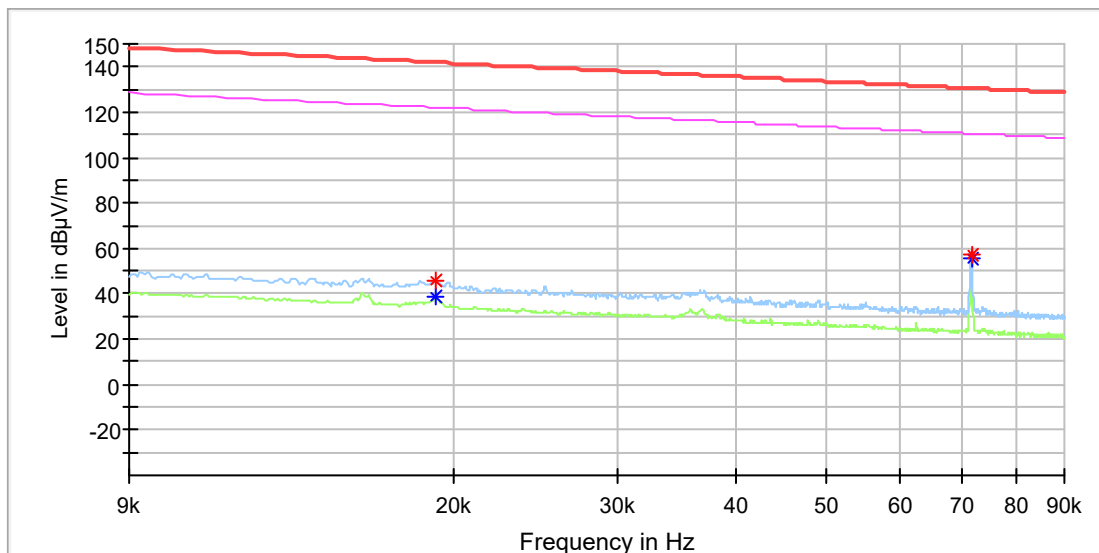


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019125	45.84	---	141.96	96.11	100.0	X	87.0	20.0
0.019183	---	38.37	121.93	83.56	100.0	X	189.0	20.0
0.071601	57.23	---	130.50	73.26	100.0	X	64.0	20.0
0.071601	---	55.40	110.50	55.09	100.0	X	64.0	20.0

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: NFC+Wireless charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

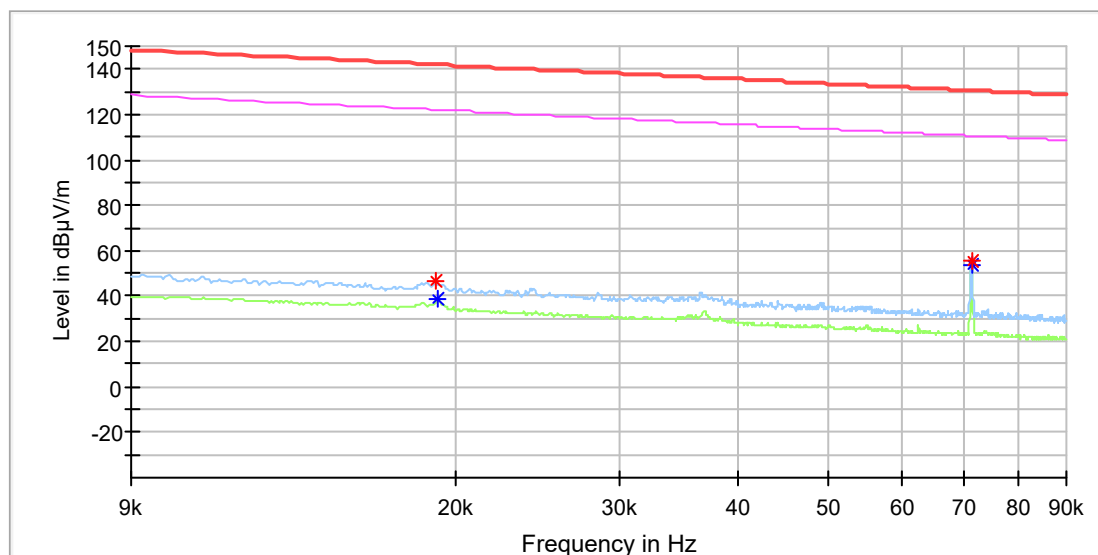


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019067	46.36	---	141.98	95.63	100.0	Y	134.0	20.0
0.019183	---	38.73	121.93	83.20	100.0	Y	0.0	20.0
0.071254	55.27	---	130.54	75.27	100.0	Y	104.0	20.0
0.071254	---	53.71	110.54	56.83	100.0	Y	104.0	20.0

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: NFC+Wireless charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

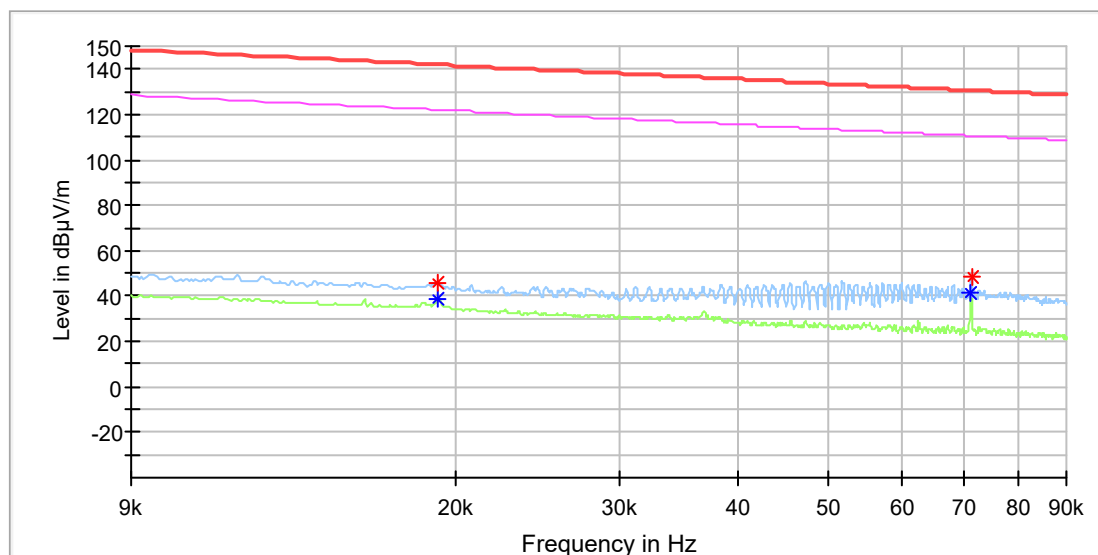


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019125	45.30	---	141.96	96.65	100.0	Z	68.0	20.0
0.019183	---	38.85	121.93	83.08	100.0	Z	68.0	20.0
0.071196	---	41.60	110.55	68.94	100.0	Z	36.0	20.0
0.071312	48.10	---	130.53	82.43	100.0	Z	36.0	20.0

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: NFC+Wireless charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

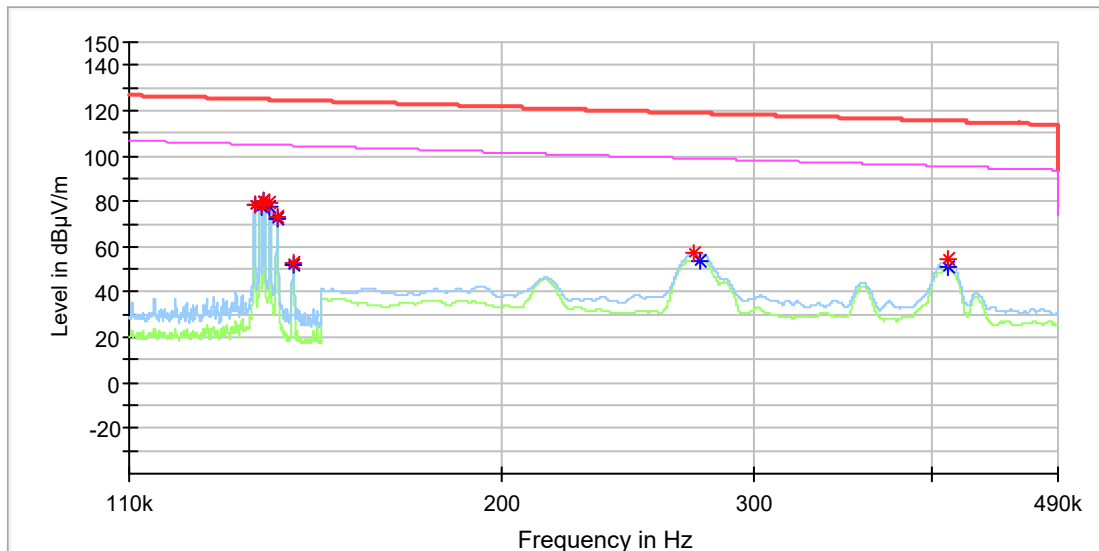


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.134629	78.34	---	125.02	46.68	100.0	X	156.0	20.0
0.134657	---	78.04	105.01	26.97	100.0	X	156.0	20.0
0.135829	---	77.96	104.94	26.98	100.0	X	65.0	20.0
0.135829	78.25	---	124.94	46.68	100.0	X	65.0	20.0
0.136629	80.26	---	124.89	44.63	100.0	X	224.0	20.0
0.136629	---	80.11	104.89	24.78	100.0	X	224.0	20.0
0.138029	79.71	---	124.80	45.09	100.0	X	210.0	20.0
0.138029	---	77.93	104.80	26.87	100.0	X	210.0	20.0
0.139572	72.71	---	124.70	52.00	100.0	X	224.0	20.0
0.139572	---	72.35	104.70	32.35	100.0	X	224.0	20.0
0.143171	52.79	---	124.48	71.69	100.0	X	57.0	20.0
0.143200	---	51.79	104.48	52.69	100.0	X	57.0	20.0
0.272350	56.97	---	118.90	61.93	100.0	X	22.0	20.0
0.275150	---	54.03	98.81	44.78	100.0	X	211.0	20.0
0.409950	---	50.74	95.35	44.61	100.0	X	223.0	20.0
0.410700	54.49	---	115.33	60.84	100.0	X	223.0	20.0

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: NFC+Wireless charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

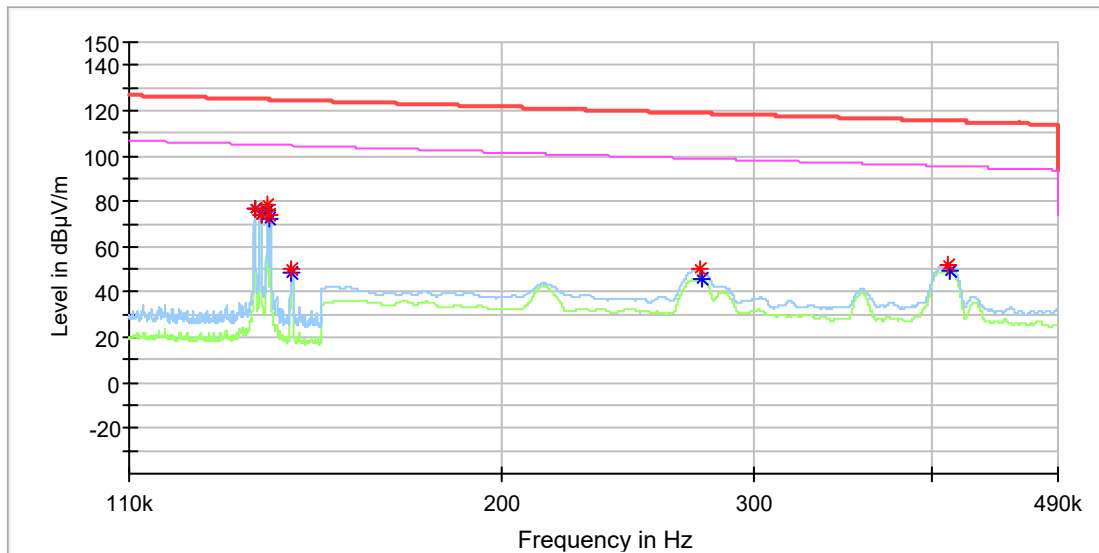


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.134629	76.78	---	125.02	48.23	100.0	Y	107.0	20.0
0.134657	---	76.55	105.01	28.47	100.0	Y	107.0	20.0
0.135857	74.11	---	124.94	50.83	100.0	Y	140.0	20.0
0.135857	---	73.90	104.94	31.04	100.0	Y	140.0	20.0
0.137372	---	76.10	104.84	28.74	100.0	Y	155.0	20.0
0.137400	78.25	---	124.84	46.59	100.0	Y	155.0	20.0
0.138000	74.26	---	124.80	50.54	100.0	Y	284.0	20.0
0.138000	---	72.12	104.80	32.68	100.0	Y	284.0	20.0
0.142800	49.98	---	124.50	74.53	100.0	Y	107.0	20.0
0.142829	---	48.77	104.50	55.73	100.0	Y	107.0	20.0
0.275150	50.26	---	118.81	68.55	100.0	Y	159.0	20.0
0.276000	---	45.39	98.78	53.39	100.0	Y	159.0	20.0
0.410050	52.09	---	115.35	63.26	100.0	Y	133.0	20.0
0.412300	---	49.19	95.30	46.11	100.0	Y	147.0	20.0

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: NFC+Wireless charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

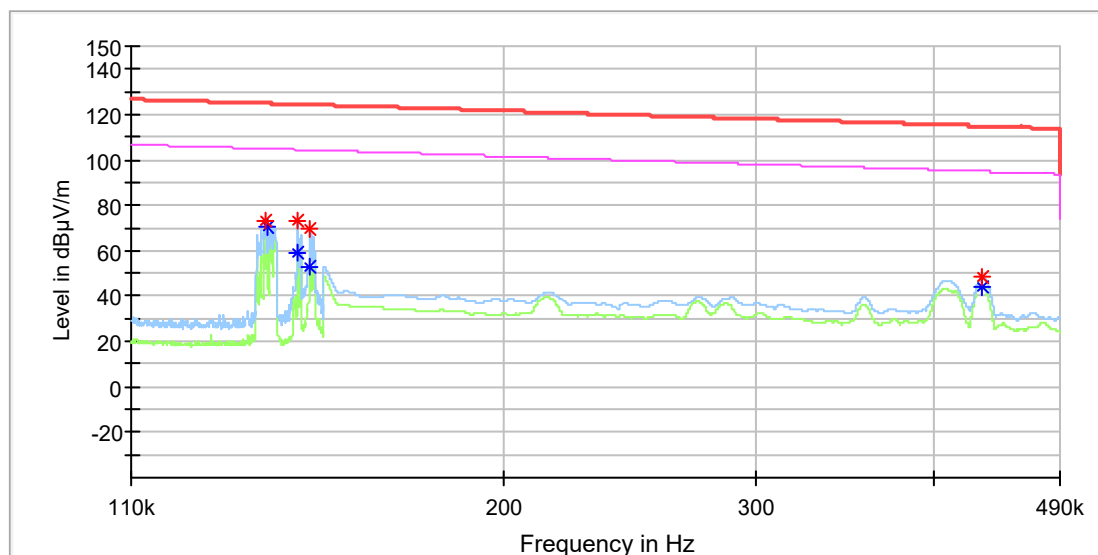


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.136400	73.54	---	124.90	51.36	100.0	Z	37.0	20.0
0.136772	---	70.45	104.88	34.42	100.0	Z	37.0	20.0
0.143714	73.15	---	124.45	51.29	100.0	Z	44.0	20.0
0.143743	---	58.54	104.45	45.91	100.0	Z	44.0	20.0
0.146657	69.39	---	124.27	54.88	100.0	Z	58.0	20.0
0.146657	---	53.21	104.27	51.06	100.0	Z	58.0	20.0
0.431850	---	44.22	94.90	50.68	100.0	Z	101.0	20.0
0.432400	48.34	---	114.89	66.55	100.0	Z	101.0	20.0

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: NFC+Wireless charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

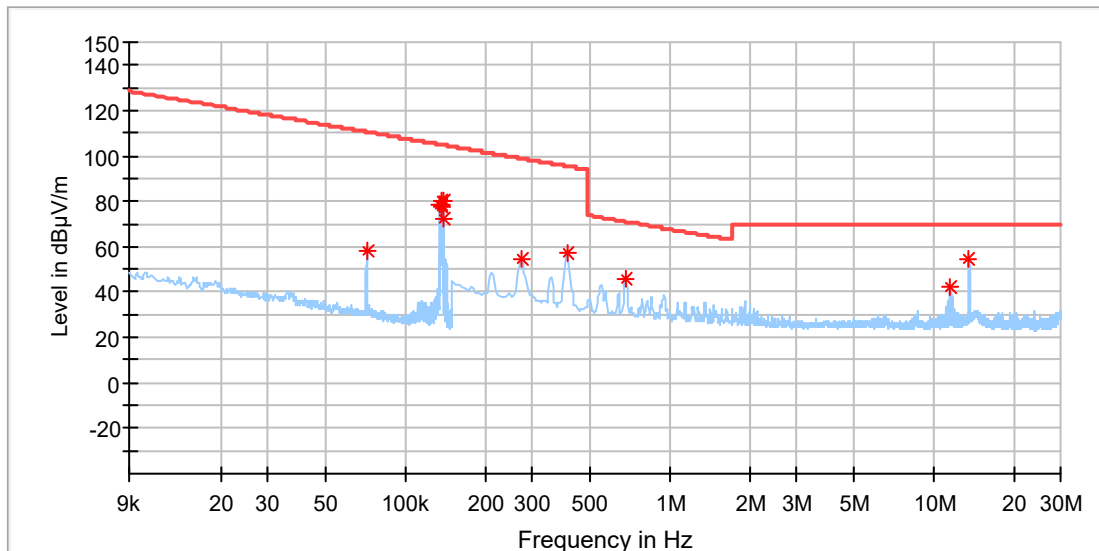

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.071342	58.36	110.53	52.17	100.0	X	45.0	19.9
0.134792	78.84	105.00	26.16	100.0	X	161.0	19.9
0.135900	78.59	104.93	26.34	100.0	X	68.0	19.9
0.136605	77.16	104.89	27.73	100.0	X	22.0	19.9
0.137411	79.80	104.84	25.04	100.0	X	229.0	19.9
0.138015	80.42	104.80	24.38	100.0	X	203.0	19.9
0.139324	72.61	104.72	32.11	100.0	X	229.0	19.9
0.272912	54.25	98.88	44.63	100.0	X	204.0	19.9
0.408993	56.93	95.37	38.44	100.0	X	224.0	19.9
0.681155	45.41	70.95	25.54	100.0	X	214.0	19.9
11.585184	42.54	69.50	26.96	100.0	X	218.0	20.2
13.560552	54.66	69.50	14.84	100.0	X	149.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: NFC+Wireless charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

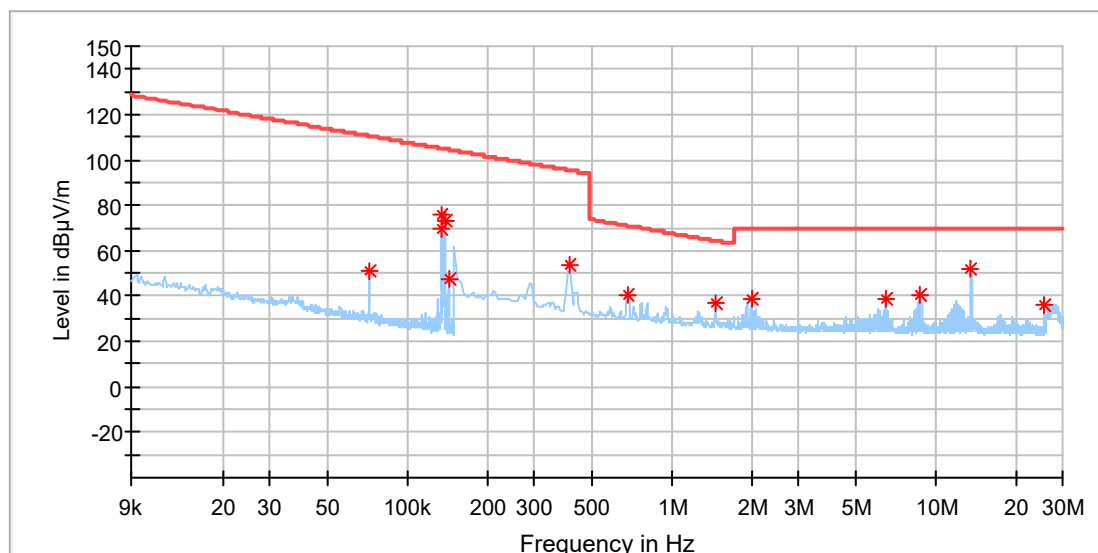

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.071544	51.27	110.50	59.23	100.0	Y	0.0	19.9
0.134792	69.37	105.00	35.63	100.0	Y	263.0	19.9
0.135598	76.07	104.95	28.88	100.0	Y	292.0	19.9
0.138015	72.79	104.80	32.01	100.0	Y	288.0	19.9
0.143051	47.09	104.49	57.40	100.0	Y	349.0	19.9
0.408993	53.67	95.37	41.70	100.0	Y	272.0	19.9
0.681155	40.76	70.95	30.19	100.0	Y	283.0	19.9
1.462522	36.53	64.33	27.80	100.0	Y	33.0	20.0
1.998066	38.83	69.50	30.67	100.0	Y	278.0	20.0
6.449228	38.66	69.50	30.84	100.0	Y	198.0	20.1
8.648471	40.44	69.50	29.06	100.0	Y	198.0	20.2
13.560552	52.01	69.50	17.49	100.0	Y	230.0	20.3
25.746375	35.59	69.50	33.91	100.0	Y	121.0	20.5

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: NFC+Wireless charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

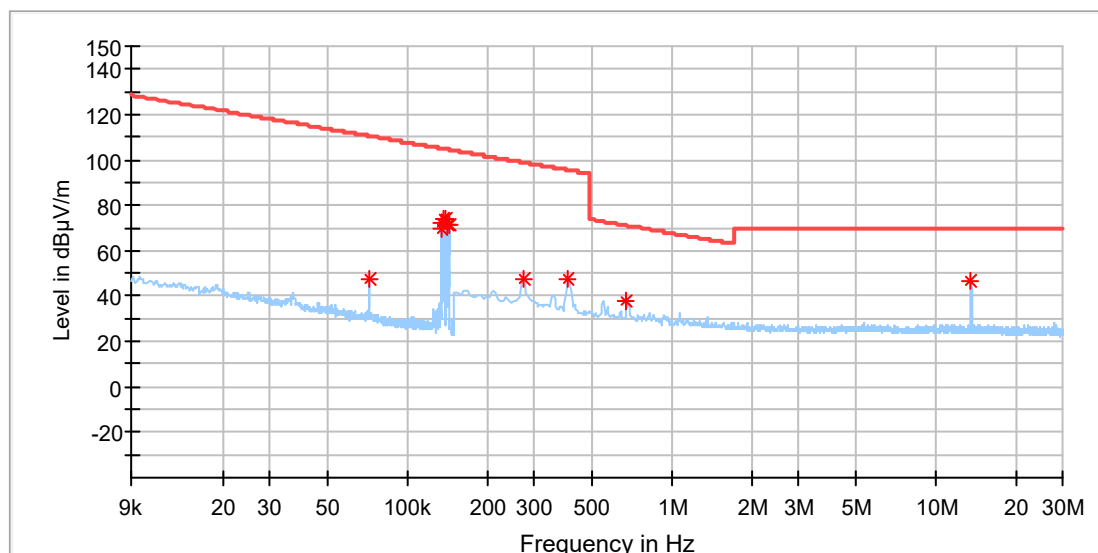

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.071443	47.78	110.52	62.73	100.0	Z	41.0	19.9
0.134188	69.67	105.04	35.37	100.0	Z	278.0	19.9
0.134792	72.36	105.00	32.65	100.0	Z	84.0	19.9
0.135799	73.89	104.94	31.05	100.0	Z	89.0	19.9
0.138116	73.69	104.79	31.10	100.0	Z	89.0	19.9
0.141439	71.07	104.59	33.52	100.0	Z	51.0	19.9
0.143756	71.57	104.45	32.88	100.0	Z	95.0	19.9
0.272912	47.92	98.88	50.96	100.0	Z	95.0	19.9
0.404603	47.16	95.46	48.30	100.0	Z	79.0	19.9
0.672375	37.57	71.06	33.49	100.0	Z	59.0	19.9
13.560552	46.65	69.50	22.85	100.0	Z	19.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: NFC+Wireless charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

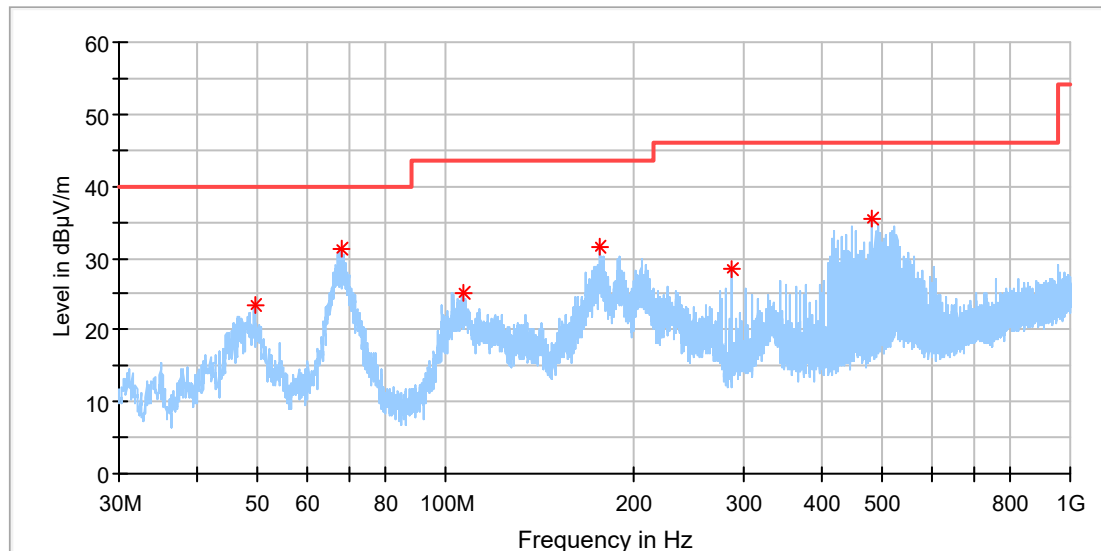

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.400000	23.32	40.00	16.68	100.0	H	236.0	-18.4
68.091154	31.16	40.00	8.84	100.0	H	299.0	-21.3
106.406154	25.17	43.50	18.33	100.0	H	299.0	-19.0
175.910385	31.54	43.50	11.96	100.0	H	291.0	-20.9
288.020000	28.39	46.00	17.61	100.0	H	58.0	-16.6
480.005385	35.42	46.00	10.58	100.0	H	228.0	-12.1

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Presto 2
Model: 9040034310
Test Mode: NFC+Wireless charging
Order No/Sample No: 168515554/A003873212-002
Test Voltage: 120V/60Hz
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

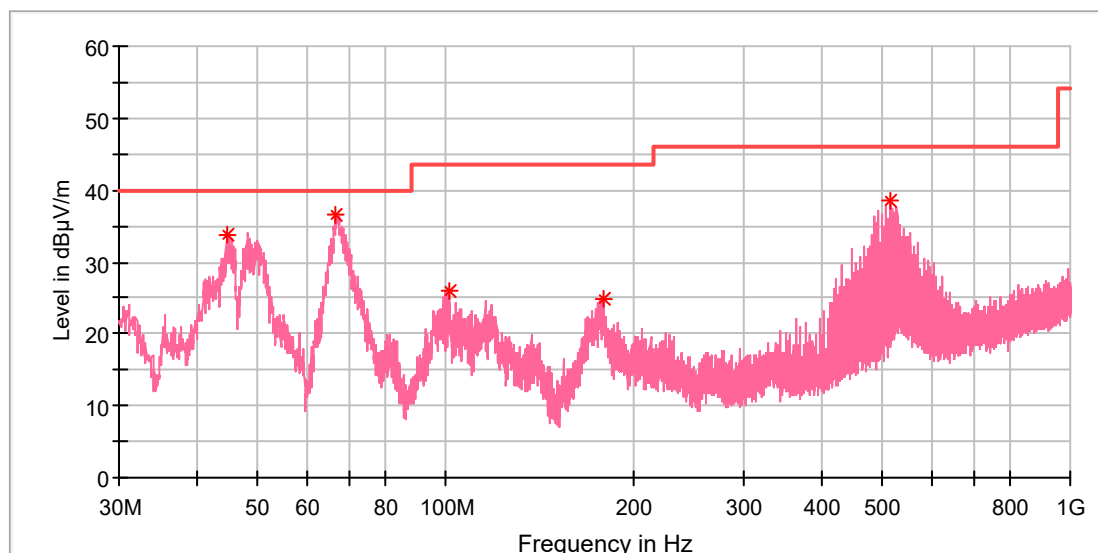

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
44.624615	33.72	40.00	6.28	100.0	V	54.0	-19.0
66.636154	36.57	40.00	3.43	100.0	V	177.0	-20.8
101.220385	25.95	43.50	17.55	100.0	V	160.0	-19.1
178.745769	24.76	43.50	18.74	100.0	V	194.0	-20.7
514.291154	38.49	46.00	7.51	100.0	V	13.0	-11.6


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.3: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name:	Presto 2
Order Number:	168515554
Model:	9040034310
Test Mode:	Wireless charging
Test Voltage:	AC 120V/60Hz
Test Standard:	FCC Part 15
Test By:/Review By:	Aric Wang / Shower Dai
Tem./Hum./Pressure:	24.0°C/51.4%/101kPa
Remark:	SR3

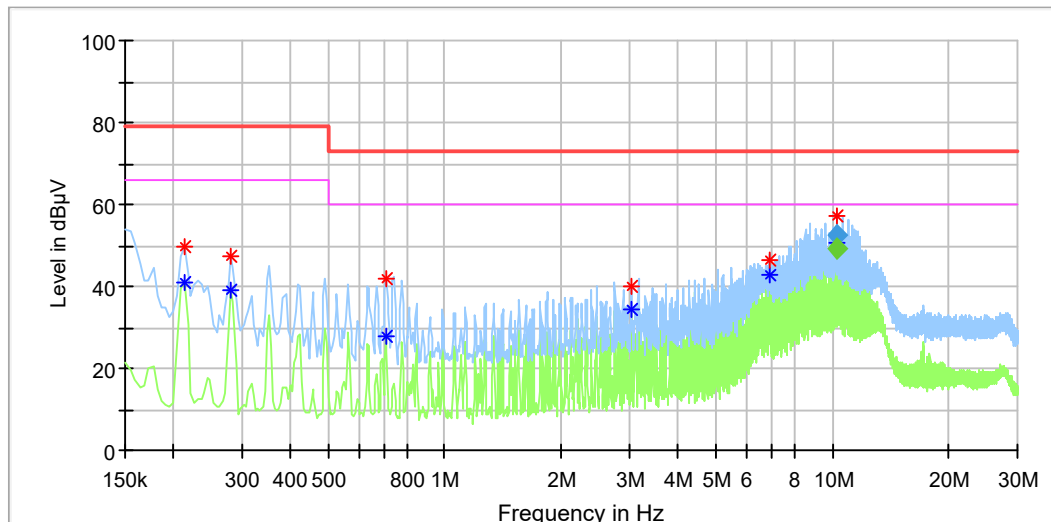

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.213000	49.73	---	79.00	29.27	L1	9.9
0.213000	---	41.03	66.00	24.97	L1	9.9
0.280500	47.64	---	79.00	31.36	L1	9.9
0.280500	---	39.18	66.00	26.82	L1	9.9
0.703500	42.09	---	73.00	30.91	L1	10.0
0.703500	---	27.91	60.00	32.09	L1	10.0
3.030000	40.04	---	73.00	32.96	L1	10.2
3.030000	---	34.35	60.00	25.65	L1	10.2
6.868500	46.65	---	73.00	26.35	L1	10.3
6.868500	---	42.57	60.00	17.43	L1	10.3
10.319500	---	50.90	60.00	9.10	L1	10.3
10.323500	57.37	---	73.00	15.63	L1	10.3

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
10.319500	---	49.46	60.00	10.54	1000.0	9.000	L1	10.3
10.323500	52.61	---	73.00	20.39	1000.0	9.000	L1	10.3

EUT Information

EUT Name: Presto 2
Order Number: 168515554
Model: 9040034310
Test Mode: Wireless charging
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15
Test By:/Review By: Aric Wang / Shower Dai
Tem./Hum./Pressure: 24.0°C/51.4%/101kPa
Remark: SR3

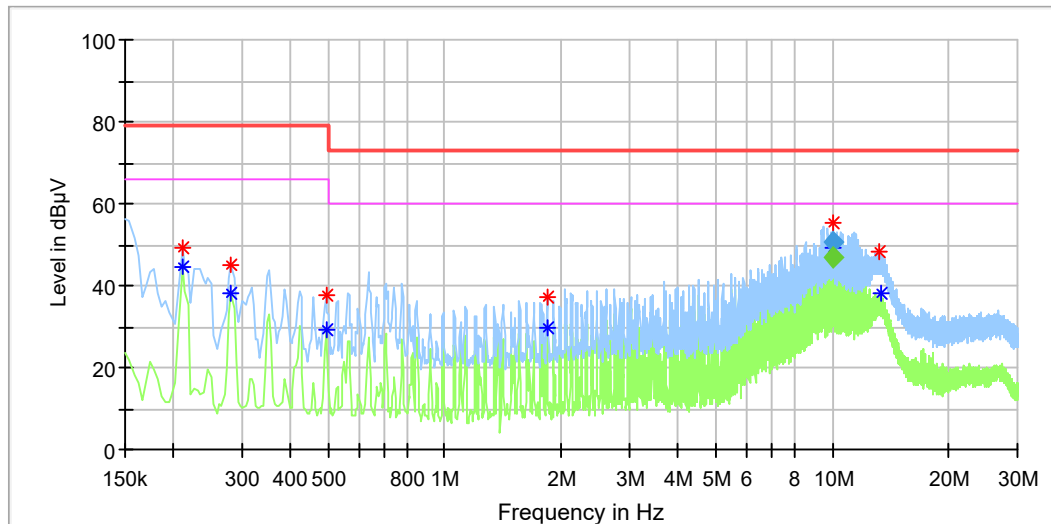

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.210000	49.44	---	79.00	29.56	N	9.8
0.210000	---	44.66	66.00	21.34	N	9.8
0.282000	45.15	---	79.00	33.85	N	9.8
0.282000	---	38.35	66.00	27.65	N	9.8
0.494000	37.50	---	79.00	41.50	N	9.8
0.494000	---	29.15	66.00	36.85	N	9.8
1.834000	37.06	---	73.00	35.94	N	9.8
1.834000	---	29.55	60.00	30.45	N	9.8
10.037500	55.33	---	73.00	17.67	N	10.0
10.041500	---	49.47	60.00	10.53	N	10.0
13.182000	48.29	---	73.00	24.71	N	10.1
13.430000	---	37.92	60.00	22.08	N	10.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
10.037500	50.47	---	73.00	22.53	1000.0	9.000	N	10.0
10.041500	---	46.96	60.00	13.04	1000.0	9.000	N	10.0