



No.: FCCSZ2024-0014-SAR

TEST REPORT

FCC ID : 2BDCL-SL08

NAME OF SAMPLE : 4G LTE Mobile Wifi


CLIENT : Signalinks Communication Technology Co.,Ltd

Max. Body SAR (1g): : **1.30** W/kg

CLASSIFICATION OF TEST : N/A

CVC Testing Technology (Shenzhen) Co., Ltd.



Applicant		Name: Signalinks Communication Technology Co.,Ltd	
		Address: 301,Building No.6, Donglongxing Technology Park, HuaningRoad.Xinshi Community.shenzhenChina	
Manufacturer		Name: Signalinks Communication Technology Co.,Ltd	
		Address: 301,Building No.6, Donglongxing Technology Park, HuaningRoad.Xinshi Community.shenzhenChina	
Equipment Under Test		Name: 4G LTE Mobile Wifi	
		Model/Type: SL08	
		Trade mark: N/A	
		SerialNO.: N/A	
		Sampe NO.: 6-5	
Date of Receipt.	2024.03.15	Date of Testing	2024.04.08
Test Specification		Test Result	
ANSI/IEEE Std. C95.1; FCC 47 CFR Part 2 (2.1093); IEEE 1528: 2013 IEC/IEEE 62209-1528: 2020		Pass	
Evaluation of Test Result		The equipment under test was found to comply with the requirements of the standards applied.	
		Seal of CVC Issue Date: 2024.04.19	
Tested by:  <u>Liang Jiatong</u> Name Signature		Reviewed by:  <u>Mo Xianbiao</u> Name Signature	Approved by:  <u>Dong Sanbi</u> Name Signature
Other Aspects: NONE.			
Abbreviations: Pass= passed Fail = failed N/A= not applicable EUT= equipment, sample(s) under tested			

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.



TABLE OF CONTENTS

1 GENERAL INFORMATION	5
1.1 GENERAL PRODUCT INFORMATION	5
1.2 TEST ENVIRONMENT	6
1.3 TEST LOCATION	6
1.4 TEST STANDARDS AND LIMITS	7
1.5 STATEMENT OF COMPLIANCE	8
2 SAR MEASUREMENT SYSTEM	9
2.1 DEFINITION OF SPECIFIC ABSORPTION RATE (SAR)	9
2.2 SAR SYSTEM	10
3 TISSUE SIMULATING LIQUIDS	16
3.1 SIMULATING LIQUIDS PARAMETER CHECK	16
3.2 LIQUIDS MEASUREMENT RESULTS	18
4 SAR SYSTEM VALIDATION	19
4.1 VALIDATION SYSTEM	19
4.2 SYSTEM VALIDATION RESULT	20
5 SAR EVALUATION PROCEDURES	21
6 SAR MEASUREMENT EVALUATION	22
6.1 EUT CONFIGURATION AND SETTING	22
6.2 EUT TESTING POSITION	29
6.3 SIMULTANEOUS TRANSMISSION POSSIBILITIES	30
7 MAXIMUM OUTPUT POWER	31
7.1 MAXIMUM CONDUCTED POWER	31
7.2 MEASURED CONDUCTED POWER RESULT	32
8 SAR TESTING RESULTS	46
8.1 SAR TEST REDUCTION CONSIDERATIONS	46
8.2 SAR RESULTS FOR BODY EXPOSURE CONDITION (SEPARATION DISTANCE IS 1.0 CM GAP)	48
8.3 SAR MEASUREMENT VARIABILITY	51
8.4 SIMULTANEOUS MULTI-BAND TRANSMISSION EVALUATION	52
9 EQUIPMENT LIST	55
10 MEASUREMENT UNCERTAINTY	56
11 TEST PHOTOS AND RESULTS	57
11.1 EUT PHOTO	57
11.2 EUT ANTENNA LOCATION	58
11.3 PHOTOGRAPHS OF SAR SETUP	59
12 APPENDIXES	60
12.1 APPENDIX A: SAR PLOTS OF SYSTEM VERIFICATION	60
12.2 APPENDIX B: SAR PLOTS OF SAR MEASUREMENT	60
12.3 APPENDIX C: CALIBRATION CERTIFICATE FOR PROBE AND DIPOLE	60



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCCSZ2024-0014-SAR	Original release	2024.04.19



1 GENERAL INFORMATION

1.1 GENERAL PRODUCT INFORMATION

PRODUCT	4G LTE Mobile Wifi
BRAND	N/A
MODEL	SL08
MODULATION MODE	GSM & GPRS & EDGE: GMSK, 8PSK WCDMA: BPSK, QPSK LTE: QPSK, 16QAM 802.11b: DSSS 802.11g/n(HT20&HT40): OFDM
OPERATING FREQUENCY	GSM 850: 824 MHz ~ 849 MHz PCS1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1852 MHz ~ 1908 MHz WCDMA Band IV: 1712 MHz ~ 1752 MHz WCDMA Band V: 826 MHz ~ 847 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 820 MHz ~ 850 MHz LTE Band 7: 2502 MHz ~ 2567 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 779 MHz ~ 785 MHz LTE Band 25: 1850 MHz ~ 1914 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2572 MHz ~ 2618 MHz LTE Band 41: 2498 MHz ~ 2688 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz
ANTENNA TYPE	FPC Antenna
OPERATING MODE	Maximum continuous output
Remark: - For more detailed features description, please refer to the manufacturer's specifications or the User's Manual. - The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power - This is provided by the manufacturer. The laboratory is not responsible for technical data provided by the customer	



1.2 TEST Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	21.0°C ~ 22.5°C
Humidity (%RH)	55% ~ 65%

1.3 TEST Location

The tests and measurements refer to this report were performed by EMC testing Lab. of CVC Testing Technology (Shenzhen) Co., Ltd.

Lab Address: No. 1301, Guanguang Road, Xinlan Community, Guanlan Street, Longhua District, Shenzhen City, Guangdong Province 518110 P.R.China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

FCC(Test firm designation number: CN1363)

IC(Test firm CAB identifier number: CN0137)

CNAS(Test firm designation number: L16091)



1.4 TEST Standards and Limits

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	IEC/IEEE 62209-1528:2020	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)
5	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
6	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
7	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
8	FCC KDB 941225 D01 v03r01	3G SAR MEAUREMENT PROCEDURES
9	FCC KDB 941225 D05 v02r05	SAR for LTE Devices
10	FCC KDB 941225 D06 v02r01	SAR EVALUATION PROCEDURES FOR PORTABLE DEVICES WITH WIRELESS ROUTER CAPABILITIES

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE

GENERAL POPULATION/UNCONTROLLED EXPOSURE

PARTIAL BODY LIMIT

1.6 W/kg



1.5 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for the EUT are as follows:

Equipment Class	Mode	Highest Reported Body SAR _{1g} (1.0 cm Gap) (W/kg)
PCB	GSM850	0.70
	PCS1900	0.94
	WCDMA II	1.09
	WCDMA IV	1.20
	WCDMA V	0.74
	LTE 4	1.06
	LTE 5	0.74
	LTE 7	0.52
	LTE 12	0.89
	LTE 13	0.92
	LTE 25(LTE 2)	0.62
	LTE 26	0.74
	LTE 38	0.32
	LTE 41	0.40
DTS	2.4G WLAN	0.10
Highest Simultaneous Transmission SAR		Body (W/kg)
PCB + DTS		1.30

Note:

1. This device supports LTE B2 and B25. Since the supported frequency span for LTE B2 falls completely within the supported frequency span for LTE B25, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B25.
2. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6W/kg as averaged over any 1 gram of tissue; 10-gram SAR for Product Specific 10g SAR, limit: 4.0W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992 and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2 SAR Measurement System

2.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue;

ρ is the mass density of the tissue and E is the RMS electrical field strength.

2.2 SAR System


DASY System Diagram:

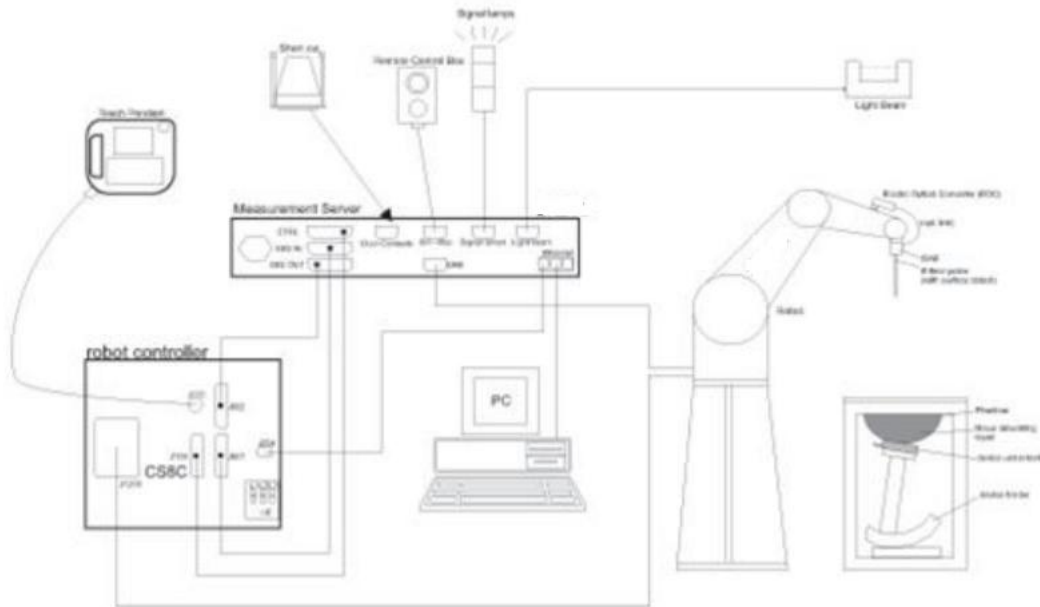

DASY is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The DASY system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition Electronics
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.

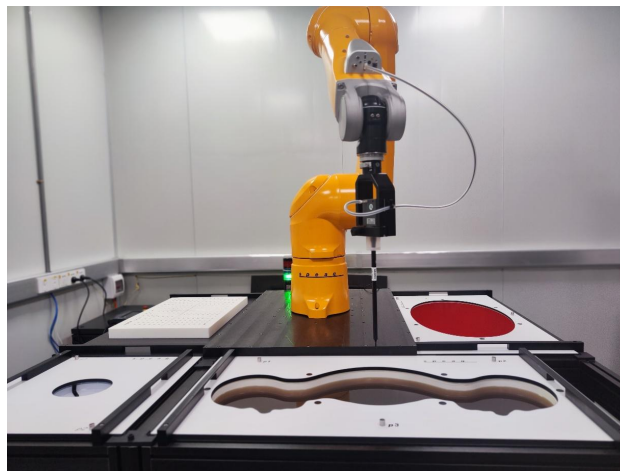

The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The Open SAR software computes the results to give a SAR value in a 1g or 10g mass.



2.2.1 Probe

EX3DV4 – Smallest isotropic dosimetric probe for high precision SAR measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 10 GHz with a precision of better than 30%

- Frequency range: 4 MHz – 10 GHz
- Dynamic range: 0.01 W/kg – >100 W/kg
- Tip diameter: 2.5 mm
- Scanning distance: ≥ 1.4 mm



Figure 1-Speag COMOSAR Dosimetric E field Dipole

2.2.2 Data Acquisition Electronics 4 (DAE4)

High precision 3-channel differential voltmeter for use with SPEAG's field, SAR, and temperature probes. Serial optical link for communication with the DASY8 measurement server. Two-step probe touch detector for mechanical surface detection and emergency robot stop.

- Measurement range: -100 – +300 mV (16-bit resolution and two range settings: 4 mV, 400 mV)
- Input offset voltage: $< 5 \mu\text{V}$ (with auto zero)
- Input resistance: 200 MOhm
- Input bias current: $< 50 \text{ fA}$
- Battery power: >10 hours of operation (with two 9.6 V NiMH batteries)
- Dimensions (L × W × H): 60 × 60 × 68 mm
- Calibration: ISO/IEC 17025 calibration service available.





2.2.3 SAM-Twin Phantom

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEC/IEEE 62209-1528. It enables the dosimetric evaluation of left and right hand phone usage as well as body-mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot. SAM-Twin V5.0 and higher has the same shell geometry and is manufactured from the same material as SAM-Twin V4.0 but with reinforced top structure.

- Material: Vinyl ester, fiberglass reinforced (VE-GF)
- Shell Thickness: 2 ± 0.2 mm (6 ± 0.2 mm at ear point)
- Dimensions: Length: 1000 mm
Width: 500 mm
Height: adjustable feet






2.2.4 ELI Phantom

The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 4 MHz to 10 GHz. ELI is fully compatible with the IEC/IEEE 62209-1528 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all of SPEAG's dosimetric probes and dipoles. The latest ELI V8.0 phantom shell has optimized pretension in the bottom surface during production, such that the phantom is more robust and with reduced sagging.

- Material: Vinyl ester, fiberglass reinforced (VE-GF)
- Shell Thickness: 2.0 ± 0.2 mm (bottom plate)
- Dimensions: Major axis: 600 mm,
Minor axis: 400 mm
- Filling Volume: approx. 30 liters.

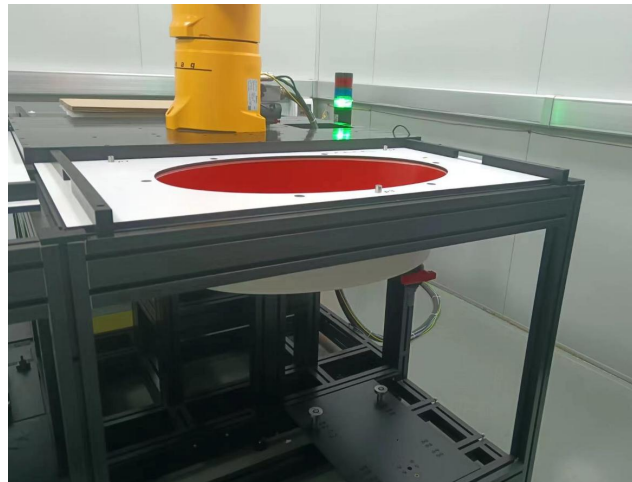




2.2.5 Wrist Phantom

The Wrist Phantom V10 is shape-compatible with the CTIA approved OTA GFPC-V1 and optimized for specific absorption rate evaluation of watches and other wireless hand accessories.

- Material: Photosensitive epoxy acrylates
- Shell Thickness: 2 ± 0.2 mm
- Wrist Shape: Design compatible with CTIA forearm.

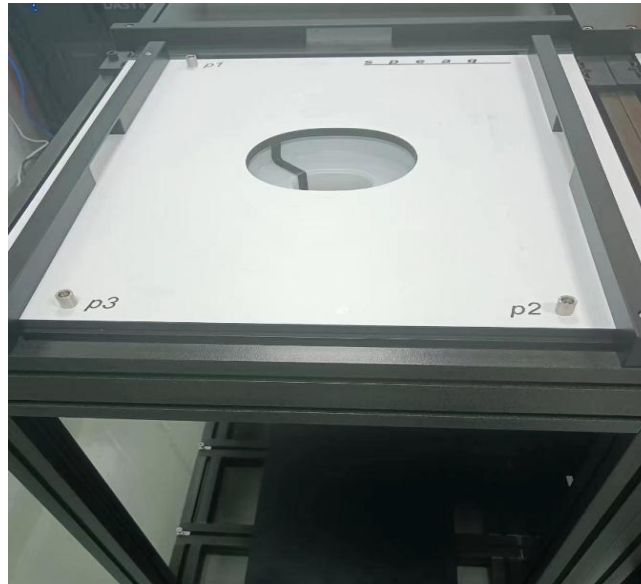

2.2.6 Device Holder

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.





2.2.7 System Validation Dipoles

Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.

- Frequency: 300 MHz to 10 GHz
- Return loss: >20 dB
- Power capability: >40 W






3 Tissue Simulating Liquids

3.1 Simulating Liquids Parameter Check

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed.

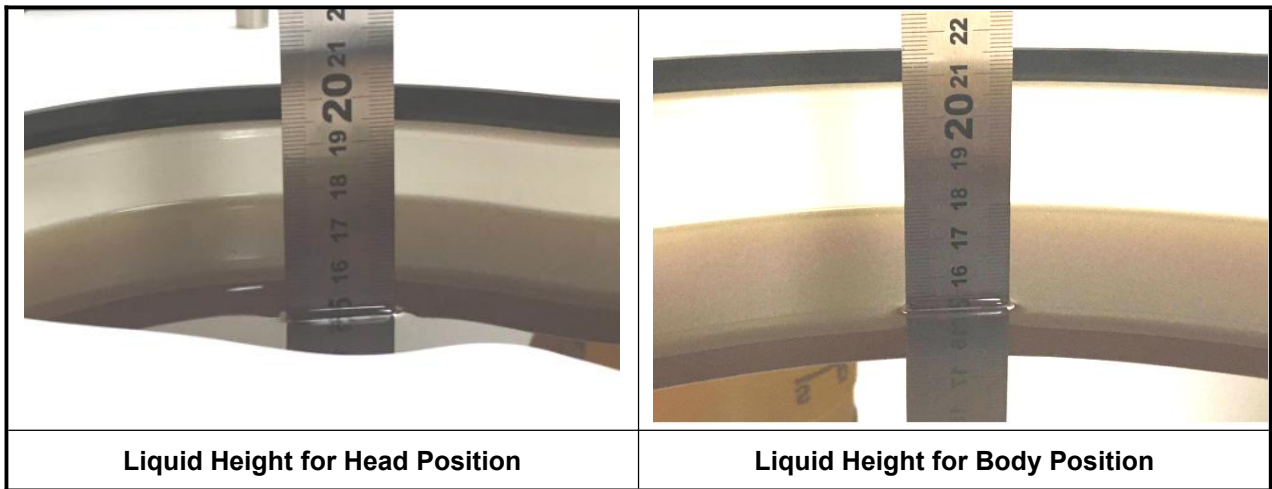

The dielectric properties of the tissue simulating liquids are defined in IEC 62209-1528. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a dielectric assessment kit and a network analyzer.



Dielectric properties of Tissue Simulating Liquid

Frequency (MHz)	Target Permittivity	Target Conductivity
300	45.3	0.87
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1640	40.3	1.29
1750	40.1	1.37
1800	40.0	1.40
1900	40.0	1.40
2000	40.0	1.40
2100	39.8	1.49
2300	39.5	1.67
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
3500	37.9	2.91
4000	37.4	3.43
4500	36.8	3.94
5000	36.2	4.45
5200	36.0	4.66
5300	35.9	4.76
5500	35.6	4.96
5600	35.5	5.07
5800	35.3	5.27
6000	35.1	5.48



3.2 Liquids Measurement Results

The measuring results for tissue simulating liquid are shown as below.

Tissue Type	Frequency (MHz)	Measured Conductivity (σ)	Measured Permittivity (ϵ_r)	Target Conductivity (σ)	Target Permittivity (ϵ_r)	Conductivity Deviation (%)	Permittivity Deviation (%)	Test Date
HSL600-10000MHz	750	0.910	43.500	0.89	41.90	2.25	3.82	Apr. 09, 2024
	850	0.949	43.100	0.92	41.50	3.15	3.86	Apr. 08, 2024
	1750	1.370	40.200	1.37	40.10	0.00	0.25	Apr. 11, 2024
	1900	1.450	39.900	1.40	40.00	3.57	-0.25	Apr. 10, 2024
	2450	1.830	39.600	1.80	39.20	1.67	1.02	Apr. 09, 2024
	2600	1.950	39.300	1.96	39.00	-0.51	0.77	Apr. 12, 2024

Note:


1. The dielectric properties of the tissue simulating liquid must be measured within 24 hours before the SAR testing and within $\pm 5\%$ of the target values. Liquid temperature during the SAR testing must be within $\pm 2^\circ\text{C}$.
2. Since the maximum deviation of dielectric properties of the tissue simulating liquid is within 5%.

4 SAR System Validation

4.1 Validation System

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

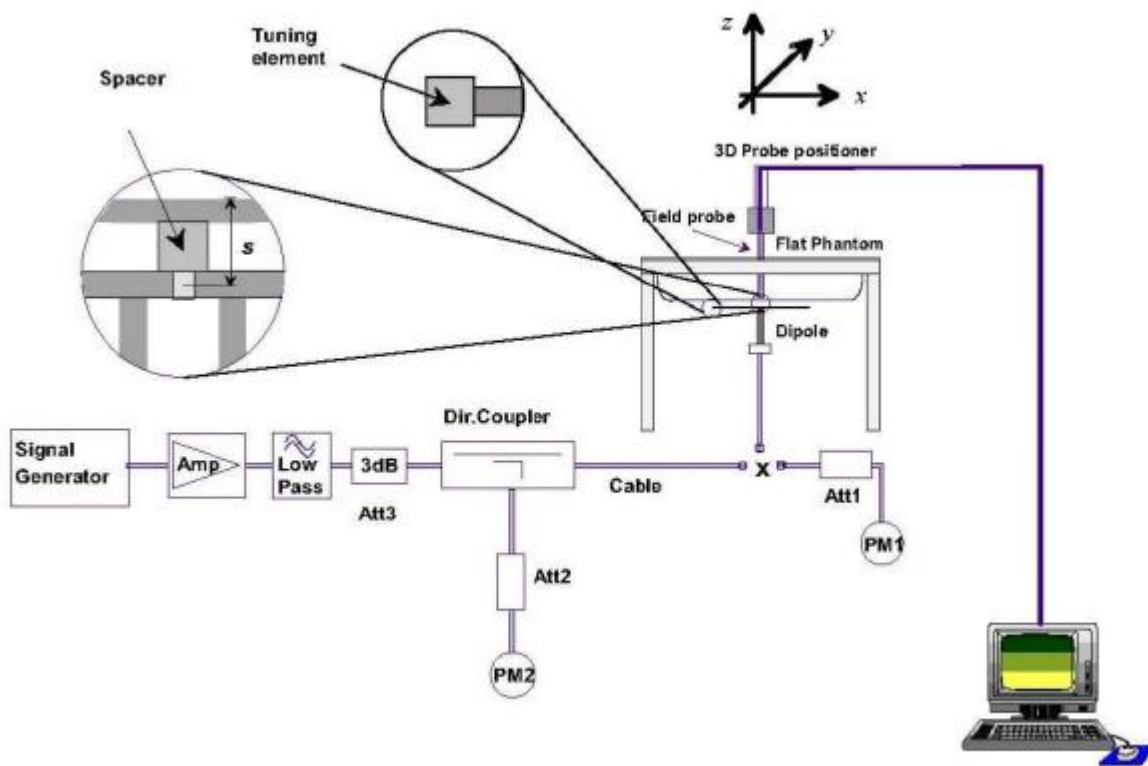



4.2 System Validation Result

The measuring result for system verification is tabulated as below.

Test Date	Frequency (MHz)	1W Target SAR-1g (W/kg)	Measured SAR-1g (W/kg)	Normalized to 1W SAR-1g (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N
Apr. 09, 2024	750	8.59	2.16	8.64	0.58	1219	7738	1725
Apr. 08, 2024	850	10.10	2.51	10.04	-0.59	1026		
Apr. 11, 2024	1750	36.60	8.89	35.56	-2.84	1192		
Apr. 10, 2024	1900	39.80	10.40	41.60	4.52	5d247		
Apr. 09, 2024	2450	51.40	12.20	48.80	-5.06	1081		
Apr. 12, 2024	2600	56.10	13.30	53.20	-5.17	1195		

Note:

Comparing to the reference SAR value provided by SPEAG, the validation data should be within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.



5 SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

Area Scan & Zoom Scan:

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.



6 SAR Measurement Evaluation

6.1 EUT Configuration and Setting

<Connections between EUT and System Simulator>

For WWAN SAR testing, the EUT was linked and controlled by base station emulator (R&S_CMW500). Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during SAR testing.

<Considerations Related to GSM / GPRS / EDGE for Setup and Testing>

The maximum multi-slot capability supported by this device is as below.

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a base station by air link. Using CMW500 the power lever is set to "5" and "0" in SAR of GSM 850 and GSM 1900. The tests in the band of GSM850 and GSM 1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 33 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 33 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

<Considerations Related to WCDMA for Setup and Testing>

WCDMA Handsets Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode.

WCDMA Handsets Body-worn SAR

SAR for body-worn configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode.

Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body-worn configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the "Release 5 HSDPA Data Devices", for the highest reported SAR body-worn exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

Handsets with Release 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn



configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the “Release 6 HSPA Data Devices”, for the highest reported body-worn exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn measurements is tested for next to the ear head exposure.

Release 5 HSDPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH / HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) are set according to values indicated in below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾	MPR
1	2 / 15	15 / 15	64	2 / 15	4 / 15	0.0	0
2	12 / 15 ⁽³⁾	15 / 15 ⁽³⁾	64	12 / 15 ⁽³⁾	24 / 15	1.0	0
3	15 / 15	8 / 15	64	15 / 8	30 / 15	1.5	0.5
4	15 / 15	4 / 15	64	15 / 4	30 / 15	1.5	0.5
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs} / \beta_c = 30 / 15 \Leftrightarrow \beta_{hs} = 30 / 15 * \beta_c$.							
Note 2: CM = 1 for $\beta_c / \beta_d = 12 / 15$, $\beta_{hs} / \beta_c = 24 / 15$.							
Note 3: For subtest 2 the β_c / β_d ratio of 12 / 15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11 / 15$ and $\beta_d = 15 / 15$.							

Release 6 HSUPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode. Otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing. Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in below.



Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11 / 15 ⁽³⁾	15 / 15 ⁽³⁾	64	11 / 15 ⁽³⁾	22 / 15	209 / 225	1039 / 225	4	1	1.0	0.0	20	75
2	6 / 15	15 / 15	64	6 / 15	12 / 15	12 / 15	94 / 75	4	1	3.0	2.0	12	67
3	15 / 15	9 / 15	64	15 / 9	30 / 15	30 / 15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2 / 15	15 / 15	64	2 / 15	4 / 15	2 / 15	56 / 75	4	1	3.0	2.0	17	71
5	15 / 15 ⁽⁴⁾	15 / 15 ⁽⁴⁾	64	15 / 15 ⁽⁴⁾	30 / 15	24 / 15	134 / 15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs} / \beta_c = 30 / 15 \Leftrightarrow \beta_{hs} = 30 / 15 * \beta_c$.

Note 2: CM = 1 for $\beta_c / \beta_d = 12 / 15$, $\beta_{hs} / \beta_c = 24 / 15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c / β_d ratio of 11 / 15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10 / 15$ and $\beta_d = 15 / 15$.

Note 4: For subtest 5 the β_c / β_d ratio of 15 / 15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14 / 15$ and $\beta_d = 15 / 15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

HSPA+ SAR Guidance

The 3G SAR test reduction procedure is applied to HSPA+ (uplink) with 12.2 kbps RMC as the primary mode. Otherwise, when SAR is required for Rel. 6 HSPA, SAR is required for Rel. 7 HSPA+. Power is measured for HSPA+ that supports uplink 16QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.



DC-HSDPA SAR Guidance

The 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Otherwise, when SAR is required for Rel. 5 HSDPA, SAR is required for Rel. 8 DC-HSDPA. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

<Considerations Related to LTE for Setup and Testing>

This device contains LTE transmitter which follows 3GPP standards, is category 3, supports both QPSK and 16QAM modulations, and supported LTE band and channel bandwidth is listed in below. The output power was tested per 3GPP TS 36.521-1 maximum transmit procedures for both QPSK and 16QAM modulation. The results please refer to section 4.6 of this report.

EUT Supported LTE Band and Channel Bandwidth						
LTE Band	BW 1.4 MHz	BW 3 MHz	BW 5 MHz	BW 10 MHz	BW 15 MHz	BW 20 MHz
2	V	V	V	V	V	V
4	V	V	V	V	V	V
5	V	V	V	V		
7			V	V	V	V
12	V	V	V	V		
13			V	V		
25	V	V	V	V	V	V
26	V	V	V	V	V	
38			V	V	V	V
41			V	V	V	V

The LTE maximum power reduction (MPR) in accordance with 3GPP TS 36.101 is active all times during LTE operation. The allowed MPR for the maximum output power is specified in below.

Modulation	Channel Bandwidth / RB Configurations						LTE MPR Setting (dB)
	BW 1.4 MHz	BW 3 MHz	BW 5 MHz	BW 10 MHz	BW 15 MHz	BW 20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16QAM	<= 5	<= 4	<= 8	<= 12	<= 16	<= 18	1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	2

Note: MPR is according to the standard and implemented in the circuit (mandatory).

In addition, the device is compliant with additional maximum power reduction (A-MPR) requirements defined in 3GPP TS 36.101 section 6.2.4 that was disabled for all FCC compliance testing.


During LTE SAR testing, the related parameters of operating band, channel bandwidth, uplink channel number, modulation type, and RB was set in base station simulator. When the EUT has registered and communicated to base station simulator, the simulator set to make EUT transmitting the maximum radiated power.

TDD-LTE Setup Configurations

According to KDB 941225 D05, SAR testing for TDD-LTE device must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the



defined 3GPP TDD-LTE configurations. The TDD-LTE of this device supports frame structure type 2 defined in 3GPP TS 36.211 section 4.2, and the frame structure configuration can be referred to below.

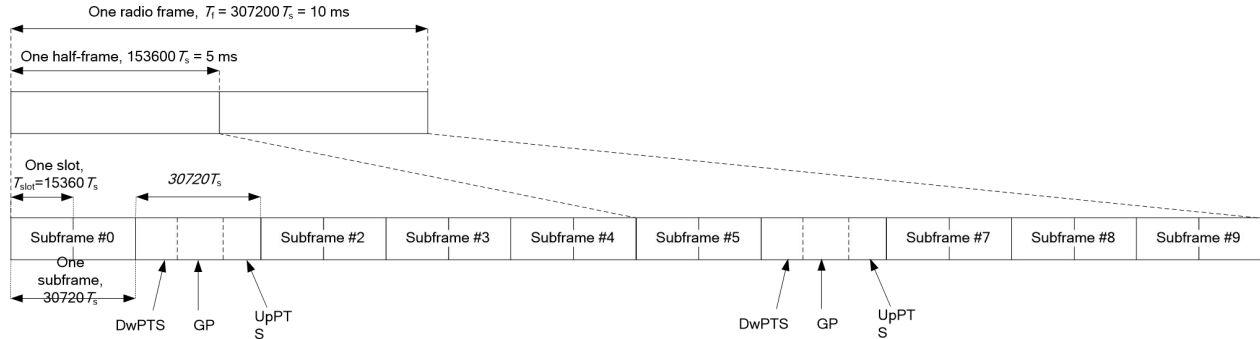

3GPP TS 36.211 Frame Structure Type 2

Special Subframe Configuration	Normal Cyclic Prefix in Downlink			Extended Cyclic Prefix in Downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal Cyclic Prefix in Uplink	Extended Cyclic Prefix in Uplink		Normal Cyclic Prefix in Uplink	Extended Cyclic Prefix in Uplink
0	6592 • Ts	2192 • Ts	2560 • Ts	7680 • Ts	2192 • Ts	2560 • Ts
1	19760 • Ts			20480 • Ts		
2	21952 • Ts			23040 • Ts		
3	24144 • Ts			25600 • Ts		
4	26336 • Ts	4384 • Ts	5120 • Ts	7680 • Ts	4384 • Ts	5120 • Ts
5	6592 • Ts			20480 • Ts		
6	19760 • Ts			23040 • Ts		
7	21952 • Ts			12800 • Ts		
8	24144 • Ts			-	-	-
9	13168 • Ts			-	-	-

3GPP TS 36.211 Configuration of Special Subframe

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-Point Periodicity	Subframe Number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

3GPP TS 36.211 Uplink-Downlink Configurations

The variety of different TD-LTE uplink-downlink configurations allows a network operator to allocate the network's capacity between uplink and downlink traffic to meet the needs of the network. The uplink duty cycle of these seven configurations can readily be computed and shown in below.



UL-DL Configuration	0	1	2	3	4	5	6
Highest Duty-Cycle	63.33%	43.33%	23.33%	31.67%	21.67%	11.67%	53.33%

Considering the highest transmission duty cycle, TDD-LTE was tested using Uplink-Downlink Configuration 0 with 6 uplink subframe and 2 special subframe. The special subframe was set to special subframe configuration 7 using extended cyclic prefix uplink. Therefore, SAR testing for TDD-LTE was performed at the maximum output power with highest transmission duty cycle of 63.33%.

<Considerations Related to WLAN for Setup and Testing>

In general, various vendor specific external test software and chipset based internal test modes are typically used for SAR measurement. These chipset based test mode utilities are generally hardware and manufacturer dependent, and often include substantial flexibility to reconfigure or reprogram a device. A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic transmission duty factor is required for current generation SAR systems to measure SAR correctly. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

According to KDB 248227 D01, this device has installed WLAN engineering testing software which can provide continuous transmitting RF signal. During WLAN SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

Initial Test Configuration

An initial test configuration is determined for OFDM transmission modes in 2.4 GHz and 5 GHz bands according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Subsequent Test Configuration

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. When the highest reported



SAR for the initial test configuration according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.

SAR Test Configuration and Channel Selection


When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is using largest channel bandwidth, lowest order modulation, lowest data rate, and lowest order 802.11 mode (i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n). After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following.

- 1) The channel closest to mid-band frequency is selected for SAR measurement.
- 2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

6.2 EUT Testing Position

6.2.1 Exposure Conditions

For this devices, SAR evaluation is required on all sides and edges with a transmitting antenna within 25 mm from that surface or edge, at 10 mm separation from a flat phantom, Next to the Body exposure requires 1-g SAR. for the data modes, wireless technologies and frequency bands supported by the device to determine SAR compliance.

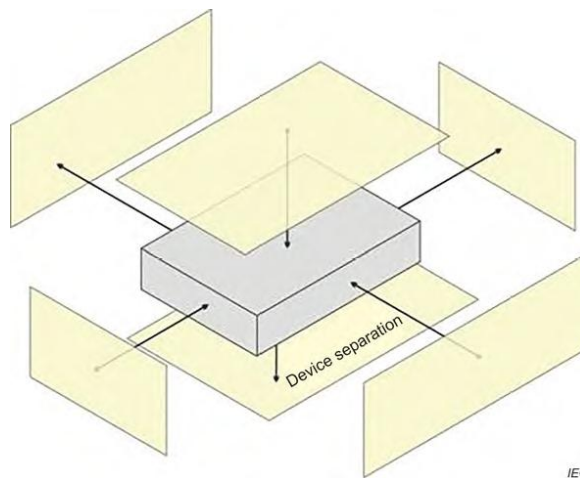



6.3 Simultaneous Transmission Possibilities

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Body (Data)
1	GSM850 (Data) + WLAN (Data)	Yes
2	PCS1900(Data) + WLAN (Data)	Yes
3	WCDMA II (Data) + WLAN (Data)	Yes
4	WCDMA IV (Data) + WLAN (Data)	Yes
5	WCDMA V (Data) + WLAN (Data)	Yes
6	LTE 2 (Data) + WLAN (Data)	Yes
7	LTE 4 (Data) + WLAN (Data)	Yes
8	LTE 5 (Data) + WLAN (Data)	Yes
9	LTE 7 (Data) + WLAN (Data)	Yes
10	LTE 12(Data) + WLAN (Data)	Yes
11	LTE 13 (Data) + WLAN (Data)	Yes
12	LTE 25 (Data) + WLAN (Data)	Yes
13	LTE 26 (Data) + WLAN (Data)	Yes
14	LTE 38 (Data) + WLAN (Data)	Yes
15	LTE 41 (Data) + WLAN (Data)	Yes



7 Maximum Output Power

7.1 Maximum Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

Mode	GSM850	PCS1900
GPRS (GMSK, 1Tx-slot)	30.0	30.0
GPRS (GMSK, 2Tx-slot)	30.0	29.0
GPRS (GMSK, 3Tx-slot)	29.0	27.0
GPRS (GMSK, 4Tx-slot)	27.5	26.0
EDGE (8PSK, 1Tx-slot)	25.5	24.5
EDGE (8PSK, 2Tx-slot)	23.5	24.0
EDGE (8PSK, 3Tx-slot)	22.5	24.0
EDGE (8PSK, 4Tx-slot)	21.5	23.0

Mode	WCDMA Band II	WCDMA Band IV	WCDMA Band V
RMC 12.2K	22.0	22.0	24.0
HSDPA	21.5	21.5	23.5
HSUPA	21.5	21.5	23.5

Mode	LTE 2	LTE 4	LTE 5
QPSK / 16QAM	21.5	22.0	23.0

Mode	LTE7	LTE 12	LTE13
QPSK / 16QAM	22.5	24.0	24.0

Mode	LTE 25	LTE 26	LTE 38
QPSK / 16QAM	21.5	23.5	22.0

Mode	LTE 41
QPSK / 16QAM	22.5

Mode	2.4G WLAN
802.11b	14.5
802.11g	9.0
802.11n HT20	10.0
802.11n HT40	9.5



7.2 Measured Conducted Power Result

Band	GSM 850			PCS1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
GPRS (GMSK, 1Tx-slot)	29.36	29.40	29.36	29.28	29.66	29.33
GPRS (GMSK, 2Tx-slot)	29.38	29.42	29.37	28.29	28.54	28.70
GPRS (GMSK, 3Tx-slot)	28.52	28.53	28.48	26.50	26.79	26.99
GPRS (GMSK, 4Tx-slot)	27.12	27.18	27.11	25.45	25.76	25.56
EDGE (8PSK, 1Tx-slot)	24.74	25.04	25.04	23.93	24.21	24.11
EDGE (8PSK, 2Tx-slot)	23.19	23.38	23.33	23.71	23.76	23.88
EDGE (8PSK, 3Tx-slot)	22.28	22.36	22.04	23.44	23.78	23.59
EDGE (8PSK, 4Tx-slot)	21.22	21.33	21.32	22.70	22.94	22.80
Maximum Frame-Averaged Output Power						
GPRS (GMSK, 1Tx-slot)	20.36	20.40	20.36	20.28	20.66	20.33
GPRS (GMSK, 2Tx-slot)	23.38	23.42	23.37	22.29	22.54	22.70
GPRS (GMSK, 3Tx-slot)	24.26	24.27	24.22	22.24	22.53	22.73
GPRS (GMSK, 4Tx-slot)	24.12	24.18	24.11	22.45	22.76	22.56
EDGE (8PSK, 1Tx-slot)	15.74	16.04	16.04	14.93	15.21	15.11
EDGE (8PSK, 2Tx-slot)	17.19	17.38	17.33	17.71	17.76	17.88
EDGE (8PSK, 3Tx-slot)	18.02	18.10	17.78	19.18	19.52	19.33
EDGE (8PSK, 4Tx-slot)	18.22	18.33	18.32	19.70	19.94	19.80

Note:

- SAR testing was performed on the maximum frame-averaged power mode.
- The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

$$\text{Frame-averaged power} = 10 \times \log (\text{Burst-averaged power mW} \times \text{Slot used} / 8)$$



Band	WCDMA Band II			WCDMA Band IV			WCDMA Band V			3GPP MPR (dB)
Channel	9262	9400	9538	1312	1413	1513	4132	4182	4233	
Frequency (MHz)	1852.4	1880.0	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6	
RMC 12.2K	21.88	21.79	21.76	21.82	21.74	21.64	23.86	23.81	23.76	-
HSDPA Subtest-1	21.30	21.21	21.18	21.24	21.16	21.06	23.28	23.23	23.18	0
HSDPA Subtest-2	21.23	21.14	21.11	21.17	21.09	20.99	23.21	23.16	23.11	0
HSDPA Subtest-3	20.77	20.68	20.65	20.71	20.63	20.53	23.40	23.35	23.30	0.5
HSDPA Subtest-4	20.71	20.62	20.59	20.65	20.57	20.47	23.34	23.29	23.24	0.5
HSUPA Subtest-1	21.29	21.20	21.17	21.23	21.15	21.05	22.29	22.24	22.19	0
HSUPA Subtest-2	19.53	19.44	19.41	19.47	19.39	19.29	21.55	21.50	21.45	2
HSUPA Subtest-3	20.41	20.32	20.29	20.35	20.27	20.17	22.43	22.38	22.33	1
HSUPA Subtest-4	19.35	19.26	19.23	19.23	19.15	19.05	21.33	21.28	21.23	2
HSUPA Subtest-5	21.45	21.36	21.33	21.39	21.31	21.21	23.43	23.38	23.33	0

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 18607	Mid CH 18900	High CH 19193		Low CH 18607	Mid CH 18900	High CH 19193	
			1850.7 MHz	1880.0 MHz	1909.3 MHz		1850.7 MHz	1880.0 MHz	1909.3 MHz	
2 / 1.4M	1	0	21.26	21.23	21.21	0	20.35	20.25	20.26	1
	1	2	21.26	21.37	21.36	0	20.43	20.31	20.22	1
	1	5	21.32	21.17	21.33	0	20.24	20.31	20.07	1
	3	0	21.34	21.26	21.25	0	20.40	20.25	20.29	1
	3	1	21.37	21.26	21.41	0	20.40	20.30	20.24	1
	3	3	21.26	21.18	21.21	0	20.19	20.19	20.17	1
	6	0	20.16	20.29	20.34	1	19.32	19.46	19.24	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 18615	Mid CH 18900	High CH 19185		Low CH 18615	Mid CH 18900	High CH 19185	
			1851.5 MHz	1880.0 MHz	1908.5 MHz		1851.5 MHz	1880.0 MHz	1908.5 MHz	
2 / 3M	1	0	21.12	21.13	21.13	0	20.36	20.25	20.10	1
	1	7	21.20	21.30	21.31	0	20.35	20.37	20.20	1
	1	14	21.16	21.18	21.20	0	20.15	20.33	20.18	1
	8	0	20.24	20.25	20.35	1	19.29	19.36	19.28	2
	8	3	20.33	20.41	20.35	1	19.36	19.37	19.21	2
	8	7	20.14	20.28	20.35	1	19.25	19.21	19.17	2
	15	0	20.15	20.15	20.29	1	19.45	19.29	19.34	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 18625	Mid CH 18900	High CH 19175		Low CH 18625	Mid CH 18900	High CH 19175	
			1852.5 MHz	1880.0 MHz	1907.5 MHz		1852.5 MHz	1880.0 MHz	1907.5 MHz	
2 / 5M	1	0	21.27	21.15	21.20	0	20.29	20.18	20.11	1
	1	12	21.31	21.20	21.36	0	20.25	20.41	20.28	1
	1	24	21.27	21.17	21.29	0	20.17	20.17	20.21	1
	12	0	20.17	20.21	20.36	1	19.39	19.40	19.19	2
	12	6	20.40	20.34	20.31	1	19.28	19.35	19.33	2
	12	13	20.31	20.22	20.24	1	19.28	19.10	19.17	2
	25	0	20.25	20.19	20.28	1	19.42	19.34	19.36	2



LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 18650	Mid CH 18900	High CH 19150		Low CH 18650	Mid CH 18900	High CH 19150	
			1855.0 MHz	1880.0 MHz	1905.0 MHz		1855.0 MHz	1880.0 MHz	1905.0 MHz	
2 / 10M	1	0	21.21	21.17	21.25	0	20.24	20.27	20.28	1
	1	24	21.36	21.23	21.32	0	20.26	20.26	20.31	1
	1	49	21.23	21.33	21.27	0	20.15	20.16	20.18	1
	25	0	20.32	20.18	20.28	1	19.27	19.41	19.35	2
	25	12	20.34	20.34	20.34	1	19.37	19.39	19.17	2
	25	25	20.20	20.19	20.29	1	19.21	19.23	19.06	2
	50	0	20.20	20.28	20.34	1	19.28	19.36	19.36	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 18675	Mid CH 18900	High CH 19125		Low CH 18675	Mid CH 18900	High CH 19125	
			1857.5 MHz	1880.0 MHz	1902.5 MHz		1857.5 MHz	1880.0 MHz	1902.5 MHz	
2 / 15M	1	0	20.24	20.27	20.28	0	20.22	20.26	20.23	1
	1	37	20.26	20.26	20.31	0	20.42	20.33	20.31	1
	1	74	20.15	20.16	20.18	0	20.29	20.21	20.13	1
	36	0	19.27	19.41	19.35	1	19.35	19.38	19.33	2
	36	19	19.37	19.39	19.17	1	19.24	19.37	19.21	2
	36	39	19.21	19.23	19.06	1	19.27	19.27	19.15	2
	75	0	19.28	19.36	19.36	1	19.27	19.28	19.34	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 18700	Mid CH 18900	High CH 19100		Low CH 18700	Mid CH 18900	High CH 19100	
			1860.0 MHz	1880.0 MHz	1900.0 MHz		1860.0 MHz	1880.0 MHz	1900.0 MHz	
2 / 20M	1	0	21.28	21.28	21.32	0	20.37	20.37	20.28	1
	1	50	21.38	21.38	21.42	0	20.44	20.44	20.35	1
	1	99	21.35	21.35	21.39	0	20.34	20.34	20.25	1
	50	0	20.37	20.37	20.41	1	19.45	19.45	19.39	2
	50	25	20.43	20.43	20.46	1	19.43	19.43	19.34	2
	50	50	20.34	20.34	20.38	1	19.30	19.30	19.21	2
	100	0	20.31	20.31	20.35	1	19.47	19.47	19.41	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 19957	Mid CH 20175	High CH 20393		Low CH 19957	Mid CH 20175	High CH 20393	
			1710.7 MHz	1732.5 MHz	1754.3 MHz		1710.7 MHz	1732.5 MHz	1754.3 MHz	
4 / 1.4M	1	0	21.04	21.15	21.40	0	20.17	20.23	20.46	1
	1	2	21.45	21.73	21.58	0	20.33	20.37	20.50	1
	1	5	21.58	21.14	21.44	0	20.20	20.43	20.41	1
	3	0	21.25	21.38	21.43	0	20.51	20.52	20.75	1
	3	1	21.19	21.39	21.50	0	20.61	20.67	20.83	1
	3	3	21.38	21.44	21.35	0	20.38	20.54	20.74	1
	6	0	20.13	20.46	20.46	1	19.28	19.58	19.55	2



LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 19965	Mid CH 20175	High CH 20385		Low CH 19965	Mid CH 20175	High CH 20385	
			1711.5 MHz	1732.5 MHz	1753.5 MHz		1711.5 MHz	1732.5 MHz	1753.5 MHz	
4 / 3M	1	0	20.90	21.05	21.32	0	20.18	20.23	20.30	1
	1	7	21.39	21.66	21.53	0	20.25	20.43	20.48	1
	1	14	21.42	21.15	21.31	0	20.11	20.45	20.52	1
	8	0	20.15	20.37	20.53	1	19.40	19.63	19.74	2
	8	3	20.15	20.54	20.44	1	19.57	19.74	19.80	2
	8	7	20.26	20.54	20.49	1	19.44	19.56	19.74	2
	15	0	20.12	20.32	20.41	1	19.41	19.41	19.65	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 19975	Mid CH 20175	High CH 20375		Low CH 19975	Mid CH 20175	High CH 20375	
			1712.5 MHz	1732.5 MHz	1752.5 MHz		1712.5 MHz	1732.5 MHz	1752.5 MHz	
4 / 5M	1	0	21.05	21.07	21.39	0	20.11	20.16	20.31	1
	1	12	21.50	21.56	21.58	0	20.15	20.47	20.56	1
	1	24	21.53	21.14	21.40	0	20.13	20.29	20.55	1
	12	0	20.08	20.33	20.54	1	19.50	19.67	19.65	2
	12	6	20.22	20.47	20.40	1	19.49	19.72	19.92	2
	12	13	20.43	20.48	20.38	1	19.47	19.45	19.74	2
	25	0	20.22	20.36	20.40	1	19.38	19.46	19.67	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 20000	Mid CH 20175	High CH 20350		Low CH 20000	Mid CH 20175	High CH 20350	
			1715.0 MHz	1732.5 MHz	1750.0 MHz		1715.0 MHz	1732.5 MHz	1750.0 MHz	
4 / 10M	1	0	20.99	21.09	21.44	0	20.06	20.25	20.48	1
	1	24	21.55	21.59	21.54	0	20.16	20.32	20.59	1
	1	49	21.49	21.30	21.38	0	20.11	20.28	20.52	1
	25	0	20.23	20.30	20.46	1	19.38	19.68	19.81	2
	25	12	20.16	20.47	20.43	1	19.58	19.76	19.76	2
	25	25	20.32	20.45	20.43	1	19.40	19.58	19.63	2
	50	0	20.17	20.45	20.46	1	19.24	19.48	19.67	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 20025	Mid CH 20175	High CH 20325		Low CH 20025	Mid CH 20175	High CH 20325	
			1717.5 MHz	1732.5 MHz	1747.5 MHz		1717.5 MHz	1732.5 MHz	1747.5 MHz	
4 / 15M	1	0	20.98	21.14	21.39	0	20.98	21.14	21.39	1
	1	37	21.37	21.70	21.53	0	21.37	21.70	21.53	1
	1	74	21.60	21.30	21.37	0	21.60	21.30	21.37	1
	36	0	20.20	20.45	20.43	1	20.20	20.45	20.43	2
	36	19	20.14	20.49	20.50	1	20.14	20.49	20.50	2
	36	39	20.31	20.53	20.40	1	20.31	20.53	20.40	2
	75	0	20.09	20.44	20.35	1	20.09	20.44	20.35	2



LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 20050	Mid CH 20175	High CH 20300		Low CH 20050	Mid CH 20175	High CH 20300	
			1720.0 MHz	1732.5 MHz	1745.0 MHz		1720.0 MHz	1732.5 MHz	1745.0 MHz	
4 / 20M	1	0	21.06	21.20	21.51	0	20.19	20.35	20.48	1
	1	50	21.57	21.74	21.64	0	20.34	20.50	20.63	1
	1	99	21.61	21.32	21.50	0	20.30	20.46	20.59	1
	50	0	20.28	20.49	20.59	1	19.56	19.72	19.85	2
	50	25	20.25	20.56	20.55	1	19.64	19.80	19.93	2
	50	50	20.46	20.60	20.52	1	19.49	19.65	19.78	2
	100	0	20.28	20.48	20.47	1	19.43	19.59	19.72	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 20407	Mid CH 20525	High CH 20643		Low CH 20407	Mid CH 20525	High CH 20643	
			824.7 MHz	836.5 MHz	848.3 MHz		824.7 MHz	836.5 MHz	848.3 MHz	
5 / 1.4M	1	0	22.72	22.74	22.61	0	21.94	21.90	21.81	1
	1	2	22.81	22.78	22.84	0	22.01	22.00	21.96	1
	1	5	22.49	22.80	22.72	0	21.94	21.83	21.70	1
	3	0	22.81	22.95	22.82	0	21.78	21.98	21.84	1
	3	1	22.88	22.84	22.72	0	21.95	21.99	21.91	1
	3	3	22.79	22.77	22.96	0	21.87	22.11	21.97	1
	6	0	21.83	21.72	21.85	1	20.78	20.76	20.66	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 20415	Mid CH 20525	High CH 20635		Low CH 20415	Mid CH 20525	High CH 20635	
			825.5 MHz	836.5 MHz	847.5 MHz		825.5 MHz	836.5 MHz	847.5 MHz	
5 / 3M	1	0	22.79	22.76	22.70	0	21.78	21.78	21.77	1
	1	7	22.68	22.80	22.74	0	22.11	22.17	22.14	1
	1	14	22.58	22.74	22.70	0	21.97	21.84	21.73	1
	8	0	21.89	21.81	21.80	1	20.66	20.95	20.93	2
	8	3	21.85	21.73	21.82	1	20.88	20.98	20.86	2
	8	7	21.71	21.78	21.80	1	20.84	21.16	20.99	2
	15	0	21.78	21.73	21.79	1	20.85	20.79	20.78	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 20425	Mid CH 20525	High CH 20625		Low CH 20425	Mid CH 20525	High CH 20625	
			826.5 MHz	836.5 MHz	846.5 MHz		826.5 MHz	836.5 MHz	846.5 MHz	
5 / 5M	1	0	22.69	22.64	22.78	0	21.88	21.84	21.74	1
	1	12	22.75	22.86	22.84	0	22.12	22.03	22.13	1
	1	24	22.56	22.79	22.78	0	21.95	21.87	21.81	1
	12	0	21.95	21.90	21.73	1	20.74	20.96	20.90	2
	12	6	21.78	21.87	21.76	1	20.98	20.92	20.97	2
	12	13	21.77	21.86	21.82	1	20.90	21.06	21.04	2
	25	0	21.68	21.74	21.90	1	20.68	20.80	20.79	2



LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 20450	Mid CH 20525	High CH 20600		Low CH 20450	Mid CH 20525	High CH 20600	
			829.0 MHz	836.5 MHz	844.0 MHz		829.0 MHz	836.5 MHz	844.0 MHz	
5 / 10M	1	0	22.87	22.79	22.78	0	21.95	21.98	21.93	1
	1	24	22.83	22.95	22.94	0	22.17	22.20	22.15	1
	1	49	22.60	22.84	22.83	0	21.98	21.93	21.88	1
	25	0	21.98	21.95	21.90	1	20.84	21.04	20.99	2
	25	12	21.94	21.91	21.92	1	21.03	21.11	21.06	2
	25	25	21.83	21.94	21.96	1	20.94	21.17	21.12	2
	50	0	21.88	21.86	21.92	1	20.87	20.87	20.82	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 20775	Mid CH 21100	High CH 21425		Low CH 20775	Mid CH 21100	High CH 21425	
			2502.5 MHz	2535.0 MHz	2567.5 MHz		2502.5 MHz	2535.0 MHz	2567.5 MHz	
7 / 5M	1	0	21.94	22.17	22.08	0	21.13	21.31	21.05	1
	1	12	22.17	22.11	21.94	0	21.40	21.24	21.31	1
	1	24	21.93	21.99	21.80	0	21.31	21.31	21.39	1
	12	0	21.23	21.28	21.14	1	20.18	20.33	20.03	2
	12	6	21.26	21.39	21.26	1	20.25	20.43	20.27	2
	12	13	21.21	21.09	21.12	1	20.06	19.99	20.01	2
	25	0	21.31	21.19	21.02	1	20.23	20.15	20.10	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 20800	Mid CH 21100	High CH 21400		Low CH 20800	Mid CH 21100	High CH 21400	
			2505.0 MHz	2535.0 MHz	2565.0 MHz		2505.0 MHz	2535.0 MHz	2565.0 MHz	
7 / 10M	1	0	21.96	22.07	22.14	0	21.17	21.21	21.10	1
	1	24	22.28	22.10	21.98	0	21.29	21.24	21.19	1
	1	49	21.92	22.06	21.93	0	21.28	21.32	21.23	1
	25	0	21.31	21.30	21.08	1	20.16	20.24	20.13	2
	25	12	21.27	21.30	21.19	1	20.35	20.39	20.11	2
	25	25	21.20	21.08	21.16	1	20.05	20.07	20.01	2
	50	0	21.35	21.05	21.15	1	20.17	20.28	20.04	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 20825	Mid CH 21100	High CH 21375		Low CH 20825	Mid CH 21100	High CH 21375	
			2507.5 MHz	2535.0 MHz	2562.5 MHz		2507.5 MHz	2535.0 MHz	2562.5 MHz	
7 / 15M	1	0	21.90	22.11	22.12	0	21.28	21.25	21.09	1
	1	37	22.17	22.21	22.05	0	21.39	21.40	21.36	1
	1	74	21.97	21.93	21.90	0	21.24	21.36	21.28	1
	36	0	21.30	21.22	21.20	1	20.15	20.33	20.18	2
	36	19	21.39	21.33	21.19	1	20.39	20.39	20.22	2
	36	39	21.35	21.10	21.19	1	20.08	20.01	19.83	2
	75	0	21.25	21.07	20.99	1	20.16	20.15	20.07	2



LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 20850	Mid CH 21100	High CH 21350		Low CH 20850	Mid CH 21100	High CH 21350	
			2510.0 MHz	2535.0 MHz	2560.0 MHz		2510.0 MHz	2535.0 MHz	2560.0 MHz	
7 / 20M	1	0	22.09	22.23	22.15	0	21.29	21.35	21.20	1
	1	50	22.35	22.22	22.14	0	21.43	21.41	21.37	1
	1	99	21.97	22.07	21.99	0	21.35	21.42	21.41	1
	50	0	21.41	21.30	21.22	1	20.31	20.37	20.22	2
	50	25	21.40	21.39	21.31	1	20.39	20.45	20.30	2
	50	50	21.38	21.27	21.19	1	20.11	20.17	20.02	2
	100	0	21.36	21.25	21.17	1	20.24	20.30	20.15	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 23017	Mid CH 23095	High CH 23173		Low CH 23017	Mid CH 23095	High CH 23173	
			699.7 MHz	707.5 MHz	715.3 MHz		699.7 MHz	707.5 MHz	715.3 MHz	
12 / 1.4M	1	0	23.44	23.45	23.37	0	21.98	22.47	22.92	1
	1	2	23.65	23.76	23.68	0	22.18	22.79	23.14	1
	1	5	23.26	23.50	23.55	0	22.11	22.64	22.91	1
	3	0	23.39	23.54	23.64	0	21.90	22.47	22.84	1
	3	1	23.49	23.60	23.56	0	22.02	22.45	22.80	1
	3	3	23.42	23.52	23.42	0	21.93	22.65	22.82	1
	6	0	22.34	22.47	22.47	1	20.91	21.50	21.69	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 23025	Mid CH 23095	High CH 23165		Low CH 23025	Mid CH 23095	High CH 23165	
			700.5 MHz	707.5 MHz	714.5 MHz		700.5 MHz	707.5 MHz	714.5 MHz	
12 / 3M	1	0	23.36	23.50	23.51	0	22.05	22.60	22.94	1
	1	7	23.57	23.75	23.63	0	22.18	22.83	23.13	1
	1	14	23.42	23.44	23.41	0	22.08	22.58	23.01	1
	8	0	22.51	22.56	22.55	1	20.93	21.54	21.76	2
	8	3	22.48	22.44	22.64	1	20.93	21.59	21.73	2
	8	7	22.35	22.52	22.41	1	20.93	21.67	21.96	2
	15	0	22.41	22.52	22.57	1	20.92	21.37	21.70	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 23035	Mid CH 23095	High CH 23155		Low CH 23035	Mid CH 23095	High CH 23155	
			701.5 MHz	707.5 MHz	713.5 MHz		701.5 MHz	707.5 MHz	713.5 MHz	
12 / 5M	1	0	23.37	23.32	23.35	0	21.95	22.57	22.80	1
	1	12	23.56	23.82	23.77	0	22.19	22.86	23.02	1
	1	24	23.45	23.37	23.39	0	22.02	22.63	22.83	1
	12	0	22.57	22.63	22.51	1	20.99	21.56	21.91	2
	12	6	22.47	22.53	22.56	1	20.91	21.56	21.90	2
	12	13	22.32	22.54	22.54	1	21.00	21.60	21.81	2
	25	0	22.42	22.46	22.53	1	20.89	21.42	21.65	2



LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 23060	Mid CH 23095	High CH 23130		Low CH 23060	Mid CH 23095	High CH 23130	
			704.0 MHz	707.5 MHz	711.0 MHz		704.0 MHz	707.5 MHz	711.0 MHz	
12 / 10M	1	0	23.45	23.51	23.55	0	22.08	22.65	22.95	1
	1	24	23.75	23.85	23.81	0	22.31	22.88	23.18	1
	1	49	23.46	23.52	23.56	0	22.16	22.73	23.03	1
	25	0	22.58	22.64	22.68	1	21.06	21.63	21.93	2
	25	12	22.55	22.61	22.65	1	21.04	21.61	21.91	2
	25	25	22.48	22.54	22.58	1	21.11	21.68	21.98	2
	50	0	22.51	22.57	22.61	1	20.94	21.51	21.81	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 23205	Mid CH 23230	High CH 23255		Low CH 23205	Mid CH 23230	High CH 23255	
			779.5 MHz	782.0 MHz	784.5 MHz		779.5 MHz	782.0 MHz	784.5 MHz	
13 / 5M	1	0	23.68	23.72	23.65	0	22.57	22.52	22.38	1
	1	12	23.74	23.64	23.82	0	22.68	22.76	22.72	1
	1	24	23.44	23.50	23.50	0	22.54	22.52	22.46	1
	12	0	22.58	22.53	22.59	1	21.54	21.59	21.53	2
	12	6	22.36	22.53	22.51	1	21.59	21.50	21.59	2
	12	13	22.40	22.51	22.54	1	21.59	21.55	21.61	2
	25	0	22.55	22.53	22.41	1	21.42	21.43	21.54	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 23230	Mid CH 23230	High CH 23230		Low CH 23230	Mid CH 23230	High CH 23230	
			782.0 MHz	782.0 MHz	782.0 MHz		782.0 MHz	782.0 MHz	782.0 MHz	
13 / 10M	1	0	23.83	23.83	23.83	0	22.58	22.58	22.58	1
	1	24	23.84	23.84	23.84	0	22.82	22.82	22.82	1
	1	49	23.61	23.61	23.61	0	22.62	22.62	22.62	1
	25	0	22.68	22.68	22.68	1	21.68	21.68	21.68	2
	25	12	22.56	22.56	22.56	1	21.61	21.61	21.61	2
	25	25	22.55	22.55	22.55	1	21.62	21.62	21.62	2
	50	0	22.59	22.59	22.59	1	21.57	21.57	21.57	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 26047	Mid CH 26365	High CH 26683		Low CH 26047	Mid CH 26365	High CH 26683	
			1850.7 MHz	1882.5 MHz	1914.3 MHz		1850.7 MHz	1882.5 MHz	1914.3 MHz	
25 / 1.4M	1	0	21.13	21.34	21.03	0	19.86	20.30	20.15	1
	1	2	21.06	21.36	21.11	0	20.37	20.37	20.25	1
	1	5	20.90	20.93	20.94	0	20.05	20.62	20.29	1
	3	0	21.33	21.31	21.35	0	20.03	20.52	20.37	1
	3	1	21.44	21.29	21.20	0	20.06	20.52	20.37	1
	3	3	21.03	21.29	21.17	0	19.75	20.35	20.11	1
	6	0	20.18	20.34	20.20	1	18.98	19.51	19.29	2



LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 26055	Mid CH 26365	High CH 26675		Low CH 26055	Mid CH 26365	High CH 26675	
			1851.5 MHz	1882.5 MHz	1913.5 MHz		1851.5 MHz	1882.5 MHz	1913.5 MHz	
25 / 3M	1	0	21.08	21.26	21.03	0	19.88	20.37	20.29	1
	1	7	21.11	21.32	21.15	0	20.21	20.35	20.23	1
	1	14	20.78	20.90	20.94	0	19.92	20.63	20.30	1
	8	0	20.37	20.36	20.26	1	19.09	19.60	19.22	2
	8	3	20.29	20.22	20.34	1	19.01	19.62	19.40	2
	8	7	20.14	20.28	20.11	1	18.91	19.47	19.13	2
	15	0	20.13	20.39	20.24	1	18.86	19.45	19.29	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 26065	Mid CH 26365	High CH 26665		Low CH 26065	Mid CH 26365	High CH 26665	
			1852.5 MHz	1882.5 MHz	1912.5 MHz		1852.5 MHz	1882.5 MHz	1912.5 MHz	
25 / 5M	1	0	21.14	21.24	21.04	0	19.81	20.29	20.22	1
	1	12	21.08	21.44	21.26	0	20.35	20.41	20.19	1
	1	24	20.71	21.04	20.79	0	19.97	20.67	20.29	1
	12	0	20.25	20.42	20.35	1	19.01	19.59	19.29	2
	12	6	20.37	20.28	20.29	1	18.91	19.49	19.26	2
	12	13	20.06	20.40	20.08	1	18.89	19.42	19.17	2
	25	0	20.21	20.40	20.24	1	18.85	19.39	19.15	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 26090	Mid CH 26365	High CH 26640		Low CH 26090	Mid CH 26365	High CH 26640	
			1855.0 MHz	1882.5 MHz	1910.0 MHz		1855.0 MHz	1882.5 MHz	1910.0 MHz	
25/10M	1	0	20.98	21.34	21.05	0	19.99	20.29	20.23	1
	1	24	21.18	21.41	21.17	0	20.33	20.46	20.20	1
	1	49	20.83	20.96	20.88	0	19.91	20.58	20.26	1
	25	0	20.34	20.41	20.41	1	18.90	19.50	19.27	2
	25	12	20.33	20.25	20.23	1	19.02	19.56	19.23	2
	25	25	20.06	20.20	20.22	1	18.91	19.35	19.21	2
	50	0	20.29	20.44	20.16	1	18.99	19.41	19.29	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 26115	Mid CH 26365	High CH 26615		Low CH 26115	Mid CH 26365	High CH 26615	
			1857.5 MHz	1882.5 MHz	1907.5 MHz		1857.5 MHz	1882.5 MHz	1907.5 MHz	
25/15M	1	0	20.97	21.18	21.14	0	19.91	20.37	20.16	1
	1	37	21.20	21.37	21.14	0	20.34	20.38	20.22	1
	1	74	20.86	20.95	20.88	0	19.96	20.62	20.23	1
	36	0	20.28	20.41	20.40	1	18.95	19.60	19.22	2
	36	19	20.36	20.33	20.27	1	18.98	19.55	19.30	2
	36	39	20.18	20.27	20.14	1	18.93	19.37	19.12	2
	75	0	20.18	20.49	20.29	1	18.95	19.47	19.20	2



LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 26140	Mid CH 26365	High CH 26590		Low CH 26140	Mid CH 26365	High CH 26590	
			1860.0 MHz	1882.5 MHz	1905.0 MHz		1860.0 MHz	1882.5 MHz	1905.0 MHz	
25 / 20M	1	0	21.15	21.35	21.20	0	20.01	20.46	20.32	1
	1	50	21.25	21.45	21.30	0	20.38	20.49	20.37	1
	1	99	20.90	21.10	20.95	0	20.11	20.70	20.42	1
	50	0	20.40	20.48	20.46	1	19.10	19.69	19.41	2
	50	25	20.46	20.41	20.39	1	19.10	19.69	19.41	2
	50	50	20.20	20.40	20.25	1	18.94	19.53	19.25	2
	100	0	20.29	20.49	20.34	1	19.00	19.59	19.31	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 26697	Mid CH 26865	High CH 27033		Low CH 26697	Mid CH 26865	High CH 27033	
			814.7 MHz	831.5 MHz	848.3 MHz		814.7 MHz	831.5 MHz	848.3 MHz	
26 / 1.4M	1	0	22.77	22.48	22.71	0	21.82	22.00	21.85	1
	1	2	23.08	23.04	22.96	0	21.67	21.74	21.65	1
	1	5	22.81	22.71	23.01	0	21.79	21.74	21.69	1
	3	0	22.95	22.90	23.01	0	21.93	21.96	21.74	1
	3	1	22.95	23.01	22.92	0	21.95	21.91	21.81	1
	3	3	22.86	23.01	22.97	0	21.97	21.95	21.96	1
	6	0	21.83	21.95	21.91	1	21.04	21.19	20.93	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 26705	Mid CH 26865	High CH 27025		Low CH 26705	Mid CH 26865	High CH 27025	
			815.5 MHz	831.5 MHz	847.5 MHz		815.5 MHz	831.5 MHz	847.5 MHz	
26 / 3M	1	0	22.71	22.65	22.65	0	21.90	21.86	21.73	1
	1	7	23.07	22.96	22.88	0	21.69	21.79	21.74	1
	1	14	22.64	22.66	22.86	0	21.66	21.76	21.76	1
	8	0	21.98	21.99	22.03	1	20.86	20.91	20.79	2
	8	3	21.89	21.98	21.97	1	20.84	20.97	20.73	2
	8	7	21.90	21.97	21.93	1	21.07	20.98	20.89	2
	15	0	21.83	21.89	22.00	1	21.17	21.04	21.08	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 26715	Mid CH 26865	High CH 27015		Low CH 26715	Mid CH 26865	High CH 27015	
			816.5 MHz	831.5 MHz	846.5 MHz		816.5 MHz	831.5 MHz	846.5 MHz	
26 / 5M	1	0	22.69	22.53	22.69	0	21.92	21.87	21.78	1
	1	12	23.00	22.97	22.87	0	21.77	21.70	21.71	1
	1	24	22.67	22.80	22.88	0	21.68	21.70	21.59	1
	12	0	22.09	21.94	22.02	1	20.86	20.89	20.82	2
	12	6	22.00	21.88	21.93	1	20.77	20.90	20.70	2
	12	13	21.97	21.97	21.91	1	20.94	20.95	20.98	2
	25	0	21.83	21.87	21.87	1	21.03	21.00	21.00	2



LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 26740	Mid CH 26865	High CH 26990		Low CH 26740	Mid CH 26865	High CH 26990	
			819.0 MHz	831.5 MHz	844.0 MHz		819.0 MHz	831.5 MHz	844.0 MHz	
26 / 10M	1	0	22.80	22.57	22.60	0	21.89	21.98	21.76	1
	1	24	23.01	23.03	22.88	0	21.63	21.69	21.57	1
	1	49	22.75	22.74	22.85	0	21.66	21.74	21.61	1
	25	0	21.98	21.91	21.94	1	20.85	20.88	20.90	2
	25	12	21.93	21.91	22.01	1	20.92	20.89	20.87	2
	25	25	21.85	21.94	21.84	1	21.00	20.96	20.98	2
	50	0	21.96	21.89	22.01	1	21.09	21.13	20.91	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 26765	Mid CH 26865	High CH 26965		Low CH 26765	Mid CH 26865	High CH 26965	
			821.5 MHz	831.5 MHz	841.5 MHz		821.5 MHz	831.5 MHz	841.5 MHz	
26 / 15M	1	0	22.87	22.66	22.75	0	21.98	22.01	21.91	1
	1	37	23.09	23.06	23.01	0	21.82	21.85	21.75	1
	1	74	22.84	22.86	23.03	0	21.86	21.89	21.79	1
	36	0	22.10	22.09	22.05	1	20.99	21.02	20.92	2
	36	19	22.07	22.07	22.04	1	20.97	21.00	20.90	2
	36	39	22.04	22.04	22.03	1	21.07	21.10	21.00	2
	75	0	22.02	22.02	22.03	1	21.17	21.20	21.10	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 37775	Mid CH 38000	High CH 38225		Low CH 37775	Mid CH 38000	High CH 38225	
			2572.5 MHz	2595 MHz	2617.5 MHz		2572.5 MHz	2595 MHz	2617.5 MHz	
38/ 5M	1	0	21.46	21.64	21.37	0	20.67	20.54	20.75	1
	1	12	21.79	21.66	21.51	0	20.79	20.67	20.87	1
	1	24	21.25	21.22	21.68	0	20.82	20.74	20.81	1
	12	0	20.62	20.50	20.62	1	19.82	19.75	19.71	2
	12	6	20.66	20.59	20.59	1	19.81	19.81	19.79	2
	12	13	20.48	20.36	20.39	1	19.74	19.63	19.87	2
	25	0	20.76	20.54	20.55	1	19.73	19.68	19.94	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 37800	Mid CH 38000	High CH 38200		Low CH 37800	Mid CH 38000	High CH 38200	
			2575 MHz	2595 MHz	2615 MHz		2575 MHz	2595 MHz	2615 MHz	
38/ 10M	1	0	21.31	21.47	21.35	0	20.75	20.56	20.64	1
	1	24	21.68	21.71	21.52	0	20.74	20.69	20.86	1
	1	49	21.19	21.13	21.57	0	20.83	20.65	20.84	1
	25	0	20.76	20.56	20.75	1	19.87	19.84	19.85	2
	25	12	20.72	20.62	20.57	1	19.89	19.70	19.68	2
	25	25	20.53	20.41	20.44	1	19.75	19.70	19.88	2
	50	0	20.59	20.47	20.55	1	19.81	19.69	19.75	2



LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 37825	Mid CH 38000	High CH 38175		Low CH 37825	Mid CH 38000	High CH 38175	
			2577.5 MHz	2595 MHz	2612.5 MHz		2577.5 MHz	2595 MHz	2612.5 MHz	
38/ 15M	1	0	21.31	21.59	21.27	0	20.73	20.54	20.61	1
	1	37	21.81	21.64	21.55	0	20.84	20.59	20.71	1
	1	74	21.11	21.25	21.68	0	20.81	20.78	20.85	1
	36	0	20.72	20.64	20.67	1	19.75	19.88	19.86	2
	36	19	20.65	20.54	20.55	1	19.88	19.75	19.81	2
	36	39	20.57	20.42	20.53	1	19.74	19.69	19.85	2
	75	0	20.59	20.51	20.59	1	19.78	19.78	19.84	2

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH 37850	Mid CH 38000	High CH 38150		Low CH 37850	Mid CH 38000	High CH 38150	
			2580 MHz	2595 MHz	2610 MHz		2580 MHz	2595 MHz	2610 MHz	
38/ 20M	1	0	21.47	21.65	21.43	0	20.82	20.65	20.78	1
	1	50	21.85	21.77	21.70	0	20.93	20.76	20.89	1
	1	99	21.25	21.28	21.70	0	20.97	20.80	20.93	1
	50	0	20.80	20.67	20.76	1	19.95	19.92	19.89	2
	50	25	20.78	20.67	20.74	1	19.92	19.90	19.86	2
	50	50	20.66	20.45	20.58	1	19.91	19.82	19.95	2
	100	0	20.77	20.60	20.73	1	19.89	19.80	19.94	2



LTE Band / BW	RB Size	RB Offset	QPSK					3GPP MPR (dB)	16QAM					3GPP MPR (dB)
			Low CH	Mid CH	Mid CH	MidCH	High CH		Low CH	Mid CH	Mid CH	MidCH	High CH	
			39675	40148	40620	40193	41565		39675	40148	40620	40193	41565	
41/ 5 M	1	0	21.88	21.61	21.32	21.21	21.42	0	20.92	20.69	20.67	20.64	20.73	1
	1	12	21.95	21.74	21.33	21.54	21.51	0	21.01	20.84	20.82	20.89	20.98	1
	1	24	21.58	21.41	21.09	20.98	21.24	0	21.07	20.84	20.82	20.89	20.98	1
	12	0	21.02	20.70	20.40	20.46	20.73	1	20.33	20.10	20.08	20.15	20.24	2
	12	6	20.87	20.82	20.51	20.35	20.62	1	20.16	19.83	19.81	19.85	19.94	2
	12	13	20.82	20.69	20.39	20.25	20.66	1	20.27	20.05	20.03	19.93	20.02	2
	25	0	20.89	20.74	20.49	20.36	20.64	1	20.29	19.99	19.97	20.18	20.27	2

LTE Band / BW	RB Size	RB Offset	QPSK					3GPP MPR (dB)	16QAM					3GPP MPR (dB)
			Low CH	Mid CH	Mid CH	Mid CH	High CH		Low CH	Mid CH	Mid CH	Mid CH	High CH	
			39700	40160	40620	41080	41540		39700	40160	40620	41080	41540	
41/ 10M	1	0	21.99	21.61	21.32	21.24	21.45	0	20.95	20.61	20.59	20.73	20.82	1
	1	24	22.00	21.69	21.28	21.58	21.55	0	21.06	20.86	20.84	20.79	20.88	1
	1	49	21.60	21.34	21.02	21.06	21.32	0	21.07	20.98	20.96	20.96	21.05	1
	25	0	20.96	20.77	20.47	20.50	20.77	1	20.23	19.96	19.94	20.15	20.24	2
	25	12	20.86	20.76	20.45	20.38	20.65	1	20.19	19.93	19.91	19.97	20.06	2
	25	25	21.02	20.72	20.42	20.18	20.59	1	20.10	19.89	19.87	19.96	20.05	2
	50	0	20.89	20.66	20.41	20.26	20.54	1	20.24	20.10	20.08	20.04	20.13	2

LTE Band / BW	RB Size	RB Offset	QPSK					3GPP MPR (dB)	16QAM					3GPP MPR (dB)
			Low CH	Mid CH	Mid CH	Mid CH	High CH		Low CH	Mid CH	Mid CH	Mid CH	High CH	
			39725	40173	40620	41068	41515		39725	40173	40620	41068	41515	
41/ 15 M	1	0	21.98	21.59	21.30	21.24	21.45	0	21.04	20.62	20.60	20.78	20.87	1
	1	37	21.94	21.79	21.38	21.58	21.55	0	21.03	20.74	20.72	20.74	20.83	1
	1	74	21.72	21.31	20.99	20.96	21.22	0	21.21	20.98	20.96	20.86	20.95	1
	36	0	20.96	20.75	20.45	20.45	20.72	1	20.24	20.01	19.99	19.98	20.07	2
	36	19	20.93	20.74	20.43	20.33	20.60	1	20.04	19.90	19.88	19.83	19.92	2
	36	39	20.87	20.67	20.37	20.13	20.54	1	20.16	20.05	20.03	20.03	20.12	2
	75	0	20.89	20.74	20.49	20.42	20.70	1	20.34	20.15	20.13	20.09	20.18	2

LTE Band / BW	RB Size	RB Offset	QPSK					3GPP MPR (dB)	16QAM					3GPP MPR (dB)
			Low CH	Mid CH	Mid CH	Mid CH	High CH		Low CH	Mid CH	Mid CH	Mid CH	High CH	
			39750	40185	40620	41055	41490		39750	40185	40620	41055	41490	
41/ 20 M	1	0	22.00	21.72	21.43	21.32	21.53	0	21.05	20.81	20.79	20.83	20.92	1
	1	50	22.08	21.87	21.46	21.72	21.69	0	21.15	20.91	20.89	20.93	21.02	1
	1	99	21.74	21.47	21.15	21.12	21.38	0	21.26	21.02	21.00	21.04	21.13	1
	50	0	21.06	20.88	20.58	20.50	20.77	1	20.38	20.14	20.12	20.16	20.25	2
	50	25	21.04	20.88	20.57	20.49	20.76	1	20.24	20.00	19.98	20.02	20.11	2
	50	50	21.02	20.74	20.44	20.28	20.69	1	20.29	20.05	20.03	20.07	20.16	2
	100	0	20.92	20.84	20.59	20.43	20.71	1	20.42	20.18	20.16	20.20	20.29	2



All Rate have been tested, the Worst average power (Unit: dBm) is shown as below.

<WLAN 2.4G>

Mode	802.11b (1Mbps)		
Channel / Frequency (MHz)	1 (2412)	6 (2437)	11 (2462)
Average Power	12.57	14.09	14.10
Mode	802.11g (6Mbps)		
Channel / Frequency (MHz)	1 (2412)	6 (2437)	11 (2462)
Average Power	8.49	7.80	8.50
Mode	802.11n (HT20) (MCS0)		
Channel / Frequency (MHz)	1 (2412)	6 (2437)	11 (2462)
Average Power	8.23	9.53	8.85
Mode	802.11n (HT40) (MCS0)		
Channel / Frequency (MHz)	3 (2422)	6 (2437)	9 (2452)
Average Power	8.68	9.38	8.91



8 SAR Testing Results

8.1 SAR Test Reduction Considerations

<KDB 447498 D01, General RF Exposure Guidance>

Testing of other required channels within the operating mode of a frequency band is not required when the reported SAR for the mid-band or highest output power channel is:

- (1) ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- (2) ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- (3) ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

<KDB 941225 D01, 3G SAR Measurement Procedures>

The mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

<KDB 941225 D05, SAR Evaluation Considerations for LTE Devices>

(1) QPSK with 1 RB and 50% RB allocation

Start with the largest channel bandwidth and measure SAR, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

(2) QPSK with 100% RB allocation

SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

(3) Higher order modulations

SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> 1/2$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

(4) Other channel bandwidth

SAR is required when the highest maximum output power of the smaller channel bandwidth is $> 1/2$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.



<KDB 248227 D01, SAR Guidance for Wi-Fi Transmitters>

- (1) For handsets operating next to ear, hotspot mode or mini-tablet configurations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When the reported SAR of initial test position is ≤ 0.4 W/kg, SAR testing for remaining test positions is not required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
- (2) For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is ≤ 0.8 W/kg, no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is ≤ 1.2 W/kg.
- (3) For WLAN 5 GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is > 0.8 W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is ≤ 1.2 W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is ≤ 1.2 W/kg.
- (4) For WLAN MIMO mode, the power-based standalone SAR test exclusion or the sum of SAR provision in KDB 447498 to determine simultaneous transmission SAR test exclusion should be applied. Otherwise, SAR for MIMO mode will be measured with all applicable antennas transmitting simultaneously at the specified maximum output power of MIMO operation.



8.2 SAR Results for Body Exposure Condition (Separation Distance is 1.0 cm Gap)

Plot No.	Band	Mode	Test Position	Ch.	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
1	GSM850	GPRS 3TS	Front Face	190	29.0	28.53	1.11	0.00	0.46	0.51
	GSM850	GPRS 3TS	Rear Face	190	29.0	28.53	1.11	-0.10	0.629	0.70
	GSM850	GPRS 3TS	Left Side	190	29.0	28.53	1.11	-0.12	0.324	0.36
	GSM850	GPRS 3TS	Right Side	190	29.0	28.53	1.11	-0.16	0.31	0.35
	GSM850	GPRS 3TS	Top Side	190	29.0	28.53	1.11	-0.19	0.06	0.07
	PCS1900	GPRS 4TS	Front Face	661	26.0	25.76	1.06	-0.05	0.563	0.59
	PCS1900	GPRS 4TS	Rear Face	661	26.0	25.76	1.06	-0.06	0.794	0.84
	PCS1900	GPRS 4TS	Left Side	661	26.0	25.76	1.06	-0.03	0.24	0.25
	PCS1900	GPRS 4TS	Right Side	661	26.0	25.76	1.06	-0.01	0.373	0.39
	PCS1900	GPRS 4TS	Top Side	661	26.0	25.76	1.06	0.10	0.24	0.25
2	PCS1900	GPRS 4TS	Rear Face	512	26.0	25.45	1.14	-0.15	0.824	0.94
	PCS1900	GPRS 4TS	Rear Face	810	26.0	25.56	1.11	0.07	0.732	0.81
	PCS1900	GPRS 4TS	Rear Face	512	26.0	25.45	1.14	-0.03	0.806	0.91
	WCDMA II	RMC12.2K	Front Face	9262	22.0	21.88	1.03	0.01	0.524	0.54
	WCDMA II	RMC12.2K	Rear Face	9262	22.0	21.88	1.03	-0.08	1.03	1.06
	WCDMA II	RMC12.2K	Left Side	9262	22.0	21.88	1.03	-0.06	0.229	0.24
	WCDMA II	RMC12.2K	Right Side	9262	22.0	21.88	1.03	-0.09	0.455	0.47
	WCDMA II	RMC12.2K	Top Side	9262	22.0	21.88	1.03	0.00	0.26	0.27
3	WCDMA II	RMC12.2K	Rear Face	9400	22.0	21.79	1.05	-0.01	1.04	1.09
	WCDMA II	RMC12.2K	Rear Face	9538	22.0	21.76	1.06	-0.03	0.964	1.02
	WCDMA II	RMC12.2K	Rear Face	9400	22.0	21.79	1.05	-0.01	1.01	1.06
	WCDMA IV	RMC12.2K	Front Face	1312	22.0	21.82	1.04	0.03	0.594	0.62
	WCDMA IV	RMC12.2K	Rear Face	1312	22.0	21.82	1.04	-0.09	1.15	1.20
	WCDMA IV	RMC12.2K	Left Side	1312	22.0	21.82	1.04	-0.08	0.174	0.18
	WCDMA IV	RMC12.2K	Right Side	1312	22.0	21.82	1.04	-0.05	0.54	0.56
	WCDMA IV	RMC12.2K	Top Side	1312	22.0	21.82	1.04	-0.08	0.442	0.46
	WCDMA IV	RMC12.2K	Rear Face	1413	22.0	21.74	1.06	-0.05	0.888	0.94
	WCDMA IV	RMC12.2K	Rear Face	1513	22.0	21.64	1.09	-0.08	0.849	0.92
	WCDMA IV	RMC12.2K	Rear Face	1312	22.0	21.82	1.04	-0.04	1.12	1.17
5	WCDMA V	RMC12.2K	Front Face	4132	24.0	23.86	1.03	0.05	0.491	0.51
	WCDMA V	RMC12.2K	Rear Face	4132	24.0	23.86	1.03	-0.11	0.714	0.74
	WCDMA V	RMC12.2K	Left Side	4132	24.0	23.86	1.03	-0.08	0.462	0.48
	WCDMA V	RMC12.2K	Right Side	4132	24.0	23.86	1.03	-0.02	0.453	0.47
	WCDMA V	RMC12.2K	Top Side	4132	24.0	23.86	1.03	-0.10	0.087	0.09

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 4	QPSK20M	Front Face	20175	1	50	22.0	21.74	1.06	0.03	0.606	0.64
	LTE 4	QPSK20M	Rear Face	20175	1	50	22.0	21.74	1.06	0.11	0.88	0.93
	LTE 4	QPSK20M	Left Side	20175	1	50	22.0	21.74	1.06	-0.07	0.131	0.14
	LTE 4	QPSK20M	Right Side	20175	1	50	22.0	21.74	1.06	0.01	0.305	0.32
	LTE 4	QPSK20M	Top Side	20175	1	50	22.0	21.74	1.06	0.00	0.198	0.21
	LTE 4	QPSK20M	Front Face	20175	50	50	21.0	20.60	1.10	-0.01	0.475	0.52
	LTE 4	QPSK20M	Rear Face	20175	50	50	21.0	20.60	1.10	0.00	0.74	0.81
	LTE 4	QPSK20M	Left Side	20175	50	50	21.0	20.60	1.10	0.06	0.105	0.12
	LTE 4	QPSK20M	Right Side	20175	50	50	21.0	20.60	1.10	0.02	0.244	0.27
	LTE 4	QPSK20M	Top Side	20175	50	50	21.0	20.60	1.10	0.01	0.16	0.18
6	LTE 4	QPSK20M	Rear Face	20050	1	50	22.0	21.57	1.10	0.02	0.96	1.06



	LTE 4	QPSK20M	Rear Face	20300	1	50	22.0	21.64	1.09	-0.04	0.957	1.04
	LTE 4	QPSK20M	Rear Face	20050	50	50	21.0	20.46	1.13	-0.03	0.774	0.88
	LTE 4	QPSK20M	Rear Face	20300	50	50	21.0	20.52	1.12	0.01	0.727	0.81
	LTE 4	QPSK20M	Rear Face	20175	100	0	21.0	20.48	1.13	-0.07	0.629	0.71
	LTE 4	QPSK20M	Rear Face	20050	1	50	22.0	21.57	1.10	-0.10	0.852	0.94
	LTE 5	QPSK10M	Front Face	20525	1	24	23.0	22.95	1.01	0.02	0.684	0.69
7	LTE 5	QPSK10M	Rear Face	20525	1	24	23.0	22.95	1.01	-0.01	0.731	0.74
	LTE 5	QPSK10M	Left Side	20525	1	24	23.0	22.95	1.01	0.08	0.48	0.49
	LTE 5	QPSK10M	Right Side	20525	1	24	23.0	22.95	1.01	0.00	0.461	0.47
	LTE 5	QPSK10M	Top Side	20525	1	24	23.0	22.95	1.01	-0.12	0.113	0.11
	LTE 5	QPSK10M	Front Face	20450	25	0	1.0	1.00	1.00	-0.06	0.53	0.53
	LTE 5	QPSK10M	Rear Face	20450	25	0	1.0	1.00	1.00	-0.01	0.556	0.56
	LTE 5	QPSK10M	Left Side	20450	25	0	1.0	1.00	1.00	-0.01	0.364	0.36
	LTE 5	QPSK10M	Right Side	20450	25	0	1.0	1.00	1.00	0.01	0.362	0.36
	LTE 5	QPSK10M	Top Side	20450	25	0	1.0	1.00	1.00	0.05	0.092	0.09
	LTE 7	QPSK20M	Front Face	20850	1	50	22.5	22.35	1.04	-0.06	0.335	0.35
8	LTE 7	QPSK20M	Rear Face	20850	1	50	22.5	22.35	1.04	0.01	0.507	0.52
	LTE 7	QPSK20M	Left Side	20850	1	50	22.5	22.35	1.04	-0.11	0.064	0.07
	LTE 7	QPSK20M	Right Side	20850	1	50	22.5	22.35	1.04	0.09	0.353	0.37
	LTE 7	QPSK20M	Top Side	20850	1	50	22.5	22.35	1.04	0.00	0.451	0.47
	LTE 7	QPSK20M	Front Face	20850	50	0	21.5	21.41	1.02	0.01	0.302	0.31
	LTE 7	QPSK20M	Rear Face	20850	50	0	21.5	21.41	1.02	0.02	0.406	0.41
	LTE 7	QPSK20M	Left Side	20850	50	0	21.5	21.41	1.02	0.03	0.053	0.05
	LTE 7	QPSK20M	Right Side	20850	50	0	21.5	21.41	1.02	-0.03	0.282	0.29
	LTE 7	QPSK20M	Top Side	20850	50	0	21.5	21.41	1.02	0.04	0.361	0.37
	LTE 12	QPSK10M	Front Face	23095	1	24	24.0	23.85	1.04	0.00	0.692	0.72
9	LTE 12	QPSK10M	Rear Face	23095	1	24	24.0	23.85	1.04	0.00	0.862	0.89
	LTE 12	QPSK10M	Left Side	23095	1	24	24.0	23.85	1.04	-0.06	0.259	0.27
	LTE 12	QPSK10M	Right Side	23095	1	24	24.0	23.85	1.04	-0.16	0.401	0.42
	LTE 12	QPSK10M	Top Side	23095	1	24	24.0	23.85	1.04	-0.06	0.062	0.06
	LTE 12	QPSK10M	Front Face	23130	25	0	23.0	22.68	1.08	0.03	0.531	0.57
	LTE 12	QPSK10M	Rear Face	23130	25	0	23.0	22.68	1.08	-0.02	0.677	0.73
	LTE 12	QPSK10M	Left Side	23130	25	0	23.0	22.68	1.08	0.02	0.21	0.23
	LTE 12	QPSK10M	Right Side	23130	25	0	23.0	22.68	1.08	-0.06	0.329	0.35
	LTE 12	QPSK10M	Top Side	23130	25	0	23.0	22.68	1.08	0.01	0.051	0.05
	LTE 12	QPSK10M	Rear Face	23060	1	24	24.0	23.75	1.06	0.09	0.804	0.85
	LTE 12	QPSK10M	Rear Face	23130	1	24	24.0	23.81	1.04	0.07	0.823	0.86
	LTE 12	QPSK10M	Rear Face	23095	50	0	23.0	22.57	1.10	0.00	0.63	0.70
	LTE 12	QPSK10M	Rear Face	23095	1	24	24.0	23.85	1.04	-0.03	0.849	0.88
	LTE 13	QPSK10M	Front Face	23230	1	24	24.0	23.84	1.04	-0.08	0.719	0.75
10	LTE 13	QPSK10M	Rear Face	23230	1	24	24.0	23.84	1.04	-0.01	0.883	0.92
	LTE 13	QPSK10M	Left Side	23230	1	24	24.0	23.84	1.04	-0.14	0.474	0.49
	LTE 13	QPSK10M	Right Side	23230	1	24	24.0	23.84	1.04	0.14	0.638	0.66
	LTE 13	QPSK10M	Top Side	23230	1	24	24.0	23.84	1.04	-0.08	0.059	0.06
	LTE 13	QPSK10M	Front Face	23230	25	0	23.0	22.68	1.08	0.00	0.554	0.60
	LTE 13	QPSK10M	Rear Face	23230	25	0	23.0	22.68	1.08	-0.02	0.693	0.75
	LTE 13	QPSK10M	Left Side	23230	25	0	23.0	22.68	1.08	0.05	0.38	0.41
	LTE 13	QPSK10M	Right Side	23230	25	0	23.0	22.68	1.08	0.01	0.497	0.54
	LTE 13	QPSK10M	Top Side	23230	25	0	23.0	22.68	1.08	0.02	0.048	0.05
	LTE 13	QPSK10M	Rear Face	23230	50	0	23.0	22.59	1.10	0.08	0.626	0.69
	LTE 13	QPSK10M	Rear Face	23230	1	24	24.0	23.84	1.04	-0.03	0.834	0.87
	LTE 25	QPSK20M	Front Face	26365	1	50	21.5	21.45	1.01	-0.03	0.531	0.54
11	LTE 25	QPSK20M	Rear Face	26365	1	50	21.5	21.45	1.01	0.12	0.612	0.62



	LTE 25	QPSK20M	Left Side	26365	1	50	21.5	21.45	1.01	-0.10	0.195	0.20
	LTE 25	QPSK20M	Right Side	26365	1	50	21.5	21.45	1.01	0.07	0.38	0.38
	LTE 25	QPSK20M	Top Side	26365	1	50	21.5	21.45	1.01	-0.06	0.19	0.19
	LTE 25	QPSK20M	Front Face	26365	50	0	20.5	20.48	1.00	0.04	0.415	0.42
	LTE 25	QPSK20M	Rear Face	26365	50	0	20.5	20.48	1.00	-0.09	0.523	0.53
	LTE 25	QPSK20M	Left Side	26365	50	0	20.5	20.48	1.00	0.02	0.16	0.16
	LTE 25	QPSK20M	Right Side	26365	50	0	20.5	20.48	1.00	0.04	0.301	0.30
	LTE 25	QPSK20M	Top Side	26365	50	0	20.5	20.48	1.00	-0.13	0.148	0.15
	LTE 26	QPSK15M	Front Face	26765	1	37	23.5	23.09	1.10	0.02	0.512	0.56
12	LTE 26	QPSK15M	Rear Face	26765	1	37	23.5	23.09	1.10	0.01	0.677	0.74
	LTE 26	QPSK15M	Left Side	26765	1	37	23.5	23.09	1.10	0.06	0.462	0.51
	LTE 26	QPSK15M	Right Side	26765	1	37	23.5	23.09	1.10	0.14	0.472	0.52
	LTE 26	QPSK15M	Top Side	26765	1	37	23.5	23.09	1.10	-0.03	0.084	0.09
	LTE 26	QPSK15M	Front Face	26765	38	0	22.5	22.10	1.10	-0.07	0.414	0.45
	LTE 26	QPSK15M	Rear Face	26765	38	0	22.5	22.10	1.10	-0.09	0.542	0.59
	LTE 26	QPSK15M	Left Side	26765	38	0	22.5	22.10	1.10	0.02	0.37	0.41
	LTE 26	QPSK15M	Right Side	26765	38	0	22.5	22.10	1.10	0.01	0.38	0.42
	LTE 26	QPSK15M	Top Side	26765	38	0	22.5	22.10	1.10	-0.04	0.068	0.07
	LTE 38	QPSK20M	Front Face	37850	1	50	22.0	21.85	1.04	-0.01	0.101	0.10
	LTE 38	QPSK20M	Rear Face	37850	1	50	22.0	21.85	1.04	0.00	0.252	0.26
	LTE 38	QPSK20M	Left Side	37850	1	50	22.0	21.85	1.04	0.03	0.015	0.02
	LTE 38	QPSK20M	Right Side	37850	1	50	22.0	21.85	1.04	-0.04	0.149	0.15
13	LTE 38	QPSK20M	Top Side	37850	1	50	22.0	21.85	1.04	0.03	0.306	0.32
	LTE 38	QPSK20M	Front Face	37850	50	0	21.0	20.80	1.05	0.02	0.083	0.09
	LTE 38	QPSK20M	Rear Face	37850	50	0	21.0	20.80	1.05	-0.03	0.194	0.20
	LTE 38	QPSK20M	Left Side	37850	50	0	21.0	20.80	1.05	0.05	0.013	0.01
	LTE 38	QPSK20M	Right Side	37850	50	0	21.0	20.80	1.05	0.04	0.121	0.13
	LTE 38	QPSK20M	Top Side	37850	50	0	21.0	20.80	1.05	0.00	0.258	0.27
	LTE 41	QPSK20M	Front Face	39750	1	50	22.5	22.08	1.10	-0.19	0.137	0.15
	LTE 41	QPSK20M	Rear Face	39750	1	50	22.5	22.08	1.10	-0.05	0.254	0.28
	LTE 41	QPSK20M	Left Side	39750	1	50	22.5	22.08	1.10	-0.05	0.014	0.02
	LTE 41	QPSK20M	Right Side	39750	1	50	22.5	22.08	1.10	-0.09	0.197	0.22
14	LTE 41	QPSK20M	Top Side	39750	1	50	22.5	22.08	1.10	0.14	0.359	0.40
	LTE 41	QPSK20M	Front Face	39750	50	0	21.5	21.06	1.11	-0.02	0.113	0.13
	LTE 41	QPSK20M	Rear Face	39750	50	0	21.5	21.06	1.11	0.03	0.191	0.21
	LTE 41	QPSK20M	Left Side	39750	50	0	21.5	21.06	1.11	0.01	0.013	0.01
	LTE 41	QPSK20M	Right Side	39750	50	0	21.5	21.06	1.11	0.06	0.162	0.18
	LTE 41	QPSK20M	Top Side	39750	50	0	21.5	21.06	1.11	-0.03	0.291	0.32

Plot No.	Band	Mode	Test Position	Ch.	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	802.11b	-	Front Face	11	14.5	14.10	1.10	-0.02	0.066	0.07
15	802.11b	-	Rear Face	11	14.5	14.10	1.10	-0.06	0.089	0.10
	802.11b	-	Left Side	11	14.5	14.10	1.10	-0.05	0.052	0.06
	802.11b	-	Top Side	11	14.5	14.10	1.10	-0.01	0.043	0.05



8.3 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Band	Mode	Test Position	Ch.	Original Measured SAR-1g (W/kg)	1st Repeated SAR-1g (W/kg)	L/S Ratio	2nd Repeated SAR-1g (W/kg)	L/S Ratio	3rd Repeated SAR-1g (W/kg)	L/S Ratio
PCS1900	GPRS 4TS	Rear Face	512	0.824	0.806	1.02	N/A	N/A	N/A	N/A
WCDMA II	RMC12.2K	Rear Face	9400	1.04	1.01	1.03	N/A	N/A	N/A	N/A
WCDMA IV	RMC12.2K	Rear Face	1312	1.15	1.12	1.03	N/A	N/A	N/A	N/A
LTE 4	QPSK20M	Rear Face	20050	0.96	0.852	1.13	N/A	N/A	N/A	N/A
LTE 12	QPSK10M	Rear Face	23095	0.862	0.849	1.02	N/A	N/A	N/A	N/A
LTE 13	QPSK10M	Rear Face	23230	0.883	0.834	1.06	N/A	N/A	N/A	N/A



8.4 Simultaneous Multi-band Transmission Evaluation

<SAR Summation Analysis>

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR_{1g} of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR_{1g} 1.6 W/kg, SAR_{10g} 4.0 W/Kg), the simultaneous transmission SAR is not required. When the sum of SAR is greater than the SAR limit (SAR_{1g} 1.6 W/kg, SAR_{10g} 4.0 W/Kg), SAR test exclusion is determined by the SPLSR.

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
1	GSM850 + WLAN (DTS)	Body	Front Face	0.51	0.07	0.58	ΣSAR < 1.6, Not required
			Rear Face	0.70	0.10	0.80	ΣSAR < 1.6, Not required
			Left Side	0.36	0.06	0.42	ΣSAR < 1.6, Not required
			Right Side	0.35		0.35	ΣSAR < 1.6, Not required
			Top Side	0.07	0.05	0.12	ΣSAR < 1.6, Not required
2	PCS1900+ WLAN (DTS)	Body	Front Face	0.59	0.07	0.66	ΣSAR < 1.6, Not required
			Rear Face	0.94	0.10	1.04	ΣSAR < 1.6, Not required
			Left Side	0.25	0.06	0.31	ΣSAR < 1.6, Not required
			Right Side	0.39		0.39	ΣSAR < 1.6, Not required
			Top Side	0.25	0.05	0.30	ΣSAR < 1.6, Not required
3	WCDMA II+ WLAN (DTS)	Body	Front Face	0.54	0.07	0.61	ΣSAR < 1.6, Not required
			Rear Face	1.09	0.10	1.19	ΣSAR < 1.6, Not required
			Left Side	0.24	0.06	0.30	ΣSAR < 1.6, Not required
			Right Side	0.47		0.47	ΣSAR < 1.6, Not required
			Top Side	0.27	0.05	0.32	ΣSAR < 1.6, Not required
4	WCDMA IV+ WLAN (DTS)	Body	Front Face	0.62	0.07	0.69	ΣSAR < 1.6, Not required
			Rear Face	1.20	0.10	1.30	ΣSAR < 1.6, Not required
			Left Side	0.18	0.06	0.24	ΣSAR < 1.6, Not required
			Right Side	0.56		0.56	ΣSAR < 1.6, Not required
			Top Side	0.46	0.05	0.51	ΣSAR < 1.6, Not required
5	WCDMA V+ WLAN (DTS)	Body	Front Face	0.51	0.07	0.58	ΣSAR < 1.6, Not required
			Rear Face	0.74	0.10	0.84	ΣSAR < 1.6, Not required
			Left Side	0.48	0.06	0.54	ΣSAR < 1.6, Not required
			Right Side	0.47		0.47	ΣSAR < 1.6, Not required
			Top Side	0.09	0.05	0.14	ΣSAR < 1.6, Not required
6	LTE 4+ WLAN (DTS)	Body	Front Face	0.64	0.07	0.71	ΣSAR < 1.6, Not required
			Rear Face	1.06	0.10	1.16	ΣSAR < 1.6, Not required
			Left Side	0.14	0.06	0.20	ΣSAR < 1.6,



							Not required
			Right Side	0.32		0.32	Σ SAR < 1.6, Not required
			Top Side	0.21	0.05	0.26	Σ SAR < 1.6, Not required
7	LTE 5+ WLAN (DTS)	Body	Front Face	0.69	0.07	0.76	Σ SAR < 1.6, Not required
			Rear Face	0.74	0.10	0.84	Σ SAR < 1.6, Not required
			Left Side	0.49	0.06	0.55	Σ SAR < 1.6, Not required
			Right Side	0.47		0.47	Σ SAR < 1.6, Not required
			Top Side	0.11	0.05	0.16	Σ SAR < 1.6, Not required
8	LTE 7+ WLAN (DTS)	Body	Front Face	0.35	0.07	0.42	Σ SAR < 1.6, Not required
			Rear Face	0.52	0.10	0.62	Σ SAR < 1.6, Not required
			Left Side	0.07	0.06	0.13	Σ SAR < 1.6, Not required
			Right Side	0.37		0.37	Σ SAR < 1.6, Not required
			Top Side	0.47	0.05	0.52	Σ SAR < 1.6, Not required
9	LTE 12+ WLAN (DTS)	Body	Front Face	0.72	0.07	0.79	Σ SAR < 1.6, Not required
			Rear Face	0.89	0.10	0.99	Σ SAR < 1.6, Not required
			Left Side	0.27	0.06	0.33	Σ SAR < 1.6, Not required
			Right Side	0.42		0.42	Σ SAR < 1.6, Not required
			Top Side	0.06	0.05	0.11	Σ SAR < 1.6, Not required
10	LTE 13+ WLAN (DTS)	Body	Front Face	0.75	0.07	0.82	Σ SAR < 1.6, Not required
			Rear Face	0.92	0.10	1.02	Σ SAR < 1.6, Not required
			Left Side	0.49	0.06	0.55	Σ SAR < 1.6, Not required
			Right Side	0.66		0.66	Σ SAR < 1.6, Not required
			Top Side	0.06	0.05	0.11	Σ SAR < 1.6, Not required
11	LTE 25+ WLAN (DTS)	Body	Front Face	0.54	0.07	0.61	Σ SAR < 1.6, Not required
			Rear Face	0.62	0.10	0.72	Σ SAR < 1.6, Not required
			Left Side	0.20	0.06	0.26	Σ SAR < 1.6, Not required
			Right Side	0.38		0.38	Σ SAR < 1.6, Not required
			Top Side	0.19	0.05	0.24	Σ SAR < 1.6, Not required
12	LTE 26+ WLAN (DTS)	Body	Front Face	0.56	0.07	0.63	Σ SAR < 1.6, Not required
			Rear Face	0.74	0.10	0.83	Σ SAR < 1.6, Not required
			Left Side	0.51	0.06	0.57	Σ SAR < 1.6, Not required
			Right Side	0.52		0.52	Σ SAR < 1.6, Not required
			Top Side	0.09	0.05	0.14	Σ SAR < 1.6, Not required
13	LTE 38+ WLAN (DTS)	Body	Front Face	0.10	0.07	0.17	Σ SAR < 1.6, Not required
			Rear Face	0.26	0.10	0.36	Σ SAR < 1.6, Not required
			Left Side	0.02	0.06	0.08	Σ SAR < 1.6, Not required
			Right Side	0.15		0.15	Σ SAR < 1.6,



							Not required
			Top Side	0.32	0.05	0.37	Σ SAR < 1.6, Not required
14	LTE 41+ WLAN (DTS)	Body	Front Face	0.15	0.07	0.22	Σ SAR < 1.6, Not required
			Rear Face	0.28	0.10	0.38	Σ SAR < 1.6, Not required
			Left Side	0.02	0.06	0.08	Σ SAR < 1.6, Not required
			Right Side	0.22		0.22	Σ SAR < 1.6, Not required
			Top Side	0.40	0.05	0.53	Σ SAR < 1.6, Not required



9 Equipment List

Equipment	Manufacturer	Model	SN	Cal. Data	Cal. interval
System Validation Dipole	SPEAG	D750V3	1219	May. 22, 2022	3 years
System Validation Dipole	SPEAG	D850V2	1026	May. 23, 2022	3 years
System Validation Dipole	SPEAG	D1750V2	1192	May. 24, 2022	3 years
System Validation Dipole	SPEAG	D1900V2	5d247	May. 23, 2022	3 years
System Validation Dipole	SPEAG	D2000V2	1099	May. 25, 2022	3 years
System Validation Dipole	SPEAG	D2300V2	1126	May. 25, 2022	3 years
System Validation Dipole	SPEAG	D2450V2	1081	May. 25, 2022	3 years
System Validation Dipole	SPEAG	D2600V2	1195	May. 25, 2022	3 years
Dosimetric E-Field Probe	SPEAG	EX3DV4	7738	Dec. 13, 2023	1 year
Data Acquisition Electronics	SPEAG	DAE4	1725	Oct. 26, 2023	1 year
Wideband Radio Communication Tester	R&S	CMW500	168558	May. 26, 2023	1 year
Signal Analyzer	R&S	FSV	104408	May. 22, 2023	1 year
Vector Network Analyzer	R&S	ZNB 40	101544	May. 26, 2023	1 year
Dielectric assessment Kit	SPEAG	DAK-3.5	1327	Oct. 22, 2022	N/A
Signal Generator	R&S	SMB 100B	101843	Sep. 21, 2023	1 year
Power Sensor	R&S	NRP18S-10	101843	Sep. 25, 2023	1 year
Power Sensor	R&S	NRP18S-10	101845	Sep. 25, 2023	1 year
DC Power Supply	Topward	3303D	810984	Sep. 24, 2023	1 year
Cavity Coupler	/	/	LS0300103	Jan. 17, 2024	1 year
Directional Coupler	/	SHX-DC04/12-20 N	2206171042	Jan. 17, 2024	1 year
Coaxial attenuator	R&S	8491A	1424.6721k02-101 845-HX	Sep. 25, 2023	1 year
Coaxial attenuator	R&S	8491A	1424.6721K02-101 843-aM	Sep. 25, 2023	1 year
Digital Thermometer	LKM	DTM3000	3946	Jan. 15, 2024	1 year
Power Amplifier Mini circuit	mini-circuits	ZVA-183W-S+	726202215	Jan. 10, 2024	1 year
PHANTOM	SPEAG	ELI V8.0	2171	N/A	N/A



10 Measurement Uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Symbol	Source of Uncertainty	Tolerance ($\pm$ %)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)	Vi Veff
Measurement System Errors									
CF	Probe Calibration	$\pm 12.7\%$	Normal ($k=2$)	2	1	1	$\pm 6.35\%$	$\pm 6.35\%$	∞
CF _{drift}	Probe Calibration Drift	$\pm 1.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.0\%$	$\pm 1.0\%$	∞
LIN	Probe Linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
BBS	Broadband Signal	$\pm 0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0\%$	$\pm 0\%$	∞
ISO	Probe Isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
DAE	Other Probe + Electronic	$\pm 2.4\%$	Normal	1	1	1	$\pm 2.4\%$	$\pm 2.4\%$	∞
AMB	RF Ambient	$\pm 0.6\%$	Normal	1	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Δ_{sys}	Probe Positioning	$\pm 0.5\%$	Normal	1	0.50	0.50	$\pm 0.2\%$	$\pm 0.2\%$	∞
DAT	Data Processing	$\pm 0\%$	Normal	1	1	1	$\pm 0\%$	$\pm 0\%$	∞
Phantom and Device Errors									
LIQ(σ)	Conductivity (meas.)DAK	$\pm 2.5\%$	Normal	1	0.78	0.71	$\pm 2.0\%$	$\pm 1.8\%$	100
LIQ($T\sigma$)	Conductivity (temp.)BB	$\pm 3.4\%$	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 1.5\%$	$\pm 1.4\%$	∞
EPS	Phantom Permittivity	$\pm 14.0\%$	Rectangular	$\sqrt{3}$	0.5	0.5	$\pm 4.0\%$	$\pm 4.0\%$	∞
DIS	Distance DUT – TSL	$\pm 2.6\%$	Normal	1	2	2	$\pm 5.3\%$	$\pm 5.3\%$	∞
MOD	DUT Modulationm	$\pm 0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0\%$	$\pm 0\%$	∞
TAS	Time-average SAR	$\pm 0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0\%$	$\pm 0\%$	∞
VAL	Val Antenna Unc.val	$\pm 3.2\%$	Normal	1	1	1	$\pm 3.2\%$	$\pm 3.2\%$	
Pin	Accepted power	$\pm 2.0\%$	Normal	1	1	1	$\pm 2.0\%$	$\pm 2.0\%$	
Correction to the SAR results									
C(ϵ, σ)	Deviation to Target	$\pm 1.9\%$	Normal	1	1	0.84	$\pm 1.9\%$	$\pm 1.6\%$	
u(Δ SAR)	Combined Standard Uncertainty (K = 1)						$\pm 13.3\%$	$\pm 13.2\%$	
U	Expanded Uncertainty (K = 2)						$\pm 26.6\%$	$\pm 26.4\%$	




11 Test Photos and Results

11.1 EUT Photo

Please refer to the attached file (External Photos report and Internal Photos).

11.2 EUT Antenna Location

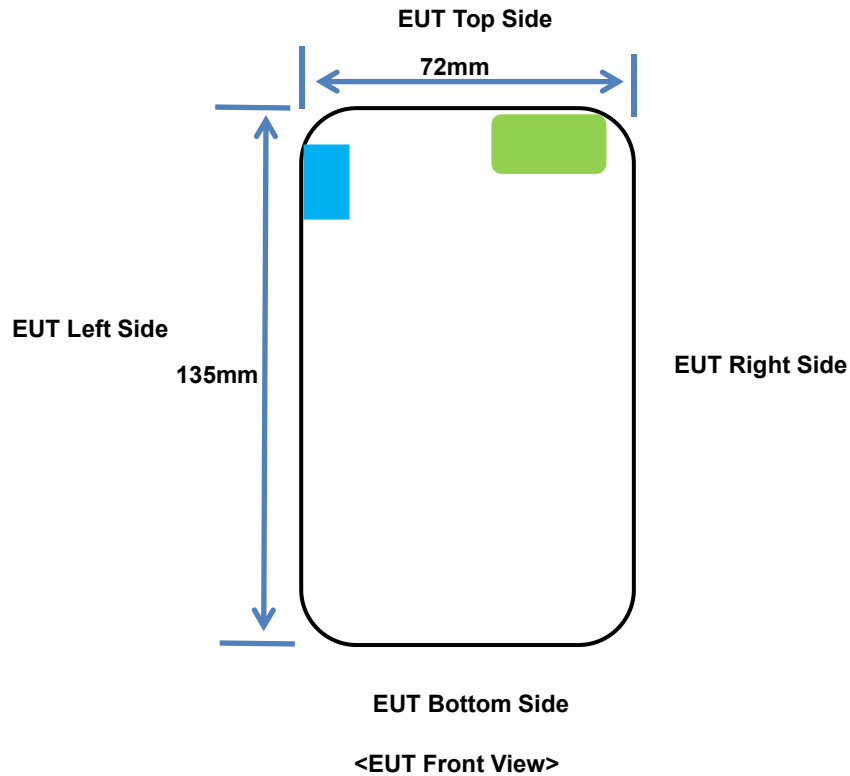

The separation distance for antenna to edge:

Antenna	To Left Side (mm)	To Right Side (mm)	To Top Side (mm)	To Bottom Side (mm)	To Front Face (mm)	To Rear Face (mm)
WWAN Ant	40	10	5	120	12	3
WLAN Ant	0	55	10	115	12	3



11.3 Photographs of SAR Setup

Please refer to the attached file (Photographs of SAR Setup).



12 Appendixes

All attachments are integral parts of this test report. This applies especially to the following appendix:

12.1 Appendix A: SAR Plots of System Verification

The plots for system verification with largest deviation for each SAR system combination are shown as follows.

12.2 Appendix B: SAR Plots of SAR Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination, and measured SAR > 1.5 W/kg are shown as follows.

12.3 Appendix C: Calibration Certificate for probe and Dipole



Important

- (1) The test report is invalid without the official stamp of CVC;
- (2) Any part photocopies of the test report are forbidden without the written permission from CVC;
- (3) The test report is invalid without the signatures of Approval and Reviewer;
- (4) The test report is invalid if altered;
- (5) Objections to the test report must be submitted to CVC within 15 days.
- (6) Generally, commission test is responsible for the tested samples only.
- (7) As for the test result “-” or “N” means “not applicable”, “/” means “not test”, “P” means “pass” and “F” means “fail”

Address: No. 1301, Guanguang Road, Xinlan Community, Guanlan Street,
Longhua District, Shenzhen, Guangdong, 518110, P. R. China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

<http://www.cvc.org.cn>