



FCC SAR Compliance Test Report

For

RPTRADING S.A

HAITI Numero: 04-21 TRINIDAD Y TOBAGO

Model: M11

Test Engineer: Zeng Longhao *Zeng Longhao*

Report Number: WSCT-A2LA-R&E231000017A-SAR

Report Date: 12 December 2023

FCC ID: 2BDCX-BULUSE-M11

Check By: Wei Liangmei *Wei Liangmei*

Liu Fuxin *Liu Fuxin*

Prepared By: World Standardization Certification & Testing Group
(Shenzhen) Co., Ltd.
Building A-B, Baoshi Science & Technology Park,
Baoshi Road, Bao'an District, Shenzhen, Guangdong,
China
Tel: +86-755-26996192
Fax: +86-755-86376605





Table of contents

1	General information	5
2	Notes	5
3	Application details	5
3.1	Statement of Compliance.....	6
3.2	EUT Information	8
4	Testing laboratory.....	10
5	2.1 ACCREDITATIONS	10
6	Test Environment.....	10
7	Applicant and Manufacturer	10
8	Test standard/s:	11
9	RF exposure limits	12
10	SAR Definition.....	12
11	SAR Measurement System	13
11.1	The Measurement System	13
11.2	Robot.....	14
11.3	Probe.....	14
11.4	Measurement procedure	15
11.5	Description of interpolation/extrapolation scheme.....	16
11.6	Phantom.....	17
11.7	Device Holder	18
11.8	Video Positioning System.....	19
11.9	Tissue simulating liquids: dielectric properties	20
11.10	Tissue simulating liquids: parameters	21
12	System Check	23
12.1	System check procedure	23
12.2	System check results	24
13	SAR Test Test Configuration.....	25
13.1	GSM Test Configurations.....	25



13.2	LTE Test Configuration	25
13.3	Wi-Fi Test Configuration	27
13.4	WiFi 2.4G SAR Test Procedures.....	27
13.5	WiFi 5G SAR Test Procedures.....	28
14	Detailed Test Results	31
14.1	Conducted Power measurements.....	31
14.1.1	Conducted Power of GSM850.....	31
14.1.2	Conducted Power of GSM1900.....	32
14.1.3	Conducted Power of LTE Band 2	33
14.1.4	Conducted Power of LTE Band 4	35
14.1.5	Conducted Power of LTE Band 5.....	37
14.1.6	Conducted Power of LTE Band 12	39
14.1.7	Conducted Power of LTE Band 17.....	41
14.1.8	Conducted Power of LTE Band 41.....	42
14.1.9	Conducted Power of LTE Band 66.....	44
14.1.10	Conducted Power of Wi-Fi 2.4G	46
14.1.11	Conducted Power of Wi-Fi 5G	47
14.1.12	Conducted Power of BT	48
14.1.13	Conducted Power of BLE	48
14.1.14	Tune-up power tolerance	49
14.2	SAR test results	50
14.2.1	Results overview of GSM850.....	53
14.2.2	Results overview of GSM1900.....	54
14.2.3	Results overview of LTE Band 2	55
14.2.4	Results overview of LTE Band 4	56
14.2.5	Results overview of LTE Band 5	57
14.2.6	Results overview of LTE Band 12	58
14.2.7	Results overview of LTE Band 17	59



14.2.8	Results overview of LTE Band 41	60
14.2.9	Results overview of LTE Band 66	61
14.2.10	Results overview of Wi-Fi 2.4G	62
14.2.11	Results overview of Wi-Fi 5G	62
15	Multiple Transmitter Information	64
15.1.1	Stand-alone SAR test exclusion	65
15.1.2	Simultaneous Transmission Possibilities	66
16	Measurement uncertainty evaluation	67
16.1	Measurement uncertainty evaluation for SAR test	67
16.2	Measurement uncertainty evaluation for system check	69
17	Test equipment and ancillaries used for tests	71
Annex A:	System performance verification	72
Annex B:	Measurement results	72
Annex C:	Calibration reports	72



Modified History

REV.	Modification Description	Issued Date	Remark
REV.1.0	Initial Test Report Relesse	13 November 2023	Liu Fuxin

1 General information

2 Notes

The test results of this test report relate exclusively to the test item specified in this test report. Shenzhen Timeway Testing Laboratories does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report is not to be reproduced or published in full without the prior written permission.

3 Application details

Date of receipt of test item: 2023-10-23
Start of test: 2023-10-26
End of test: 2023-11-11



3.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for M11 is as below:

Band	Position	MAX Reported SAR _{1g} (W/kg)
GSM850	Head	0.642
	Body & Hotspot 0mm	0.745
GSM1900	Head	0.761
	Body & Hotspot 0mm	0.506
LTE Band 2	Head	0.471
	Body & Hotspot 0mm	0.306
LTE Band 4	Head	0.528
	Body & Hotspot 0mm	0.363
LTE Band 5	Head	0.586
	Body & Hotspot 0mm	0.351
LTE Band 12	Head	0.545
	Body & Hotspot 0mm	0.354
LTE Band 17	Head	0.421
	Body & Hotspot 0mm	0.349
LTE Band 41	Head	0.659
	Body & Hotspot 0mm	0.414
LTE Band 66	Head	0.521
	Body & Hotspot 0mm	0.375
Wi-Fi 2.4G	Head	0.358
	Body & Hotspot 0mm	0.382
Wi-Fi 5.2G	Head	0.315
	Body & Hotspot 0mm	0.351
Wi-Fi 5.6G	Head	0.299
	Body & Hotspot 0mm	0.382
Wi-Fi 5.8G	Head	0.298
	Body & Hotspot 0mm	0.284
The highest simultaneous SAR is 1.143W/kg per KDB690783 D01		



The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits of 1.6 W/Kg as averaged over any 1g tissue according to the FCC rule §2.1093, the ANSI/IEEE C95.1:2005, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.



3.2 EUT Information

Device Information:			
Product Name:	Tablet		
Model :	M11		
Trade Mark:	BULUSE		
Software Version:	F866_WXGA_4+64_V1.0		
Hardware Version:	F866T-Y_6762_BJJ_MB_V4.0		
Device Type:	Portable device		
Exposure Category:	uncontrolled environment / general population		
Production Unit or Identical Prototype:	Production Unit		
Antenna Type :	PIFA Antenna		
Device Operating Configurations:			
Supporting Mode(s) :	GSM850,PCS1900, LTE Band 2, LTE Band 4,LTE Band 5 , LTE Band 12, LTE Band 17LTE Band 41, LTE Band 66,Wi-Fi , BT		
Modulation:	GSM850, GSM1900,LTE(QPSK/16QAM), WiFi(DBPSK,DQPSK,CCK,BPSK, QPSK,16QAM,64QAM,256QAM,1024QAM), BT3.0(GFSK, $\pi/4$ -DQPSK, 8-DPSK),BT 5.0(GFSK)		
Device Class :	Class B, No DTM Mode		
Operating Frequency Range(s)	Band	TX(MHz)	RX(MHz)
	GSM850	824~849	869~894
	GSM1900	1850~1910	1930~1990
	LTE Band 2	1850~1910	1930~1990
	LTE Band 4	1710~1755	2110~2155
	LTE Band 5	824~849	869~894
	LTE Band 12	699~715	699~715
	LTE Band 17	706~713	706~713
	LTE Band 41	2496~2690	2496~2690
	LTE Band 66	1710~1779	1710~1779
	Wi-Fi (2.4G)	2412-2462	
	Wi-Fi (5G)	Band 1: 5180-5240 MHz Band 2: 5260-5320 MHz Band 3: 5500-5700 MHz Band 4: 5745-5825 MHz	
	BT	2402~2480	
	GPRS class level:	GPRS class 12	



Test Channels (low-mid-high):	128-190-251(GSM850)
	512-661-810(GSM1900)
	18700-18900-19100(LTE Band 2)
	20050-20175-20300(LTE Band 4)
	20450-20525-20600(LTE Band 5)
	23060-23095-23130(LTE Band 12)
	23780-23790-23800(LTE Band 17)
	39750-39948-40740(LTE Band 41)
	132072-132322-132572(LTE Band 66)
	1-6-11 (Wi-Fi)
	802.11a/n/ac 20M: 36-40-44-48-52-56-60-64-149-153-157-161-165
	802.11 n/ac 40M: 38-46-54-62-151-159 (Wi-Fi 5G)
	0-39-78(BT)
Power Source:	0-19-39(BLE)
	Li-ion Battery: JJY32100100
	Rated Voltage: 3.8V
	Rated Capacity: 5000mAh/19Wh



4 Testing laboratory

Test Site	World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.
Test Location	Building A-B, Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
Telephone	+86-755-26996192
Fax	+86-755-86376605

5 2.1 ACCREDITATIONS

CNAS - Registration Number: L3732

China National Accreditation Service for Conformity Assessment, The test firm Registration Number: L3732

FCC - Designation Number: CN1303

World Standardization Certification & Testing Group(Shenzhen) CO., LTD. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Designation Number: CN1303.

A2LA - Certificate Number: 5768.01

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA).Certification Number: 5768.01

6 Test Environment

	Required	Actual
Ambient temperature:	18 – 25 °C	22 ± 2 °C
Tissue Simulating liquid:	22 ± 2 °C	22 ± 2 °C
Relative humidity content:	30 – 70 %	30 – 70 %

7 Applicant and Manufacturer

Applicant/Client Name:	RPTRADING S.A
Applicant Address:	HAITI Numero: 04-21 TRINIDAD Y TOBAGO
Manufacturer Name:	SHENZHEN GERUIBANG TECHNOLOGY CO.,LTD
Manufacturer Address:	Sogood Technology Park Sanwei Village in Xixiang Baoan District Shenzhen ,China
Factory Name:	SHENZHEN GERUIBANG TECHNOLOGY CO.,LTD
Factory Address:	Sogood Technology Park Sanwei Village in Xixiang Baoan District Shenzhen ,China



8 Test standard/s:

ANSI Std C95.1-2005	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands (Issue 5 March 2015)
KDB447498 D01	General RF Exposure Guidance v06
KDB648474 D04	Head set SAR v01r03
KDB941225 D06	Hot Spot SAR V02r01
KDB248227 D01	SAR meas for 802.11 a/b/g v02r02
KDB865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB865664 D02	RF Exposure Reporting v01r02
KDB 941225 D05	SAR Evaluation Considerations for LTE Devices
KDB941225 D05A	LTE Rel.10 KDB Inquiry Sheet v01r02



9 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Heads/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

The limit applied in this test report is shown in bold letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

10 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = rms electric field strength (V/m)



11 SAR Measurement System

11.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Device holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.



11.2 Robot

The COMOSAR system uses the high precision robots KR 6 R900 sixx type out of the newer series from Satimo SA (France). For the 6-axis controller COMOSAR system, the KUKA robot controller version from Satimo is used. The KR 6 R900 sixx robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller

11.3 Probe

For the measurements the Specific Dosimetric E-Field Probe SSE 5 with following specifications is used




Figure 1 – MVG COMOSAR Dosimetric E field Dipole

- Dynamic range: 0.01-100 W/kg

Probe Length	330 mm
Length of Individual Dipoles	4.5 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	5 mm
Distance between dipoles / probe extremity	2.7 mm

- Calibration range: 300MHz to 3GHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°

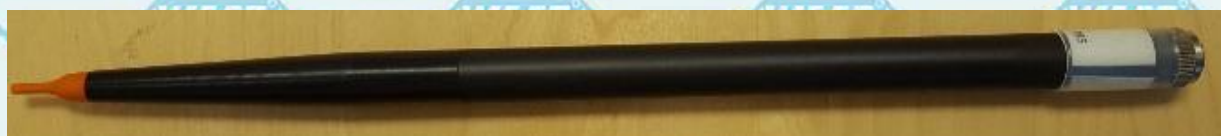


Figure 2 – MVG COMOSAR Dosimetric E field Dipole

Dynamic range: 0.01-100 W/kg

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

- Calibration range: 5GHz to 6GHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°



11.4 Measurement procedure

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors can not directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



SAR Averaged Methods

In SATIMO, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

11.5 Description of interpolation/extrapolation scheme

- The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.
- An extrapolation is used to determine these highest local SAR values.
The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.
- The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR average over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.



11.6 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.




System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005



11.7 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

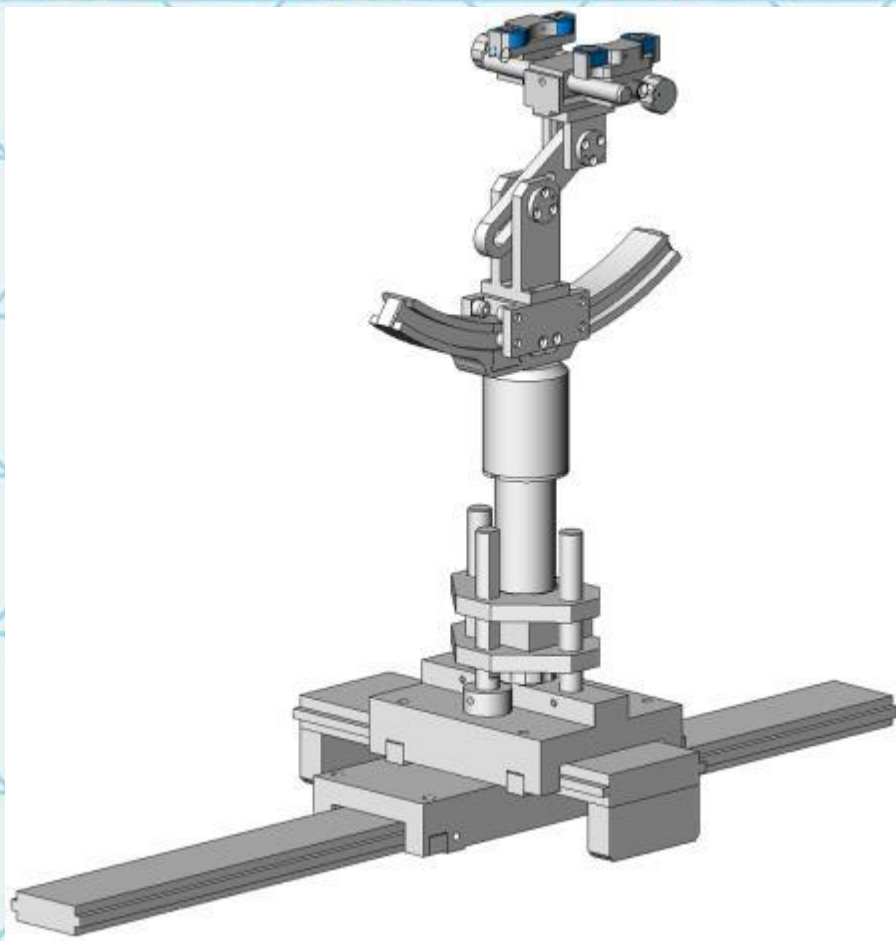

Device holder

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005



11.8 Video Positioning System

- The video positioning system is used in OpenSAR to check the probe. Which is composed of a camera, LED, mirror and mechanical parts. The camera is piloted by the main computer with firewire link.
- During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.
- The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



**11.9 Tissue simulating liquids: dielectric properties**

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

(Liquids used for tests are marked with ☒):

Ingredients(% of weight)	Frequency (MHz)					
frequency band	☐ 750	☒ 835	☒ 1800	☒ 1900	☒ 2450	☒ 2600
Tissue Type	Head	Head	Head	Head	Head	Head
Water	39.2	41.45	52.64	55.242	62.7	55.242
Salt (NaCl)	2.7	1.45	0.36	0.306	0.5	0.306
Sugar	57.0	56.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	47.0	44.542	0.0	44.452
Ingredients(% of weight)	Frequency (MHz)					
frequency band	☐ 750	☒ 835	☒ 1800	☒ 1900	☒ 2450	☒ 2600
Tissue Type	Body	Body	Body	Body	Body	Body
Water	50.30	52.4	69.91	69.91	73.2	64.493
Salt (NaCl)	1.60	1.40	0.13	0.13	0.04	0.024
Sugar	47.0	45.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7	32.252

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether



11.10 Tissue simulating liquids: parameters

Tissue Type	Measured Frequency (MHz)	Target Tissue				Measured Tissue		Liquid Temp.	Test Date
		Target Permittivity ϵ_r	Range of $\pm 5\%$	Target Conductivity σ (S/m)	Range of $\pm 5\%$	ϵ_r	σ (S/m)		
835MHz Head	825	41.60	39.52~43.68	0.90	0.86~0.95	40.34	0.91	21.6°C	2023-11-06
	835	41.50	39.43~43.58	0.90	0.86~0.95	40.33	0.92		
	850	41.50	39.43~43.58	0.92	0.87~0.97	40.11	0.94		
835MHz Body	825	55.20	52.44~57.96	0.97	0.92~1.02	54.04	0.98	21.6°C	2023-11-06
	835	55.20	52.44~57.96	0.97	0.92~1.02	53.93	0.99		
	850	55.20	52.44~57.96	0.99	0.94~1.04	53.69	1.01		
1900MHz Head	1850	40.00	38.00~42.00	1.40	1.33~1.47	39.93	1.37	21.6°C	2023-11-07
	1880	40.00	38.00~42.00	1.40	1.33~1.47	39.91	1.40		
	1900	40.00	38.00~42.00	1.40	1.33~1.47	39.98	1.41		
	1910	40.00	38.00~42.00	1.40	1.33~1.47	39.97	1.42		
1900MHz Body	1850	53.30	50.64~55.97	1.52	1.44~1.60	53.23	1.49	21.6°C	2023-11-07
	1880	53.30	50.64~55.97	1.52	1.44~1.60	53.36	1.53		
	1900	53.30	50.64~55.97	1.52	1.44~1.60	53.37	1.56		
	1910	53.30	50.64~55.97	1.52	1.44~1.60	53.37	1.57		
2450MHz Head	2410	39.30	37.34~41.26	1.76	1.67~1.85	39.22	1.78	21.6°C	2023-11-09
	2435	39.20	37.24~41.16	1.79	1.70~1.88	39.25	1.77		
	2450	39.20	37.24~41.16	1.80	1.71~1.89	39.24	1.76		
	2460	39.20	37.24~41.16	1.81	1.72~1.90	39.20	1.76		
2450MHz Body	2410	52.80	50.16~55.44	1.91	1.81~2.00	52.72	1.92	21.6°C	2023-11-09
	2435	52.70	50.07~55.34	1.94	1.84~2.04	52.75	1.92		
	2450	52.70	50.07~55.34	1.95	1.85~2.05	52.74	1.91		
	2460	52.70	50.07~55.34	1.96	1.86~2.06	52.70	1.91		



2600MHz Head	2510	39.00	37.05~40.95	1.96	1.86~2.06	38.87	1.93	21.6°C	2023-11-10
	2535	39.00	37.05~40.95	1.96	1.86~2.06	38.58	1.93		
	2560	39.00	37.05~40.95	1.96	1.86~2.06	38.98	2.02		
	2600	39.00	37.05~40.95	1.96	1.86~2.06	52.50	2.02		
2600MHz Body	2510	52.50	49.90~55.11	2.16	2.05~2.27	52.21	2.05		
	2535	52.50	49.90~55.11	2.16	2.05~2.27	51.92	2.06		
	2560	52.50	49.90~55.11	2.16	2.05~2.27	52.01	2.09		
	2600	52.50	49.90~55.11	2.16	2.05~2.27	38.87	1.93		
5G Body	5200	49.0	46.55~51.45	5.30	5.03~5.56	49.86	5.19	21.6°C	2023-11-11
	5300	48.9	46.05~51.35	5.42	5.15~5.69	48.32	5.27		
	5800	48.20	45.79~50.61	6.00	5.70~6.30	47.74	6.09		
ε _r = Relative permittivity, σ= Conductivity									




12 System Check

12.1 System check procedure

The System check is performed by using a System check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100 mW. To adjust this power a power meter is used. The power sensor is connected to the cable before the System check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

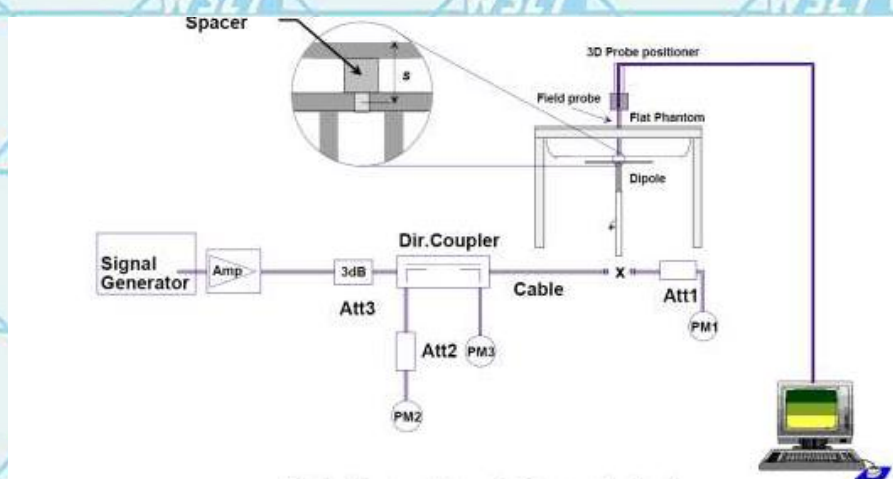



12.2 System check results

The system Check is performed for verifying the accuracy of the complete measurement system and performance of the software. The following table shows System check results for all frequency bands and tissue liquids used during the tests (plot(s) see annex A).

System Check	Target SAR (1W) (+/-10%)				Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/g)	Range of $\pm 10\%$ 1-g (W/g)	10-g (W/g)	Range of $\pm 10\%$ 10-g (W/g)	1-g (W/g)	10-g (W/g)		
D835V2 Head	9.82	8.84~10.80	6.35	5.72~6.99	9.700	6.150	21.6°C	2023/11/06
D1900V2 Head	38.93	35.04~42.82	20.27	18.45~22.55	39.980	21.070	21.6°C	2023/11/07
D2450V2 Head	53.41	48.07~58.75	23.95	21.56~26.35	53.930	24.530	21.6°C	2023/11/09
D2600V2 Head	56.88	51.20~62.56	24.92	22.43~27.41	53.180	23.430	21.6°C	2023/11/10
D835V2 Body	9.41	8.47~10.35	6.22	5.99~6.84	10.150	6.450	21.6°C	2023/11/06
D1900V2 Body	38.73	34.86~42.60	20.48	18.43~22.53	39.330	20.940	21.6°C	2023/11/07
D2450V2 Body	51.39	46.25~56.53	23.63	21.27~25.99	54.330	23.330	21.6°C	2023/11/09
D2600V2 Body	54.54	49.09~59.99	24.37	21.94~26.80	57.860	25.600	21.6°C	2023/11/10
D5200V2 Body	163.36	147.03~179.69	57.09	51.39~62.79	167.180	59.640	21.6°C	2023/11/11
D5300V2 Body	166.22	149.60~182.84	57.22	51.50~62.94	165.370	58.820	21.6°C	2023/11/11
D5800V2 Body	177.10	159.39~194.81	59.95	53.96~65.94	179.660	60.800	21.6°C	2023/11/11

Note: All SAR values are normalized to 1W forward power.

Note: 5G band system check USES standard waveguide, so the test results are standard en62209-2 table B2



13 SAR Test Test Configuration

13.1 GSM Test Configurations

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power lever is set to "5" and "0" in SAR of GSM850 and GSM1900. The tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

13.2 LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames (Maximum TTI)

1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

3) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of "NS_01" on the base station simulator.



4) LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

5) TDD LTE test configuration

According to KDB 941225 D05 SAR for LTE Devices v02r04, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.



13.3 Wi-Fi Test Configuration

For the 802.11b/g SAR tests, a communication link is set up with the test mode software for Wi-Fi mode test. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 1, 6 and 11 respectively in the case of 2450 MHz. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate. 802.11b/g operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g modes are tested on channel 1, 6, 11; however, if output power reduction is necessary for channels 1 and/or 11 to meet restricted band requirements the highest output channel closest to each of these channels must be tested instead.

SAR is not required for 802.11g/n channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels.

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2412	1#	√	△
		2437	6	√	△
		2462	11#	√	△

Notes:

√ = "default test channels"

△ = possible 802.11g channels with maximum average output ¼ dB the "default test channels"

= when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

802.11 Test Channels per FCC Requirements

13.4 WiFi 2.4G SAR Test Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.

A) 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel (section 3.1 of of KDB 248227D01v02) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.



B) 2.4GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3 of of KDB 248227D01v02r01). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

C) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

13.5 WiFi 5G SAR Test Procedures

A) U-NII-1 and U-NII-2A Bands

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U- NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
- 3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50.

Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

**B) U-NII-2C and U-NII-3 Bands**

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

C) OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.
 - 1) The channel closest to mid-band frequency is selected for SAR measurement.
 - 2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

**D) SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.



14 Detailed Test Results

14.1 Conducted Power measurements

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

14.1.1 Conducted Power of GSM850

GSM850(SIM1)		Burst-Averaged output Power (dBm)			Division Factors	Source Based time Average Power(dBm)		
		128CH	190CH	251CH		128CH	190CH	251CH
GSM(CS)		33.13	34.02	32.99	-9.03	24.10	24.99	23.96
GPRS (GMSK)	1 Tx Slot	30.88	30.47	31.34	-9.03	21.85	21.44	22.31
	2 Tx Slots	29.72	31.21	29.97	-6.02	23.70	25.19	23.95
	3 Tx Slots	31.24	30.78	31.21	-4.26	26.98	26.52	26.95
	4 Tx Slots	31.23	30.89	30.57	-3.01	28.22	27.88	27.56
EGPRS (8-PSK)	1 Tx Slot	27.77	27.56	27.27	-9.03	18.74	18.53	18.24
	2 Tx Slots	27.26	26.70	26.92	-6.02	21.24	20.68	20.90
	3 Tx Slots	28.21	26.10	27.38	-4.26	23.95	21.84	23.12
	4 Tx Slots	26.63	27.23	27.82	-3.01	23.62	24.22	24.81

Note: 1) The conducted power of GSM850 is measured with RMS detector.

2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

3) The bolded GPRS 4Tx slots mode was selected for SAR testing according to the highest Source Based time Average Power table.

4) channel /Frequency: 128/824.2; 190/836.6; 251/848.8



14.1.2 Conducted Power of GSM1900

GSM1900(SIM1)		Burst-Averaged output Power (dBm)			Division Factors	Source Based time Average Power(dBm)		
		512CH	661CH	810CH		512CH	661CH	810CH
GSM(CS)		33.77	33.10	33.04	-9.03	24.74	24.07	24.01
GPRS (GMSK)	1 Tx Slot	30.76	30.68	31.03	-9.03	21.73	21.65	22.00
	2 Tx Slots	30.88	29.90	30.32	-6.02	24.86	23.88	24.30
	3 Tx Slots	29.10	29.94	30.16	-4.26	24.84	25.68	25.90
	4 Tx Slots	30.42	30.45	29.62	-3.01	27.41	27.44	26.61
EGPRS (8-PSK)	1 Tx Slot	27.36	27.73	27.29	-9.03	18.33	18.70	18.26
	2 Tx Slots	27.22	27.10	27.31	-6.02	21.20	21.08	21.29
	3 Tx Slots	26.68	28.47	27.10	-4.26	22.42	24.21	22.84
	4 Tx Slots	26.79	27.48	27.27	-3.01	23.78	24.47	24.26

Note: 1) The conducted power of GSM1900 is measured with RMS detector.

2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

3) The bolded GPRS 1Tx slots mode was selected for SAR testing according the highest Source Based time Average Power table.

4) channel /Frequency: 512/1850.2; 661/1880; 810/1909.8



14.1.3 Conducted Power of LTE Band 2

LTE-FDD Band 2				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		18607	18900	19193
					1850.7MHz	1880.0MHz	1909.3MHz
1.4MHz	QPSK	1	0	23.00	22.17	21.75	21.73
			2	23.00	22.37	21.93	21.91
			5	23.00	22.17	21.81	21.78
		3	0	23.00	22.39	21.87	21.89
			2	23.00	22.41	21.87	21.87
			3	23.00	22.34	21.91	21.87
		6	0	23.00	21.16	20.71	20.70
	16QAM	1	0	23.00	21.48	20.71	20.73
			2	23.00	21.58	20.87	20.84
			5	23.00	21.46	20.74	20.70
		3	0	23.00	21.65	21.09	21.07
			2	23.00	21.70	21.10	21.10
			3	23.00	21.70	21.12	21.12
		6	0	23.00	20.46	20.02	20.00
		6	0	23.00	20.46	20.02	20.00
			0	23.00	20.46	20.02	20.00
		6	0	23.00	20.46	20.02	20.00
0	23.00		20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6	0	23.00	20.46	20.02	20.00		
	0	23.00	20.46	20.02	20.00		
6							



LTE-FDD Band 2				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		18650	18900	19150
					1855.0MHz	1880.0MHz	1905.0MHz
10MHz	QPSK	1	0	23.00	22.22	21.67	21.80
			25	23.00	22.33	21.94	0.00
			49	23.00	22.10	21.90	21.73
		25	0	23.00	21.28	20.89	20.99
			13	23.00	21.28	20.89	20.90
			25	23.00	21.27	20.94	20.81
	16QAM	1	0	23.00	21.31	20.94	20.96
			25	23.00	21.19	20.67	21.36
			49	23.00	21.30	20.95	21.50
		25	0	23.00	21.06	20.82	21.30
			13	23.00	20.40	19.99	20.12
			25	23.00	20.36	20.02	19.94
15MHz	QPSK	1	0	23.00	20.42	20.08	20.05
			38	23.00	22.04	21.49	21.66
			74	23.00	22.51	22.16	22.12
		36	0	23.00	21.76	21.66	21.62
			18	23.00	21.18	20.74	20.91
			39	23.00	21.18	20.77	20.88
	16QAM	1	0	23.00	21.12	20.84	20.69
			38	23.00	21.12	20.73	20.82
			74	23.00	21.34	20.69	21.20
		36	0	23.00	21.74	21.37	21.74
			18	23.00	21.02	20.85	21.16
			39	23.00	20.31	19.82	20.00
20MHz	QPSK	1	0	23.00	20.29	19.84	19.93
			50	23.00	20.24	19.86	19.83
			99	23.00	20.22	19.87	19.91
		50	0	23.00	20.22	19.87	19.91
			25	23.00	20.22	19.87	19.91
			50	23.00	20.22	19.87	19.91
	16QAM	1	0	23.00	20.22	19.87	19.91
			50	23.00	20.22	19.87	19.91
			99	23.00	20.22	19.87	19.91
		50	0	23.00	20.22	19.87	19.91
			25	23.00	20.22	19.87	19.91
			50	23.00	20.22	19.87	19.91



14.1.4 Conducted Power of LTE Band 4

LTE-FDD Band 4				Maximum Tune-up(dBm)	Conducted Power(dBm)				
Bandwidth	Modulation	RB allocation	RB offset		19957	20175	20393		
					1710.7MHz	1732.5MHz	1754.3MHz		
1.4MHz	QPSK	1	0	23.50	22.67	22.42	22.61		
			2	23.50	22.80	22.54	22.81		
		3	5	23.50	22.54	22.36	22.62		
			0	23.50	22.67	22.49	22.66		
			2	23.50	22.66	22.49	22.69		
			3	23.50	22.69	22.48	22.70		
			6	23.50	21.49	21.32	21.52		
	16QAM	1	0	23.50	21.79	21.36	21.83		
			2	23.50	21.99	21.46	21.99		
			5	23.50	21.80	21.33	21.81		
		3	0	23.50	21.96	21.77	21.97		
			2	23.50	21.94	21.79	21.97		
			3	23.50	21.94	21.81	21.92		
		6	0	23.50	20.84	20.65	20.84		
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	19965	20175	20385
							1711.5MHz	1732.5MHz	1753.5MHz
		3MHz	QPSK	1	0	23.50	22.62	22.54	22.61
7	23.50				23.03	22.89	23.07		
14	23.50				22.58	22.52	22.62		
8	0			23.50	21.62	21.45	21.62		
	4			23.50	21.69	21.44	21.67		
	7			23.50	21.69	21.45	21.69		
15	0		23.50	21.69	21.53	21.70			
16QAM	1		0	23.50	22.25	21.53	22.21		
			7	23.50	22.54	21.87	22.48		
			14	23.50	22.14	21.41	22.22		
	8		0	23.50	20.82	20.58	20.80		
			4	23.50	20.85	20.61	20.87		
			7	23.50	20.83	20.55	20.83		
	15		0	23.50	20.85	20.71	20.86		
	Bandwidth		Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	19976	20175	20375
1712.5MHz							1732.5MHz	1752.5MHz	
5MHz	QPSK		1	0	23.50	22.47	22.33	22.41	
		13		23.50	22.90	22.70	22.93		
		24		23.50	22.47	22.15	22.46		
		12	0	23.50	21.57	21.45	21.55		
			6	23.50	21.67	21.48	21.67		
			13	23.50	21.60	21.35	21.63		
		25	0	23.50	21.63	21.42	21.63		
	16QAM	1	0	23.50	22.21	21.80	22.10		
			13	23.50	22.60	22.24	22.43		
			24	23.50	22.19	21.67	21.99		
		12	0	23.50	20.70	20.49	20.73		
			6	23.50	20.78	20.60	20.84		
			13	23.50	20.75	20.39	20.78		
		25	0	23.50	20.72	20.62	20.72		



LTE-FDD Band 4				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		20000	20175	20350	
					1715.0MHz	1732.5MHz	1750.0MHz	
10MHz	QPSK	1	0	23.50	22.63	22.53	22.37	
			25	23.50	22.71	22.60	22.63	
			49	23.50	22.66	0.00	22.53	
		25	0	23.50	21.65	21.53	21.57	
			13	23.50	21.71	21.55	21.66	
			25	23.50	21.74	22.20	21.70	
	16QAM	50	0	23.50	21.74	21.54	21.68	
			0	23.50	21.82	21.50	22.00	
			25	23.50	21.98	21.87	22.22	
		1	49	23.50	21.86	21.20	22.10	
			25	0	23.50	20.78	20.72	20.71
				13	23.50	20.83	20.67	21.58
25	23.50	20.88		20.56	20.85			
50	0	23.50	22.12	20.63	20.82			
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20025	20175	20325	
					1717.5MHz	1732.5MHz	1747.5MHz	
15MHz	QPSK	1	0	23.50	22.36	22.46	21.87	
			38	23.50	22.88	22.87	22.88	
			74	23.50	22.41	21.95	22.49	
		36	0	23.50	21.46	21.45	21.16	
			18	23.50	21.64	21.44	21.47	
			39	23.50	21.57	21.25	21.57	
	16QAM	75	0	23.50	21.56	21.35	21.37	
			0	23.50	21.96	21.75	21.05	
			38	23.50	22.49	22.15	22.14	
		1	74	23.50	21.99	21.21	21.58	
			36	0	23.50	20.62	20.62	20.23
				18	23.50	20.76	20.59	20.53
39	23.50	20.72		20.42	20.62			
75	0	23.50	20.66	20.46	20.52			
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20050	20175	20300	
					1720.0MHz	1732.5MHz	1745.0MHz	
20MHz	QPSK	1	0	23.50	22.22	22.43	22.03	
			50	23.50	22.70	22.56	22.38	
			99	23.50	22.16	21.66	22.29	
		50	0	23.50	21.61	21.62	21.19	
			25	23.50	21.74	21.46	21.36	
			50	23.50	21.60	21.25	21.63	
	16QAM	100	0	23.50	21.63	21.43	21.44	
			0	23.50	21.72	21.76	21.43	
			50	23.50	22.20	21.93	21.82	
		1	99	23.50	21.62	21.05	21.64	
			50	0	23.50	20.85	20.72	20.38
				25	23.50	20.94	20.62	20.54
50	23.50	20.82		20.38	20.80			
100	0	23.50	20.77	20.57	20.60			



14.1.5 Conducted Power of LTE Band 5

LTE-FDD Band 5				Maximum Tune-up(dBm)	Conducted Power(dBm)				
Bandwidth	Modulation	RB allocation	RB offset		20407	20525	20643		
					824.7MHz	836.5MHz	848.3MHz		
1.4MHz	QPSK	1	0	26.00	25.11	25.27	25.25		
			2	26.00	25.32	25.41	25.41		
			5	26.00	25.07	25.34	25.23		
		3	0	26.00	25.25	25.16	25.00		
			2	26.00	25.28	25.18	25.00		
			3	26.00	25.23	25.17	25.01		
		6	0	26.00	24.25	24.31	24.23		
		16QAM	1	0	26.00	24.27	23.86	23.93	
				2	26.00	24.43	23.99	24.05	
	5			26.00	24.23	23.89	23.94		
	3		0	26.00	24.35	24.18	24.06		
			2	26.00	24.38	24.17	24.10		
			3	26.00	24.36	24.20	24.05		
	6		0	26.00	23.30	23.33	23.12		
	Bandwidth		Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20415	20525	20635
							825.5MHz	836.5MHz	847.5MHz
	3MHz	QPSK	1	0	26.00	25.37	25.16	25.21	
				7	26.00	25.57	25.52	25.45	
14				26.00	25.43	25.41	25.15		
8			0	26.00	24.31	24.27	24.26		
			4	26.00	24.37	24.38	24.26		
			7	26.00	24.28	24.35	24.21		
15			0	26.00	24.21	24.17	24.12		
16QAM			1	0	26.00	24.03	24.44	24.20	
				7	26.00	24.25	24.73	24.31	
		14		26.00	23.97	24.54	24.12		
		8	0	26.00	23.21	23.20	23.13		
			4	26.00	23.22	23.25	23.14		
			7	26.00	23.19	23.26	23.08		
		15	0	26.00	23.25	23.14	22.99		



LTE-FDD Band 5				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		20425	20525	20625	
					826.5MHz	836.5MHz	846.5MHz	
5MHz	QPSK	1	0	26.00	25.16	24.92	25.13	
			13	26.00	25.57	25.52	25.51	
			24	26.00	25.14	25.23	25.09	
		12	0	26.00	24.10	24.12	24.13	
			6	26.00	24.15	24.16	24.14	
			13	26.00	24.03	24.18	24.00	
			25	0	26.00	24.05	24.09	24.00
	16QAM	1	0	26.00	24.31	24.16	24.35	
			13	26.00	24.61	24.54	24.68	
			24	26.00	24.24	24.33	24.24	
		12	0	26.00	23.06	23.07	23.02	
			6	26.00	23.08	23.15	23.05	
			13	26.00	22.98	23.08	22.92	
			25	0	26.00	23.06	23.07	22.98
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20450	20525	20600	
					829.0MHz	836.5MHz	844.0MHz	
10MHz	QPSK	1	0	26.00	25.12	25.17	25.41	
			25	26.00	25.29	25.49	25.38	
			49	26.00	25.13	25.67	25.14	
		25	0	26.00	24.19	24.16	24.45	
			13	26.00	24.12	24.19	24.28	
			25	26.00	24.20	24.25	24.07	
			50	0	26.00	24.17	24.20	24.21
	16QAM	1	0	26.00	24.22	23.81	24.47	
			25	26.00	24.32	24.04	24.50	
			49	26.00	24.21	24.14	24.25	
		25	0	26.00	23.16	23.14	23.37	
			13	26.00	23.17	23.12	23.19	
			25	26.00	23.16	23.19	23.04	
			50	0	26.00	23.21	23.14	23.18



14.1.6 Conducted Power of LTE Band 12

LTE-FDD Band 12				Maximum Tune-up(dBm)	Conducted Power(dBm)				
Bandwidth	Modulation	RB allocation	RB offset		23017	23095	23173		
					699.7MHz	707.5MHz	715.3MHz		
1.4MHz	QPSK	1	0	27.50	27.13	26.65	26.28		
			2	27.50	27.31	26.95	26.43		
		3	5	27.50	27.02	26.63	25.92		
			0	27.50	27.10	26.97	26.26		
			2	27.50	27.14	27.05	26.27		
			3	27.50	27.07	26.94	26.03		
			6	0	27.50	27.07	26.81	26.10	
			16QAM	1	0	27.50	26.72	26.52	25.66
		2			27.50	26.85	26.74	25.86	
	5	27.50			26.66	26.55	25.41		
	3	0		27.50	26.89	26.67	26.10		
		2		27.50	26.83	26.65	25.93		
		3		27.50	26.74	26.63	25.90		
	6	0		27.50	26.00	25.88	25.20		
	Bandwidth	Modulation		RB allocation	RB offset	Maximum Tune-up(dBm)	23025	23095	23173
							700.5MHz	707.5MHz	714.5MHz
	3MHz	QPSK	1	0	27.50	26.83	26.64	26.28	
				7	27.50	26.97	26.86	26.70	
				14	27.50	26.61	26.50	25.88	
			8	0	27.50	26.94	26.49	26.45	
				4	27.50	27.00	26.53	26.25	
7				27.50	26.87	26.58	26.17		
15			0	27.50	26.90	26.48	26.28		
16QAM			1	0	27.50	26.84	26.44	25.77	
				7	27.50	26.95	26.65	26.16	
		14		27.50	26.66	26.42	25.38		
		8	0	27.50	25.84	25.35	25.09		
			4	27.50	25.84	25.31	25.11		
			7	27.50	25.81	25.36	25.03		
		15	0	27.50	25.64	25.21	25.08		



LTE-FDD Band 12				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		23035	23095	23155	
					701.5MHz	707.5MHz	713.5MHz	
5MHz	QPSK	1	0	27.50	26.73	26.81	26.09	
			13	27.50	26.65	26.69	26.05	
			24	27.50	26.54	26.30	25.49	
		12	0	27.50	26.36	26.20	26.22	
			6	27.50	26.42	26.34	26.13	
			13	27.50	26.34	26.33	25.98	
			25	0	27.50	26.31	26.22	26.00
	16QAM	1	0	27.50	26.62	26.35	26.06	
			13	27.50	26.72	26.56	26.08	
			24	27.50	26.62	26.25	25.59	
		12	0	27.50	25.20	25.13	25.04	
			6	27.50	25.27	25.12	25.03	
			13	27.50	25.18	25.13	24.91	
			25	0	27.50	25.17	25.15	24.91
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23060	23095	23130
						704.0MHz	707.5MHz	711.0MHz
	10MHz	QPSK	1	0	27.50	26.76	26.60	26.77
25				27.50	26.71	26.58	26.34	
49				27.50	26.46	26.04	25.95	
25			0	27.50	26.41	26.43	26.51	
			13	27.50	26.34	26.34	26.41	
			25	27.50	26.29	26.34	26.23	
			50	0	27.50	26.30	26.22	26.24
16QAM		1	0	27.50	26.52	26.28	25.96	
			25	27.50	26.60	26.36	25.79	
			49	27.50	26.44	25.96	25.48	
		25	0	27.50	25.29	25.21	25.29	
			13	27.50	25.24	25.20	25.23	
			25	27.50	25.20	25.15	25.07	
		50	0	27.50	25.24	25.19	25.15	



14.1.7 Conducted Power of LTE Band 17

LTE-FDD Band 17				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		23755 706.5MHz	23790 710.0MHz	23825 713.5MHz
5MHz	QPSK	1	0	25.00	23.53	23.46	23.08
			13	25.00	23.53	23.35	23.06
			24	25.00	23.25	22.82	22.61
		12	0	25.00	23.61	23.46	23.03
			6	25.00	23.57	23.35	23.01
			13	25.00	23.40	23.08	22.87
	16QAM	25	0	25.00	23.49	23.28	22.96
			0	25.00	23.79	23.95	23.37
			13	25.00	23.79	23.82	23.37
		12	24	25.00	23.52	23.33	22.91
			0	25.00	23.58	23.40	22.95
			6	25.00	23.53	23.30	22.93
10MHz	QPSK	25	13	25.00	23.36	23.03	22.79
			25	25.00	23.43	23.22	22.96
			0	25.00	23.780	23790	23800
	16QAM	50	0	25.00	709.0MHz	710.0MHz	711.0MHz
			0	25.00	22.36	23.97	23.82
			25	25.00	22.15	23.47	23.30
	QPSK	1	49	25.00	22.54	22.95	23.04
			0	25.00	22.31	23.72	23.59
			25	25.00	24.43	23.45	23.31
	16QAM	25	25	25.00	24.59	23.15	23.07
			0	25.00	23.49	23.43	23.34
			0	25.00	23.25	24.01	23.56
	QPSK	1	25	25.00	23.12	23.54	23.07
			49	25.00	23.56	23.03	22.81
			0	25.00	23.53	23.63	23.55
	16QAM	25	13	25.00	23.54	23.38	23.28
			25	25.00	23.70	23.10	23.05
			0	25.00	23.62	23.41	23.30



14.1.8 Conducted Power of LTE Band 41

LTE-FDD Band 41				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		40265	40740	41215
					2557.5MHz	2605.0MHz	2652.5MHz
5MHz	QPSK	1	0	23.00	21.92	21.61	22.07
			13	23.00	21.63	22.11	22.29
			24	23.00	21.53	22.37	22.06
		12	0	23.00	22.50	22.11	22.02
			6	23.00	21.84	21.53	21.84
			13	23.00	22.43	22.41	21.59
			25	0	23.00	22.30	21.84
	16QAM	1	0	23.00	21.77	22.02	21.50
			13	23.00	22.24	21.98	21.83
			24	23.00	21.78	21.88	21.76
		12	0	23.00	21.98	22.22	22.15
			6	23.00	22.09	22.36	22.21
			13	23.00	21.68	22.04	21.93
		25	0	23.00	22.23	21.66	21.93
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	40290	40740	41190
					2560.0MHz	2605.0MHz	2650.0MHz
10MHz	QPSK	1	0	23.00	22.25	22.26	22.45
			25	23.00	22.22	22.27	22.34
			49	23.00	22.23	21.50	21.72
		25	0	23.00	21.82	21.77	22.43
			13	23.00	21.77	22.35	21.84
			25	23.00	22.19	21.86	21.94
			50	0	23.00	21.93	22.20
	16QAM	1	0	23.00	22.04	21.82	21.68
			25	23.00	21.85	22.09	22.10
			49	23.00	21.57	21.57	22.44
		25	0	23.00	22.27	21.99	21.89
			13	23.00	22.15	21.64	22.06
			25	23.00	22.03	22.34	21.88
		50	0	23.00	22.39	21.92	22.32



LTE-FDD Band 41				Maximum Tune-up(dBm)	Conducted Power(dBm)				
Bandwidth	Modulation	RB allocation	RB offset		40315	40740	41165		
					2562.5MHz	2605.0MHz	2647.5MHz		
15MHz	QPSK	1	0	23.00	21.72	22.27	22.38		
			38	23.00	21.53	21.76	22.19		
			74	23.00	22.44	22.02	21.90		
		36	0	23.00	22.46	21.52	21.89		
			18	23.00	21.56	21.85	22.41		
			39	23.00	21.89	22.22	21.63		
		75	0	23.00	21.99	22.33	21.63		
			0	23.00	21.59	22.23	21.63		
	16QAM	1	38	23.00	21.53	21.66	22.22		
			74	23.00	22.31	21.93	21.83		
			0	23.00	21.76	21.53	22.27		
		36	18	23.00	22.06	22.21	21.70		
			39	23.00	22.29	21.74	22.32		
			75	0	23.00	21.73	21.80	21.75	
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	40340	40740	41140
							2565.0MHz	2605.0MHz	2645.0MHz
20MHz	QPSK	1	0	23.00	21.58	22.48	22.20		
			50	23.00	21.61	22.16	21.89		
			99	23.00	21.87	22.29	22.11		
		50	0	23.00	21.83	21.84	21.99		
			25	23.00	22.24	21.90	22.08		
			50	23.00	21.95	22.25	22.02		
		100	0	23.00	21.68	22.31	21.92		
			0	23.00	21.52	22.31	21.56		
	16QAM	1	50	23.00	22.18	22.15	22.50		
			99	23.00	22.43	22.30	22.43		
			0	23.00	21.59	22.34	21.98		
		50	25	23.00	22.25	21.79	22.32		
			50	23.00	22.30	21.63	21.69		
			100	0	23.00	22.16	22.21	21.82	



14.1.9 Conducted Power of LTE Band 66

LTE-FDD Band 66				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		131979	132322	132665
					1710.7MHz	1745.0MHz	1779.3MHz
1.4MHz	QPSK	1	0	22.00	21.19	20.46	20.55
			2	22.00	21.24	20.62	20.70
			5	22.00	21.09	20.41	20.55
		3	0	22.00	21.16	20.60	20.71
			2	22.00	21.17	20.61	20.66
			3	22.00	21.15	20.58	20.71
		6	0	22.00	19.99	19.43	19.59
	16QAM	1	0	22.00	20.46	19.77	19.61
			2	22.00	20.46	19.88	19.77
			5	22.00	20.38	19.77	19.61
		3	0	22.00	20.58	19.96	20.01
			2	22.00	20.62	20.00	20.01
			3	22.00	20.46	19.97	20.04
		6	0	22.00	19.39	18.67	18.85
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	131987
1711.5MHz	1745.0MHz						1778.5MHz
3MHz	QPSK	1	0	22.00	21.22	20.64	20.75
			7	22.00	21.50	20.99	21.16
			14	22.00	21.00	20.58	20.74
		8	0	22.00	20.20	19.59	19.71
			4	22.00	20.20	19.63	19.75
			7	22.00	20.14	19.60	19.74
		15	0	22.00	20.23	19.62	19.76
	16QAM	1	0	22.00	20.92	19.91	19.77
			7	22.00	21.16	20.32	20.03
			14	22.00	20.72	19.93	19.72
		8	0	22.00	19.31	18.68	18.82
			4	22.00	19.37	18.73	18.81
			7	22.00	19.28	18.71	18.80
		15	0	22.00	19.41	18.67	18.93
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	131997
1712.5MHz	1745.0MHz						1777.5MHz
5MHz	QPSK	1	0	22.00	21.04	20.50	20.55
			13	22.00	21.40	20.82	21.06
			24	22.00	20.67	20.44	20.52
		12	0	22.00	20.07	19.53	19.72
			6	22.00	20.07	19.61	19.76
			13	22.00	19.94	19.57	19.66
		25	0	22.00	20.06	19.57	19.69
	16QAM	1	0	22.00	20.60	20.25	20.06
			13	22.00	20.97	20.64	20.42
			24	22.00	20.24	20.21	20.05
		12	0	22.00	19.23	18.61	18.75
			6	22.00	19.18	18.71	18.76
			13	22.00	19.08	18.64	18.70
		25	0	22.00	19.11	18.56	18.84



LTE-FDD Band 66				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		132022	132322	132622	
					1715.0MHz	1745.0MHz	1775.0MHz	
10MHz	QPSK	1	0	22.00	21.11	20.58	20.69	
			25	22.00	20.96	20.69	20.81	
			49	22.00	20.68	20.54	20.61	
		25	0	22.00	19.99	19.65	19.84	
			13	22.00	20.00	19.65	19.83	
			25	22.00	19.88	19.64	19.74	
	16QAM	50	0	22.00	20.04	19.71	19.85	
			0	22.00	20.17	20.21	20.01	
			25	22.00	19.95	20.25	20.11	
		1	49	22.00	19.81	20.16	19.96	
			25	0	22.00	19.18	18.77	18.97
				13	22.00	19.13	18.78	18.93
15MHz	QPSK	1		25	22.00	19.02	18.79	18.85
			0	22.00	19.13	18.81	18.95	
			36	0	22.00	21.01	20.50	20.62
		38		22.00	21.04	20.71	20.96	
		74		22.00	20.65	20.44	20.48	
		16QAM	75	0	22.00	19.87	19.55	19.76
	18			22.00	19.75	19.53	19.73	
	39			22.00	19.77	19.53	19.64	
	1		0	22.00	19.76	19.52	19.71	
			0	22.00	20.33	19.74	20.27	
			38	22.00	20.47	20.06	20.57	
	20MHz	QPSK	1	74	22.00	19.98	19.62	20.11
36				0	22.00	19.00	18.57	18.87
				18	22.00	18.93	18.55	18.85
		100	39	22.00	18.91	18.53	18.73	
0			22.00	18.83	18.65	18.77		
16QAM			50	0	22.00	18.83	18.65	18.77
	25	22.00		18.99	18.76	18.98		
	50	22.00		18.95	18.79	18.86		
20MHz	QPSK	1	0	22.00	19.01	18.85	18.93	
			50	22.00	19.04	18.79	18.92	
			50	0	22.00	20.92	20.49	20.17
		50		22.00	20.86	20.66	20.74	
		99		22.00	20.61	20.35	20.29	
		16QAM	50	0	22.00	20.61	20.35	20.29
	25			22.00	19.87	19.70	19.82	
	50			22.00	19.92	19.64	19.84	
	100		50	22.00	19.85	19.67	19.69	
			0	22.00	19.88	19.69	19.81	
			0	22.00	20.29	19.94	19.70	
	16QAM	1	50	22.00	20.27	20.04	20.30	
99			22.00	20.08	19.77	19.83		
0			22.00	19.01	18.85	18.93		
50		25	22.00	18.99	18.76	18.98		
		50	22.00	18.95	18.79	18.86		
		100	0	22.00	19.04	18.79	18.92	

**14.1.10 Conducted Power of Wi-Fi 2.4G**

Mode	802.11b		
Channel / Frequency (MHz)	1(2412)	6(2437)	11(2462)
Average Power(dBm)	16.91	16.68	16.51
Mode	802.11g		
Channel / Frequency (MHz)	1(2412)	6(2437)	11(2462)
Average Power(dBm)	18.69	18.66	18.22
Mode	802.11n(HT20)		
Channel / Frequency (MHz)	1(2412)	6(2437)	11(2462)
Average Power(dBm)	18.53	18.60	18.12
Mode	802.11n(HT40)		
Channel / Frequency (MHz)	1(2412)	6(2437)	11(2462)
Average Power(dBm)	17.92	17.65	17.88



14.1.11 Conducted Power of Wi-Fi 5G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Power Setting	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
5.2G (IEEE 802.11a/n/ac/ax) 20MHz	Band1	36	5180	6	11.00	10.00±0.5	10.96	No
		48	5240		11.00	10.00±0.5	10.51	No
	Band2	52	5260	6.5M	10.00	9.50±0.5	9.61	No
		64	5320		10.50	10.0±0.5	10.09	No
	Band3	112	5550	13.5M	10.00	9.50±0.5	9.74	No
		140	5700		11.50	11.00±0.5	11.23	Yes
	Band4	149	5745	29.3M	11.50	11.00±0.5	11.11	No
		165	5825		11.50	11.00±0.5	11.22	No
5.3G (IEEE 802.11n/ac/ax) 40MHz	Band1	36	5190	6	11.00	10.50±0.5	10.52	No
		44	5230		10.50	10.00±0.5	10.28	No
	Band2	56	5270	6.5M	9.50	9.00±0.5	9.13	No
		60	5310		10.00	9.50±0.5	9.62	No
	Band3	100	5510	13.5M	9.50	9.00±0.5	9.34	No
		132	5670		11.50	11.00±0.5	11.19	No
	Band4	149	5755	29.3M	11.00	10.50±0.5	10.95	No
		165	5595		11.00	10.50±0.5	10.85	No
5.8G (IEEE 802.11ac/ax) 80MHz	Band1	44	5210	6	10.50	10.00±0.5	10.13	No
	Band2	56	5290	6.5M	9.50	9.00±0.5	9.24	No
	Band3	108	5530	13.5M	9.50	9.00±0.5	9.31	No
		124	5610		10.00	9.50±0.5	9.8	No
	Band4	149	5755	29.3M	11.00	10.50±0.5	10.64	No

<KDB 248227 D01, SAR Guidance for Wi-Fi Transmitters>

For WLAN 5 GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is > 0.8 W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is ≤ 1.2 W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is ≤ 1.2 W/kg.

**14.1.12 Conducted Power of BT**

The maximum output power of BT is:

Mode	GFSK mode		
Channel / Frequency (MHz)	0(2402)	39(2441)	78(2480)
Average Power(dBm)	7.09	3.44	5.49
Mode	Pi/4DQPSK mode		
Channel / Frequency (MHz)	0(2402)	39(2441)	78(2480)
Average Power(dBm)	6.63	2.49	4.63
Mode	8DPSK mode		
Channel / Frequency (MHz)	0(2402)	39(2441)	78(2480)
Average Power(dBm)	6.39	2.51	4.58

14.1.13 Conducted Power of BLE

The maximum output power of BLE is:

Mode	BLE 1M		
Channel / Frequency (MHz)	0(2402)	19(2440)	39(2480)
Average Power(dB)	-4.32	-4.13	-4.26
Mode	BLE 2M		
Channel / Frequency (MHz)	0(2402)	19(2440)	39(2480)
Average Power(dB)	-4.39	-4.69	-4.76



14.1.14 Tune-up power tolerance

Band	Tune-up power tolerance(dBm)		
GSM850	GSM/GPRS (GMSK)	GSM	Max output power =34.0dBm±0.5dBm
		1TXslots	Max output power =31.0dBm±0.5dBm
		2TXslots	Max output power =31.0dBm±0.5dBm
		3TXslots	Max output power =31.0dBm±0.5dBm
GSM850	EGPRS (8-PSK)	4TXslots	Max output power =31.0dBm±0.5dBm
		1TXslots	Max output power =27.5dBm±0.5dBm
		2TXslots	Max output power =27.0dBm±0.5dBm
		3TXslots	Max output power =28.0dBm±0.5dBm
GSM1900	GSM/GPRS (GMSK)	4TXslots	Max output power =27.5dBm±0.5dBm
		GSM	Max output power =33.5dBm±0.5dBm
		1TXslots	Max output power =31.0dBm±0.5dBm
		2TXslots	Max output power =30.5dBm±0.5dBm
GSM1900	EGPRS (8-PSK)	3TXslots	Max output power =30.0dBm±0.5dBm
		4TXslots	Max output power =30.0dBm±0.5dBm
		1TXslots	Max output power =27.5dBm±0.5dBm
		2TXslots	Max output power =27.0dBm±0.5dBm
LTE B2		3TXslots	Max output power =28.0dBm±0.5dBm
		4TXslots	Max output power =27.0dBm±0.5dBm
LTE B4			Max output power =22.5dbm±0.5dbm
LTE B5			Max output power =23.0dbm±0.5dbm
LTE B12			Max output power =25.5dbm±0.5dbm
LTE B17			Max output power =27.0dbm±0.5dbm
LTE B41			Max output power =24.5dbm±0.5dbm
LTE B66			Max output power =22.5dbm±0.5dbm
2.4G Wi-Fi		802.11b	Max output power =21.5dbm±0.5dbm
		802.11g	Max output power =16.5±0.5dbm
		802.11n (HT20)	Max output power =18.5±0.5dbm
		802.11n (HT40)	Max output power =17.5±0.5dbm
5G Wi-Fi	5.2G	802.11n(HT20)	Max output power =11.0dbm±1.0dBm
		802.11n(HT40)	Max output power =10.5dbm±1.0dBm
		802.11ac20M	Max output power =11.5dbm±1.0dBm
		802.11ac40M	Max output power =11.5dbm±1.0dBm
	5.3G	802.11n(HT20)	Max output power =11.0dbm±1.0dBm
		802.11n(HT40)	Max output power =10.0dbm±1.0dBm
		802.11ac20M	Max output power =11.5dbm±1.0dBm
		802.11ac40M	Max output power =11.0dbm±1.0dBm
	5.8G	802.11n(HT20)	Max output power =10.5dbm±1.0dBm
		802.11n(HT40)	Max output power =9.5dbm±1.0dBm
		802.11ac20M	Max output power =10.0dbm±1.0dBm
		802.11ac40M	Max output power =11.0dbm±1.0dBm
BT		1Mbps Power	Max output power =7.0dBm±0.5dbm
		2Mbps Power	Max output power =6.5dBm±0.5dbm
		3Mbps Power	Max output power =6.0dBm±0.5dbm
BLE		1Mbps Power	Max output power =-4.0dBm±0.5dbm
		2Mbps Power	Max output power =-4.5dBm±0.5dbm



14.2 SAR test results

Notes:

1) Per KDB447498 D01v05 r02, the SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the scaled SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit ($< 0.8 \text{ W/kg}$), testing at the high and low channels is optional.

2) Per KDB447498 D01v05r02, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: $\leq 0.8 \text{ W/kg}$ or 2.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\leq 100 \text{ MHz}$. When the maximum output power variation across the required test channels is $> \frac{1}{2} \text{ dB}$, instead of the middle channel, the highest output power channel must be used.

3) Per KDB447498 D01v05r02, All measurement SAR result is scaled-up to account for tune-up tolerance is compliant.

4) Per KDB648474 D04v01r02, body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn with headset SAR.

5) Per KDB248227 D01v01r02, the procedures required to establish specific device operating configurations for testing the SAR of 802.11 a/b/g transmitters.

(1) For Headsets operating next to ear, hotspot mode or mini-tablet configurations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When the reported SAR of initial test position is $\leq 0.4 \text{ W/kg}$, SAR testing for remaining test positions is not required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is $\leq 0.8 \text{ W/kg}$ or all test positions are measured.

(2) For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is $\leq 0.8 \text{ W/kg}$, no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is $> 1.2 \text{ W/kg}$, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is $\leq 1.2 \text{ W/kg}$.



(3) For WLAN 5 GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is > 0.8 W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is ≤ 1.2 W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is ≤ 1.2 W/kg.

6) Per KDB865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/kg, only one repeated measurement is required.

7) Per KDB865664 D02v01r01, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing (Refer to appendix B for details).

8) Per KDB941225 D06v01r01, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.

9) Per KDB 941225 D01, 3G SAR Measurement Procedures, The mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

10) Per KDB 941225 D05, SAR Evaluation Considerations for LTE Devices

(1) QPSK with 1 RB and 50% RB allocation

Start with the largest channel bandwidth and measure SAR, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.



(2) QPSK with 100% RB allocation

SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be

tested.

(3) Higher order modulations

SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> 1/2$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

(4) Other channel bandwidth

SAR is required when the highest maximum output power of the smaller channel bandwidth is $> 1/2$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.



14.2.1 Results overview of GSM850

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conduct ed Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Scaling Factor
			1-g	10-g					
Left Head Touched	128/824.2	GPRS 4TS	0.575	0.276	1.300	34.02	34.50	0.642	1.117
Left Head Tilted 15°	128/824.2	GPRS 4TS	0.497	0.212	-2.730	34.02	34.50	0.555	1.117
Right Head Touched	128/824.2	GPRS 4TS	0.484	0.181	2.230	34.02	34.50	0.541	1.117
Right Head Tilted 15°	128/824.2	GPRS 4TS	0.527	0.221	4.320	34.02	34.50	0.589	1.117
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conduct ed Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Scaling Factor
			1-g	10-g					
SAR Results for Hotspot Exposure Condition									
Front side	128/824.2	GPRS 4TS	0.612	0.318	0.720	34.02	34.50	0.684	1.117
Rear side	128/824.2	GPRS 4TS	0.667	0.369	1.300	34.02	34.50	0.745	1.117
Bottom side	128/824.2	GPRS 4TS	0.595	0.304	2.030	34.02	34.50	0.665	1.117
Left side	128/824.2	GPRS 4TS	0.573	0.284	-4.540	34.02	34.50	0.640	1.117
Right side	128/824.2	GPRS 4TS	0.640	0.344	-4.560	34.02	34.50	0.715	1.117



14.2.2 Results overview of GSM1900

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	661/1880	GPRS 4TS	0.722	0.331	2.730	33.77	34.00	0.761	1.054
Left Head Tilted 15°	661/1880	GPRS 4TS	0.652	0.253	3.700	33.77	34.00	0.687	1.054
Right Head Touched	661/1880	GPRS 4TS	0.624	0.243	4.610	33.77	34.00	0.658	1.054
Right Head Tilted 15°	661/1880	GPRS 4TS	0.668	0.273	1.720	33.77	34.00	0.704	1.054
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Scalig Factor
			1-g	10-g					
SAR Results for Hotspot Exposure Condition									
Front side	661/1880	GPRS 4TS	0.430	0.117	-3.180	33.77	34.00	0.453	1.054
Rear side	661/1880	GPRS 4TS	0.480	0.184	-0.590	33.77	34.00	0.506	1.054
Bottom side	661/1880	GPRS 4TS	0.404	0.113	3.430	33.77	34.00	0.426	1.054
Left side	661/1880	GPRS 4TS	0.384	0.096	1.330	33.77	34.00	0.405	1.054
Right side	661/1880	GPRS 4TS	0.454	0.147	-2.570	33.77	34.00	0.479	1.054



14.2.3 Results overview of LTE Band 2

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	19100/1900	20M QPSK 1RB#99	0.421	0.266	-0.500	22.51	23.00	0.471	1.119
Left Head Tilted 15°	19100/1900	20M QPSK 1RB#99	0.360	0.203	1.750	22.51	23.00	0.403	1.119
Right Head Touched	19100/1900	20M QPSK 1RB#99	0.366	0.220	-2.960	22.51	23.00	0.410	1.119
Right Head Tilted 15°	19100/1900	20M QPSK 1RB#99	0.397	0.241	-1.740	22.51	23.00	0.444	1.119
Left Head Touched	19100/1900	20M QPSK 50%RB#25	0.333	0.175	4.070	22.51	23.00	0.373	1.119
Left Head Tilted 15°	19100/1900	20M QPSK 50%RB#25	0.288	0.139	3.030	22.51	23.00	0.322	1.119
Right Head Touched	19100/1900	20M QPSK 50%RB#25	0.357	0.198	-2.770	22.51	23.00	0.400	1.119
Right Head Tilted 15°	19100/1900	20M QPSK 50%RB#25	0.354	0.212	-1.690	22.51	23.00	0.396	1.119

SAR Results for Hotspot Exposure Condition

Front side	19100/1900	20M QPSK 1RB#99	0.231	0.147	4.100	22.51	23.00	0.259	1.119
Rear side	19100/1900	20M QPSK 1RB#99	0.264	0.184	-0.020	22.51	23.00	0.296	1.119
Bottom side	19100/1900	20M QPSK 1RB#99	0.214	0.128	4.740	22.51	23.00	0.240	1.119
Left side	19100/1900	20M QPSK 1RB#99	0.206	0.116	1.190	22.51	23.00	0.231	1.119
Right side	19100/1900	20M QPSK 1RB#99	0.238	0.163	1.100	22.51	23.00	0.266	1.119
Front side	19100/1900	20M QPSK 50%RB#25	0.189	0.117	-3.100	22.51	23.00	0.212	1.119
Rear side	19100/1900	20M QPSK 50%RB#25	0.206	0.126	-2.240	22.51	23.00	0.231	1.119
Bottom side	19100/1900	20M QPSK 50%RB#25	0.223	0.142	1.480	22.51	23.00	0.250	1.119
Left side	19100/1900	20M QPSK 50%RB#25	0.183	0.104	-4.410	22.51	23.00	0.205	1.119
Right side	19100/1900	20M QPSK 50%RB#25	0.241	0.161	0.980	22.51	23.00	0.270	1.119



14.2.4 Results overview of LTE Band 4

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	20300/1745	20M QPSK 1RB#99	0.478	0.228	0.610	23.07	23.50	0.528	1.104
Left Head Tilted 15°	20300/1745	20M QPSK 1RB#99	0.415	0.149	0.430	23.07	23.50	0.458	1.104
Right Head Touched	20300/1745	20M QPSK 1RB#99	0.428	0.175	0.090	23.07	23.50	0.473	1.104
Right Head Tilted 15°	20300/1745	20M QPSK 1RB#99	0.452	0.191	0.710	23.07	23.50	0.499	1.104
Left Head Touched	20300/1745	20M QPSK 50%RB#25	0.378	0.133	1.640	23.07	23.50	0.417	1.104
Left Head Tilted 15°	20300/1745	20M QPSK 50%RB#25	0.352	0.101	2.780	23.07	23.50	0.389	1.104
Right Head Touched	20300/1745	20M QPSK 50%RB#25	0.425	0.166	-0.990	23.07	23.50	0.469	1.104
Right Head Tilted 15°	20300/1745	20M QPSK 50%RB#25	0.426	0.170	0.270	23.07	23.50	0.470	1.104
SAR Results for Hotspot Exposure Condition									
Front side	20300/1745	20M QPSK 1RB#99	0.291	0.125	-1.090	23.07	23.50	0.321	1.104
Rear side	20300/1745	20M QPSK 1RB#99	0.339	0.159	1.010	23.07	23.50	0.374	1.104
Bottom side	20300/1745	20M QPSK 1RB#99	0.290	0.119	-1.660	23.07	23.50	0.320	1.104
Left side	20300/1745	20M QPSK 1RB#99	0.288	0.092	1.580	23.07	23.50	0.318	1.104
Right side	20300/1745	20M QPSK 1RB#99	0.311	0.119	4.320	23.07	23.50	0.343	1.104
Front side	20300/1745	20M QPSK 50%RB#25	0.268	0.090	1.380	23.07	23.50	0.296	1.104
Rear side	20300/1745	20M QPSK 50%RB#25	0.297	0.111	-3.730	23.07	23.50	0.328	1.104
Bottom side	20300/1745	20M QPSK 50%RB#25	0.297	0.126	-4.940	23.07	23.50	0.328	1.104
Left side	20300/1745	20M QPSK 50%RB#25	0.259	0.087	3.190	23.07	23.50	0.286	1.104
Right side	20300/1745	20M QPSK 50%RB#25	0.328	0.148	-3.730	23.07	23.50	0.362	1.104



14.2.5 Results overview of LTE Band 5

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	20600/844	10M QPSK 1RB#49	0.543	0.267	1.400	25.67	26.00	0.586	1.079
Left Head Tilted 15°	20600/844	10M QPSK 1RB#49	0.472	0.200	3.630	25.67	26.00	0.509	1.079
Right Head Touched	20600/844	10M QPSK 1RB#49	0.499	0.219	-2.400	25.67	26.00	0.538	1.079
Right Head Tilted 15°	20600/844	10M QPSK 1RB#49	0.519	0.230	1.790	25.67	26.00	0.560	1.079
Left Head Touched	20600/844	10M QPSK 25RB#25	0.461	0.174	0.010	25.67	26.00	0.497	1.079
Left Head Tilted 15°	20600/844	10M QPSK 25RB#25	0.414	0.138	-3.520	25.67	26.00	0.447	1.079
Right Head Touched	20600/844	10M QPSK 25RB#25	0.475	0.198	1.020	25.67	26.00	0.512	1.079
Right Head Tilted 15°	20600/844	10M QPSK 25RB#25	0.492	0.200	3.480	25.67	26.00	0.531	1.079

SAR Results for Hotspot Exposure Condition

Front side	20600/844	10M QPSK 1RB#49	0.280	0.157	0.000	25.67	26.00	0.302	1.079
Rear side	20600/844	10M QPSK 1RB#49	0.325	0.198	0.335	25.67	26.00	0.351	1.079
Bottom side	20600/844	10M QPSK 1RB#49	0.275	0.146	1.320	25.67	26.00	0.297	1.079
Left side	20600/844	10M QPSK 1RB#49	0.264	0.130	4.390	25.67	26.00	0.285	1.079
Right side	20600/844	10M QPSK 1RB#49	0.290	0.166	-1.030	25.67	26.00	0.313	1.079
Front side	20600/844	10M QPSK 25RB#25	0.246	0.127	1.870	25.67	26.00	0.265	1.079
Rear side	20600/844	10M QPSK 25RB#25	0.271	0.139	3.050	25.67	26.00	0.292	1.079
Bottom side	20600/844	10M QPSK 25RB#25	0.278	0.161	-2.140	25.67	26.00	0.300	1.079
Left side	20600/844	10M QPSK 25RB#25	0.249	0.126	3.380	25.67	26.00	0.269	1.079
Right side	20600/844	10M QPSK 25RB#25	0.308	0.170	-4.910	25.67	26.00	0.332	1.079



14.2.6 Results overview of LTE Band 12

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	23130/711	10M QPSK 1RB#49	0.522	0.284	-4.320	27.31	27.50	0.545	1.045
Left Head Tilted 15°	23130/711	10M QPSK 1RB#49	0.455	0.223	-4.220	27.31	27.50	0.475	1.045
Right Head Touched	23130/711	10M QPSK 1RB#49	0.478	0.228	3.020	27.31	27.50	0.499	1.045
Right Head Tilted 15°	23130/711	10M QPSK 1RB#49	0.499	0.252	-4.840	27.31	27.50	0.521	1.045
Left Head Touched	23130/711	10M QPSK 25RB#25	0.436	0.200	-3.360	27.31	27.50	0.455	1.045
Left Head Tilted 15°	23130/711	10M QPSK 25RB#25	0.395	0.161	-2.400	27.31	27.50	0.413	1.045
Right Head Touched	23130/711	10M QPSK 25RB#25	0.455	0.220	-0.150	27.31	27.50	0.475	1.045
Right Head Tilted 15°	23130/711	10M QPSK 25RB#25	0.466	0.219	0.310	27.31	27.50	0.487	1.045

SAR Results for Hotspot Exposure Condition

Front side	23130/711	10M QPSK 1RB#49	0.294	0.154	-2.220	27.31	27.50	0.307	1.045
Rear side	23130/711	10M QPSK 1RB#49	0.327	0.188	0.710	27.31	27.50	0.342	1.045
Bottom side	23130/711	10M QPSK 1RB#49	0.269	0.136	-3.210	27.31	27.50	0.281	1.045
Left side	23130/711	10M QPSK 1RB#49	0.272	0.126	3.170	27.31	27.50	0.284	1.045
Right side	23130/711	10M QPSK 1RB#49	0.302	0.159	2.020	27.31	27.50	0.316	1.045
Front side	23130/711	10M QPSK 25RB#25	0.250	0.117	2.210	27.31	27.50	0.261	1.045
Rear side	23130/711	10M QPSK 25RB#25	0.270	0.140	-4.470	27.31	27.50	0.282	1.045
Bottom side	23130/711	10M QPSK 25RB#25	0.289	0.157	-3.580	27.31	27.50	0.302	1.045
Left side	23130/711	10M QPSK 25RB#25	0.242	0.103	-0.570	27.31	27.50	0.253	1.045
Right side	23130/711	10M QPSK 25RB#25	0.313	0.176	4.900	27.31	27.50	0.327	1.045



14.2.7 Results overview of LTE Band 17

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	23800/711	10M QPSK 1RB#49	0.383	0.185	-3.520	24.59	25.00	0.421	1.099
Left Head Tilted 15°	23800/711	10M QPSK 1RB#49	0.316	0.123	-3.800	24.59	25.00	0.347	1.099
Right Head Touched	23800/711	10M QPSK 1RB#49	0.333	0.135	-1.190	24.59	25.00	0.366	1.099
Right Head Tilted 15°	23800/711	10M QPSK 1RB#49	0.359	0.156	-2.820	24.59	25.00	0.395	1.099
Left Head Touched	23800/711	10M QPSK 25RB#25	0.293	0.097	-4.670	24.59	25.00	0.322	1.099
Left Head Tilted 15°	23800/711	10M QPSK 25RB#25	0.260	0.053	1.770	24.59	25.00	0.286	1.099
Right Head Touched	23800/711	10M QPSK 25RB#25	0.332	0.128	-2.370	24.59	25.00	0.365	1.099
Right Head Tilted 15°	23800/711	10M QPSK 25RB#25	0.313	0.128	-1.890	24.59	25.00	0.344	1.099
SAR Results for Hotspot Exposure Condition									
Front side	23800/711	10M QPSK 1RB#49	0.278	0.133	-3.300	24.59	25.00	0.306	1.099
Rear side	23800/711	10M QPSK 1RB#49	0.318	0.167	1.940	24.59	25.00	0.349	1.099
Bottom side	23800/711	10M QPSK 1RB#49	0.269	0.108	-1.700	24.59	25.00	0.296	1.099
Left side	23800/711	10M QPSK 1RB#49	0.258	0.113	3.680	24.59	25.00	0.284	1.099
Right side	23800/711	10M QPSK 1RB#49	0.282	0.130	4.250	24.59	25.00	0.310	1.099
Front side	23800/711	10M QPSK 25RB#25	0.246	0.087	3.500	24.59	25.00	0.270	1.099
Rear side	23800/711	10M QPSK 25RB#25	0.261	0.126	0.890	24.59	25.00	0.287	1.099
Bottom side	23800/711	10M QPSK 25RB#25	0.284	0.126	0.010	24.59	25.00	0.312	1.099
Left side	23800/711	10M QPSK 25RB#25	0.229	0.082	-3.840	24.59	25.00	0.252	1.099
Right side	23800/711	10M QPSK 25RB#25	0.292	0.154	1.350	24.59	25.00	0.321	1.099



14.2.8 Results overview of LTE Band 41

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	41140/2645	20M QPSK 1RB#99	0.587	0.367	0.020	22.50	23.00	0.659	1.122
Left Head Tilted 15°	41140/2645	20M QPSK 1RB#99	0.519	0.300	-1.060	22.50	23.00	0.582	1.122
Right Head Touched	41140/2645	20M QPSK 1RB#99	0.545	0.310	2.240	22.50	23.00	0.612	1.122
Right Head Tilted 15°	41140/2645	20M QPSK 1RB#99	0.550	0.344	-0.360	22.50	23.00	0.617	1.122
Left Head Touched	41140/2645	20M QPSK 50%RB#25	0.489	0.286	-2.840	22.50	23.00	0.549	1.122
Left Head Tilted 15°	41140/2645	20M QPSK 50%RB#25	0.458	0.237	-0.960	22.50	23.00	0.514	1.122
Right Head Touched	41140/2645	20M QPSK 50%RB#25	0.518	0.313	-4.870	22.50	23.00	0.581	1.122
Right Head Tilted 15°	41140/2645	20M QPSK 50%RB#25	0.536	0.311	-1.750	22.50	23.00	0.601	1.122
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Scalig Factor
			1-g	10-g					
SAR Results for Hotspot Exposure Condition									
Front side	41140/2645	20M QPSK 1RB#99	0.336	0.186	4.830	22.50	23.00	0.377	1.122
Rear side	41140/2645	20M QPSK 1RB#99	0.369	0.234	3.610	22.50	23.00	0.414	1.122
Bottom side	41140/2645	20M QPSK 1RB#99	0.314	0.194	-4.320	22.50	23.00	0.352	1.122
Left side	41140/2645	20M QPSK 1RB#99	0.305	0.179	0.720	22.50	23.00	0.342	1.122
Right side	41140/2645	20M QPSK 1RB#99	0.331	0.196	-0.310	22.50	23.00	0.371	1.122
Front side	41140/2645	20M QPSK 50%RB#25	0.302	0.174	2.830	22.50	23.00	0.339	1.122
Rear side	41140/2645	20M QPSK 50%RB#25	0.320	0.175	0.020	22.50	23.00	0.359	1.122
Bottom side	41140/2645	20M QPSK 50%RB#25	0.321	0.189	-4.040	22.50	23.00	0.360	1.122
Left side	41140/2645	20M QPSK 50%RB#25	0.294	0.152	2.600	22.50	23.00	0.330	1.122
Right side	41140/2645	20M QPSK 50%RB#25	0.358	0.209	-2.860	22.50	23.00	0.402	1.122



14.2.9 Results overview of LTE Band 66

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	132572/1770	20M QPSK 1RB#99	0.464	0.235	1.940	21.50	22.00	0.521	1.122
Left Head Tilted 15°	132572/1770	20M QPSK 1RB#99	0.403	0.156	-2.380	21.50	22.00	0.452	1.122
Right Head Touched	132572/1770	20M QPSK 1RB#99	0.421	0.190	0.000	21.50	22.00	0.472	1.122
Right Head Tilted 15°	132572/1770	20M QPSK 1RB#99	0.427	0.204	3.070	21.50	22.00	0.479	1.122
Left Head Touched	132572/1770	20M QPSK 50%RB#25	0.367	0.142	-4.660	21.50	22.00	0.412	1.122
Left Head Tilted 15°	132572/1770	20M QPSK 50%RB#25	0.330	0.112	2.330	21.50	22.00	0.370	1.122
Right Head Touched	132572/1770	20M QPSK 50%RB#25	0.401	0.182	-4.420	21.50	22.00	0.450	1.122
Right Head Tilted 15°	132572/1770	20M QPSK 50%RB#25	0.408	0.167	-4.820	21.50	22.00	0.458	1.122
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Scalig Factor
			1-g	10-g					
SAR Results for Hotspot Exposure Condition									
Front side	132572/1770	20M QPSK 1RB#99	0.296	0.130	3.730	21.50	22.00	0.332	1.122
Rear side	132572/1770	20M QPSK 1RB#99	0.334	0.170	0.900	21.50	22.00	0.375	1.122
Bottom side	132572/1770	20M QPSK 1RB#99	0.280	0.127	-1.390	21.50	22.00	0.314	1.122
Left side	132572/1770	20M QPSK 1RB#99	0.267	0.104	-3.750	21.50	22.00	0.300	1.122
Right side	132572/1770	20M QPSK 1RB#99	0.313	0.131	4.160	21.50	22.00	0.351	1.122
Front side	132572/1770	20M QPSK 50%RB#25	0.257	0.103	1.330	21.50	22.00	0.288	1.122
Rear side	132572/1770	20M QPSK 50%RB#25	0.290	0.124	-3.590	21.50	22.00	0.325	1.122
Bottom side	132572/1770	20M QPSK 50%RB#25	0.290	0.124	1.520	21.50	22.00	0.325	1.122
Left side	132572/1770	20M QPSK 50%RB#25	0.254	0.087	-4.630	21.50	22.00	0.285	1.122
Right side	132572/1770	20M QPSK 50%RB#25	0.320	0.146	0.650	21.50	22.00	0.359	1.122

**14.2.10 Results overview of Wi-Fi 2.4G**

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Scaling Factor
			1-g	10-g					
Left Head Touched	6/2437	802.11b	0.333	0.158	2.310	18.69	19.00	0.358	1.074
Left Head Tilted 15°	6/2437	802.11b	0.253	0.096	4.250	18.69	19.00	0.272	1.074
Right Head Touched	6/2437	802.11b	0.237	0.078	-2.530	18.69	19.00	0.255	1.074
Right Head Tilted 15°	6/2437	802.11b	0.292	0.109	-1.500	18.69	19.00	0.314	1.074
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Scaling Factor
			1-g	10-g					

SAR Results for Hotspot Exposure Condition

Front side	6/2437	802.11b	0.290	0.108	-2.650	18.69	19.00	0.311	1.074
Rear side	6/2437	802.11b	0.356	0.169	0.225	18.69	19.00	0.382	1.074
Top side	6/2437	802.11b	0.293	0.096	3.670	18.69	19.00	0.315	1.074
Right side	6/2437	802.11b	0.267	0.086	0.230	18.69	19.00	0.287	1.074

14.2.11 Results overview of Wi-Fi 5G

Test Position of Body with 0mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Scaling Factor
			1-g	10-g					
5.2G U-NII-1 band (802.11a)									
Wi-Fi antenna to side									
Left Head Touched	48/5240	802.11a	0.296	0.166	-0.690	11.23	11.50	0.315	1.064
Left Head Tilted 15°	48/5240	802.11a	0.268	0.131	-0.600	11.23	11.50	0.285	1.064
Right Head Touched	48/5240	802.11a	0.248	0.116	4.720	11.23	11.50	0.264	1.064
Right Head Tilted 15°	48/5240	802.11a	0.219	0.091	-0.980	11.23	11.50	0.233	1.064

SAR Results for Hotspot Exposure Condition

Front side	48/5240	802.11b	0.275	0.169	2.660	11.23	11.50	0.293	1.064
Rear side	48/5240	802.11b	0.330	0.230	0.335	11.23	11.50	0.351	1.064
Bottom side	48/5240	802.11b	0.255	0.166	1.880	11.23	11.50	0.271	1.064
Right side	48/5240	802.11b	0.231	0.142	-1.150	11.23	11.50	0.246	1.064



5.8G U-NII-3 Band (802.11a)

Wi-Fi antenna to side

Left Head Touched	165/5825	802.11a	0.278	0.152	2.030	11.19	11.50	0.299	1.074
Left Head Tilted 15°	165/5825	802.11a	0.249	0.131	-2.560	11.19	11.50	0.267	1.074
Right Head Touched	165/5825	802.11a	0.238	0.096	4.770	11.19	11.50	0.256	1.074
Right Head Tilted 15°	165/5825	802.11a	0.202	0.073	-2.750	11.19	11.50	0.217	1.074

SAR Results for Hotspot Exposure Condition

Front side	6/2437	802.11b	0.302	0.118	-4.160	11.19	11.50	0.324	1.074
Rear side	6/2437	802.11b	0.356	0.169	0.225	11.19	11.50	0.382	1.074
Top side	6/2437	802.11b	0.283	0.109	-2.840	11.19	11.50	0.304	1.074
Right side	6/2437	802.11b	0.270	0.088	-2.000	11.19	11.50	0.290	1.074

5.8G U-NII-4 Band (802.11a)

Wi-Fi antenna to side

Left Head Touched	157/5785	802.11a	0.274	0.144	-2.930	10.64	11.00	0.298	1.086
Left Head Tilted 15°	157/5785	802.11a	0.260	0.134	-2.030	10.64	11.00	0.282	1.086
Right Head Touched	157/5785	802.11a	0.261	0.126	4.400	10.64	11.00	0.284	1.086
Right Head Tilted 15°	157/5785	802.11a	0.245	0.118	-0.120	10.64	11.00	0.266	1.086


SAR Results for Hotspot Exposure Condition

Front side	6/2437	802.11b	0.240	0.119	-3.330	10.64	11.00	0.261	1.086
Rear side	6/2437	802.11b	0.261	0.135	-1.110	10.64	11.00	0.284	1.086
Top side	6/2437	802.11b	0.224	0.100	4.350	10.64	11.00	0.243	1.086
Right side	6/2437	802.11b	0.23	0.095	-0.700	10.64	11.00	0.250	1.086



15 Multiple Transmitter Information

The SAR measurement positions of each side are as below:

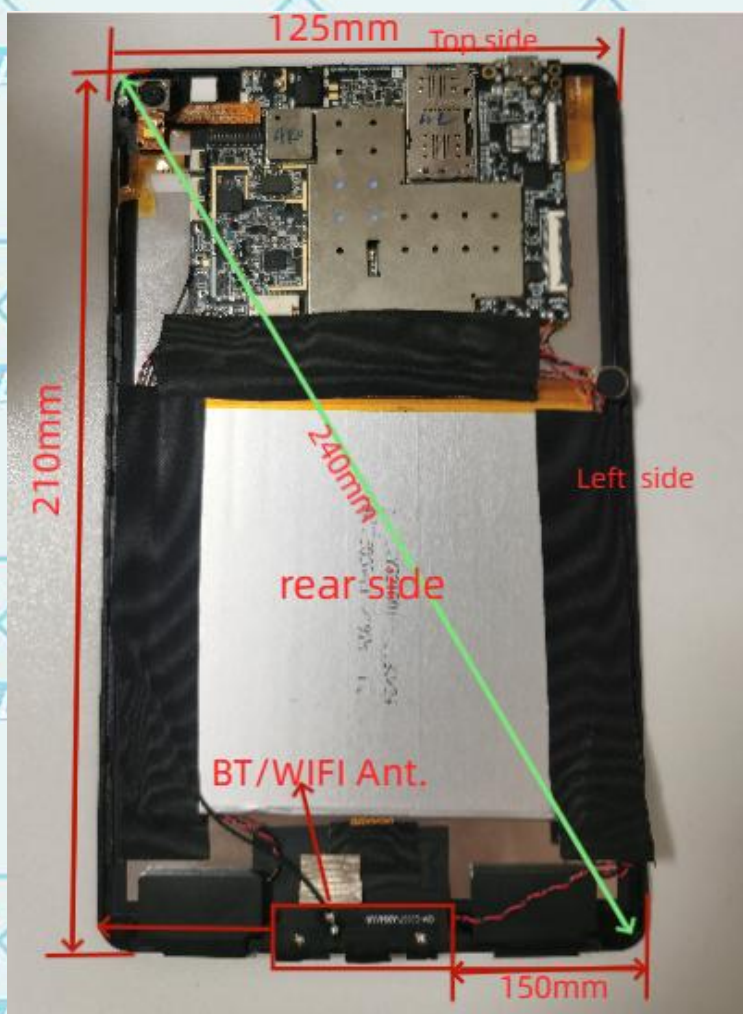

< Rear Side >

Mode	Front side	Rear side	Left side	Right side	Bottom side	Bottom side
2G/4G Antenna	Yes	Yes	Yes	Yes	No	Yes
Wi-Fi/BT Antenna	Yes	Yes	No	Yes	Yes	No

1) Per KDB941225 D06v01r01, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.



15.1.1 Stand-alone SAR test exclusion

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances $\leq$ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [f(\text{GHz})] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

a) Head position

Mode	Pmax(dBm)	Pmax(mW)	Distance(mm)	f(GHz)	Calculation Result	exclusion Threshold	SAR test exclusion
BT	1.05	1.27	5.00	2.45	0.040	3.00	Yes

Body-Worn position

Mode	Pmax(dBm)	Pmax(mW)	Distance(mm)	f(GHz)	Calculation Result	exclusion Threshold	SAR test exclusion
BT	1.05	1.27	10.00	2.45	0.020	3.00	Yes



When the standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[$\sqrt{f(\text{GHz})/x}$] W/kg for test separation distances ≤ 50 mm, where $x = 7.5$ for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	Pmax(dBm)	Pmax(mW)	Distance(mm)	f(GHz)	X	Estimated SAR(W/Kg)
BT	Head	1.05	1.27	5.00	2.45	7.50	0.053
BT	Body	1.05	1.27	10.00	2.45	7.50	0.027

15.1.2 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities are as below:

Simultaneous Transmission Possibilities				
Simultaneous Tx Combination	Configuration	Head	Body	Hotspot
1	GSM/GPRS/ LTE +Wi-Fi	YES	YES	YES
2	GSM/GPRS/LTE +BT	YES	NO	NO

Note: The device does not support simultaneous BT and Wi-Fi ,because the BT and Wi-Fi share the same antenna and can't transmit simultaneously.



16 Measurement uncertainty evaluation

16.1 Measurement uncertainty evaluation for SAR test

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Satimo. The breakdown of the individual uncertainties is as follows:

Measurement Uncertainty evaluation for SAR test								
Uncertainty Component	Tol. (±%)	Prob. Dist.	Div.	C _i (1g)	C _i (10g)	1g U _i (±%)	10g U _i (±%)	V _i
measurement system								
Probe Calibration	5.8	N	1	1	1	5.8	5.8	∞
Axial Isotropy	3.5	R	$\sqrt{3}$	$(1-C_p)^{1/2}$	$(1-C_p)^{1/2}$	1.43	1.43	∞
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
Boundary Effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
system Detection Limits	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3	N	1	1	1	3.00	3.00	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF Ambient Conditions-Noise	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF Ambient Conditions-Reflections	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe Positioner Mechanical Tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation and Integration Algorithms for Max.SAR Evaluation	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Test sample Related								
Test Sample Positioning	2.6	N	1	1	1	2.60	2.60	11
Device Holder Uncertainty	3	N	1	1	1	3.00	3.00	7
Output Power Variation-SAR drift measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	2	R	$\sqrt{3}$	1	1	1.15	1.15	∞

**Phantom and Tissue Parameters**

Phantom Uncertainty (shape and thickness tolerances)	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation (in permittivity and conductivity)	2	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity (meas.)	2.5	N	1	0.64	0.43	1.60	1.08	5
Liquid conductivity (target.)	5	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	5
Liquid Permittivity (meas.)	2.5	N	1	0.60	0.49	1.50	1.23	∞
Liquid Permittivity (target.)	5	R	$\sqrt{3}$	0.60	0.49	1.73	1.42	∞
Combined Standard Uncertainty		Rss				10.63	10.54	
Expanded Uncertainty{95% CONFIDENCE INTERVAL}		k				21.26	21.08	



16.2 Measurement uncertainty evaluation for system check

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Satimo. The breakdown of the individual uncertainties is as follows:

Uncertainty For System Performance Check								
Uncertainty Component	Tol. (±%)	Prob. Dist.	Div.	C _i 1g	C _i 10g	1g U _i (±%)	10g U _i (±%)	V _i
measurement system								
Probe Calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	$\sqrt{3}$	$(1-C_p)^{1/2}$	$(1-C_p)^{1/2}$	1.43	1.43	∞
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
Boundary Effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
system detection Limits	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	0	N	1	1	1	0.00	0.00	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF ambient Conditions - Noise	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions – Reflections	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioned Mechanical Tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Dipole								
Deviation of experimental source from numerical source	4	N	1	1	1	4.00	4.00	∞
Input power and SAR drift measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole axis to liquid Distance	2	R	$\sqrt{3}$	1	1	1.16	1.16	∞



Phantom and Tissue Parameters								
Phantom Uncertainty (shape and thickness tolerances)	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation (in permittivity and conductivity)	2	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity (meas.)	2.5	N	1	0.64	0.43	1.60	1.08	5
Liquid conductivity (target.)	5	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	5
Liquid Permittivity (meas.)	2.5	N	1	0.60	0.49	1.50	1.23	∞
Liquid Permittivity (target.)	5	R	$\sqrt{3}$	0.60	0.49	1.73	1.41	∞
Combined Standard Uncertainty		Rss				10.28	9.98	
Expanded Uncertainty (95% Confidence interval)		k				20.57	19.95	



17 Test equipment and ancillaries used for tests

To simplify the identification of the test equipment and/or ancillaries which were used, the reporting of the relevant test cases only refer to the test item number as specified in the table below.

	Manufacturer	Device Type	Type(Model)	Serial number	calibration	
					Last Cal.	Due Date
☒	SATIMO	COMOSAR DOSIMETRIC E FIELD PROBE	SSE5	0123-EPGO-396	2023-01-30	2024-01-29
☒	SATIMO	COMOSAR 750 MHz REFERENCE DIPOLE	SID750	SN 48/16 DIP0G750-444	2023-06-25	2026-06-24
☒	SATIMO	COMOSAR 835 MHz REFERENCE DIPOLE	SID835	SN 14/13 DIP0G835-235	2023-06-25	2026-06-24
☒	SATIMO	COMOSAR 900 MHz REFERENCE DIPOLE	SID900	SN 14/13 DIP0G900-231	2023-06-25	2026-06-24
☒	SATIMO	COMOSAR 1800 MHz REFERENCE DIPOLE	SID1800	SN 14/13 DIP1G800-232	2023-06-25	2026-06-24
☐	SATIMO	COMOSAR 1900 MHz REFERENCE DIPOLE	SID1900	SN 14/13 DIP1G900-236	2023-06-25	2026-06-24
☒	SATIMO	COMOSAR 2000 MHz REFERENCE DIPOLE	SID2000	SN 14/13 DIP2G000-237	2023-06-25	2026-06-24
☒	SATIMO	COMOSAR 2450 MHz REFERENCE DIPOLE	SID2450	SN 14/13 DIP2G450-238	2023-06-25	2026-06-24
☒	SATIMO	COMOSAR 2600 MHz REFERENCE DIPOLE	SID2600	SN 28/14 DIP2G600-327	2023-06-25	2026-06-24
☒	SATIMO	Software	OPENSAR	N/A	N/A	N/A
☒	SATIMO	Phantom	COMOSAR IEEE SAM PHANTOM	SN 14/13 SAM99	N/A	N/A
☒	R & S	Universal Radio Communication Tester	CMU 200	119733	2023-11-02	2024-11-01
☒	R & S	Universal Radio Communication Tester	CMW500	144459	2023-11-02	2024-11-01
☒	R & S	UXM5G Wireless Test Platform	E7515B	MY60192341	2023-11-02	2024-11-01
☒	HP	Network Analyser	8753D	3410A08889	2023-11-02	2024-11-01
☒	HP	Signal Generator	E4421B	GB39340770	2023-11-02	2024-11-01
☒	Keithley	Multimeter	Keithley 2000	4014539	2023-11-02	2024-11-01
☒	SATIMO	Amplifier	Power Amplifier	MODU-023-A-0004	2023-11-02	2024-11-01
☒	Agilent	Power Meter	E4418B	GB43312909	2023-11-02	2024-11-01
☒	Agilent	Power Meter Sensor	E4412A	MY41500046	2023-11-02	2024-11-01

**Annex A: System performance verification**

(Please See the SAR Measurement Plots of annex A.)

Annex B: Measurement results

(Please See the SAR Measurement Plots of annex B.)

Annex C: Calibration reports

(Please See the Calibration reports of annex C.)