


# FCC ID TEST REPORT

Prepared for : Thortron Technology Incorporated Co Ltd  
Address : 12F., No.166 Fuxing N.Rd., Taipei 10487, Taiwan  
Trade Name : WFCO  
E.U.T : Power Pro Plus Control System  
Model Number : WF-3611

Prepared by : Keyway Testing Technology(Guangdong) Co., Ltd.  
Address : 21st Floor, Building 6, Dongyi Intelligent Equipment New Energy Vehicle Park, No.30 of Tangxia District, Dongshen Road, Tangxia Town, Dongguan City, Guangdong province, China

Tel: 86-769-87182258  
Fax: 86-769-87181058

Report No. : TR25050434-E-001  
Date of Test: : May 20~Jun. 05, 2025  
Date of Report : Jun. 06, 2025

<b>Applicant:</b>	Thortron Technology Incorporated Co Ltd	
<b>Address:</b>	12F., No.166 Fuxing N.Rd., Taipei 10487, Taiwan	
<b>Manufacturer 1:</b>	Jeytron Technology Co Ltd	
<b>Address:</b>	16 Gaoli 5th Rd Tang Xia Town Dong Guan Guang Dong China	
<b>Manufacturer 2:</b>	Thortron Technology Incorporated Co., Ltd.	
<b>Address:</b>	12F., No.166 Fuxing N.Rd., Taipei 10487, Taiwan	
<b>E.U.T:</b>	Power Pro Plus Control System	
<b>Model Number:</b>	WF-3611	
<b>Trade Name:</b>	WFCO	
<b>Date of Receipt:</b>	May 19, 2025	
<b>Date of Test:</b>	May 20~Jun. 05, 2025	
<b>Test Specification :</b>	FCC CFR47 Part 15 Section 15.247	
<b>Test Result:</b>	The equipment under test was found to be compliance with the requirements of the standards applied.	
<b>Issue Date: Jun. 06, 2025</b>		
Tested by:	Reviewed by:	Authorized by:
		
Jacob Ouyang/Engineer	Billy Zeng / Supervisor	Cherry Chen / Manager
<p><i>Abbreviations: OK/P=passed fail/F=failed N/A=not applicable E.U.T=equipment under tested</i></p> <p><i>This device described above has been tested by Keyway, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.</i></p> <p><i>This report shall not be reproduced except in full, without the written approval of Keyway, this document may be altered or revised by Keyway, personal only, and shall be noted in the revision of the document.</i></p>		

## Revision Record

Version	Chapter	Date	Modifier	Remark
00		Jun. 06, 2025		Original

## TABLE OF CONTENTS

	<b>Page</b>
<b>1 TEST SUMMARY .....</b>	<b>6</b>
<b>2 GENERAL PRODUCT INFORMATION .....</b>	<b>7</b>
2.1 DESCRIPTION OF DEVICE (EUT) .....	7
2.2 CHANNEL LIST .....	8
2.3 TEST MODE .....	10
<b>3 TEST SITES .....</b>	<b>11</b>
3.1 TEST FACILITIES .....	11
3.2 MEASUREMENT UNCERTAINTY .....	11
3.3 LIST OF TEST AND MEASUREMENT INSTRUMENTS .....	12
3.4 DESCRIPTION OF SUPPORT UNITS .....	14
<b>4 CONDUCTED EMISSION .....</b>	<b>15</b>
4.1 E.U.T. OPERATION .....	15
4.2 EUT SETUP .....	15
4.3 MEASUREMENT PROCEDURE .....	15
4.4 CONDUCTED EMISSION LIMIT .....	16
4.5 MEASUREMENT DESCRIPTION .....	16
4.6 CONDUCTED EMISSION TEST RESULT .....	16
<b>5 RADIATED SPURIOUS EMISSIONS .....</b>	<b>17</b>
5.1 EUT OPERATION .....	17
5.2 TEST SETUP .....	18
5.3 SPECTRUM ANALYZER SETUP .....	19
5.4 TEST PROCEDURE .....	19
5.5 SUMMARY OF TEST RESULTS .....	20
<b>6 CONDUCT BAND EDGE AND SPURIOUS EMISSIONS MEASUREMENT .....</b>	<b>27</b>
6.1 TEST SETUP .....	27
6.2 TEST PROCEDURE .....	27
6.3 TEST RESULT .....	27
<b>7 6DB&amp;99% BANDWIDTH MEASUREMENT .....</b>	<b>28</b>
7.1 TEST SETUP .....	28

7.2 TEST PROCEDURE .....	28
7.3 TEST RESULT .....	28
<b>8 MAXIMUM PEAK OUTPUT POWER .....</b>	<b>29</b>
8.1 TEST SETUP .....	错误！未定义书签。
8.2 TEST PROCEDURE .....	29
8.3 TEST RESULT .....	29
<b>9 POWER SPECTRAL DENSITY .....</b>	<b>30</b>
9.1 TEST SETUP .....	30
9.2 TEST PROCEDURE .....	30
9.3 TEST RESULT .....	30
<b>10 ON TIME AND DUTY CYCLE .....</b>	<b>31</b>
10.1 STANDARD APPLICABLE .....	31
10.2 MEASURING INSTRUMENTS AND SETTING .....	31
10.3 TEST SETUP .....	31
10.4 TEST PROCEDURES .....	31
10.5 EUT OPERATION DURING TEST .....	31
10.6 TEST RESULT .....	31
<b>11 ANTENNA APPLICATION .....</b>	<b>32</b>
11.1 ANTENNA REQUIREMENT .....	32
11.2 RESULT .....	32
<b>12 TEST SETUP AND EUT PHOTOS .....</b>	<b>33</b>

## 1 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	N/A
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB&99% Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203 15.247 (c)	PASS

Remark:

“N/A” denotes test is not applicable in this Test Report.

## 2 GENERAL PRODUCT INFORMATION

### 2.1 Description of Device (EUT)

Product Name:	Power Pro Plus Control System
Trademark	WFCO
Test Model No.:	WF-3611
Sample ID:	250520001
Model No.:	N/A
Model Difference:	N/A
Operation Frequency:	2402-2480MHz
Number of Channel:	40 channels
Type of Modulation:	GFSK
Antenna installation:	Internal Antenna
Antenna Gain:	2.57dBi
Power supply:	8Vdc-18Vdc
Hardware Version:	WF-3510-Voice Board-R03(20230313)
Software Version:	0.7.8.01

Remark: The information in this section is provided by the applicant or manufacturer, Kayway is not liable to the accuracy, suitability, reliability or/and integrity of the information.

## 2.2 Channel List

The EUT has been tested under its typical operating condition.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The details of test channels and bandwidth were for RF conductive measurement.

Frequency and Channel list :

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
<b>00</b>	<b>2402</b>	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	<b>19</b>	<b>2440</b>	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	<b>39</b>	<b>2480</b>
12	2426	26	2454		
13	2428	27	2456		



Test Frequency and Channel :

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	19	2440	39	2480

## 2.3 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	MP_Kit RTL11n_8723DS_SDIO_v1.09
Power level setup	1

### 3 TEST SITES

#### 3.1 Test Facilities

##### Site Description

EMC Lab. : Certificated by Nemko  
 Registration No.: ELA 814  
 Date of registration: September 25, 2024

Certificated by CMA China  
 Registration No.: 202319016955  
 Date of registration: July 23, 2024

Certificated by A2LA  
 Certificate Number: 7404.01  
 Valid To: March 31, 2027

Name of Firm : Keyway Testing Technology (Guangdong) Co., Ltd.  
 Site Location : 21st Floor, Building 6, Dongyi Intelligent Equipment New ,  
 Energy Vehicle Park, No.30 of Tangxia, District, Dongshen  
 Road, Tangxia Town, Dongguan City, Guangdong province, China

#### 3.2 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Duty Cycle	$\pm 2\%$
Spurious emissions, conducted	$\pm 0.21\text{dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(9KHz~30MHz)	$\pm 4.51\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$
Radiated Emission(25GHz~40GHz)	$\pm 3.38\text{dB}$

### 3.3 List of Test and Measurement Instruments

Equipment	Manufacturer	Model No.	Serial No.	Date of Cal.	Valid until
For conducted emission at the mains terminals and signal port test 944 Shielded Room					
Test Software	FARAD	EZ-EMC Ver.FARAD-3A1+	KWET-089	/	/
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr 14, 25	Apr 13, 26
ArtificialMains Network	Rohde&Schwarz	ENV216	101314	Mar 05, 25	Mar 04, 26
RF Cable	FUJIKURA	3D-2W	KWET-030	Apr 14, 25	Apr 13, 26
Socket	Gongniu	KWET-003A1	KWET-003A1	Feb 21, 25	Feb 20, 26
For radiated emission test (30MHz-1GHz)966 Chamber 2					
Test Software	FARAD	EZ-EMC Ver.FARAD-3A1+	KWET-087	/	/
EMI Test Receiver	Rohde&Schwarz	ESCI	101178	Apr 14, 25	Apr 13, 26
TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00829	May 10, 25	May 09, 26
3m Semi-anechoic Chamber	YIHENDIANZI	966	YH-KW-966-02	Mar 07, 26	Mar 06, 29
RF Cable	EMC Instruments	EMCCFD400-NM-NM-2000	240307	Apr 14, 25	Apr 13, 26
RF Cable	EMC Instruments	EMCCFD400-NM-NM-9000	240309	Apr 14, 25	Apr 13, 26
For radiated emission test (Above 1GHz)966 Chamber 2					
Test Software	FARAD	EZ-EMC Ver.FARAD-3A1+	KWET-087	/	/
EMI Test Receiver	Rohde&Schwarz	ESCI	101178	Apr 14, 25	Apr 13, 26
Spectrum Analyzer	Agilent	N9020A	MY56070279	Apr 14, 25	Apr 13, 26
Spectrum analyzer	R&S	FSV 40	101059	Nov 06, 25	Nov 05, 26
Horn Antenna	DAZE	ZN30701	11003	Jul 27, 25	Jul 26, 26
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1368	May 16, 25	May 15, 26
Signal Amplifier	WCS Technology	DLNA-18000-40000	KWET-138	Apr 19, 25	Apr 18, 26
3m anechoic Chamber	YIHENDIANZI	966	YH-KW-966-02	Mar 07, 25	Mar 06, 29
RF Cable(1G-18GHz)	EMC Instruments	EMC105-SM-SM-1000	240301	Apr 14, 25	Apr 13, 26
RF Cable(1G-18GHz)	EMC Instruments	EMC105-SM-SM-2000	240302	Apr 14, 25	Apr 13, 26
RF Cable(1G-18GHz)	EMC Instruments	EMC105-SM-SM-9000	240303	Apr 14, 25	Apr 13, 26
RF Cable(18G-40GHz)	WCS Technology	CA360P-29M29M-1M	W2415130001	Apr 14, 25	Apr 13, 26
RF Cable(18G-40GHz)	WCS Technology	CA360P-29M29M-9M	W2415110001	Apr 14, 25	Apr 13, 26
For conducted emission test (RF)					
MXG Signal Analyzer	Agilent	N9020A	MY56070279	Apr 14, 25	Apr 13, 26



RF SWITCH BOX	CSKJ	SMU-1003	KWET-047	Apr 14, 25	Apr 13, 26
Attenuator	R&S	ESH3-Z2	102696	Apr 14, 25	Apr 13, 26
Power Meter	Agilent	E4418B	MY41294414	May 15, 25	May 14, 26
RF sma cable	Keysight	ULC-1m-SMSM+	1623	May 15, 25	May 14, 26
RF sma cable	Keysight	ULC-1m-SMSM+	1623	May 15, 25	May 14, 26
RF sma cable	Keysight	ULC-1.5FT-SMSM+	1623	May 15, 25	May 14, 26
RF sma cable	Keysight	ULC-1.5FT-SMSM+	1623	May 15, 25	May 14, 26
Coupler	Keysight	ZHDC-10-63-S+	SF331801603	May 15, 25	May 14, 26
Test Software	CSKJ	CS-305X	KWET-149	/	/

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Power Pro Plus Control System	WFCO	WF-3611	N/A	EUT

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 4 Conducted Emission

Test Requirement:	:	FCC CFR 47 Part 15 Section 15.207,RSS-Gen 8.8
Test Method	:	ANSI C63.10: 2013
Test Result	:	PASS
Frequency Range	:	150kHz to 30MHz
Class/Severity	:	Class B


### 4.1 E.U.T. Operation

Operating Environment :

Temperature	:	23.5
Humidity	:	54
Atmospheric Pressure	:	1015

### 4.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

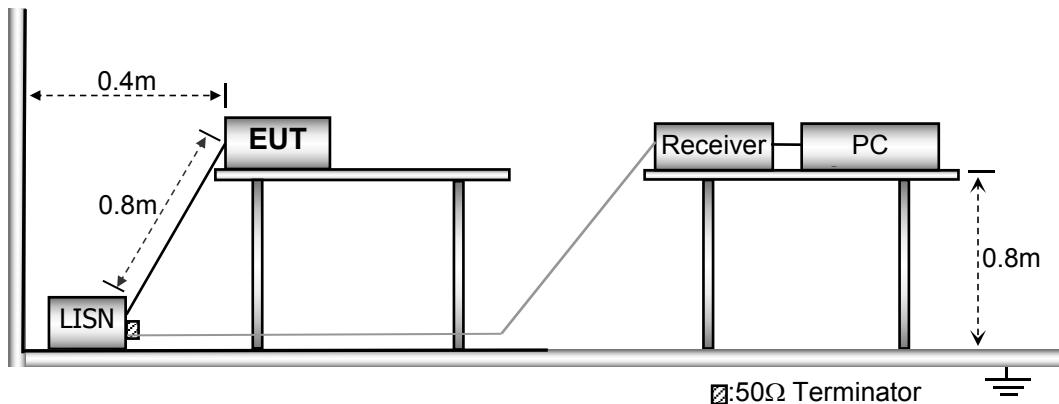

### 4.3 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

#### 4.4 Conducted Emission Limit

##### Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

**Note:**

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 4.5 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

#### 4.6 Conducted Emission Test Result

Not Applicable.

## 5 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method : ANSI C63.10:2013

Test Result : PASS

Measurement Distance : 3m

Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log <sup>(2400/F(kHz))</sup> + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log <sup>(24000/F(kHz))</sup> + 40
1.705 ~ 30	30	30	100 * 30	20log <sup>(30)</sup> + 40
30 ~ 88	100	3	100	20log <sup>(100)</sup>
88 ~ 216	150	3	150	20log <sup>(150)</sup>
216 ~ 960	200	3	200	20log <sup>(200)</sup>
Above 960	500	3	500	20log <sup>(500)</sup>

### 5.1 EUT Operation

Operating Environment :

Temperature: : 23


Humidity: : 54

Atmospheric Pressure: : 1015


## 5.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

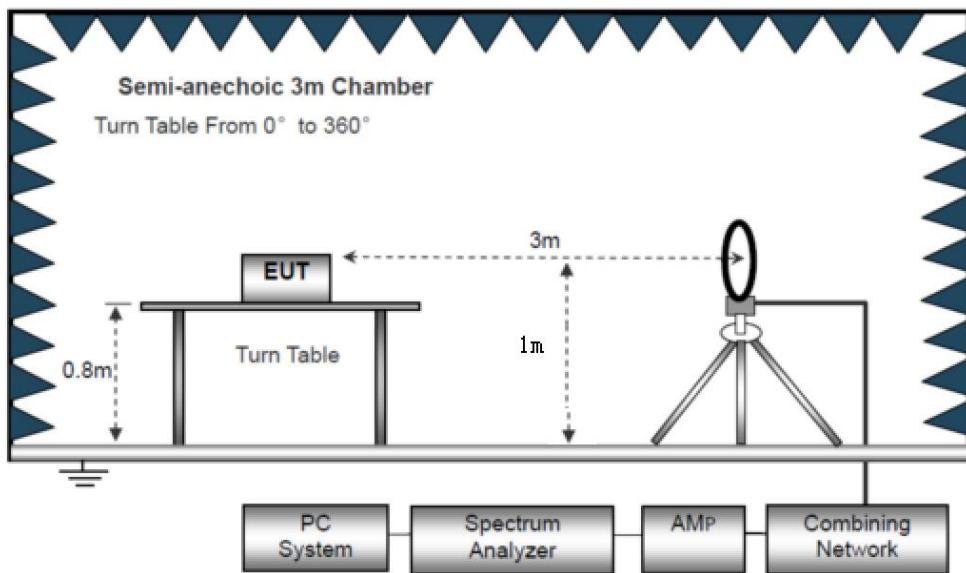

The test setup for emission measurement from 30 MHz to 1 GHz.

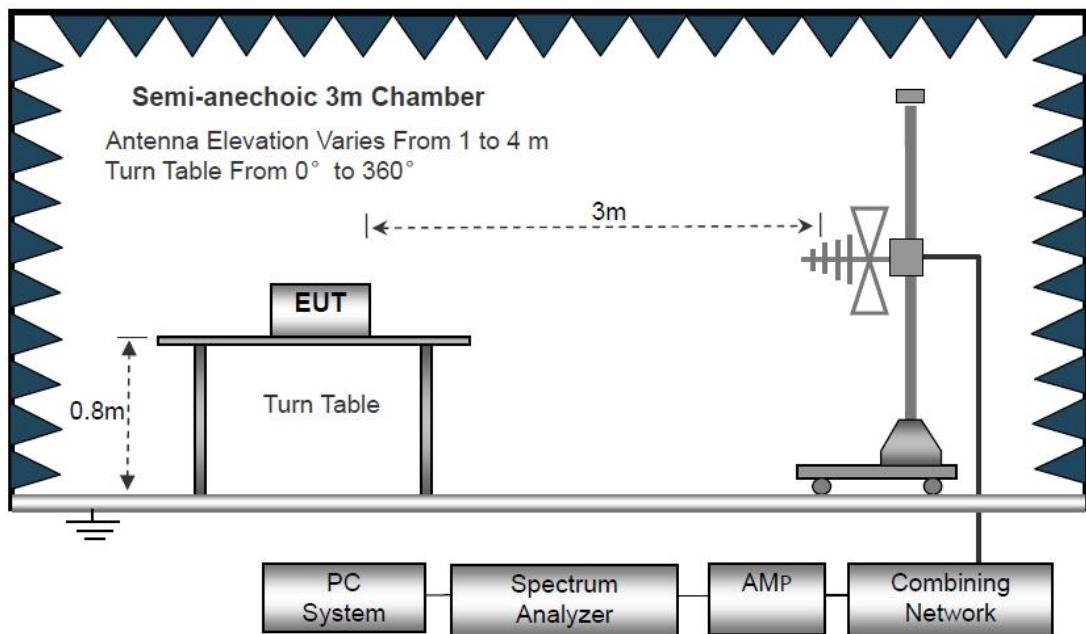

The test setup for emission measurement above 1 GHz

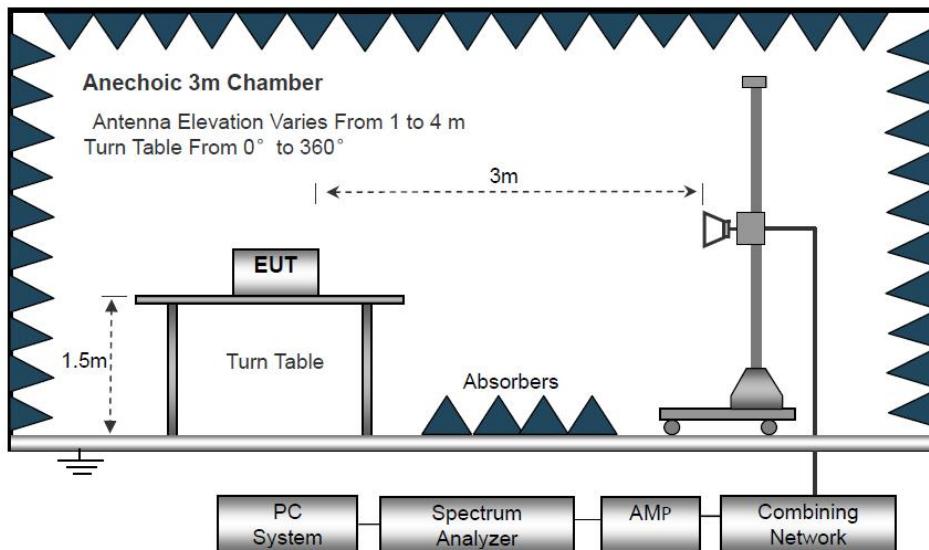

### 5.3 Spectrum Analyzer Setup

Below 30MHz			
IF Bandwidth	:	10kHz	
Resolution Bandwidth	:	10kHz	
Video Bandwidth	:	10kHz	
30MHz ~ 1GHz			
Detector	:	PK	QP
Resolution Bandwidth	:	100kHz	120kHz
Video Bandwidth	:	300kHz	300kHz
Above 1GHz			
Detector	:	PK	AV
Resolution Bandwidth	:	1MHz	1MHz
Video Bandwidth	:	3MHz	10Hz

### 5.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room

## 5.5 Summary of Test Results

### Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance/ test distance})$ ( dB);  
 Limit line=Specific limits(dBuV) + distance extrapolation factor.

### Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX GFSK Low Channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following test plots:

M/N : WF-3611

Operation Mode : TX GFSK Low Channel

Test Voltage : DC 12V from battery

Test Specification : Vertical



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	81.497	11.25	8.38	19.63	40.00	-20.37	QP
2	102.719	5.67	13.19	18.86	43.50	-24.64	QP
3	143.830	15.60	7.96	23.56	43.50	-19.94	QP
4	304.610	11.39	14.30	25.69	46.00	-20.31	QP
5	578.670	5.51	20.27	25.78	46.00	-20.22	QP
6 *	830.400	3.92	23.03	26.95	46.00	-19.05	QP

Remark:

Emission Level=Reading+Factor

Factor=Cable Loss+ANT Factor+Preamp Factor

M/N : WF-3611  
 Operation Mode : TX GFSK Low Channel  
 Test Voltage : DC 12V from battery  
 Test Specification : Horizontal



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	82.648	14.51	8.75	23.26	40.00	-16.74	QP
2 *	84.110	15.54	9.24	24.78	40.00	-15.22	QP
3	147.404	12.35	8.04	20.39	43.50	-23.11	QP
4	269.428	16.58	13.48	30.06	46.00	-15.94	QP
5	301.422	12.26	14.21	26.47	46.00	-19.53	QP
6	494.198	10.53	18.43	28.96	46.00	-17.04	QP

Remark:

Emission Level=Reading+Factor

Factor=Cable Loss+ANT Factor+Preamp Factor



KEYWAY

FCC ID:2BDDW-WF3611

Report No. TR25050434-E-001

**Test Frequency: From 1GHz to 25GHz**

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2402MHz									
V	4804.00	47.54	34.12	5.03	32.39	50.84	74	-23.16	PK
V	4804.00	41.21	34.12	5.03	32.39	44.51	54	-9.49	AV
V	7206.00	41.42	32.54	6.29	35.86	51.03	74	-22.97	PK
V	7206.00	32.36	32.54	6.29	35.86	41.97	54	-12.03	AV
V	9608.00	41.20	32.98	7.55	38.4	54.17	74	-19.83	PK
V	9608.00	31.62	32.98	7.55	38.4	44.59	54	-9.41	AV
V	12010.00	37.90	32.09	8.93	39	53.74	74	-20.26	PK
V	12010.00	29.36	32.09	8.93	39	45.20	54	-8.80	AV
H	4804.00	50.71	34.12	5.03	32.39	54.01	74	-19.99	PK
H	4804.00	39.65	34.12	5.03	32.39	42.95	54	-11.05	AV
H	7206.00	43.90	32.54	6.29	35.86	53.51	74	-20.49	PK
H	7206.00	34.37	32.54	6.29	35.86	43.98	54	-10.02	AV
H	9608.00	40.05	32.98	7.55	38.4	53.02	74	-20.98	PK
H	9608.00	30.26	32.98	7.55	38.4	43.23	54	-10.77	AV
H	12010.00	39.15	32.09	8.93	39	54.99	74	-19.01	PK
H	12010.00	31.22	32.09	8.93	39	47.06	54	-6.94	AV



KEYWAY

FCC ID:2BDDW-WF3611

Report No. TR25050434-E-001

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2440MHz									
V	4880.00	50.58	34.07	5.09	32.59	54.19	74	-19.81	PK
V	4880.00	40.16	34.07	5.09	32.59	43.77	54	-10.23	AV
V	7320.00	42.19	32.63	6.34	35.96	51.86	74	-22.14	PK
V	7320.00	32.35	32.63	6.34	35.96	42.02	54	-11.98	AV
V	9760.00	41.65	32.92	7.59	38.4	54.72	74	-19.28	PK
V	9760.00	31.56	32.92	7.59	38.4	44.63	54	-9.37	AV
V	12200.00	37.92	31.96	8.88	39.04	53.88	74	-20.12	PK
V	12200.00	29.49	31.96	8.88	39.04	45.45	54	-8.55	AV
H	4880.00	50.76	34.07	5.09	32.59	54.37	74	-19.63	PK
H	4880.00	40.75	34.07	5.09	32.59	44.36	54	-9.64	AV
H	7320.00	43.01	32.63	6.34	35.96	52.68	74	-21.32	PK
H	7320.00	34.48	32.63	6.34	35.96	44.15	54	-9.85	AV
H	9760.00	42.73	32.92	7.59	38.4	55.80	74	-18.20	PK
H	9760.00	31.73	32.92	7.59	38.4	44.80	54	-9.20	AV
H	12200.00	38.14	31.96	8.88	39.04	54.10	74	-19.90	PK
H	12200.00	28.99	31.96	8.88	39.04	44.95	54	-9.05	AV



KEYWAY

FCC ID:2BDDW-WF3611

Report No. TR25050434-E-001

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2480MHz									
V	4960.00	50.79	34.02	5.15	32.8	54.72	74	-19.28	PK
V	4960.00	39.15	34.02	5.15	32.8	43.08	54	-10.92	AV
V	7440.00	42.66	32.71	6.4	36.05	52.40	74	-21.60	PK
V	7440.00	32.04	32.71	6.4	36.05	41.78	54	-12.22	AV
V	9920.00	42.55	32.86	7.62	38.4	55.71	74	-18.29	PK
V	9920.00	31.90	32.86	7.62	38.4	45.06	54	-8.94	AV
V	12400.00	39.97	31.82	8.84	39.08	56.07	74	-17.93	PK
V	12400.00	30.62	31.82	8.84	39.08	46.72	54	-7.28	AV
H	4960.00	51.63	34.02	5.15	32.8	55.56	74	-18.44	PK
H	4960.00	40.42	34.02	5.15	32.8	44.35	54	-9.65	AV
H	7440.00	44.42	32.71	6.4	36.05	54.16	74	-19.84	PK
H	7440.00	35.20	32.71	6.4	36.05	44.94	54	-9.06	AV
H	9920.00	42.38	32.86	7.62	38.4	55.54	74	-18.46	PK
H	9920.00	31.12	32.86	7.62	38.4	44.28	54	-9.72	AV
H	12400.00	38.51	31.82	8.84	39.08	54.61	74	-19.39	PK
H	12400.00	29.08	31.82	8.84	39.08	45.18	54	-8.82	AV

Note:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



KEYWAY

FCC ID:2BDDW-WF3611

Report No. TR25050434-E-001


Radiated Band Emission Measuremen:

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifie r (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margin(dB)	Detect or Type	Result
GFSK	Low Channel 2402MHz										
	H	2390	56.82	35.17	3.48	27.49	52.62	74	-21.38	PK	PASS
	H	2390	44.89	35.17	3.48	27.49	40.69	54	-13.31	AV	PASS
	H	2400	55.90	35.16	3.49	27.52	51.75	74	-22.25	PK	PASS
	H	2400	46.11	35.16	3.49	27.52	41.96	54	-12.04	AV	PASS
	V	2390	57.27	35.17	3.48	27.49	53.07	74	-20.93	PK	PASS
	V	2390	48.67	35.17	3.48	27.49	44.47	54	-9.53	AV	PASS
	V	2400	55.33	35.16	3.49	27.52	51.18	74	-22.82	PK	PASS
	V	2400	47.56	35.16	3.49	27.52	43.41	54	-10.59	AV	PASS
	High Channel 2480MHz										
	H	2483.5	54.29	35.11	3.56	27.75	50.49	74	-23.51	PK	PASS
	H	2483.5	46.96	35.11	3.56	27.75	43.16	54	-10.84	AV	PASS
	H	2500	57.82	35.1	3.57	27.8	54.09	74	-19.91	PK	PASS
	H	2500	47.27	35.1	3.57	27.8	43.54	54	-10.46	AV	PASS
	V	2483.5	56.58	35.11	3.56	27.75	52.78	74	-21.22	PK	PASS
	V	2483.5	47.37	35.11	3.56	27.75	43.57	54	-10.43	AV	PASS
	V	2500	55.50	35.1	3.57	27.8	51.77	74	-22.23	PK	PASS
	V	2500	45.42	35.1	3.57	27.8	41.69	54	-12.31	AV	PASS
Remark:											
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											

## 6 Conduct Band Edge And Spurious Emissions Measurement

- Test Requirement : Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
- RSS-247 §5.5:  
 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### 6.1 Test Setup



### 6.2 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto  
 Detector function = peak, Trace = max hold

### 6.3 Test Result

Please see the attachment for BLE data.


## 7 6dB&99% Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013

Test Limit  
Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 7.1 Test Setup

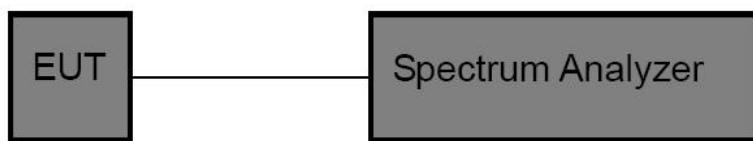

### 7.2 Test Procedure

For 6dB Bandwidth Measurement

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

For 99% Bandwidth Measurement

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 1%-5% OBW, VBW  $\geq$  3RBW


### 7.3 Test Result

Please see the attachment for BLE data.

## 8 Maximum Peak Output Power

- Test Requirement : FCC CFR47 Part 15 Section 15.247 (b)(3)
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.  
RSS-247§5.4 (d)  
For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

### 8.1 Test Setup

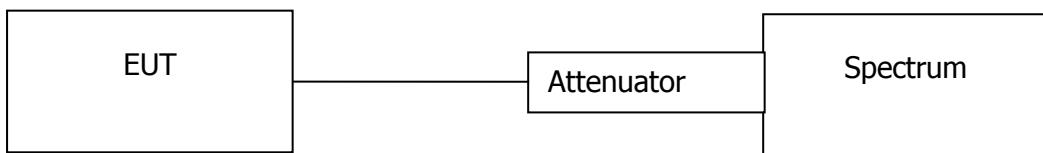

### 8.2 Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

Measure the conducted output power and record the results in the test report.


### 8.3 Test Result

Please see the attachment for BLE data.

## 9 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247 (e)
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 9.1 Test Setup

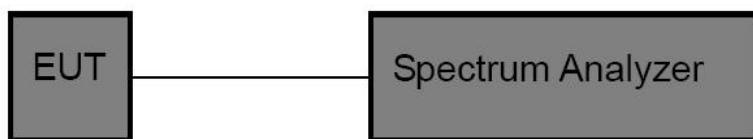

### 9.2 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 9.1kHz, Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 9.3 Test Result

Please see the attachment for BLE data.

## 10 On Time and Duty Cycle


### 10.1 Standard Applicable

None: for reporting purpose only.

### 10.2 Measuring Instruments and Setting

Please refer to equipment's list in this report. The following table is the setting of the spectrum analyzer.

### 10.3 Test Setup

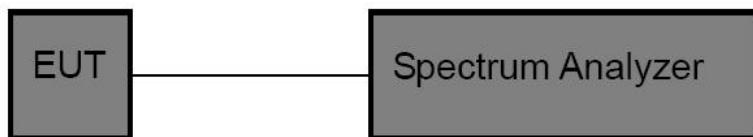

### 10.4 Test Procedures

1. Set the centre frequency of the spectrum analyzer to the transmitting frequency;
2. Set the span=0MHz, RBW=8MHz, VBW=8MHz, Sweep time=10001pts;
3. Detector = RMS;
4. Trace mode = Single hold.

### 10.5 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 10.6 Test result

Please see the attachment for BLE data.

## 11 Antenna Application

### 11.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

According to RSS-GEN section 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

### 11.2 Result

The EUT'S antenna, permanent attached antenna, is Internal Antenna. The antenna's gain is 2.57dBi, and meets the requirement.

## 12 Test Setup and EUT Photos

Reference to the attachment for details.

\*\*\*\*\*THE END REPORT\*\*\*\*\*