

Sample acceptance certificate

SPECIFICATION FOR APPROVAL

Admission of status	trial - produce	large cargo	
Supplier name	Shenzhen Tao Soft Electronics Co., LTD		
product model	A11		
code			
Assembly plant code			
name of material	A11 single coil		
Specifications	<p>A11 coil, $6.3\mu\text{H}\pm 10\%$, magnetic sheet diameter 50mm, thickness 1.0mm, central hole diameter 5.3mm magnetic tape wire groove wire diagram outer diameter 41mm wire diagram inner diameter 20.5mm wire wrapping</p> <p>0.08*105P 10TS is attached with 2.5mm thick EVA foam wire drawing with a total thickness of 4.8mm, the wire drawing has a length of 15mm and a tin immersion of 3mm. R OHS</p>		
Acknowledge the version			
Environmental requirements	ROHS		
Date of receipt	2023/8/4		
Suppliers address	701, Building 10, Zone B, Wulian Team Industrial Zone, Shangcun Community, Gongming Street, Guangming District, Shenzhen		
Suppliers telephone/fax			
Suppliers email address/web site			



CS 扫描全能王

3亿人都在用的扫描App

The version has a revised
resume

Version Change History

FY-GZ001




CS 扫描全能王

2亿人都在用的扫描App

SPECIFICATION

product model : DESC	Φ20.5*41-10T-0.08*105-15mm-CLS	edition Rev:A 0	client CUST :	
			Fine PN of Taoshuan material:	
			Customer part number CUST PIN:	

I. DIMENSION: (mm)

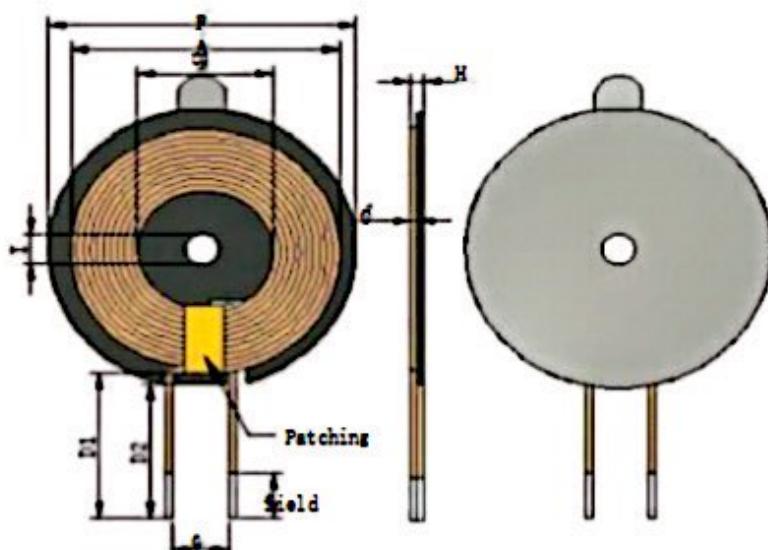

A	41.0±1
B	20.5±0.5
C	1.0±0.1
D1	17±2
D2	15±2
E	3-5mm
F	50±0.5
G	11.0 ref
H	4.8±0.2 Max
I	5.3 ref

pour :

1. The coil is attached with magnetic sheet, the size of which is $50\pm 0.5\text{mm}$, the inner hole is 5.3mm, the thickness is $1.0\pm 0.1\text{mm}$, and the double slot is used
2. Wrap the coil outlet position with $8\text{mm} \pm 0.5$ high temperature tape.
3. The back of the magnetic sheet is attached with a hand-tearable position with a circular diameter of 48mm (ref) and an inner hole of 7.0mm (Ref) 2.5mm thick EVA foam.

II. Schematic diagram:



Winding Specifications:

order number NO	terminal TERMINAL		Wire diameter	number of turns Turns	direction of winding Winding Direction
-	S F		Silk wrapping line 0.8*105P	10Ts	CCW

FY-GZ001



CS 扫描全能王


3亿人都在用的扫描App

SPECIFICATION

product model : DESC	20.5*41-10Ts-0.08*105-15mm-CL	edition Rev.A0	client CUST:	
			Fine PN of Taoshuan material:	
			Customer part number CUST PN	

V. Packaging PACKONG:

5.1 Packing pictures:

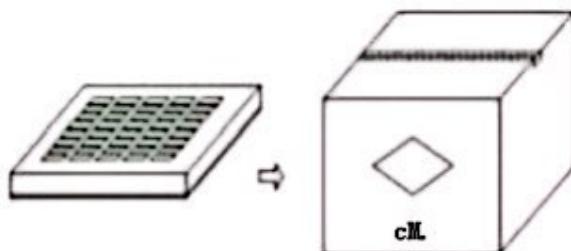

5.2 Quantity and Specifications of Packing:

project ltem	Quantity	Material specification Material	
box Box	350 Pcs	370*265*55mm	
Box Big Carton	1400 Pcs	390*270*245mm	

5.3 The packaging shall be based on the existing packaging tray as the reference standard and the actual shipping packaging shall be taken as the standard. If there is any special requirement, it can be customized.

The packaging shall be based on the existing packing plate and the actual delivery package shall prevail. If there is any requirement, we can customize it.

VI. List of materials:

order number number	Material name Material name	Product description Description	manufacturer Manufacturer
1	silk-covered wire	Silk wrapping line 0.08*106P	Dongguan Jinjileyuan Electronic Material Co., LTD
2	Lead-free solder bars	Lead-free solder bars	Shenzhen Daoqin Tin Co., LTD
3	magnetic sheet	① 50*5.3*1.0 mm manganese zinc hard magnetic sheet	Guangzhou Runjing New Material Technology Co., LTD
4	glue	201 glue	Dongguan Feiquan Electronic Material Co., LTD
5	High temperature tape	8mm wide high temperature tape	Dongguan Zhixing Tape New Material Co., LTD

FY-GZ001



CS 扫描全能王

3亿人都在用的扫描App